

#01_Bluetooth_LE_Front_0mm_Ch39

Communication System: Bluetooth; Frequency: 2480 MHz; Duty Cycle: 1:1.632

Medium: HSL_2450_210803 Medium parameters used: $f = 2480$ MHz; $\sigma = 1.79$ S/m; $\epsilon_r = 38.343$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C ; Liquid Temperature : 22.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(7.57, 7.57, 7.57) @ 2480 MHz; Calibrated: 2020/10/22
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1399; Calibrated: 2021/2/16
- Phantom: SAM_Left; Type: QD000P40CD; Serial: TP:1682
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (61x101x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.158 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.449 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.244 W/kg

SAR(1 g) = 0.107 W/kg; SAR(10 g) = 0.034 W/kg

Maximum value of SAR (measured) = 0.192 W/kg

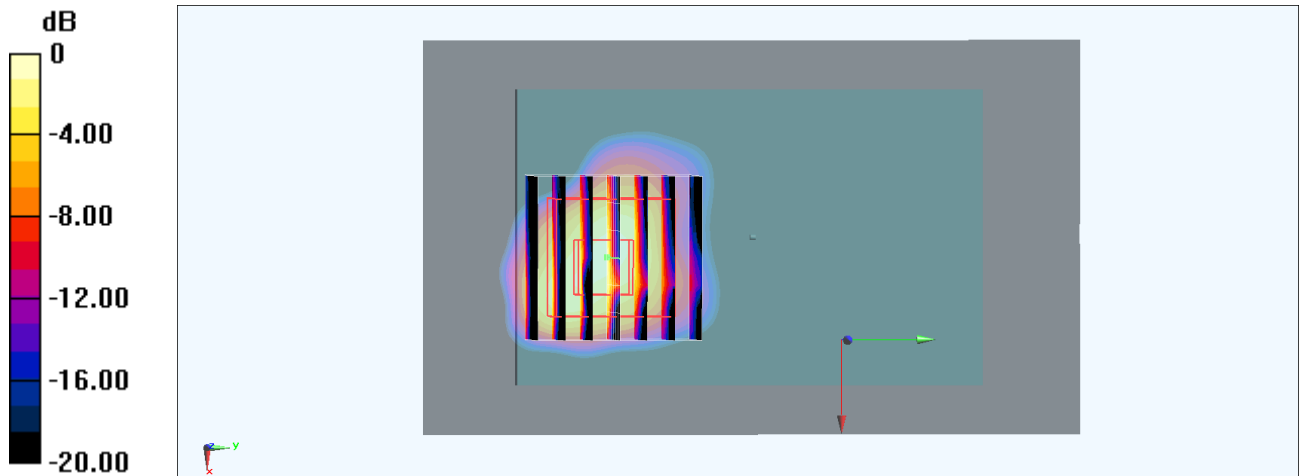

0 dB = 0.192 W/kg = -7.17 dBW/kg