



UNLESS OTHERWISE SPECIFIED LINEAR	
Classification	Tolerance
0.45x53	±0.05
3<x≤6	±0.1
6<x≤30	±0.1
30<x≤120	±0.2
120<x≤400	±0.2
400<x≤1000	±0.3
1000<x≤2000	±0.5
2000<x≤4000	-

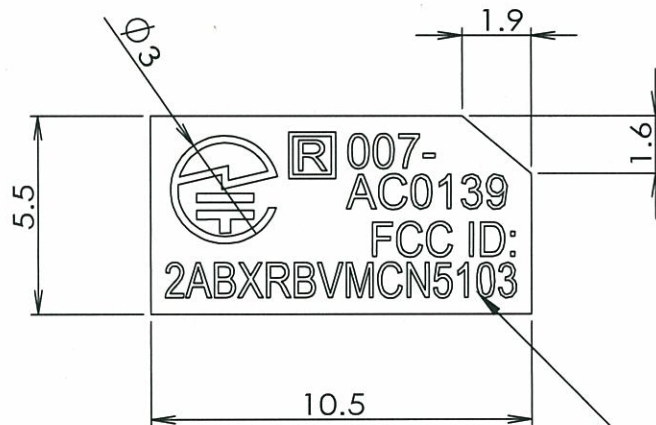

This module is small,
so there is no space FCCID written in by one line.

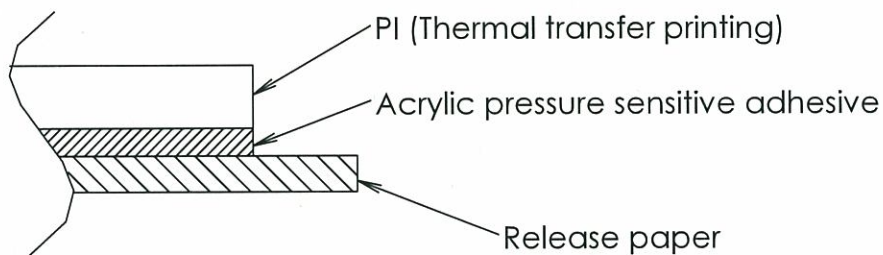

SECTIONAL COMPOSITION

HEAT-RESISTANCE SPECIFICATION

PERFORMANCE PROPERTIES	TEST METHODS	TYPICAL RESULTS
Short term High Service Temperature	80 seconds at 270°C	No visible effect to label at 270°C
	5 minutes at 230°C	No visible effect to label at 230°C
	2 hours at 170°C	No visible effect to label at 170°C
Long Term High Service Temperature	1000 hours at 100°C	No visible effect to label at 100°C, label discolors slightly at 120°C, but remains functional.

DIMENSIONS ARE IN MILLIMETERS
SURFACE FINISH:

FINISH:

DEBUR AND
BREAK SHARP
EDGES

DO NOT SCALE DRAWING

REVISION

PARTS NO.

BBLE2ST01ZA

VIEW:



TITLE:

CERTIFICATION LABEL

MODEL:

BVMCN5103

SCALE:5:1
SHEET 1 OF 1

A4

UNLESS OTHERWISE SPECIFIED LINEAR	
Classification	Tolerance
$0.4 \leq x \leq 3$	± 0.05
$3 < x \leq 6$	± 0.1
$6 < x \leq 30$	± 0.1
$30 < x \leq 120$	± 0.2
$120 < x \leq 400$	± 0.2
$400 < x \leq 1000$	± 0.3
$1000 < x \leq 2000$	± 0.5
$2000 < x \leq 4000$	-


A

B

C

D

E

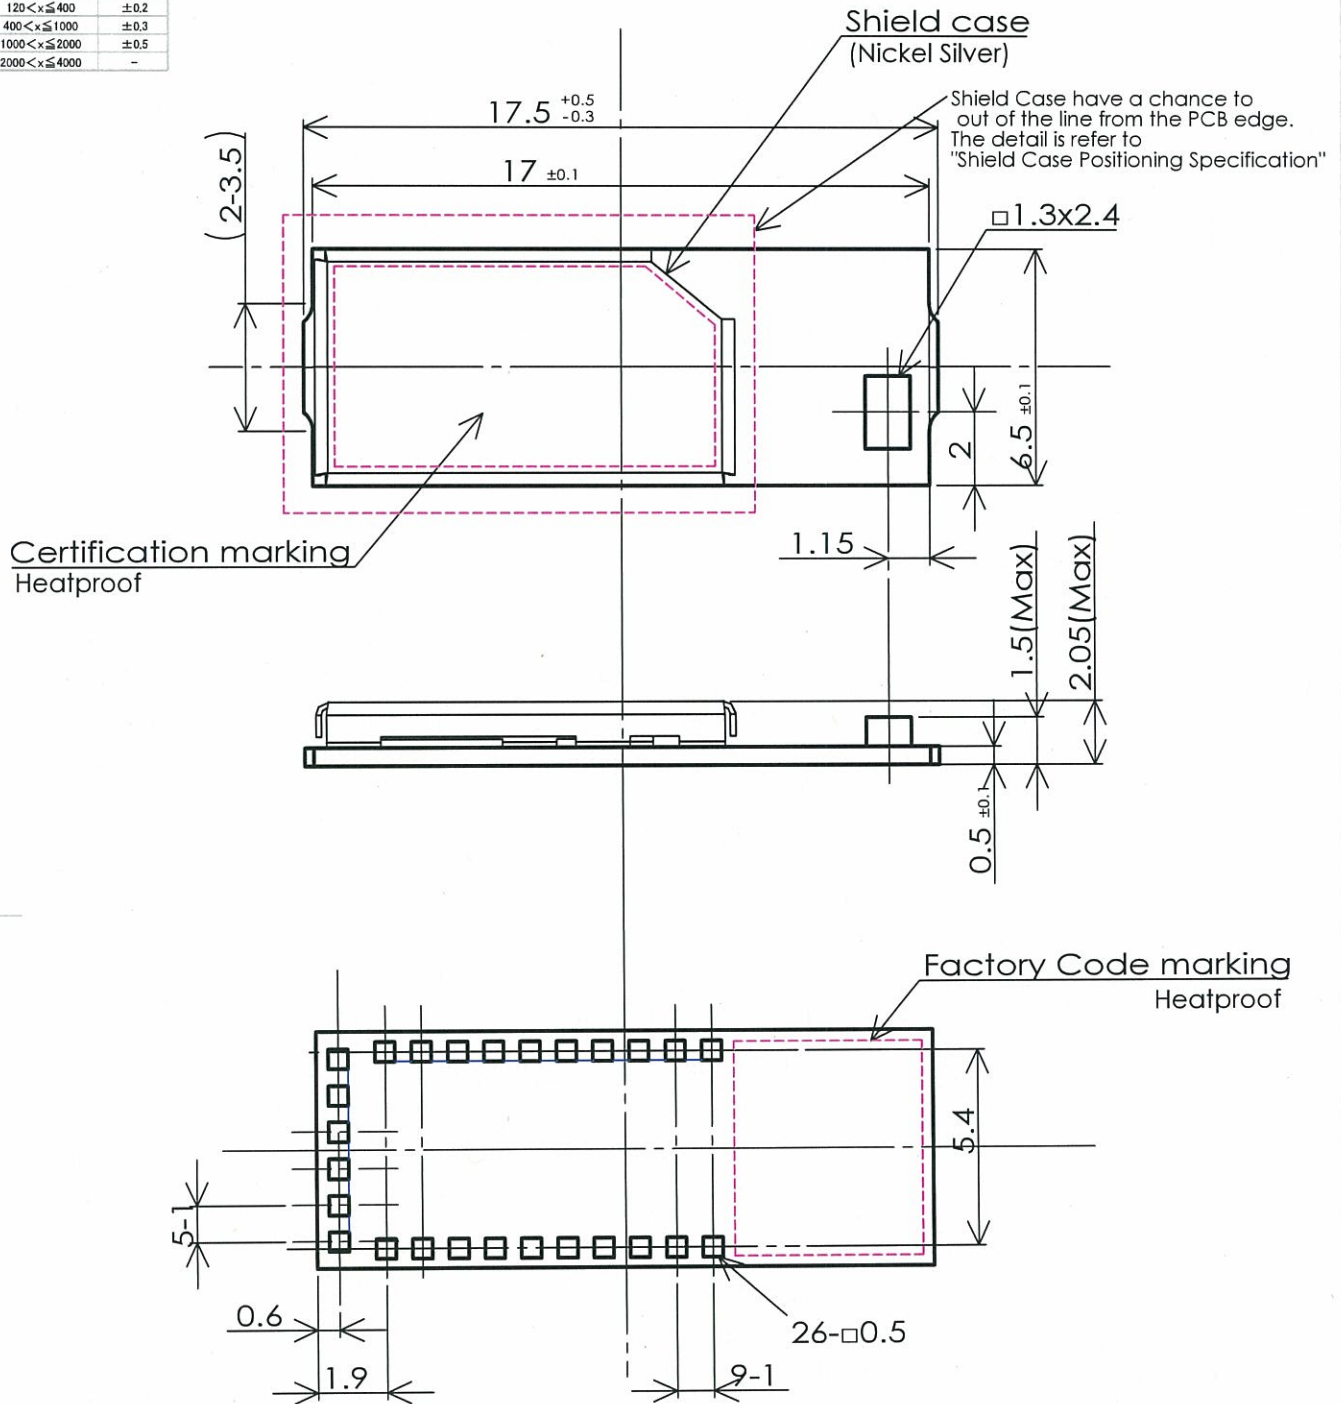

DIMENSIONS ARE IN MILLIMETERS
SURFACE FINISH:

FINISH:

DEBUR AND
BREAK SHARP
EDGES

R=0.5

DO NOT SCALE DRAWING

REVISION

PARTS NO.

BVMCN5102-xx

VIEW:



TITLE:

BLE Module

MODEL:

SCALE:5:1
SHEET 1 OF 1

A4

NAME	SIGNATURE	DATE		
DRAWN Tomiyoshi		14/4/25		
CHKD Yoshida		14/4/25		
APPV'D Yoshida		14/4/25		
MFG			MATERIAL:	
Q.A			WEIGHT: -	