



Radio Test Report

Report No.:STS2510068W01

Issued for

GODOX PHOTO EQUIPMENT CO.,LTD

1st to 4th Floor, Building 2/1st to 4th Floor, Building 4,
Yaochuan Industrial Zone, Tangwei Community, Fuhai Street,
Baoan District, Shenzhen, 518103 China

Product Name: iFlash Camera Flash

Brand Name: 

Model Name: iT32

Series Model(s): N/A

FCC ID: 2ABYN156

Test Standards: FCC Part15.249

The test results presented in this report relate only to the object tested. This report shall not be reproduced, except in full, without the written approval of the Shenzhen STS Test Services Co., Ltd.

**TEST REPORT**

Applicant's Name: GODOX PHOTO EQUIPMENT CO.,LTD
1st to 4th Floor, Building 2/1st to 4th Floor, Building 4, Yaochuan
Address.....: Industrial Zone, Tangwei Community, Fuhai Street, Baoan District,
Shenzhen, 518103 China

Manufacturer's Name: GODOX Photo Equipment Co.,Ltd.
4th Floor of Building 1, 1st to 4th Floor of Building 2, 4th Floor of
Address.....: Building 3,1st to 4th Floor of Building 4, Yaochuan Industrial Zone,
Tangwei Community, Fuhai Street, Bao'an District, Shenzhen
518103, China

Product Description

Product Name: iFlash Camera Flash

Brand Name: 

Model Name.....: iT32

Series Model(s).....: N/A

Standards.....: FCC Part 15.249

Test Procedure.....: ANSI C63.10-2020

This device described above has been tested by STS, the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

The test results presented in this report relate only to the object tested. This report shall not be reproduced, except in full, without the written approval of the Shenzhen STS Test Services Co., Ltd.

Date of Test.....:


Date of receipt of test item.....: 14 Oct. 2025

Date of performance of tests ..: 14 Oct. 2025~11 Nov. 2025

Date of Issue.....: 11 Nov. 2025

Test Result: **Pass**

Testing Engineer :




(Aaron Bu)

Technical Manager :



(Skylar Li)

Authorized Signatory :



(Bovey Yang)





Table of Contents	Page
1. SUMMARY OF TEST RESULTS	5
1.1 TEST FACTORY	6
1.2 MEASUREMENT UNCERTAINTY	6
2. GENERAL INFORMATION	7
2.1 GENERAL DESCRIPTION OF THE EUT	7
2.2 DESCRIPTION OF THE TEST MODES	8
2.3 TEST SOFTWARE AND POWER LEVEL	8
2.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	9
2.5 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS	10
2.6 EQUIPMENTS LIST FOR ALL TEST ITEMS	11
3. EMC EMISSION TEST	12
3.1 CONDUCTED EMISSION MEASUREMENT	12
3.2 RADIATED EMISSION MEASUREMENT	16
4. BANDWIDTH TEST	37
4.1 TEST PROCEDURE	37
4.2 TEST SETUP	37
4.3 EUT OPERATION CONDITIONS	37
4.4 TEST RESULTS	37
5. ANTENNA REQUIREMENT	39
5.1 STANDARD REQUIREMENT	39
5.2 EUT ANTENNA	39
APPENDIX- PHOTOS OF TEST SETUP	40



Revision History

Rev.	Issue Date	Report No.	Effect Page	Contents
00	11 Nov. 2025	STS2510068W01	ALL	Initial Issue



1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC Part 15.249 , Subpart C			
Standard Section	Test Item	Judgment	Remark
15.207	Conducted Emission	PASS	--
15.203	Antenna Requirement	Pass	--
15.249	Radiated Spurious Emission	Pass	--
15.249	Radiated Band Edge Emission	Pass	--
15.249	Field Strength of fundamental	Pass	--
15.215(c)	20dB Bandwidth	Pass	--

NOTE:

- (1) 'N/A' denotes test is not applicable in this Test Report.
- (2) All tests are according to ANSI C63.10-2020.



1.1 TEST FACTORY

SHENZHEN STS TEST SERVICES CO., LTD

Add. :101, Building B, Zhuoke Science Park, No.190 Chongqing Road, ZhanChengShequ, Fuhai Sub-District, Bao'an District, Shenzhen, Guang Dong, China

FCC test Firm Registration Number: 625569

IC test Firm Registration Number: 12108A

A2LA Certificate No.: 4338.01

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately **95** %.

No.	Item	Uncertainty
1	RF output power, conducted	$\pm 0.751\text{dB}$
2	Unwanted Emissions, conducted	$\pm 2.888\text{dB}$
3	All emissions, radiated 9K-30MHz	$\pm 2.48\text{dB}$
4	All emissions, radiated 30M-1GHz	$\pm 2.52\text{dB}$
5	All emissions, radiated 1G-18GHz	$\pm 3.48\text{dB}$
6	All emissions, radiated >18GHz	$\pm 4.18\text{dB}$
7	Conducted Emission (9KHz-150KHz)	$\pm 2.48\text{dB}$
8	Conducted Emission (150KHz-30MHz)	$\pm 2.52\text{dB}$
9	Occupied Channel Bandwidth	$\pm 3.6\%$
10	Power Spectral Density, conducted	$\pm 1.214\text{dB}$
11	Duty Cycle	$\pm 3.2\%$



2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF THE EUT

Product Name	iFlash Camera Flash	
Brand Name		
Model Name	iT32	
Series Model(s)	N/A	
Model Difference	N/A	
Product Description	The EUT is a iFlash Camera Flash	
	Operation Frequency:	2.412999634 GHz-2.464499756 GHz
	Modulation Type:	MSK
	Antenna Designation:	Ceramic
	Antenna Gain(Peak):	5.46dBi
	Based on the application, features, or specification exhibited in User Manual, the EUT is considered as an ITE/Computing Device. More details of EUT technical specification, please refer to the User Manual.	
Power Rating	Input: DC5V 2A Built-in lithium battery: DC7.4V 900mAh	
Adapter	N/A	
Battery	Rated Voltage: 7.4V Capacity: 900mAh 6.66Wh	
Hardware version number	20250701E01	
Software version number	V1.0	
Connecting I/O Port(s)	Please refer to the Note 1.	

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User Manual.
- 2.

Channel	Frequency (GHz)	Channel	Frequency (GHz)	Channel	Frequency (GHz)
1	2.412999634	12	2.431000000	23	2.449499847
2	2.414499664	13	2.432999908	24	2.450999878
3	2.415999695	14	2.434499939	25	2.452999786
4	2.418000000	15	2.435999969	26	2.454499817
5	2.419499634	16	2.437999878	27	2.455999847
6	2.420999664	17	2.439499908	28	2.457999756
7	2.422999969	18	2.440999939	29	2.459499786
8	2.424500000	19	2.442999847	30	2.460999817
9	2.425999634	20	2.444499878	31	2.462999725
10	2.427999939	21	2.445999908	32	2.464499756
11	2.429499969	22	2.447999817		



3.

Test channel List		
Test Channel	EUT Channel	Test Frequency (GHz)
lowest	CH01	2.412999634
middle	CH16	2.437999878
highest	CH32	2.464499756

Note: The antenna information refer the manufacturer provide report, applicable only to the tested sample identified in the report.

2.2 DESCRIPTION OF THE TEST MODES

For conducted test items and radiated spurious emissions

Each of these EUT operation mode(s) or test configuration mode(s) mentioned below was evaluated respectively.

Pretest Mode	Description	Data/Modulation
Mode 1	TX/CH01	MSK
Mode 2	TX/CH16	MSK
Mode 3	TX/CH32	MSK

Note:

(1) All above mode have been measurement, only worst data was reported.

For AC Conducted Emission

Test Case	
AC Conducted Emission	Mode 4 : Keeping TX

2.3 TEST SOFTWARE AND POWER LEVEL

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level.

RF Function	Type	Mode Or Modulation type	ANT Gain(dBi)	Power Class	Software For Testing
Other SRD	2.4G	MSK	5.46	Default	The EUT has signal transmission when it is powered on




2.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters.

Radiated Spurious Emission Test



Conducted Emission Test

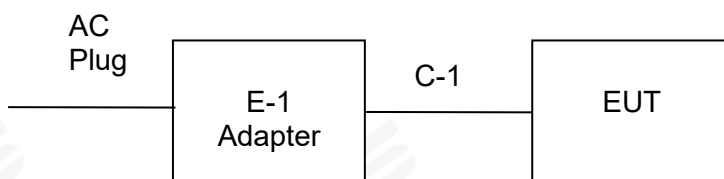

RF Conducted Test





2.5 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Note
E-1	Adapter	ZTC	NB-A515A	N/A
C-1	USB Cable	ZTC	NB-A515A	N/A

Item	Equipment	Mfr/Brand	Length	Note
C-1	Shielded	NO	100cm	N/A

Note:

- (1) For detachable type I/O cable should be specified the length in cm in 『Length』 column.



2.6 EQUIPMENTS LIST FOR ALL TEST ITEMS

RF Radiation Test Equipment					
Kind of Equipment	Manufacturer	Type No.	Serial No.	Last Calibration	Calibrated Until
Temperature & Humidity	SW-108	SuWei	N/A	2025.02.24	2026.02.23
Pre-Amplifier(0.1M-3GHz)	EM	EM330	060665	2025.02.22	2026.02.21
Pre-Amplifier(1G-18GHz)	SKET	LNPA-01018G-45	SK2018080901	2025.09.25	2026.09.24
Pre-Amplifier(18G-40GHz)	SKET	LNPA_1840-50	SK2018101801	2025.02.22	2026.02.21
Active loop Antenna	ZHINAN	ZN30900C	16035	2025.02.25	2027.02.24
Bilog Antenna	TESEQ	CBL6111D	34678	2025.09.27	2027.09.26
Horn Antenna	SCHWARZBECK	BBHA 9120D	02014	2025.09.27	2027.09.26
Horn Antenna	A-INFOMW	LB-180400-KF	J211020657	2025.09.27	2027.09.26
Positioning Controller	MF	MF-7802	MF-780208587	N/A	N/A
Signal Analyzer	R&S	FSV 40-N	101823	2025.09.26	2026.09.25
Switch Control Box	N/A	N/A	N/A	N/A	N/A
Filter Box	BALUN Technology	SU319E	BL-SZ1530051	N/A	N/A
Antenna Mast	MF	MFA-440H	N/A	N/A	N/A
Turn Table	MF	SC100_1	60531	N/A	N/A
AC Power Source	APC	KDF-11010G	F214050035	N/A	N/A
DC power supply	HONGSHENGFE NG	DPS-305AF	17064939	2025.09.22	2026.09.21
Test SW	EZ-EMC	Ver.STSLAB-03A1 RE			
Conduction Test Equipment					
Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
Test Receiver	R&S	ESCI	101427	2025.09.25	2026.09.24
Limiter	CYBERTEK	EM5010	N/A	2025.09.25	2026.09.24
LISN	R&S	ENV216	101242	2025.09.25	2026.09.24
LISN	EMCO	3810/2NM	23625	2025.09.25	2026.09.24
Temperature & Humidity	SW-108	SuWei	N/A	2025.02.24	2026.02.23
Test SW	EZ-EMC	Ver.STSLAB-03A1 CE			
RF Connected Test					
Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
Signal Analyzer	Agilent	N9020A	MY51510623	2025.02.22	2026.02.21
Temperature & Humidity	SW-108	SuWei	N/A	2025.02.24	2026.02.23



3. EMC EMISSION TEST

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 POWER LINE CONDUCTED EMISSION LIMITS

The radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table.

FREQUENCY (MHz)	Quasi-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

Note:

(1) The tighter limit applies at the band edges.

(2) The limit of “*” marked band means the limitation decreases linearly with the logarithm of the frequency in the range.


The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

3.1.2 TEST PROCEDURE

- The EUT is 0.8 m from the horizontal ground plane and 0.4 m from the vertical ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments are powered from additional LISN(s). The LISN provides 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN is at least 80 cm from the nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.1.3 TEST SETUP

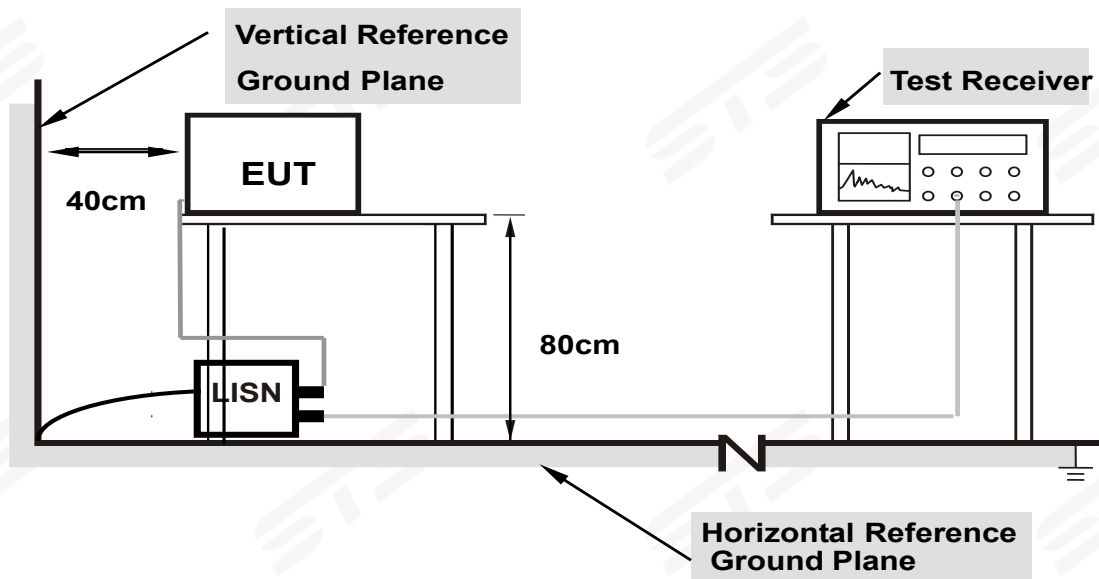

Note: 1. Support units were connected to second LISN.

2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes support units.

3.1.4 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.




3.1.5 TEST RESULT

Temperature:	25.1°C	Relative Humidity:	59%
Test Voltage:	AC 120V/60Hz	Phase:	L
Test Mode:	Mode 4		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1540	27.67	19.87	47.54	65.78	-18.24	QP
2	0.1540	12.33	19.87	32.20	55.78	-23.58	AVG
3	0.2340	22.34	19.89	42.23	62.31	-20.08	QP
4	0.2340	7.31	19.89	27.20	52.31	-25.11	AVG
5	0.3940	19.20	19.78	38.98	57.98	-19.00	QP
6	0.3940	6.33	19.78	26.11	47.98	-21.87	AVG
7	0.5860	17.85	19.81	37.66	56.00	-18.34	QP
8	0.5860	8.20	19.81	28.01	46.00	-17.99	AVG
9	0.7900	16.98	19.80	36.78	56.00	-19.22	QP
10	0.7900	4.93	19.80	24.73	46.00	-21.27	AVG
11	1.1900	17.32	19.81	37.13	56.00	-18.87	QP
12	1.1900	4.18	19.81	23.99	46.00	-22.01	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Margin = Result (Result = Reading + Factor) – Limit

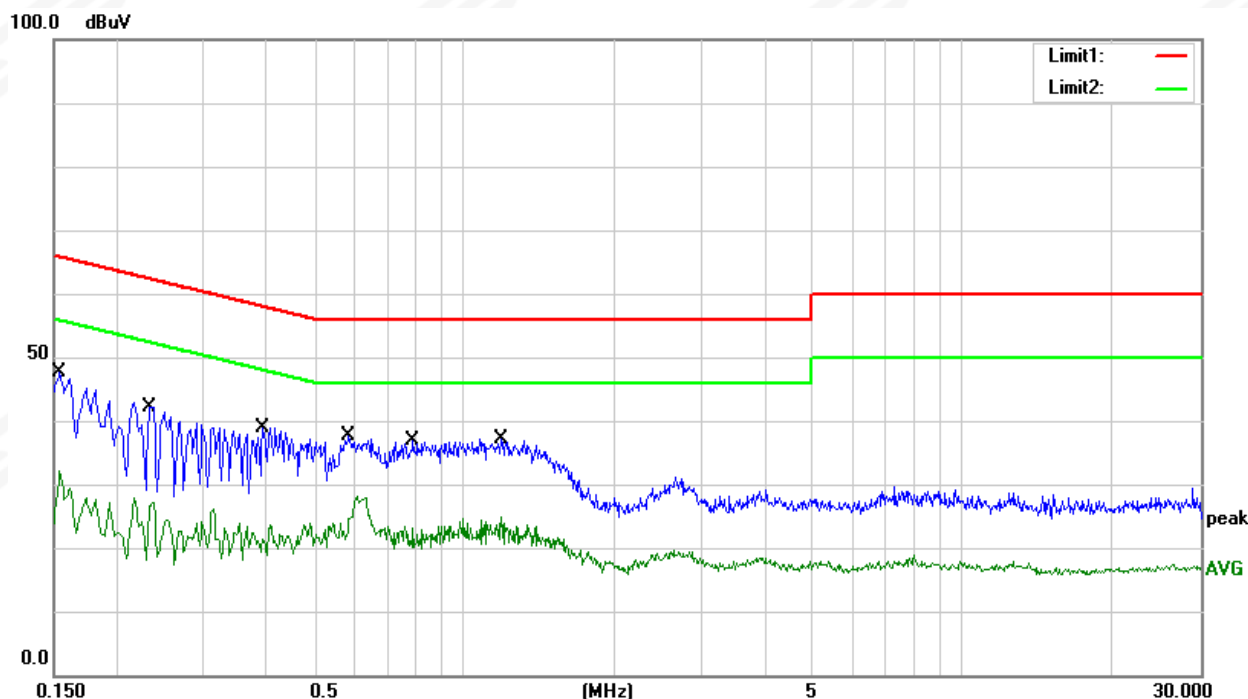




Temperature:	23.4°C	Relative Humidity:	60%
Test Voltage:	AC 120V/60Hz	Phase:	N
Test Mode:	Mode 4		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.2220	22.34	19.81	42.15	62.74	-20.59	QP
2	0.2220	9.16	19.81	28.97	52.74	-23.77	AVG
3	0.3460	19.81	19.75	39.56	59.06	-19.50	QP
4	0.3460	5.48	19.75	25.23	49.06	-23.83	AVG
5	0.4780	18.42	19.78	38.20	56.37	-18.17	QP
6	0.4780	7.64	19.78	27.42	46.37	-18.95	AVG
7	0.6380	19.05	19.80	38.85	56.00	-17.15	QP
8	0.6380	13.03	19.80	32.83	46.00	-13.17	AVG
9	0.7740	17.71	19.81	37.52	56.00	-18.48	QP
10	0.7740	6.86	19.81	26.67	46.00	-19.33	AVG
11	0.9420	17.07	19.81	36.88	56.00	-19.12	QP
12	0.9420	6.01	19.81	25.82	46.00	-20.18	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Margin = Result (Result = Reading + Factor) – Limit

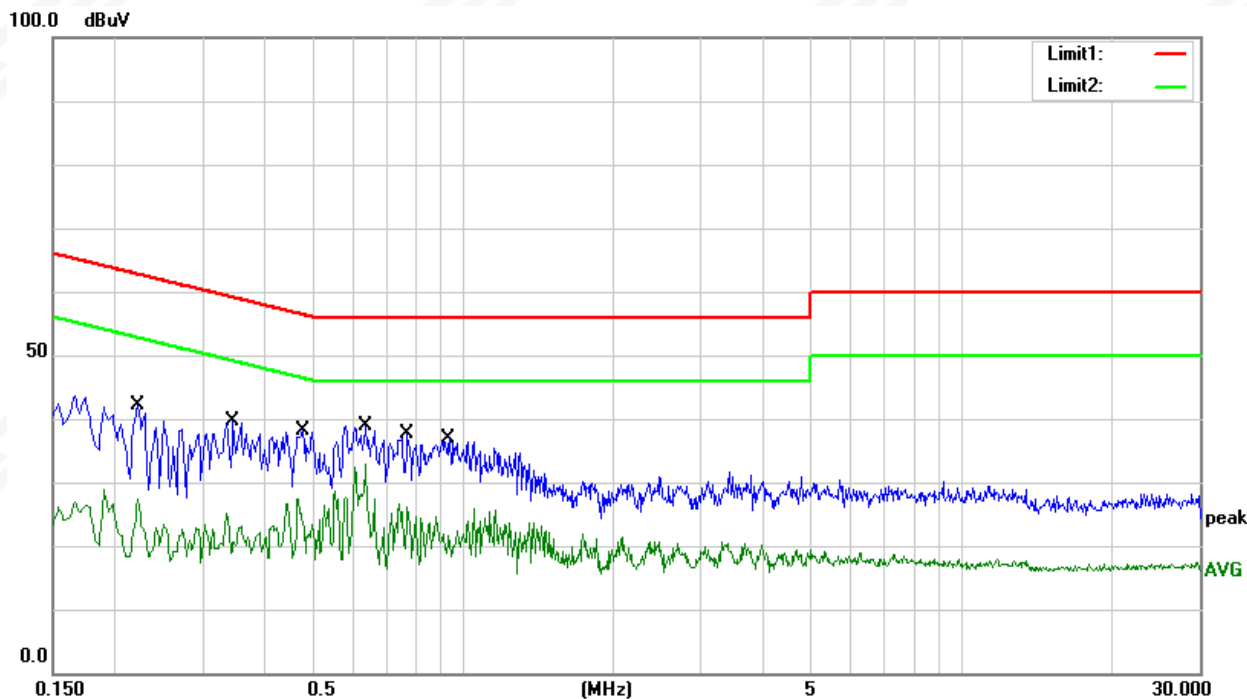



3.2 RADIATED EMISSION MEASUREMENT

3.2.1 RADIATED EMISSION LIMITS

In any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on Part 15.249 and the Part 15.209(a) limit in the table below has to be followed.

Standard FCC 15.209

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
960~1000	500	3
Above 1000	Other:74.0 dB(μV)/m (Peak) 54.0 dB(μV)/m (Average)	3

Standard FCC 15.249

Frequency of Emission (MHz)	Field Strength of fundamental (millivolts /meter)	Field Strength of Harmonics (microvolts/meter)
900~928	50	500
2400~2483.5	50	500
5725~5875	50	500
24000~242500	250	2500

Notes:

- (1) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.
- (2) Emission level (dBuV/m) =20log Emission level (uV/m).

LIMITS OF RESTRICTED FREQUENCY BANDS

FREQUENCY (MHz)	FREQUENCY (MHz)	FREQUENCY (MHz)	FREQUENCY (GHz)
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7



6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	Above 38.6
13.36-13.41			

Spectrum Parameter	Setting
Detector	Peak/AV
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB (emission in restricted band)	>20BW
VB (emission in restricted band)	=3xRB

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~90kHz / RB 200Hz for PK & AV
	90kHz~110kHz / RB 200Hz for QP
	110kHz~490kHz / RB 200Hz for PK & AV
	490kHz~30MHz / RB 9kHz for QP
	30MHz~1000MHz / RB 120kHz for QP



3.2.2 TEST PROCEDURE


- a. The measuring distance of 3m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation (Below 1GHz)
- b. The measuring distance of 3m shall be used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation (Above 1GHz)
- c. The height of the test antenna shall vary between 1m to 4m. Both horizontal and vertical polarization of the antenna are set to make the measurement.
- d. The initial step in collecting radiated emission data is a receive peak detector mode. Pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- e. All readings are peak unless otherwise stated QP in column of Note. Peak denoted that the Peak reading compliance with the QP limits and then QP Mode measurement didn't perform (Below 1GHz)
- f. All readings are Peak mode value unless otherwise stated AVG in column of Note. If the Peak mode measured value compliance with the Peak limits and lower than AVG Limits, the EUT shall be deemed to meet Peak & AVG limits and then only Peak mode was measured, but AVG mode didn't perform. (Above 1GHz)
- g. For the actual test configuration, please refer to the related Item –EUT Test Photos.
Note: Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported.

3.2.3 DEVIATION FROM TEST STANDARD


No deviation

3.2.4 TEST SETUP


(A) Radiated Emission Test-Up Frequency Below 30MHz

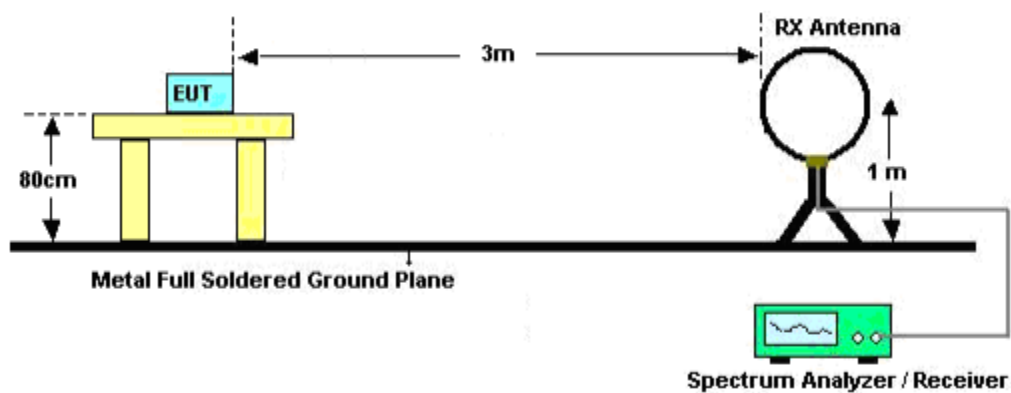

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

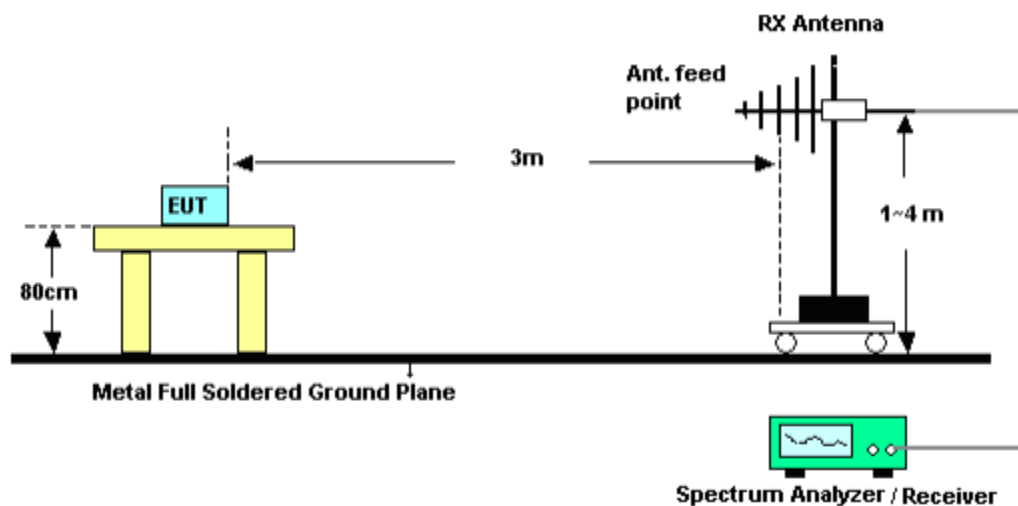

(C) Radiated Emission Test-Up Frequency Above 1GHz

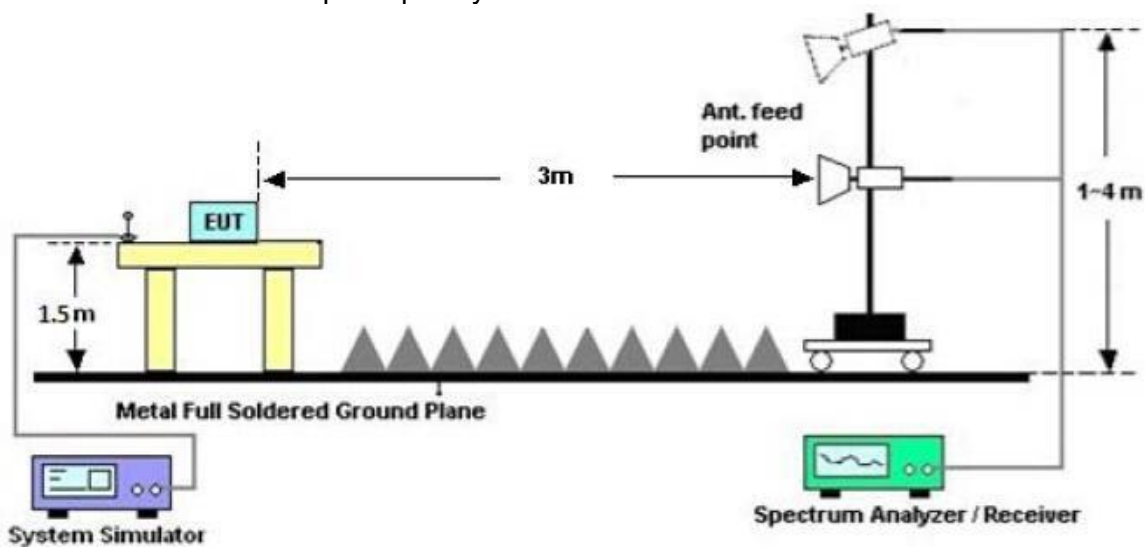



3.2.5 FIELD STRENGTH CALCULATION

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

Margin=PL-PK L or AL- AV L; Margin only shown the worst case.

Where

PR = Peak Reading

AR = Average Reading

PL = Peak Level

AL = Average Level

AF = Antenna Factor

PK L = Peak Limit

AV L = AV Limit

For example

Frequency	PR	AR	AF	PL	AL	PK L	AV L	Margin
(MHz)	(dBμV/m)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV/m)	(dBμV/m)	(dBμV/m)	(dB)
2178	40.23	30.31	9.83	50.06	40.14	74.00	54.00	-13.86



3.2.6 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

Below 30 MHz

Temperature:	23.4°C	Relative Humidity:	60%
Test Voltage:	DC 7.4V	Polarization:	---
Test Mode:	TX Mode		

Freq.	Reading	Limit	Margin	State
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F
--	--	--	--	PASS
--	--	--	--	PASS

Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor = $40 \log (\text{specific distance/test distance})$ (dB);

Limit line = specific limits(dBuv) + distance extrapolation factor.




Between 30MHz – 1000 MHz Radiation Spurious

Temperature:	23.4°C	Relative Humidity:	60%
Test Voltage:	DC 7.4V	Phase:	Horizontal
Test Mode:	Mode 1/2/3 (Mode 3 worst mode)		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	30.9700	28.05	-13.35	14.70	40.00	-25.30	peak
2	362.7100	30.71	-12.77	17.94	46.00	-28.06	peak
3	433.5200	30.78	-10.13	20.65	46.00	-25.35	peak
4	553.8000	39.20	-5.67	33.53	46.00	-12.47	peak
5	729.3700	34.54	-2.52	32.02	46.00	-13.98	peak
6	981.5700	29.07	2.57	31.64	54.00	-22.36	peak

Remark:

1. Margin = Result (Result = Reading + Factor) – Limit
2. Factor = Antenna factor + Cable attenuation factor (cable loss) – Amplifier gain

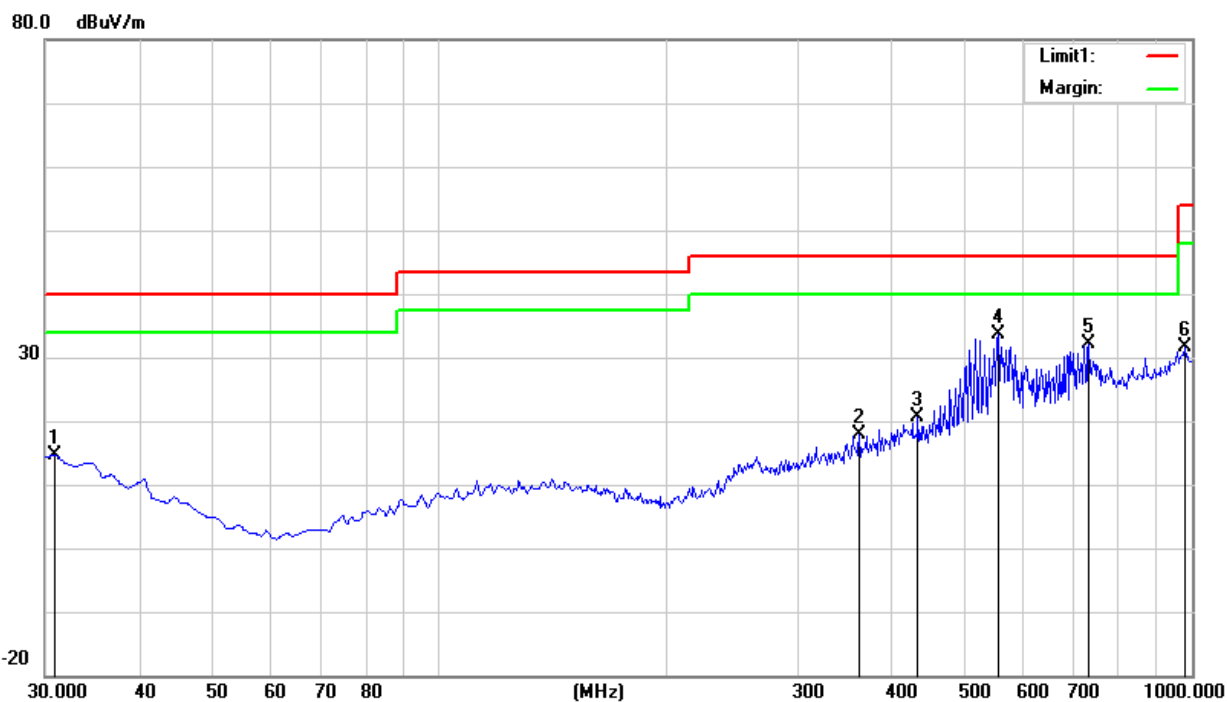




Temperature:	23.4°C	Relative Humidity:	60%
Test Voltage:	DC 7.4V	Phase:	Vertical
Test Mode:	Mode 1/2/3 (Mode 3 worst mode)		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	30.5306	27.96	-13.12	14.84	40.00	-25.16	peak
2	421.8800	29.51	-10.10	19.41	46.00	-26.59	peak
3	553.8000	29.82	-5.67	24.15	46.00	-21.85	peak
4	632.3700	29.17	-5.00	24.17	46.00	-21.83	peak
5	759.4400	31.35	-2.16	29.19	46.00	-16.81	peak
6	983.5100	28.33	2.46	30.79	54.00	-23.21	peak

Remark:

3. Margin = Result (Result = Reading + Factor) – Limit

4. Factor = Antenna factor + Cable attenuation factor (cable loss) – Amplifier gain

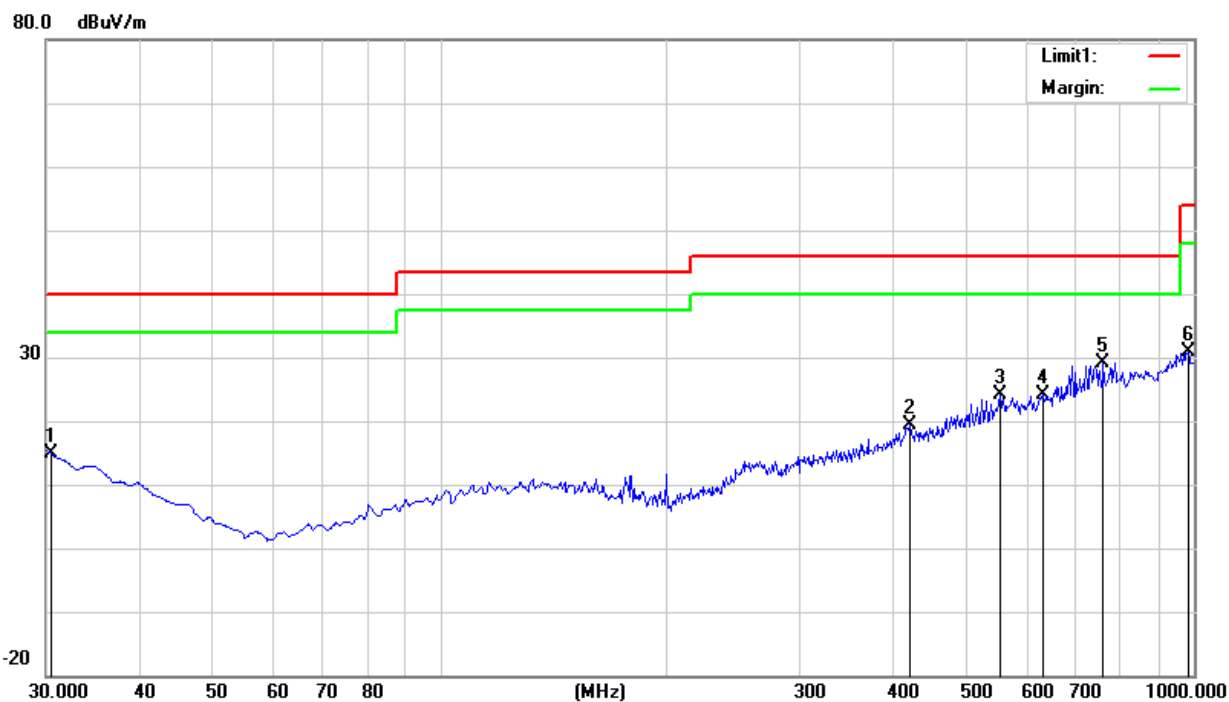




Above 1G Radiation Spurious

RSE-L-H

RE_FCC Test Case_FCC 15C 1GHz-18GHz

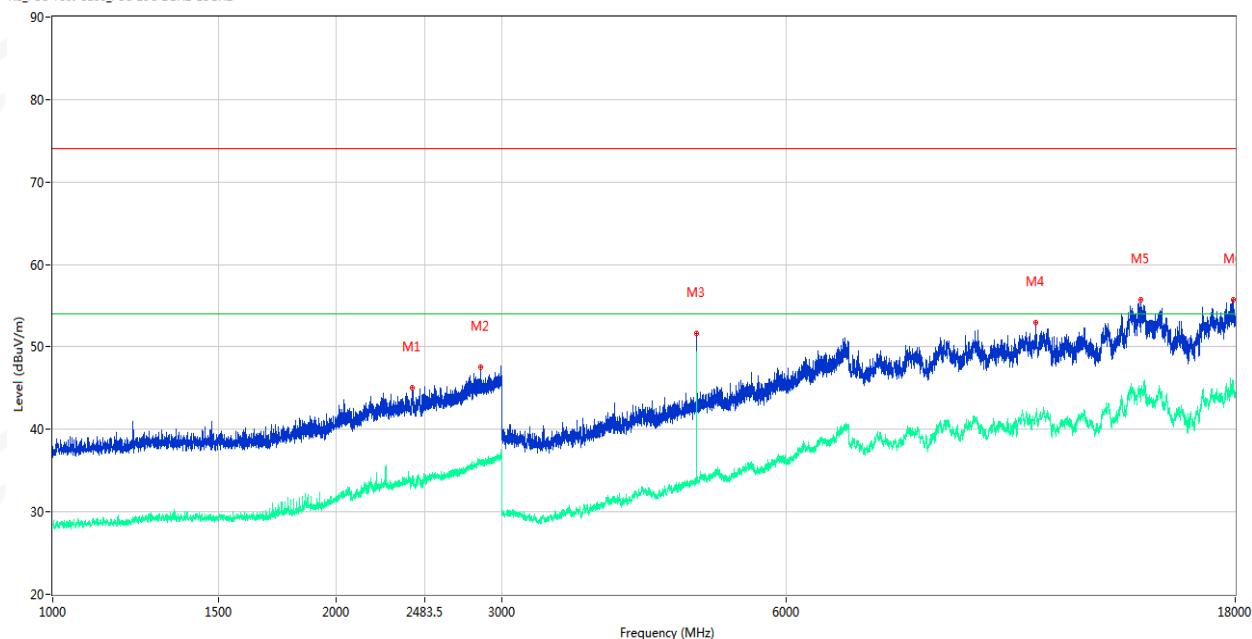


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2408.500	45.05	3.10	74.0	28.95	Peak	337.90	100	Horizontal	Pass
1**	2408.500	34.11	3.10	54.0	19.89	AV	337.90	100	Horizontal	Pass
2	2847.500	47.54	4.98	74.0	26.46	Peak	233.80	100	Horizontal	Pass
2**	2847.500	36.22	4.98	54.0	17.78	AV	233.80	100	Horizontal	Pass
3	4826.000	51.58	-6.87	74.0	22.42	Peak	249.70	100	Horizontal	Pass
3**	4826.000	49.34	-6.87	54.0	4.66	AV	249.70	100	Horizontal	Pass
4	11056.250	52.90	1.94	74.0	21.10	Peak	354.70	100	Horizontal	Pass
4**	11056.250	41.97	1.94	54.0	12.03	AV	354.70	100	Horizontal	Pass
5	14304.000	55.77	6.88	74.0	18.23	Peak	351.30	100	Horizontal	Pass
5**	14304.000	44.86	6.88	54.0	9.14	AV	351.30	100	Horizontal	Pass
6	17912.001	55.68	7.15	74.0	18.32	Peak	55.40	100	Horizontal	Pass
6**	17912.001	45.55	7.15	54.0	8.45	AV	55.40	100	Horizontal	Pass



RSE-L-V

RE_FCC Test Case_FCC 15C 1GHz-18GHz

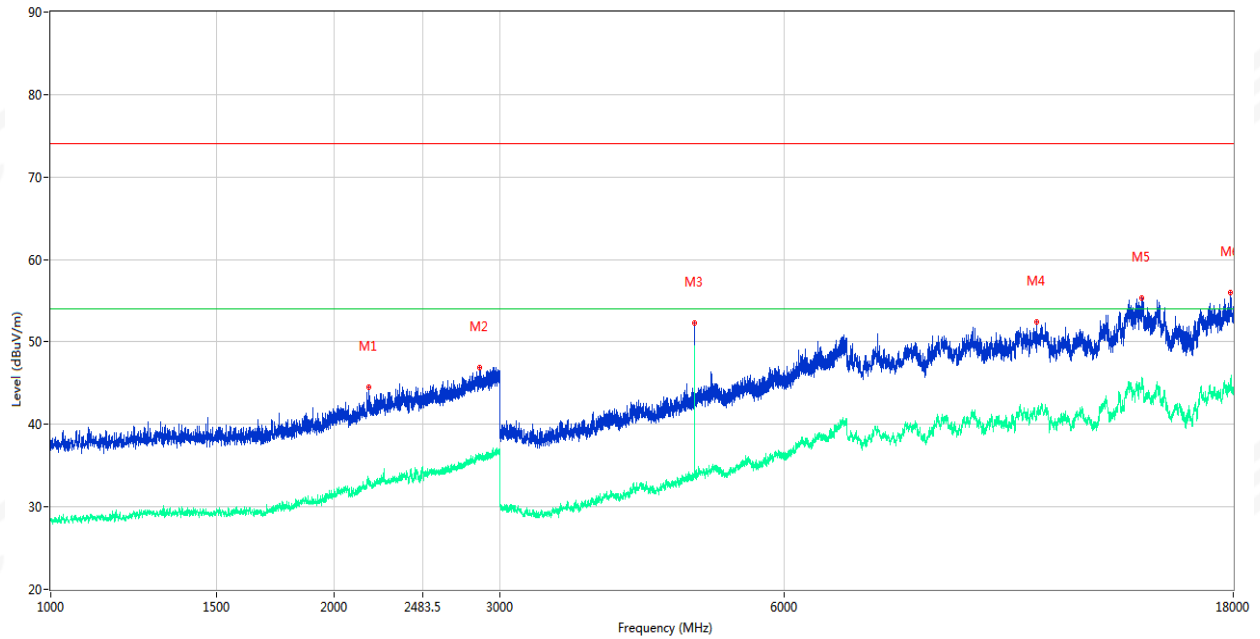


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2175.500	44.53	1.68	74.0	29.47	Peak	62.30	100	Vertical	Pass
1**	2175.500	33.18	1.68	54.0	20.82	AV	62.30	100	Vertical	Pass
2	2850.000	46.95	4.99	74.0	27.05	Peak	102.90	100	Vertical	Pass
2**	2850.000	35.71	4.99	54.0	18.29	AV	102.90	100	Vertical	Pass
3	4826.000	52.25	-6.87	74.0	21.75	Peak	343.10	100	Vertical	Pass
3**	4826.000	49.57	-6.87	54.0	4.43	AV	343.10	100	Vertical	Pass
4	11138.750	52.47	2.29	74.0	21.53	Peak	303.80	100	Vertical	Pass
4**	11138.750	41.38	2.29	54.0	12.62	AV	303.80	100	Vertical	Pass
5	14405.750	55.28	6.95	74.0	18.72	Peak	288.90	100	Vertical	Pass
5**	14405.750	45.68	6.95	54.0	8.32	AV	288.90	100	Vertical	Pass
6	17892.749	55.96	7.18	74.0	18.04	Peak	1.90	100	Vertical	Pass
6**	17892.749	45.61	7.18	54.0	8.39	AV	1.90	100	Vertical	Pass



RSE-M-H

RE_FCC Test Case_FCC 15C 1GHz-18GHz

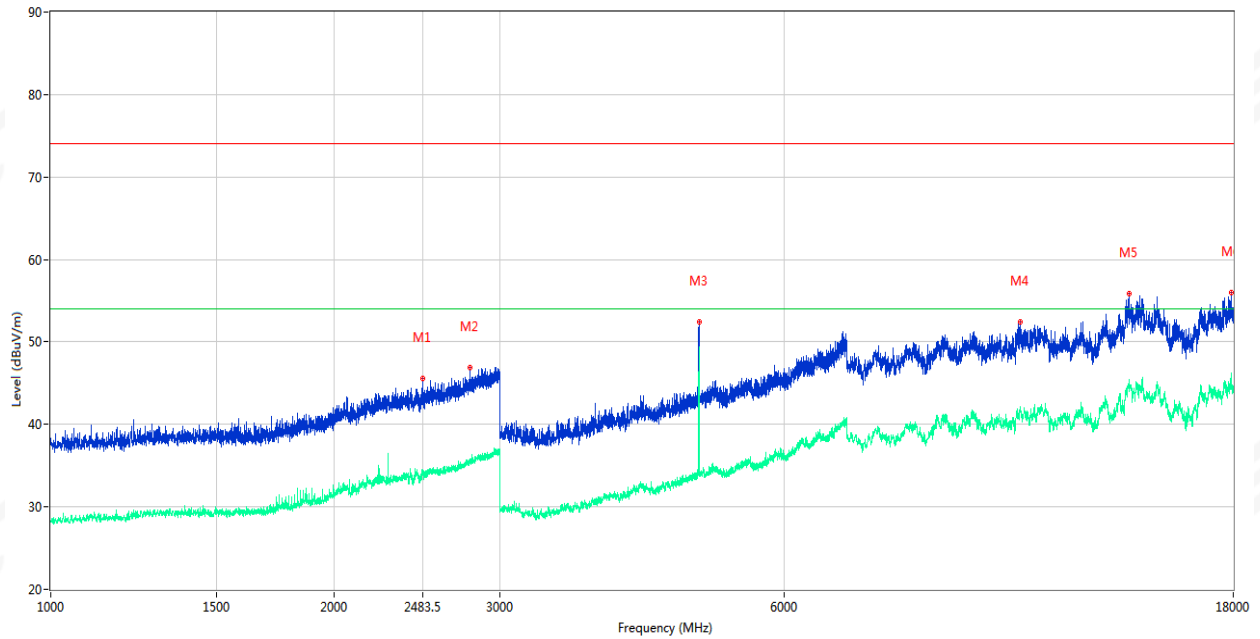


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2481.000	45.54	3.18	74.0	28.46	Peak	69.80	100	Horizontal	Pass
1**	2481.000	34.55	3.18	54.0	19.45	AV	69.80	100	Horizontal	Pass
2	2787.000	46.86	4.67	74.0	27.14	Peak	213.00	100	Horizontal	Pass
2**	2787.000	35.83	4.67	54.0	18.17	AV	213.00	100	Horizontal	Pass
3	4876.000	52.39	-6.33	74.0	21.61	Peak	248.80	100	Horizontal	Pass
3**	4876.000	49.33	-6.33	54.0	4.67	AV	248.80	100	Horizontal	Pass
4	10701.500	52.46	1.16	74.0	21.54	Peak	10.60	100	Horizontal	Pass
4**	10701.500	42.21	1.16	54.0	11.79	AV	10.60	100	Horizontal	Pass
5	13943.750	55.88	7.75	74.0	18.12	Peak	268.10	100	Horizontal	Pass
5**	13943.750	45.15	7.75	54.0	8.85	AV	268.10	100	Horizontal	Pass
6	17898.250	56.04	7.22	74.0	17.96	Peak	58.20	100	Horizontal	Pass
6**	17898.250	46.18	7.22	54.0	7.82	AV	58.20	100	Horizontal	Pass



RSE-M-V

RE_FCC Test Case_FCC 15C 1GHz-18GHz

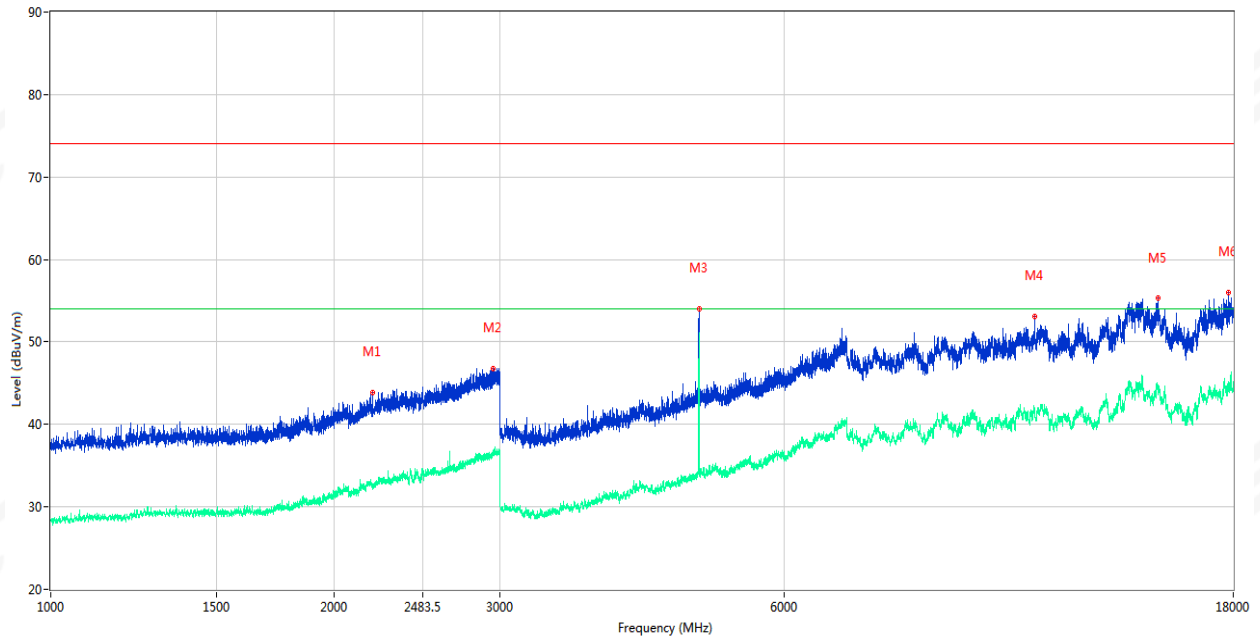


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2197.000	43.92	1.51	74.0	30.08	Peak	198.50	100	Vertical	Pass
1**	2197.000	32.42	1.51	54.0	21.58	AV	198.50	100	Vertical	Pass
2	2948.000	46.75	5.20	74.0	27.25	Peak	239.70	100	Vertical	Pass
2**	2948.000	36.30	5.20	54.0	17.70	AV	239.70	100	Vertical	Pass
3	4876.000	53.98	-6.33	74.0	20.02	Peak	330.90	100	Vertical	Pass
3**	4876.000	51.15	-6.33	54.0	2.85	AV	330.90	100	Vertical	Pass
4	11083.750	53.14	2.03	74.0	20.86	Peak	342.70	100	Vertical	Pass
4**	11083.750	41.84	2.03	54.0	12.16	AV	342.70	100	Vertical	Pass
5	14972.250	55.27	5.44	74.0	18.73	Peak	229.30	100	Vertical	Pass
5**	14972.250	43.79	5.44	54.0	10.21	AV	229.30	100	Vertical	Pass
6	17780.001	56.02	6.29	74.0	17.98	Peak	194.40	100	Vertical	Pass
6**	17780.001	44.38	6.29	54.0	9.62	AV	194.40	100	Vertical	Pass



RSE-H-H

RE_FCC Test Case_FCC 15C 1GHz-18GHz

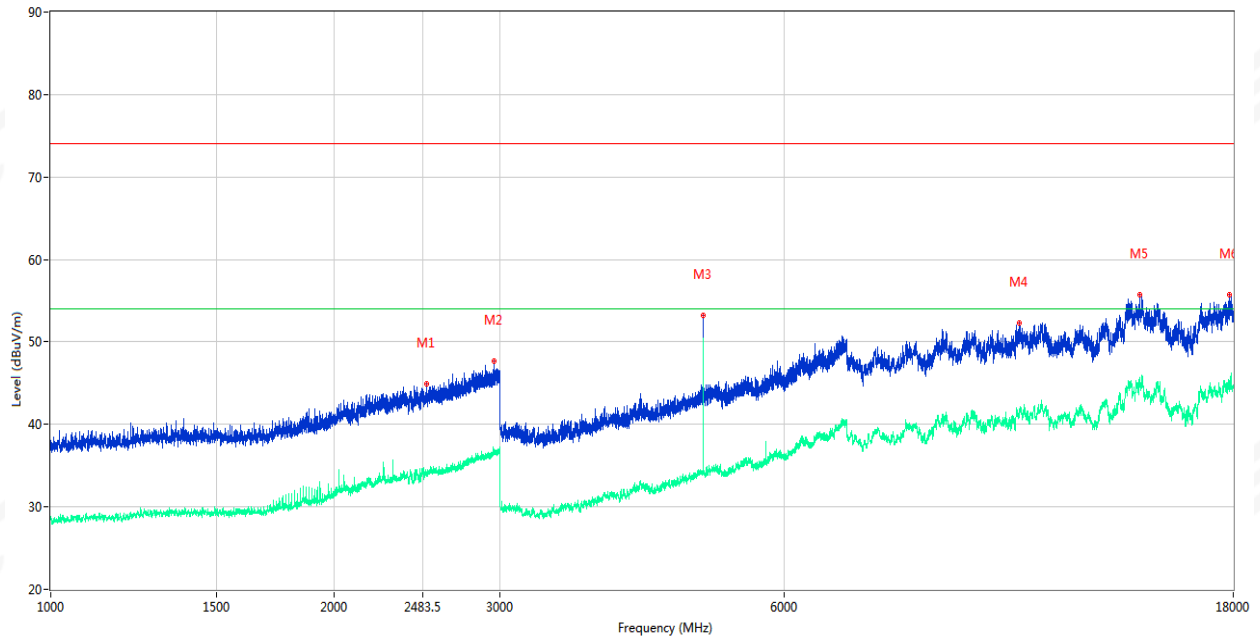


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2506.500	44.87	3.19	74.0	29.13	Peak	82.40	100	Horizontal	Pass
1**	2506.500	33.90	3.19	54.0	20.10	AV	82.40	100	Horizontal	Pass
2	2956.000	47.67	5.24	74.0	26.33	Peak	13.40	100	Horizontal	Pass
2**	2956.000	36.50	5.24	54.0	17.50	AV	13.40	100	Horizontal	Pass
3	4929.000	53.25	-6.03	74.0	20.75	Peak	178.00	100	Horizontal	Pass
3**	4929.000	50.44	-6.03	54.0	3.56	AV	178.00	100	Horizontal	Pass
4	10671.250	52.26	1.34	74.0	21.74	Peak	265.90	100	Horizontal	Pass
4**	10671.250	41.39	1.34	54.0	12.61	AV	265.90	100	Horizontal	Pass
5	14334.250	55.79	6.92	74.0	18.21	Peak	180.40	100	Horizontal	Pass
5**	14334.250	44.61	6.92	54.0	9.39	AV	180.40	100	Horizontal	Pass
6	17813.000	55.77	6.49	74.0	18.23	Peak	206.40	100	Horizontal	Pass
6**	17813.000	45.14	6.49	54.0	8.86	AV	206.40	100	Horizontal	Pass



RSE-H-V

RE_FCC Test Case_FCC 15C 1GHz-18GHz

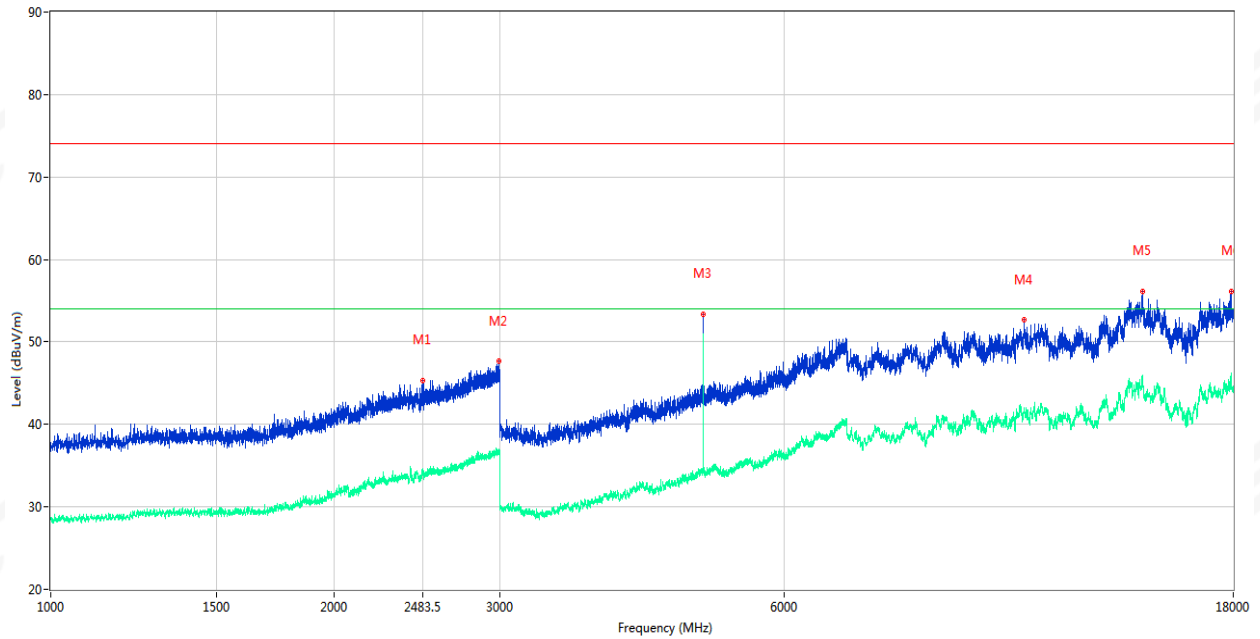

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2484.000	45.38	3.17	74.0	28.62	Peak	360.40	100	Vertical	Pass
1**	2484.000	34.37	3.17	54.0	19.63	AV	360.40	100	Vertical	Pass
2	2991.000	47.62	5.42	74.0	26.38	Peak	191.10	100	Vertical	Pass
2**	2991.000	36.57	5.42	54.0	17.43	AV	191.10	100	Vertical	Pass
3	4929.000	53.40	-6.03	74.0	20.60	Peak	330.10	100	Vertical	Pass
3**	4929.000	51.03	-6.03	54.0	2.97	AV	330.10	100	Vertical	Pass
4	10786.750	52.63	1.92	74.0	21.37	Peak	356.50	100	Vertical	Pass
4**	10786.750	41.80	1.92	54.0	12.20	AV	356.50	100	Vertical	Pass
5	14416.750	56.07	6.87	74.0	17.93	Peak	224.20	100	Vertical	Pass
5**	14416.750	45.39	6.87	54.0	8.61	AV	224.20	100	Vertical	Pass
6	17895.500	56.11	7.20	74.0	17.89	Peak	160.90	100	Vertical	Pass
6**	17895.500	45.85	7.20	54.0	8.15	AV	160.90	100	Vertical	Pass

Note: The peak value is less than the AV limit, so AV data does not need to be tested.



Duty cycle

Ton (ms)	Tp (ms)	Duty Factor
0.224	0.4	5.04


Note: Duty Factor= $20 \times \text{LOG}_{10}(1/(T_{on}/T_p))$



(Radiation Band edge)

CH01

Horizontal

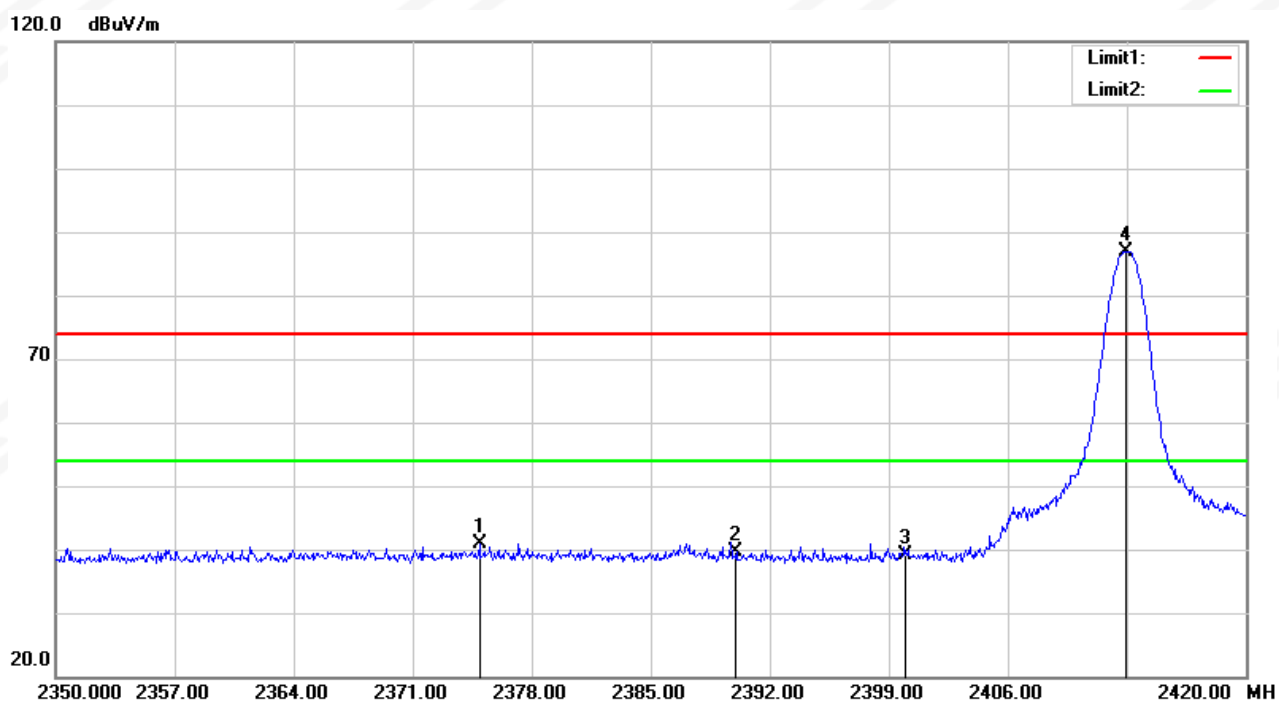


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2374.920	40.26	0.69	40.95	74.00	-33.05	peak
2	2390.000	38.71	0.81	39.52	74.00	-34.48	peak
3	2400.000	38.28	0.88	39.16	74.00	-34.84	peak

Fundamental Frequency

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Duty cycle Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4	2412.996	85.99	0.90	-	86.89	114	-27.11	peak
4	2412.996	85.99	0.90	5.04	81.85	94	-12.15	AVG



Vertical

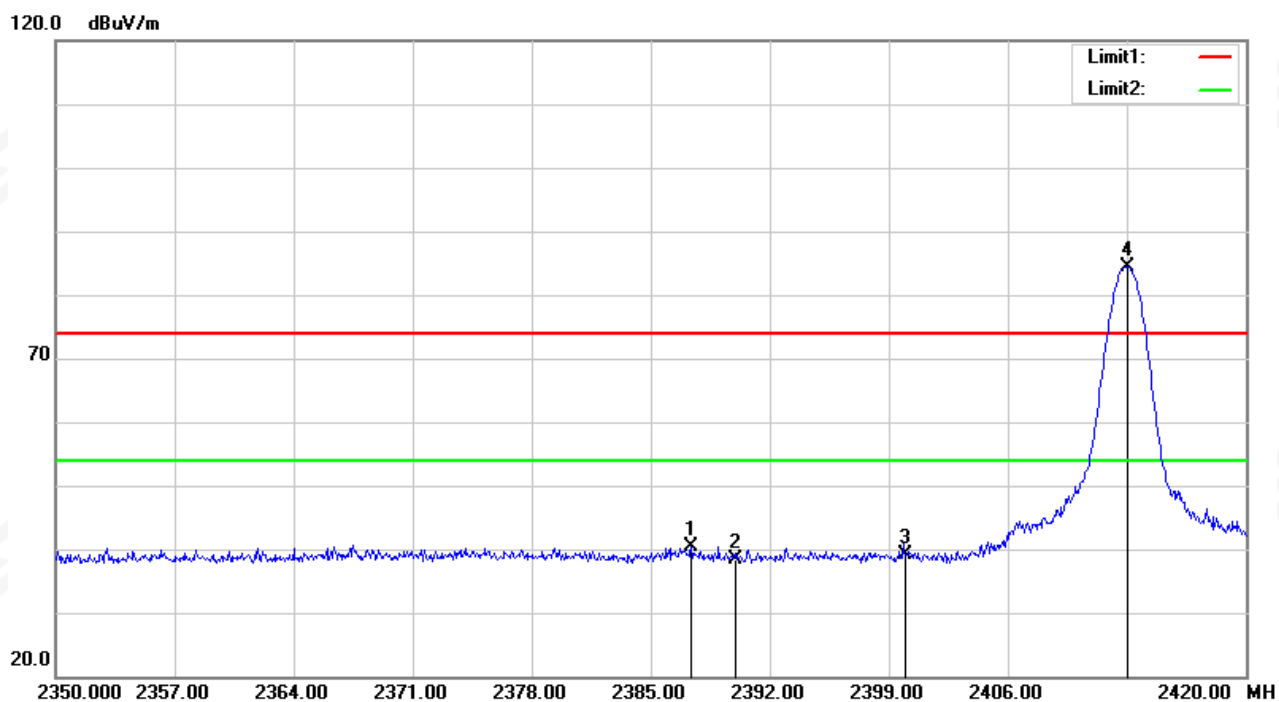

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2387.380	39.65	0.79	40.44	74.00	-33.56	peak
2	2390.000	37.53	0.81	38.34	74.00	-35.66	peak
3	2400.000	38.16	0.88	39.04	74.00	-34.96	peak


Fundamental Frequency

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Duty cycle Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4	2413.000	83.41	0.90	-	84.31	114	-29.69	peak
4	2413.000	83.41	0.90	5.04	79.27	94	-14.73	AVG



CH16

Horizontal

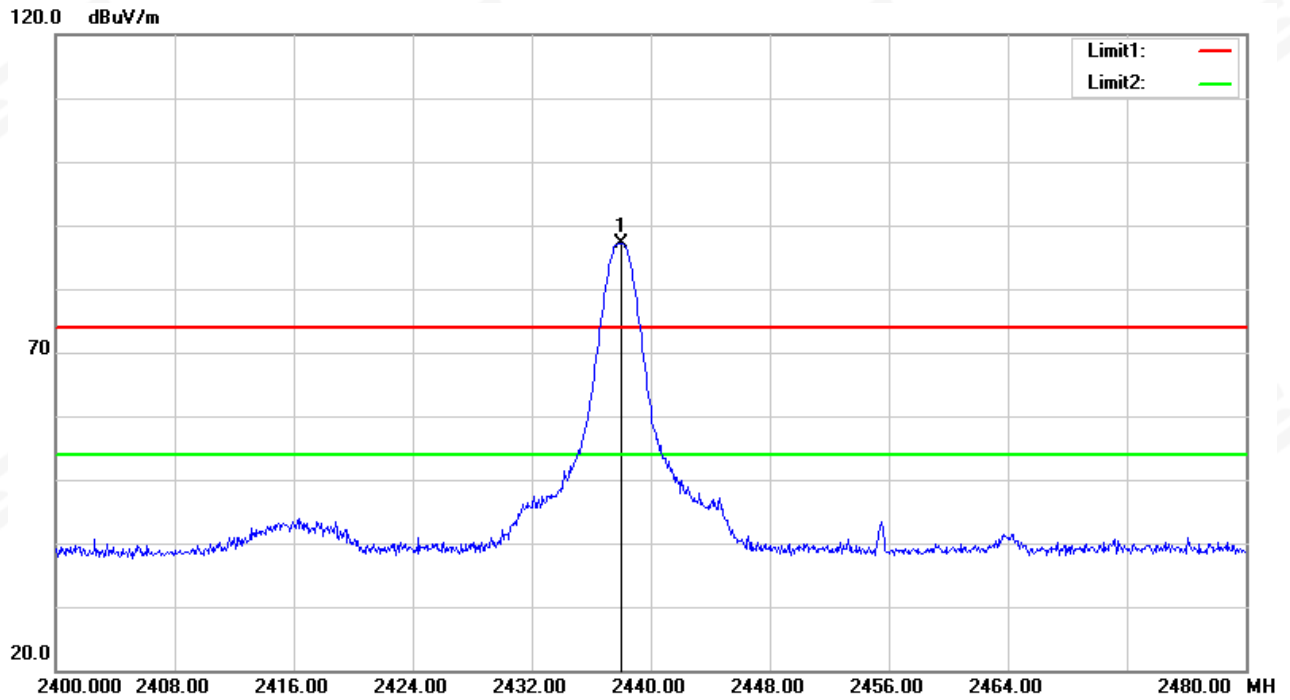


Fundamental Frequency

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Duty cycle Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2438.000	86.23	0.95	-	87.18	114	-26.82	peak
1	2438.000	86.23	0.95	5.04	82.14	94	-11.86	AVG



Vertical

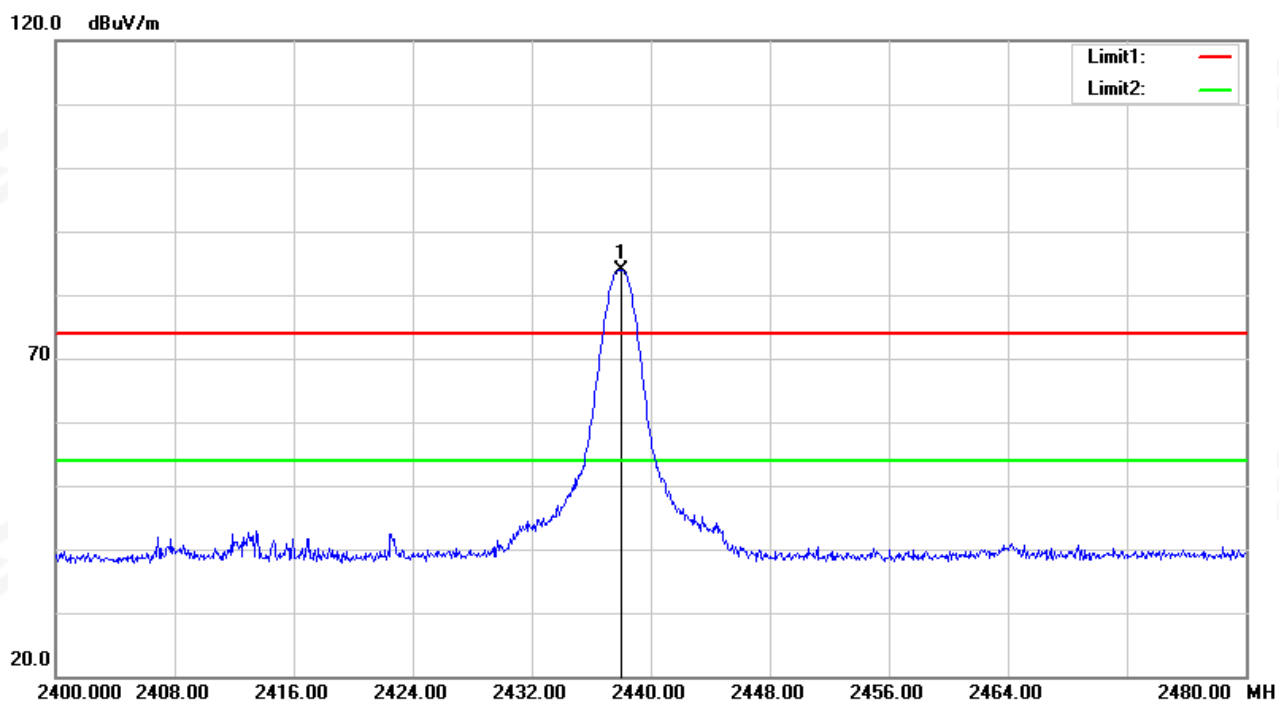


Fundamental Frequency

No.	Frequency	Reading	Correct	Duty cycle	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	Factor(dB/m)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	2438.000	82.97	0.95	-	83.92	114	-30.08	peak
1	2438.000	82.97	0.95	5.04	78.88	94	-15.12	AVG



CH32

Horizontal

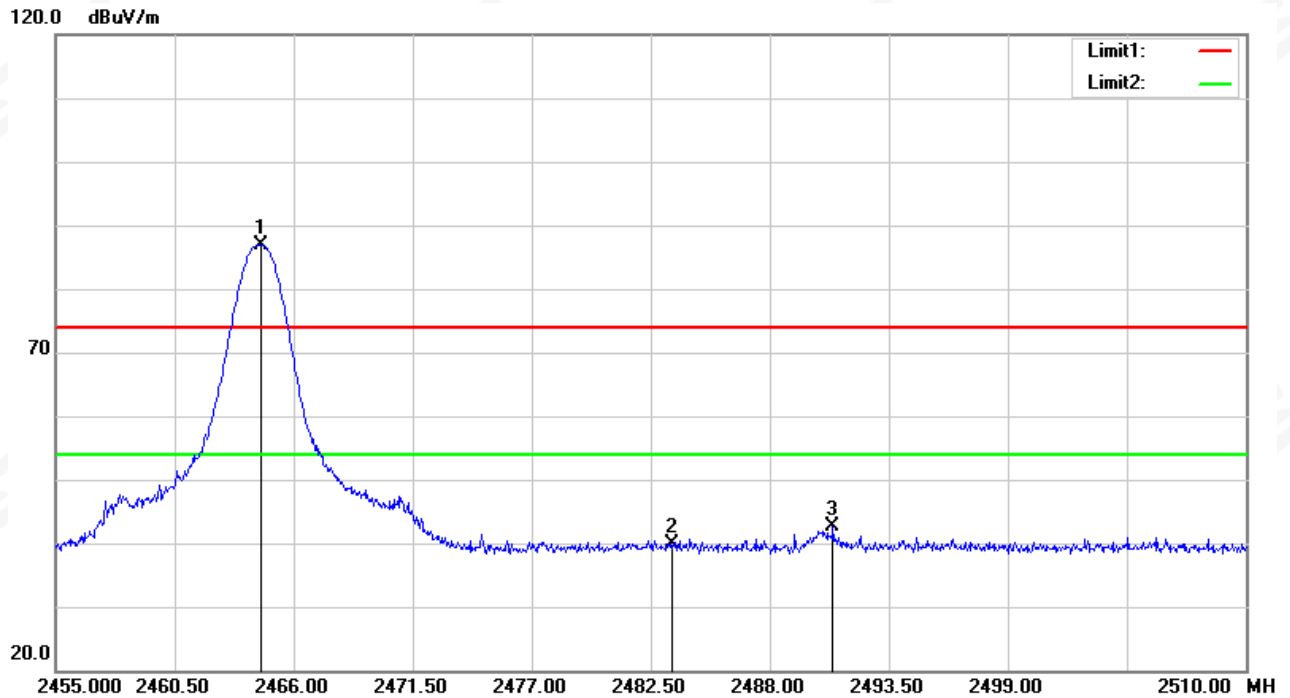


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
2	2483.500	38.75	1.02	39.77	74.00	-34.23	peak
3	2490.915	41.48	1.04	42.52	74.00	-31.48	peak

Fundamental Frequency

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Duty cycle Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2464.500	85.83	0.99	-	86.82	114	-27.18	peak
1	2464.500	85.83	0.99	5.04	81.78	94	-12.22	AVG



Vertical

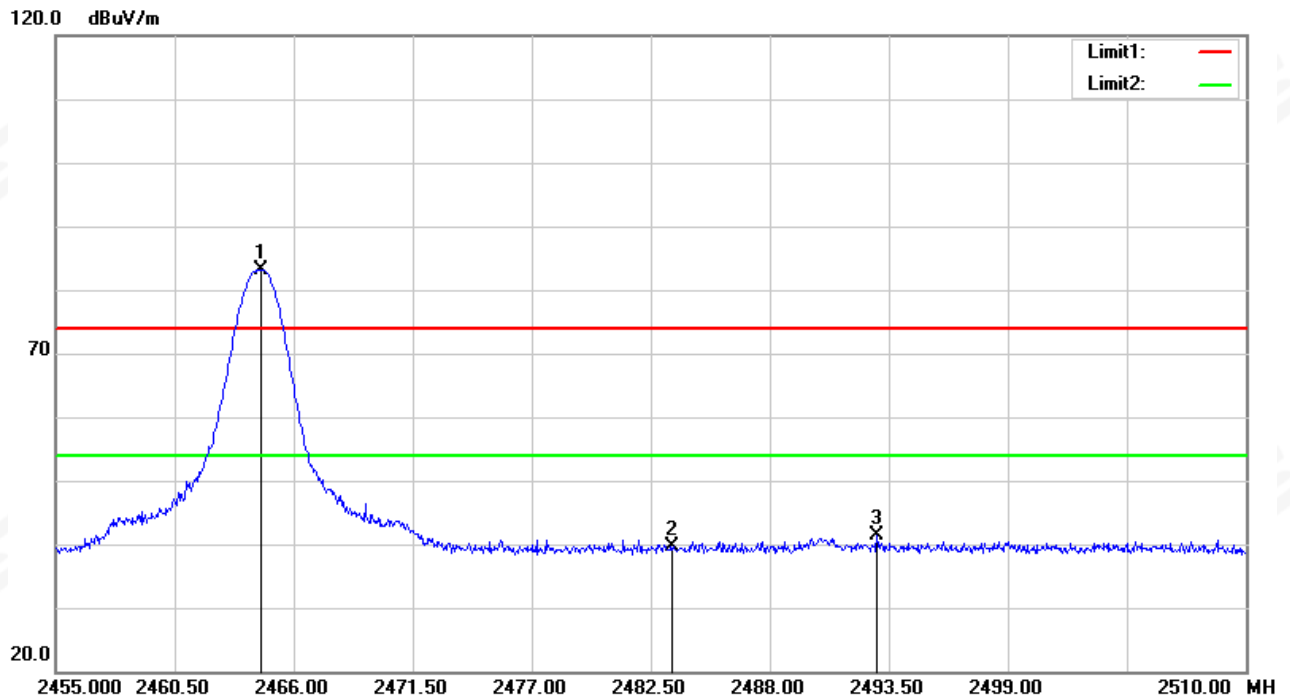

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
2	2483.500	38.49	1.02	39.51	74.00	-34.49	peak
3	2492.950	40.29	1.04	41.33	74.00	-32.67	peak

Fundamental Frequency

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Duty cycle Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2464.500	82.10	0.99	-	83.09	114	-30.91	peak
1	2464.500	82.10	0.99	5.04	78.05	94	-15.95	AVG



4. BANDWIDTH TEST

4.1 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- Spectrum Setting : RBW= 1% to 5% OBW, VBW $\geq$ RBW, Sweep time = Auto.

4.2 TEST SETUP




4.3 EUT OPERATION CONDITIONS

TX mode.

4.4 TEST RESULTS


Test Channel	Frequency(MHz)	20dB Bandwidth(KHz)
CH01	2412.99	782
CH16	2437.99	1007
CH32	2464.49	793.8

CH01

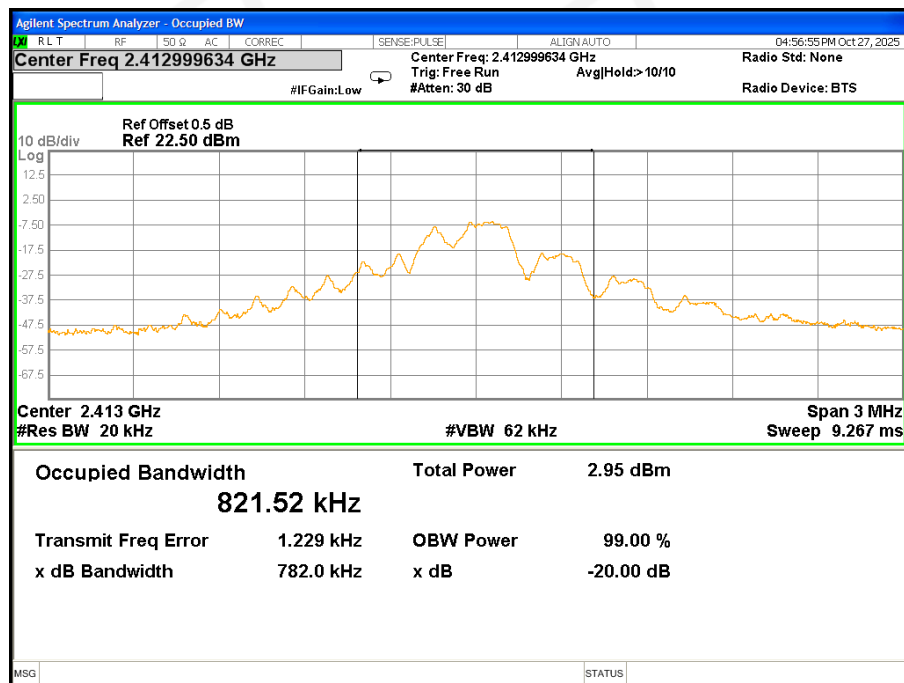




CH16

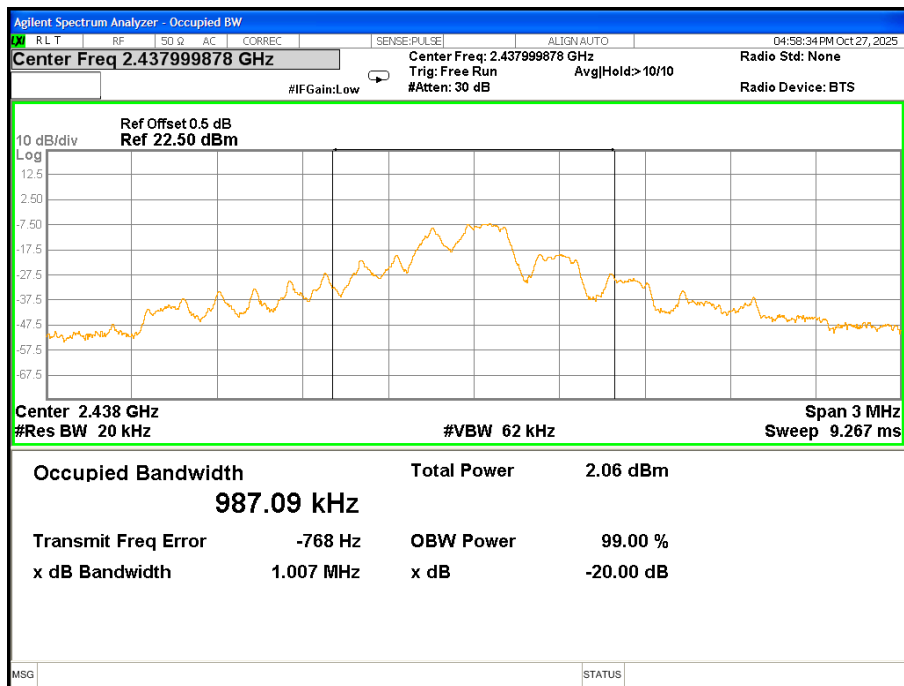

CH32

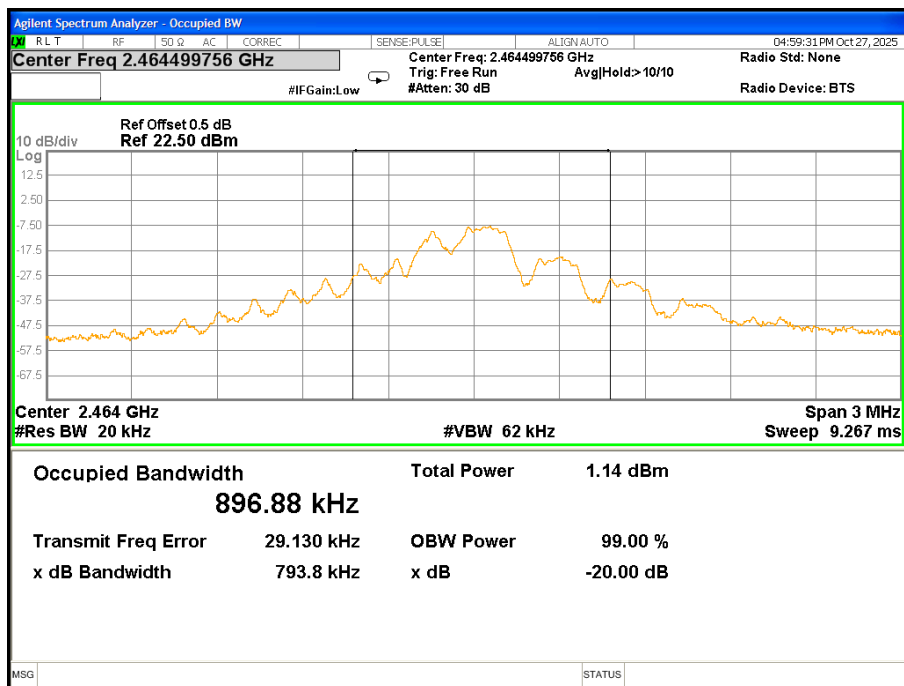



5. ANTENNA REQUIREMENT

5.1 STANDARD REQUIREMENT

According to the FCC Part 15 Paragraph 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

5.2 EUT ANTENNA

The EUT antenna is Ceramic Antenna. It conforms to the standard requirements.



APPENDIX- PHOTOS OF TEST SETUP

Note: See test photos in setup photo document for the actual connections between Product and support equipment.

※※※※END OF THE REPORT※※※※※