



FCC RF Test Report

APPLICANT : OnePlus Technology (Shenzhen) Co.,Ltd.
EQUIPMENT : Smart Phone
BRAND NAME : ONEPLUS
MODEL NAME : NE2217, NE2215
FCC ID : 2ABZ2-AA438
STANDARD : FCC Part 15 Subpart C §15.209
CLASSIFICATION : (DCD) Part 15 Low Power Transmitter Below 1705 kHz
TEST DATE(S) : Nov. 02, 2021 ~ Nov. 13, 2021

We, Sporton International (ShenZhen) Inc., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (ShenZhen) Inc., the test report shall not be reproduced except in full.

Derreck Chen

Reviewed by: Derreck Chen / Supervisor

Eric Shih

Approved by: Eric Shih / Manager



Sporton International (ShenZhen) Inc.

**1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055
People's Republic of China**



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description	5
1.1 Applicant.....	5
1.2 Manufacturer	5
1.3 Product Feature of Equipment Under Test	5
1.4 Modification of EUT	5
1.5 Test Location	6
1.6 Test Software	6
1.7 Applied Standards	6
2 Test Configuration of Equipment Under Test	7
2.1 Test Mode	7
2.2 Connection Diagram of Test System	8
2.3 Support Unit used in test configuration and system	9
3 Test Result	10
3.1 20dB and 99% Occupied Bandwidth Measurement	10
3.2 Radiated Emission Measurement	13
3.3 AC Conducted Emission Measurement	23
3.4 Antenna Requirements.....	27
4 List of Measuring Equipment.....	28
5 Uncertainty of Evaluation	29
Appendix A. Setup Photographs	



History of this test report

Report No.	Version	Description	Issued Date
FR1O1920E	01	Initial issue of report	Dec. 17, 2021

Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.1	2.1049	20dB Bandwidth	Reporting Only	-
3.1	2.1049	99% Occupied Bandwidth	Reporting Only	-
3.2	15.209	Radiated Emission	Pass	Under limit 16.51 dB at 849.650 MHz
3.3	15.207	AC Conducted Emission	Pass	Under limit 7.76 dB at 0.200 MHz
3.4	15.203	Antenna Requirements	Pass	-

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

1 General Description

1.1 Applicant

OnePlus Technology (Shenzhen) Co.,Ltd.

18C02, 18C03, 18C04, 18C05, Shum Yip Terra Building, Binhe Avenue North, Futian District, Shenzhen, Guangdong, China.

1.2 Manufacturer

OnePlus Technology (Shenzhen) Co.,Ltd.

18C02, 18C03, 18C04, 18C05, Shum Yip Terra Building, Binhe Avenue North, Futian District, Shenzhen, Guangdong, China.

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Smart Phone
Brand Name	ONEPLUS
Model Name	NE2217, NE2215
FCC ID	2ABZ2-AA438
IMEI Code	Conducted: 861679050034387 Conduction: 861679050034163 Radiation: 861679050034122
HW Version	11
SW Version	NE2217_11_A.02
WPT Frequency Range	110 ~ 148.5kHz
WPT Type of Modulation	ASK
WPT Antenna Type	Fixed Internal Antenna
EUT Stage	Production Unit

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Modification of EUT

No modifications are made to the EUT during all test items.

1.5 Test Location

Sporton International (Shenzhen) Inc. is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

Test Firm	Sporton International (Shenzhen) Inc.		
Test Site Location	1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055 People's Republic of China TEL: +86-755-86379589 FAX: +86-755-86379595		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	CO01-SZ TH01-SZ	CN1256	421272

Test Firm	Sporton International (Shenzhen) Inc.		
Test Site Location	101, 1st Floor, Block B, Building 1, No. 2, Tengfeng 4th Road, Fenghuang Community, Fuyong Street, Baoan District, Shenzhen City Guangdong Province China 518103 TEL: +86-755-33202398		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	03CH05-SZ	CN1256	421272

1.6 Test Software

Item	Site	Manufacture	Name	Version
1.	03CH05-SZ	AUDIX	E3	6.2009-8-24a1
2.	CO01-SZ	AUDIX	E3	6.120613b

1.7 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.209, §15.207
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01.
- ♦ ANSI C63.10-2013

Remark: All test items were verified and recorded according to the standards and without any deviation during the test.

2 Test Configuration of Equipment Under Test


2.1 Test Mode

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 1000 MHz).
- b. AC power line Conducted Emission was tested under maximum output power.


Test Items	Function Type
20dB and 99% Occupied Bandwidth	Mode 1: EUT + Battery + Other phone (Power-on State with Battery 90%) Wireless Charging from EUT Mode 2: EUT + Battery + Other phone (Power-off State) Wireless Charging from EUT
AC Conducted Emission	Mode 1: Bluetooth Link + WLAN 2.4GHz Link + Battery + Charing from Wireless Charger
Radiated Emission	Mode 1: EUT + Battery + Other phone (Power-on State with Battery 20%) Wireless Charging from EUT Mode 2: EUT + Battery + Other phone (Power-on State with Battery 50%) Wireless Charging from EUT Mode 3: EUT + Battery + Other phone (Power-on State with Battery 90%) Wireless Charging from EUT Mode 4: EUT(with Battery 50%) + Battery + Other phone (Power-off State) Wireless Charging from EUT
Remark: The worst case of radiated emission is mode 4; only the test data of it was reported.	

2.2 Connection Diagram of Test System

Conducted Emission:

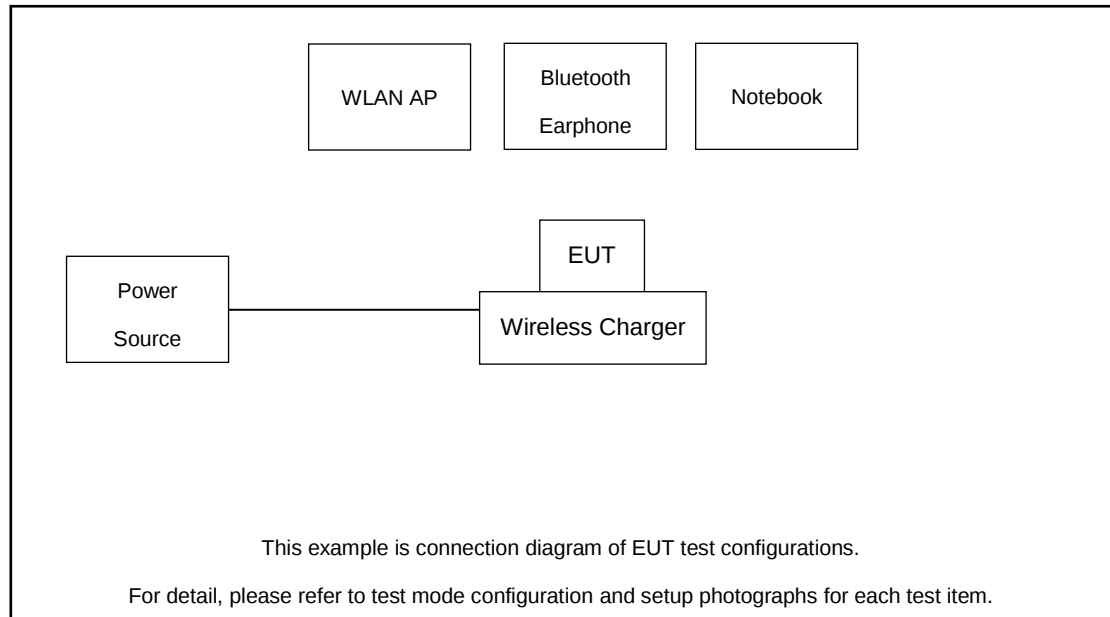

Radiated Emission:

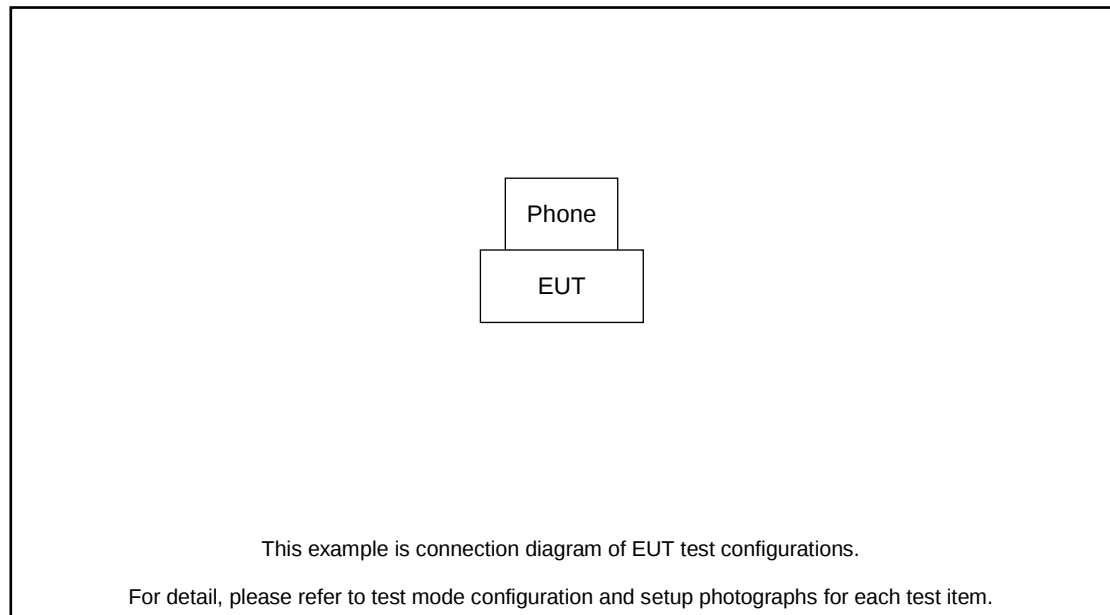



2.3 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	WLAN AP	Dlink	DIR-820L	KA2IR820LA1	N/A	Unshielded, 1.8m
2.	Bluetooth Earphone	Samsung	EO-MG900	PYAHS-107W	N/A	N/A
3.	Notebook	Lenovo	E540	FCC DoC	Lenovo	E540
4.	Phone	ONEPLUS	N/A	N/A	N/A	N/A
5.	Wireless Charger	N/A	N/A	N/A	N/A	N/A

3 Test Result

3.1 20dB and 99% Occupied Bandwidth Measurement

3.1.1 Limit of 20dB and 99% Occupied Bandwidth

Reporting only


3.1.2 Measuring Instruments

See list of measuring equipment of this test report.

3.1.3 Test Procedures

1. The 20dB bandwidth is measured with a spectrum analyzer connected via a receiver antenna placed near the EUT while wirelessly charging a charging board.
2. Use the following spectrum analyzer settings for 99 % Bandwidth measurement.
3. Measure and record the results in the test report.

3.1.4 Test Setup

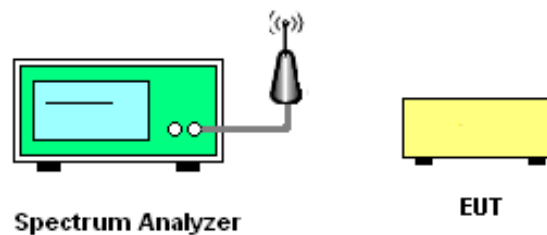





3.1.5 Test Result of 20dB and 99% Bandwidth

Mode 1

20 dB Bandwidth Plot

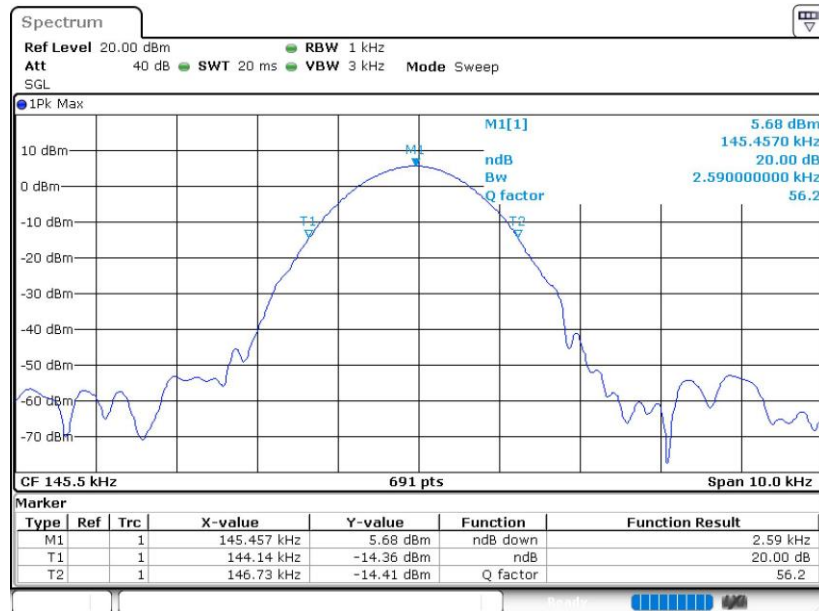


99% Occupied Bandwidth Plot

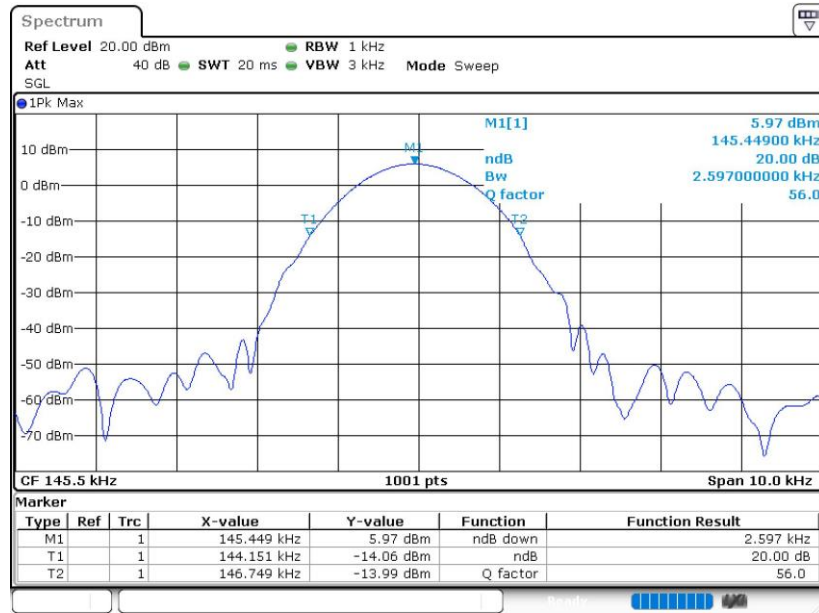




Mode 2

20 dB Bandwidth Plot

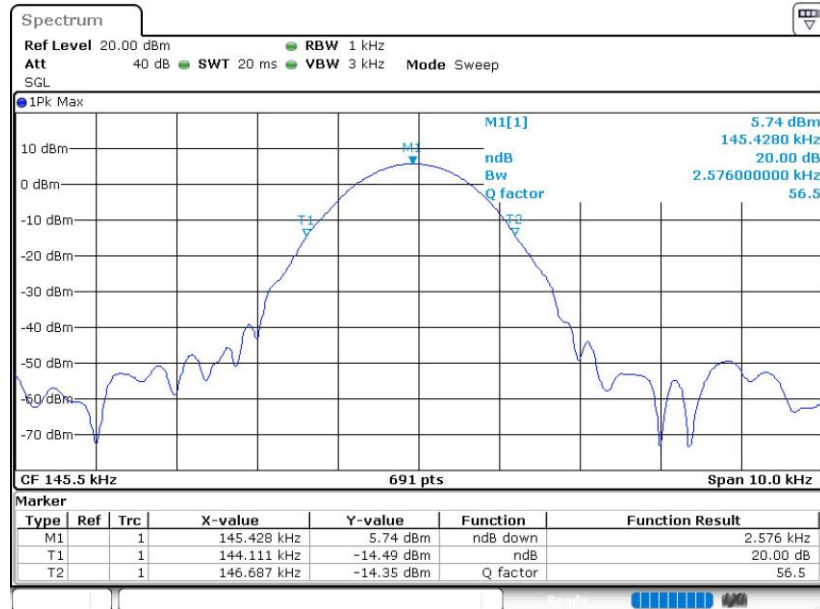

Date: 12.NOV.2021 16:10:47

99% Occupied Bandwidth Plot

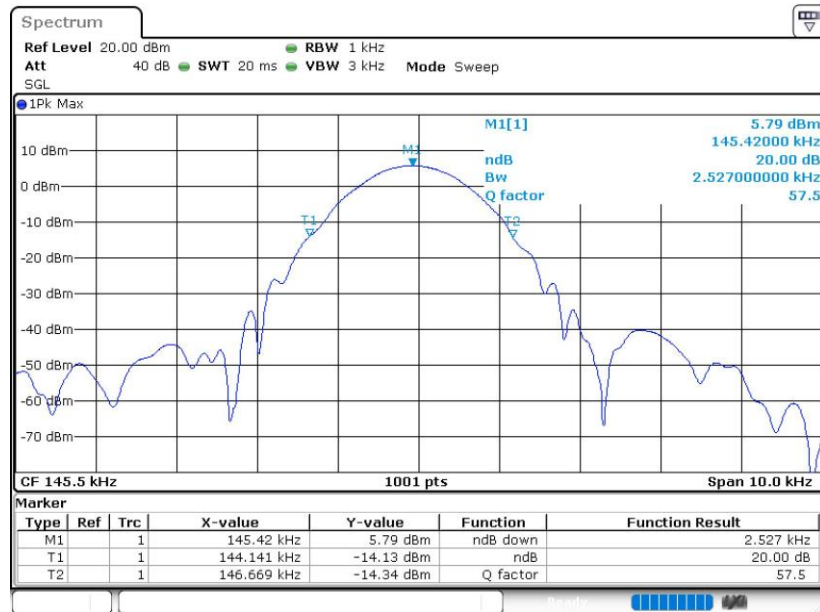

Date: 12.NOV.2021 16:05:26

3.2 Radiated Emission Measurement

3.2.1 Limit of Radiated Emission

The emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

Receiver Parameter	Setting
Frequency Range: 9kHz~150kHz	RBW 200Hz for QP
Frequency Range: 150kHz~30MHz	RBW 9kHz for QP
Frequency Range: 30MHz~1000MHz	RBW 120kHz for Peak

Note: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz. Radiated emission limits in these two bands are based on measurements employing an average detector.

For radiated emissions from 9kHz to 1GHz test distance is 3m

For 9kHz ~ 30MHz

1. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
2. Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB);
3. specific line (dB μ V/m) = $20 \log$ Emission level (μ V/m)
4. Limit line = specific limits (dB μ V/m) + distance extrapolation factor.

3.2.2 Measuring Instruments


See list of measuring equipment of this test report.

3.2.3 Measuring Instrument Setting

Follow the guidelines in ANSI C63.10-2013 with respect to maximizing the emission by rotating the EUT, measuring the emission for three EUT orthogonal planes, and adjusting the measurement antenna height and polarization. A pre-amp and a high pass filter are used for this test in order to get the good signal level.


3.2.4 Test Setup of Radiated Emission

For radiated emissions below 30MHz

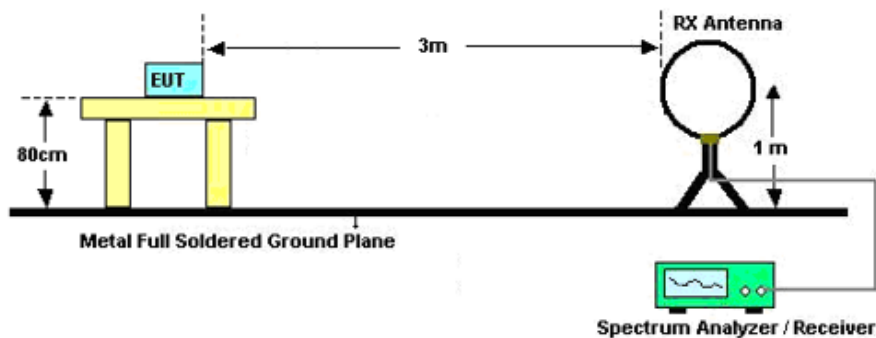


Note: There is a comparison data of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result came out very similar.

For radiated emissions above 30MHz

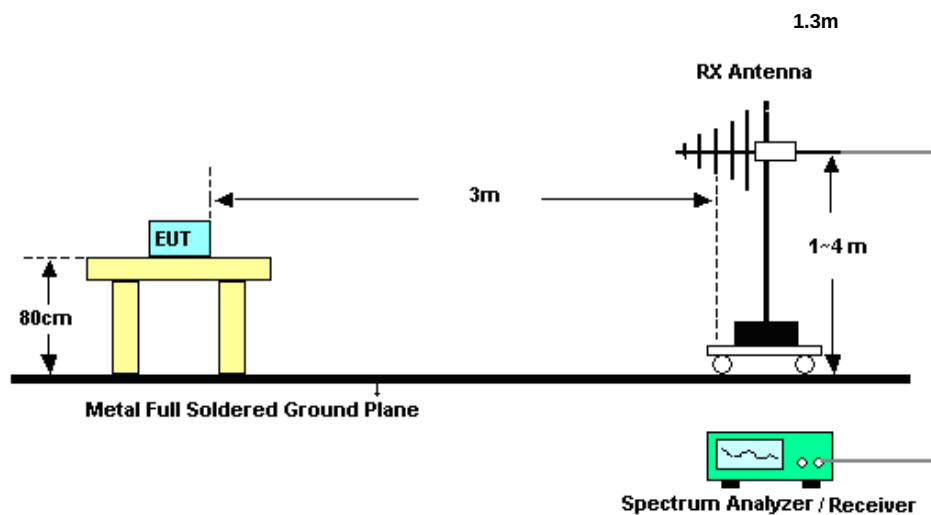



3.2.5 Test Result of Radiated Emission

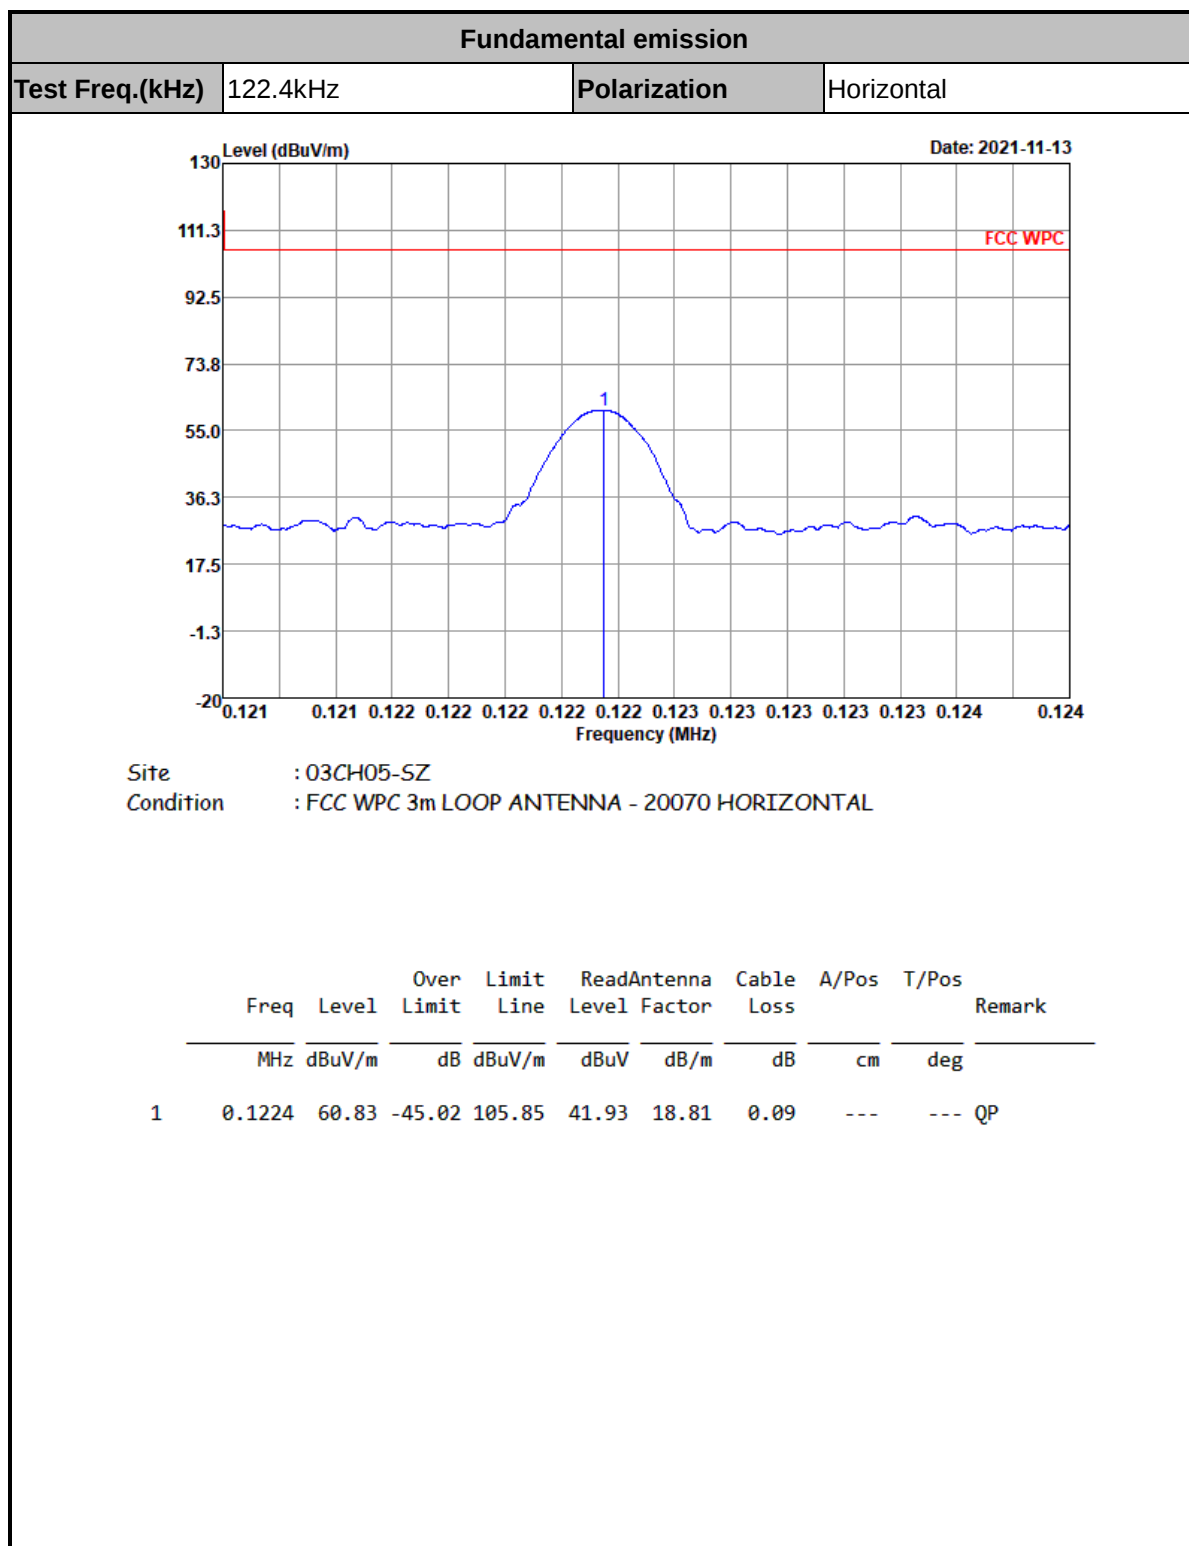




Fundamental emission

Test Freq.(kHz) 122.5kHz

Polarization


Vertical

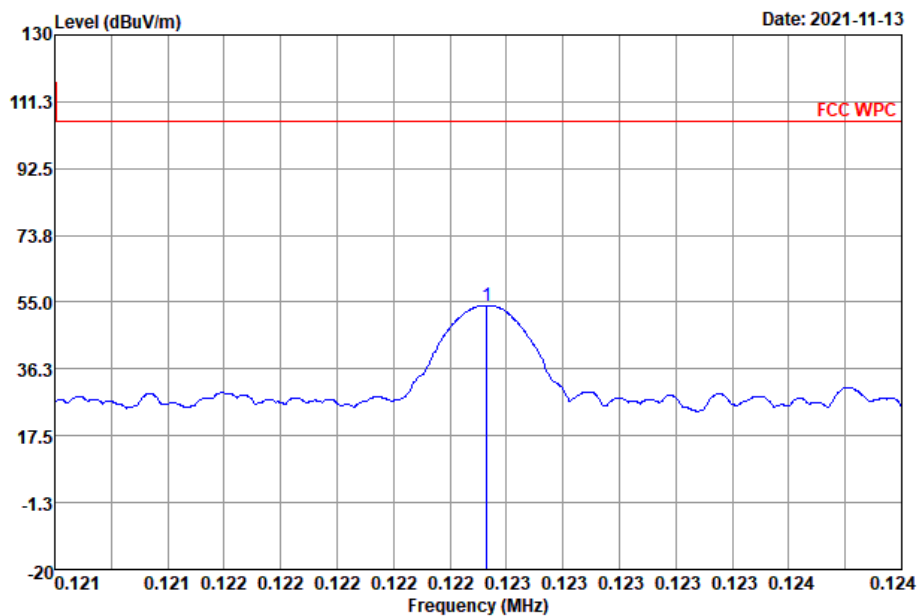

Site : 03CH05-SZ


Condition : FCC WPC 3m LOOP ANTENNA - 20070 VERTICAL

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level Factor	Cable Loss	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg
1	0.1225	54.04	-51.80	105.84	35.14	18.81	0.09	---	--- QP

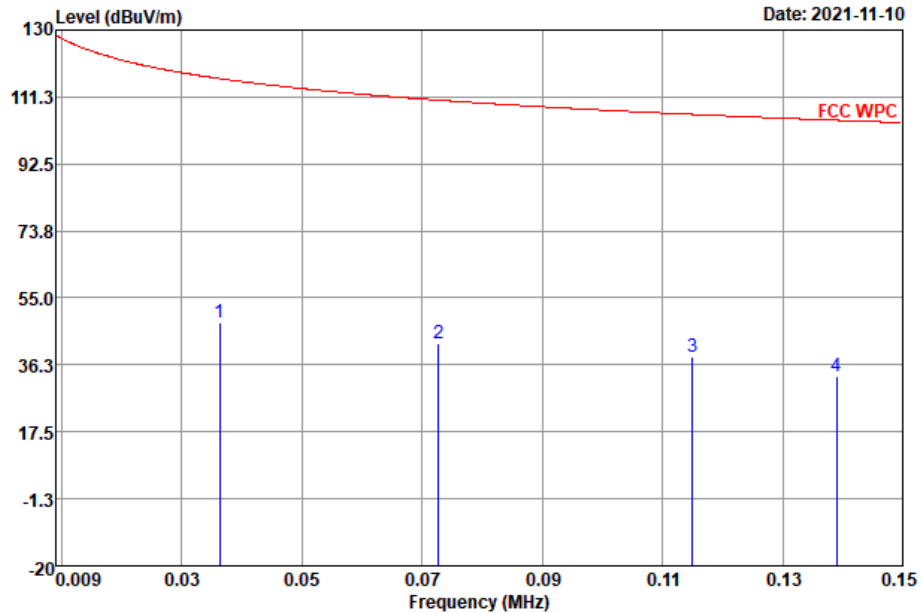Radiated Emission (9kHz ~ 150kHz)
Polarization : Horizontal

Site : 03CH05-SZ

Condition : FCC WPC 3m LOOP ANTENNA - 20070 HORIZONTAL

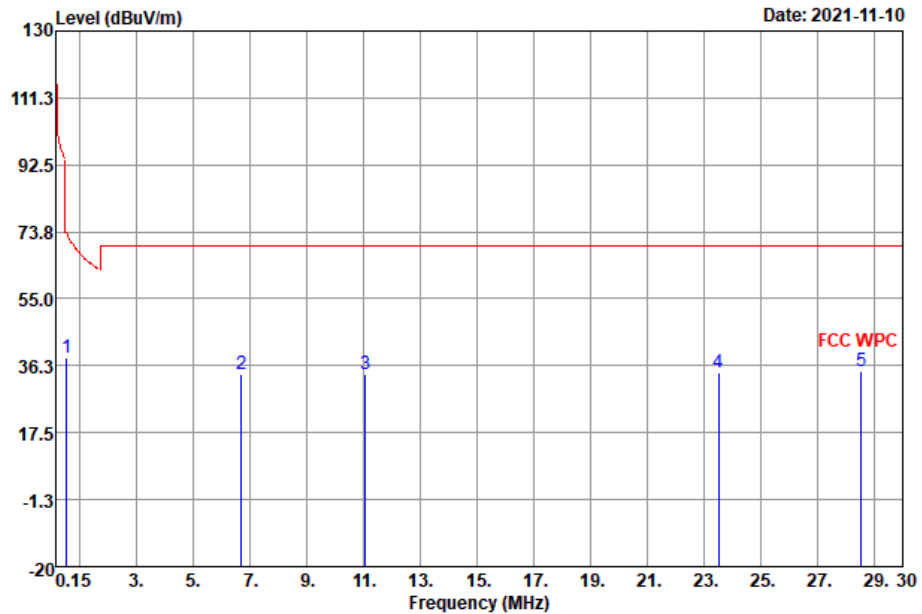	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Cable Loss	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg	
1	0.0363	48.28	-68.12	116.40	29.30	18.93	0.05	---	---	Average
2	0.0727	42.44	-67.93	110.37	23.50	18.87	0.07	---	---	Average
3	0.1151	38.61	-67.78	106.39	19.71	18.81	0.09	---	---	Average
4	0.1391	33.11	-71.63	104.74	14.21	18.81	0.09	---	---	Average

Radiated Emission (150kHz ~ 30MHz)
Polarization : Horizontal


Site : 03CH05-SZ


Condition : FCC WPC 3m LOOP ANTENNA - 20070 HORIZONTAL

	Freq	Level	Over	Limit	ReadAntenna	Cable	A/Pos	T/Pos	Remark
	MHz	dBuV/m	Limit	Line	Level	Factor	Loss		
			dB	dBuV/m	dBuV	dB/m	dB	cm	deg
1	0.5422	38.58	-34.34	72.92	19.62	18.76	0.20	---	QP
2	6.6920	33.80	-36.20	70.00	14.84	18.61	0.35	---	QP
3	11.0720	34.11	-35.89	70.00	14.95	18.76	0.40	---	QP
4	23.5060	34.44	-35.56	70.00	14.79	19.12	0.53	---	QP
5	28.5350	34.75	-35.25	70.00	15.20	18.94	0.61	---	QP




Radiated Emission (30MHz ~ 1000MHz)

Polarization : Horizontal

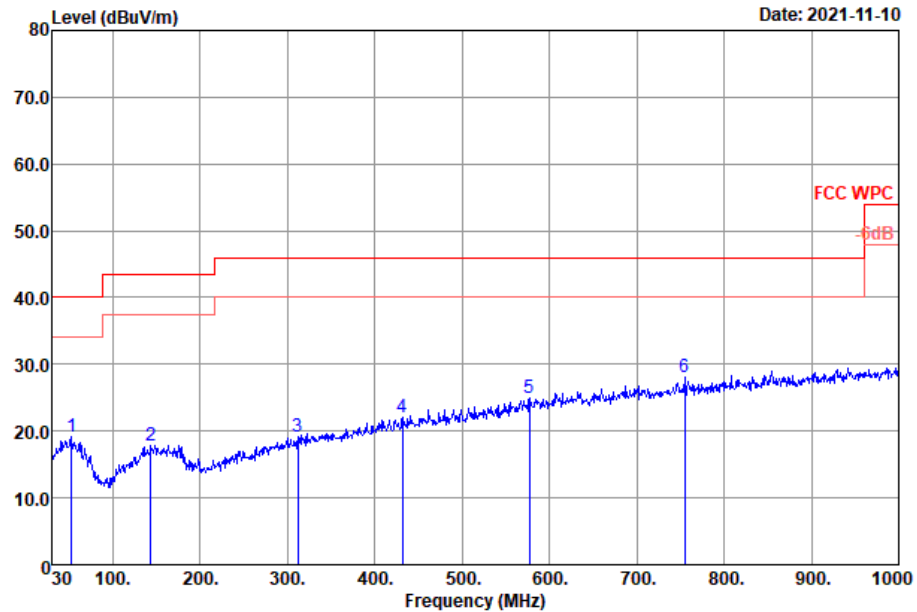

Site : 03CH05-SZ
Condition : FCC WPC 3m VULB9168-01001 HORIZONTAL

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	A/Pos	T/Pos	Remark	
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	52.31	19.17	-20.83	40.00	31.88	20.21	2.18	35.10	---	---	Peak
2	143.49	17.79	-25.71	43.50	31.07	19.29	2.54	35.11	---	---	Peak
3	312.27	19.18	-26.82	46.00	30.87	20.01	3.20	34.90	---	---	Peak
4	431.58	22.11	-23.89	46.00	30.81	22.74	3.30	34.74	---	---	Peak
5	577.08	25.01	-20.99	46.00	30.45	25.33	3.78	34.55	---	---	Peak
6 *	754.59	28.09	-17.91	46.00	30.67	27.92	3.89	34.39	---	---	Peak

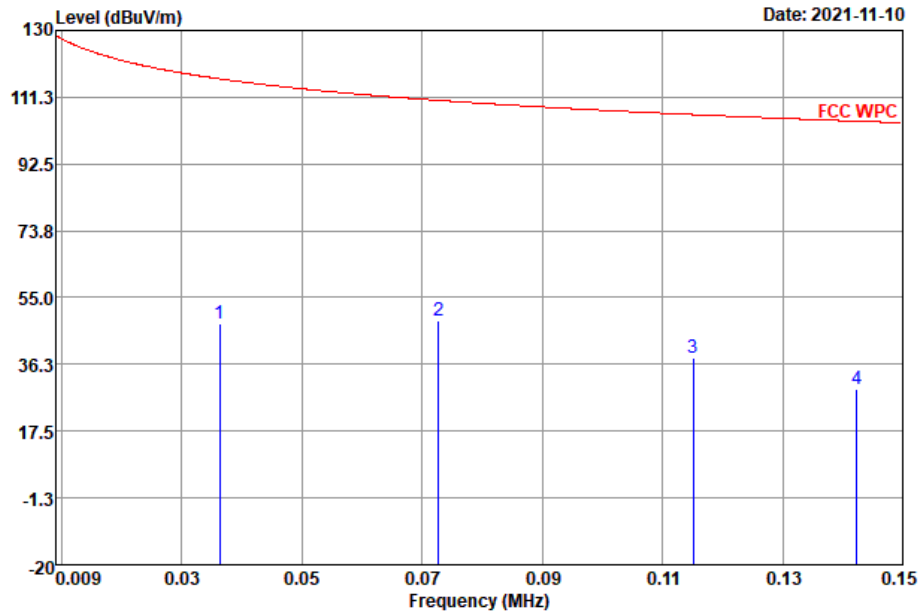Radiated Emission (9kHz ~ 150kHz)
Polarization : Vertical


Site : 03CH05-SZ


Condition : FCC WPC 3m LOOP ANTENNA - 20070 VERTICAL

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg
1	0.0363	47.51	-68.89	116.40	28.53	18.93	0.05	---	Average
2	0.0727	48.64	-61.73	110.37	29.70	18.87	0.07	---	Average
3	0.1151	38.14	-68.24	106.38	19.24	18.81	0.09	---	Average
4	0.1424	29.31	-75.22	104.53	10.41	18.81	0.09	---	Average



Radiated Emission (150kHz ~ 30MHz)

Polarization : Vertical

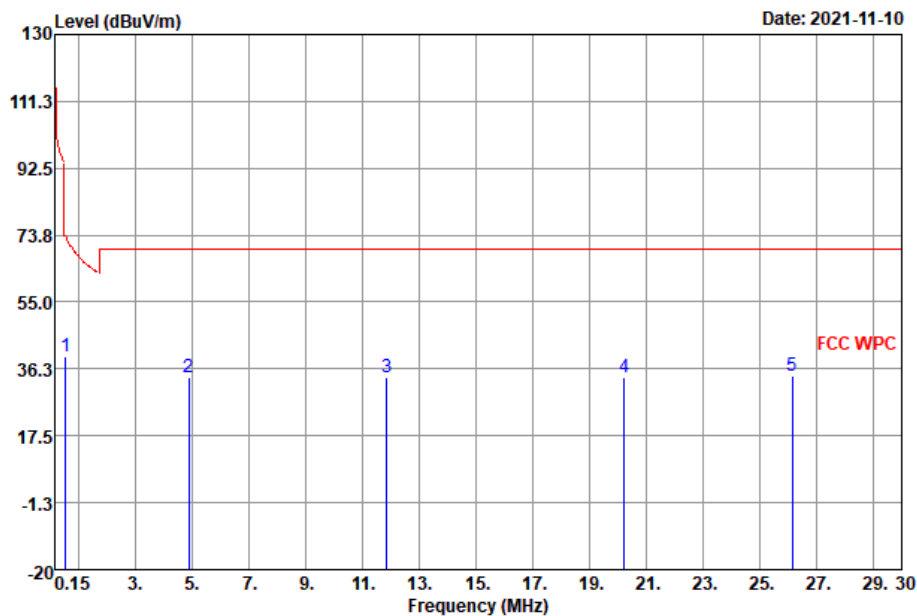

Site : 03CH05-SZ


Condition : FCC WPC 3m LOOP ANTENNA - 20070 VERTICAL

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg	
1	0.5422	39.76	-33.16	72.92	20.80	18.76	0.20	---	---	QP
2	4.8860	33.92	-36.08	70.00	14.76	18.84	0.32	---	---	QP
3	11.8560	33.87	-36.13	70.00	14.78	18.68	0.41	---	---	QP
4	20.2300	34.03	-20.47	54.50	14.33	19.19	0.51	---	---	QP
5	26.1450	34.18	-35.82	70.00	14.48	19.12	0.58	---	---	QP



Radiated Emission (30MHz ~ 1000MHz)

Polarization : Vertical

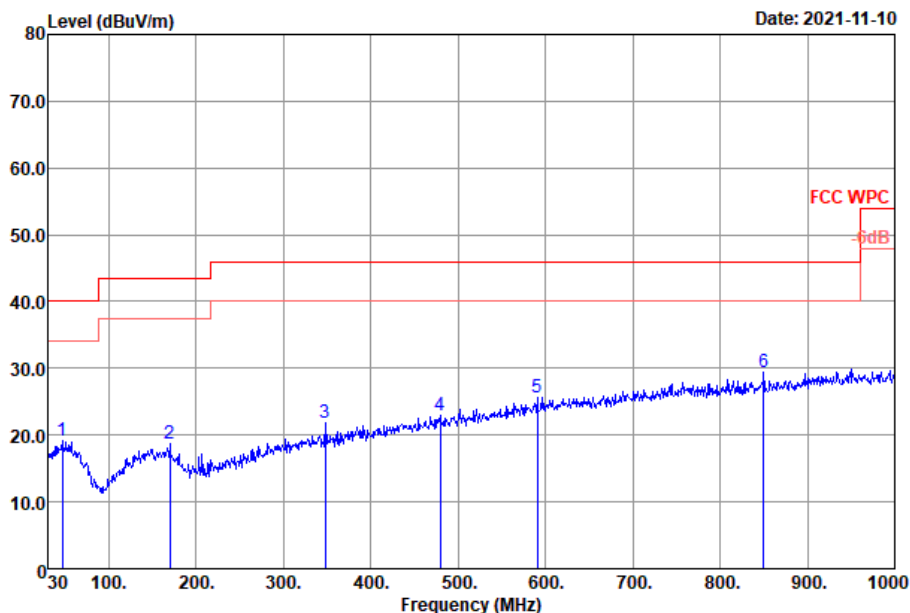

Site : 03CH05-SZ

Condition : FCC WPC 3m VULB9168-01001 VERTICAL

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Preamp	A/Pos	T/Pos	Remark		
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	46.49	19.15	-20.85	40.00	31.80	20.26	2.15	35.06	---	---	Peak
2	169.68	18.75	-24.75	43.50	32.07	19.15	2.63	35.10	---	---	Peak
3	348.16	21.84	-24.16	46.00	32.66	20.85	3.23	34.90	---	---	Peak
4	479.11	22.89	-23.11	46.00	30.66	23.53	3.40	34.70	---	---	Peak
5	590.66	25.71	-20.29	46.00	30.76	25.62	3.85	34.52	---	---	Peak
6 *	849.65	29.49	-16.51	46.00	31.12	28.61	4.06	34.30	---	---	Peak

Note:

- Level(dBμV/m) = Read Level(dBμV) + Antenna Factor(dB/m) + Cable Loss(dB) - Preamp Factor(dB)
- Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

3.3 AC Conducted Emission Measurement

3.3.1 Limits of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of Emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-Peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.3.2 Measuring Instruments

See list of measuring equipment of this test report.

3.3.3 Test Procedure


1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

3.3.4 Test Setup

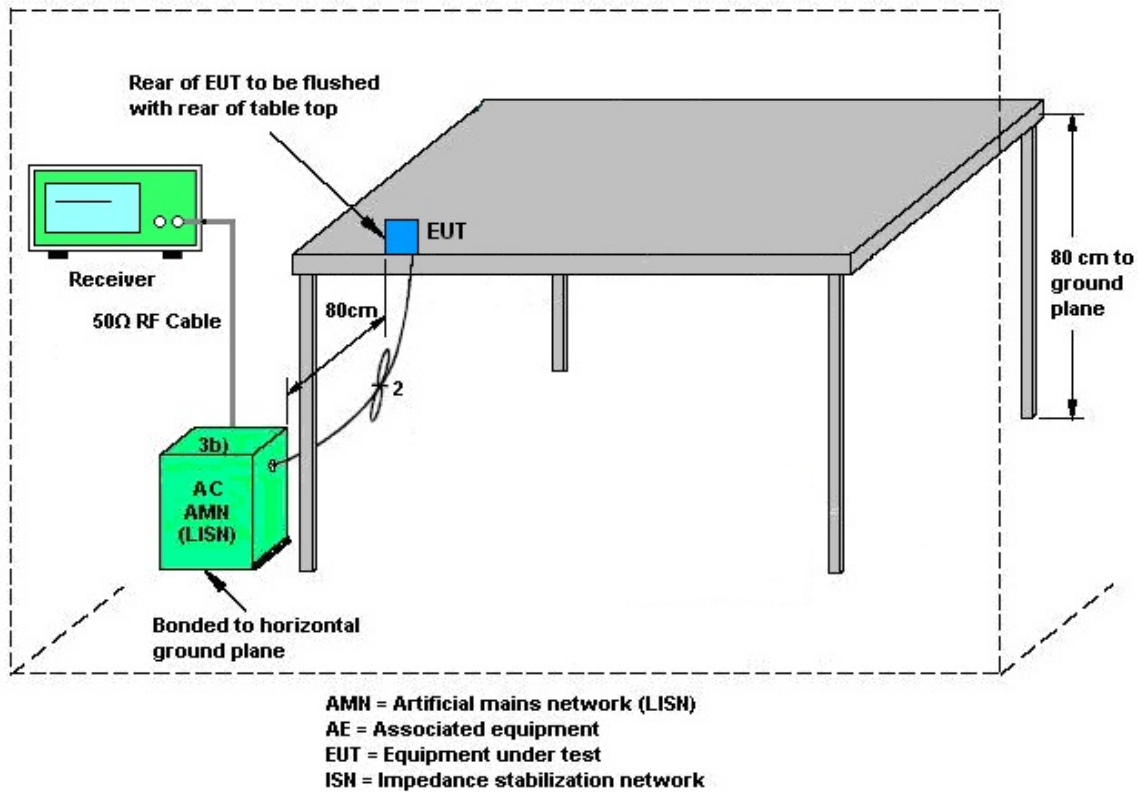

3.3.5 Test Result of AC Conducted Emission

Test Engineer :	YuQiang Xie	Temperature :	22~25°C
		Relative Humidity :	50~55%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

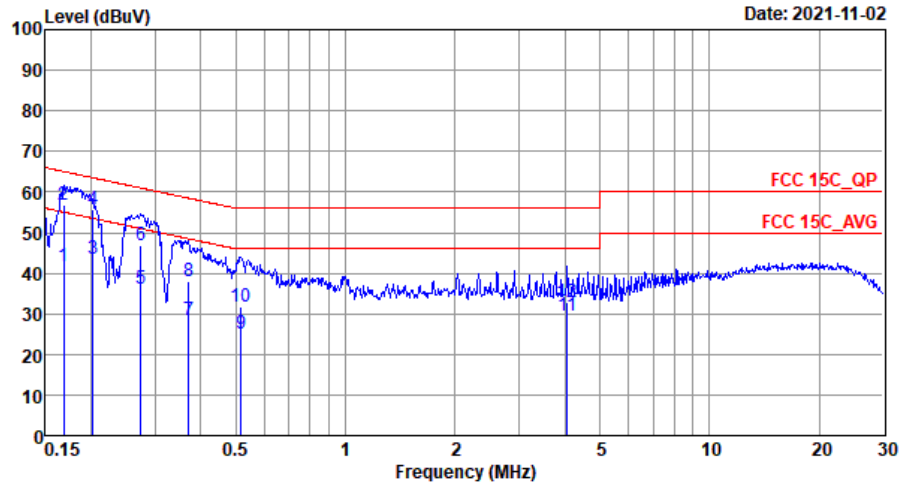


Site : CO01-SZ
Condition: FCC 15C_QP LISN_20210901_L LINE

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.17	41.82	-13.21	55.03	21.60	10.20	10.02	Average
2	0.17	56.92	-8.11	65.03	36.70	10.20	10.02	QP
3	0.20	43.53	-9.96	53.49	23.30	10.20	10.03	Average
4 *	0.20	55.73	-7.76	63.49	35.50	10.20	10.03	QP
5	0.27	36.01	-14.97	50.98	15.80	10.17	10.04	Average
6	0.27	46.81	-14.17	60.98	26.60	10.17	10.04	QP
7	0.37	28.43	-20.04	48.47	8.30	10.09	10.04	Average
8	0.37	37.83	-20.64	58.47	17.70	10.09	10.04	QP
9	0.52	24.97	-21.03	46.00	4.80	10.12	10.05	Average
10	0.52	31.67	-24.33	56.00	11.50	10.12	10.05	QP
11	4.07	29.65	-16.35	46.00	9.40	10.00	10.25	Average
12	4.07	32.75	-23.25	56.00	12.50	10.00	10.25	QP



Test Engineer :	YuQiang Xie	Temperature :	22~25°C
		Relative Humidity :	50~55%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

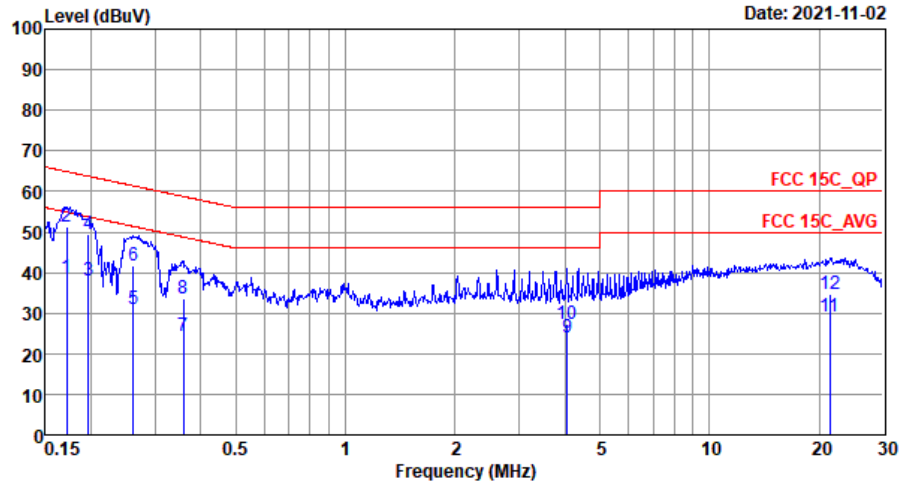

Site : CO01-SZ
Condition: FCC 15C_QP LISN_20210901_N NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
			dB	dBuV	dBuV	dB	dB	
1	0.17	38.73	-16.17	54.90	18.40	10.31	10.02	Average
2 *	0.17	51.43	-13.47	64.90	31.10	10.31	10.02	QP
3	0.20	37.91	-15.85	53.76	17.60	10.28	10.03	Average
4	0.20	49.31	-14.45	63.76	29.00	10.28	10.03	QP
5	0.26	31.08	-20.30	51.38	10.80	10.24	10.04	Average
6	0.26	41.58	-19.80	61.38	21.30	10.24	10.04	QP
7	0.36	24.52	-24.22	48.74	4.31	10.17	10.04	Average
8	0.36	33.52	-25.22	58.74	13.31	10.17	10.04	QP
9	4.07	24.10	-21.90	46.00	3.70	10.15	10.25	Average
10	4.07	27.40	-28.60	56.00	7.00	10.15	10.25	QP
11	21.37	29.33	-20.67	50.00	8.90	9.89	10.54	Average
12	21.37	34.83	-25.17	60.00	14.40	9.89	10.54	QP

Note:

- Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
- Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



3.4 Antenna Requirements

3.4.1 Standard Applicable

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited.

The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.4.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101078	10Hz~40GHz	Apr. 08, 2021	Nov. 12, 2021	Apr. 07, 2022	Conducted (TH01-SZ)
EMI Test Receiver	R&S	ESR7	102261	9kHz~7GHz	May 21, 2021	Nov. 10, 2021~ Nov. 13, 2021	May 20, 2022	Radiation (03CH05-SZ)
EXA Spectrum Analyzer	KEYSIGHT	N9010B	MY590711 91	10Hz~44GHz	Apr. 07, 2021	Nov. 10, 2021~ Nov. 13, 2021	Apr. 06, 2022	Radiation (03CH05-SZ)
Loop Antenna	R&S	HFH2-Z2	100354	9kHz~30MHz	Jun. 22, 2020	Nov. 10, 2021~ Nov. 13, 2021	Jun. 21, 2022	Radiation (03CH05-SZ)
Log-periodic Antenna	SCHWARZBECK	VULB 9168	01001	20MHz~1.5GHz	Mar. 25, 2021	Nov. 10, 2021~ Nov. 13, 2021	Mar. 24, 2022	Radiation (03CH05-SZ)
Double Ridge Horn Antenna	SCHWARZBECK	BBHA9120D	9120D-220 6	1GHz~18GHz	Apr. 11, 2021	Nov. 10, 2021~ Nov. 13, 2021	Apr. 10, 2022	Radiation (03CH05-SZ)
Amplifier	EM Electronics	EM330	060756	0.01Hz~3000MHz	Apr. 07, 2021	Nov. 10, 2021~ Nov. 13, 2021	Apr. 06, 2022	Radiation (03CH05-SZ)
HF Amplifier	EM Electronics	EM01G18GA	060781	1GHz~18GHz	Apr. 07, 2021	Nov. 10, 2021~ Nov. 13, 2021	Apr. 06, 2022	Radiation (03CH05-SZ)
Amplifier	Keysight	83017A	MY532703 57	500MHz~26.5GHz	Apr. 07, 2021	Nov. 10, 2021~ Nov. 13, 2021	Apr. 06, 2022	Radiation (03CH05-SZ)
AC Power Source	APC	AFV-S-600	F11905001 3	N/A	NCR	Nov. 10, 2021~ Nov. 13, 2021	NCR	Radiation (03CH05-SZ)
Turn Table	EMEC	T-200-S-1	060925-T	0~360 degree	NCR	Nov. 10, 2021~ Nov. 13, 2021	NCR	Radiation (03CH05-SZ)
Antenna Mast	EMEC	MBS-400-1	060927	1 m~4 m	NCR	Nov. 10, 2021~ Nov. 13, 2021	NCR	Radiation (03CH05-SZ)
EMI Receiver	R&S	ESR7	101630	9kHz~7GHz;	Mar. 08, 2021	Nov. 02, 2021	Mar. 07, 2022	Conduction (CO01-SZ)
AC LISN	R&S	ENV216	100063	9kHz~30MHz	Sep. 01, 2021	Nov. 02, 2021	Aug. 31, 2022	Conduction (CO01-SZ)
AC LISN (for auxiliary equipment)	EMCO	3816/2SH	00103892	9kHz~30MHz	Oct. 28, 2021	Nov. 02, 2021	Oct. 27, 2022	Conduction (CO01-SZ)
AC Power Source	Chroma	61602	616020000 891	100Vac~250Vac	Jul. 14, 2021	Nov. 02, 2021	Jul. 13, 2022	Conduction (CO01-SZ)

NCR: No Calibration Required



5 Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.2dB
--	-------

Uncertainty of Radiated Emission Measurement (9 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.5dB
--	-------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.2dB
--	-------

----- THE END -----