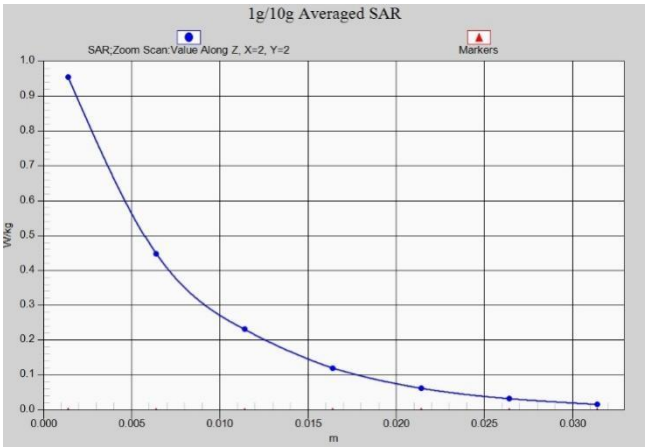

LTE Band38 Body 10mm ANT5

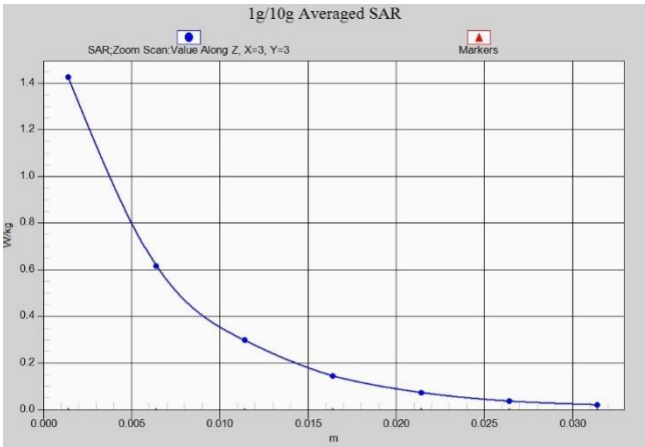

LTE Band41 PC3 Head ANT2

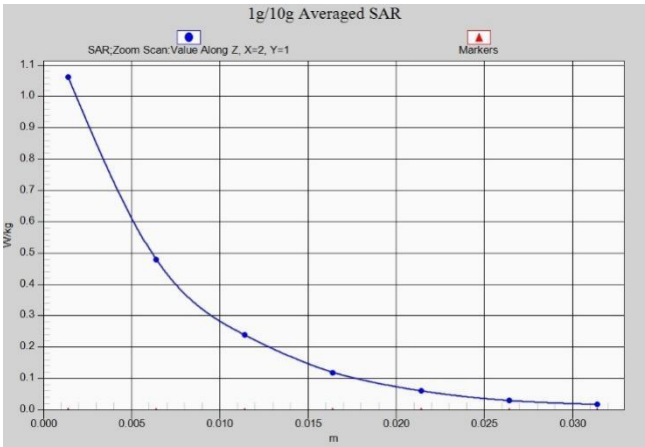

LTE Band41 PC3 Body 10mm ANT2

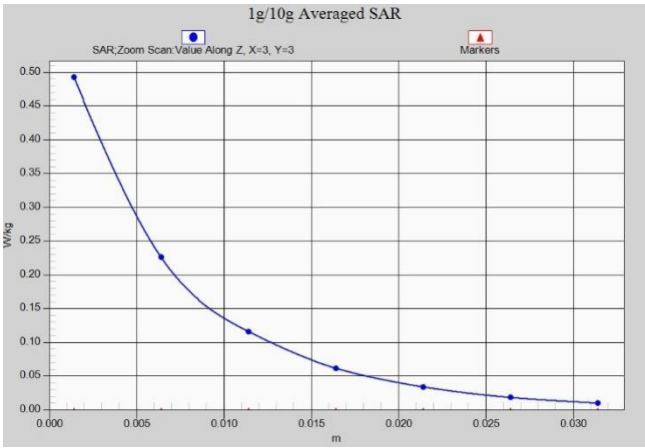

LTE Band41 PC3 Head ANT3

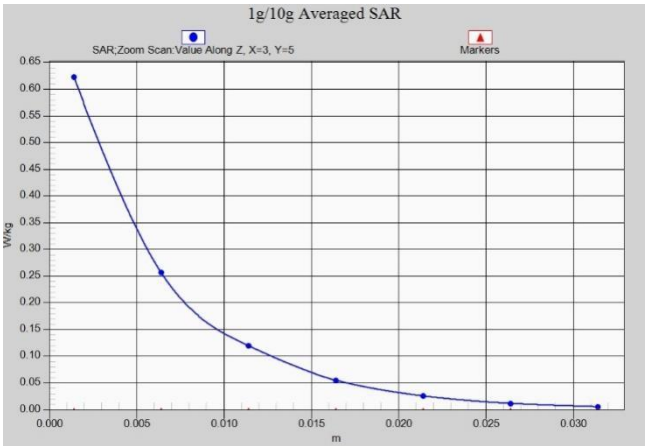

LTE Band41 PC3 Body 10mm ANT3

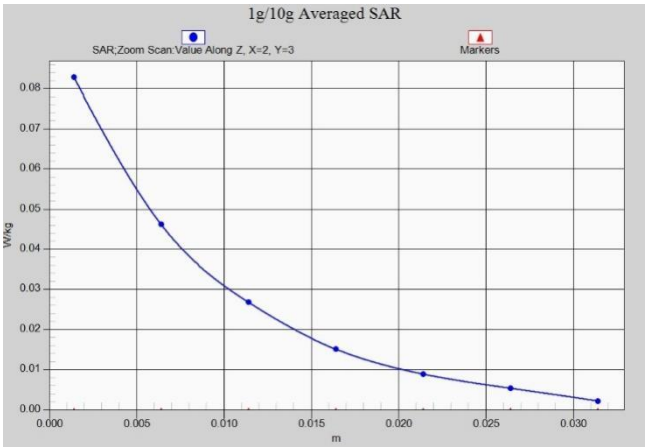

LTE Band41 PC3 Head ANT4

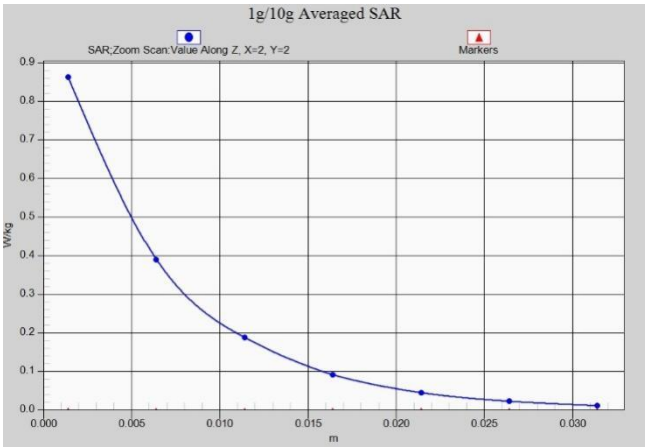

LTE Band41 PC3 Body 10mm ANT4

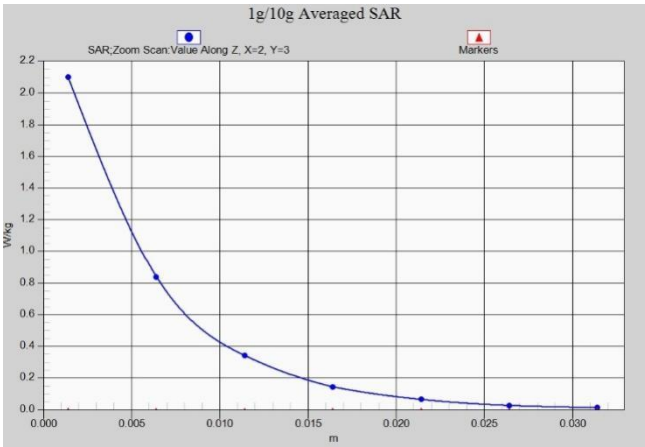

LTE Band41 PC3 Head ANT5

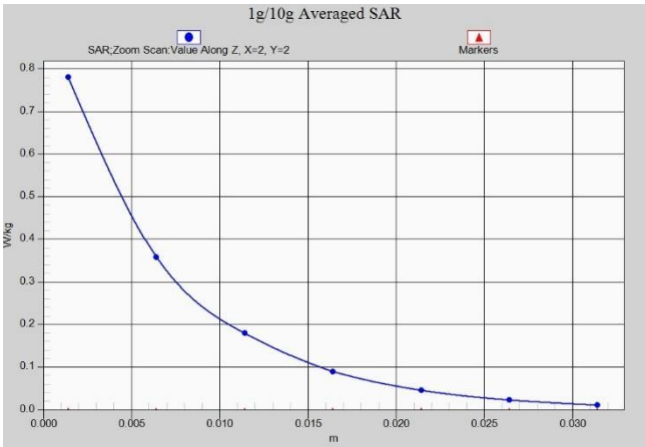

LTE Band41 PC3 Body 10mm ANT5

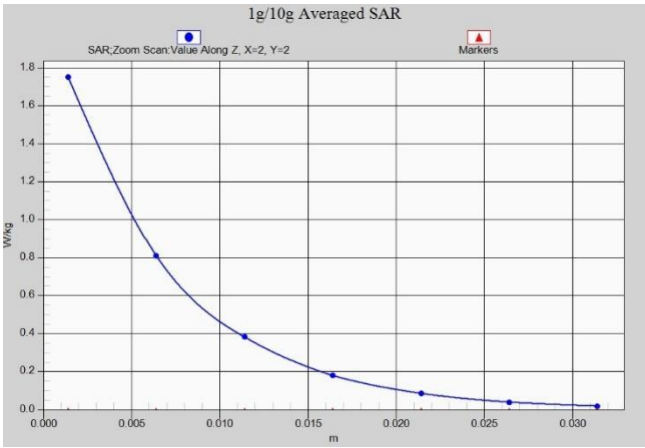

LTE Band41 PC2 Head ANT2

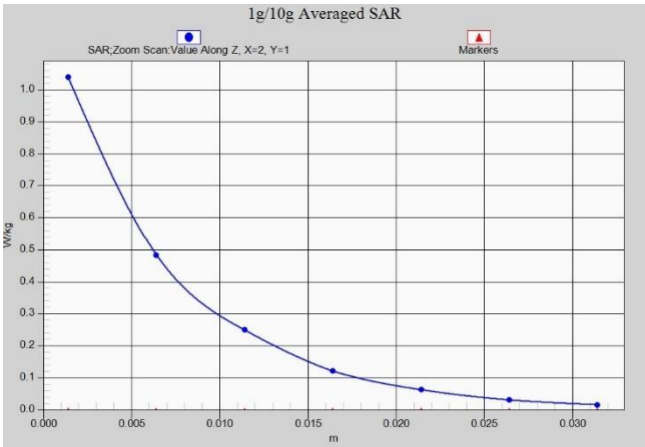

LTE Band41 PC2 Body 10mm ANT2

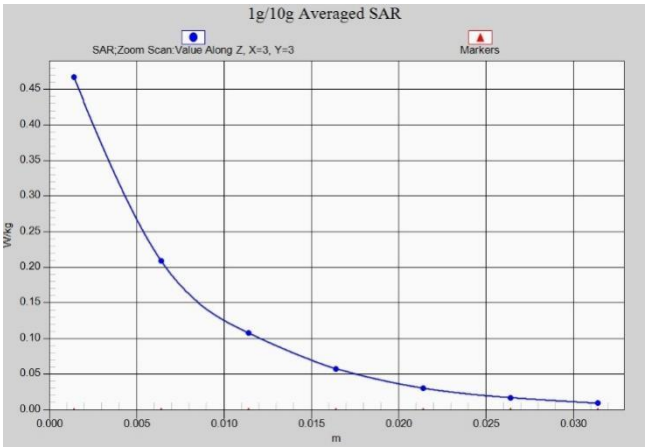

LTE Band41 PC2 Head ANT3

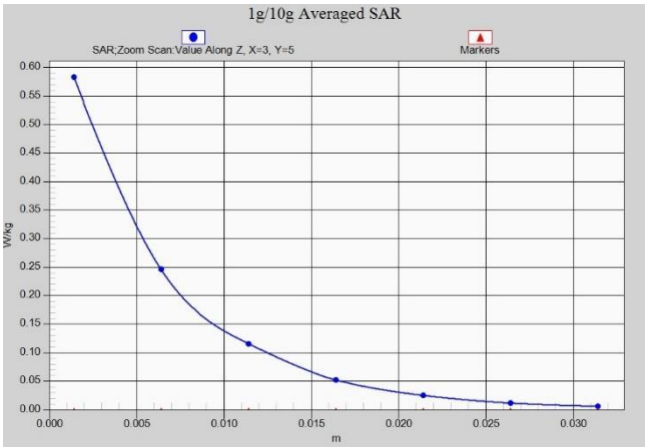

LTE Band41 PC2 Body 10mm ANT3

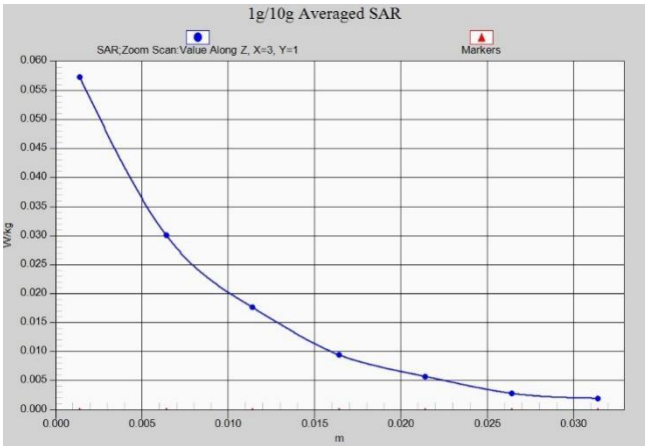

LTE Band41 PC2 Head ANT4

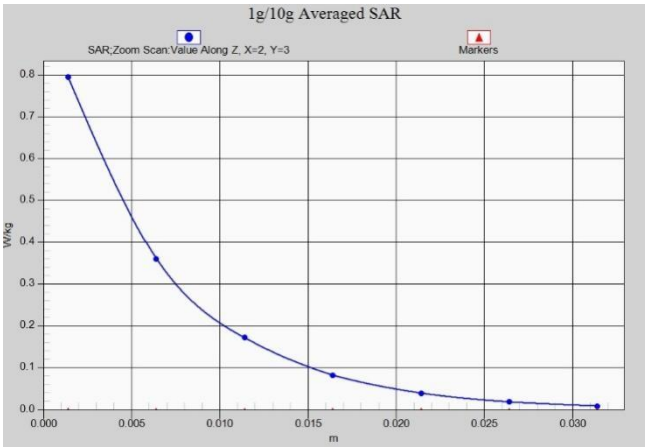

LTE Band41 PC2 Body 10mm ANT4

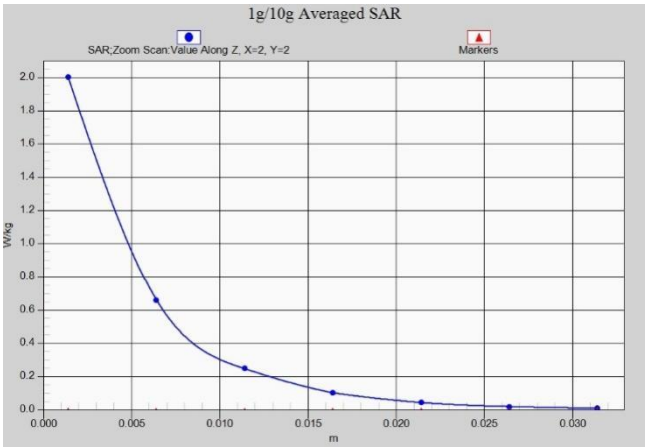

LTE Band41 PC2 Head ANT5

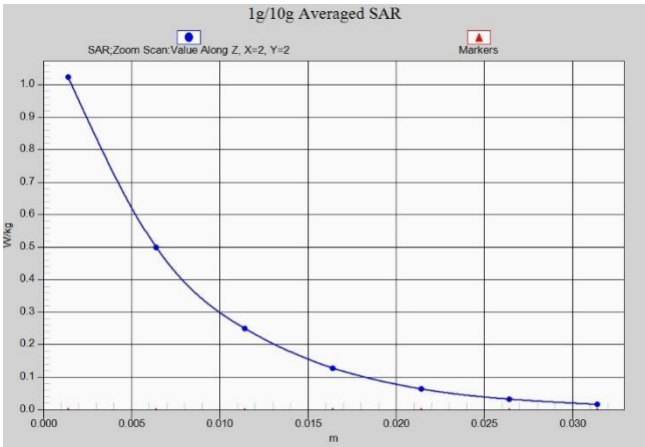

LTE Band41 PC2 Body 10mm ANT5

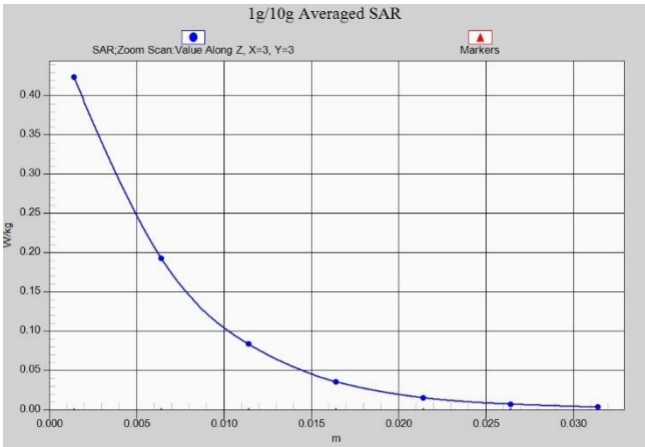

LTE Band48 Head ANT0

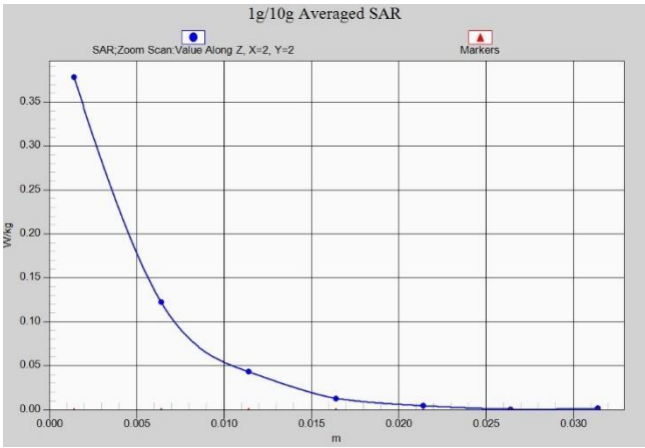

LTE Band48 Body 10mm ANT0

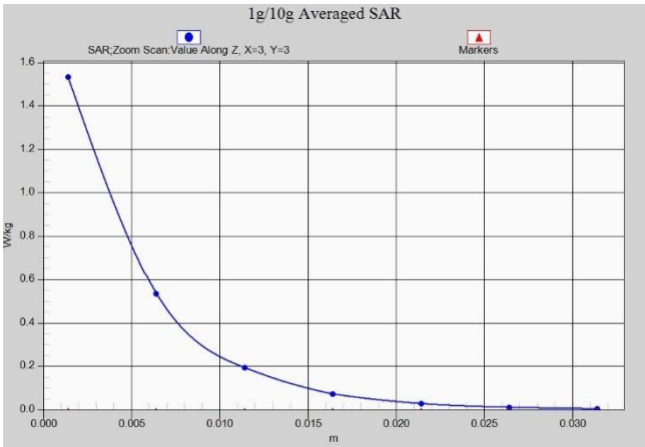

LTE Band48 Head ANT2

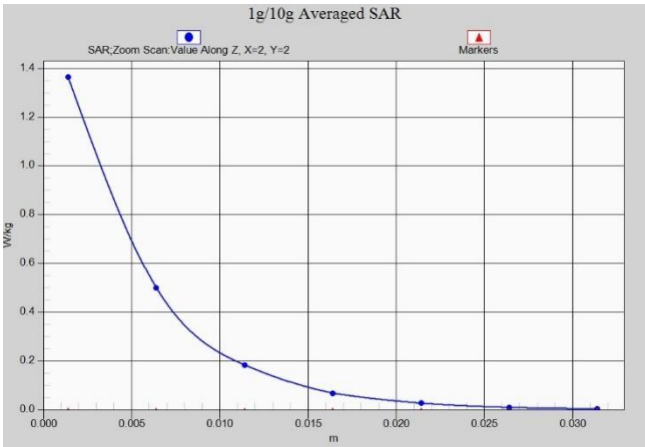

LTE Band48 Body 10mm ANT2

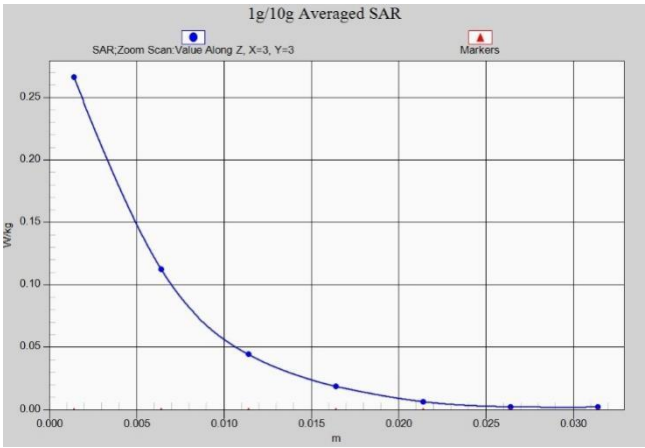

LTE Band48 Head ANT3

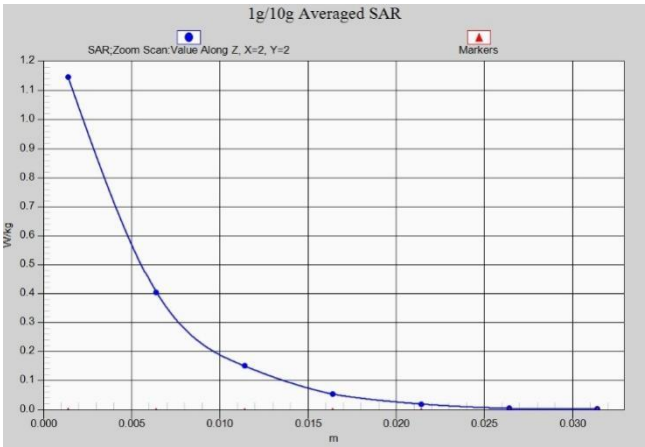

LTE Band48 Body 10mm ANT3

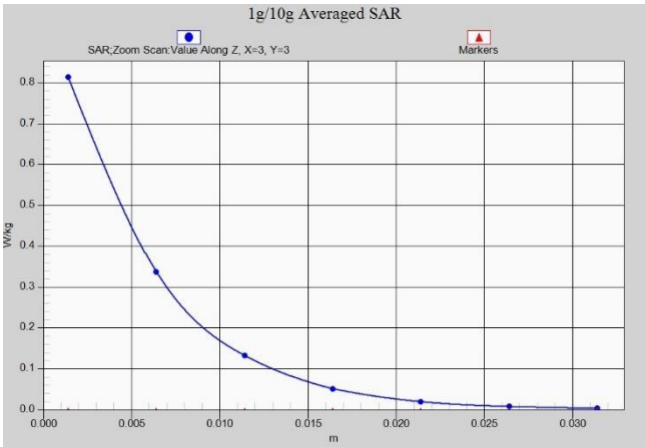

LTE Band48 Head ANT7

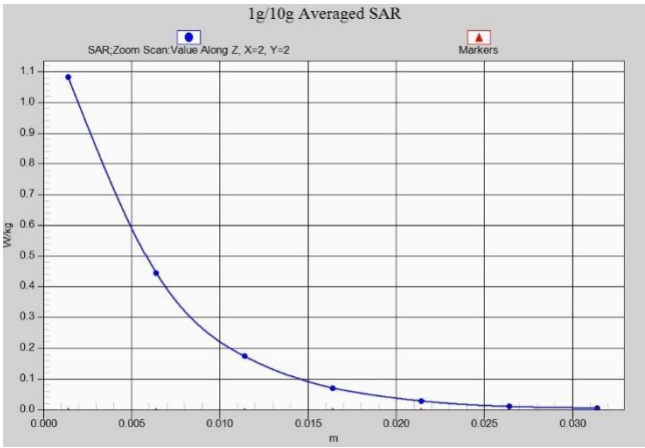

LTE Band48 Body 10mm ANT7

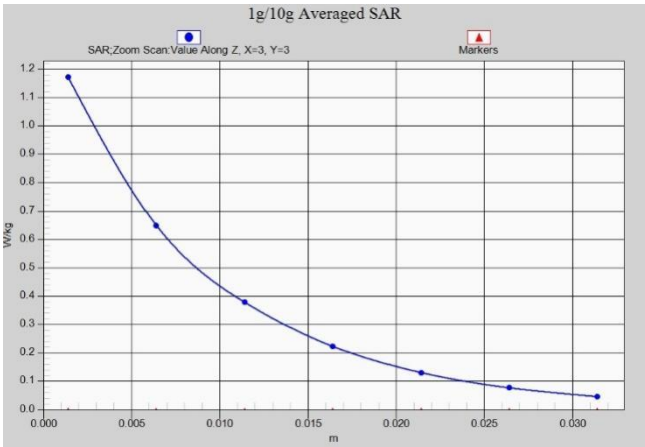

LTE Band66 Head ANT2

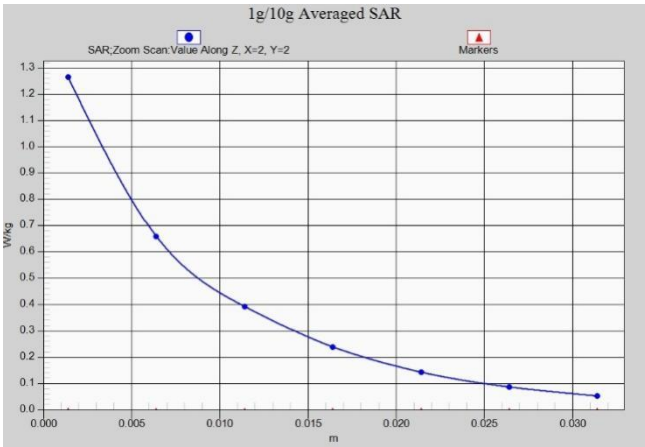

LTE Band66 Body 10mm ANT2

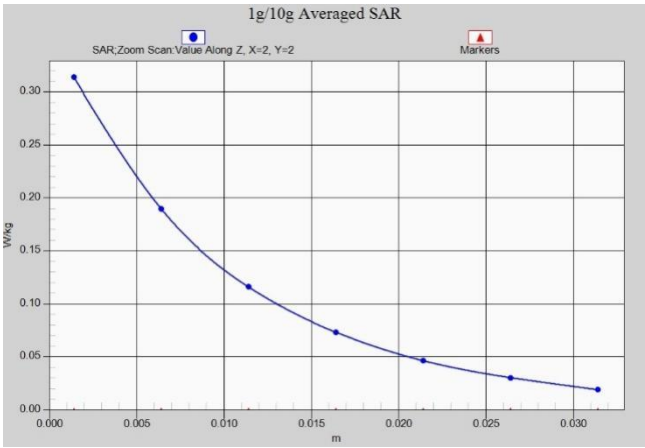

LTE Band66 Head ANT3

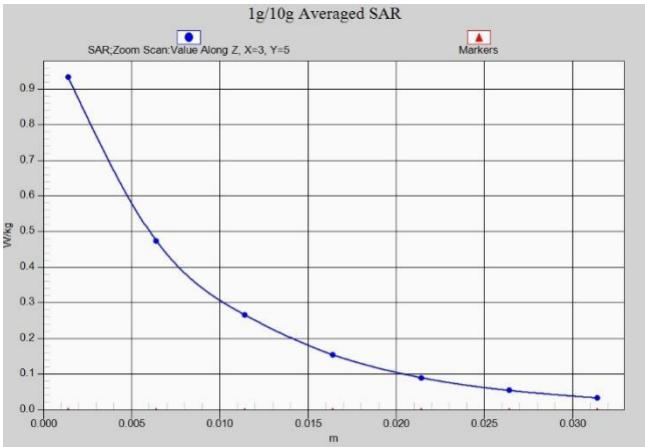

LTE Band66 Body 10mm ANT3

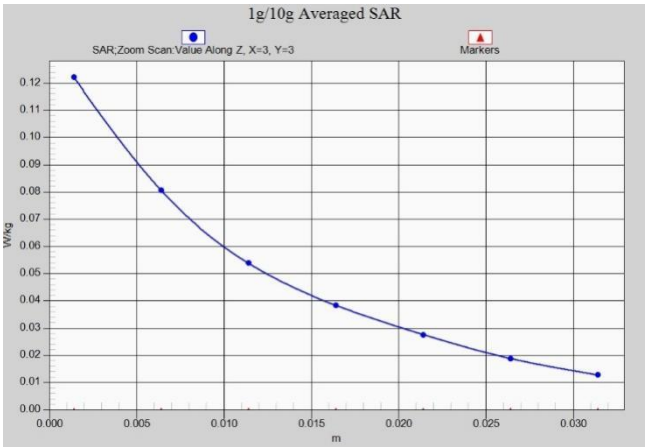

LTE Band66 Head ANT4

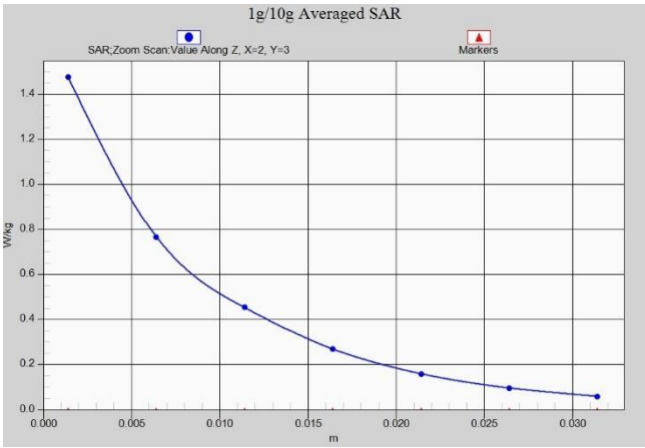

LTE Band66 Body 10mm ANT4

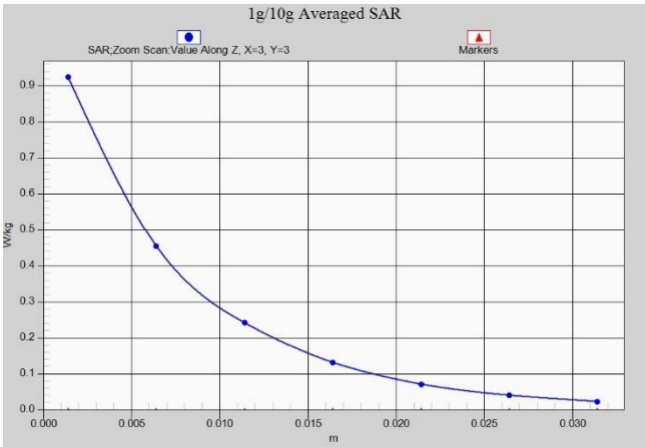

LTE Band66 Head ANT5

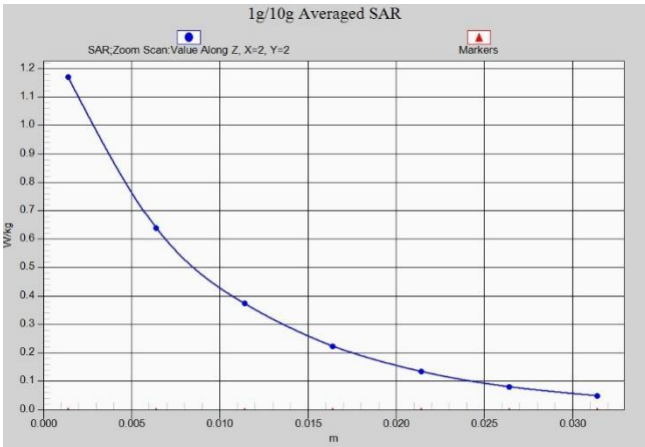

LTE Band66 Body 10mm ANT5

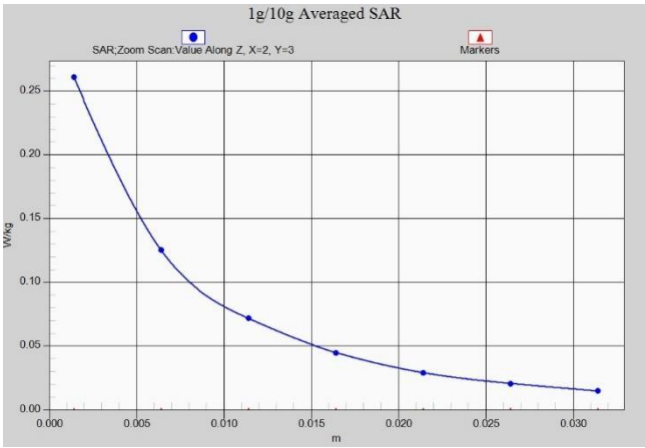

LTE Band71 Head ANT0

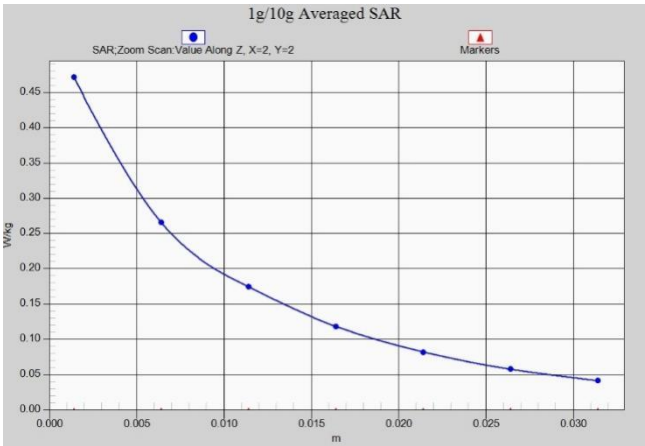

LTE Band71 Body 10mm ANT0

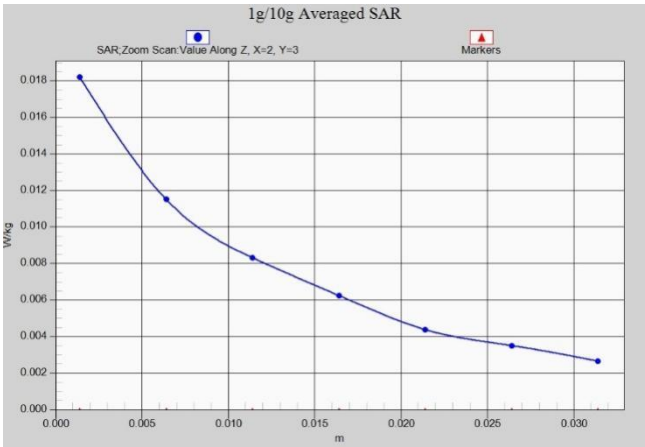

LTE Band71 Head ANT1

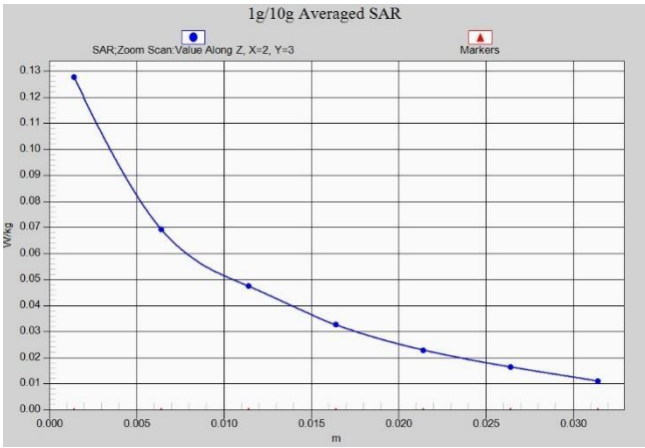

LTE Band71 Body 10mm ANT1

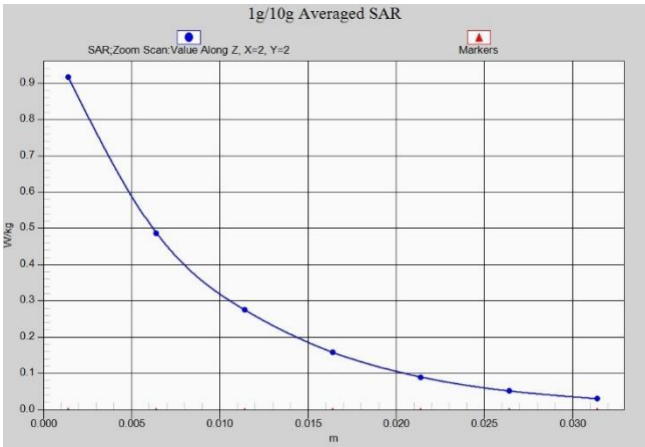

N2 Head ANT2

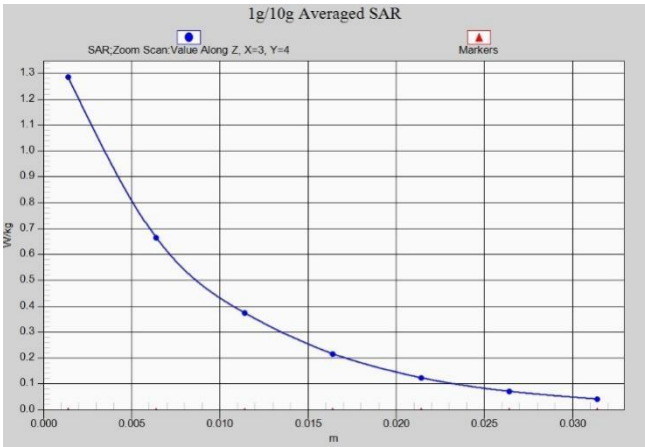

N2 Body 10mm ANT2

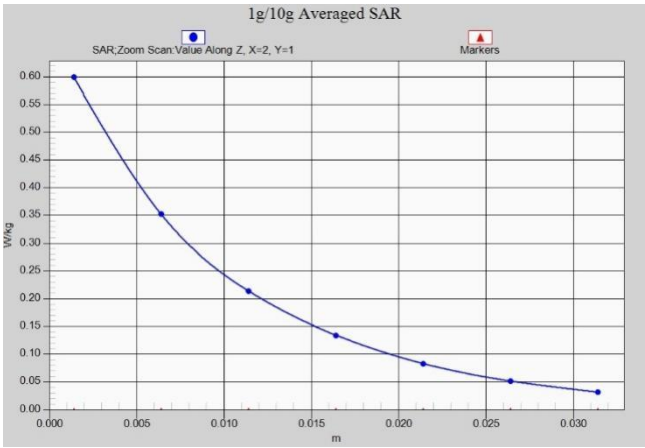

N2 Head ANT3

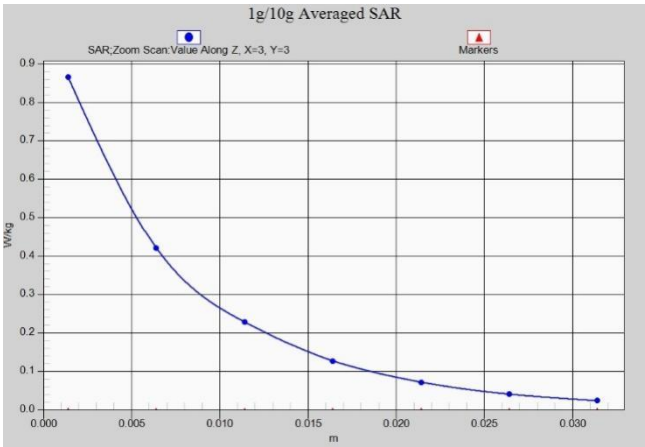

N2 Body 10mm ANT3

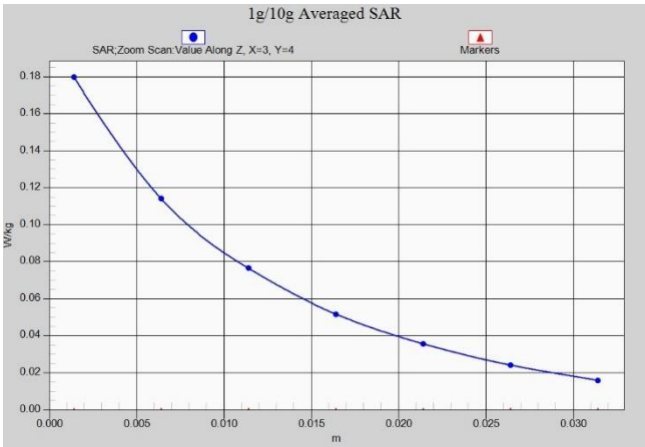

N2 Head ANT4

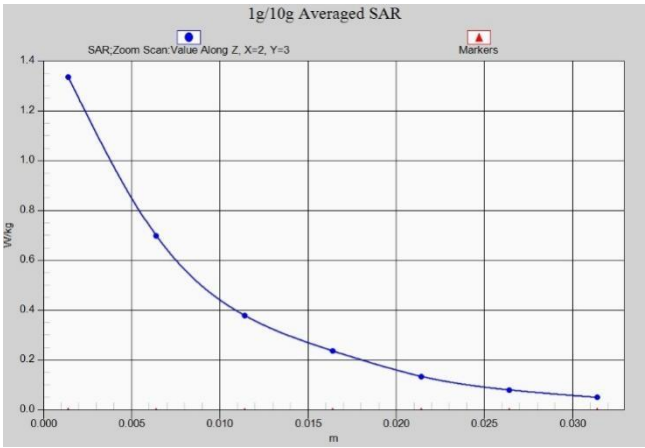

N2 Body 10mm ANT4

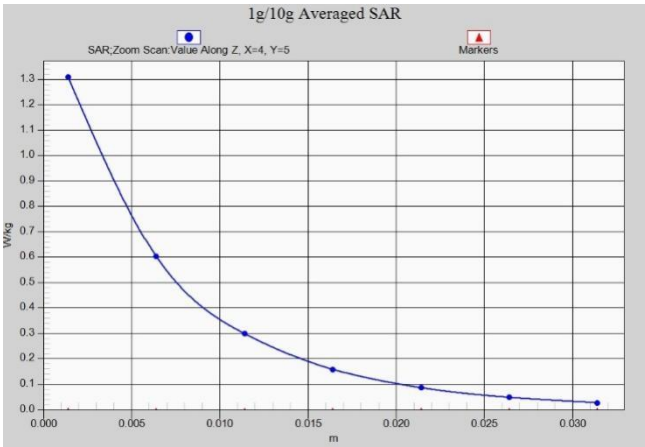

N2 Head ANT5

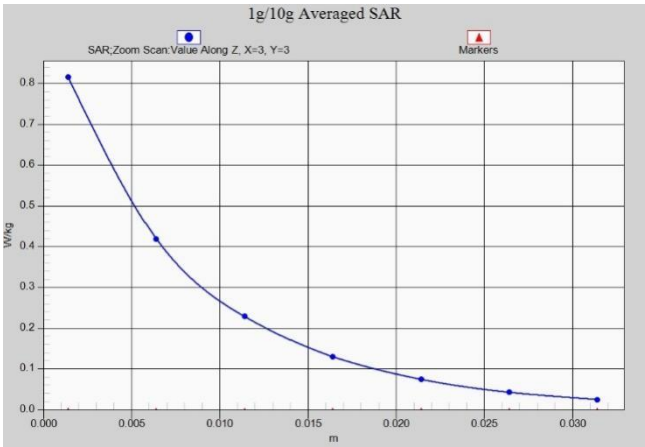

N2 Body 10mm ANT5

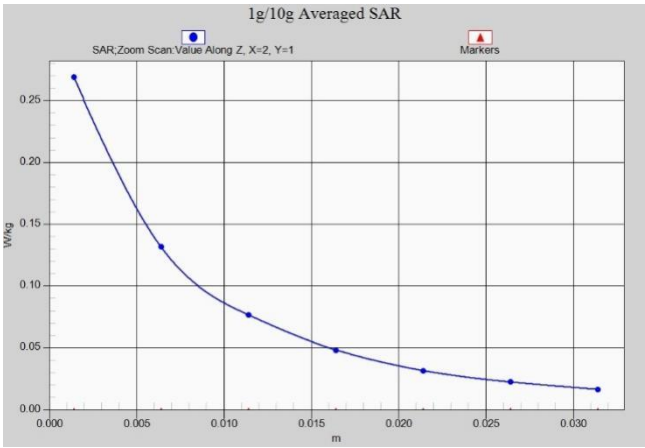

N5 Head ANT0

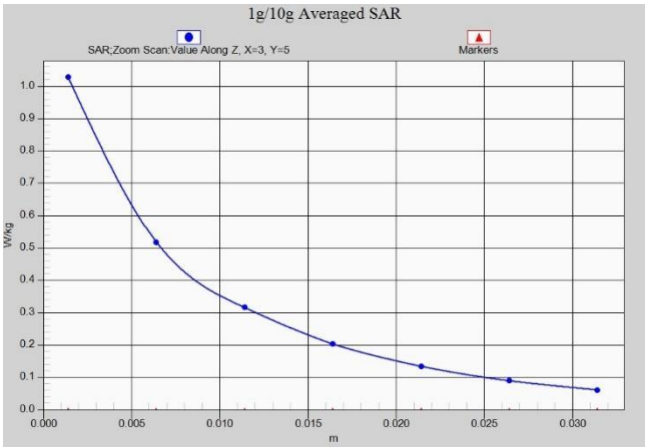

N5 Body 10mm ANT0

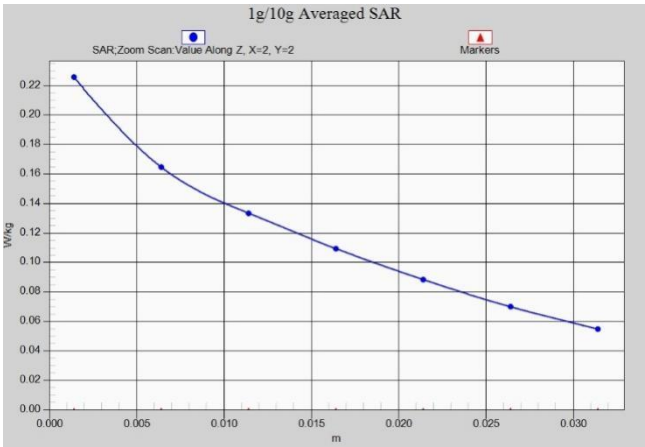

N5 Head ANT1

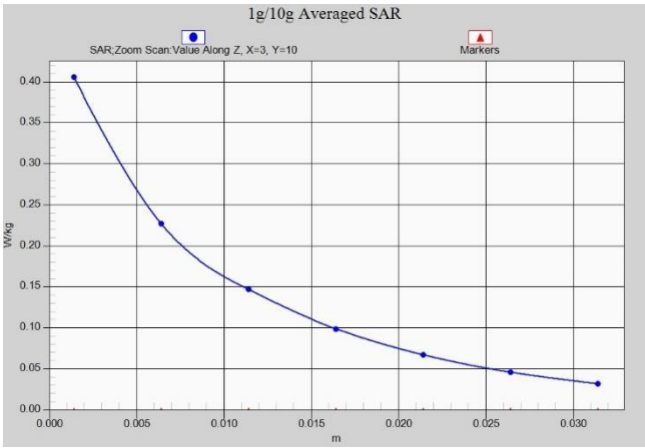

N5 Body 10mm ANT1

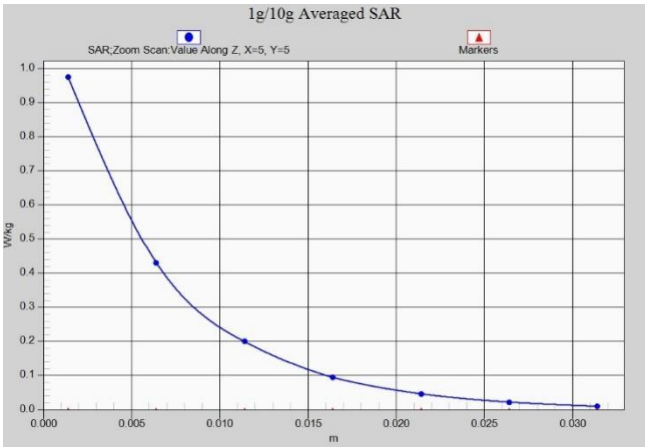

N7 Head ANT2

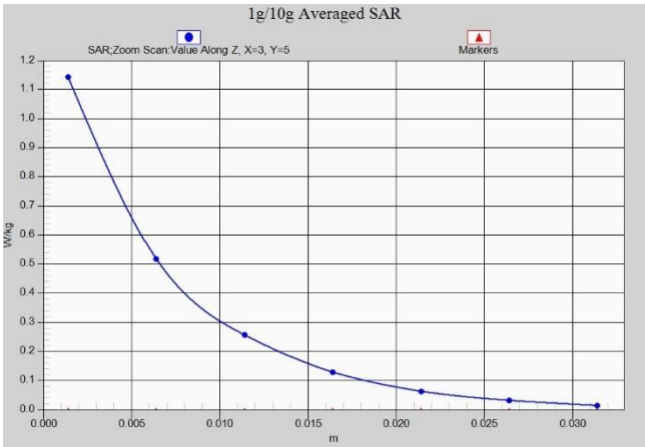

N7 Body 10mm ANT2

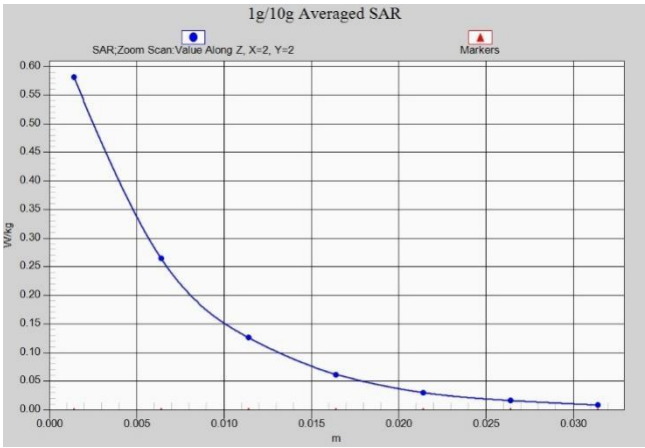

N7 Head ANT3

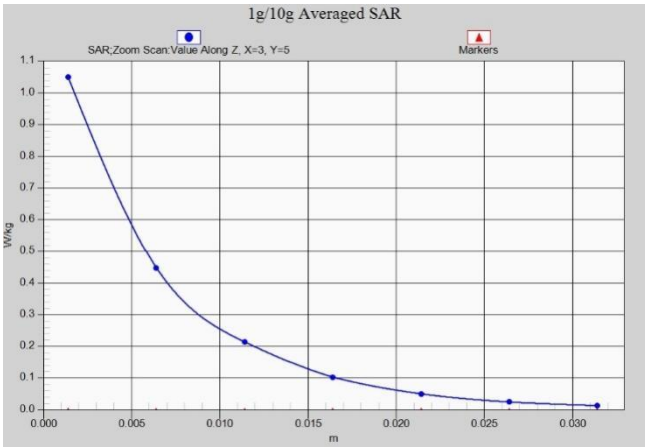

N7 Body 10mm ANT3

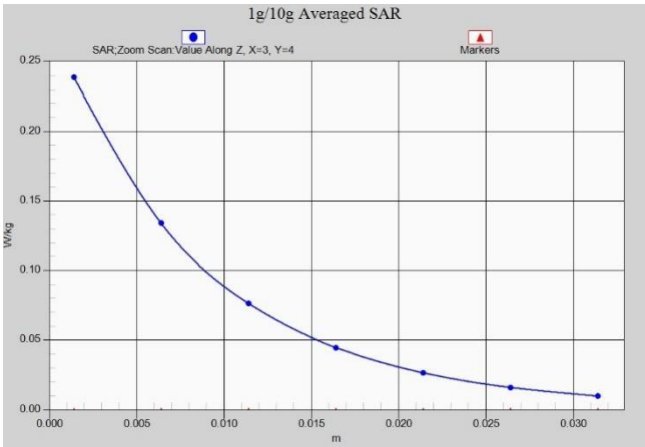

N7 Head ANT4

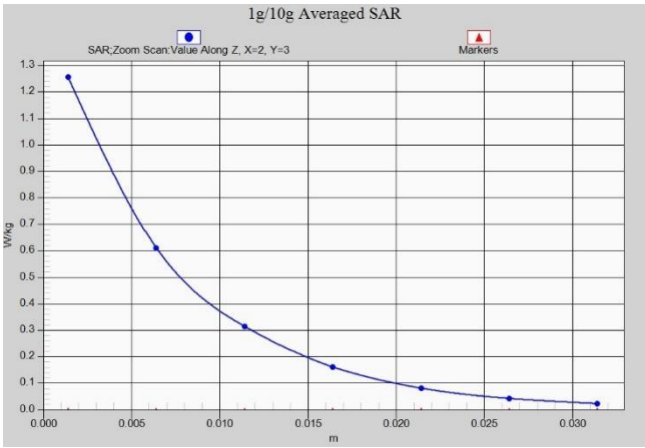

N7 Body 10mm ANT4

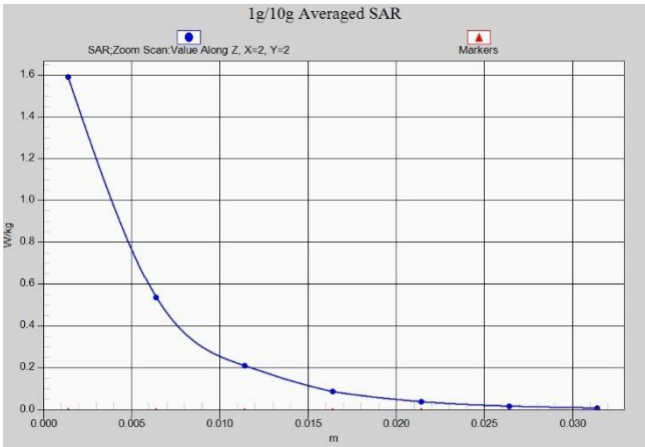

N7 Head ANT5

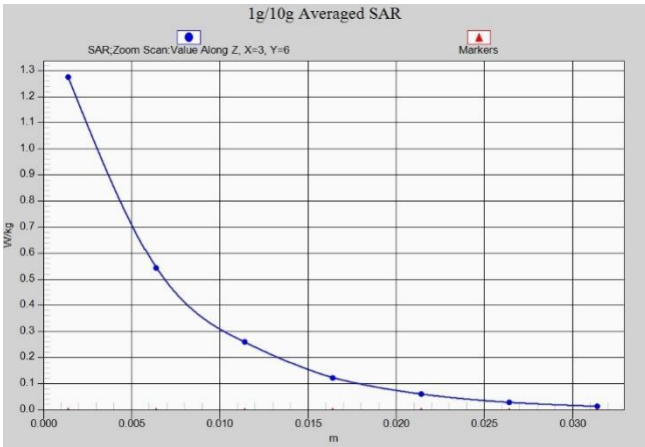

N7 Body 10mm ANT5

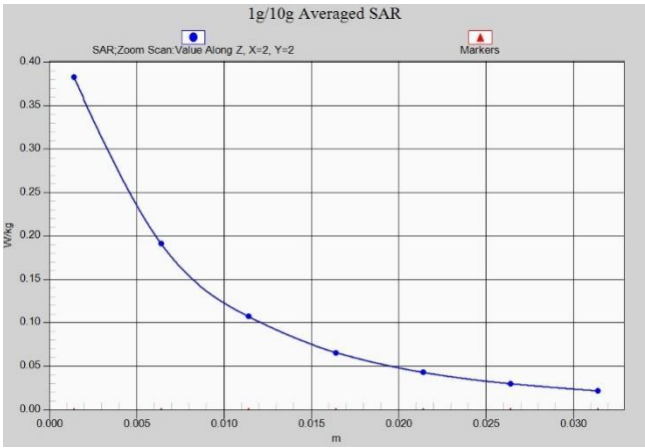

N12 Head ANT0

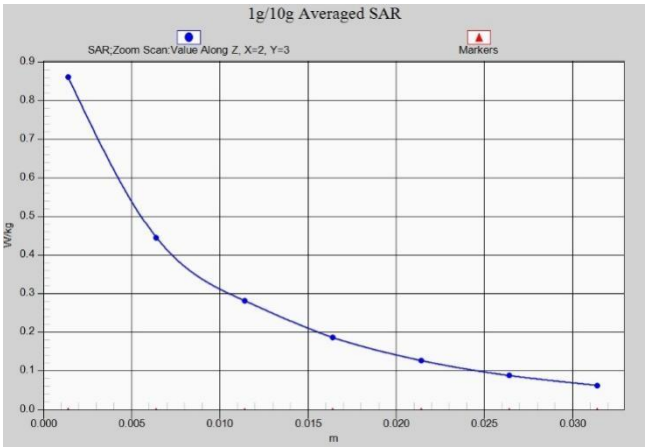

N12 Body 10mm ANT0

N12 Head ANT1

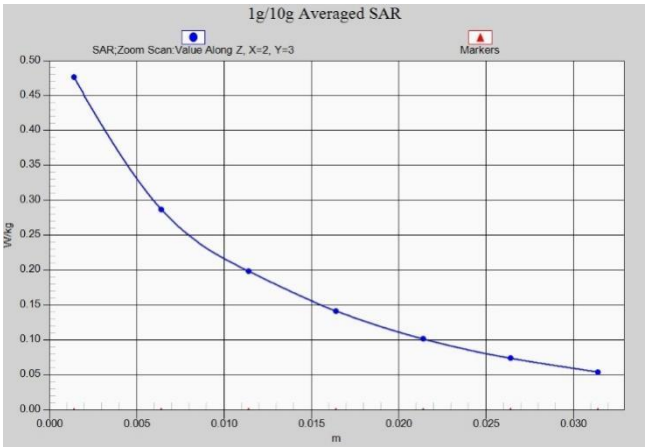

N12 Body 10mm ANT1

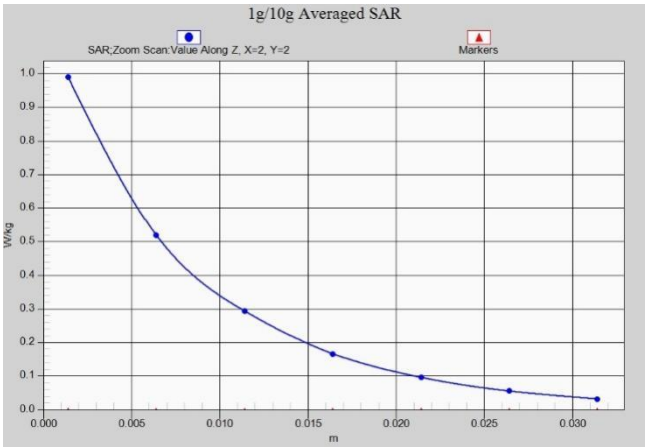

N25 Head ANT2

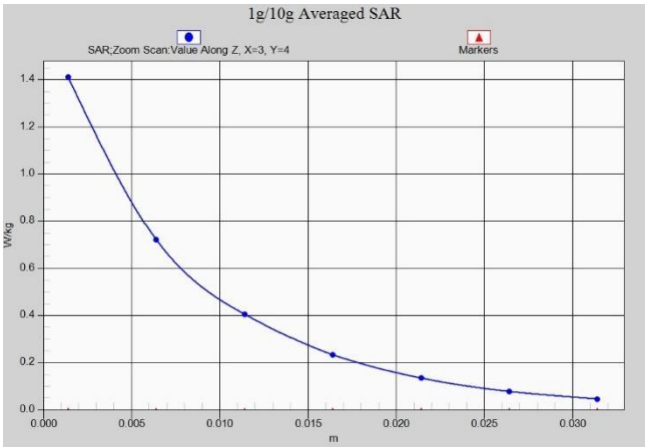

N25 Body 10mm ANT2

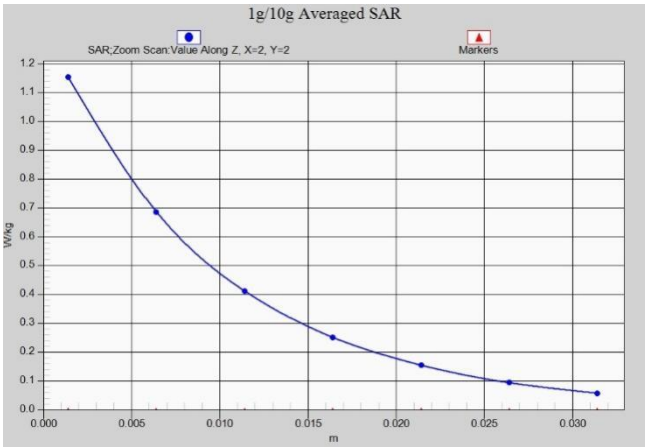

N25 Head ANT3

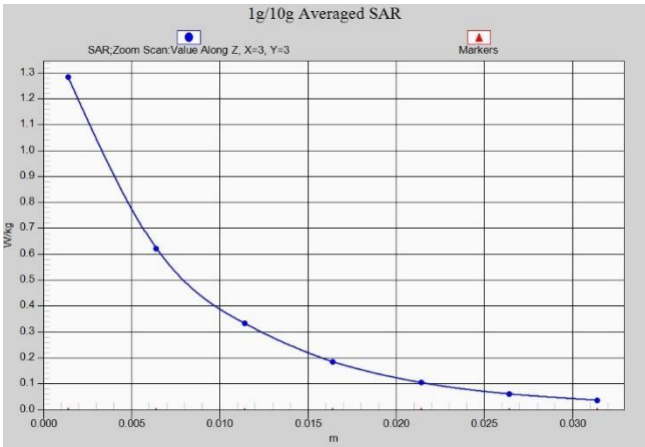

N25 Body 10mm ANT3

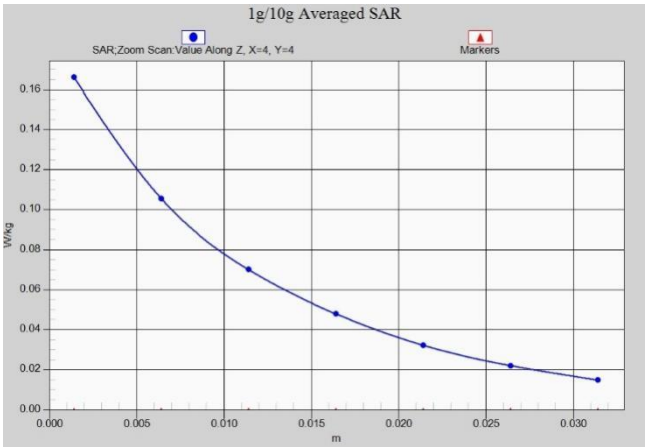

N25 Head ANT4

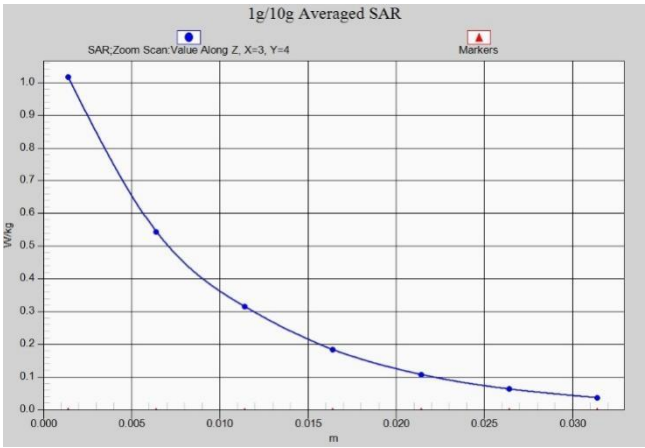

N25 Body 10mm ANT4

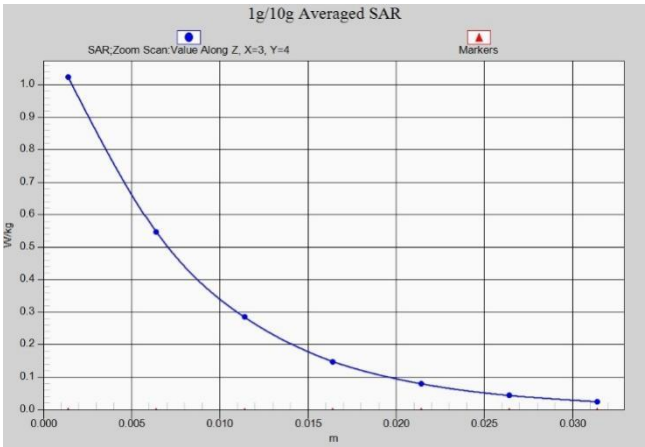

N25 Head ANT5

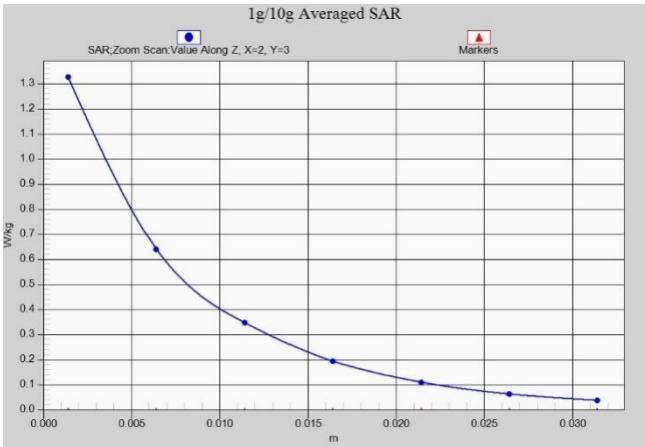

N25 Body 10mm ANT5

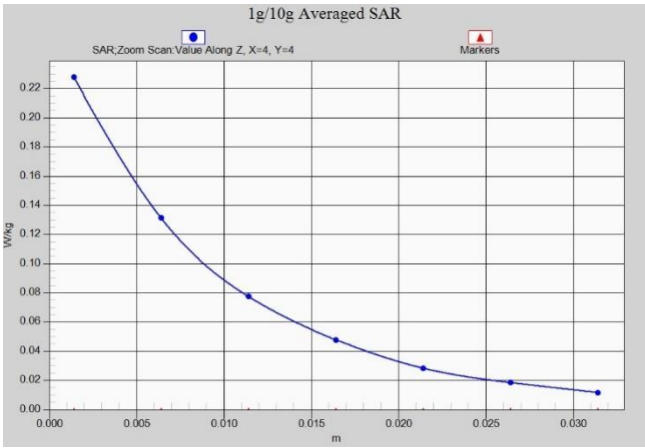

N30 Head ANT4

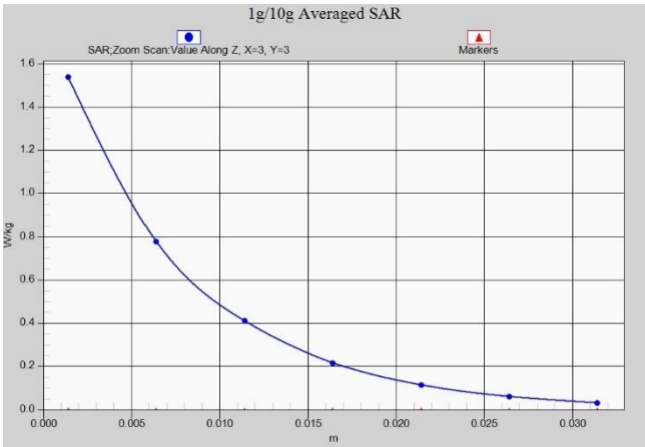

N30 Body 10mm ANT4

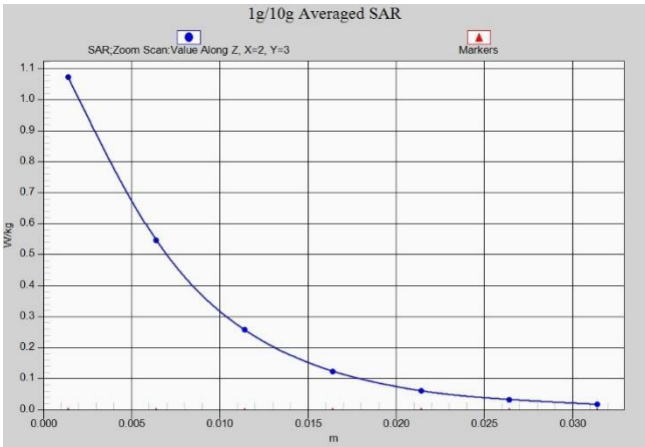

N30 Head ANT5

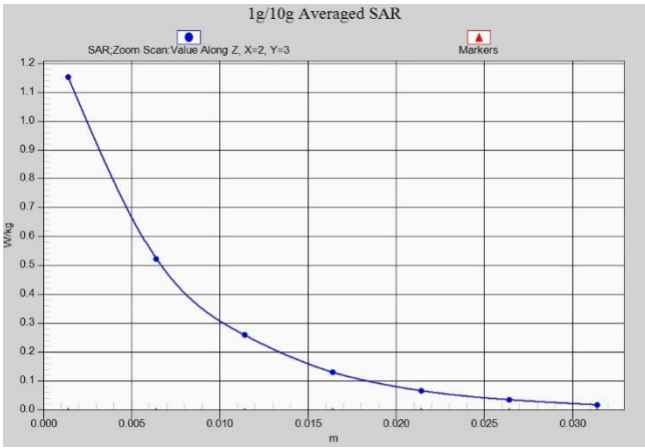

N30 Body 10mm ANT5

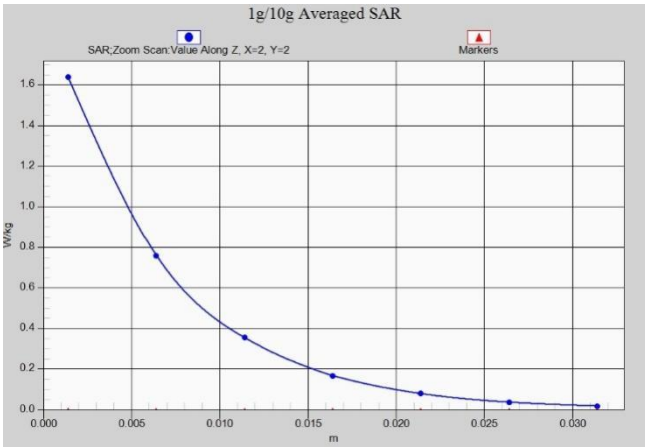

N38 Head ANT2

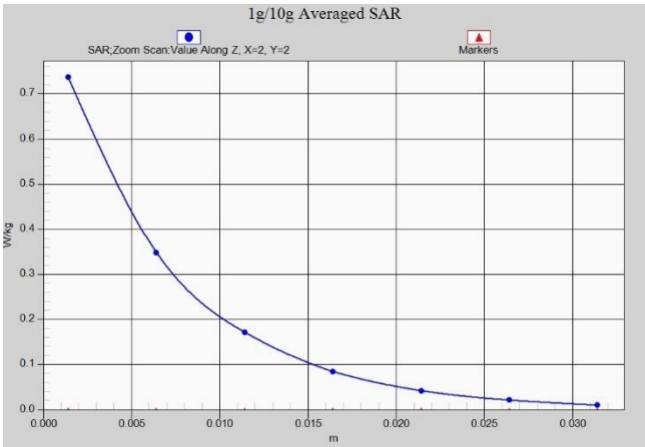

N38 Body 10mm ANT2

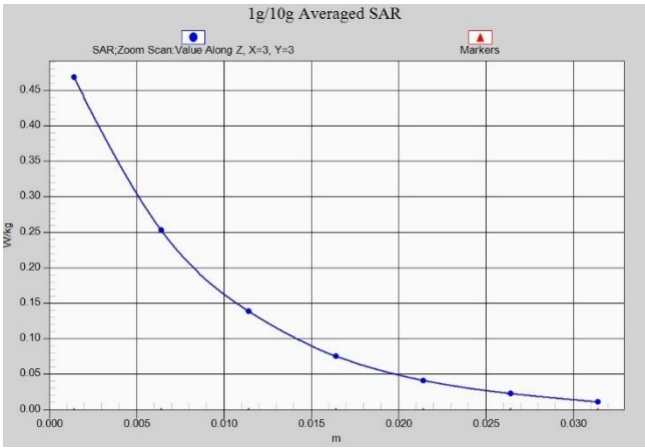

N38 Head ANT3

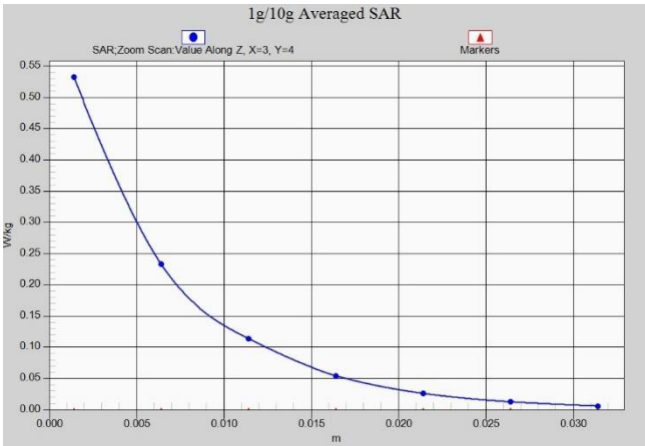

N38 Body 10mm ANT3

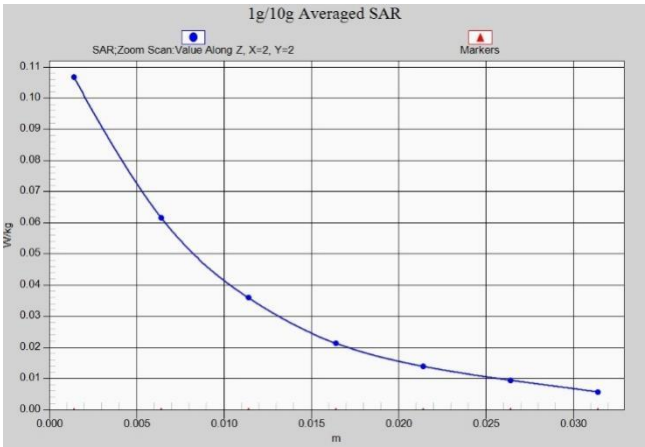

N38 Head ANT4

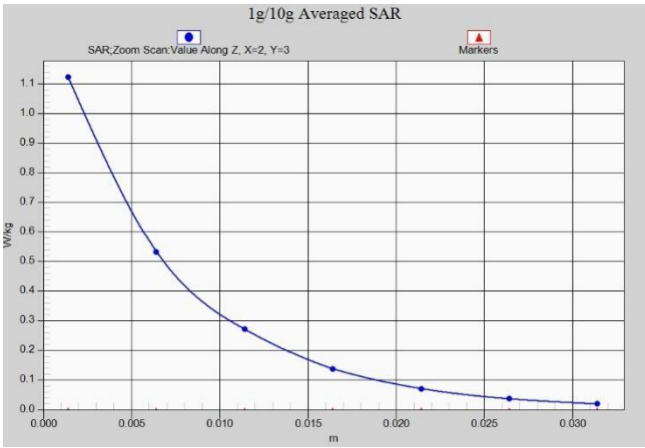

N38 Body 10mm ANT4

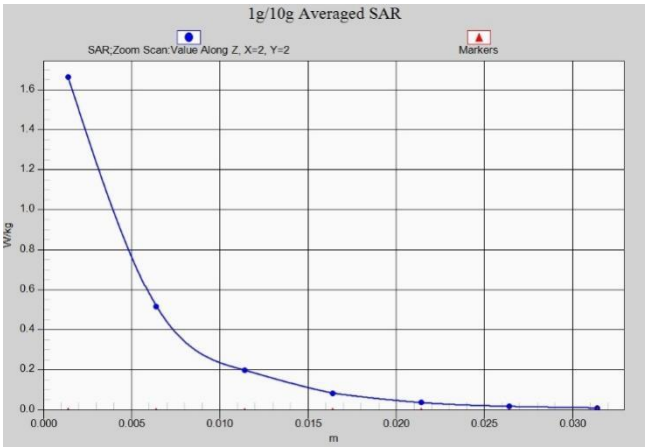

N38 Head ANT5

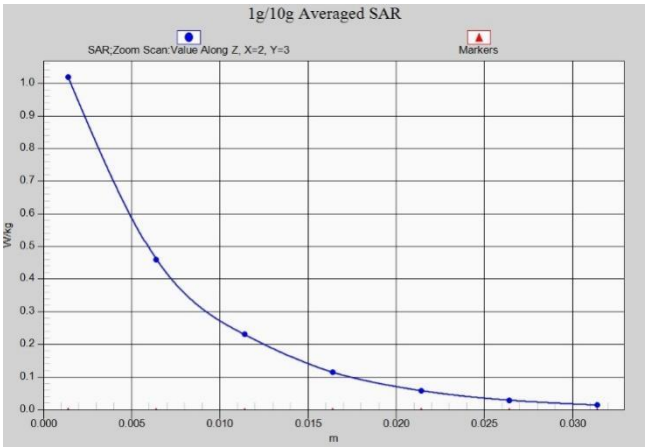

N38 Body 10mm ANT5

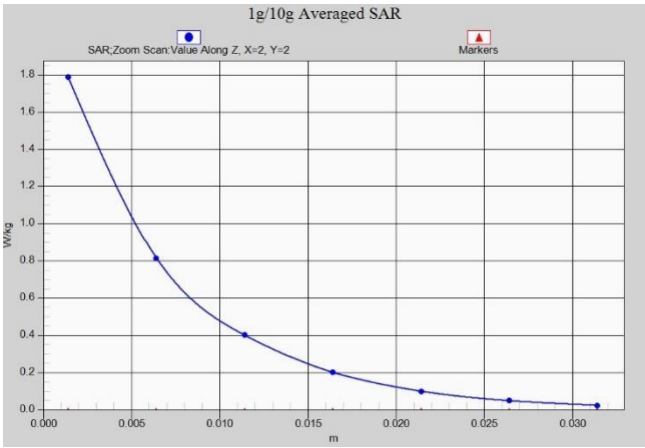

N41 Head ANT2

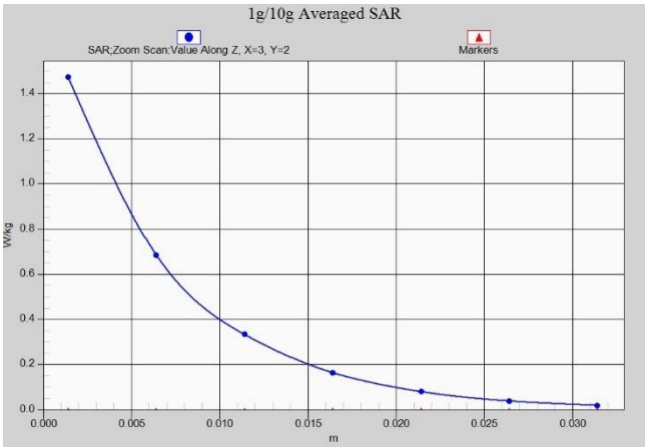

N41 Body 10mm ANT2

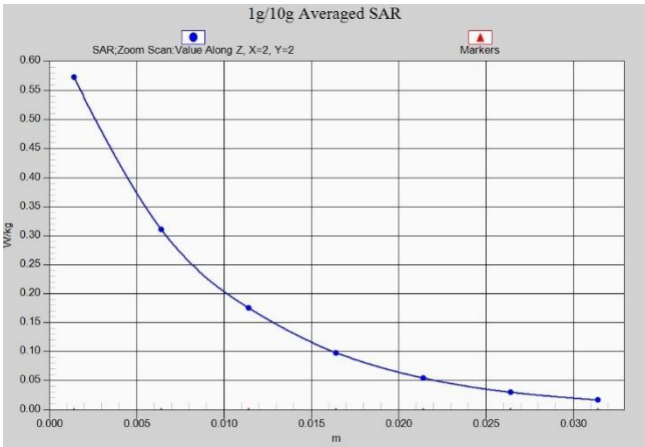

N41 Head ANT3

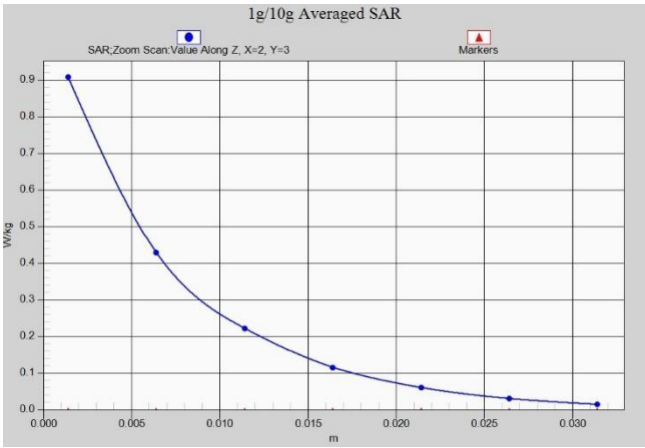

N41 Body 10mm ANT3

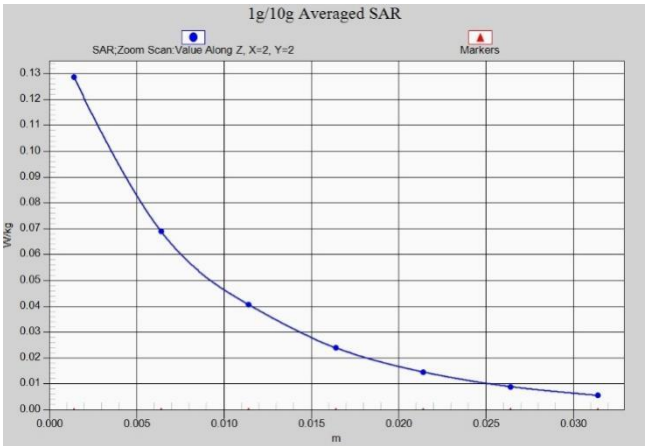

N41 Head ANT4

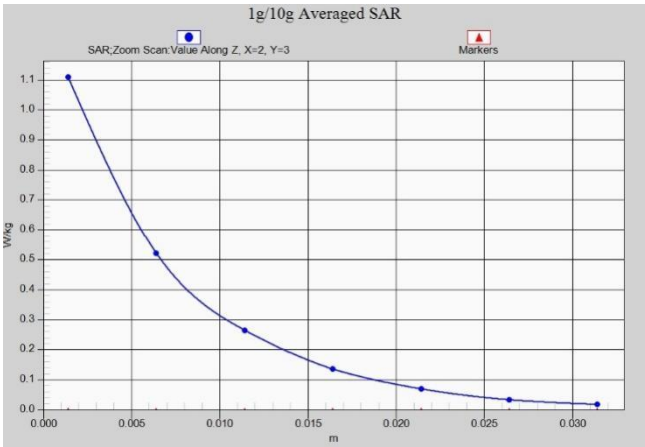

N41 Body 10mm ANT4

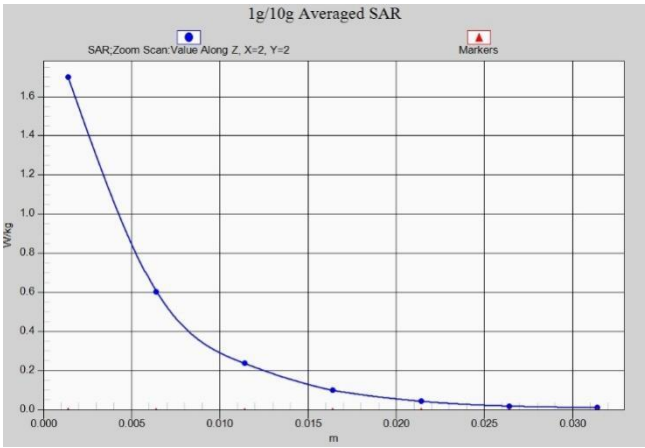

N41 Head ANT5

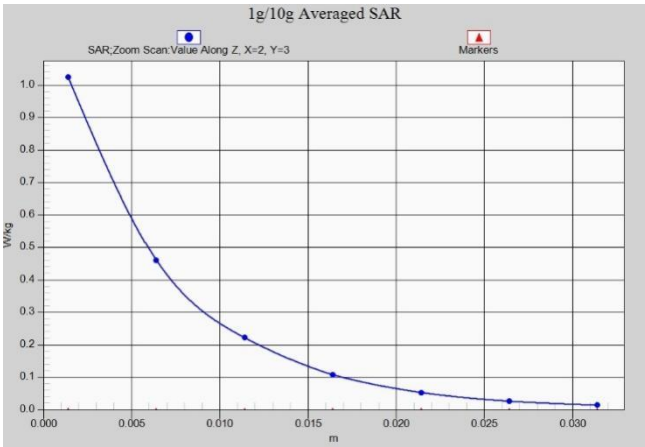

N41 Body 10mm ANT5

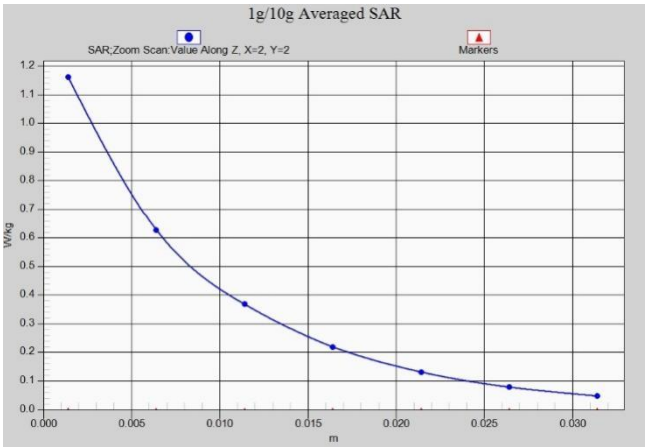

N66 Head ANT2

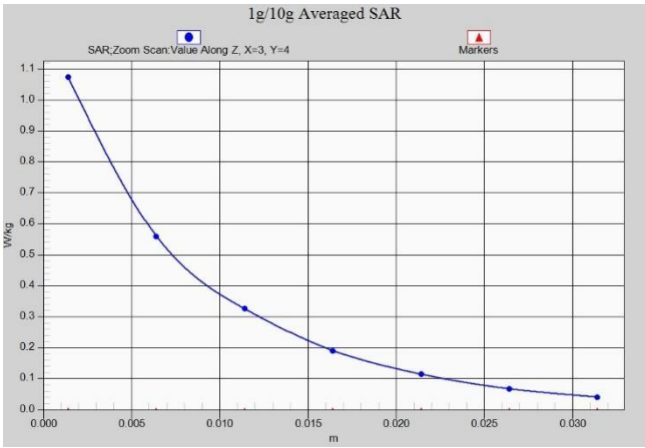

N66 Body 10mm ANT2

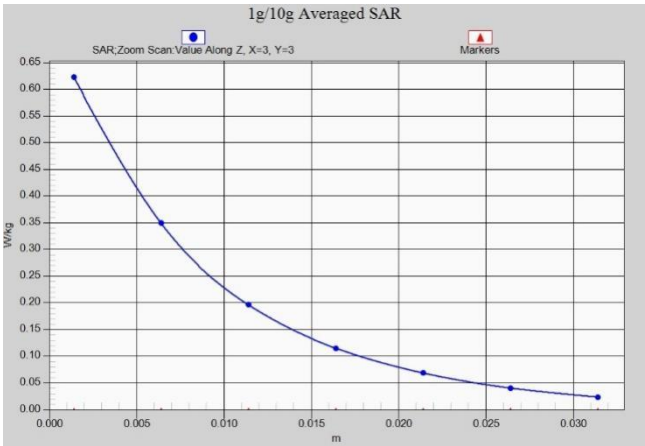

N66 Head ANT3

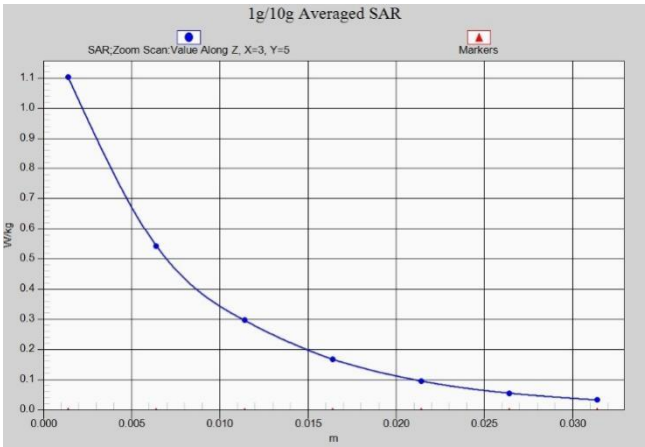

N66 Body 10mm ANT3

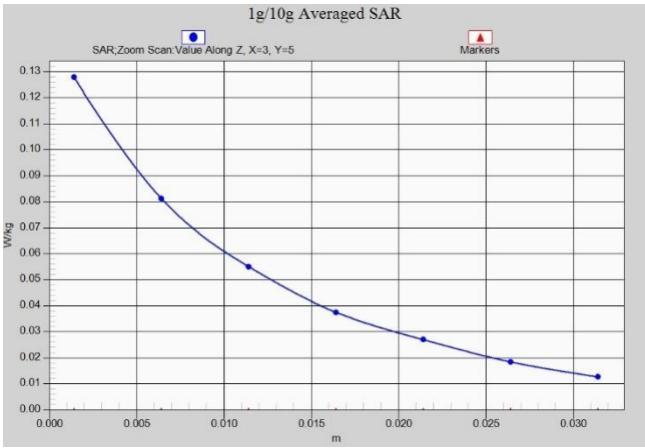

N66 Head ANT4

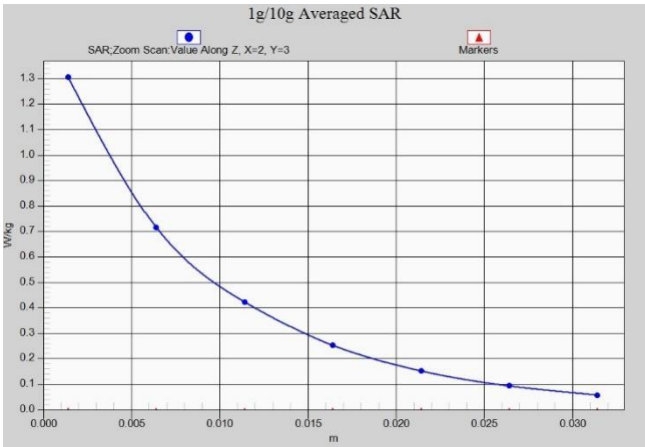

N66 Body 10mm ANT4

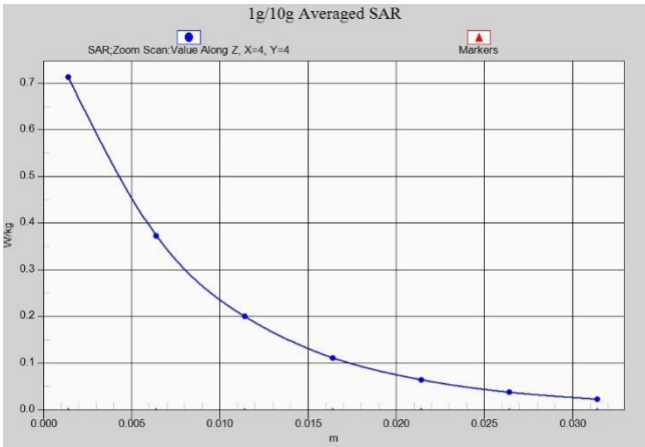

N66 Head ANT5

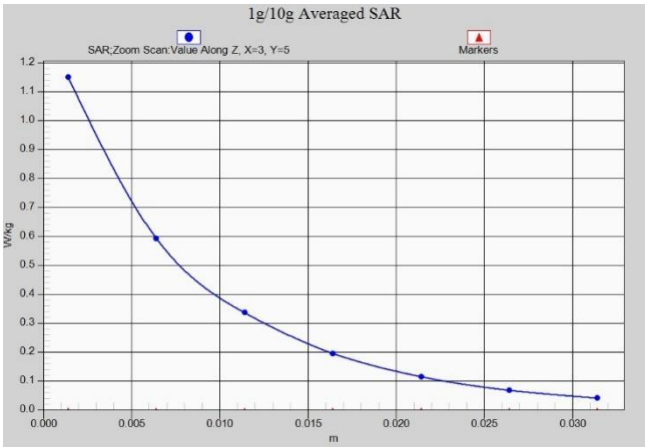

N66 Body 10mm ANT5

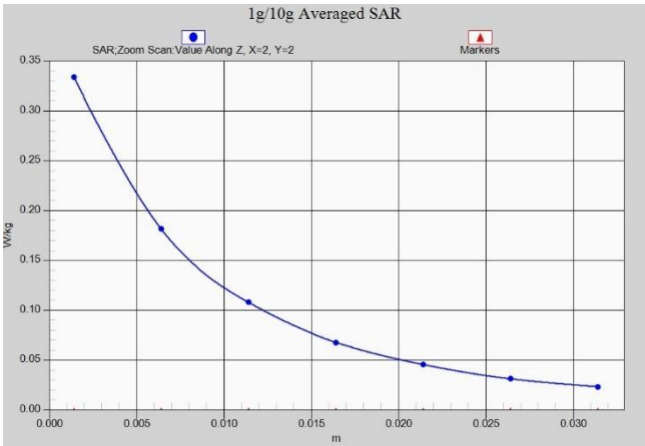

N71 Head ANT0

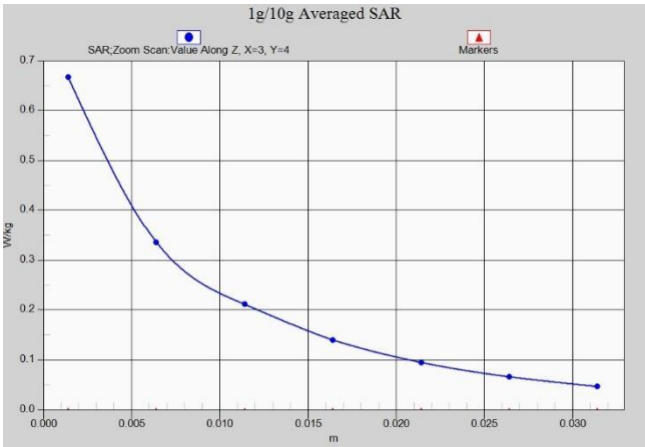

N71 Body 10mm ANT0

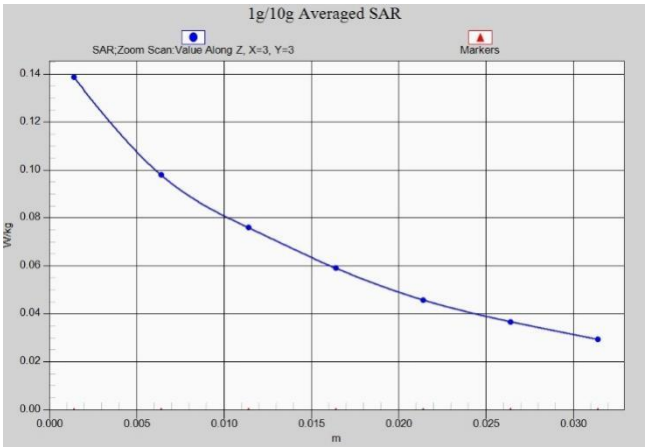

N71 Head ANT1

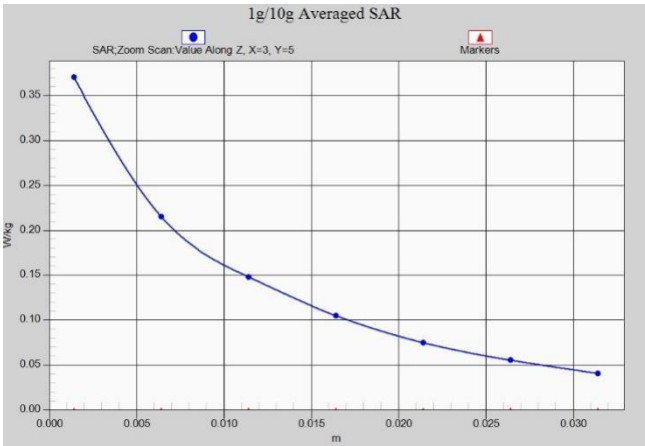

N71 Body 10mm ANT1

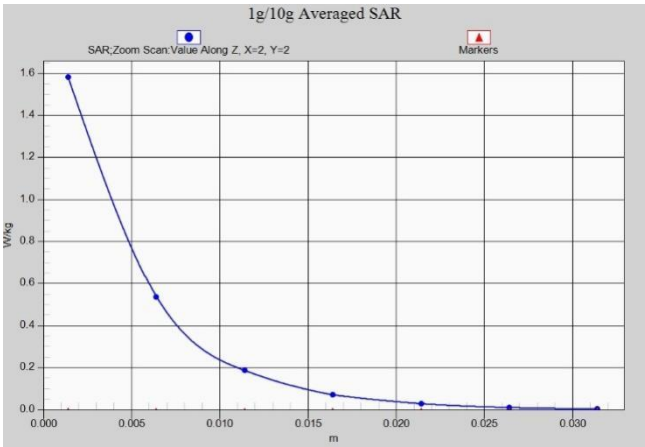

N77L Head ANT0

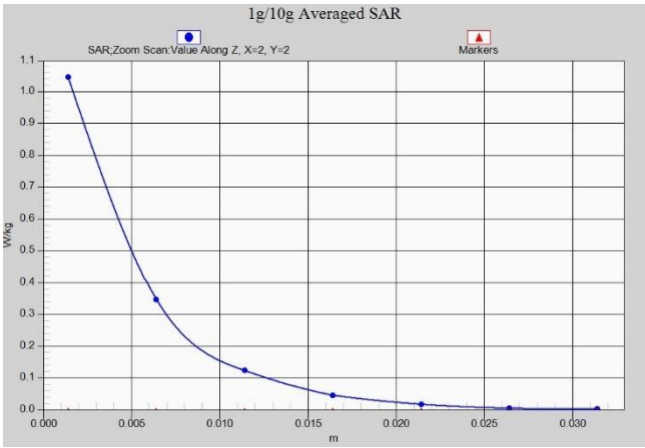

N77L Body 10mm ANT0

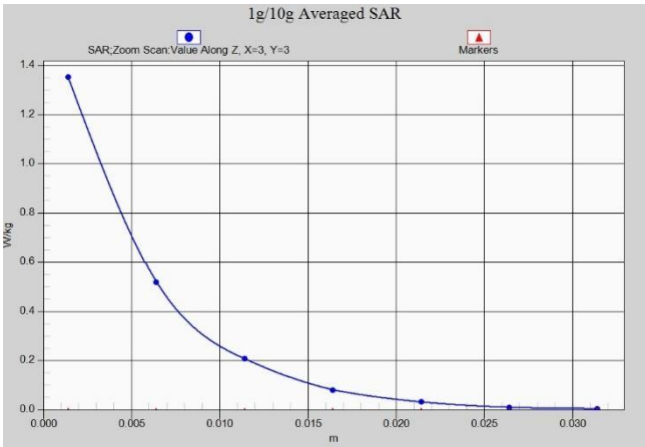

N77L Head ANT2

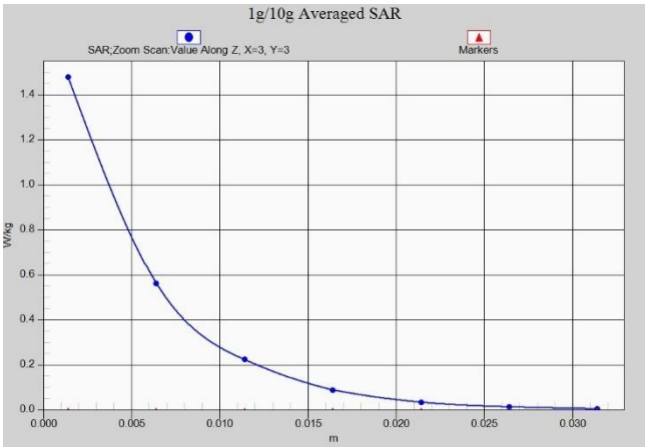

N77L Body 10mm ANT2

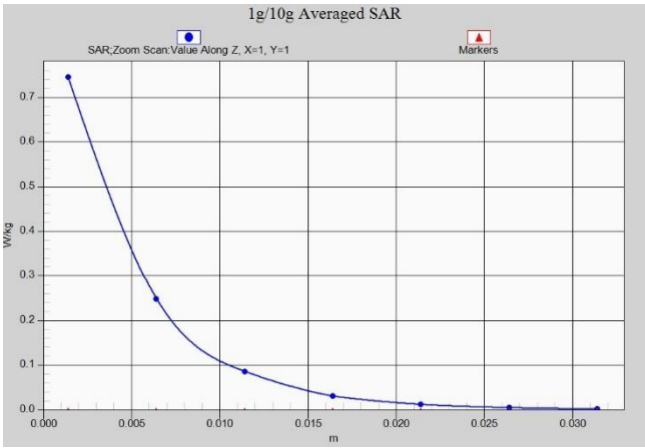

N77L Head ANT3

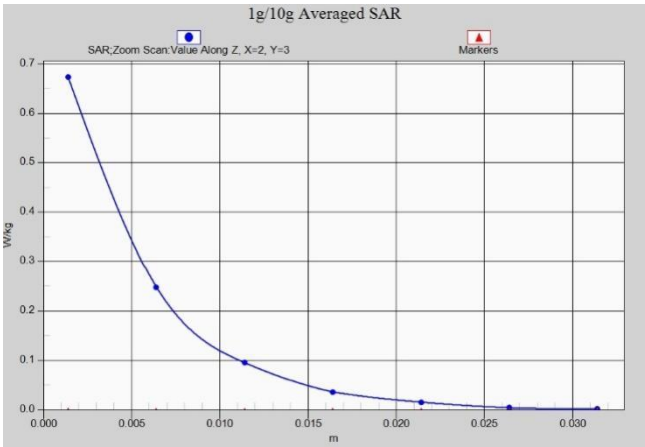

N77L Body 10mm ANT3

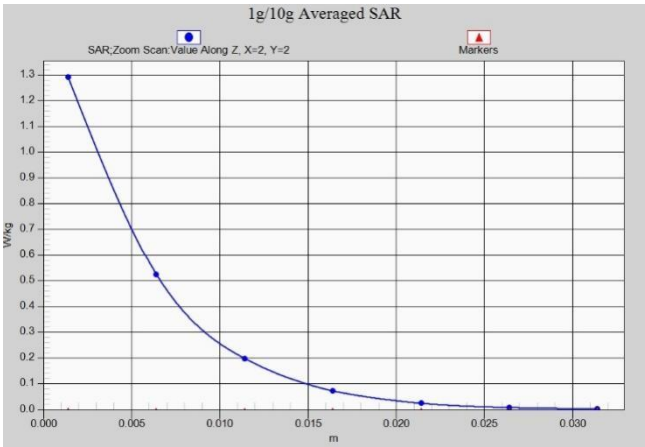

N77L Head ANT7

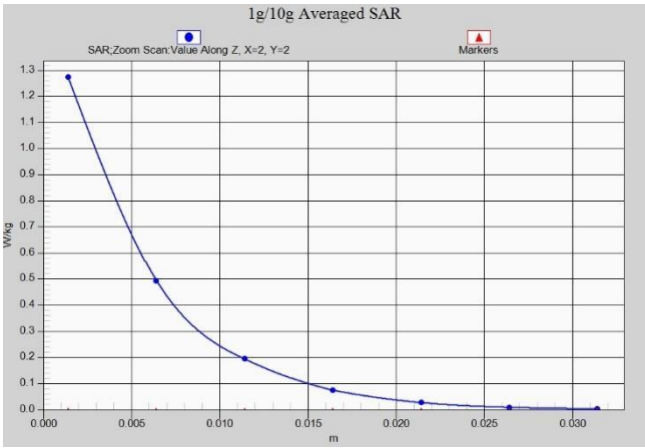

N77L Body 10mm ANT7

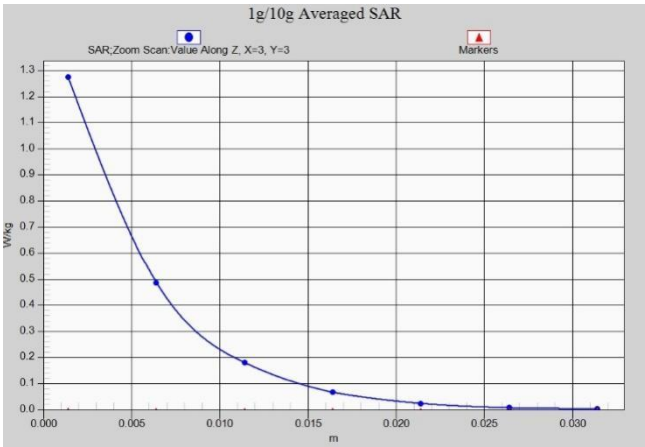

N77H Head ANT0

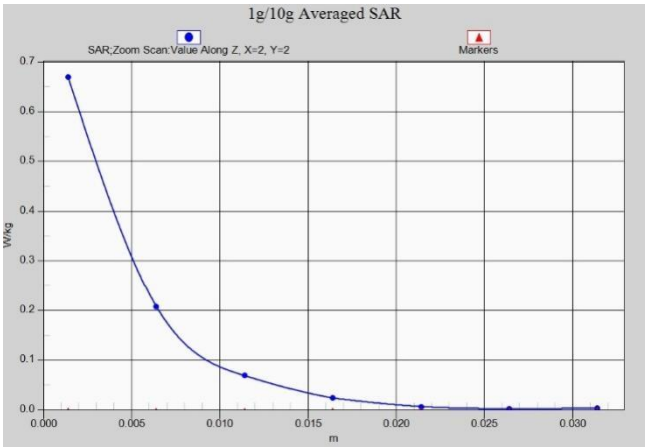

N77H Body 10mm ANT0

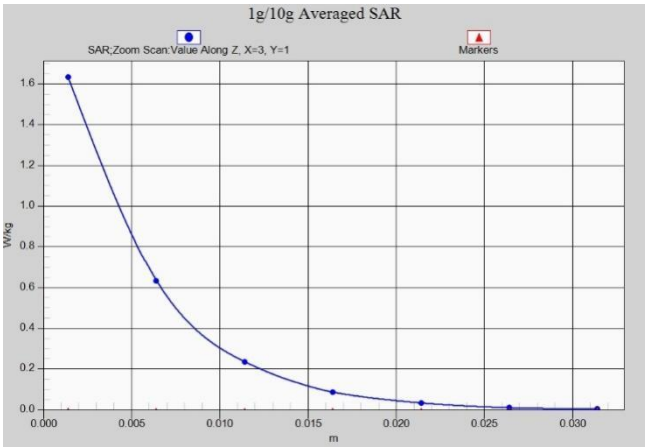

N77H Head ANT2

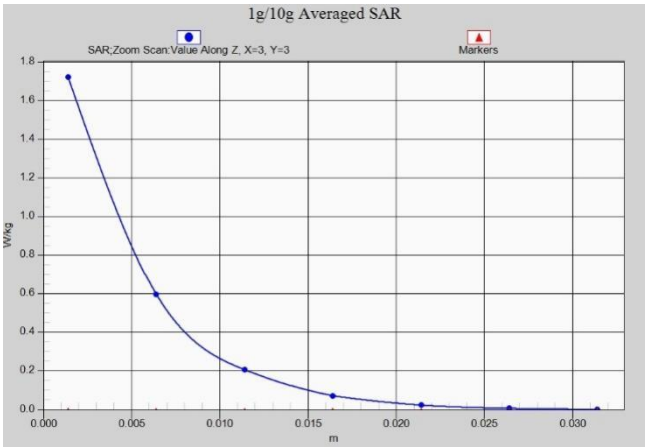

N77H Body 10mm ANT2

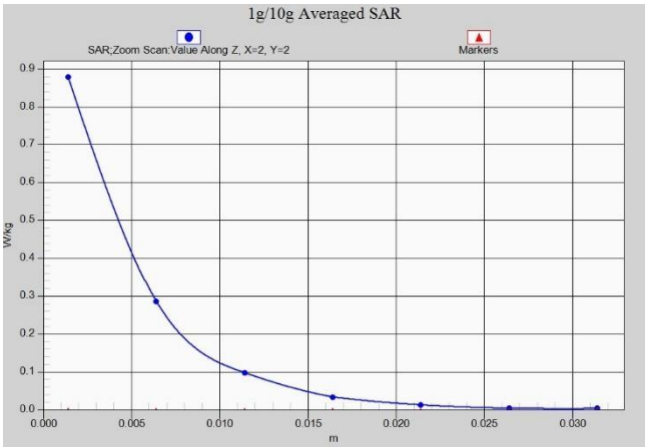

N77H Head ANT3

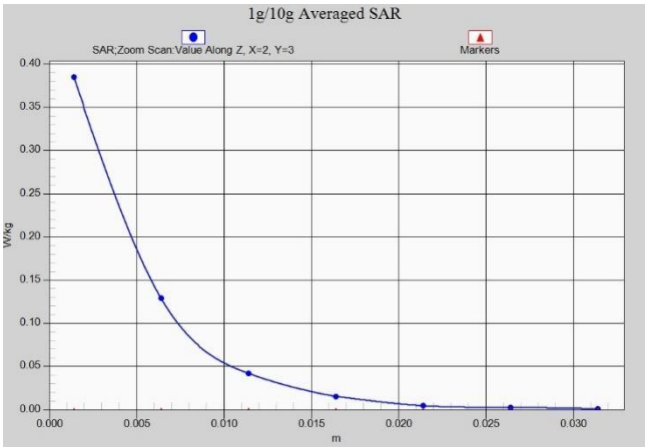

N77H Body 10mm ANT3

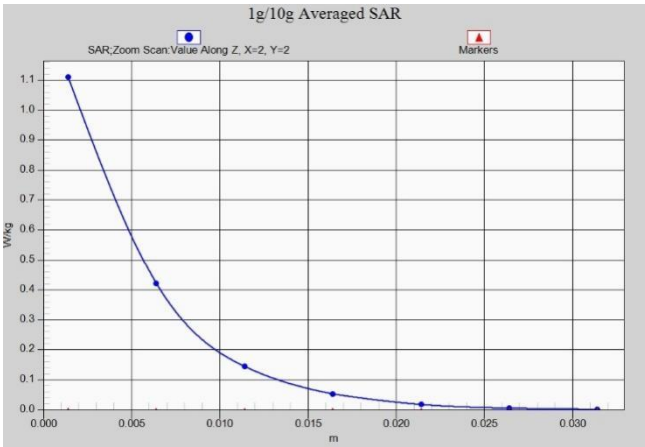

N77H Head ANT7

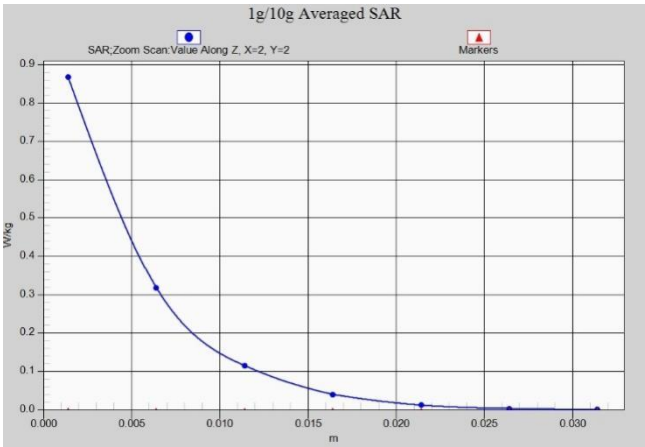

N77H Body 10mm ANT7

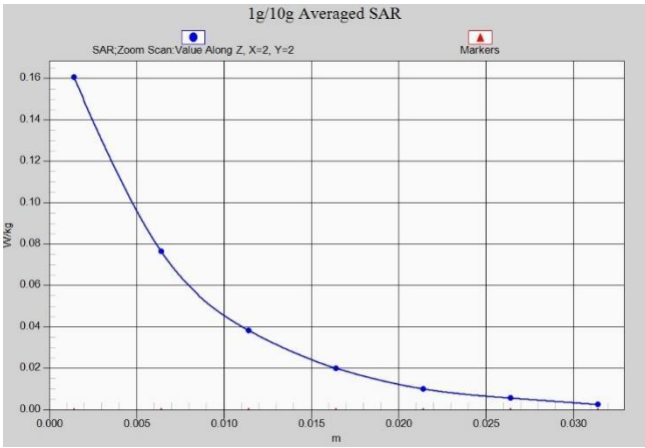

WIFI2.4G Head ANT5

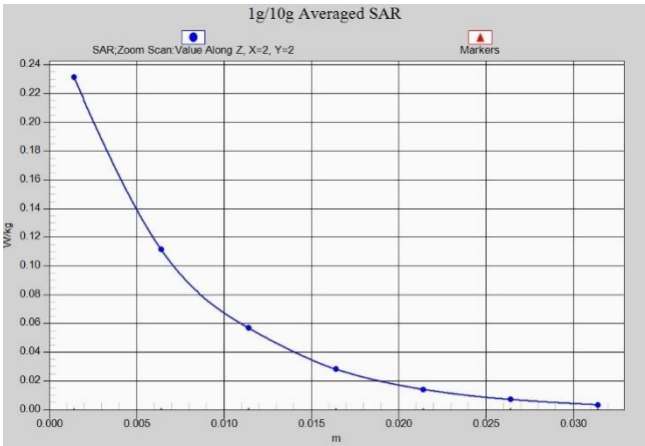

WIFI2.4G Body 10mm ANT5

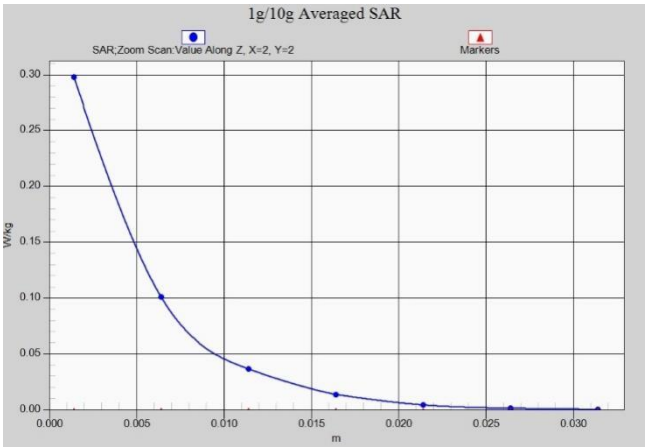

WIFI2.4G Head ANT6

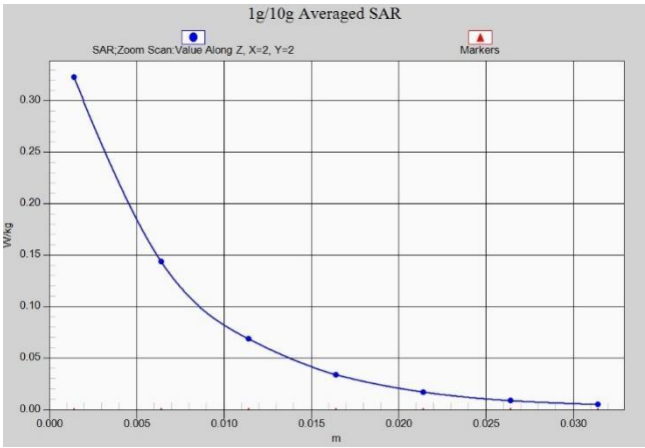

WIFI2.4G Body 10mm ANT6

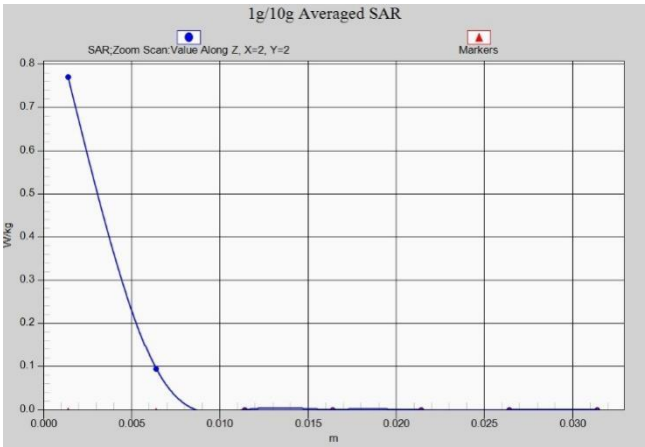

WIFI5G Head ANT7

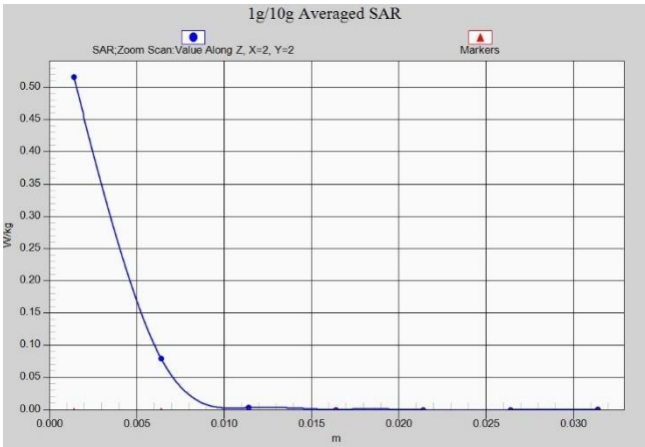

WIFI5G Body 10mm ANT7

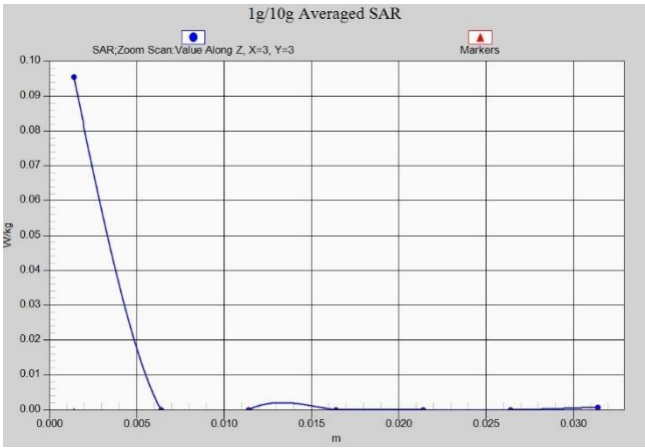

WIFI5G Head ANT10

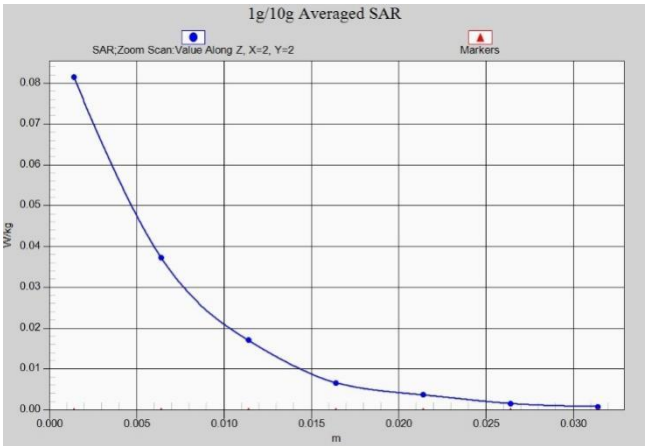

BT Head ANT5

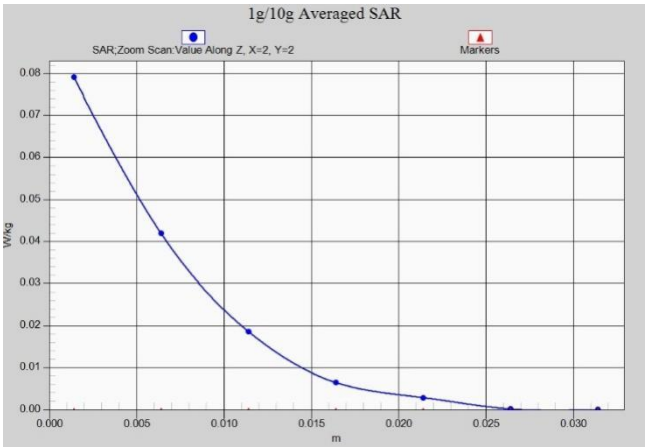

BT Head ANT6

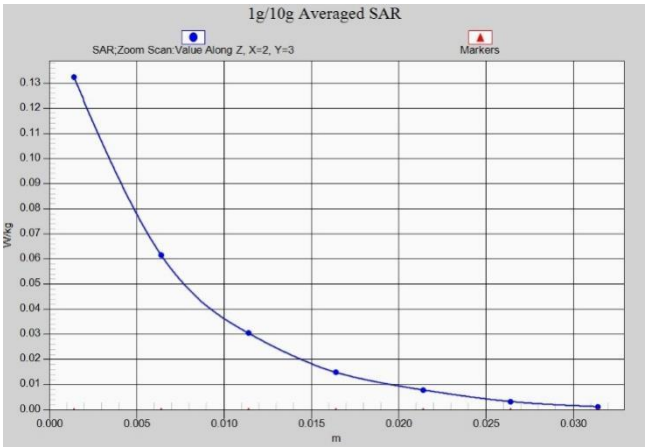

BT Body 10mm ANT6

Folder Open
GSM850 Head ANT1

Date: 2023/6/7

Electronics: DAE4 Sn777

Medium: H700-6000M

Medium parameters used (interpolated): f = 836.6 MHz; σ = 0.872 S/m; ε r = 43.502; ρ = 1000 kg/m3

Ambient Temperature:23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, GSM850 (0) Frequency: 836.6 MHz Duty Cycle: 1:8.30042

Probe: EX3DV4 - SN7464 ConvF(10.26, 10.26, 10.26)

Area Scan (121x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.164 W/kg

Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.953 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.182 W/kg

SAR(1 g) = 0.134 W/kg; SAR(10 g) = 0.103 W/kg

Maximum value of SAR (measured) = 0.163 W/kg

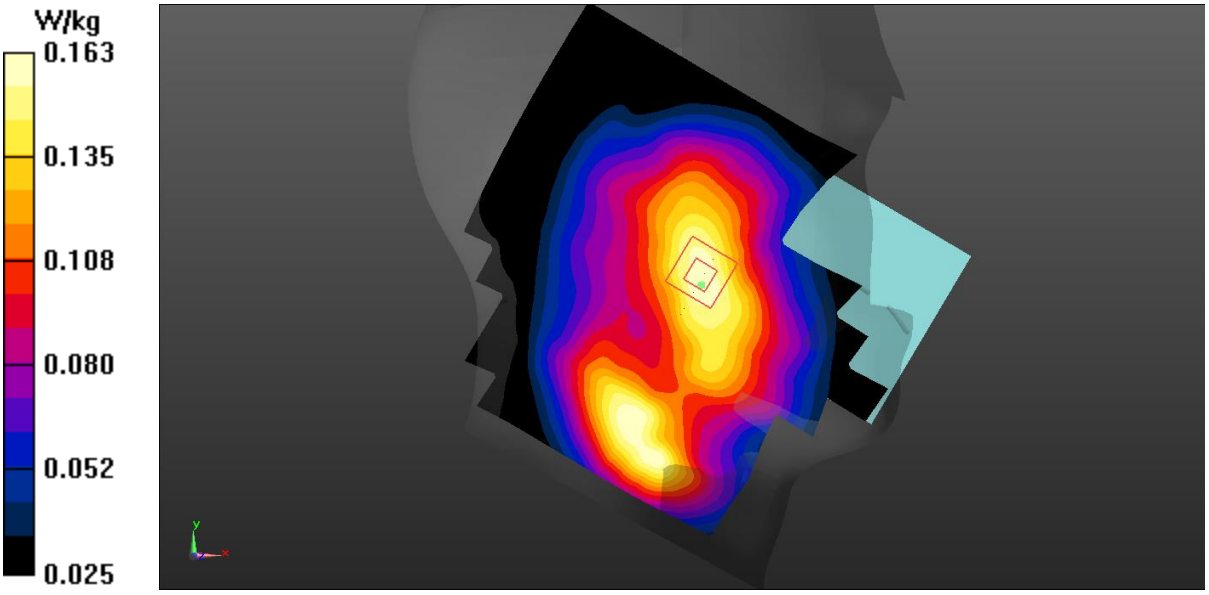

GSM850 Body 0mm ANT1

Date: 2023/6/7

Electronics: DAE4 Sn777

Medium: H700-6000M

Medium parameters used (interpolated): f = 836.6 MHz; σ = 0.872 S/m; ε r = 43.502; ρ = 1000 kg/m3

Ambient Temperature:23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, GSM850 4TX (0) Frequency: 836.6 MHz Duty Cycle: 1:8.30042

Probe: EX3DV4 - SN7464 ConvF(10.26, 10.26, 10.26)

Area Scan (51x141x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.41 W/kg

Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 24.74 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 4.95 W/kg

SAR(1 g) = 0.960 W/kg; SAR(10 g) = 0.336 W/kg
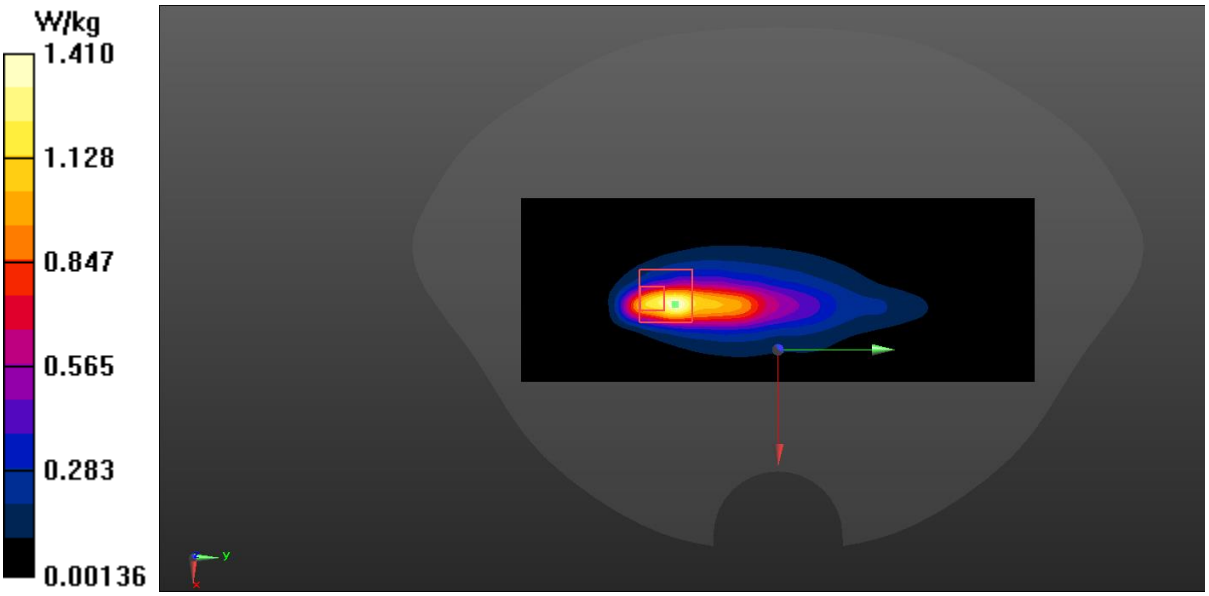
Maximum value of SAR (measured) = 3.07 W/kg