N25 Head ANT2

Date: 2023/5/11

Electronics: DAE4 Sn777

Medium: H700-6000M

Medium parameters used (interpolated): f = 1882.5 MHz; σ = 1.422 S/m; εr = 41.529; ρ = 1000 kg/m3

Ambient Temperature:23.3°C Liquid Temperature: 22.5°C

Communication System: 5G N25 (0) Frequency: 1882.5 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7464 ConvF(8.13, 8.13, 8.13)

Area Scan (121x141x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.982 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.74 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 1.56 W/kg

SAR(1 g) = 0.838 W/kg; SAR(10 g) = 0.411 W/kg

Maximum value of SAR (measured) = 1.27 W/kg

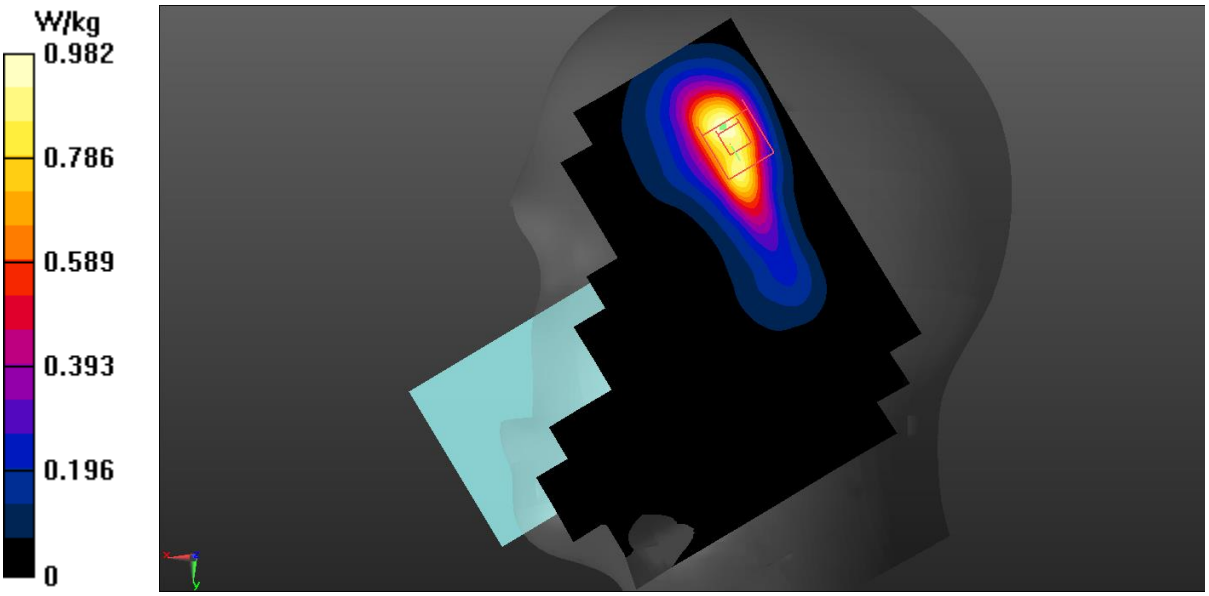

N25 Body 0mm ANT2

Date: 2023/5/11

Electronics: DAE4 Sn777

Medium: H700-6000M

Medium parameters used: f = 1870 MHz; σ = 1.416 S/m; εr = 41.539; ρ = 1000 kg/m3

Ambient Temperature:23.3°C Liquid Temperature: 22.5°C

Communication System: 5G N25 (0) Frequency: 1870 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7464 ConvF(8.13, 8.13, 8.13)

Area Scan (51x141x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.11 W/kg

Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.680 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 2.29 W/kg

SAR(1 g) = 0.736 W/kg; SAR(10 g) = 0.268 W/kg

Maximum value of SAR (measured) = 1.32 W/kg

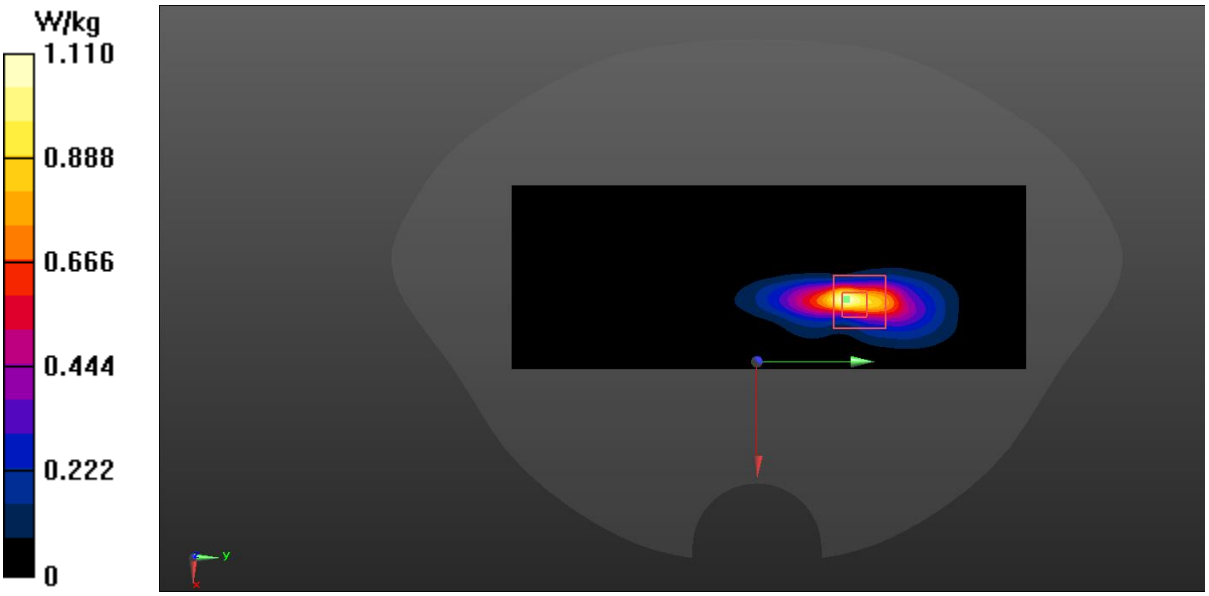

N25 Head ANT3

Date: 2023/5/11

Electronics: DAE4 Sn777

Medium: H700-6000M

Medium parameters used: f = 1895 MHz; σ = 1.427 S/m; εr = 41.519; ρ = 1000 kg/m3

Ambient Temperature:23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, 5G NR (0) Frequency: 1895 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7464 ConvF(8.13, 8.13, 8.13)

Area Scan (121x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.533 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.590 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.595 W/kg

SAR(1 g) = 0.377 W/kg; SAR(10 g) = 0.224 W/kg

Maximum value of SAR (measured) = 0.515 W/kg

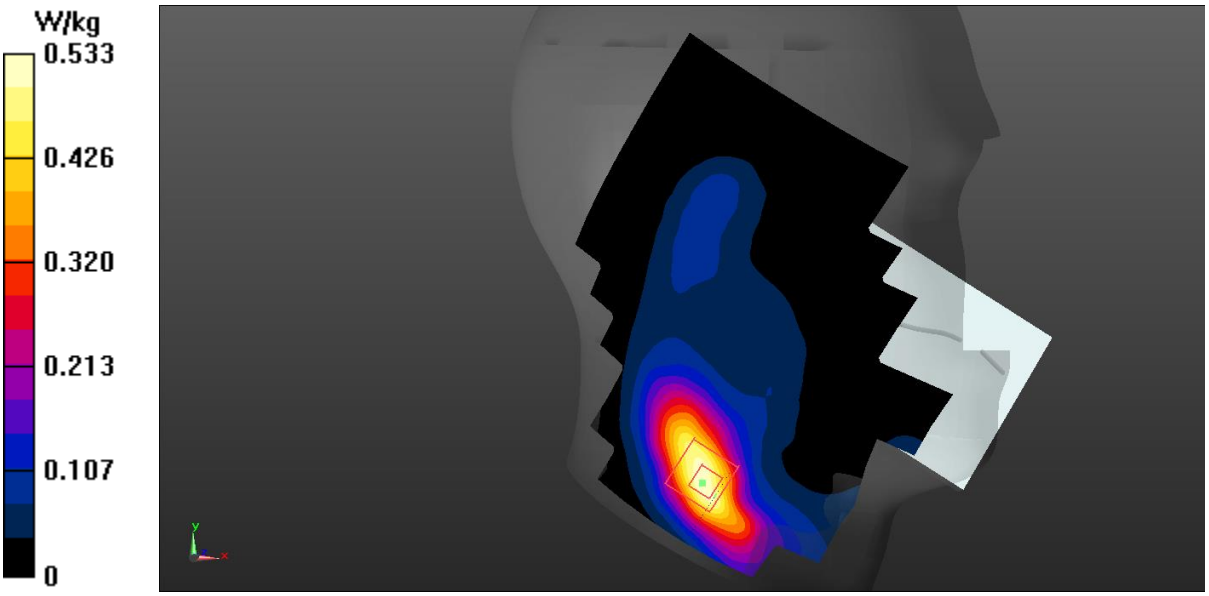

N25 Body 0mm ANT3

Date: 2023/5/11

Electronics: DAE4 Sn777

Medium: H700-6000M

Medium parameters used: f = 1895 MHz; σ = 1.427 S/m; εr = 41.519; ρ = 1000 kg/m3

Ambient Temperature:23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, 5G N25 (0) Frequency: 1895 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7464 ConvF(8.13, 8.13, 8.13) @

Area Scan (51x141x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.98 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.99 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 2.88 W/kg

SAR(1 g) = 0.852 W/kg; SAR(10 g) = 0.321 W/kg

Maximum value of SAR (measured) = 2.22 W/kg

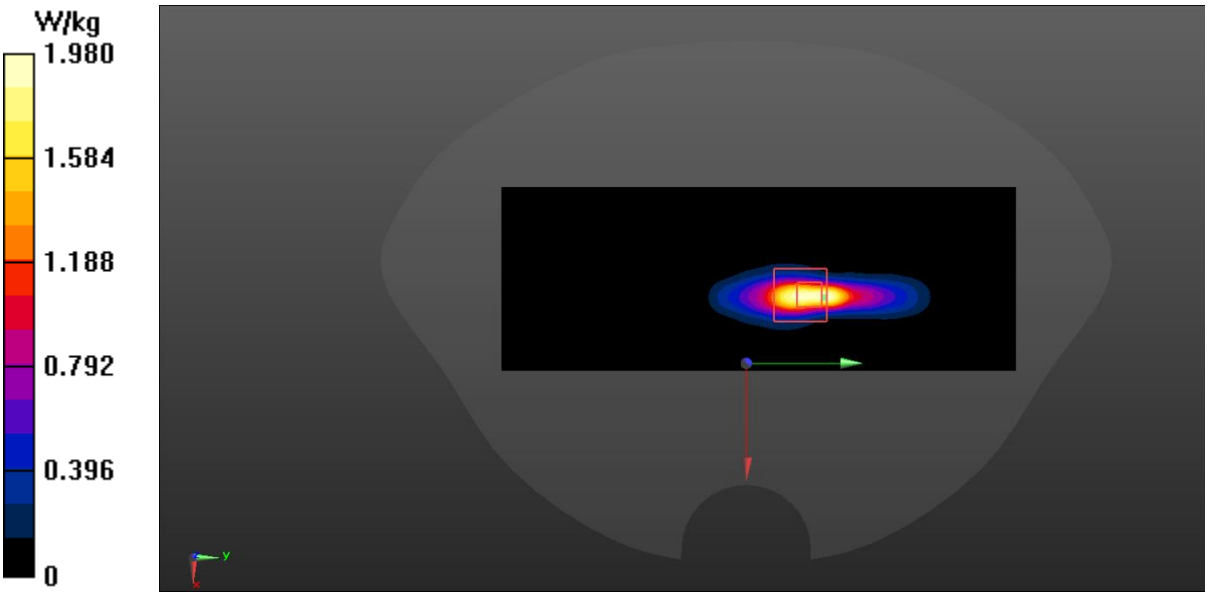

N25 Head ANT4

Date: 2023/6/14

Electronics: DAE4 Sn777

Medium: H700-6000M

Medium parameters used: f = 1870 MHz; σ = 1.397 S/m; εr = 41.989; ρ = 1000 kg/m3

Ambient Temperature:23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, 5G N25 (0) Frequency: 1870 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7464 ConvF(8.13, 8.13, 8.13)

Area Scan (101x141x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.229 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.605 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 0.293 W/kg

SAR(1 g) = 0.174 W/kg; SAR(10 g) = 0.104 W/kg

Maximum value of SAR (measured) = 0.233 W/kg

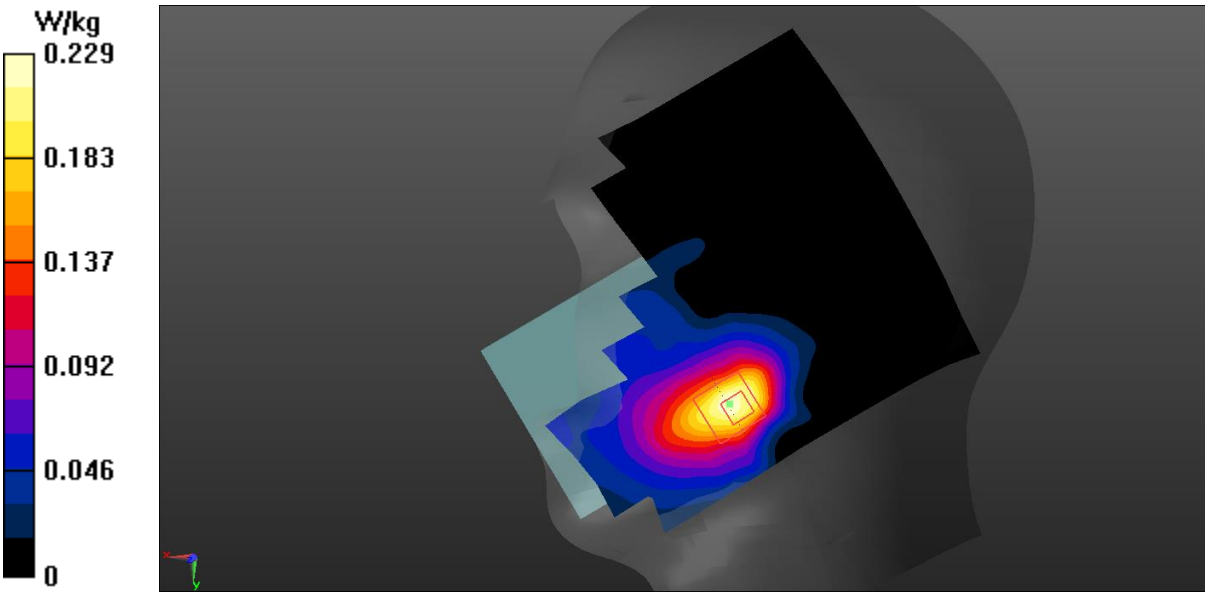

N25 Body 0mm ANT4

Date: 2023/6/14

Electronics: DAE4 Sn777

Medium: H700-6000M

Medium parameters used: f = 1870 MHz; σ = 1.397 S/m; εr = 41.989; ρ = 1000 kg/m3

Ambient Temperature:23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, 5G N25 (0) Frequency: 1870 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7464 ConvF(8.13, 8.13, 8.13)

Area Scan (81x141x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.627 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.349 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.829 W/kg

SAR(1 g) = 0.435 W/kg; SAR(10 g) = 0.224 W/kg

Maximum value of SAR (measured) = 0.664 W/kg

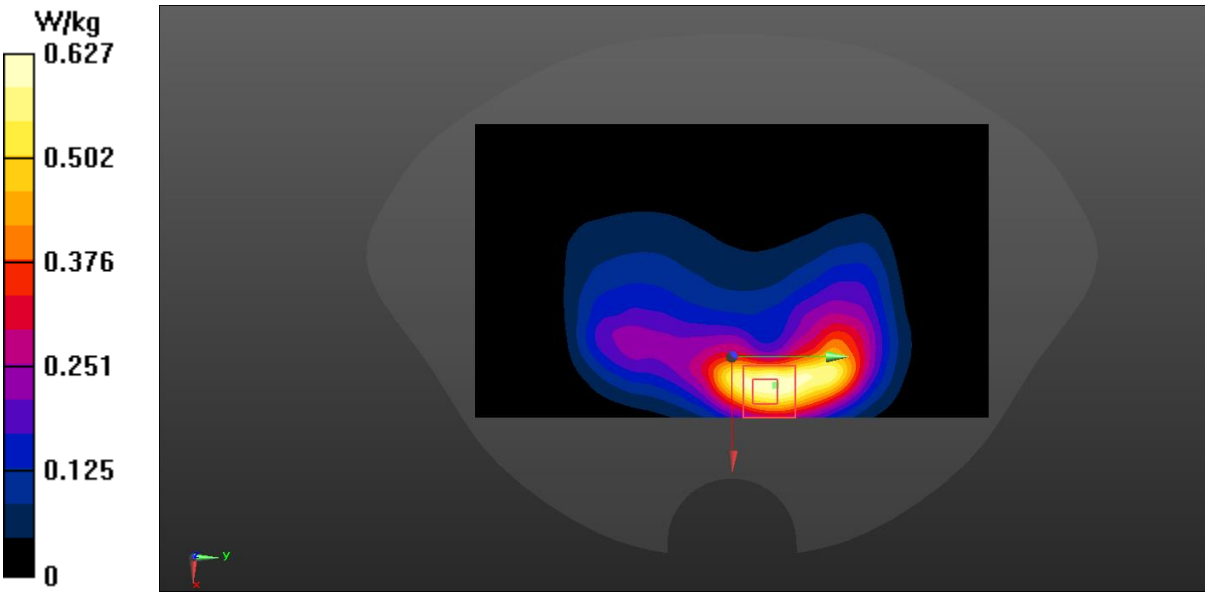

N25 Head ANT5

Date: 2023/6/14

Electronics: DAE4 Sn777

Medium: H700-6000M

Medium parameters used (interpolated): f = 1882.5 MHz; σ = 1.403 S/m; εr = 41.979; ρ = 1000 kg/m3

Ambient Temperature:23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, 5G N25 (0) Frequency: 1882.5 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7464 ConvF(8.13, 8.13, 8.13)

Area Scan (121x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.858 W/kg

Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.31 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 1.00 W/kg

SAR(1 g) = 0.600 W/kg; SAR(10 g) = 0.336 W/kg

Maximum value of SAR (measured) = 0.818 W/kg

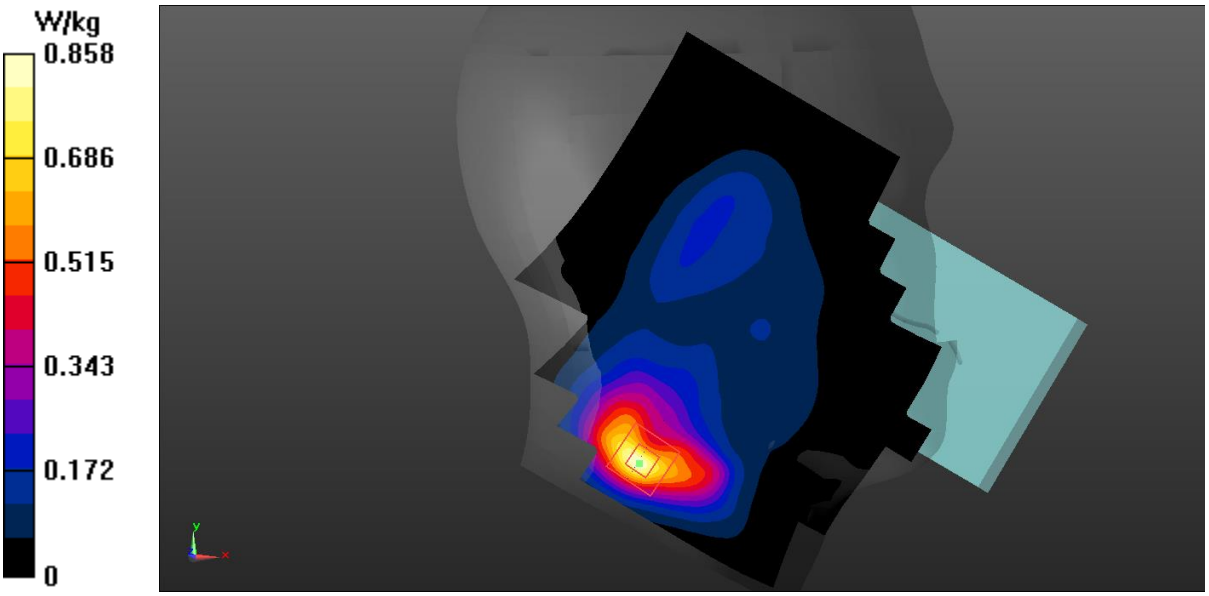

N25 Body 0mm ANT5

Date: 2023/6/14

Electronics: DAE4 Sn777

Medium: H700-6000M

Medium parameters used (interpolated): f = 1882.5 MHz; σ = 1.403 S/m; εr = 41.979; ρ = 1000 kg/m3

Ambient Temperature:23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, 5G N25 (0) Frequency: 1882.5 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7464 ConvF(8.13, 8.13, 8.13)

Area Scan (81x141x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.948 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.782 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 1.62 W/kg

SAR(1 g) = 0.565 W/kg; SAR(10 g) = 0.217 W/kg

Maximum value of SAR (measured) = 1.26 W/kg

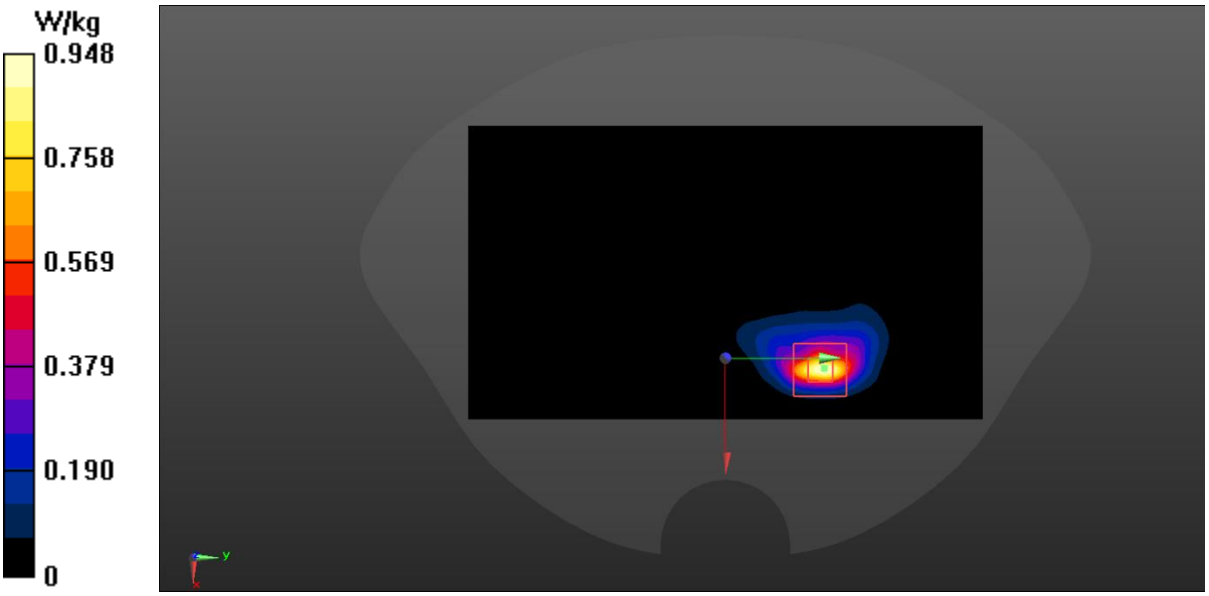

N30 Head ANT4

Date: 2023/5/12

Electronics: DAE4 Sn777

Medium: H700-6000M

Medium parameters used: f = 2310 MHz; σ = 1.737 S/m; εr = 40.909; ρ = 1000 kg/m3

Ambient Temperature:23.3°C Liquid Temperature: 22.5°C

Communication System: 5G N30 (0) Frequency: 2310 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7464 ConvF(7.95, 7.95, 7.95)

Area Scan (101x171x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.165 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 0.6370 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.223 W/kg

SAR(1 g) = 0.121 W/kg; SAR(10 g) = 0.063 W/kg

Maximum value of SAR (measured) = 0.174 W/kg

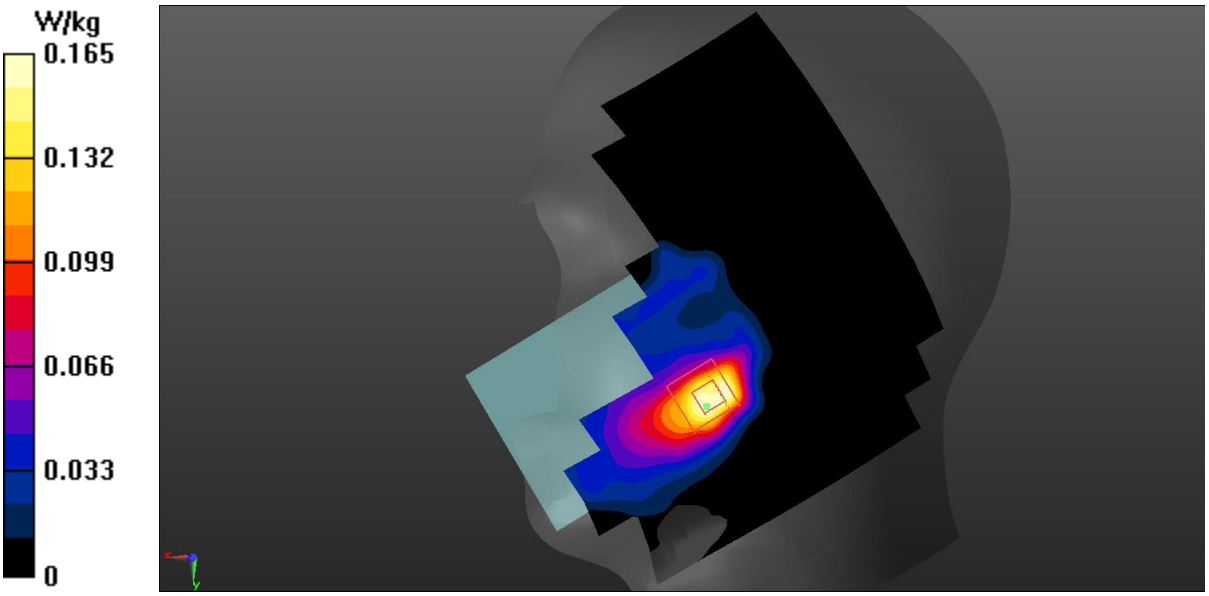

N30 Body 0mm ANT4

Date: 2023/5/12

Electronics: DAE4 Sn777

Medium: H700-6000M

Medium parameters used: f = 2310 MHz; σ = 1.737 S/m; εr = 40.909; ρ = 1000 kg/m3

Ambient Temperature:23.3°C Liquid Temperature: 22.5°C

Communication System: 5G N30 (0) Frequency: 2310 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7464 ConvF(7.95, 7.95, 7.95)

Area Scan (101x171x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 1.22 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 21.55 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 1.70 W/kg

SAR(1 g) = 0.804 W/kg; SAR(10 g) = 0.383 W/kg

Maximum value of SAR (measured) = 1.26 W/kg

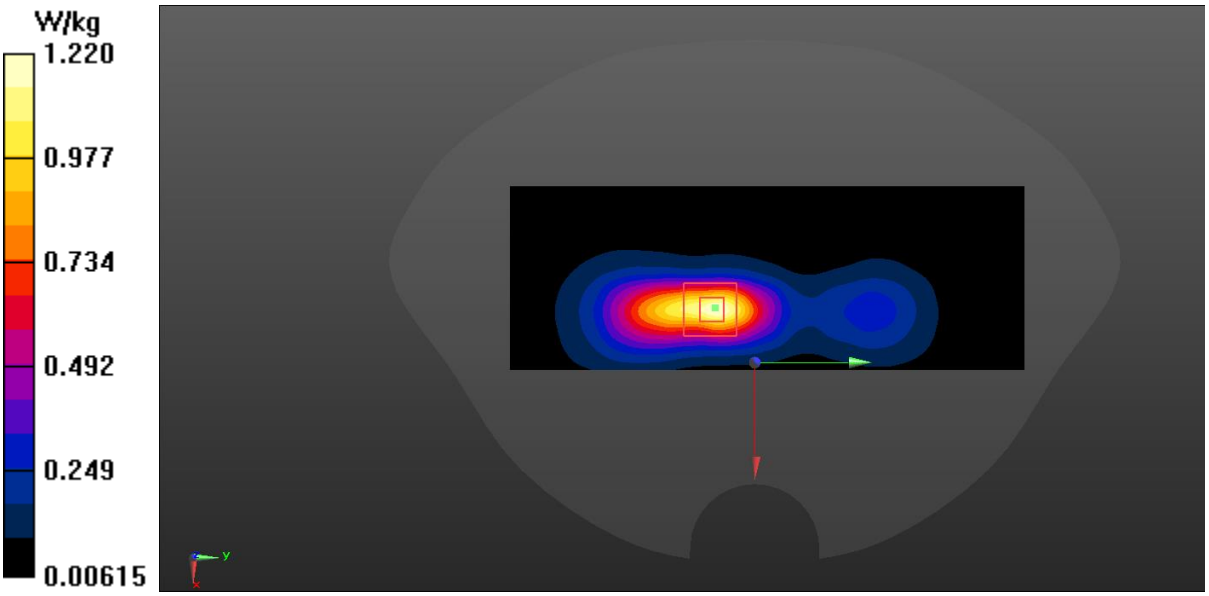

N30 Head ANT5

Date: 2023/5/12

Electronics: DAE4 Sn777

Medium: H700-6000M

Medium parameters used: f = 2310 MHz; σ = 1.737 S/m; εr = 40.909; ρ = 1000 kg/m3

Ambient Temperature:23.3°C Liquid Temperature: 22.5°C

Communication System: 5G N30 (0) Frequency: 2310 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7464 ConvF(7.95, 7.95, 7.95)

Area Scan (101x171x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.924 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.70 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 1.21 W/kg

SAR(1 g) = 0.631 W/kg; SAR(10 g) = 0.319 W/kg

Maximum value of SAR (measured) = 1.01 W/kg

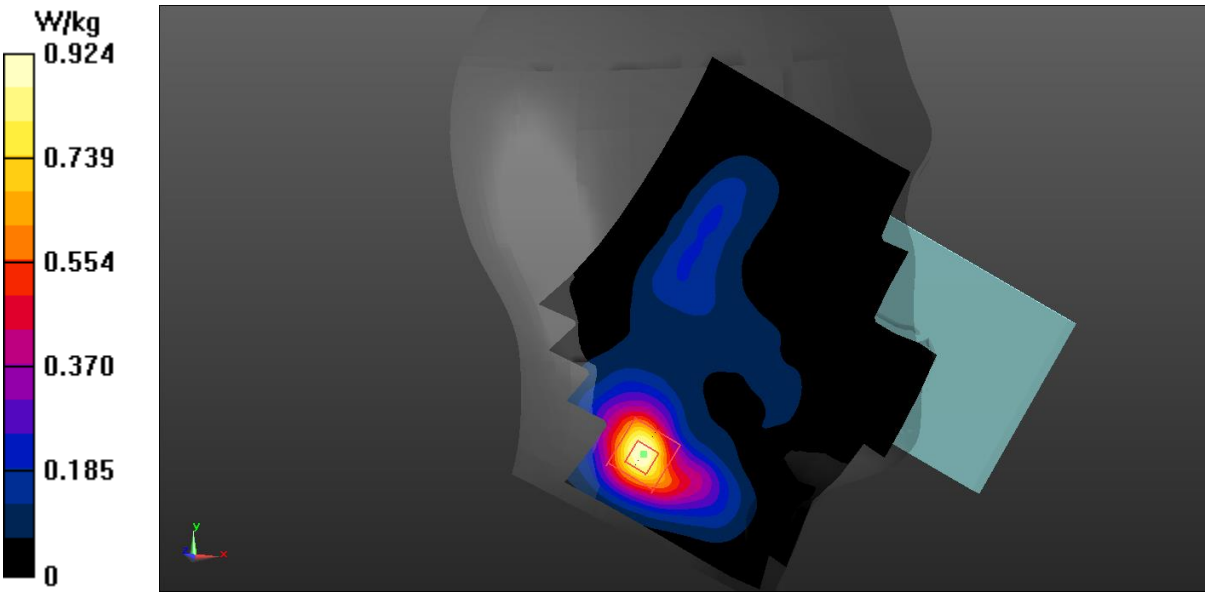

N30 Body 0mm ANT5

Date: 2023/5/12

Electronics: DAE4 Sn777

Medium: H700-6000M

Medium parameters used (interpolated): f = 2307.5 MHz; σ = 1.737 S/m; εr = 40.909; ρ = 1000 kg/m3

Ambient Temperature:23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, 5G N30 (0) Frequency: 2307.5 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7464 ConvF(7.95, 7.95, 7.95)

Area Scan (101x171x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 1.86 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.922 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 1.76 W/kg

SAR(1 g) = 0.606 W/kg; SAR(10 g) = 0.222 W/kg

Maximum value of SAR (measured) = 1.43 W/kg

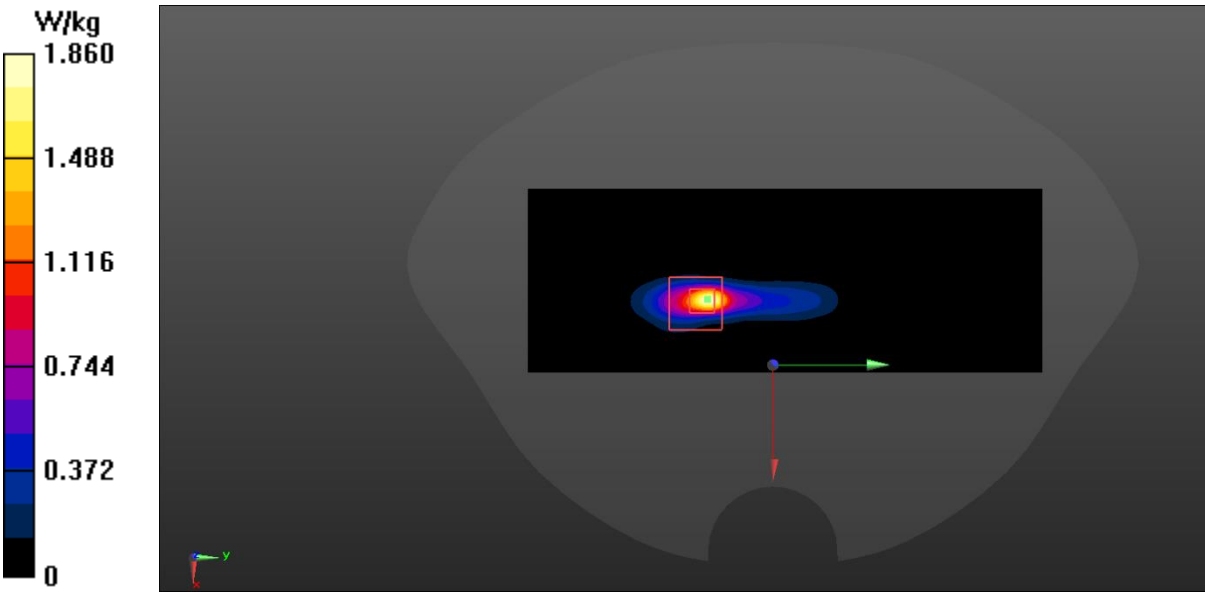

N38 Head ANT2

Date: 2023/5/26

Electronics: DAE4 Sn777

Medium: H700-6000M

Medium parameters used: f = 2575 MHz; σ = 1.963 S/m; εr = 40.331; ρ = 1000 kg/m3

Ambient Temperature:23.3°C Liquid Temperature: 22.5°C

Communication System: n38 (0) Frequency: 2575 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7464 ConvF(7.5, 7.5, 7.5)

Area Scan (101x171x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 1.02 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.720 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 1.39 W/kg

SAR(1 g) = 0.635 W/kg; SAR(10 g) = 0.288 W/kg

Maximum value of SAR (measured) = 1.15 W/kg

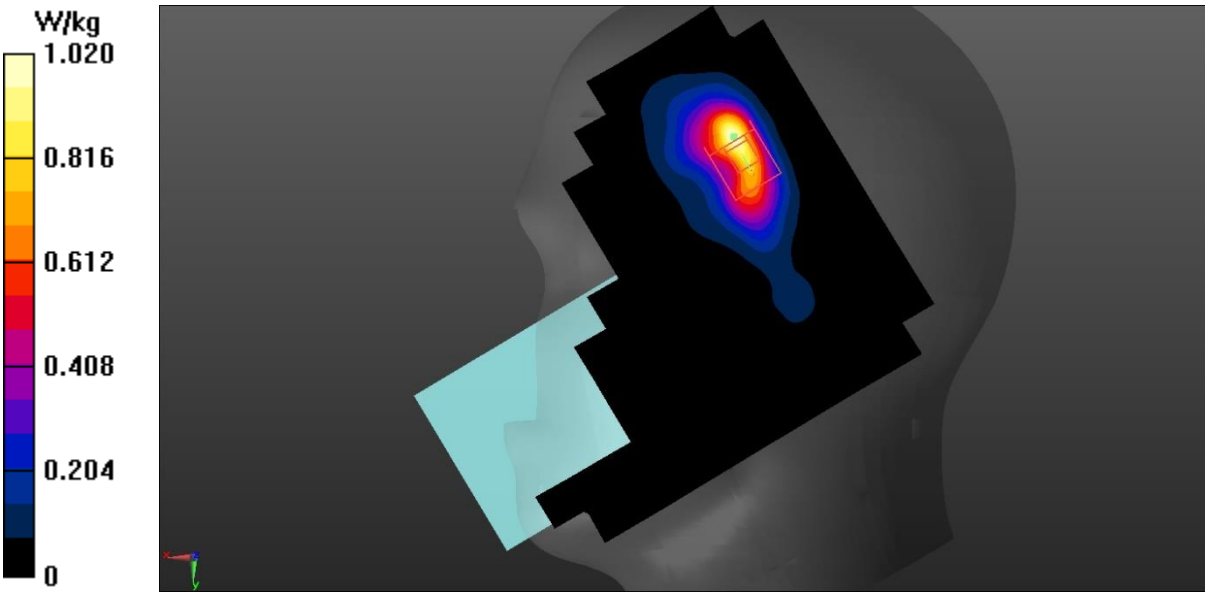

N38 Body 0mm ANT2

Date: 2023/5/26

Electronics: DAE4 Sn777

Medium: H700-6000M

Medium parameters used: f = 2575 MHz; σ = 1.963 S/m; εr = 40.331; ρ = 1000 kg/m3

Ambient Temperature:23.3°C Liquid Temperature: 22.5°C

Communication System: n38 (0) Frequency: 2575 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7464 ConvF(7.5, 7.5, 7.5)

Area Scan (101x171x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.511 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.999 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 1.34 W/kg

SAR(1 g) = 0.453 W/kg; SAR(10 g) = 0.148 W/kg

Maximum value of SAR (measured) = 0.712 W/kg

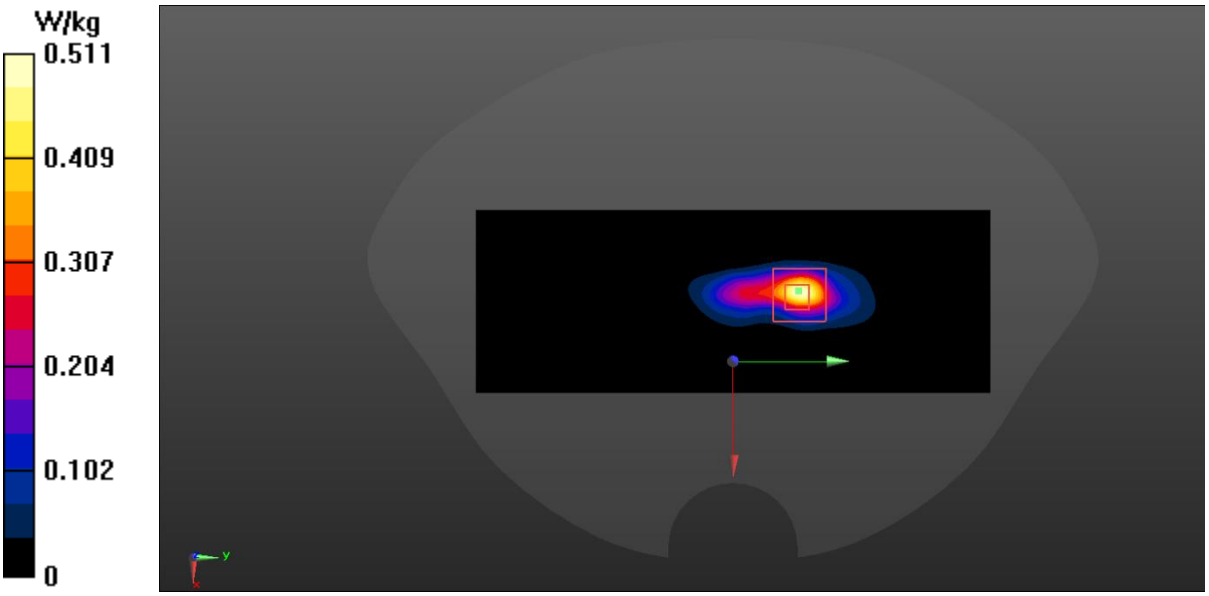

N38 Head ANT3

Date: 2023/5/26

Electronics: DAE4 Sn777

Medium: H700-6000M

Medium parameters used: f = 2595 MHz; σ = 1.974 S/m; εr = 40.301; ρ = 1000 kg/m3

Ambient Temperature:23.3°C Liquid Temperature: 22.5°C

Communication System: 5G NR (0) Frequency: 2595 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7464 ConvF(7.5, 7.5, 7.5)

Area Scan (101x171x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.541 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.216 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.675 W/kg

SAR(1 g) = 0.371 W/kg; SAR(10 g) = 0.192 W/kg

Maximum value of SAR (measured) = 0.563 W/kg

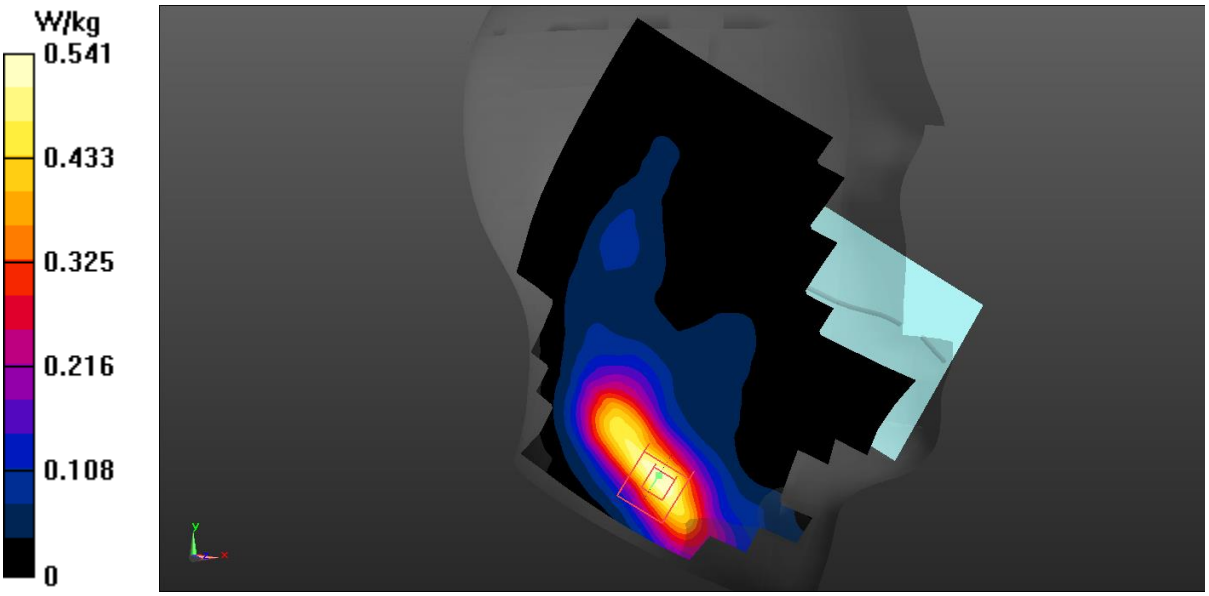

N38 Body 0mm ANT3

Date: 2023/5/26

Electronics: DAE4 Sn777

Medium: H700-6000M

Medium parameters used: f = 2575 MHz; σ = 1.963 S/m; εr = 40.331; ρ = 1000 kg/m3

Ambient Temperature:23.3°C Liquid Temperature: 22.5°C

Communication System: n38 (0) Frequency: 2575 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7464 ConvF(7.5, 7.5, 7.5)

Area Scan (101x171x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 1.13 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 14.31 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 2.46 W/kg

SAR(1 g) = 0.716 W/kg; SAR(10 g) = 0.233 W/kg

Maximum value of SAR (measured) = 1.86 W/kg

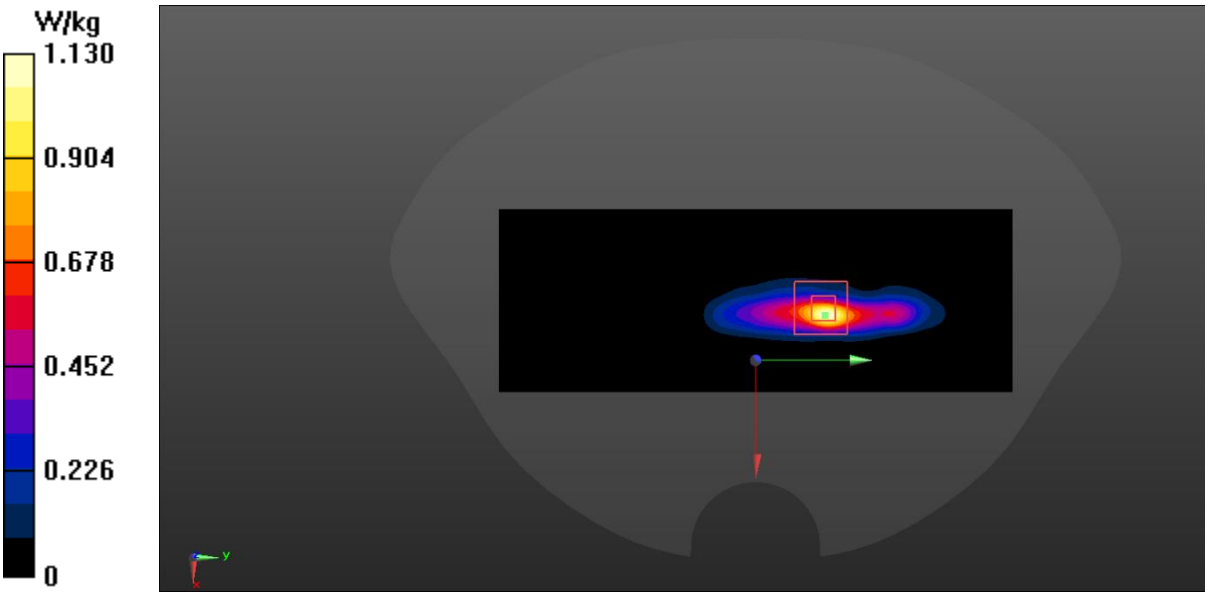

N38 Head ANT4

Date: 2023/6/15

Electronics: DAE4 Sn777

Medium: H700-6000M

Medium parameters used: f = 2595 MHz; σ = 1.981 S/m; εr = 40.443; ρ = 1000 kg/m3

Ambient Temperature:23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, n38 (0) Frequency: 2595 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7464 ConvF(7.5, 7.5, 7.5)

Area Scan (101x171x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.0705 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 0.1590 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.0880 W/kg

SAR(1 g) = 0.049 W/kg; SAR(10 g) = 0.030 W/kg

Maximum value of SAR (measured) = 0.0716 W/kg

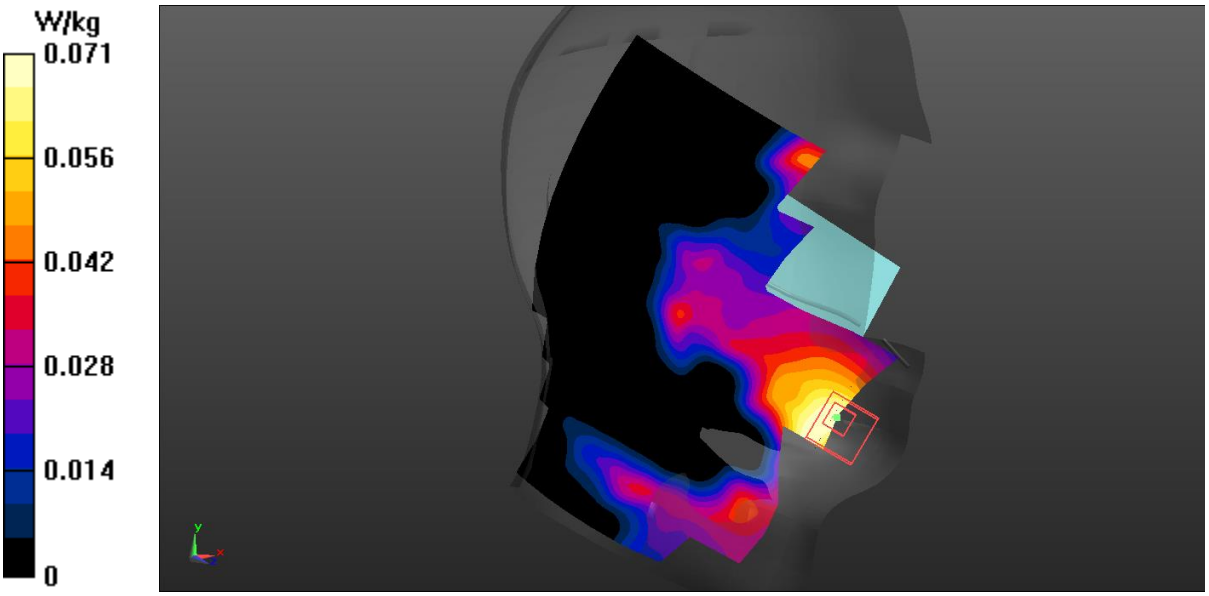

N38 Body 0mm ANT4

Date: 2023/6/15

Electronics: DAE4 Sn777

Medium: H700-6000M

Medium parameters used: f = 2600 MHz; σ = 1.983 S/m; εr = 40.433; ρ = 1000 kg/m3

Ambient Temperature:23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, 5G NR (0) Frequency: 2600 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7464 ConvF(7.5, 7.5, 7.5)

Area Scan (101x171x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 1.67 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 15.85 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 2.06 W/kg

SAR(1 g) = 0.889 W/kg; SAR(10 g) = 0.386 W/kg

Maximum value of SAR (measured) = 1.62 W/kg

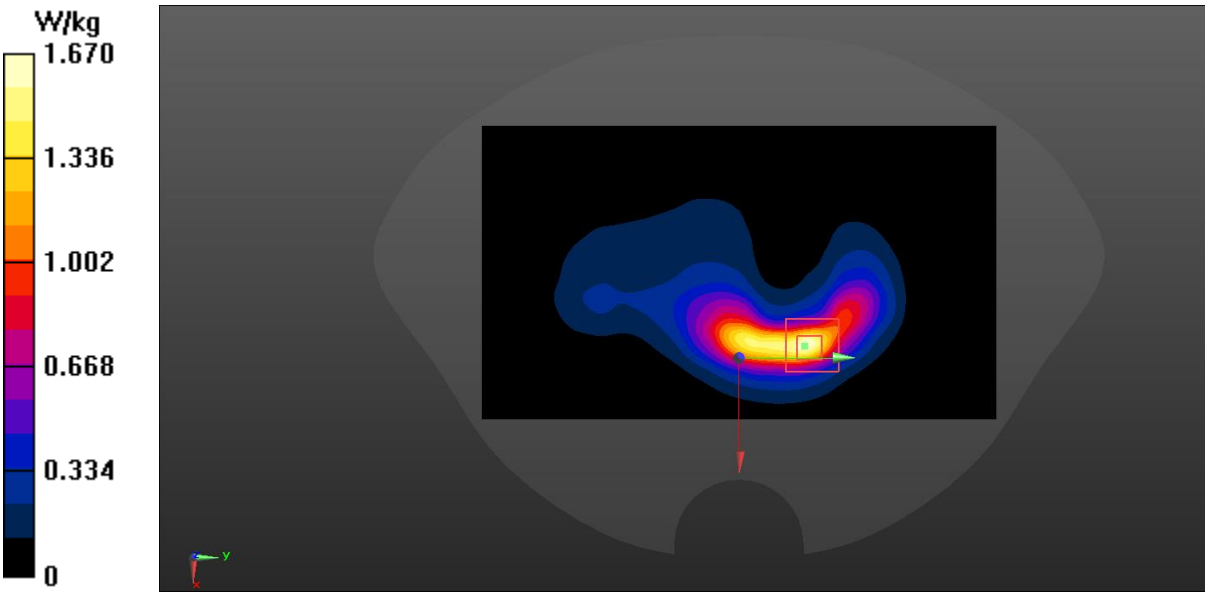

N38 Head ANT5

Date: 2023/6/15

Electronics: DAE4 Sn777

Medium: H700-6000M

Medium parameters used: f = 2600 MHz; σ = 1.983 S/m; εr = 40.433; ρ = 1000 kg/m3

Ambient Temperature:23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, 5G NR (0) Frequency: 2600 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7464 ConvF(7.5, 7.5, 7.5)

Area Scan (101x171x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.993 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.503 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 1.52 W/kg

SAR(1 g) = 0.716 W/kg; SAR(10 g) = 0.334 W/kg

Maximum value of SAR (measured) = 1.21 W/kg

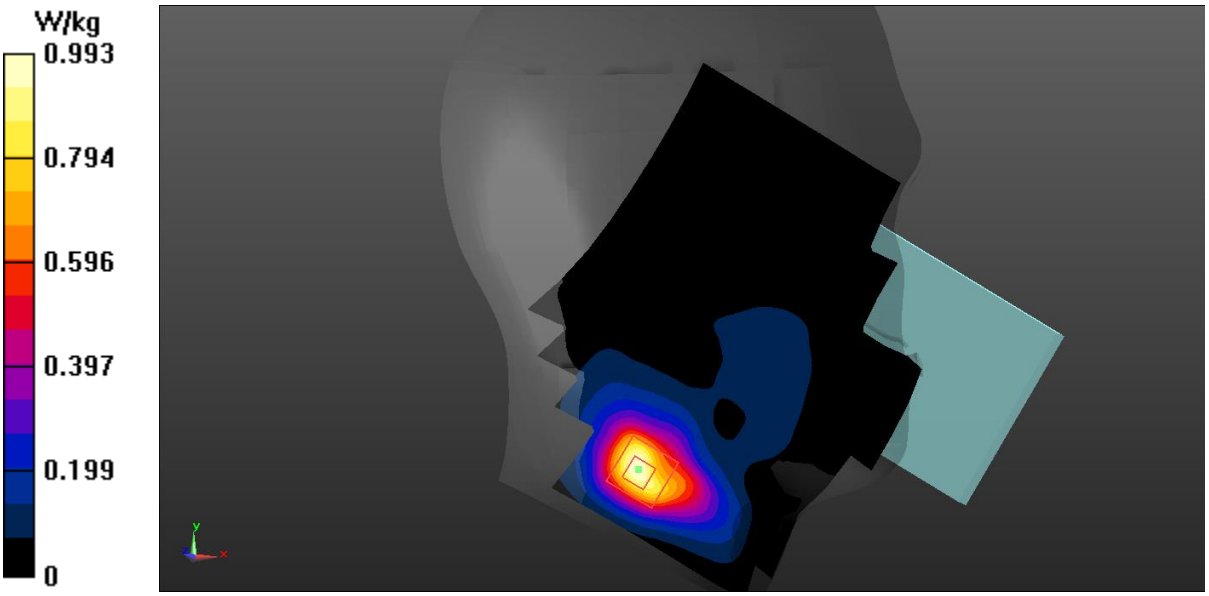

N38 Body 0mm ANT5

Date: 2023/6/15

Electronics: DAE4 Sn777

Medium: H700-6000M

Medium parameters used: f = 2595 MHz; σ = 1.981 S/m; εr = 40.443; ρ = 1000 kg/m3

Ambient Temperature:23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, n38 (0) Frequency: 2595 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7464 ConvF(7.5, 7.5, 7.5)

Area Scan (101x171x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 1.05 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.988 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 2.73 W/kg

SAR(1 g) = 0.731 W/kg; SAR(10 g) = 0.239 W/kg

Maximum value of SAR (measured) = 2.18 W/kg

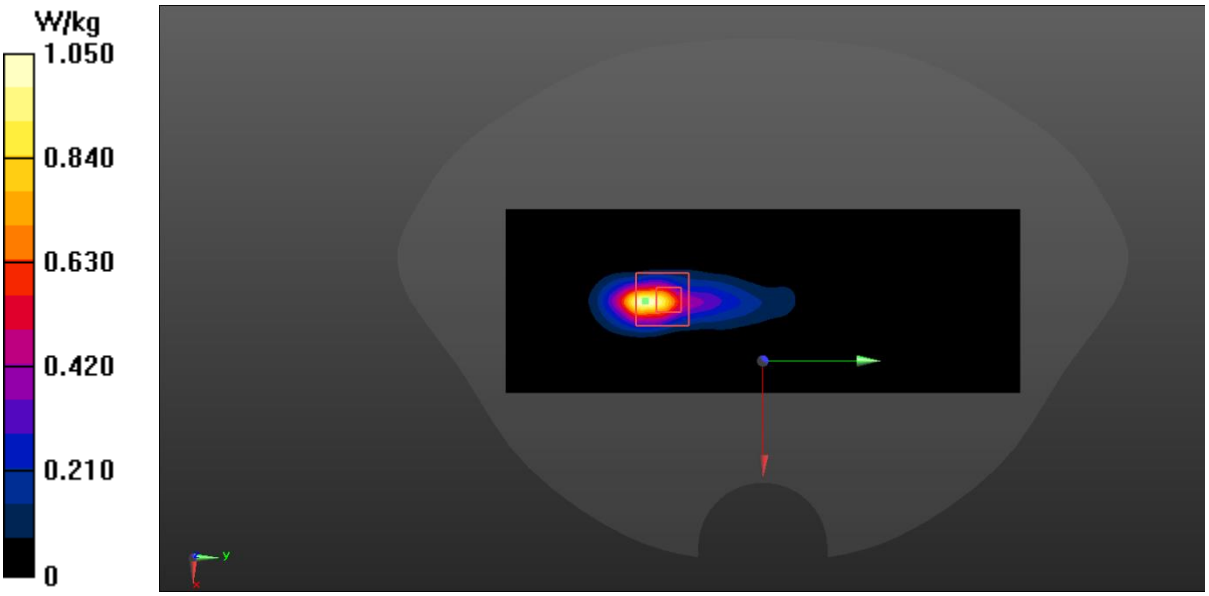

N41 Head ANT2

Date: 2023/5/27

Electronics: DAE4 Sn777

Medium: H700-6000M

Medium parameters used (interpolated): f = 2501.01 MHz; σ = 1.908 S/m; εr = 40.417; ρ = 1000 kg/m3

Ambient Temperature:23.3°C Liquid Temperature: 22.5°C

Communication System: 5G N41 (0) Frequency: 2501.01 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7464 ConvF(7.67, 7.67, 7.67)

Area Scan (101x171x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 1.52 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.511 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 1.93 W/kg

SAR(1 g) = 0.993 W/kg; SAR(10 g) = 0.459 W/kg

Maximum value of SAR (measured) = 1.50 W/kg

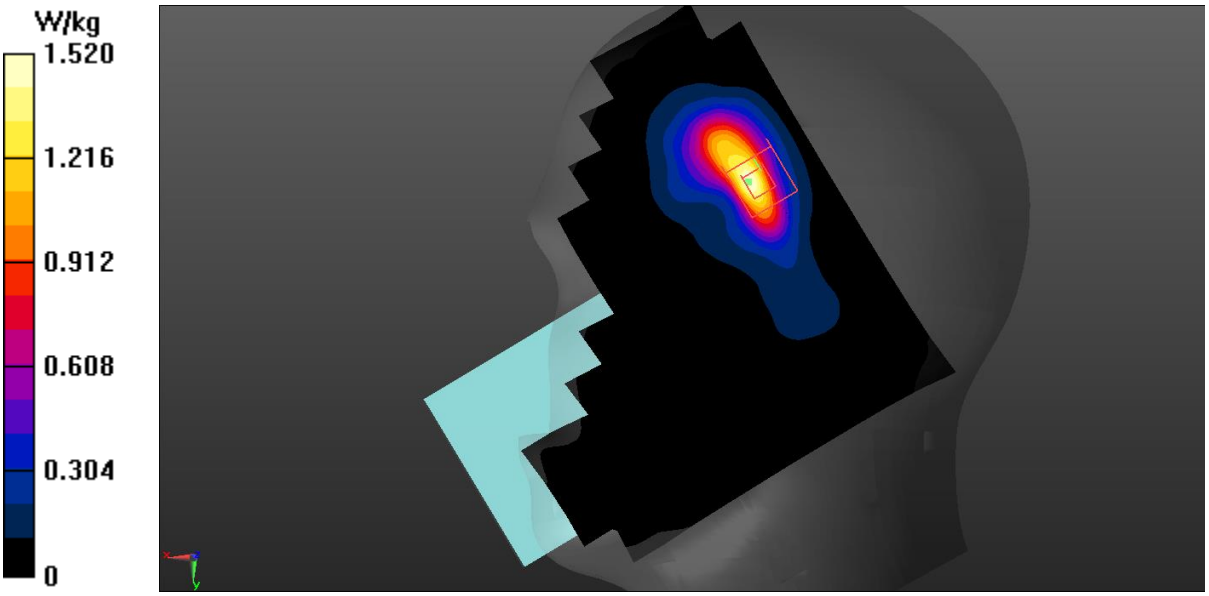

N41 Body 0mm ANT2

Date: 2023/5/27

Electronics: DAE4 Sn777

Medium: H700-6000M

Medium parameters used (interpolated): f = 2501.01 MHz; σ = 1.908 S/m; εr = 40.417; ρ = 1000 kg/m3

Ambient Temperature:23.3°C Liquid Temperature: 22.5°C

Communication System: 5G N41 (0) Frequency: 2501.01 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7464 ConvF(7.67, 7.67, 7.67)

Area Scan (101x171x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 2.09 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 20.46 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 2.34 W/kg

SAR(1 g) = 0.722 W/kg; SAR(10 g) = 0.229 W/kg

Maximum value of SAR (measured) = 1.94 W/kg

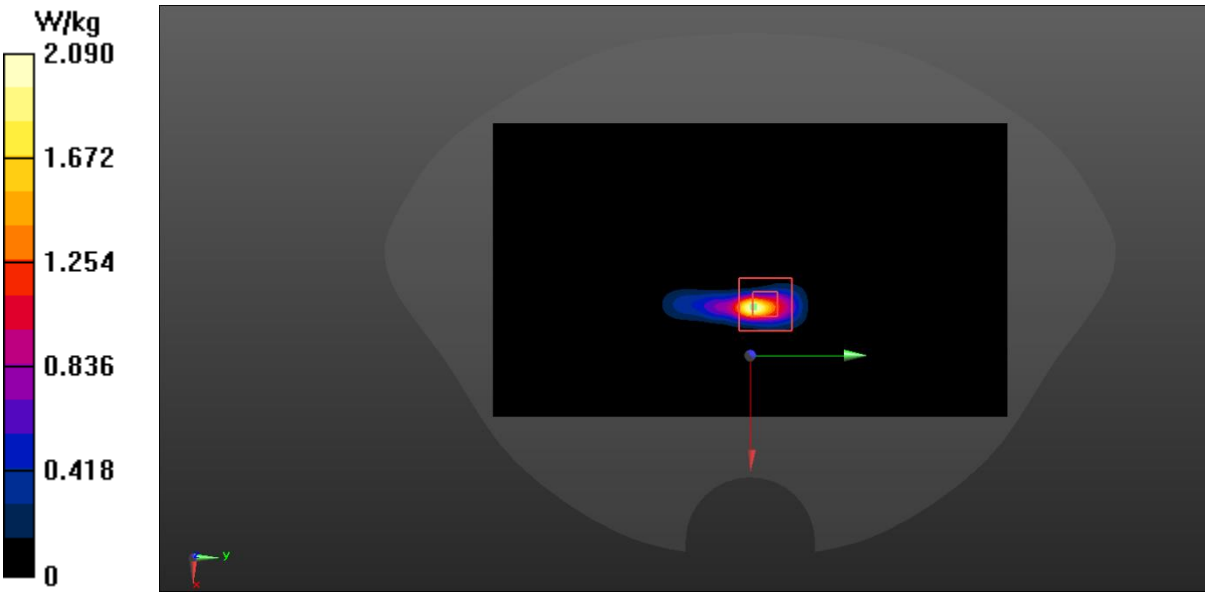

N41 Head ANT3

Date: 2023/5/27

Electronics: DAE4 Sn777

Medium: H700-6000M

Medium parameters used (interpolated): f = 2592.99 MHz; σ = 1.972 S/m; εr = 40.26; ρ = 1000 kg/m3

Ambient Temperature:23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, 5G N41 (0) Frequency: 2592.99 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7464 ConvF(7.5, 7.5, 7.5)

Area Scan (101x171x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.774 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.327 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.905 W/kg

SAR(1 g) = 0.495 W/kg; SAR(10 g) = 0.264 W/kg

Maximum value of SAR (measured) = 0.702 W/kg

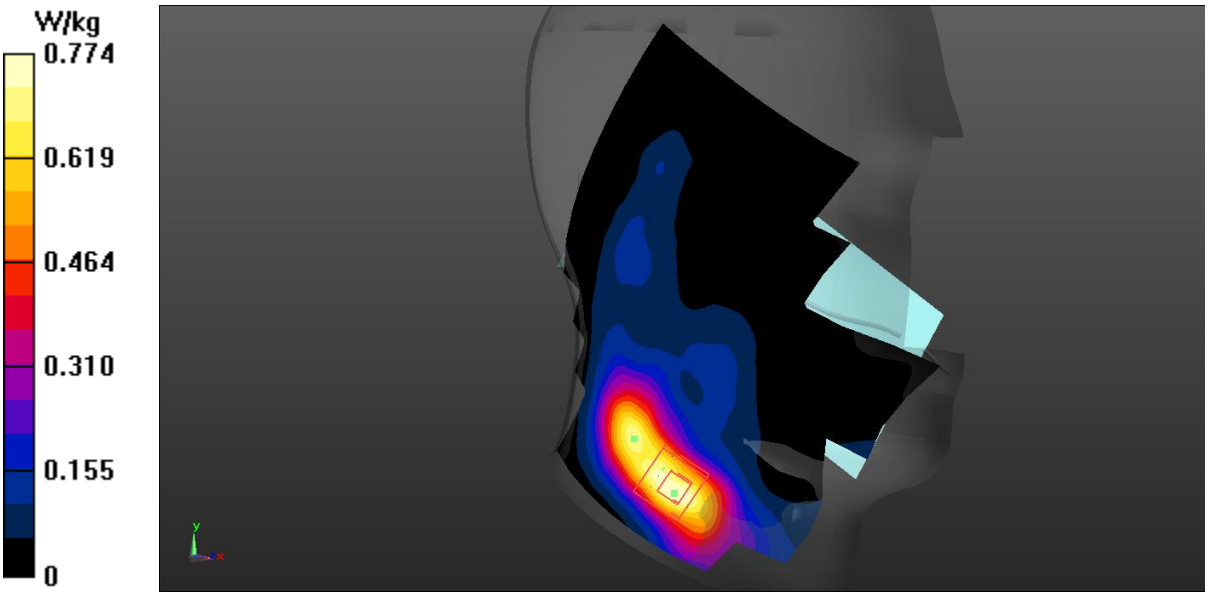

N41 Body 0mm ANT3

Date: 2023/5/27

Electronics: DAE4 Sn777

Medium: H700-6000M

Medium parameters used (interpolated): f = 2639 MHz; σ = 1.998 S/m; εr = 40.152; ρ = 1000 kg/m3

Ambient Temperature:23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, 5G N41 (0) Frequency: 2639 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7464 ConvF(7.5, 7.5, 7.5)

Area Scan (101x171x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 1.54 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.178 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 2.92 W/kg

SAR(1 g) = 0.859 W/kg; SAR(10 g) = 0.277 W/kg

Maximum value of SAR (measured) = 1.98 W/kg

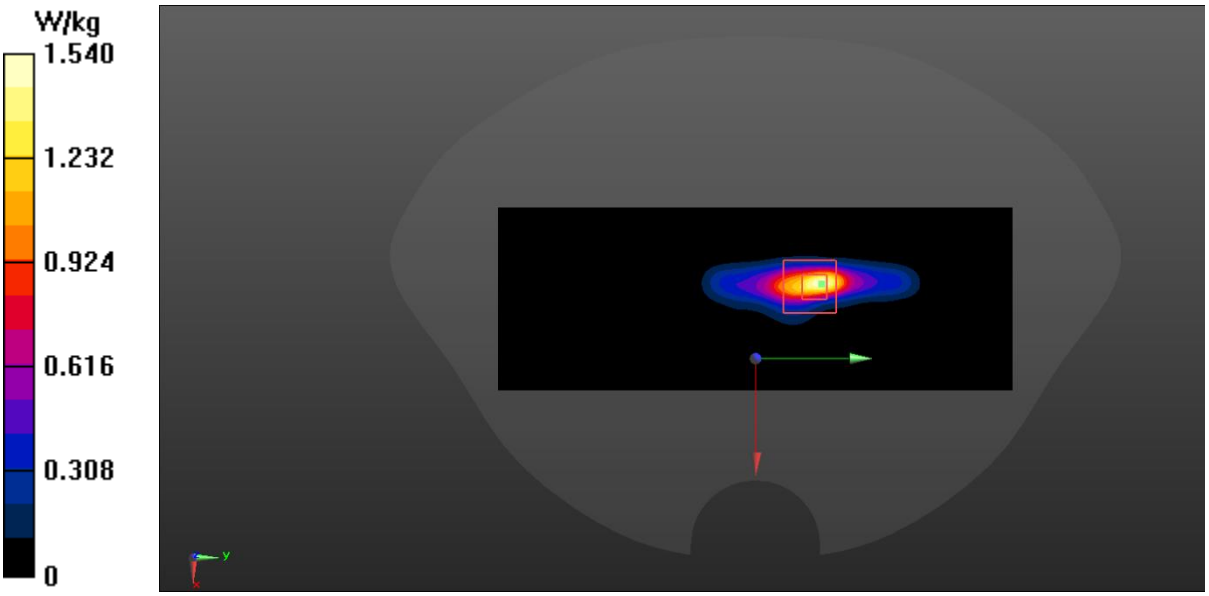

N41 Head ANT4

Date: 2023/6/12

Electronics: DAE4 Sn777

Medium: H700-6000M

Medium parameters used (interpolated): f = 2592.99 MHz; σ = 1.999 S/m; εr = 40.649; ρ = 1000 kg/m3

Ambient Temperature:23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, 5G N41 (0) Frequency: 2592.99 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7464 ConvF(7.5, 7.5, 7.5)

Area Scan (101x171x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.0761 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 0.6900 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.0970 W/kg

SAR(1 g) = 0.055 W/kg; SAR(10 g) = 0.033 W/kg

Maximum value of SAR (measured) = 0.0799 W/kg

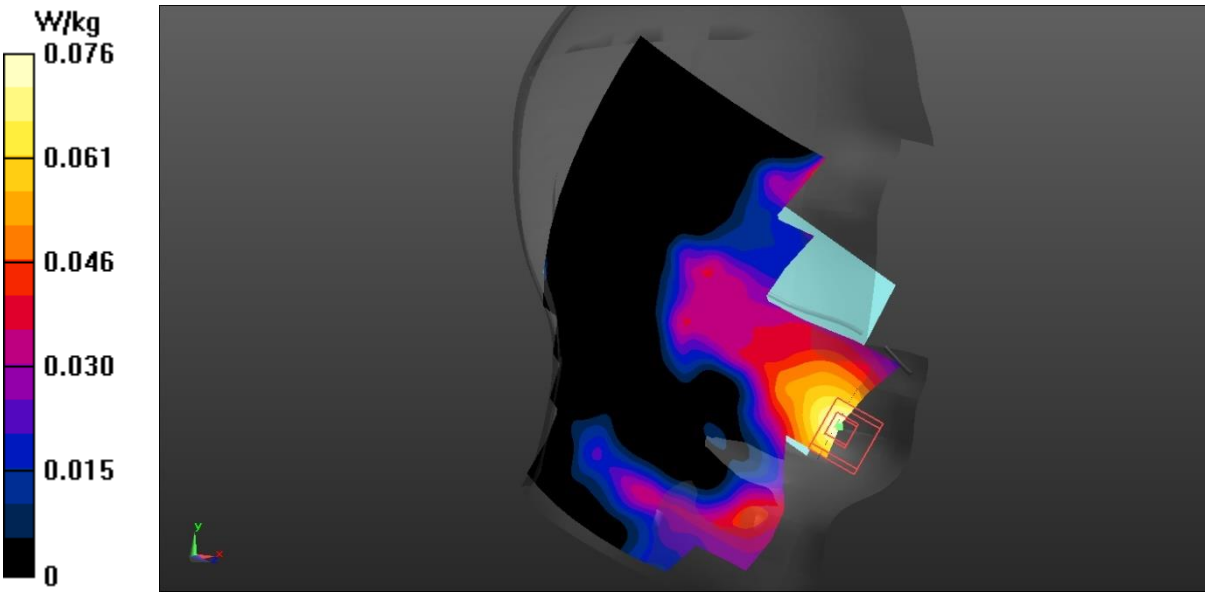

N41 Body 0mm ANT4

Date: 2023/6/12

Electronics: DAE4 Sn777

Medium: H700-6000M

Medium parameters used (interpolated): f = 2639 MHz; σ = 2.026 S/m; εr = 40.54; ρ = 1000 kg/m3

Ambient Temperature:23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, 5G N41 (0) Frequency: 2639 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7464 ConvF(7.5, 7.5, 7.5)

Area Scan (101x171x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 1.13 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.53 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 1.52 W/kg

SAR(1 g) = 0.679 W/kg; SAR(10 g) = 0.322 W/kg

Maximum value of SAR (measured) = 1.10 W/kg

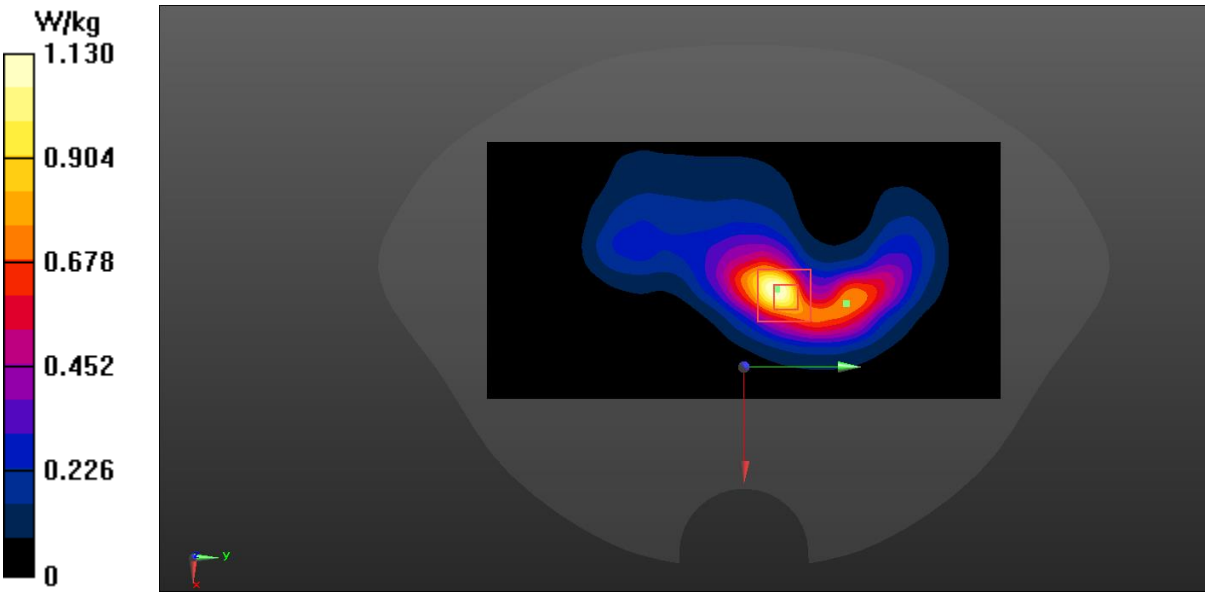

N41 Head ANT5

Date: 2023/6/12

Electronics: DAE4 Sn777

Medium: H700-6000M

Medium parameters used (interpolated): f = 2501.01 MHz; σ = 1.934 S/m; εr = 40.808; ρ = 1000 kg/m3

Ambient Temperature:23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, 5G NR (0) Frequency: 2501.01 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7464 ConvF(7.67, 7.67, 7.67)

Area Scan (101x171x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.820 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.270 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 1.31 W/kg

SAR(1 g) = 0.646 W/kg; SAR(10 g) = 0.325 W/kg

Maximum value of SAR (measured) = 1.06 W/kg

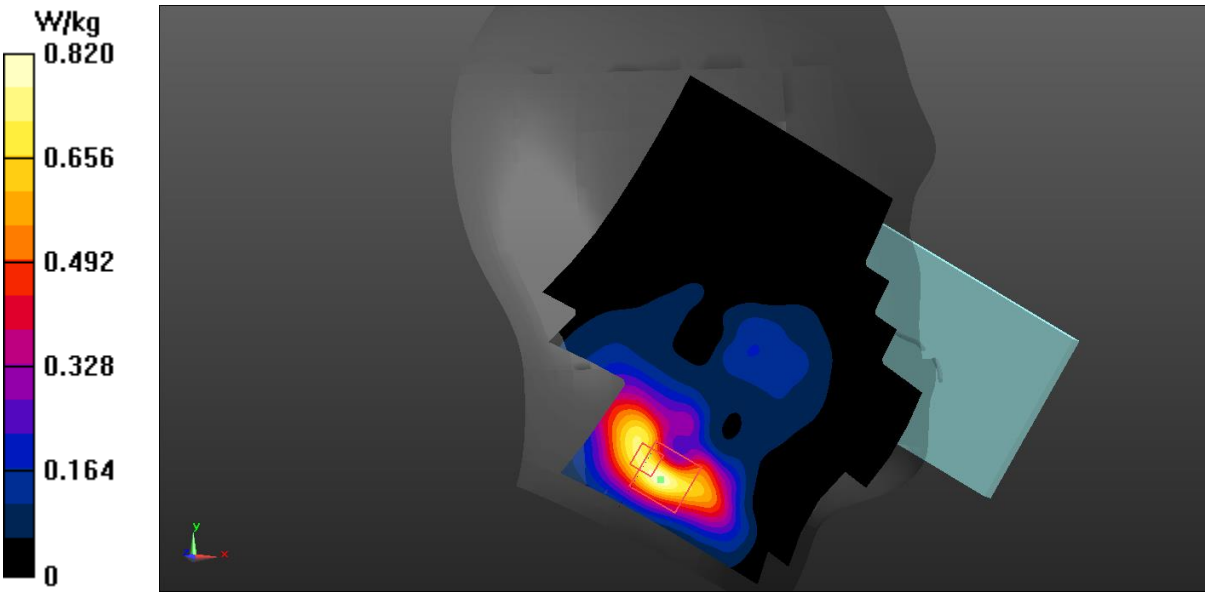

N41 Body 0mm ANT5

Date: 2023/6/12

Electronics: DAE4 Sn777

Medium: H700-6000M

Medium parameters used (interpolated): f = 2547.03 MHz; σ = 1.974 S/m; εr = 40.718; ρ = 1000 kg/m3

Ambient Temperature:23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, 5G N41 (0) Frequency: 2547.03 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7464 ConvF(7.67, 7.67, 7.67)

Area Scan (101x171x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.557 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.975 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 2.35 W/kg

SAR(1 g) = 0.586 W/kg; SAR(10 g) = 0.191 W/kg

Maximum value of SAR (measured) = 1.86 W/kg

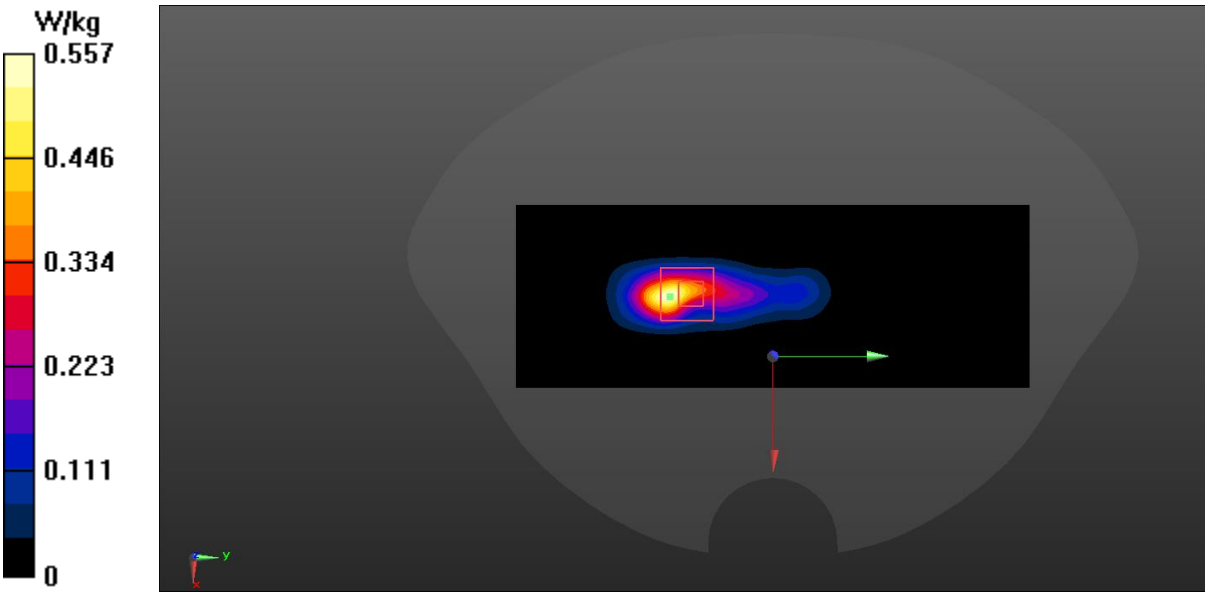

N66 Head ANT2

Date: 2023/5/25

Electronics: DAE4 Sn777

Medium: H700-6000M

Medium parameters used: f = 1745 MHz; σ = 1.329 S/m; εr = 41.866; ρ = 1000 kg/m3

Ambient Temperature:23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, 5G N66 (0) Frequency: 1745 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7464 ConvF(8.54, 8.54, 8.54)

Area Scan (101x141x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.960 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.07 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 1.10 W/kg

SAR(1 g) = 0.592 W/kg; SAR(10 g) = 0.302 W/kg

Maximum value of SAR (measured) = 0.812 W/kg

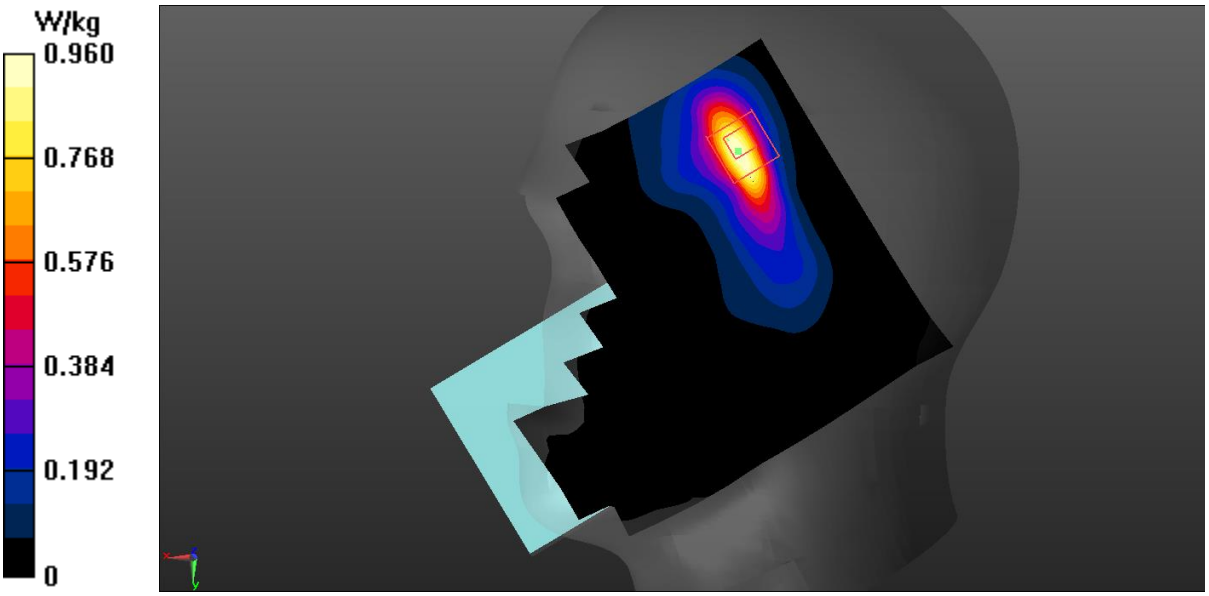

N66 Body 0mm ANT2

Date: 2023/5/25

Electronics: DAE4 Sn777

Medium: H700-6000M

Medium parameters used: f = 1730 MHz; σ = 1.327 S/m; εr = 41.895; ρ = 1000 kg/m3

Ambient Temperature:23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, 5G N66 (0) Frequency: 1730 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7464 ConvF(8.54, 8.54, 8.54)

Area Scan (51x141x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.28 W/kg

Zoom Scan (6x7x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.554 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 1.72 W/kg

SAR(1 g) = 0.582 W/kg; SAR(10 g) = 0.221 W/kg

Maximum value of SAR (measured) = 1.15 W/kg

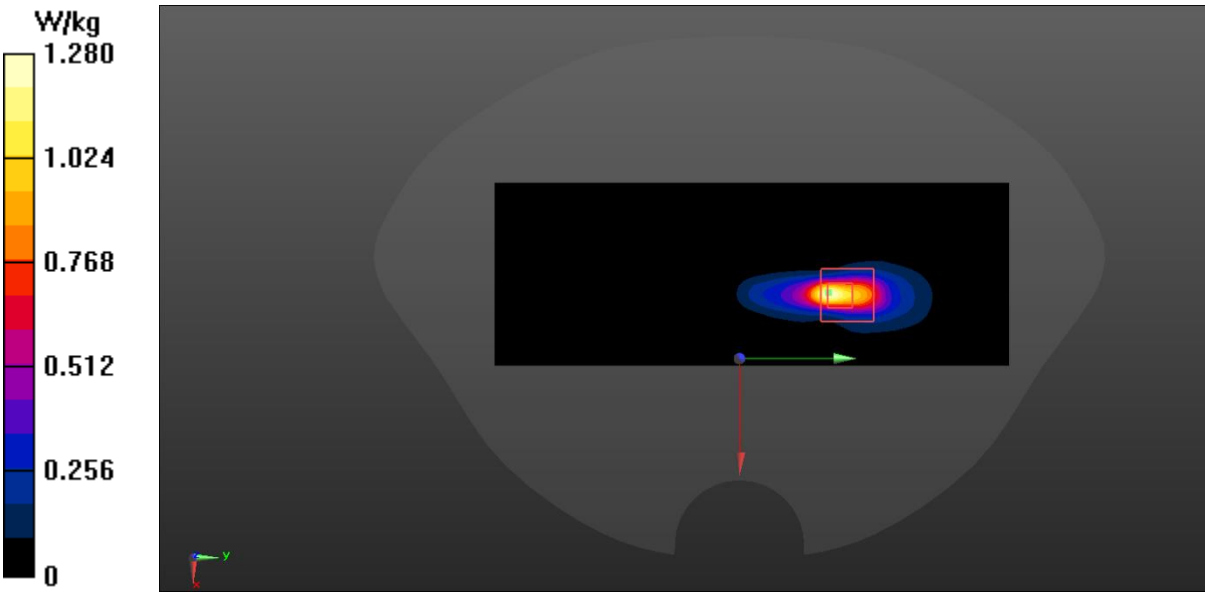

N66 Head ANT3

Date: 2023/5/25

Electronics: DAE4 Sn777

Medium: H700-6000M

Medium parameters used: f = 1745 MHz; σ = 1.329 S/m; εr = 41.866; ρ = 1000 kg/m3

Ambient Temperature:23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, 5G N66 (0) Frequency: 1745 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7464 ConvF(8.54, 8.54, 8.54)

Area Scan (121x141x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.669 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.921 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.713 W/kg

SAR(1 g) = 0.444 W/kg; SAR(10 g) = 0.270 W/kg

Maximum value of SAR (measured) = 0.613 W/kg

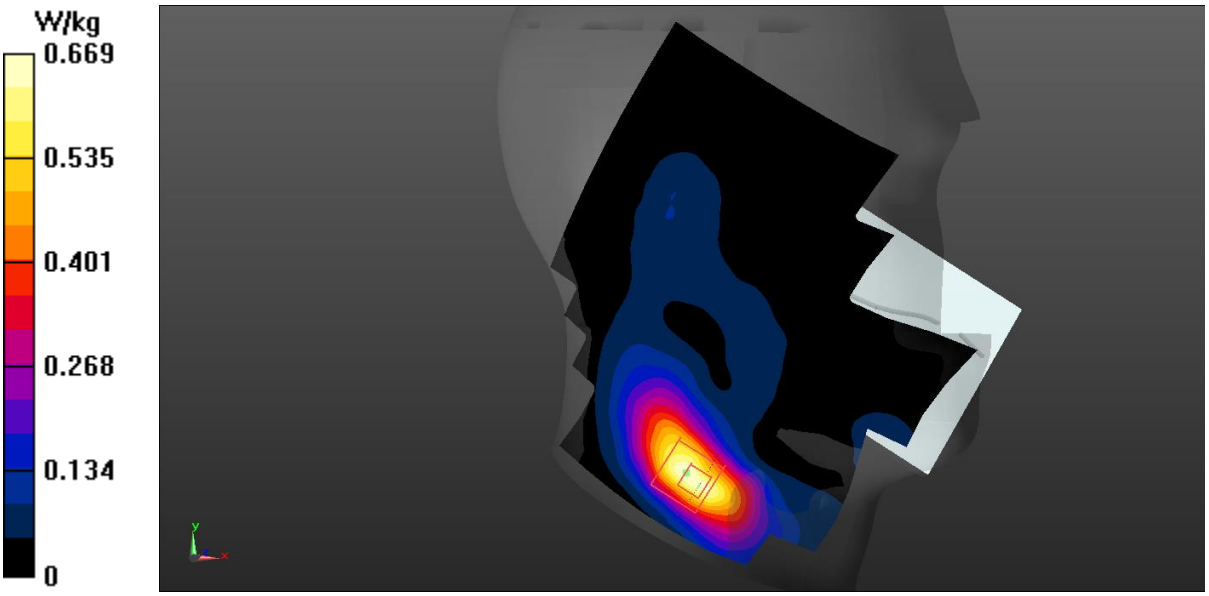

N66 Body 0mm ANT3

Date: 2023/5/25

Electronics: DAE4 Sn777

Medium: H700-6000M

Medium parameters used: f = 1760 MHz; σ = 1.333 S/m; εr = 41.817; ρ = 1000 kg/m3

Ambient Temperature:23.3°C Liquid Temperature: 22.5°C

Communication System: N66 (0) Frequency: 1760 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7464 ConvF(8.54, 8.54, 8.54)

Area Scan (51x141x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.583 W/kg

Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.396 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 1.53 W/kg

SAR(1 g) = 0.526 W/kg; SAR(10 g) = 0.203 W/kg

Maximum value of SAR (measured) = 1.10 W/kg

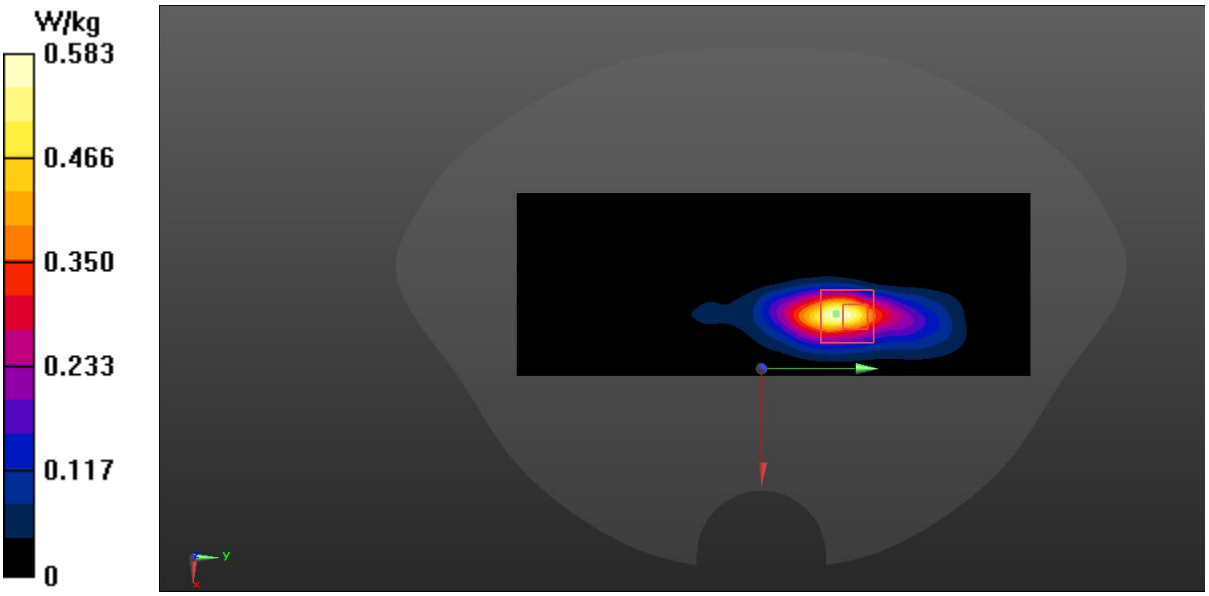

N66 Head ANT4

Date: 2023/6/6

Electronics: DAE4 Sn777

Medium: H700-6000M

Medium parameters used: f = 1760 MHz; σ = 1.321 S/m; εr = 41.434; ρ = 1000 kg/m3

Ambient Temperature:23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, N66 (0) Frequency: 1760 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7464 ConvF(8.54, 8.54, 8.54)

Area Scan (101x141x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.156 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.994 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.187 W/kg

SAR(1 g) = 0.116 W/kg; SAR(10 g) = 0.070 W/kg

Maximum value of SAR (measured) = 0.164 W/kg

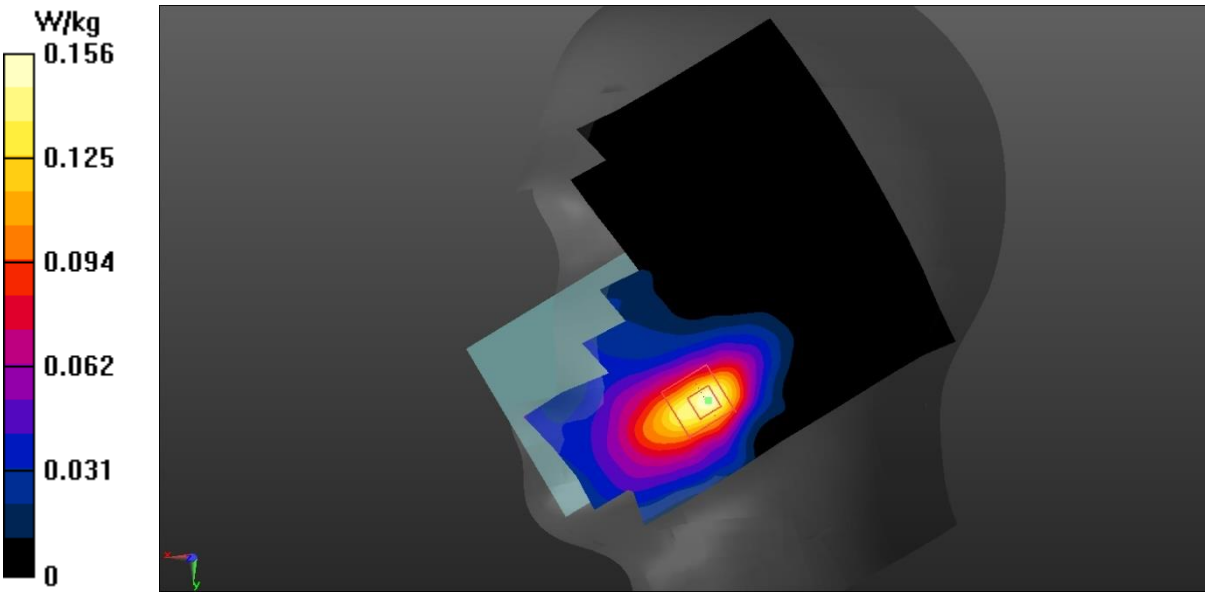

N66 Body 0mm ANT4

Date: 2023/6/6

Electronics: DAE4 Sn777

Medium: H700-6000M

Medium parameters used: f = 1760 MHz; σ = 1.321 S/m; εr = 41.434; ρ = 1000 kg/m3

Ambient Temperature:23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, N66 (0) Frequency: 1760 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7464 ConvF(8.54, 8.54, 8.54)

Area Scan (51x141x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.891 W/kg

Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.67 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 1.17 W/kg

SAR(1 g) = 0.614 W/kg; SAR(10 g) = 0.321 W/kg

Maximum value of SAR (measured) = 0.934 W/kg

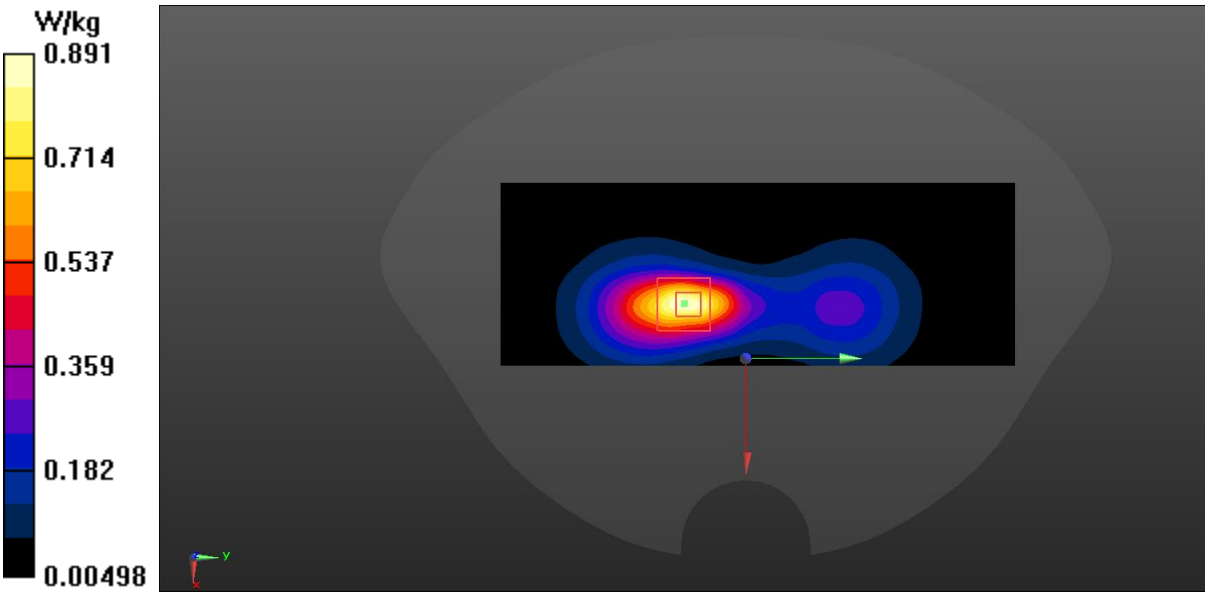

N66 Head ANT5

Date: 2023/6/6

Electronics: DAE4 Sn777

Medium: H700-6000M

Medium parameters used: f = 1745 MHz; σ = 1.317 S/m; εr = 41.483; ρ = 1000 kg/m3

Ambient Temperature:23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, 5G N66 (0) Frequency: 1745 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7464 ConvF(8.54, 8.54, 8.54)

Area Scan (121x141x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.831 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.33 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 1.01 W/kg

SAR(1 g) = 0.606 W/kg; SAR(10 g) = 0.336 W/kg

Maximum value of SAR (measured) = 0.844 W/kg

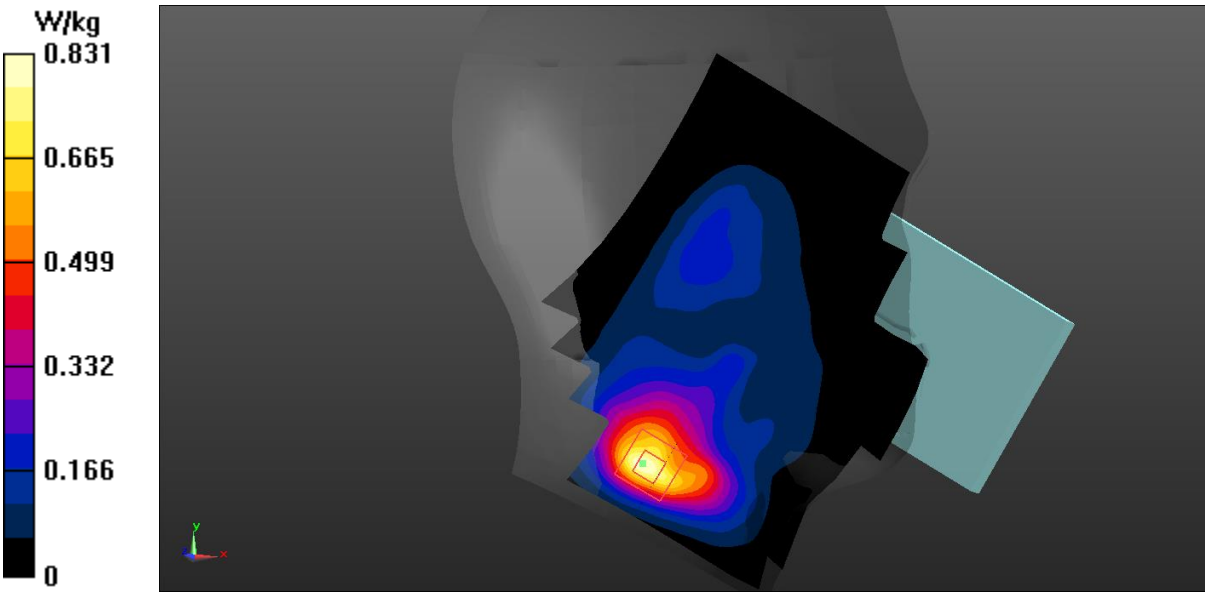

N66 Body 0mm ANT5

Date: 2023/6/6

Electronics: DAE4 Sn777

Medium: H700-6000M

Medium parameters used: f = 1760 MHz; σ = 1.321 S/m; εr = 41.434; ρ = 1000 kg/m3

Ambient Temperature:23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, N66 (0) Frequency: 1760 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7464 ConvF(8.54, 8.54, 8.54)

Area Scan (51x141x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 2.47 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.818 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 2.71 W/kg

SAR(1 g) = 0.878 W/kg; SAR(10 g) = 0.331 W/kg

Maximum value of SAR (measured) = 2.20 W/kg

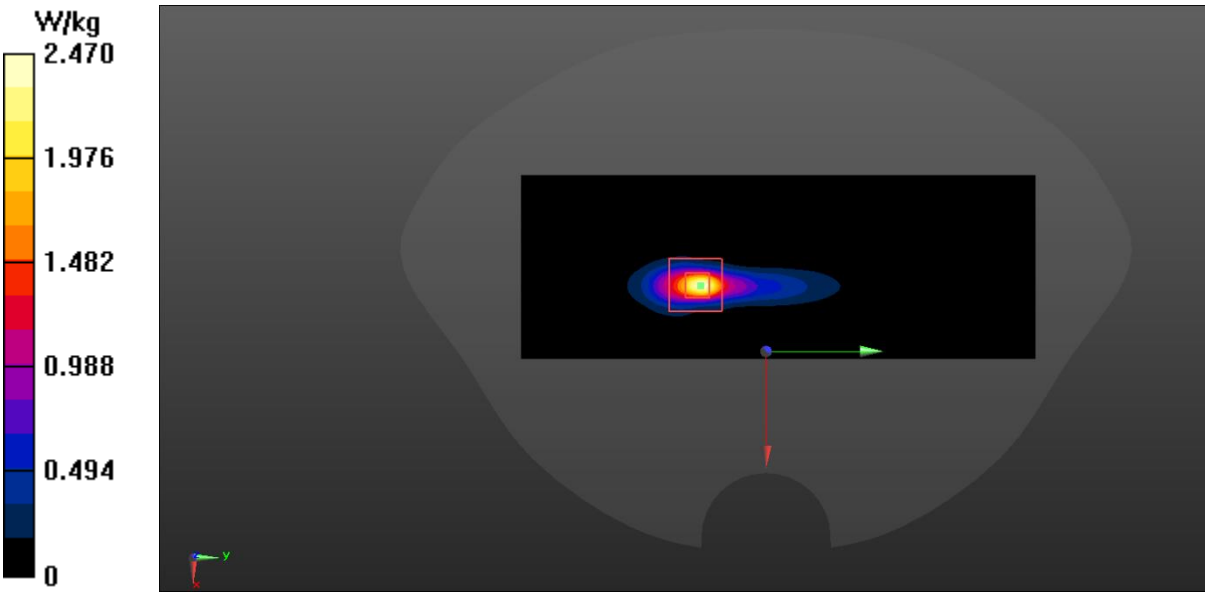

N71 Head ANT0

Date: 2023/5/13

Electronics: DAE4 Sn777

Medium: H700-6000M

Medium parameters used (extrapolated): f = 688 MHz; σ = 0.856 S/m; εr = 44.067; ρ = 1000 kg/m3

Ambient Temperature:23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, 5G N71 (0) Frequency: 688 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7464 ConvF(10.26, 10.26, 10.26)

Area Scan (121x141x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.736 W/kg

Zoom Scan (7x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.961 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 1.29 W/kg

SAR(1 g) = 0.519 W/kg; SAR(10 g) = 0.247 W/kg

Maximum value of SAR (measured) = 0.949 W/kg

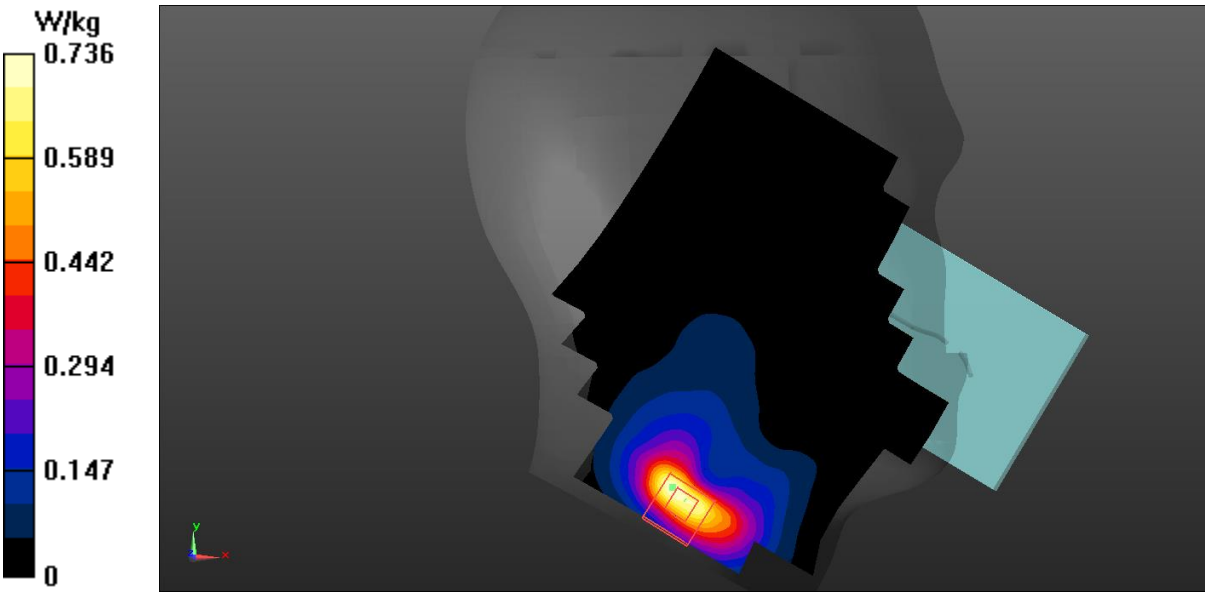

N71 Body 0mm ANT0

Date: 2023/5/13

Electronics: DAE4 Sn777

Medium: H700-6000M

Medium parameters used (extrapolated): f = 673 MHz; σ = 0.856 S/m; εr = 44.067; ρ = 1000 kg/m3

Ambient Temperature:23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, 5G N71 (0) Frequency: 673 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7464 ConvF(10.26, 10.26, 10.26)

Area Scan (51x141x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.96 W/kg

Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.39 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 2.75 W/kg

SAR(1 g) = 0.687 W/kg; SAR(10 g) = 0.260 W/kg

Maximum value of SAR (measured) = 1.54 W/kg

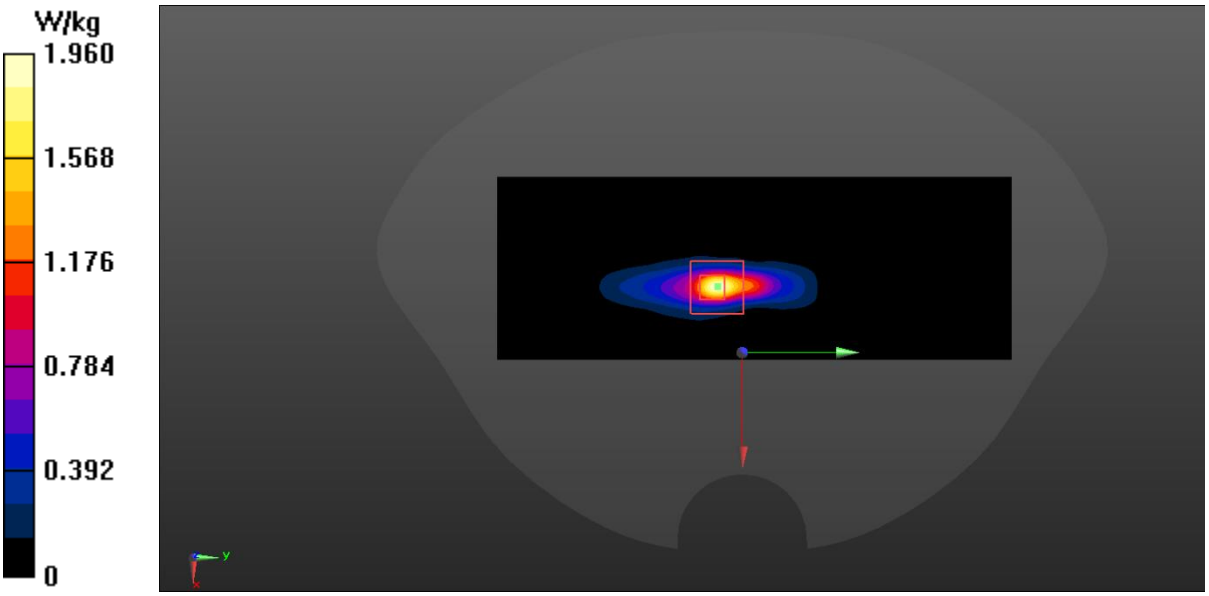

N71 Head ANT1

Date: 2023/5/13

Electronics: DAE4 Sn777

Medium: H700-6000M

Medium parameters used (extrapolated): f = 688 MHz; σ = 0.856 S/m; εr = 44.067; ρ = 1000 kg/m3

Ambient Temperature:23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, 5G N71 (0) Frequency: 688 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7464 ConvF(10.26, 10.26, 10.26)

Area Scan (121x141x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0634 W/kg

Zoom Scan (6x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.270 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.0720 W/kg

SAR(1 g) = 0.055 W/kg; SAR(10 g) = 0.046 W/kg

Maximum value of SAR (measured) = 0.0647 W/kg

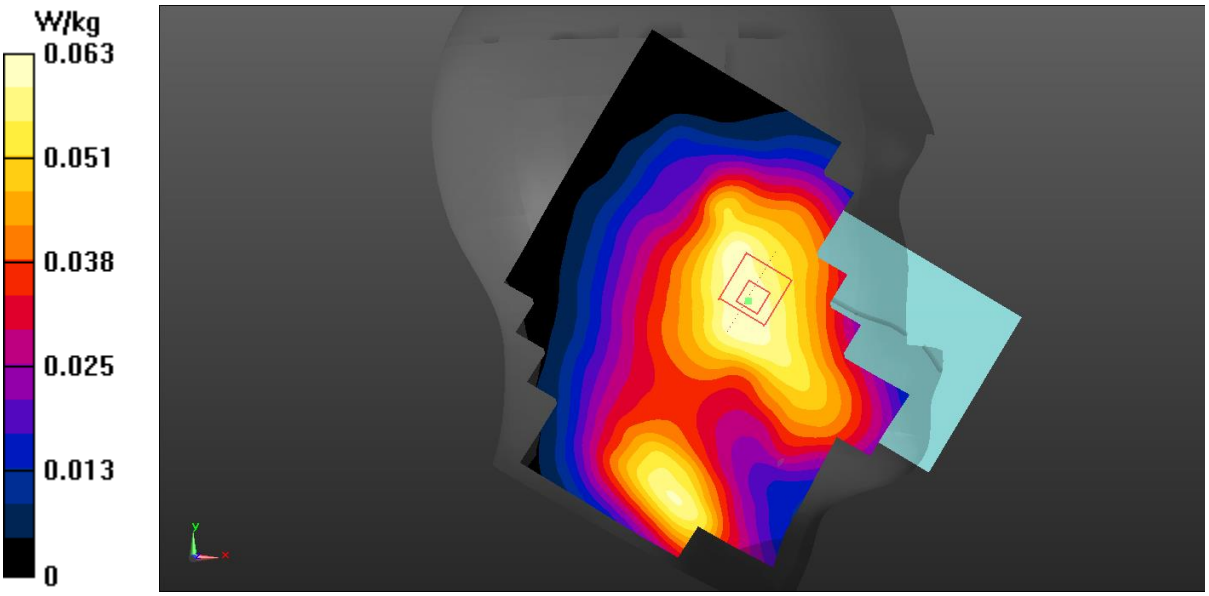

N71 Body 0mm ANT1

Date: 2023/5/13

Electronics: DAE4 Sn777

Medium: H700-6000M

Medium parameters used (extrapolated): f = 680.5 MHz; σ = 0.856 S/m; εr = 44.067; ρ = 1000 kg/m3

Ambient Temperature:23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, 5G N71 (0) Frequency: 680.5 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7464 ConvF(10.26, 10.26, 10.26)

Area Scan (51x141x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.08 W/kg

Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.53 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 2.21 W/kg

SAR(1 g) = 0.498 W/kg; SAR(10 g) = 0.170 W/kg

Maximum value of SAR (measured) = 1.21 W/kg

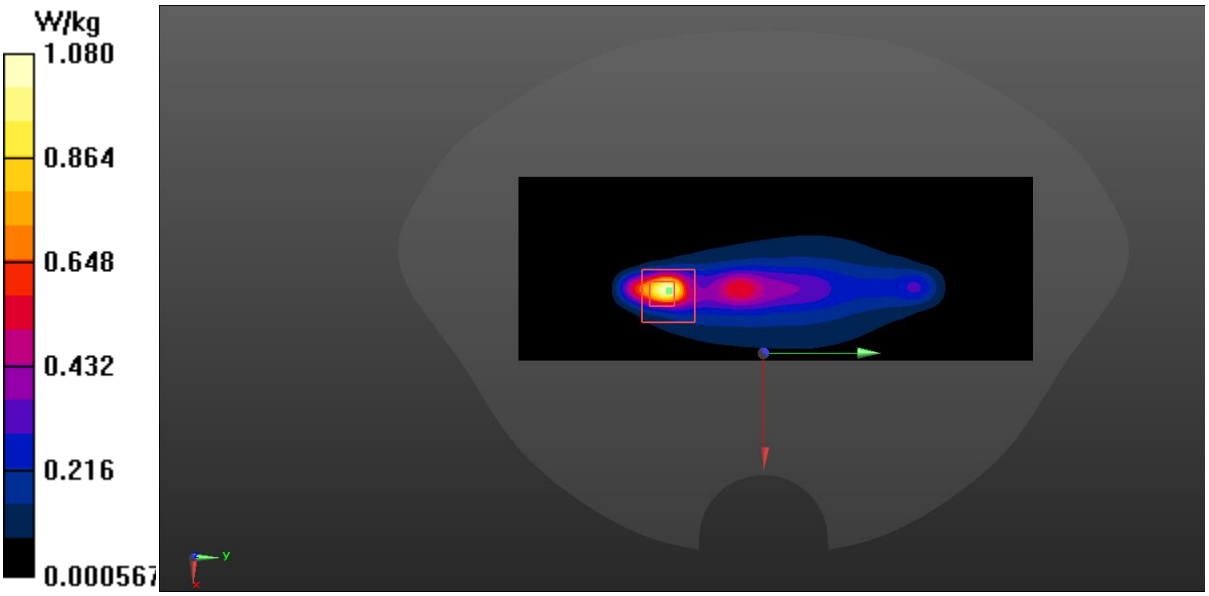

N77 L Head ANT0

Date: 2023/6/18

Electronics: DAE4 Sn777

Medium: H700-6000M

Medium parameters used (interpolated): f = 3500.01 MHz; σ = 2.968 S/m; εr = 38.493; ρ = 1000 kg/m3

Ambient Temperature:23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, N77 (0) Frequency: 3500.01 MHz Duty Cycle: 1:2.49977

Probe: EX3DV4 - SN7464 ConvF(7.06, 7.06, 7.06)

Area Scan (121x211x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.18 W/kg

Zoom Scan (9x9x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 0 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 1.47 W/kg

SAR(1 g) = 0.639 W/kg; SAR(10 g) = 0.285 W/kg

Maximum value of SAR (measured) = 1.14 W/kg

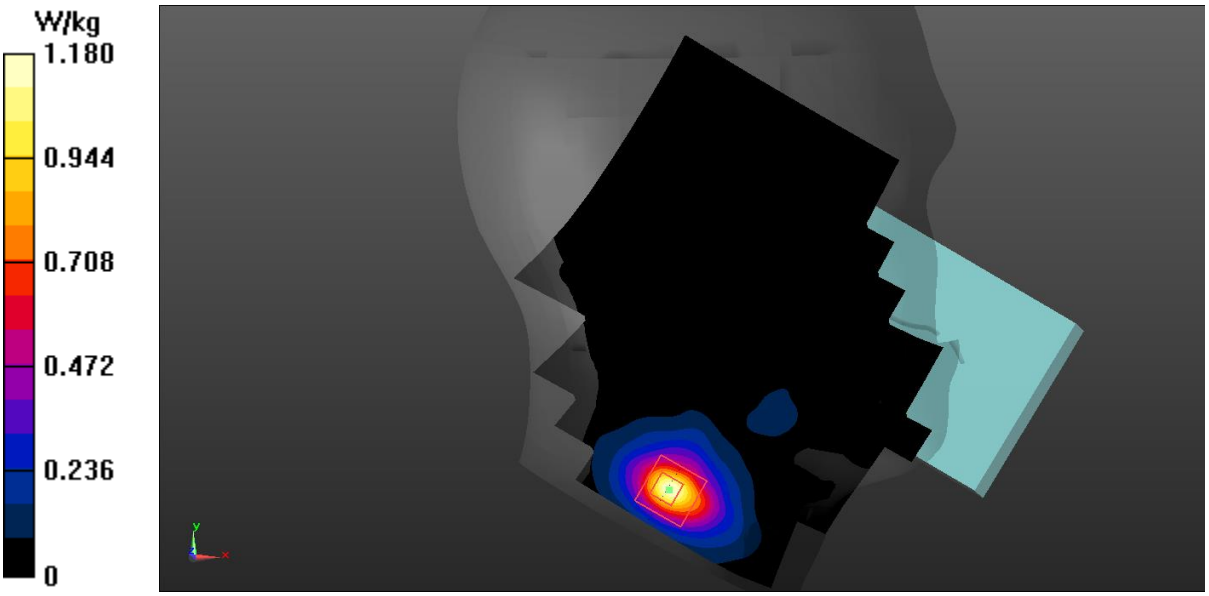

N77 L Body 0mm ANT0

Date: 2023/6/18

Electronics: DAE4 Sn777

Medium: H700-6000M

Medium parameters used (interpolated): f = 3445.01 MHz; σ = 2.927 S/m; εr = 38.543; ρ = 1000 kg/m3

Ambient Temperature:23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, N77 (0) Frequency: 3445.01 MHz Duty Cycle: 1:2.49977

Probe: EX3DV4 - SN7464 ConvF(7.06, 7.06, 7.06)

Area Scan (121x211x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.83 W/kg

Zoom Scan (9x9x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 8.037 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 3.23 W/kg

SAR(1 g) = 0.682 W/kg; SAR(10 g) = 0.204 W/kg

Maximum value of SAR (measured) = 2.25 W/kg

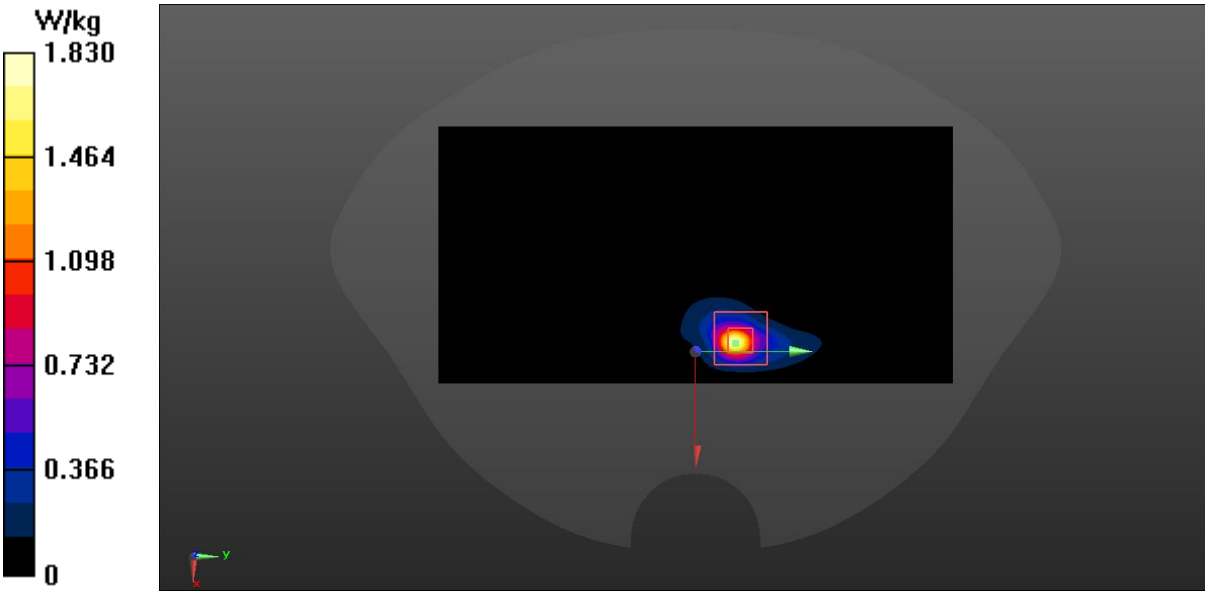

N77 L Head ANT2

Date: 2023/6/18

Electronics: DAE4 Sn777

Medium: H700-6000M

Medium parameters used (interpolated): f = 3445.01 MHz; σ = 2.927 S/m; εr = 38.543; ρ = 1000 kg/m3

Ambient Temperature:23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, N77 (0) Frequency: 3445.01 MHz Duty Cycle: 1:2.49977

Probe: EX3DV4 - SN7464 ConvF(7.06, 7.06, 7.06)

Area Scan (121x211x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.48 W/kg

Zoom Scan (9x9x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 9.292 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 1.72 W/kg

SAR(1 g) = 0.667 W/kg; SAR(10 g) = 0.256 W/kg

Maximum value of SAR (measured) = 1.08 W/kg

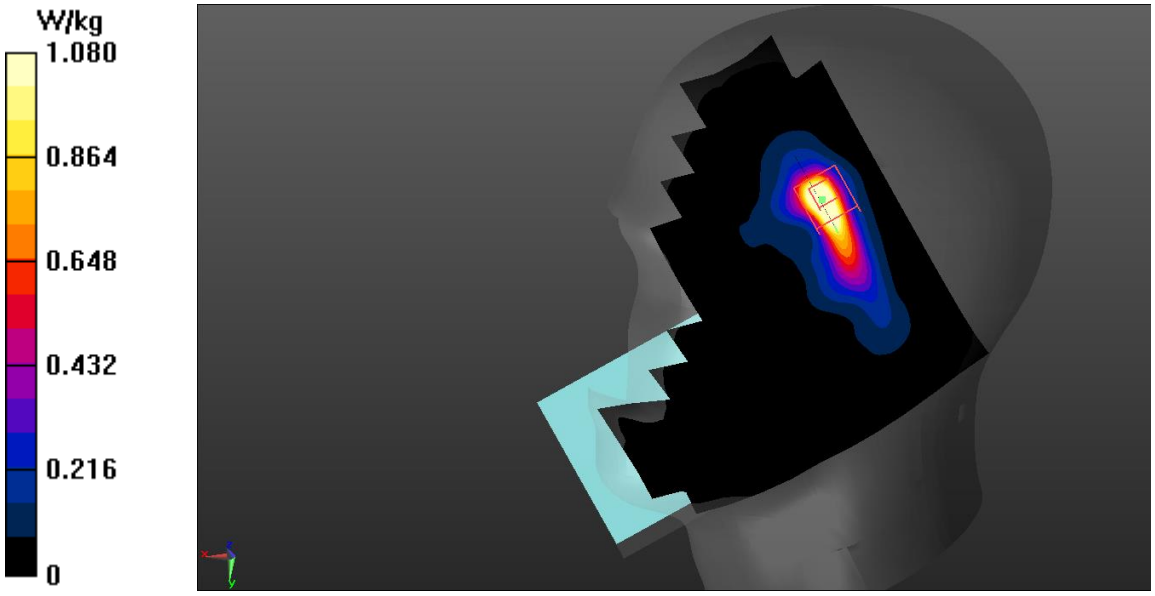

N77 L Body 0mm ANT2

Date: 2023/6/18

Electronics: DAE4 Sn777

Medium: H700-6000M

Medium parameters used (interpolated): f = 3445.01 MHz; σ = 2.927 S/m; εr = 38.543; ρ = 1000 kg/m3

Ambient Temperature:23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, N77 (0) Frequency: 3445.01 MHz Duty Cycle: 1:2.49977

Probe: EX3DV4 - SN7464 ConvF(7.06, 7.06, 7.06)

Area Scan (121x211x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 2.29 W/kg

Zoom Scan (9x9x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 16.04 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 3.88 W/kg

SAR(1 g) = 0.831 W/kg; SAR(10 g) = 0.240 W/kg

Maximum value of SAR (measured) = 2.75 W/kg

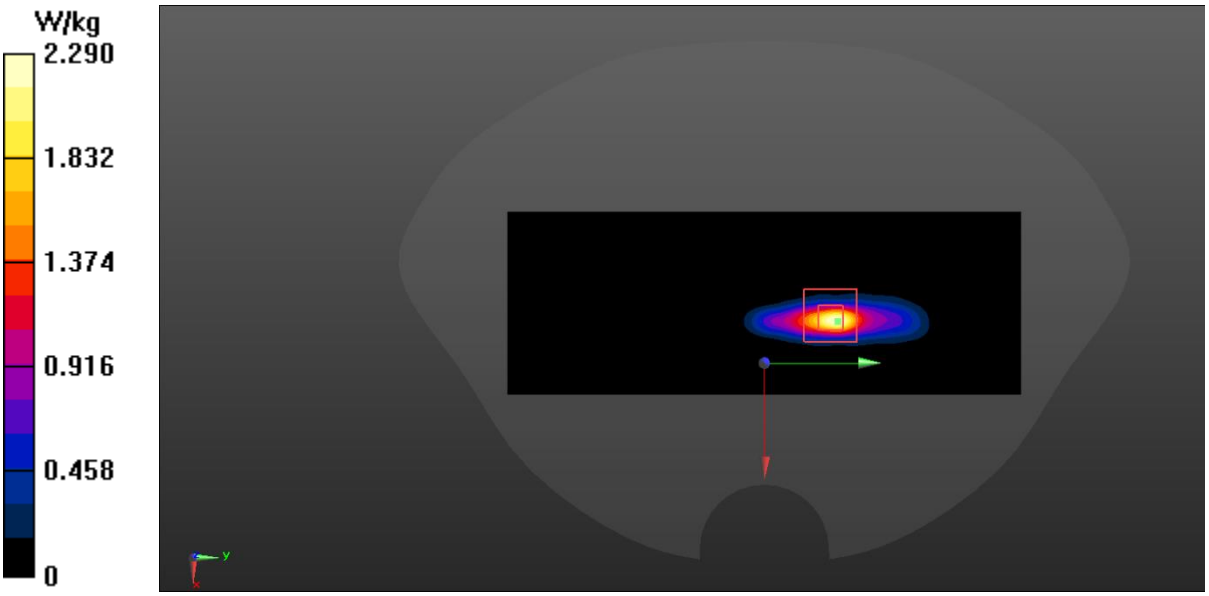

N77 L Head ANT3

Date: 2023/6/16

Electronics: DAE4 Sn777

Medium: H700-6000M

Medium parameters used (interpolated): f = 3500.01 MHz; σ = 2.873 S/m; εr = 38.019; ρ = 1000 kg/m3

Ambient Temperature:23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, N77 (0) Frequency: 3500.01 MHz Duty Cycle: 1:2.49977

Probe: EX3DV4 - SN7464 ConvF(7.06, 7.06, 7.06)

Area Scan (121x211x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.41 W/kg

Zoom Scan (9x9x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 3.862 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 1.70 W/kg

SAR(1 g) = 0.796 W/kg; SAR(10 g) = 0.375 W/kg

Maximum value of SAR (measured) = 1.32 W/kg

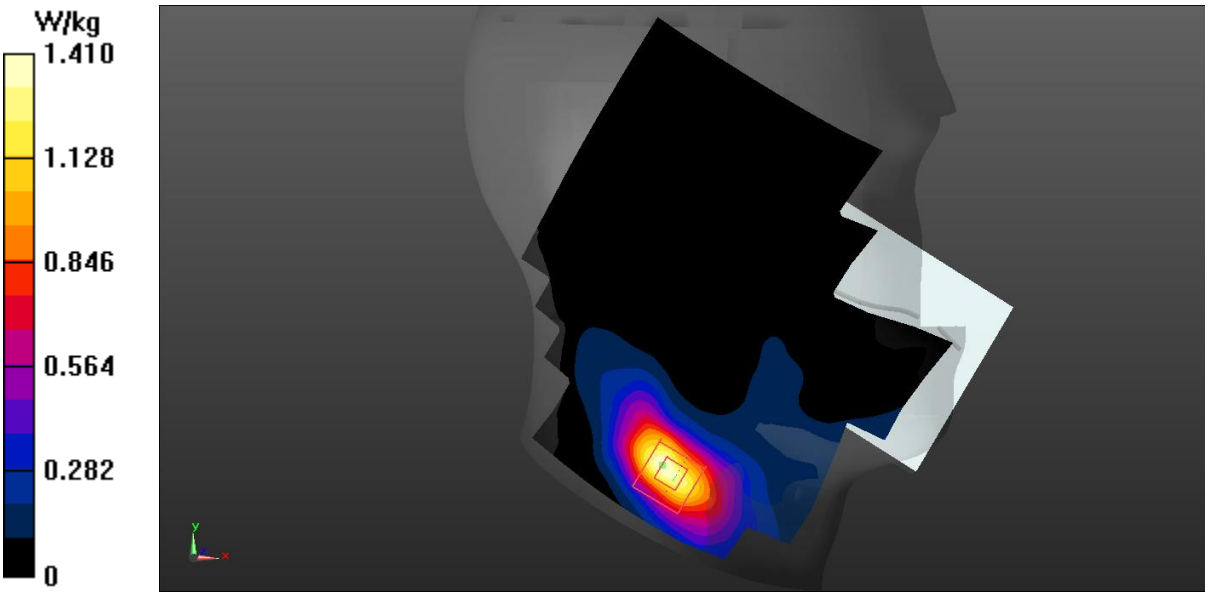

N77 L Body 0mm ANT3

Date: 2023/6/16

Electronics: DAE4 Sn777

Medium: H700-6000M

Medium parameters used (interpolated): f = 3445.01 MHz; σ = 2.833 S/m; εr = 38.068; ρ = 1000 kg/m3

Ambient Temperature:23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, N77 (0) Frequency: 3455.01 MHz Duty Cycle: 1:2.49977

Probe: EX3DV4 - SN7464 ConvF(7.06, 7.06, 7.06)

Area Scan (121x211x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.15 W/kg

Zoom Scan (9x9x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 0.9760 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 1.63 W/kg

SAR(1 g) = 0.399 W/kg; SAR(10 g) = 0.114 W/kg

Maximum value of SAR (measured) = 1.28 W/kg

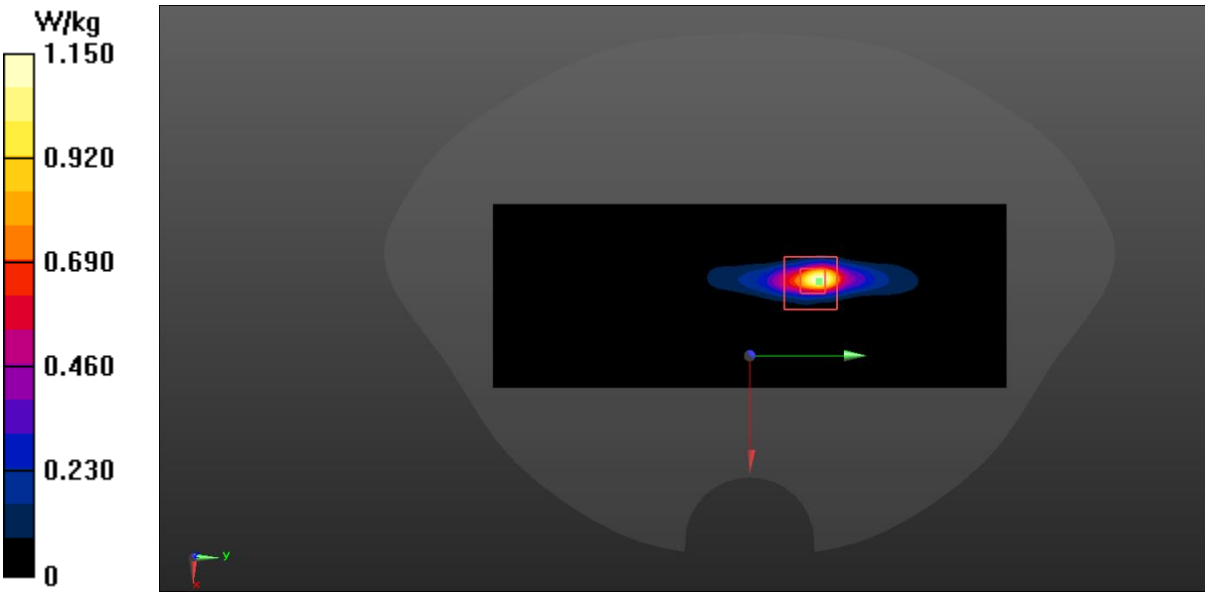

N77 L Head ANT7

Date: 2023/6/16

Electronics: DAE4 Sn777

Medium: H700-6000M

Medium parameters used: f = 3545 MHz; σ = 2.923 S/m; εr = 37.941; ρ = 1000 kg/m3

Ambient Temperature:23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, N77 (0) Frequency: 3544.98 MHz Duty Cycle: 1:2.49977

Probe: EX3DV4 - SN7464 ConvF(7.06, 7.06, 7.06)

Area Scan (121x211x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.11 W/kg

Zoom Scan (9x9x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 6.773 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 1.44 W/kg

SAR(1 g) = 0.563 W/kg; SAR(10 g) = 0.223 W/kg

Maximum value of SAR (measured) = 0.982 W/kg

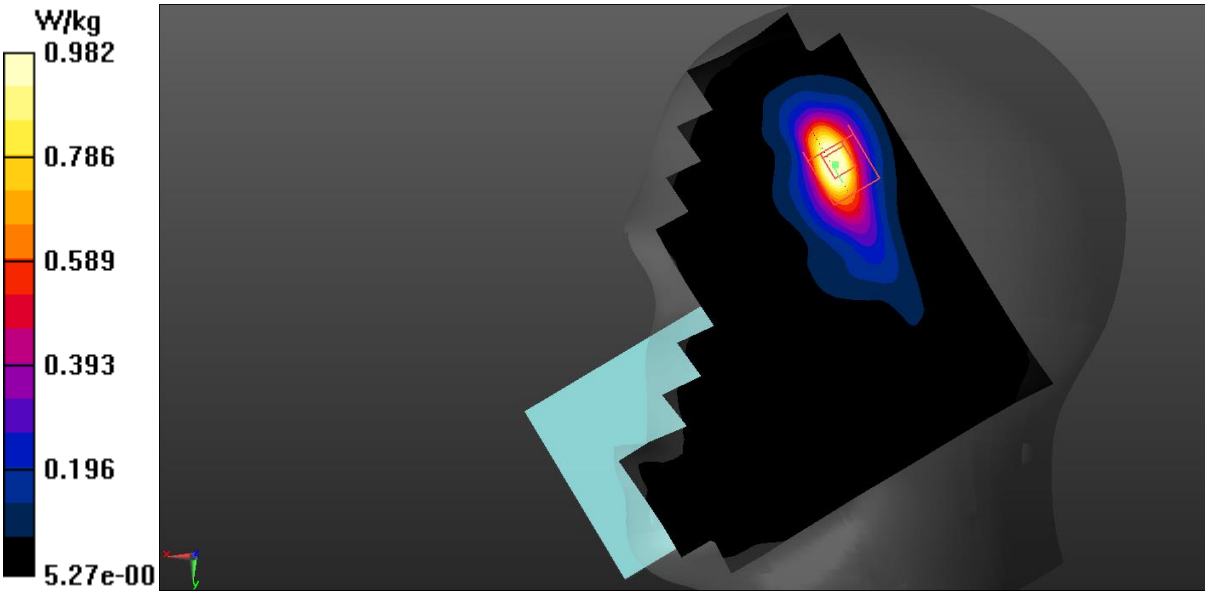

N77 L Body 0mm ANT7

Date: 2023/6/16

Electronics: DAE4 Sn777

Medium: H700-6000M

Medium parameters used: f = 3545 MHz; σ = 2.923 S/m; εr = 37.941; ρ = 1000 kg/m3

Ambient Temperature:23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, N77 (0) Frequency: 3544.98 MHz Duty Cycle: 1:2.49977

Probe: EX3DV4 - SN7464 ConvF(7.06, 7.06, 7.06)

Area Scan (121x211x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.595 W/kg

Zoom Scan (9x9x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 0 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 1.23 W/kg

SAR(1 g) = 0.369 W/kg; SAR(10 g) = 0.119 W/kg

Maximum value of SAR (measured) = 0.758 W/kg

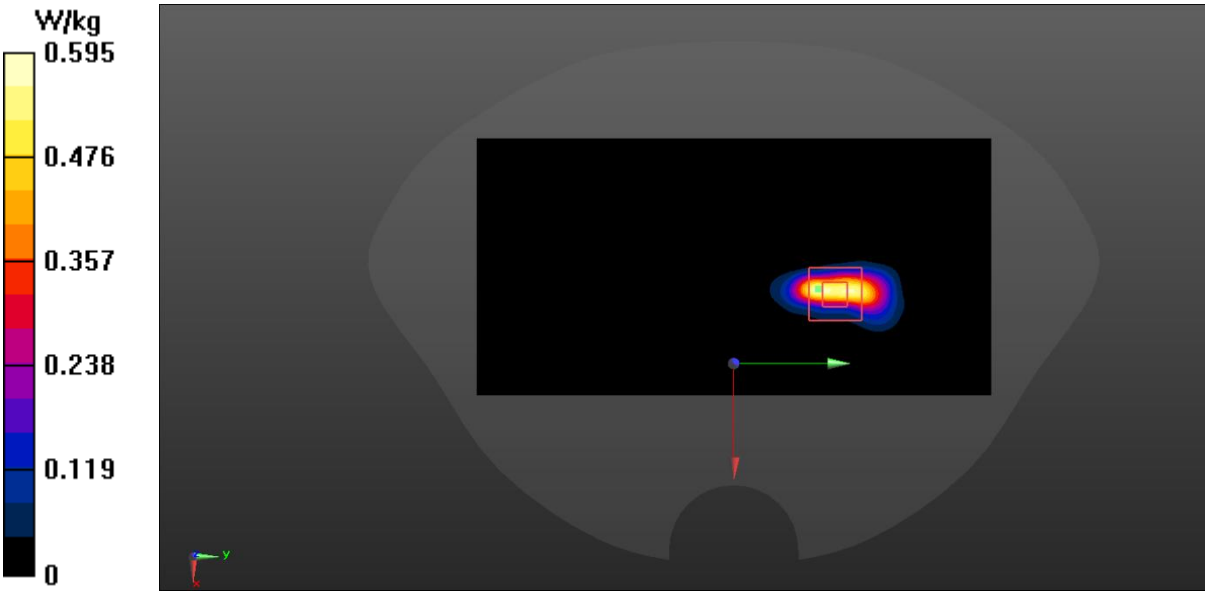

N77 H Head ANT0

Date: 2023/6/11

Electronics: DAE4 Sn777

Medium: H700-6000M

Medium parameters used: f = 3705 MHz; σ = 3.194 S/m; εr = 38.089; ρ = 1000 kg/m3

Ambient Temperature:23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, N77 (0) Frequency: 3705 MHz Duty Cycle: 1:2.49977

Probe: EX3DV4 - SN7464 ConvF(6.9, 6.9, 6.9)

Area Scan (121x211x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.33 W/kg

Zoom Scan (9x9x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 3.457 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 1.65 W/kg

SAR(1 g) = 0.684 W/kg; SAR(10 g) = 0.310 W/kg

Maximum value of SAR (measured) = 1.24 W/kg

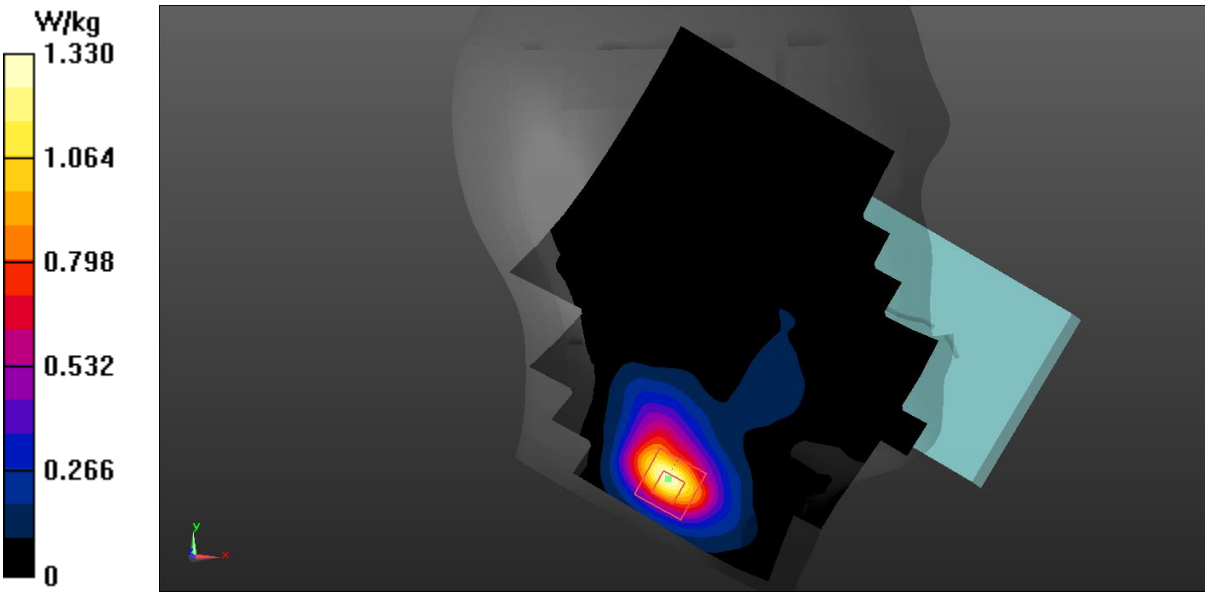

N77 H Body 0mm ANT0

Date: 2023/6/11

Electronics: DAE4 Sn777

Medium: H700-6000M

Medium parameters used (interpolated): f = 3759 MHz; σ = 3.241 S/m; εr = 37.971; ρ = 1000 kg/m3

Ambient Temperature:23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, N77 (0) Frequency: 3759 MHz Duty Cycle: 1:2.49977

Probe: EX3DV4 - SN7464 ConvF(6.9, 6.9, 6.9)

Area Scan (121x211x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 2.59 W/kg

Zoom Scan (9x9x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 8.770 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 4.67 W/kg

SAR(1 g) = 0.909 W/kg; SAR(10 g) = 0.267 W/kg

Maximum value of SAR (measured) = 3.03 W/kg

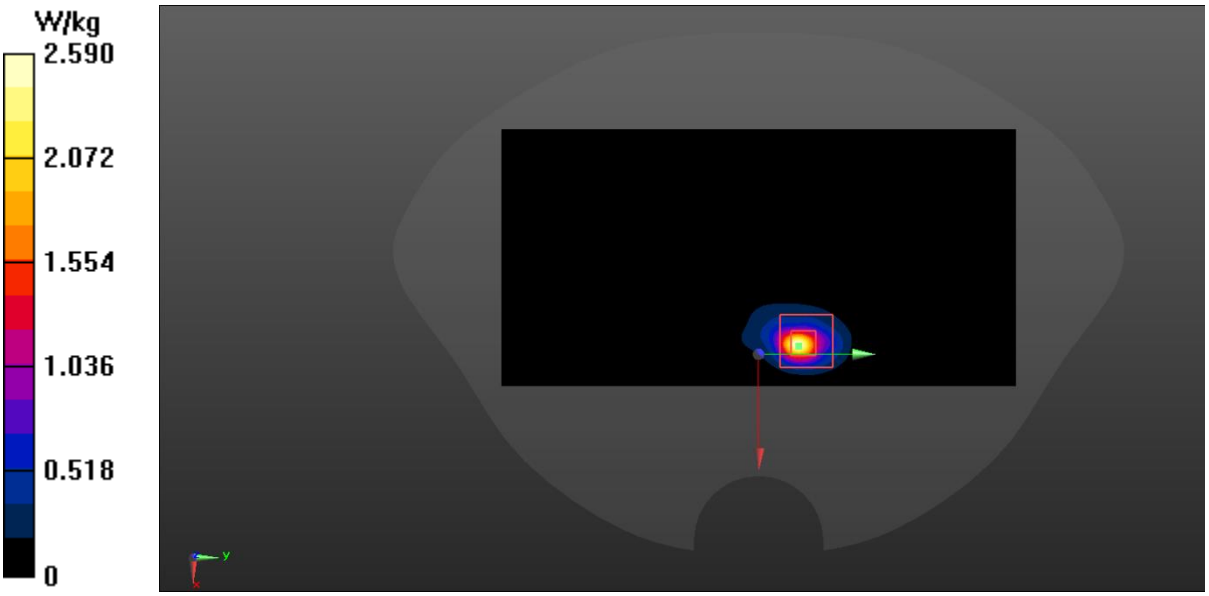

N77 H Head ANT2

Date: 2023/6/11

Electronics: DAE4 Sn777

Medium: H700-6000M

Medium parameters used (interpolated): f = 3813 MHz; σ = 3.302 S/m; εr = 37.793; ρ = 1000 kg/m3

Ambient Temperature:23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, N77 (0) Frequency: 3813 MHz Duty Cycle: 1:2.49977

Probe: EX3DV4 - SN7464 ConvF(6.77, 6.77, 6.77)

Area Scan (121x211x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.94 W/kg

Zoom Scan (9x9x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 12.59 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 2.60 W/kg

SAR(1 g) = 0.954 W/kg; SAR(10 g) = 0.349 W/kg

Maximum value of SAR (measured) = 1.72 W/kg

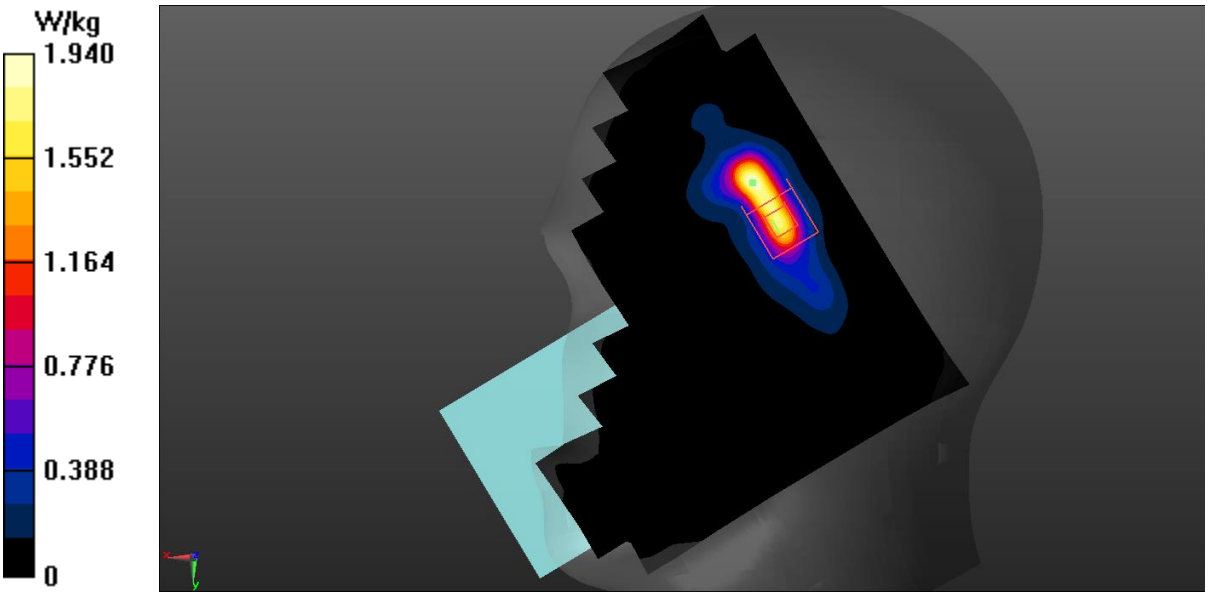

N77 H Body 0mm ANT2

Date: 2023/6/11

Electronics: DAE4 Sn777

Medium: H700-6000M

Medium parameters used: f = 3975 MHz; σ = 3.499 S/m; εr = 37.438 7; ρ = 1000 kg/m3

Ambient Temperature:23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, N77 (0) Frequency: 3975 MHz Duty Cycle: 1:2.49977

Probe: EX3DV4 - SN7464 ConvF(6.77, 6.77, 6.77)

Area Scan (121x211x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.62 W/kg

Zoom Scan (9x9x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 9.374 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 4.69 W/kg

SAR(1 g) = 1.12 W/kg; SAR(10 g) = 0.291 W/kg

Maximum value of SAR (measured) = 3.01 W/kg

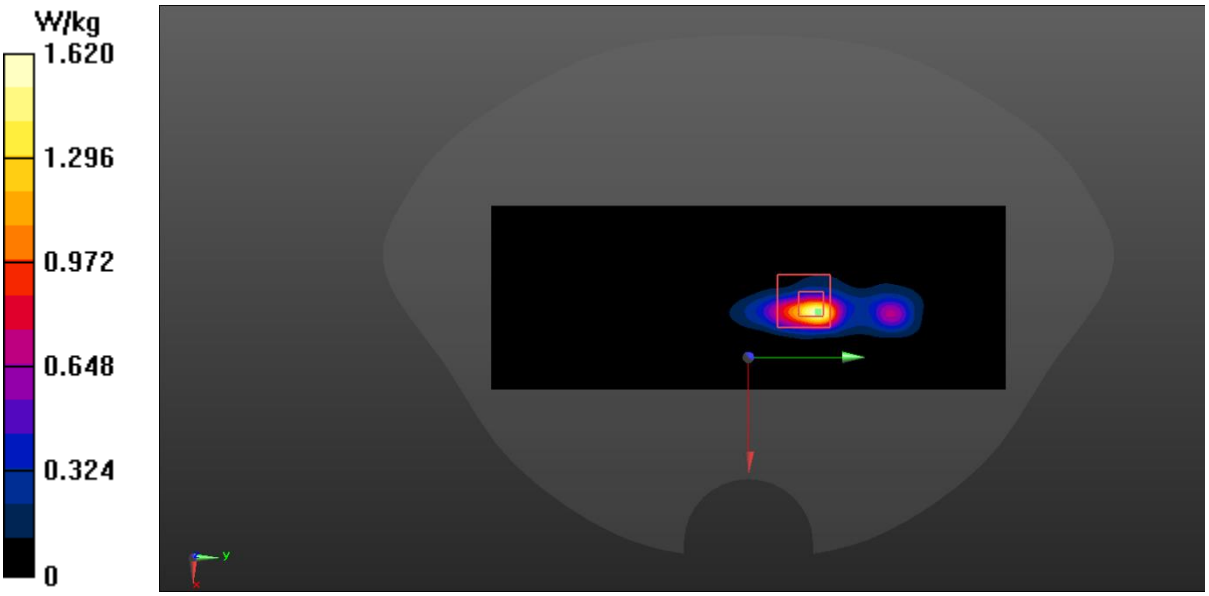

N77 H Head ANT3

Date: 2023/6/17

Electronics: DAE4 Sn777

Medium: H700-6000M

Medium parameters used: f = 3705 MHz; σ = 3.12 S/m; εr = 38.197; ρ = 1000 kg/m3

Ambient Temperature:23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, N77 (0) Frequency: 3705 MHz Duty Cycle: 1:2.49977

Probe: EX3DV4 - SN7464 ConvF(6.9, 6.9, 6.9)

Area Scan (121x211x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.17 W/kg

Zoom Scan (9x9x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 3.806 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 1.54 W/kg

SAR(1 g) = 0.631 W/kg; SAR(10 g) = 0.294 W/kg

Maximum value of SAR (measured) = 1.11 W/kg

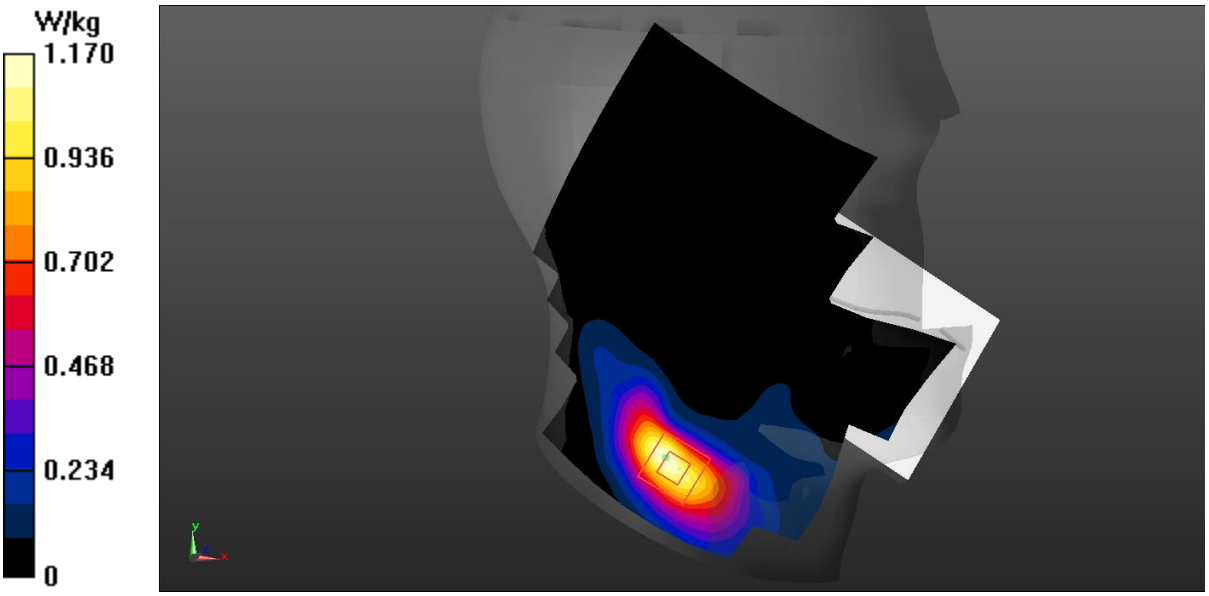

N77 H Body 0mm ANT3

Date: 2023/6/17

Electronics: DAE4 Sn777

Medium: H700-6000M

Medium parameters used (interpolated): f = 3813 MHz; σ = 3.226 S/m; εr = 37.901; ρ = 1000 kg/m3

Ambient Temperature:23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, N77 (0) Frequency: 3813 MHz Duty Cycle: 1:2.49977

Probe: EX3DV4 - SN7464 ConvF(6.77, 6.77, 6.77)

Area Scan (121x211x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.655 W/kg

Zoom Scan (9x9x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 8.104 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 1.96 W/kg

SAR(1 g) = 0.428 W/kg; SAR(10 g) = 0.121 W/kg

Maximum value of SAR (measured) = 1.48 W/kg

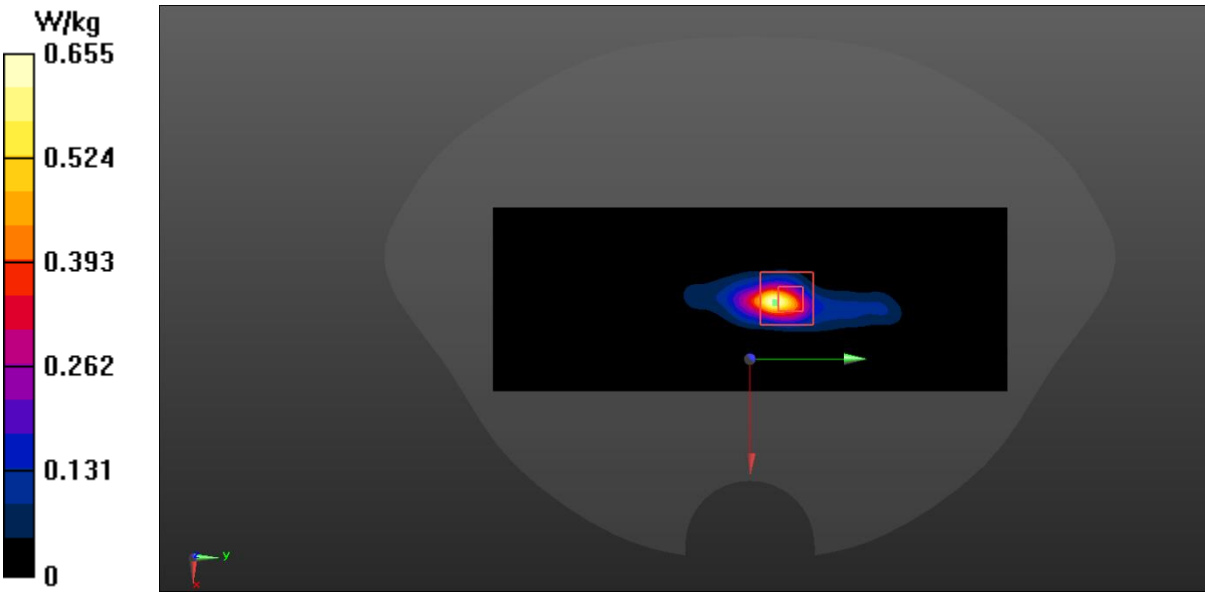

N77 H Head ANT7

Date: 2023/6/17

Electronics: DAE4 Sn777

Medium: H700-6000M

Medium parameters used (interpolated): f = 3867 MHz; σ = 3.282 S/m; εr = 37.782; ρ = 1000 kg/m3

Ambient Temperature:23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, N77 (0) Frequency: 3867 MHz Duty Cycle: 1:2.49977

Probe: EX3DV4 - SN7464 ConvF(6.77, 6.77, 6.77)

Area Scan (121x211x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.844 W/kg

Zoom Scan (9x9x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 6.275 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 1.35 W/kg

SAR(1 g) = 0.503 W/kg; SAR(10 g) = 0.190 W/kg

Maximum value of SAR (measured) = 0.896 W/kg

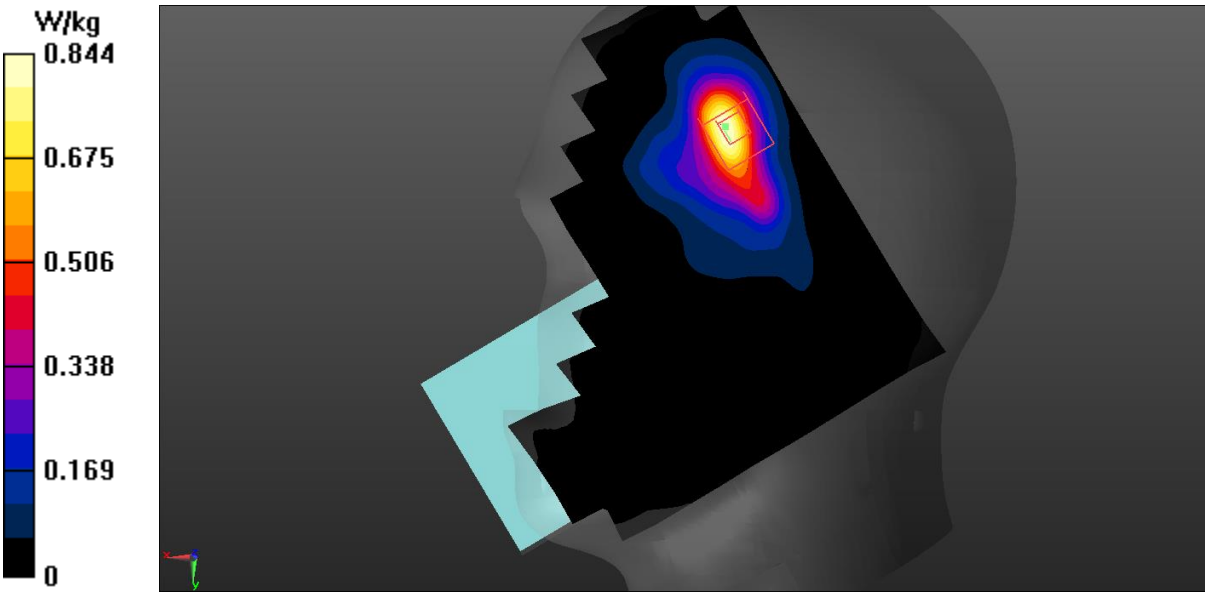

N77 H Body 0mm ANT7

Date: 2023/6/17

Electronics: DAE4 Sn777

Medium: H700-6000M

Medium parameters used (interpolated): f = 3759 MHz; σ = 3.167 S/m; εr = 38.079; ρ = 1000 kg/m3

Ambient Temperature:23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, 5G NR (0) Frequency: 3759 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7464 ConvF(6.9, 6.9, 6.9)

Area Scan (121x211x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.54 W/kg

Zoom Scan (9x9x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 0 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 2.27 W/kg

SAR(1 g) = 0.457 W/kg; SAR(10 g) = 0.124 W/kg

Maximum value of SAR (measured) = 1.66 W/kg

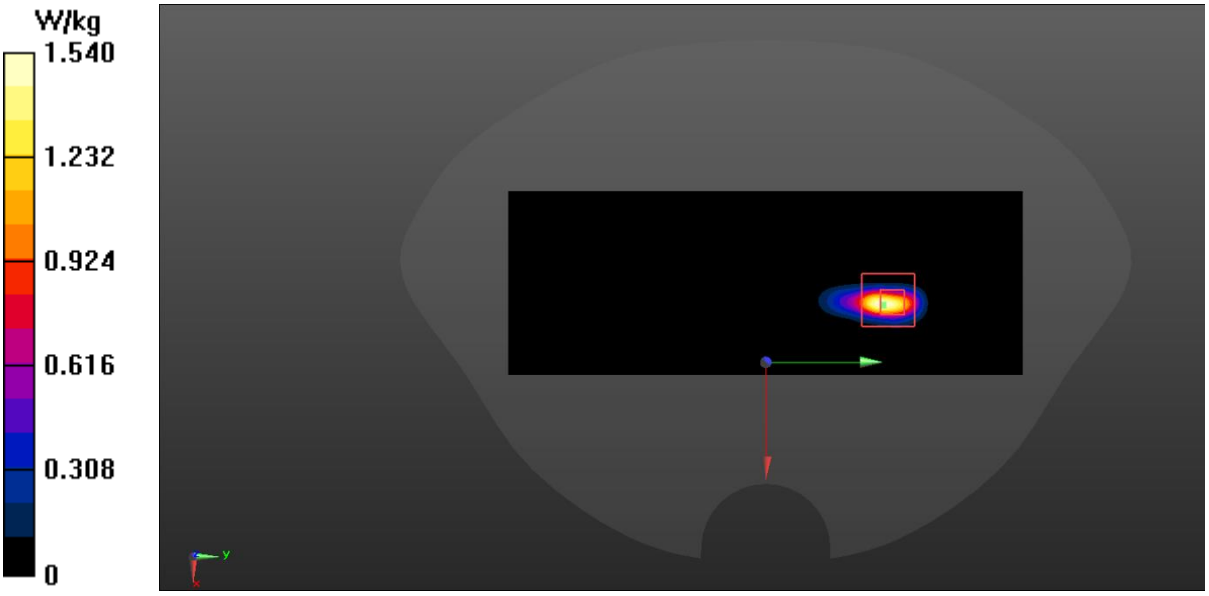

WIFI2.4G Head ANT5

Date: 2023/5/18

Electronics: DAE4 Sn1331

Medium: H650-7000M

Medium parameters used: f = 2462.5 MHz; σ = 1.868 S/m; εr = 40.722; ρ = 1000 kg/m3

Ambient Temperature:23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, wifi 2450 (0) Frequency: 2462 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7673 ConvF(7.57, 7.57, 7.57)

Area Scan (101x171x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.447 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.941 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.560 W/kg

SAR(1 g) = 0.264 W/kg; SAR(10 g) = 0.124 W/kg

Maximum value of SAR (measured) = 0.443 W/kg

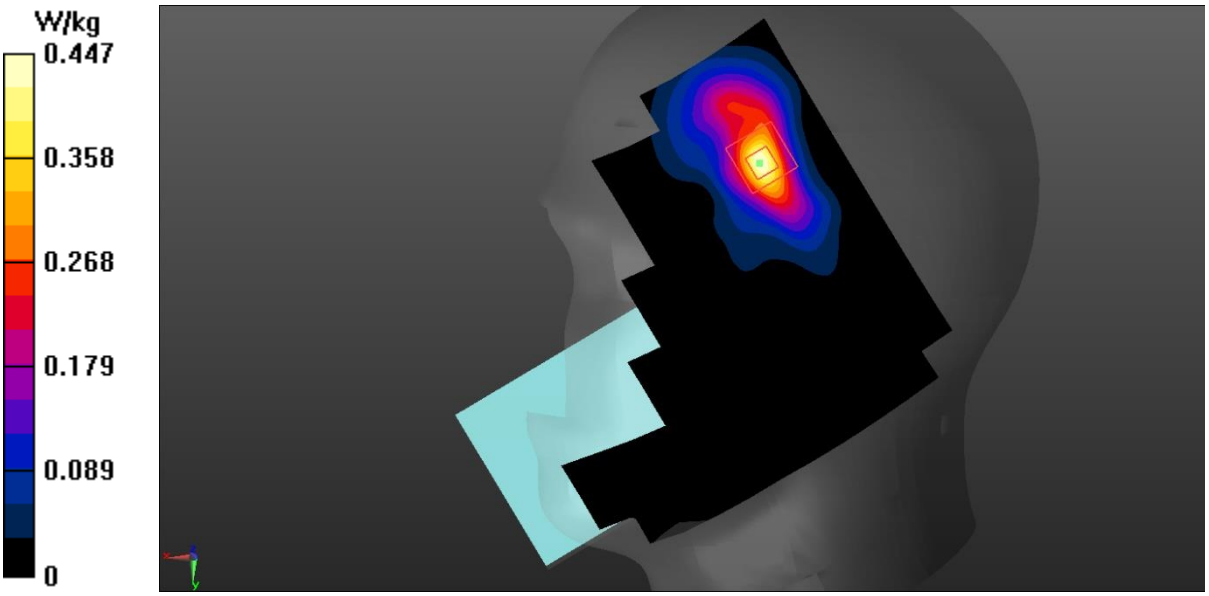

WIFI2.4G Body 0mm ANT5

Date: 2023/5/18

Electronics: DAE4 Sn1331

Medium: H650-7000M

Medium parameters used: f = 2462.5 MHz; σ = 1.868 S/m; εr = 40.722; ρ = 1000 kg/m3

Ambient Temperature:23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, wifi 2450 (0) Frequency: 2462 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7673 ConvF(7.57, 7.57, 7.57)

Area Scan (101x171x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.982 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.82 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 1.39 W/kg

SAR(1 g) = 0.509 W/kg; SAR(10 g) = 0.180 W/kg

Maximum value of SAR (measured) = 1.06 W/kg

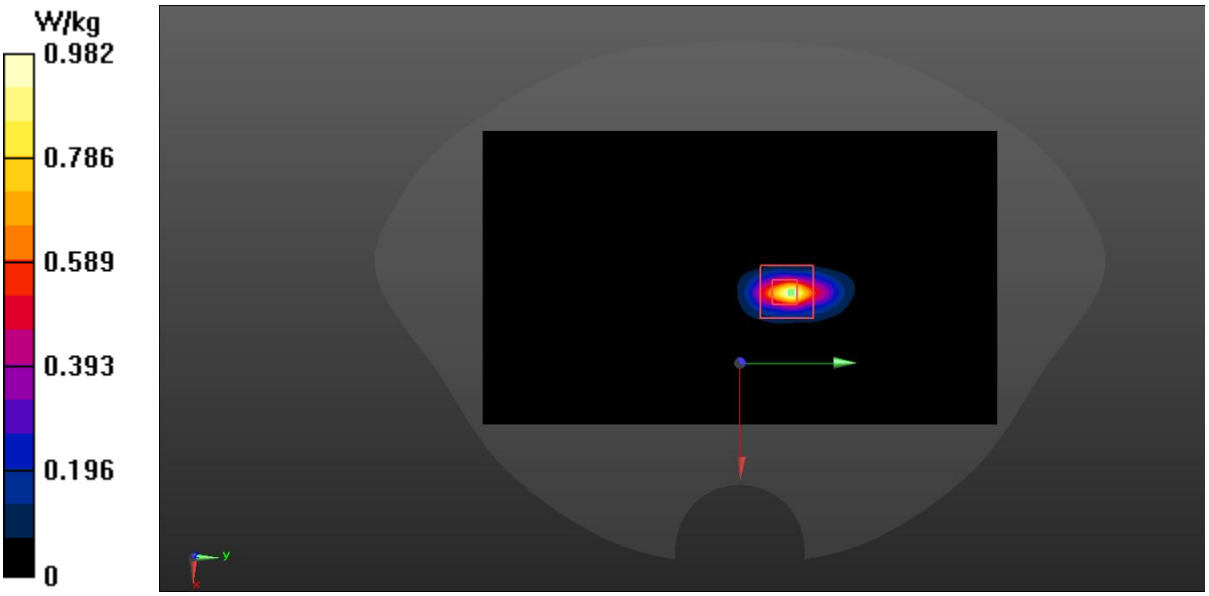

WIFI2.4G Head ANT6

Date: 2023/5/24

Electronics: DAE4 Sn1331

Medium: H650-7000M

Medium parameters used: f = 2462.5 MHz; σ = 1.856 S/m; εr = 40.466; ρ = 1000 kg/m3

Ambient Temperature:23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, wifi 2450 (0) Frequency: 2462 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7673 ConvF(7.57, 7.57, 7.57)

Area Scan (101x171x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.219 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.229 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.292 W/kg

SAR(1 g) = 0.138 W/kg; SAR(10 g) = 0.062 W/kg

Maximum value of SAR (measured) = 0.221 W/kg

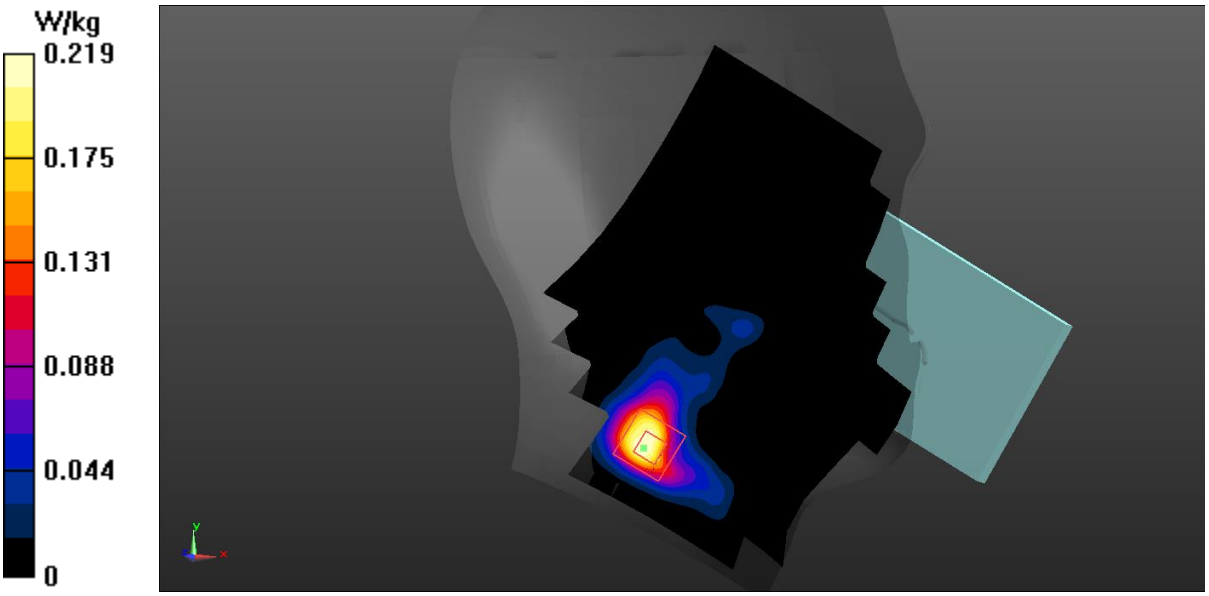

WIFI2.4G Body 0mm ANT6

Date: 2023/5/24

Electronics: DAE4 Sn1331

Medium: H650-7000M

Medium parameters used: f = 2462.5 MHz; σ = 1.856 S/m; εr = 40.466; ρ = 1000 kg/m3

Ambient Temperature:23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, wifi 2450 (0) Frequency: 2462 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7673 ConvF(7.57, 7.57, 7.57)

Area Scan (101x171x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.444 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 0 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.773 W/kg

SAR(1 g) = 0.258 W/kg; SAR(10 g) = 0.092 W/kg

Maximum value of SAR (measured) = 0.558 W/kg

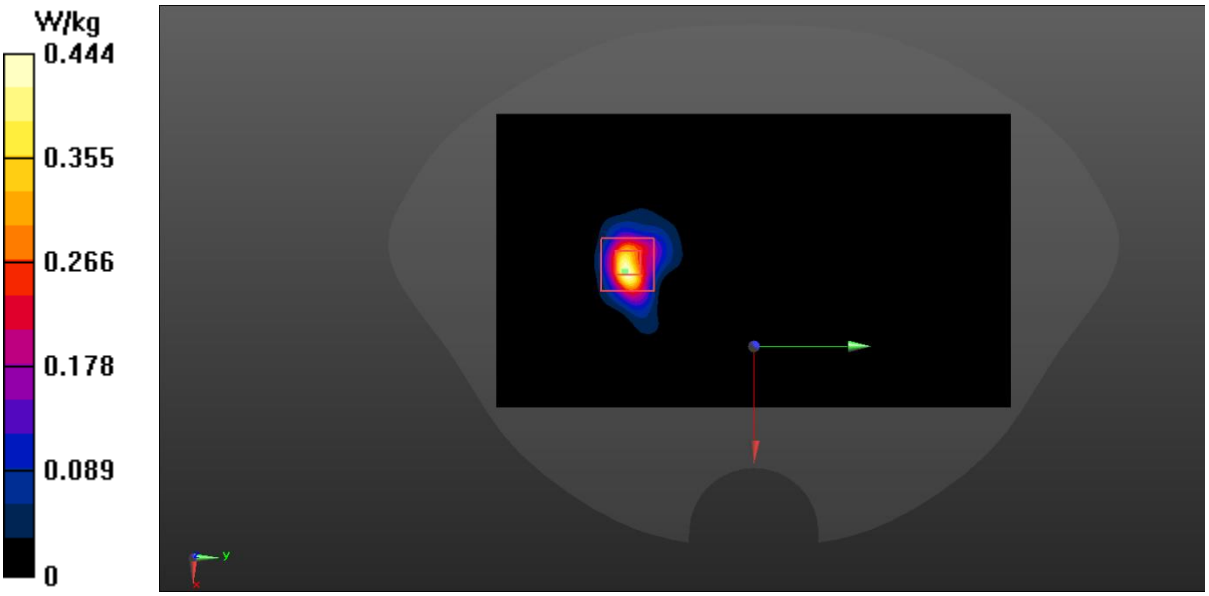

WIFI5G Head ANT7

Date: 2023/6/4

Electronics: DAE4 Sn1331

Medium: H650-7000M

Medium parameters used: f = 5210 MHz; σ = 4.653 S/m; εr = 36.158; ρ = 1000 kg/m3

Ambient Temperature:23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, WIFI 5G (0) Frequency: 5210 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7673 ConvF(5.21, 5.21, 5.21)

Area Scan (121x211x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.18 W/kg

Zoom Scan (9x9x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 3.559 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 2.42 W/kg

SAR(1 g) = 0.459 W/kg; SAR(10 g) = 0.134 W/kg

Maximum value of SAR (measured) = 1.10 W/kg

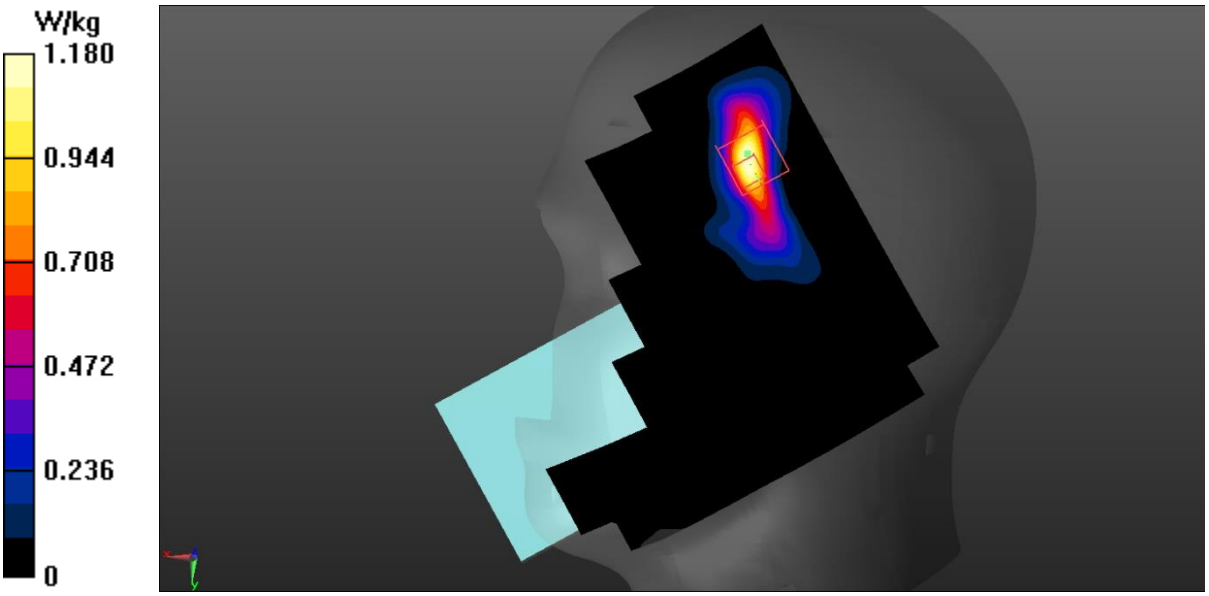

WIFI5G Body 0mm ANT7

Date: 2023/6/4

Electronics: DAE4 Sn1331

Medium: H650-7000M

Medium parameters used: f = 5210 MHz; σ = 4.653 S/m; εr = 36.158; ρ = 1000 kg/m3

Ambient Temperature:23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, WIFI 5G (0) Frequency: 5210 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7673 ConvF(5.21, 5.21, 5.21)

Area Scan (121x211x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.415 W/kg

Zoom Scan (9x9x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 0 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 3.18 W/kg

SAR(1 g) = 0.329 W/kg; SAR(10 g) = 0.077 W/kg

Maximum value of SAR (measured) = 1.76 W/kg

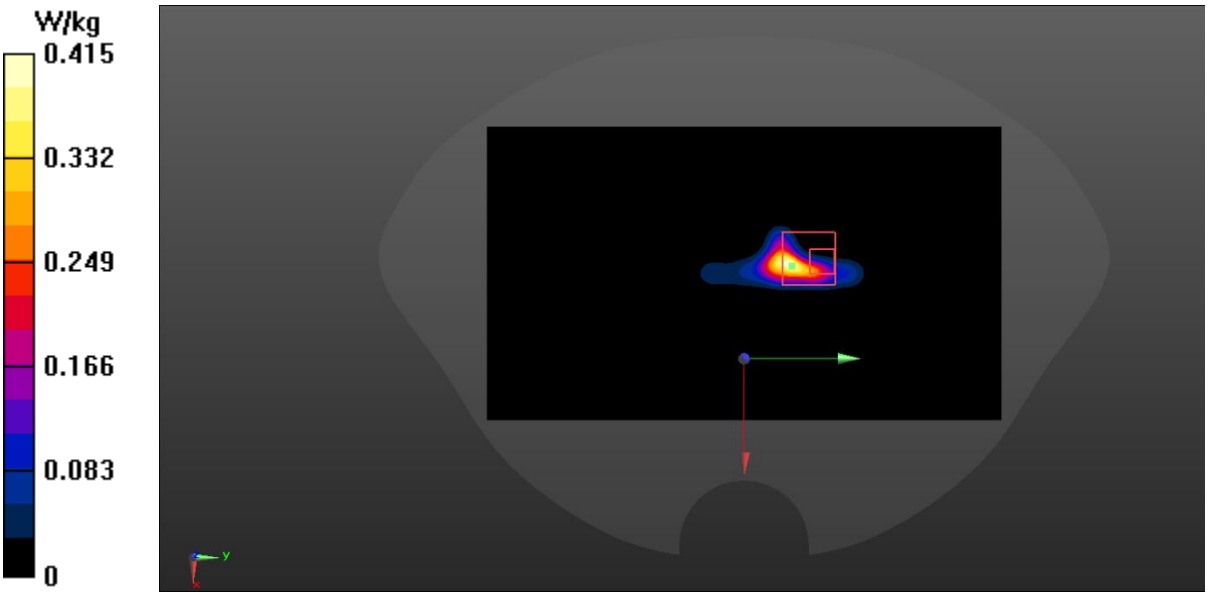

WIFI5G Head ANT10

Date: 2023/6/5

Electronics: DAE4 Sn1331

Medium: H650-7000M

Medium parameters used: f = 5250 MHz; σ = 4.623 S/m; εr = 35.746; ρ = 1000 kg/m3

Ambient Temperature:23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, WIFI 5G (0) Frequency: 5250 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7673 ConvF(5.21, 5.21, 5.21)

Area Scan (121x211x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.355 W/kg

Zoom Scan (9x9x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 0 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.602 W/kg

SAR(1 g) = 0.091 W/kg; SAR(10 g) = 0.023 W/kg

Maximum value of SAR (measured) = 0.304 W/kg

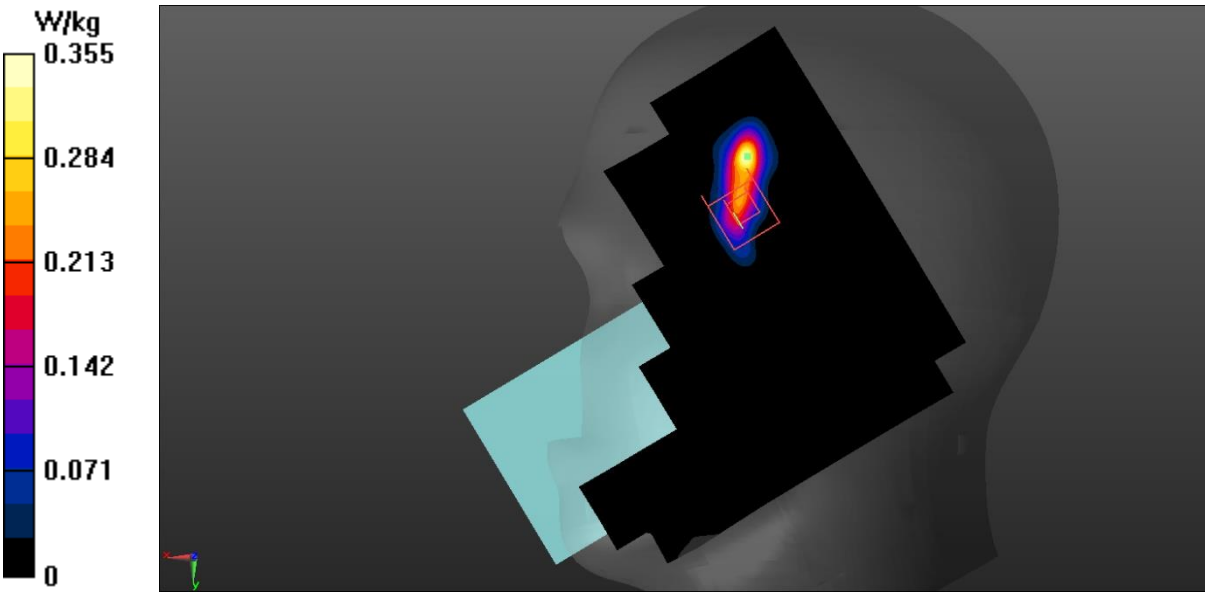

WIFI5G Body 0mm ANT10

Date: 2023/6/5

Electronics: DAE4 Sn1331

Medium: H650-7000M

Medium parameters used: f = 5250 MHz; σ = 4.623 S/m; εr = 35.746; ρ = 1000 kg/m3

Ambient Temperature:23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, WIFI 5G (0) Frequency: 5250 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7673 ConvF(5.21, 5.21, 5.21)

Area Scan (121x211x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.0342 W/kg

Zoom Scan (9x9x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 0 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.204 W/kg

SAR(1 g) = 0.030 W/kg; SAR(10 g) = 0.00686 W/kg

Maximum value of SAR (measured) = 0.146 W/kg

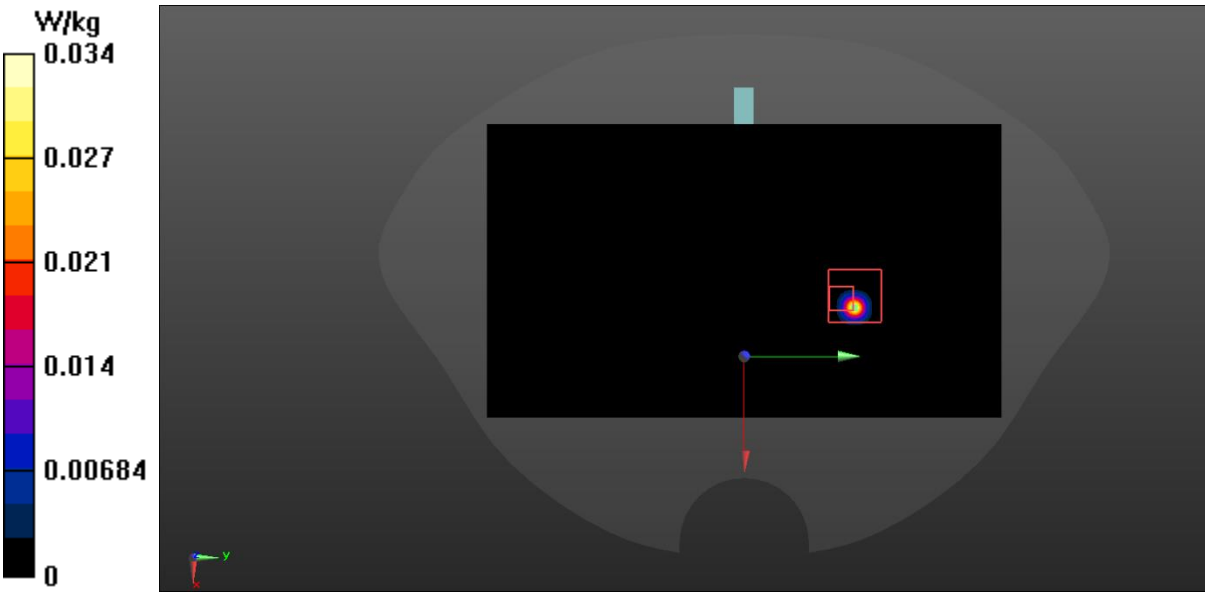

BT Head ANT5

Date: 2023/6/8

Electronics: DAE4 Sn1331

Medium: H650-7000M

Medium parameters used: f = 2480 MHz; σ = 1.889 S/m; εr = 40.602; ρ = 1000 kg/m3

Ambient Temperature:23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, BT (0) Frequency: 2480 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7673 ConvF(7.57, 7.57, 7.57)

Area Scan (101x171x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.123 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.587 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.183 W/kg

SAR(1 g) = 0.080 W/kg; SAR(10 g) = 0.035 W/kg

Maximum value of SAR (measured) = 0.147 W/kg

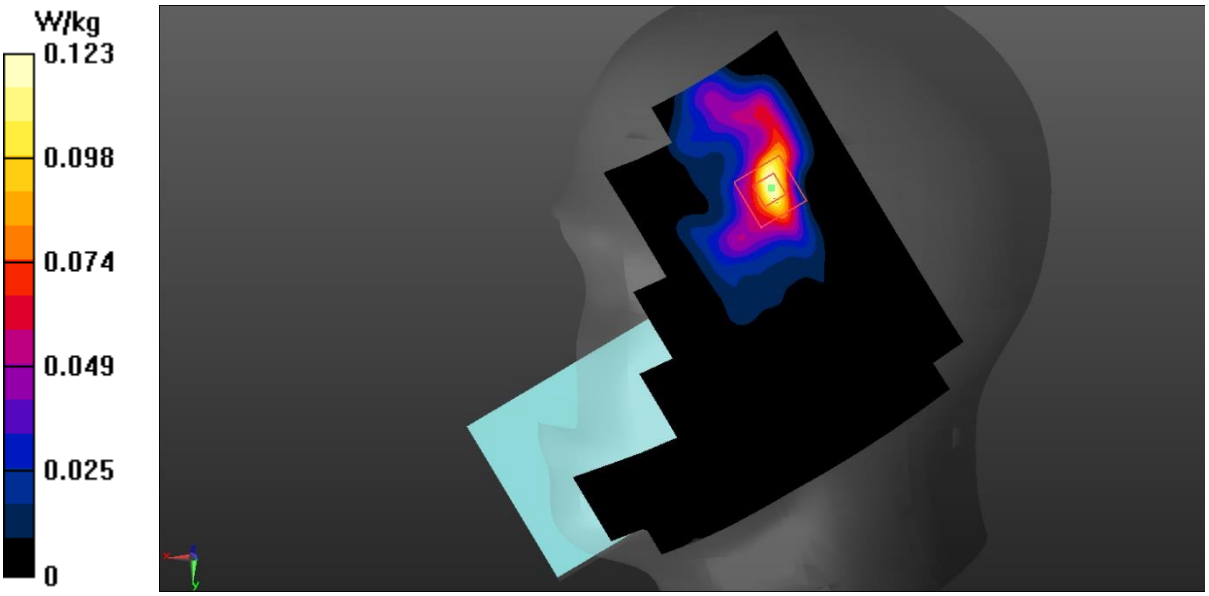

BT Body 0mm ANT5

Date: 2023/6/8

Electronics: DAE4 Sn1331

Medium: H650-7000M

Medium parameters used: f = 2480 MHz; σ = 1.889 S/m; εr = 40.602; ρ = 1000 kg/m3

Ambient Temperature:23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, BT (0) Frequency: 2480 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7673 ConvF(7.57, 7.57, 7.57)

Area Scan (101x171x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.750 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.651 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 1.08 W/kg

SAR(1 g) = 0.405 W/kg; SAR(10 g) = 0.177 W/kg

Maximum value of SAR (measured) = 0.771 W/kg

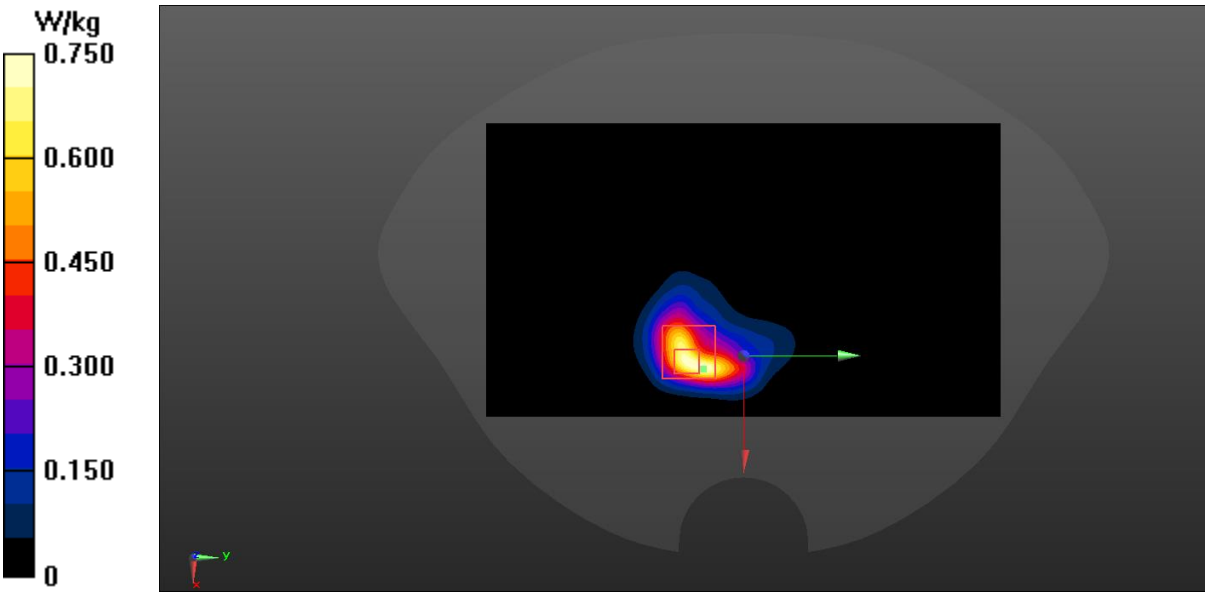

BT Body 0mm ANT6

Date: 2023/6/8

Electronics: DAE4 Sn1331

Medium: H650-7000M

Medium parameters used: f = 2402.5 MHz; σ = 1.85 S/m; εr = 40.671; ρ = 1000 kg/m3

Ambient Temperature:23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, BT (0) Frequency: 2402 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7673 ConvF(7.57, 7.57, 7.57)

Area Scan (101x171x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.380 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 0.1800 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.554 W/kg

SAR(1 g) = 0.201 W/kg; SAR(10 g) = 0.075 W/kg

Maximum value of SAR (measured) = 0.328 W/kg

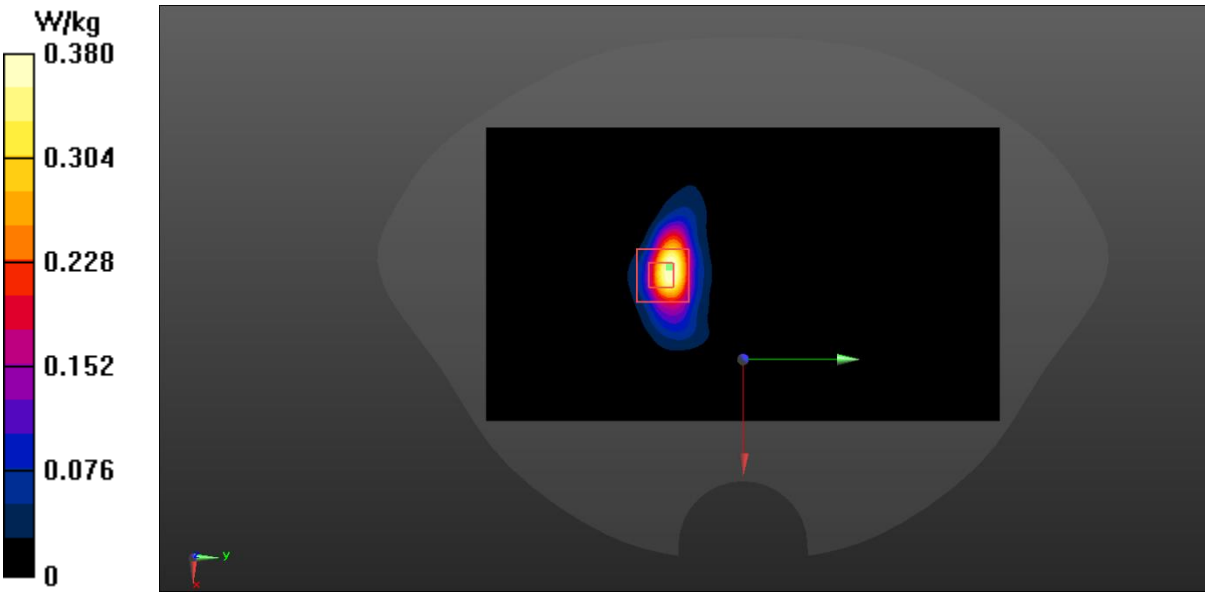

WIFI6E Body 0mm ANT10

Measurement Report for Device, EDGE TOP, Custom Band, IEEE 802.16e WiMAX (29:18, 5ms, 10MHz, QPSK, PUSC), Channel 6265000 (6265.0 MHz)

Device Under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
Device,	158.0 x 152.0 x 8.0		Phone

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	EDGE TOP, 5.00	Custom Band	CW, 10301-AAA	6265.0, 6265000	5.15	5.8	34.67

Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V4.0 (30deg probe tilt) - 1186	HBBL-600-10000	EX3DV4 - SN3846, 2023-05-31	DAE4 Sn1588, 2022-09-15

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	48.0 x 187.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	8.5 x 8.5	3.4 x 3.4 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	n/a	Yes
Grading Ratio	n/a	1.4
MAIA	Y	Y
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2023-07-15, 16:23	2023-07-15, 17:00
psSAR1g [W/Kg]	0.006	0.065
psSAR10g [W/Kg]	0	0.014
Power Drift [dB]	-0.17	0.15
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		49.2
Dist 3dB Peak [mm]		3.1

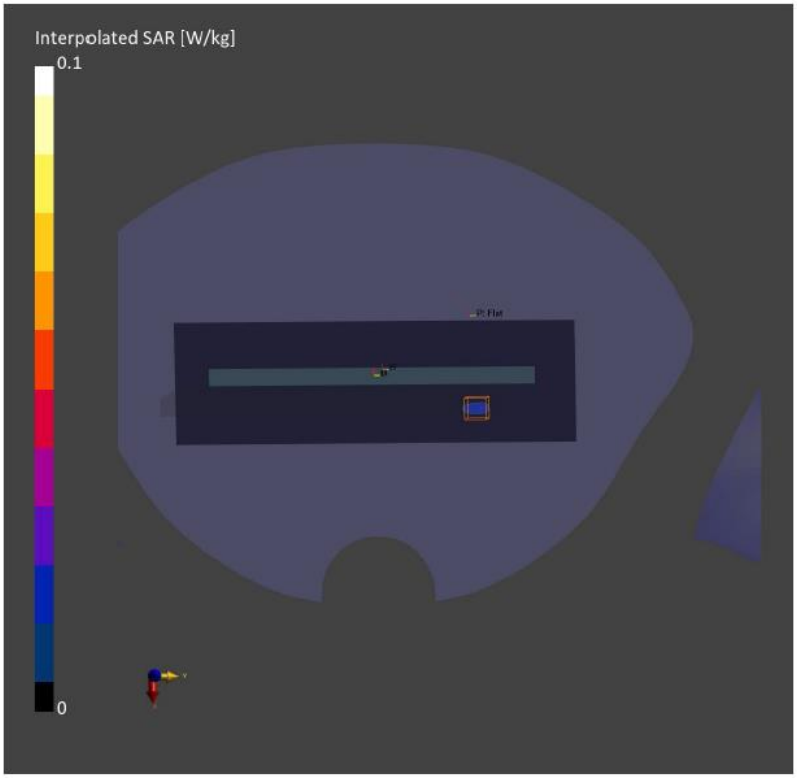

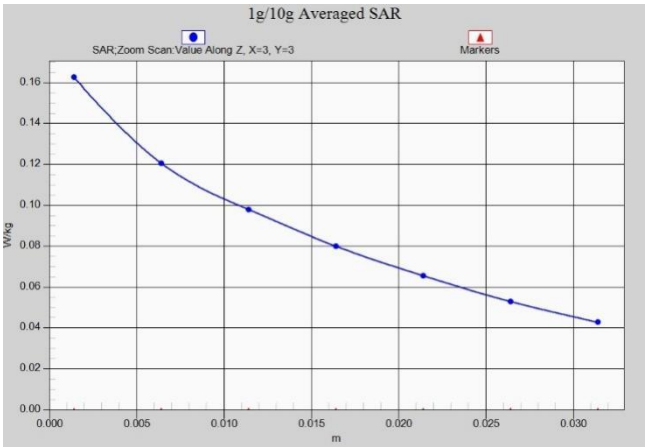

GSM850 Head ANT1

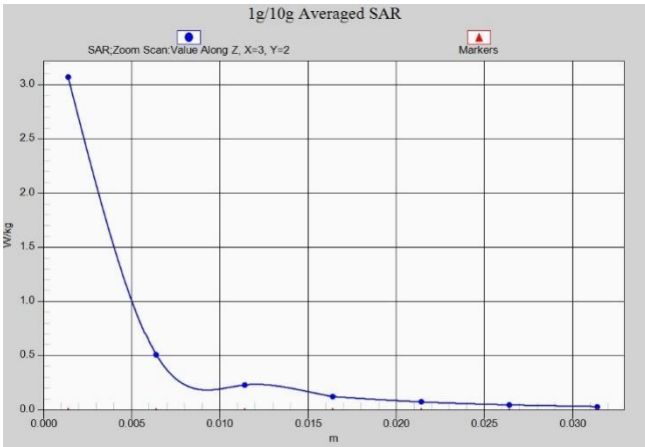

GSM850 Body 0mm ANT1

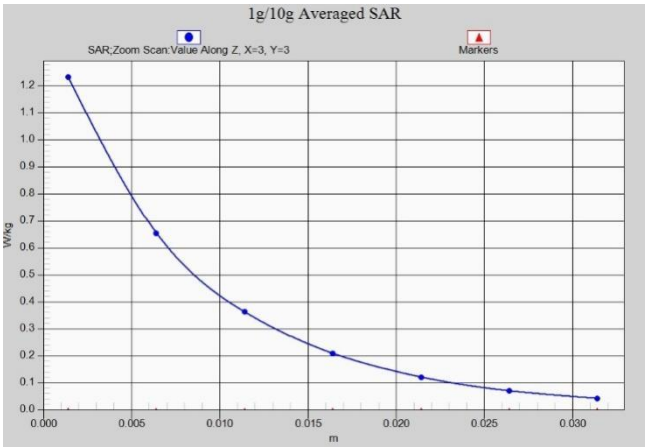

GSM1900 Head ANT2

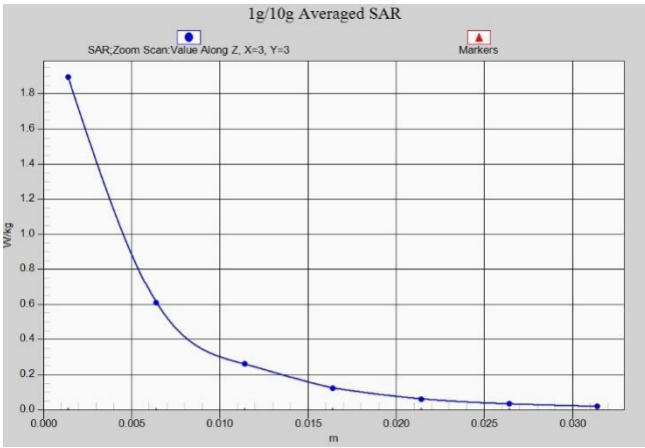

GSM1900 Body 0mm ANT2

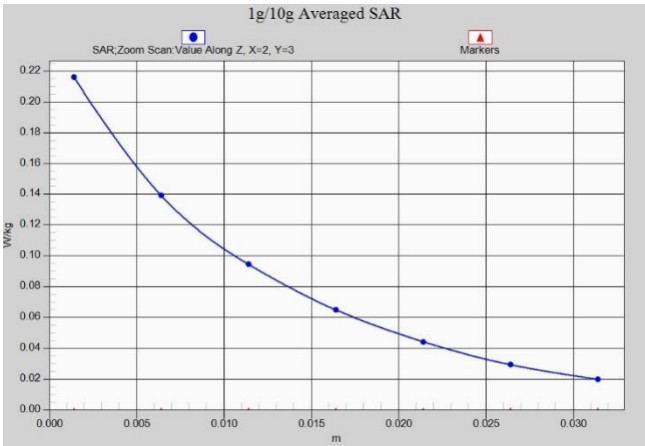

GSM1900 Head ANT3

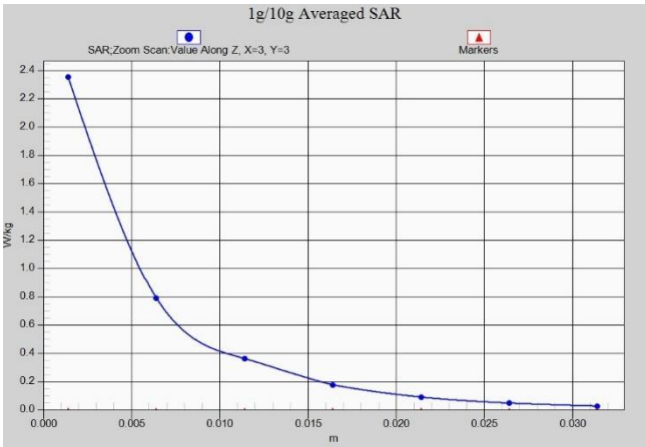

GSM1900 Body 0mm ANT3

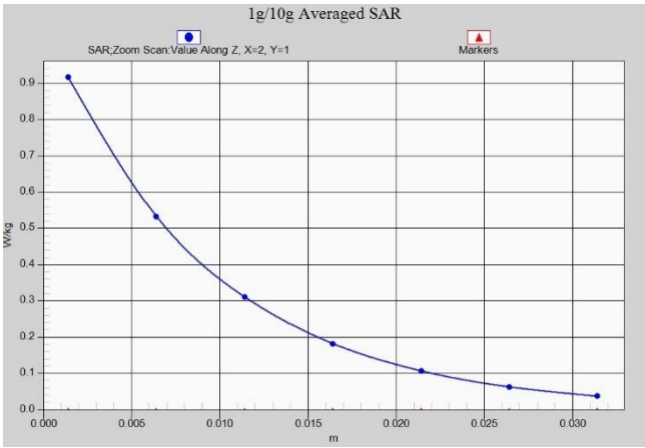

WCDMA1900 Head ANT2

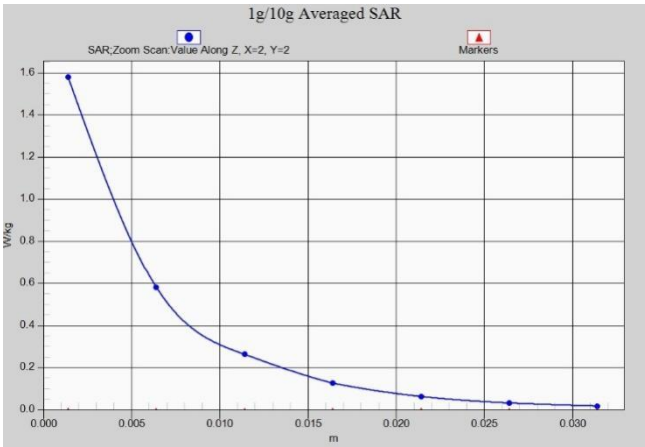

WCDMA1900 Body 0mm ANT2

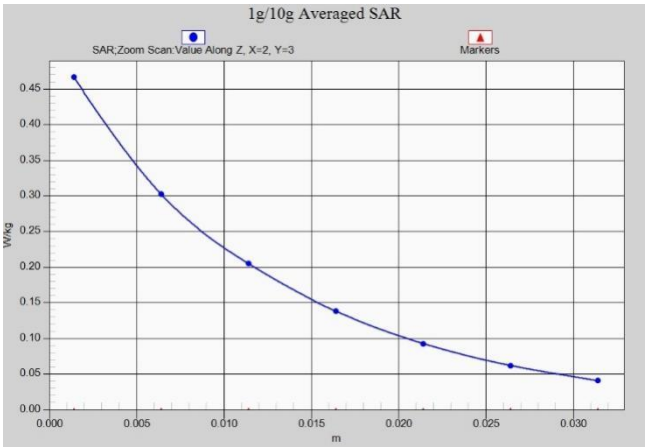

WCDMA1900 Head ANT3

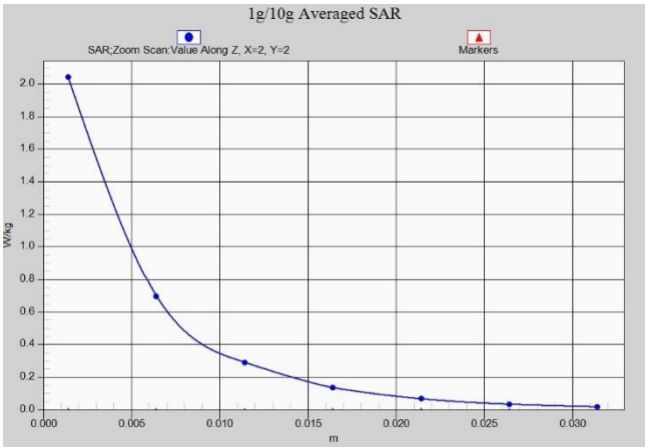

WCDMA1900 Body 0mm ANT3

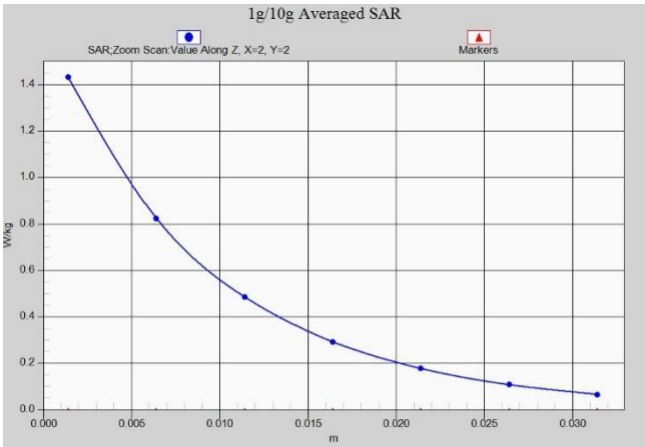

WCDMA1700 Head ANT2

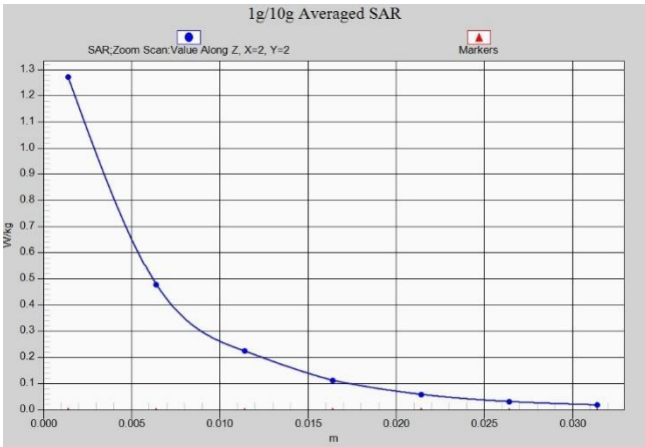

WCDMA1700 Body 0mm ANT2

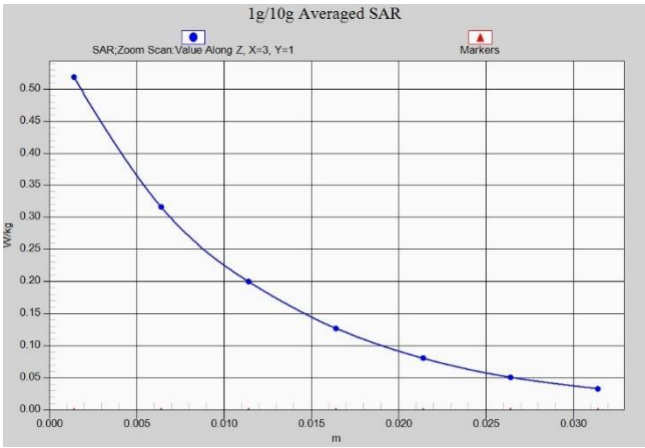

WCDMA1700 Head ANT3

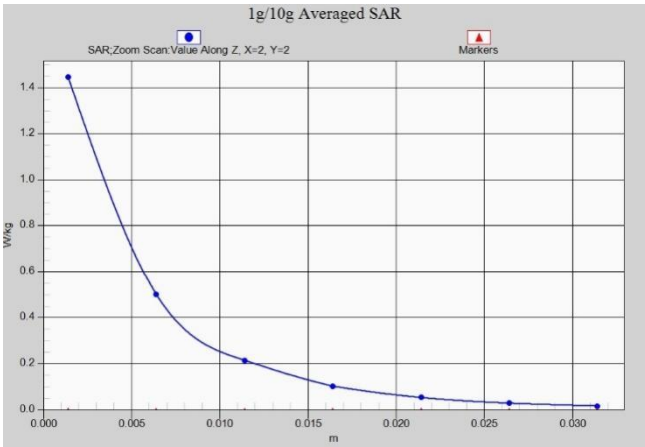

WCDMA1700 Body 0mm ANT3

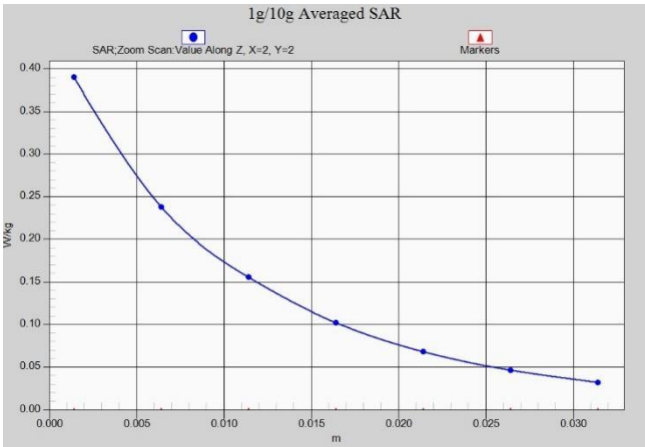

WCDMA850 Head ANT0

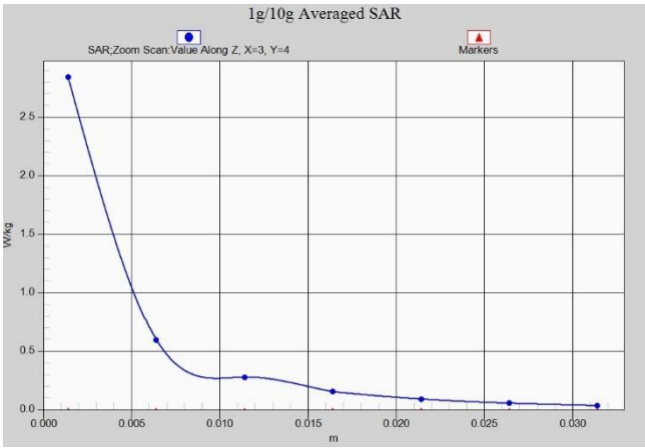

WCDMA850 Body 0mm ANT0

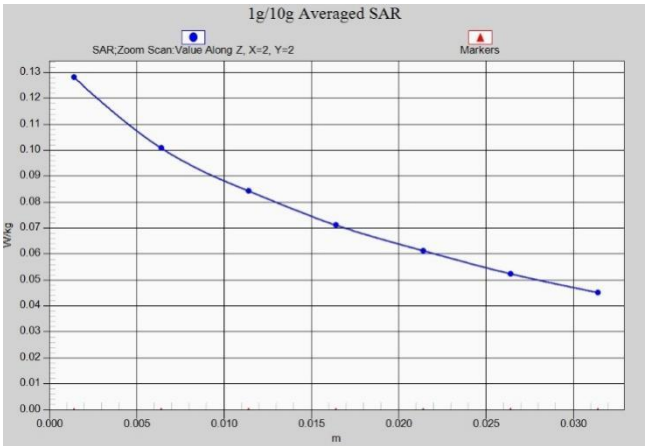

WCDMA850 Head ANT1

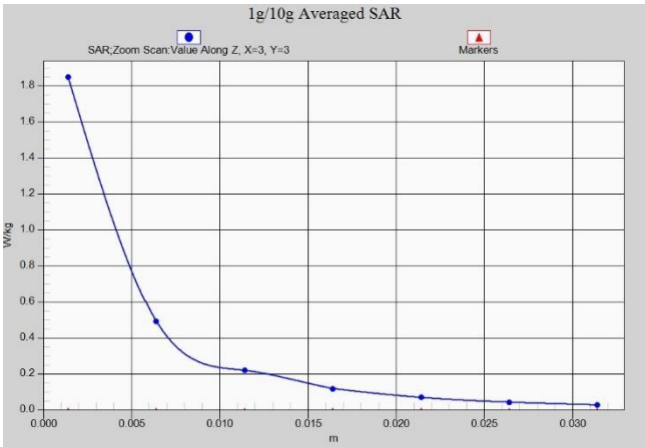

WCDMA850 Body 0mm ANT1

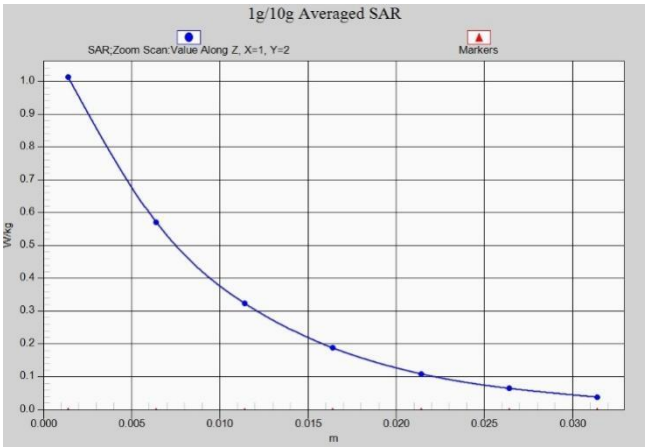

LTE Band2 Head ANT2

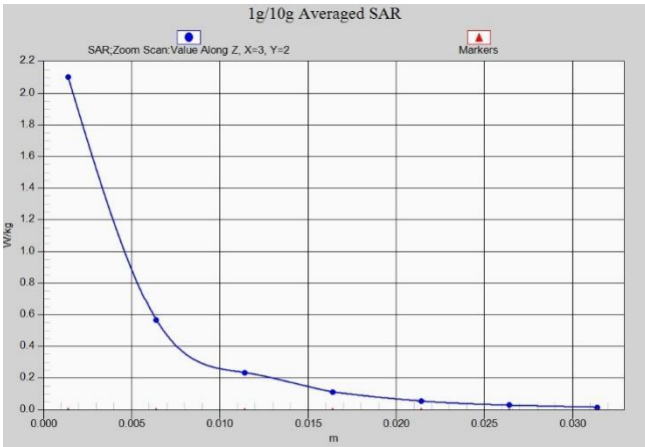

LTE Band2 Body 0mm ANT2

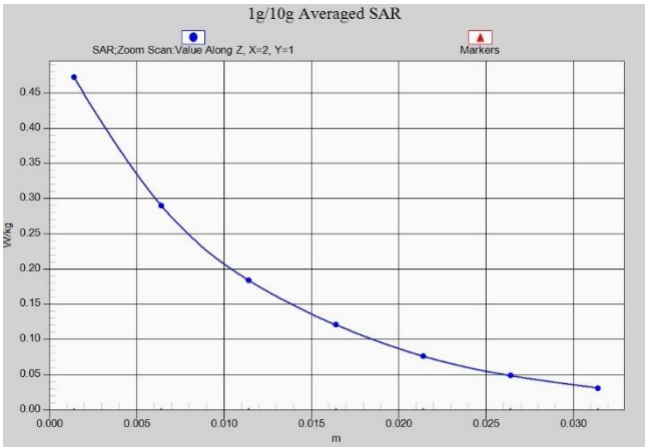

LTE Band2 Head ANT3

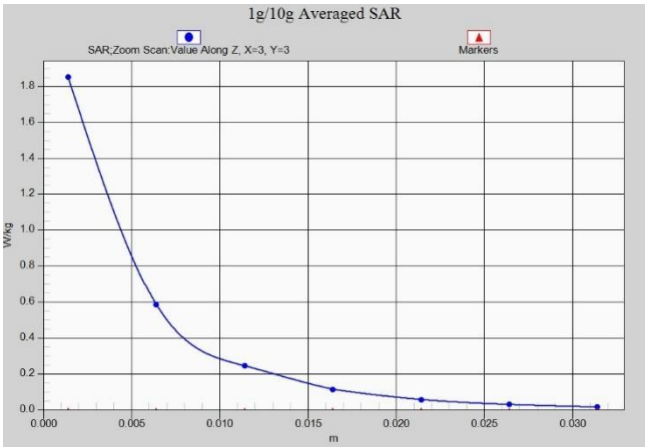

LTE Band2 Body 0mm ANT3

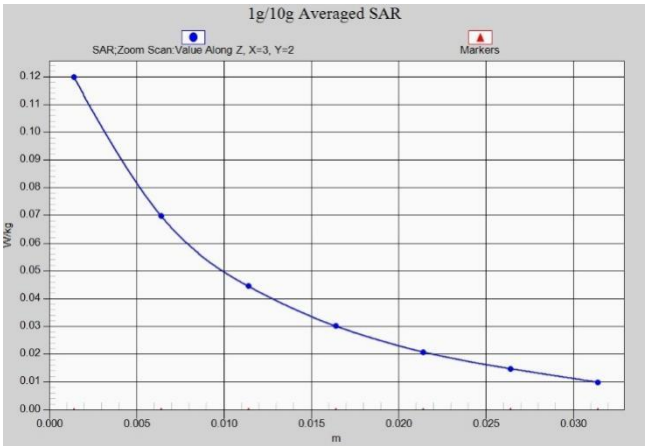

LTE Band2 Head ANT4

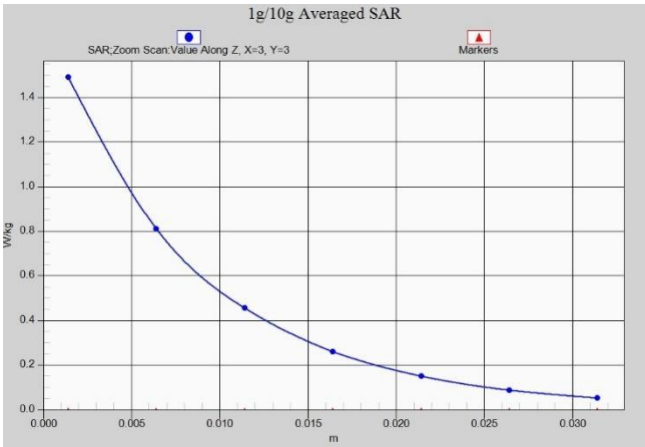

LTE Band2 Body 0mm ANT4

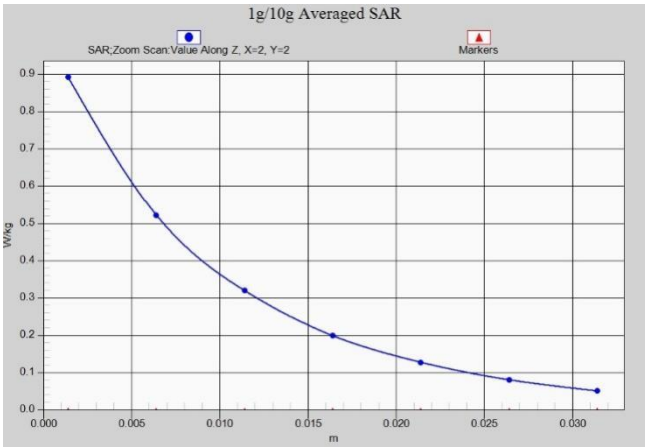

LTE Band2 Head ANT5

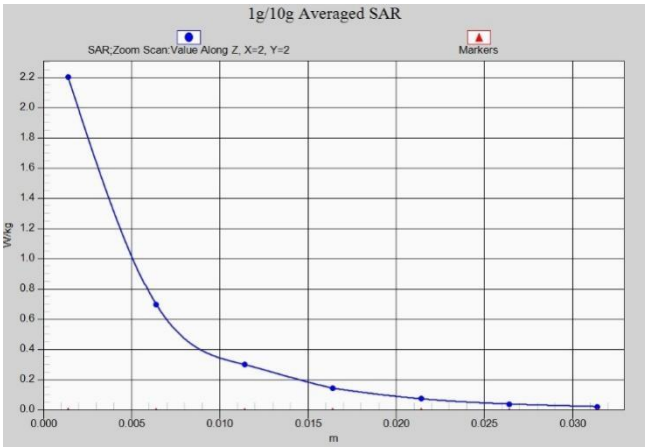

LTE Band2 Body 0mm ANT5

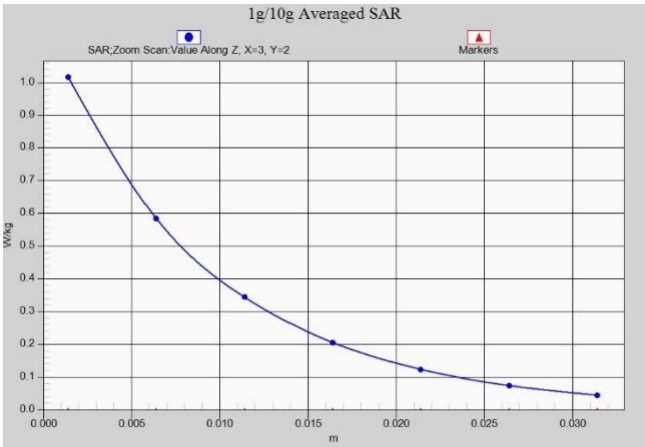

LTE Band4 Head ANT2

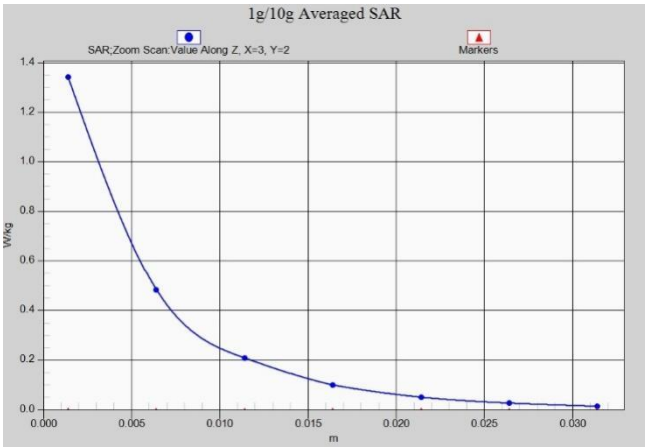

LTE Band4 Body 0mm ANT2

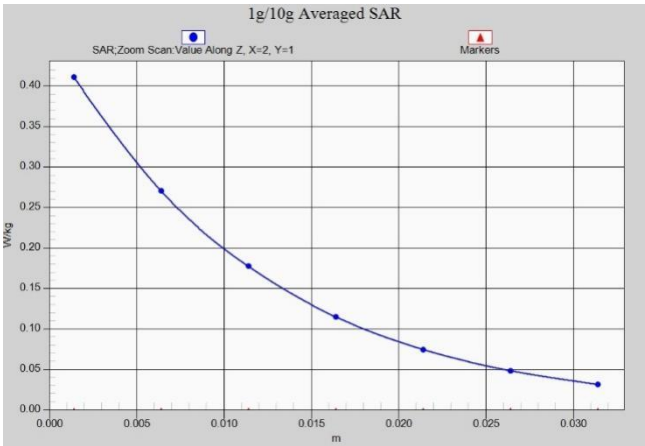

LTE Band4 Head ANT3

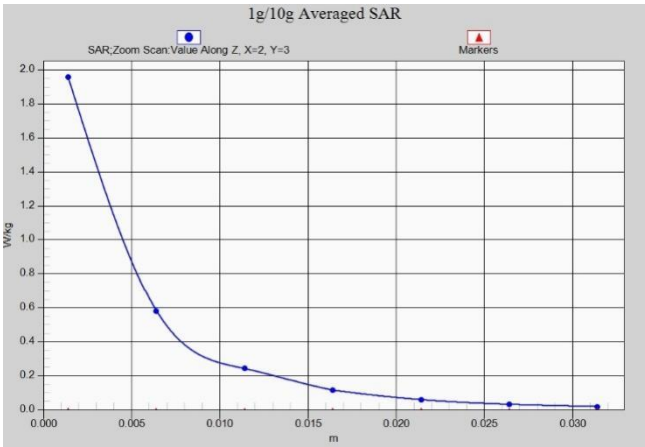

LTE Band4 Body 0mm ANT3

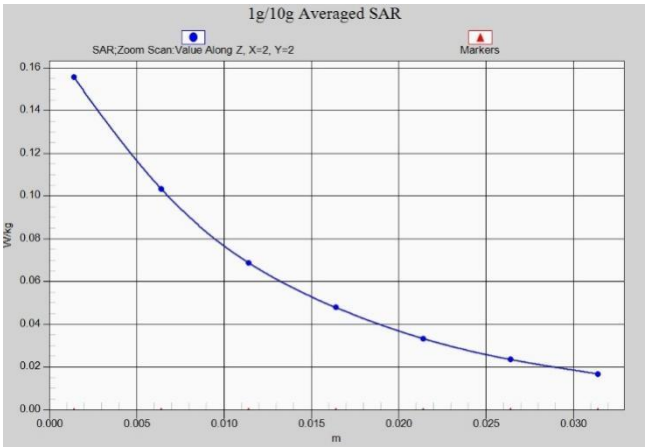

LTE Band4 Head ANT4

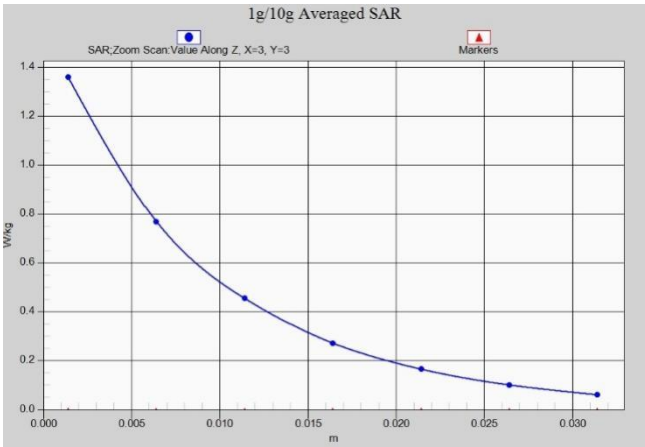

LTE Band4 Body 0mm ANT4

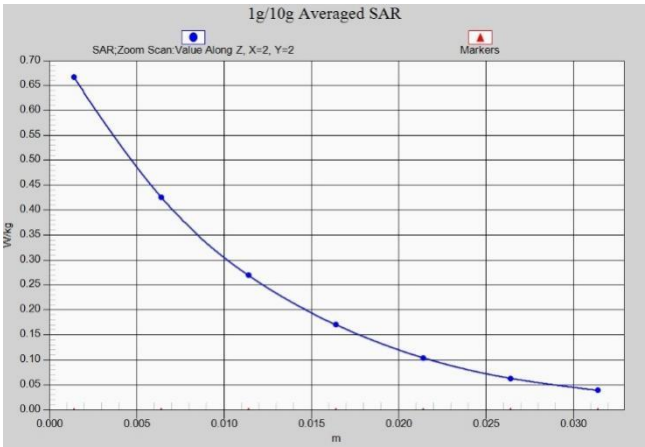

LTE Band4 Head ANT5

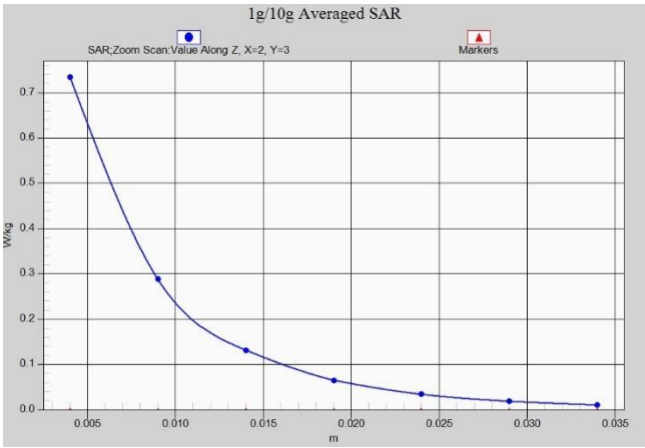

LTE Band4 Body 0mm ANT5

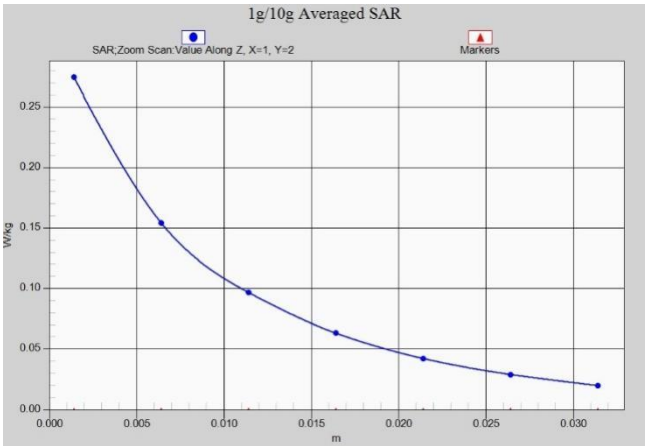

LTE Band5 Head ANT0

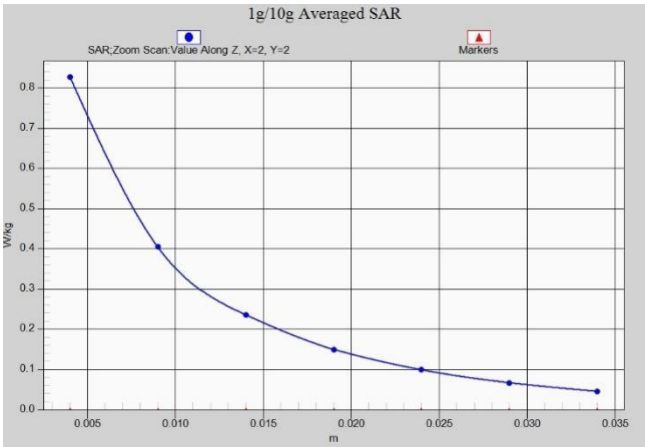

LTE Band5 Body 0mm ANT0

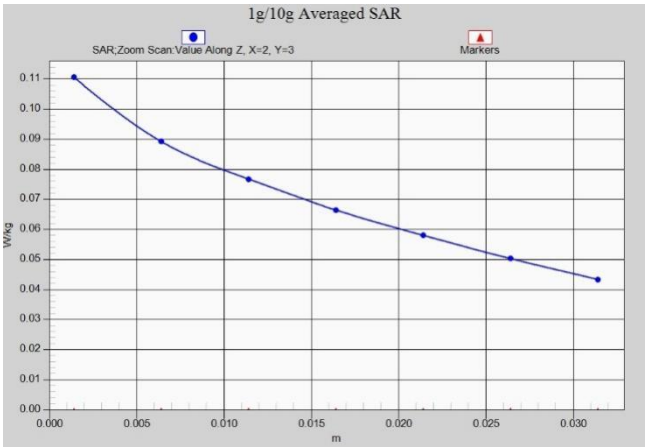

LTE Band5 Head ANT1

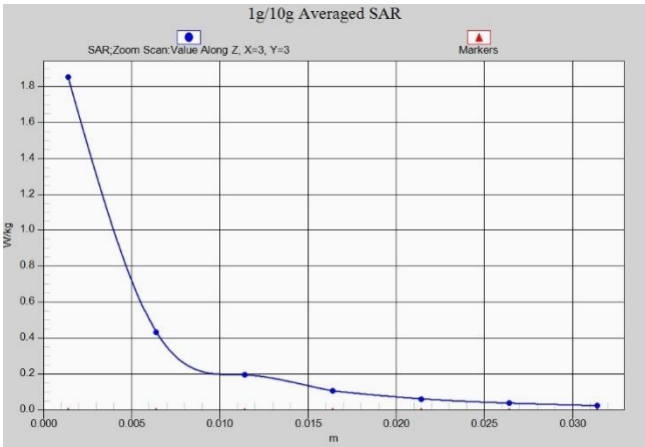

LTE Band5 Body 0mm ANT1

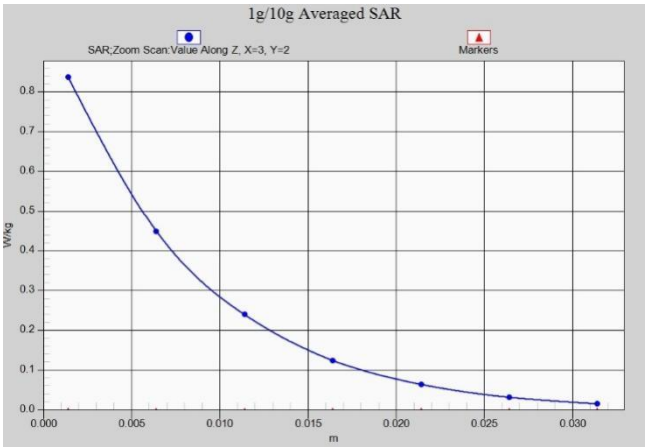

LTE Band7 Head ANT2

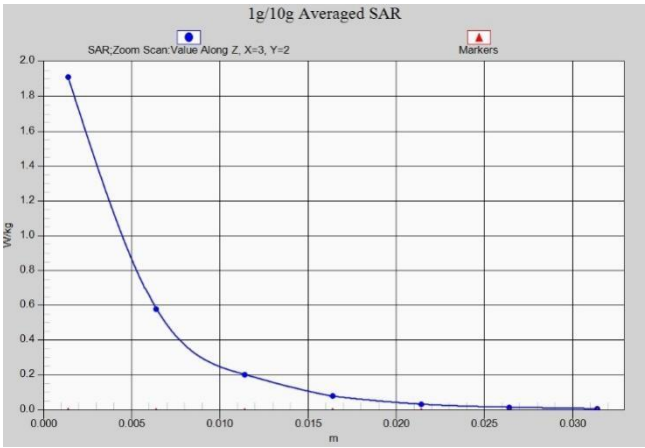

LTE Band7 Body 0mm ANT2

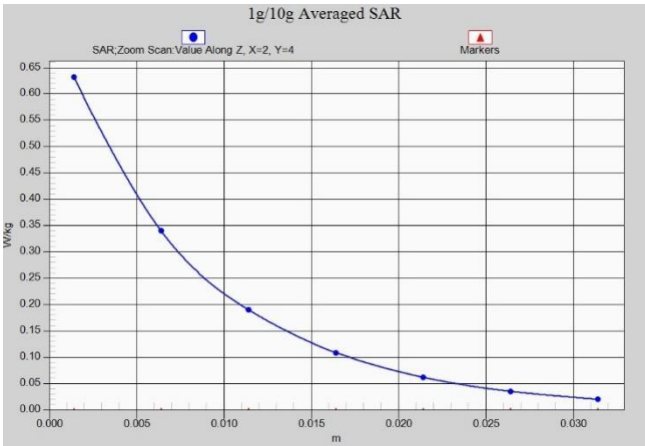

LTE Band7 Head ANT3

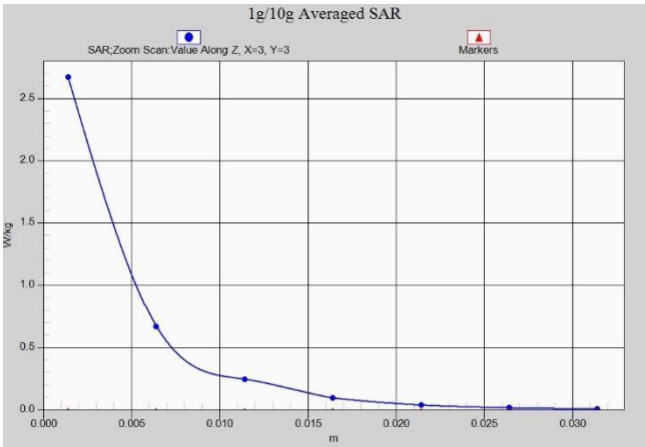

LTE Band7 Body 0mm ANT3

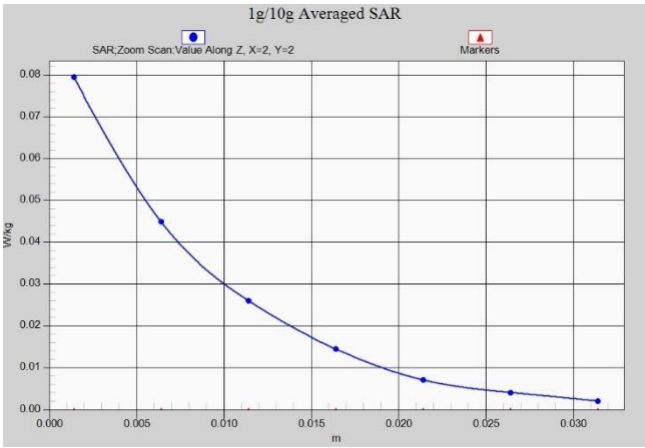

LTE Band7 Head ANT4

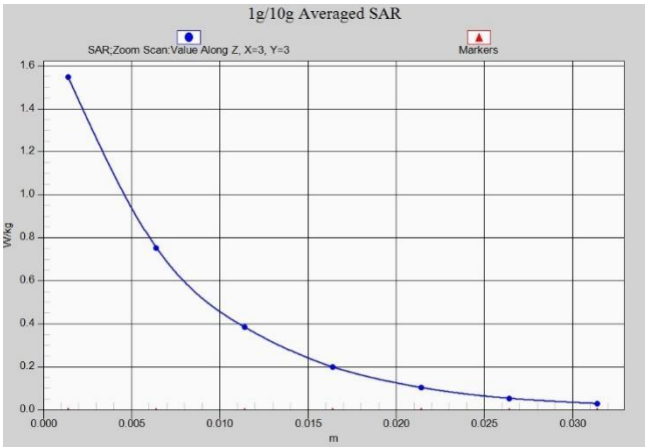

LTE Band7 Body 0mm ANT4

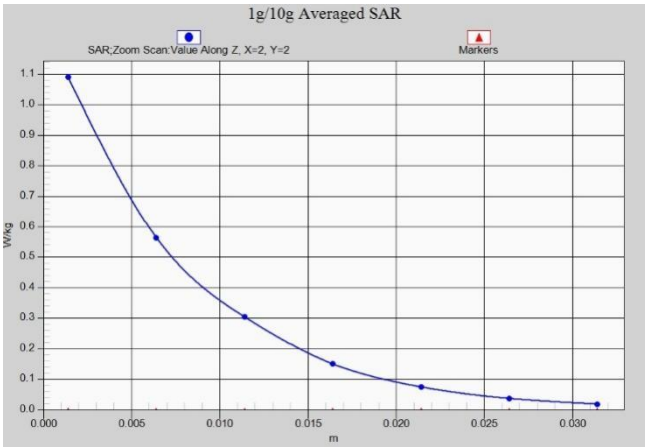

LTE Band7 Head ANT5

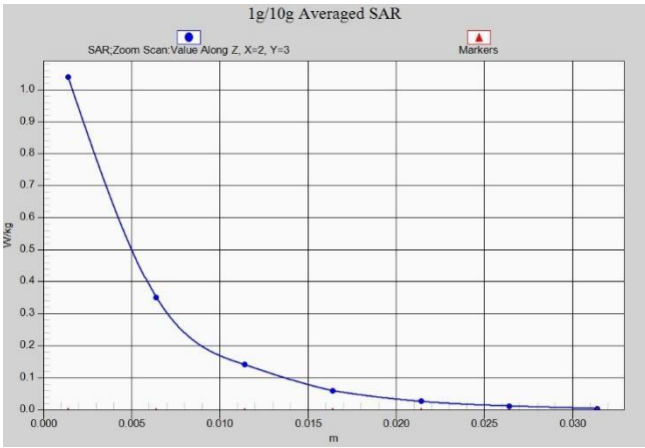

LTE Band7 Body 0mm ANT5

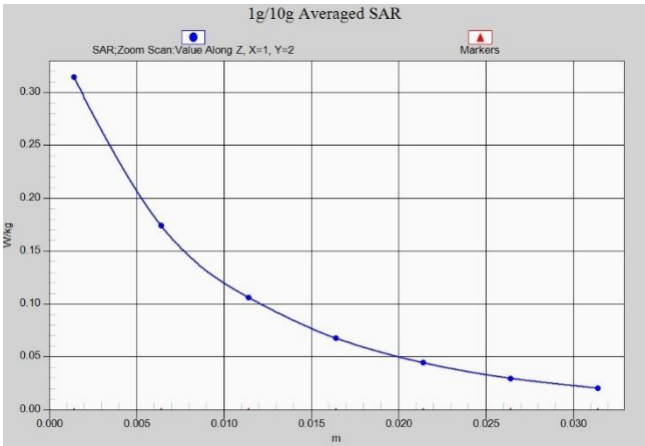

LTE Band12 Head ANT0

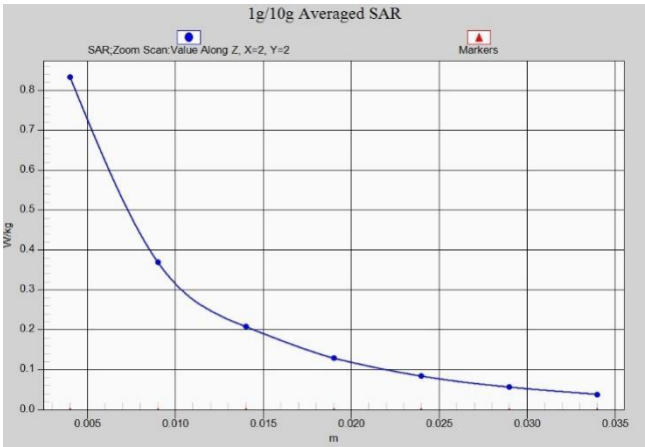

LTE Band12 Body 0mm ANT0

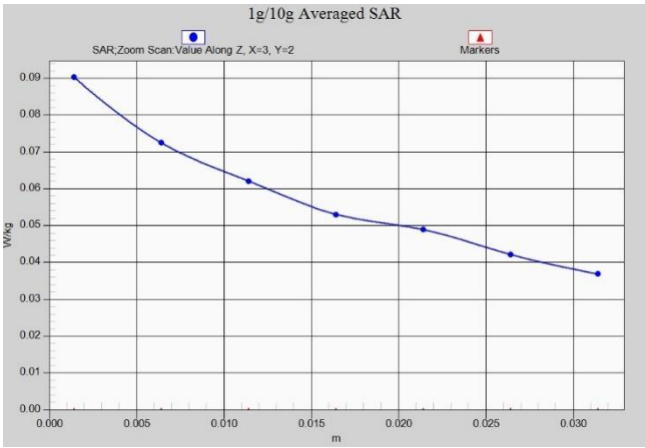

LTE Band12 Head ANT1

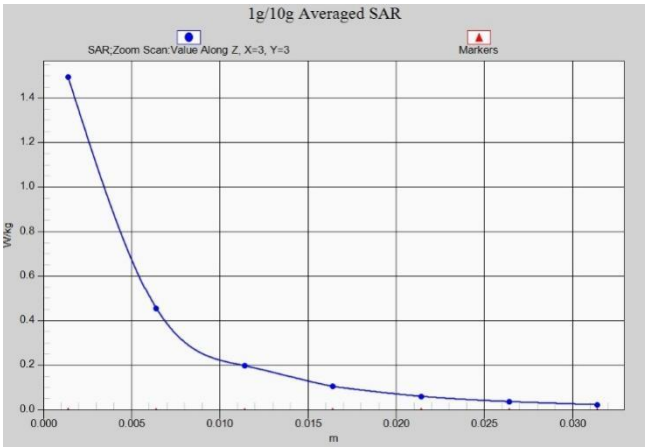

LTE Band12 Body 0mm ANT1

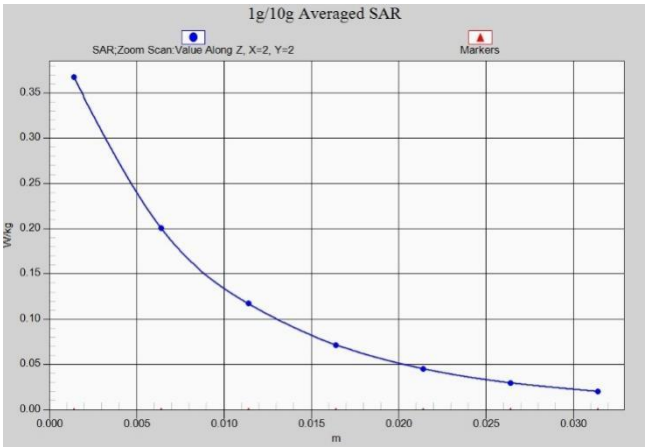

LTE Band13 Head ANT0

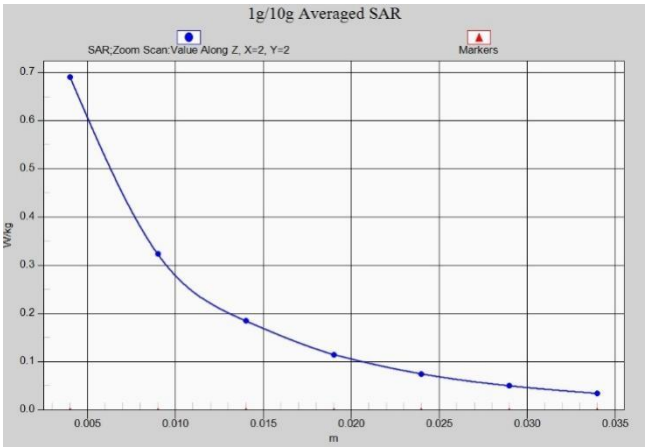

LTE Band13 Body 0mm ANT0

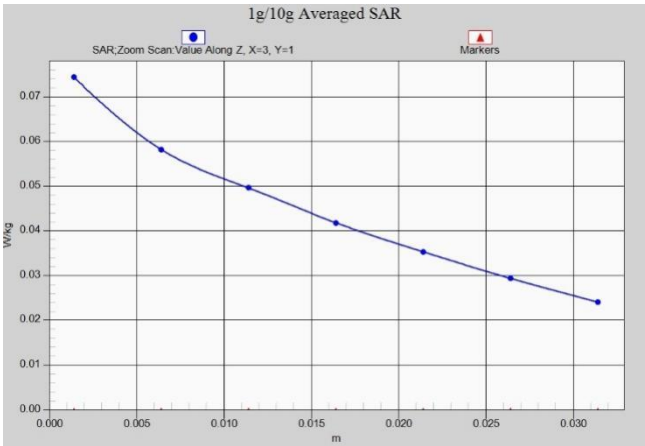

LTE Band13 Head ANT1

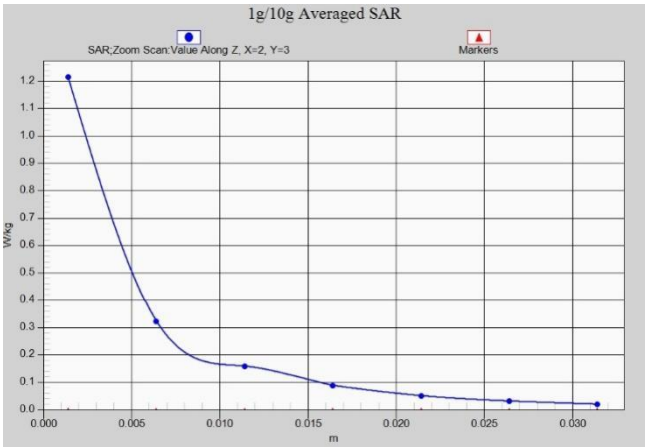

LTE Band13 Body 0mm ANT1

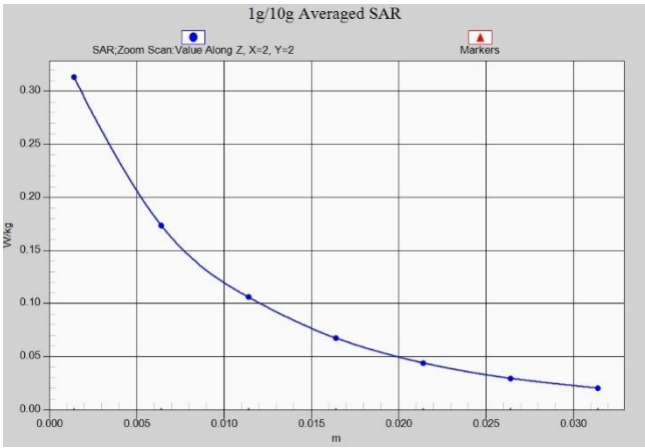

LTE Band17 Head ANT0

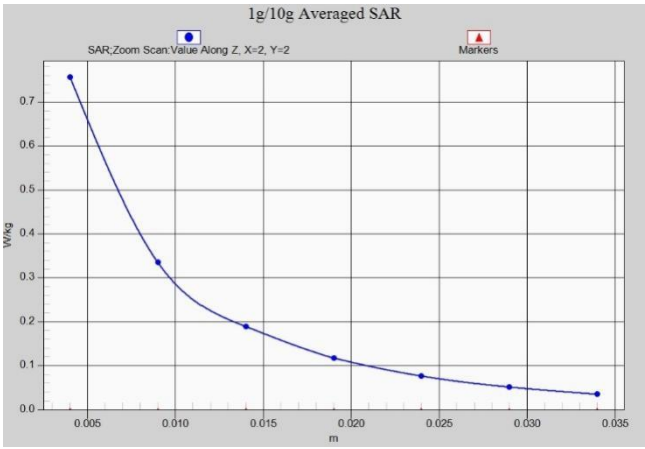

LTE Band17 Body 0mm ANT0

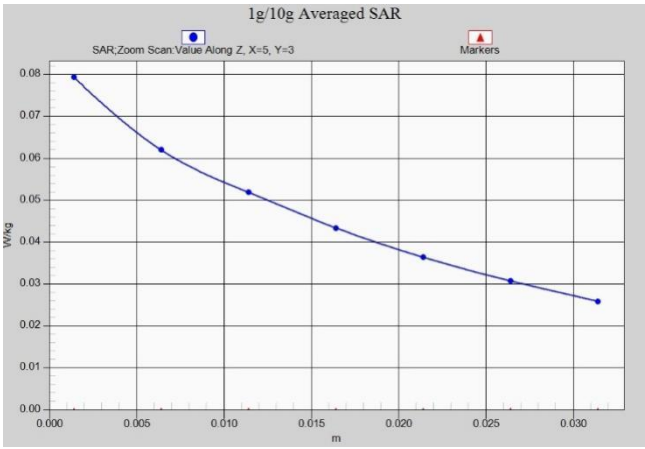

LTE Band17 Head ANT1

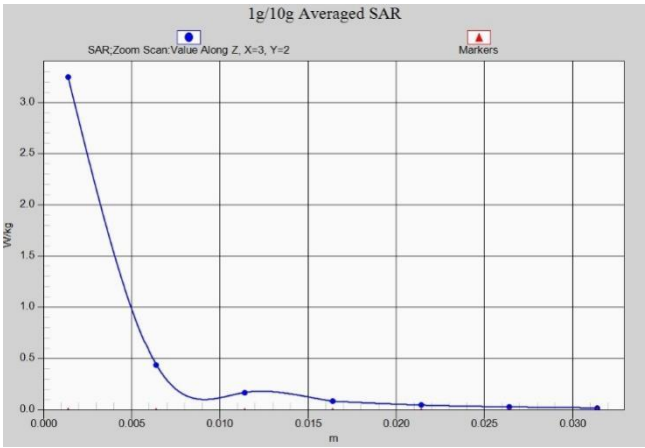

LTE Band17 Body 0mm ANT1

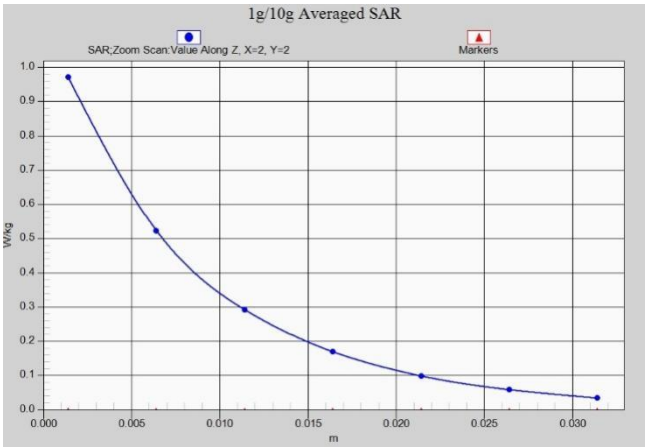

LTE Band25 Head ANT2

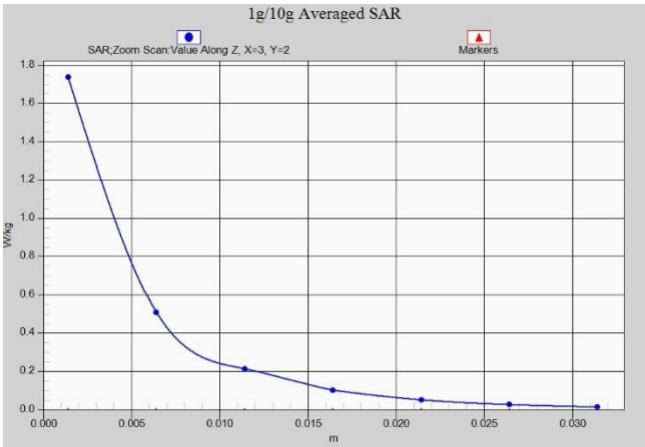

LTE Band25 Body 0mm ANT2

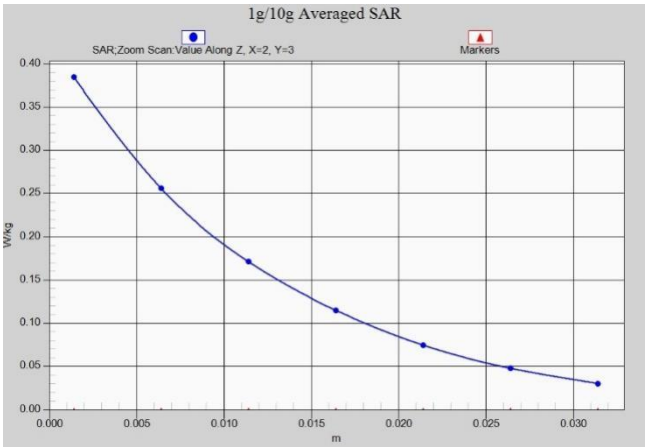

LTE Band25 Head ANT3

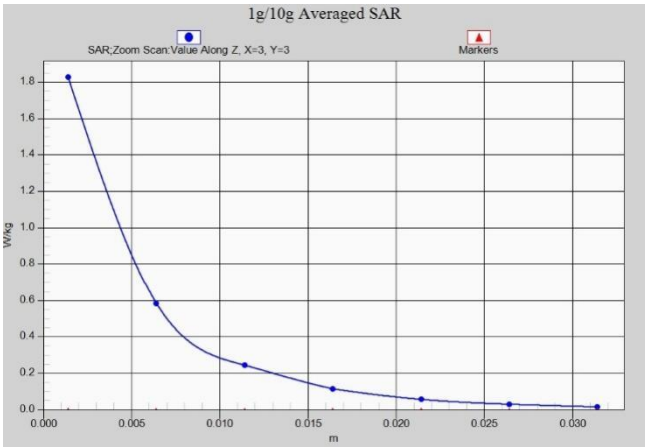

LTE Band25 Body 0mm ANT3

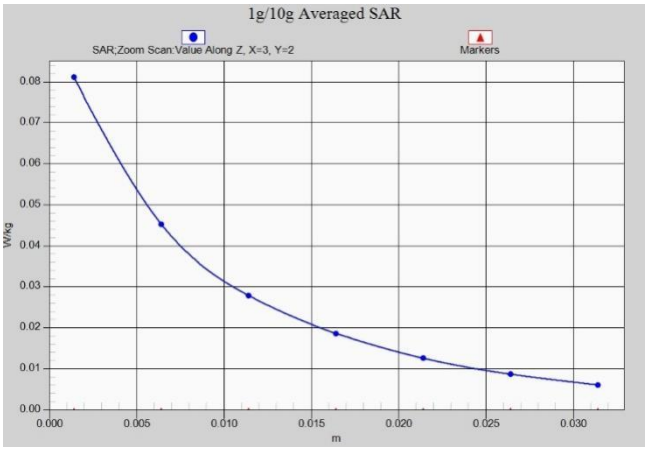

LTE Band25 Head ANT4

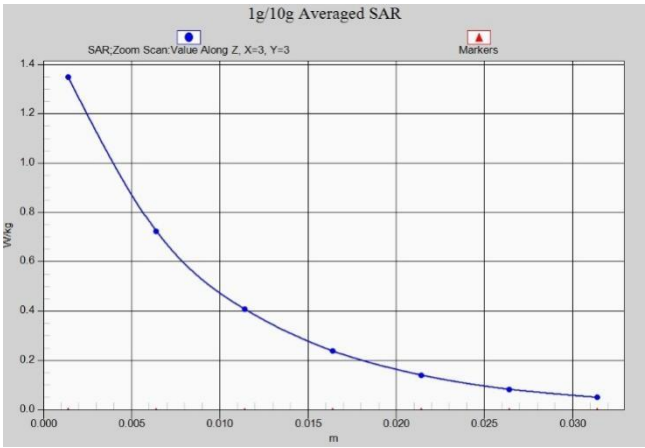

LTE Band25 Body 0mm ANT4

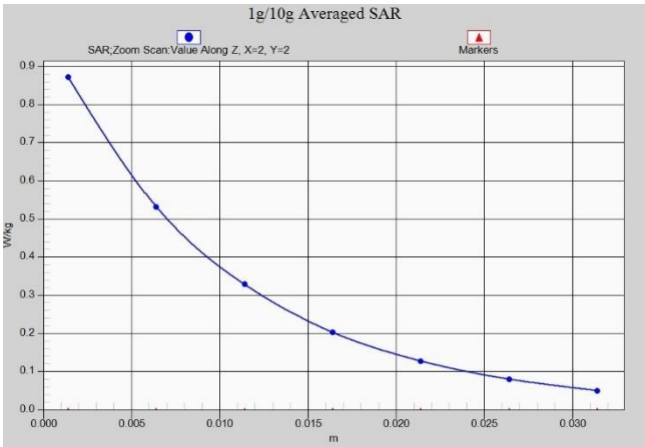

LTE Band25 Head ANT5

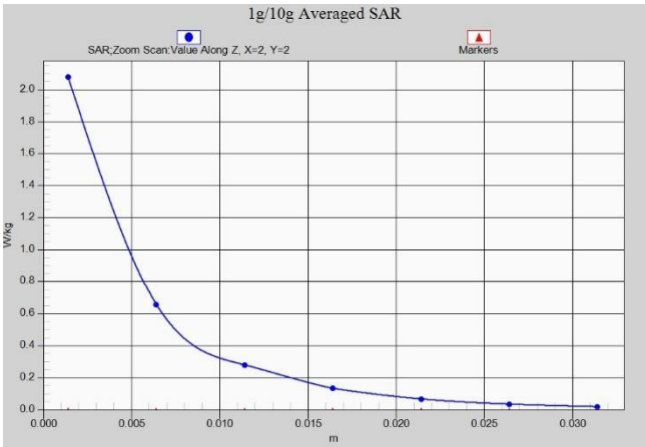

LTE Band25 Body 0mm ANT5