



FCC RF Test Report

APPLICANT : OnePlus Technology (Shenzhen) Co.,
Ltd
EQUIPMENT : Smart Phone
BRAND NAME : ONEPLUS
MODEL NAME : IN2015
FCC ID : 2ABZ2-EE103
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : (DSS) Spread Spectrum Transmitter

The product was received on Nov. 20, 2019 and testing was completed on Jan. 11, 2020. We, Sporton International (ShenZhen) Inc., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (ShenZhen) Inc., the test report shall not be reproduced except in full.

Reviewed by: Derreck Chen / Supervisor

Approved by: Eric Shih / Manager



Sporton International (ShenZhen) Inc.

1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055
People's Republic of China



TABLE OF CONTENTS

REVISION HISTORY.....	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION.....	5
1.1 Applicant.....	5
1.2 Manufacturer.....	5
1.3 Product Feature of Equipment Under Test.....	5
1.4 Product Specification of Equipment Under Test.....	6
1.5 Modification of EUT	6
1.6 Testing Location	7
1.7 Test Software.....	7
1.8 Applicable Standards.....	7
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST.....	8
2.1 Carrier Frequency Channel	8
2.2 Test Mode.....	9
2.3 Connection Diagram of Test System.....	10
2.4 Support Unit used in test configuration and system	11
2.5 EUT Operation Test Setup	11
2.6 Measurement Results Explanation Example.....	11
3 TEST RESULT	12
3.1 Number of Channel Measurement	12
3.2 Hopping Channel Separation Measurement	15
3.3 Dwell Time Measurement.....	26
3.4 20dB and 99%Bandwidth Measurement	29
3.5 Output Power Measurement.....	50
3.6 Conducted Band Edges Measurement.....	51
3.7 Conducted Spurious Emission Measurement	65
3.8 Radiated Band Edges and Spurious Emission Measurement	84
3.9 AC Conducted Emission Measurement.....	88
3.10 Antenna Requirements.....	90
4 LIST OF MEASURING EQUIPMENT.....	91
5 UNCERTAINTY OF EVALUATION.....	92
APPENDIX A. CONDUCTED TEST RESULTS	
APPENDIX B. AC CONDUCTED EMISSION TEST RESULT	
APPENDIX C. RADIATED SPURIOUS EMISSION	
APPENDIX D. DUTY CYCLE PLOTS	
APPENDIX E. SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR9N2025-02A	Rev. 01	Initial issue of report	Mar. 19, 2020

SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(1)	Number of Channels	$\geq 15\text{Chs}$	Pass	-
3.2	15.247(a)(1)	Hopping Channel Separation	$\geq 2/3$ of 20dB BW	Pass	-
3.3	15.247(a)(1)	Dwell Time of Each Channel	$\leq 0.4\text{sec}$ in 31.6sec period	Pass	-
3.4	15.247(a)(1)	20dB Bandwidth	NA	Pass	-
3.4	-	99% Bandwidth	-	Pass	-
3.5	15.247(b)(1)	Peak Output Power	$\leq 125\text{ mW}$	Pass	-
3.6	15.247(d)	Conducted Band Edges	$\leq 20\text{dBc}$	Pass	-
3.7	15.247(d)	Conducted Spurious Emission	$\leq 20\text{dBc}$	Pass	-
3.8	15.247(d)	Radiated Band Edges and Radiated Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 9.45 dB at 30.000 MHz
3.9	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 12.62 dB at 0.470 MHz
3.10	15.203 & 15.247(b)	Antenna Requirement	N/A	Pass	-

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.



1 General Description

1.1 Applicant

OnePlus Technology (Shenzhen) Co., Ltd

18C02, 18C03, 18C04 and 18C05, Shum Yip Terra Building, Binhe Avenue North, Futian District, Shenzhen

1.2 Manufacturer

OnePlus Technology (Shenzhen) Co., Ltd

18C02, 18C03, 18C04 and 18C05, Shum Yip Terra Building, Binhe Avenue North, Futian District, Shenzhen

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Smart Phone
Brand Name	ONEPLUS
Model Name	IN2015
FCC ID	2ABZ2-EE103
EUT supports Radios application	CDMA/ GSM/ WCDMA/ LTE / 5G NR WLAN 2.4GHz 802.11b/g/n (HT20) WLAN 2.4GHz 802.11ax (HE20/HE40) WLAN 5GHz 802.11a/n/ac (HT20/HT40/VHT20/VHT40/VHT80) WLAN 5GHz 802.11ax (HE20/HE40/HE80) Bluetooth BR / EDR / LE GNSS / NFC
IMEI/MEID Code	Conducted: 99001575002227 Conduction: 001003902897498 Radiation: 001003902672834
HW Version	15
SW Version	Oxygen OS 10.5.IN21AA
EUT Stage	Production Unit

Remark:

1. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.
2. This is a variant report, the difference is to change the model name and SW version for market segment. The change has no influence on the test results, all the test results are leveraged from original report FR9N2025-01A

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Frequency Range	2402 MHz ~ 2480 MHz
Number of Channels	79
Carrier Frequency of Each Channel	2402+n*1 MHz; n=0~78
Maximum Output Power to Antenna	Ant. 1: Bluetooth BR(1Mbps) : 17.80 dBm (0.0603 W) Bluetooth EDR (2Mbps) : 17.50 dBm (0.0562 W) Bluetooth EDR (3Mbps) : 17.90 dBm (0.0617 W) Ant. 2: Bluetooth BR(1Mbps) : 17.50 dBm (0.0562 W) Bluetooth EDR (2Mbps) : 16.10 dBm (0.0407 W) Bluetooth EDR (3Mbps) : 16.50 dBm (0.0447 W)
99% Occupied Bandwidth	Ant. 1: Bluetooth BR(1Mbps) : 0.828MHz Bluetooth EDR (2Mbps) : 1.172MHz Bluetooth EDR (3Mbps) : 1.152MHz Ant. 2: Bluetooth BR(1Mbps) : 0.828MHz Bluetooth EDR (2Mbps) : 1.172MHz Bluetooth EDR (3Mbps) : 1.152MHz
Antenna Type / Gain	Ant. 1: PIFA Antenna type with gain -2.80 dBi Ant. 2: PIFA Antenna type with gain -3.00 dBi
Type of Modulation	Bluetooth BR (1Mbps) : GFSK Bluetooth EDR (2Mbps) : $\pi/4$ -DQPSK Bluetooth EDR (3Mbps) : 8-DPSK

Note:

1. For Radiation testing, the whole testing has assessed only Ant 1 by referring to their higher conducted power.
2. The Antenna 1 and Antenna 2 can't transmit simultaneously.

1.5 Modification of EUT

No modifications are made to the EUT during all test items.



1.6 Testing Location

Sporton International (Shenzhen) Inc. is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

Test Firm	Sporton International (Shenzhen) Inc.		
Test Site Location	1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055 People's Republic of China TEL: +86-755-86379589 FAX: +86-755-86379595		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	CO01-SZ TH01-SZ	CN1256	421272

Test Firm	Sporton International (Shenzhen) Inc.		
Test Site Location	No. 3 Bldg the third floor of south, Shahe River west, Fengzeyuan Warehouse, Nanshan Shenzhen, 518055 People's Republic of China TEL: +86-755-33202398		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	03CH02-SZ	CN1256	421272

1.7 Test Software

Item	Site	Manufacture	Name	Version
1.	03CH02-SZ	AUDIX	E3	6.2009-8-24a
2.	CO01-SZ	AUDIX	E3	6.120613b

1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR Part 15 Subpart C §15.247
- FCC KDB 558074 D01 15.247 Meas Guidance v05r02
- ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	0	2402	27	2429	54	2456
	1	2403	28	2430	55	2457
	2	2404	29	2431	56	2458
	3	2405	30	2432	57	2459
	4	2406	31	2433	58	2460
	5	2407	32	2434	59	2461
	6	2408	33	2435	60	2462
	7	2409	34	2436	61	2463
	8	2410	35	2437	62	2464
	9	2411	36	2438	63	2465
	10	2412	37	2439	64	2466
	11	2413	38	2440	65	2467
	12	2414	39	2441	66	2468
	13	2415	40	2442	67	2469
	14	2416	41	2443	68	2470
	15	2417	42	2444	69	2471
	16	2418	43	2445	70	2472
	17	2419	44	2446	71	2473
	18	2420	45	2447	72	2474
	19	2421	46	2448	73	2475
	20	2422	47	2449	74	2476
	21	2423	48	2450	75	2477
	22	2424	49	2451	76	2478
	23	2425	50	2452	77	2479
	24	2426	51	2453	78	2480
	25	2427	52	2454	-	-
	26	2428	53	2455	-	-

2.2 Test Mode


- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Z plane) were recorded in this report, and the worst mode of radiated spurious emissions is Bluetooth 3Mbps mode, and recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

The following summary table is showing all test modes to demonstrate in compliance with the standard.


Summary table of Test Cases			
Test Item	Data Rate / Modulation		
	Bluetooth BR 1Mbps GFSK	Bluetooth EDR 2Mbps $\pi/4$ -DQPSK	Bluetooth EDR 3Mbps 8-DPSK
Conducted Test Cases	Mode 1: CH00_2402 MHz	Mode 4: CH00_2402 MHz	Mode 7: CH00_2402 MHz
	Mode 2: CH39_2441 MHz	Mode 5: CH39_2441 MHz	Mode 8: CH39_2441 MHz
	Mode 3: CH78_2480 MHz	Mode 6: CH78_2480 MHz	Mode 9: CH78_2480 MHz
Radiated Test Cases	Bluetooth EDR 3Mbps 8-DPSK		
	Mode 1: CH00_2402 MHz Mode 2: CH39_2441 MHz Mode 3: CH78_2480 MHz		
AC Conducted Emission	Mode 1 : GSM 850 Idle + Bluetooth Link + WLAN Link (2.4G) + USB Cable1 (Charging from Adapter1) + Battery2		
Remark:			
1. For radiated test cases, the worst mode data rate 3Mbps was reported only, because this data rate has the highest RF output power at preliminary tests, and no other significantly frequencies found in conducted spurious emission.			
2. For Radiated Test Cases, The tests were performed with Adapter 1 and USB Cable 1.			

2.3 Connection Diagram of Test System

For Radiation

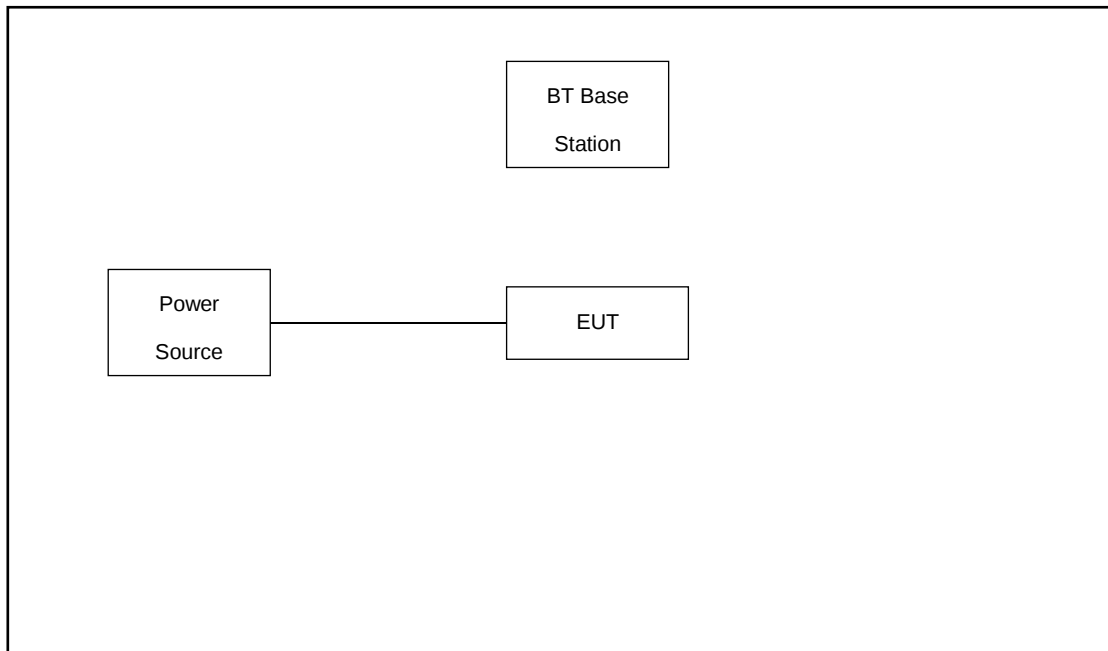

For Conducted Emission

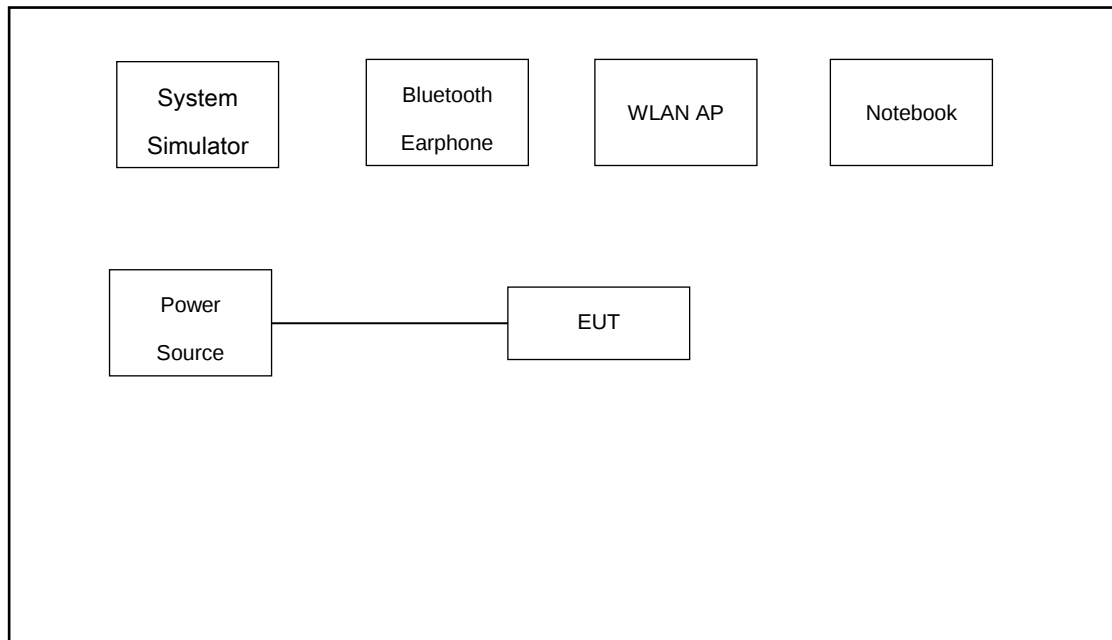

2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	Anritsu	MT8820C	N/A	N/A	Unshielded,1.8m
2.	Bluetooth Earphone	Samsung	EO-MG900	N/A	N/A	N/A
3.	Notebook	Lenovo	E540	FCC DoC	N/A	AC I/P : Unshielded, 1.2m DC O/P : Shielded, 1.8m
4.	Bluetooth Base station	R&S	CBT	N/A	N/A	Unshielded,1.8m
5.	WLAN AP	D-Link	DIR-820L	KA2IR820LA1	N/A	Unshielded,1.8m

2.5 EUT Operation Test Setup

For Bluetooth function, the engineering test program was provided and enabled to make EUT connect with Bluetooth base station to continuous transmit/receive.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example:

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 5.0 dB and attenuator factor 10 dB.

$$\begin{aligned}
 \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\
 &= 5.0 \text{ (dB)} + 10 \text{ (dB)} \\
 &= 15.0 \text{ (dB)}
 \end{aligned}$$

3 Test Result

3.1 Number of Channel Measurement

3.1.1 Limits of Number of Hopping Frequency

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedure

1. The testing follows ANSI C63.10-2013 clause 7.8.3.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Enable the EUT hopping function.
5. Use the following spectrum analyzer settings: Span = the frequency band of operation;
RBW = 300kHz; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold.
6. The number of hopping frequency used is defined as the number of total channel.
7. Record the measurement data derived from spectrum analyzer.

3.1.4 Test Setup

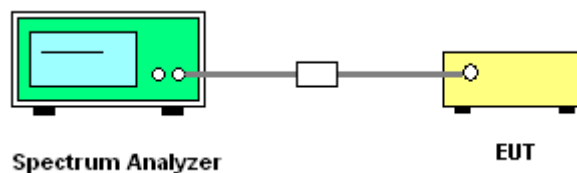


3.1.5 Test Result of Number of Hopping Frequency

Please refer to Appendix A.




Number of Hopping Channel Plot on Channel 00 – 78

For Ant1:

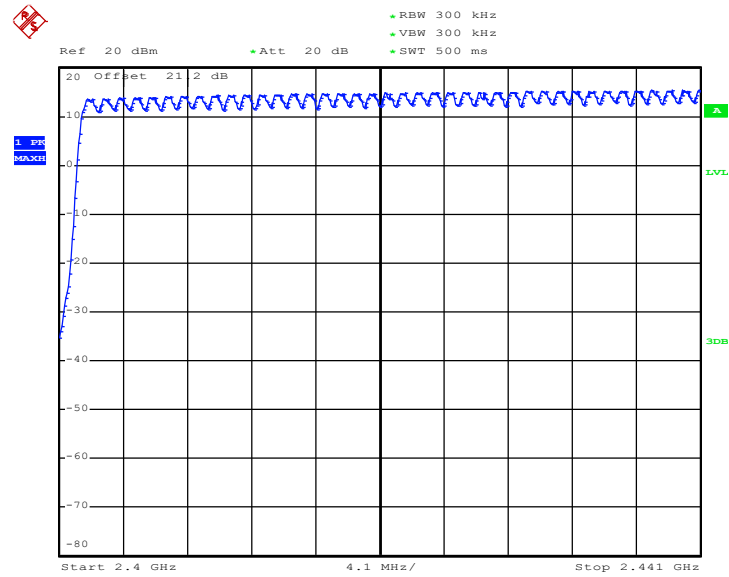

Date: 5.JAN.2020 14:14:50

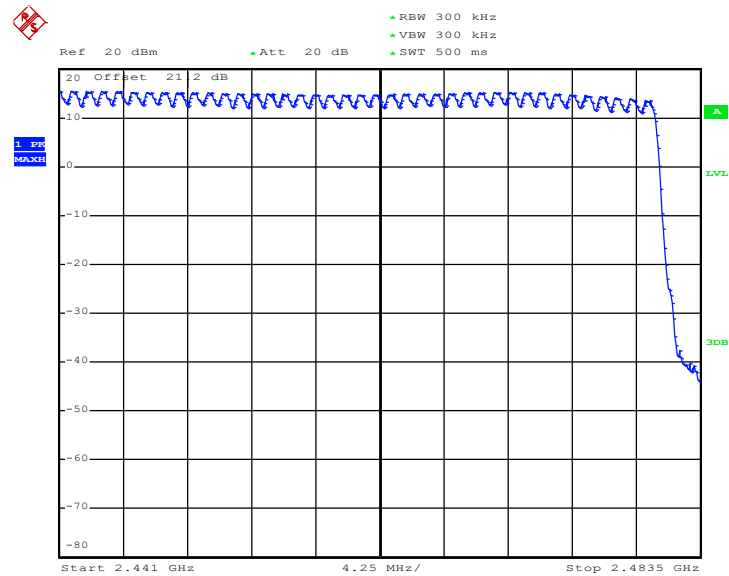


Date: 5.JAN.2020 14:19:55




Number of Hopping Channel Plot on Channel 00 – 78

For Ant2:

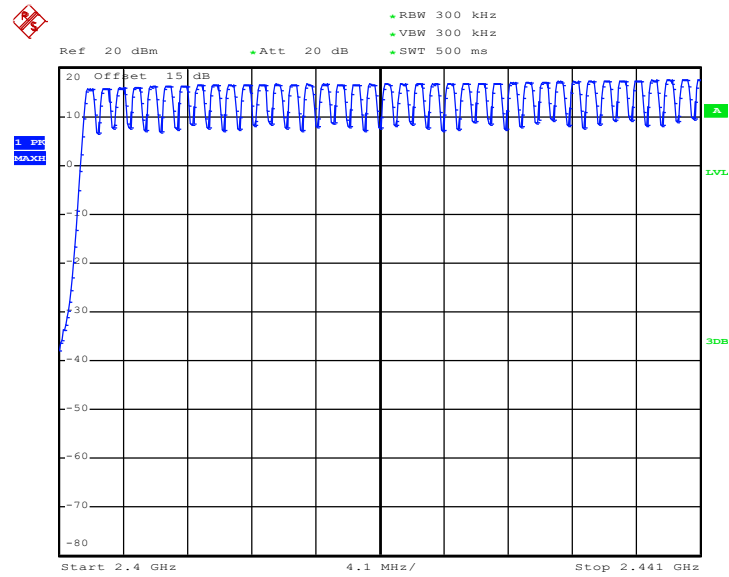

Date: 11.JAN.2020 18:05:36

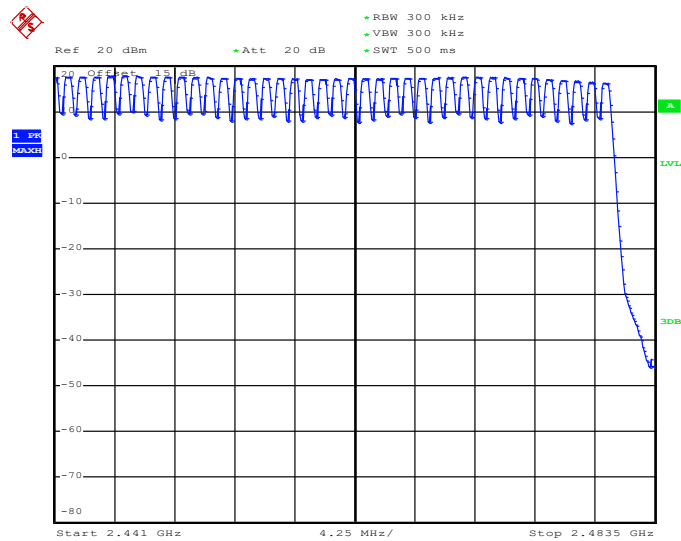

Date: 11.JAN.2020 18:11:16

3.2 Hopping Channel Separation Measurement

3.2.1 Limit of Hopping Channel Separation

Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.


3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.2.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 7.8.2.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Enable the EUT hopping function.
5. Use the following spectrum analyzer settings:
Span = wide enough to capture the peaks of two adjacent channels;
RBW = 300kHz; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold.
6. Measure and record the results in the test report.

3.2.4 Test Setup

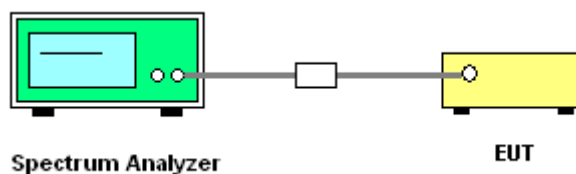

3.2.5 Test Result of Hopping Channel Separation


Please refer to Appendix A.



For Ant1:


<1Mbps>

Channel Separation Plot on Channel 00 - 01

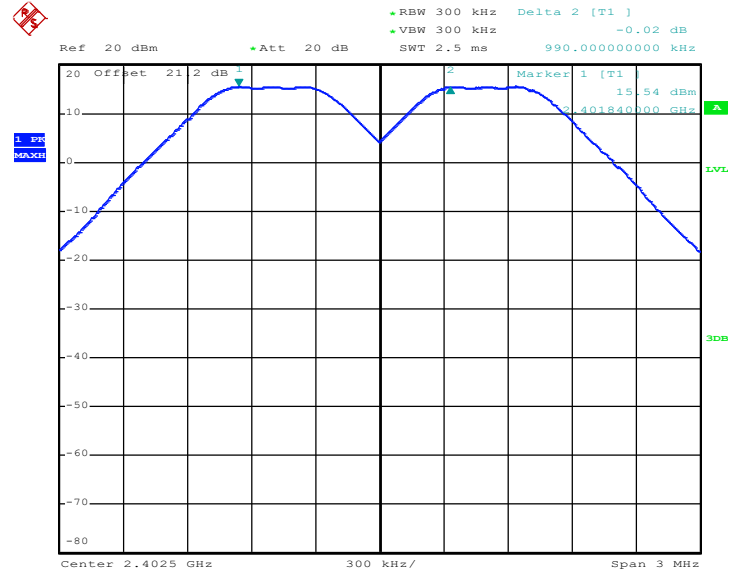

Date: 5.JAN.2020 13:06:37


Channel Separation Plot on Channel 39 - 40

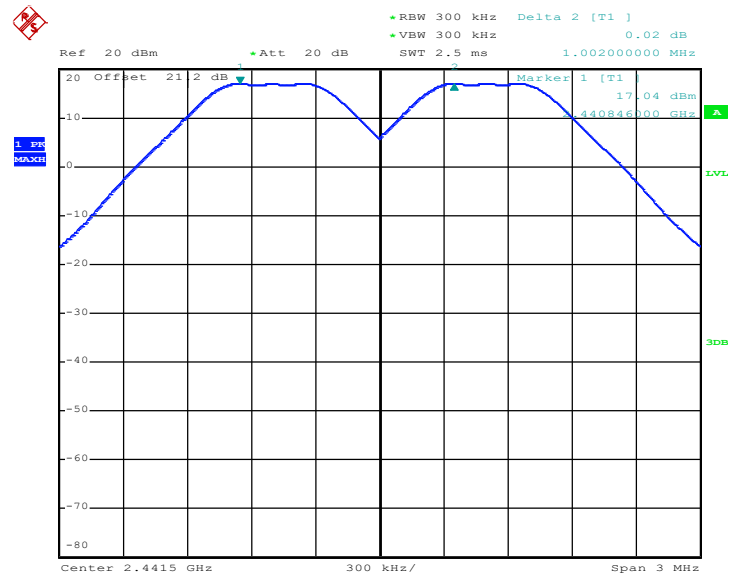

Date: 5.JAN.2020 13:10:33




Channel Separation Plot on Channel 77 - 78

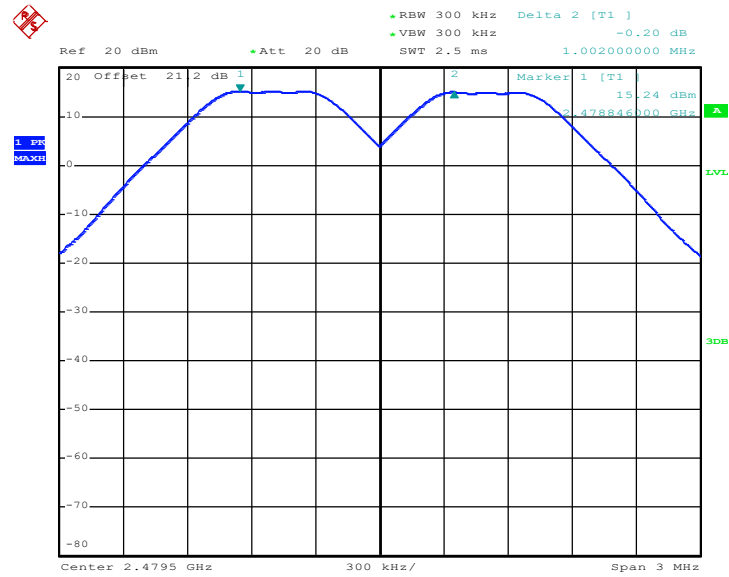

Date: 5.JAN.2020 13:15:28

<2Mbps>


Channel Separation Plot on Channel 00 - 01

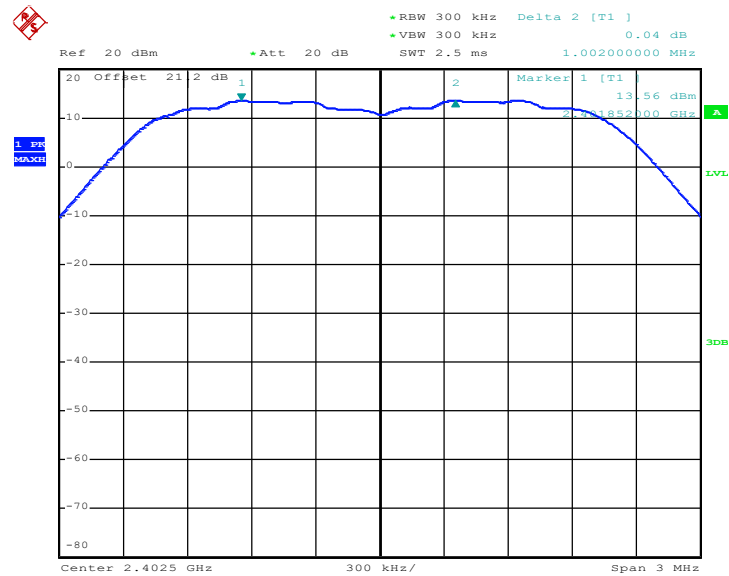

Date: 5.JAN.2020 13:46:44




Channel Separation Plot on Channel 39 - 40

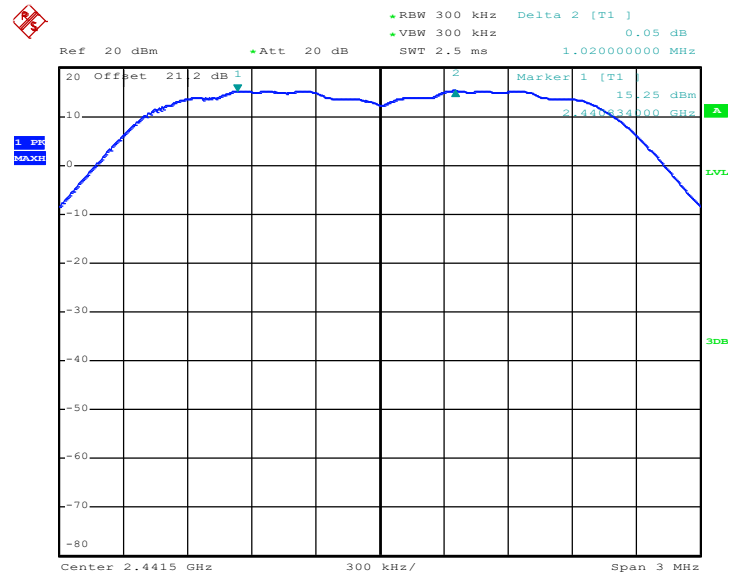

Date: 5.JAN.2020 13:51:46

Channel Separation Plot on Channel 77 - 78

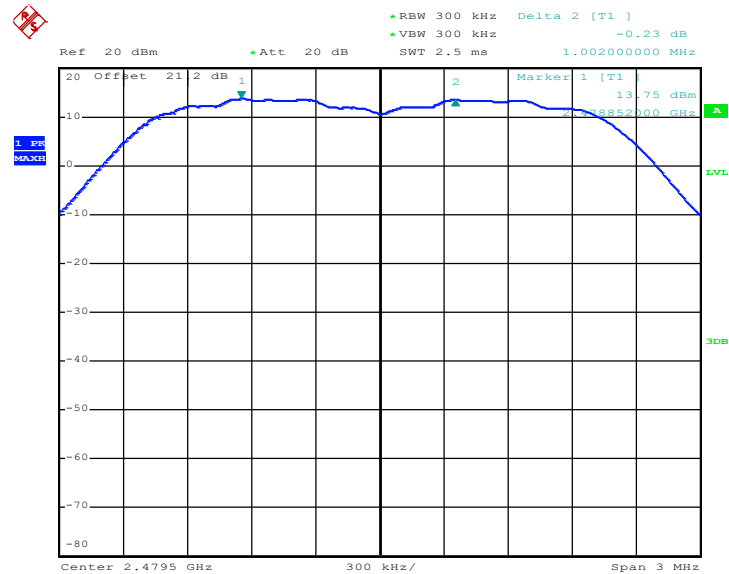


Date: 5.JAN.2020 13:58:20




<3Mbps>

Channel Separation Plot on Channel 00 - 01

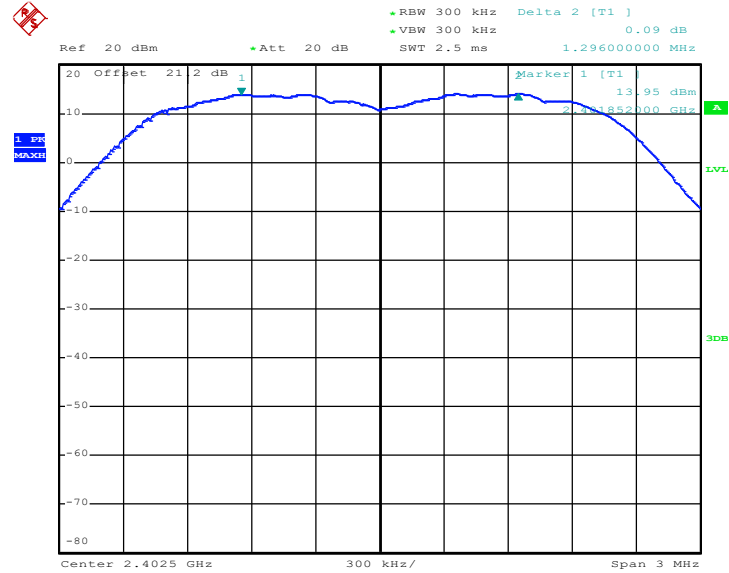

Date: 5.JAN.2020 16:08:40


Channel Separation Plot on Channel 39 - 40

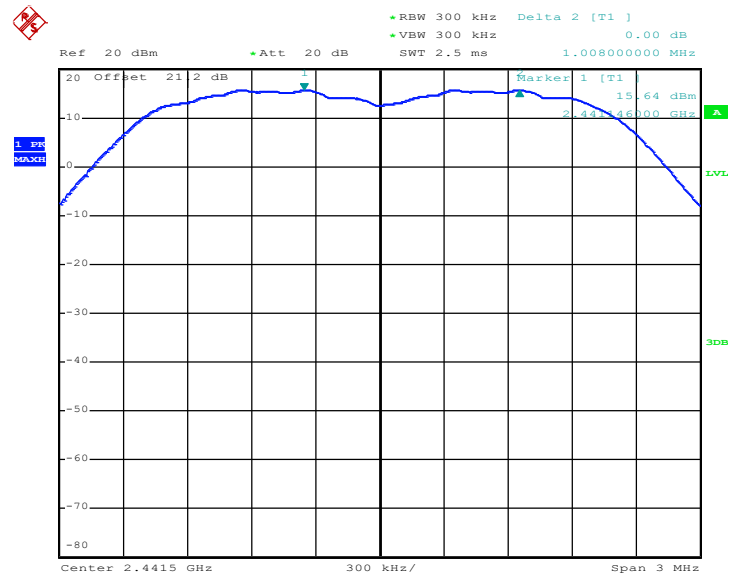

Date: 5.JAN.2020 15:34:01



Channel Separation Plot on Channel 77 - 78

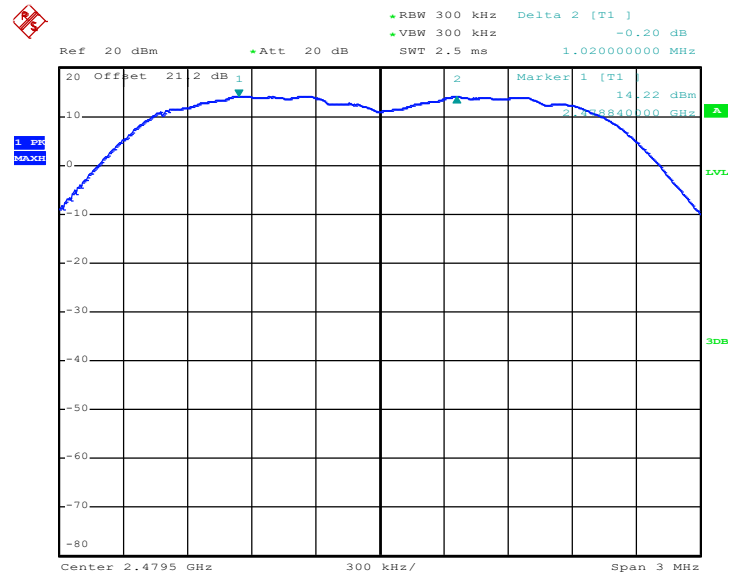


Date: 5.JAN.2020 16:04:33



For Ant2:


<1Mbps>

Channel Separation Plot on Channel 00 - 01

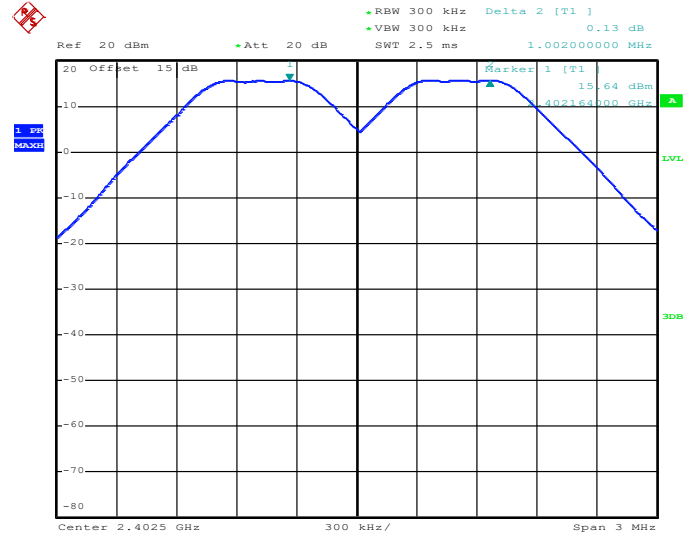

Date: 11.JAN.2020 15:26:53


Channel Separation Plot on Channel 39 - 40

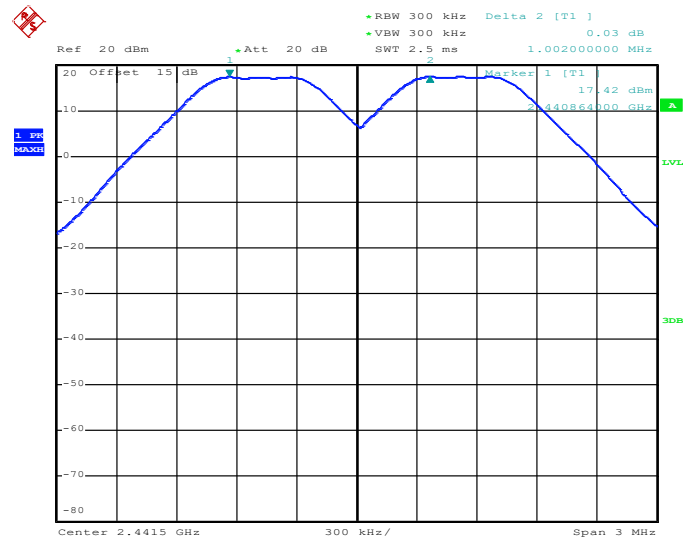

Date: 11.JAN.2020 17:37:32




Channel Separation Plot on Channel 77 - 78

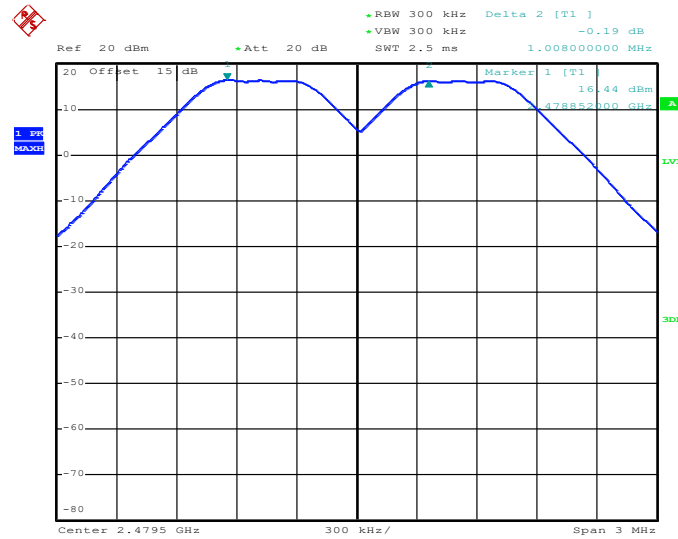

Date: 11.JAN.2020 15:53:21


<2Mbps>

Channel Separation Plot on Channel 00 - 01

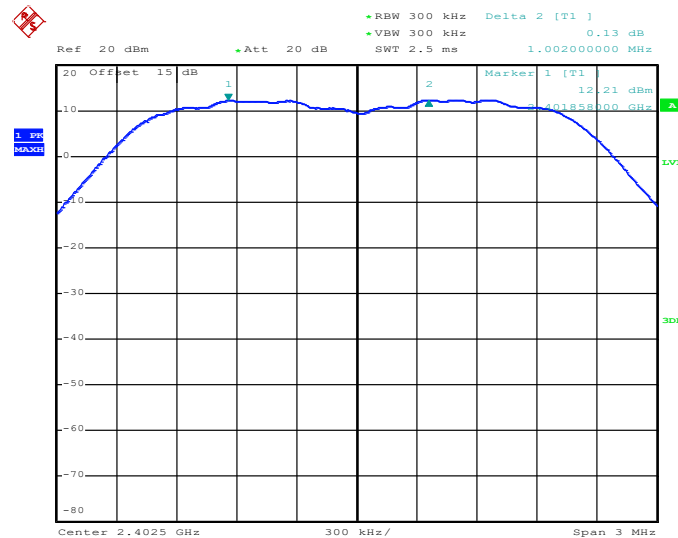


Date: 11.JAN.2020 16:07:17

Channel Separation Plot on Channel 39 - 40

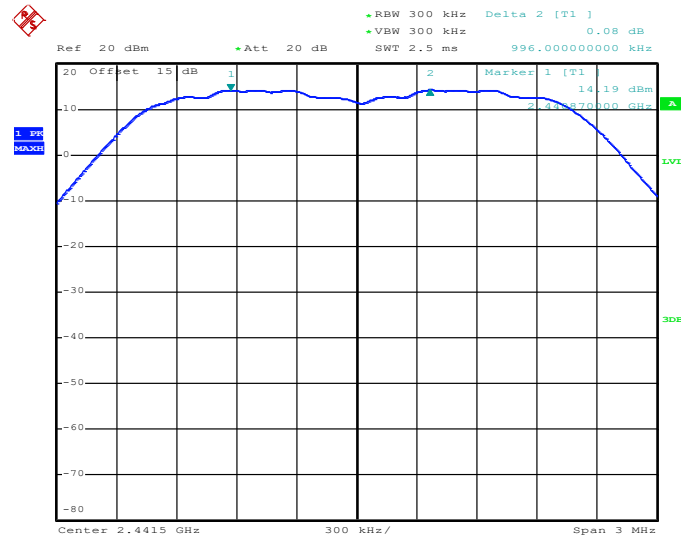

Date: 11.JAN.2020 17:36:22

Channel Separation Plot on Channel 77 - 78

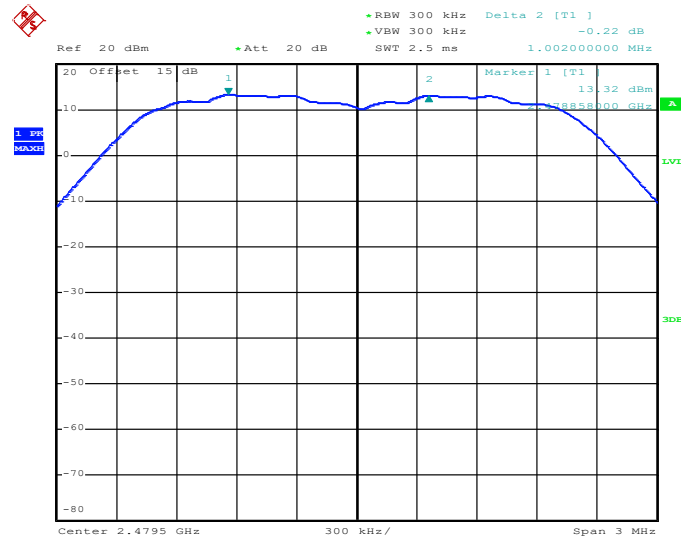


Date: 11.JAN.2020 16:41:28




<3Mbps>

Channel Separation Plot on Channel 00 - 01

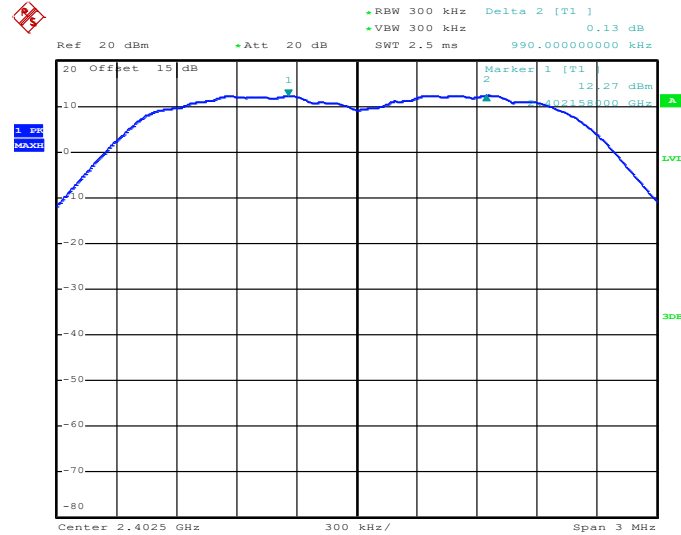


Date: 11.JAN.2020 16:59:50

Channel Separation Plot on Channel 39 - 40

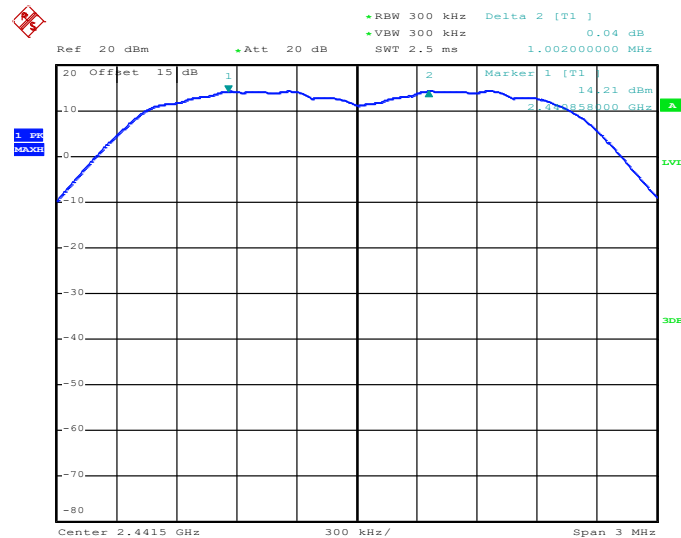

Date: 11.JAN.2020 17:31:37

Channel Separation Plot on Channel 77 - 78

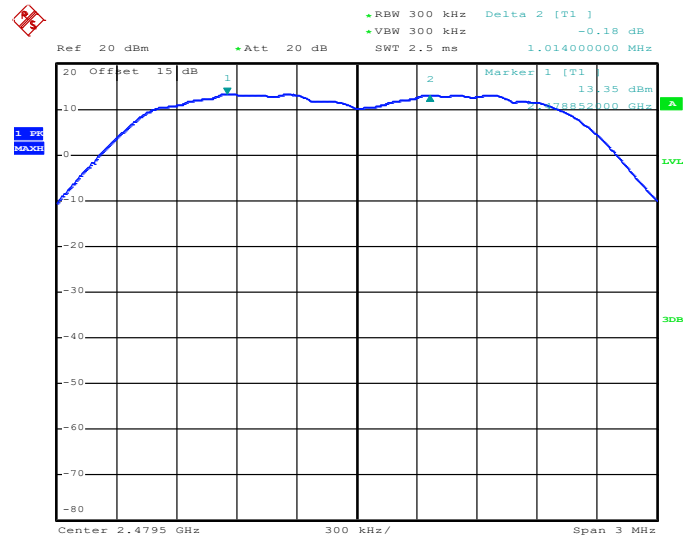

Date: 11.JAN.2020 17:16:32

3.3 Dwell Time Measurement

3.3.1 Limit of Dwell Time

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.


3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 7.8.4.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Enable the EUT hopping function.
5. Use the following spectrum analyzer settings: Span = zero span, centered on a hopping channel; RBW = 1 MHz; VBW $\geq$ RBW; Sweep = as necessary to capture the entire dwell time per hopping channel; Detector function = peak; Trace = max hold.
6. Measure and record the results in the test report.

3.3.4 Test Setup

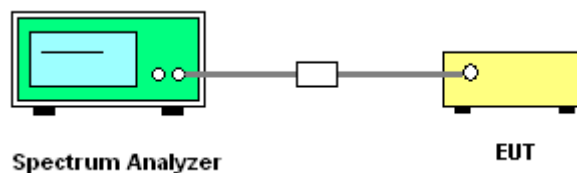




3.3.5 Test Result of Dwell Time

Please refer to Appendix A.


For ant 1:

Package Transfer Time Plot

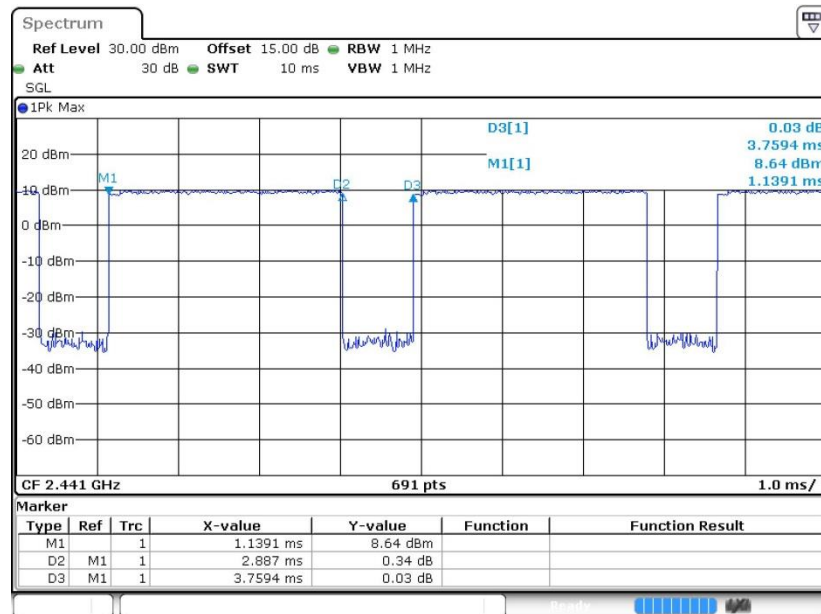

For ant 2:

Package Transfer Time Plot

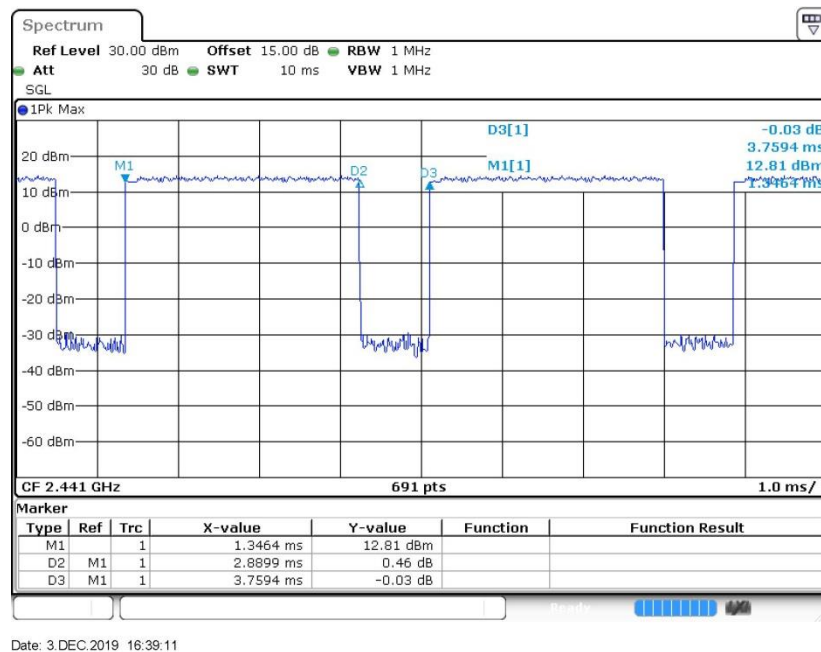

**Remark:**

1. In normal mode, hopping rate is 1600 hops/s with 6 slots (5 Transmit and 1 Receive slot) in 79 hopping channels.
With channel hopping rate $(1600 / 6 / 79)$ in Occupancy Time Limit (0.4×79) (s),
Hops Over Occupancy Time comes to $(1600 / 6 / 79) \times (0.4 \times 79) = 106.67$ hops.
2. In AFH mode, hopping rate is 800 hops/s with 6 slots in 20 hopping channels.
With channel hopping rate $(800 / 6 / 20)$ in Occupancy Time Limit (0.4×20) (s),
Hops Over Occupancy Time comes to $(800 / 6 / 20) \times (0.4 \times 20) = 53.33$ hops.
3. Dwell Time(s) = Hops Over Occupancy Time (hops) x Package Transfer Time

3.4 20dB and 99%Bandwidth Measurement

3.4.1 Limit of 20dB and 99%Bandwidth

Reporting only


3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.4.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 6.9.2 and 6.9.3.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Use the following spectrum analyzer settings for 20dB Bandwidth measurement.
Span = approximately 2 to 5 times the 20 dB bandwidth, centered on a hopping channel;
RBW $\geq$ 1% of the 20 dB bandwidth; VBW $\geq$ RBW; Sweep = auto; Detector function = peak;
Trace = max hold.
5. Use the following spectrum analyzer settings for 99 % Bandwidth measurement.
Span = approximately 1.5 to 5 times the 99% bandwidth, centered on a hopping channel;
RBW $\geq$ 1% of the 99% bandwidth; VBW $\geq$ RBW; Sweep = auto; Detector function = sample;
Trace = max hold.
6. Measure and record the results in the test report.

3.4.4 Test Setup

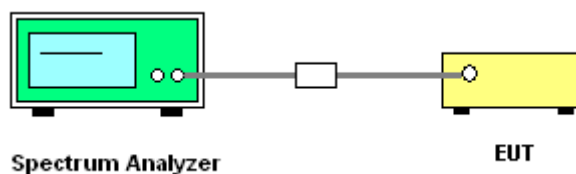


3.4.5 Test Result of 20dB Bandwidth

Please refer to Appendix A.

For ant 1:


<1Mbps>

20 dB Bandwidth Plot on Channel 00

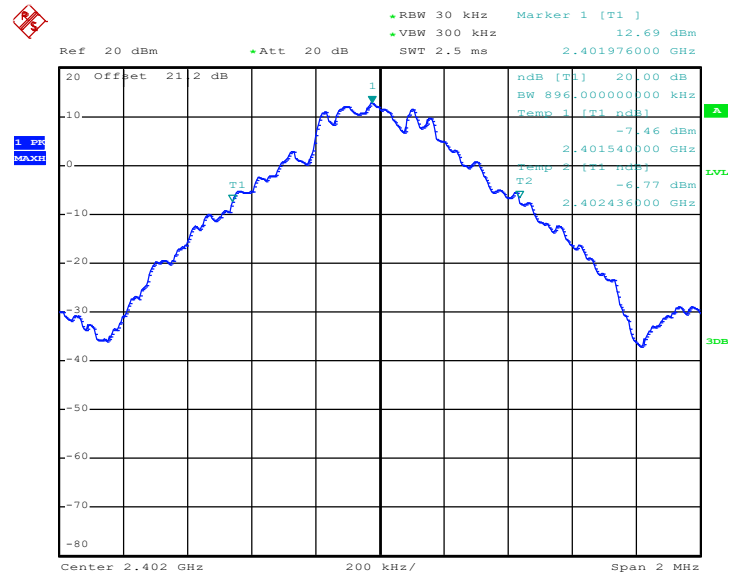

Date: 5.JAN.2020 13:05:49


20 dB Bandwidth Plot on Channel 39

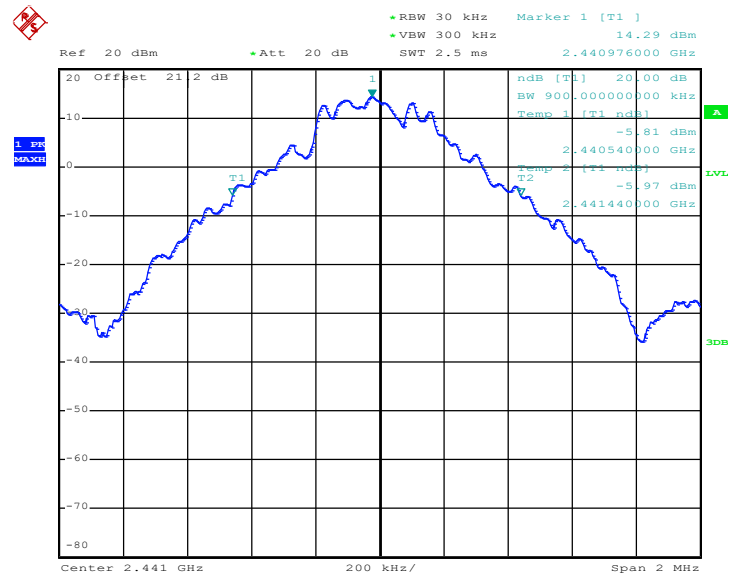

Date: 5.JAN.2020 13:09:37




20 dB Bandwidth Plot on Channel 78

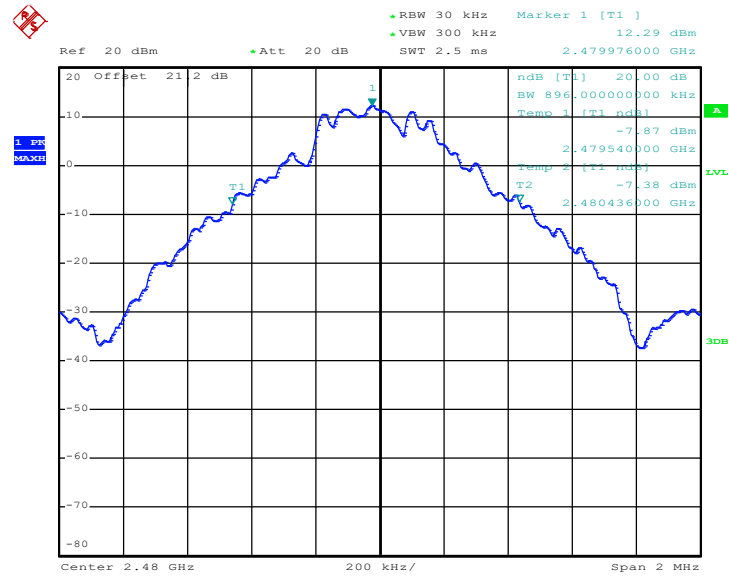

Date: 5.JAN.2020 13:14:26

<2Mbps>


20 dB Bandwidth Plot on Channel 00

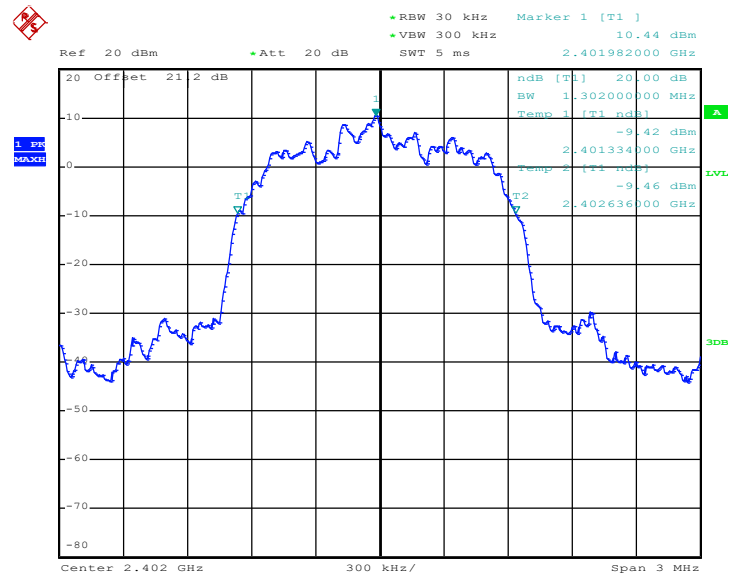

Date: 5.JAN.2020 13:45:54




20 dB Bandwidth Plot on Channel 39

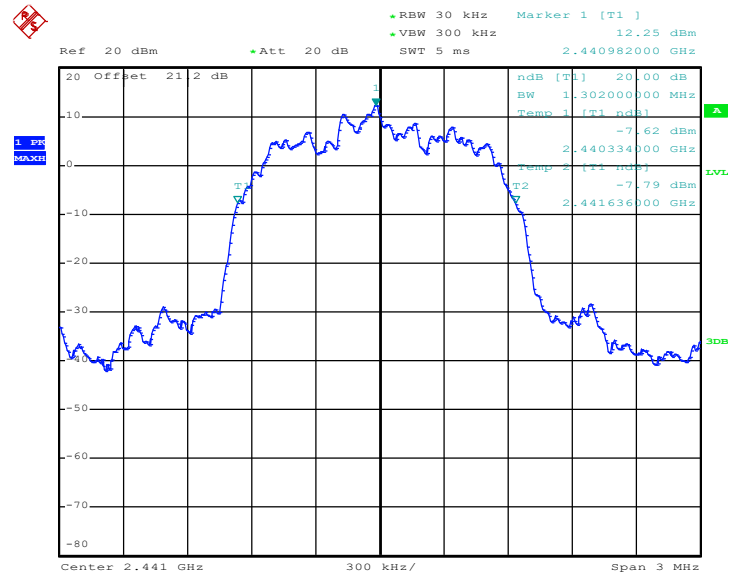

Date: 5.JAN.2020 13:50:49

20 dB Bandwidth Plot on Channel 78

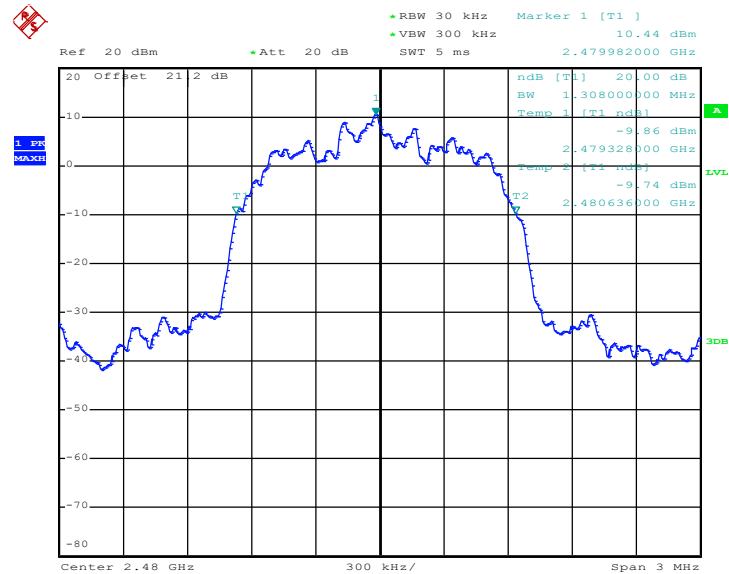


Date: 5.JAN.2020 13:59:26




<3Mbps>

20 dB Bandwidth Plot on Channel 00

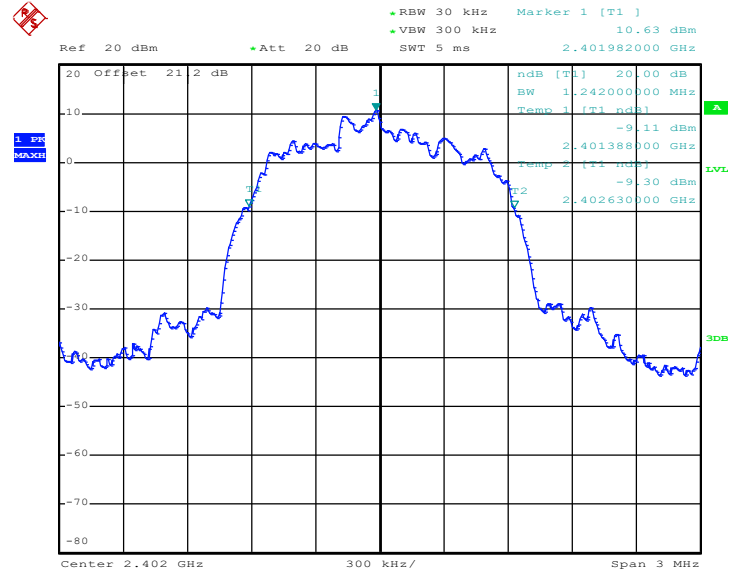

Date: 5.JAN.2020 15:21:49


20 dB Bandwidth Plot on Channel 39

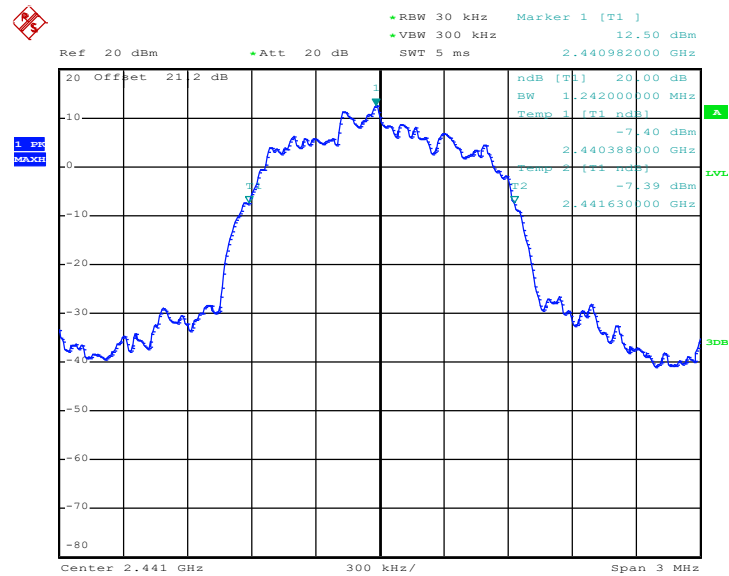

Date: 5.JAN.2020 15:31:27



20 dB Bandwidth Plot on Channel 78

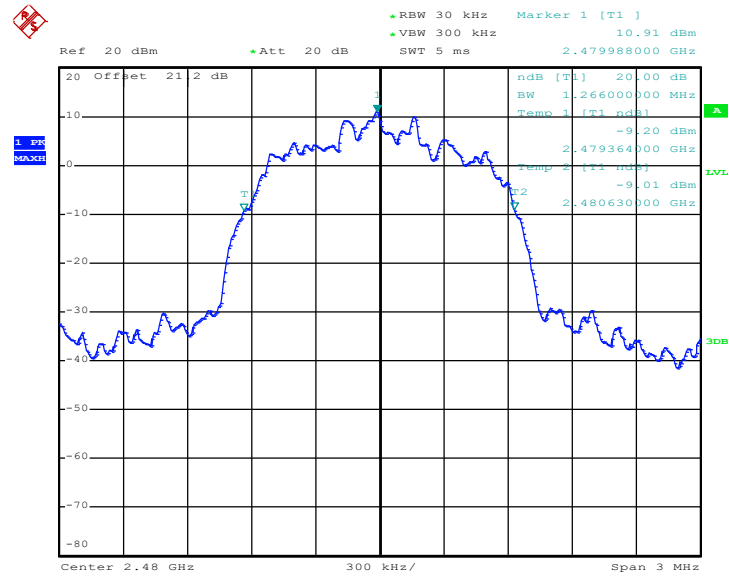


Date: 5.JAN.2020 16:02:53



For ant 2:


<1Mbps>

20 dB Bandwidth Plot on Channel 00

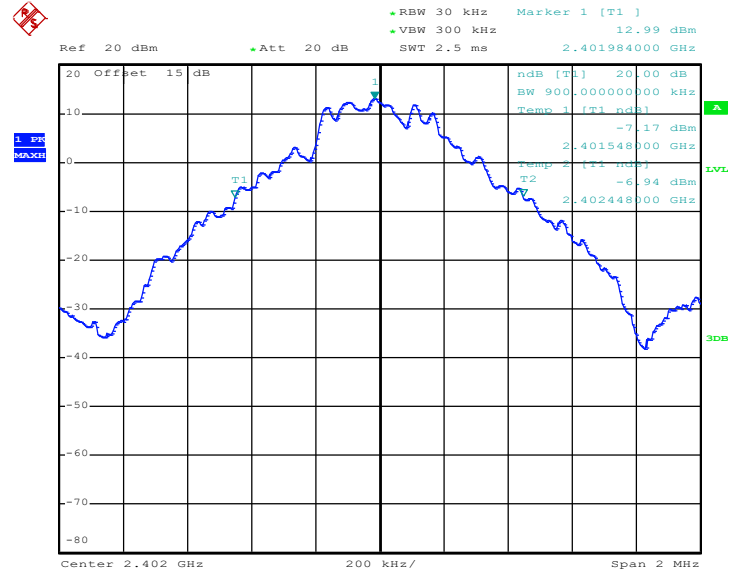

Date: 11.JAN.2020 15:27:26


20 dB Bandwidth Plot on Channel 39

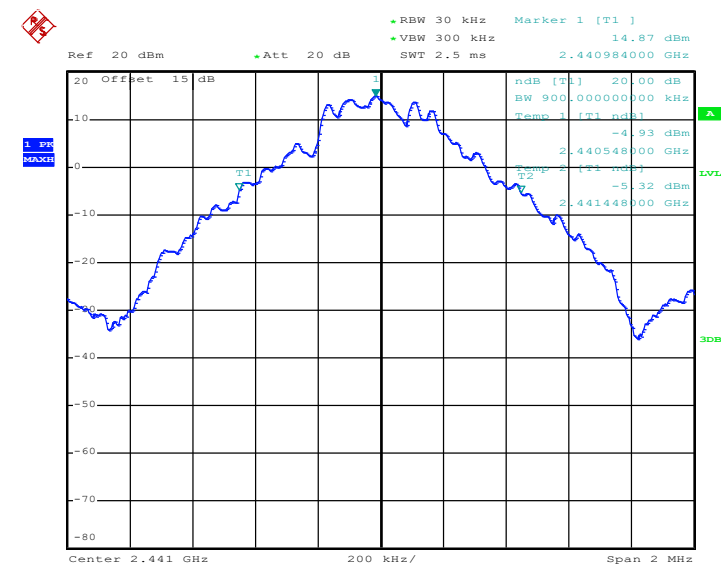

Date: 11.JAN.2020 15:59:32




20 dB Bandwidth Plot on Channel 78

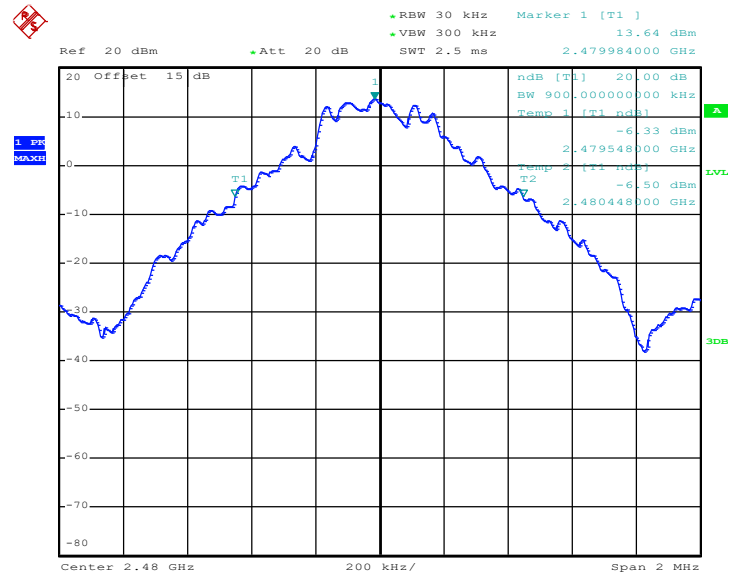

Date: 11.JAN.2020 15:53:47

<2Mbps>


20 dB Bandwidth Plot on Channel 00

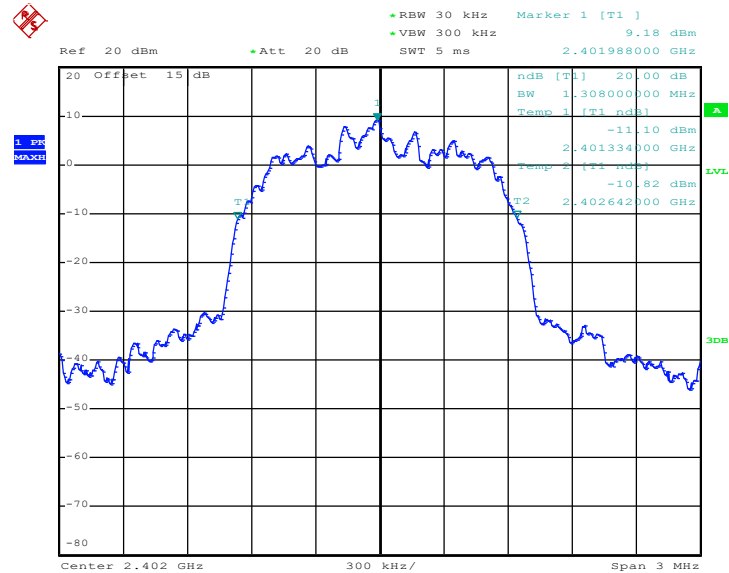

Date: 11.JAN.2020 16:06:22




20 dB Bandwidth Plot on Channel 39

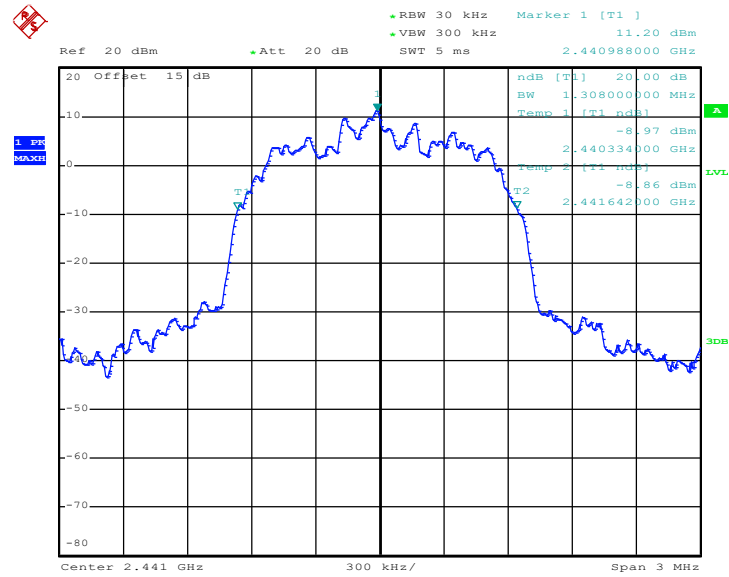

Date: 11.JAN.2020 16:49:12

20 dB Bandwidth Plot on Channel 78

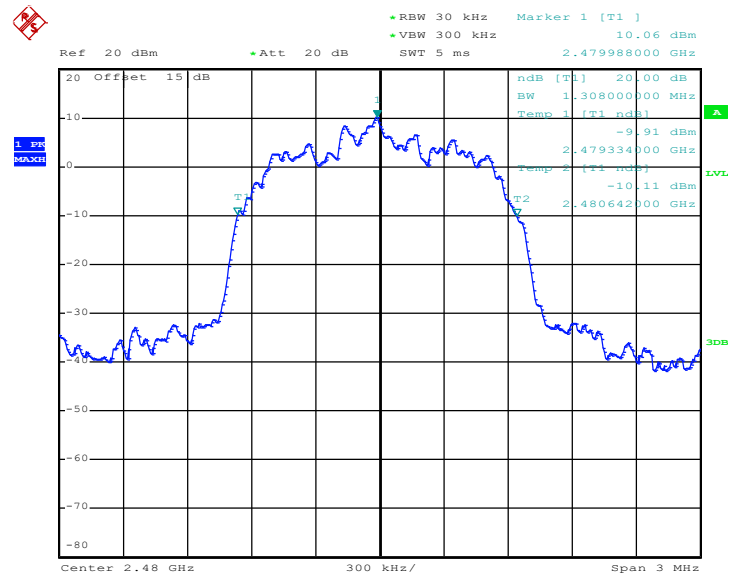


Date: 11.JAN.2020 16:42:45




<3Mbps>

20 dB Bandwidth Plot on Channel 00

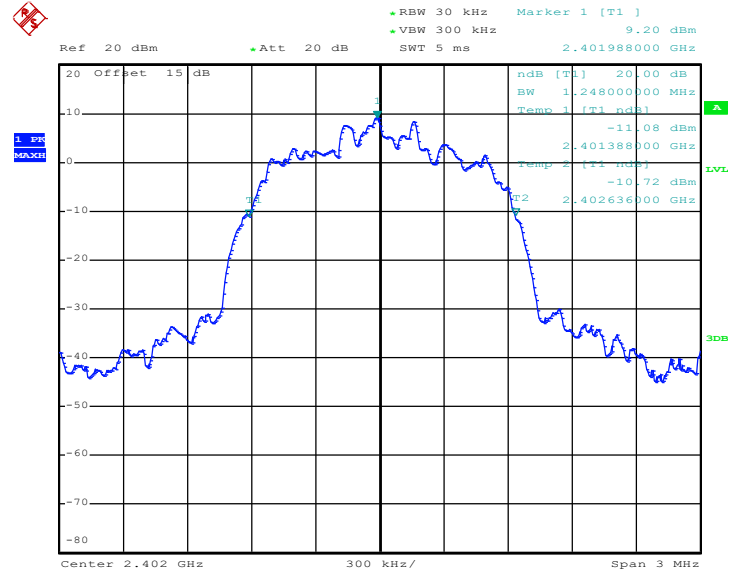

Date: 11.JAN.2020 16:58:27


20 dB Bandwidth Plot on Channel 39

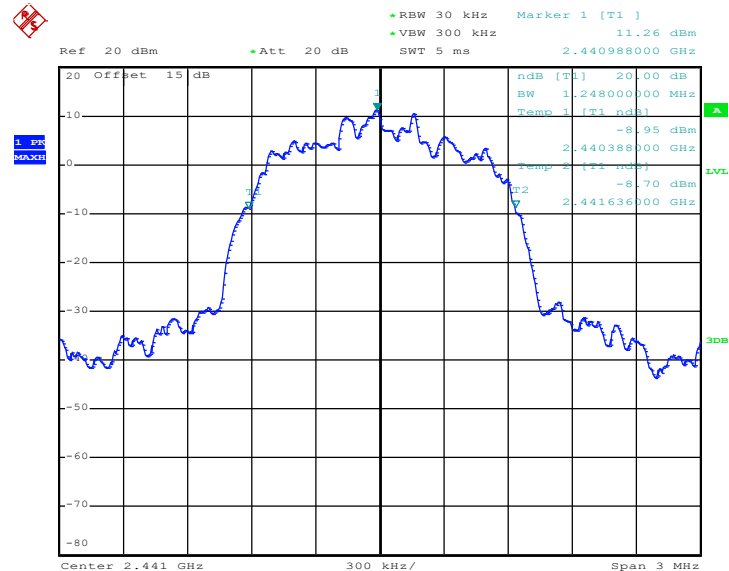

Date: 11.JAN.2020 17:59:22



20 dB Bandwidth Plot on Channel 78

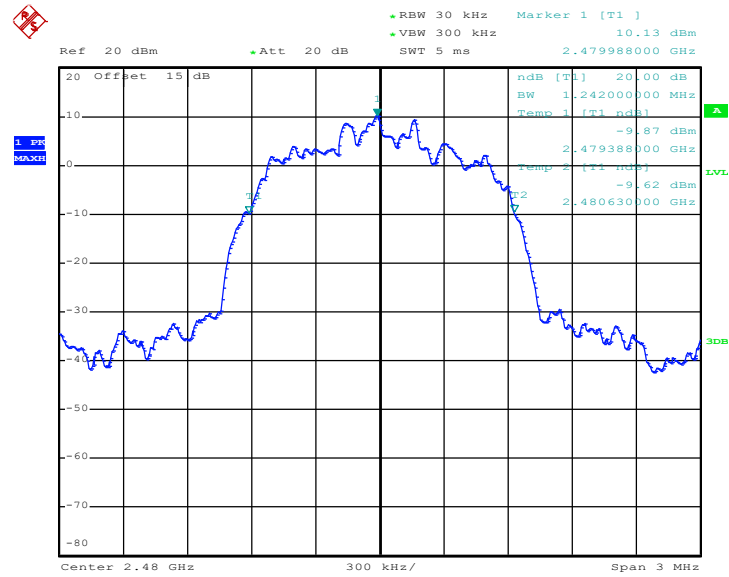

Date: 11.JAN.2020 17:17:04




3.4.6 Test Result of 99% Occupied Bandwidth

Please refer to Appendix A.

For ant 1:

<1Mbps>


99% Occupied Bandwidth Plot on Channel 00

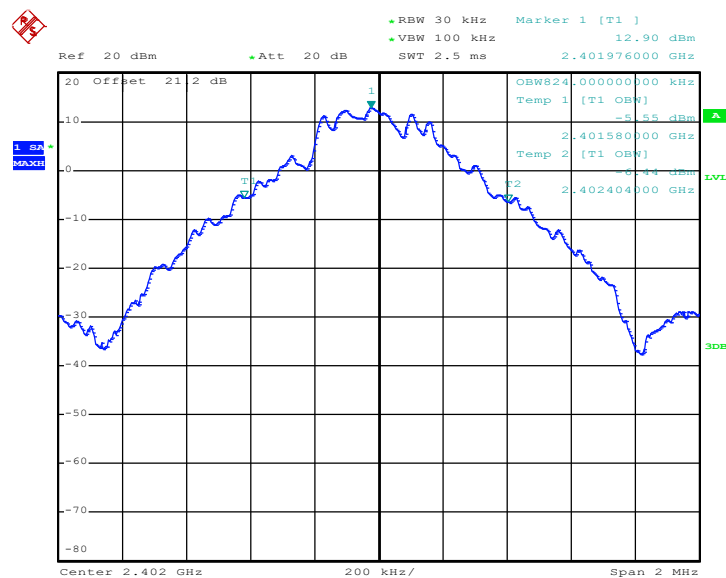

Date: 5.JAN.2020 12:51:42




99% Occupied Bandwidth Plot on Channel 39

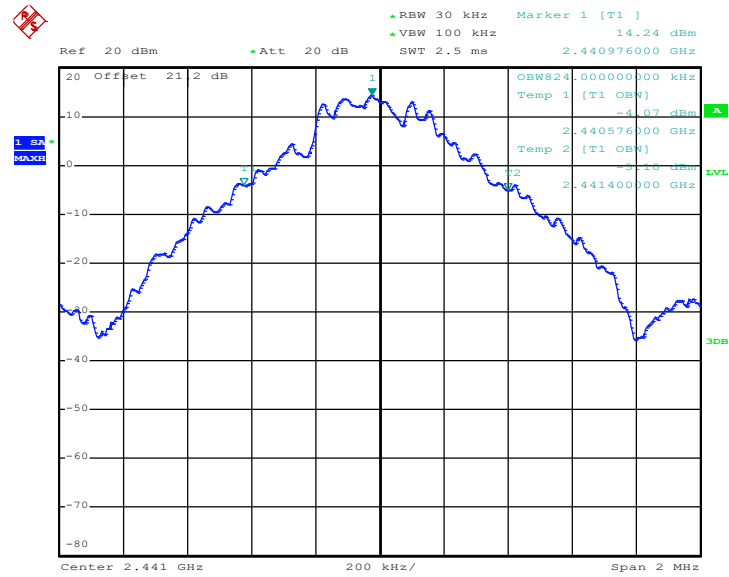

Date: 5.JAN.2020 13:08:59

99% Occupied Bandwidth Plot on Channel 78

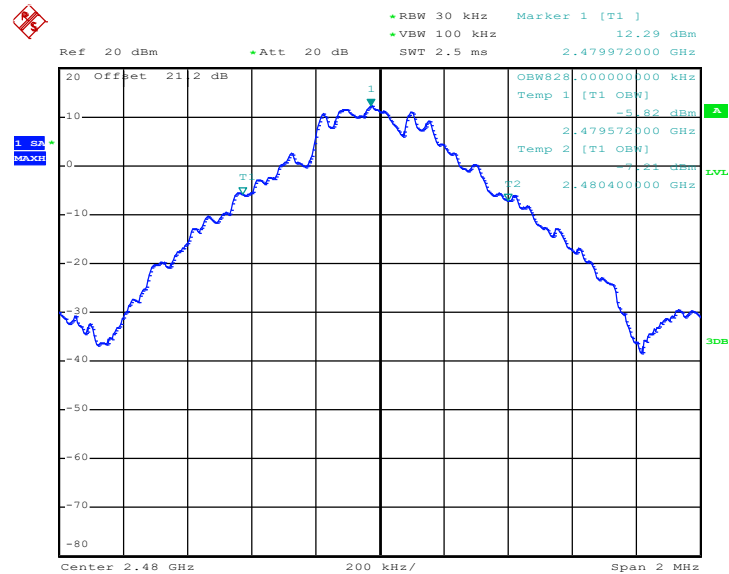


Date: 5.JAN.2020 13:13:39




<2Mbps>

99% Occupied Bandwidth Plot on Channel 00

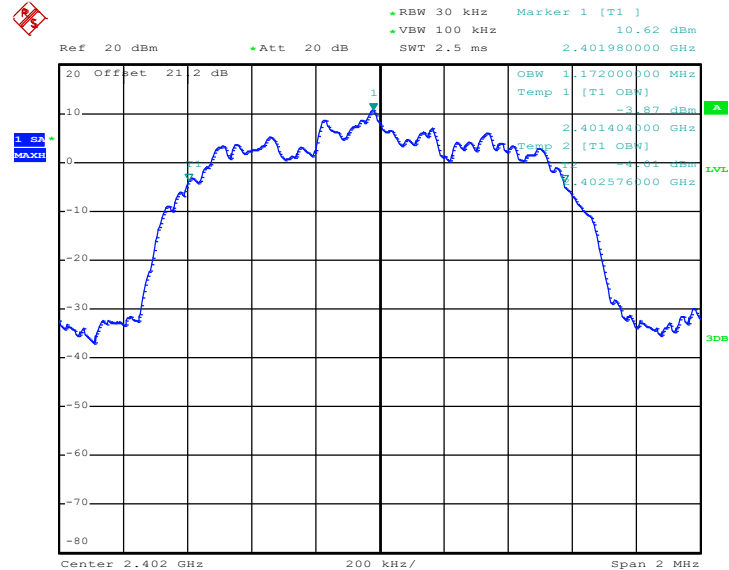

Date: 5.JAN.2020 13:42:40


99% Occupied Bandwidth Plot on Channel 39

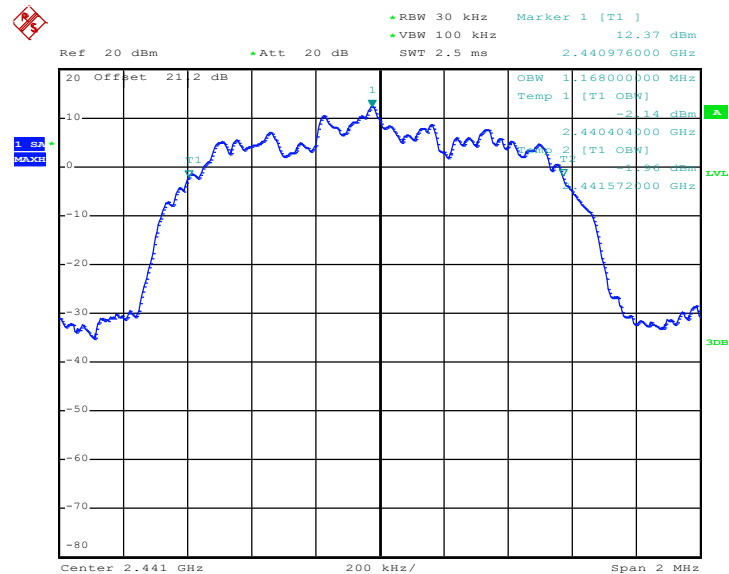

Date: 5.JAN.2020 13:50:17




99% Occupied Bandwidth Plot on Channel 78

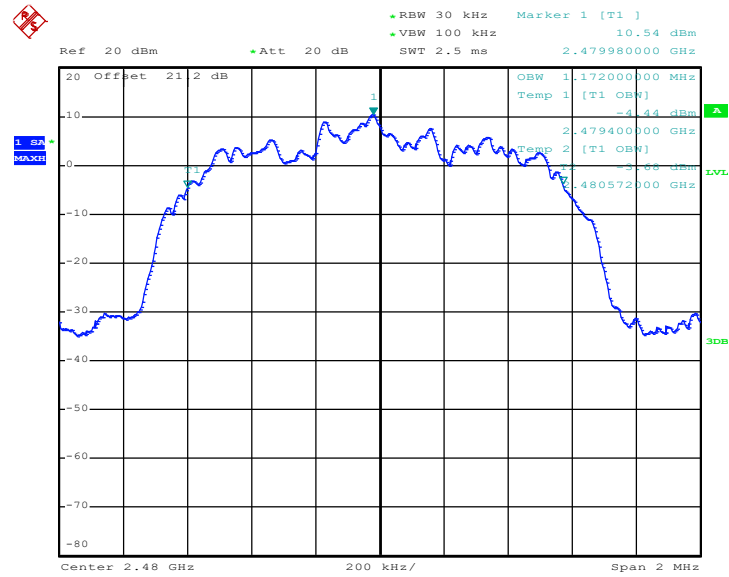

Date: 5.JAN.2020 14:00:21

<3Mbps>


99% Occupied Bandwidth Plot on Channel 00

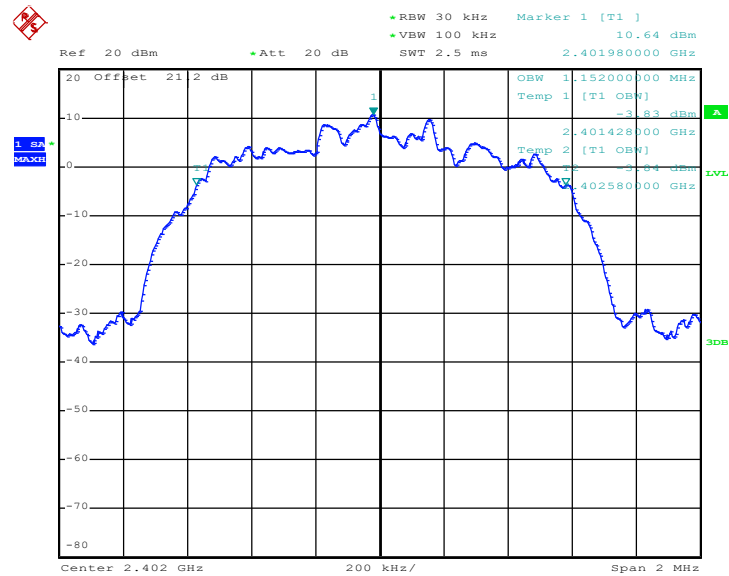

Date: 5.JAN.2020 14:27:22




99% Occupied Bandwidth Plot on Channel 39

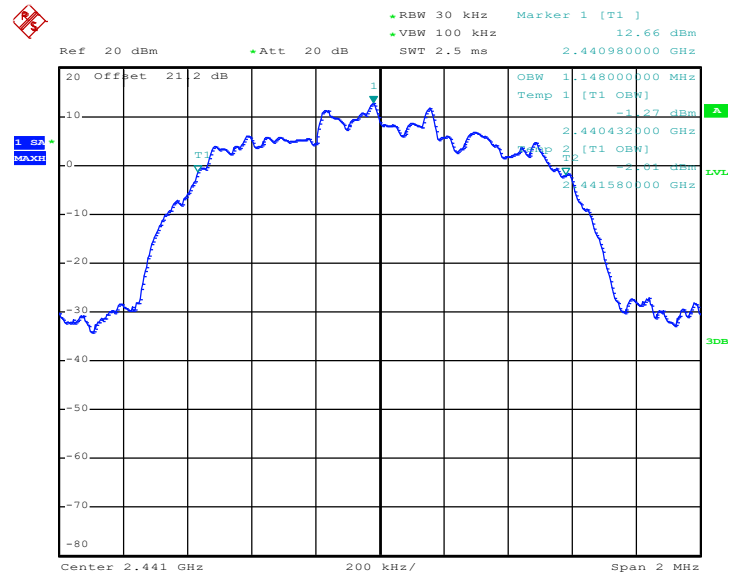

Date: 5.JAN.2020 15:30:56

99% Occupied Bandwidth Plot on Channel 78

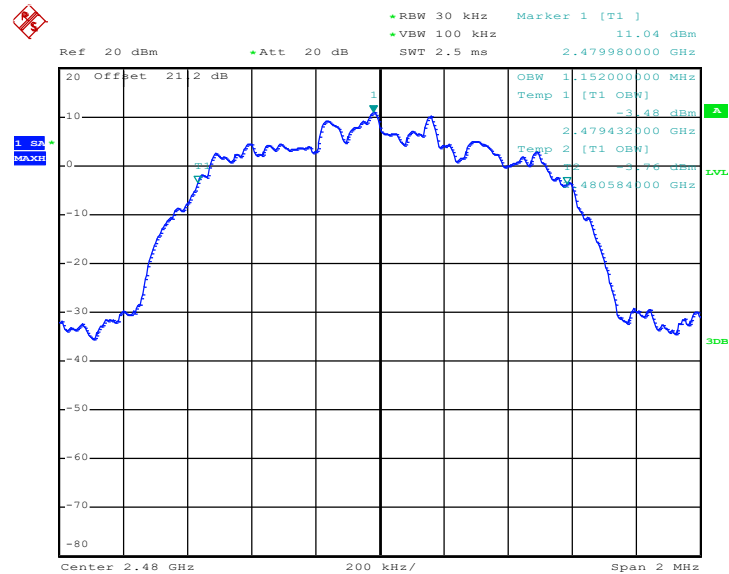

Date: 5.JAN.2020 16:01:05


Note : The occupied channel bandwidth is maintained within the band of operation for all of the modulations.



For ant 2:

<1Mbps>


99% Occupied Bandwidth Plot on Channel 00

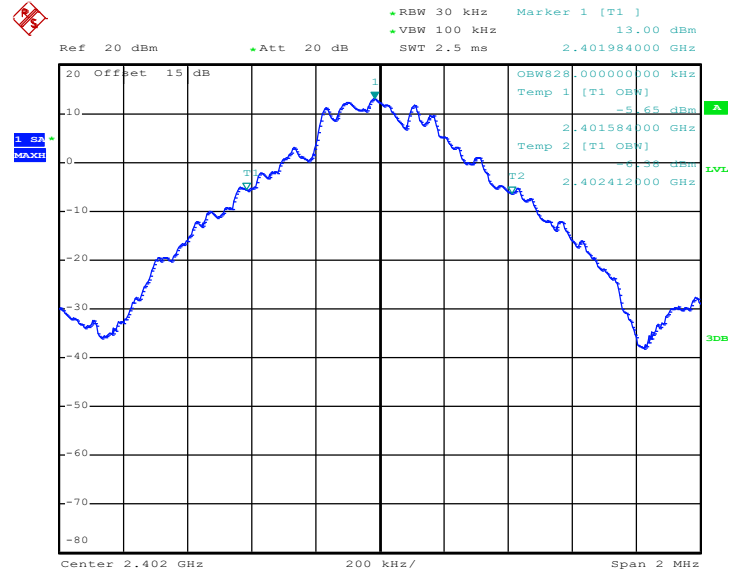

Date: 11.JAN.2020 15:35:45




99% Occupied Bandwidth Plot on Channel 39

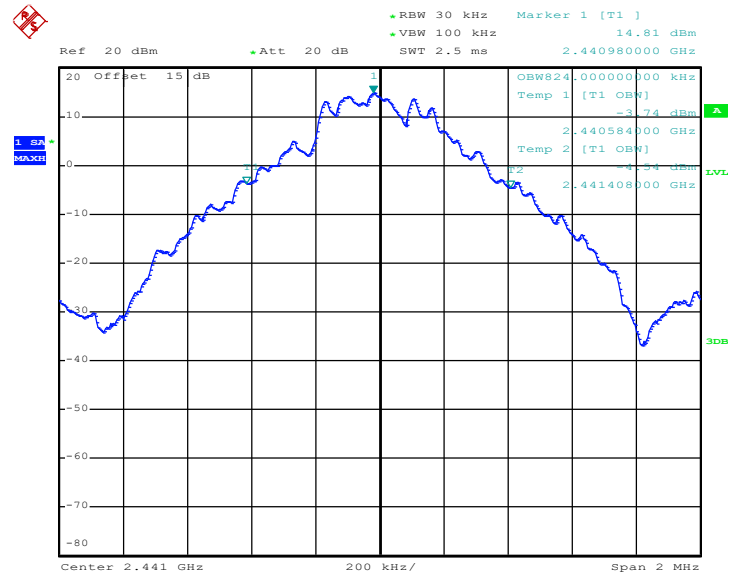

Date: 11.JAN.2020 16:00:43

99% Occupied Bandwidth Plot on Channel 78

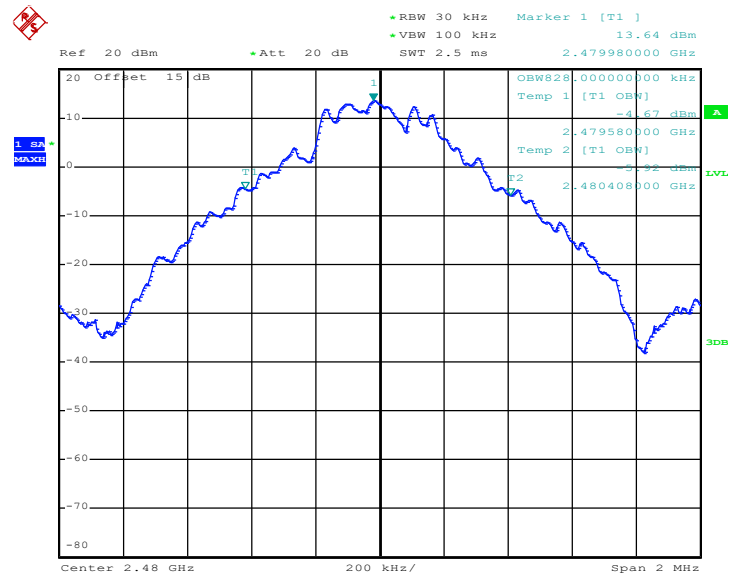


Date: 11.JAN.2020 15:58:38




<2Mbps>

99% Occupied Bandwidth Plot on Channel 00

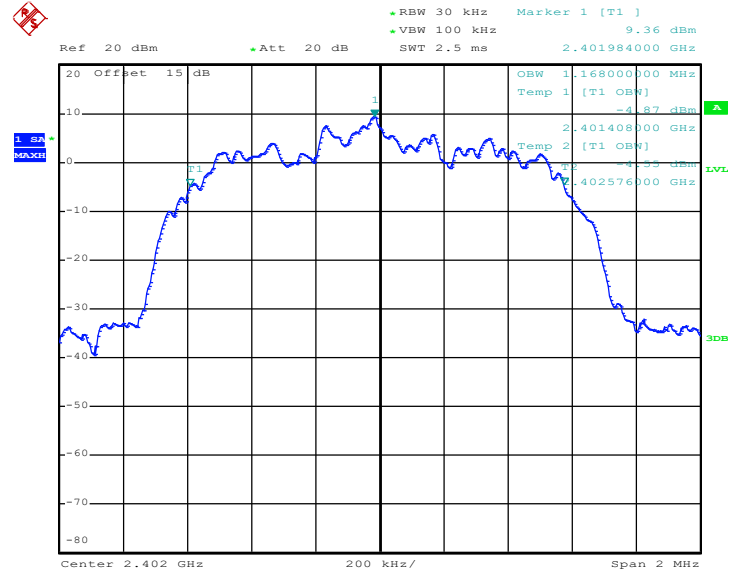

Date: 11.JAN.2020 16:20:16


99% Occupied Bandwidth Plot on Channel 39

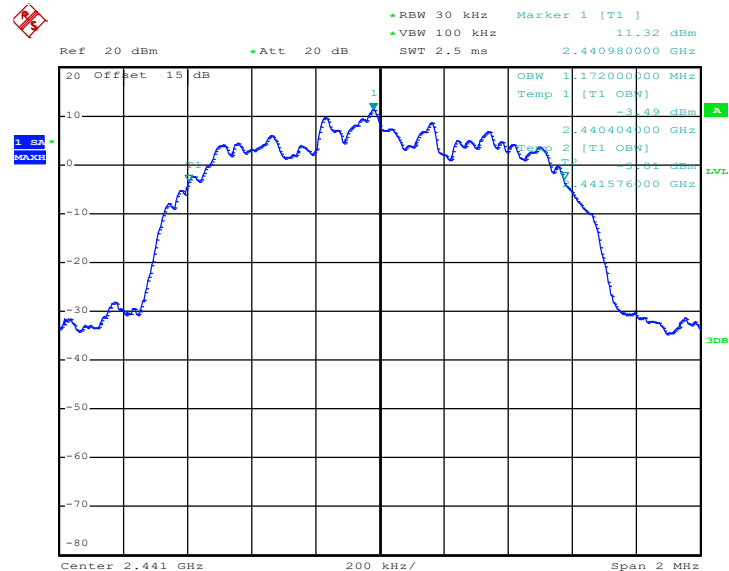

Date: 11.JAN.2020 16:50:23




99% Occupied Bandwidth Plot on Channel 78

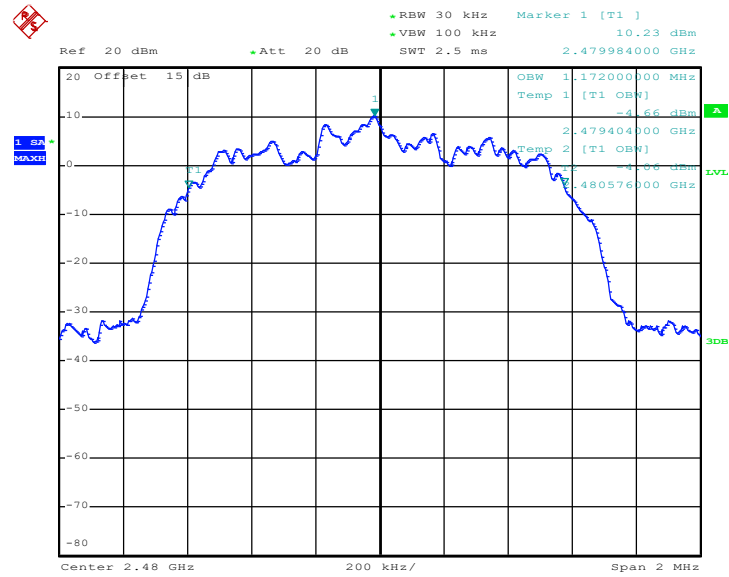

Date: 11.JAN.2020 16:47:50

<3Mbps>


99% Occupied Bandwidth Plot on Channel 00

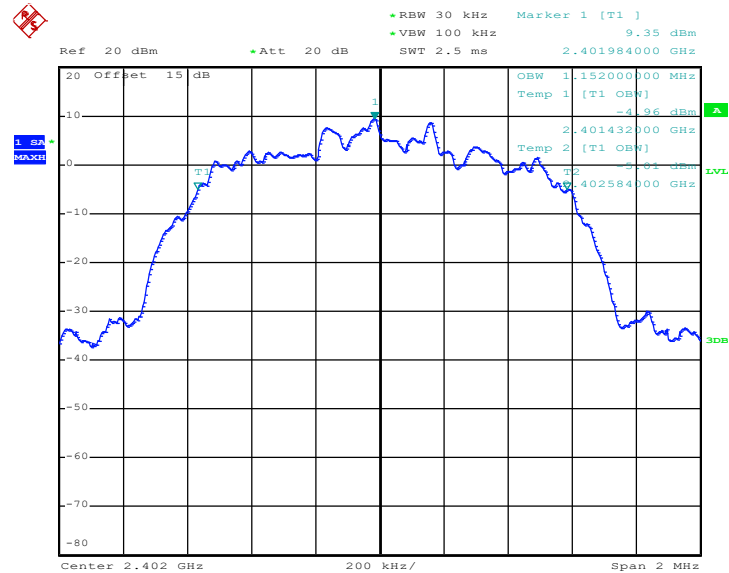

Date: 11.JAN.2020 17:06:05




99% Occupied Bandwidth Plot on Channel 39

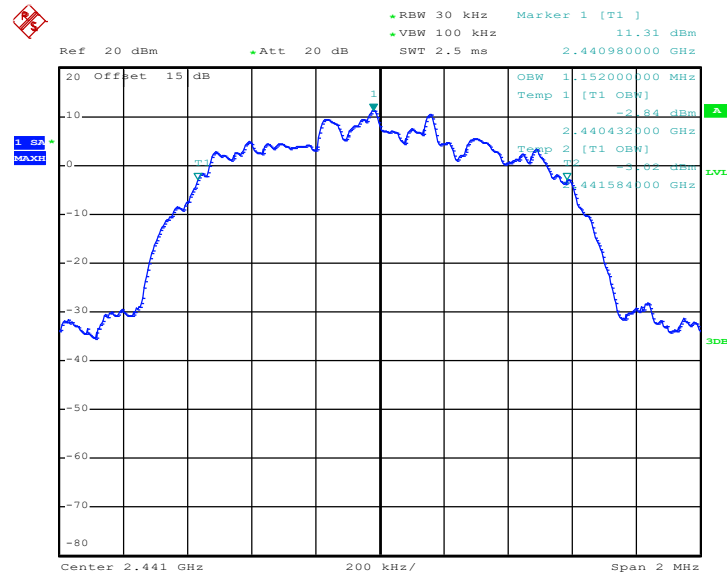

Date: 11.JAN.2020 17:25:35

99% Occupied Bandwidth Plot on Channel 78

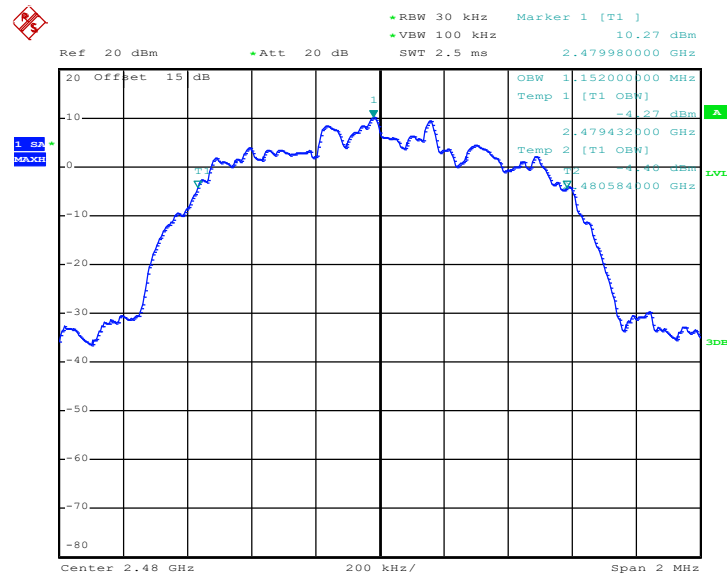

Date: 11.JAN.2020 17:22:53

Note : The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

3.5 Output Power Measurement

3.5.1 Limit of Output Power

The maximum peak conducted output power of the intentional radiator shall not exceed the following:
(1) For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band 0.125 watts.


3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.5.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 7.8.5.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power with cable loss and record the results in the test report.
5. Measure and record the results in the test report.

3.5.4 Test Setup

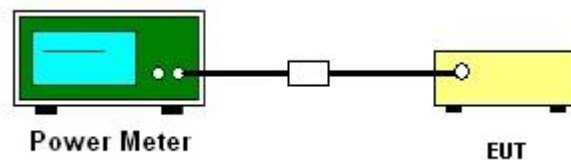

3.5.5 Test Result of Peak Output Power

Please refer to Appendix A.

3.5.6 Test Result of Average Output Power (Reporting Only)

Please refer to Appendix A.

3.6 Conducted Band Edges Measurement

3.6.1 Limit of Band Edges

In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.


3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.6.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 7.8.6.
2. Set to the maximum power setting and enable the EUT transmit continuously.
3. Set RBW = 100kHz, VBW = 300kHz. Band edge emissions must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100kHz RBW. The attenuation shall be 30 dB instead of 20 dB when RMS conducted output power procedure is used.
4. Enable hopping function of the EUT and then repeat step 2. and 3.
5. Measure and record the results in the test report.

3.6.4 Test Setup

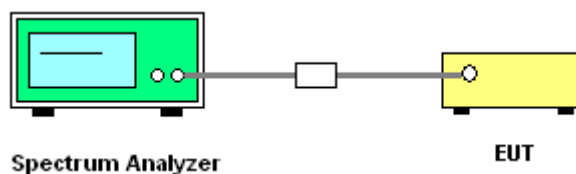


3.6.5 Test Result of Conducted Band Edges

For ant 1:


<1Mbps>

Low Band Edge Plot on Channel 00

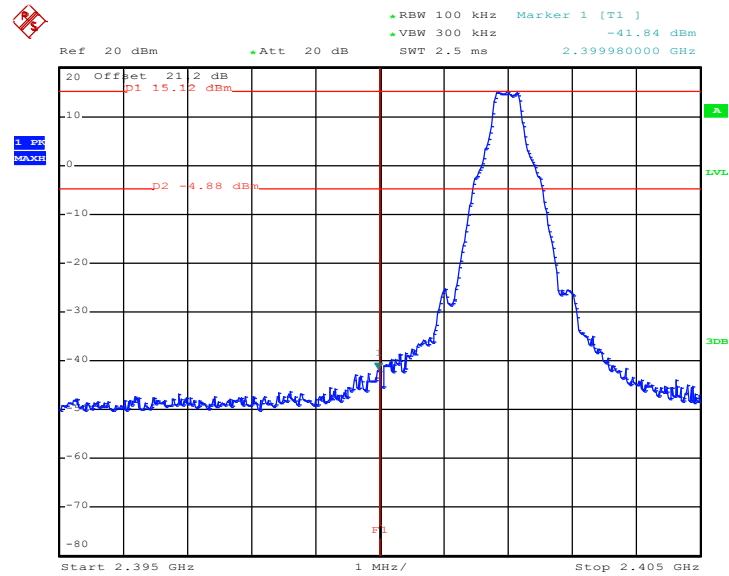

Date: 5.JAN.2020 13:05:23

High Band Edge Plot on Channel 78

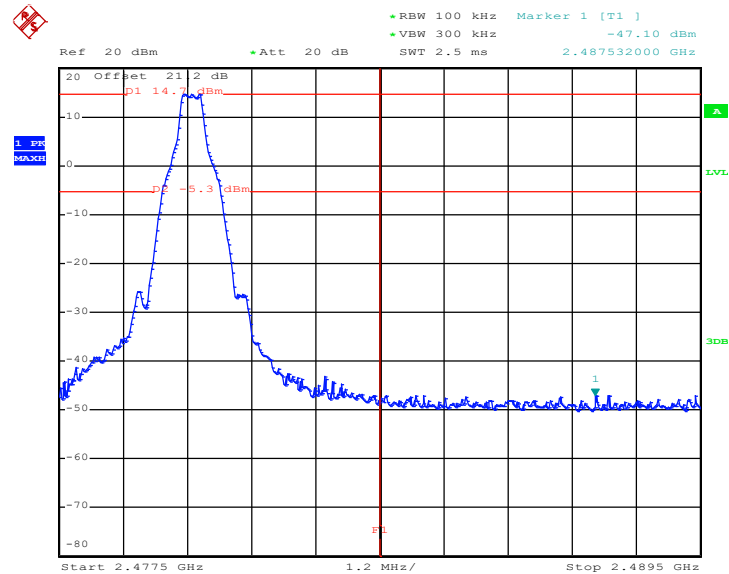


Date: 5.JAN.2020 13:13:58




<2Mbps>

Low Band Edge Plot on Channel 00

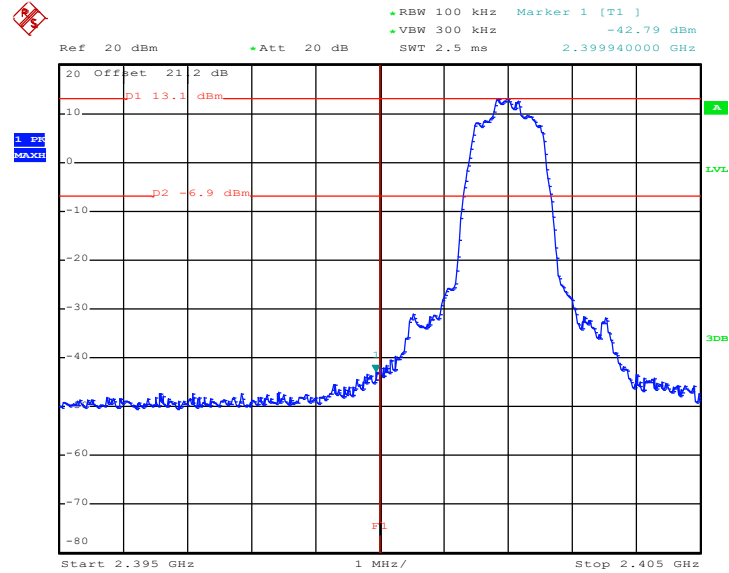

Date: 5.JAN.2020 13:45:26

High Band Edge Plot on Channel 78

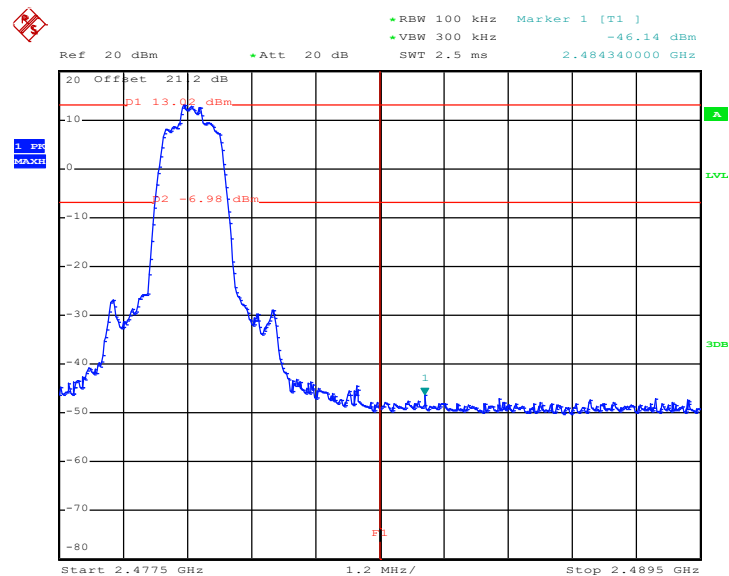


Date: 5.JAN.2020 13:59:47




<3Mbps>

Low Band Edge Plot on Channel 00

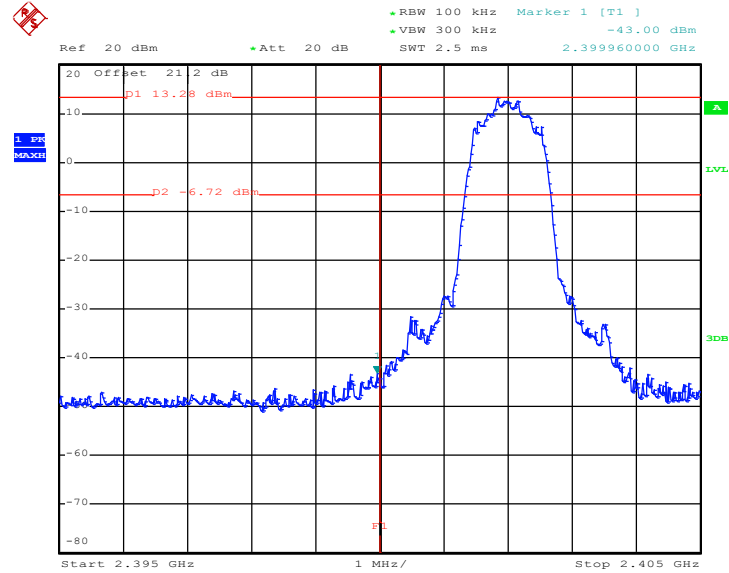

Date: 5.JAN.2020 14:38:42

High Band Edge Plot on Channel 78

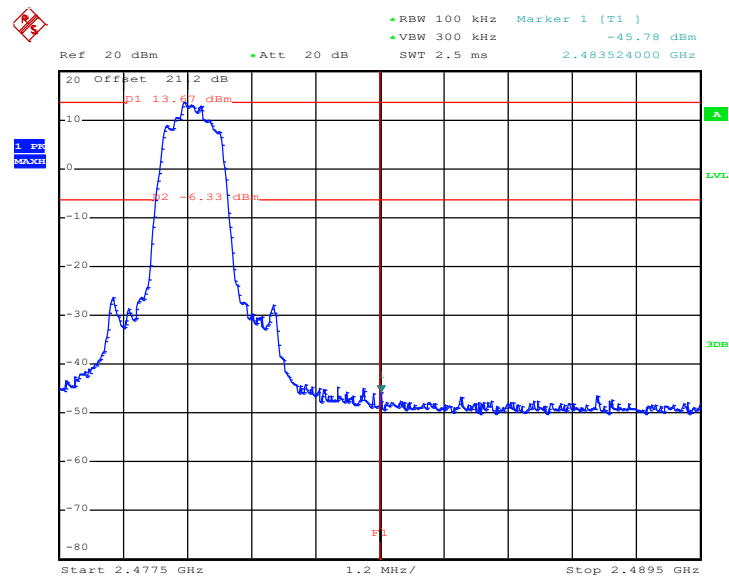


Date: 5.JAN.2020 16:00:27



For ant 2:


<1Mbps>

Low Band Edge Plot on Channel 00

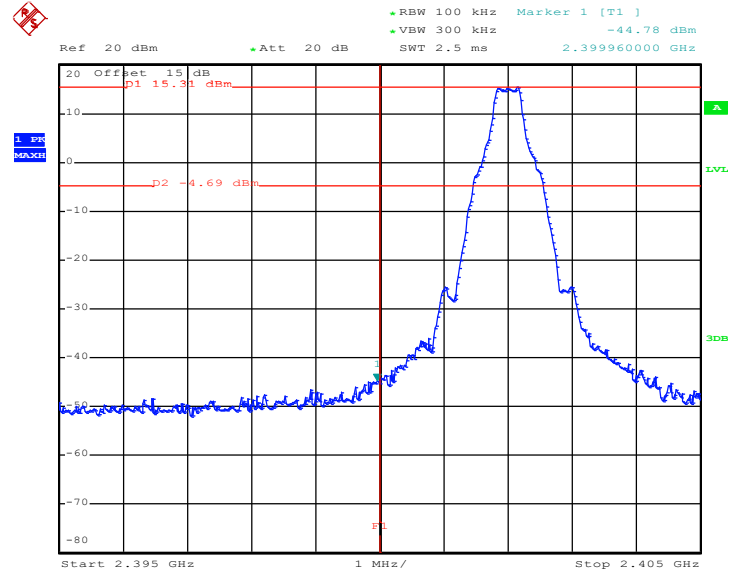

Date: 11.JAN.2020 15:30:13


High Band Edge Plot on Channel 78

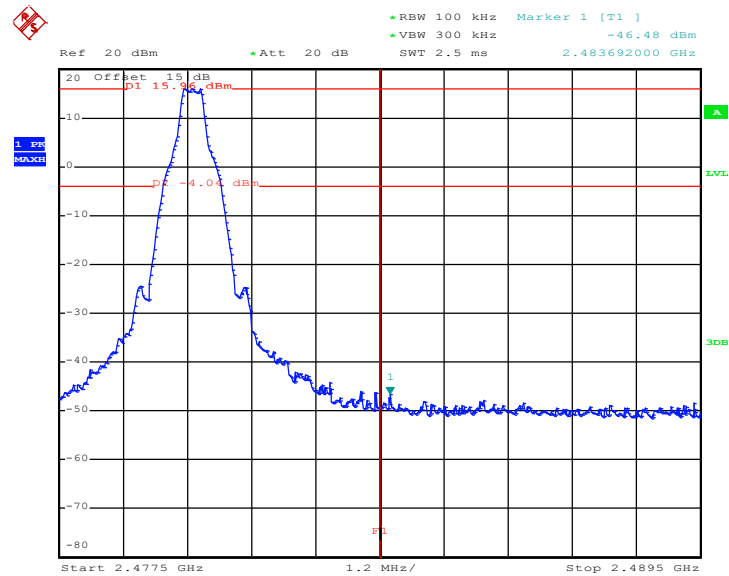

Date: 11.JAN.2020 15:54:32


<2Mbps>

Low Band Edge Plot on Channel 00

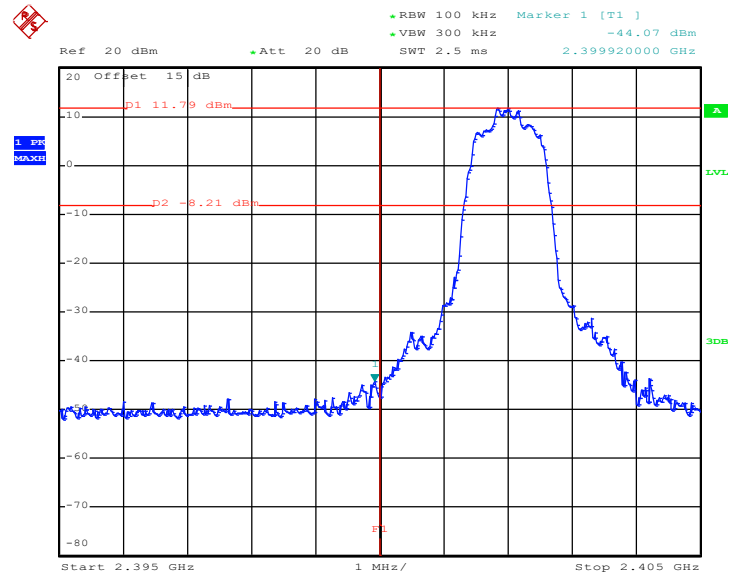

Date: 11.JAN.2020 16:08:25


High Band Edge Plot on Channel 78

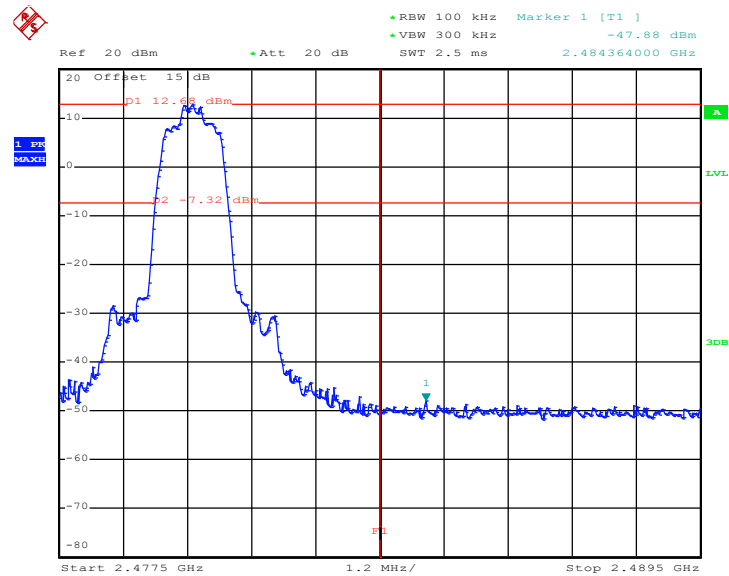

Date: 11.JAN.2020 16:43:08


<3Mbps>

Low Band Edge Plot on Channel 00

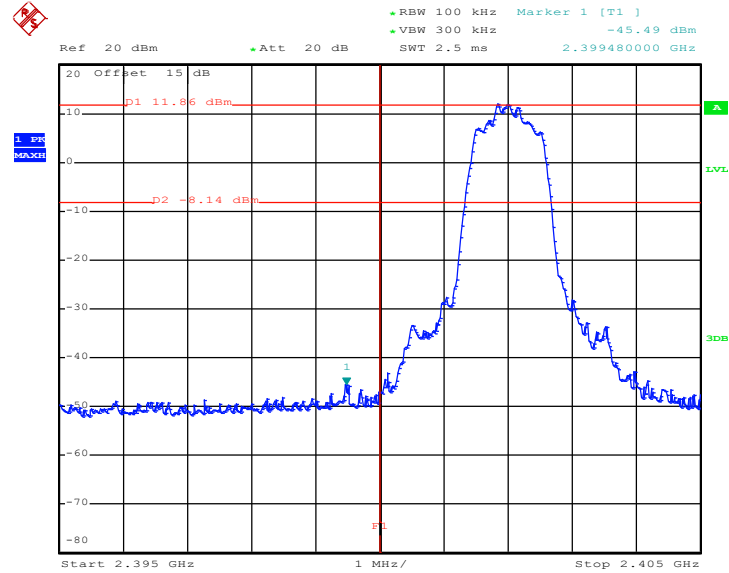

Date: 11.JAN.2020 17:00:33

High Band Edge Plot on Channel 78

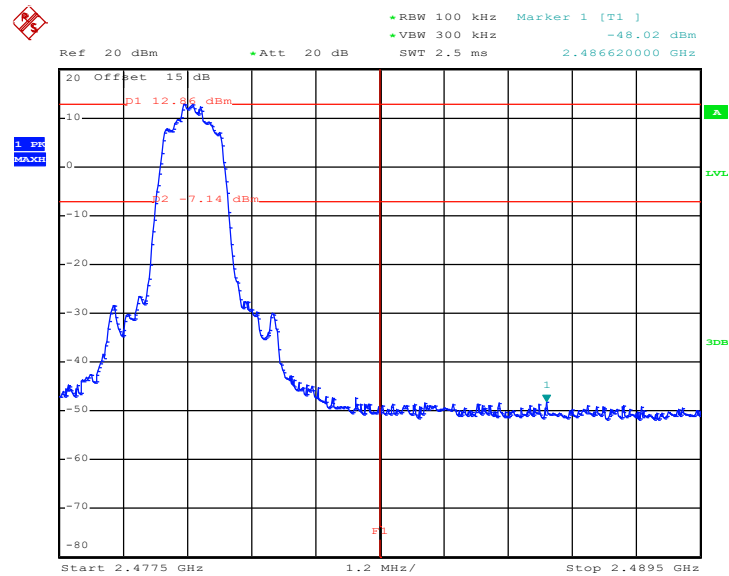


Date: 11.JAN.2020 17:17:28

3.6.6 Test Result of Conducted Hopping Mode Band Edges

For ant 1:


<1Mbps>

Hopping Mode Low Band Edge Plot

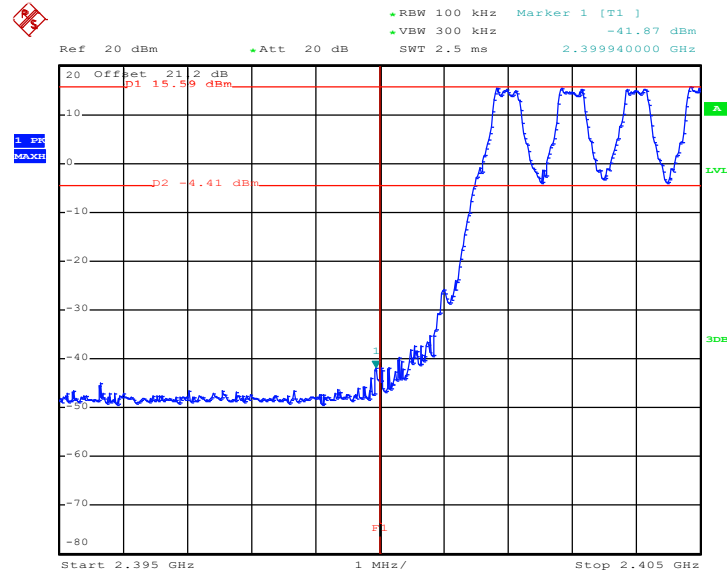

Date: 5.JAN.2020 13:02:03

Hopping Mode High Band Edge Plot

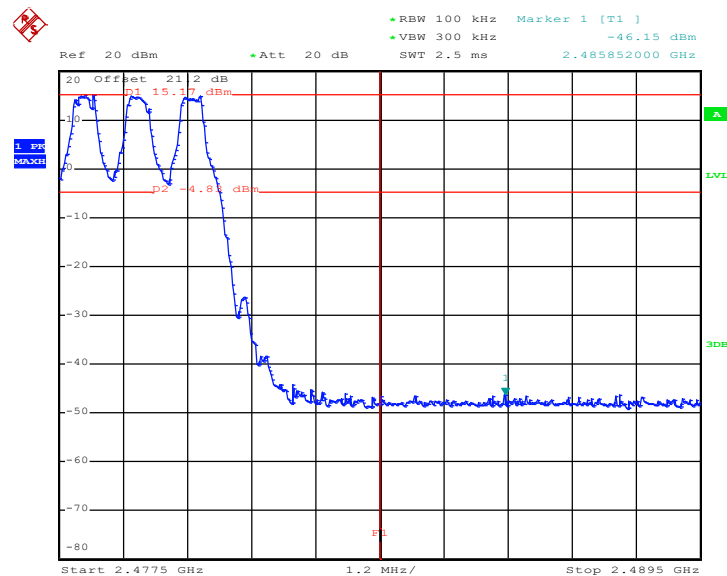


Date: 5.JAN.2020 13:18:42




<2Mbps>

Hopping Mode Low Band Edge Plot

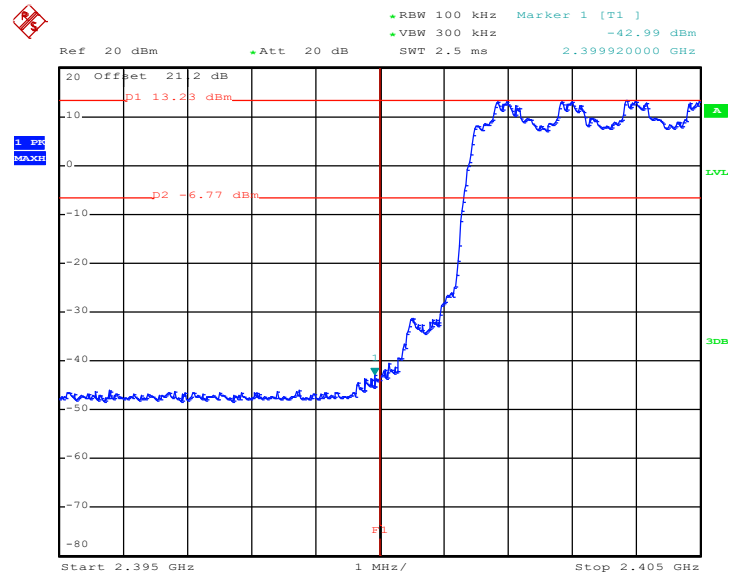

Date: 5.JAN.2020 13:41:03

Hopping Mode High Band Edge Plot

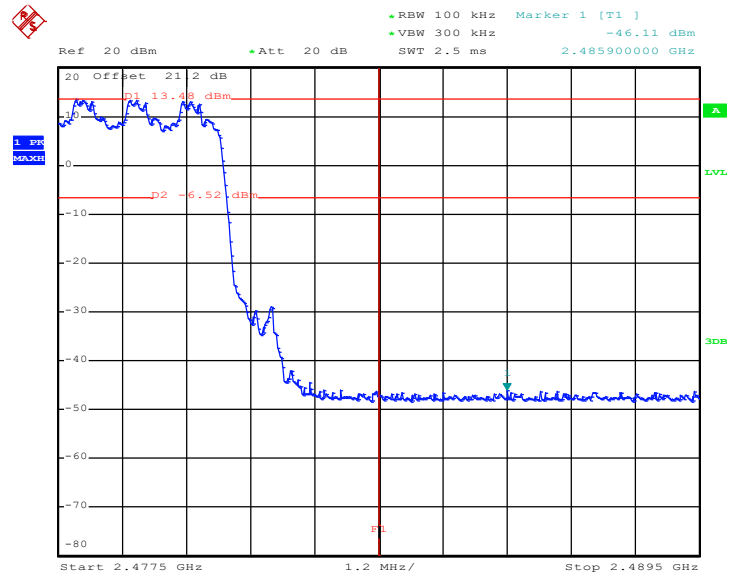


Date: 5.JAN.2020 14:10:21




<3Mbps>

Hopping Mode Low Band Edge Plot

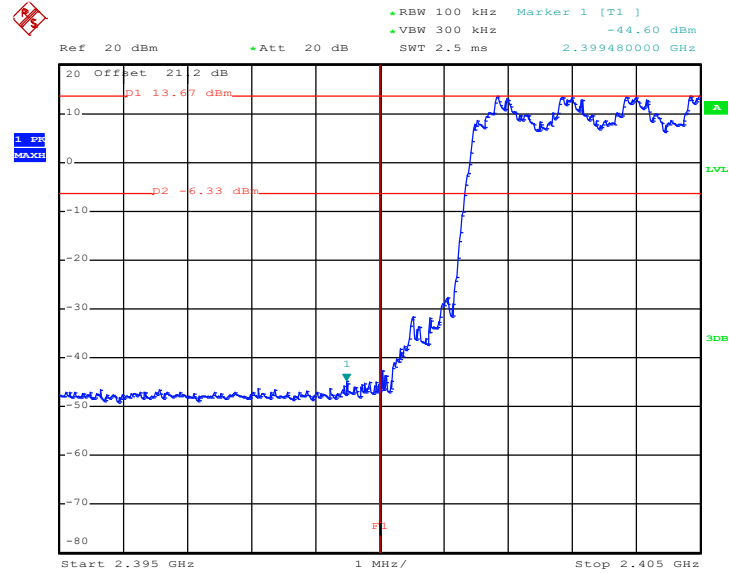

Date: 5.JAN.2020 15:28:29

Hopping Mode High Band Edge Plot

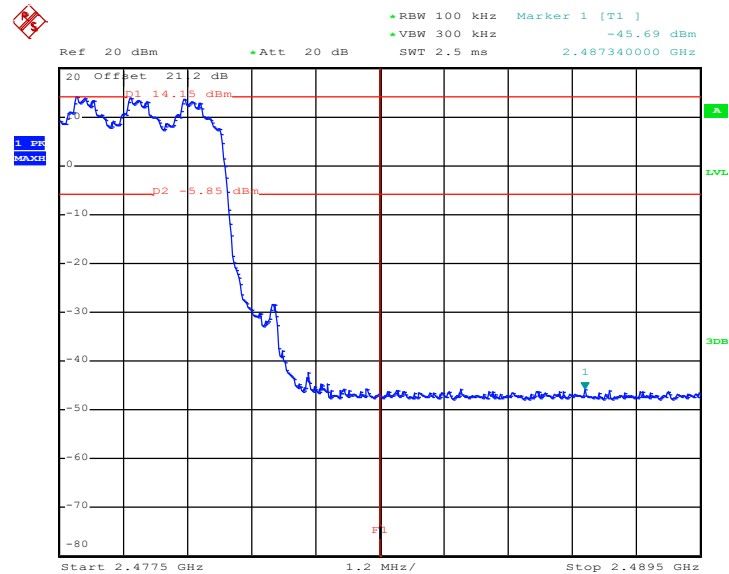


Date: 5.JAN.2020 15:59:45

For ant 2:


<1Mbps>

Hopping Mode Low Band Edge Plot

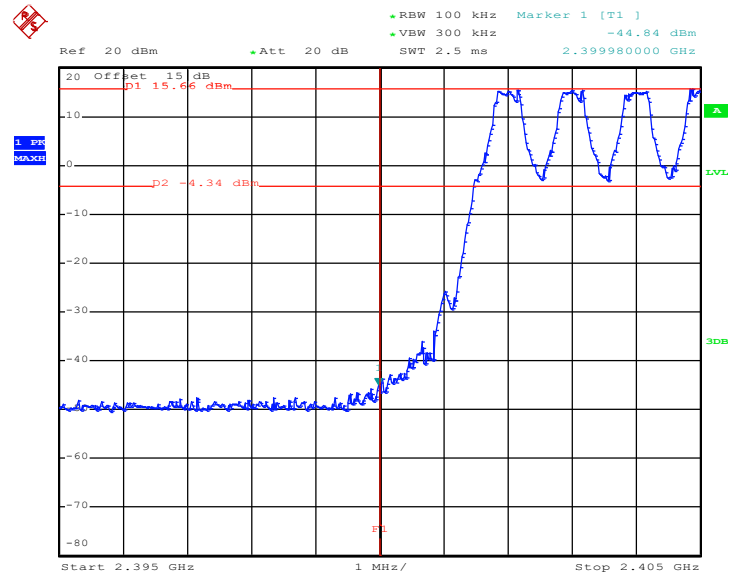

Date: 11.JAN.2020 15:34:52


Hopping Mode High Band Edge Plot

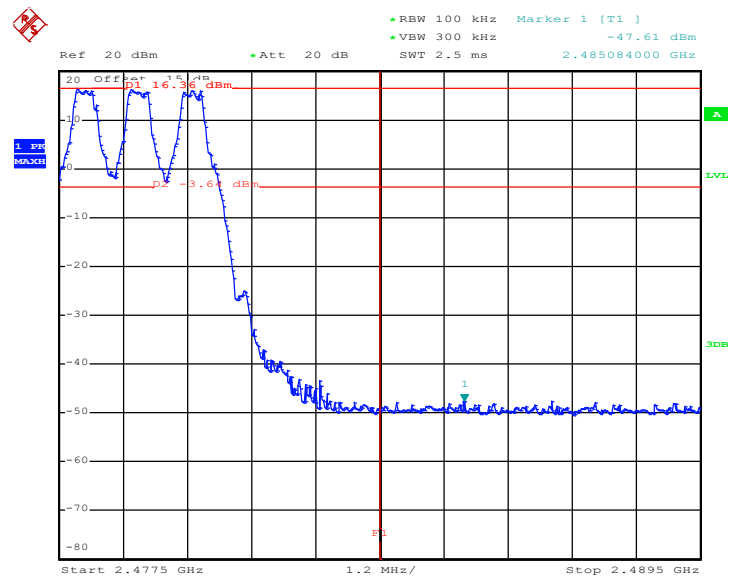

Date: 11.JAN.2020 15:57:53


<2Mbps>

Hopping Mode Low Band Edge Plot

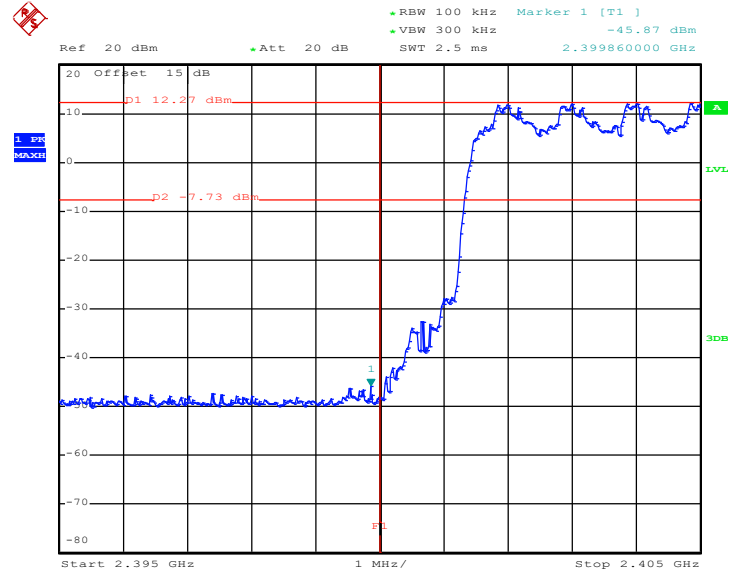

Date: 11.JAN.2020 16:18:13

Hopping Mode High Band Edge Plot

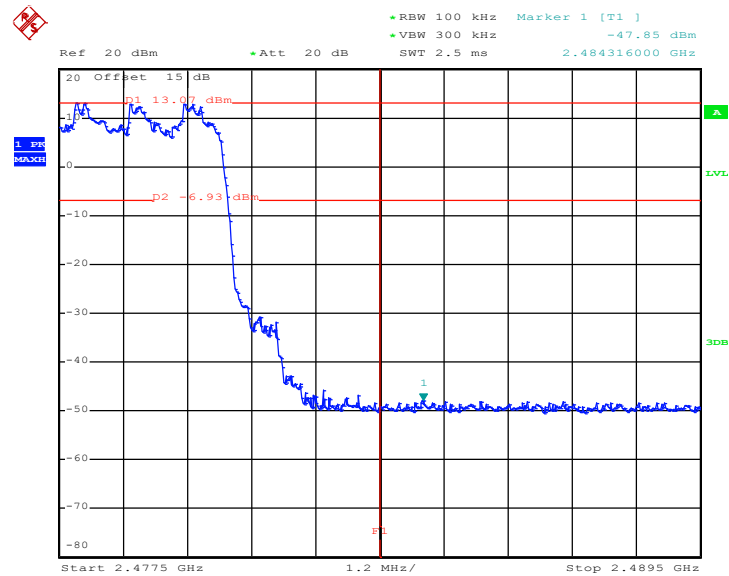


Date: 11.JAN.2020 16:47:01




<3Mbps>

Hopping Mode Low Band Edge Plot

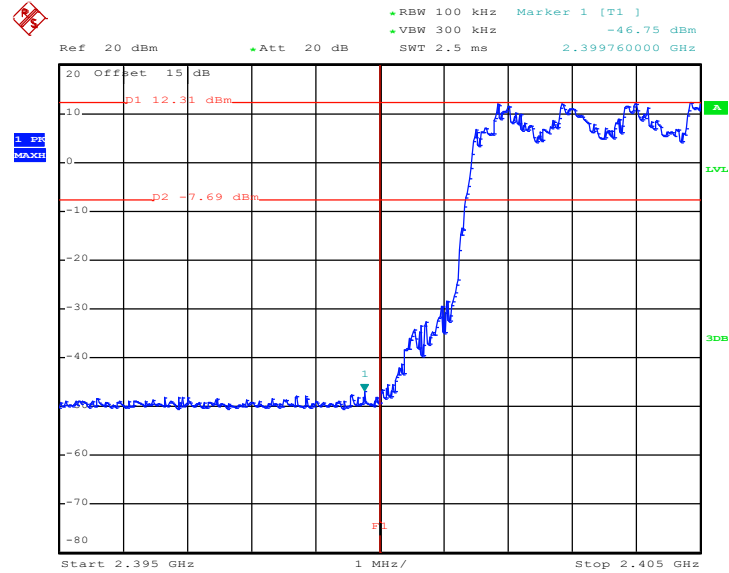

Date: 11.JAN.2020 17:05:23

Hopping Mode High Band Edge Plot

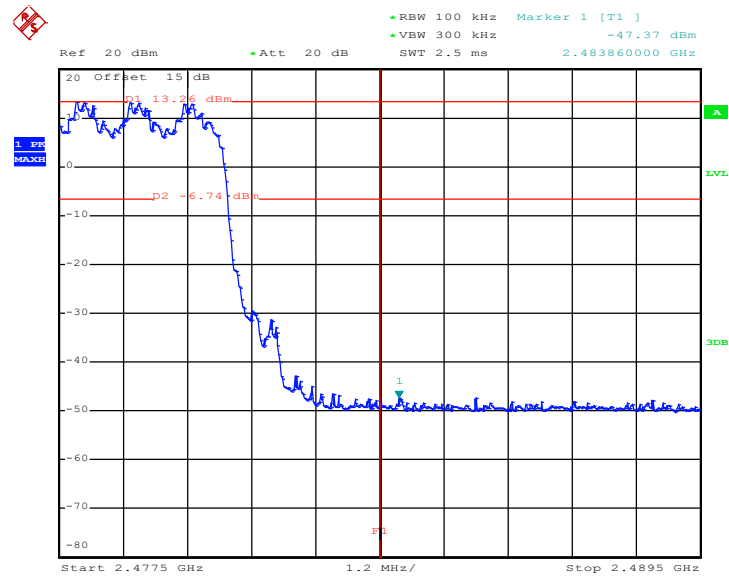

Date: 11.JAN.2020 17:22:03

3.7 Conducted Spurious Emission Measurement

3.7.1 Limit of Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.


3.7.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.7.3 Test Procedure

1. The testing follows ANSI C63.10-2013 clause 7.8.8.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW = 300kHz, scan up through 10th harmonic. All harmonics / spurs must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100 kHz RBW.
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.7.4 Test Setup

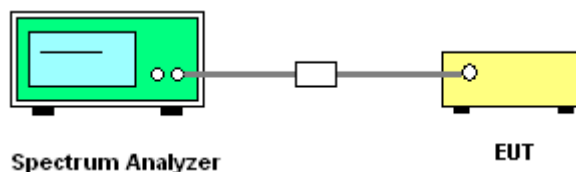




3.7.5 Test Result of Conducted Spurious Emission

For ant 1:


<1Mbps>

CSE Plot on Ch 00 between 30MHz ~ 3 GHz

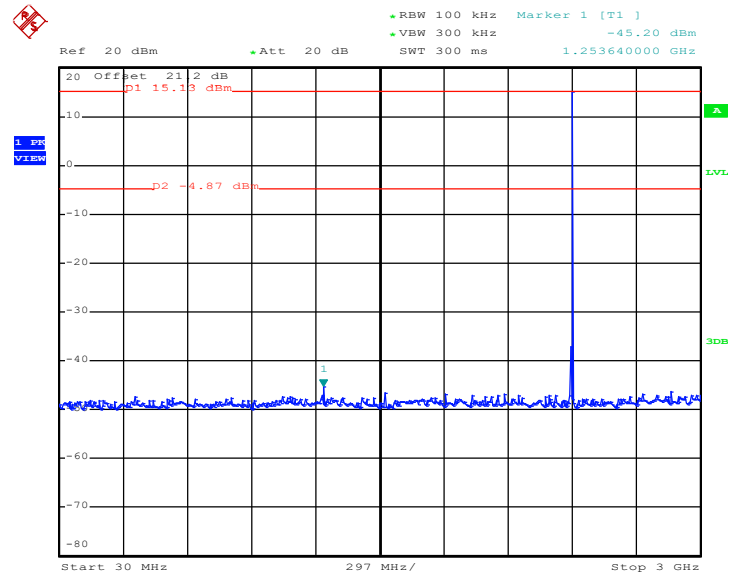

Date: 5.JAN.2020 12:54:00


CSE Plot on Ch 00 between 2 GHz ~ 25 GHz

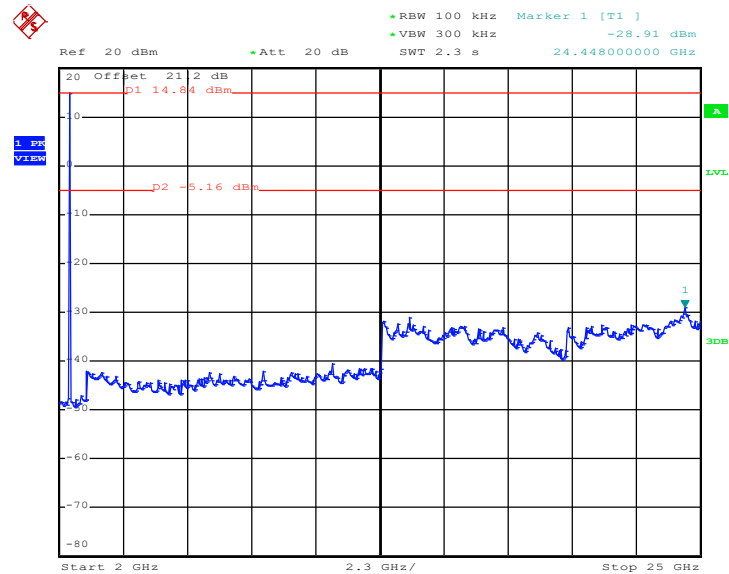

Date: 5.JAN.2020 12:54:21




CSE Plot on Ch 39 between 30MHz ~ 3 GHz

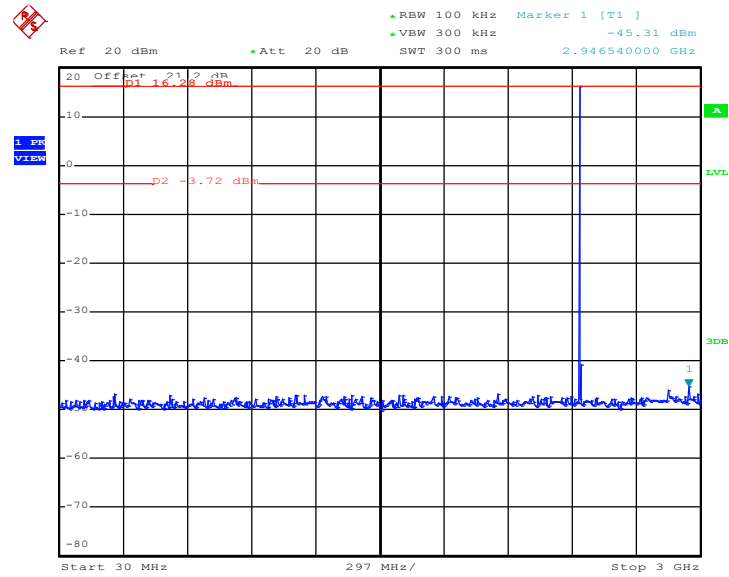

Date: 5.JAN.2020 13:07:38


CSE Plot on Ch 39 between 2 GHz ~ 25 GHz

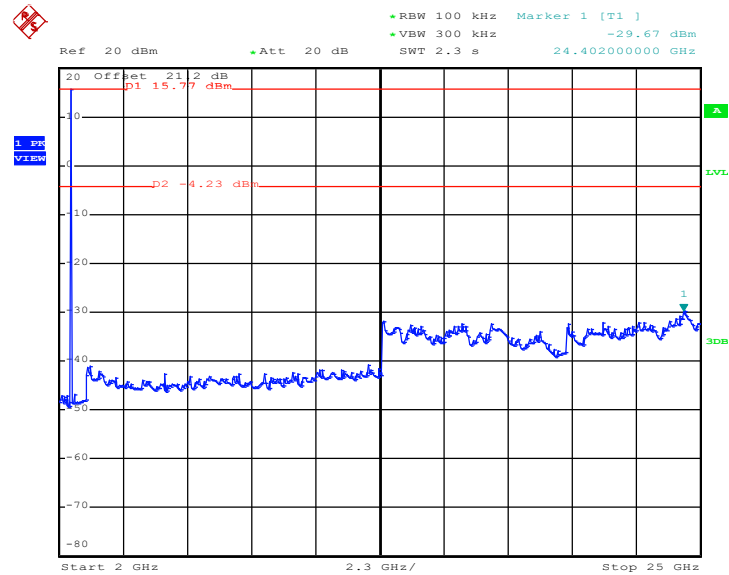

Date: 5.JAN.2020 13:08:00




CSE Plot on Ch 78 between 30MHz ~ 3 GHz

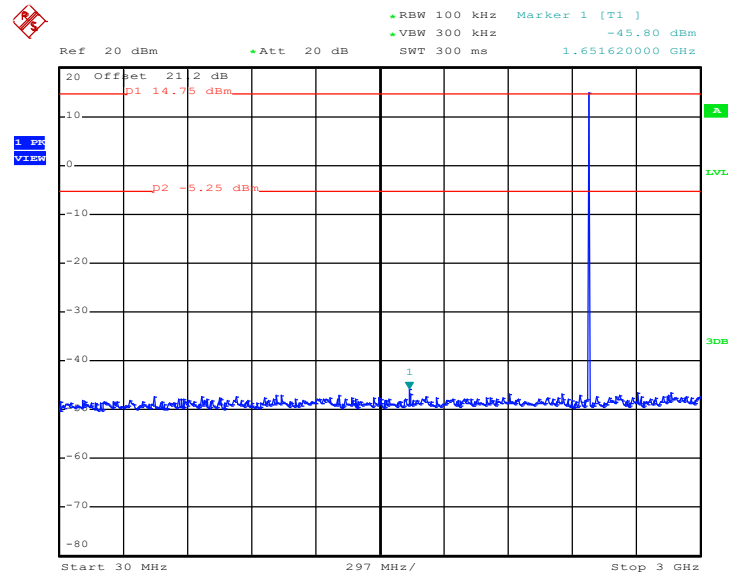

Date: 5.JAN.2020 13:12:40

CSE Plot on Ch 78 between 2 GHz ~ 25 GHz

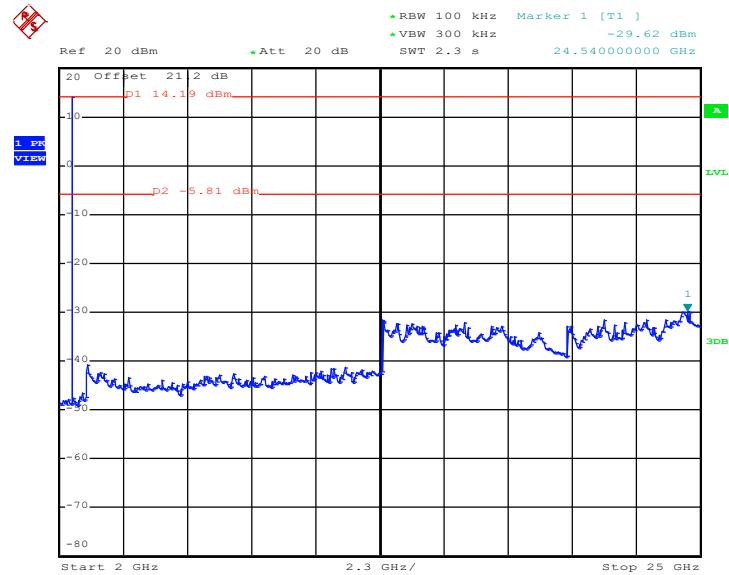


Date: 5.JAN.2020 13:13:02




<2Mbps>

CSE Plot on Ch 00 between 30MHz ~ 3 GHz

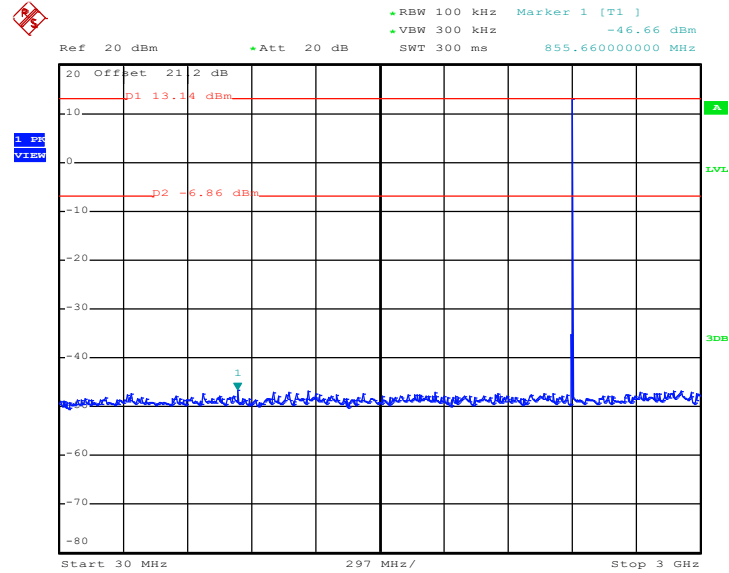

Date: 5.JAN.2020 13:44:43


CSE Plot on Ch 00 between 2 GHz ~ 25 GHz

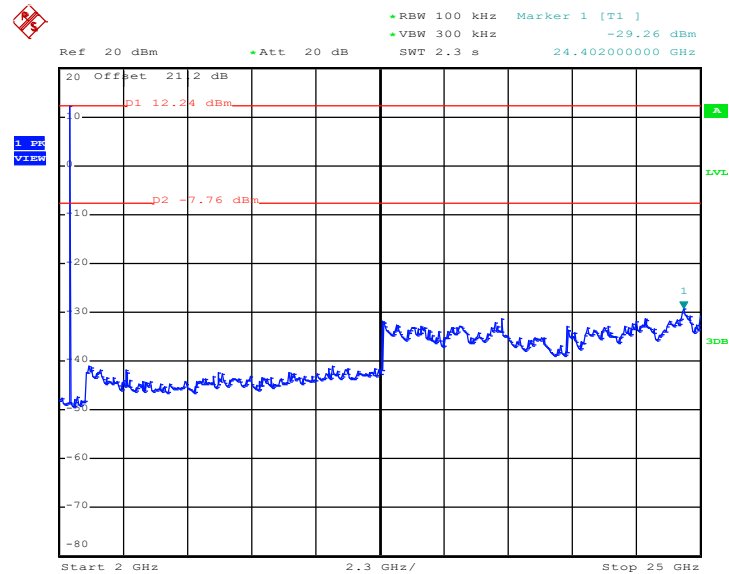

Date: 5.JAN.2020 13:45:05




CSE Plot on Ch 39 between 30MHz ~ 3 GHz

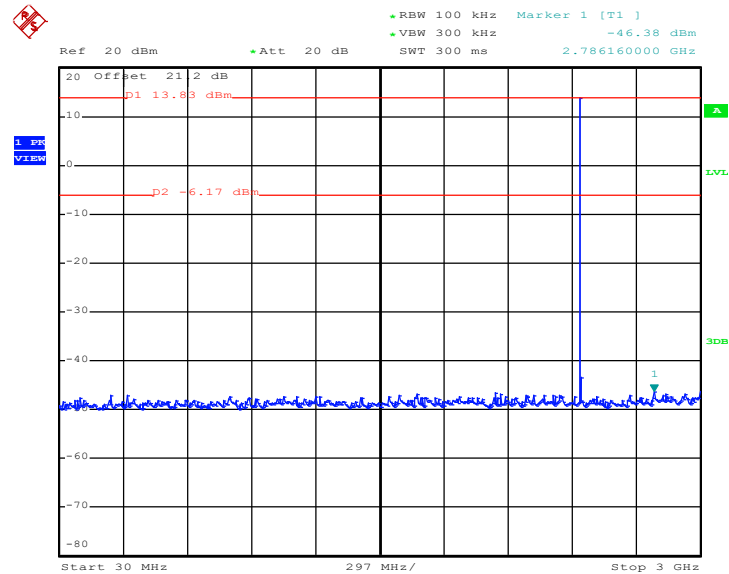

Date: 5.JAN.2020 13:49:00


CSE Plot on Ch 39 between 2 GHz ~ 25 GHz

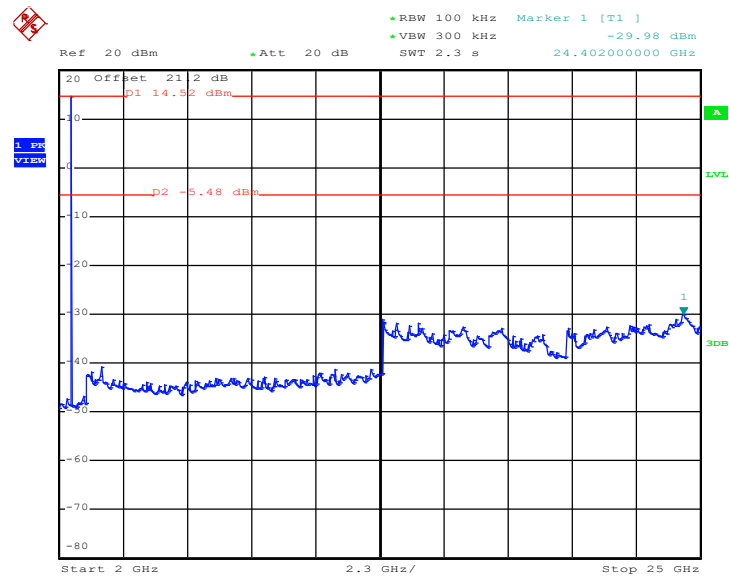

Date: 5.JAN.2020 13:49:21




CSE Plot on Ch 78 between 30MHz ~ 3 GHz

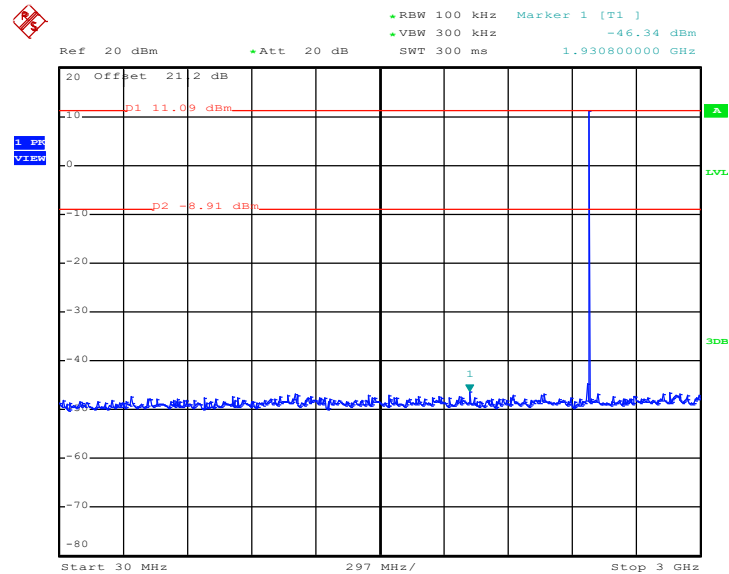

Date: 5.JAN.2020 14:00:46

CSE Plot on Ch 78 between 2 GHz ~ 25 GHz

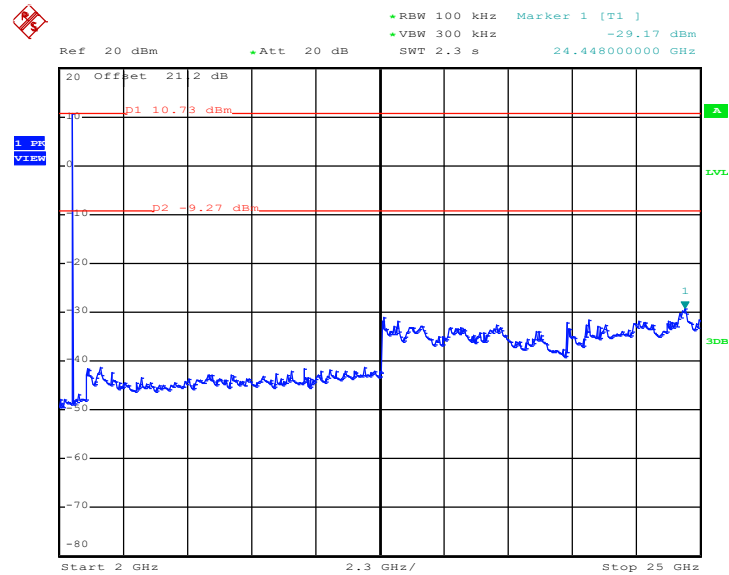


Date: 5.JAN.2020 14:01:08




<3Mbps>

CSE Plot on Ch 00 between 30MHz ~ 3 GHz

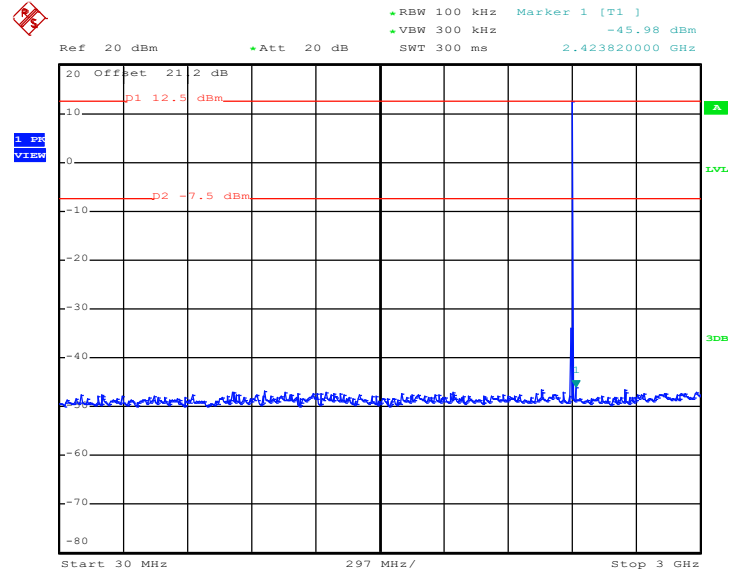

Date: 5.JAN.2020 14:23:52


CSE Plot on Ch 00 between 2 GHz ~ 25 GHz

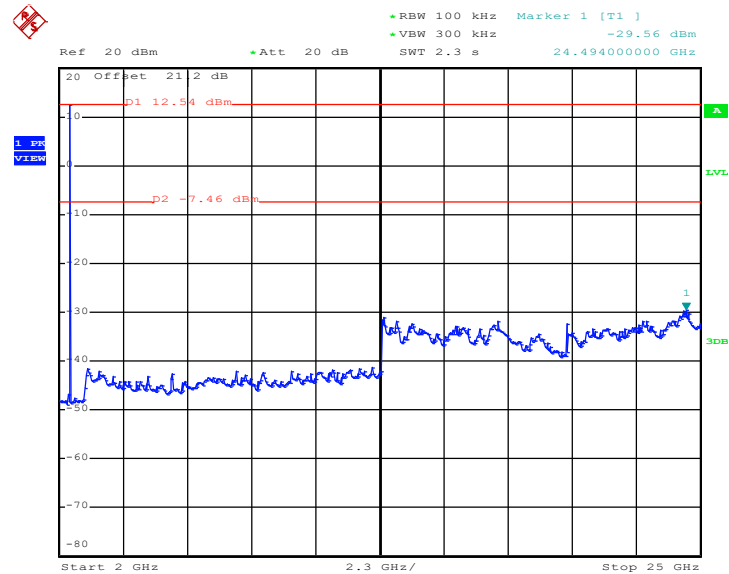

Date: 5.JAN.2020 14:24:14




CSE Plot on Ch 39 between 30MHz ~ 3 GHz

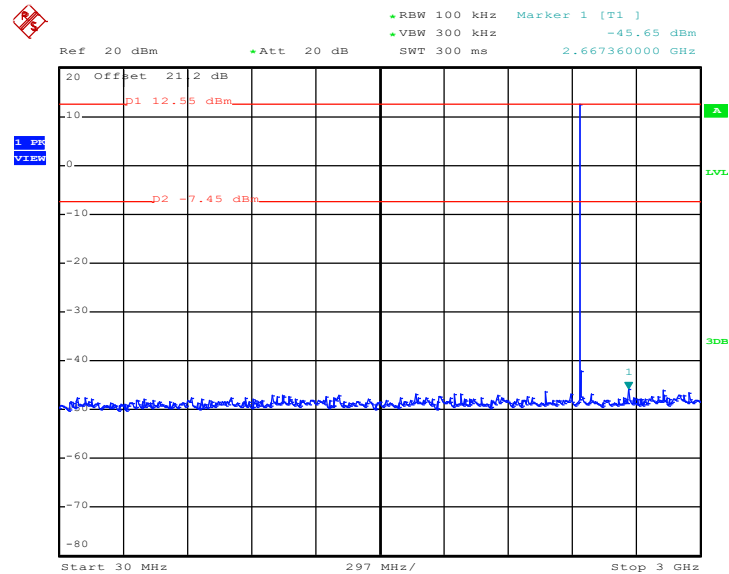

Date: 5.JAN.2020 15:29:59


CSE Plot on Ch 39 between 2 GHz ~ 25 GHz

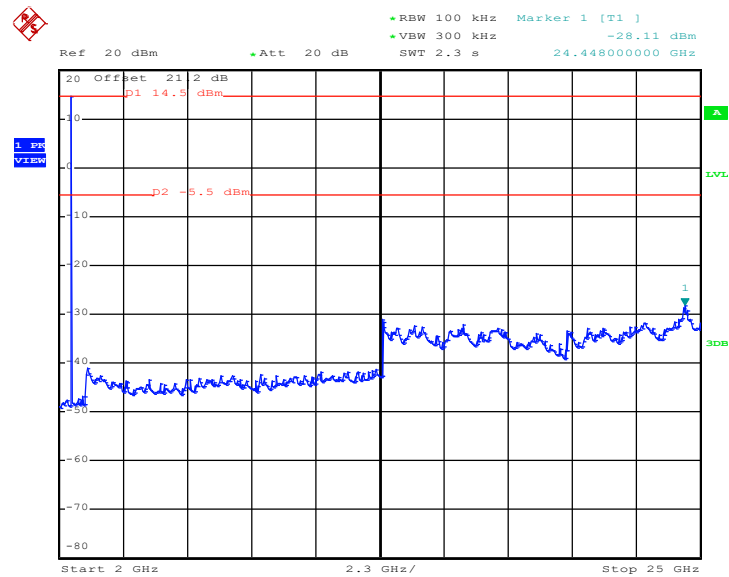

Date: 5.JAN.2020 15:30:21




CSE Plot on Ch 78 between 30MHz ~ 3 GHz

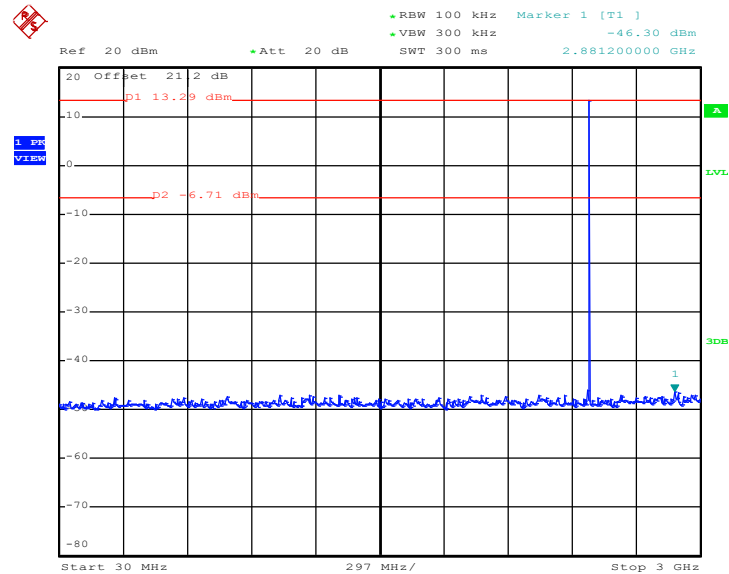

Date: 5.JAN.2020 16:01:30

CSE Plot on Ch 78 between 2 GHz ~ 25 GHz

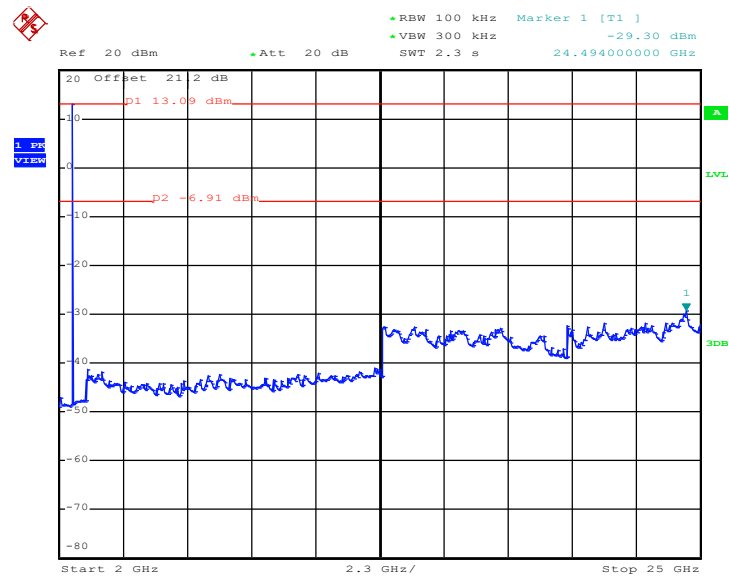


Date: 5.JAN.2020 16:01:51



For ant 2:


<1Mbps>

CSE Plot on Ch 00 between 30MHz ~ 3 GHz

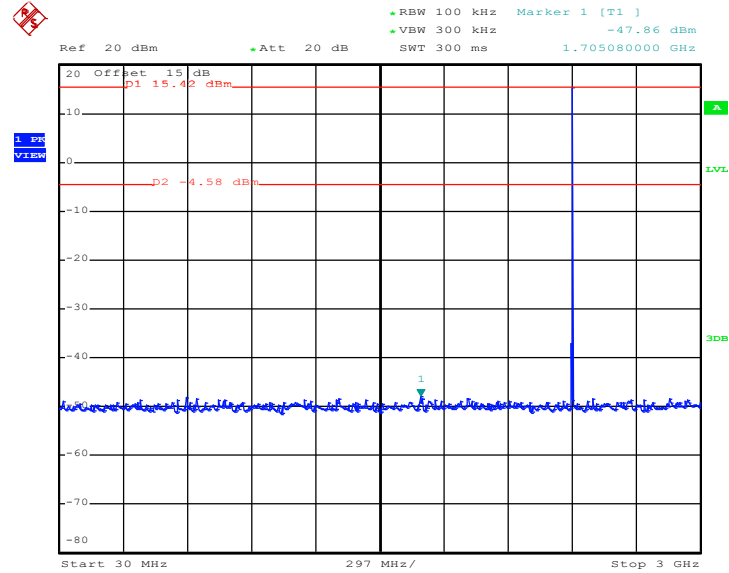

Date: 11.JAN.2020 15:37:33


1Mbps CSE Plot on Ch 00 between 2 GHz ~ 25 GHz

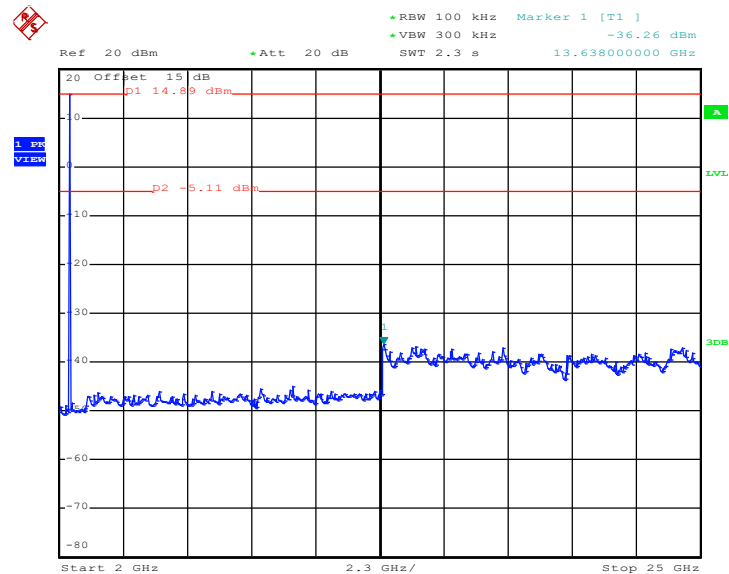

Date: 11.JAN.2020 15:37:55




CSE Plot on Ch 39 between 30MHz ~ 3 GHz

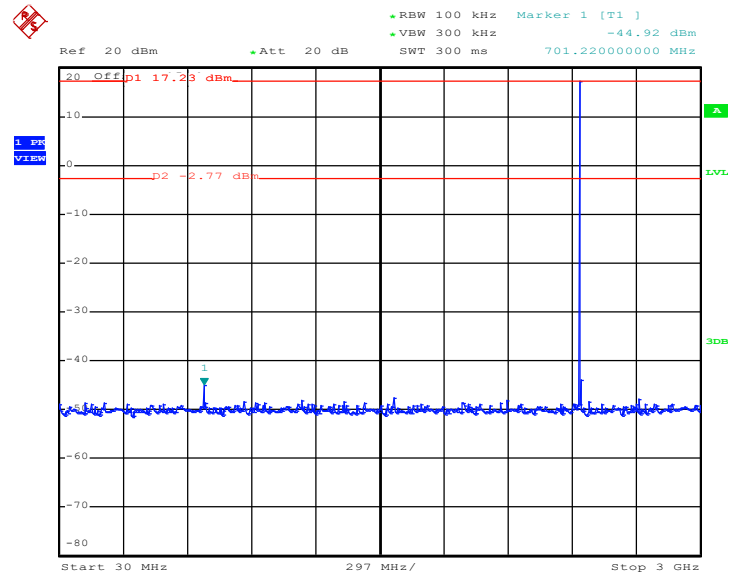

Date: 11.JAN.2020 15:48:59


CSE Plot on Ch 39 between 2 GHz ~ 25 GHz

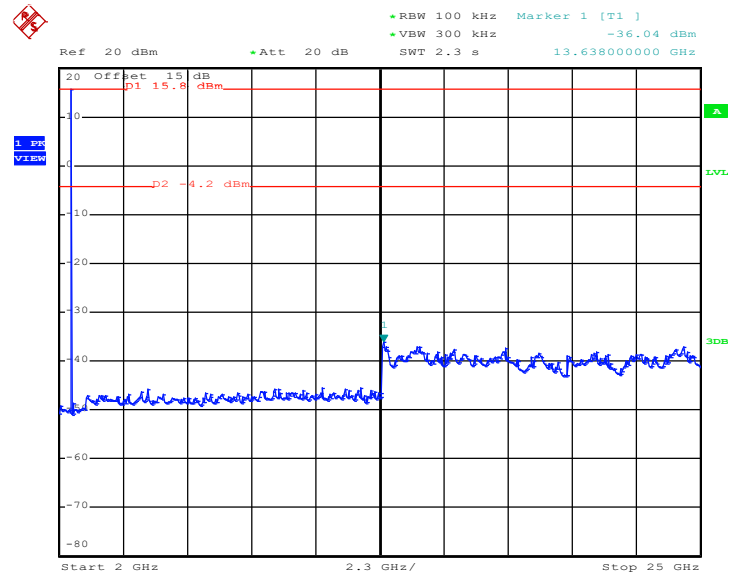

Date: 11.JAN.2020 15:49:21




CSE Plot on Ch 78 between 30MHz ~ 3 GHz

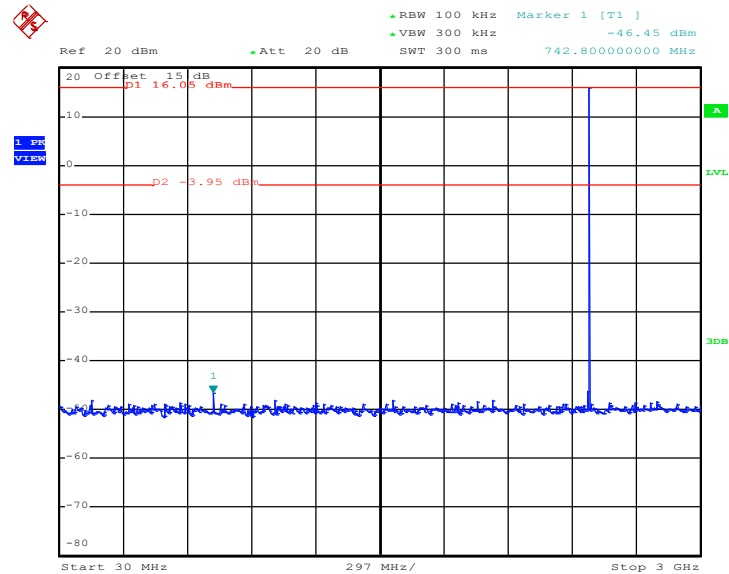

Date: 11.JAN.2020 15:51:06

CSE Plot on Ch 78 between 2 GHz ~ 25 GHz

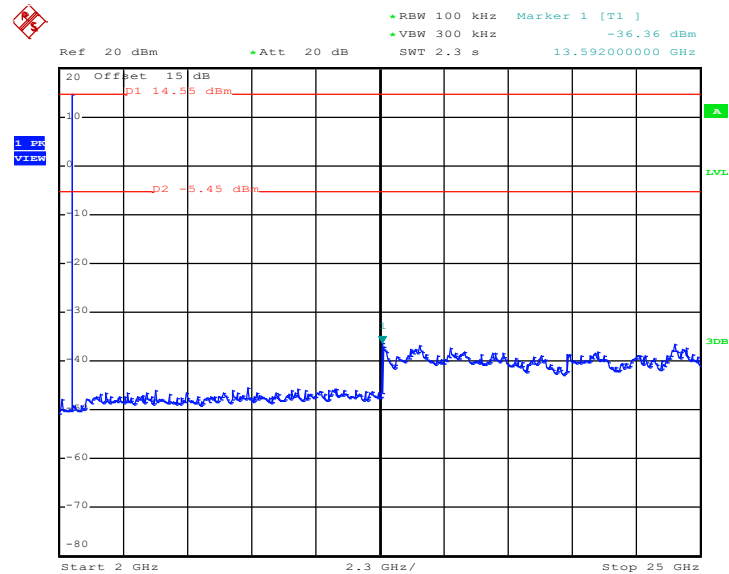


Date: 11.JAN.2020 15:51:27




<2Mbps>

CSE Plot on Ch 00 between 30MHz ~ 3 GHz

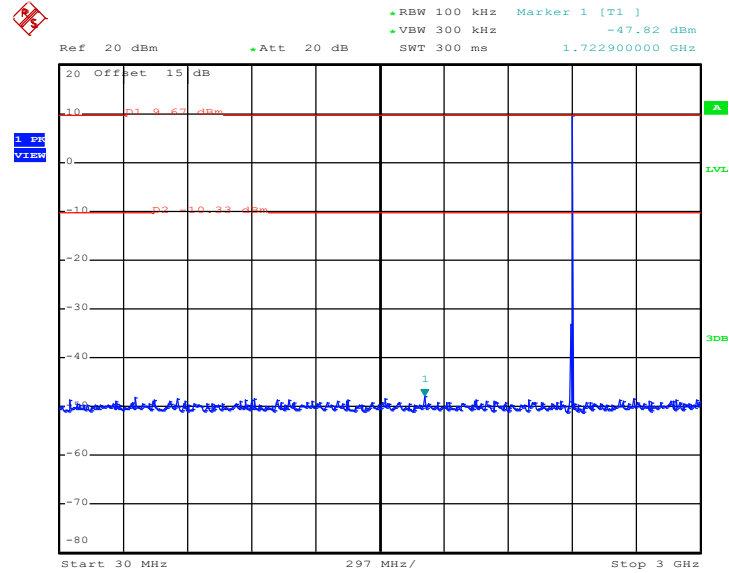

Date: 11.JAN.2020 16:26:53


CSE Plot on Ch 00 between 2 GHz ~ 25 GHz

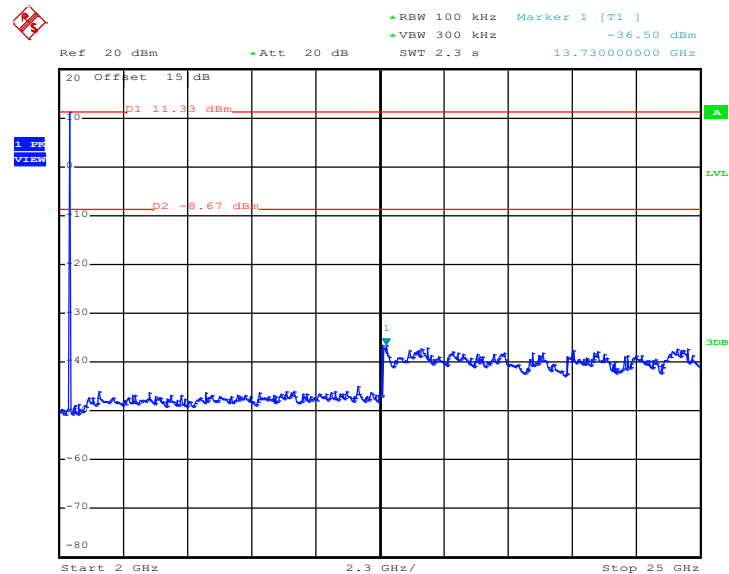

Date: 11.JAN.2020 16:27:15




CSE Plot on Ch 39 between 30MHz ~ 3 GHz

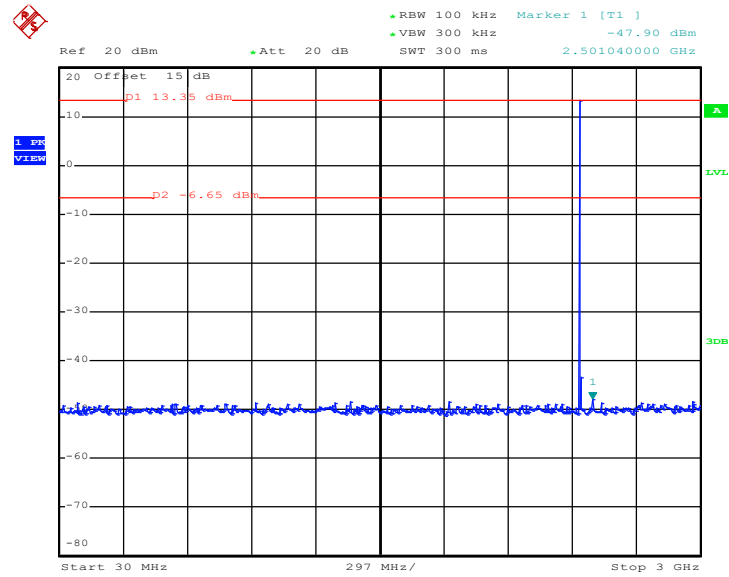

Date: 11.JAN.2020 16:28:53


CSE Plot on Ch 39 between 2 GHz ~ 25 GHz

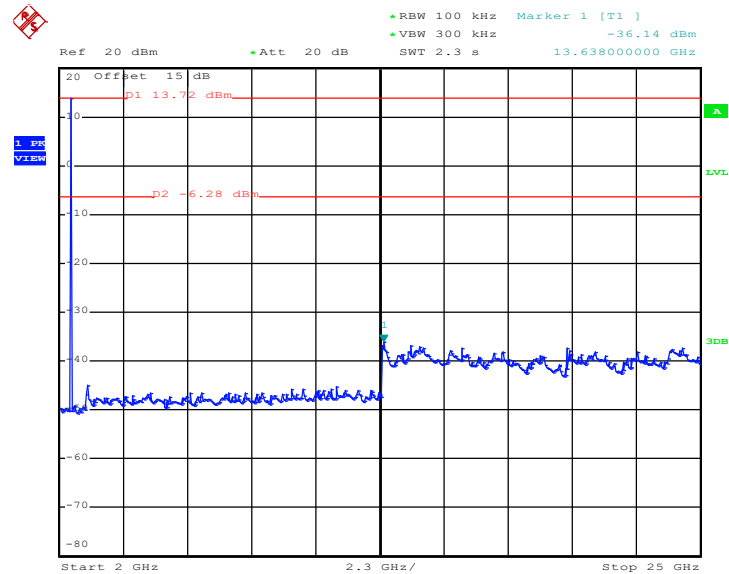

Date: 11.JAN.2020 16:29:14




CSE Plot on Ch 78 between 30MHz ~ 3 GHz

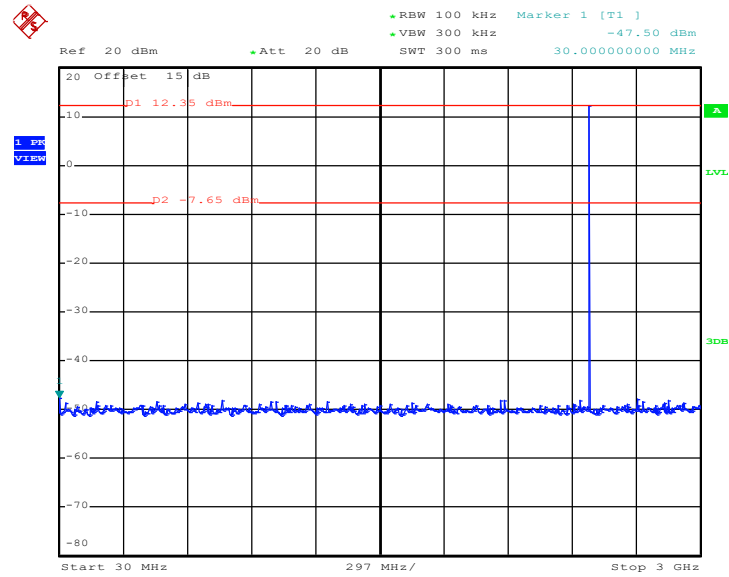

Date: 11.JAN.2020 16:30:34

CSE Plot on Ch 78 between 2 GHz ~ 25 GHz

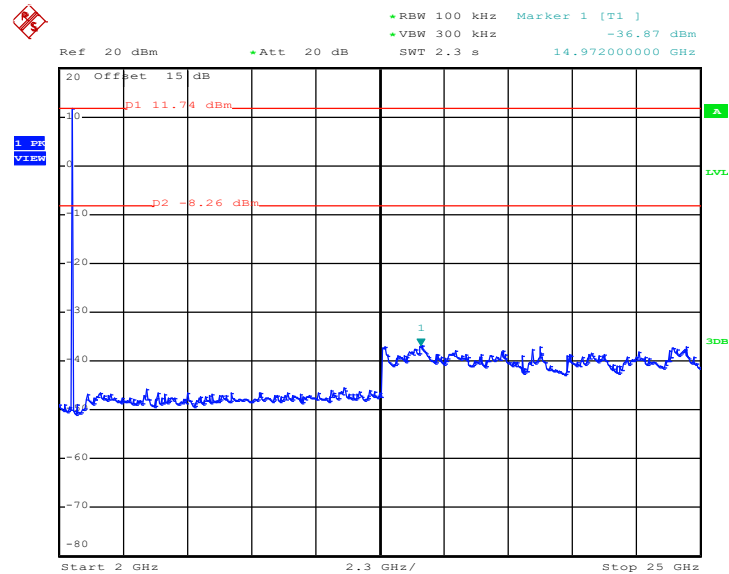


Date: 11.JAN.2020 16:30:56




<3Mbps>

CSE Plot on Ch 00 between 30MHz ~ 3 GHz

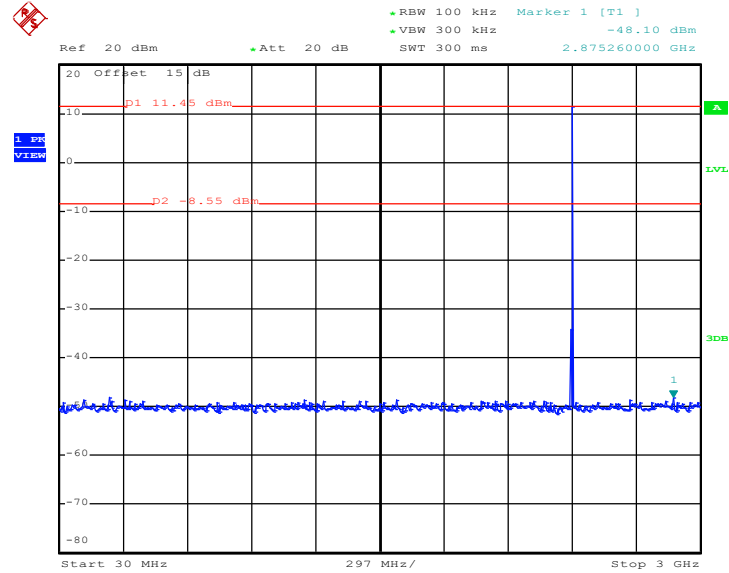

Date: 11.JAN.2020 17:08:15


CSE Plot on Ch 00 between 2 GHz ~ 25 GHz

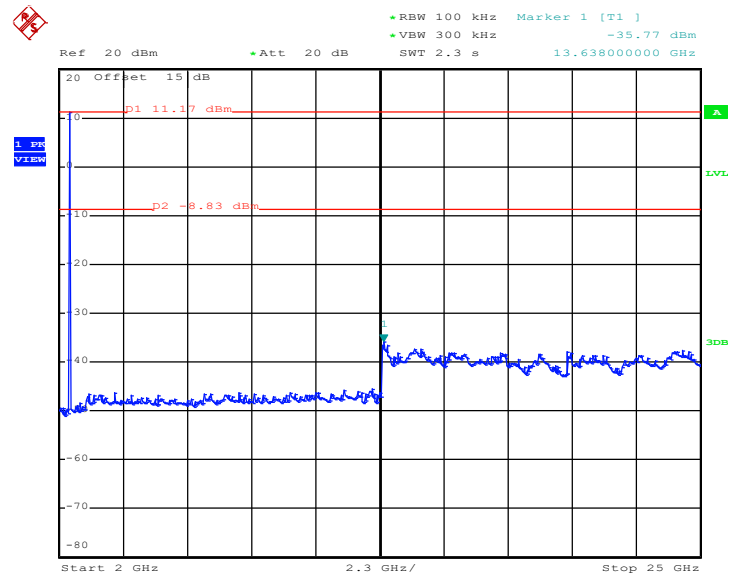

Date: 11.JAN.2020 17:08:37




CSE Plot on Ch 39 between 30MHz ~ 3 GHz

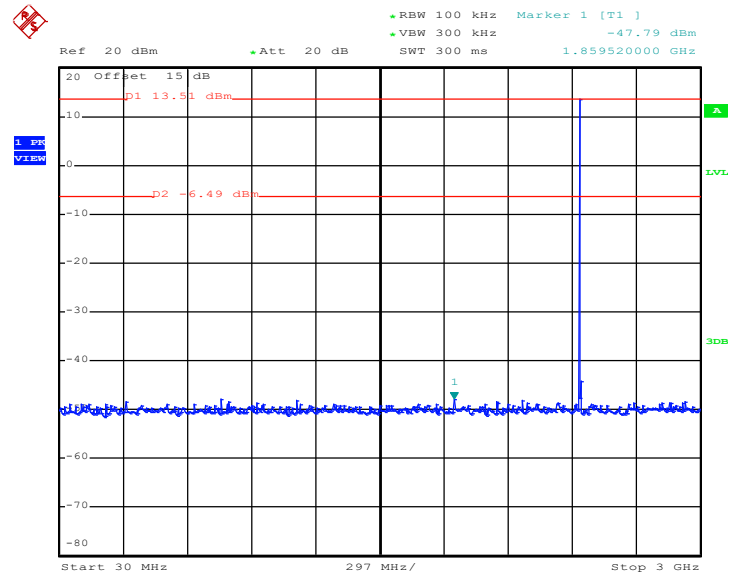

Date: 11.JAN.2020 17:09:56


CSE Plot on Ch 39 between 2 GHz ~ 25 GHz

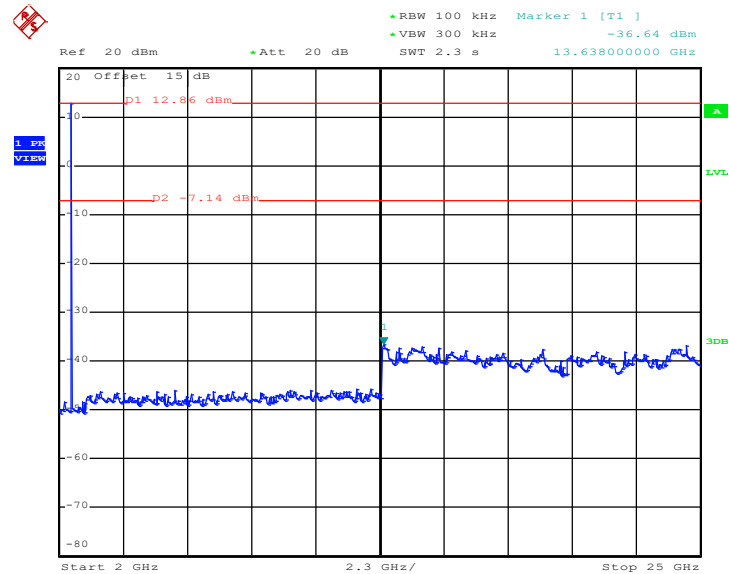

Date: 11.JAN.2020 17:10:18




CSE Plot on Ch 78 between 30MHz ~ 3 GHz

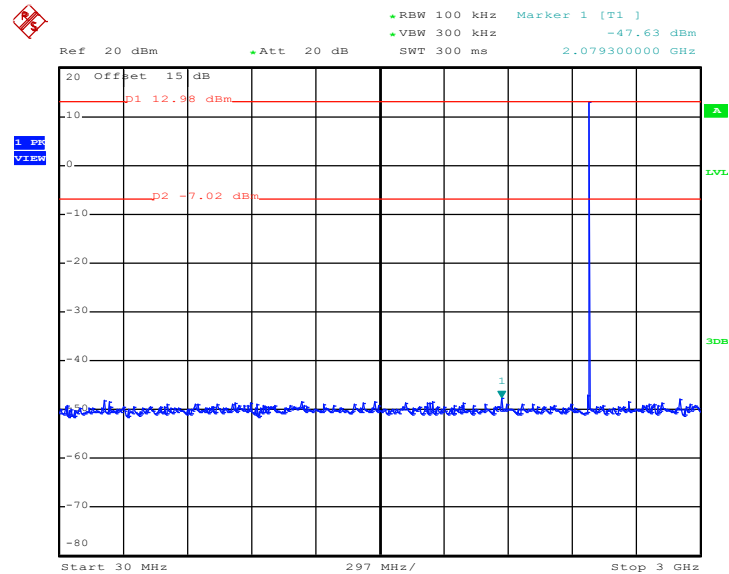

Date: 11.JAN.2020 17:12:36

CSE Plot on Ch 78 between 2 GHz ~ 25 GHz

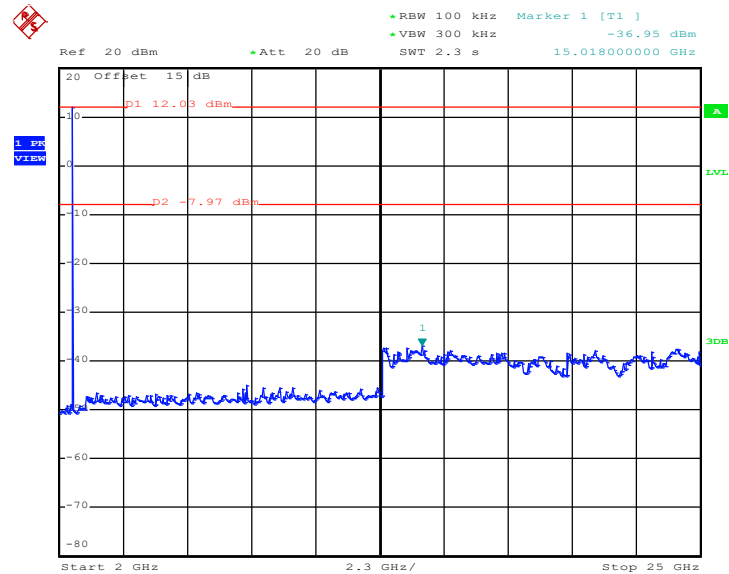

Date: 11.JAN.2020 17:12:57

3.8 Radiated Band Edges and Spurious Emission Measurement

3.8.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.8.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.


3.8.3 Test Procedures

1. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
2. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
3. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
4. Set to the maximum power setting and enable the EUT transmit continuously.
5. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz, RBW=1MHz for $f > 1$ GHz ; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold for peak
 - (3) For average measurement: use duty cycle correction factor method per 15.35(c).
Duty cycle = On time/100 milliseconds
On time = $N_1 * L_1 + N_2 * L_2 + \dots + N_{n-1} * L_{n-1} + N_n * L_n$
Where N_1 is number of type 1 pulses, L_1 is length of type 1 pulses, etc.
Average Emission Level = Peak Emission Level + $20 * \log(\text{Duty cycle})$
6. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
7. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
8. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.


Note: The average levels were calculated from the peak level corrected with duty cycle correction factor (-24.79 dB) derived from $20\log(\text{dwell time}/100\text{ms})$. This correction is only for signals that hop with the fundamental signal, such as band-edge and harmonic. Other spurious signals that are independent of the hopping signal would not use this correction.

3.8.4 Test Setup


For radiated emissions below 30MHz

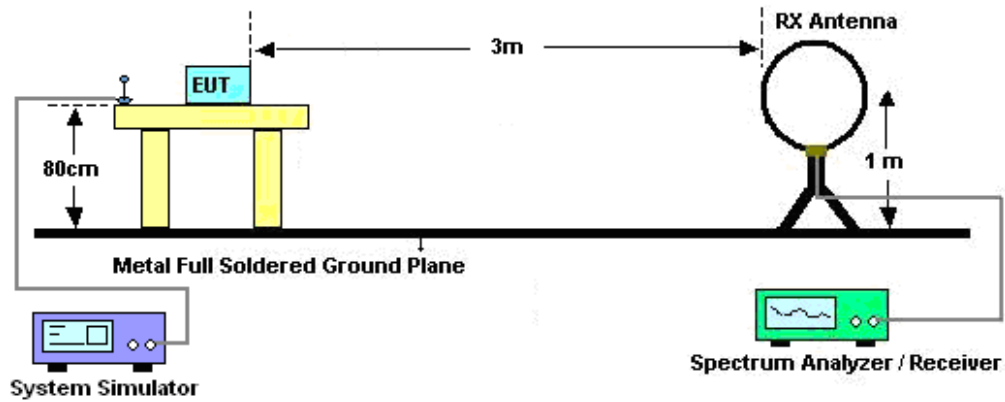

For radiated emissions from 30MHz to 1GHz

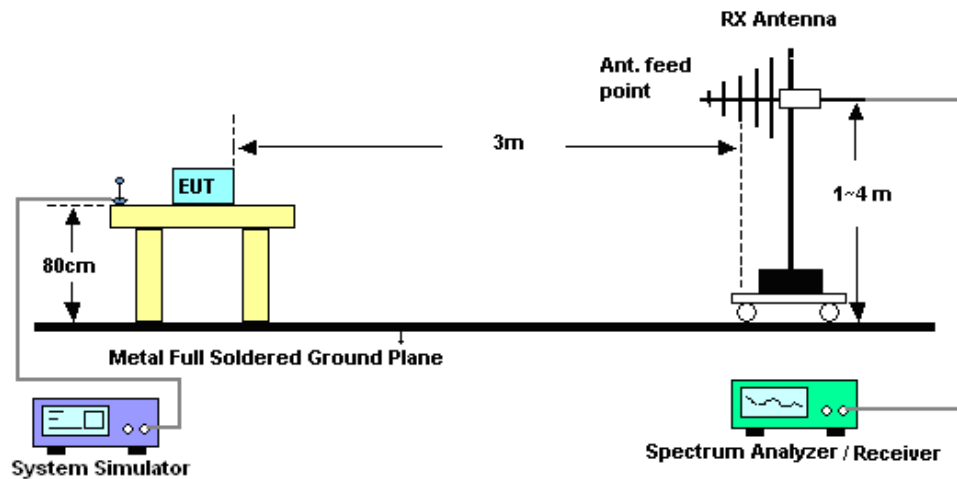

For radiated emissions above 1GHz

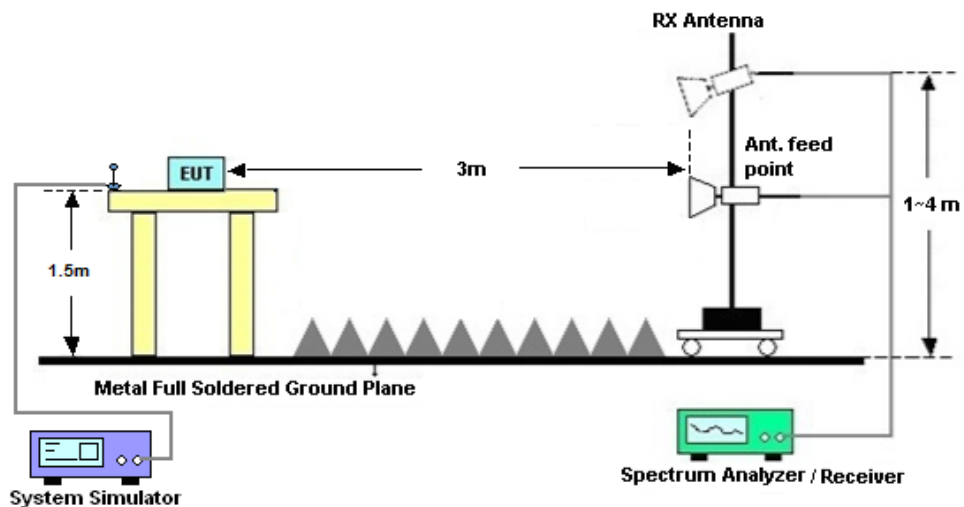



3.8.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.8.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C.

3.8.7 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic)

Please refer to Appendix C.

3.8.8 Duty cycle correction factor for average measurement

Please refer to Appendix D.

3.9 AC Conducted Emission Measurement

3.9.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dBμV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.9.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.9.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

3.9.4 Test Setup

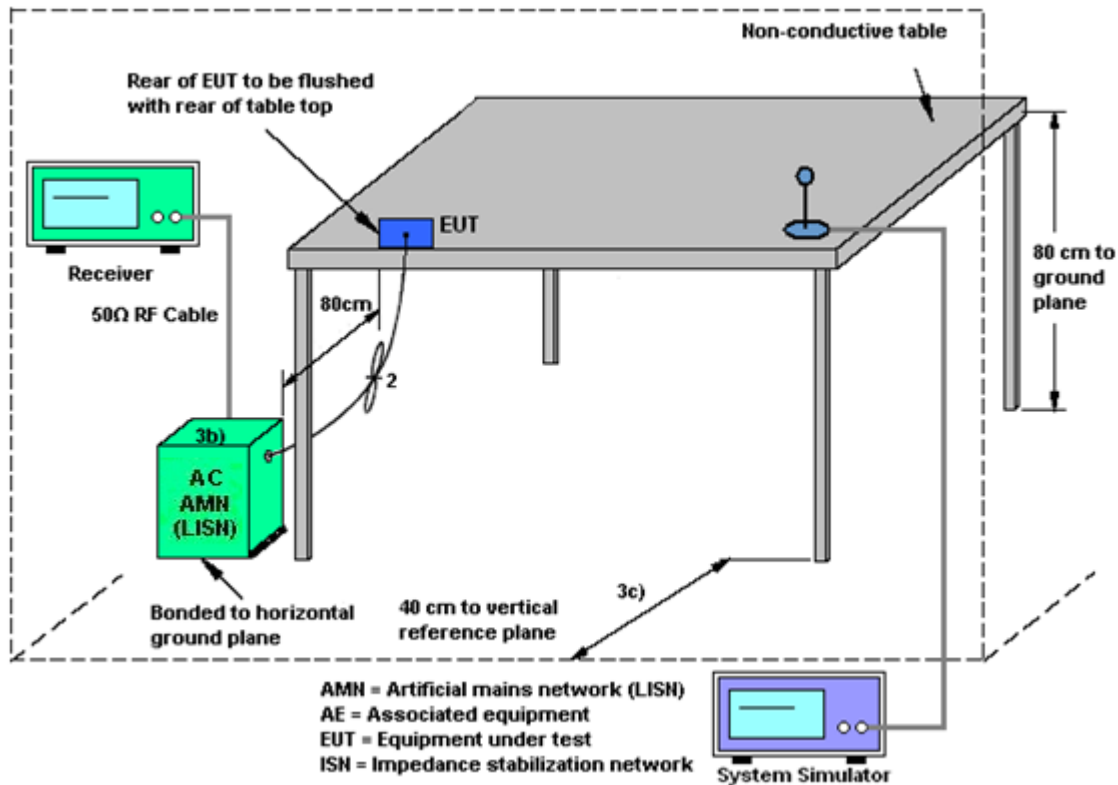

3.9.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.10 Antenna Requirements

3.10.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.10.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.10.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101078	10Hz~40GHz	Apr. 18, 2019	Dec. 03, 2019~ Jan. 11, 2020	Apr. 17, 2020	Conducted (TH01-SZ)
Spectrum Analyzer	R&S	FSP30	101400	9KHz~30GHz	Dec. 27, 2018	Dec. 03, 2019	Dec. 26, 2019	Conducted (TH01-SZ)
Spectrum Analyzer	R&S	FSP30	101400	9KHz~30GHz	Dec. 26, 2019	Jan. 05, 2020~ Jan. 11, 2020	Dec. 25, 2020	Conducted (TH01-SZ)
Pulse Power Sensor	Anritsu	MA2411B	1207253	30MHz~40GHz	Dec. 27, 2018	Dec. 03, 2019	Dec. 26, 2019	Conducted (TH01-SZ)
Pulse Power Sensor	Anritsu	MA2411B	1207253	30MHz~40GHz	Dec. 26, 2019	Jan. 05, 2020~ Jan. 11, 2020	Dec. 25, 2020	Conducted (TH01-SZ)
Power Meter	Anritsu	ML2495A	1218010	50MHz Bandwidth	Dec. 27, 2018	Dec. 03, 2019	Dec. 26, 2019	Conducted (TH01-SZ)
Power Meter	Anritsu	ML2495A	1218010	50MHz Bandwidth	Dec. 26, 2019	Jan. 05, 2020~ Jan. 11, 2020	Dec. 25, 2020	Conducted (TH01-SZ)
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY55150213	10Hz~44GHz	Apr. 19, 2019	Dec. 11, 2019	Apr. 18, 2020	Radiation (03CH02-SZ)
Loop Antenna	R&S	HFH2-Z2	100354	9kHz~30MHz	May 29, 2019	Dec. 11, 2019	May 28, 2020	Radiation (03CH02-SZ)
Bilog Antenna	TeseQ	CBL6112D	35407	30MHz~2GHz	Jul. 19, 2019	Dec. 11, 2019	Jul. 18, 2020	Radiation (03CH02-SZ)
Double Ridge Horn Antenna	SCHWARZBECK	BBHA 9120D	9120D-1285	1GHz~18GHz	Jan. 07, 2019	Dec. 11, 2019	Jan. 06, 2020	Radiation (03CH02-SZ)
HF Amplifier	MITEQ	TTA1840-35-HG	1871923	18GHz~40GHz	Jul. 22, 2019	Dec. 11, 2019	Jul. 21, 2020	Radiation (03CH02-SZ)
SHF-EHF Horn	com-power	AH-840	101071	18GHz~40GHz	Apr. 18, 2019	Dec. 11, 2019	Apr. 17, 2020	Radiation (03CH02-SZ)
LF Amplifier	Burgeon	BPA-530	102211	0.01~3000Mhz	Oct. 18, 2019	Dec. 11, 2019	Oct. 17, 2020	Radiation (03CH02-SZ)
HF Amplifier	MITEQ	AMF-7D-0010 1800-30-10P-R	1943528	1GHz~18GHz	Oct. 18, 2019	Dec. 11, 2019	Oct. 17, 2020	Radiation (03CH02-SZ)
HF Amplifier	KEYSIGHT	83017A	MY53270105	0.5GHz~26.5GHz	Oct. 18, 2019	Dec. 11, 2019	Oct. 17, 2020	Radiation (03CH02-SZ)
AC Power Source	Chroma	61601	616010002470	N/A	NCR	Dec. 11, 2019	NCR	Radiation (03CH02-SZ)
Turn Table	Chaintek	T-200	N/A	0~360 degree	NCR	Dec. 11, 2019	NCR	Radiation (03CH02-SZ)
Antenna Mast	Chaintek	MBS-400	N/A	1 m~4 m	NCR	Dec. 11, 2019	NCR	Radiation (03CH02-SZ)
EMI Receiver	R&S	ESR7	101630	9kHz~7GHz;	Dec. 26, 2018	Dec. 13, 2019	Dec. 25, 2019	Conduction (CO01-SZ)
AC LISN	EMCO	3816/2SH	00103912	9kHz~30MHz	Oct. 17, 2019	Dec. 13, 2019	Oct. 16, 2020	Conduction (CO01-SZ)
AC LISN (for auxiliary equipment)	EMCO	3816/2SH	00103892	9kHz~30MHz	Dec. 27, 2018	Dec. 13, 2019	Dec. 26, 2019	Conduction (CO01-SZ)
AC Power Source	Chroma	61602	616020000891	100Vac~250Vac	Jul. 23, 2019	Dec. 13, 2019	Jul. 22, 2020	Conduction (CO01-SZ)

NCR: No Calibration Required

5 Uncertainty of Evaluation

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage $K=2$ to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.6dB
---	-------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.0dB
---	-------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.0dB
---	-------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.4dB
---	-------



Appendix A. Conducted Test Results

Appendix A. Test Result of Conducted Test Items

Test Engineer:	Hayden Wang	Temperature:	21~25	°C
Test Date:	2019/12/3~2020/1/11	Relative Humidity:	51~54	%

20dB Bandwidth Measurement**15.247 (a) (1) (ii)**

BT	20dB Bandwidth MHz	Limit
CH 00	0.896	
CH 39	0.900	
CH 78	0.896	
BT EDR(2Mbps)	20dB Bandwidth MHz	Limit
CH 00	1.302	
CH 39	1.302	
CH 78	1.308	
BT EDR(3Mbps)	20dB Bandwidth MHz	Limit
CH 00	1.242	
CH 39	1.242	
CH 78	1.266	

Hopping Channel Separation Measurement**15.247 (a) (1)**

BT	Separation MHz	Limit MHz
CH 00	0.990	0.5973
CH 39	1.002	0.6000
CH 78	1.002	0.5973
BT EDR(2Mbps)	Separation MHz	Limit MHz
CH 00	1.002	0.8680
CH 39	1.020	0.8680
CH 78	1.002	0.8720
BT EDR(3Mbps)	Separation MHz	Limit MHz
CH 00	1.296	0.8280
CH 39	1.008	0.8280
CH 78	1.020	0.8440

Dwell Time of each Frequency Measurement 15.247 (a) (1) (ii)
CH00

CFG:PKT 31/1021 TX DATA1

Package Mode	Average Hopping Channel	Package Transfer Time(ms)	Dwell Time(s)	Limit
3-DH5	106.67	2.89	0.31	< 0.4s

Occupied Bandwidth Measurement

BT	99% Bandwidth MHz	Max Occupied Bandwidth
CH 00	0.824	0.8280
CH 39	0.824	
CH 78	0.828	
BT EDR(2Mbps)	99% Bandwidth MHz	Max Occupied Bandwidth
CH 00	1.172	1.1720
CH 39	1.168	
CH 78	1.172	
BT EDR(3Mbps)	99% Bandwidth KHz	Max Occupied Bandwidth
CH 00	1.152	1.1520
CH 39	1.148	
CH 78	1.152	

Output Power Measurement

15.247 (b)

TX DATA1

BT	Output Power dBm	Output Power mW	Limit
CH 00	16.10	40.74	< 20.97 dBm
CH 39	17.80	60.26	< 20.97 dBm
CH 78	15.80	38.02	< 20.97 dBm
BT EDR(2Mbps)	Output Power dBm	Output Power mW	Limit
CH 00	15.60	36.31	< 20.97 dBm
CH 39	17.50	56.23	< 20.97 dBm
CH 78	15.50	35.48	< 20.97 dBm
BT EDR(3Mbps)	Output Power dBm	Output Power mW	Limit
CH 00	16.10	40.74	< 20.97 dBm
CH 39	17.90	61.66	< 20.97 dBm
CH 78	15.80	38.02	< 20.97 dBm

Total Channels

Results	Limit
79	> 15

Ant2:**20dB Bandwidth Measurement****15.247 (a) (1) (ii)**

BT	20dB Bandwidth MHz	Limit
CH 00	0.900	
CH 39	0.900	
CH 78	0.900	
BT EDR(2Mbps)	20dB Bandwidth MHz	Limit
CH 00	1.308	
CH 39	1.308	
CH 78	1.308	
BT EDR(3Mbps)	20dB Bandwidth MHz	Limit
CH 00	1.248	
CH 39	1.248	
CH 78	1.242	

Hopping Channel Separation Measurement**15.247 (a) (1)**

BT	Separation MHz	Limit MHz
CH 00	1.002	0.6000
CH 39	1.002	0.6000
CH 78	1.008	0.6000
BT EDR(2Mbps)	Separation MHz	Limit MHz
CH 00	1.002	0.8720
CH 39	0.996	0.8720
CH 78	1.002	0.8720
BT EDR(3Mbps)	Separation MHz	Limit MHz
CH 00	0.990	0.8320
CH 39	1.002	0.8320
CH 78	1.014	0.8280

Dwell Time of each Frequency Measurement 15.247 (a) (1) (ii)
CH00

CFG:PKT 31/1021 TX DATA1

Package Mode	Average Hopping Channel	Package Transfer Time(ms)	Dwell Time(s)	Limit
3-DH5	106.67	2.89	0.31	< 0.4s

Occupied Bandwidth Measurement

BT	99% Bandwidth MHz	Max Occupied Bandwidth
CH 00	0.828	0.8280
CH 39	0.824	
CH 78	0.828	
BT EDR(2Mbps)	99% Bandwidth MHz	Max Occupied Bandwidth
CH 00	1.168	1.1720
CH 39	1.172	
CH 78	1.172	
BT EDR(3Mbps)	99% Bandwidth KHz	Max Occupied Bandwidth
CH 00	1.152	1.1520
CH 39	1.152	
CH 78	1.152	

Output Power Measurement

15.247 (b)

TX DATA1


BT	Output Power dBm	Output Power mW	Limit
CH 00	16.00	39.81	< 20.97 dBm
CH 39	17.50	56.23	< 20.97 dBm
CH 78	16.00	39.81	< 20.97 dBm
BT EDR(2Mbps)	Output Power dBm	Output Power mW	Limit
CH 00	14.50	28.18	< 20.97 dBm
CH 39	16.10	40.74	< 20.97 dBm
CH 78	14.80	30.20	< 20.97 dBm
BT EDR(3Mbps)	Output Power dBm	Output Power mW	Limit
CH 00	14.80	30.20	< 20.97 dBm
CH 39	16.50	44.67	< 20.97 dBm
CH 78	15.20	33.11	< 20.97 dBm

Total Channels

Results	Limit
79	> 15




Appendix B. AC Conducted Emission Test Results

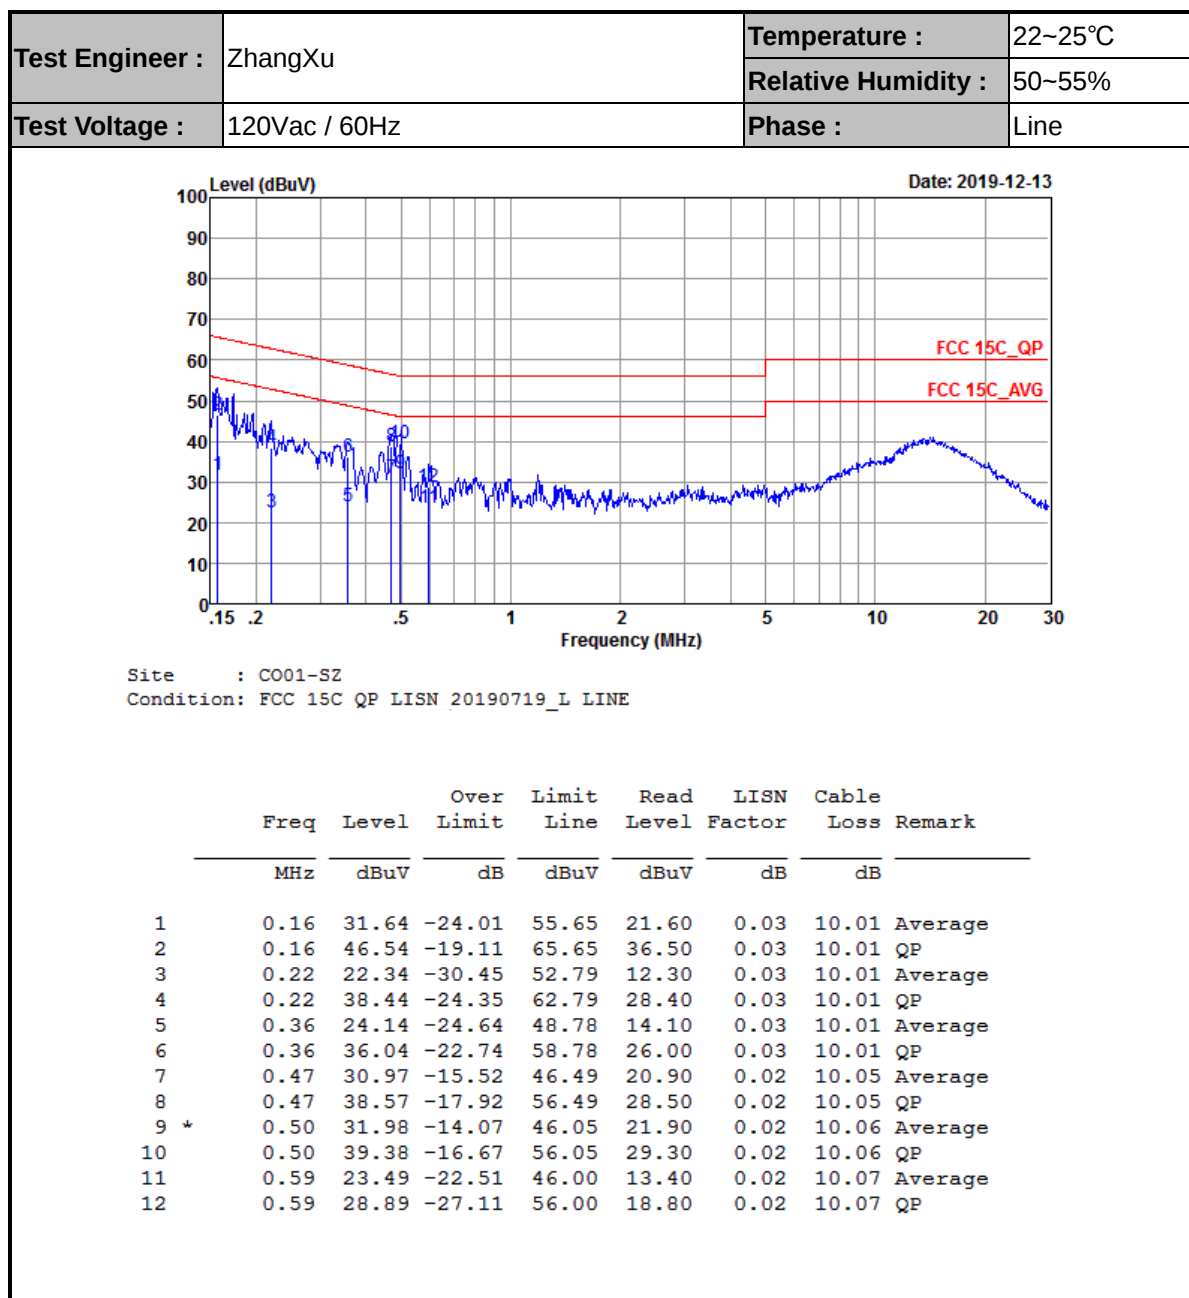



Test Engineer :	ZhangXu	Temperature :	22~25°C
		Relative Humidity :	50~55%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral

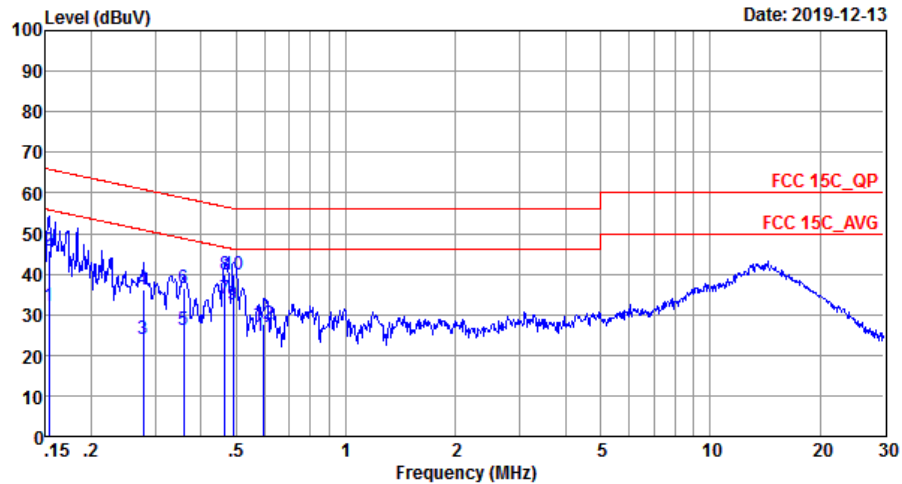

Site : C001-SZ
Condition: FCC 15C QP LISN 20190719_N NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable		
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark	
			dB	dBuV	dBuV	dB	dB		
1	0.15	32.24	-23.58	55.82	22.20	0.03	10.01	Average	
2	0.15	45.84	-19.98	65.82	35.80	0.03	10.01	QP	
3	0.28	23.84	-27.06	50.90	13.80	0.03	10.01	Average	
4	0.28	36.24	-24.66	60.90	26.20	0.03	10.01	QP	
5	0.36	26.13	-22.61	48.74	16.10	0.02	10.01	Average	
6	0.36	36.63	-22.11	58.74	26.60	0.02	10.01	QP	
7 *	0.47	33.96	-12.62	46.58	23.90	0.02	10.04	Average	
8	0.47	39.86	-16.72	56.58	29.80	0.02	10.04	QP	
9	0.49	32.58	-13.56	46.14	22.50	0.02	10.06	Average	
10	0.49	39.88	-16.26	56.14	29.80	0.02	10.06	QP	
11	0.59	24.79	-21.21	46.00	14.70	0.02	10.07	Average	
12	0.59	27.79	-28.21	56.00	17.70	0.02	10.07	QP	

Note:

1. $\text{Level(dB}\mu\text{V)} = \text{Read Level(dB}\mu\text{V)} + \text{LISN Factor(dB)} + \text{Cable Loss(dB)}$
2. $\text{Over Limit(dB)} = \text{Level(dB}\mu\text{V)} - \text{Limit Line(dB}\mu\text{V)}$



Appendix C. Radiated Spurious Emission

2.4GHz 2400~2483.5MHz

BT (Band Edge @ 3m)

BT	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
BT CH00 2402MHz		2388.85	42.77	-31.23	74	40.33	27.7	7.54	32.8	100	53	P	H
		2388.85	17.98	-36.02	54	-	-	-	-	100	53	A	H
	*	2402	109.03	-	-	106.57	27.7	7.54	32.78	100	53	P	H
	*	2402	84.24	-	-	-	-	-	-	100	53	A	H
		2389.59	41.74	-32.26	74	39.3	27.7	7.54	32.8	100	103	P	V
		2389.59	16.95	-37.05	54	-	-	-	-	100	103	A	V
	*	2402	107.62	-	-	105.16	27.7	7.54	32.78	100	103	P	V
	*	2402	82.83	-	-	-	-	-	-	100	103	A	V
BT CH 39 2441MHz		2340.52	41.23	-32.77	74	38.67	27.9	7.48	32.82	100	0	P	H
		2340.52	16.44	-37.56	54	-	-	-	-	100	0	A	H
	*	2441	110.57	-	-	108.17	27.6	7.54	32.74	100	0	P	H
	*	2441	85.78	-	-	-	-	-	-	100	0	A	H
		2484.74	40.78	-33.22	74	38.5	27.47	7.53	32.72	100	0	P	H
		2484.74	15.99	-38.01	54	-	-	-	-	100	0	A	H
		2388.26	40.93	-33.07	74	38.49	27.7	7.54	32.8	100	64	P	V
		2388.26	16.14	-37.86	54	-	-	-	-	100	64	A	V
	*	2441	108.67	-	-	106.27	27.6	7.54	32.74	100	64	P	V
	*	2441	83.88	-	-	-	-	-	-	100	64	A	V
		2492.44	40.61	-33.39	74	38.38	27.4	7.53	32.7	100	64	P	V
		2492.44	15.82	-38.18	54	-	-	-	-	100	64	A	V



BT CH 78 2480MHz	*	2480	108.18	-	-	105.9	27.47	7.53	32.72	102	0	P	H
	*	2480	83.39	-	-	-	-	-	-	102	0	A	H
		2483.52	50.52	-23.48	74	48.24	27.47	7.53	32.72	102	0	P	H
		2483.52	25.73	-28.27	54	-	-	-	-	102	0	A	H
	*	2480	105.79	-	-	103.51	27.47	7.53	32.72	108	108	P	V
	*	2480	81	-	-	-	-	-	-	108	108	A	V
		2483.52	48.48	-25.52	74	46.2	27.47	7.53	32.72	108	108	P	V
		2483.52	23.69	-30.31	54	-	-	-	-	108	108	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

BT (Harmonic @ 3m)

BT	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
BT CH 00 2402MHz		4804	38.96	-35.04	74	52.38	31.1	9.86	54.38	151	219	P	H
		4804	14.17	-39.83	54	-	-	-	-	151	219	A	H
		4804	39.66	-34.34	74	53.08	31.1	9.86	54.38	127	152	P	V
		4804	14.87	-39.13	54	-	-	-	-	127	152	A	V
BT CH 39 2441MHz		4882	38.56	-35.44	74	51.88	31.13	9.9	54.35	129	161	P	H
		4882	13.77	-40.23	54	-	-	-	-	129	161	A	H
		7323	45.04	-28.96	74	51.29	36.4	11.88	54.53	137	206	P	H
		7323	20.25	-33.75	54	-	-	-	-	137	206	A	H
		4882	38.94	-35.06	74	52.26	31.13	9.9	54.35	150	258	P	V
		4882	14.15	-39.85	54	-	-	-	-	150	258	A	V
		7323	45.45	-28.55	74	51.7	36.4	11.88	54.53	152	309	P	V
		7323	20.66	-33.34	54	-	-	-	-	152	309	A	V
BT CH 78 2480MHz		4960	40.95	-33.05	74	53.96	31.37	9.93	54.31	155	214	P	H
		4960	16.16	-37.84	54	-	-	-	-	155	214	A	H
		7440	45.02	-28.98	74	51.14	36.5	12.03	54.65	137	209	P	H
		7440	20.23	-33.77	54	-	-	-	-	137	209	A	H
		4960	39.57	-34.43	74	52.58	31.37	9.93	54.31	118	289	P	V
		4960	14.78	-39.22	54	-	-	-	-	118	289	A	V
		7440	44.61	-29.39	74	50.73	36.5	12.03	54.65	158	273	P	V
		7440	19.82	-34.18	54	-	-	-	-	158	273	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Emission below 1GHz

2.4GHz BT (LF)

BT	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
2.4GHz BT LF		30	28.06	-11.94	40	35.2	24.8	0.56	32.5	122	305	P	H
		133.79	25.29	-18.21	43.5	38.52	17.47	1.2	31.9	-	-	P	H
		240.49	28.25	-17.75	46	40.79	17.64	1.62	31.8	-	-	P	H
		403.45	28.73	-17.27	46	36.41	21.88	2.13	31.69	-	-	P	H
		513.06	28.92	-17.08	46	33.86	24.14	2.43	31.51	-	-	P	H
		884.57	31.55	-14.45	46	30.47	28.92	3.28	31.12	-	-	P	H
		30	30.55	-9.45	40	36.49	24.8	0.56	31.3	154	122	P	V
		128.94	29.84	-13.66	43.5	42.72	17.44	1.17	31.49	-	-	P	V
		260.86	21.28	-24.72	46	30.89	20.33	1.69	31.63	-	-	P	V
		430.61	25.01	-20.99	46	31.81	22.45	2.21	31.46	-	-	P	V
		521.79	27.19	-18.81	46	31.68	24.31	2.45	31.25	-	-	P	V
		996.12	31.29	-22.71	54	28.49	30.54	3.47	31.21	-	-	P	V
Remark	1. No other spurious found. 2. All results are PASS against limit line.												



Note symbol

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is over limit line.
P/A	P eak or A verage
H/V	H orizontal or V ertical



A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Level(dBμV/m) =

Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

2. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)

= 55.45 (dBμV/m)

2. Over Limit(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 55.45(dBμV/m) – 74(dBμV/m)

= -18.55(dB)

For Average Limit @ 2390MHz:

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)

= 43.54 (dBμV/m)

2. Over Limit(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)


= 43.54(dBμV/m) – 54(dBμV/m)

= -10.46(dB)


Both peak and average measured complies with the limit line, so test result is “PASS”.

Appendix D. Duty Cycle Plots

3DH5 on time (One Pulse) Plot on Channel 39

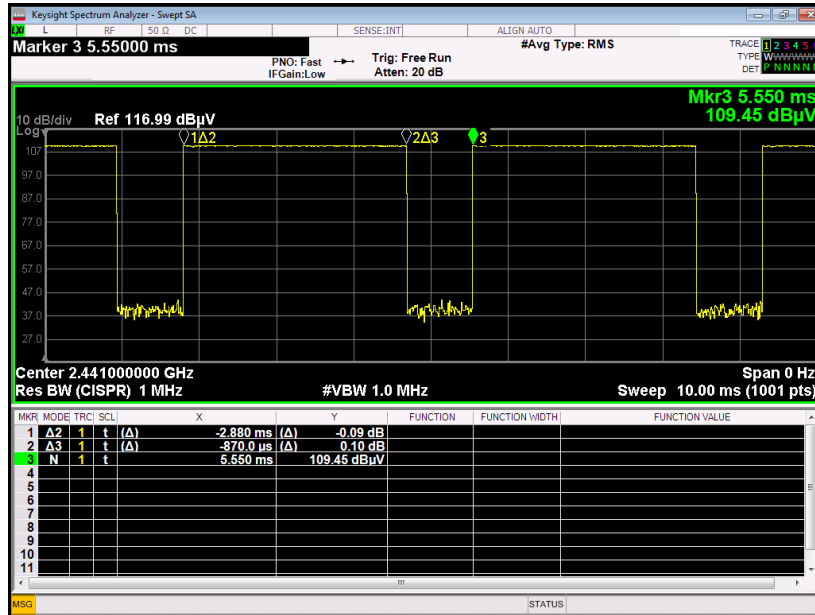

3DH5 on time (Count Pulses) Plot on Channel 39

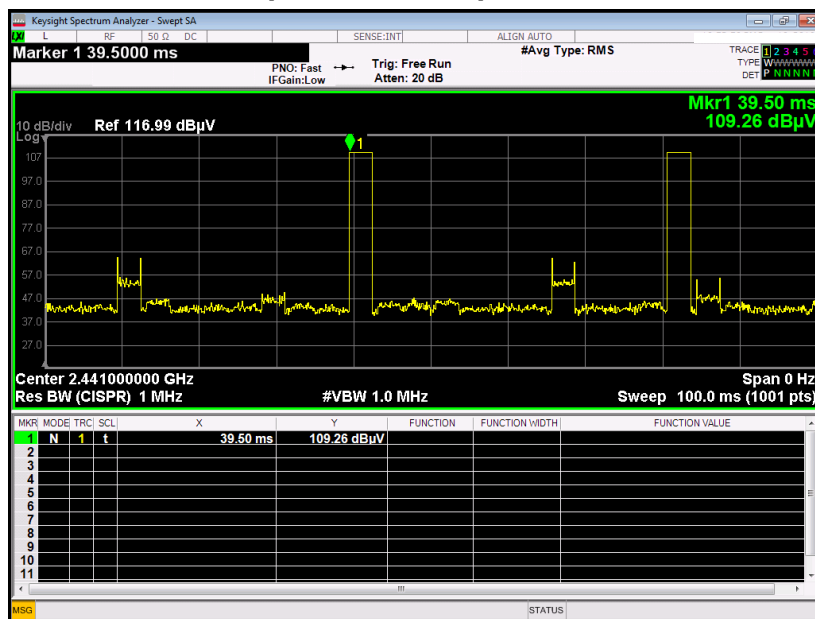

Note:

1. Worst case Duty cycle = on time/100 milliseconds = $2 * 2.88 / 100 = 5.76 \%$
2. Worst case Duty cycle correction factor = $20 * \log(\text{Duty cycle}) = -24.79 \text{ dB}$
3. 3DH5 has the highest duty cycle worst case and is reported.