

FCC Test Report

APPLICANT : OnePlus Technology (Shenzhen) Co., Ltd
EQUIPMENT : Smart Phone
BRAND NAME : ONEPLUS
MODEL NAME : IN2015
FCC ID : 2ABZ2-EE103
STANDARD : 47 CFR Part 15 Subpart B
CLASSIFICATION : Certification

The product was received on Nov. 20, 2019 and testing was completed on Dec. 16, 2019. We, Sporton International (ShenZhen) Inc., would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI C63.4-2014 and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (ShenZhen) Inc., the test report shall not be reproduced except in full.



Reviewed by: Derreck Chen / Supervisor



Approved by: Eric Shih / Manager



Sporton International (ShenZhen) Inc.

**1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan Shenzhen, 518055
People's Republic of China**



TABLE OF CONTENTS

REVISION HISTORY	3
SUMMARY OF TEST RESULT	4
1. GENERAL DESCRIPTION	5
1.1. Applicant.....	5
1.2. Manufacturer	5
1.3. Product Feature of Equipment Under Test	5
1.4. Product Specification of Equipment Under Test	6
1.5. Modification of EUT	7
1.6. Test Location	8
1.7. Test Software	8
1.8. Applicable Standards	8
2. TEST CONFIGURATION OF EQUIPMENT UNDER TEST	9
2.1. Test Mode	9
2.2. Connection Diagram of Test System	11
2.3. Support Unit used in test configuration and system	12
2.4. EUT Operation Test Setup	13
3. TEST RESULT	14
3.1. Test of AC Conducted Emission Measurement	14
3.2. Test of Radiated Emission Measurement	18
4. LIST OF MEASURING EQUIPMENT	23
5. UNCERTAINTY OF EVALUATION	24
APPENDIX A. SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FC9N2025-02	Rev. 01	Initial issue of report	Mar. 19, 2020

SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.107	AC Conducted Emission	< 15.107 limits	PASS	Under limit 10.90 dB at 0.48 MHz
3.2	15.109	Radiated Emission	< 15.109 limits	PASS	Under limit 6.08 dB at 62.01 MHz

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.



1. General Description

1.1. Applicant

OnePlus Technology (Shenzhen) Co., Ltd

18C02, 18C03, 18C04 and 18C05, Shum Yip Terra Building, Binhe Avenue North, Futian District, Shenzhen

1.2. Manufacturer

OnePlus Technology (Shenzhen) Co., Ltd

18C02, 18C03, 18C04 and 18C05, Shum Yip Terra Building, Binhe Avenue North, Futian District, Shenzhen

1.3. Product Feature of Equipment Under Test

Product Feature	
Equipment	Smart Phone
Brand Name	ONEPLUS
Model Name	IN2015
FCC ID	2ABZ2-EE103
EUT supports Radios application	CDMA/GSM/WCDMA/LTE/5G NR WLAN 2.4GHz 802.11b/g/n (HT20) WLAN 2.4GHz 802.11ax (HE20/HE40) WLAN 5GHz 802.11a/n/ac (HT20/HT40/VHT20/VHT40/VHT80) WLAN 5GHz 802.11ax (HE20/HE40/HE80) Bluetooth BR / EDR / LE GNSS/NFC
IMEI Code	Conduction: 001003902897498 Radiation:001003902294902
HW Version	15
SW Version	Oxygen OS 10.5.IN21AA
EUT Stage	Production Unit

Remark:

1. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.
2. This is a variant report, the difference is to change the model name and SW version for market segment. The change has no influence on the test results, all the test results are leveraged from original report FC9N2025-01.



1.4. Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx Frequency	GSM850: 824.2 MHz ~ 848.8 MHz GSM1900: 1850.2 MHz ~ 1909.8MHz WCDMA Band V: 826.4 MHz ~ 846.6 MHz WCDMA Band IV : 1712.4 MHz ~ 1752.6 MHz WCDMA Band II: 1852.4 MHz ~ 1907.6 MHz CDMA2000 BC0: 824.70 MHz ~ 848.31 MHz CDMA2000 BC1: 1851.25 MHz ~ 1908.75 MHz CDMA2000 BC10: 817.9 MHz ~ 823.1 MHz LTE Band 2 : 1850.7 MHz ~ 1909.3 MHz LTE Band 4 : 1710.7 MHz ~ 1754.3 MHz LTE Band 5 : 824.7 MHz ~ 848.3 MHz LTE Band 7 : 2502.5 MHz ~ 2567.5 MHz LTE Band 12 : 699.7 MHz ~ 715.3 MHz LTE Band 13 : 779.5 MHz ~ 784.5 MHz LTE Band 17 : 706.5 MHz ~ 713.5 MHz LTE Band 25 : 1850.7 MHz ~ 1914.3 MHz LTE Band 26 : 814.7 MHz ~ 848.3 MHz LTE Band 30 : 2307.5 MHz ~ 2312.5 MHz LTE Band 38 : 2572.5 MHz ~ 2617.5 MHz LTE Band 41 : 2498.5 MHz ~ 2687.5 MHz LTE Band 48 : 3552.5 MHz ~ 3697.5 MHz LTE Band 66 : 1710.7 MHz ~ 1779.3 MHz LTE Band 71: 665.5 MHz ~ 695.5MHz 5G NR n2: 1852.5 MHz ~ 1907.5 MHz 5G NR n5: 826.5 MHz ~ 846.5 MHz 5G NR n41: 2506 MHz ~ 2680 MHz 5G NR n66: 1712.5 MHz ~ 1777.5 MHz 5G NR n71: 665.5 MHz ~ 695.5MHz 802.11b/g/n: 2412 MHz ~ 2462 MHz 802.11a/n/ac: 5180 MHz ~ 5240 MHz; 5260 MHz ~ 5320 MHz; 5500 MHz ~ 5720 MHz; 5745 MHz ~ 5825 MHz Bluetooth: 2402 MHz ~ 2480 MHz NFC : 13.56 MHz
Rx Frequency	GSM850: 869.2 MHz ~ 893.8 MHz GSM1900: 1930.2 MHz ~ 1989.8 MHz WCDMA Band V: 871.4 MHz ~ 891.6 MHz WCDMA Band IV : 2112.4 MHz ~ 2152.6 MHz WCDMA Band II: 1932.4 MHz ~ 1987.6 MHz CDMA2000 BC0: 869.70 MHz ~ 893.31 MHz CDMA2000 BC1: 1931.25 MHz ~ 1988.75 MHz CDMA2000 BC10: 862.9 MHz ~ 868.1 MHz LTE Band 2 : 1930.7 MHz ~ 1989.3 MHz LTE Band 4 : 2110.7 MHz ~ 2154.3 MHz LTE Band 5 : 869.7 MHz ~ 893.3 MHz LTE Band 7 : 2622.5 MHz ~ 2687.5 MHz LTE Band 12 : 729.7 MHz ~ 745.3 MHz LTE Band 13 : 748.5 MHz ~ 753.5 MHz LTE Band 17 : 736.5 MHz ~ 743.5 MHz LTE Band 25 : 1930.7 MHz ~ 1994.3 MHz LTE Band 26 : 859.7 MHz ~ 893.3 MHz

	LTE Band 29 : 718.5 MHz ~ 726.5 MHz LTE Band 30 : 2352.5 MHz ~ 2357.5 MHz LTE Band 38: 2572.5 MHz ~ 2617.5 MHz LTE Band 41 : 2498.5 MHz ~ 2687.5 MHz LTE Band 46 : 5150 MHz ~ 5350 MHz; 5470 MHz ~5725 MHz LTE Band 48 : 3552.5 MHz ~ 3697.5 MHz LTE Band 66 : 2110.7 MHz~ 2199.3 MHz LTE Band 71: 619.5 MHz ~ 649.5MHz 5G NR n2: 1932.5 MHz ~ 1987.5 MHz 5G NR n5: 871.5 MHz ~ 891.5 MHz 5G NR n41: 2506 MHz ~ 2680 MHz 5G NR n66: 2112.5 MHz~ 2197.5 MHz 5G NR n71: 619.5 MHz ~ 649.5MHz 802.11b/g/n: 2412 MHz ~ 2462 MHz 802.11a/n/ac: 5180 MHz ~ 5240 MHz; 5260 MHz ~ 5320 MHz; 5500 MHz ~ 5720 MHz; 5745 MHz ~ 5825 MHz Bluetooth: 2402 MHz ~ 2480 MHz GNSS : 1559 MHz ~ 1610 MHz; 1164 MHz ~ 1215 MHz NFC : 13.56 MHz
Antenna Type	WWAN : PIFA Antenna Bluetooth/WLAN : PIFA Antenna GNSS: IFA Antenna NFC : Loop Antenna
Type of Modulation	GSM: GMSK GPRS: GMSK EDGE(MCS 0-4): GMSK / (MCS 5-9): 8PSK WCDMA : BPSK HSDPA/DC-HSDPA : QPSK HSUPA : QPSK HSPA+ : 16QAM DC-HSDPA : 64QAM LTE: QPSK / 16QAM / 64QAM / 256QAM 5G NR: DFT-s-OFDM (Pi/2 BPSK / QPSK / 16QAM / 64QAM / 256QAM) CP-OFDM (QPSK / 16QAM / 64QAM / 256QAM) CDMA2000 1xRTT: QPSK CDMA2000 1xEV-DO: QPSK/8PSK 802.11b : DSSS (DBPSK / DQPSK / CCK) 802.11a/g/n/ac/ax : OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM/1024QAM) Bluetooth LE : GFSK Bluetooth (1Mbps) : GFSK Bluetooth (2Mbps) : $\pi/4$ -DQPSK Bluetooth (3Mbps) : 8-DPSK GNSS : BPSK NFC: ASK

Note: GNSS Rx = GLONASS + GPS + BDS + Galileo + SBAS

1.5. Modification of EUT

No modifications are made to the EUT during all test items.

1.6. Test Location

Sporton International (Shenzhen) Inc. is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

Test Firm	Sporton International (Shenzhen) Inc.		
Test Site Location	1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055 People's Republic of China TEL: +86-755-86379589 FAX: +86-755-86379595		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	CO01-SZ	CN1256	421272

Test Firm	Sporton International (Shenzhen) Inc.		
Test Site Location	No. 3 Bldg the third floor of south, Shahe River west, Fengzeyuan Warehouse, Nanshan Shenzhen, 518055 People's Republic of China TEL: +86-755-33202398		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	03CH03-SZ	CN1256	421272

1.7. Test Software

Item	Site	Manufacture	Name	Version
1.	03CH03-SZ	AUDIX	E3	6.2009-8-24
2.	CO01-SZ	AUDIX	E3	6.120613b

1.8. Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 15 Subpart B
- ♦ ANSI C63.4-2014

Remark: All test items were verified and recorded according to the standards and without any deviation during the test.

2. Test Configuration of Equipment Under Test

2.1. Test Mode


The EUT has been associated with peripherals pursuant to ANSI C63.4-2014 and configuration operated in a manner tended to maximize its emission characteristics in a typical application.

Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (30MHz to the 5th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower).

Test Items	Function Type
AC Conducted Emission	Mode 1: GSM 850 Idle(Middle CH) + USB Cable 1(Charging from Adapter 1) + Battery 1 + BT Idle + WLAN Idle(2.4G) + Camera(Rear)
	Mode 2: CDMA BC10 Idle(Middle CH) + USB Cable 2(Charging from Adapter 1) + Battery 1 + BT Idle + WLAN Idle(5G) + Camera(Front)
	Mode 3: LTE Band 12 Idle(Low CH) + USB Cable 3(Charging from Adapter 1) + Battery 1 + BT Idle + WLAN Idle(2.4G) + MPEG4(Colur bar)
	Mode 4: LTE Band 13 Idle(High CH) + USB Cable 1(Charging from Adapter 1) + Battery 1 + BT Idle + WLAN Idle(5G) + NFC On
	Mode 5: LTE Band 17 Idle(Middle CH) + USB Cable 1(Charging from Adapter 1) + Battery 1 + BT Idle + WLAN Idle(2.4G) + H-Pattern
	Mode 6: LTE Band 26 Idle(High CH) + USB Cable 1(Charging from Adapter 1) + Battery 1 + BT Idle + WLAN Idle(5G) + GNSS RX
	Mode 7: LTE Band 71 Idle(Low CH) + USB Cable1(Data Link with Notebook) + Battery 1 + BT Idle + WLAN Idle(2.4G)
	Mode 8: LTE Band 29 Idle(Middle CH) + USB Cable 1(Charging from Adapter 2) + Battery 1 + BT Idle + WLAN Idle(2.4G) + H-Pattern
	Mode 9: NSA_2A_N5A Idle(Middle CH) + USB Cable 1(Charging from Adapter 3) + Battery 1 + BT Idle + WLAN Idle(2.4G) + H-Pattern
	Mode 10 : NSA 2A_n71A Idle(Middle CH) + USB Cable 1(Charging from Adapter 1) + Battery 2 + BT Idle + WLAN Idle(2.4G) + H-Pattern
	Mode 11 : NSA 2A_n71A Idle(Middle CH) + USB Cable 1(Charging from Adapter 1) + Battery 2 + BT Idle + WLAN Idle(2.4G) + H-Pattern
	Mode 12 : NSA 2A_n71A Idle(Middle CH) + USB Cable 1(Charging from Adapter 1) + Battery 2 + BT Idle + WLAN Idle(2.4G) + H-Pattern
	Mode 13 : NSA 2A_n71A Idle(Middle CH) + USB Cable 1(Charging from Adapter 1) + Battery 2 + BT Idle + WLAN Idle(2.4G) + H-Pattern
	Mode 14 : NSA 2A_n71A Idle(Middle CH) + USB Cable 1(Charging from Adapter 2) + Battery 2 + BT Idle + WLAN Idle(2.4G) + H-Pattern
	Mode 15 : NSA 2A_n71A Idle(Middle CH) + USB Cable 1(Charging from Adapter 2) + Battery 2 + BT Idle + WLAN Idle(2.4G) + H-Pattern
	Mode 16 : NSA 2A_n71A Idle(Middle CH) + USB Cable 1(Charging from Adapter 2) + Battery 2 + BT Idle + WLAN Idle(2.4G) + H-Pattern
	Mode 17 : NSA 2A_n71A Idle(Middle CH) + USB Cable 1(Charging from Adapter

	3) + Battery 2 + BT Idle + WLAN Idle(2.4G) + H-Pattern Mode 18 : NSA 2A_n71A Idle(Middle CH) + USB Cable 1(Charging from Adapter 3) + Battery 2 + BT Idle + WLAN Idle(2.4G) + H-Pattern Mode 19 : NSA 2A_n71A Idle(Middle CH) + USB Cable 1(Charging from Adapter 3) + Battery 2 + BT Idle + WLAN Idle(2.4G) + H-Pattern
Radiated Emissions	Mode 1: GSM 850 Idle(Middle CH) + USB Cable 1(Charging from Adapter 1) + Battery 1 + BT Idle + WLAN Idle(2.4G) + Camera(Rear) Mode 2: CDMA BC10 Idle(Middle CH) + USB Cable 2(Charging from Adapter 1) + Battery 1 + BT Idle + WLAN Idle(5G) + Camera(Front) Mode 3: LTE Band 12 Idle(Low CH) + USB Cable 3(Charging from Adapter 1) + Battery 1 + BT Idle + WLAN Idle(2.4G) + MPEG4(Colour bar) Mode 4: LTE Band 13 Idle(High CH) + USB Cable 1(Charging from Adapter 1) + Battery 1 + BT Idle + WLAN Idle(5G) + NFC On Mode 5: LTE Band 17 Idle(Middle CH) + USB Cable 1(Charging from Adapter 1) + Battery 1 + BT Idle + WLAN Idle(2.4G) + H-Pattern Mode 6: LTE Band 26 Idle(High CH) + USB Cable 1(Charging from Adapter 1) + Battery 1 + BT Idle + WLAN Idle(5G) + GNSS RX Mode 7: NSA_2A_N5A Idle(Middle CH) + USB Cable 1(Charging from Adapter 2) + Battery 1 + BT Idle + WLAN Idle(2.4G) + Camera(Rear) Mode 8: NSA 2A_n71A Idle(Middle CH) + USB Cable 1(Charging from Adapter 3) + Battery 1 + BT Idle + WLAN Idle(2.4G) + Camera(Rear) Mode 9: LTE Band 71 Idle(Low CH) + USB Cable 1(Data Link with Notebook) + Battery 1 + BT Idle + WLAN Idle(2.4G) Mode 10 : LTE Band 71 Idle(Low CH) + USB Cable 2(Data Link with Notebook) + Battery 1 + BT Idle + WLAN Idle(2.4G) Mode 11 : LTE Band 71 Idle(Low CH) + USB Cable 3(Data Link with Notebook) + Battery 1 + BT Idle + WLAN Idle(2.4G) Mode 12 : LTE Band 29 Idle(Middle CH) + Type C Earphone + Battery 1 + BT Idle + WLAN Idle(2.4G) + MP3 Mode 13 : LTE Band 71 Idle(Low CH) + USB Cable 1(Data Link with Notebook) + Battery 2 + BT Idle + WLAN Idle(2.4G)
Remark: 1. The worst case of AC is mode 12; only the test data of this mode is reported. 2. The worst case of RE is mode 9; only the test data of this mode is reported. 3. Data Link with Notebook / PC means data application transferred mode between EUT and Notebook / PC. 4. Pre-scanned Low/Middle/High channel, the worst channel was recorded in this report.	

2.2.Connection Diagram of Test System

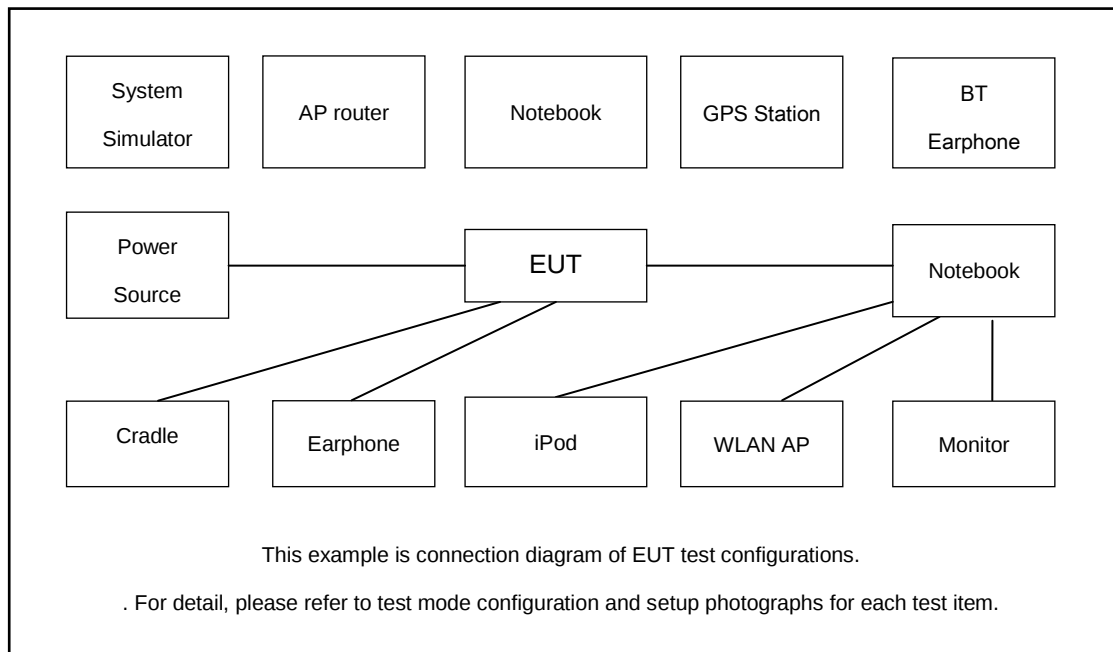

The EUT has been associated with peripherals pursuant to ANSI C63.4-2014 and configuration operated in a manner tended to maximize its emission characteristics in a typical application

2.3. Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Notebook	Lenovo	E540	Fcc DoC	N/A	shielded cable DC O/P 1.8m Unshielded AC I/P cable 1.8m
2.	WLAN AP	ASUSTek	RT-AC66U	MSQ-RTAC66U	N/A	Unshielded,2.7m with Core
3.	WLAN AP	Dlink	DIR-820L	KA2IR820LA1	N/A	Unshielded,1.8m
4.	Bluetooth Earphone	Samsung	EO-MG900	CCAH14LP1680T5	N/A	N/A
5.	Bluetooth Earphone	Samsung	EO-MG900	PYAHS-107W	N/A	N/A
6.	iPod	Apple	MC525 ZP/A	Fcc DoC	Shielded, 1.0m	N/A
7.	GPS Station	T&E	GS-50	N/A	N/A	Unshielded,1.8m
8.	Earphone	HUAWEI	Type C Earphone	Fcc DoC	Shielded, 1.2m	N/A
9.	Base Station	Anritsu	MT8000A	Fcc DoC	N/A	Unshielded,1.8m
10.	Base Station	Anritsu	MT8821C	Fcc DoC	N/A	Unshielded,1.8m
11.	Base Station	Anritsu	MT8820C	Fcc DoC	N/A	Shielded, 1.5m
12.	FM Station	R&S	SMB100A	N/A	N/A	Unshielded,1.8m
13.	Labsat	RACELOGIC	18645	N/A	N/A	Unshielded,1.8m

2.4. EUT Operation Test Setup

The EUT was in LTE idle mode during the testing. The EUT was synchronized to the BCCH, and is in continuous receiving mode by setting system simulator's paging reorganization.

At the same time, the EUT was attached to the WLAN AP, and the following programs installed in the EUT were programmed during the test.

1. Data application is transferred between notebook and EUT via USB cable.
2. Turn on camera to capture images.
3. Turn on NFC Function.
4. Turn on MPEG4 function.
5. Turn on GNSS function to make the EUT receive continuous signals from GNSS station.

3. Test Result

3.1. Test of AC Conducted Emission Measurement

3.1.1 Limits of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

<Class B Limit>

Frequency of emission (MHz)	Conducted limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedure

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.


3.1.4 Test Setup

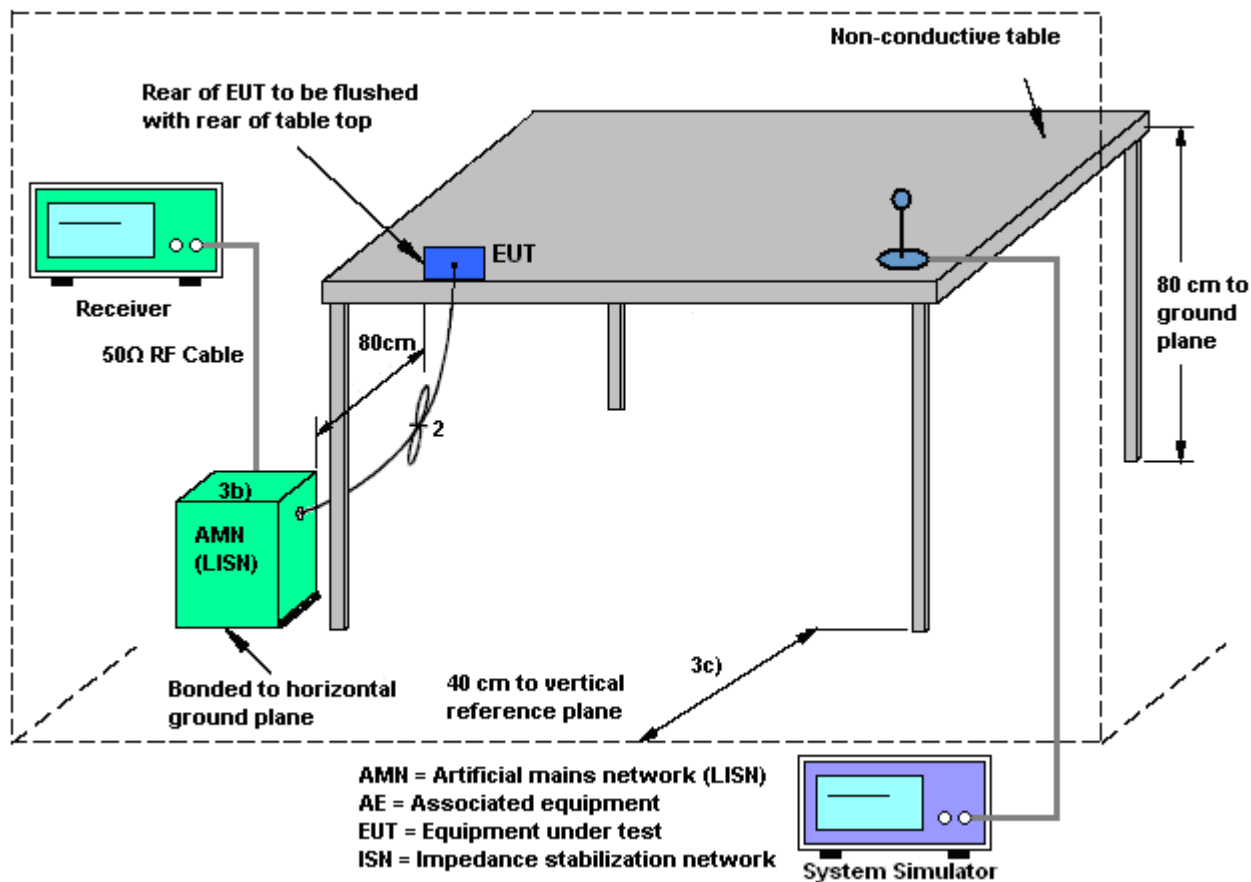



3.1.5 Test Result of AC Conducted Emission

Test Engineer :	ZhangXu	Temperature :	22~25°C
		Relative Humidity :	50~55%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

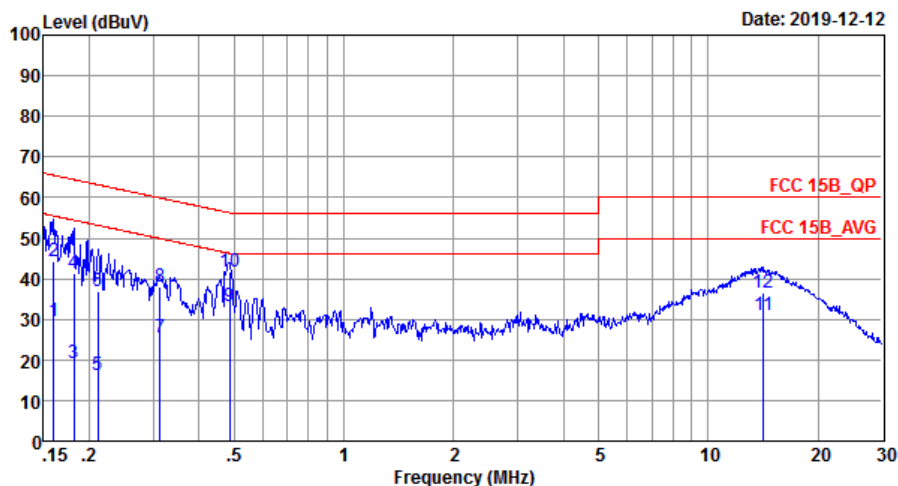


Site : CO01-SZ
Condition: FCC 15B_QP LISN_20190719_L LINE

	Freq	Level	Over	Limit	Read	LISN	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.16	29.64	-25.83	55.47	19.60	0.03	10.01	Average
2	0.16	44.44	-21.03	65.47	34.40	0.03	10.01	QP
3	0.18	19.34	-35.08	54.42	9.30	0.03	10.01	Average
4	0.18	41.24	-23.18	64.42	31.20	0.03	10.01	QP
5	0.21	16.34	-36.80	53.14	6.30	0.03	10.01	Average
6	0.21	37.04	-26.10	63.14	27.00	0.03	10.01	QP
7	0.31	25.64	-24.24	49.88	15.60	0.03	10.01	Average
8	0.31	38.14	-21.74	59.88	28.10	0.03	10.01	QP
9 *	0.49	33.38	-12.85	46.23	23.31	0.02	10.05	Average
10	0.49	41.68	-14.55	56.23	31.61	0.02	10.05	QP
11	14.21	30.87	-19.13	50.00	20.10	0.49	10.28	Average
12	14.21	36.37	-23.63	60.00	25.60	0.49	10.28	QP



Test Engineer :	ZhangXu	Temperature :	22~25°C
		Relative Humidity :	50~55%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

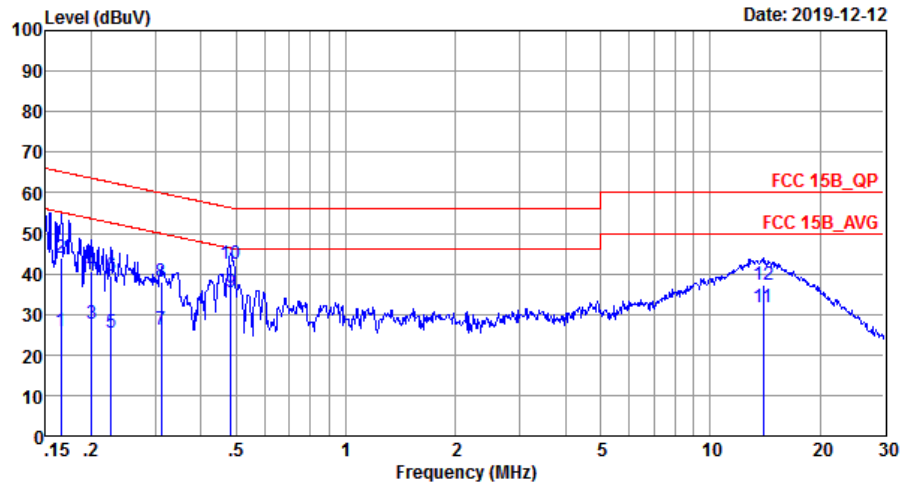

Site : C001-SZ
Condition: FCC 15B QP LISN 20190719_N NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
			dB	dBuV	dBuV	dB	dB	
1	0.17	25.74	-29.47	55.21	15.70	0.03	10.01	Average
2	0.17	43.84	-21.37	65.21	33.80	0.03	10.01	QP
3	0.20	27.74	-25.84	53.58	17.70	0.03	10.01	Average
4	0.20	40.74	-22.84	63.58	30.70	0.03	10.01	QP
5	0.23	25.34	-27.23	52.57	15.30	0.03	10.01	Average
6	0.23	39.34	-23.23	62.57	29.30	0.03	10.01	QP
7	0.31	26.04	-23.89	49.93	16.00	0.03	10.01	Average
8	0.31	37.84	-22.09	59.93	27.80	0.03	10.01	QP
9 *	0.48	35.37	-10.90	46.27	25.30	0.02	10.05	Average
10	0.48	42.47	-13.80	56.27	32.40	0.02	10.05	QP
11	13.99	31.78	-18.22	50.00	21.20	0.30	10.28	Average
12	13.99	37.28	-22.72	60.00	26.70	0.30	10.28	QP

Note:

1. Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
2. Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)

3.2. Test of Radiated Emission Measurement

3.2.1. Limit of Radiated Emission

The emissions from an unintentional radiator shall not exceed the field strength levels specified in the following table:

<Class B Limit>

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.2.2. Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.2.3. Test Procedures


1. The EUT was placed on a turntable with 0.8 meter above ground.
2. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest radiation.
4. The antenna is a Bi-Log antenna and its height is adjusted between one to four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode (RBW=120kHz/VBW=300kHz for frequency below 1GHz; RBW=1MHz VBW=3MHz (Peak), RBW=1MHz/VBW=10Hz (Average) for frequency above 1GHz).
7. If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, peak values of EUT will be reported. Otherwise, the emission will be repeated by using the quasi-peak method and reported.
8. Emission level (dBμV/m) = 20 log Emission level (μV/m)
9. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

3.2.4. Test Setup of Radiated Emission


For radiated emissions from 30MHz to 1GHz



For radiated emissions above 1GHz

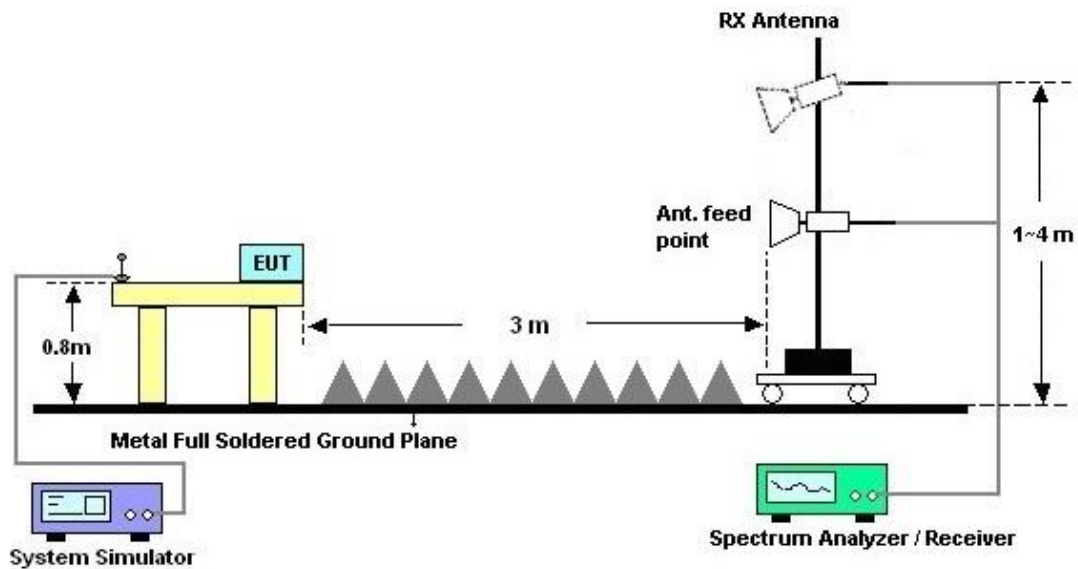


3.2.5. Test Result of Radiated Emission

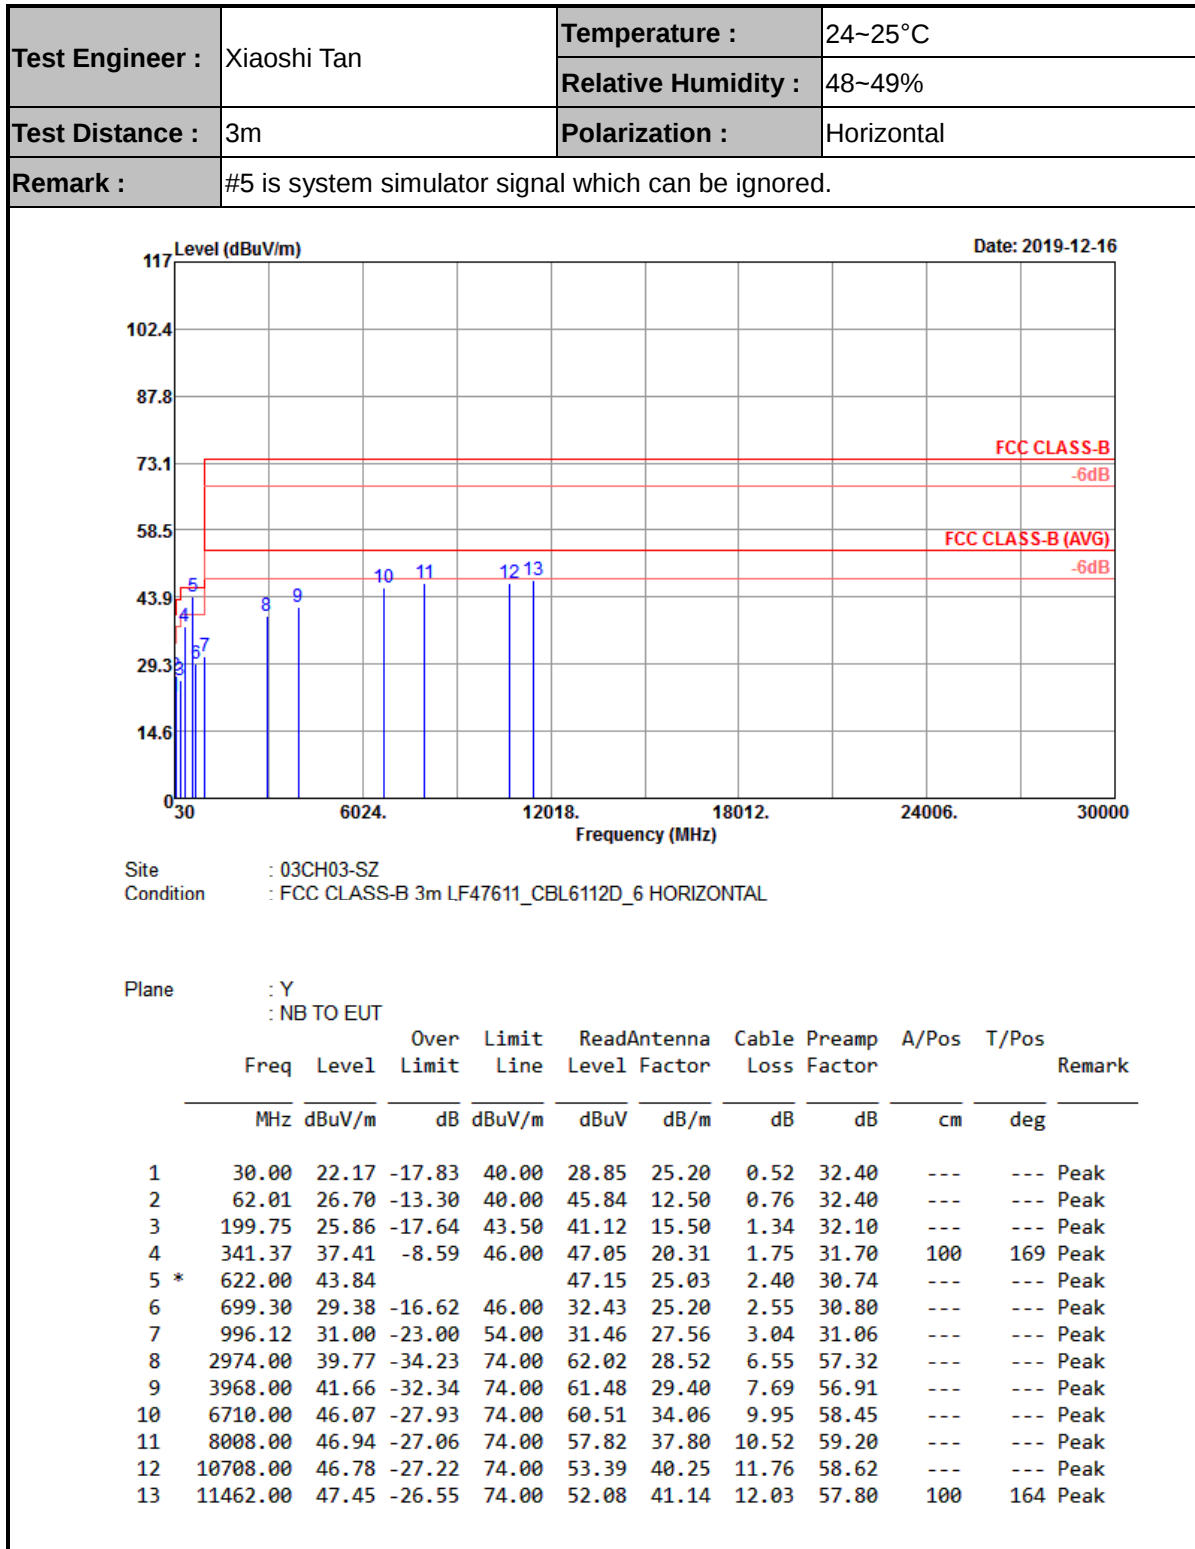



Test Engineer :	Xiaoshi Tan	Temperature :	24~25°C
		Relative Humidity :	48~49%
Test Distance :	3m	Polarization :	Vertical
Remark :	#6 is system simulator signal which can be ignored.		

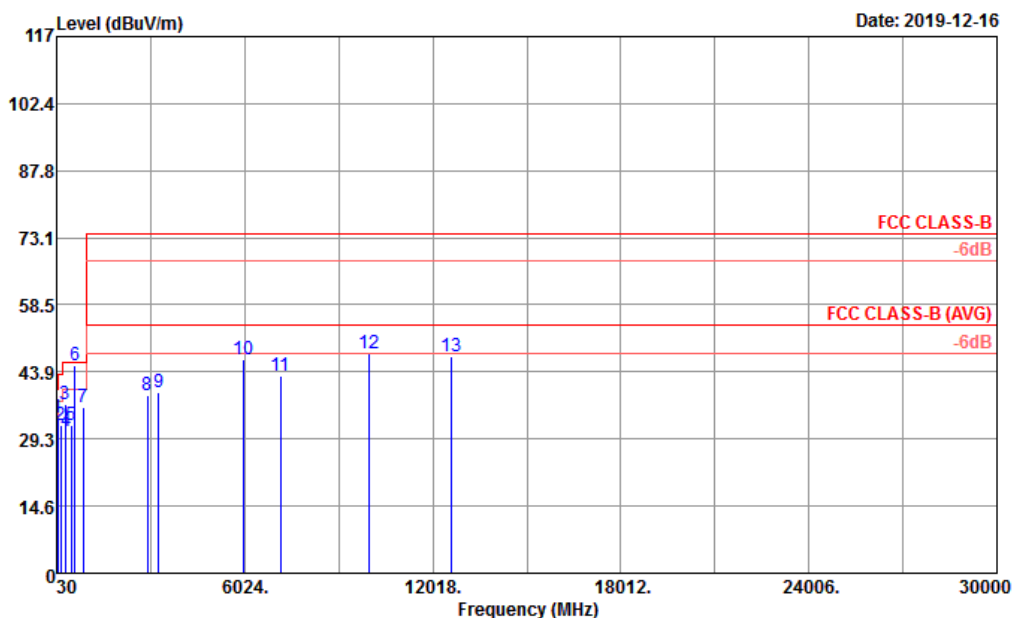

Site : 03CH03-SZ
Condition : FCC CLASS-B 3m LF47611_CBL6112D_6 VERTICAL

Plane : Y
: NB TO EUT

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	62.01	33.92	-6.08	40.00	53.06	12.50	0.76	32.40	100	112	Peak
2	166.77	32.21	-11.29	43.50	47.19	15.95	1.23	32.16	---	---	Peak
3	299.66	36.96	-9.04	46.00	47.60	19.40	1.66	31.70	---	---	Peak
4	328.76	30.89	-15.11	46.00	40.84	20.03	1.72	31.70	---	---	Peak
5	497.54	32.16	-13.84	46.00	37.56	23.66	2.15	31.21	---	---	Peak
6 *	622.00	45.24			48.55	25.03	2.40	30.74	---	---	Peak
7	880.69	36.03	-9.97	46.00	37.95	26.68	2.86	31.46	---	---	Peak
8	2936.00	38.76	-35.24	74.00	61.34	28.43	6.34	57.35	---	---	Peak
9	3292.00	39.59	-34.41	74.00	61.72	28.17	6.88	57.18	---	---	Peak
10	5968.00	46.53	-27.47	74.00	62.08	32.60	9.45	57.60	---	---	Peak
11	7170.00	42.88	-31.12	74.00	55.88	35.62	10.25	58.87	---	---	Peak
12	9984.00	47.97	-26.03	74.00	56.51	39.38	11.47	59.39	100	55	Peak
13	12620.00	47.22	-26.78	74.00	52.06	40.31	12.49	57.64	---	---	Peak

Note:

- Level(dBμV/m) = Read Level(dBμV) + Antenna Factor(dB/m) + Cable Loss(dB) - Preamp Factor(dB)
- Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)



4. List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EMI Receiver	R&S	ESR7	101630	9kHz~7GHz;	Dec. 26, 2018	Dec. 12, 2019	Dec. 25, 2019	Conduction (CO01-SZ)
AC LISN	EMCO	3816/2SH	00103912	9kHz~30MHz	Oct. 17, 2019	Dec. 12, 2019	Oct. 16, 2020	Conduction (CO01-SZ)
AC LISN (for auxiliary)	EMCO	3816/2SH	00103892	9kHz~30MHz	Dec. 27, 2018	Dec. 12, 2019	Dec. 26, 2019	Conduction (CO01-SZ)
AC Power Source	Chroma	61602	61602000089	100Vac~250Vac	Jul. 23, 2019	Dec. 12, 2019	Jul. 22, 2020	Conduction (CO01-SZ)
EMI Test Receiver&SA	KEYSIGHT	N9038A	MY54450083	20Hz~8.4GHz	Apr. 18, 2019	Dec. 16, 2019	Apr. 17, 2020	Radiation (03CH03-SZ)
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY55150246	10Hz~44GHz;	Apr. 18, 2019	Dec. 16, 2019	Apr. 17, 2020	Radiation (03CH03-SZ)
Bilog Antenna	TeseQ	CBL6112D	35408	30MHz~2GHz	Apr. 19, 2019	Dec. 16, 2019	Apr. 18, 2020	Radiation (03CH03-SZ)
Double Ridge Horn Antenna	SCHWARZBECK	BBHA9120D	9120D-1355	1GHz~18GHz	Apr. 01 2019	Dec. 16, 2019	Mar. 31, 2020	Radiation (03CH03-SZ)
SHF-EHF Horn	com-power	AH-840	101071	18Ghz~40GHz	Apr. 18 2019	Dec. 16, 2019	Apr. 17 2020	Radiation (03CH03-SZ)
LF Amplifier	Burgeon	BPA-530	102210	0.01Hz~3000MHz	Oct. 18,2019	Dec. 16, 2019	Oct. 17,2020	Radiation (03CH03-SZ)
HF Amplifier	MITEQ	AMF-7D-0010 1800-30-10P-	1943528	1GHz~18GHz	Oct. 18,2019	Dec. 16, 2019	Oct. 17,2020	Radiation (03CH03-SZ)
HF Amplifier	MITEQ	TTA1840-35-H G	1871923	18GHz~40GHz	Jul. 22. 2019	Dec. 16, 2019	Jul. 21. 2020	Radiation (03CH03-SZ)
AC Power Source	Chroma	61601	616010001985	N/A	NCR	Dec. 16, 2019	NCR	Radiation (03CH03-SZ)
Turn Table	EM	EM1000	N/A	0~360 degree	NCR	Dec. 16, 2019	NCR	Radiation (03CH03-SZ)
Antenna Mast	EM	EM1000	N/A	1 m~4 m	NCR	Dec. 16, 2019	NCR	Radiation (03CH03-SZ)

5. Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	2.6dB
--	-------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	5.0dB
--	-------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	4.8dB
--	-------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	4.6dB
--	-------