

**HAC\_E\_Dipole\_835****DUT: HAC-Dipole 835 MHz**

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>

Ambient Temperature : 23.7 °C

**DASY5 Configuration**

- Probe: EF3DV3 - SN4047; ConvF(1, 1, 1) @ 835 MHz; Calibrated: 2020/1/24

- Sensor-Surface: (Fix Surface)

- Electronics: DAE4 Sn854; Calibrated: 2020/5/26

- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**E Scan - measurement distance from the probe sensor center to CD835 = 10mm & 15mm/Hearing Aid Compatibility Test at 15mm distance (41x361x1): Interpolated grid:**

dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 141.9 V/m; Power Drift = -0.05 dB

PMR not calibrated. PMF = 1.000 is applied.

E-field emissions = 119.1 V/m

Average value of Total=(118.1+119.1) / 2 = 118.6 V/m

**PMF scaled E-field**



|                                      |                                      |                                      |
|--------------------------------------|--------------------------------------|--------------------------------------|
| Grid 1 <b>M4</b><br><b>117.8 V/m</b> | Grid 2 <b>M4</b><br><b>118.1 V/m</b> | Grid 3 <b>M4</b><br><b>112.1 V/m</b> |
| Grid 4 <b>M4</b><br><b>64.45 V/m</b> | Grid 5 <b>M4</b><br><b>64.63 V/m</b> | Grid 6 <b>M4</b><br><b>62.50 V/m</b> |
| Grid 7 <b>M4</b><br><b>117.8 V/m</b> | Grid 8 <b>M4</b><br><b>119.1 V/m</b> | Grid 9 <b>M4</b><br><b>115.0 V/m</b> |

**Cursor:**

Total = 119.1 V/m

E Category: M4

Location: 1, 73.5, 9.7 mm

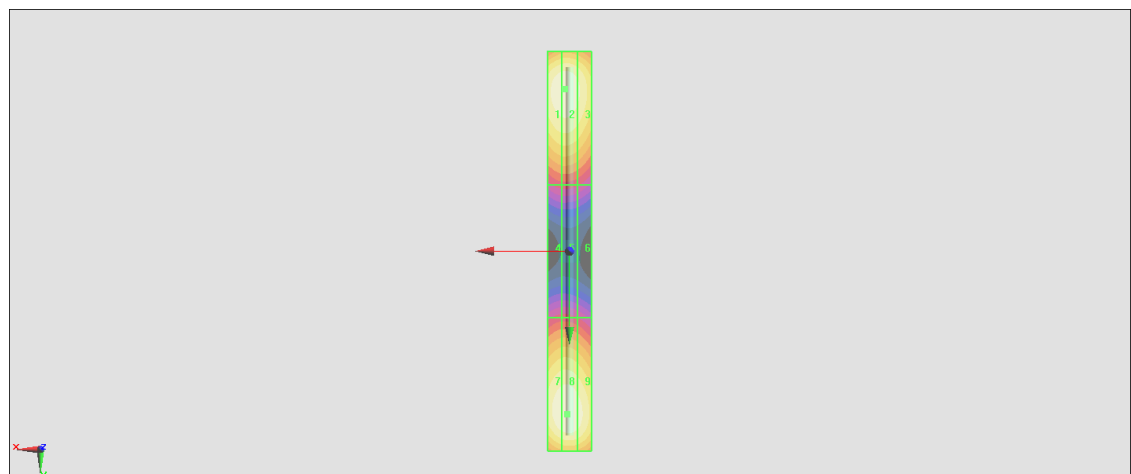

0 dB = 119.1 V/m = 41.52 dBV/m

**HAC\_E\_Dipole\_1880****DUT: HAC Dipole 1880 MHz**

Communication System: CW; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>

Ambient Temperature : 23.7 °C

**DASY5 Configuration**

- Probe: EF3DV3 - SN4047; ConvF(1, 1, 1) @ 1880 MHz; Calibrated: 2020/1/24
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn854; Calibrated: 2020/5/26
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**E Scan - measurement distance from the probe sensor center to CD1880 = 10mm & 15mm/Hearing Aid Compatibility Test at 15mm distance (41x181x1):** Interpolated grid:

dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 152.7 V/m; Power Drift = 0.01 dB

PMR not calibrated. PMF = 1.000 is applied.

E-field emissions = 86.41 V/m

Average value of Total=(86.41+85.68) / 2 = 86.04 V/m

**PMF scaled E-field**



|                                      |                                      |                                      |
|--------------------------------------|--------------------------------------|--------------------------------------|
| Grid 1 <b>M3</b><br><b>86.05 V/m</b> | Grid 2 <b>M3</b><br><b>86.41 V/m</b> | Grid 3 <b>M3</b><br><b>83.63 V/m</b> |
| Grid 4 <b>M3</b><br><b>63.99 V/m</b> | Grid 5 <b>M3</b><br><b>64.06 V/m</b> | Grid 6 <b>M4</b><br><b>62.83 V/m</b> |
| Grid 7 <b>M3</b><br><b>84.74 V/m</b> | Grid 8 <b>M3</b><br><b>85.68 V/m</b> | Grid 9 <b>M3</b><br><b>83.40 V/m</b> |

**Cursor:**

Total = 86.41 V/m

E Category: M3

Location: 1.5, -33.5, 9.7 mm

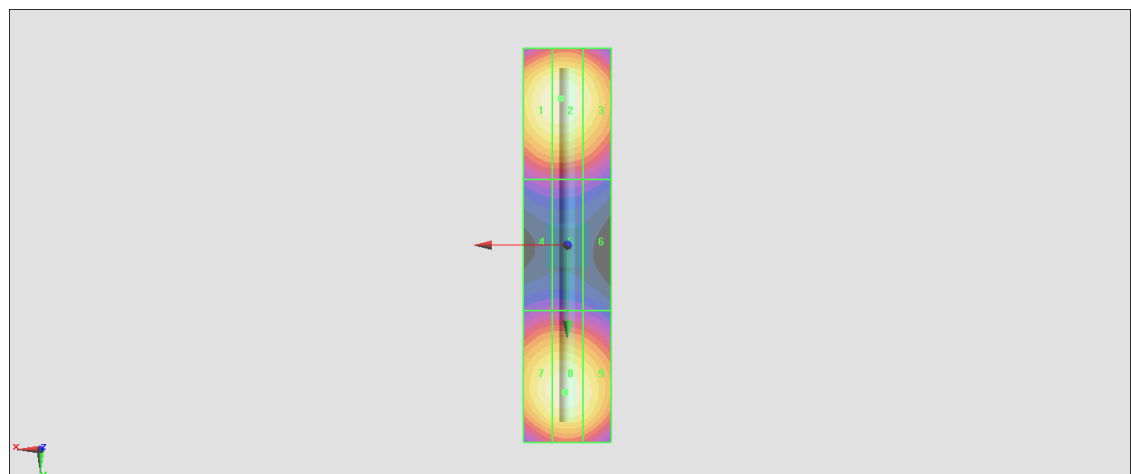

0 dB = 86.41 V/m = 38.73 dBV/m

**HAC\_E\_Dipole\_2450****DUT: HAC Dipole 2450 MHz**

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>

Ambient Temperature : 23.7 °C

**DASY5 Configuration**

- Probe: EF3DV3 - SN4047; ConvF(1, 1, 1) @ 2450 MHz; Calibrated: 2020/1/24
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn854; Calibrated: 2020/5/26
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**E Scan - measurement distance from the probe sensor center to CD2450 = 10mm & 15mm/Hearing Aid Compatibility Test at 15mm distance (41x181x1): Interpolated grid:**

dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 79.93 V/m; Power Drift = 0.01 dB

PMR not calibrated. PMF = 1.000 is applied.

E-field emissions = 85.49 V/m

Average value of Total=(84.91+85.49) / 2 = 85.2 V/m

**PMF scaled E-field**



|                                      |                                      |                                      |
|--------------------------------------|--------------------------------------|--------------------------------------|
| Grid 1 <b>M3</b><br><b>84.56 V/m</b> | Grid 2 <b>M3</b><br><b>84.91 V/m</b> | Grid 3 <b>M3</b><br><b>81.90 V/m</b> |
| Grid 4 <b>M3</b><br><b>75.60 V/m</b> | Grid 5 <b>M3</b><br><b>75.86 V/m</b> | Grid 6 <b>M3</b><br><b>73.83 V/m</b> |
| Grid 7 <b>M3</b><br><b>84.16 V/m</b> | Grid 8 <b>M3</b><br><b>85.49 V/m</b> | Grid 9 <b>M3</b><br><b>83.29 V/m</b> |

**Cursor:**

Total = 85.49 V/m

E Category: M3

Location: 0.5, 24.5, 9.7 mm

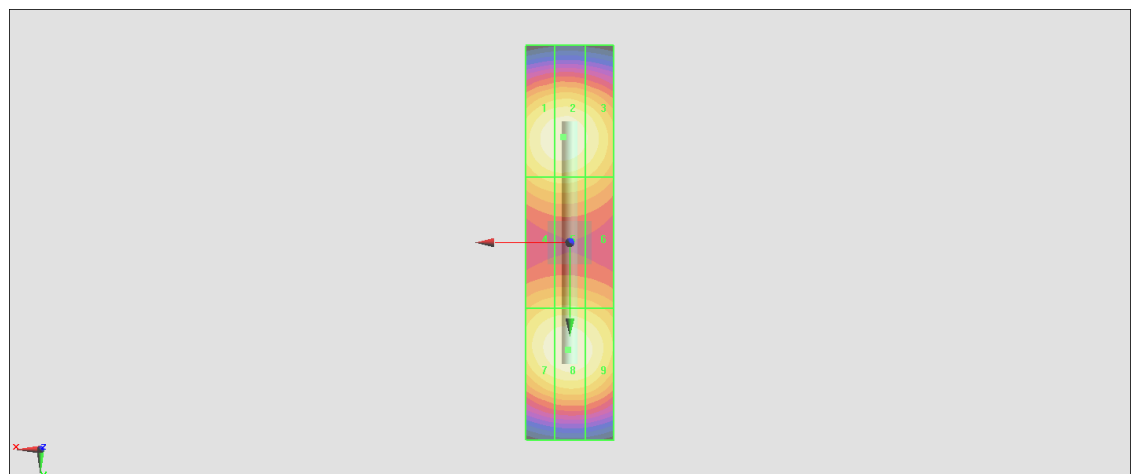

0 dB = 85.49 V/m = 38.64 dBV/m

**HAC\_E\_Dipole\_2600****DUT: HAC Dipole 2600 MHz**

Communication System: CW ; Frequency: 2600 MHz;Duty Cycle: 1:1

Medium: Air Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>

Ambient Temperature : 23.7 °C

**DASY5 Configuration**

- Probe: EF3DV3 - SN4047; ConvF(1, 1, 1) @ 2600 MHz; Calibrated: 2020/1/24
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn854; Calibrated: 2020/5/26
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**E Scan - measurement distance from the probe sensor center to CD2600 = 10mm & 15mm/Hearing Aid Compatibility Test at 15mm distance (41x181x1): Interpolated grid:**

dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 69.38 V/m; Power Drift = 0.14 dB

PMR not calibrated. PMF = 1.000 is applied.

E-field emissions = 87.62 V/m

Average value of Total=(86.31+87.62) / 2 = 86.96 V/m

**PMF scaled E-field**



|                                      |                                      |                                      |
|--------------------------------------|--------------------------------------|--------------------------------------|
| Grid 1 <b>M3</b><br><b>85.57 V/m</b> | Grid 2 <b>M3</b><br><b>86.31 V/m</b> | Grid 3 <b>M3</b><br><b>83.65 V/m</b> |
| Grid 4 <b>M3</b><br><b>79.31 V/m</b> | Grid 5 <b>M3</b><br><b>79.83 V/m</b> | Grid 6 <b>M3</b><br><b>77.91 V/m</b> |
| Grid 7 <b>M3</b><br><b>86.49 V/m</b> | Grid 8 <b>M3</b><br><b>87.62 V/m</b> | Grid 9 <b>M3</b><br><b>85.08 V/m</b> |

**Cursor:**

Total = 87.62 V/m

E Category: M3

Location: 0.5, 23, 9.7 mm

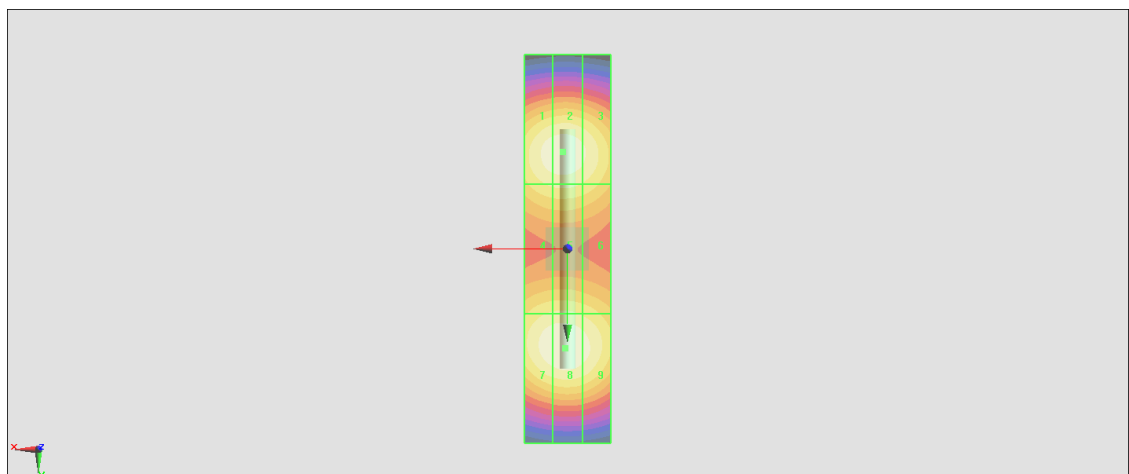

0 dB = 87.62 V/m = 38.85 dBV/m