49_GSM850_GPRS(4 Tx slots)_Back_15mm_Ch251

Communication System: UID 0, GPRS/EDGE12 (0); Frequency: 848.8 MHz;Duty Cycle: 1:2.08
Medium: MSL_835_190202 Medium parameters used: f = 849 MHz; σ = 0.988 S/m; ε_r = 54.127; ρ = 1000 kg/m^3
Ambient Temperature：23.4 ℃; Liquid Temperature：22.6 ℃

DASY5 Configuration:
- Probe: EX3DV4 - SN3753; ConvF(9.24, 9.24, 9.24); Calibrated: 2018.05.29;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1437; Calibrated: 2018.10.15
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1671
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch251/Area Scan (71x121x1): Interpolated grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.788 W/kg

Ch251/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 4.120 V/m; Power Drift = -0.05 dB
Peak SAR (extrapolated) = 0.888 W/kg
SAR(1 g) = 0.457 W/kg; SAR(10 g) = 0.310 W/kg
Maximum value of SAR (measured) = 0.740 W/kg

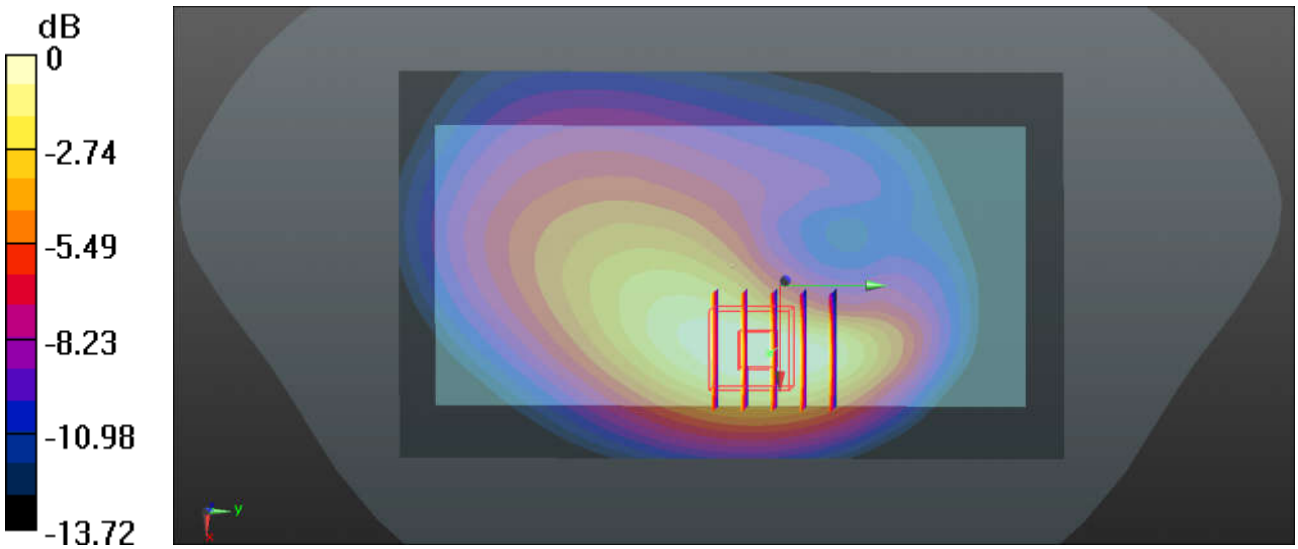

0 dB = 0.740 W/kg

50_GSM1900_GPRS(3 Tx slots)_Back_15mm_Ch661

Communication System: UID 0, GPRS/EDGE11 (0); Frequency: 1880 MHz;Duty Cycle: 1:2.77
Medium: MSL_1900_190130 Medium parameters used: f = 1880 MHz; σ = 1.513 S/m; ε_r = 54.609; ρ = 1000 kg/m^3
Ambient Temperature：23.5 ℃; Liquid Temperature：22.4 ℃

DASY5 Configuration:
- Probe: EX3DV4 - SN3753; ConvF(7.52, 7.52, 7.52); Calibrated: 2018.05.29;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1437; Calibrated: 2018.10.15
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1671
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch661/Area Scan (71x121x1): Interpolated grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.295 W/kg

Ch661/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 4.195 V/m; Power Drift = -0.09 dB
Peak SAR (extrapolated) = 0.357 W/kg
SAR(1 g) = 0.224 W/kg; SAR(10 g) = 0.138 W/kg
Maximum value of SAR (measured) = 0.291 W/kg

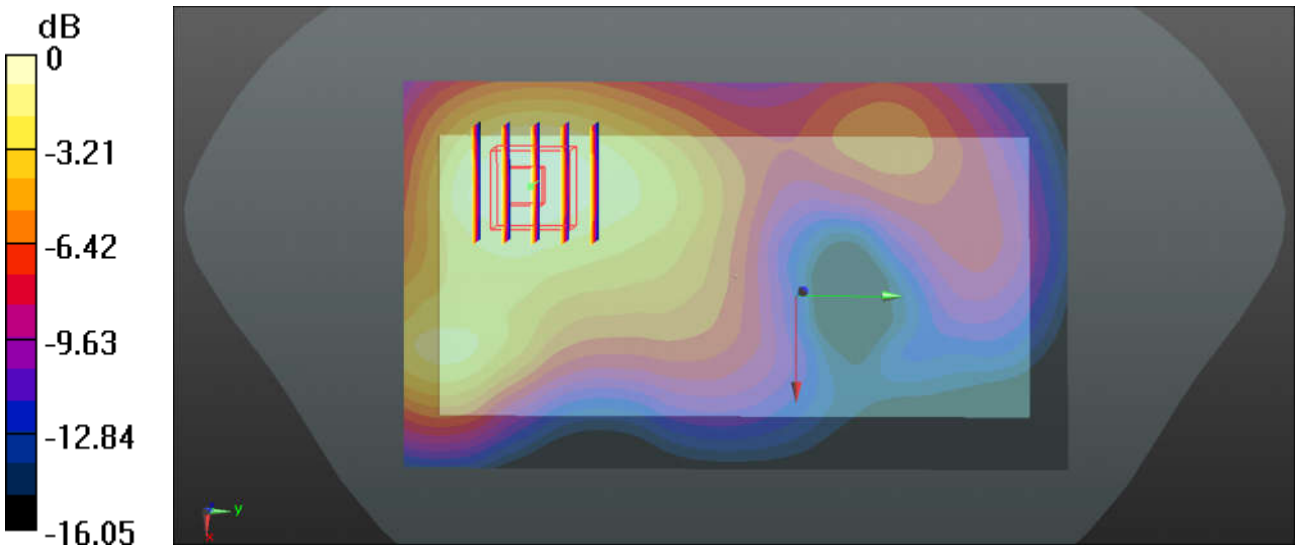

0 dB = 0.291 W/kg

51_WCDMA V_RMC 12.2Kbps_Back_15mm_Ch4132

Communication System: UID 0, UMTS (0); Frequency: 826.4 MHz;Duty Cycle: 1:1
Medium: MSL_835_190202 Medium parameters used: f = 826.4 MHz; σ = 0.966 S/m; ε_r = 54.313; ρ = 1000 kg/m^3
Ambient Temperature：23.4 ℃; Liquid Temperature：22.6 ℃

DASY5 Configuration:
- Probe: EX3DV4 - SN3753; ConvF(9.24, 9.24, 9.24); Calibrated: 2018.05.29;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1437; Calibrated: 2018.10.15
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1671
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch4132/Area Scan (71x121x1): Interpolated grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.563 W/kg

Ch4132/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 2.133 V/m; Power Drift = -0.05 dB
Peak SAR (extrapolated) = 0.665 W/kg
SAR(1 g) = 0.448 W/kg; SAR(10 g) = 0.290 W/kg
Maximum value of SAR (measured) = 0.565 W/kg

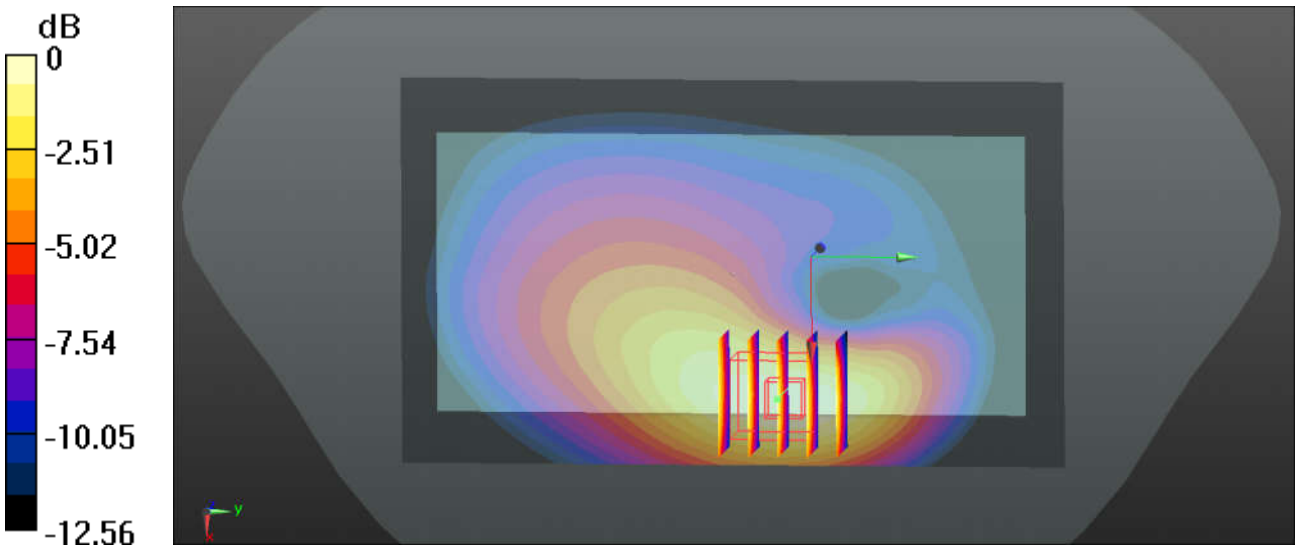

0 dB = 0.565 W/kg

52_WCDMA IV_RMC 12.2Kbps_Back_15mm_Ch1312

Communication System: UID 0, UMTS (0); Frequency: 1712.4 MHz;Duty Cycle: 1:1
Medium: MSL_1750_190131 Medium parameters used: f = 1712.4 MHz; σ = 1.47 S/m; ε_r = 52.06; ρ = 1000 kg/m^3
Ambient Temperature：23.4 ℃； Liquid Temperature：22.7 ℃

DASY5 Configuration:
- Probe: EX3DV4 - SN3753; ConvF(7.76, 7.76, 7.76); Calibrated: 2018.05.29;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1437; Calibrated: 2018.10.15
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1671
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch1312/Area Scan (71x121x1): Interpolated grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.512 W/kg

Ch1312/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 5.559 V/m; Power Drift = 0.07 dB
Peak SAR (extrapolated) = 0.590 W/kg
SAR(1 g) = 0.406 W/kg; SAR(10 g) = 0.275 W/kg
Maximum value of SAR (measured) = 0.494 W/kg

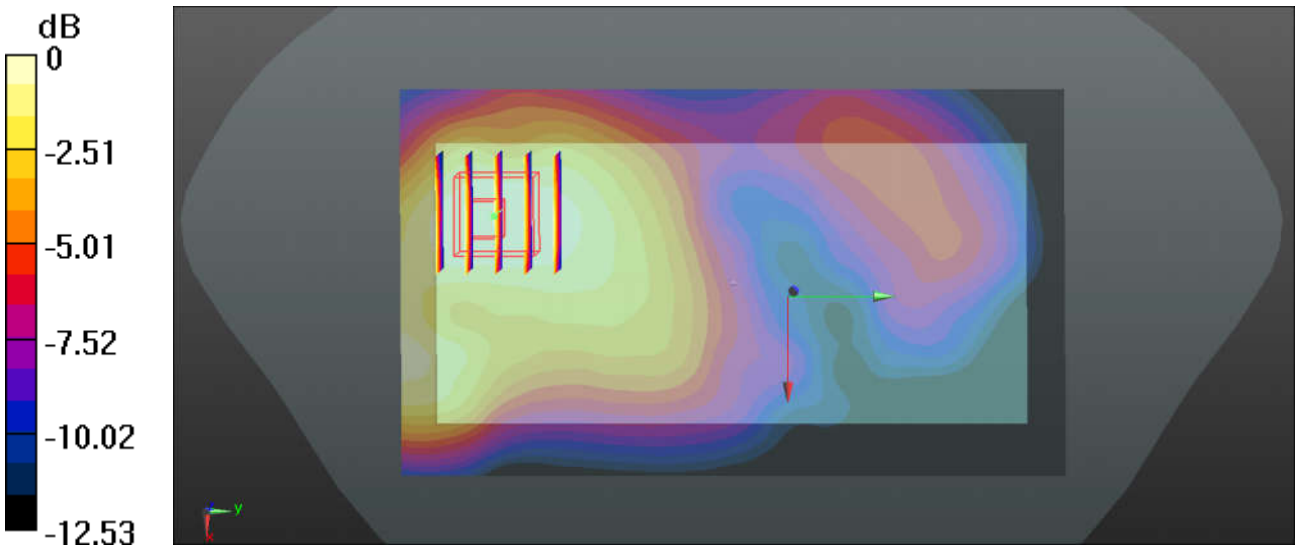

0 dB = 0.494 W/kg

53_WCDMA II_RMC 12.2Kbps_Back_15mm_Ch9262

Communication System: UID 0, UMTS (0); Frequency: 1852.4 MHz;Duty Cycle: 1:1
Medium: MSL_1900_190130 Medium parameters used: f = 1852.4 MHz; σ = 1.475 S/m; ε_r = 54.674; ρ = 1000 kg/m^3
Ambient Temperature：23.5 ℃; Liquid Temperature：22.4 ℃

DASY5 Configuration:
- Probe: EX3DV4 - SN3753; ConvF(7.52, 7.52, 7.52); Calibrated: 2018.05.29;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1437; Calibrated: 2018.10.15
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1671
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch9262/Area Scan (71x121x1): Interpolated grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.701 W/kg

Ch9262/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 6.128 V/m; Power Drift = -0.08 dB
Peak SAR (extrapolated) = 0.817 W/kg
SAR(1 g) = 0.492 W/kg; SAR(10 g) = 0.296 W/kg
Maximum value of SAR (measured) = 0.644 W/kg

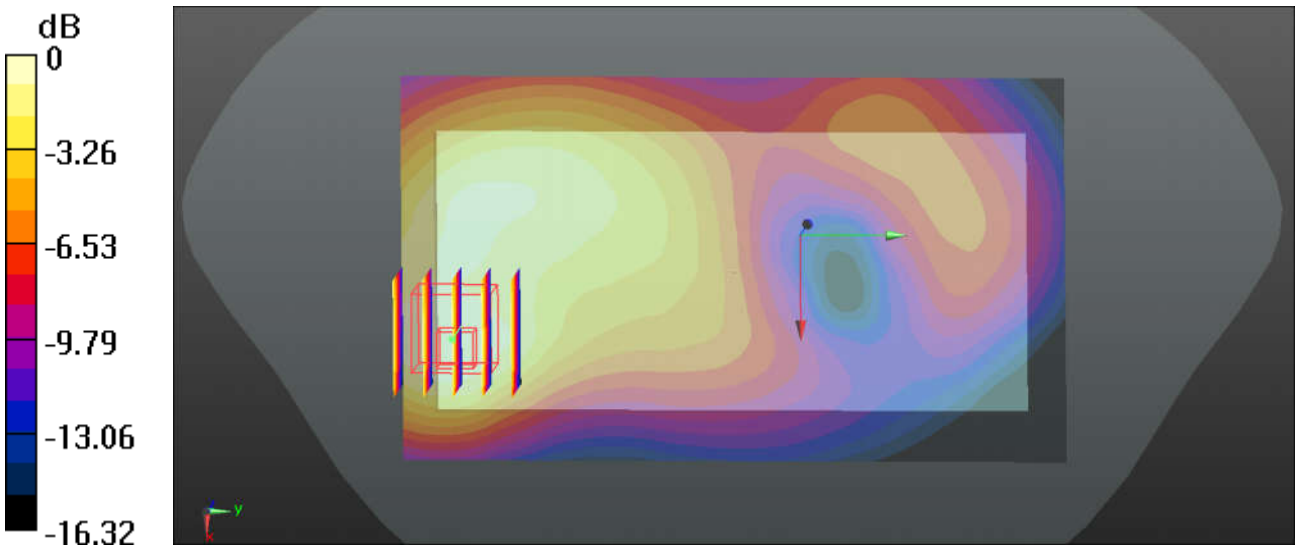

0 dB = 0.644 W/kg

54_CDMA2000 BC0_RC3 SO32 (F+SCH)_Back_15mm_Ch384

Communication System: UID 0, CDMA2000 (0); Frequency: 836.52 MHz;Duty Cycle: 1:1
Medium: MSL_835_190202 Medium parameters used: f = 837 MHz; σ = 0.976 S/m; ε_r = 54.233; ρ = 1000 kg/m^3
Ambient Temperature：23.4 ℃； Liquid Temperature：22.6 ℃

DASY5 Configuration:
- Probe: EX3DV4 - SN3753; ConvF(9.24, 9.24, 9.24); Calibrated: 2018.05.29;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1437; Calibrated: 2018.10.15
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1671
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch384/Area Scan (71x121x1): Interpolated grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.682 W/kg

Ch384/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 2.200 V/m; Power Drift = -0.07 dB
Peak SAR (extrapolated) = 0.794 W/kg
SAR(1 g) = 0.527 W/kg; SAR(10 g) = 0.338 W/kg
Maximum value of SAR (measured) = 0.669 W/kg

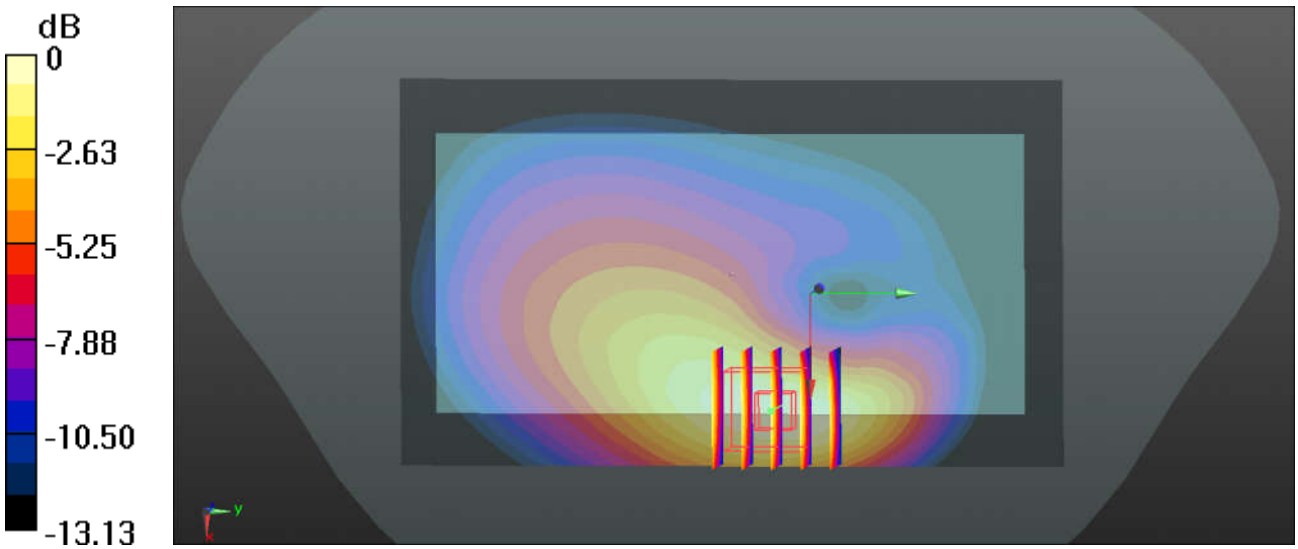

0 dB = 0.669 W/kg

55_CDMA2000 BC1_RC3 SO32 (F+SCH) _Back_15mm_Ch600

Communication System: UID 0, CDMA2000 (0); Frequency: 1880 MHz;Duty Cycle: 1:1
Medium: MSL_1900_190130 Medium parameters used: f = 1880 MHz; σ = 1.513 S/m; ε_r = 54.609; ρ = 1000 kg/m^3
Ambient Temperature：23.5 ℃; Liquid Temperature：22.4 ℃

DASY5 Configuration:
- Probe: EX3DV4 - SN3753; ConvF(7.52, 7.52, 7.52); Calibrated: 2018.05.29;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1437; Calibrated: 2018.10.15
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1671
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch600/Area Scan (71x121x1): Interpolated grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.595 W/kg

Ch600/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 5.175 V/m; Power Drift = -0.05 dB
Peak SAR (extrapolated) = 0.697 W/kg
SAR(1 g) = 0.463 W/kg; SAR(10 g) = 0.302 W/kg
Maximum value of SAR (measured) = 0.585 W/kg

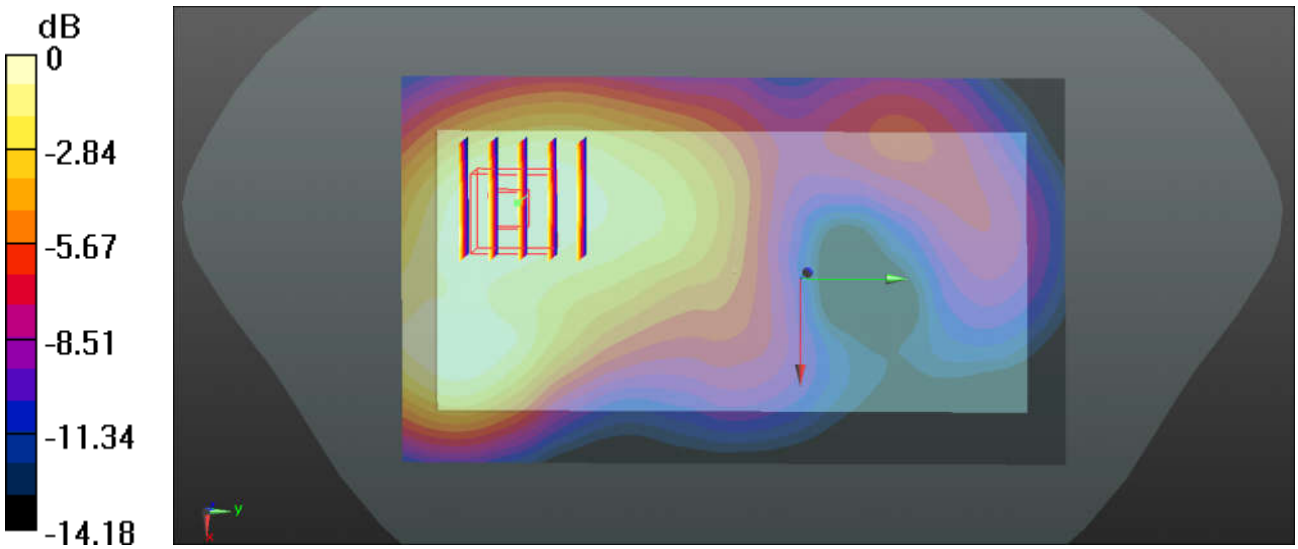

0 dB = 0.585 W/kg

56_LTE Band 71_20M_QPSK_1RB_0Offset_Back_15mm_Ch133322

Communication System: UID 0, LTE (0); Frequency: 683 MHz;Duty Cycle: 1:1
Medium: MSL_750_190201 Medium parameters used: f = 683 MHz; σ = 0.91 S/m; ε_r = 55.617; ρ = 1000 kg/m^3
Ambient Temperature：23.4 ℃； Liquid Temperature：22.4 ℃

DASY5 Configuration:
- Probe: EX3DV4 - SN3753; ConvF(9.58, 9.58, 9.58); Calibrated: 2018.05.29;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1437; Calibrated: 2018.10.15
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1671
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch133322/Area Scan (71x121x1): Interpolated grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.394 W/kg

Ch133322/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 1.487 V/m; Power Drift = 0.03 dB
Peak SAR (extrapolated) = 0.452 W/kg
SAR(1 g) = 0.314 W/kg; SAR(10 g) = 0.210 W/kg
Maximum value of SAR (measured) = 0.389 W/kg

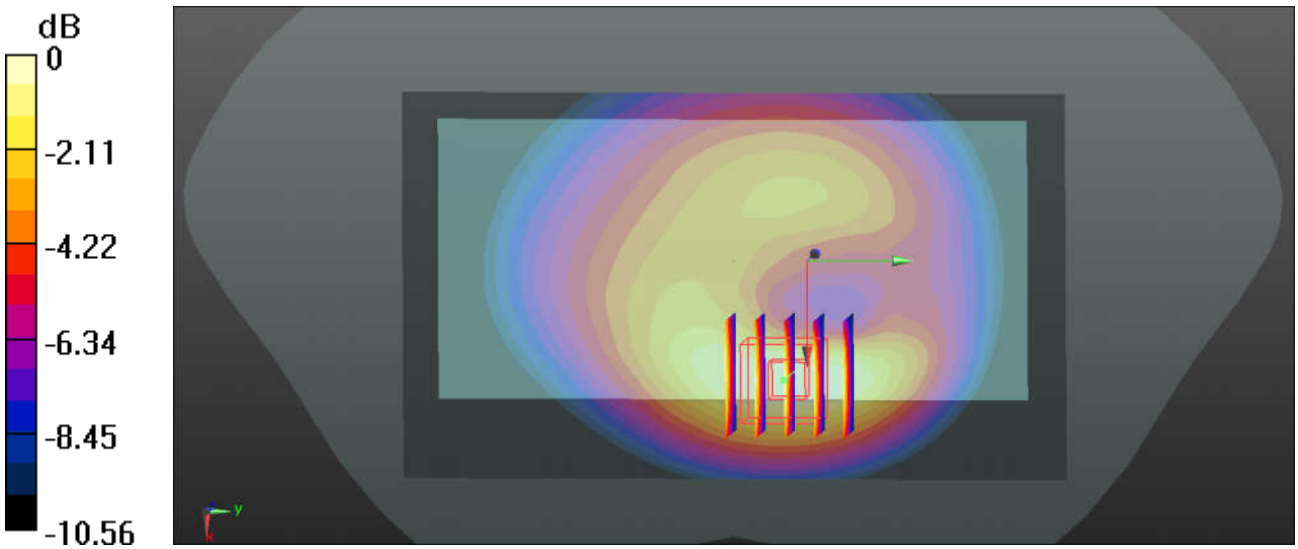

0 dB = 0.389 W/kg

57_LTE Band 12_10M_QPSK_1RB_49Offset_Back_15mm_Ch23095

Communication System: UID 0, LTE (0); Frequency: 707.5 MHz;Duty Cycle: 1:1
Medium: MSL_750_190201 Medium parameters used: f = 707.5 MHz; σ = 0.933 S/m; ε_r = 55.184; ρ = 1000 kg/m^3
Ambient Temperature：23.4 ℃; Liquid Temperature：22.4 ℃

DASY5 Configuration:
- Probe: EX3DV4 - SN3753; ConvF(9.58, 9.58, 9.58); Calibrated: 2018.05.29;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1437; Calibrated: 2018.10.15
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1671
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch23095/Area Scan (71x121x1): Interpolated grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.541 W/kg

Ch23095/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 1.871 V/m; Power Drift = -0.02 dB
Peak SAR (extrapolated) = 0.627 W/kg
SAR(1 g) = 0.434 W/kg; SAR(10 g) = 0.288 W/kg
Maximum value of SAR (measured) = 0.538 W/kg

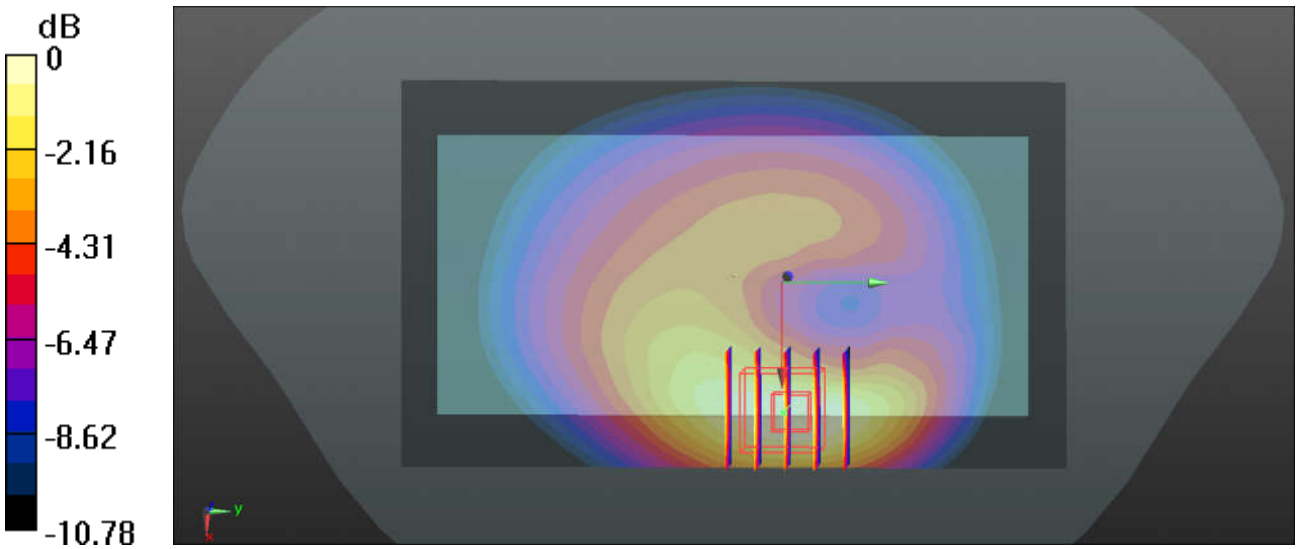

0 dB = 0.538 W/kg

58_LTE Band 13_10M_QPSK1RB_25Offset_Back_15mm_Ch23230

Communication System: UID 0, LTE (0); Frequency: 782 MHz;Duty Cycle: 1:1
Medium: MSL_750_190201 Medium parameters used: f = 782 MHz; σ = 0.988 S/m; ε_r = 53.552; ρ = 1000 kg/m^3
Ambient Temperature：23.4 ℃； Liquid Temperature：22.4 ℃

DASY5 Configuration:
- Probe: EX3DV4 - SN3753; ConvF(9.58, 9.58, 9.58); Calibrated: 2018.05.29;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1437; Calibrated: 2018.10.15
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1671
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch23230/Area Scan (71x121x1): Interpolated grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.590 W/kg

Ch23230/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 1.662 V/m; Power Drift = -0.07 dB
Peak SAR (extrapolated) = 0.694 W/kg
SAR(1 g) = 0.471 W/kg; SAR(10 g) = 0.309 W/kg
Maximum value of SAR (measured) = 0.593 W/kg

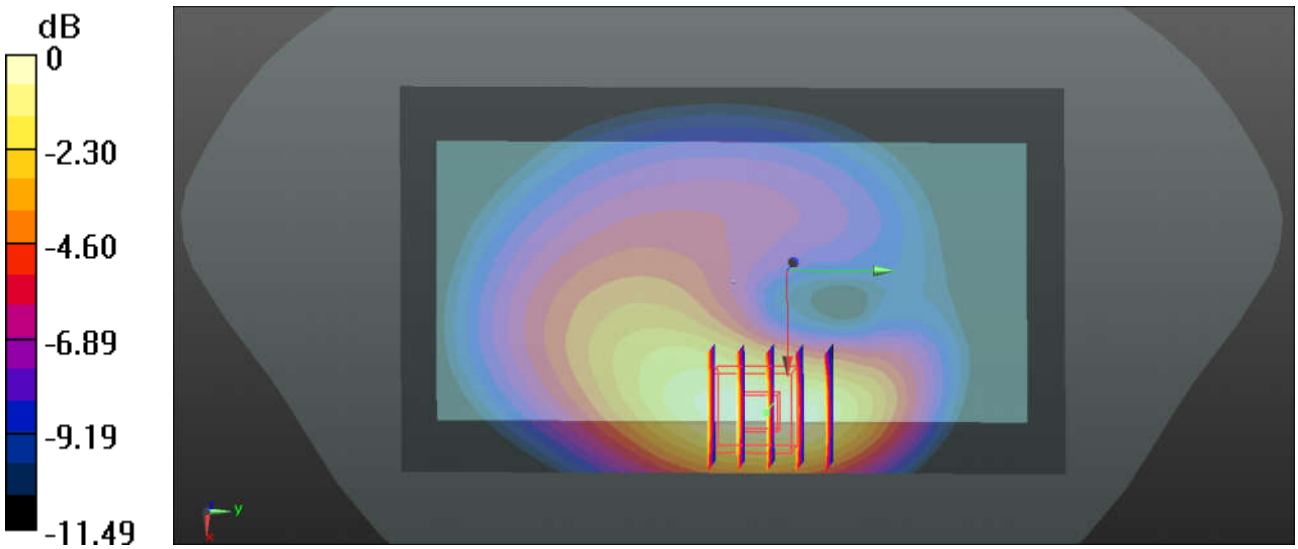

0 dB = 0.593 W/kg

59_LTE Band 5_10M_QPSK_1RB_0Offset_Back_15mm_Ch20525

Communication System: UID 0, LTE (0); Frequency: 836.5 MHz;Duty Cycle: 1:1
Medium: MSL_835_190202 Medium parameters used: f = 836.5 MHz; σ = 0.976 S/m; ε_r = 54.24; ρ = 1000 kg/m^3
Ambient Temperature：23.4 ℃； Liquid Temperature：22.6 ℃

DASY5 Configuration:
- Probe: EX3DV4 - SN3753; ConvF(9.24, 9.24, 9.24); Calibrated: 2018.05.29;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1437; Calibrated: 2018.10.15
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1671
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch20525/Area Scan (71x121x1): Interpolated grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.627 W/kg

Ch20525/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 1.871 V/m; Power Drift = -0.07 dB
Peak SAR (extrapolated) = 0.714 W/kg
SAR(1 g) = 0.479 W/kg; SAR(10 g) = 0.311 W/kg
Maximum value of SAR (measured) = 0.606 W/kg

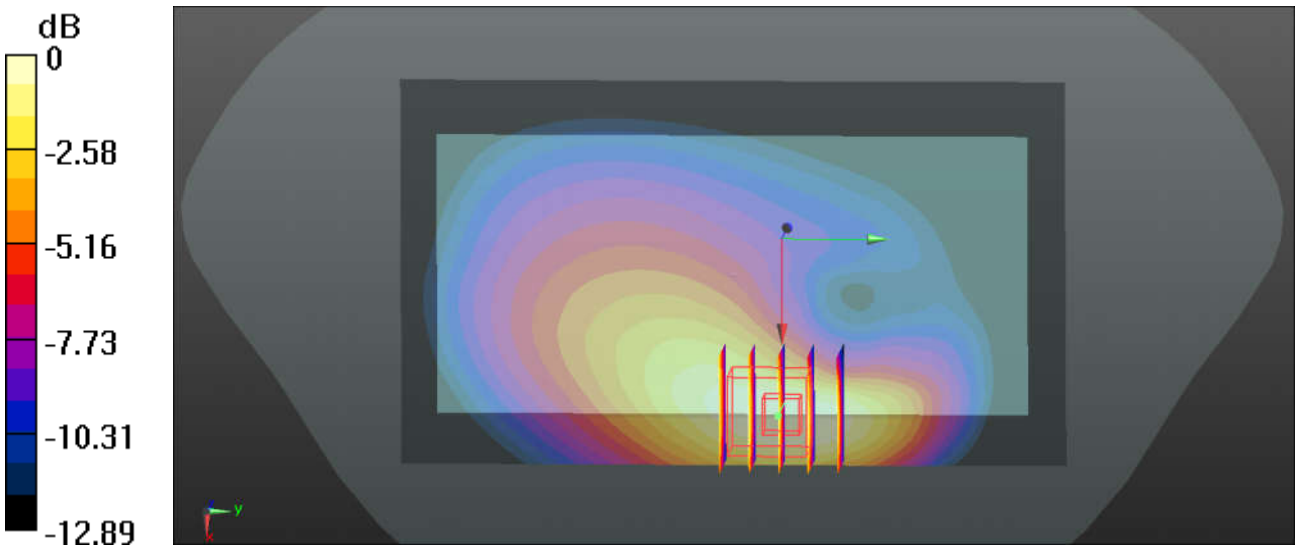

0 dB = 0.606 W/kg

60_LTE Band 26_15M_QPSK_1RB_0Offset_Back_15mm_Ch26965

Communication System: UID 0, LTE (0); Frequency: 841.5 MHz;Duty Cycle: 1:1
Medium: MSL_835_190202 Medium parameters used: f = 841.5 MHz; σ = 0.98 S/m; ε_r = 54.194; ρ = 1000 kg/m^3
Ambient Temperature：23.4 ℃； Liquid Temperature：22.6 ℃

DASY5 Configuration:
- Probe: EX3DV4 - SN3753; ConvF(9.24, 9.24, 9.24); Calibrated: 2018.05.29;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1437; Calibrated: 2018.10.15
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1671
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch26965/Area Scan (71x121x1): Interpolated grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.532 W/kg

Ch26965/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 1.677 V/m; Power Drift = 0.08 dB
Peak SAR (extrapolated) = 0.603 W/kg
SAR(1 g) = 0.405 W/kg; SAR(10 g) = 0.262 W/kg
Maximum value of SAR (measured) = 0.514 W/kg

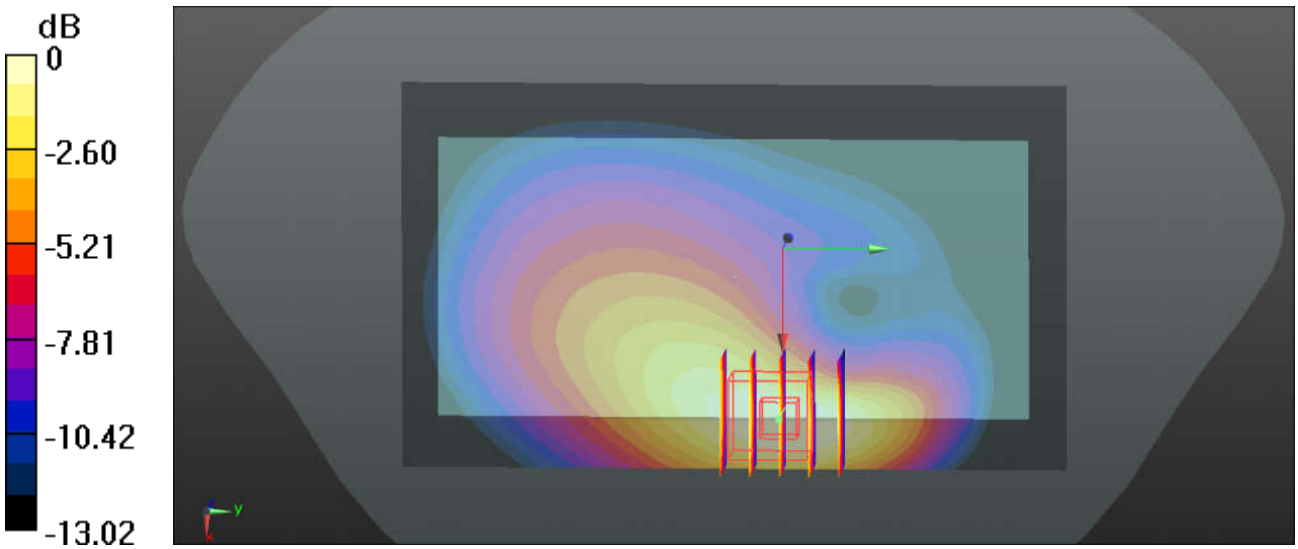

0 dB = 0.514 W/kg

61_LTE Band 66_20M_QPSK_1RB_0Offset_Back_15mm_Ch132322

Communication System: UID 0, LTE (0); Frequency: 1745 MHz;Duty Cycle: 1:1
Medium: MSL_1750_190131 Medium parameters used: f = 1745 MHz; σ = 1.506 S/m; ε_r = 52.003; ρ = 1000 kg/m^3
Ambient Temperature：23.4 ℃； Liquid Temperature：22.7 ℃

DASY5 Configuration:
- Probe: EX3DV4 - SN3753; ConvF(7.76, 7.76, 7.76); Calibrated: 2018.05.29;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1437; Calibrated: 2018.10.15
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1671
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch132322/Area Scan (71x121x1): Interpolated grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.524 W/kg

Ch132322/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 5.216 V/m; Power Drift = -0.09 dB
Peak SAR (extrapolated) = 0.617 W/kg
SAR(1 g) = 0.417 W/kg; SAR(10 g) = 0.276 W/kg
Maximum value of SAR (measured) = 0.522 W/kg

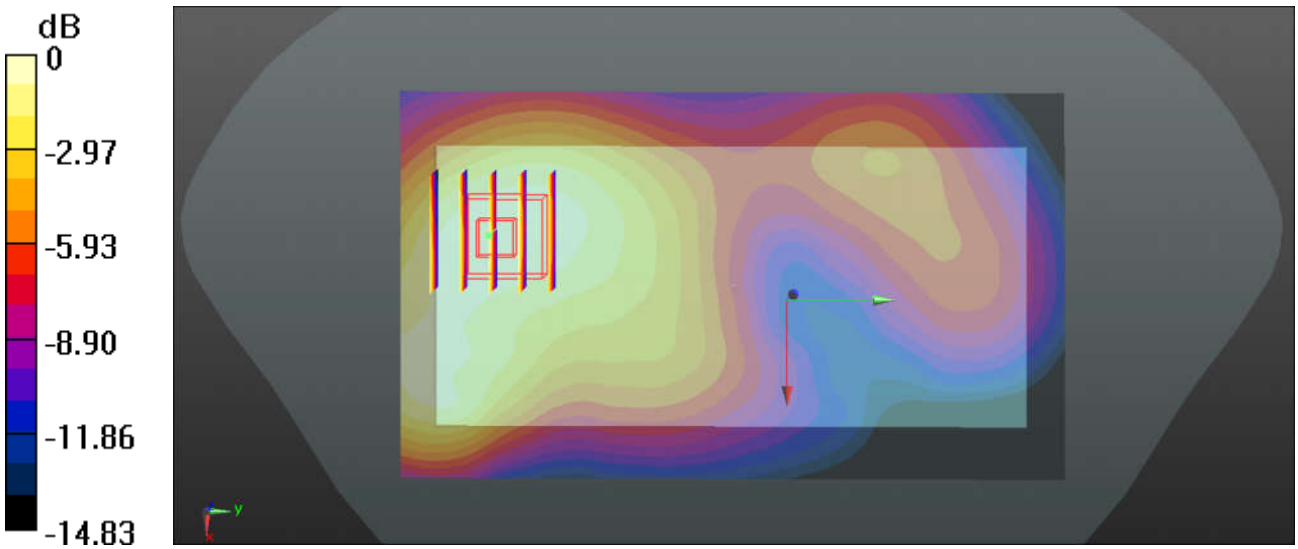

0 dB = 0.522 W/kg

62_LTE Band 25_20M_QPSK_1RB_0Offset_Back_15mm_Ch26140

Communication System: UID 0, LTE (0); Frequency: 1860 MHz;Duty Cycle: 1:1
Medium: MSL_1900_190130 Medium parameters used: f = 1860 MHz; σ = 1.486 S/m; ε_r = 54.647; ρ = 1000 kg/m^3
Ambient Temperature：23.5 ℃； Liquid Temperature：22.4 ℃

DASY5 Configuration:
- Probe: EX3DV4 - SN3753; ConvF(7.52, 7.52, 7.52); Calibrated: 2018.05.29;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1437; Calibrated: 2018.10.15
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1671
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch26140/Area Scan (71x121x1): Interpolated grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.580 W/kg

Ch26140/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 3.174 V/m; Power Drift = -0.17 dB
Peak SAR (extrapolated) = 0.685 W/kg
SAR(1 g) = 0.401 W/kg; SAR(10 g) = 0.246 W/kg
Maximum value of SAR (measured) = 0.526 W/kg

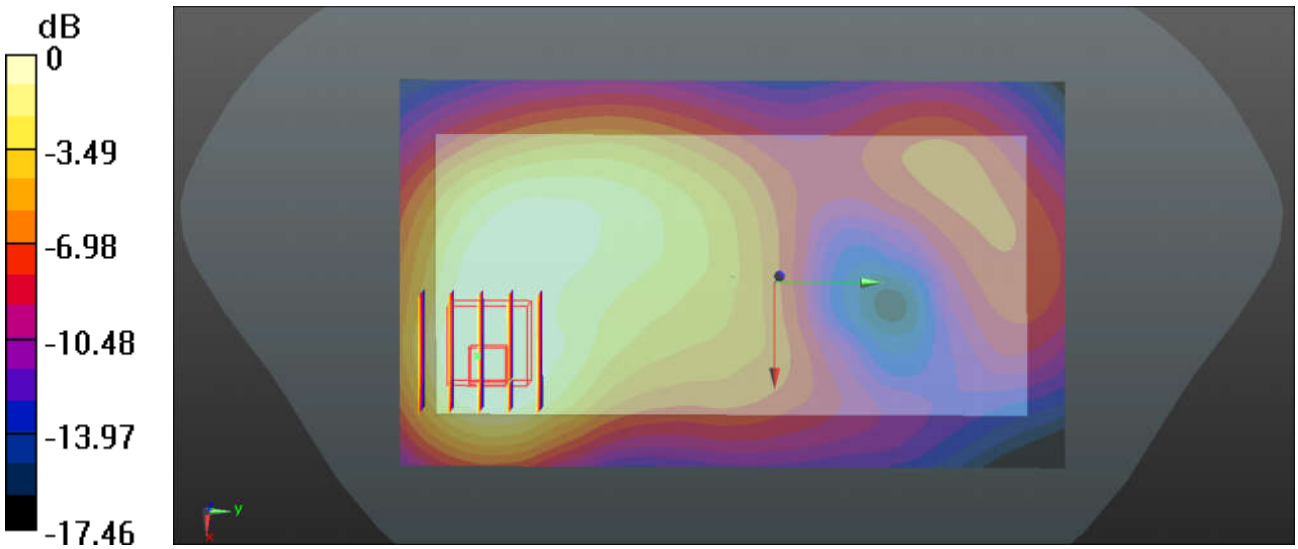

0 dB = 0.526 W/kg

63_LTE Band 2_20M_QPSK_1RB_0Offset_Back_15mm_Ch18900

Communication System: UID 0, LTE (0); Frequency: 1880 MHz;Duty Cycle: 1:1
Medium: MSL_1900_190130 Medium parameters used: f = 1880 MHz; σ = 1.513 S/m; ε_r = 54.609; ρ = 1000 kg/m^3
Ambient Temperature：23.5 ℃; Liquid Temperature：22.4 ℃

DASY5 Configuration:
- Probe: EX3DV4 - SN3753; ConvF(7.52, 7.52, 7.52); Calibrated: 2018.05.29;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1437; Calibrated: 2018.10.15
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1671
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch18900/Area Scan (71x121x1): Interpolated grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.598 W/kg

Ch18900/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 4.683 V/m; Power Drift = -0.03 dB
Peak SAR (extrapolated) = 0.753 W/kg
SAR(1 g) = 0.432 W/kg; SAR(10 g) = 0.245 W/kg
Maximum value of SAR (measured) = 0.578 W/kg

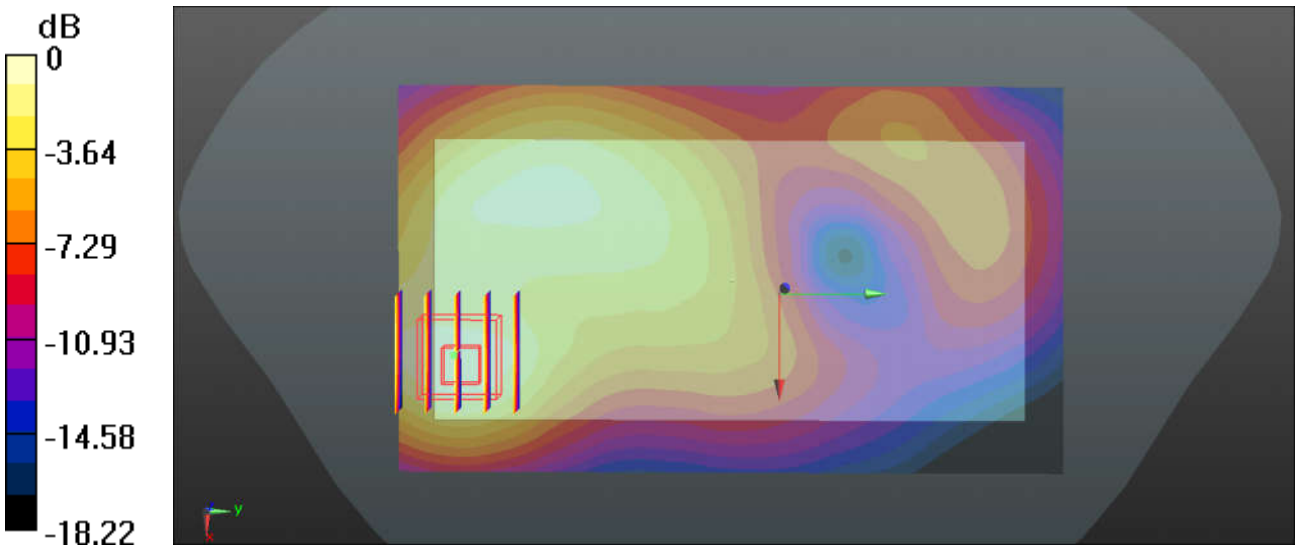

0 dB = 0.578 W/kg

64_LTE Band 30_10M_QPSK_1RB_0Offset_Back_15mm_Ch27710

Communication System: UID 0, LTE (0); Frequency: 2310 MHz;Duty Cycle: 1:1
Medium: MSL_2300_190223 Medium parameters used: f = 2310 MHz; σ = 1.773 S/m; ε_r = 53.718; ρ = 1000 kg/m^3
Ambient Temperature：23.5 ℃; Liquid Temperature：22.9 ℃

DASY5 Configuration:
- Probe: EX3DV4 - SN3935; ConvF(7.86, 7.86, 7.86); Calibrated: 2018.11.26;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn715; Calibrated: 2019.01.23
- Phantom: SAM (Front) with CRP v5.0; Type: QD000P40CD; Serial: TP:1795
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch27710/Area Scan (91x161x1): Interpolated grid: dx=12mm, dy=12mm
Maximum value of SAR (interpolated) = 0.362 W/kg

Ch27710/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 2.971 V/m; Power Drift = -0.16 dB
Peak SAR (extrapolated) = 0.468 W/kg
SAR(1 g) = 0.254 W/kg; SAR(10 g) = 0.138 W/kg
Maximum value of SAR (measured) = 0.358 W/kg

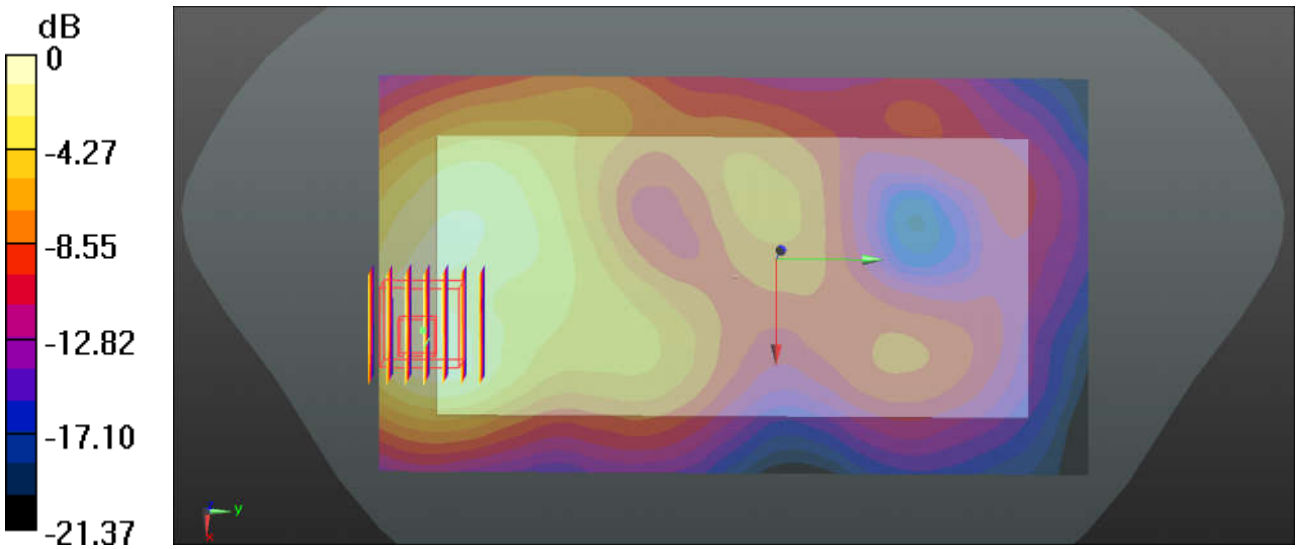

0 dB = 0.358 W/kg

65_LTE Band 7_20M_QPSK_1RB_99Offset_Back_15mm_Ch20850

Communication System: UID 0, LTE (0); Frequency: 2510 MHz;Duty Cycle: 1:1
Medium: MSL_2600_190203 Medium parameters used: f = 2510 MHz; σ = 2.075 S/m; ε_r = 51.267; ρ= 1000 kg/m^3
Ambient Temperature：23.6 ℃; Liquid Temperature：22.8 ℃

DASY5 Configuration:
- Probe: EX3DV4 - SN3935; ConvF(7.52, 7.52, 7.52); Calibrated: 2018.11.26;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn715; Calibrated: 2019.01.23
- Phantom: SAM (Front) with CRP v5.0; Type: QD000P40CD; Serial: TP:1795
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch20850/Area Scan (91x161x1): Interpolated grid: dx=12mm, dy=12mm
Maximum value of SAR (interpolated) = 0.386 W/kg

Ch20850/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 3.030 V/m; Power Drift = -0.02 dB
Peak SAR (extrapolated) = 0.518 W/kg
SAR(1 g) = 0.272 W/kg; SAR(10 g) = 0.147 W/kg
Maximum value of SAR (measured) = 0.389 W/kg

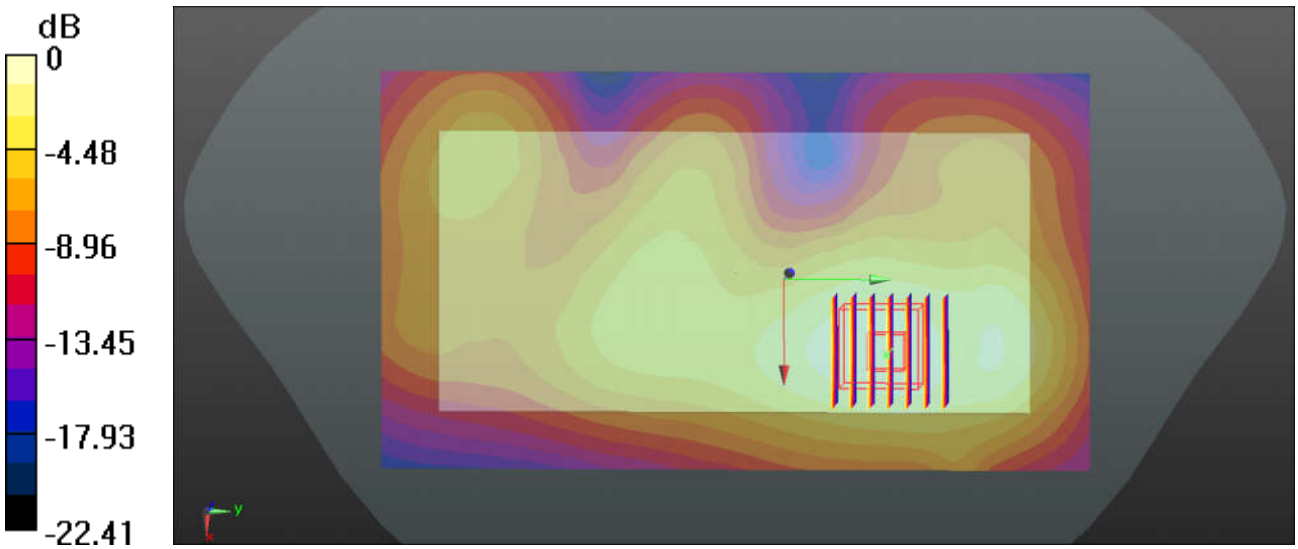

0 dB = 0.389 W/kg

66_LTE Band 41_20M_QPSK_1RB_49Offset_Back_15mm_Ch40620

Communication System: UID 0, LTE (0); Frequency: 2593 MHz;Duty Cycle: 1:2.331
Medium: MSL_2600_190220 Medium parameters used: f = 2593 MHz; σ = 2.173 S/m; ε_r = 50.754; ρ = 1000 kg/m^3
Ambient Temperature：23.6 ℃； Liquid Temperature：22.8 ℃

DASY5 Configuration:
- Probe: EX3DV4 - SN3935; ConvF(7.52, 7.52, 7.52); Calibrated: 2018.11.26;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1437; Calibrated: 2018.10.15
- Phantom: SAM (Front) with CRP v5.0; Type: QD000P40CD; Serial: TP:1795
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch40620/Area Scan (91x161x1): Interpolated grid: dx=12mm, dy=12mm
Maximum value of SAR (interpolated) = 0.320 W/kg

Ch40620/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 3.975 V/m; Power Drift = -0.06 dB
Peak SAR (extrapolated) = 0.472 W/kg
SAR(1 g) = 0.215 W/kg; SAR(10 g) = 0.101 W/kg
Maximum value of SAR (measured) = 0.335 W/kg

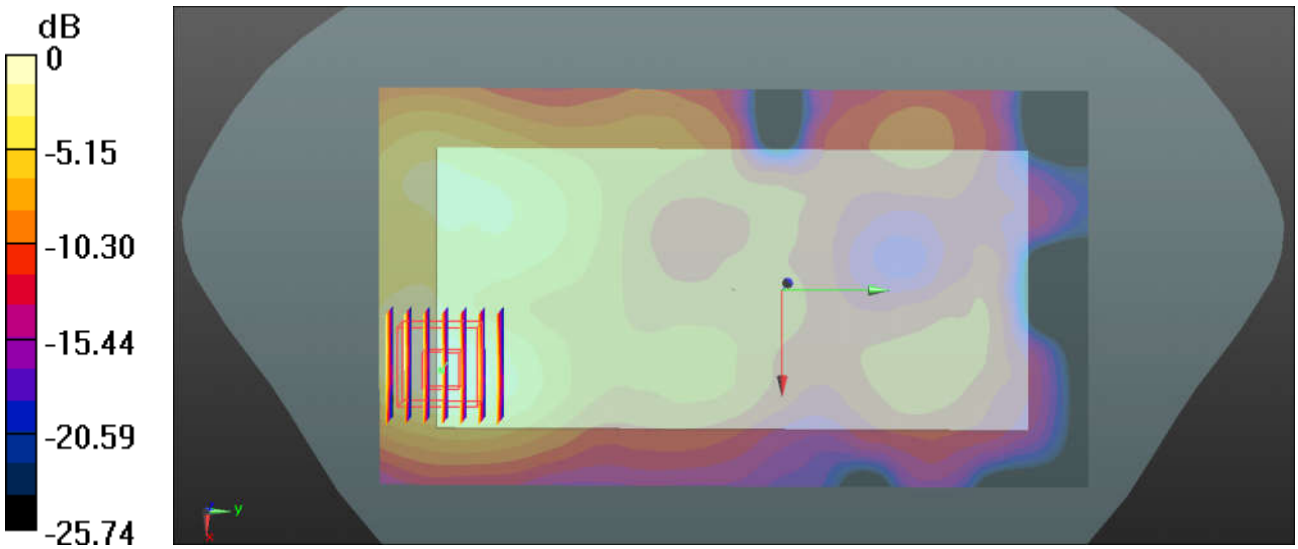

0 dB = 0.335 W/kg

67_LTE Band 48_20M_QPSK_1RB_0Offset_Front_15mm_Ch56150

Communication System: UID 0, LTE (0); Frequency: 3641 MHz;Duty Cycle: 1:1
Medium: MSL_3500-3700_190228 Medium parameters used: f = 3641 MHz; σ = 3.47 S/m; ε_r = 50.459; ρ = 1000 kg/m^3
Ambient Temperature：23.3 ℃; Liquid Temperature：22.6 ℃

DASY5 Configuration:
- Probe: EX3DV4 - SN3857; ConvF(6.71, 6.71, 6.71); Calibrated: 2018.05.31;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn715; Calibrated: 2019.01.23
- Phantom: SAM (Front) with CRP v5.0; Type: QD000P40CD; Serial: TP:1795
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch56150/Area Scan (91x191x1): Interpolated grid: dx=10mm, dy=10mm
Maximum value of SAR (interpolated) = 0.548 W/kg

Ch56150/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 0.8670 V/m; Power Drift = 0.04 dB
Peak SAR (extrapolated) = 0.740 W/kg
SAR(1 g) = 0.311 W/kg; SAR(10 g) = 0.133 W/kg
Maximum value of SAR (measured) = 0.559 W/kg

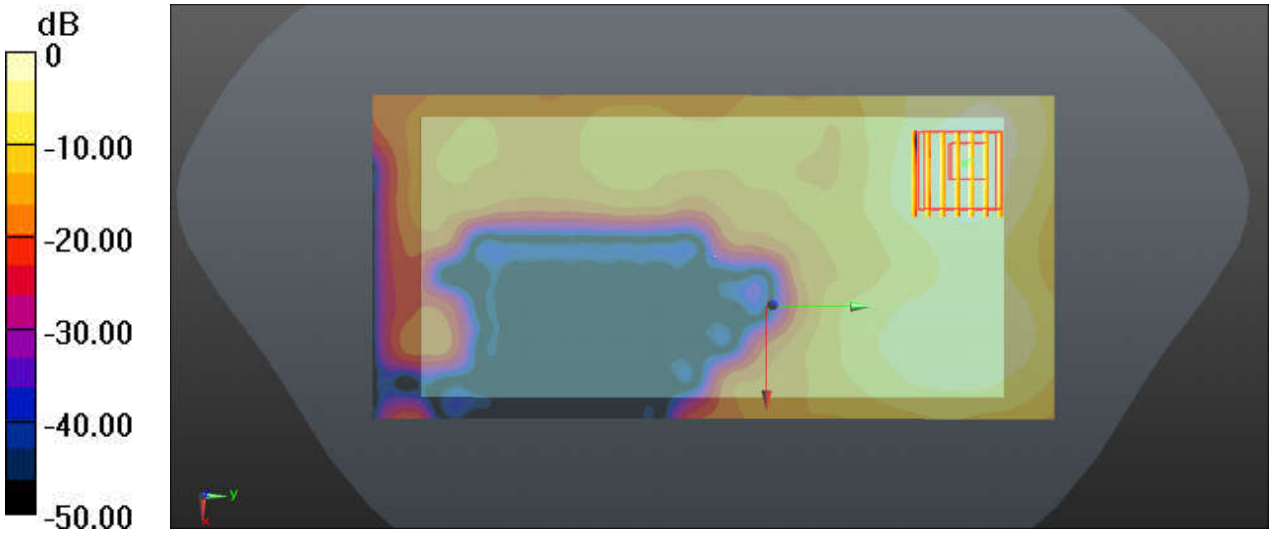

0 dB = 0.559 W/kg

68_WLAN2.4GHz_802.11b 1Mbps_Back_15mm_Ch6

Communication System: UID 0, WIFI (0); Frequency: 2437 MHz;Duty Cycle: 1:1.008
Medium: MSL_2450_180224 Medium parameters used: f = 2437 MHz; σ = 2.024 S/m; ε_r = 51.922; ρ = 1000 kg/m^3
Ambient Temperature：23.3 ℃; Liquid Temperature：22.6 ℃

DASY5 Configuration:
- Probe: EX3DV4 - SN3911; ConvF(7.54, 7.54, 7.54); Calibrated: 2019.01.22;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn715; Calibrated: 2019.01.23
- Phantom: SAM (Front) with CRP v5.0; Type: QD000P40CD; Serial: TP:1795
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch6/Area Scan (81x151x1): Interpolated grid: dx=12mm, dy=12mm
Maximum value of SAR (interpolated) = 0.281 W/kg

Ch6/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 6.409 V/m; Power Drift = 0.11 dB
Peak SAR (extrapolated) = 0.365 W/kg
SAR(1 g) = 0.200 W/kg; SAR(10 g) = 0.110 W/kg
Maximum value of SAR (measured) = 0.280 W/kg

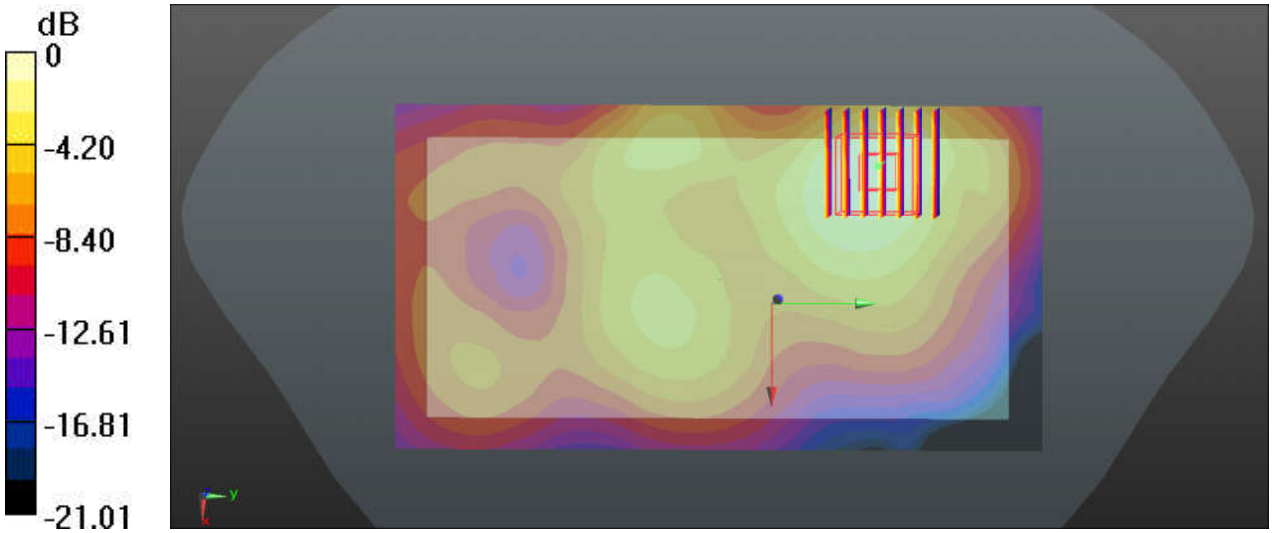

0 dB = 0.280 W/kg

69_WLAN5GHz_802.11a_6Mbps_Back_15mm_Ch52

Communication System: UID 0, WIFI (0); Frequency: 5260 MHz;Duty Cycle: 1:1.022
Medium: MSL_5250_190225 Medium parameters used: f = 5260 MHz; σ = 5.399 S/m; ε_r = 46.875; ρ = 1000 kg/m^3
Ambient Temperature：23.5 ℃; Liquid Temperature：22.9 ℃

DASY5 Configuration:
- Probe: EX3DV4 - SN3911; ConvF(4.67, 4.67, 4.67); Calibrated: 2019.01.22;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn715; Calibrated: 2019.01.23
- Phantom: SAM (Front) with CRP v5.0; Type: QD000P40CD; Serial: TP:1795
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch52/Area Scan (91x181x1): Interpolated grid: dx=10mm, dy=10mm
Maximum value of SAR (interpolated) = 1.25 W/kg

Ch52/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 0 V/m; Power Drift = 0.09 dB
Peak SAR (extrapolated) = 2.03 W/kg
SAR(1 g) = 0.539 W/kg; SAR(10 g) = 0.178 W/kg
Maximum value of SAR (measured) = 1.26 W/kg

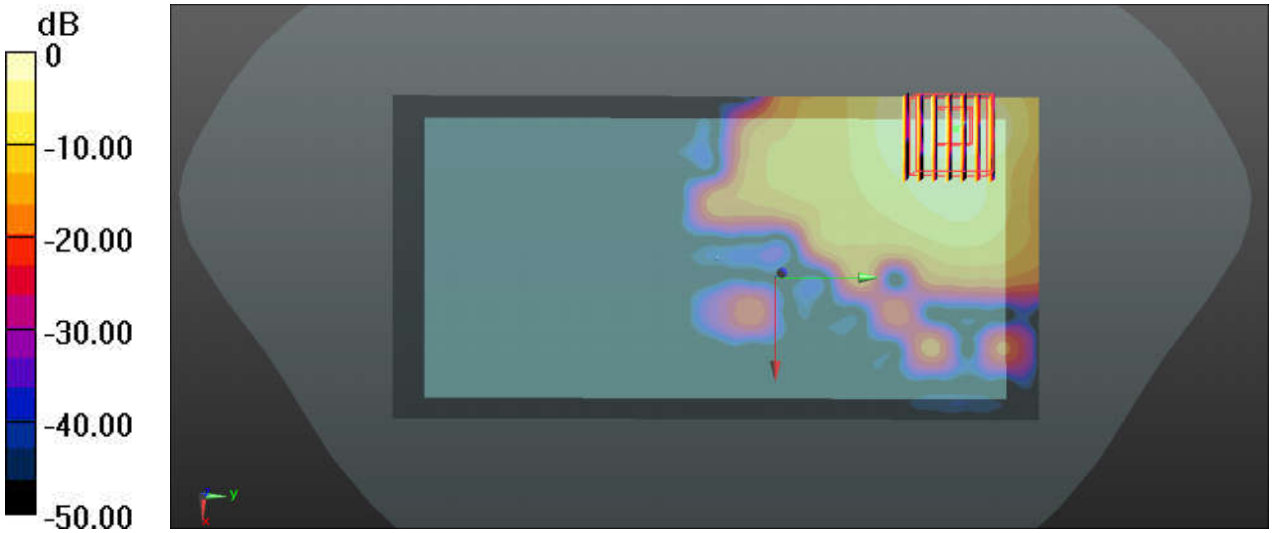

0 dB = 1.26 W/kg

70_WLAN5GHz_802.11a_6Mbps_Back_15mm_Ch132

Communication System: UID 0, WIFI (0); Frequency: 5660 MHz;Duty Cycle: 1:1.022
Medium: MSL_5600_190225 Medium parameters used: f = 5660 MHz; σ = 5.917 S/m; ε_r = 46.174; ρ = 1000 kg/m^3
Ambient Temperature：23.5 ℃; Liquid Temperature：22.9 ℃

DASY5 Configuration:
- Probe: EX3DV4 - SN3911; ConvF(4.04, 4.04, 4.04); Calibrated: 2019.01.22;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn715; Calibrated: 2019.01.23
- Phantom: SAM (Front) with CRP v5.0; Type: QD000P40CD; Serial: TP:1795
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch132/Area Scan (91x181x1): Interpolated grid: dx=10mm, dy=10mm
Maximum value of SAR (interpolated) = 0.878 W/kg

Ch132/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 0.7900 V/m; Power Drift = 0.06 dB
Peak SAR (extrapolated) = 1.70 W/kg
SAR(1 g) = 0.407 W/kg; SAR(10 g) = 0.162 W/kg
Maximum value of SAR (measured) = 0.956 W/kg

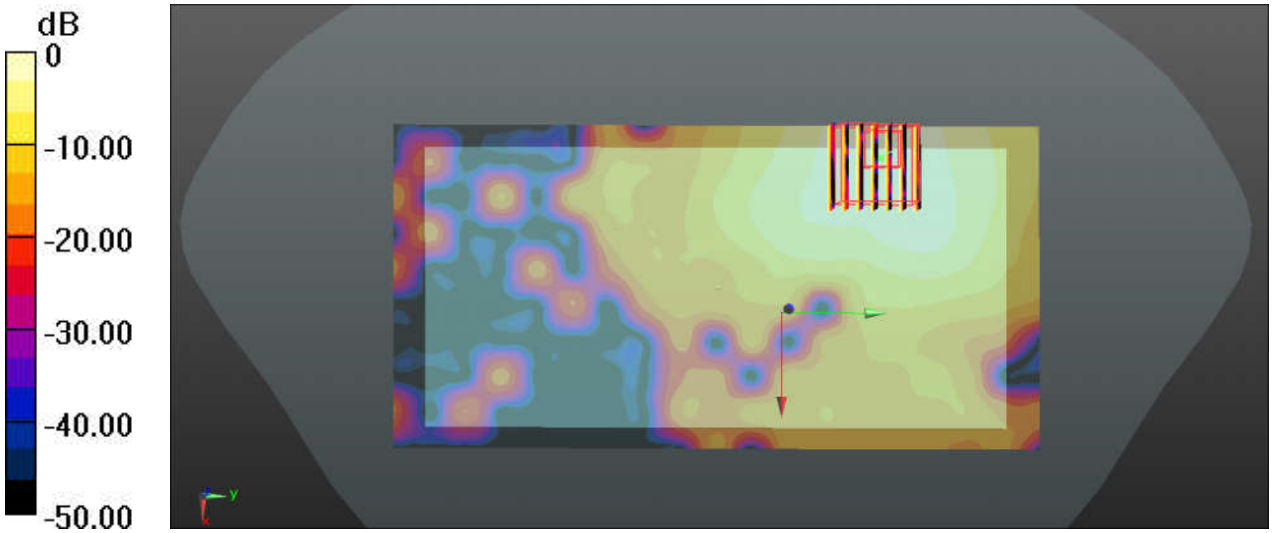

0 dB = 0.956 W/kg

71_WLAN5GHz_802.11a_6Mbps_Back_15mm_Ch157

Communication System: UID 0, WIFI (0); Frequency: 5785 MHz;Duty Cycle: 1:1.022
Medium: MSL_5750_190225 Medium parameters used: f = 5785 MHz; σ = 6.086 S/m; ε_r = 45.962; ρ = 1000 kg/m^3
Ambient Temperature：23.5 ℃; Liquid Temperature：22.7 ℃

DASY5 Configuration:
- Probe: EX3DV4 - SN3911; ConvF(4.16, 4.16, 4.16); Calibrated: 2019.01.22;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn715; Calibrated: 2019.01.23
- Phantom: SAM (Front) with CRP v5.0; Type: QD000P40CD; Serial: TP:1795
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch157/Area Scan (91x181x1): Interpolated grid: dx=10mm, dy=10mm
Maximum value of SAR (interpolated) = 0.744 W/kg

Ch157/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 0.7000 V/m; Power Drift = 0.02 dB
Peak SAR (extrapolated) = 1.48 W/kg
SAR(1 g) = 0.329 W/kg; SAR(10 g) = 0.113 W/kg
Maximum value of SAR (measured) = 0.819 W/kg

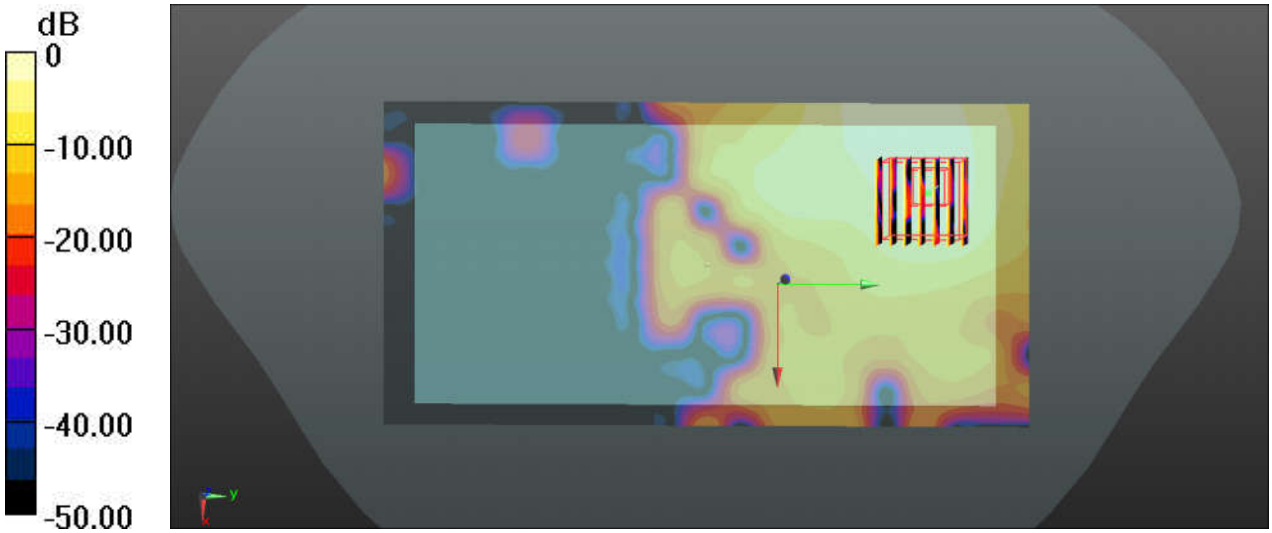

0 dB = 0.819 W/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 2019.02.24

72_Bluetooth_DH5 1Mbps_Back_15mm_Ch39

Communication System: UID 0, Bluetooth (0); Frequency: 2441 MHz;Duty Cycle: 1:1.302
Medium: MSL_2450_180224 Medium parameters used: f = 2441 MHz; σ = 2.029 S/m; ε_r = 51.905; ρ = 1000 kg/m^3
Ambient Temperature：23.3 ℃; Liquid Temperature：22.6 ℃

DASY5 Configuration:
- Probe: EX3DV4 - SN3911; ConvF(7.54, 7.54, 7.54); Calibrated: 2019.01.22;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn715; Calibrated: 2019.01.23
- Phantom: SAM (Front) with CRP v5.0; Type: QD000P40CD; Serial: TP:1795
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch39/Area Scan (81x151x1): Interpolated grid: dx=12mm, dy=12mm
Maximum value of SAR (interpolated) = 0.0271 W/kg

Ch39/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 0.8350 V/m; Power Drift = 0.07 dB
Peak SAR (extrapolated) = 0.0270 W/kg
SAR(1 g) = 0.014 W/kg; SAR(10 g) = 0.00704 W/kg
Maximum value of SAR (measured) = 0.0202 W/kg

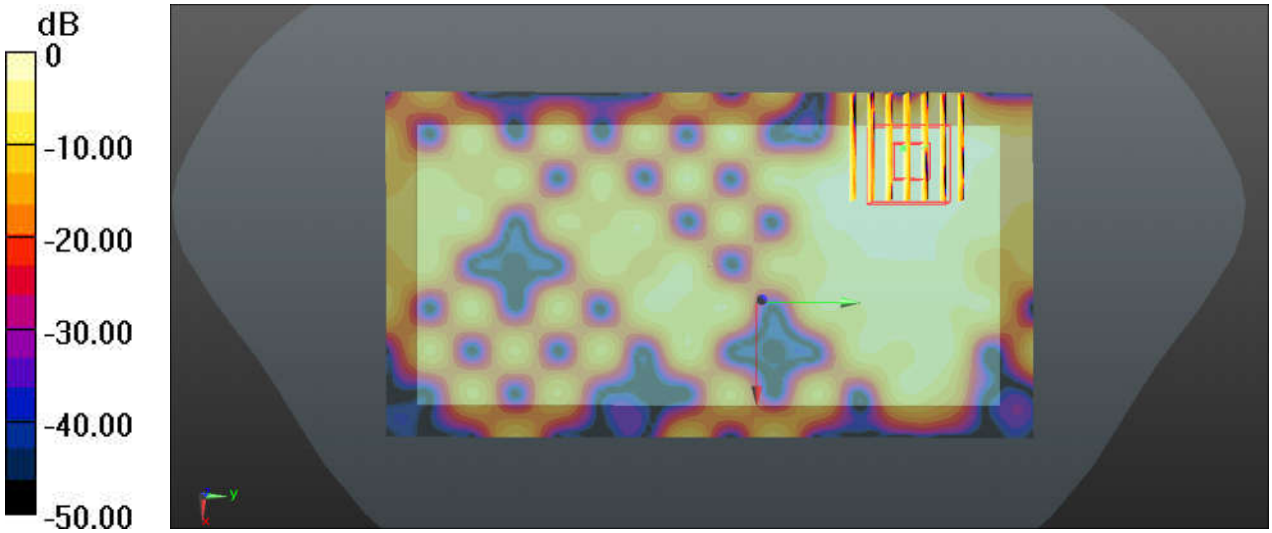

0 dB = 0.0202 W/kg

73_WCDMA IV_RMC 12.2Kbps_Bottom Side_0mm_Ch1513

Communication System: UID 0, UMTS (0); Frequency: 1752.6 MHz;Duty Cycle: 1:1
Medium: MSL_1750_190222 Medium parameters used: f = 1753 MHz; σ = 1.528 S/m; ε_r = 52.273; ρ = 1000 kg/m^3
Ambient Temperature：23.6 ℃; Liquid Temperature：22.7 ℃

DASY5 Configuration:
- Probe: EX3DV4 - SN3935; ConvF(8.45, 8.45, 8.45); Calibrated: 2018.11.26;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn715; Calibrated: 2019.01.23
- Phantom: SAM (Front) with CRP v5.0; Type: QD000P40CD; Serial: TP:1795
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch1513/Area Scan (41x81x1): Interpolated grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 8.59 W/kg

Ch1513/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 3.091 V/m; Power Drift = 0.04 dB
Peak SAR (extrapolated) = 12.8 W/kg
SAR(1 g) = 5.71 W/kg; SAR(10 g) = 2.65 W/kg
Maximum value of SAR (measured) = 9.63 W/kg

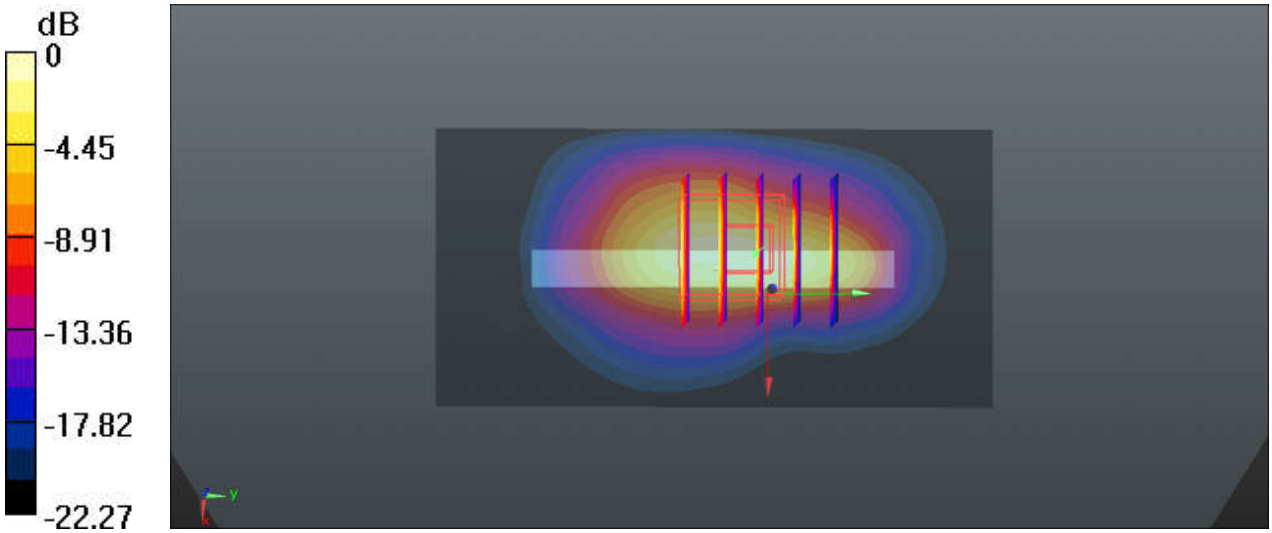

0 dB = 9.63 W/kg

74_WCDMA II_RMC 12.2Kbps_Bottom Side_0mm_Ch9538

Communication System: UID 0, UMTS (0); Frequency: 1907.6 MHz;Duty Cycle: 1:1
Medium: MSL_1900_190221 Medium parameters used: f = 1908 MHz; σ = 1.571 S/m; ε_r = 55.2; ρ = 1000 kg/m^3
Ambient Temperature：23.7 ℃; Liquid Temperature：22.7 ℃

DASY5 Configuration:
- Probe: EX3DV4 - SN3935; ConvF(8.07, 8.07, 8.07); Calibrated: 2018.11.26;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn715; Calibrated: 2019.01.23
- Phantom: SAM (Front) with CRP v5.0; Type: QD000P40CD; Serial: TP:1795
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch9538/Area Scan (41x81x1): Interpolated grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 7.45 W/kg

Ch9538/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 2.318 V/m; Power Drift = 0.04 dB
Peak SAR (extrapolated) = 11.0 W/kg
SAR(1 g) = 5.04 W/kg; SAR(10 g) = 2.36 W/kg
Maximum value of SAR (measured) = 8.45 W/kg

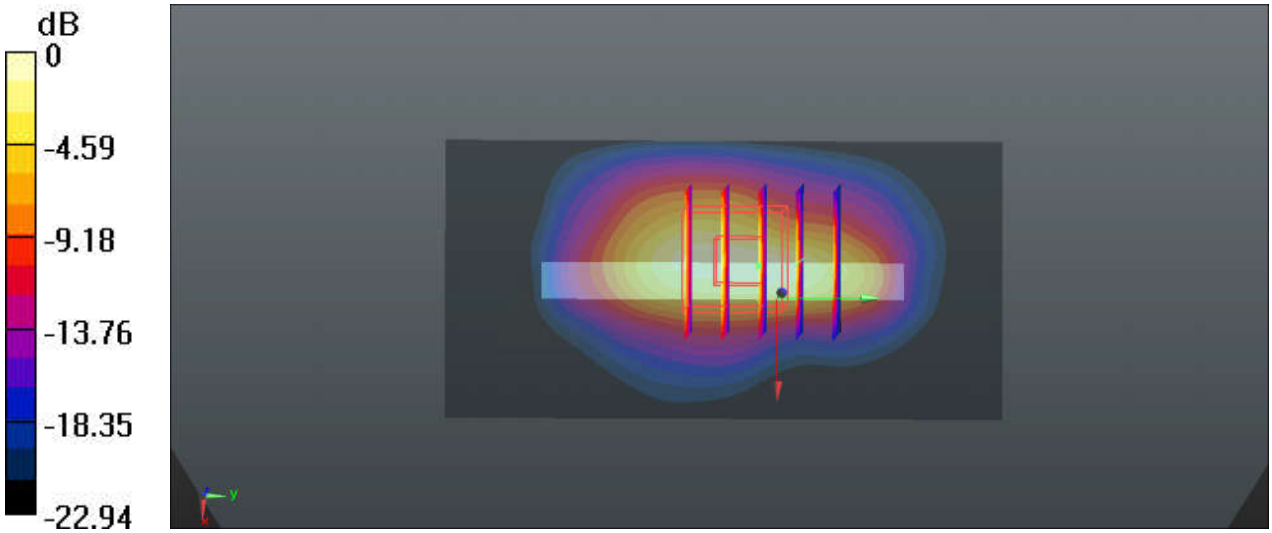

0 dB = 8.45 W/kg

75_CDMA2000 BC1_RTAP 153.6Kbps_Back_0mm_Ch1175

Communication System: UID 0, CDMA2000 (0); Frequency: 1908.75 MHz;Duty Cycle: 1:1
Medium: MSL_1900_190221 Medium parameters used: f = 1909 MHz; σ = 1.573 S/m; ε_r = 55.197; ρ = 1000 kg/m^3
Ambient Temperature：23.7 ℃; Liquid Temperature：22.7 ℃

DASY5 Configuration:
- Probe: EX3DV4 - SN3935; ConvF(8.07, 8.07, 8.07); Calibrated: 2018.11.26;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn715; Calibrated: 2019.01.23
- Phantom: SAM (Front) with CRP v5.0; Type: QD000P40CD; Serial: TP:1795
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch1175/Area Scan (71x131x1): Interpolated grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 8.67 W/kg

Ch1175/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 0.9830 V/m; Power Drift = 0.06 dB
Peak SAR (extrapolated) = 15.3 W/kg
SAR(1 g) = 6.1 W/kg; SAR(10 g) = 2.72 W/kg
Maximum value of SAR (measured) = 9.30 W/kg

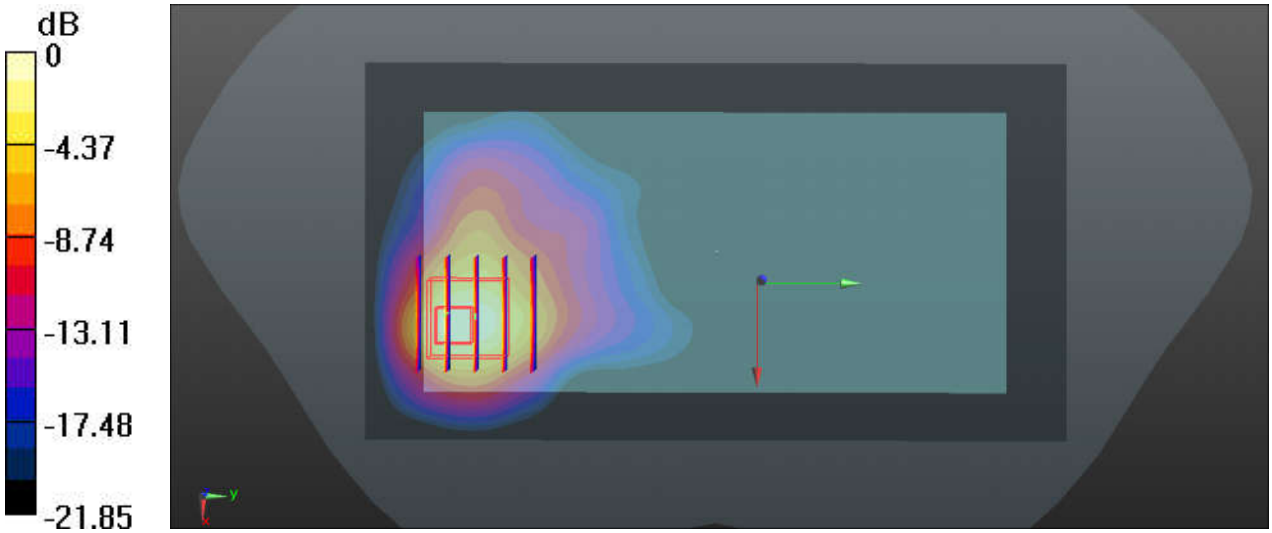

0 dB = 9.30 W/kg

76_LTE Band 66_20M_QPSK_50RB_24Offset_Bottom Side_0mm_Ch132322

Communication System: UID 0, LTE (0); Frequency: 1745 MHz;Duty Cycle: 1:1
Medium: MSL_1750_190131 Medium parameters used: f = 1745 MHz; σ = 1.506 S/m; ε_r = 52.003; ρ = 1000 kg/m^3
Ambient Temperature：23.4 ℃； Liquid Temperature：22.7 ℃

DASY5 Configuration:
- Probe: EX3DV4 - SN3753; ConvF(7.76, 7.76, 7.76); Calibrated: 2018.05.29;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1437; Calibrated: 2018.10.15
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1671
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch132322/Area Scan (41x81x1): Interpolated grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 8.00 W/kg

Ch132322/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 2.480 V/m; Power Drift = 0.03 dB
Peak SAR (extrapolated) = 23.4 W/kg
SAR(1 g) = 6.36 W/kg; SAR(10 g) = 2.69 W/kg
Maximum value of SAR (measured) = 13.1 W/kg

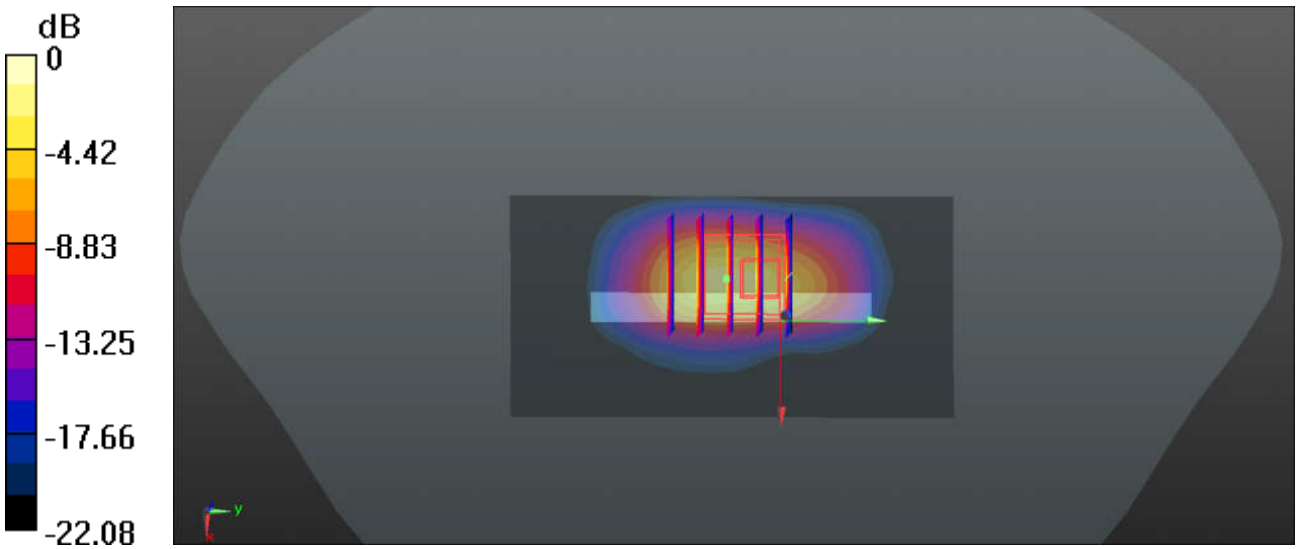

0 dB = 13.1 W/kg

77_LTE Band 25_20M_QPSK_50RB_24Offset_Bottom Side_0mm_Ch26140

Communication System: UID 0, LTE (0); Frequency: 1860 MHz;Duty Cycle: 1:1
Medium: MSL_1900_190130 Medium parameters used: f = 1860 MHz; σ = 1.486 S/m; ε_r = 54.647; ρ = 1000 kg/m^3
Ambient Temperature：23.5 ℃； Liquid Temperature：22.4 ℃

DASY5 Configuration:
- Probe: EX3DV4 - SN3753; ConvF(7.52, 7.52, 7.52); Calibrated: 2018.05.29;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1437; Calibrated: 2018.10.15
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1671
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch26140/Area Scan (41x81x1): Interpolated grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 8.62 W/kg

Ch26140/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 2.896 V/m; Power Drift = 0.10 dB
Peak SAR (extrapolated) = 27.5 W/kg
SAR(1 g) = 6.07 W/kg; SAR(10 g) = 2.67 W/kg
Maximum value of SAR (measured) = 16.0 W/kg

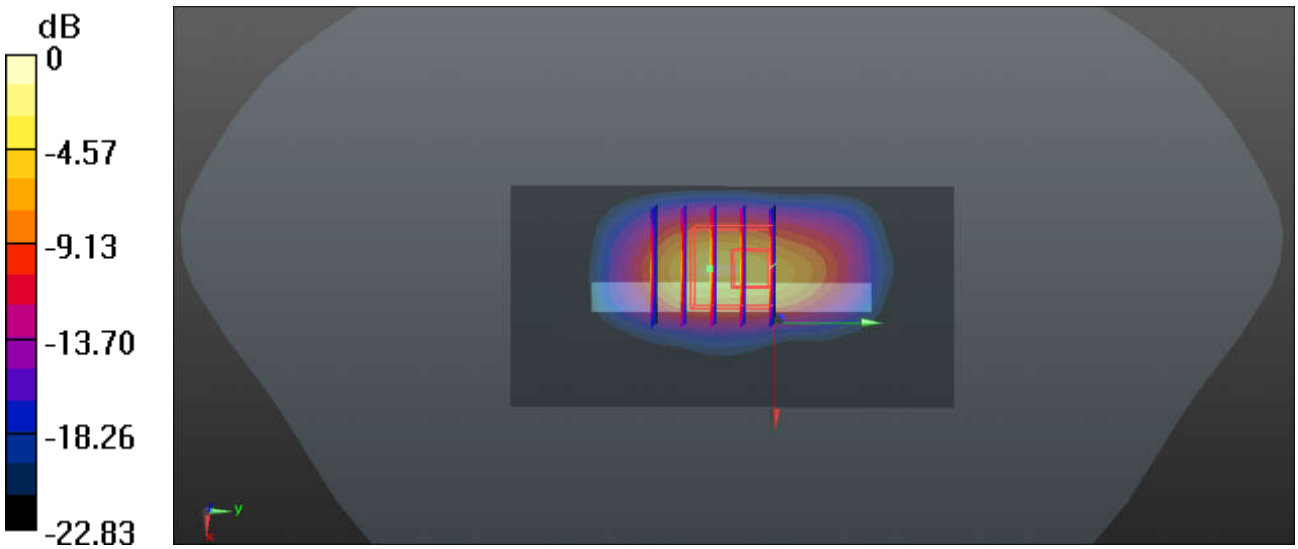

0 dB = 16.0 W/kg

78_LTE Band 7_20M_QPSK_1RB_99Offset_Bottom Side_10mm_Ch20850

Communication System: UID 0, LTE (0); Frequency: 2510 MHz;Duty Cycle: 1:1
Medium: MSL_2600_190220 Medium parameters used: f = 2510 MHz; σ = 2.075 S/m; ε_r = 51.267; ρ = 1000 kg/m^3
Ambient Temperature：23.6 ℃; Liquid Temperature：22.8 ℃

DASY5 Configuration:
- Probe: EX3DV4 - SN3935; ConvF(7.52, 7.52, 7.52); Calibrated: 2018.11.26;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn715; Calibrated: 2019.01.23
- Phantom: SAM (Front) with CRP v5.0; Type: QD000P40CD; Serial: TP:1795
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch20850/Area Scan (41x91x1): Interpolated grid: dx=12mm, dy=12mm
Maximum value of SAR (interpolated) = 9.49 W/kg

Ch20850/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 56.72 V/m; Power Drift = 0.08 dB
Peak SAR (extrapolated) = 16.8 W/kg
SAR(1 g) = 5.68 W/kg; SAR(10 g) = 1.86 W/kg
Maximum value of SAR (measured) = 10.6 W/kg

Ch20850/Zoom Scan (7x7x7)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 56.72 V/m; Power Drift = 0.08 dB
Peak SAR (extrapolated) = 13.9 W/kg
SAR(1 g) = 4.02 W/kg; SAR(10 g) = 1.6 W/kg
Maximum value of SAR (measured) = 8.79 W/kg

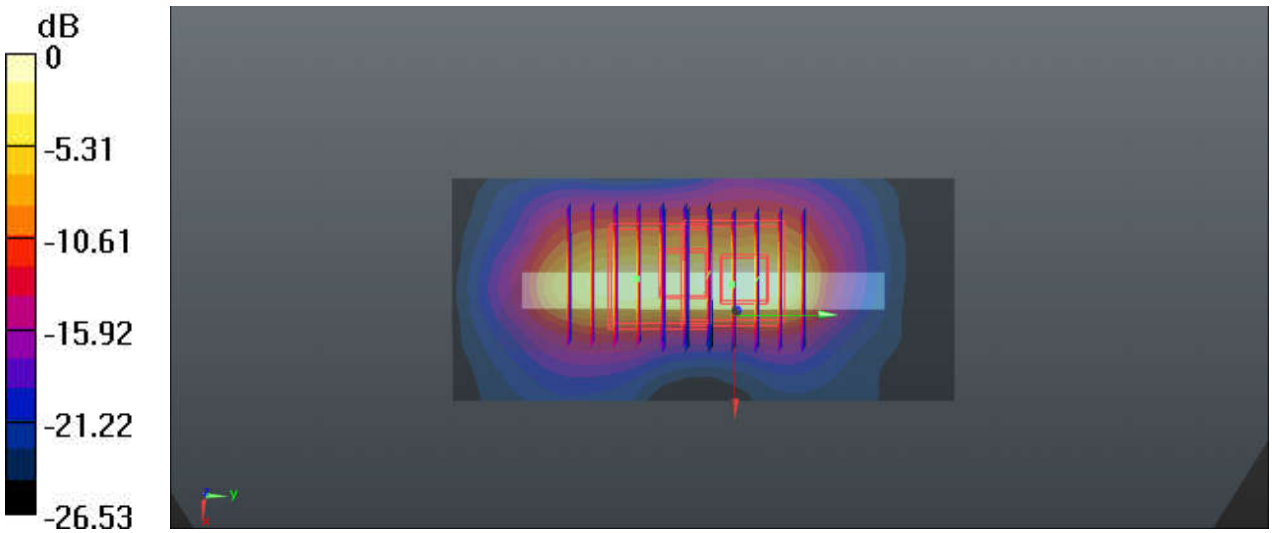

0 dB = 9.49 W/kg

79_WLAN5GHz_802.11a_6Mbps_Back_0mm_Ch52

Communication System: UID 0, WIFI (0); Frequency: 5260 MHz;Duty Cycle: 1:1.022
Medium: MSL_5250_190225 Medium parameters used: f = 5260 MHz; σ = 5.399 S/m; ε_r = 46.875; ρ = 1000 kg/m^3
Ambient Temperature：23.5 ℃; Liquid Temperature：22.9 ℃

DASY5 Configuration:
- Probe: EX3DV4 - SN3911; ConvF(4.67, 4.67, 4.67); Calibrated: 2019.01.22;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn715; Calibrated: 2019.01.23
- Phantom: SAM (Front) with CRP v5.0; Type: QD000P40CD; Serial: TP:1795
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch52/Area Scan (91x181x1): Interpolated grid: dx=10mm, dy=10mm
Maximum value of SAR (interpolated) = 31.8 W/kg

Ch52/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 0 V/m; Power Drift = 0.04 dB
Peak SAR (extrapolated) = 82.9 W/kg
SAR(1 g) = 11.5 W/kg; SAR(10 g) = 2.2 W/kg
Maximum value of SAR (measured) = 37.5 W/kg

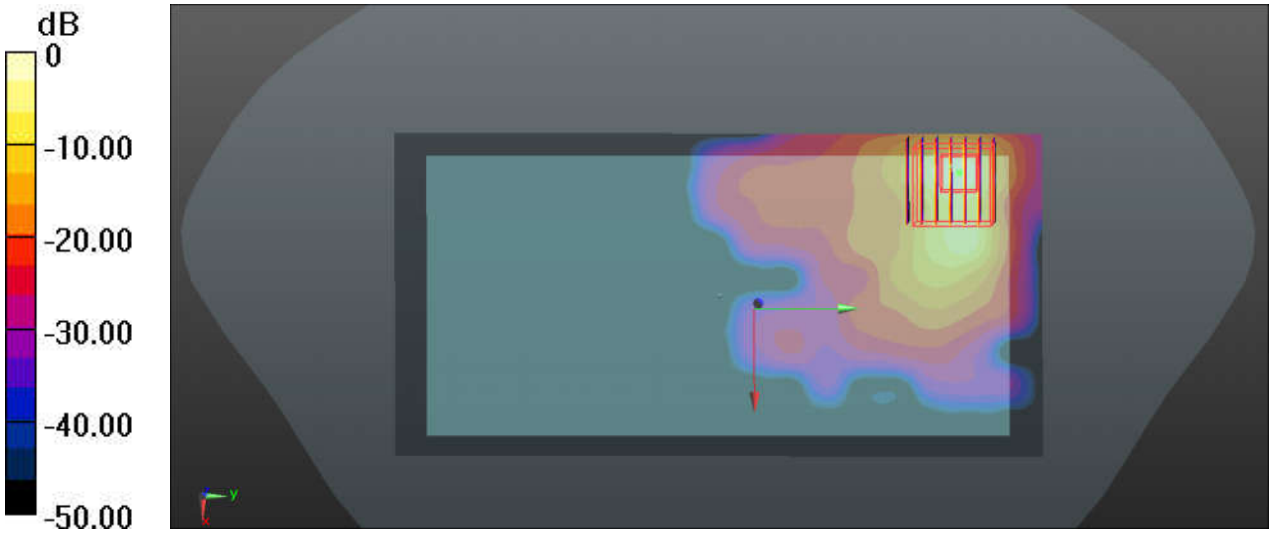

0 dB = 31.8 W/kg

80_WLAN5GHz_802.11a_6Mbps_Back_0mm_Ch100

Communication System: UID 0, WIFI (0); Frequency: 5500 MHz;Duty Cycle: 1:1.022
Medium: MSL_5600_190225 Medium parameters used: f = 5500 MHz; σ = 5.694 S/m; ε_r = 46.439; ρ = 1000 kg/m^3
Ambient Temperature：23.5 ℃; Liquid Temperature：22.8 ℃

DASY5 Configuration:
- Probe: EX3DV4 - SN3911; ConvF(4.04, 4.04, 4.04); Calibrated: 2019.01.22;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn715; Calibrated: 2019.01.23
- Phantom: SAM (Front) with CRP v5.0; Type: QD000P40CD; Serial: TP:1795
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch100/Area Scan (91x181x1): Interpolated grid: dx=10mm, dy=10mm
Maximum value of SAR (interpolated) = 13.8 W/kg

Ch100/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 0 V/m; Power Drift = 0.05 dB
Peak SAR (extrapolated) = 42.8 W/kg
SAR(1 g) = 6.52 W/kg; SAR(10 g) = 1.52 W/kg
Maximum value of SAR (measured) = 22.6 W/kg

Ch100/Zoom Scan (7x7x7)/Cube 1: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 0 V/m; Power Drift = 0.05 dB
Peak SAR (extrapolated) = 33.2 W/kg
SAR(1 g) = 5.82 W/kg; SAR(10 g) = 1.21 W/kg
Maximum value of SAR (measured) = 18.0 W/kg

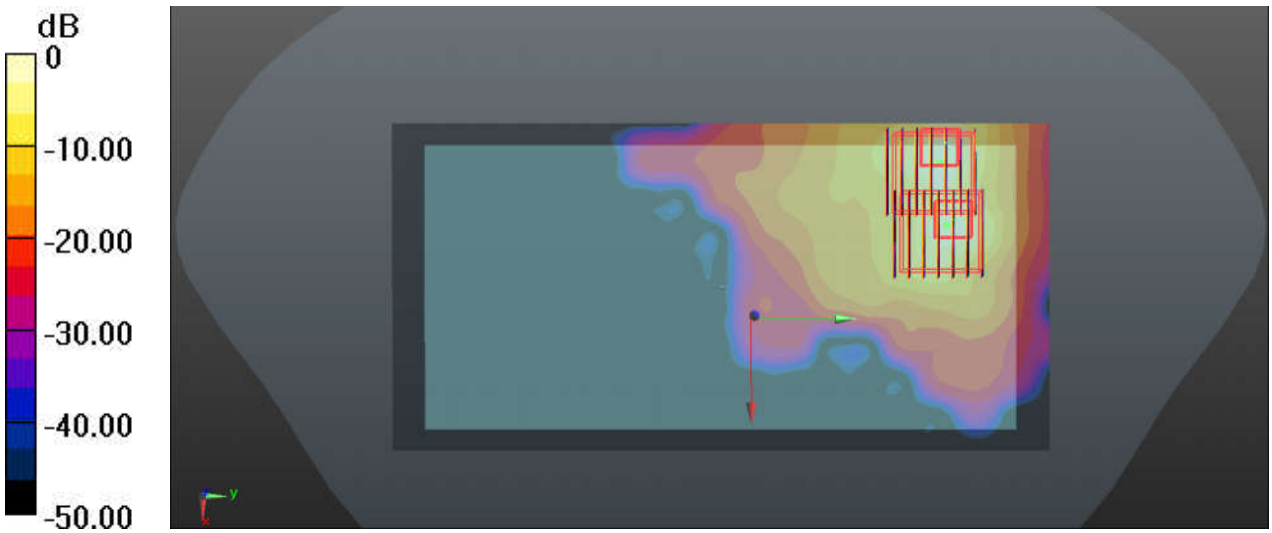

0 dB = 13.8 W/kg