



FCC RF Test Report

APPLICANT : OnePlus Technology (Shenzhen) Co., Ltd.
EQUIPMENT : Mobile Phone
BRAND NAME : OnePlus
MODEL NAME : CPH2771
FCC ID : 2ABZ2-OP24879
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : (DTS) Digital Transmission System
TEST DATE(S) : Oct. 25, 2025 ~ Nov. 11, 2025

We, Sporton International Inc. (ShenZhen), would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (ShenZhen), the test report shall not be reproduced except in full.

Fly Liang

Approved by: Fly Liang



Sporton International Inc. (ShenZhen)

1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055

People's Republic of China



TABLE OF CONTENTS

REVISION HISTORY.....	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant	5
1.2 Manufacturer	5
1.3 Product Feature of Equipment Under Test.....	5
1.4 Product Specification of Equipment Under Test.....	6
1.5 Modification of EUT	7
1.6 Testing Location	7
1.7 Test Software.....	7
1.8 Applicable Standards.....	7
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	8
2.1 Carrier Frequency and Channel	8
2.2 Test Mode.....	8
2.3 Connection Diagram of Test System.....	9
2.4 Support Unit used in test configuration and system	10
2.5 EUT Operation Test Setup	10
2.6 Measurement Results Explanation Example.....	11
3 TEST RESULT	12
3.1 6dB and 99% Bandwidth Measurement	12
3.2 Output Power Measurement.....	13
3.3 Power Spectral Density Measurement	14
3.4 Conducted Band Edges and Spurious Emission Measurement	16
3.5 Radiated Band Edges and Spurious Emission Measurement	17
3.6 AC Conducted Emission Measurement.....	21
3.7 Antenna Requirements.....	23
4 LIST OF MEASURING EQUIPMENT	24
5 MEASUREMENT UNCERTAINTY	25
APPENDIX A. CONDUCTED TEST RESULTS	
APPENDIX B. AC CONDUCTED EMISSION TEST RESULT	
APPENDIX C. RADIATED SPURIOUS EMISSION	
APPENDIX D. DUTY CYCLE PLOTS	
APPENDIX E. SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR501021C	Rev. 01	Initial issue of report	Nov. 24, 2025



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(2)	6dB Bandwidth	$\geq 0.5\text{MHz}$	Pass	-
3.1	-	99% Bandwidth	-	Report Only	-
3.2	15.247(b)	Conducted Output Power	$\leq 30\text{dBm}$	Pass	-
3.3	15.247(e)	Power Spectral Density	$\leq 8\text{dBm/3kHz}$	Pass	-
3.4	15.247(d)	Conducted Band Edges	$\leq 20\text{dBc}$	Pass	-
		Conducted Spurious Emission		Pass	-
3.5	15.247(d)	Radiated Band Edges and Radiated Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 5.09 dB at 2483.56 MHz
3.6	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 5.19 dB at 0.16 MHz
3.7	15.203 & 15.247(b)	Antenna Requirement	15.203 & 15.247(b)	Pass	-

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.



1 General Description

1.1 Applicant

OnePlus Technology (Shenzhen) Co., Ltd.

18C02, 18C03, 18C04, and 18C05, Shum Yip Terra Building, Binhe Avenue North, Futian District,
Shenzhen, Guangdong, P.R. China

1.2 Manufacturer

OnePlus Technology (Shenzhen) Co., Ltd.

18C02, 18C03, 18C04, and 18C05, Shum Yip Terra Building, Binhe Avenue North, Futian District,
Shenzhen, Guangdong, P.R. China

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Phone
Brand Name	OnePlus
Model Name	CPH2771
FCC ID	2ABZ2-OP24879
IMEI Code	Conducted: 863339080030875/863339080030867 Conduction: 863339080028895/863339080028887 Radiation: 863339080028119/863339080028101
HW Version	11
SW Version	OxygenOS 16.0
EUT Stage	Production Unit

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Channel Frequency Range	2412 MHz ~ 2462 MHz
Maximum (Peak) Output Power to antenna	<SISO Ant 6> 802.11b : 20.63 dBm (0.1156 W) <SISO Ant 13> 802.11b : 20.77 dBm (0.1194 W) <MIMO Ant 6+13> 802.11g : 25.39 dBm (0.3459 W) 802.11n HT20 : 25.88 dBm (0.3873 W) 802.11n HT40 : 24.81 dBm (0.3027 W) 802.11ax HE20 : 26.13 dBm (0.4102 W) 802.11ax HE40 : 24.41 dBm (0.2761 W) 802.11be EHT20 : 26.18 dBm (0.4150 W) 802.11be EHT40 : 24.43 dBm (0.2773 W)
99% Occupied Bandwidth	<Ant 6/13> 802.11b : 12.995MHz 802.11g : 17.230MHz 802.11n HT20 : 18.398MHz 802.11n HT40 : 37.068MHz 802.11be EHT20 : 19.202MHz 802.11be EHT40 : 38.924MHz
Antenna Type / Gain	<Ant 6> : IFA Antenna Type with gain -0.4 dBi <Ant 13> : IFA Antenna Type with gain -1.8 dBi
Type of Modulation	802.11b : DSSS (DBPSK / DQPSK / CCK) 802.11g/n : OFDM (BPSK / QPSK / 16QAM / 64QAM) 802.11ac : OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM) 802.11ax : OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM / 1024QAM) 802.11be : OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM / 1024QAM / 4096QAM)

Note:

1. The device supports WLAN SISO mode for 802.11b mode.
2. The device supports WLAN SISO & MIMO CDD mode for 802.11g/n/ac/ax/be modes.
3. For WLAN SISO & MIMO mode, the whole testing has assessed only MIMO mode by referring to the higher normal output power.
4. For 802.11n/11ac mode, since the power settings which provided by the customer are the same, after evaluation, only 11n HT20/HT40 was full tested.
5. For 802.11ax/11be mode, the conducted test items have assessed only 802.11be EHT20/EHT40 by referring to the higher output power.
6. 802.11ax/be support OFDMA full RU tone and partial RU tone, both full RU and partial RU-left (for low CH) and partial RU-right (for high CH) test output power, the full RU power/PSD > partial RU, therefore the full RU perform full, and partial RU verify bandedge/spurious.
7. 802.11be support OFDMA for small size RU, 52Tone + 26 Tone or 106Tone + 26Tone, test combination as below,
 - a. For Low channel, 52Tone_Index38 + 26Tone_Index1 and 106Tone_Index53 + 26Tone_Index4
 - b. For High channel, 52Tone_Index39 + 26Tone_Index7 and 106Tone_Index54 + 26Tone_Index4



8. The worse cases of RSE for partial RU and small size RU are shown in this report.

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Testing Location

Sporton International Inc. (ShenZhen) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

Test Firm	Sporton International Inc. (ShenZhen)		
Test Site Location	101, 1st Floor, Block B, Building 1, No. 2, Tengfeng 4th Road, Fenghuang Community, Fuyong Street, Baoan District, Shenzhen City, Guangdong Province 518103 People's Republic of China TEL: +86-755-86066985		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	TH01-SZ CO02-SZ 03CH01-SZ	CN1256	421272

1.7 Test Software

Item	Site	Manufacturer	Name	Version
1.	03CH01-SZ	AUDIX	E3	6.2009-8-24
2.	CO02-SZ	AUDIX	E3	6.120613b

1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 15 Subpart C §15.247
- ♦ FCC KDB 558074 D01 15.247 Meas Guidance v05r02
- ♦ FCC KDB 662911 D01 Multiple Transmitter Output v02r01.
- ♦ ANSI C63.10-2020

Remark: All test items were verified and recorded according to the standards and without any deviation during the test.

2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Z plane) were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	1	2412	7	2442
	2	2417	8	2447
	3	2422	9	2452
	4	2427	10	2457
	5	2432	11	2462
	6	2437	-	-

2.2 Test Mode

Final test modes are considering the modulation and worse data rates as below table.

SISO/MIMO Antenna

Modulation	Data Rate
802.11b	1 Mbps
802.11g	6 Mbps
802.11n HT20	MCS0
802.11n HT40	MCS0
802.11ax HE20	MCS0
802.11ax HE40	MCS0
802.11be EHT20	MCS0
802.11be EHT40	MCS0


RSE Co-location

802.11be EHT20 CH01 2412MHz Tx + LTE B48 Link


Test Cases	
AC Conducted Emission	Mode 1 :GSM 850 Idle + Bluetooth Link + WLAN Link (2.4G) + Battery 1+ USB Cable (Charging from Adapter 1)
Remark: For Radiated Test Cases, The tests were performance with Adapter 1 and USB Cable.	

2.3 Connection Diagram of Test System

AC Conducted Emission:

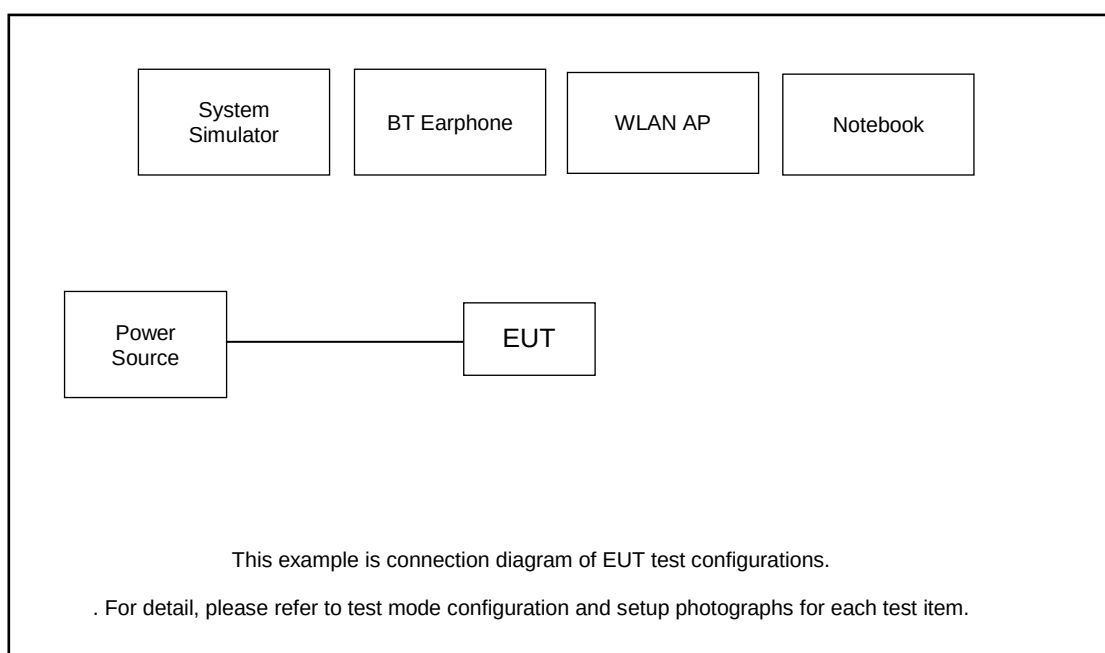

Radiated Emission:

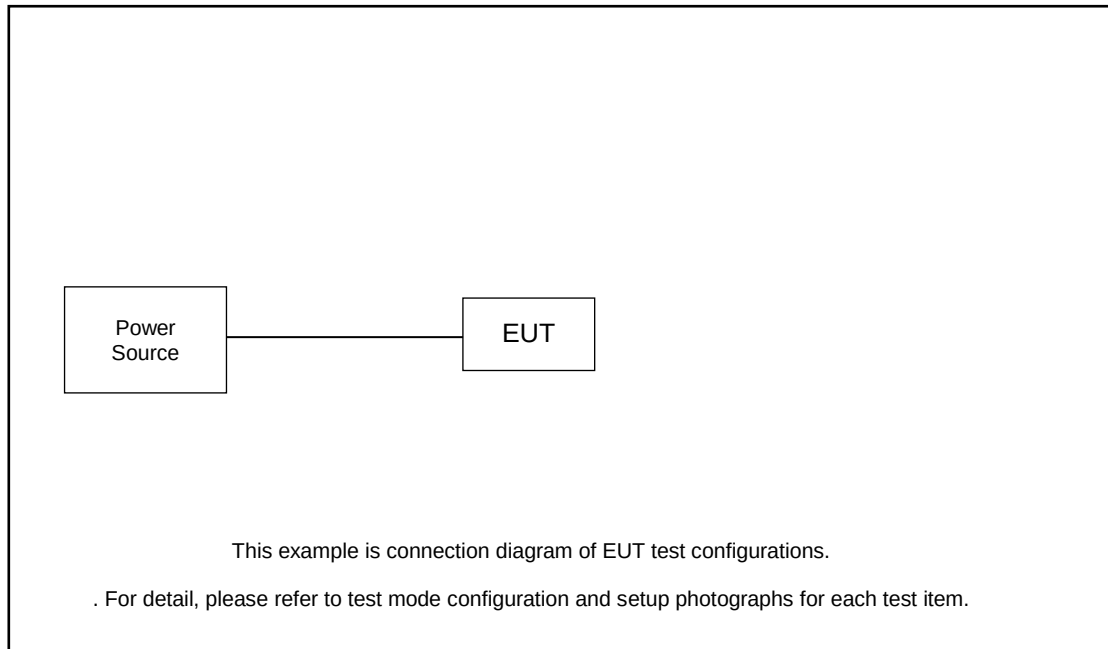

2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Base Station(LTE)	Anritsu	MT8820C	N/A	N/A	Unshielded,1.8m
2.	Notebook	DELL	Latiude 3400	N/A	N/A	N/A
3.	WLAN AP	Dlink	DIR-820L	KA2IR820LA1	N/A	Unshielded,1.8m
4.	Bluetooth Earphone	Samsung	EO-MG900	PYAHS-107W	N/A	N/A

2.5 EUT Operation Test Setup

For WLAN RF test items, an engineering test program was provided and enabled to make EUT continuous transmit.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.



2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example:

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 2.12 dB and 10dB attenuator.

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 2.12 + 10 = 12.12 \text{ (dB)}\end{aligned}$$

3 Test Result

3.1 6dB and 99% Bandwidth Measurement

3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures

1. The testing follows ANSI C63.10-2020 clause 11.8.1 for 6dB BW and 6.9.3 for 99% occupied bandwidth measurements
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = shall be in the range of 1% to 5% of the OBW but not less than 100 kHz. Set the Video bandwidth (VBW) $\geq 3 \times \text{RBW}$. Detector = Peak. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) = 1%~5% of OBW and set the Video bandwidth (VBW) approximately three times the RBW.
6. Measure and record the results in the test report.

3.1.4 Test Setup

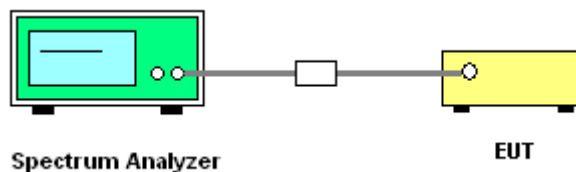

3.1.5 Test Result of 6dB and 99% Occupied Bandwidth

Please refer to Appendix A.

3.2 Output Power Measurement

3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for output power is 30dBm. If transmitting antenna with directional gain greater than 6dBi is used, the output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.


3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.2.3 Test Procedures

1. The testing follows the Measurement Procedure of ANSI C63.10-2020 clause 11.9.1.2 PKPM1 Peak power meter or ANSI C63.10-2020 clause 11.9.2.3.1 Method AVGPM method.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.
5. For MIMO mode, calculation method follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01.

3.2.4 Test Setup

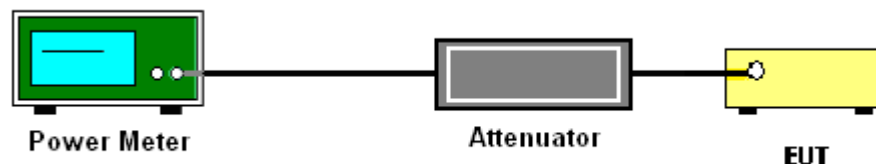

3.2.5 Test Result of Peak Output Power

Please refer to Appendix A.

3.2.6 Test Result of Average Output Power (Reporting Only)

Please refer to Appendix A.



3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.

3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.


3.3.3 Test Procedures

1. The testing follows Measurement Procedure of ANSI C63.10-2020 clause 11.10.2 Method PKPSD.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.
7. For MIMO mode, calculation method follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01:

Method (b): Measure and sum spectral maxima across the outputs.

The measurement on each individual output were performed with the same span and number on each individual output. The maximum value (peak) of each spectrum is determined. These maximum values are then summed mathematically in linear power units across the outputs.

3.3.4 Test Setup

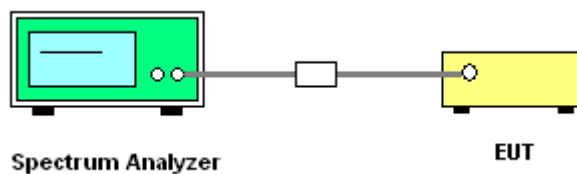

3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission Measurement

In any 100 kHz bandwidth outside of the authorized frequency band, the emissions which fall in the non-restricted bands shall be attenuated at least 20 dB relative to the maximum PSD level in 100 kHz by RF conducted measurement.


3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.4.3 Test Procedures

1. The testing follows ANSI C63.10-2020 clause 11.11.3
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB per 15.247(d).
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.4.4 Test Setup

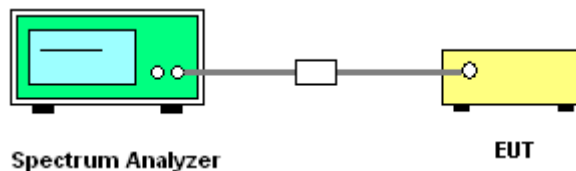

3.4.5 Test Result of Conducted Band Edges and Spurious Emission

Please refer to Appendix A.

3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated band edge and Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments


The measuring equipment is listed in the section 4 of this test report.

3.5.3 Test Procedures


1. The testing follows ANSI C63.10-2020 clause 6.3, 6.5, 6.6, 11.11 and 11.12
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than peak limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
8. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for peak measurement.
For average measurement:
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

3.5.4 Test Setup


For radiated emissions below 30MHz

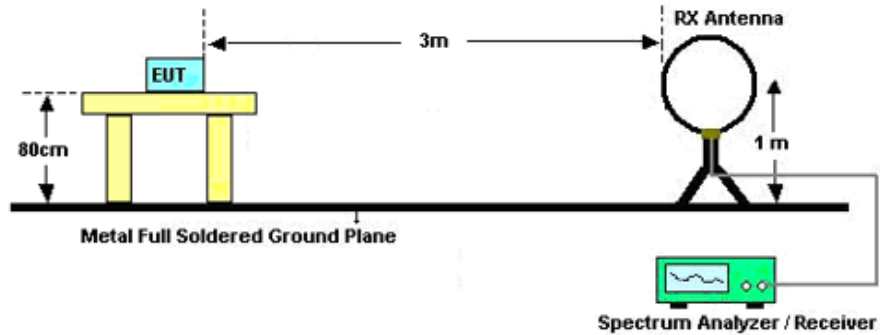

For radiated emissions from 30MHz to 1GHz

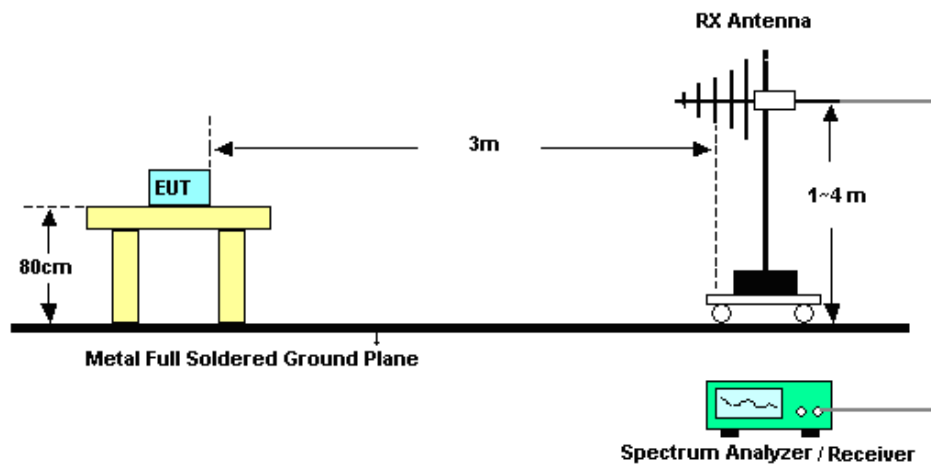

For radiated emissions above 1GHz

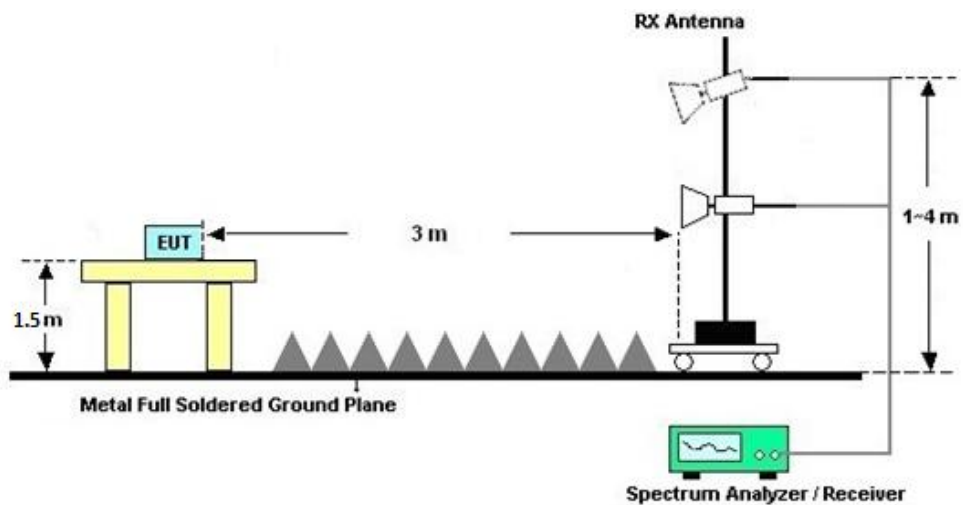

**3.5.5 Test Results of Radiated Spurious Emissions (9kHz ~ 30MHz)**

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C.

3.5.7 Duty Cycle

Please refer to Appendix D.

3.5.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic or 40GHz, whichever is lower)

Please refer to Appendix C.

3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of Emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-Peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.6.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room, and it was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF bandwidth = 9kHz) with Maximum Hold Mode.

3.6.4 Test Setup

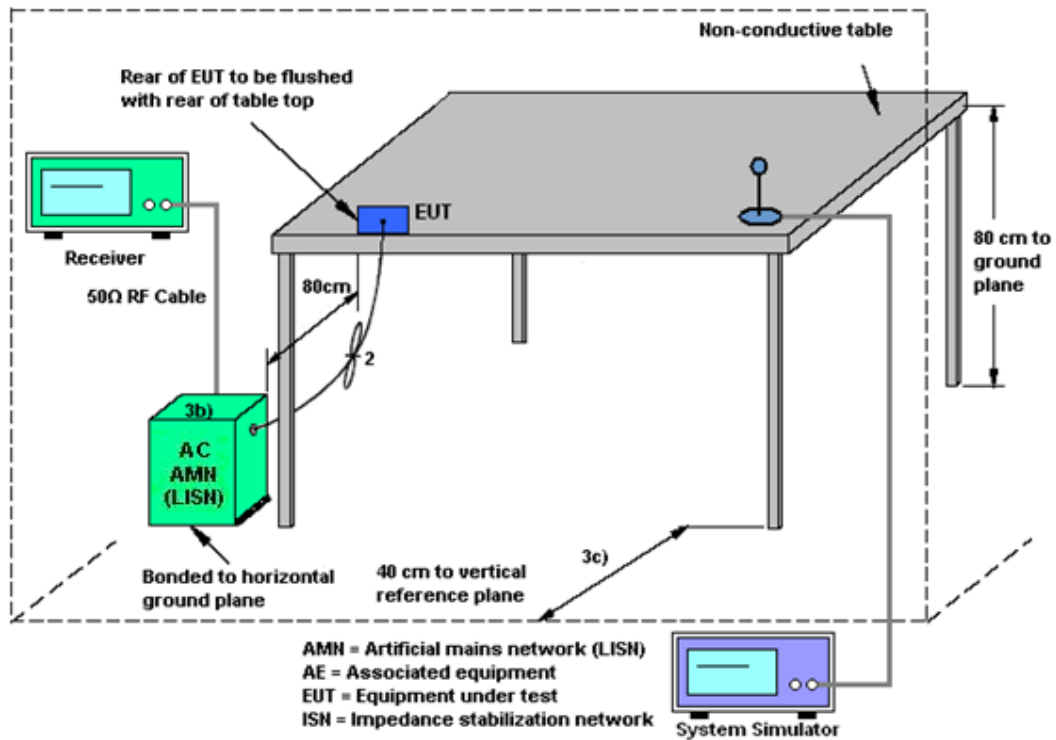

3.6.5 Test Result of AC Conducted Emission

Please refer to Appendix B.

3.7 Antenna Requirements

3.7.1 Standard Applicable

If directional gain of transmitting Antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached Antenna or of an Antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.7.3 Antenna Gain

<CDD Modes >

FCC KDB 662911 D01 Multiple Transmitter Output v02r01

For CDD transmissions, directional gain is calculated as

Directional gain = G_{ANT} + Array Gain, where Array Gain is as follows.

For power spectral density (PSD) measurements on all devices,

Array Gain = $10 \log(N_{ANT}/N_{SS}=1)$ dB.

For power measurements on IEEE 802.11 devices,

Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$.

Directional gain may be calculated by using the formulas applicable to equal gain antennas with G_{ANT} set equal to the gain of the antenna having the highest gain;

The EUT supports CDD mode for 802.11g/n/ac/ax/be modes.

For power, the directional gain G_{ANT} is set equal to the antenna having the highest gain, i.e., F)2)f)i).

For PSD, the directional gain calculation is following F)2)f)ii) of KDB 662911 D01 v02r01.

The power and PSD limit should be modified if the directional gain of EUT is over 6 dBi,

The directional gain "DG" is calculated as following table.

<CDD Modes>						
			DG for Power (dBi)	DG for PSD (dBi)	Power Limit Reduction (dB)	PSD Limit Reduction (dB)
	Ant. 6 (dBi)	Ant. 13 (dBi)				
2.4 GHz	-0.40	-1.80	-0.40	1.94	0.00	0.00

$Power\ Limit\ Reduction = DG(Power) - 6dBi, (min = 0)$

$PSD\ Limit\ Reduction = DG(PSD) - 6dBi, (min = 0)$



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EMI Test Receiver&SA	Agilent	N9038A	MY52260185	20Hz~26.5GHz	Dec. 25, 2024	Oct. 14, 2025~Nov. 11, 2025	Dec. 24, 2025	Radiation (03CH01-SZ)
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY55150213	10Hz~44GHz	Jul. 03, 2025	Oct. 14, 2025~Nov. 11, 2025	Jul. 02, 2026	Radiation (03CH01-SZ)
Loop Antenna	R&S	HFH2-Z2E	101141	9kHz~30MHz	Dec. 28, 2024	Oct. 14, 2025~Nov. 11, 2025	Dec. 27, 2025	Radiation (03CH01-SZ)
Bilog Antenna	TeseQ	CBL6112D	35407	30MHz~2GHz	Oct. 24, 2023	Oct. 14, 2025~Nov. 11, 2025	Oct. 23, 2025	Radiation (03CH01-SZ)
Bilog Antenna	TeseQ	CBL6112D	35407	30MHz~2GHz	Oct. 24, 2025		Oct. 23, 2027	Radiation (03CH01-SZ)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00119436	1GHz~18GHz	Jul. 04, 2025	Oct. 14, 2025~Nov. 11, 2025	Jul. 03, 2026	Radiation (03CH01-SZ)
SHF-EHF Horn	com-power	AH-840	101071	18GHz~40GHz	Apr. 03, 2025	Oct. 14, 2025~Nov. 11, 2025	Apr. 02, 2027	Radiation (03CH01-SZ)
LF Amplifier	EM Electronics	EM330	060788	20MHz~3GHz	Dec. 25, 2024	Oct. 14, 2025~Nov. 11, 2025	Dec. 24, 2025	Radiation (03CH01-SZ)
HF Amplifier	MITEQ	AMF-7D-00101800-30-10P-R	1943528	1GHz~18GHz	Oct. 14, 2025	Oct. 14, 2025~Nov. 11, 2025	Oct. 13, 2026	Radiation (03CH01-SZ)
HF Amplifier	KEYSIGHT	83017A	MY53270105	0.5GHz~26.5GHz	Oct. 14, 2025	Oct. 14, 2025~Nov. 11, 2025	Oct. 13, 2026	Radiation (03CH01-SZ)
HF Amplifier	MITEQ	TTA1840-35-HG	1871923	18GHz~40GHz	Jul. 03, 2025	Oct. 14, 2025~Nov. 11, 2025	Jul. 02, 2026	Radiation (03CH01-SZ)
AC Power Source	Chroma	61601	616010001985	N/A	Oct. 14, 2025	Oct. 14, 2025~Nov. 11, 2025	Oct. 13, 2026	Radiation (03CH01-SZ)
Turn Table	EM	EM1000	N/A	0~360 degree	NCR	Oct. 14, 2025~Nov. 11, 2025	NCR	Radiation (03CH01-SZ)
Antenna Mast	EM	EM1000	N/A	1 m~4 m	NCR	Oct. 14, 2025~Nov. 11, 2025	NCR	Radiation (03CH01-SZ)
Spectrum Analyzer	R&S	FSV40	101078	10Hz~40GHz	Apr. 02, 2025	Oct. 24, 2025~Nov. 11, 2025	Apr. 01, 2026	Conducted (TH01-SZ)
Pulse Power Sensor	Anritsu	MA2411B	1339473	30MHz~40GHz	Dec. 25, 2024	Oct. 24, 2025~Nov. 11, 2025	Dec. 24, 2025	Conducted (TH01-SZ)
Power Meter	Anritsu	ML2495A	1218010	50MHz Bandwidth	Oct. 13, 2025	Oct. 24, 2025~Nov. 11, 2025	Oct. 12, 2026	Conducted (TH01-SZ)
EMI Receiver	R&S	ESR7	102297	9kHz~7GHz;	Jul. 02, 2025	Nov. 10, 2025	Jul. 01, 2026	Conduction (CO02-SZ)
AC LISN	R&S	ENV216	101499	9kHz~30MHz	Jul. 03, 2025	Nov. 10, 2025	Jul. 02, 2026	Conduction (CO02-SZ)
AC Power Source	CHROMA	61601	616010002470	100Vac~250Vac	Dec. 25, 2024	Nov. 10, 2025	Dec. 24, 2025	Conduction (CO02-SZ)

NCR: No Calibration Required

5 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement

Test Item	Uncertainty
Conducted Spurious Emission & Bandedge	± 1.34 dB
Occupied Channel Bandwidth	± 0.012 MHz
Conducted Power	± 1.34 dB
Conducted Power Spectral Density	± 1.32 dB
Frequency	± 1.3 Hz

Uncertainty of AC Conducted Emission Measurement (0.15 MHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.5 dB
---	--------

Uncertainty of Radiated Emission Measurement (9 KHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.8 dB
---	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.2 dB
---	--------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.0 dB
---	--------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.3 dB
---	--------

----- THE END -----



Appendix A. Conducted Test Results

A1. Conducted Test Results

Test Engineer:	Wen Shiwei	Temperature:	21~25	°C
Test Date:	2025/10/24~2025/11/11	Relative Humidity:	51~54	%

TEST RESULTS DATA
Average Output Power

2.4GHz Band Single Antenna																
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power (dBm)			Conducted Power Limit (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)		Pass /Fail
					Ant13	Ant6	SUM	Ant13	Ant6	Ant13	Ant6	Ant13	Ant6	Ant13	Ant6	
11b	1Mbps	1	1	2412	18.00	17.80		30.00	30.00	-1.80	-0.40	16.20	17.40	36.00	36.00	Pass
11b	1Mbps	1	6	2437	17.80	17.90		30.00	30.00	-1.80	-0.40	16.00	17.50	36.00	36.00	Pass
11b	1Mbps	1	11	2462	17.60	17.60		30.00	30.00	-1.80	-0.40	15.80	17.20	36.00	36.00	Pass

Setting	
Ant13	Ant6
18.00	18.00
18.00	18.00
18.00	18.00

2.4GHz Band MIMO																
Mod.	Data Rate	NTx	CH.	Freq. (MHz)	Average Conducted Power (dBm)			Conducted Power Limit (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)		Pass /Fail
					Ant13	Ant6	SUM	Ant13	Ant6	Ant13	Ant6	Ant13	Ant6	Ant13	Ant6	
11g	6Mbps	2	1	2412	14.60	14.50	17.56	30.00		-0.40		17.16		36.00		Pass
11g	6Mbps	2	6	2437	17.10	17.00	20.06	30.00		-0.40		19.66		36.00		Pass
11g	6Mbps	2	11	2462	16.30	16.10	19.21	30.00		-0.40		18.81		36.00		Pass
HT20	MCS0	2	1	2412	12.40	12.10	15.26	30.00		-0.40		14.86		36.00		Pass
HT20	MCS0	2	2	2417	16.90	16.70	19.81	30.00		-0.40		19.41		36.00		Pass
HT20	MCS0	2	6	2437	17.50	17.10	20.31	30.00		-0.40		19.91		36.00		Pass
HT20	MCS0	2	11	2462	15.10	15.00	18.06	30.00		-0.40		17.66		36.00		Pass
HT40	MCS0	2	3	2422	14.10	14.00	17.06	30.00		-0.40		16.66		36.00		Pass
HT40	MCS0	2	6	2437	16.50	16.50	19.51	30.00		-0.40		19.11		36.00		Pass
HT40	MCS0	2	7	2442	14.10	14.00	17.06	30.00		-0.40		16.66		36.00		Pass
HT40	MCS0	2	8	2447	13.60	13.50	16.56	30.00		-0.40		16.16		36.00		Pass
HT40	MCS0	2	9	2452	12.60	12.50	15.56	30.00		-0.40		15.16		36.00		Pass

Setting	
Ant13	Ant6
14.50	
17.00	
16.50	
12.00	
16.50	
17.00	
15.00	
14.50	
17.00	
14.50	
14.00	
13.00	

Note: Measured power (dBm) has offset with cable loss.

TEST RESULTS DATA
Average Output Power

2.4GHz Band MIMO																	
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Average Conducted Power (dBm)			Conducted Power Limit (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)		Pass /Fail
						Ant13	Ant6	SUM	Ant13	Ant6	Ant13	Ant6	Ant13	Ant6	Ant13	Ant6	
HE20	MCS0	2	1	2412	Full	11.40	11.00	14.21	30.00		-0.40		13.81		36.00		Pass
HE20	MCS0	2	1	2412	26/0	6.50	5.00	8.82	30.00		-0.40		8.42		36.00		Pass
HE20	MCS0	2	1	2412	52/37	9.50	8.30	11.95	30.00		-0.40		11.55		36.00		Pass
HE20	MCS0	2	1	2412	106/53	10.40	10.00	13.21	30.00		-0.40		12.81		36.00		Pass
HE20	MCS0	2	2	2417	Full	16.40	16.10	19.26	30.00		-0.40		18.86		36.00		Pass
HE20	MCS0	2	6	2437	Full	16.90	16.70	19.81	30.00		-0.40		19.41		36.00		Pass
HE20	MCS0	2	11	2462	Full	15.10	15.00	18.06	30.00		-0.40		17.66		36.00		Pass
HE20	MCS0	2	11	2462	26/8	5.50	5.00	8.27	30.00		-0.40		7.87		36.00		Pass
HE20	MCS0	2	11	2462	52/40	9.20	8.20	11.74	30.00		-0.40		11.34		36.00		Pass
HE20	MCS0	2	11	2462	106/54	10.80	10.00	13.43	30.00		-0.40		13.03		36.00		Pass
HE40	MCS0	2	3	2422	Full	12.10	12.10	15.11	30.00		-0.40		14.71		36.00		Pass
HE40	MCS0	2	4	2427	Full	13.10	13.00	16.06	30.00		-0.40		15.66		36.00		Pass
HE40	MCS0	2	6	2437	Full	15.00	15.00	18.01	30.00		-0.40		17.61		36.00		Pass
HE40	MCS0	2	8	2447	Full	12.60	12.50	15.56	30.00		-0.40		15.16		36.00		Pass
HE40	MCS0	2	9	2452	Full	12.10	12.00	15.06	30.00		-0.40		14.66		36.00		Pass

Setting	
Ant13	Ant6
11.50	
6.50	
9.50	
10.50	
16.50	
17.00	
15.50	
6.00	
9.00	
10.50	
12.50	
14.50	
16.50	
14.00	
13.50	

Note: Measured power (dBm) has offset with cable loss.

TEST RESULTS DATA
Average Output Power

2.4GHz Band MIMO																	
Mod.	Data Rate	NTx	CH.	Freq. (MHz)	RU Config.	Average Conducted Power (dBm)			Conducted Power Limit (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)		Pass /Fail
						Ant13	Ant6	SUM	Ant13	Ant6	Ant13	Ant6	Ant13	Ant6	Ant13	Ant6	
EHT20	MCS0	2	1	2412	Full	12.60	12.20	15.41	30.00		-0.40		15.01		36.00		Pass
EHT20	MCS0	2	1	2412	26/0	6.50	5.10	8.87	30.00		-0.40		8.47		36.00		Pass
EHT20	MCS0	2	1	2412	52/37	9.50	8.40	12.00	30.00		-0.40		11.60		36.00		Pass
EHT20	MCS0	2	1	2412	106/53	10.60	10.10	13.37	30.00		-0.40		12.97		36.00		Pass
EHT20	MCS0	2	1	2412	52+26/38+1	8.70	8.20	11.47	30.00		-0.40		11.07		36.00		Pass
EHT20	MCS0	2	1	2412	106+26/53+4	10.90	10.20	13.57	30.00		-0.40		13.17		36.00		Pass
EHT20	MCS0	2	2	2417	Full	16.50	16.30	19.41	30.00		-0.40		19.01		36.00		Pass
EHT20	MCS0	2	6	2437	Full	17.00	16.80	19.91	30.00		-0.40		19.51		36.00		Pass
EHT20	MCS0	2	11	2462	Full	15.30	15.20	18.26	30.00		-0.40		17.86		36.00		Pass
EHT20	MCS0	2	11	2462	26/8	5.60	5.10	8.37	30.00		-0.40		7.97		36.00		Pass
EHT20	MCS0	2	11	2462	52/40	9.30	8.30	11.84	30.00		-0.40		11.44		36.00		Pass
EHT20	MCS0	2	11	2462	106/54	10.90	10.10	13.53	30.00		-0.40		13.13		36.00		Pass
EHT20	MCS0	2	11	2462	52+26/39+7	8.90	8.10	11.53	30.00		-0.40		11.13		36.00		Pass
EHT20	MCS0	2	11	2462	106+26/54+4	10.90	10.10	13.53	30.00		-0.40		13.13		36.00		Pass
EHT40	MCS0	2	3	2422	Full	12.80	12.60	15.71	30.00		-0.40		15.31		36.00		Pass
EHT40	MCS0	2	4	2427	Full	14.70	14.60	17.66	30.00		-0.40		17.26		36.00		Pass
EHT40	MCS0	2	6	2437	Full	16.00	16.10	19.06	30.00		-0.40		18.66		36.00		Pass
EHT40	MCS0	2	9	2452	Full	13.60	13.60	16.61	30.00		-0.40		16.21		36.00		Pass

Setting	
Ant13	Ant6
12.50	
6.50	
9.50	
10.50	
8.50	
10.50	
16.50	
17.00	
15.50	
6.00	
9.00	
10.50	
8.50	
10.50	
12.50	
14.50	
16.00	
13.50	

Note: Measured power (dBm) has offset with cable loss.

TEST RESULTS DATA
Peak Output Power

2.4GHz Band Single Antenna																
Mod.	Data Rate	Ntx	CH.	Freq. (MHz)	Peak Conducted Power (dBm)			Conducted Power Limit (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)		Pass /Fail
					Ant13	Ant6	SUM	Ant13	Ant6	Ant13	Ant6	Ant13	Ant6	Ant13	Ant6	
11b	1Mbps	1	1	2412	20.77	20.56		30.00	30.00	-1.80	-0.40	18.97	20.16	36.00	36.00	Pass
11b	1Mbps	1	6	2437	20.47	20.63		30.00	30.00	-1.80	-0.40	18.67	20.23	36.00	36.00	Pass
11b	1Mbps	1	11	2462	20.35	20.17		30.00	30.00	-1.80	-0.40	18.55	19.77	36.00	36.00	Pass

2.4GHz Band MIMO																
Mod.	Data Rate	NTx	CH.	Freq. (MHz)	Peak Conducted Power (dBm)			Conducted Power Limit (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)		Pass /Fail
					Ant13	Ant6	SUM	Ant13	Ant6	Ant13	Ant6	Ant13	Ant6	Ant13	Ant6	
11g	6Mbps	2	1	2412	18.56	18.71	21.65	30.00		-0.40		21.25		36.00		Pass
11g	6Mbps	2	6	2437	22.88	21.81	25.39	30.00		-0.40		24.99		36.00		Pass
11g	6Mbps	2	11	2462	21.03	21.39	24.22	30.00		-0.40		23.82		36.00		Pass
HT20	MCS0	2	1	2412	16.00	16.61	19.33	30.00		-0.40		18.93		36.00		Pass
HT20	MCS0	2	2	2417	22.54	21.85	25.22	30.00		-0.40		24.82		36.00		Pass
HT20	MCS0	2	6	2437	23.35	22.33	25.88	30.00		-0.40		25.48		36.00		Pass
HT20	MCS0	2	11	2462	19.51	19.60	22.57	30.00		-0.40		22.17		36.00		Pass
HT40	MCS0	2	3	2422	18.33	18.72	21.54	30.00		-0.40		21.14		36.00		Pass
HT40	MCS0	2	6	2437	22.06	21.52	24.81	30.00		-0.40		24.41		36.00		Pass
HT40	MCS0	2	7	2442	18.40	18.75	21.59	30.00		-0.40		21.19		36.00		Pass
HT40	MCS0	2	8	2447	17.91	18.22	21.08	30.00		-0.40		20.68		36.00		Pass
HT40	MCS0	2	9	2452	17.02	17.03	20.04	30.00		-0.40		19.64		36.00		Pass

Note: Measured power (dBm) has offset with cable loss.

TEST RESULTS DATA
Peak Output Power

2.4GHz Band MIMO																	
Mod.	Data Rate	NtX	CH.	Freq. (MHz)	RU Config.	Peak Conducted Power (dBm)			Conducted Power Limit (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)		Pass /Fail
						Ant13	Ant6	SUM	Ant13	Ant6	Ant13	Ant6	Ant13	Ant6	Ant13	Ant6	
HE20	MCS0	2	1	2412	Full	16.03	16.29	19.17	30.00		-0.40		18.77		36.00		Pass
HE20	MCS0	2	1	2412	26/0	12.76	11.55	15.21	30.00		-0.40		14.81		36.00		Pass
HE20	MCS0	2	1	2412	52/37	15.88	14.86	18.41	30.00		-0.40		18.01		36.00		Pass
HE20	MCS0	2	1	2412	106/53	17.02	16.58	19.82	30.00		-0.40		19.42		36.00		Pass
HE20	MCS0	2	2	2417	Full	22.98	22.13	25.59	30.00		-0.40		25.19		36.00		Pass
HE20	MCS0	2	6	2437	Full	23.53	22.67	26.13	30.00		-0.40		25.73		36.00		Pass
HE20	MCS0	2	11	2462	Full	20.24	21.01	23.65	30.00		-0.40		23.25		36.00		Pass
HE20	MCS0	2	11	2462	26/8	12.11	11.35	14.76	30.00		-0.40		14.36		36.00		Pass
HE20	MCS0	2	11	2462	52/40	15.74	14.62	18.23	30.00		-0.40		17.83		36.00		Pass
HE20	MCS0	2	11	2462	106/54	17.13	16.20	19.70	30.00		-0.40		19.30		36.00		Pass
HE40	MCS0	2	3	2422	Full	17.33	17.72	20.54	30.00		-0.40		20.14		36.00		Pass
HE40	MCS0	2	4	2427	Full	19.50	19.66	22.59	30.00		-0.40		22.19		36.00		Pass
HE40	MCS0	2	6	2437	Full	21.51	21.28	24.41	30.00		-0.40		24.01		36.00		Pass
HE40	MCS0	2	8	2447	Full	19.06	19.22	22.15	30.00		-0.40		21.75		36.00		Pass
HE40	MCS0	2	9	2452	Full	18.51	18.73	21.63	30.00		-0.40		21.23		36.00		Pass

Note: Measured power (dBm) has offset with cable loss.

TEST RESULTS DATA
Peak Output Power

2.4GHz Band MIMO																	
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	RU Config.	Peak Conducted Power (dBm)			Conducted Power Limit (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)		Pass /Fail
						Ant13	Ant6	SUM	Ant13	Ant6	Ant13	Ant6	Ant13	Ant6	Ant13	Ant6	
EHT20	MCS0	2	1	2412	Full	17.39	17.54	20.48	30.00		-0.40		20.08		36.00		Pass
EHT20	MCS0	2	1	2412	26/0	12.91	11.76	15.38	30.00		-0.40		14.98		36.00		Pass
EHT20	MCS0	2	1	2412	52/37	16.09	15.04	18.61	30.00		-0.40		18.21		36.00		Pass
EHT20	MCS0	2	1	2412	106/53	17.29	16.74	20.03	30.00		-0.40		19.63		36.00		Pass
EHT20	MCS0	2	1	2412	52+26/38+1	15.09	14.11	17.64	30.00		-0.40		17.24		36.00		Pass
EHT20	MCS0	2	1	2412	106+26/53+4	17.79	17.13	20.48	30.00		-0.40		20.08		36.00		Pass
EHT20	MCS0	2	2	2417	Full	23.03	22.24	25.66	30.00		-0.40		25.26		36.00		Pass
EHT20	MCS0	2	6	2437	Full	23.58	22.72	26.18	30.00		-0.40		25.78		36.00		Pass
EHT20	MCS0	2	11	2462	Full	20.30	21.04	23.70	30.00		-0.40		23.30		36.00		Pass
EHT20	MCS0	2	11	2462	26/8	12.38	11.53	14.99	30.00		-0.40		14.59		36.00		Pass
EHT20	MCS0	2	11	2462	52/40	15.97	14.82	18.44	30.00		-0.40		18.04		36.00		Pass
EHT20	MCS0	2	11	2462	106/54	17.42	16.48	19.99	30.00		-0.40		19.59		36.00		Pass
EHT20	MCS0	2	11	2462	52+26/39+7	14.65	14.13	17.41	30.00		-0.40		17.01		36.00		Pass
EHT20	MCS0	2	11	2462	106+26/54+4	17.57	16.26	19.97	30.00		-0.40		19.57		36.00		Pass
EHT40	MCS0	2	3	2422	Full	17.34	17.73	20.55	30.00		-0.40		20.15		36.00		Pass
EHT40	MCS0	2	4	2427	Full	19.55	19.78	22.68	30.00		-0.40		22.28		36.00		Pass
EHT40	MCS0	2	6	2437	Full	21.54	21.30	24.43	30.00		-0.40		24.03		36.00		Pass
EHT40	MCS0	2	9	2452	Full	18.60	18.81	21.72	30.00		-0.40		21.32		36.00		Pass

Note: Measured power (dBm) has offset with cable loss.



Ambient Condition: 25 °C, 45 %RH

Test Date: 2025.10.24-2025.11.11

Test Engineer: Chen Zhiqiang


DTS Bandwidth


Test Result


TestMode	Antenna	Freq(MHz)	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11B-SISO	Ant13	2412	7.72	2408.32	2416.04	0.5	PASS
	Ant6	2412	6.72	2408.32	2415.04	0.5	PASS
	Ant13	2437	7.72	2432.92	2440.64	0.5	PASS
	Ant6	2437	6.76	2433.88	2440.64	0.5	PASS
	Ant13	2462	7.72	2458.36	2466.08	0.5	PASS
	Ant6	2462	6.72	2459.40	2466.12	0.5	PASS
11G-CDD	Ant13	2412	16.48	2403.76	2420.24	0.5	PASS
	Ant6	2412	16.16	2404.12	2420.28	0.5	PASS
	Ant13	2437	16.56	2428.72	2445.28	0.5	PASS
	Ant6	2437	16.60	2428.80	2445.40	0.5	PASS
	Ant13	2462	16.52	2453.76	2470.28	0.5	PASS
	Ant6	2462	16.56	2453.80	2470.36	0.5	PASS
11N20MIMO	Ant13	2412	17.56	2403.24	2420.80	0.5	PASS
	Ant6	2412	17.60	2403.28	2420.88	0.5	PASS
	Ant13	2437	17.76	2428.04	2445.80	0.5	PASS
	Ant6	2437	17.80	2428.12	2445.92	0.5	PASS
	Ant13	2462	17.76	2453.16	2470.92	0.5	PASS
	Ant6	2462	17.76	2453.12	2470.88	0.5	PASS
11N40MIMO	Ant13	2422	36.40	2403.84	2440.24	0.5	PASS
	Ant6	2422	36.56	2403.76	2440.32	0.5	PASS
	Ant13	2437	36.64	2418.60	2455.24	0.5	PASS
	Ant6	2437	31.60	2423.32	2454.92	0.5	PASS
	Ant13	2452	36.56	2433.76	2470.32	0.5	PASS
	Ant6	2452	36.48	2433.68	2470.16	0.5	PASS
11BE20MIMO	Ant13	2412	19.00	2402.48	2421.48	0.5	PASS
	Ant6	2412	18.72	2402.84	2421.56	0.5	PASS
	Ant13	2437	19.04	2427.48	2446.52	0.5	PASS
	Ant6	2437	19.12	2427.44	2446.56	0.5	PASS
	Ant13	2462	19.08	2452.48	2471.56	0.5	PASS
	Ant6	2462	19.20	2452.44	2471.64	0.5	PASS
11BE40MIMO	Ant13	2422	38.16	2402.96	2441.12	0.5	PASS
	Ant6	2422	38.08	2403.04	2441.12	0.5	PASS
	Ant13	2437	38.08	2417.88	2455.96	0.5	PASS
	Ant6	2437	38.24	2417.88	2456.12	0.5	PASS
	Ant13	2452	38.16	2432.96	2471.12	0.5	PASS
	Ant6	2452	38.24	2432.88	2471.12	0.5	PASS





Test Graphs

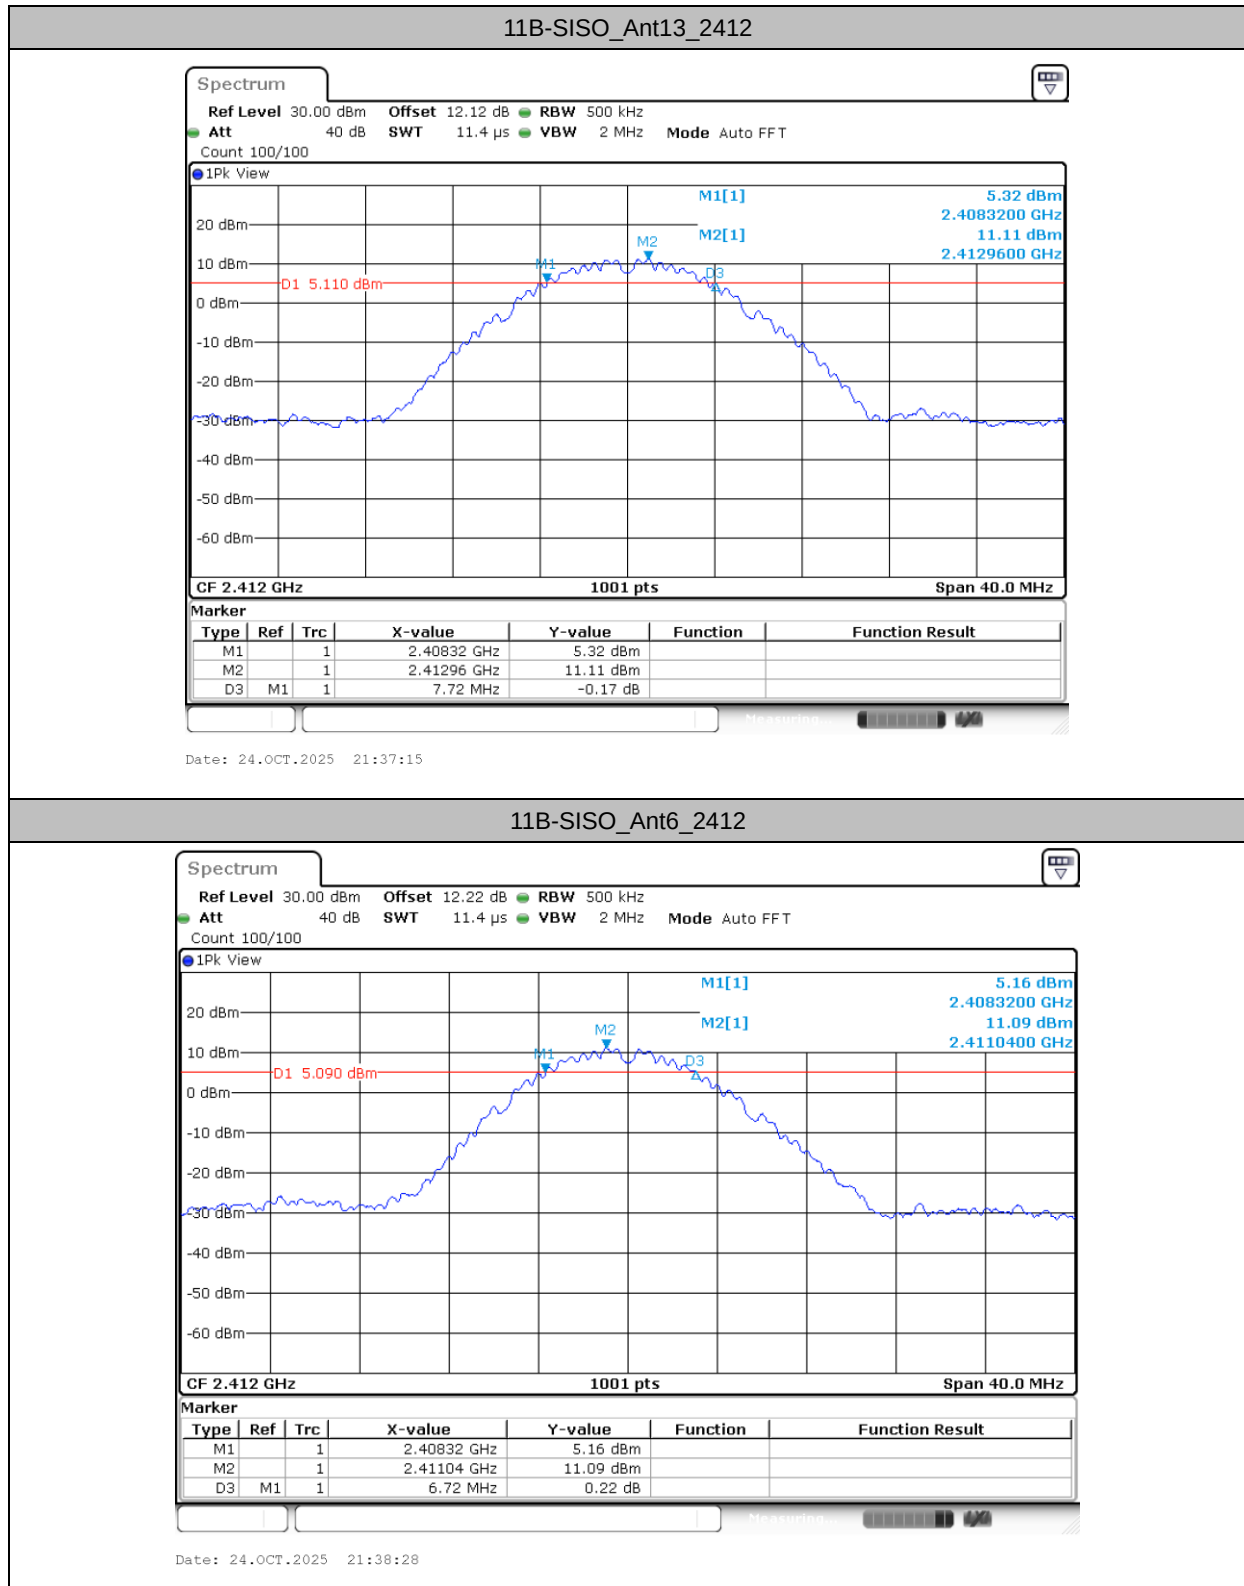


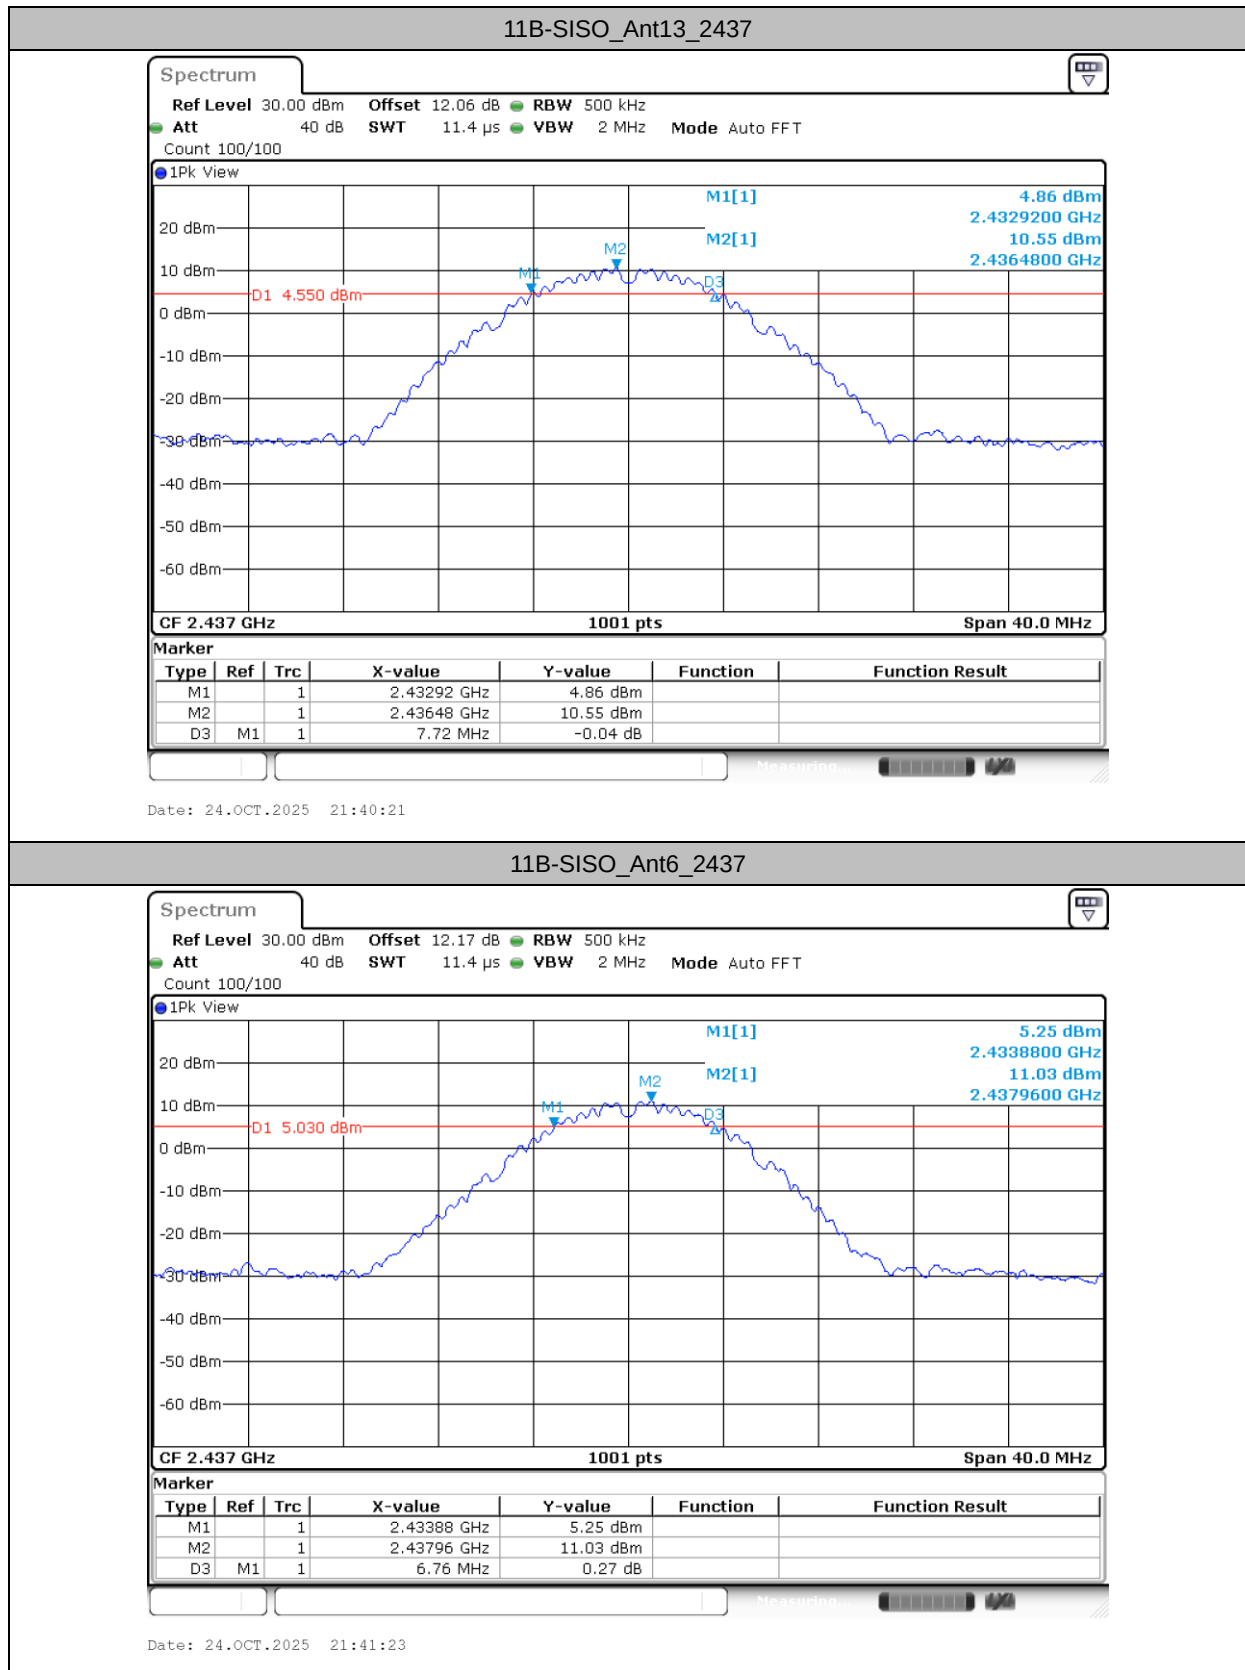


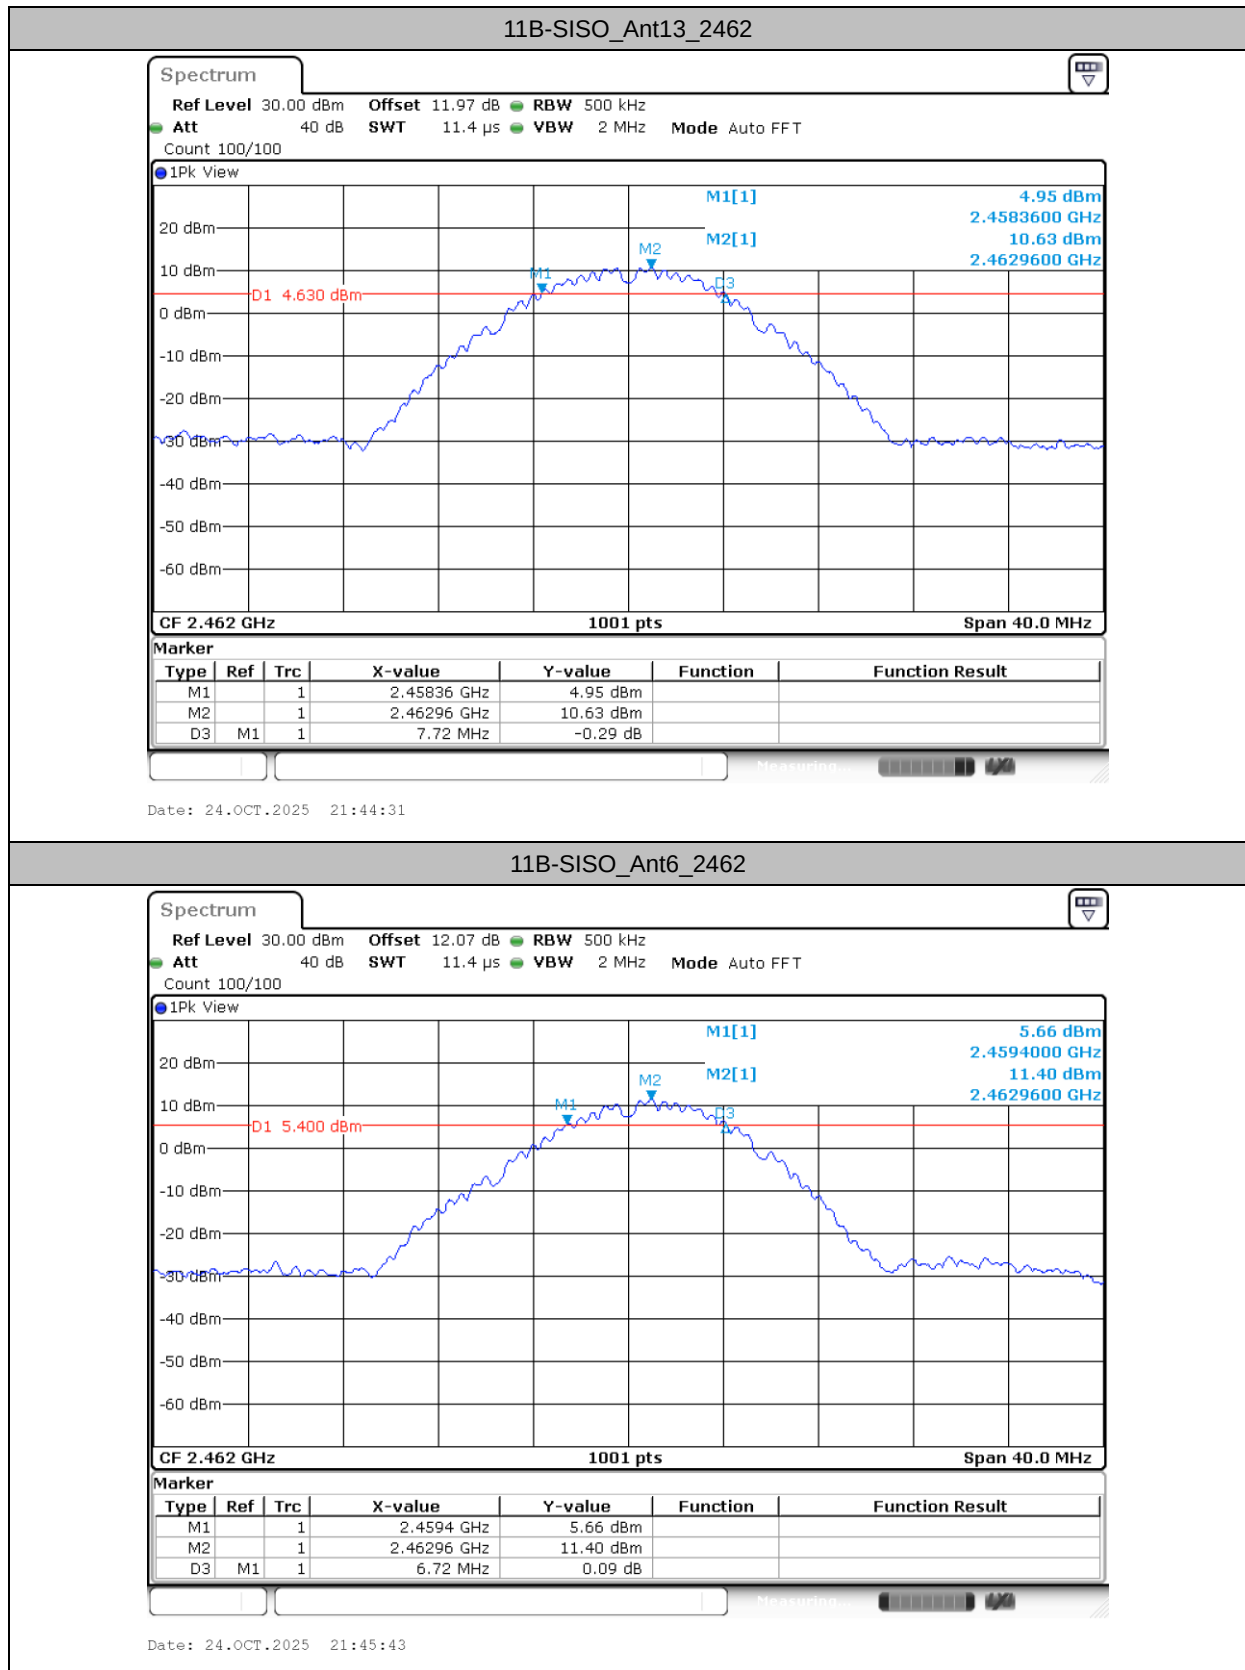


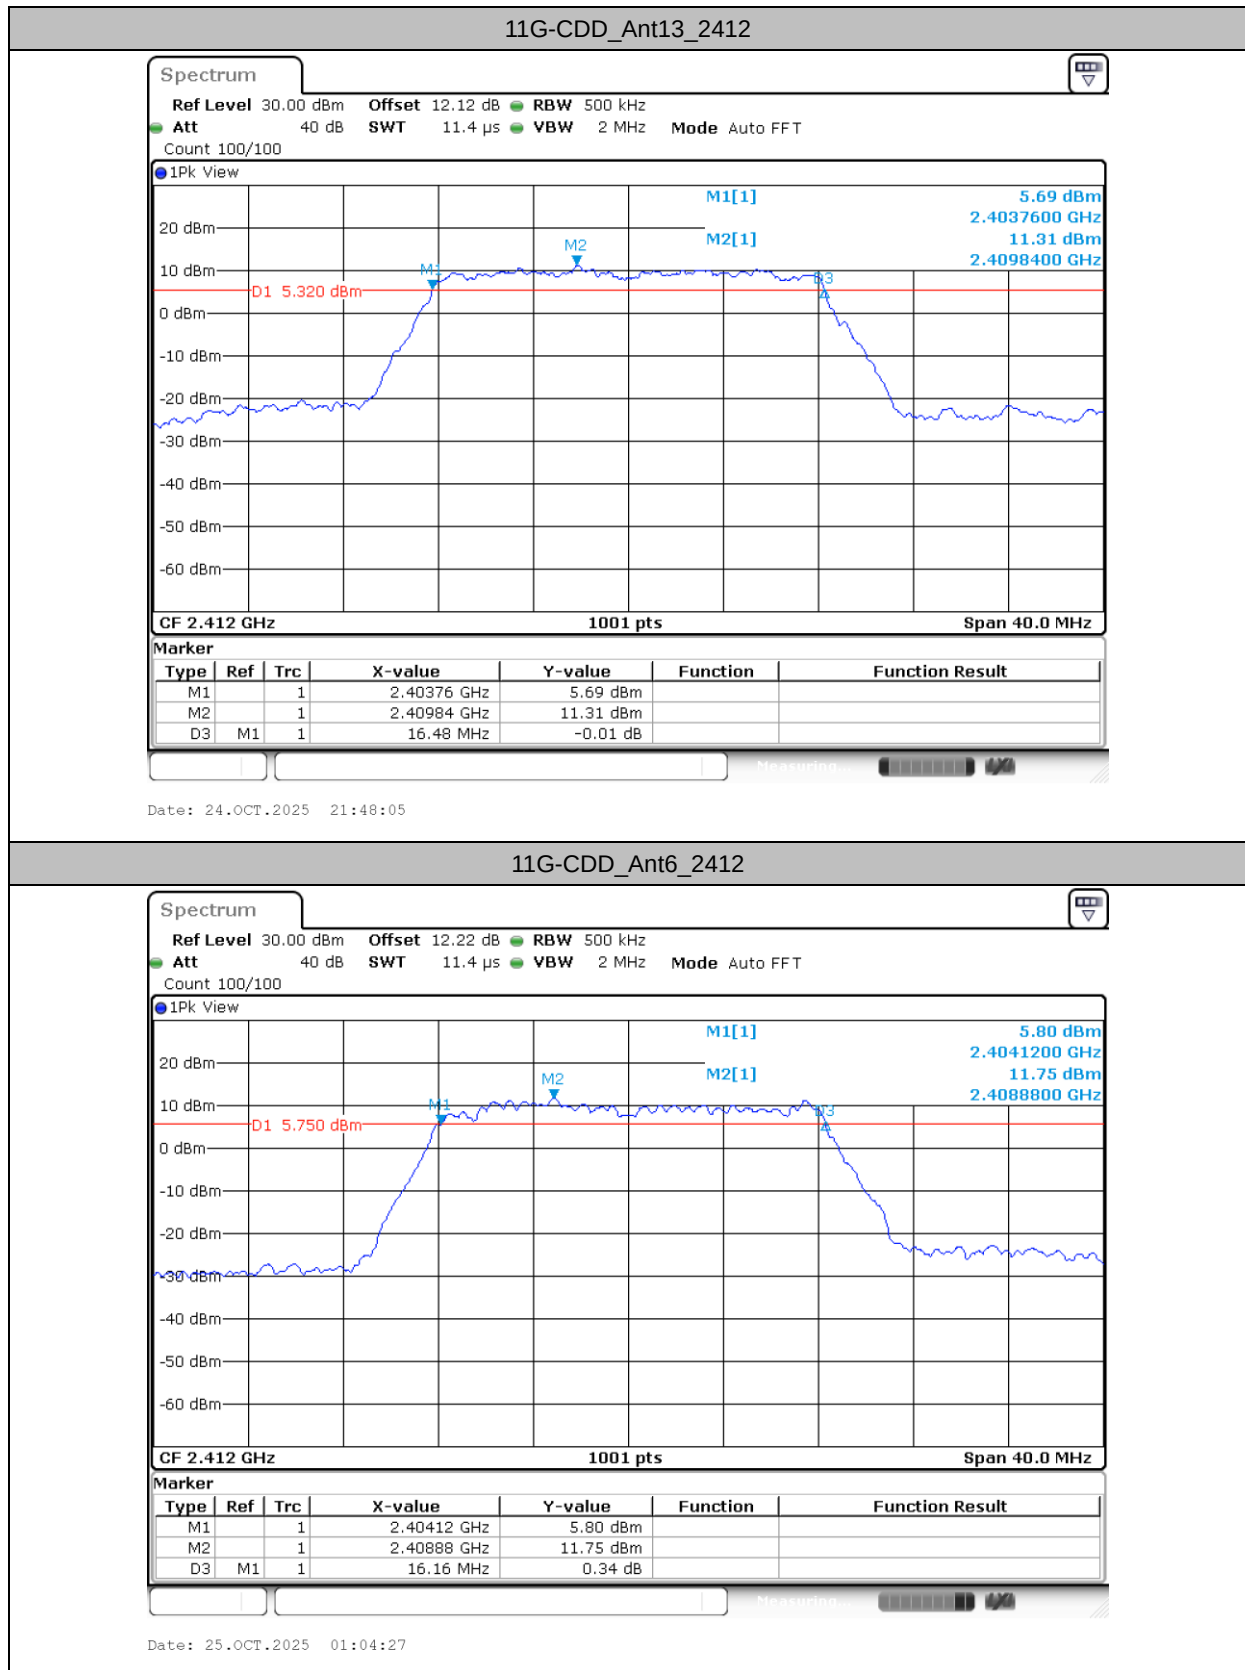


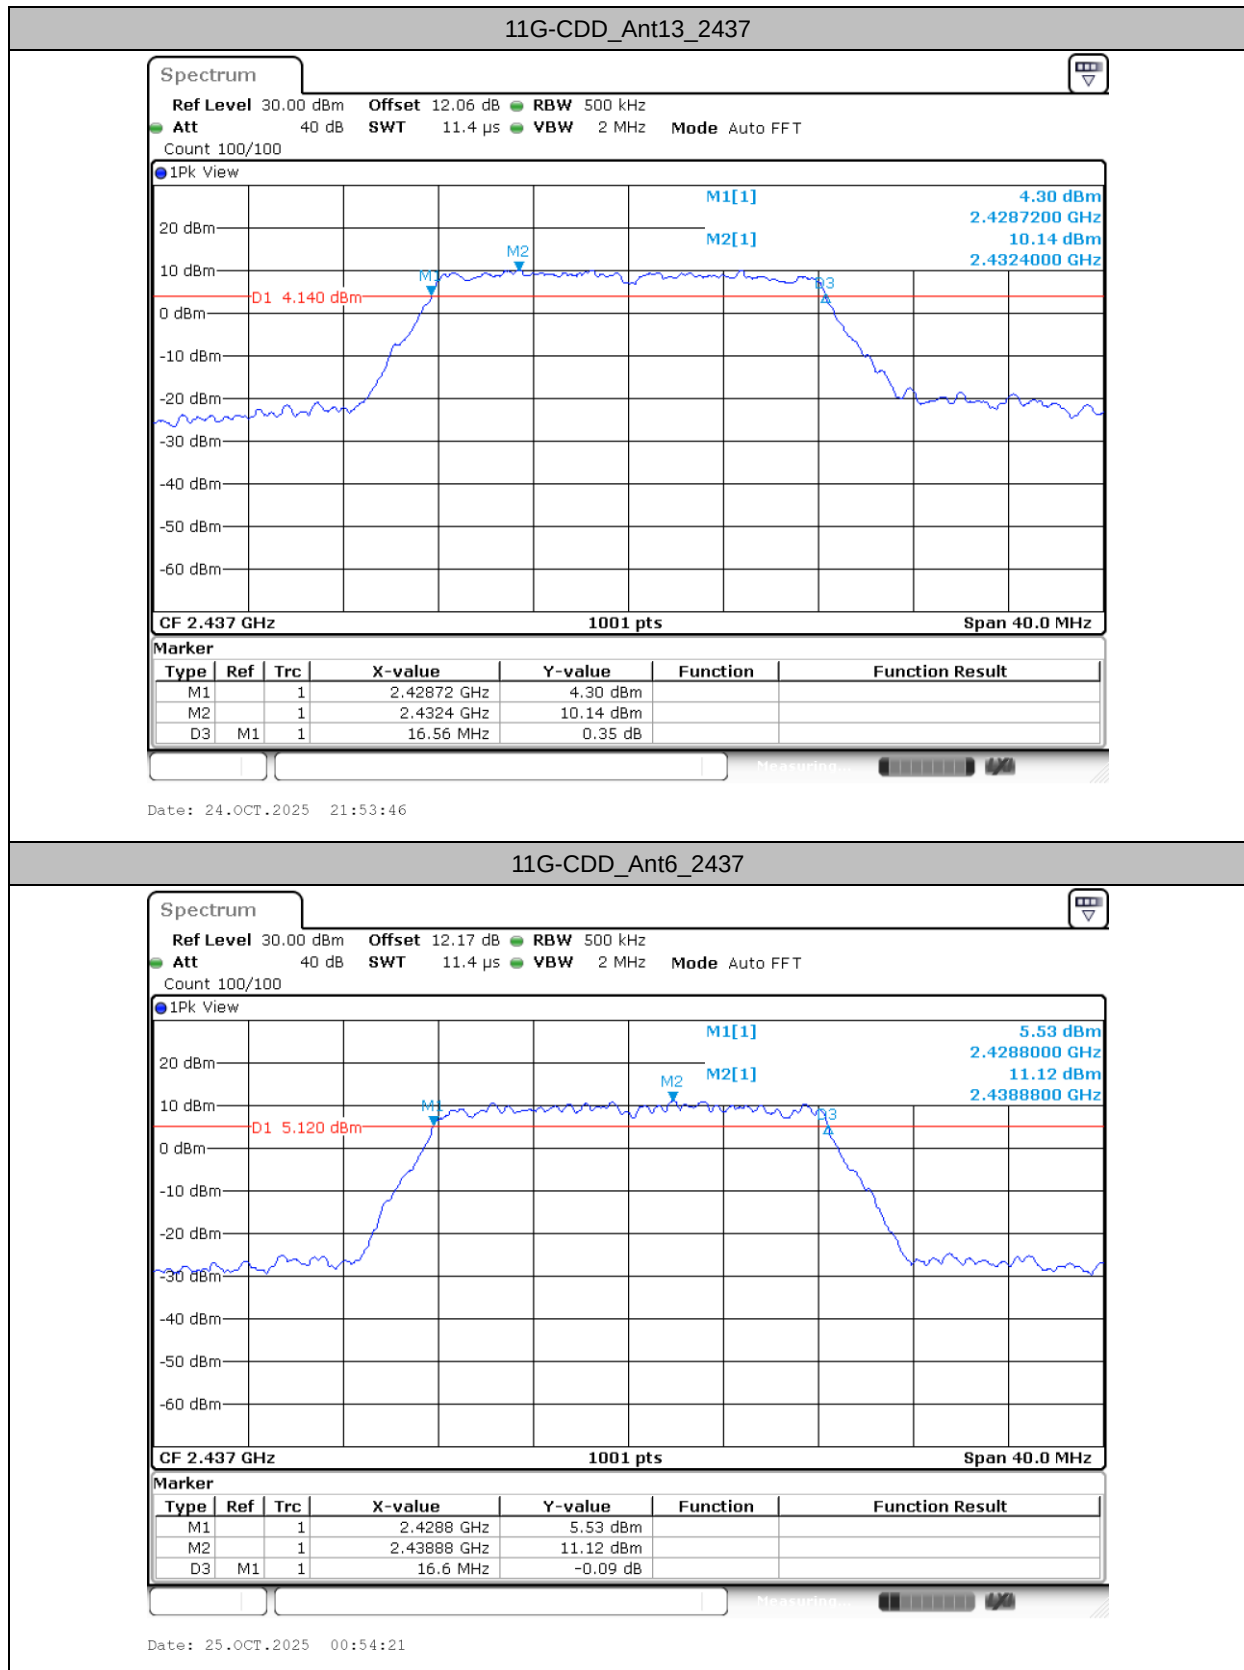


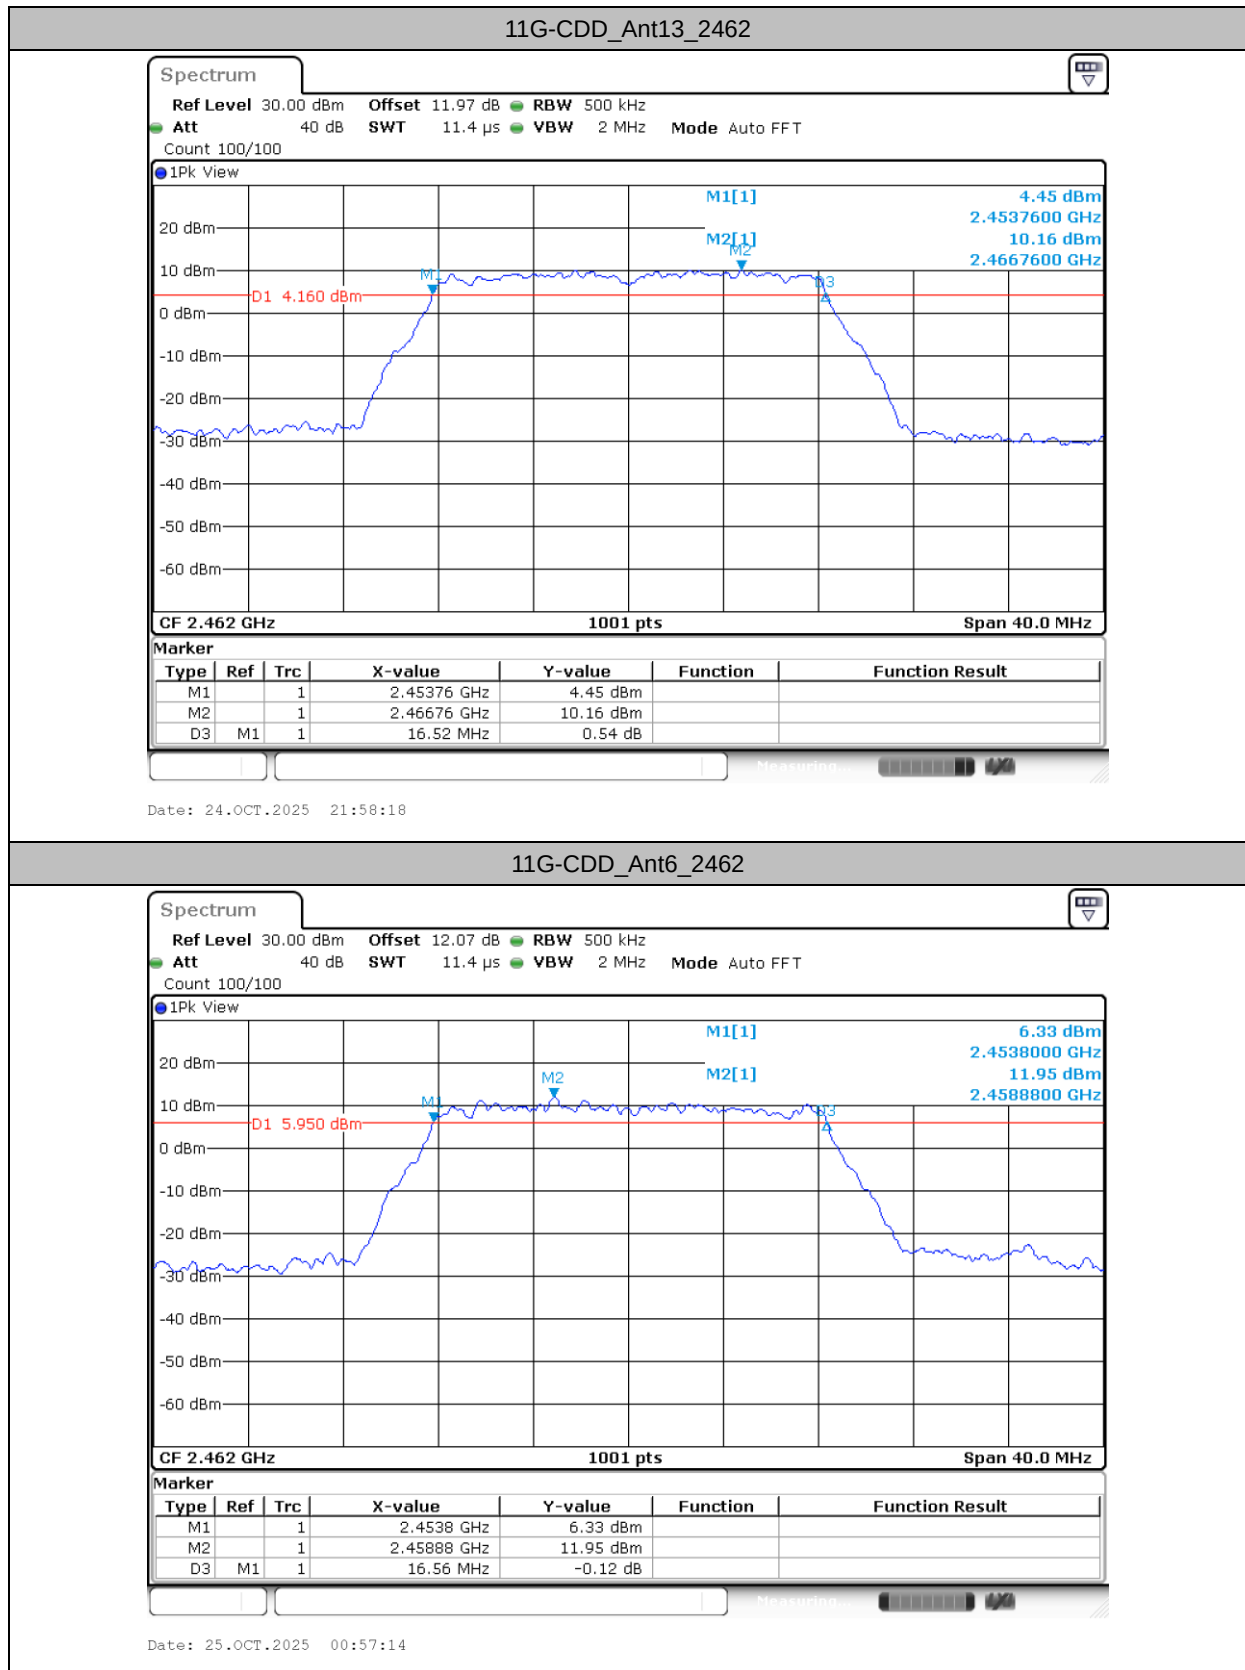


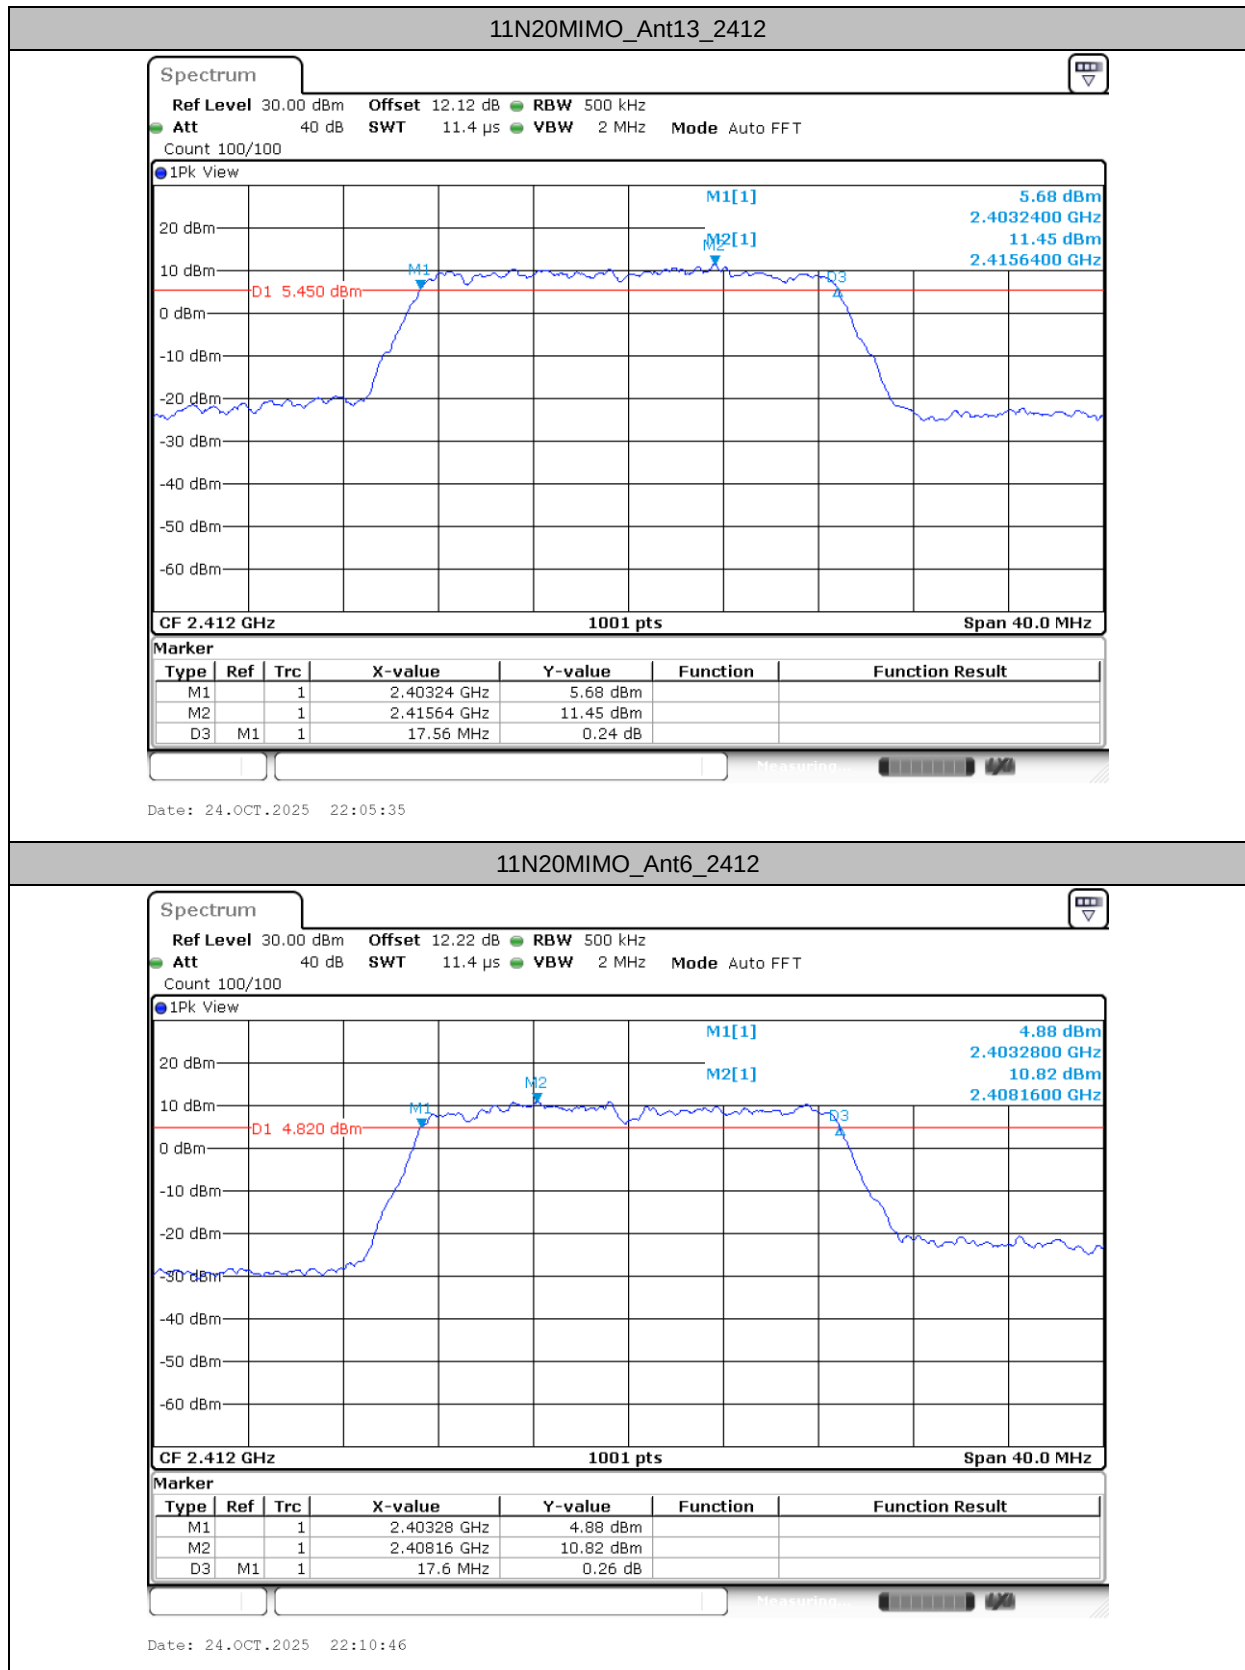


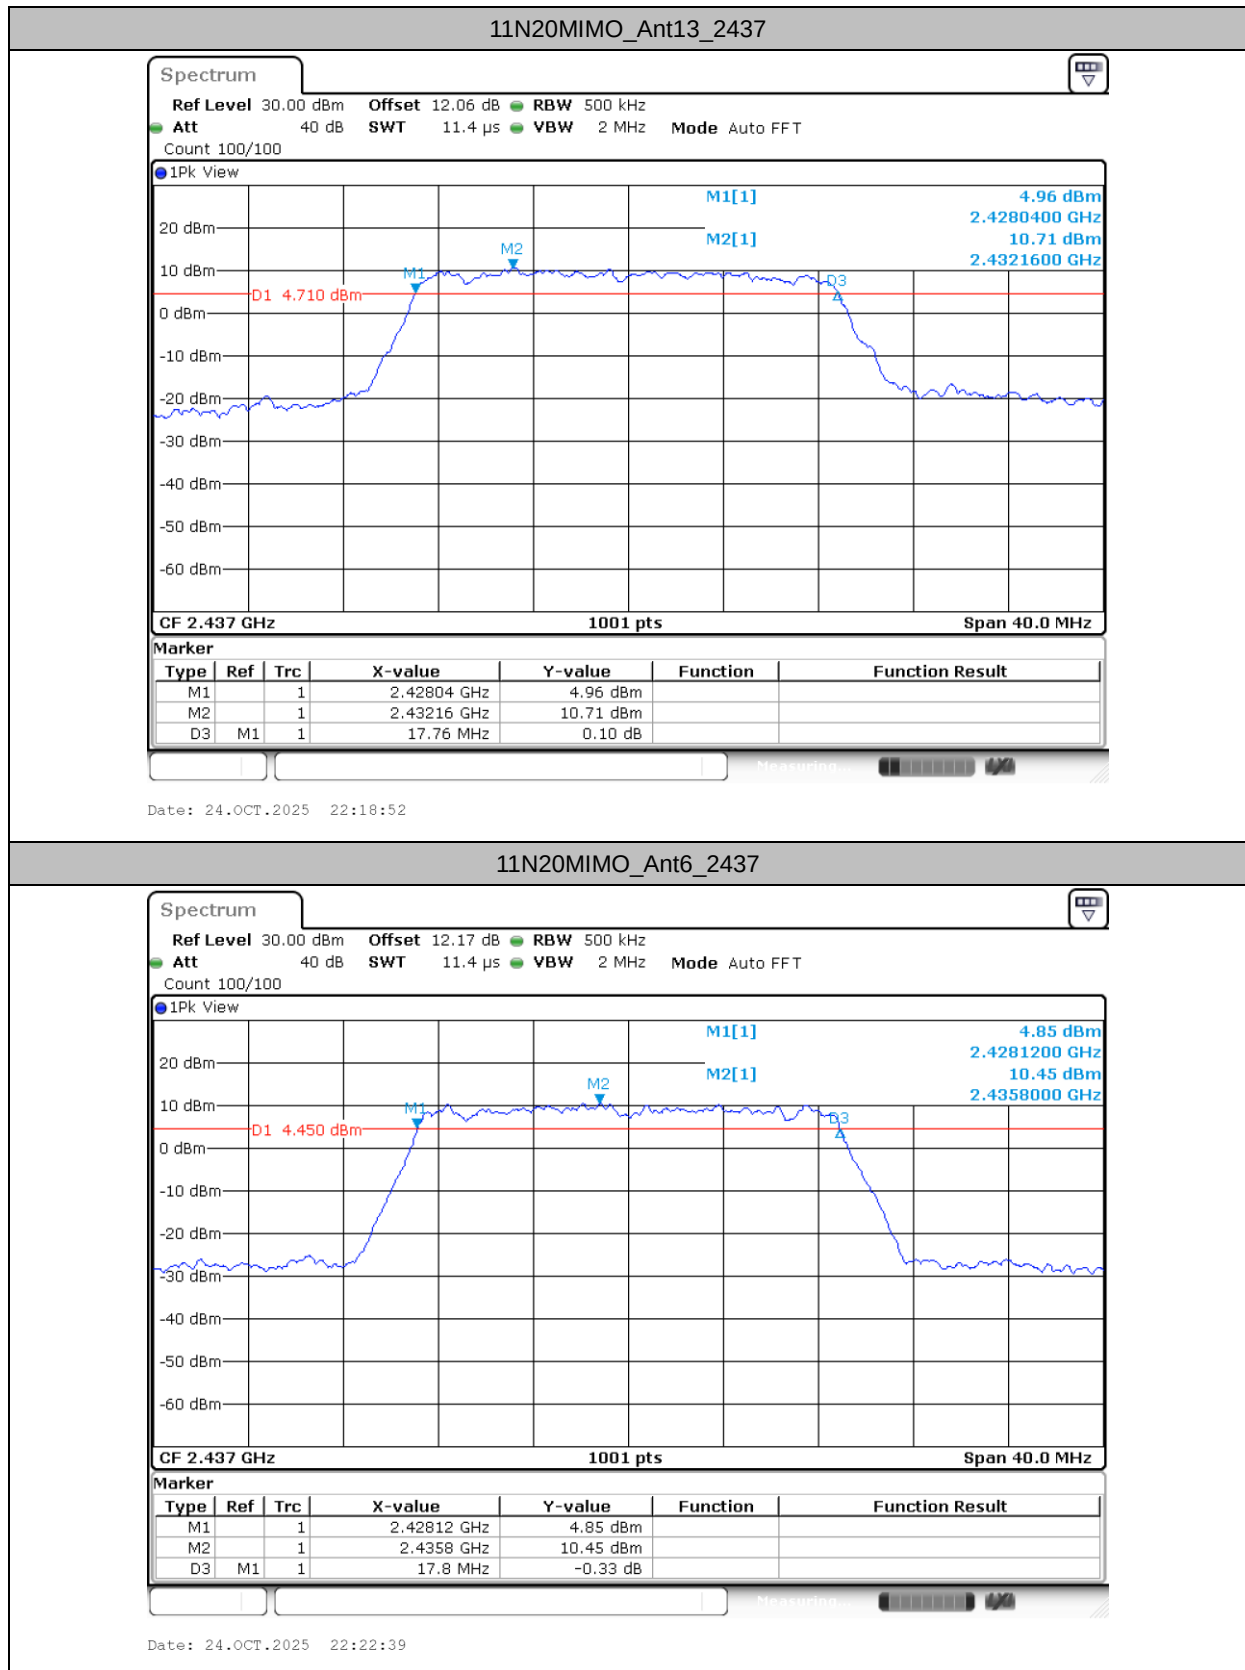


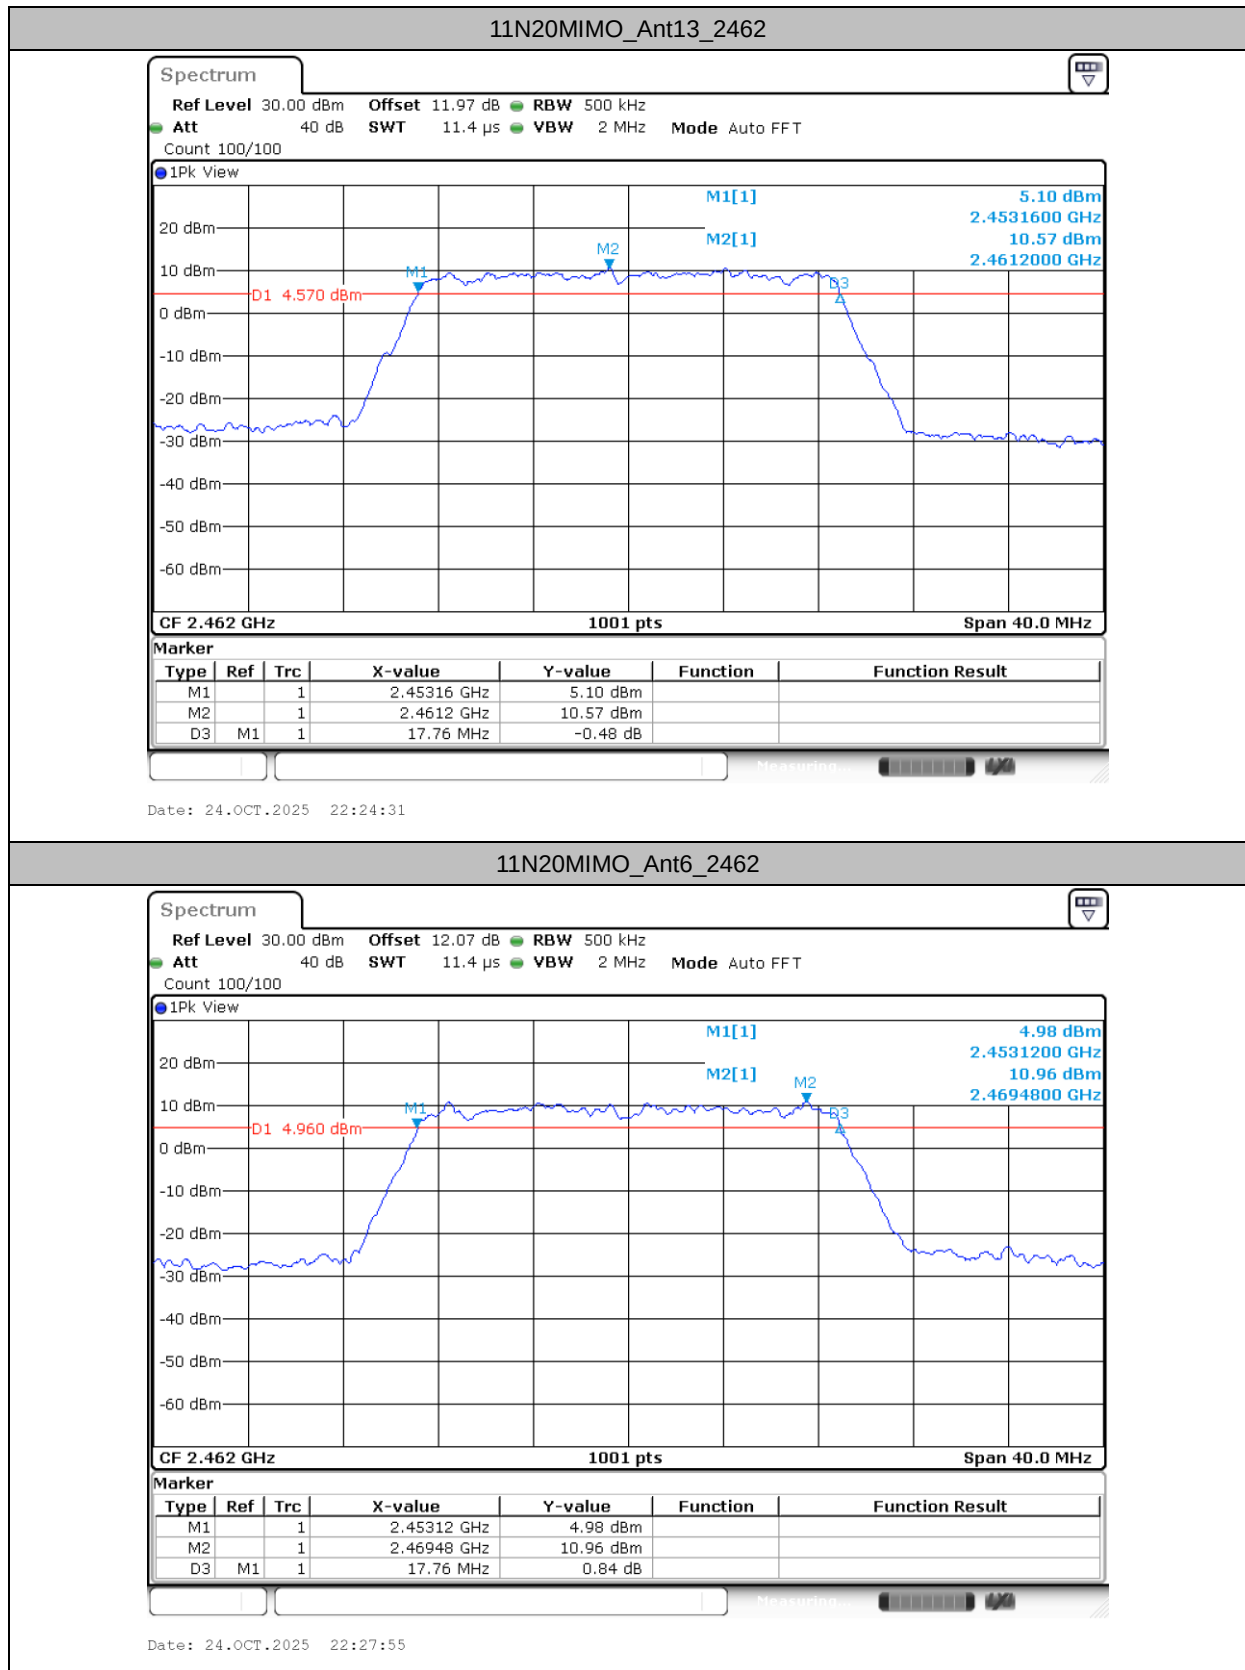


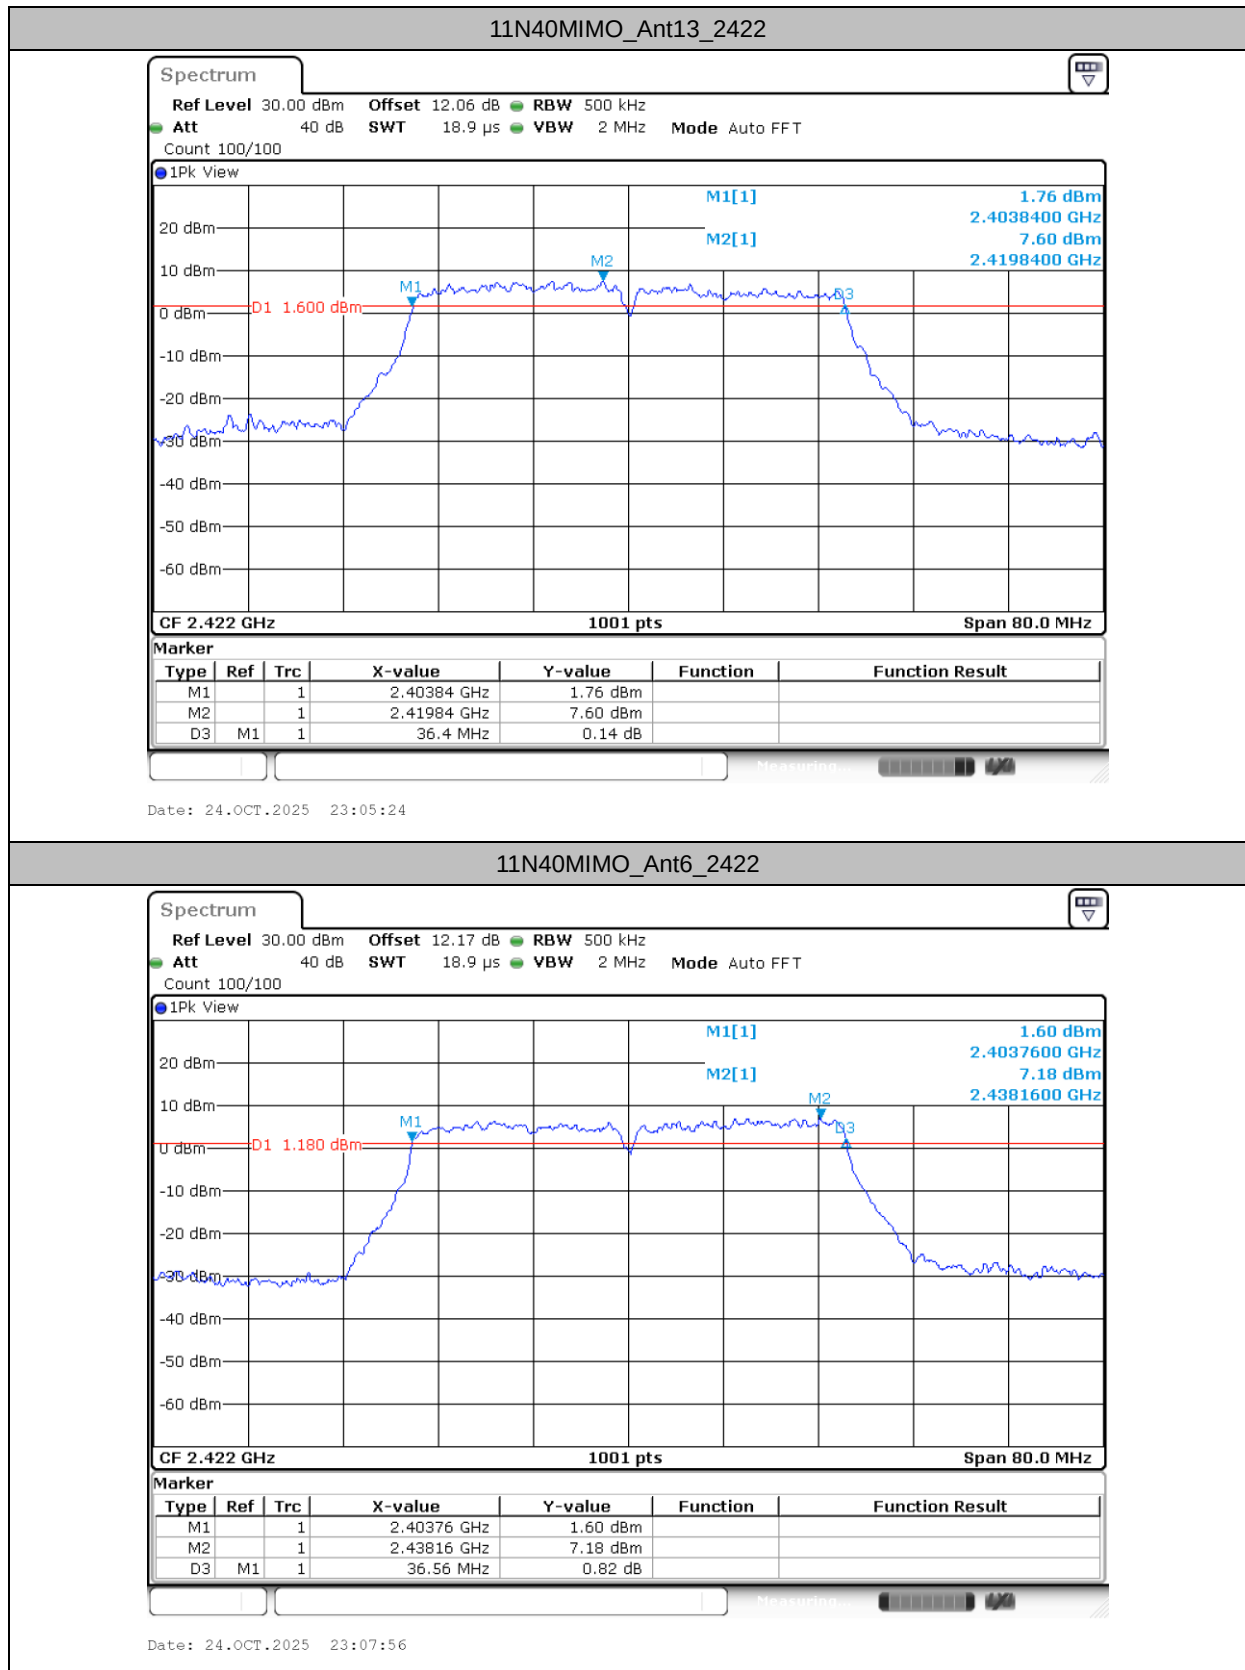


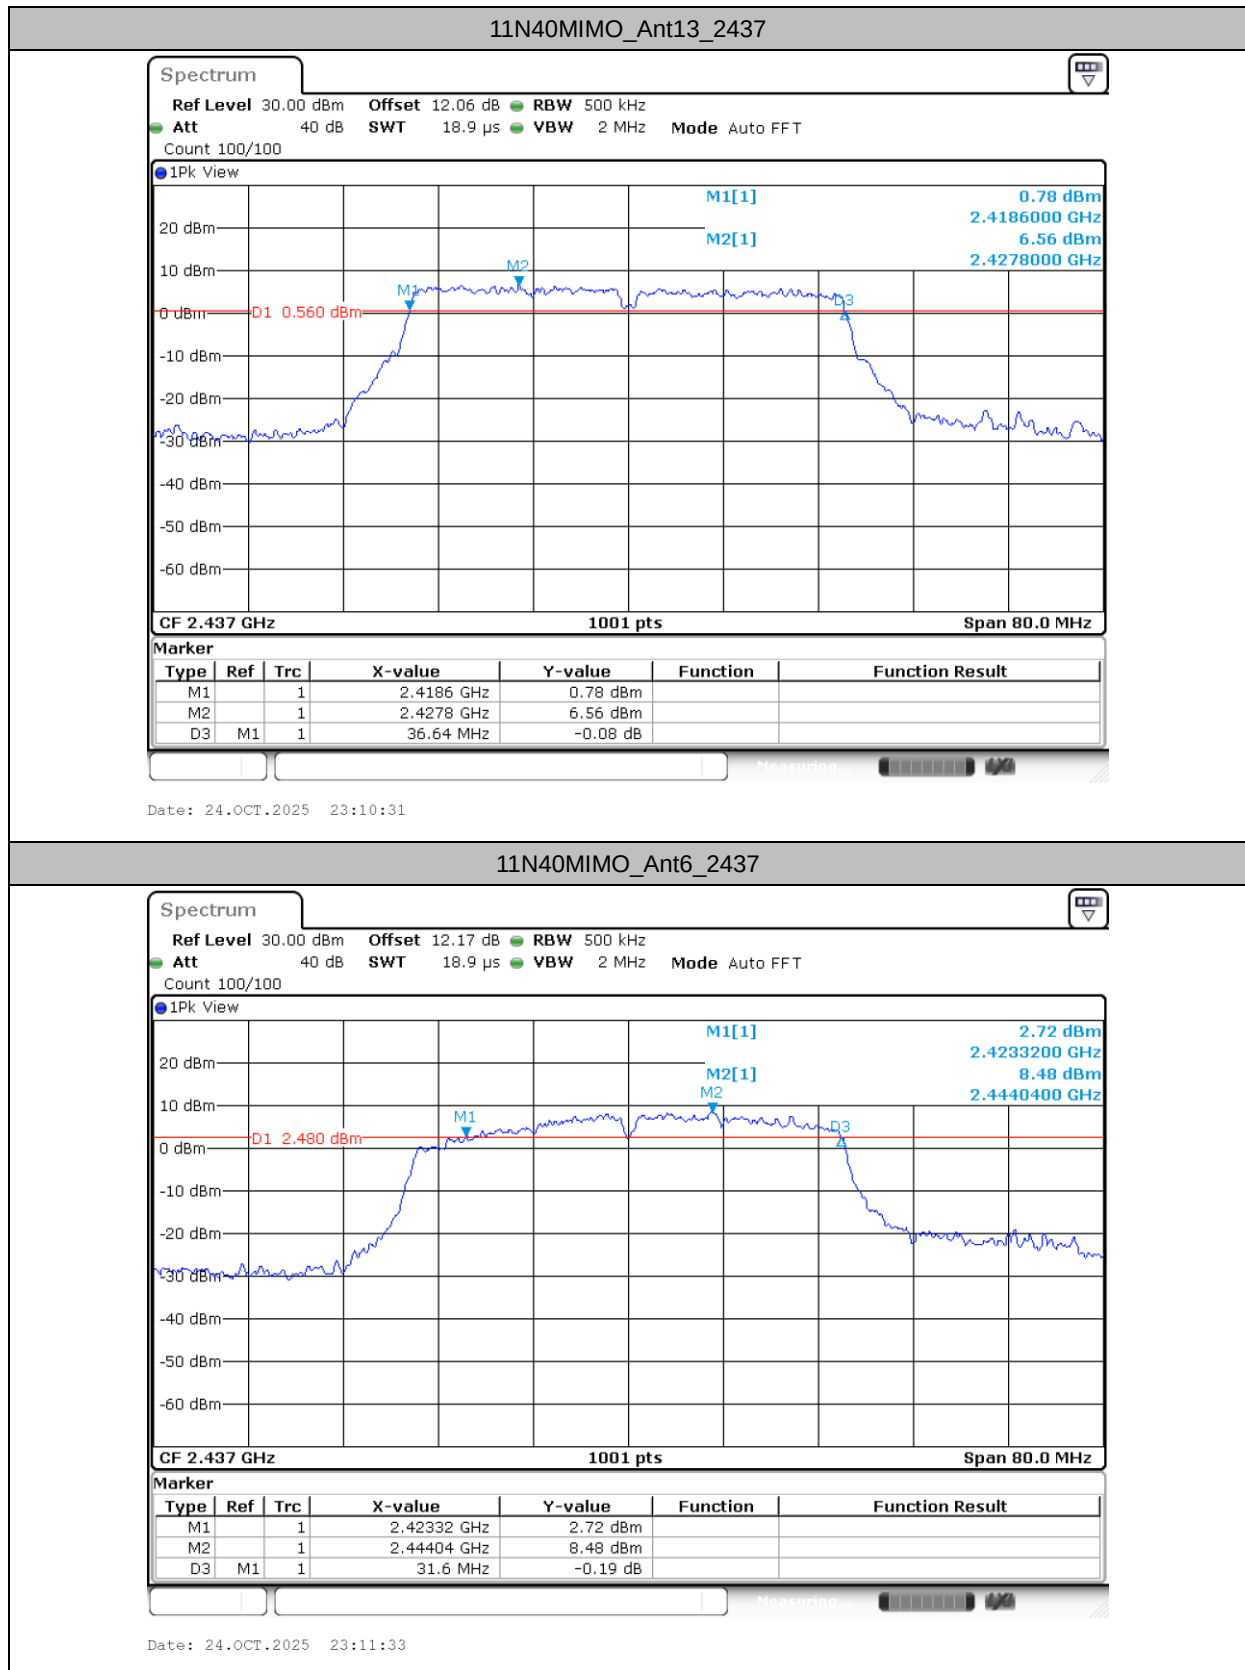


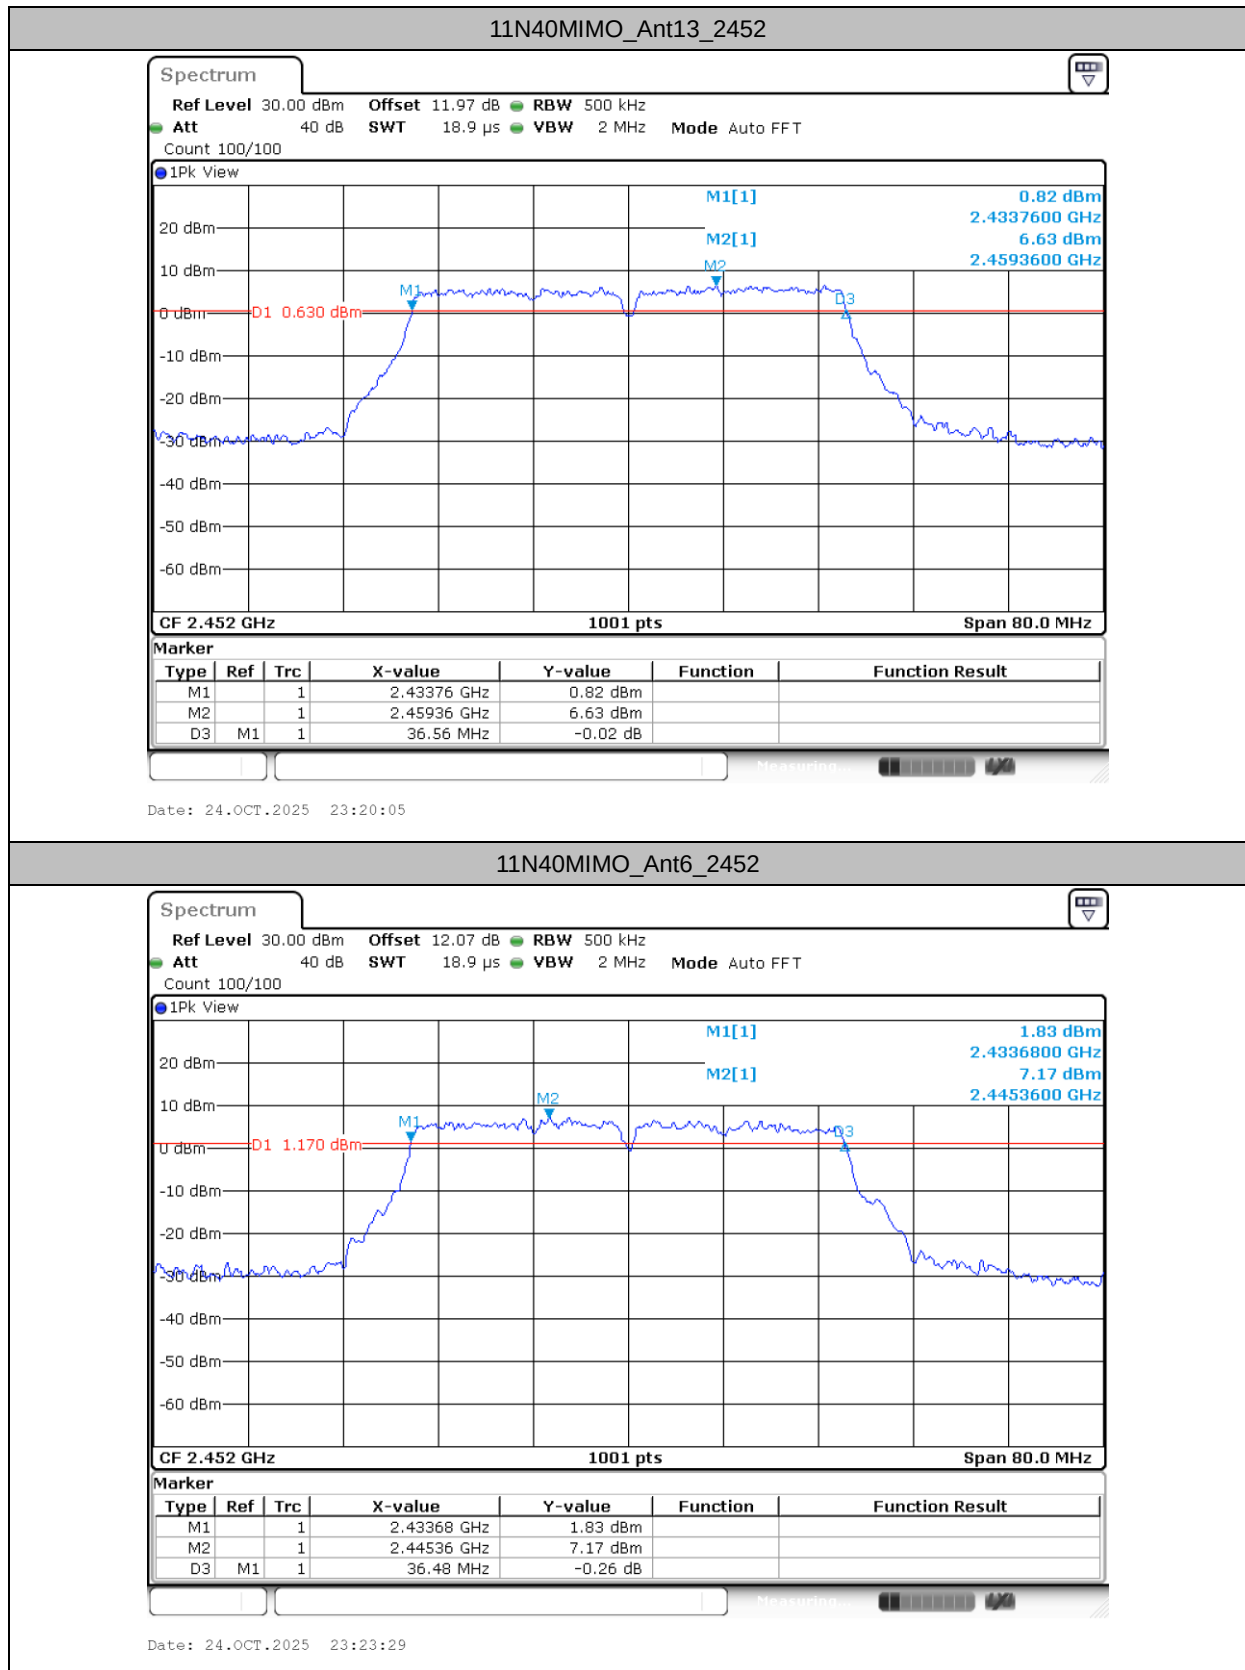


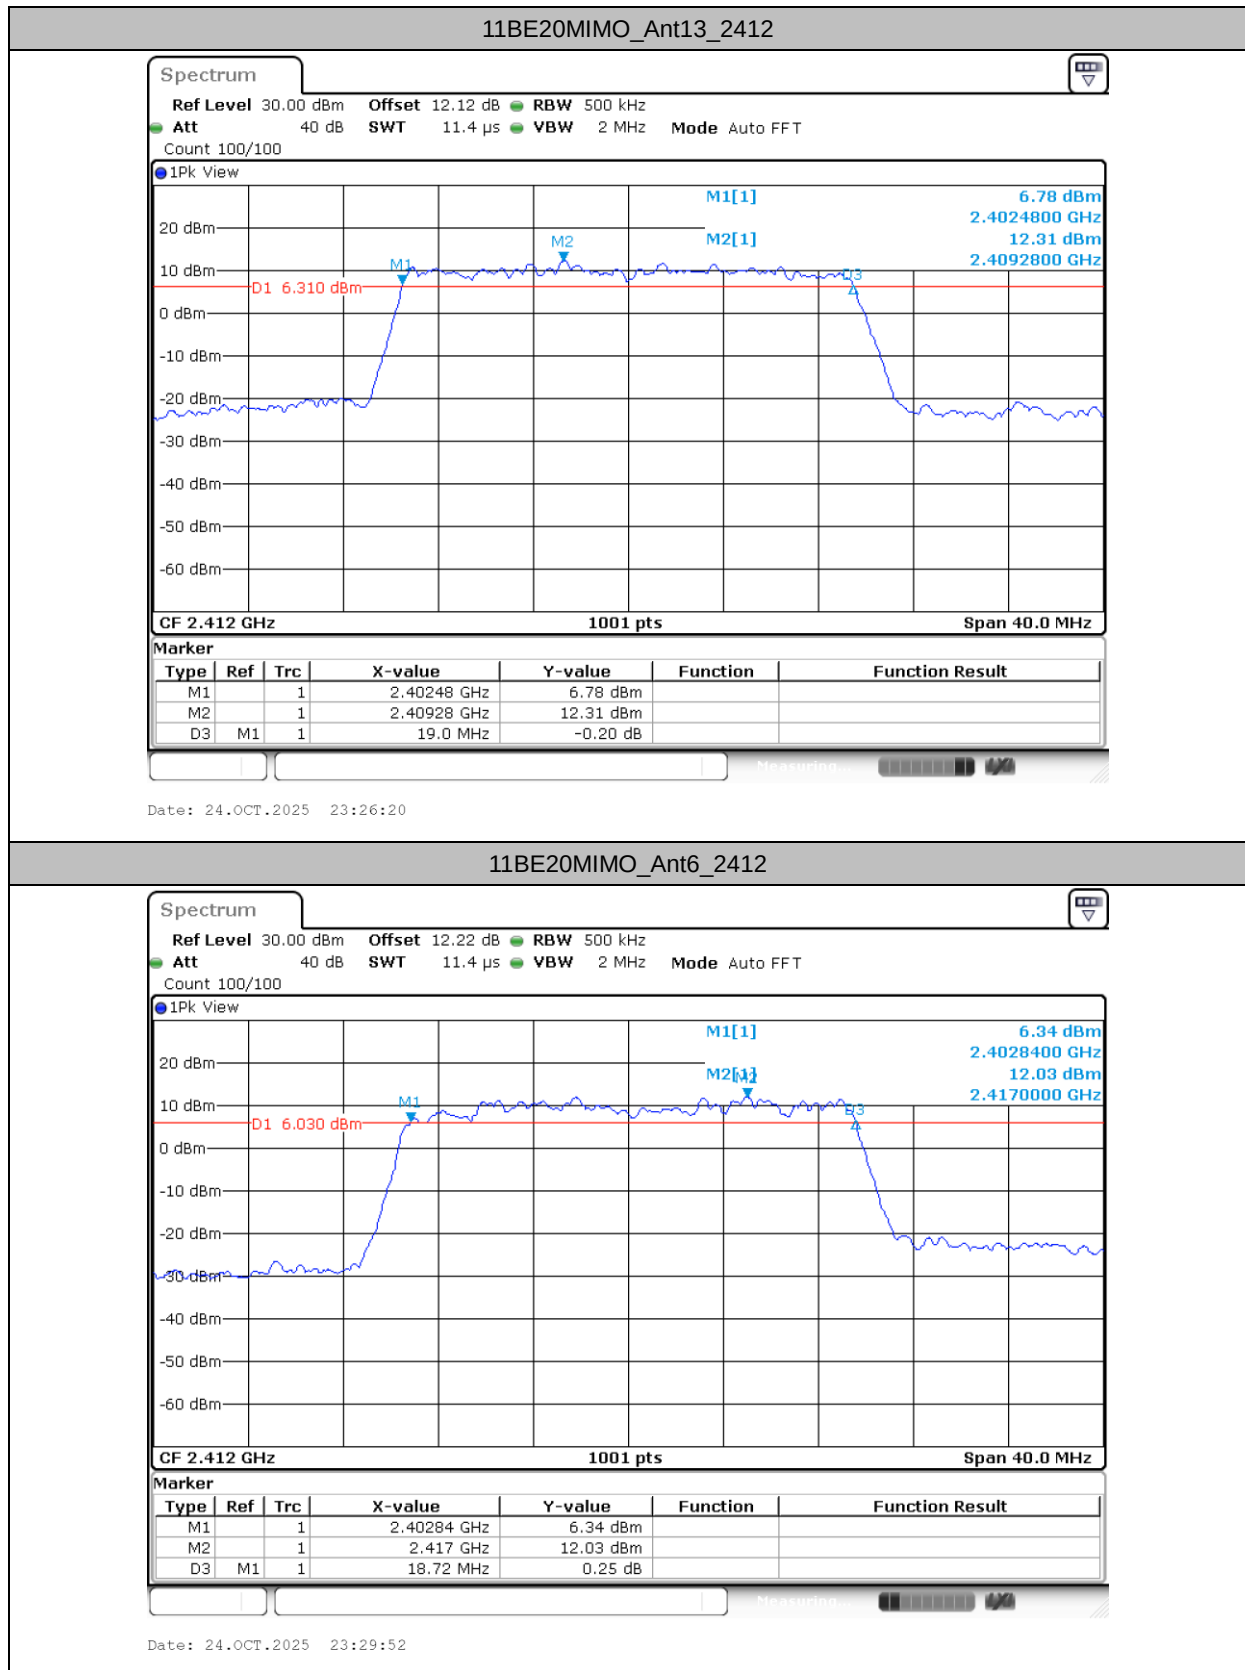


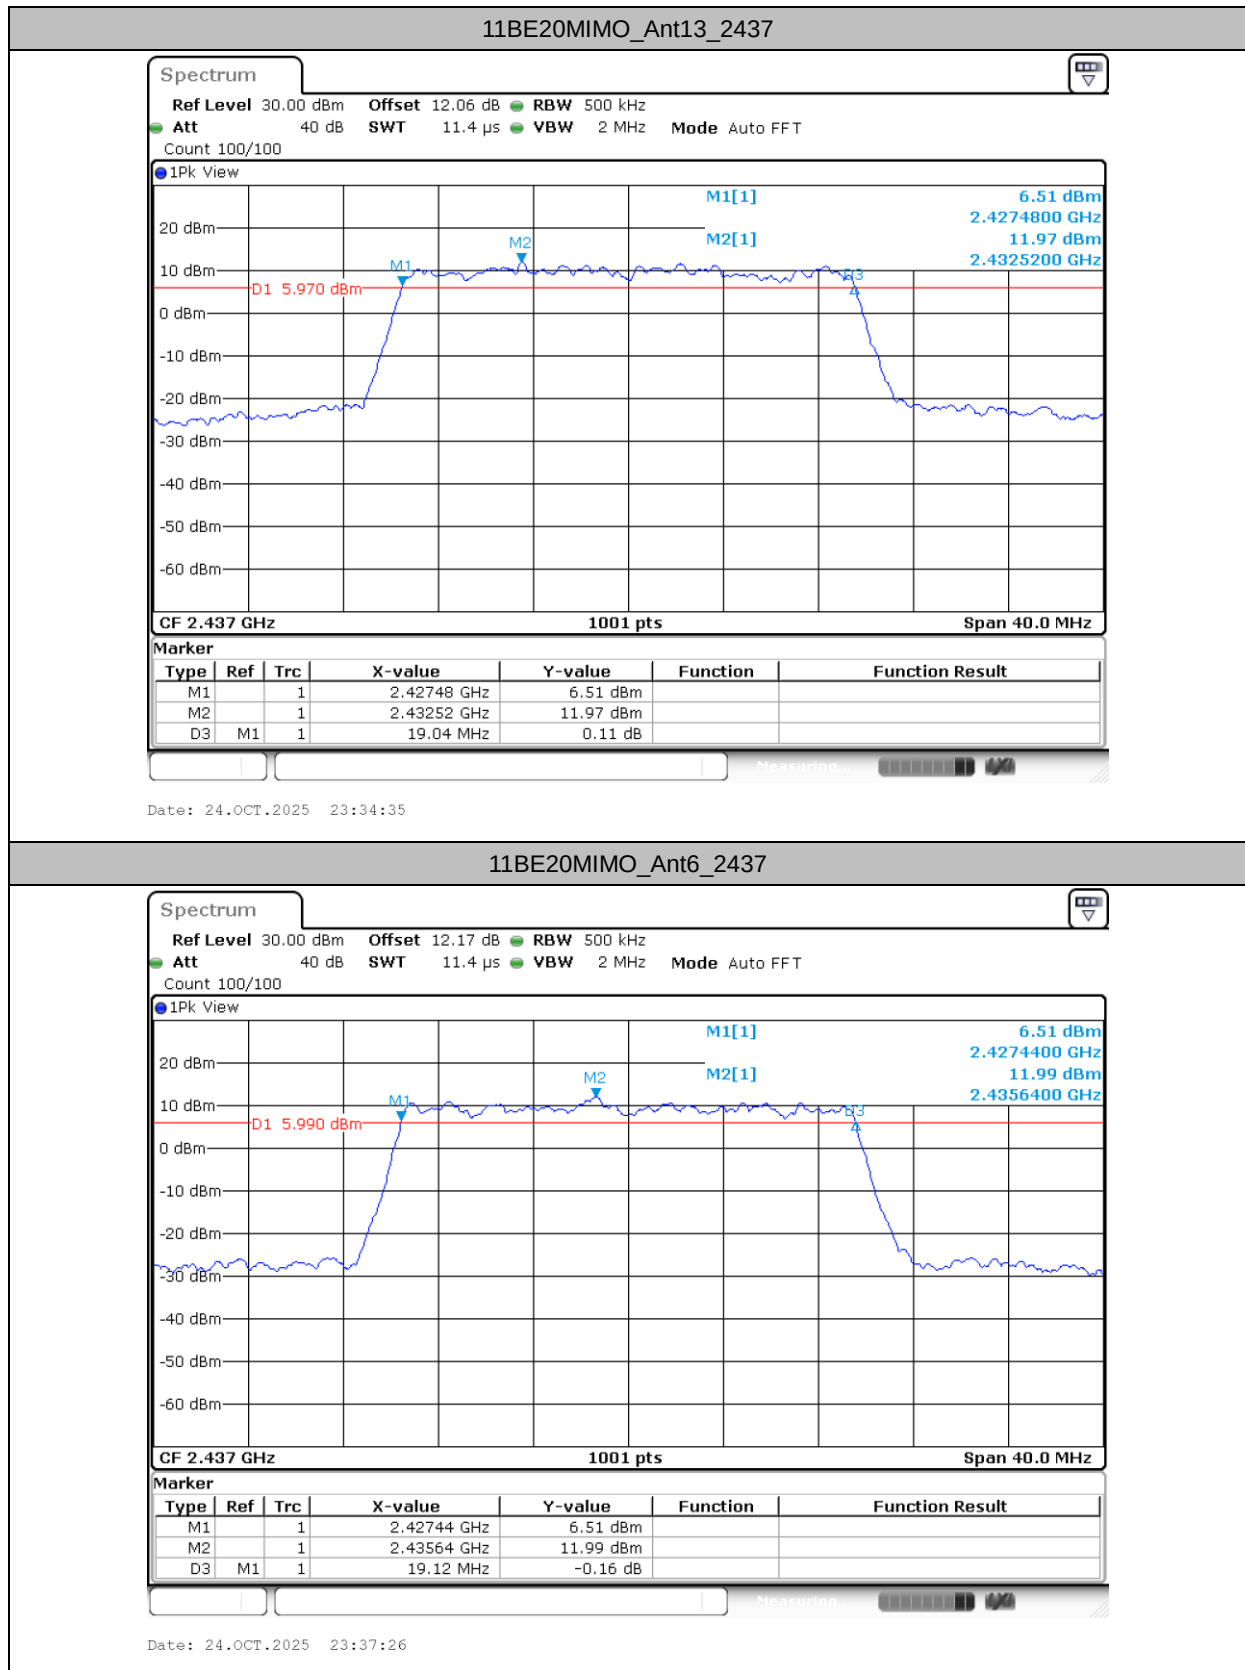

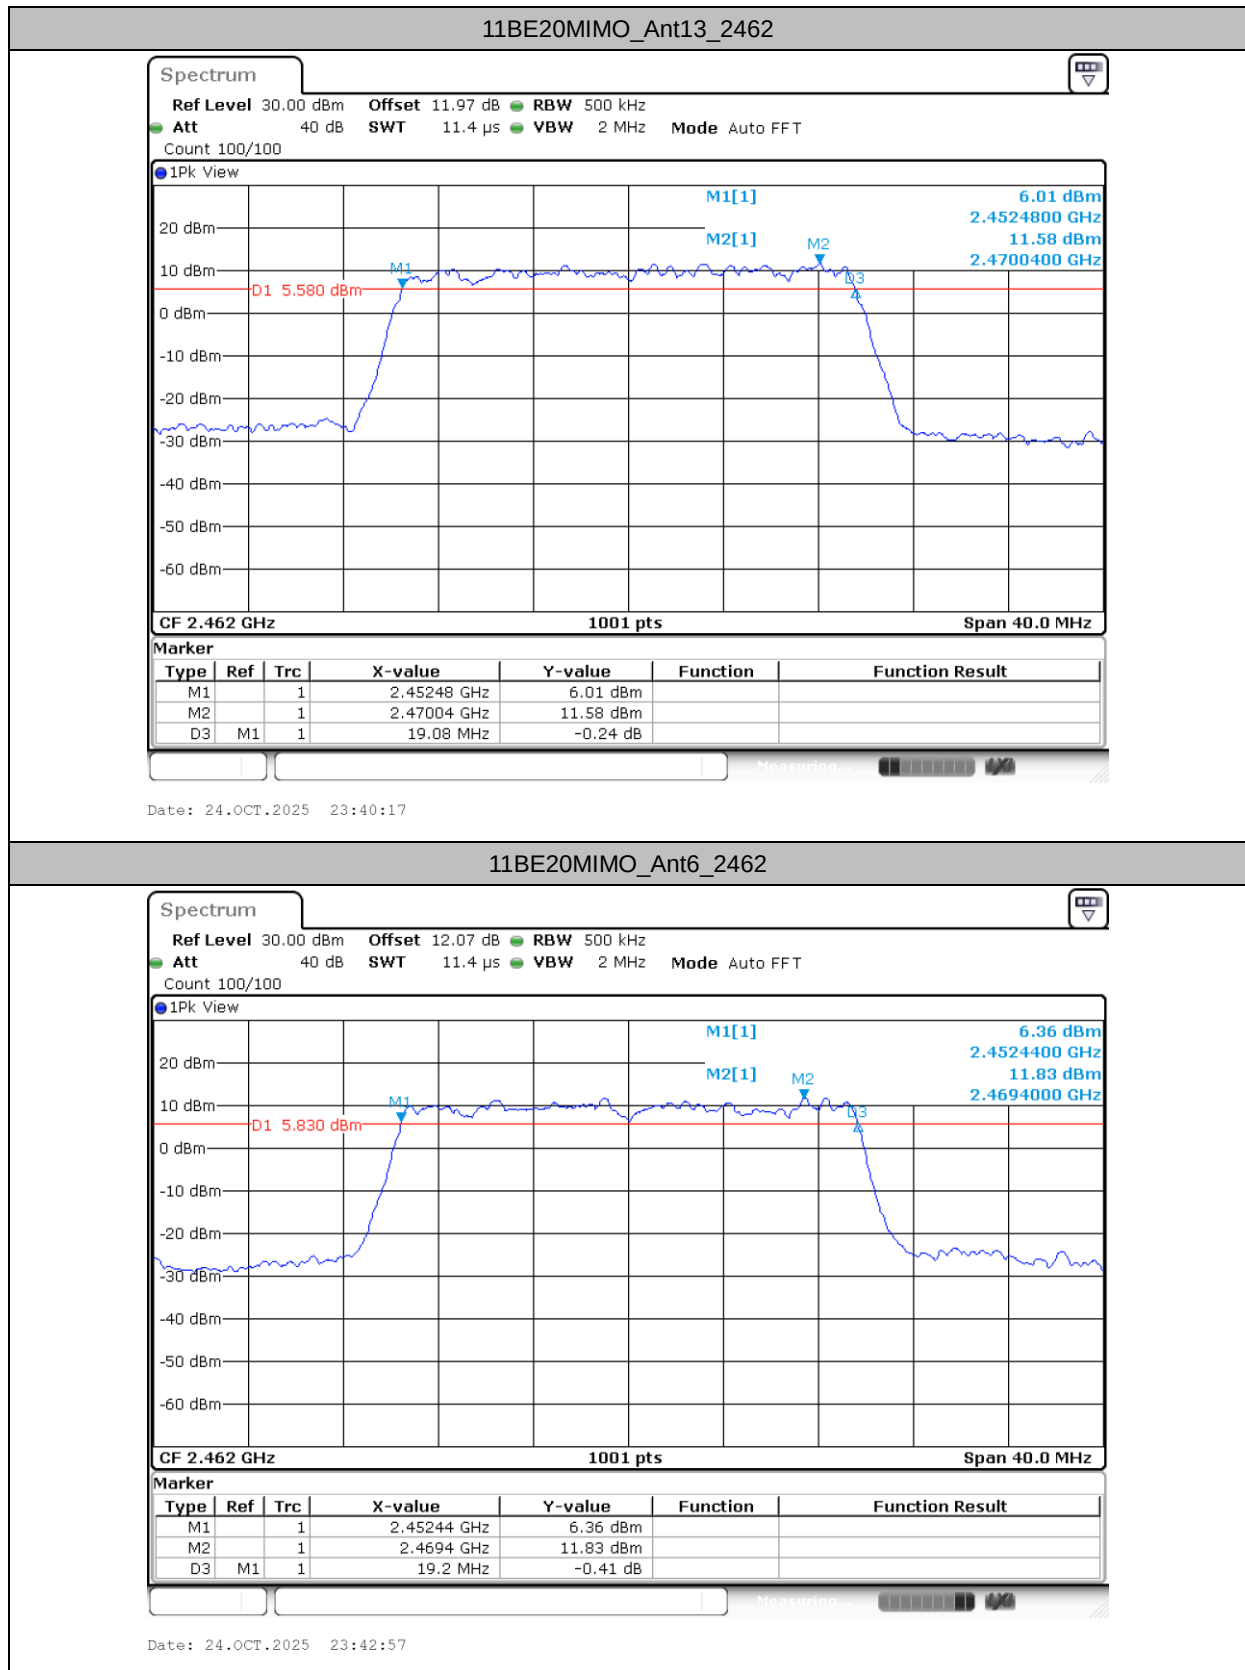

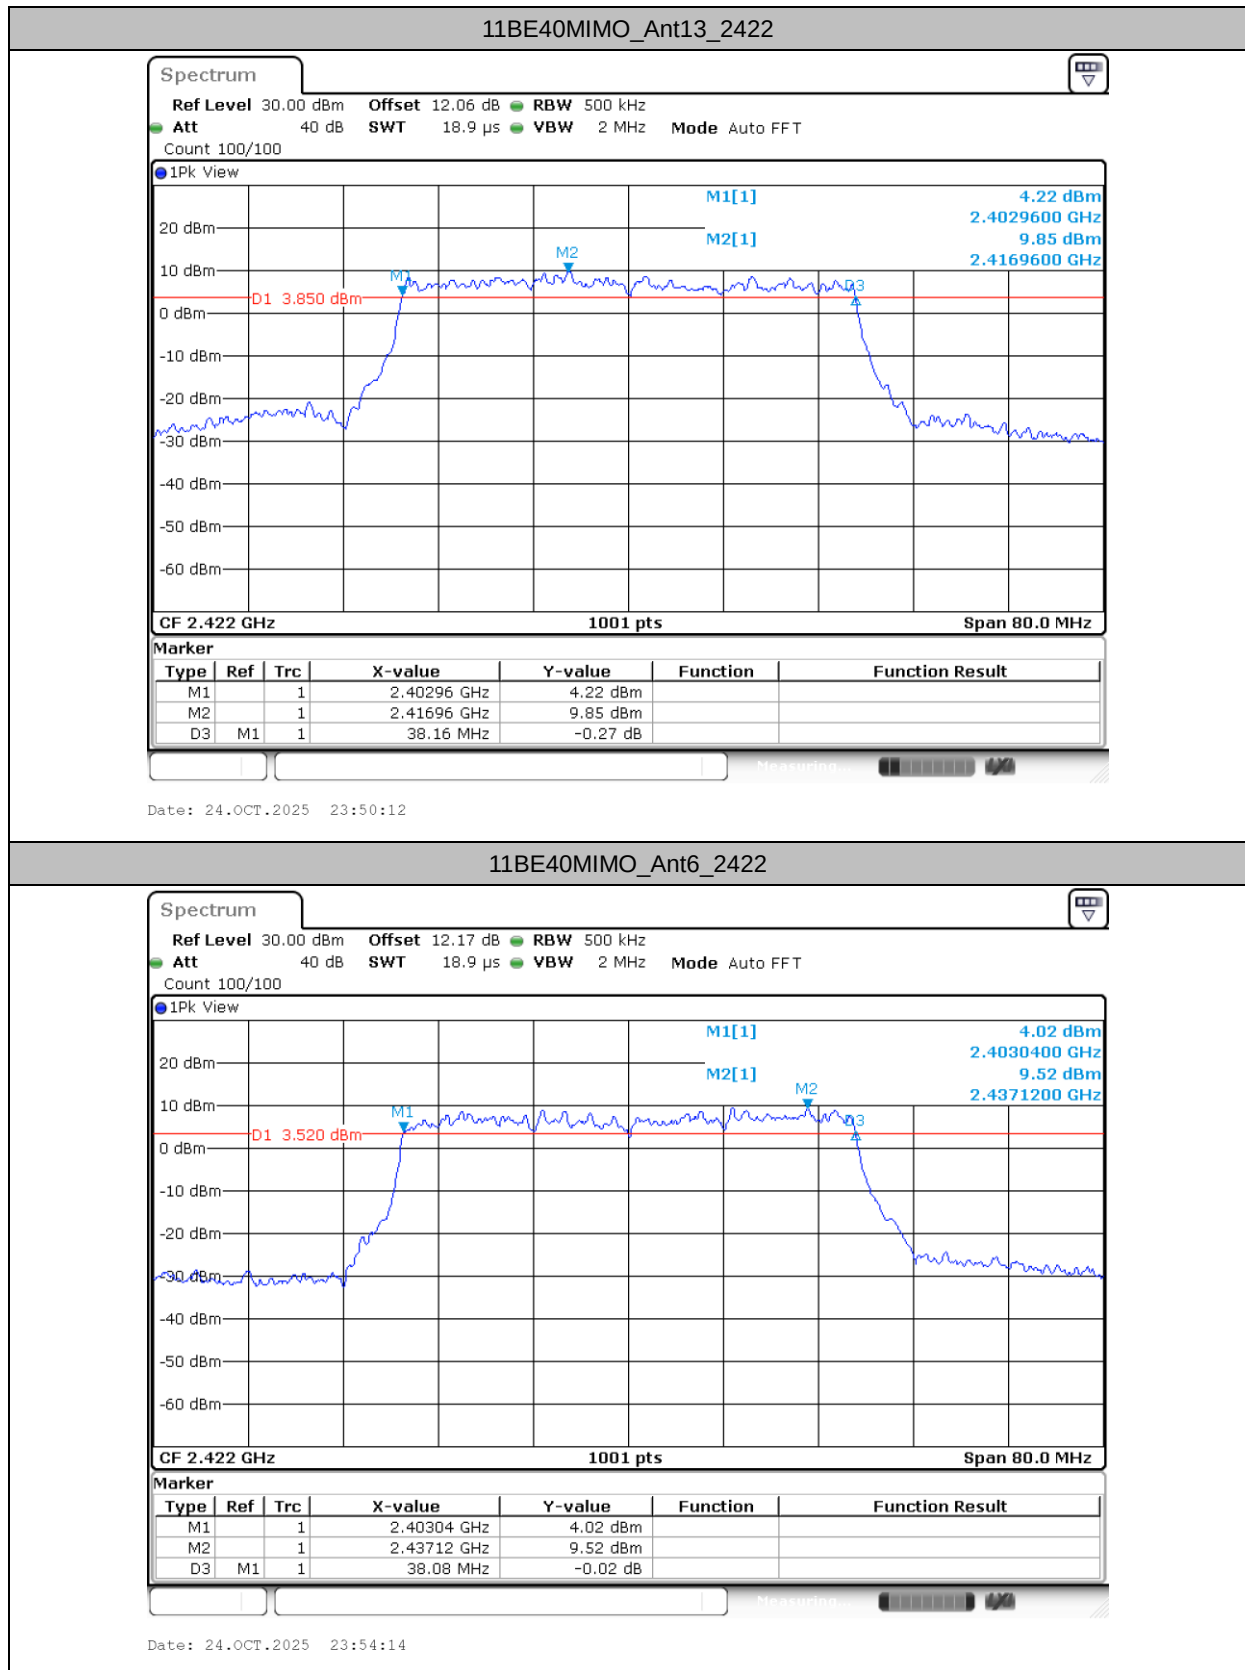

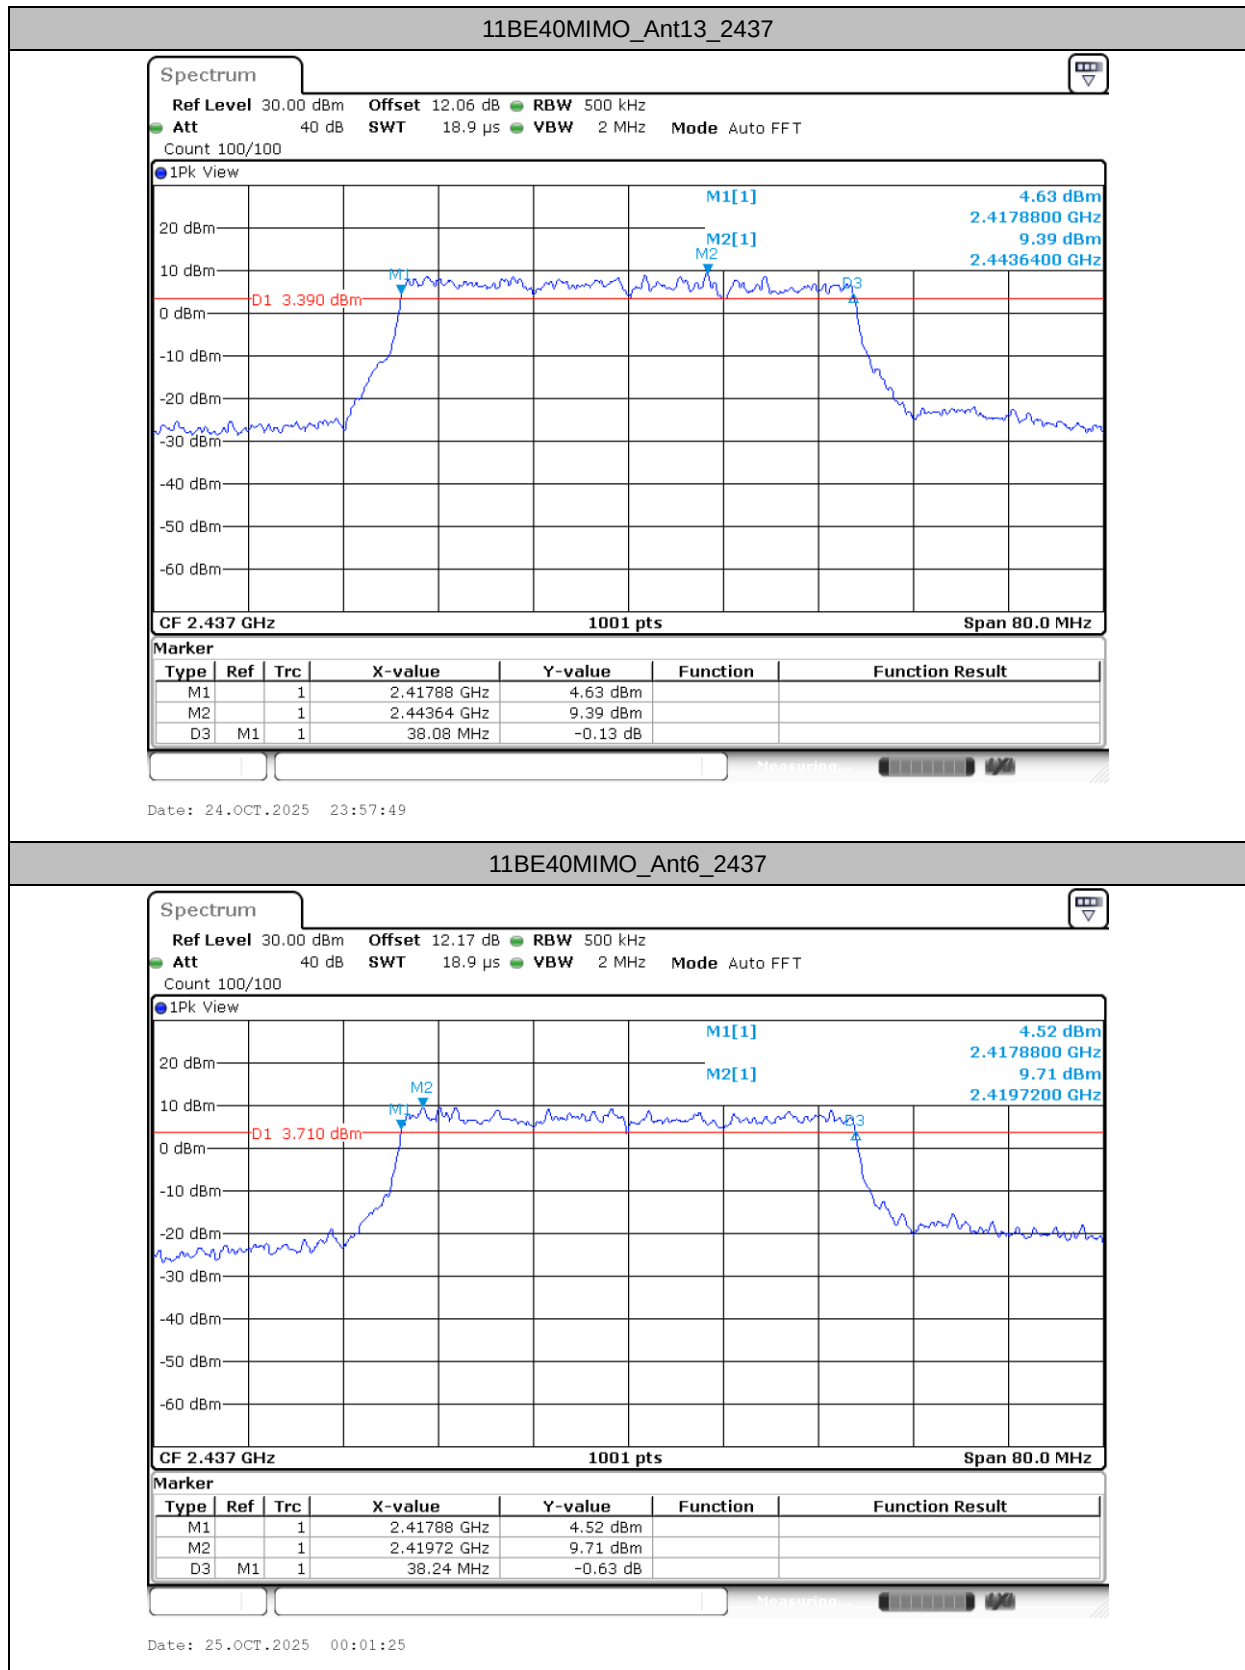

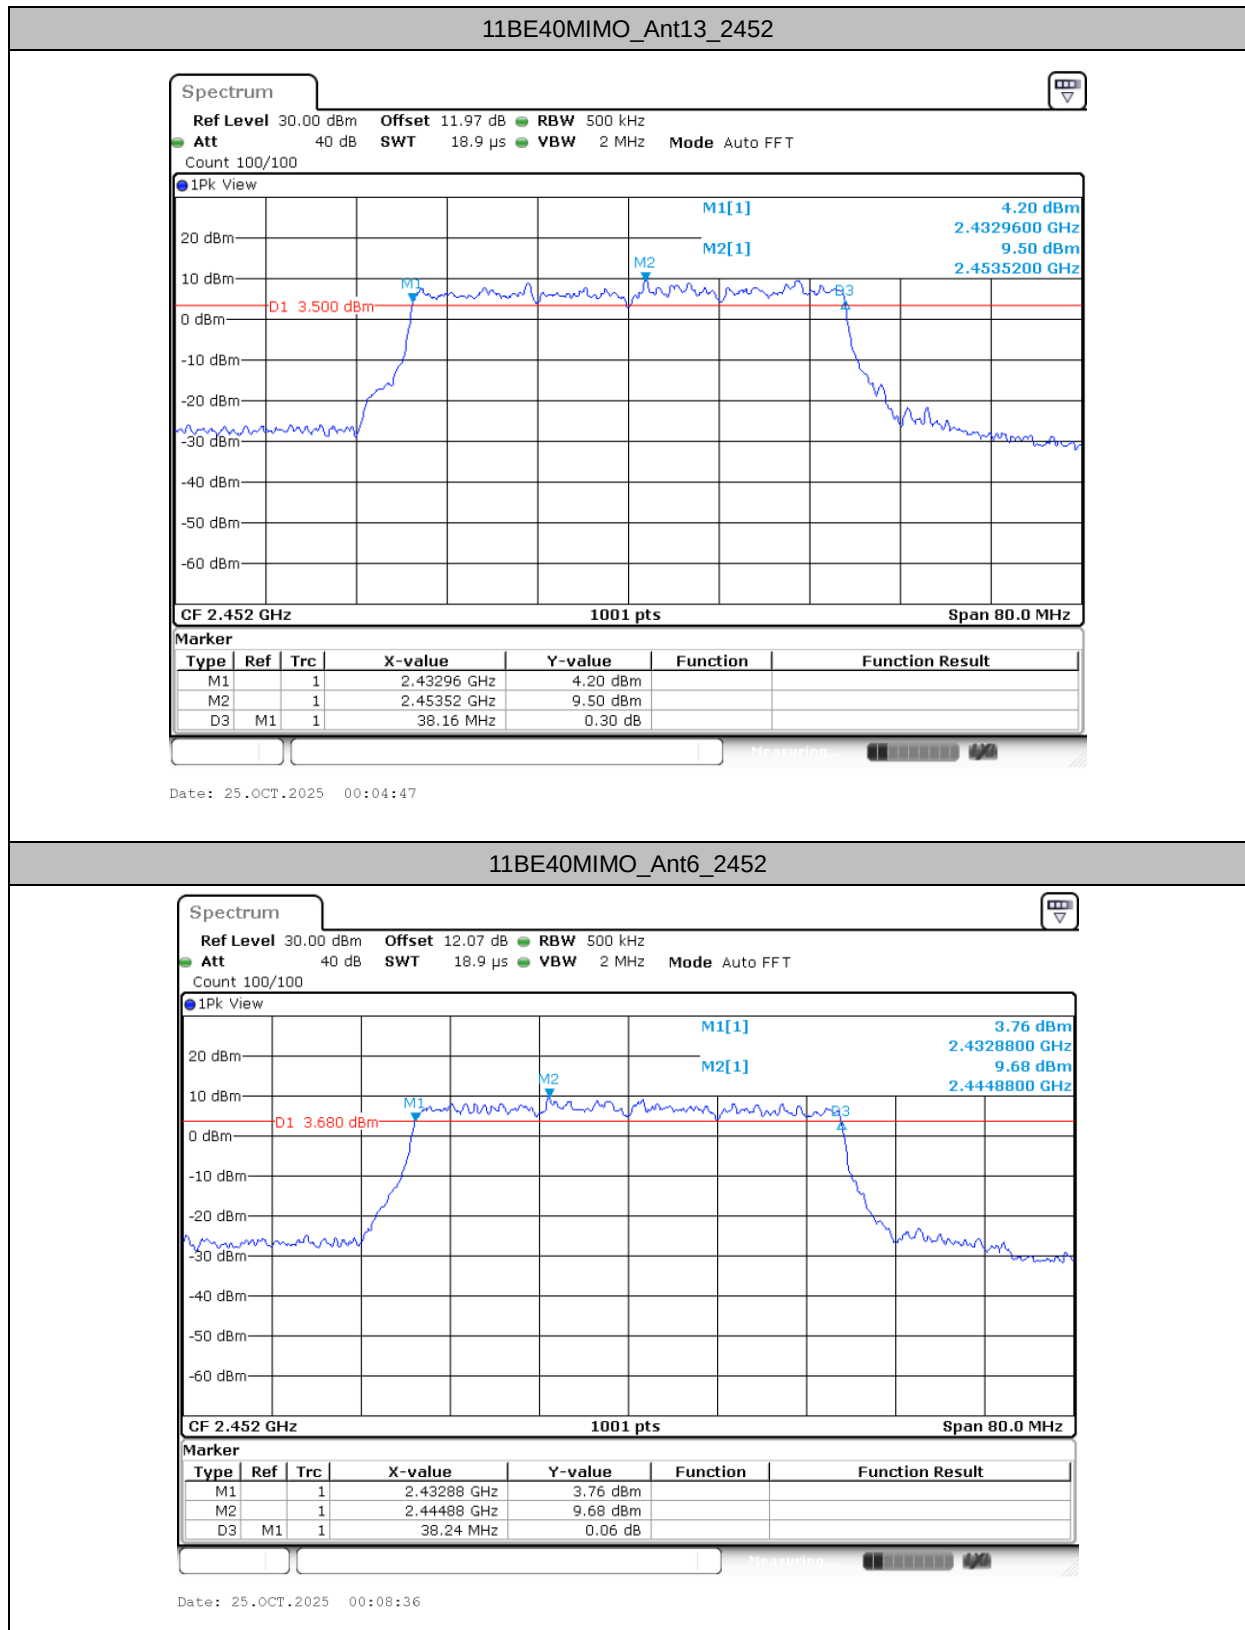



Occupied Channel Bandwidth

Test Result

TestMode	Antenna	Freq(MHz)	OCB [MHz]	FL[MHz]	FH[MHz]
11B-SISO	Ant13	2412	12.779	2405.7726	2418.5513
	Ant6	2412	11.935	2405.9526	2417.8874
	Ant13	2437	12.995	2430.4407	2443.4354
	Ant6	2437	11.811	2431.4086	2443.2194
	Ant13	2462	12.815	2455.6726	2468.4874
	Ant6	2462	12.111	2456.4726	2468.5833
11G-CDD	Ant13	2412	16.994	2403.5208	2420.5151
	Ant6	2412	16.910	2403.7408	2420.6511
	Ant13	2437	17.230	2428.4209	2445.6511
	Ant6	2437	17.078	2428.5928	2445.6711
	Ant13	2462	17.046	2453.5328	2470.5791
	Ant6	2462	17.114	2453.5368	2470.6511
11N20MIMO	Ant13	2412	18.094	2402.9609	2421.0551
	Ant6	2412	17.958	2403.1409	2421.0991
	Ant13	2437	18.398	2427.7329	2446.1311
	Ant6	2437	18.038	2427.9809	2446.0191
	Ant13	2462	18.034	2453.0209	2471.0551
	Ant6	2462	18.042	2453.0329	2471.0751
11N40MIMO	Ant13	2422	36.860	2403.5058	2440.3662
	Ant6	2422	36.724	2403.8258	2440.5501
	Ant13	2437	37.068	2418.4339	2455.5021
	Ant6	2437	35.916	2419.4578	2455.3742
	Ant13	2452	36.900	2433.6498	2470.5501
	Ant6	2452	36.972	2433.5938	2470.5661
11BE20MIMO	Ant13	2412	19.158	2402.4490	2421.6070
	Ant6	2412	18.950	2402.6089	2421.5590
	Ant13	2437	19.202	2427.3570	2446.5590
	Ant6	2437	19.146	2427.4250	2446.5710
	Ant13	2462	19.114	2452.4290	2471.5430
	Ant6	2462	19.186	2452.4610	2471.6470
11BE40MIMO	Ant13	2422	38.044	2403.0179	2441.0621
	Ant6	2422	38.404	2403.0099	2441.4141
	Ant13	2437	38.412	2417.7299	2456.1421
	Ant6	2437	38.924	2417.4260	2456.3501
	Ant13	2452	38.876	2432.7619	2471.6380
	Ant6	2452	38.428	2432.7859	2471.2141



Test Graphs

