




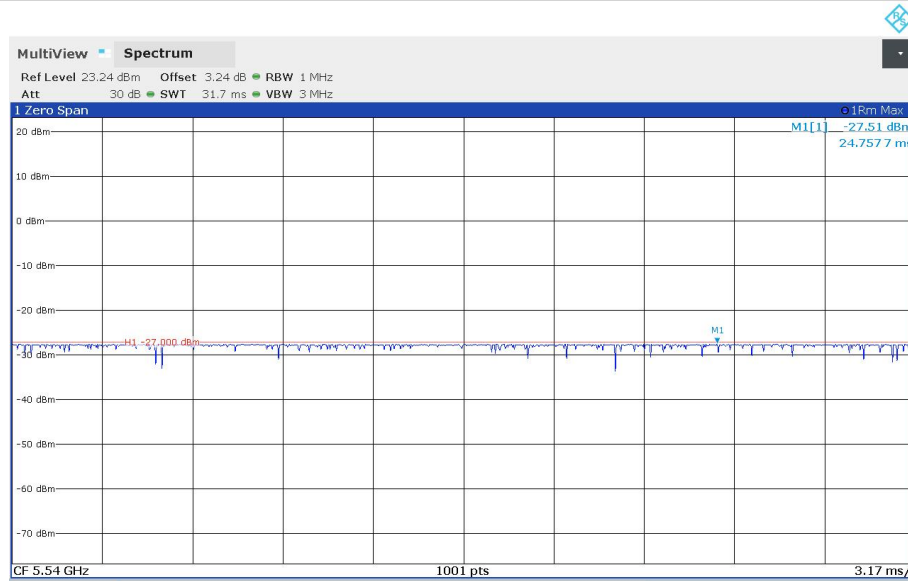


11BE160MIMO_Ant1_5570_Puncturing20- configure-4

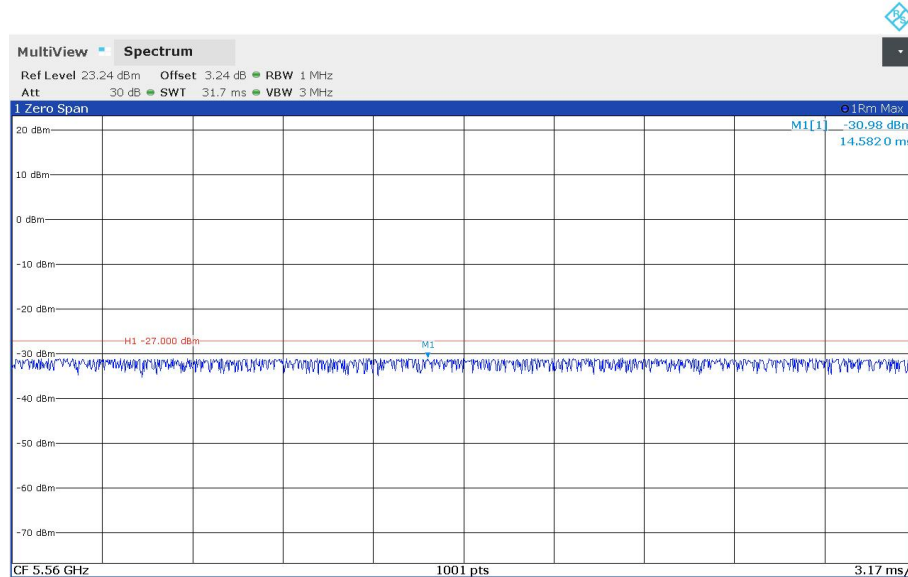


11BE160MIMO_Ant1_5570_Puncturing20- configure-5

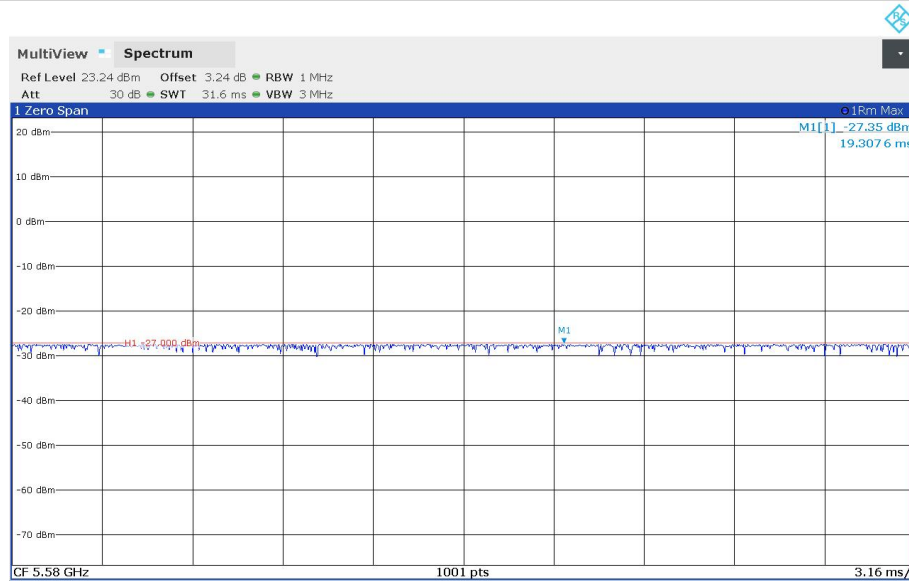


11BE160MIMO_Ant1_5570_Puncturing20- configure-6

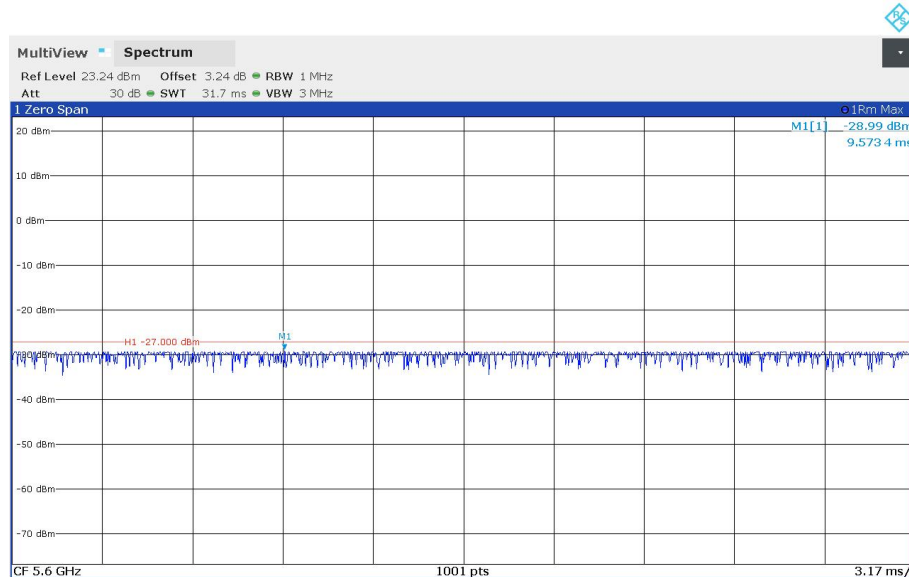


11BE160MIMO_Ant1_5570_Puncturing20- configure-7

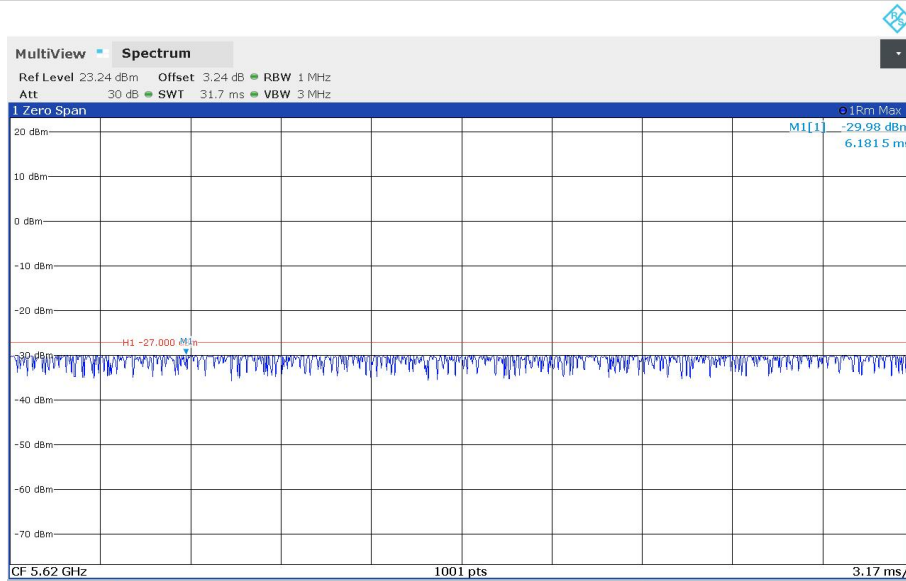


11BE160MIMO_Ant1_5570_Puncturing20- configure-8

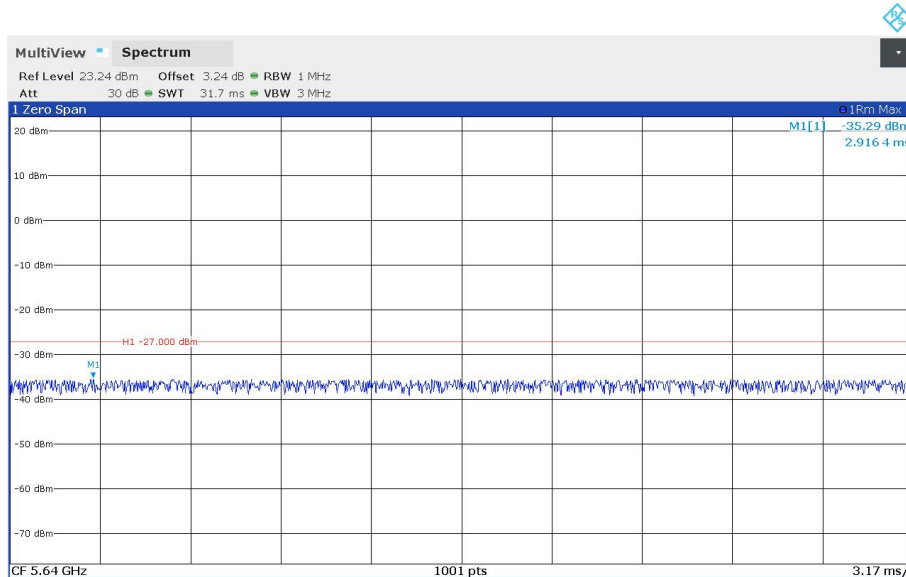


11BE160MIMO_Ant1_5570_Puncturing40- configure-1

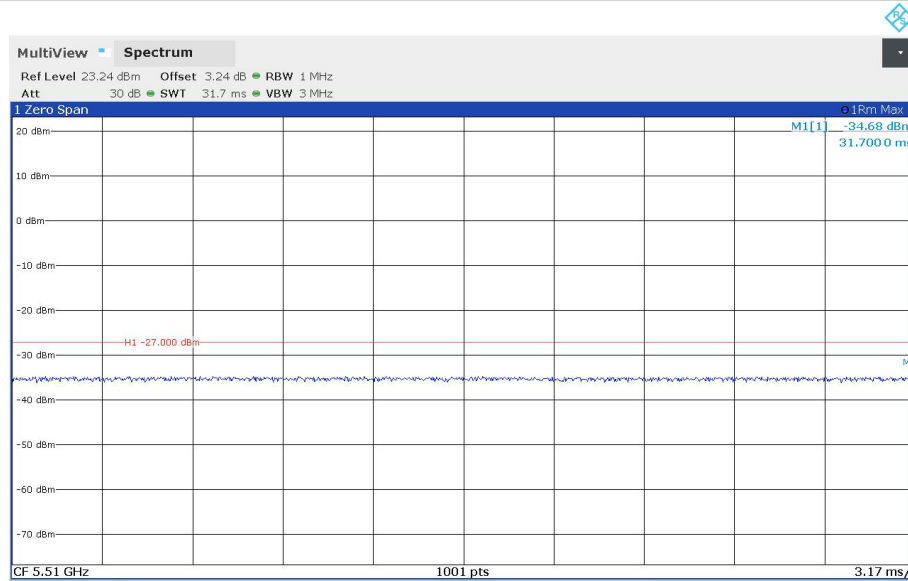


11BE160MIMO_Ant1_5570_Puncturing40- configure-2

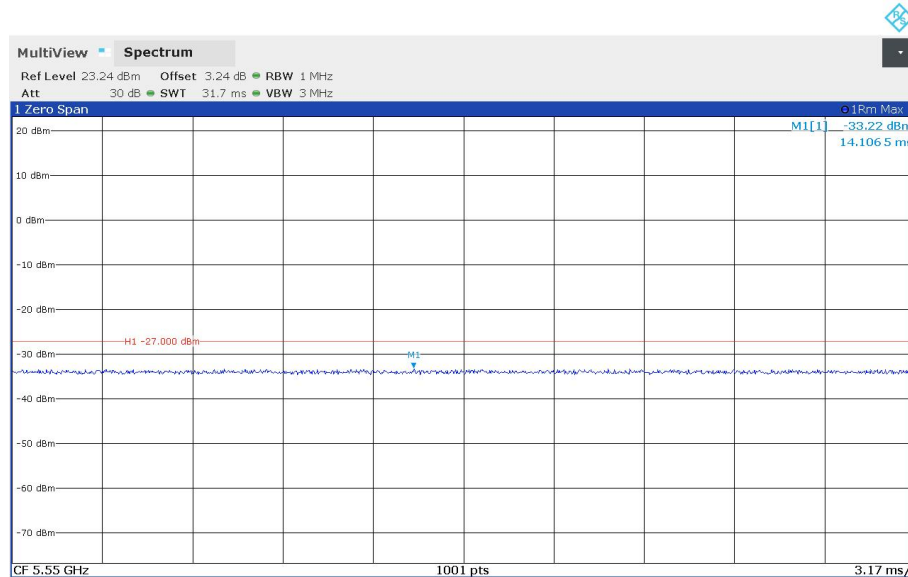

11BE160MIMO_Ant1_5570_Puncturing40- configure-3

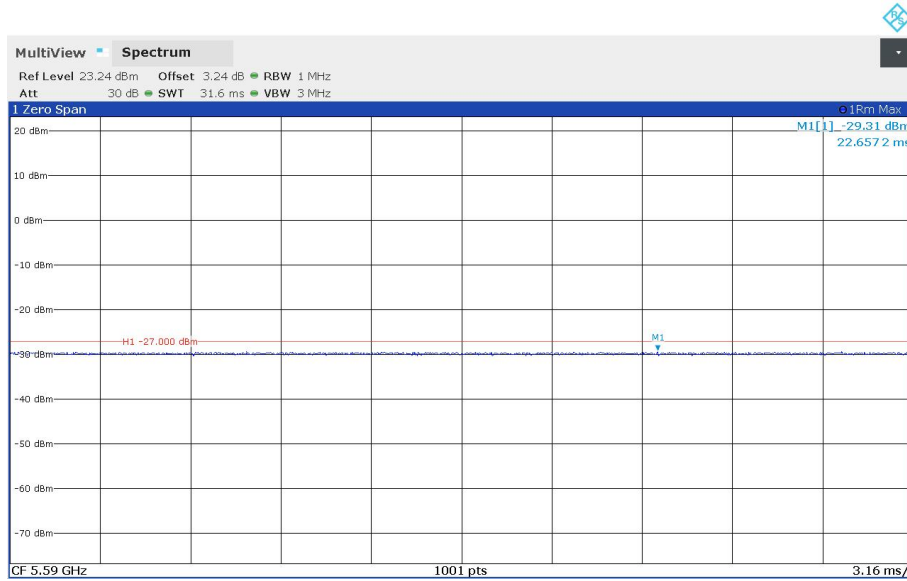

11BE160MIMO_Ant1_5570_Puncturing40- configure-4

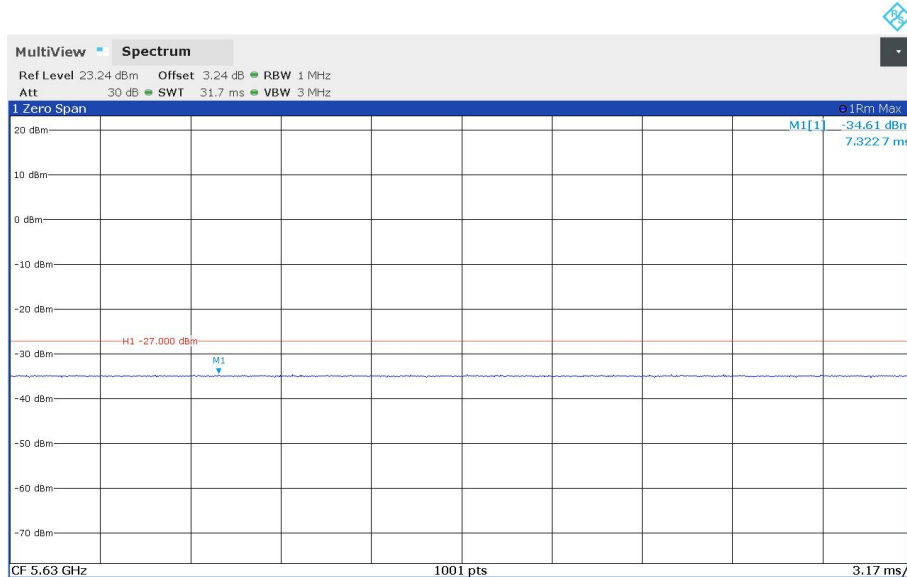

A.5. Antenna Requirement

The antenna of the device is permanently attached. There are no provisions for connection to an external antenna.

The unit complies with the requirement of FCC Part 15.203.

ANNEX B: EUT parameters

Disclaimer: The antenna gain provided by the client may affect the validity of the measurement results in this report, and the client shall bear the impact and consequences arising therefrom.

ANNEX C: Accreditation Certificate



*** END OF REPORT BODY ***