



RADIO EXPOSURE TEST REPORT

FCC ID : 2ABZJ-100-60224-03

Equipment : C6

Brand Name : 

Model Name : C6


Applicant : Mimosa Networks, Inc.
3150 Coronado Drive, Santa Clara, California,
United States, 95054

Manufacturer : Mimosa Networks, Inc.
3150 Coronado Drive, Santa Clara, California,
United States, 95054

Standard : 47 CFR Part 2.1091

The product was received on Jul. 23, 2025, and testing was started from Aug. 05, 2025 and completed on Apr. 23, 2026. We, Sporton International Inc. Hsinchu Laboratory, would like to declare that the tested sample has been evaluated in accordance with the procedures given in 47 CFR Part 2.1091 and shown compliance with the applicable technical standards.

The test results in this variant report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. Hsinchu Laboratory, the test report shall not be reproduced except in full.

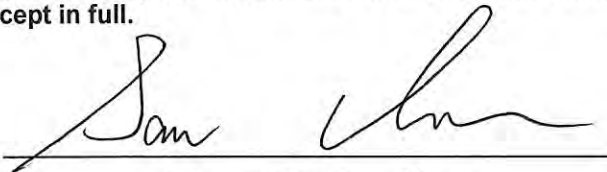

Approved by: Sam Chen

Sporton International Inc. Hsinchu Laboratory

No.8, Ln. 724, Bo'ai St., Zhubei City, Hsinchu County 302010, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description	5
1.1 EUT General Information	5
1.2 Antenna Information	6
1.3 Table for Permissive Change	8
1.4 Accessories	8
1.5 Testing Location	8
2 Maximum Permissible Exposure	9
2.1 Limit of Maximum Permissible Exposure	9
2.2 MPE Calculation Method	9
2.3 Calculated Result and Limit.....	10

Photographs of EUT v01



TEL : 886-3-656-9065
FAX : 886-3-656-9085
Report Template No.: CB-A1_1 Ver1.1



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
2	-	Exposure evaluation	PASS	-

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the chapter "Measurement Uncertainty".

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

Reviewed by: Sam Chen

Report Producer: Lavender Zeng



1 General Description

1.1 EUT General Information

RF General Information			
Evaluation Mode	Frequency Range (MHz)	Operating Frequency (MHz)	Modulation Type
5GHz WLAN	5150-5250	5180-5240	802.11ac: OFDM (BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM)
	5250-5350	5260-5320	802.11ax: OFDMA (BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM)
5GHz WLAN	5470-5725	5500-5720	802.11ac: OFDM (BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM)
	5725-5850	5745-5825	802.11ax: OFDMA (BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM)
6GHz WLAN	5925-6425	5955-6415	802.11ax: OFDMA (BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM)

1.2 Antenna Information

Ant.	Port	Brand	Model Name	Antenna Type	Connector	Gain (dBi)
1	1~8	mimosa	4x4 array of printed patch elements on a printed circuit board	4x4 array of printed patch elements on a printed circuit board	I-PEX	Note 1

Note 1:

Ant.	Port			Gain (dBi)	Cable loss (dB)				
	WLAN 5GHz / 6GHz	Bluetooth	GPS		UNII1	UNII2A	UNII2C	UNII3	UNII5
1	1	-	-	14	1.44	1.46	1.56	1.62	1.77
	2	-	-	14	1.38	1.40	1.53	1.56	1.75
	3	-	-	14	1.30	1.32	1.43	1.48	1.62
	4	-	-	14	1.30	1.32	1.43	1.48	1.62
	5	-	-	14	1.30	1.32	1.43	1.48	1.62
	6	-	-	14	1.30	1.32	1.43	1.48	1.62
	7	-	-	14	1.30	1.32	1.43	1.48	1.62
	8	-	-	14	1.30	1.32	1.43	1.48	1.62

Ant.	Net Gain (dBi)				
	UNII1	UNII2A	UNII2C	UNII3	UNII5
1	12.56	12.54	12.44	12.38	12.23
	12.62	12.60	12.47	12.44	12.25
	12.70	12.68	12.57	12.52	12.38
	12.70	12.68	12.57	12.52	12.38
	12.70	12.68	12.57	12.52	12.38
	12.70	12.68	12.57	12.52	12.38
	12.70	12.68	12.57	12.52	12.38
	12.70	12.68	12.57	12.52	12.38

Note 2: The EUT is equipped with three antennas: Antenna 1 is used for WLAN, Antenna 2 for Bluetooth, and Antenna 3 for GPS. The EUT doesn't enable the Bluetooth function at this time.

Note 3: The above information was declared by manufacturer.

Note 4: Directional gain information.

<WLAN 5GHz>

Type	Maximum Output Power	Power Spectral Density
Non-BF	Directional gain = Max.gain + array gain. For power measurements on IEEE 802.11 devices Array Gain = 0 dB (i.e., no array gain) for NANT ≤ 4; Array Gain = 0 dB (i.e., no array gain) for channel widths ≥ 40 MHz for any NANT; Array Gain = 5 log(NANT/NSS) dB or 3 dB, whichever is less, for 20-MHz channel widths with NANT ≥ 5.	$Directional\ Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^N \left[\sum_{k=1}^N E_{j,k} ^2 \right]}{N_{ANT}} \right]$
BF	$Directional\ Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^N \left[\sum_{k=1}^N E_{j,k} ^2 \right]}{N_{ANT}} \right]$	$Directional\ Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^N \left[\sum_{k=1}^N E_{j,k} ^2 \right]}{N_{ANT}} \right]$

Ex.

Directional Gain (NSS1) formula :

$$Directional\ Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^N \left[\sum_{k=1}^N |E_{j,k}|^2 \right]}{N_{ANT}} \right]$$

$$NSS1(g1,1) = 10^{G1/20} ; NSS1(g1,2) = 10^{G2/20} ; NSS1(g1,3) = 10^{G3/20} ; NSS1(g1,4) = 10^{G4/20}$$

$$g_{j,k} = (NSS1(g1,1) + NSS1(g1,2) + NSS1(g1,3) + NSS1(g1,4))^2$$

$$DG = 10 \log[(NSS1(g1,1) + NSS1(g1,2) + NSS1(g1,3) + NSS1(g1,4))^2 / N_{ANT}] \Rightarrow 10$$

$$\log[(10^{G1/20} + 10^{G2/20} + 10^{G3/20} + 10^{G4/20})^2 / N_{ANT}]$$

Where ;

Cross-Polarized Antenna

5G UNII-1 G1= 12.56 dBi ; G2= 12.62 dBi ; G3= 12.7 dBi ; G4= 12.7 dBi ; G5= 12.7 dBi ;

G6= 12.7 dBi ; G7= 12.7 dBi ; G8= 12.7 dBi ; DG= 12.67dBi

5G UNII-2A G1= 12.54 dBi ; G2= 12.6 dBi ; G3= 12.68 dBi ; G4= 12.68 dBi ; G5= 12.68 dBi ;

G6= 12.68 dBi ; G7= 12.68 dBi ; G8= 12.68 dBi ; DG= 12.65dBi

5G UNII-2C G1= 12.44 dBi ; G2= 12.47 dBi ; G3= 12.57 dBi ; G4= 12.57 dBi ; G5= 12.57 dBi ;

G6= 12.57 dBi ; G7= 12.57 dBi ; G8= 12.57 dBi ; DG= 12.54dBi

5G UNII-3 G1= 12.38 dBi ; G2= 12.44 dBi ; G3= 12.52 dBi ; G4= 12.52 dBi ; G5= 12.52 dBi ;

G6= 12.52 dBi ; G7= 12.52 dBi ; G8= 12.52 dBi ; DG= 12.49dBi

6G UNII-5 G1= 12.23 dBi ; G2= 12.25 dBi ; G3= 12.38 dBi ; G4= 12.38 dBi ; G5= 12.38 dBi ;

G6= 12.38 dBi ; G7= 12.38 dBi ; G8= 12.38 dBi ; DG= 12.38dBi

<For 5GHz function>

For IEEE 802.11ac/ax (8TX/8RX, Nss4)

Port 1~8 can be used as transmitting/receiving antenna.

Port 1~8 could transmit/receive simultaneously.

<For 6GHz function>

For IEEE 802.11ax (8TX/8RX, Nss4)

Port 1~8 can be used as transmitting/receiving antenna.

Port 1~8 could transmit/receive simultaneously.



1.3 Table for Permissive Change

This product is an extension of original one reported under Sporton project number: FA572206

Below is the table for the change of the product with respect to the original one.

Modifications	Performance Checking
Add Fixed client (6FC) for this device via Firmware by factory.	MPE for UNII-5 Fixed client (6FC)

Note: Other test results are based on original test report.

1.4 Accessories

Power	Brand	Model	Rating
PoE	mimosa	G0566-500-120	Input: 100-240V~50/60Hz, MAX 1.5A Output: 50.0V, 1.2A, 60.0W
Others			
Plastic rotating cover*1			
Power cable*1: Non-Shielding, 0.75m			

1.5 Testing Location

Testing Location Information	
Test Lab. : Sporton International Inc. Hsinchu Laboratory	
Hsinchu	ADD: No.8, Ln. 724, Bo'ai St., Zhubei City, Hsinchu County 302010, Taiwan (R.O.C.)
(TAF: 3787)	TEL: 886-3-656-9065 FAX: 886-3-656-9085
	Test site Designation No. TW3787 with FCC.
	Conformity Assessment Body Identifier (CABID) TW3787 with ISCED.



2 Maximum Permissible Exposure

2.1 Limit of Maximum Permissible Exposure

(A) Limits for Occupational / Controlled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-3.0	614	1.63	*(100)	<6
3.0-30	1842/f	4.89/f	*(900/f ²)	<6
30-300	61.4	0.163	1.0	<6
300-1500	-	-	f/300	<6
1500-100,000	-	-	5	<6

(B) Limits for General Population / Uncontrolled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-1.34	614	1.63	*(100)	<30
1.34-30	824/f	2.19/f	*(180/f ²)	<30
30-300	27.5	0.073	0.2	<30
300-1500	-	-	f/1500	<30
1500-100,000	-	-	1.0	<30

Note: f = frequency in MHz ; *Plane-wave equivalent power density

2.2 MPE Calculation Method

The MPE was calculated at 20 cm to show compliance with the power density limit.

The following formula was used to calculate the Power Density:

$$E \text{ (V/m)} = \frac{\sqrt{30 \times P \times G}}{d} \quad \text{Power Density: } Pd \text{ (W/m}^2\text{)} = \frac{E^2}{377}$$

E = Electric field (V/m)

P = RF output power (W)

G = EUT Antenna numeric gain (numeric)

d = Separation distance between radiator and human body (m)

The formula can be changed to

$$Pd = \frac{30 \times P \times G}{377 \times d^2}$$



2.3 Calculated Result and Limit

Exposure Environment: General Population / Uncontrolled Exposure

Mode	DG (dBi)	Power (dBm)	EIRP (dBm)	Tolerance (dB)	Tune-up EIRP (dBm)	Distance (cm)	S (mW/cm ²)	S Limit (mW/cm ²)
5.2G;D1D	12.70	17.26	29.96	0.01	29.97	20	0.19757	1.00000
5.3G;D1D	12.68	16.72	29.40	0.50	29.90	20	0.19442	1.00000
5.6G;D1D	12.57	17.05	29.62	0.35	29.97	20	0.19757	1.00000
5.8G;D1D	12.52	19.45	31.97	0.50	32.47	20	0.35134	1.00000
6.2G;D1D (6FX)	-	-	29.97	0.02	29.99	20	0.19849	1.00000
6.2G;D1D (6FC)	12.38	21.56	33.94	0.50	34.44	20	0.55299	1.00000

—————THE END—————