

FCC &ISED Radio Test Report**FCC ID: 2AC23-WT5L****IC: 12290A-WT5L****The report concerns: Original Grant**

Report Reference No. : 20EFAS11141 10941
Date Sample(s) Received : 2020-11-27
Date of Tested : 2020-11-27 to 2020-12-15
Date of issue : 2020-12-17
Testing Laboratory : DongGuan ShuoXin Electronic Technology Co., Ltd.
Address : Zone A, 1F, No. 6, XinGang Road YuanGang Street,
XinAn District, ChangAn Town, DongGuan City,
GuangDong, China

Applicant's name : Hui Zhou Gaoshengda Technology Co., LTD
Address : NO.75 Zhongkai Development Area, Huizhou,
Guangdong, China
Manufacturer : Hui Zhou Gaoshengda Technology Co., LTD

Equipment : WIFI +BT Module
Trade Mark : GSD
Model : WT5LM2001
Ratings : I/P: DC 3.3V

Test Engineer:




Blue Qiu

Responsible Engineer :



Smile Wang

Authorized Signatory:



King Wang

Table of Contents	Page
1. . TEST REPORT DECLARE	4
2. SUMMARY OF TEST RESULTS	5
2.1. MEASUREMENT UNCERTAINTY	6
3. GENERAL INFORMATION	7
3.1. GENERAL DESCRIPTION OF EUT	7
3.2. TEST MODES	9
3.3. PARAMETERS OF TEST SOFTWARE	11
3.4. BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	12
3.5. SUPPORT UNITS	12
3.6. TEST ENVIRONMENT CONDITIONS	12
3.7. DUTY CYCLE	13
4. AC POWER LINE CONDUCTED EMISSIONS TEST	14
4.1. LIMIT	14
4.2. TEST PROCEDURE	14
4.3. MEASUREMENT INSTRUMENTS LIST	14
4.4. TESTSETUP	15
4.5. EUT OPERATION CONDITIONS	15
4.6. TEST RESULTS	16
5. RADIATED EMISSIONSTEST	18
5.1. LIMIT	18
5.2. TEST PROCEDURE	19
5.3. MEASUREMENT INSTRUMENTS LIST	19
5.4. TESTSETUP	20
5.5. EUT OPERATION CONDITIONS	20
5.6. TEST RESULTS - 9 KHZ to 30MHZ	21
5.7. TEST RESULTS - 30 MHz TO 1000 MHz	22
5.8. TEST RESULTS - ABOVE1000 MHz(BAND EDGE)	24
5.9. TEST RESULTS - ABOVE1000 MHz (HARMONIC)	52
6. BANDWIDTH TEST	84
6.1. LIMIT	84
6.2. TEST PROCEDURE AND SETTING	84
6.3. MEASUREMENT INSTRUMENTS LIST	84
6.4. TEST SETUP	85

Table of Contents	Page
6.5. EUT OPERATION CONDITIONS	85
6.6. TEST RESULTS	86
7. MAXIMUM OUTPUT POWER TEST	90
7.1. LIMIT	90
7.2. TEST PROCEDURE AND SETTING	90
7.3. MEASUREMENT INSTRUMENTS LIST	90
7.4. TEST SETUP	90
7.5. EUT OPERATION CONDITIONS	90
7.6. TEST RESULTS	91
8. POWER SPECTRAL DENSITY TEST	97
8.1. LIMIT	97
8.2. TEST PROCEDURE AND SETTING	97
8.3. MEASUREMENT INSTRUMENTS LIST	97
8.4. TEST SETUP	97
8.5. EUT OPERATION CONDITIONS	97
8.6. TEST RESULTS	98
9. FREQUENCY STABILITY MEASUREMENT	105
9.1. LIMIT	105
9.2. TEST PROCEDURE AND SETTING	105
9.3. MEASUREMENT INSTRUMENTS LIST	105
9.4. TEST SETUP	105
9.5. EUT OPERATION CONDITIONS	105
9.6. TEST RESULTS	106

1. TEST REPORT DECLARE

Applicant	Hui Zhou Gaoshengda Technology Co., LTD
Address	NO.75 Zhongkai Development Area, Huizhou, Guangdong, China
Manufacturer	Hui Zhou Gaoshengda Technology Co., LTD
Address	No.2,Jin-da Road, Huinan High-tech Industrial Park, Hui-ao Avenue, Huizhou City, Guangdong, China
Factory	Hui Zhou Gaoshengda Technology Co., LTD
Address	No.2,Jin-da Road, Huinan High-tech Industrial Park, Hui-ao Avenue, Huizhou City, Guangdong, China
Equipment	WIFI +BT Module
Model No.	WT5LM2001
Trade Mark	GSD
Standard	FCC Part15, Subpart E(15.407) RSS-247 Issue 2, Feb. 2017 RSS-Gen Issue 5, Apr. 2018 ANSI C63.10-2013 FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01

We Declare:

The equipment described above is tested by DongGuan ShuoXin Electronic Technology Co., Ltd(ATT). and in the configuration tested the equipment complied with the standards specified above. The test results are contained in this test report and DongGuan ShuoXin Electronic Technology Co., Ltd.(ATT) is assumed of full responsibility for the accuracy and completeness of these tests.

ATT is not responsible for the sampling stage, so the results only apply to the sample as received.

ATT's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. ATT shall have no liability for any declarations, inferences or generalizations drawn by the client or others from ATT issued reports.

2 SUMMARY OF TEST RESULTS

The EUT have been tested according to the applicable standards as referenced below:

Standard(s) Section		Test Item	Judgment	Remark
FCC	IC			
15.207 15.407(b)	RSS-GEN 8.8	AC Power Line Conducted Emissions	PASS	-----
15.407(b) 15.205(a) 15.209(a)	RSS-247 6.2.1.2 RSS-247 6.2.4.2 RSS-GEN 8.9 RSS-GEN 8.10	Radiated Emissions	PASS	-----
15.407(a) 15.407(e)	RSS-247 6.2.1.1 RSS-247 6.2.2.1 RSS-247 6.2.3.1 RSS-247 6.2.4.1 RSS-GEN 6.7	Spectrum Bandwidth	PASS	-----
15.407(a)	RSS-247 6.2.1.1 RSS-247 6.2.2.1 RSS-247 6.2.3.1 RSS-247 6.2.4.1	Maximum Output Power	PASS	-----
15.407(a)	RSS-247 6.2.1.1 RSS-247 6.2.2.1 RSS-247 6.2.3.1 RSS-247 6.2.4.1	Power Spectral Density	PASS	-----
15.407(g)	RSS-GEN 6.11	Frequency Stability	PASS	-----
15.203	RSS-247 6.4(a)	Antenna Requirements	PASS	Note(4)
15.407(c)	RSS-GEN 8.8	Automatically Discontinue Transmission	PASS	Note(2)

Note:

- (1) "N/A" denotes test is not applicable in this test report.
- (2) During no any information transmission, the EUT can automatically discontinue transmission and become standby mode for power saving. the EUT can detect the controlling signal of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission.
- (3) For UNII-1 this device was functioned as a
☐ Access point device ☒ Client device
- (4) The device what use a permanently attached antenna were considered sufficient to comply with the provisions of 15.203.

2.1 MEASUREMENT UNCERTAINTY

Test Item	Uncertainty
Uncertainty for Conduction emission test (9kHz-150kHz)	3.7 dB
Uncertainty for Conduction emission test (150kHz-30MHz)	3.3 dB
Uncertainty for Radiation Emission test (30MHz-200MHz)	4.60 dB (Polarize: V)
	4.60 dB (Polarize: H)
Uncertainty for Radiation Emission test (200MHz-1GHz)	6.10 dB (Polarize: V)
	5.08 dB (Polarize: H)
Uncertainty for Radiation Emission test (1GHz-6GHz)	5.01 dB (Polarize: V)
	5.01 dB (Polarize: H)
Uncertainty for Radiation Emission test (6GHz-18GHz)	5.26 dB (Polarize: V)
	5.26 dB (Polarize: H)
Uncertainty for Radiation Emission test (18GHz-40GHz)	5.06 dB (Polarize: V)
	5.06 dB (Polarize: H)
Uncertainty for radio frequency	$\pm 0.048\text{kHz}$
Uncertainty for conducted RF Power	$\pm 0.32\text{dB}$

Note:

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

Test Facility:

The Test site used by DongGuan ShuoXin Electronic Technology Co., Ltd. to collect test data is located on the Zone A, 1F, No. 6, XinGang Road YuanGang Street, XinAn District, ChangAn Town, DongGuan City, GuangDong, China

The test facility is recognized, certified, or accredited by the following organizations:

Item	Registration No.	Expiration Date
CNAS	L3098	2024-08-27
A2LA	4893.01	2022-06-30
Innovation, Science and Economic Development Canada (ISED)	11033A	2022-06-30
Federal Communications Commission (FCC)	171688 Designation No.:CN1235	2022-06-30

3 GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Equipment	WIFI+BT Module	
Brand Name	GSD	
Test Model	WT5LM2001	
Series Model	N/A	
Model Difference(s)	N/A	
Hardware Version	V1.0	
Software Version	V1.0	
Power Source	Supplied from USB.	
Power Rating	DC 3.3V	
Operation Frequency Bands	UNII-1: 5150 MHz~5250 MHz UNII-3: 5725 MHz~5850 MHz	
Modulation Type	OFDM	
Bit Rate of Transmitter	Up to 866.6Mbps	
Operating Mode	IEEE 802.11a: 1TX(Ant 1 or Ant 2) IEEE 802.11n (HT20): 2TX(Ant 1+Ant 2) IEEE 802.11n (HT40): 2TX(Ant 1+Ant 2)	
Antenna Information	Antenna Type: PIFA	Maximum Peak Gain:3dBi
Maximum Output Power for UNII-1 For FCC	IEEE 802.11a: 16.81dBm (0.0480W) IEEE 802.11n (HT20): 16.72dBm (0.0768 W) IEEE 802.11n (HT40): 16.78dBm (0.0739 W)	
Maximum EIRP Output Power for UNII-1 For IC	IEEE 802.11a: 19.81dBm (0.0957W) IEEE 802.11n (HT20): 22.73dBm (0.1600 W) IEEE 802.11n (HT40): 22.79dBm (0.1592 W)	
Maximum Output Power for UNII-3	IEEE 802.11a: 16.71dBm (0.0469 W) IEEE 802.11n (HT20): 18.69dBm (0.0708 W) IEEE 802.11n (HT40): 18.94dBm (0.0725 W)	

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
2. Channel List:

IEEE 802.11a IEEE 802.11n (HT20)		IEEE 802.11n (HT40)	
UNII-1		UNII-1	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	38	5190
40	5200	46	5230
44	5220		
48	5240		

IEEE 802.11a IEEE 802.11n (HT20)		IEEE 802.11n (HT40)	
UNII-3		UNII-3	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
149	5745	151	5755
153	5765	159	5795
157	5785		
161	5805		
165	5825		

3.2 TEST MODES

The test system was pre-tested based on the consideration of all possible combinations of EUT operation mode.

Pretest Mode	Description
Mode 1	TX A Mode / CH36, CH40, CH48 (UNII-1)
Mode 2	TX N (HT20) Mode / CH36, CH40, CH48 (UNII-1)
Mode 3	TX N (HT40) Mode / CH38, CH46 (UNII-1)
Mode 4	TX A Mode / CH149,CH157,CH165 (UNII-3)
Mode 5	TX N (HT20) Mode / CH149,CH157,CH165 (UNII-3)
Mode 6	TX N (HT40) Mode / CH151,CH159 (UNII-3)
Mode 7	TX N(HT20) Mode / CH48 (UNII-1)

Following mode(s) as (were) found to be the worst case(s) and selected for the final test.

AC power line conducted emissions test	
Final Test Mode	Description
Mode 7	TX N(HT20) Mode / CH48 (UNII-1)

Radiated emissions test - Below 1GHz	
Final Test Mode	Description
Mode 7	TX N(HT20) Mode / CH48 (UNII-1)

Radiated emissions test - Above 1GHz	
Final Test Mode	Description
Mode 1	TX A Mode / CH36, CH40, CH48 (UNII-1)
Mode 2	TX N (HT20) Mode / CH36, CH40, CH48 (UNII-1)
Mode 3	TX N (HT40) Mode / CH38, CH46 (UNII-1)
Mode 4	TX A Mode / CH149,CH157,CH165 (UNII-3)
Mode 5	TX N (HT20) Mode / CH149,CH157,CH165 (UNII-3)
Mode 6	TX N (HT40) Mode / CH151,CH159 (UNII-3)

Conducted test	
Final Test Mode	Description
Mode 1	TX A Mode / CH36, CH40, CH48 (UNII-1)
Mode 2	TX N (HT20) Mode / CH36, CH40, CH48 (UNII-1)
Mode 3	TX N (HT40) Mode / CH38, CH46 (UNII-1)
Mode 4	TX A Mode / CH149,CH157,CH165 (UNII-3)
Mode 5	TX N (HT20) Mode / CH149,CH157,CH165 (UNII-3)
Mode 6	TX N (HT40) Mode / CH151,CH159 (UNII-3)

Note:


- (1) For radiated emission below 1 GHz and AC power line conducted emissions test, the IEEE 802.11n20channel 48 is found to be the worst case and recorded.

3.3 PARAMETERS OF TEST SOFTWARE

UNII-1			
Test Software	Realtek 11ac 8822B PCIE WLAN MP		
Test Frequency (MHz)	5180	5200	5240
IEEE 802.11a	29	29	28
IEEE 802.11n (HT20)	28	28	27
Test Frequency (MHz)	5190	5230	
IEEE 802.11n (HT40)	28	28	

UNII-3			
Test Software	Realtek 11ac 8822B PCIE WLAN MP		
Test Frequency (MHz)	5745	5785	5825
IEEE 802.11a	24	24	22
IEEE 802.11n (HT20)	23	23	23
Test Frequency (MHz)	5755	5795	
IEEE 802.11n (HT40)	24	24	

3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

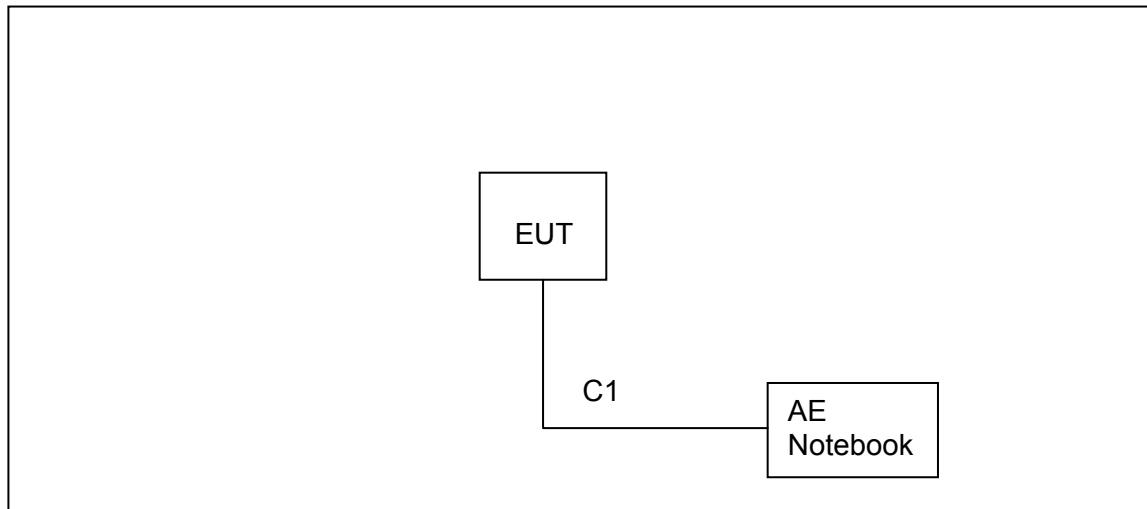

3.5 SUPPORT UNITS

Item	Equipment	Brand	Model No.	Series No.
AE	Notebook	ACER	MS2367	32807810766


Item	Cable Type	Shielded Type	Ferrite Core	Length
C1	DC Cable	NO	NO	1m

3.6 TEST ENVIRONMENT CONDITIONS

Test Item	Temperature	Humidity	Test Voltage
AC Power Line Conducted Emissions	25°C	53%	DC 3.3V
Radiated Emissions-9K-30MHz	25°C	60%	DC 3.3V
Radiated Emissions-30 MHz to 1GHz	24°C	68%	DC 3.3V
Radiated Emissions-Above 1000 MHz	24°C	68%	DC 3.3V
Spectrum Bandwidth	25.3°C	44.8%	DC 3.3V
Maximum Output Power	25.3°C	44.8%	DC 3.3V
Power Spectral Density	25.3°C	44.8%	DC 3.3V
Frequency Stability	Normal, Extreme	44.8%	Normal, Extreme


3.7 DUTY CYCLE

IEEE 802.11a

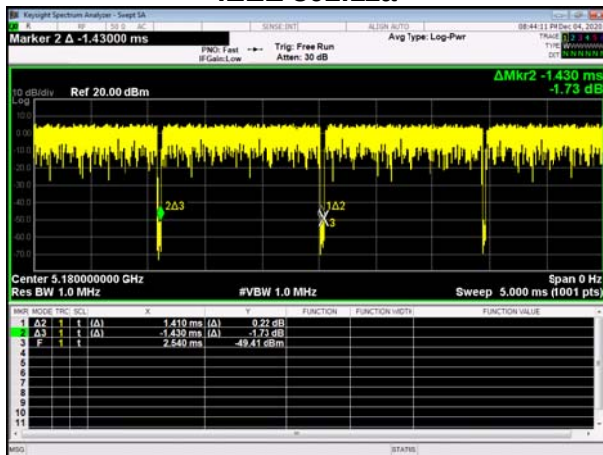

Duty cycle = $1.410\text{ms} / 1.430\text{ms} = 98.601\%$
Duty Factor = $10 \log(1 / \text{Duty cycle}) = 0.00$

IEEE 802.11n (HT20)

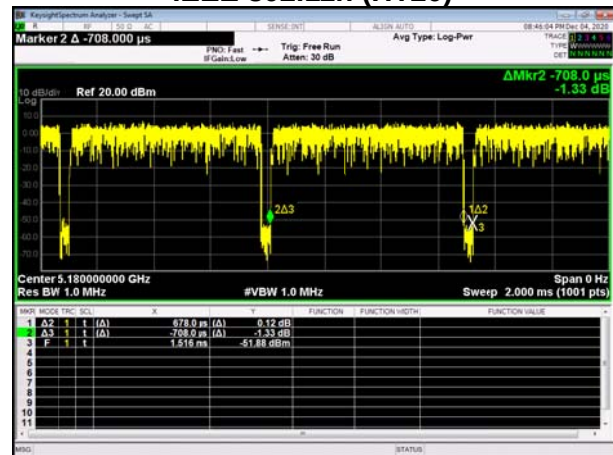

Duty cycle = $0.678\text{ms} / 0.708\text{ms} = 95.763\%$
Duty Factor = $10 \log(1 / \text{Duty cycle}) = 0.19$

IEEE 802.11n (HT40)



Duty cycle = $0.353\text{ms} / 0.381\text{ms} = 92.651\%$
Duty Factor = $10 \log(1 / \text{Duty cycle}) = 0.33$

If duty cycle is $\geq 98\%$, duty factor is not required.

If duty cycle is $< 98\%$, duty factor shall be considered, the Duty Factor = $10 \log(1/\text{Duty cycle})$, the output power = measured power + duty factor, the result of duty factor as below table:

IEEE 802.11a	IEEE 802.11n (HT20)	IEEE 802.11n (HT40)
0.00	0.19	0.33

NOTE:

For IEEE 802.11a, IEEE 802.11n (HT20) and IEEE 802.11ac (VHT20):

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 1 kHz (Duty cycle $< 98\%$).

For IEEE 802.11n (HT40) and IEEE 802.11ac (VHT40):

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 2 kHz (Duty cycle $< 98\%$).

For IEEE 802.11ac (VHT80):

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 kHz (Duty cycle $< 98\%$).

4 AC POWER LINE CONDUCTED EMISSIONS TEST

4.1 LIMIT

Frequency (MHz)	Limit (dB μ V)	
	Quasi-peak	Average
0.15 - 0.50	66 to 56*	56 to 46*
0.50 - 5.0	56	46
5.0 - 30.0	60	50

NOTE:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

Receiver Parameter	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 KHz


4.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipment powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.

4.3 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Pulse Limiter	MTS-systemtec hnik	MTS-IMP-136	261115-010-0024	12/11/2021
2	EMI Test Receiver	R&S	ESCI	101308	12/11/2021
3	LISN	AFJ	LS16	16011103219	06/10/2021
4	LISN	Schwarzbeck	NSLK 8127	8127-432	12/11/2021
5	Measurement Software	Farad	EZ-EMC (Ver.ATT-03A)	N/A	N/A

4.4 TESTSETUP

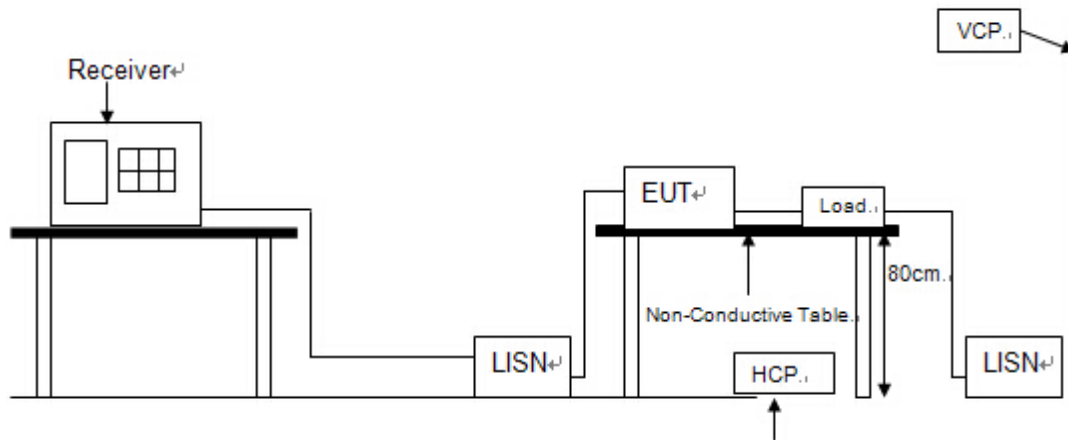


4.5 EUT OPERATION CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

The EUT was programmed to be in continuously transmitting/TX mode.

4.6 TEST RESULTS

Test Mode: TX N(HT20) Mode / CH48 (UNII-1)

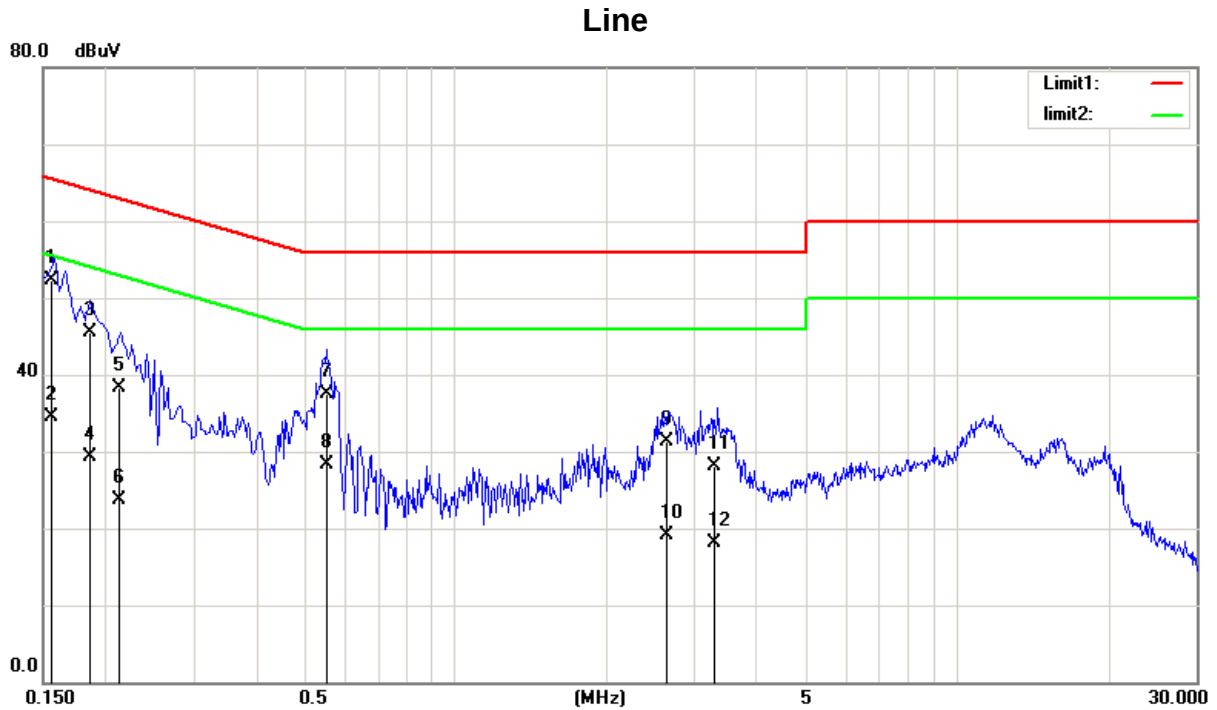


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1555	40.74	11.49	52.23	65.70	-13.47	QP
2	0.1555	23.03	11.49	34.52	55.70	-21.18	AVG
3	0.1861	34.13	11.28	45.41	64.20	-18.79	QP
4	0.1861	18.01	11.28	29.29	54.20	-24.91	AVG
5	0.2123	27.15	11.11	38.26	63.11	-24.85	QP
6	0.2123	12.53	11.11	23.64	53.11	-29.47	AVG
7	0.5539	27.29	10.27	37.56	56.00	-18.44	QP
8	0.5539	18.03	10.27	28.30	46.00	-17.70	AVG
9	2.6445	21.15	10.22	31.37	56.00	-24.63	QP
10	2.6445	8.91	10.22	19.13	46.00	-26.87	AVG
11	3.3060	17.80	10.23	28.03	56.00	-27.97	QP
12	3.3060	7.96	10.23	18.19	46.00	-27.81	AVG

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N(HT20) Mode / CH48 (UNII-1)

Neutral

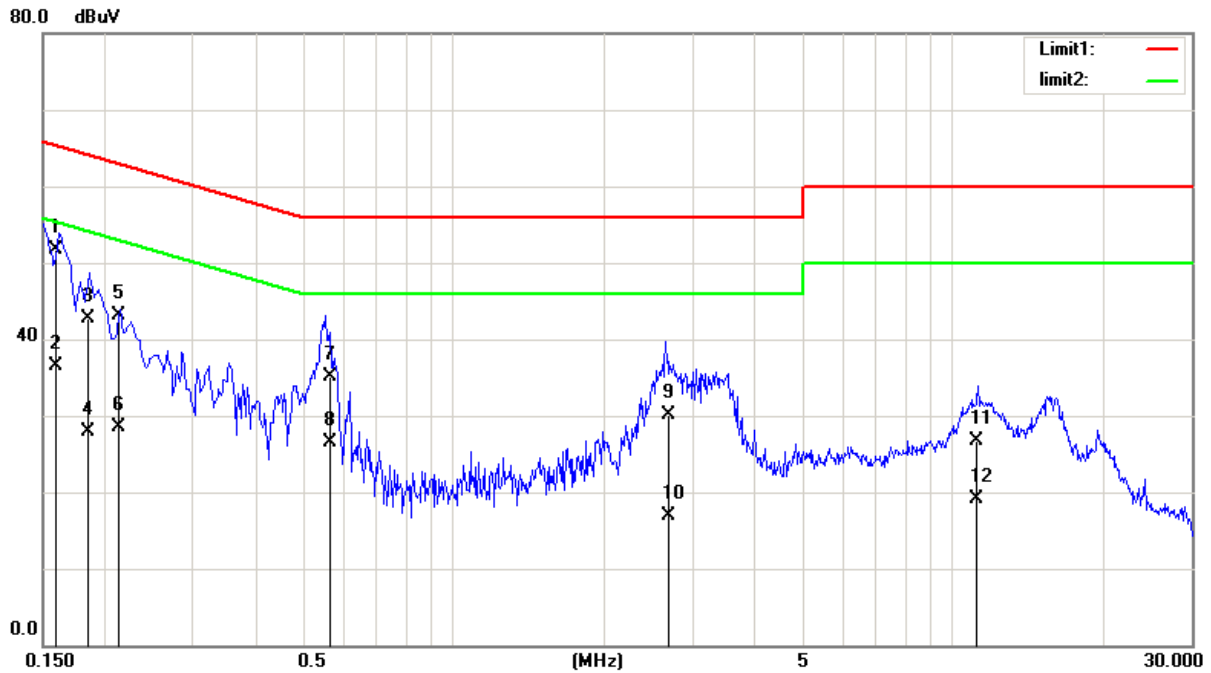

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1583	40.16	11.47	51.63	65.55	-13.92	QP
2	0.1583	25.12	11.47	36.59	55.55	-18.96	AVG
3	0.1842	31.45	11.29	42.74	64.29	-21.55	QP
4	0.1842	16.66	11.29	27.95	54.29	-26.34	AVG
5	0.2119	31.99	11.11	43.10	63.13	-20.03	QP
6	0.2119	17.34	11.11	28.45	53.13	-24.68	AVG
7	0.5627	24.74	10.27	35.01	56.00	-20.99	QP
8	0.5627	16.22	10.27	26.49	46.00	-19.51	AVG
9	2.6832	19.93	10.22	30.15	56.00	-25.85	QP
10	2.6832	6.65	10.22	16.87	46.00	-29.13	AVG
11	11.1678	16.53	10.20	26.73	60.00	-33.27	QP
12	11.1678	8.85	10.20	19.05	50.00	-30.95	AVG

Remarks:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

5 RADIATED EMISSIONSTEST

5.1 LIMIT

In case the emission fall within the restricted band specified on 15.205(a)&RSS-Gen 8.10, then the 15.209(a)&RSS-Gen 8.9 limit in the table below has to be followed.

LIMITS OF RADIATED EMISSIONS MEASUREMENT (9 kHz to 1000MHz)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

LIMITS OF UNWANTED EMISSION OUT OF THE RESTRICTED BANDS

Frequency (MHz)	EIRP Limit (dBm/MHz)	Equivalent Field Strength at 3m (dBμV/m)
5150-5250	-27	68.3
5250-5350	-27	68.3
5470-5725	-27	68.3
5725-5850	-27 Note(2)	68.3
	10 Note(2)	105.3
	15.6 Note(2)	110.9
	27 Note(2)	122.3

Note:

(1) The following formula is used to convert the equipment isotropic radiated power (eirp) to field

strength: $E = \frac{1000000\sqrt{30P}}{3}$ μV/m, where P is the eirp (Watts)

(2) According to 15.407(b)(4)(i), all emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below theband edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above orbelow the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27dBm/MHz at the band edge.

(3) Radiation larger than 26.5GHz is background, so the following data only measures the maximum 26.5GHz

(4) Duty Cycle compensation less than 98% has been compensated in the test software prior to the implementation of the test

5.2 TEST PROCEDURE


- a. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1GHz)
- b. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- c. The height of the equipment or of the substitution antenna shall be 0.8m or 1.5m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- e. The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1GHz.
- f. The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- g. All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform. (below 1GHz)
- h. All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1GHz)
- i. The test result is calculated as the following:
 - (1) Result = Reading + Correct Factor
 - (2) Correct Factor = Antenna Factor + Cable Loss – Amplifier Gain + Attenuator
 - (3) Margin = Result - Limit

5.3 MEASUREMENT INSTRUMENTS LIST


Item	Equipment	Manufacturer	Model No.	Serial No.	Calibrated until
1	EMI Test Receiver	R&S	ESCI	101307	12/12/2021
2	Spectrum Analyzer	Agilent	E4407B	US40240708	11/17/2021
3	Spectrum Analyzer	R&S	FSP	1164.4391.38	06/01/2021
4	Loop antenna	SCHWARZBECK	FMZB1519	1519-062	12/14/2021
5	Broadband antenna	SCHWARZBECK	VULB9168	VULB9168-192	03/22/2021
6	HORN ANTENNA	SCHWARZBECK	BBHA9120D	9120D 1065	04/21/2021
7	DRG Horn Antenna	A.H. Systems	SAS-574	588	06/01/2021
8	Preamplifier Amplifier	HP	8447F	3113A05680	12/11/2021
9	Preamplifier Amplifier	Aeroflex	33711-392-77150-11	97	06/01/2021
10	PRE-AMPLIFIER	CY	EMC011830	980136	12/11/2021
11	RF Cable	R&S	Test Cable 4	4	12/11/2021
12	RF Cable	R&S	Test Cable 5	5	12/11/2021
13	RF Cable	R&S	Test Cable 9	9	04/21/2021
14	RF Cable	R&S	Test Cable 10	10	12/11/2021
15	Measurement Software	Farad	EZ-EMC (Ver.ATT-03A)	N/A	N/A

5.4 TESTSETUP


9 kHz to 30 MHz

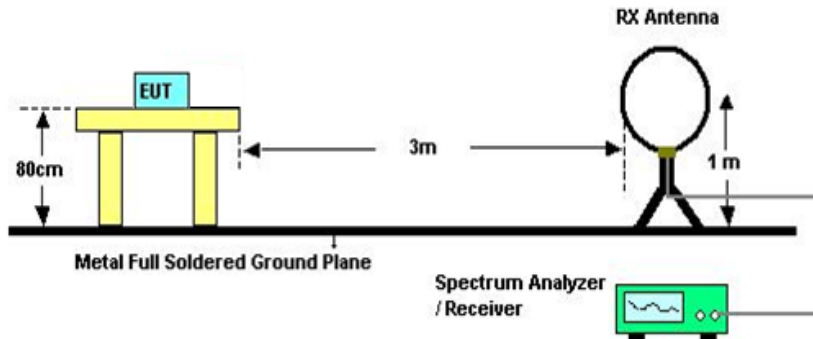

30 MHz to 1 GHz

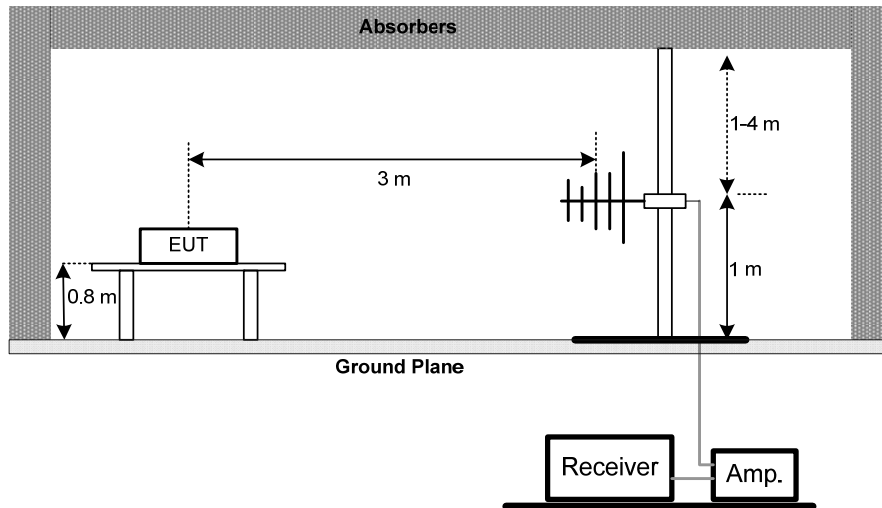

Above 1 GHz

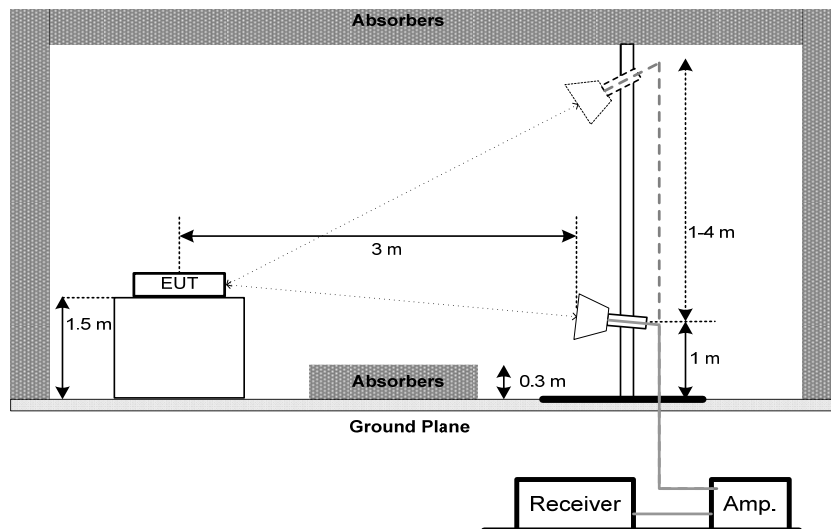

5.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

5.6 TEST RESULTS - 9 KHZ to 30MHZ

Test Mode:	TX N(HT20) Mode / CH48 (UNII-1)
------------	---------------------------------

Freq.	Reading	Limit	Margin	State
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F
--	--	--	--	P
--	--	--	--	P

Note:


The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor = $20 \log (\text{specific distance/test distance})$ (dB);

Limit line = specific limits(dBuv) + distance extrapolation factor

5.7 TEST RESULTS - 30 MHz TO 1000 MHz


Test Mode: TX N(HT20) Mode / CH48 (UNII-1)

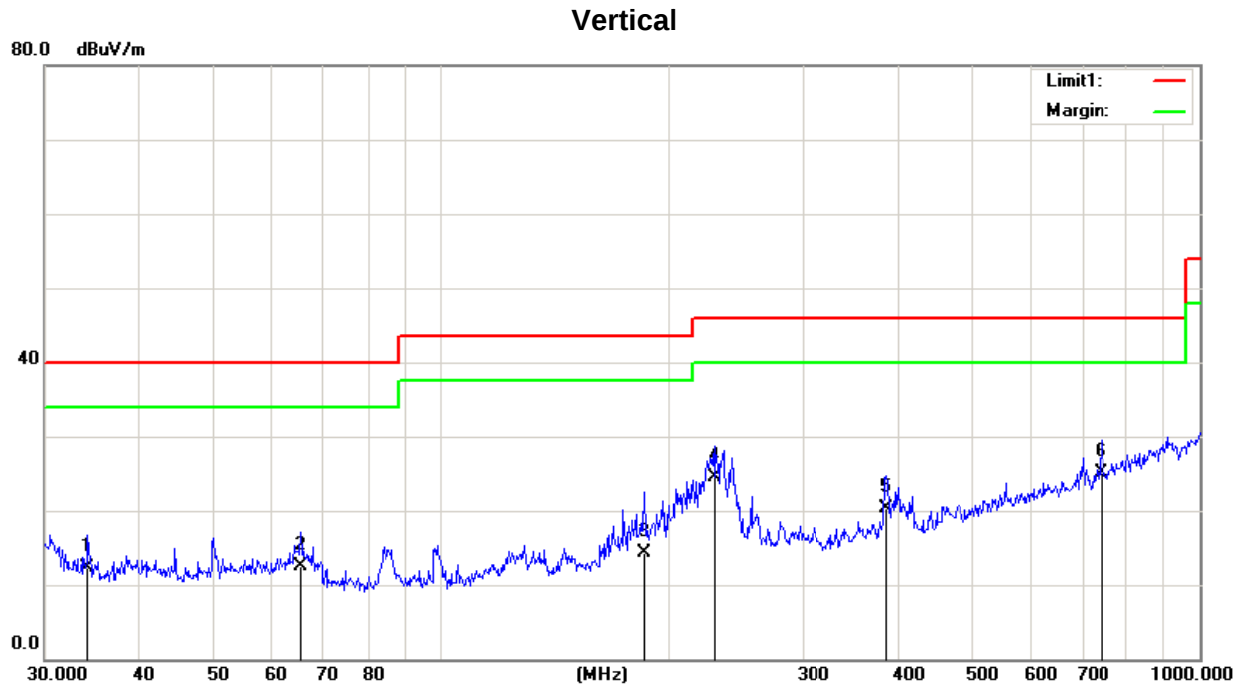

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	34.1561	25.37	-13.07	12.30	40.00	-27.70	QP
2	65.3432	25.10	-12.58	12.52	40.00	-27.48	QP
3	185.1379	25.30	-11.06	14.24	43.50	-29.26	QP
4	230.0985	32.31	-7.86	24.45	46.00	-21.55	QP
5	385.2805	26.38	-6.08	20.30	46.00	-25.70	QP
6	742.2587	25.72	-0.57	25.15	46.00	-20.85	QP

Test Mode: TX N(HT20) Mode / CH48 (UNII-1)


Horizontal

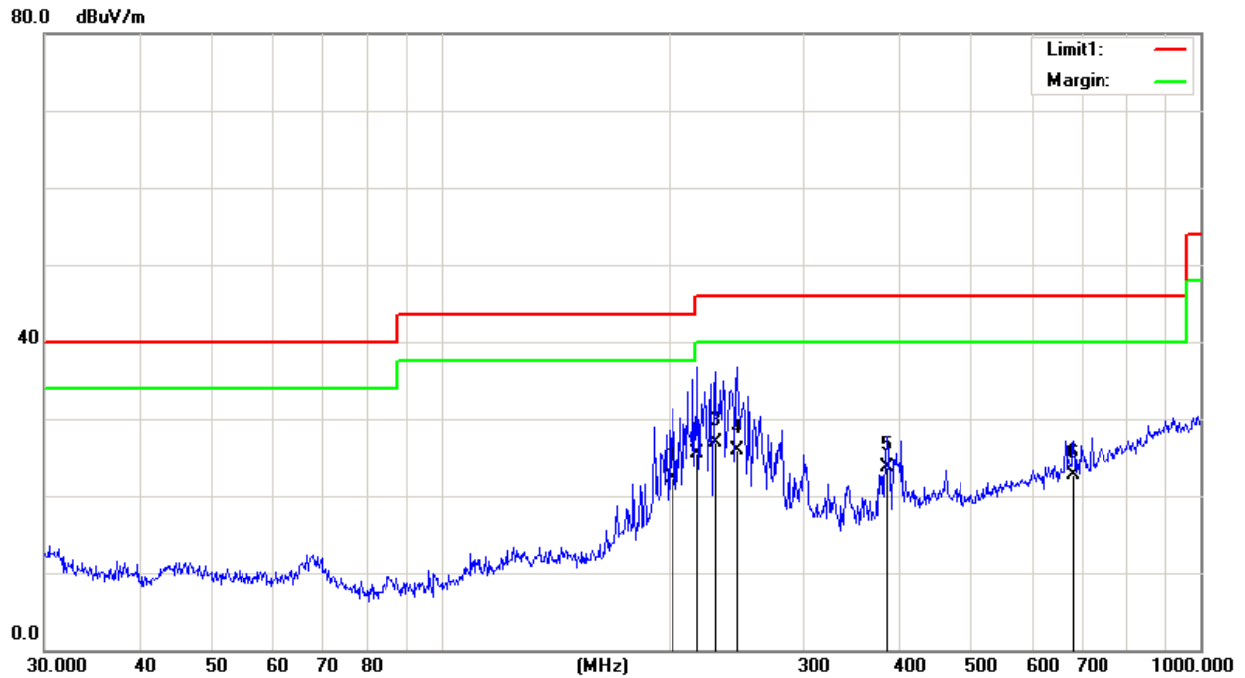

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	201.3930	31.59	-9.27	22.32	43.50	-21.18	QP
2	217.5443	34.47	-9.02	25.45	46.00	-20.55	QP
3	229.2931	35.56	-8.74	26.82	46.00	-19.18	QP
4	245.0900	31.97	-6.13	25.84	46.00	-20.16	QP
5	386.6338	30.95	-7.33	23.62	46.00	-22.38	QP
6	679.9600	24.69	-1.95	22.74	46.00	-23.26	QP


5.8 TEST RESULTS - ABOVE1000 MHz(BAND EDGE)

Orthogonal Axis	X
Test Mode	UNII-1_TX A Mode 5180 MHz

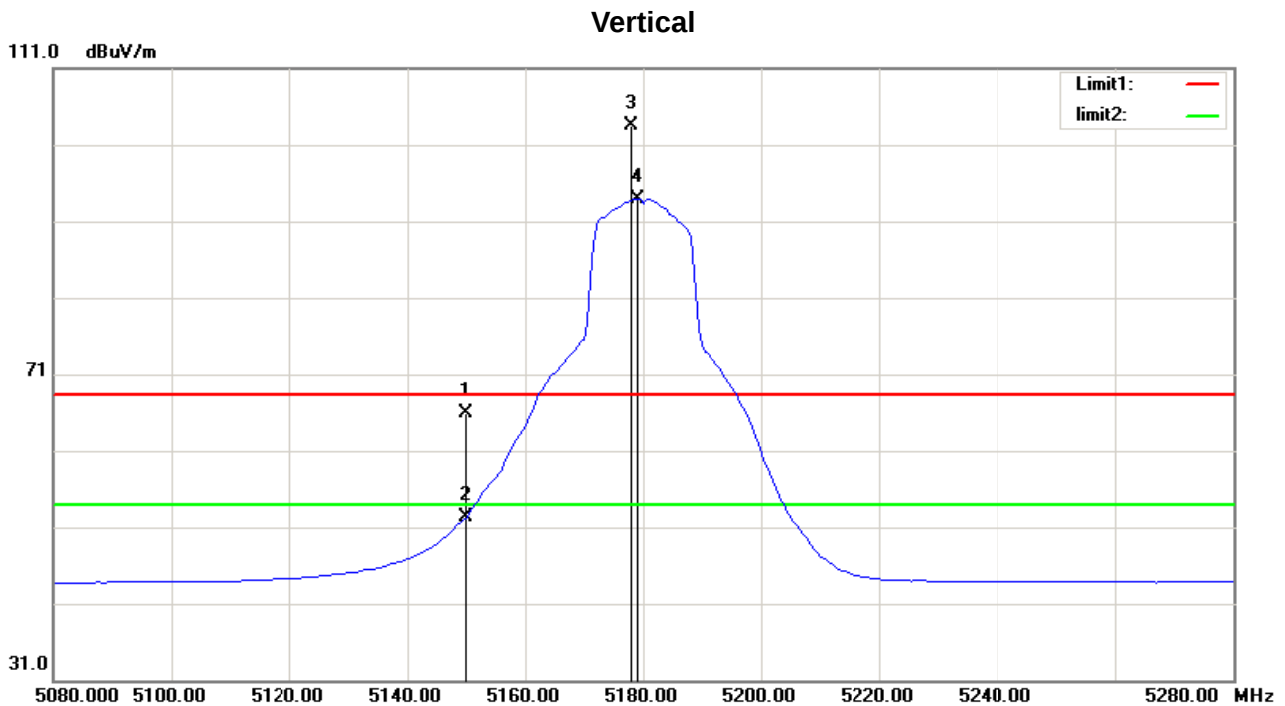

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5150.000	31.01	34.94	65.95	68.30	-2.35	peak
2	5150.000	17.26	34.94	52.20	54.00	-1.80	AVG
3	5178.000	68.52	35.02	103.54	/	/	peak
4	5179.000	58.96	35.02	93.98	/	/	AVG


Orthogonal Axis	X
Test Mode	UNII-1_TX A Mode 5180 MHz

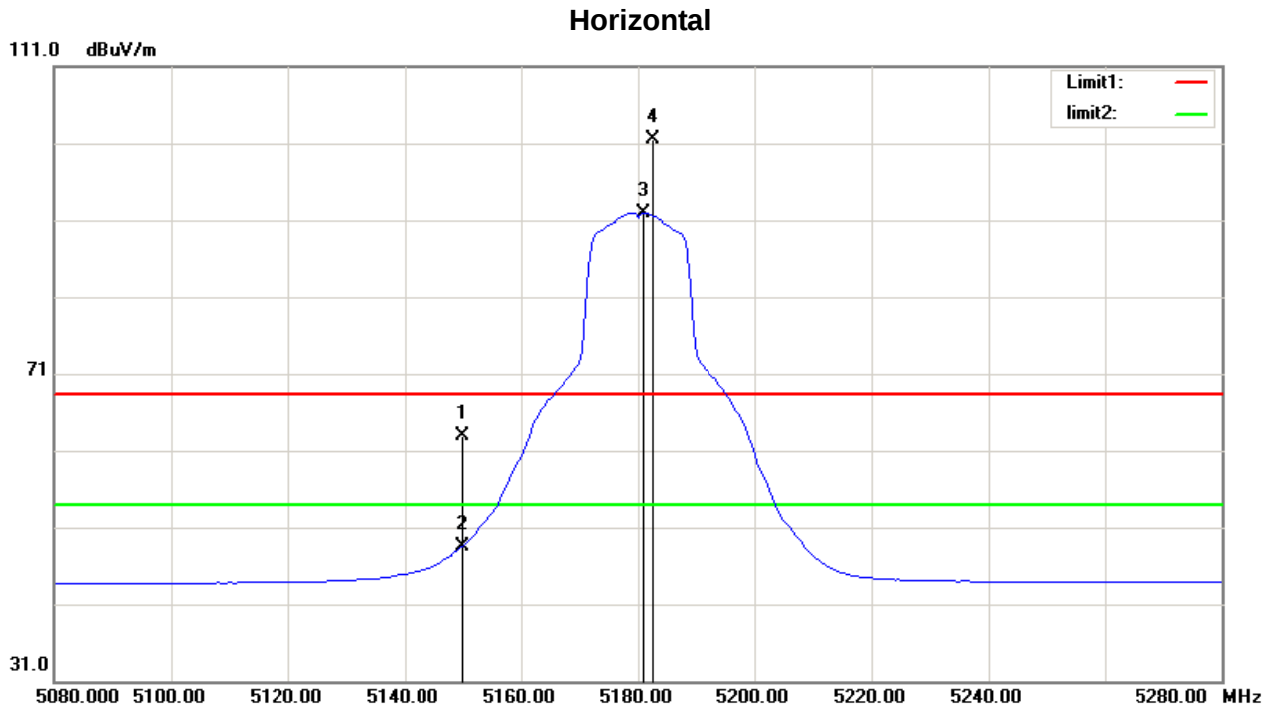

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5150.000	28.03	34.94	62.97	68.30	-5.33	peak
2	5150.000	13.50	34.94	48.44	54.00	-5.56	AVG
3	5181.000	56.95	35.02	91.97	/	/	AVG
4	5182.500	66.47	35.03	101.50	/	/	peak

Orthogonal Axis	X
Test Mode	UNII-1_TX A Mode 5240 MHz


Vertical

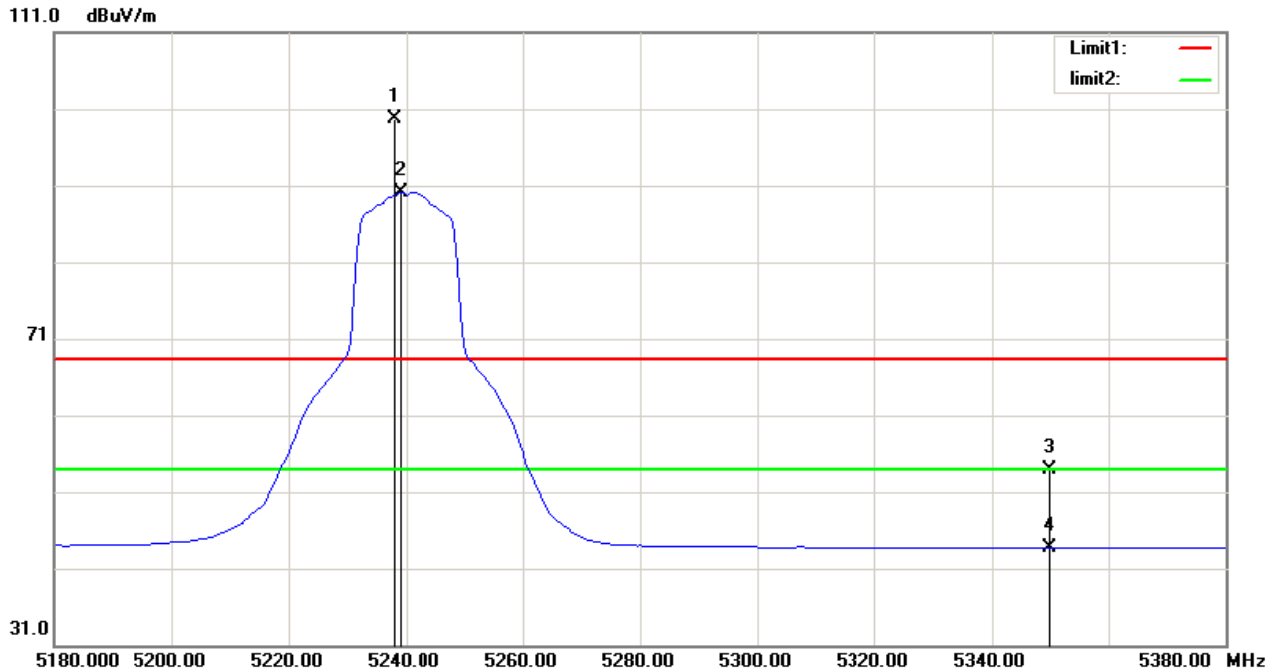

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5238.000	64.60	35.19	99.79	/	/	peak
2	5239.000	54.91	35.19	90.10	/	/	AVG
3	5350.000	18.34	35.50	53.84	68.30	-14.46	peak
4	5350.000	8.23	35.50	43.73	54.00	-10.27	AVG


Orthogonal Axis	X
Test Mode	UNII-1_TX A Mode 5240 MHz

Horizontal

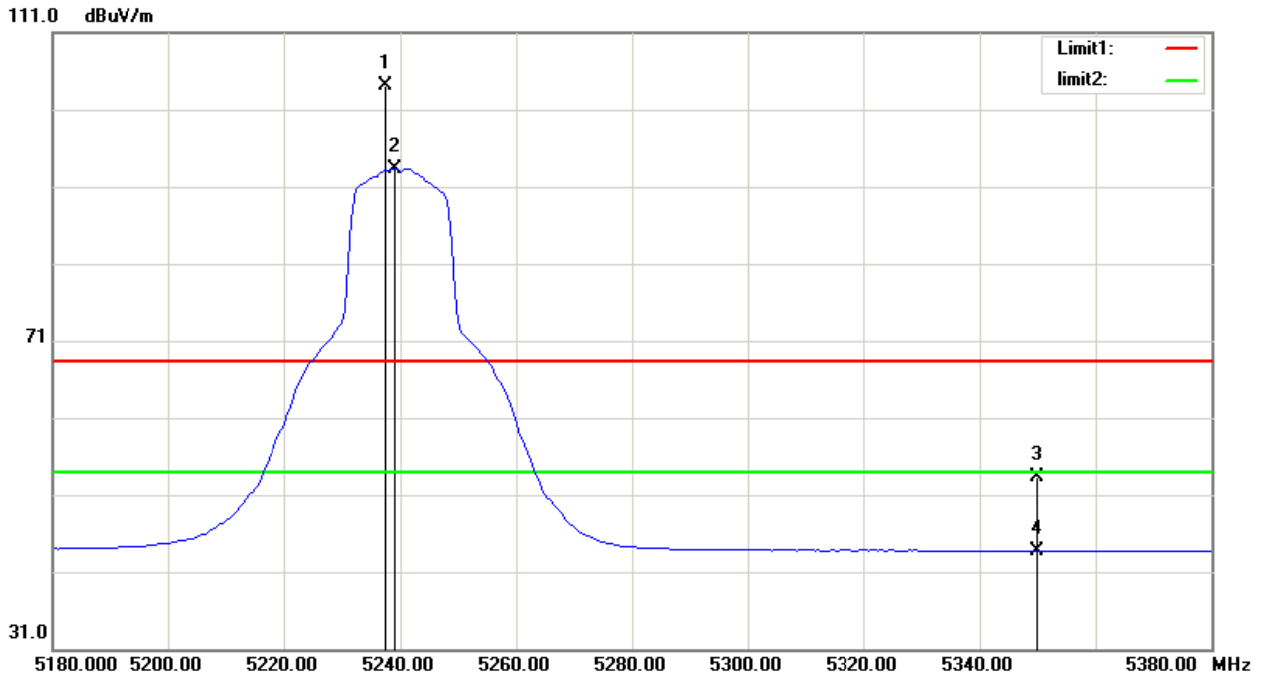


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5237.500	69.00	35.19	104.19	/	/	peak
2	5239.000	58.20	35.19	93.39	/	/	AVG
3	5350.000	17.75	35.50	53.25	68.30	-15.05	peak
4	5350.000	8.28	35.50	43.78	54.00	-10.22	AVG

Orthogonal Axis	X
Test Mode	UNII-1_TX N (HT20) Mode 5180 MHz

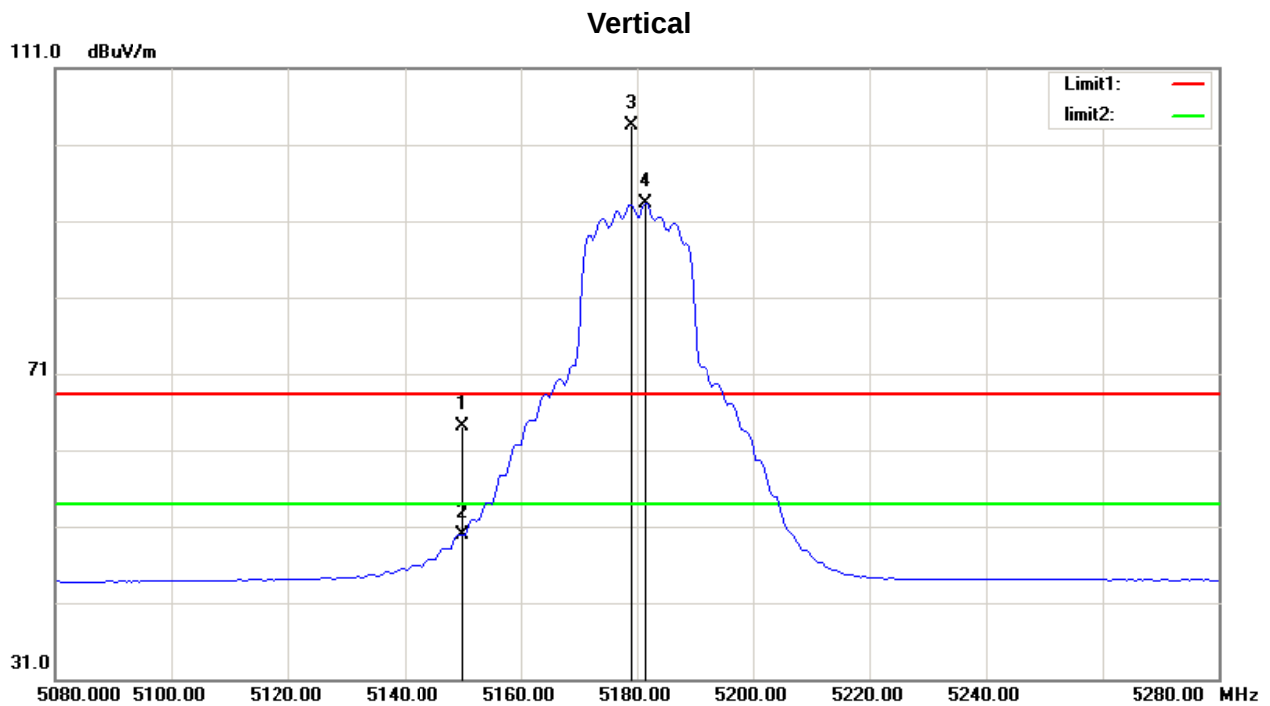

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5150.000	29.08	34.94	64.02	68.30	-4.28	peak
2	5150.000	14.88	34.94	49.82	54.00	-4.18	AVG
3	5179.000	68.42	35.02	103.44	/	/	peak
4	5181.500	58.22	35.03	93.25	/	/	AVG


Orthogonal Axis	X
Test Mode	UNII-1_TX N (HT20) Mode 5180 MHz

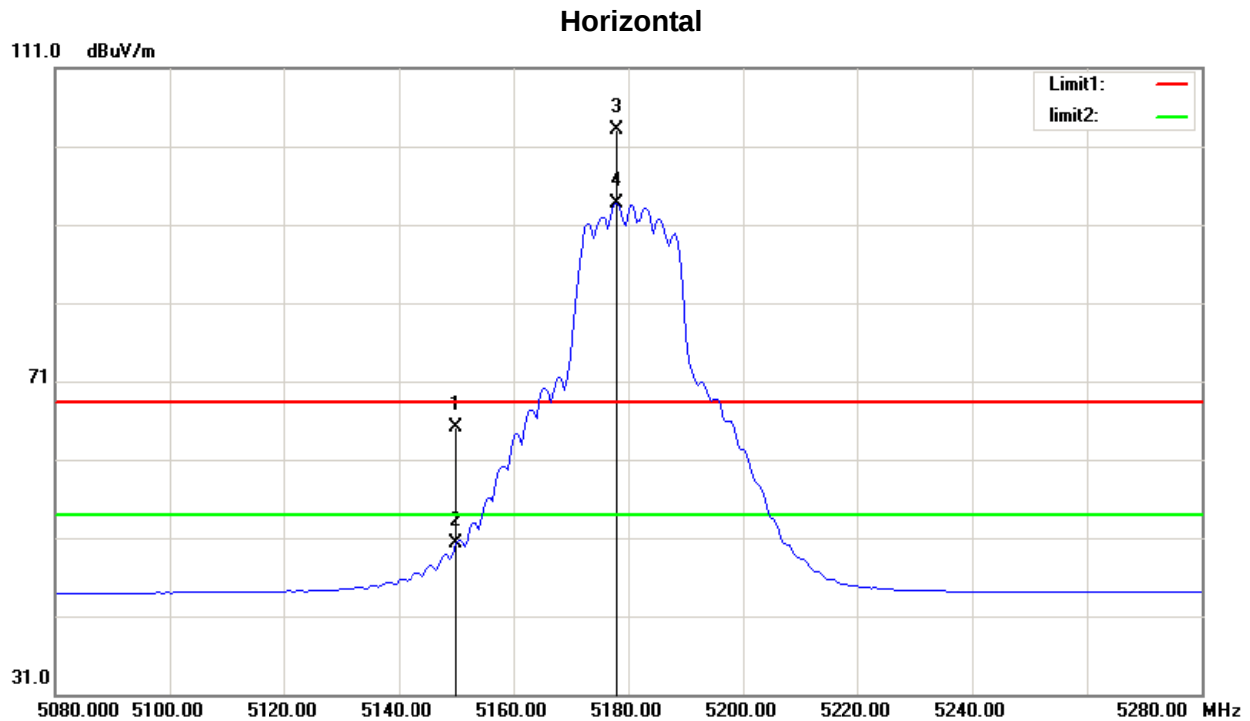

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5150.000	30.21	34.94	65.15	68.30	-3.15	peak
2	5150.000	15.30	34.94	50.24	54.00	-3.76	AVG
3	5178.000	68.03	35.02	103.05	/	/	peak
4	5178.000	58.64	35.02	93.66	/	/	AVG

Orthogonal Axis	X
Test Mode	UNII-1_TX N (HT20) Mode 5240 MHz


Vertical

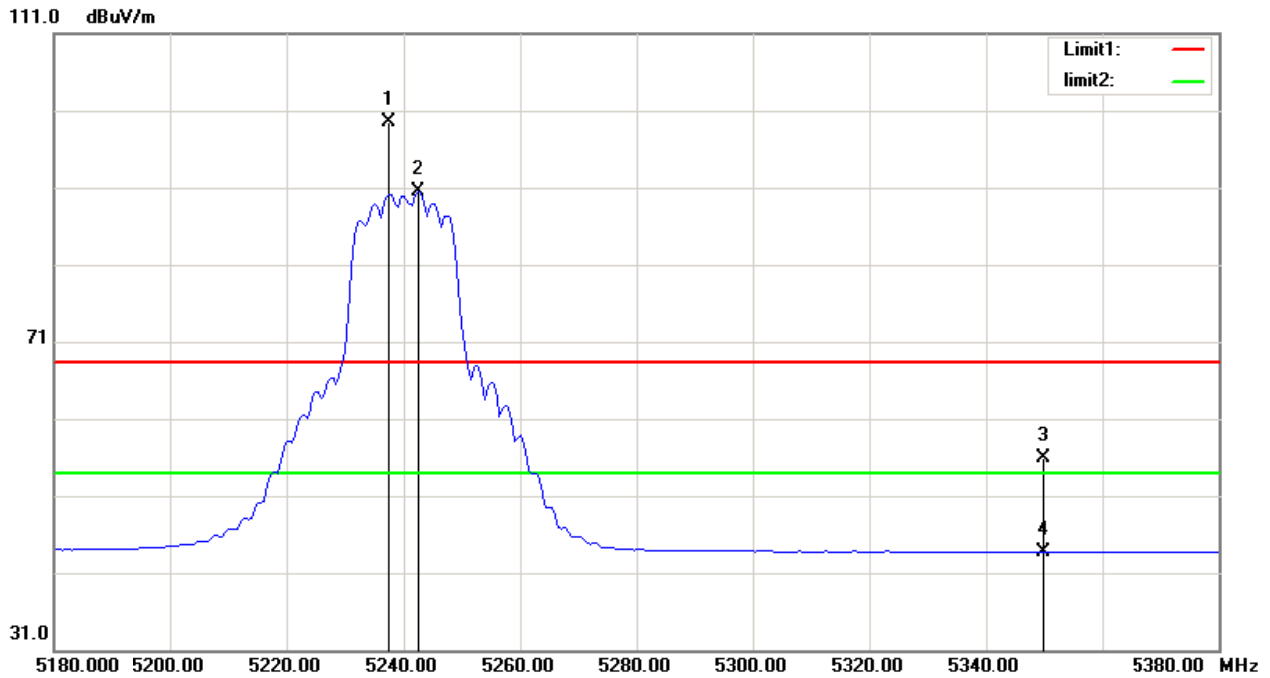

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5237.500	64.37	35.19	99.56	/	/	peak
2	5242.500	55.28	35.20	90.48	/	/	AVG
3	5350.000	20.48	35.50	55.98	68.30	-12.32	peak
4	5350.000	8.20	35.50	43.70	54.00	-10.30	AVG


Orthogonal Axis	X
Test Mode	UNII-1_TX N (HT20) Mode 5240 MHz

Horizontal

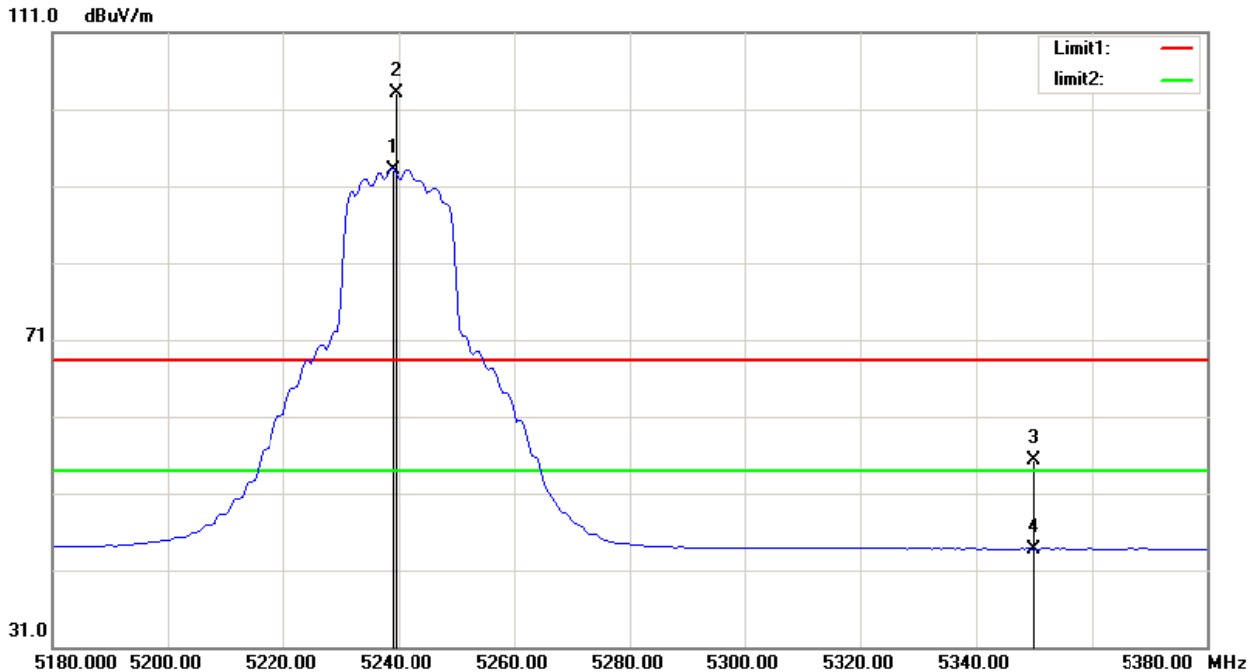


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5239.000	58.01	35.19	93.20	/	/	AVG
2	5239.500	67.83	35.19	103.02	/	/	peak
3	5350.000	19.72	35.50	55.22	68.30	-13.08	peak
4	5350.000	8.29	35.50	43.79	54.00	-10.21	AVG

Orthogonal Axis	X
Test Mode	UNII-1_TX N (HT40) Mode 5190 MHz

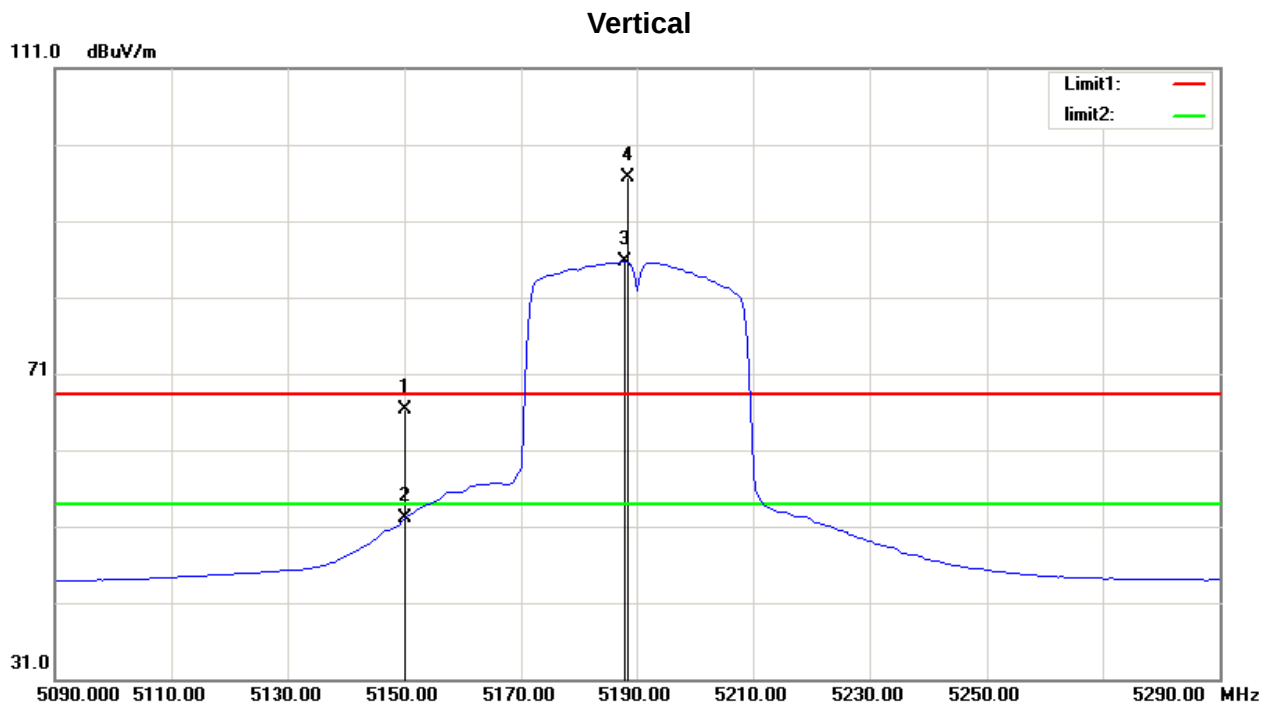

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5150.000	31.36	34.94	66.30	68.30	-2.00	peak
2	5150.000	17.21	34.94	52.15	54.00	-1.85	AVG
3	5188.000	50.60	35.05	85.65	/	/	AVG
4	5188.500	61.73	35.05	96.78	/	/	peak


Orthogonal Axis	X
Test Mode	UNII-1_TX N (HT40) Mode 5190 MHz

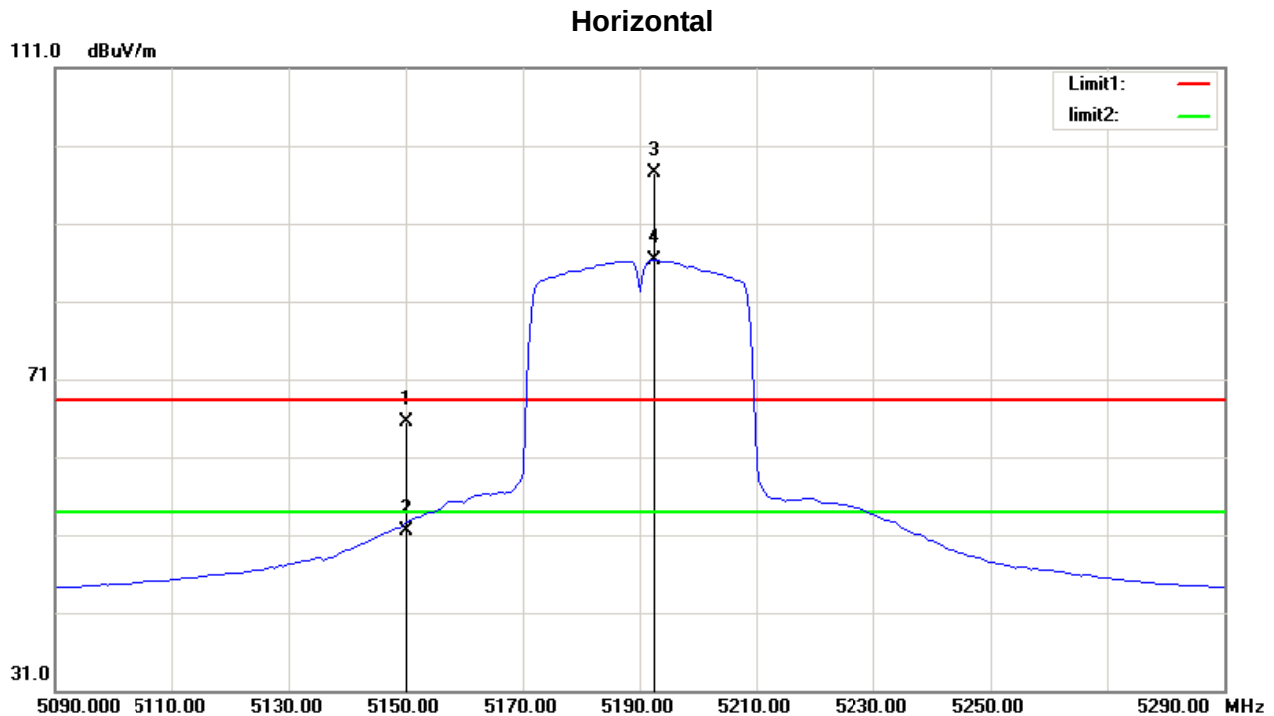

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5150.000	30.55	34.94	65.49	68.30	-2.81	peak
2	5150.000	16.54	34.94	51.48	54.00	-2.52	AVG
3	5192.500	62.36	35.06	97.42	/	/	peak
4	5192.500	51.18	35.06	86.24	/	/	AVG

Orthogonal Axis	X
Test Mode	UNII-1_TX N (HT40) Mode 5230 MHz


Vertical

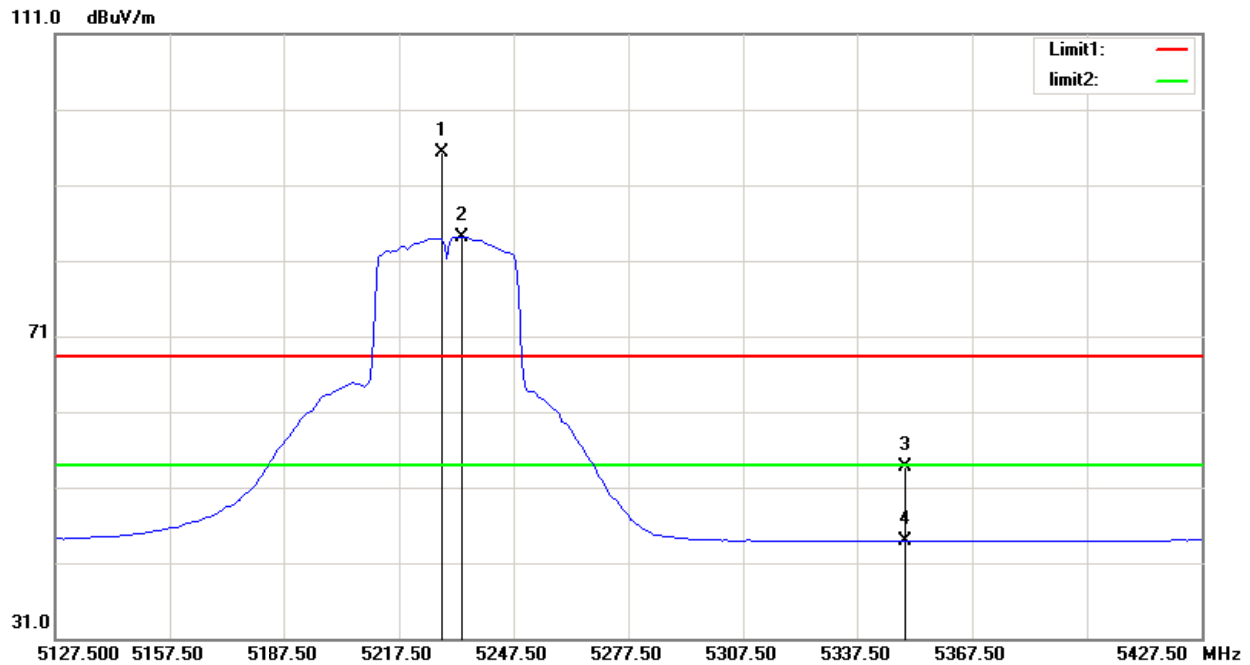

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5228.750	60.09	35.16	95.25	/	/	peak
2	5234.000	49.02	35.18	84.20	/	/	AVG
3	5350.000	18.20	35.50	53.70	68.30	-14.60	peak
4	5350.000	8.41	35.50	43.91	54.00	-10.09	AVG


Orthogonal Axis	X
Test Mode	UNII-1_TX N (HT40) Mode 5230 MHz

Horizontal

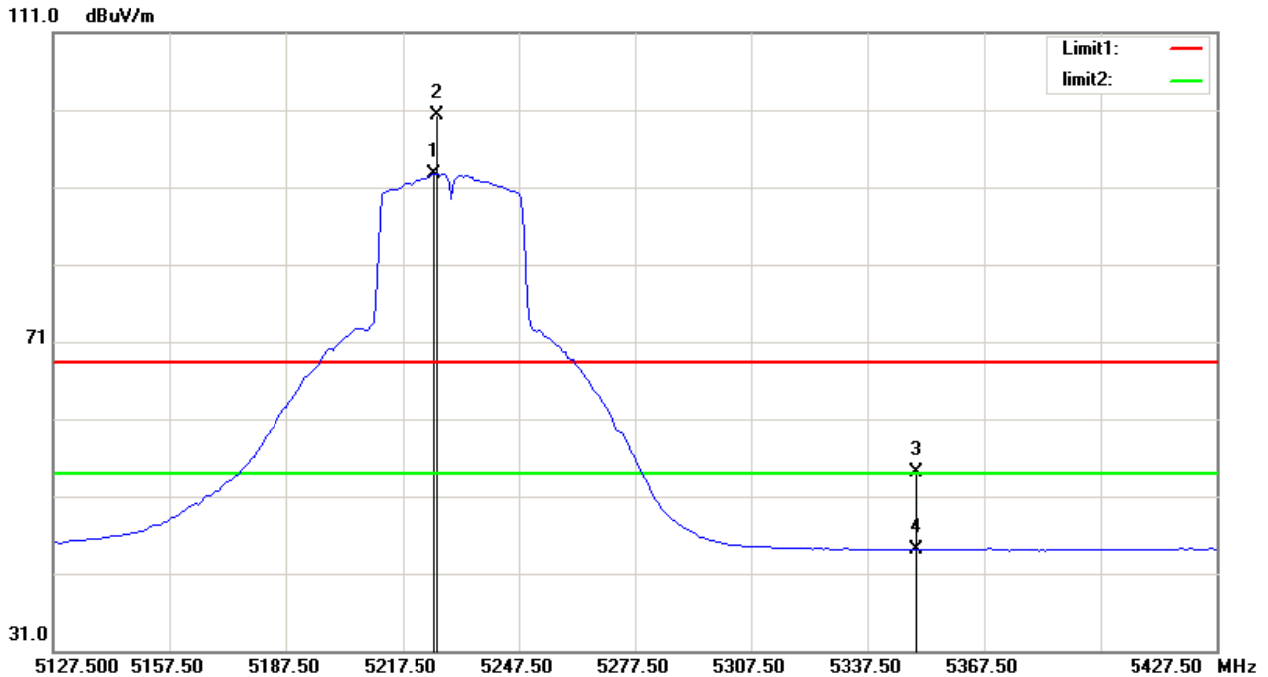


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5225.750	57.51	35.15	92.66	/	/	AVG
2	5226.500	65.22	35.15	100.37	/	/	peak
3	5350.000	18.67	35.50	54.17	68.30	-14.13	peak
4	5350.000	8.63	35.50	44.13	54.00	-9.87	AVG

Orthogonal Axis	X
Test Mode	UNII-3_TX A Mode 5745 MHz

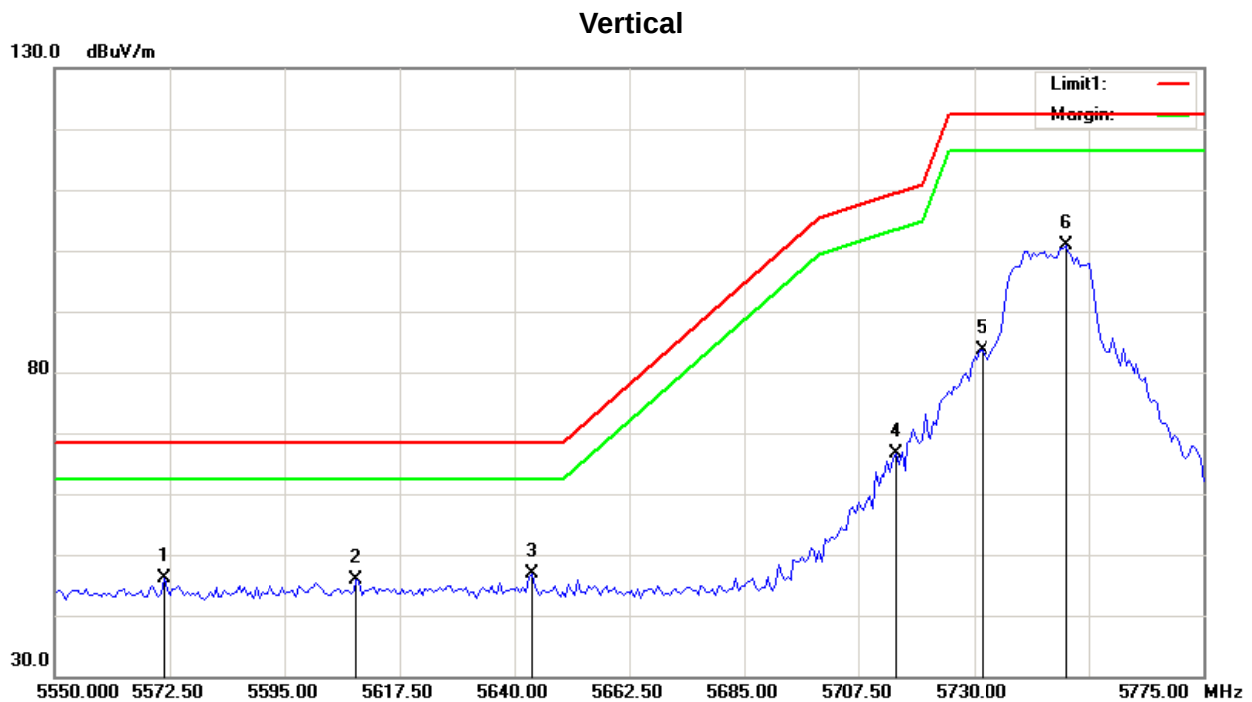


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5571.375	50.55	-4.47	46.08	68.30	-22.22	peak
2	5609.063	50.31	-4.40	45.91	68.30	-22.39	peak
3	5643.375	51.11	-4.34	46.77	68.30	-21.53	peak
4	5714.813	70.87	-4.23	66.64	109.45	-42.81	peak
5	5731.688	87.87	-4.21	83.66	122.30	-38.64	peak
6	5748.000	104.95	-4.17	100.78	122.30	-21.52	peak

Orthogonal Axis	X
Test Mode	UNII-3_TX A Mode 5745 MHz

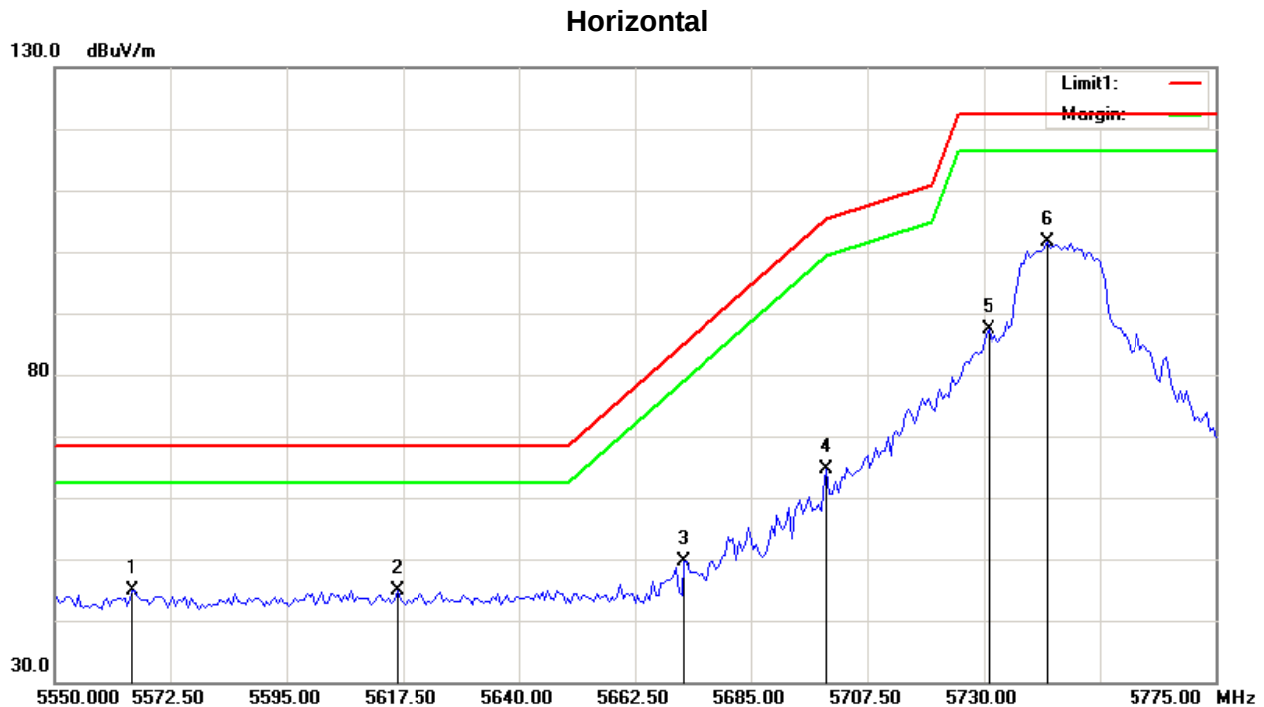


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5565.188	49.29	-4.47	44.82	68.30	-23.48	peak
2	5616.375	49.21	-4.39	44.82	68.30	-23.48	peak
3	5672.063	53.92	-4.30	49.62	84.63	-35.01	peak
4	5699.625	68.81	-4.25	64.56	105.02	-40.46	peak
5	5731.125	91.53	-4.20	87.33	122.30	-34.97	peak
6	5742.375	105.75	-4.19	101.56	122.30	-20.74	peak

Orthogonal Axis	X
Test Mode	UNII-3_TX A Mode 5785 MHz

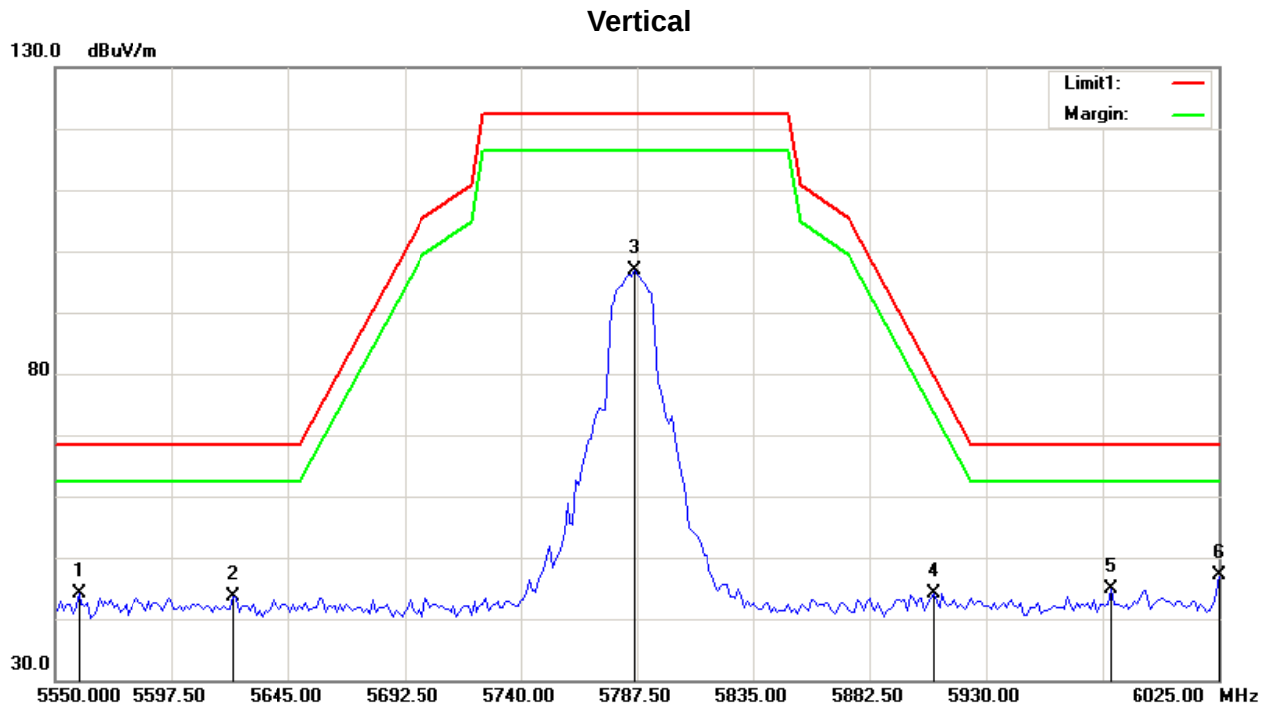

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5559.500	48.66	-4.48	44.18	68.30	-24.12	peak
2	5622.438	48.09	-4.38	43.71	68.30	-24.59	peak
3	5786.313	100.90	-4.12	96.78	122.30	-25.52	peak
4	5908.625	48.07	-3.92	44.15	80.42	-36.27	peak
5	5981.063	48.67	-3.80	44.87	68.30	-23.43	peak
6	6025.000	50.73	-3.64	47.09	68.30	-21.21	peak


Orthogonal Axis	X
Test Mode	UNII-3_TX A Mode 5785 MHz

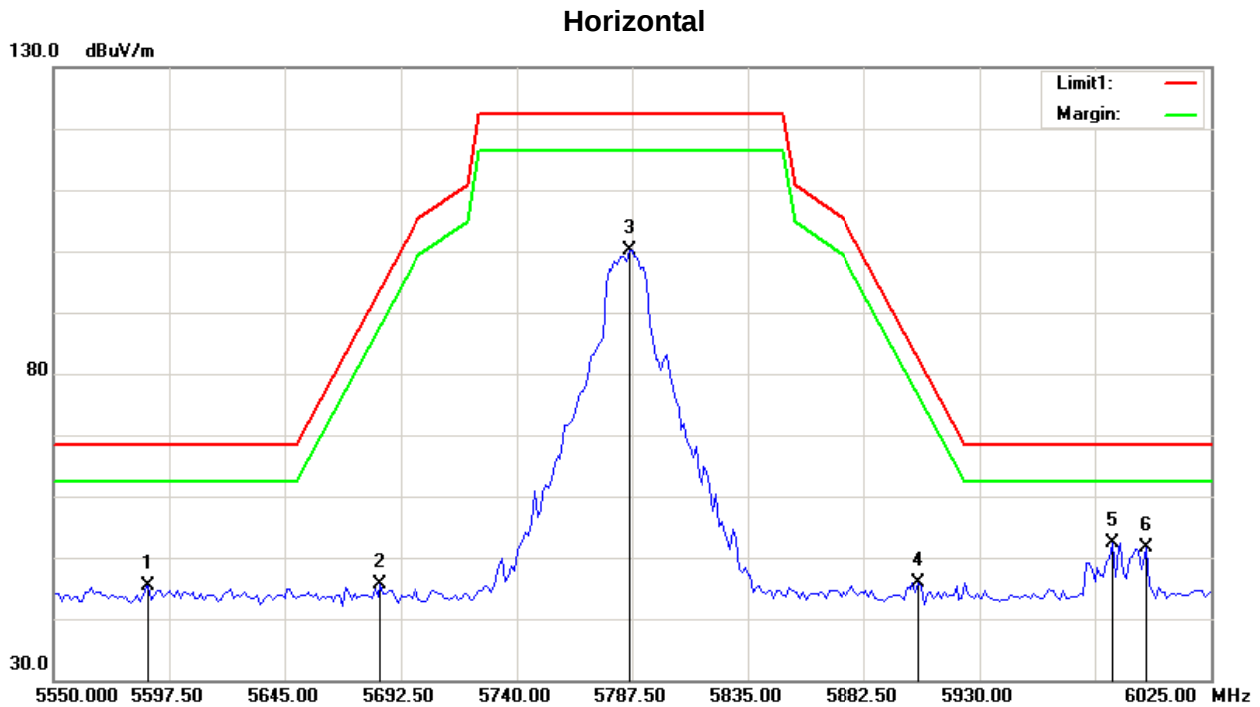

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5589.188	49.79	-4.43	45.36	68.30	-22.94	peak
2	5684.188	49.83	-4.28	45.55	93.60	-48.05	peak
3	5786.313	104.21	-4.12	100.09	122.30	-22.21	peak
4	5905.063	49.73	-3.92	45.81	83.05	-37.24	peak
5	5984.625	56.29	-3.80	52.49	68.30	-15.81	peak
6	5998.875	55.33	-3.77	51.56	68.30	-16.74	peak

Orthogonal Axis	X
Test Mode	UNII-3_TX A Mode 5825 MHz


Vertical

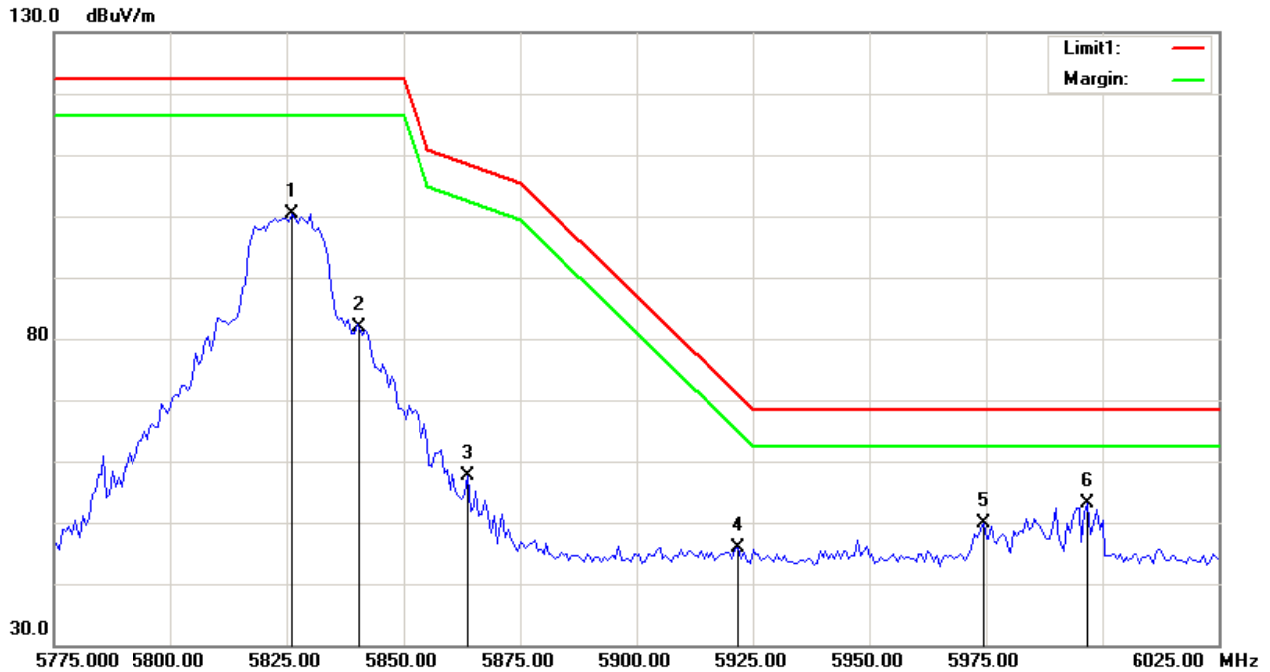

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5826.250	104.44	-4.05	100.39	122.30	-21.91	peak
2	5840.625	85.87	-4.03	81.84	122.30	-40.46	peak
3	5863.750	61.66	-3.99	57.67	108.45	-50.78	peak
4	5921.875	49.70	-3.90	45.80	70.61	-24.81	peak
5	5974.375	53.74	-3.81	49.93	68.30	-18.37	peak
6	5996.875	56.81	-3.78	53.03	68.30	-15.27	peak


Orthogonal Axis	X
Test Mode	UNII-3_TX A Mode 5825 MHz

Horizontal

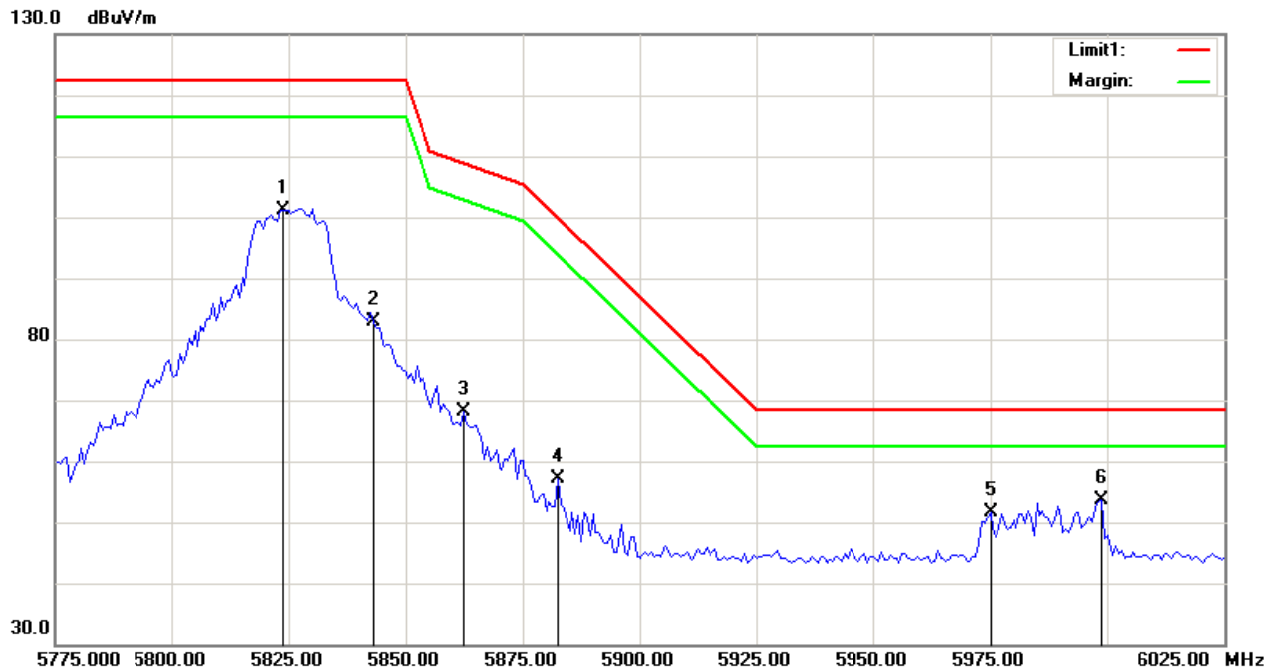


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5823.750	105.24	-4.05	101.19	122.30	-21.11	peak
2	5843.125	87.01	-4.01	83.00	122.30	-39.30	peak
3	5862.500	72.09	-3.99	68.10	108.80	-40.70	peak
4	5882.500	61.18	-3.96	57.22	99.75	-42.53	peak
5	5975.000	55.50	-3.81	51.69	68.30	-16.61	peak
6	5998.750	57.44	-3.77	53.67	68.30	-14.63	peak

Orthogonal Axis	X
Test Mode	UNII-3_TX N (HT20) Mode 5745 MHz

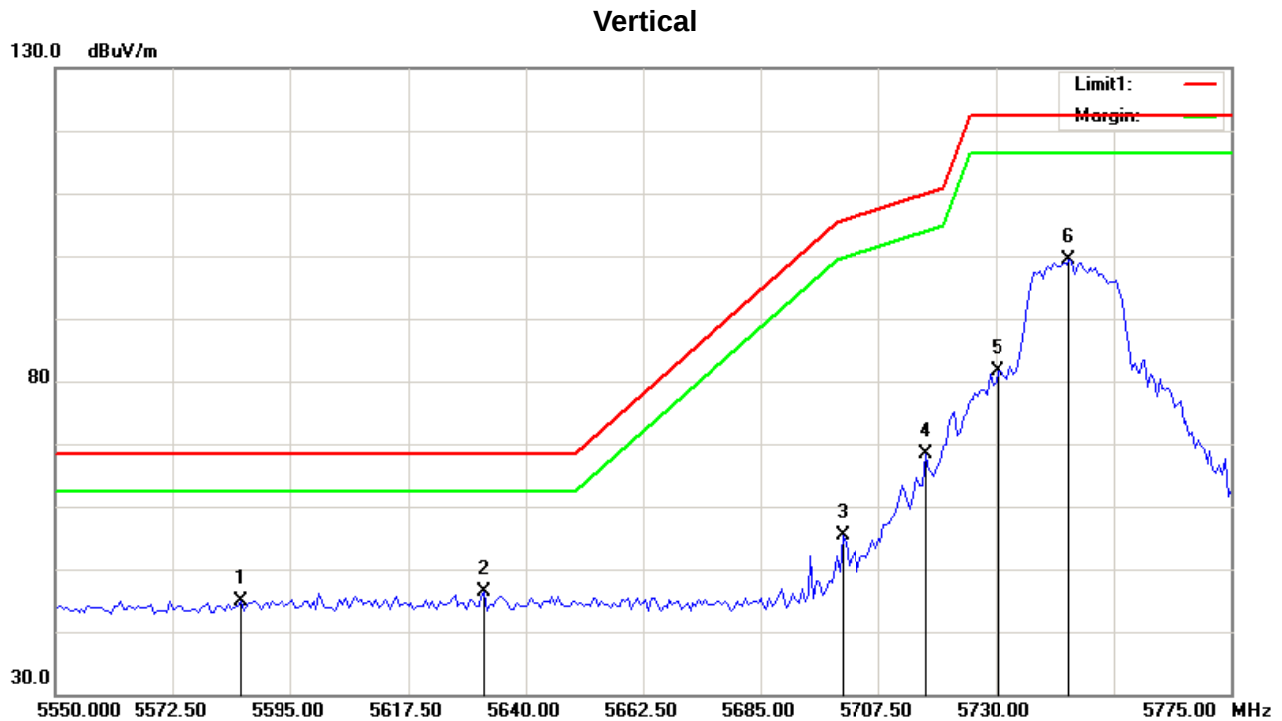


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5585.438	49.29	-4.44	44.85	68.30	-23.45	peak
2	5632.125	50.68	-4.37	46.31	68.30	-21.99	peak
3	5700.750	59.65	-4.25	55.40	105.51	-50.11	peak
4	5716.500	72.55	-4.23	68.32	109.92	-41.60	peak
5	5730.563	85.78	-4.20	81.58	122.30	-40.72	peak
6	5744.063	103.44	-4.18	99.26	122.30	-23.04	peak

Orthogonal Axis	X
Test Mode	UNII-3_TX N (HT20) Mode 5745 MHz

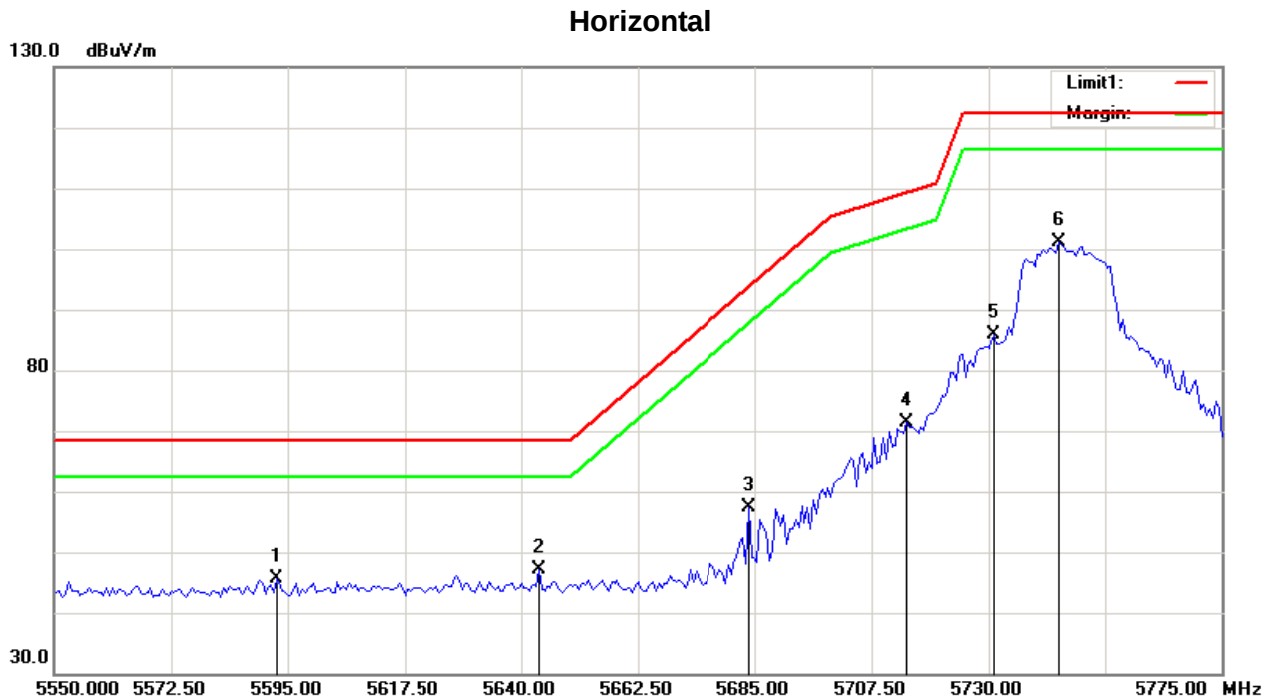

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5592.750	49.98	-4.42	45.56	68.30	-22.74	peak
2	5643.375	51.52	-4.34	47.18	68.30	-21.12	peak
3	5683.875	61.59	-4.28	57.31	93.37	-36.06	peak
4	5714.250	75.50	-4.23	71.27	109.29	-38.02	peak
5	5731.125	90.03	-4.20	85.83	122.30	-36.47	peak
6	5743.500	105.40	-4.18	101.22	122.30	-21.08	peak


Orthogonal Axis	X
Test Mode	UNII-3_TX N (HT20) Mode 5785 MHz

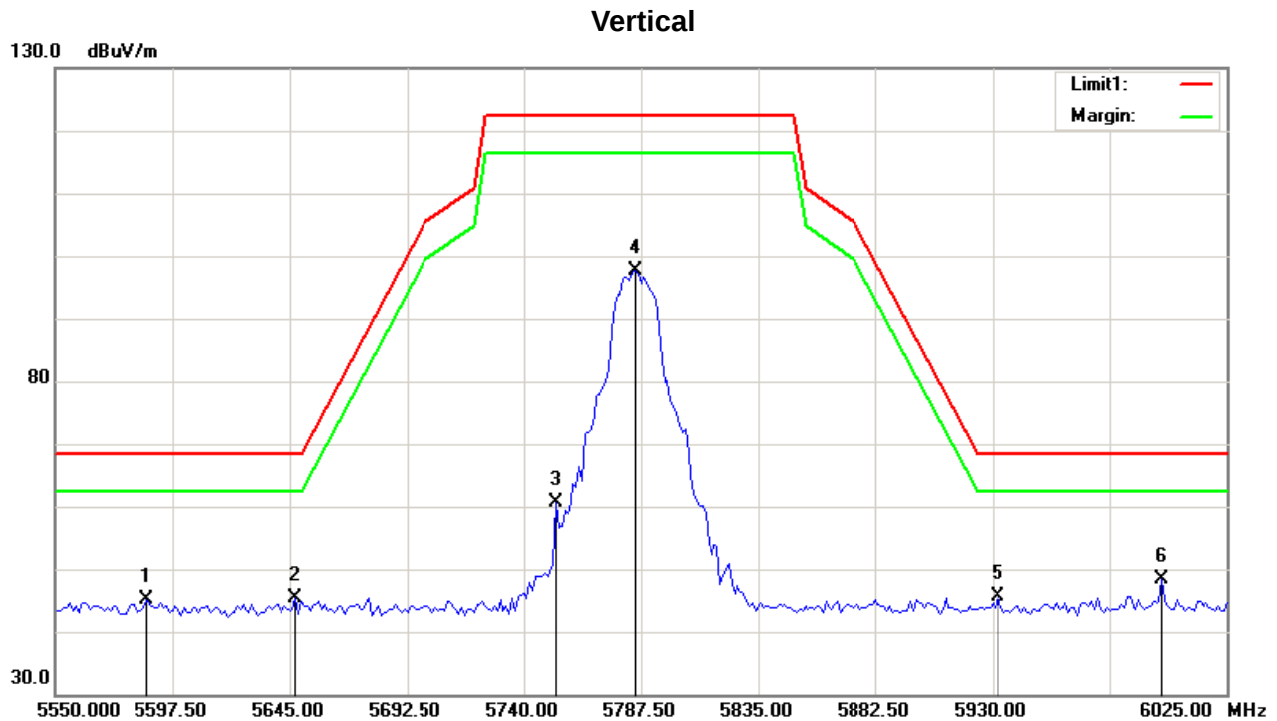

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5586.813	49.47	-4.44	45.03	68.30	-23.27	peak
2	5647.375	49.84	-4.34	45.50	68.30	-22.80	peak
3	5753.063	64.79	-4.16	60.63	122.30	-61.67	peak
4	5785.125	101.78	-4.12	97.66	122.30	-24.64	peak
5	5932.375	49.48	-3.89	45.59	68.30	-22.71	peak
6	5998.875	52.04	-3.77	48.27	68.30	-20.03	peak

Orthogonal Axis	X
Test Mode	UNII-3_TX N (HT20) Mode 5785 MHz


Horizontal

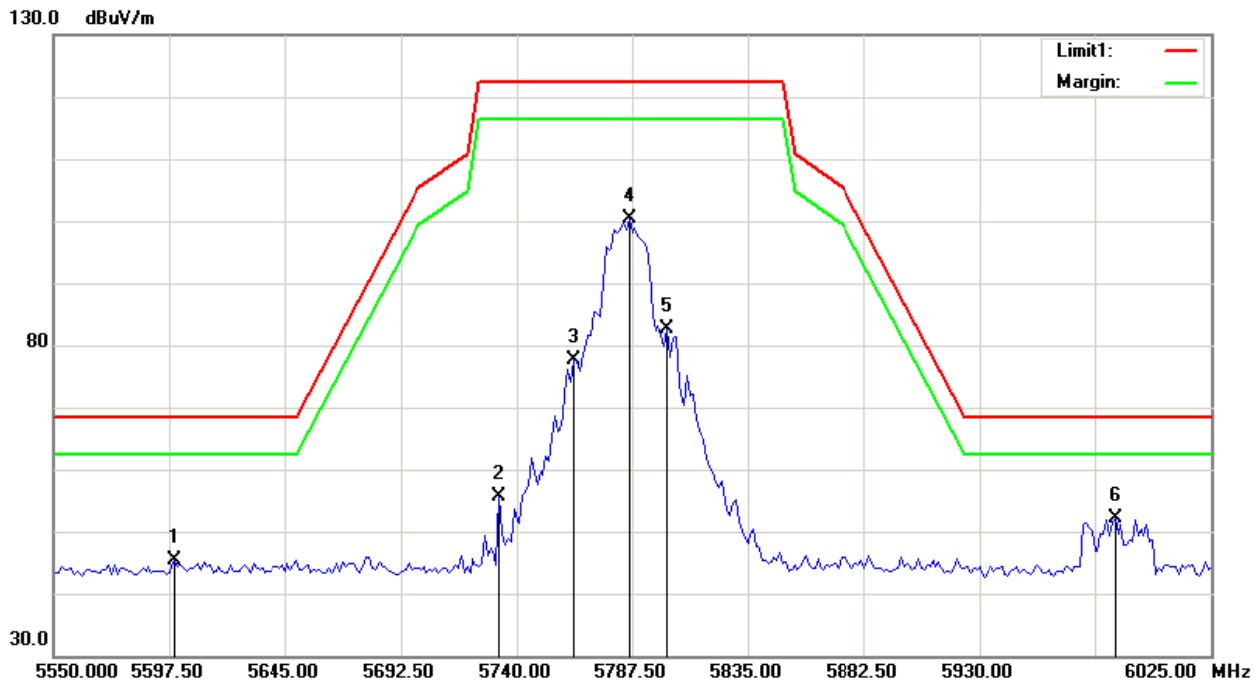

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5599.875	49.73	-4.41	45.32	68.30	-22.98	peak
2	5732.875	59.76	-4.20	55.56	122.30	-66.74	peak
3	5763.750	81.67	-4.15	77.52	122.30	-44.78	peak
4	5786.313	104.58	-4.12	100.46	122.30	-21.84	peak
5	5801.750	86.82	-4.09	82.73	122.30	-39.57	peak
6	5985.813	55.82	-3.80	52.02	68.30	-16.28	peak

Orthogonal Axis	X
Test Mode	UNII-3_TX N (HT20) Mode 5825 MHz


Vertical

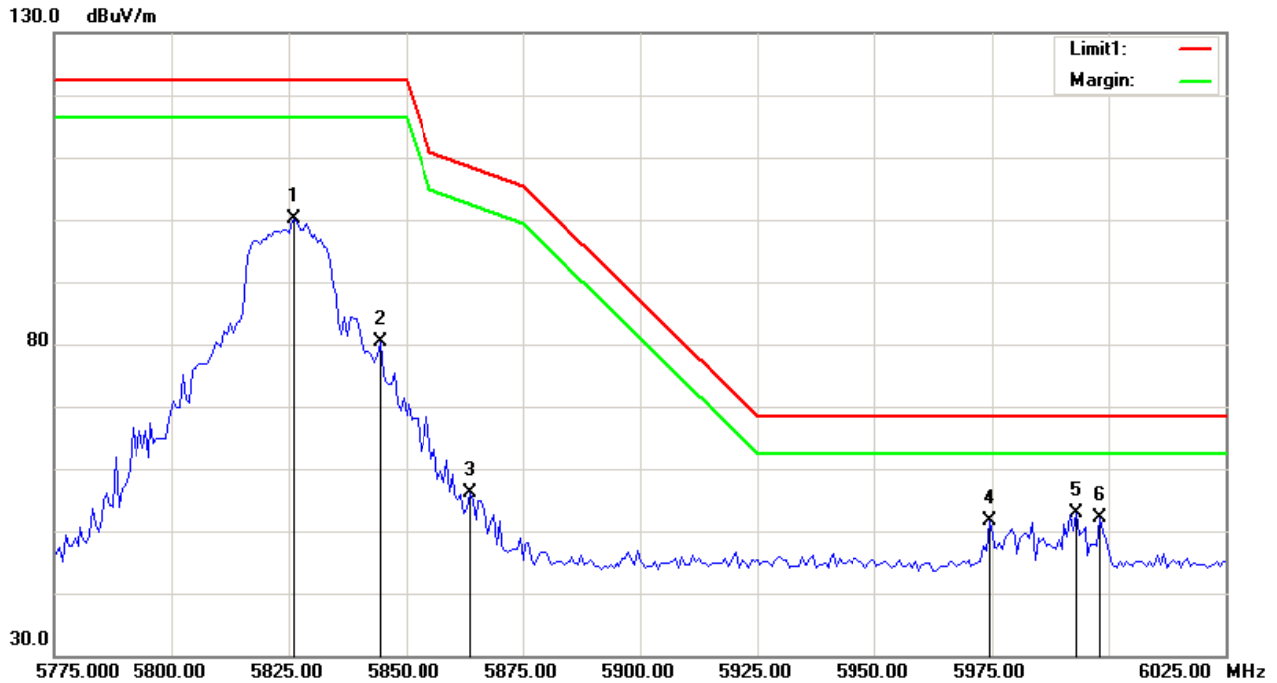

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5826.250	104.06	-4.05	100.01	122.30	-22.29	peak
2	5844.375	84.36	-4.02	80.34	122.30	-41.96	peak
3	5863.750	60.10	-3.99	56.11	108.45	-52.34	peak
4	5974.375	55.43	-3.81	51.62	68.30	-16.68	peak
5	5993.125	56.75	-3.77	52.98	68.30	-15.32	peak
6	5998.125	55.97	-3.77	52.20	68.30	-16.10	peak


Orthogonal Axis	X
Test Mode	UNII-3_TX N (HT20) Mode 5825 MHz

Horizontal

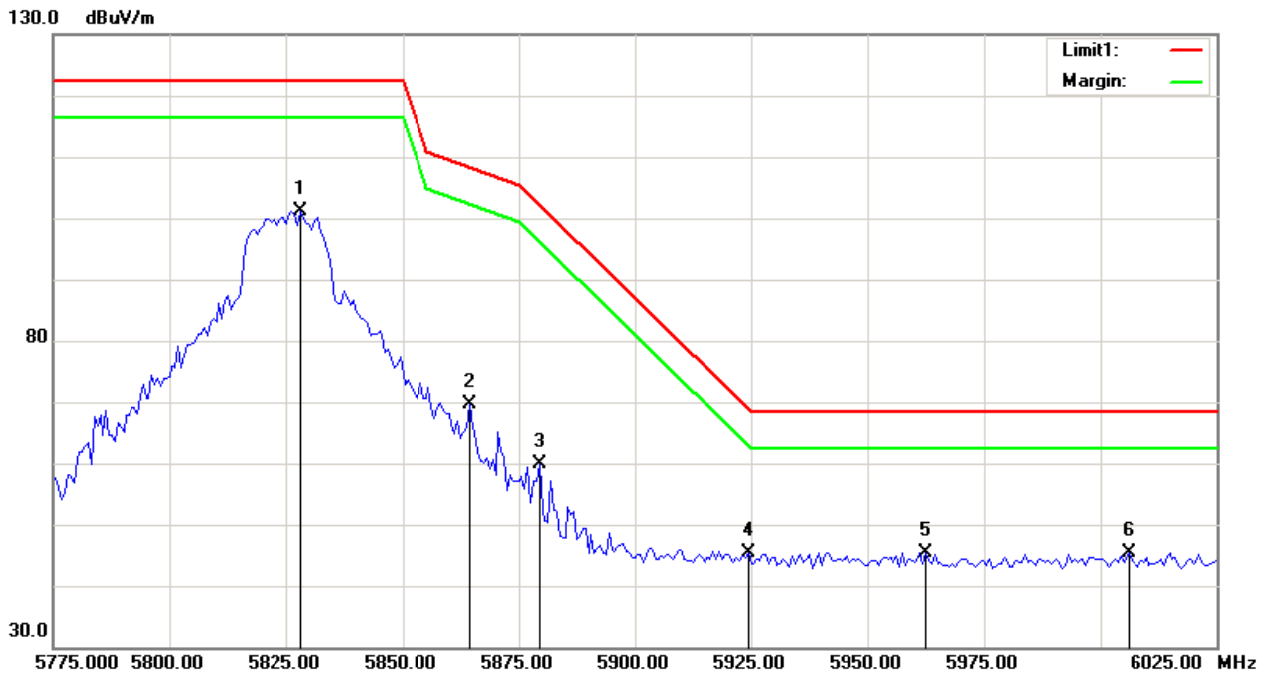

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5828.125	105.26	-4.04	101.22	122.30	-21.08	peak
2	5864.375	73.55	-3.99	69.56	108.27	-38.71	peak
3	5879.375	63.85	-3.96	59.89	102.06	-42.17	peak
4	5924.375	49.29	-3.89	45.40	68.76	-23.36	peak
5	5962.500	49.30	-3.84	45.46	68.30	-22.84	peak
6	6006.250	49.06	-3.74	45.32	68.30	-22.98	peak


Orthogonal Axis	X
Test Mode	UNII-3_TX N (HT40) Mode 5755 MHz

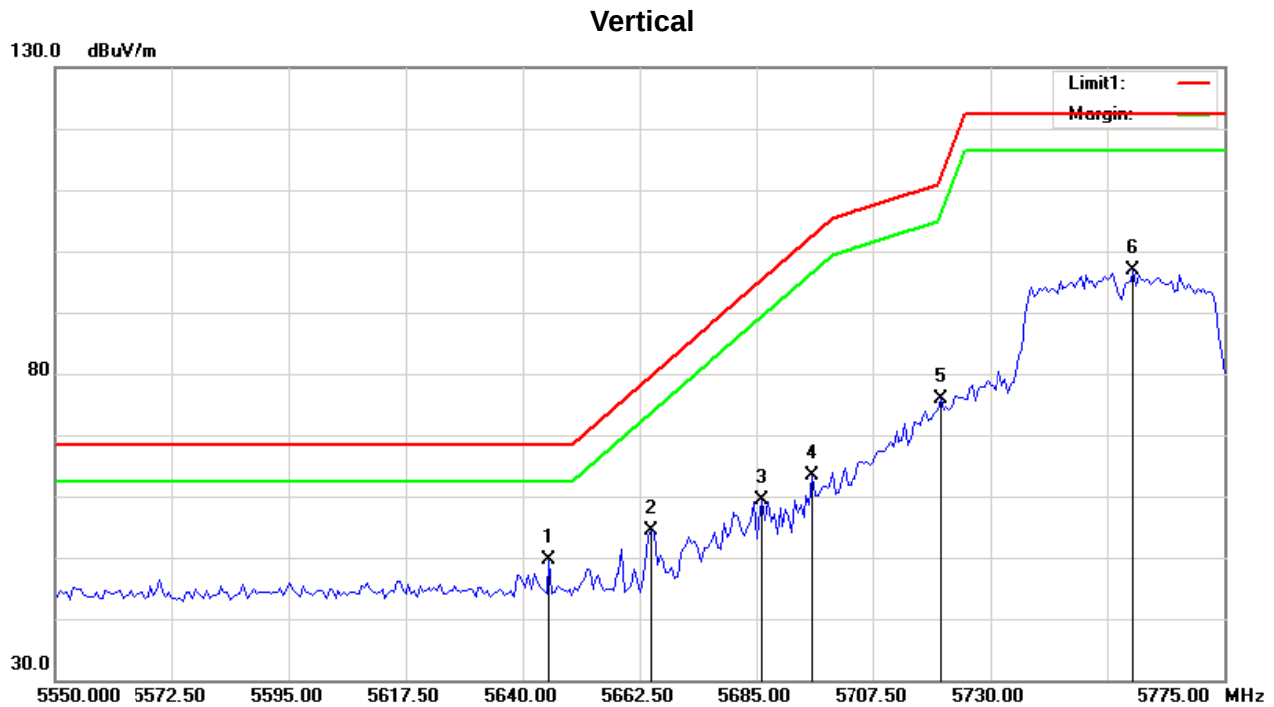

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5645.063	53.86	-4.35	49.51	68.30	-18.79	peak
2	5664.750	58.69	-4.31	54.38	79.21	-24.83	peak
3	5686.125	63.57	-4.28	59.29	95.03	-35.74	peak
4	5695.688	67.57	-4.26	63.31	102.11	-38.80	peak
5	5720.438	80.09	-4.22	75.87	111.90	-36.03	peak
6	5757.563	100.96	-4.16	96.80	122.30	-25.50	peak

Orthogonal Axis	X
Test Mode	UNII-3_TX N (HT40) Mode 5755 MHz


Horizontal

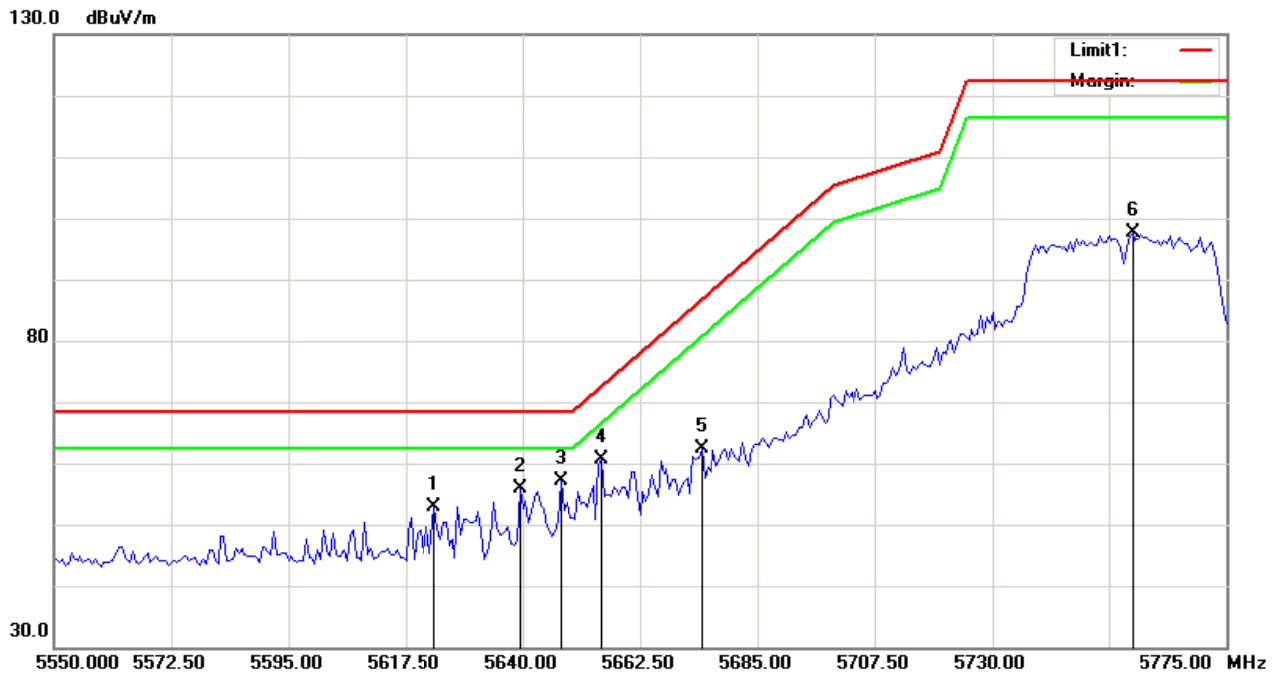

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5623.125	57.26	-4.37	52.89	68.30	-15.41	peak
2	5639.438	60.14	-4.35	55.79	68.30	-12.51	peak
3	5647.313	61.35	-4.34	57.01	68.30	-11.29	peak
4	5655.188	64.85	-4.32	60.53	72.14	-11.61	peak
5	5674.313	66.79	-4.29	62.50	86.29	-23.79	peak
6	5757.000	101.75	-4.17	97.58	122.30	-24.72	peak

Orthogonal Axis	X
Test Mode	UNII-3_TX N (HT40) Mode 5795 MHz


Vertical

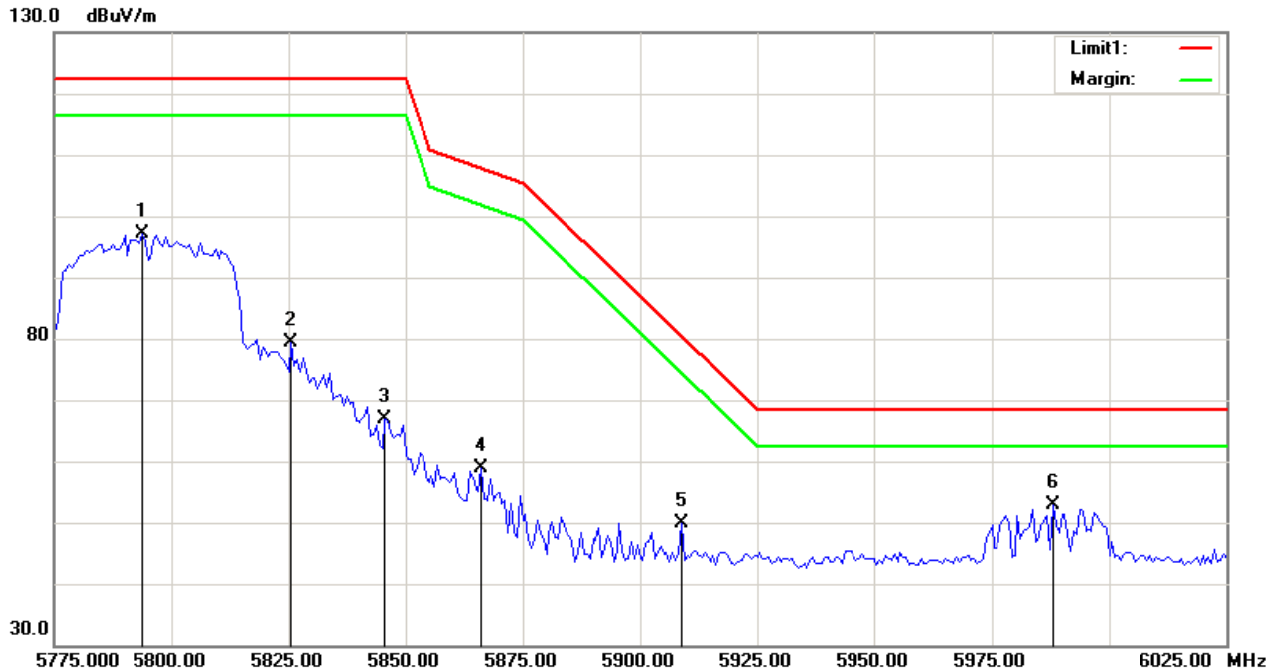

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5793.750	101.21	-4.10	97.11	122.30	-25.19	peak
2	5825.625	83.54	-4.05	79.49	122.30	-42.81	peak
3	5845.625	70.96	-4.02	66.94	122.30	-55.36	peak
4	5866.250	62.83	-3.98	58.85	107.75	-48.90	peak
5	5908.750	53.77	-3.92	49.85	80.32	-30.47	peak
6	5988.125	56.65	-3.78	52.87	68.30	-15.43	peak

Orthogonal Axis	X
Test Mode	UNII-3_TX N (HT40) Mode 5795 MHz


Horizontal

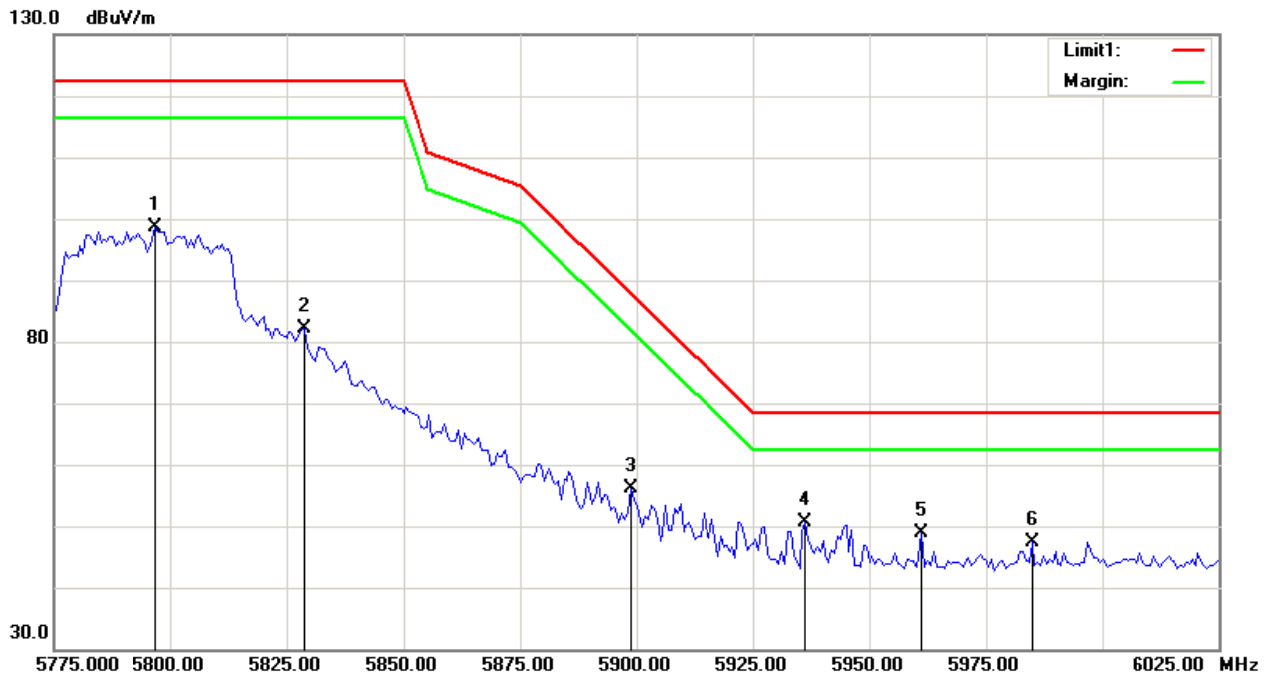

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5796.875	102.77	-4.10	98.67	122.30	-23.63	peak
2	5828.750	86.24	-4.04	82.20	122.30	-40.10	peak
3	5898.750	60.11	-3.93	56.18	87.72	-31.54	peak
4	5936.250	54.42	-3.88	50.54	68.30	-17.76	peak
5	5961.250	52.67	-3.84	48.83	68.30	-19.47	peak
6	5985.000	51.29	-3.80	47.49	68.30	-20.81	peak

5.9 TEST RESULTS - ABOVE1000 MHz (HARMONIC)


Orthogonal Axis	X
Test Mode	UNII-1_TX A Mode 5180 MHz

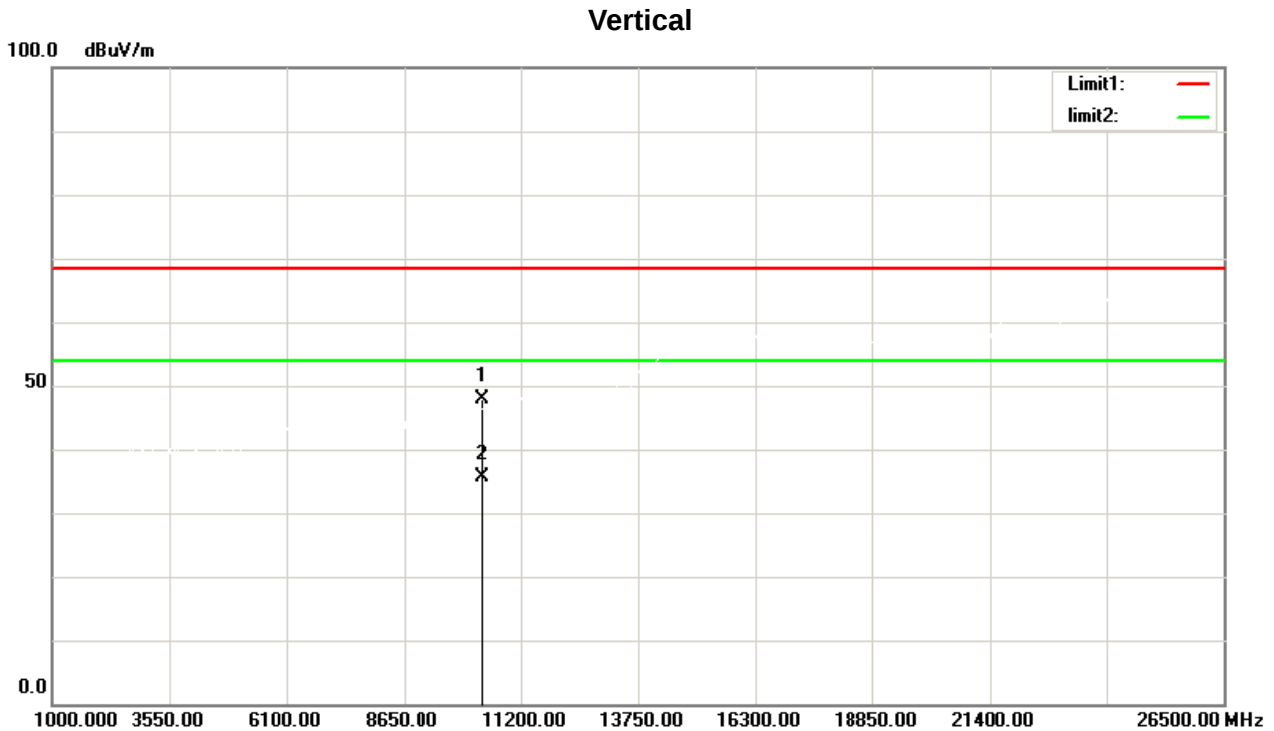

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10360.000	41.71	6.22	47.93	68.30	-20.37	peak
2	10360.000	29.46	6.22	35.68	54.00	-18.32	AVG

Report No.: 20EFAS11141 10941


Orthogonal Axis	X
Test Mode	UNII-1_TX A Mode 5180 MHz

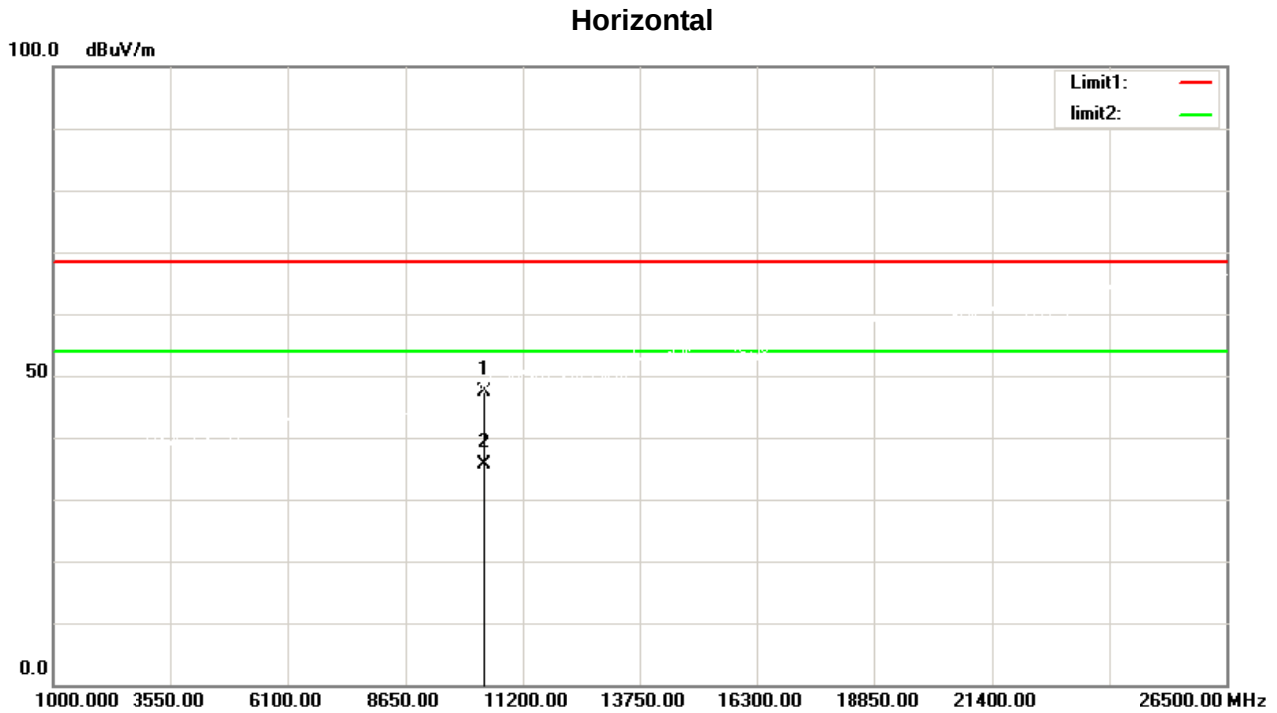

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10360.000	41.15	6.22	47.37	68.30	-20.93	peak
2	10360.000	29.40	6.22	35.62	54.00	-18.38	AVG


Orthogonal Axis	X
Test Mode	UNII-1_TX A Mode 5200 MHz

Vertical

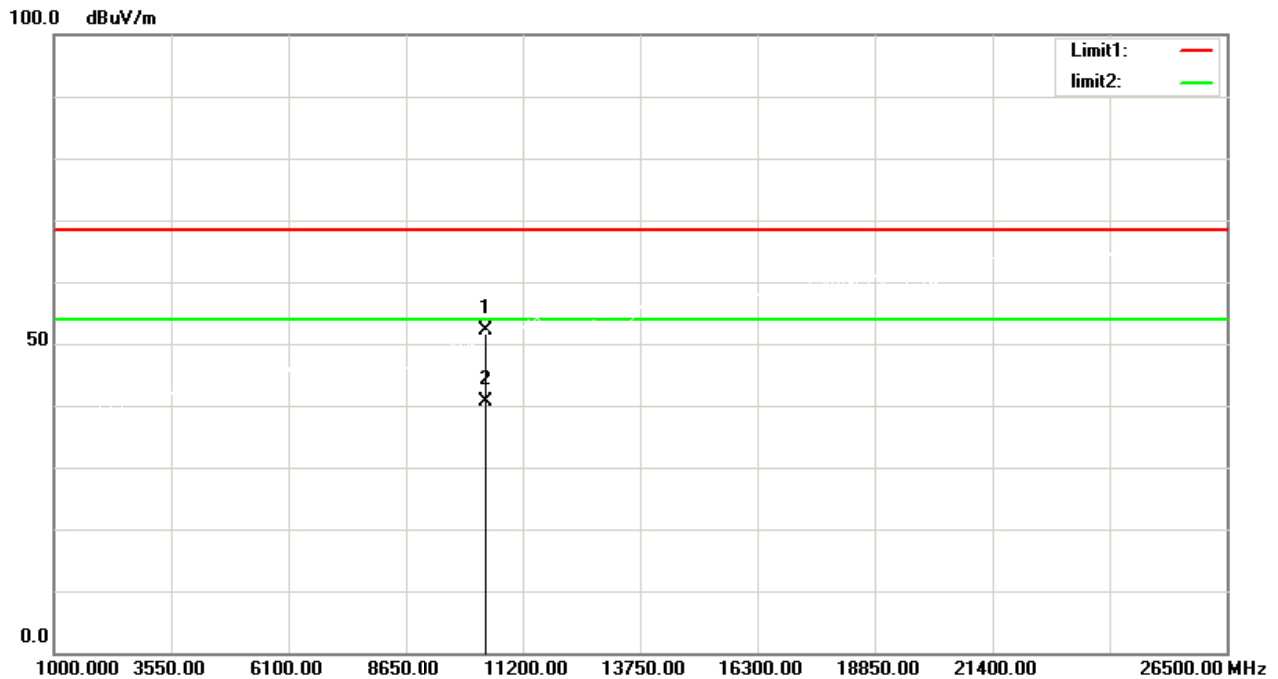

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10400.000	45.70	6.35	52.05	68.30	-16.25	peak
2	10400.000	34.33	6.35	40.68	54.00	-13.32	AVG


Orthogonal Axis	X
Test Mode	UNII-1_TX A Mode 5200 MHz

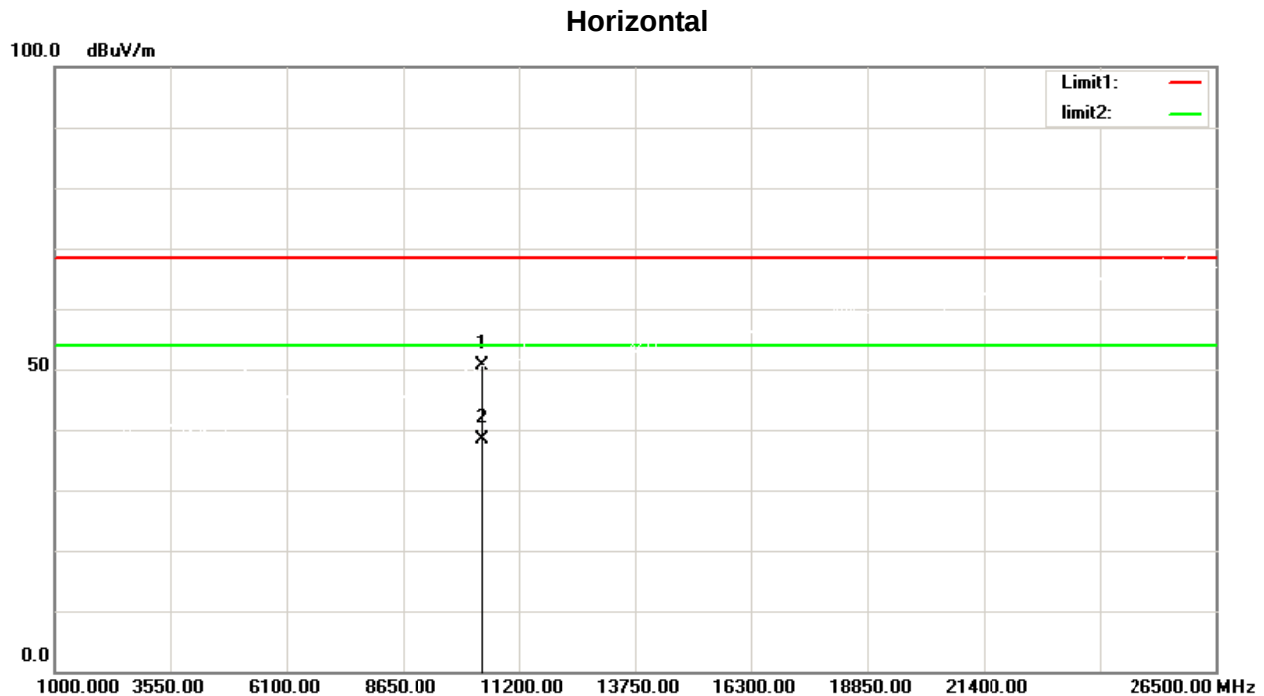

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10400.000	44.16	6.35	50.51	68.30	-17.79	peak
2	10400.000	32.13	6.35	38.48	54.00	-15.52	AVG


Orthogonal Axis	X
Test Mode	UNII-1_TX A Mode 5240 MHz

Vertical

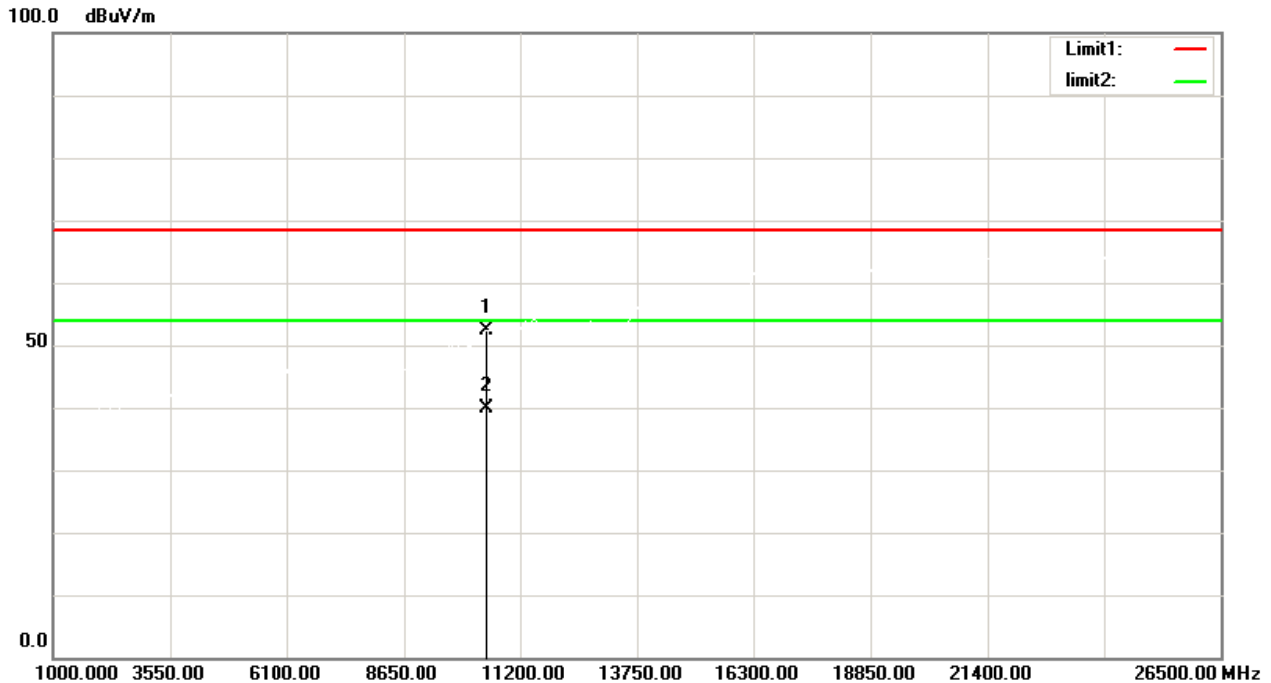

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10480.000	45.77	6.61	52.38	68.30	-15.92	peak
2	10480.000	33.28	6.61	39.89	54.00	-14.11	AVG


Orthogonal Axis	X
Test Mode	UNII-1_TX A Mode 5240 MHz

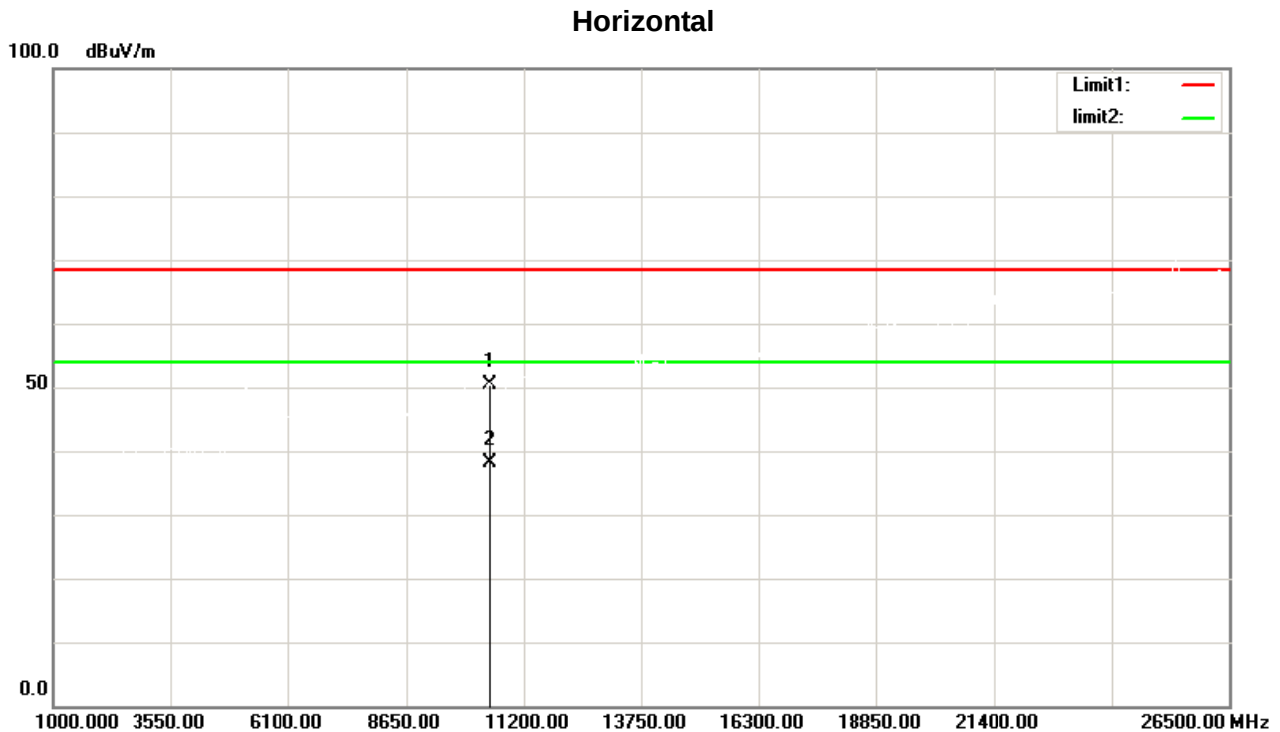

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10480.000	43.78	6.61	50.39	68.30	-17.91	peak
2	10480.000	31.53	6.61	38.14	54.00	-15.86	AVG


Orthogonal Axis	X
Test Mode	UNII-1_TX N (HT20) Mode 5180 MHz

Vertical

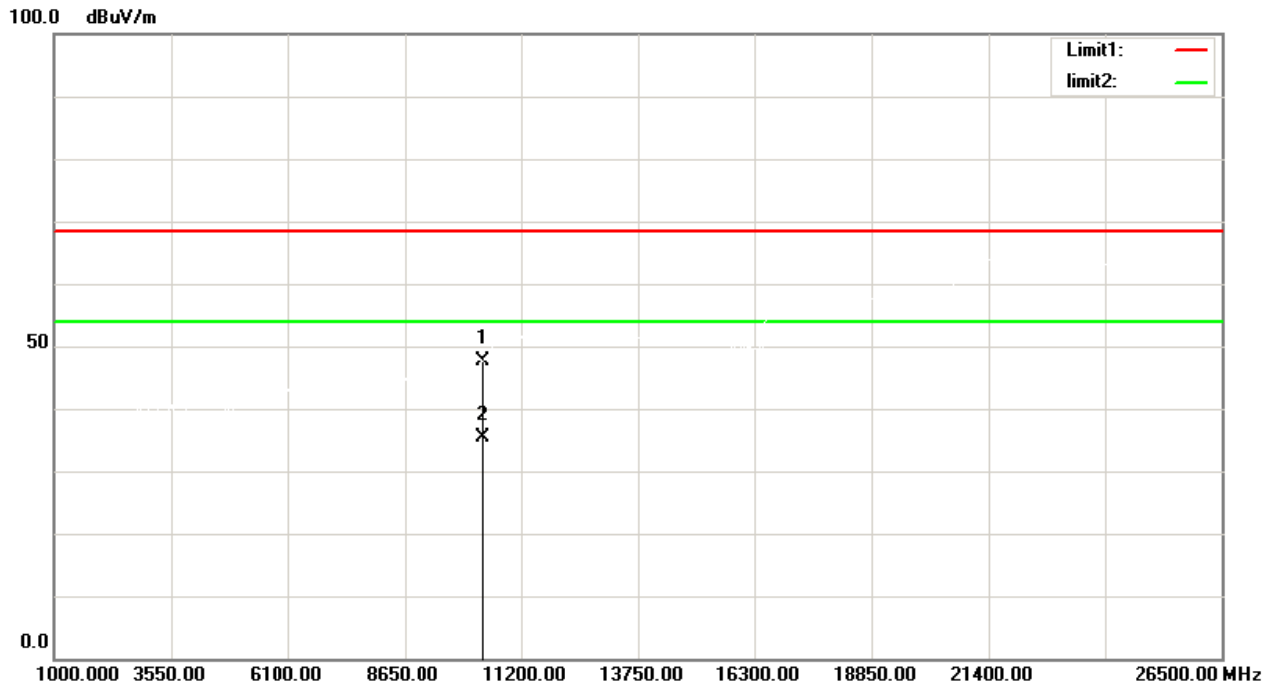


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10360.000	41.42	6.22	47.64	68.30	-20.66	peak
2	10360.000	29.23	6.22	35.45	54.00	-18.55	AVG

Orthogonal Axis	X
Test Mode	UNII-1_TX N (HT20) Mode 5180 MHz

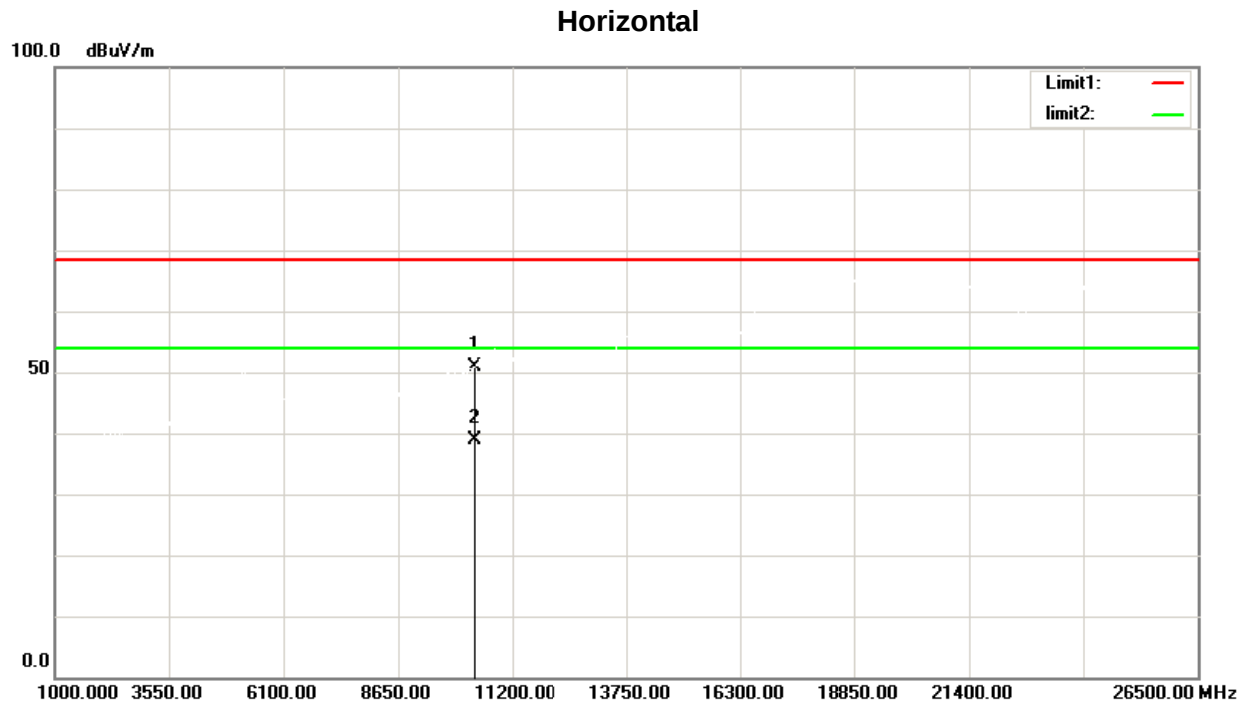


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10360.000	44.62	6.22	50.84	68.30	-17.46	peak
2	10360.000	32.56	6.22	38.78	54.00	-15.22	AVG

Orthogonal Axis	X
Test Mode	UNII-1_TX N (HT20) Mode 5200 MHz

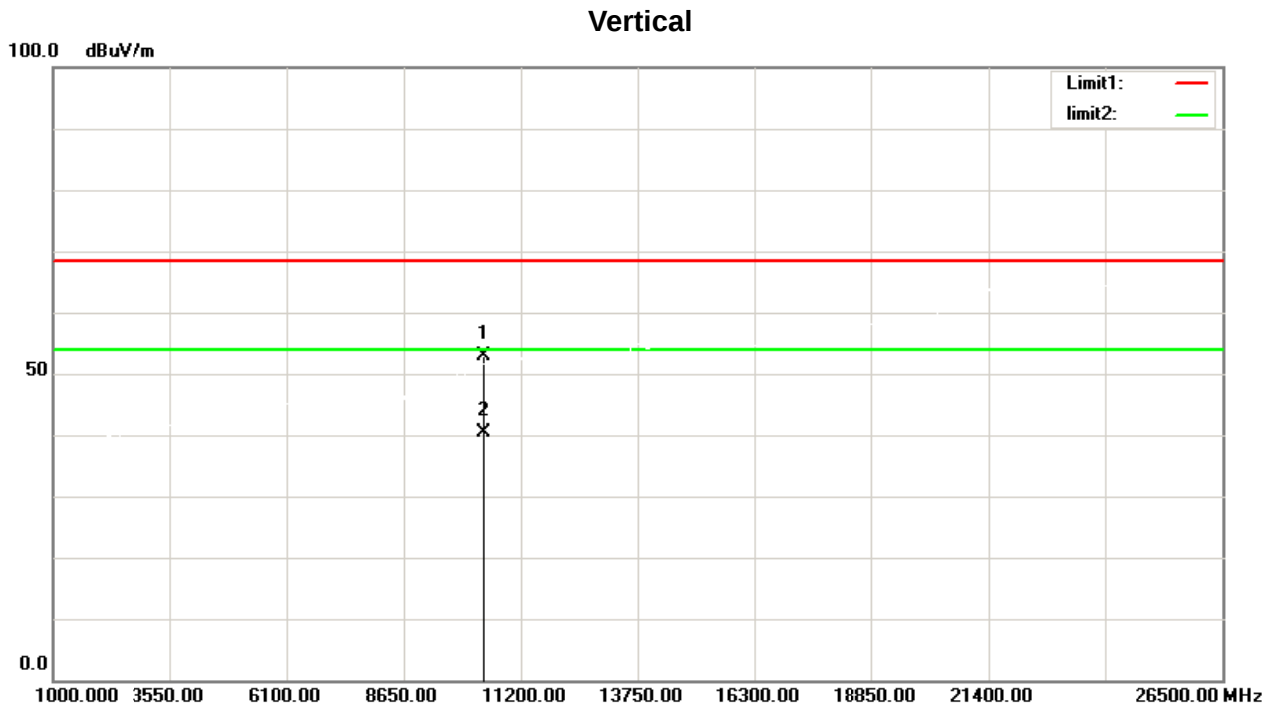

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10400.000	46.54	6.35	52.89	68.30	-15.41	peak
2	10400.000	34.03	6.35	40.38	54.00	-13.62	AVG


Orthogonal Axis	X
Test Mode	UNII-1_TX N (HT20) Mode 5200 MHz

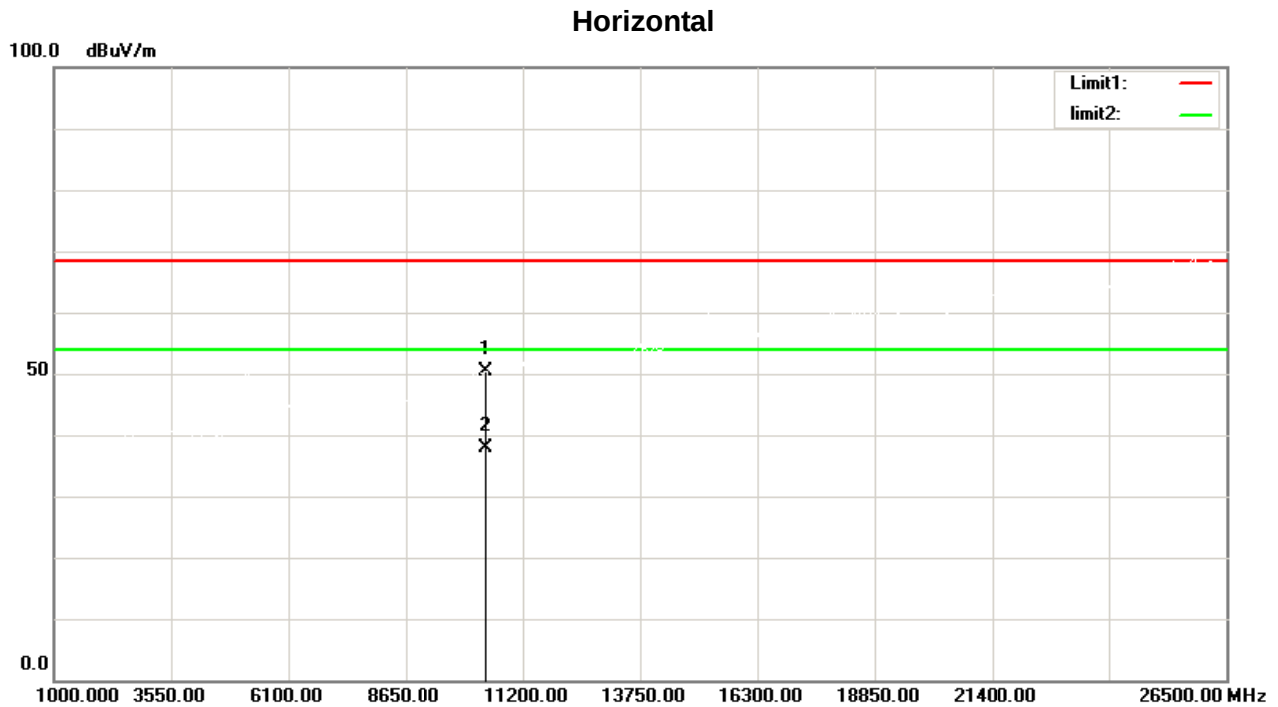

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10400.000	44.10	6.35	50.45	68.30	-17.85	peak
2	10400.000	31.60	6.35	37.95	54.00	-16.05	AVG


Orthogonal Axis	X
Test Mode	UNII-1_TX N (HT20) Mode 5240 MHz

Vertical

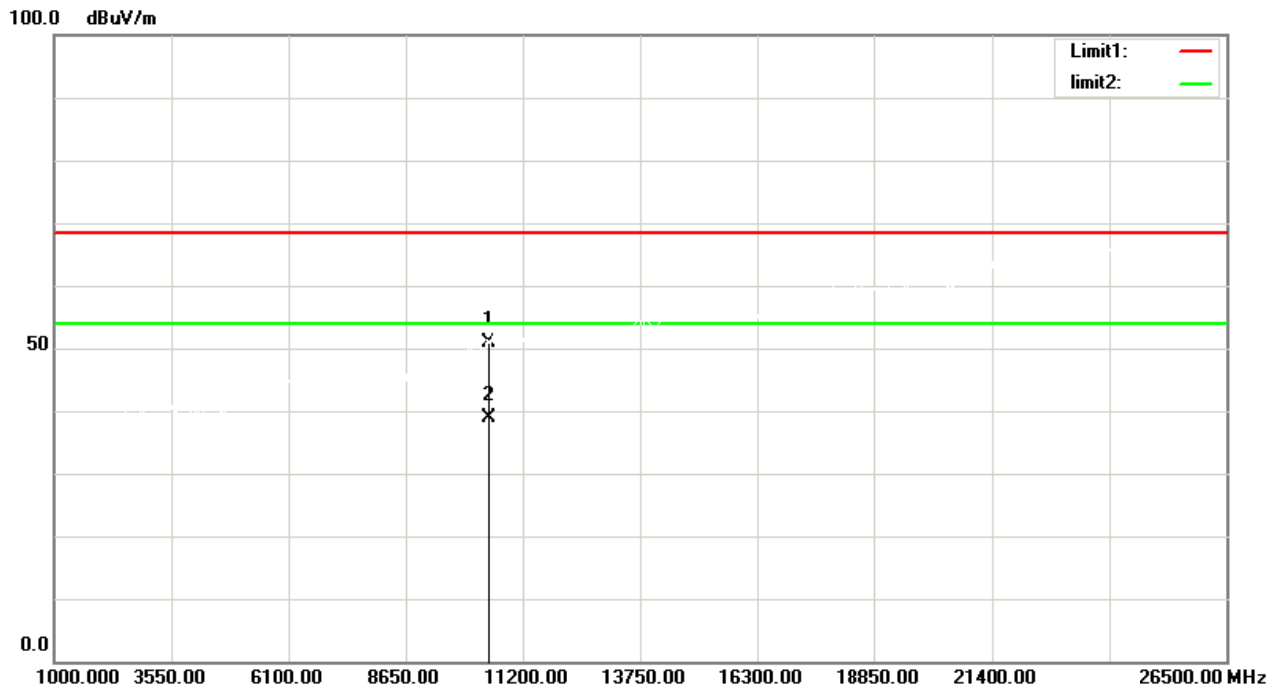

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10480.000	44.33	6.61	50.94	68.30	-17.36	peak
2	10480.000	32.17	6.61	38.78	54.00	-15.22	AVG


Orthogonal Axis	X
Test Mode	UNII-1_TX N (HT20) Mode 5240 MHz

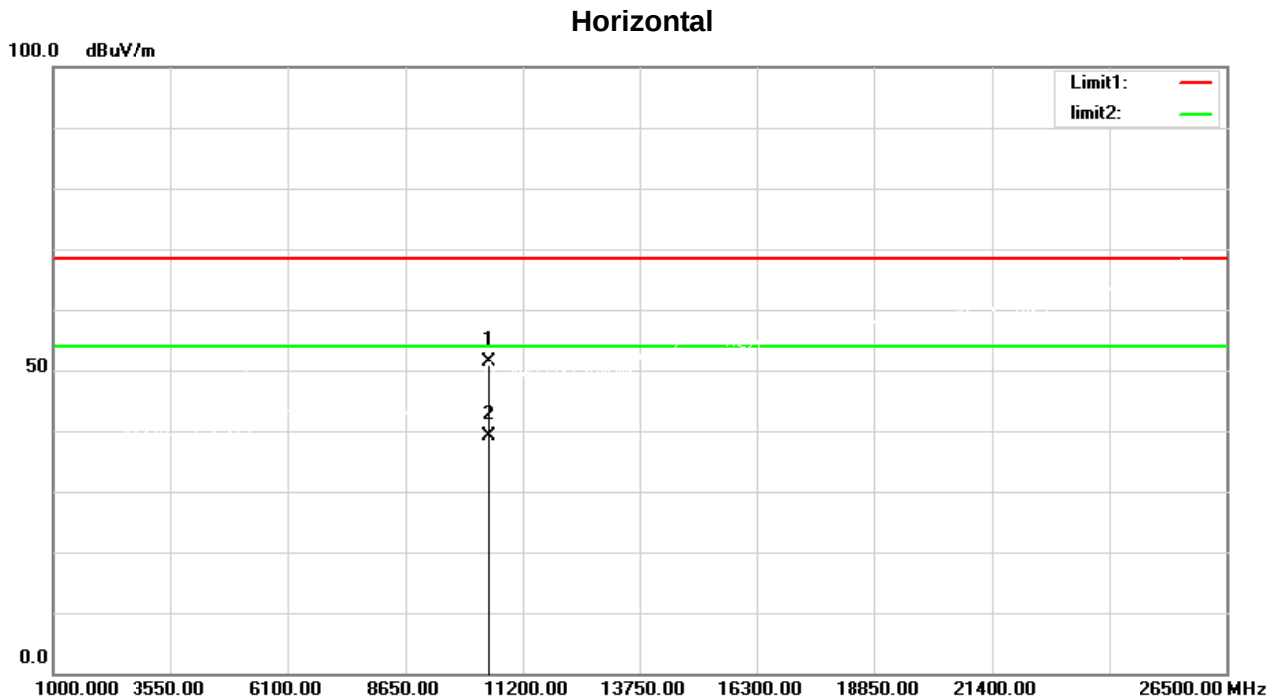

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10480.000	44.83	6.61	51.44	68.30	-16.86	peak
2	10480.000	32.41	6.61	39.02	54.00	-14.98	AVG


Orthogonal Axis	X
Test Mode	UNII-1_TX N (HT40) Mode 5190 MHz

Vertical

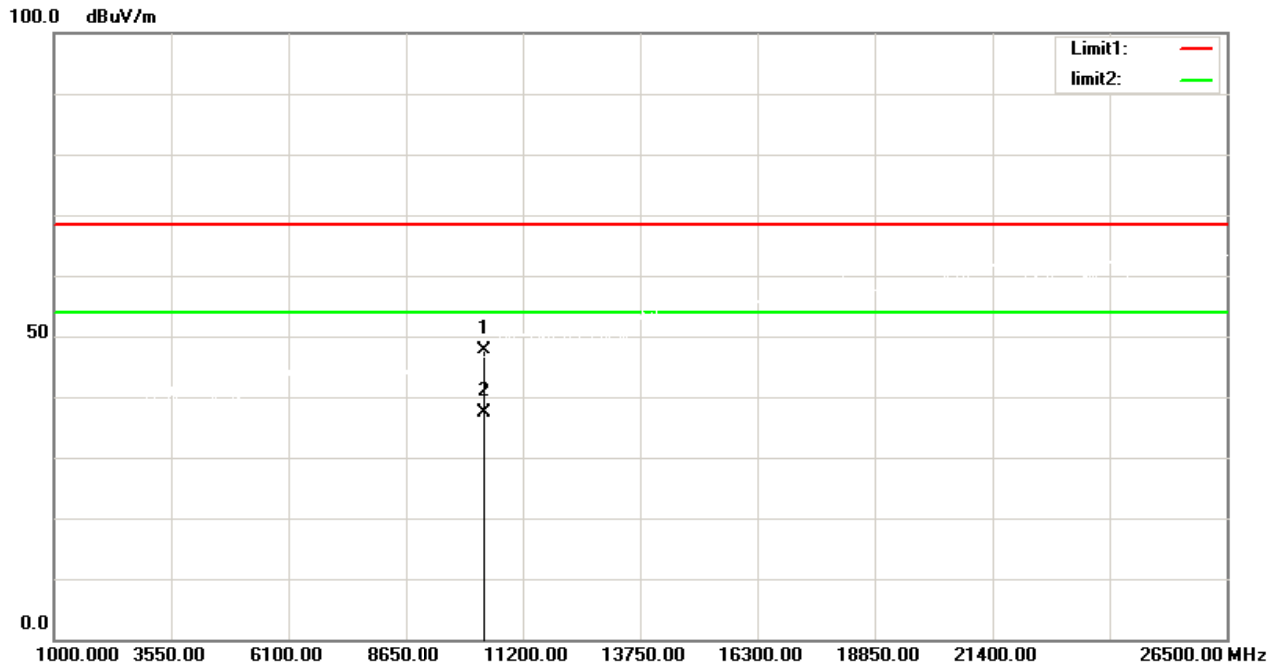

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10380.000	41.39	6.28	47.67	68.30	-20.63	peak
2	10380.000	31.12	6.28	37.40	54.00	-16.60	AVG


Orthogonal Axis	X
Test Mode	UNII-1_TX N (HT40) Mode 5190 MHz

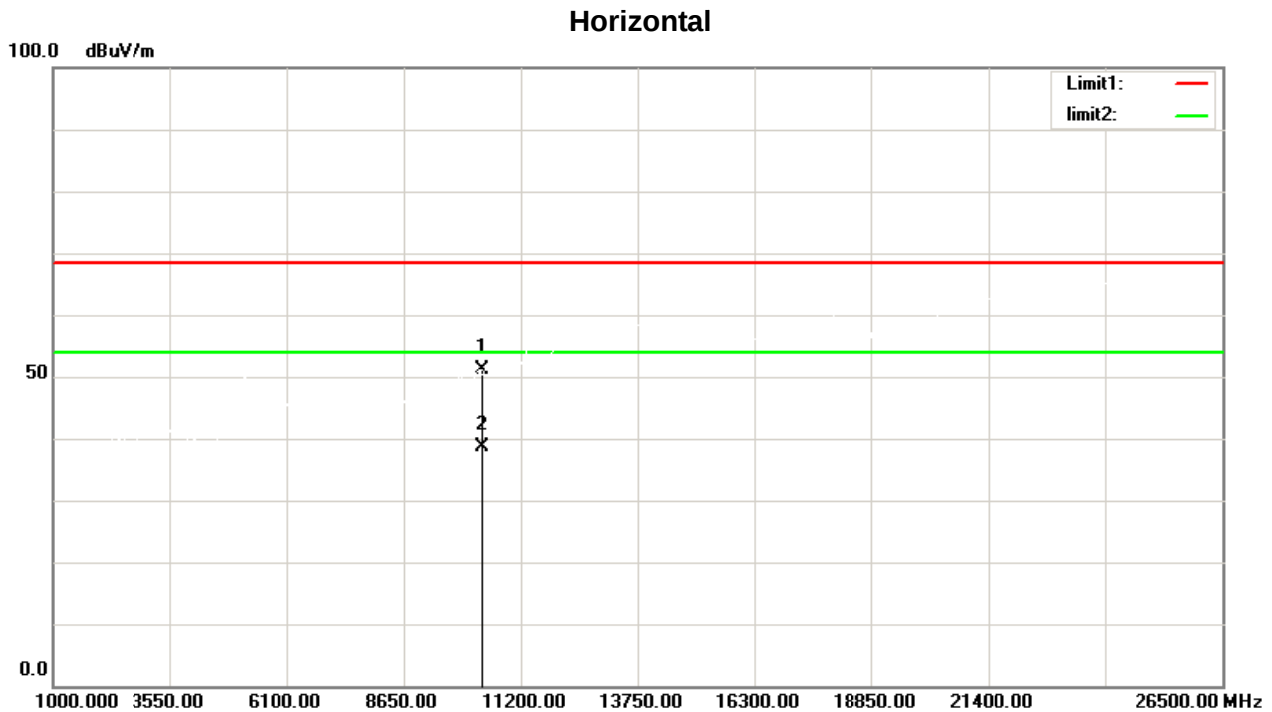

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10380.000	44.74	6.28	51.02	68.30	-17.28	peak
2	10380.000	32.31	6.28	38.59	54.00	-15.41	AVG


Orthogonal Axis	X
Test Mode	UNII-1_TX N (HT40) Mode 5230 MHz

Vertical

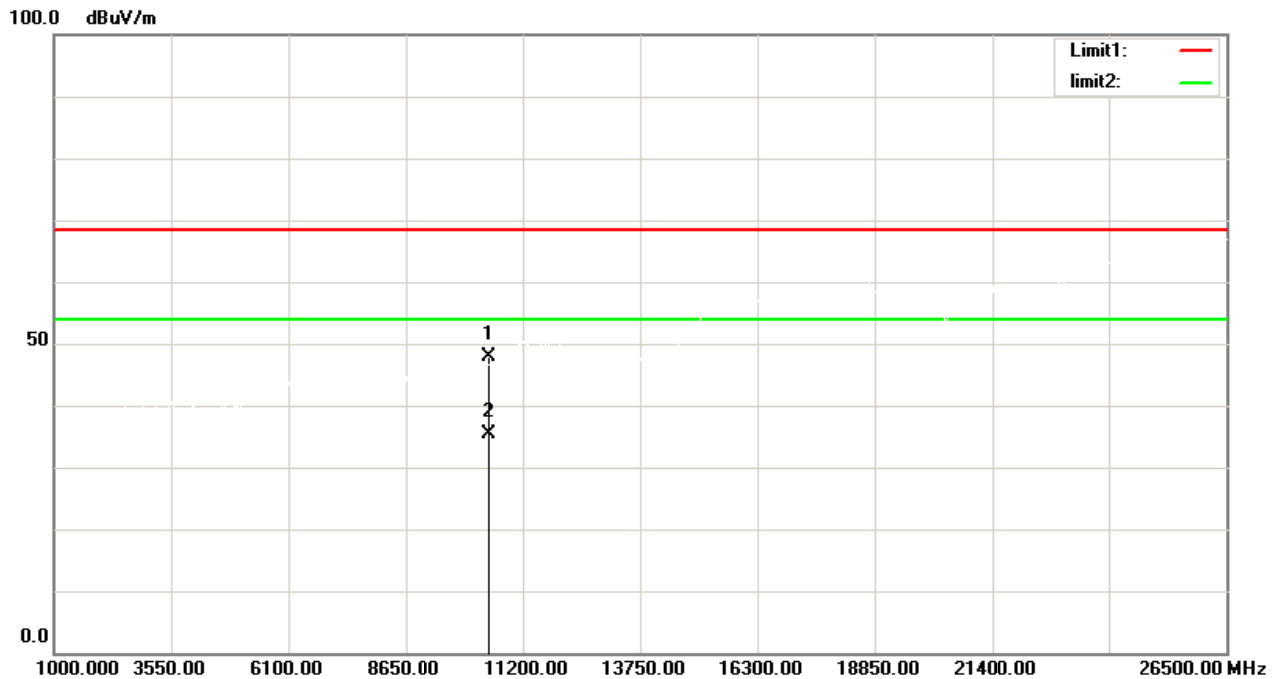


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10460.000	41.44	6.55	47.99	68.30	-20.31	peak
2	10460.000	28.94	6.55	35.49	54.00	-18.51	AVG

Orthogonal Axis	X
Test Mode	UNII-1_TX N (HT40) Mode 5230 MHz

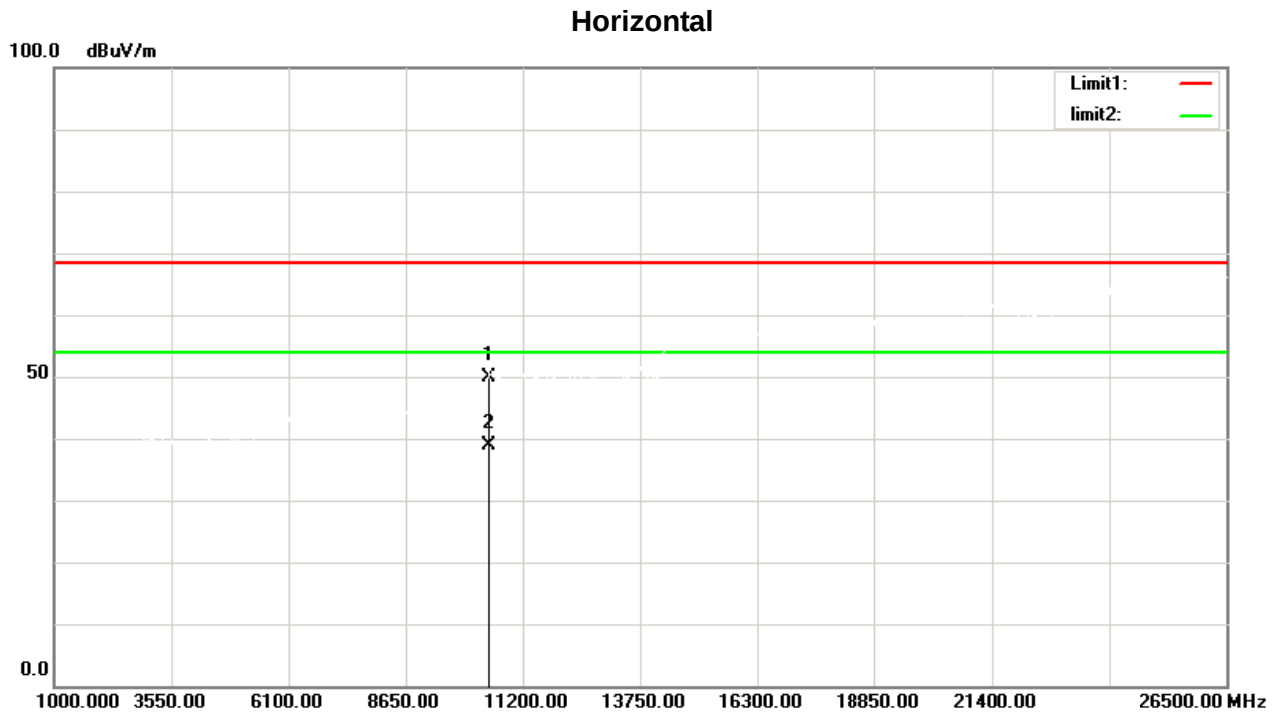


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10460.000	43.27	6.55	49.82	68.30	-18.48	peak
2	10460.000	32.25	6.55	38.80	54.00	-15.20	AVG

Orthogonal Axis	X
Test Mode	UNII-3_TX A Mode 5745 MHz

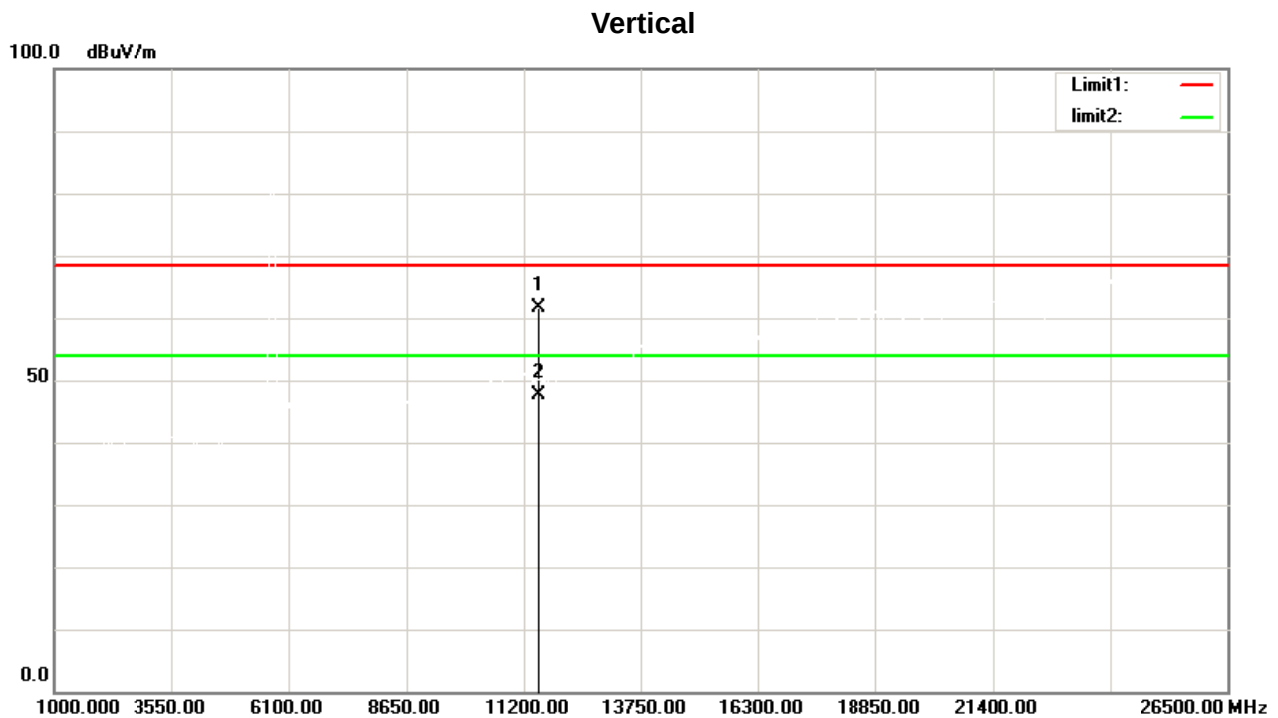


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11518.750	53.67	8.04	61.71	68.30	-6.59	peak
2	11518.750	39.56	8.04	47.60	54.00	-6.40	AVG

Orthogonal Axis	X
Test Mode	UNII-3_TX A Mode 5745 MHz

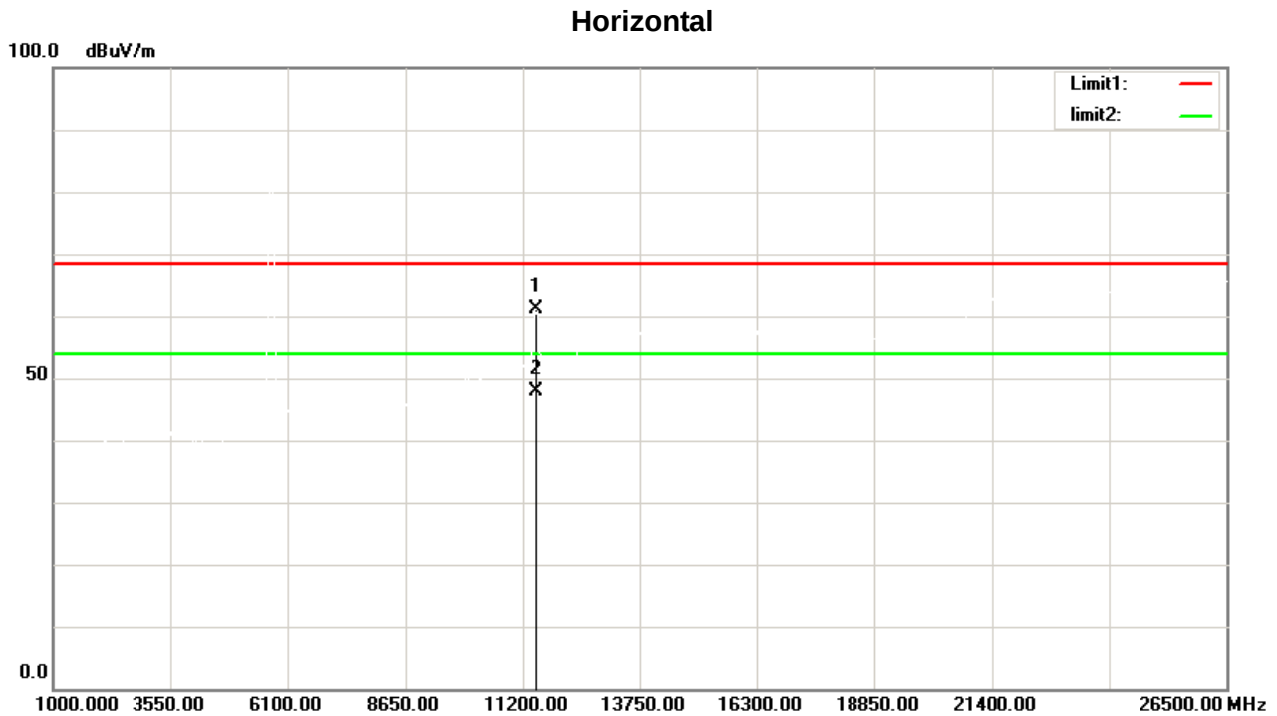


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11490.000	52.96	8.06	61.02	68.30	-7.28	peak
2	11490.000	39.94	8.06	48.00	54.00	-6.00	AVG

Orthogonal Axis	X
Test Mode	UNII-3_TX A Mode 5785 MHz

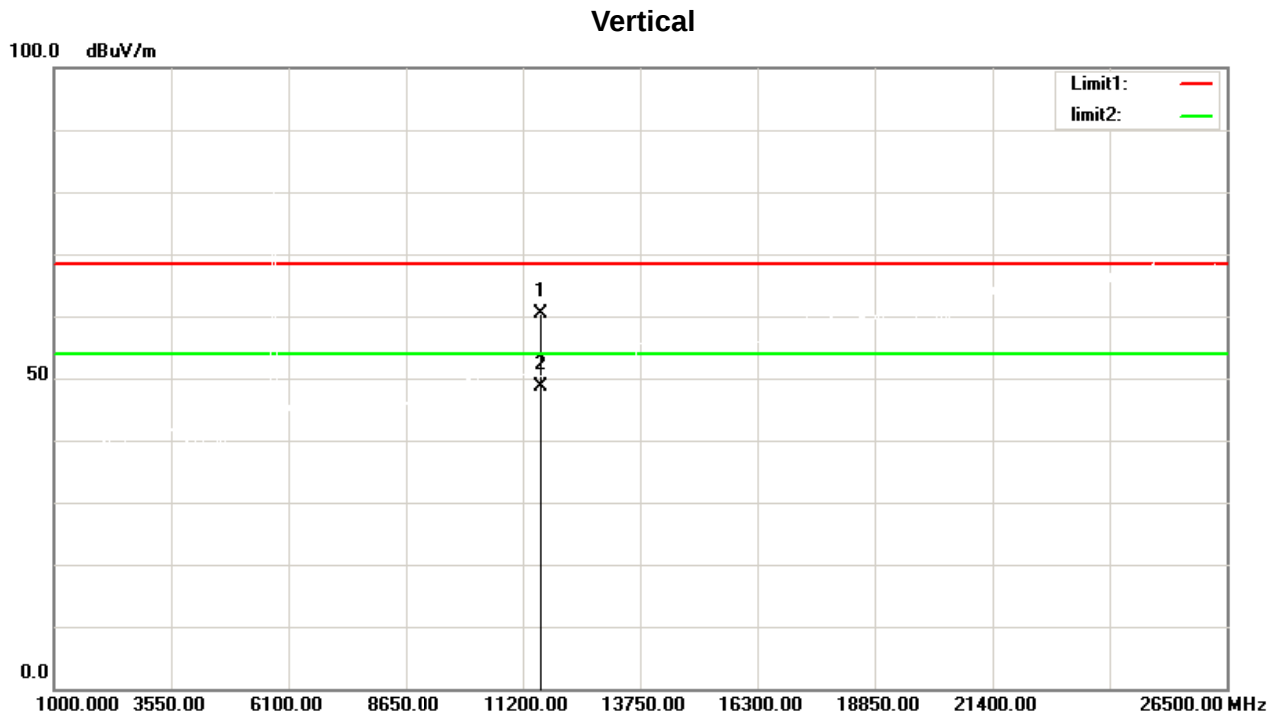


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11582.500	52.31	8.00	60.31	68.30	-7.99	peak
2	11582.500	40.71	8.00	48.71	54.00	-5.29	AVG

Orthogonal Axis	X
Test Mode	UNII-3_TX A Mode 5785 MHz

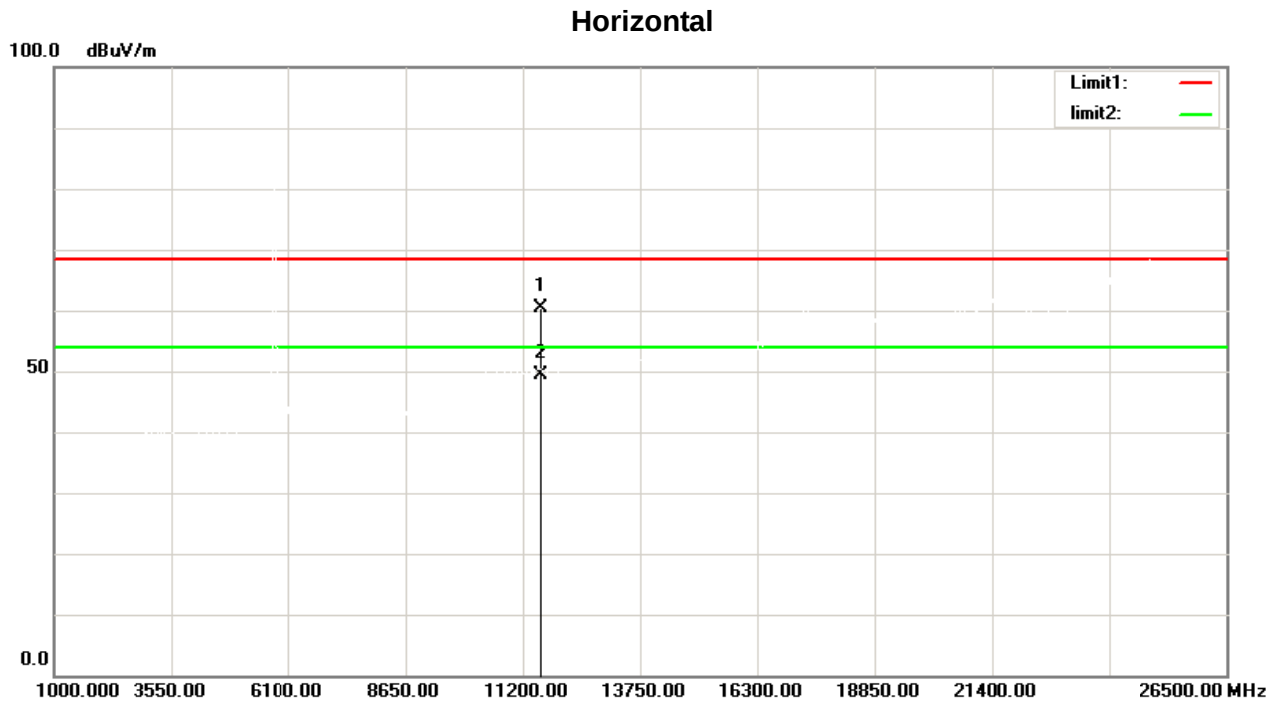

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11582.500	52.46	8.00	60.46	68.30	-7.84	peak
2	11582.500	41.30	8.00	49.30	54.00	-4.70	AVG


Orthogonal Axis	X
Test Mode	UNII-3_TX A Mode 5825 MHz

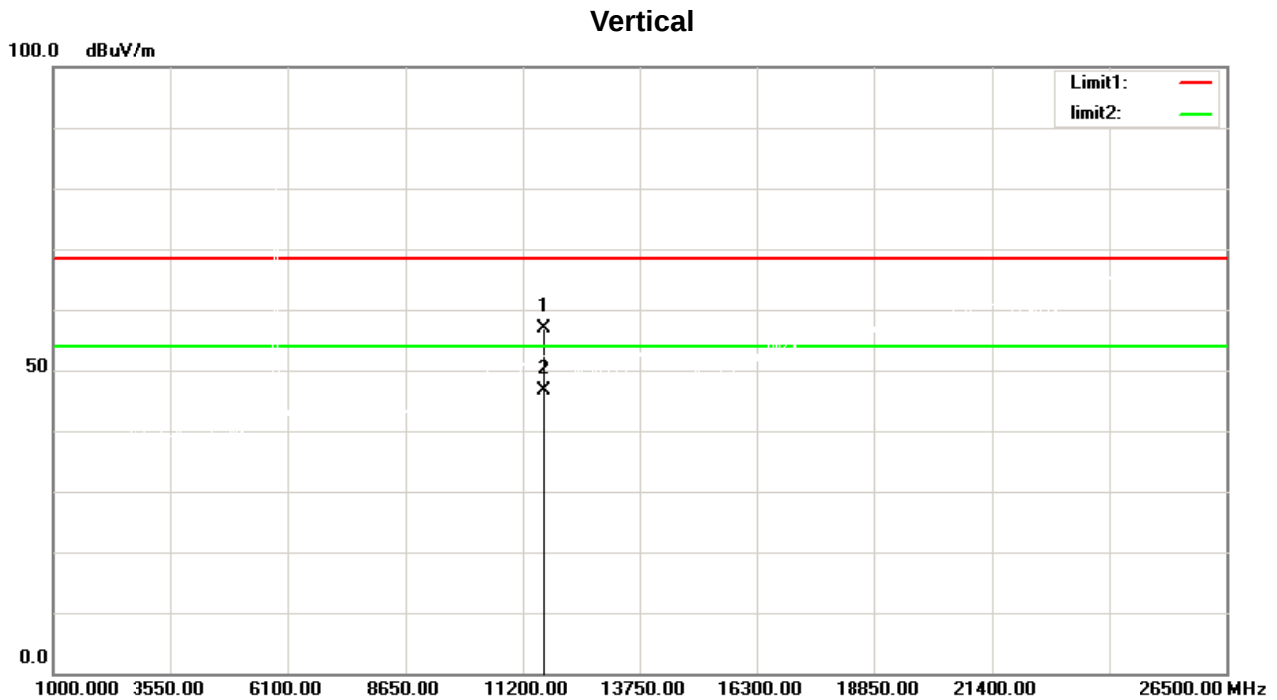

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11646.250	48.84	7.97	56.81	68.30	-11.49	peak
2	11646.250	38.62	7.97	46.59	54.00	-7.41	AVG


Orthogonal Axis	X
Test Mode	UNII-3_TX A Mode 5825 MHz

Horizontal

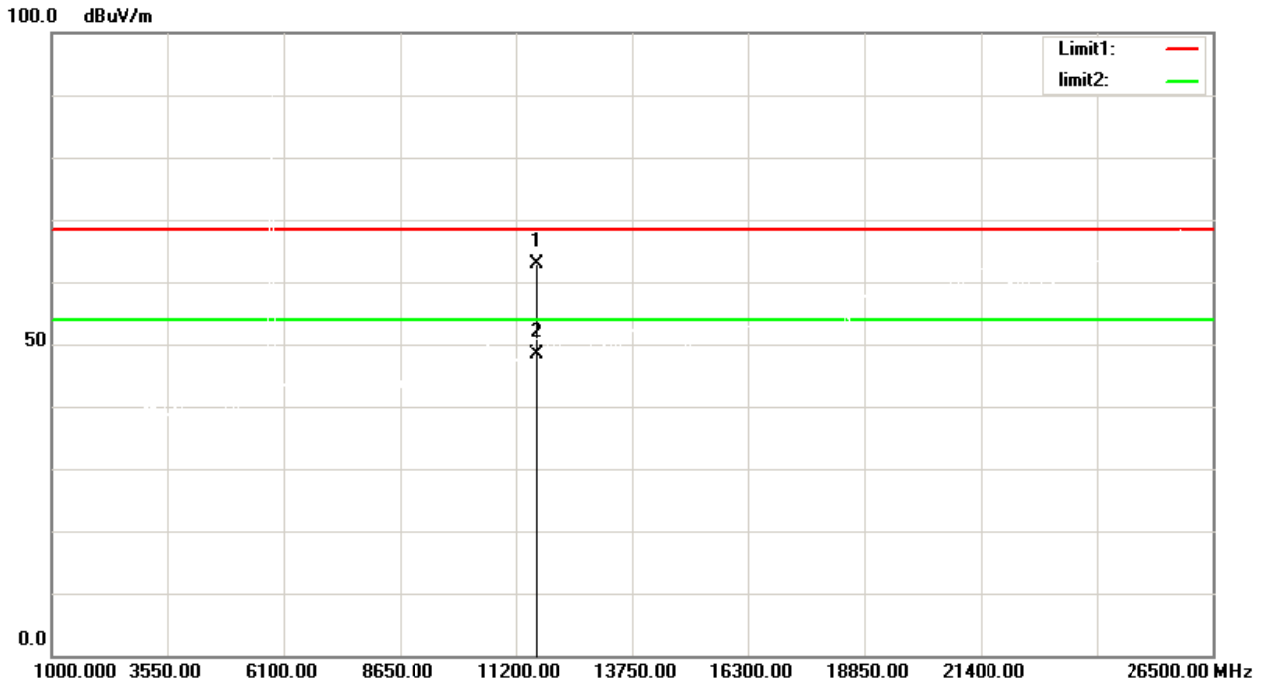


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11646.250	54.96	7.97	62.93	68.30	-5.37	peak
2	11646.250	40.51	7.97	48.48	54.00	-5.52	AVG

Orthogonal Axis	X
Test Mode	UNII-3_TX N (HT20) Mode 5745 MHz

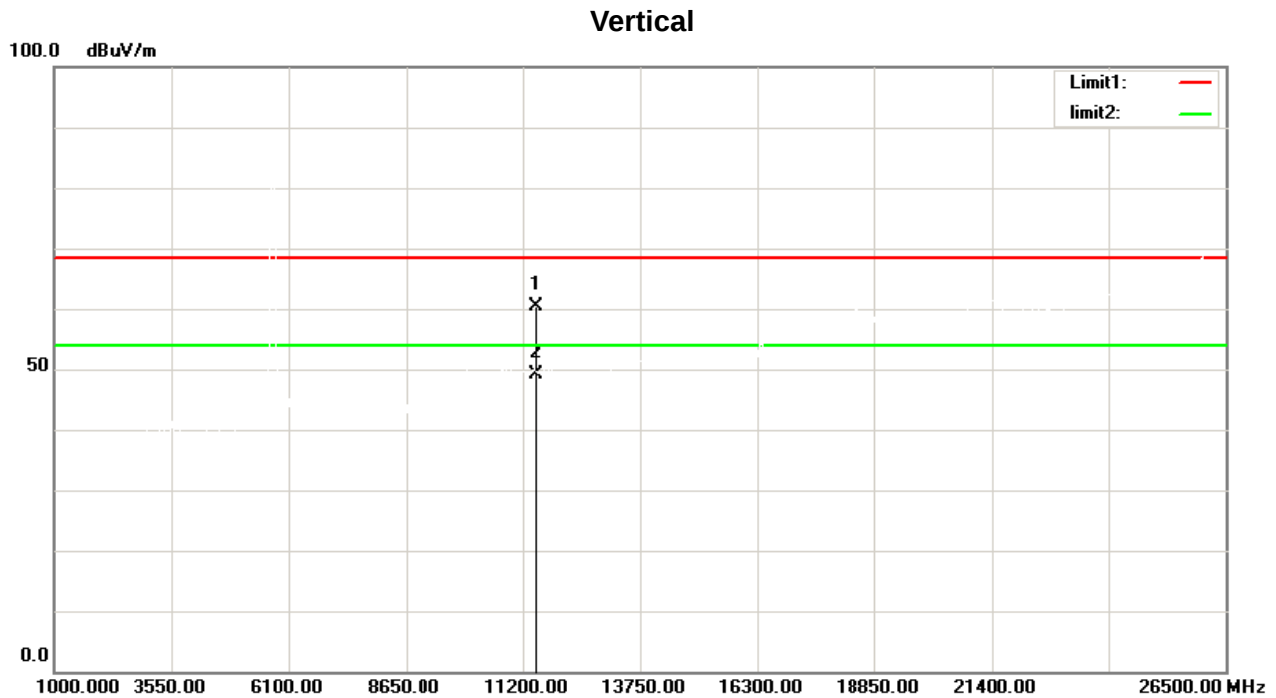


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11490.000	52.32	8.06	60.38	68.30	-7.92	peak
2	11490.000	41.19	8.06	49.25	54.00	-4.75	AVG

Orthogonal Axis	X
Test Mode	UNII-3_TX N (HT20) Mode 5745 MHz

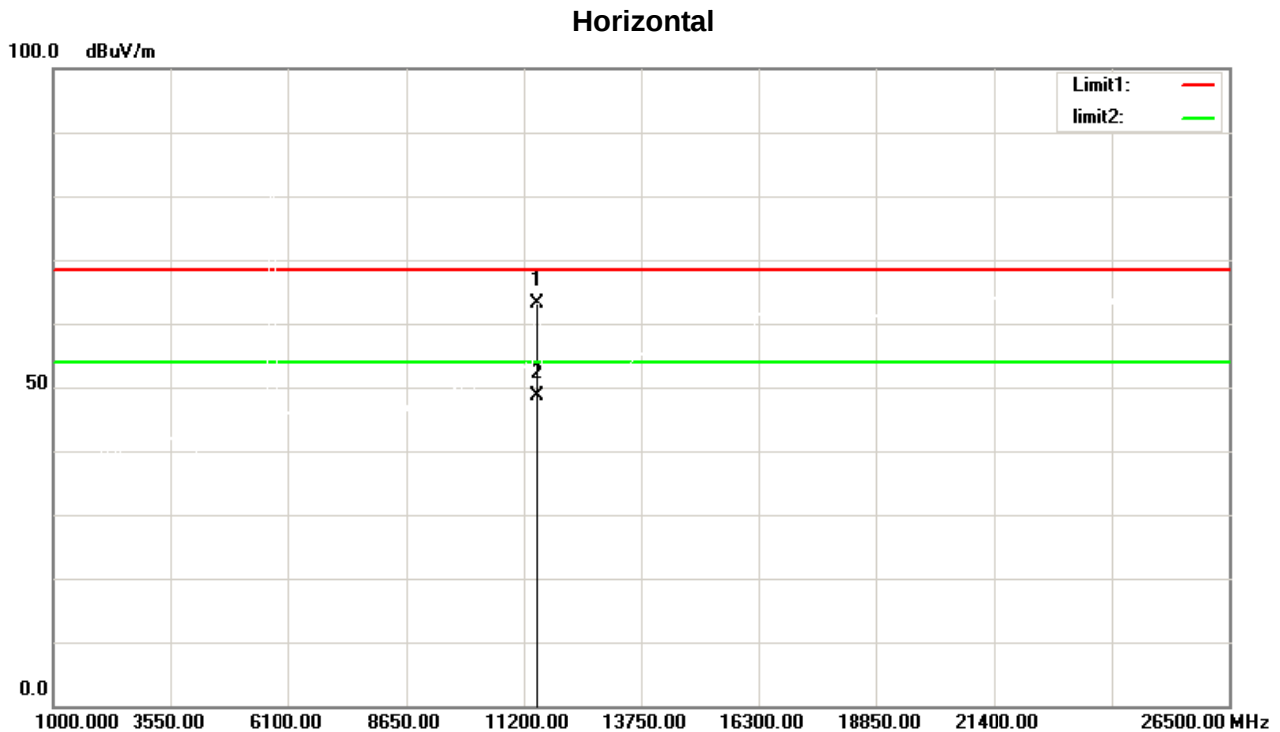


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11490.000	55.18	8.06	63.24	68.30	-5.06	peak
2	11490.000	40.63	8.06	48.69	54.00	-5.31	AVG

Orthogonal Axis	X
Test Mode	UNII-3_TX N (HT20) Mode 5785 MHz

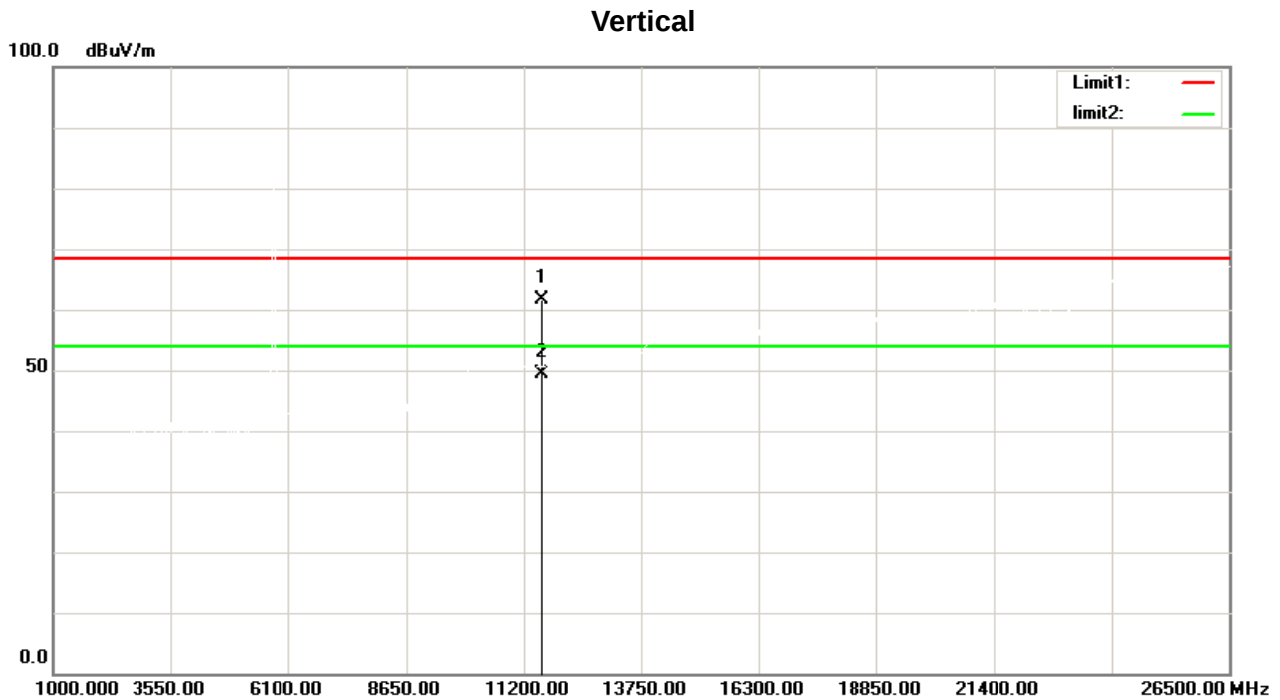


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11582.500	53.68	8.00	61.68	68.30	-6.62	peak
2	11582.500	41.38	8.00	49.38	54.00	-4.62	AVG

Orthogonal Axis	X
Test Mode	UNII-3_TX N (HT20) Mode 5785 MHz

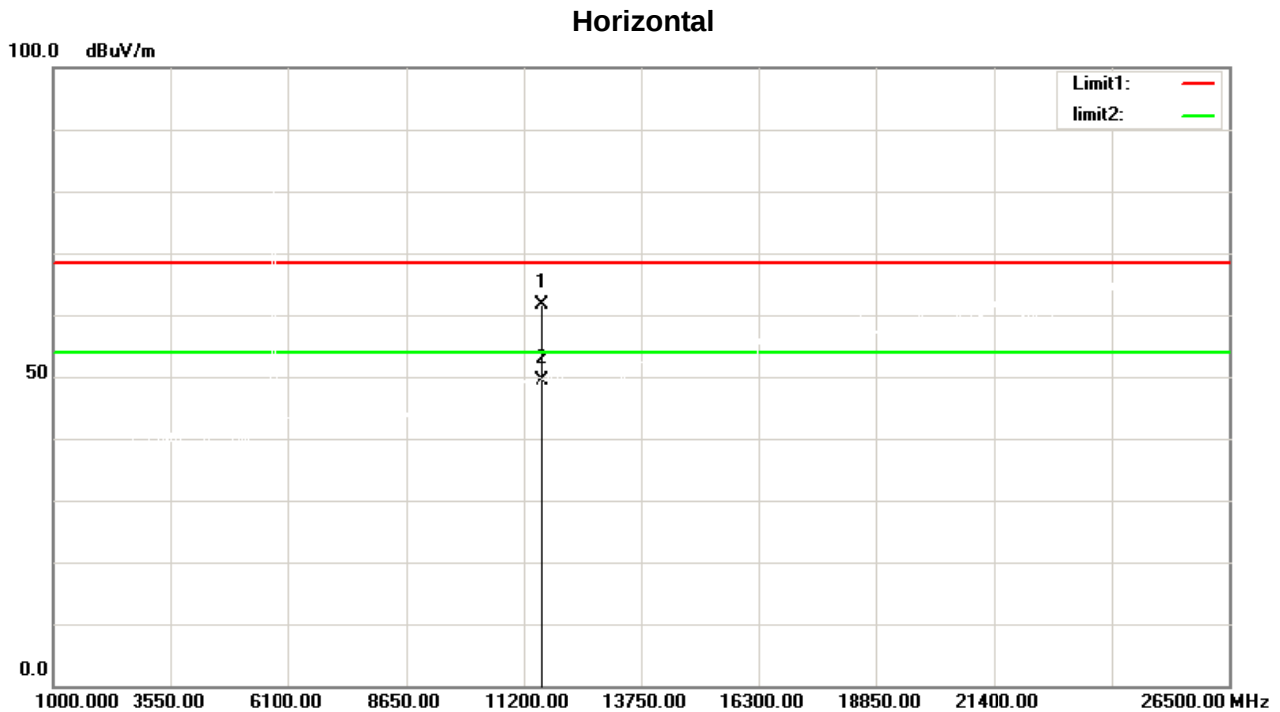


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11582.500	53.56	8.00	61.56	68.30	-6.74	peak
2	11582.500	41.28	8.00	49.28	54.00	-4.72	AVG

Orthogonal Axis	X
Test Mode	UNII-3_TX N (HT20) Mode 5825 MHz

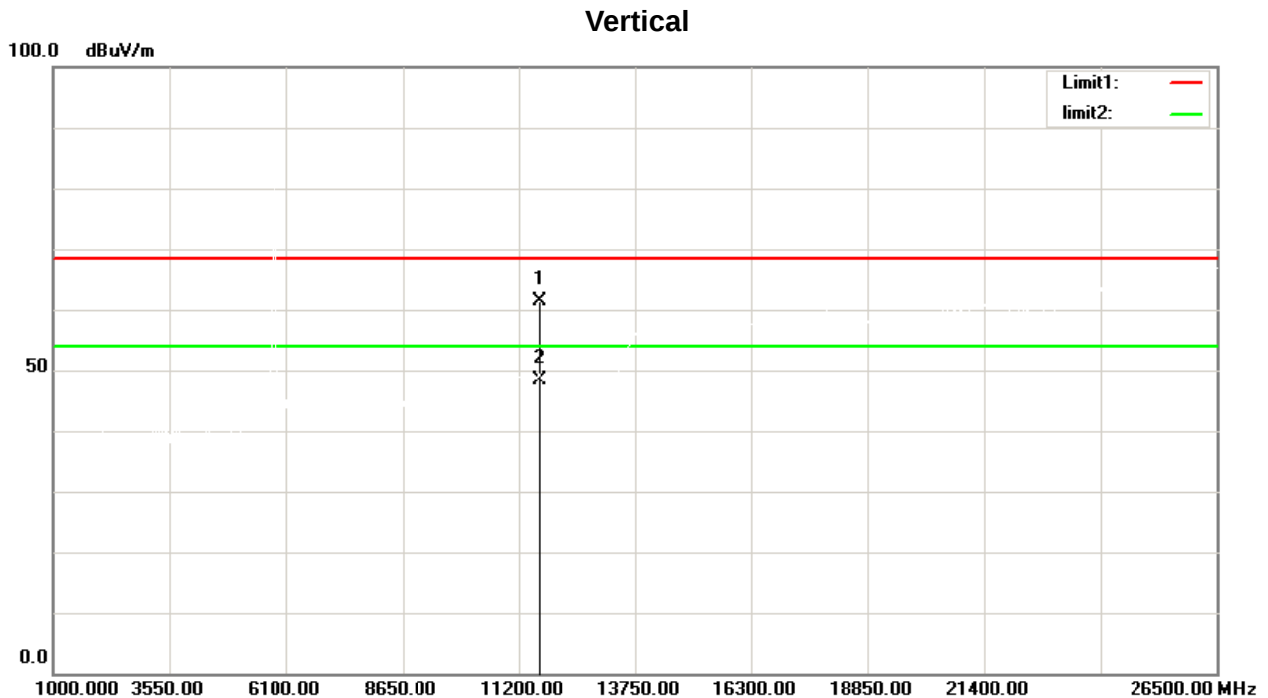

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11646.250	53.43	7.97	61.40	68.30	-6.90	peak
2	11646.250	40.50	7.97	48.47	54.00	-5.53	AVG


Orthogonal Axis	X
Test Mode	UNII-3_TX N (HT20) Mode 5825 MHz

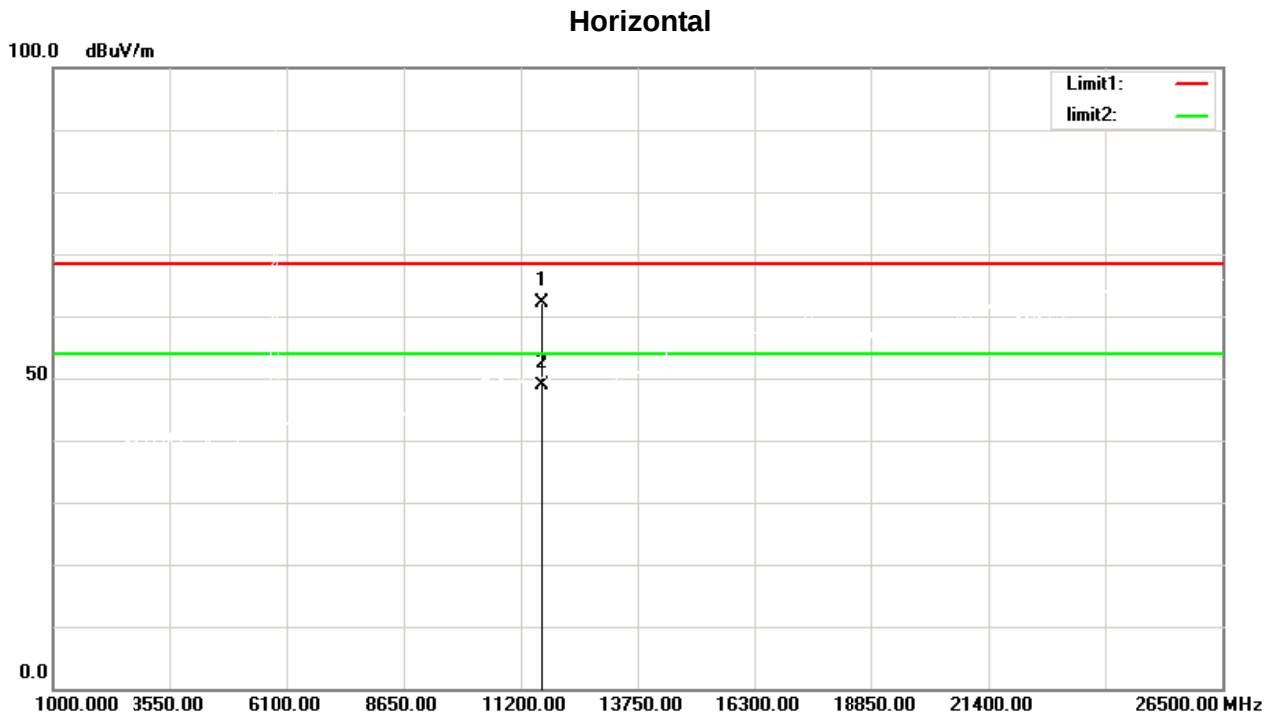

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11646.250	54.06	7.97	62.03	68.30	-6.27	peak
2	11646.250	40.95	7.97	48.92	54.00	-5.08	AVG

Orthogonal Axis	X
Test Mode	UNII-3_TX N (HT40) Mode 5755 MHz


Vertical

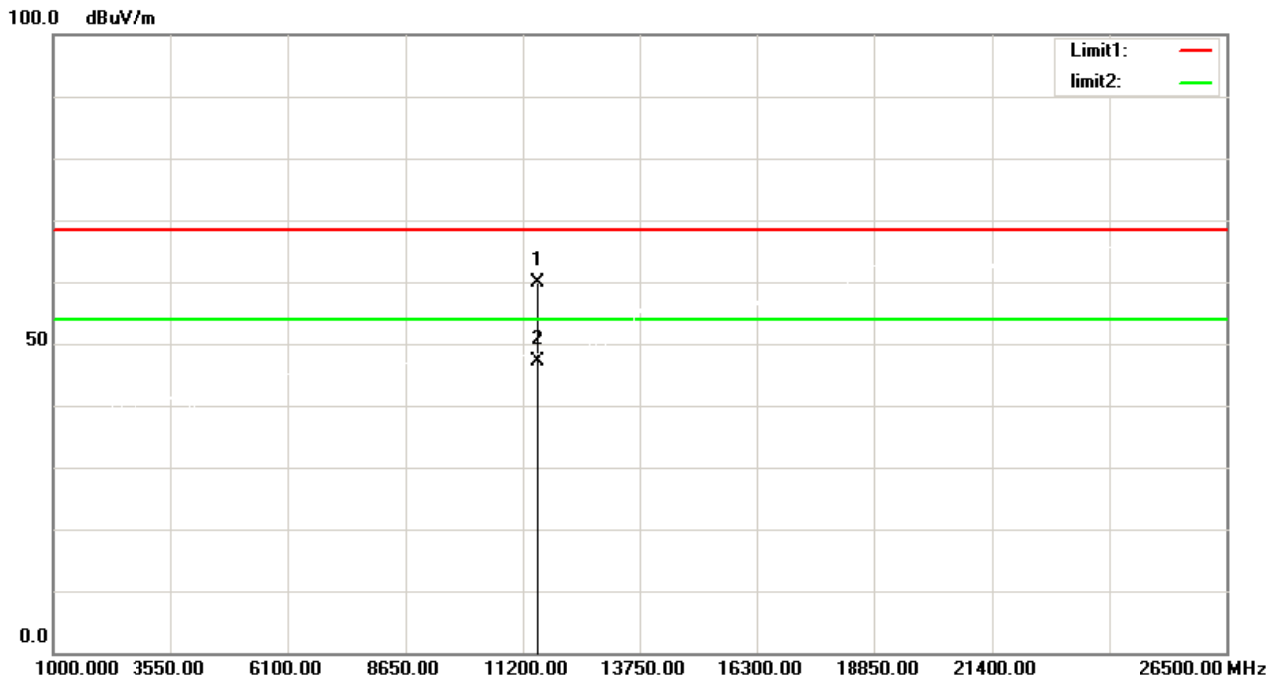

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11518.750	51.94	8.04	59.98	68.30	-8.32	peak
2	11518.750	39.06	8.04	47.10	54.00	-6.90	AVG


Orthogonal Axis	X
Test Mode	UNII-3_TX N (HT40) Mode 5755 MHz

Horizontal

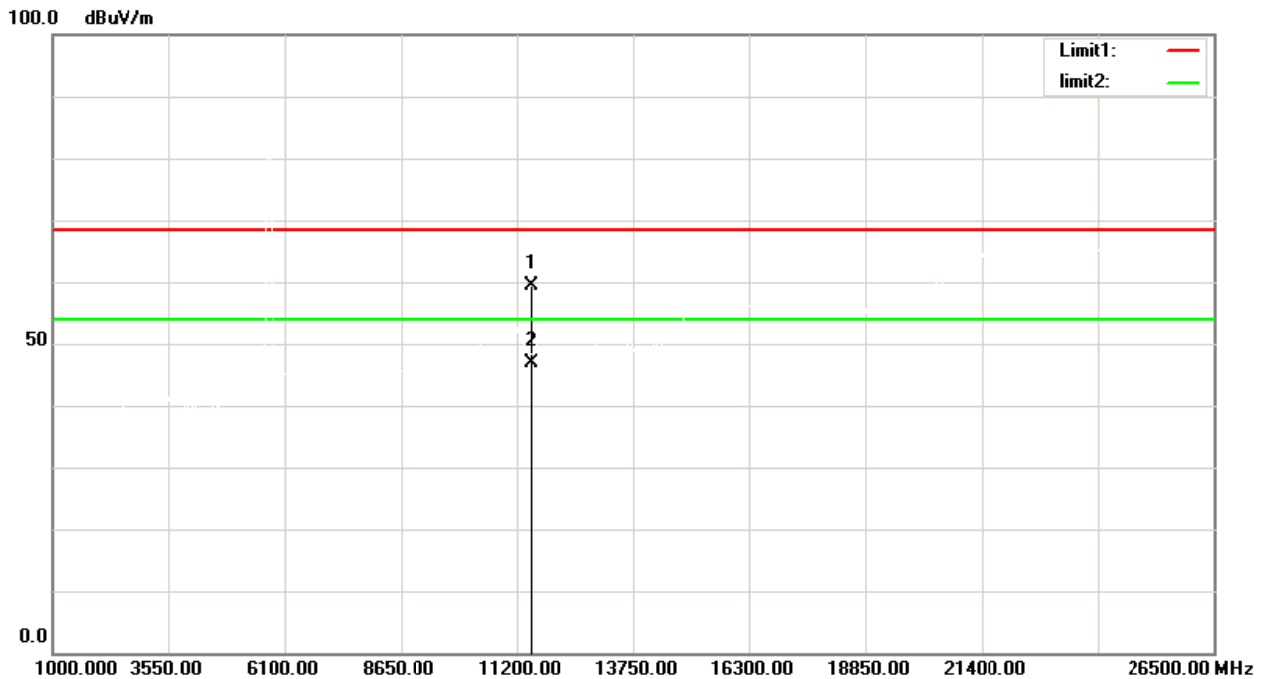


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11518.750	51.29	8.04	59.33	68.30	-8.97	peak
2	11518.750	38.82	8.04	46.86	54.00	-7.14	AVG

Orthogonal Axis	X
Test Mode	UNII-3_TX N (HT40) Mode 5795 MHz

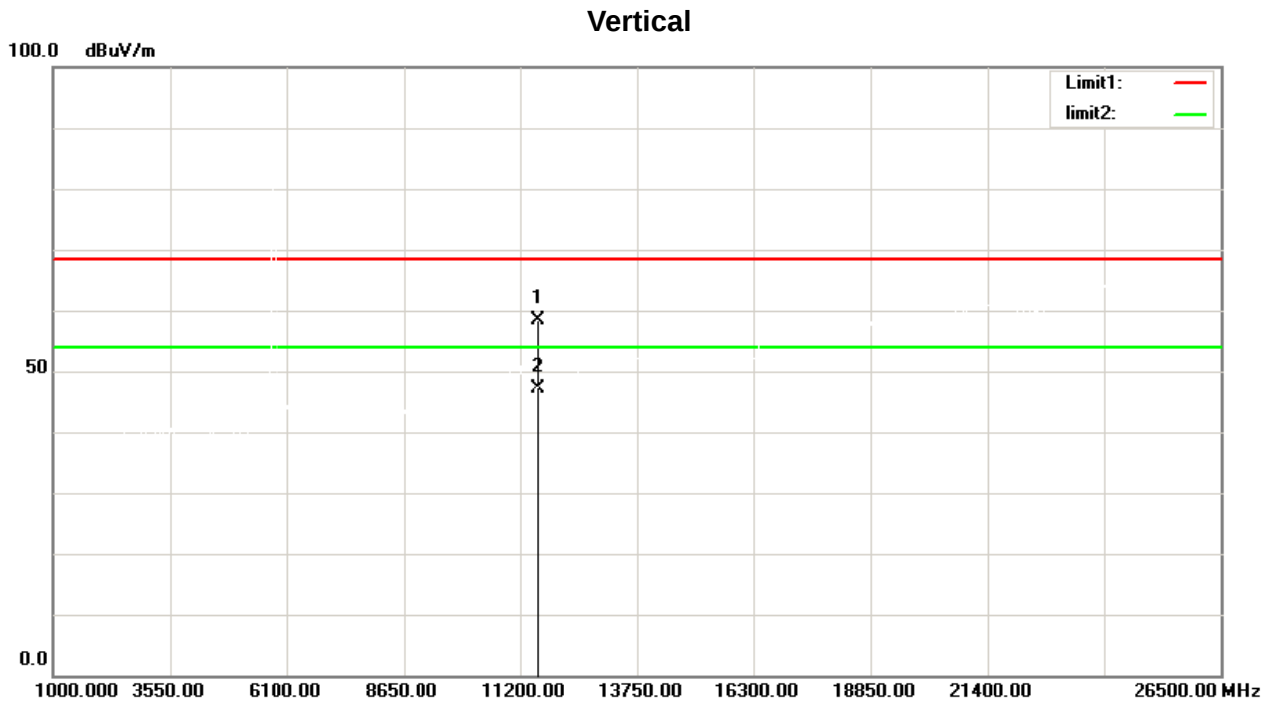

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11582.500	50.40	8.00	58.40	68.30	-9.90	peak
2	11582.500	39.02	8.00	47.02	54.00	-6.98	AVG

Orthogonal Axis	X
Test Mode	UNII-3_TX N (HT40) Mode 5795 MHz

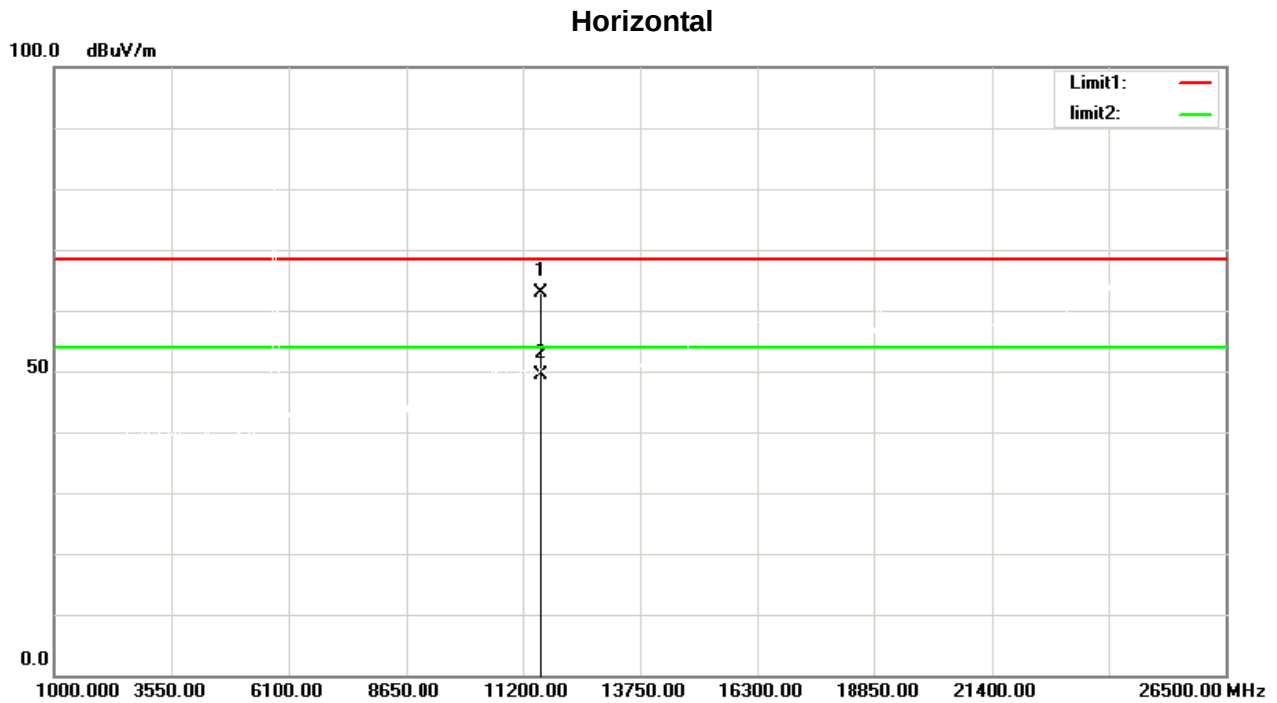

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11582.500	54.86	8.00	62.86	68.30	-5.44	peak
2	11582.500	41.36	8.00	49.36	54.00	-4.64	AVG

6 BANDWIDTH TEST

6.1 LIMIT

FCC Part15, Subpart E (15.407) RSS-Gen and RSS-247			
Section	Test Item	Limit	Frequency Range (MHz)
15.407(a) 15.407(e) RSS-247 6.2.1.1 RSS-247 6.2.4.1	26 dB Bandwidth	-	5150-5250
	6dB Bandwidth	Minimum 500 kHz	5725-5850

6.2 TEST PROCEDURE AND SETTING

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below
- Spectrum Setting:
For UNII-1:

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	> 26dB Bandwidth
RBW	300 kHz (Bandwidth 20 MHz) 1 MHz (Bandwidth 40 MHz and 80 MHz)
VBW	1 MHz (Bandwidth 20 MHz) 3 MHz (Bandwidth 40 MHz and 80 MHz)
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

For UNII-3:


Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	6dB Bandwidth
RBW	100 kHz
VBW	300 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

- Measured the spectrum width with power higher than 26dB / 6dB below carrier.

6.3 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum analyzer	KEYSIGHT	N9010A	MY55150427	2021/05/24
2	Attenuator	Mini-Circuits	BW-S10W2	101109	N/A
3	RF Cable	Mi-cable	C10-01-01-1	100309	N/A

6.4 TEST SETUP

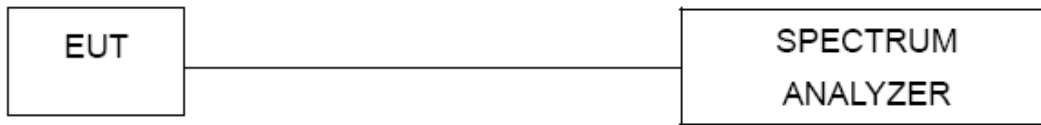


6.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.


6.6 TEST RESULTS

UNII-1_TX A Mode			
Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Emission Bandwidth (MHz)
36	5180	24.60	16.832
40	5200	24.61	16.730
48	5240	23.73	16.695


CH36

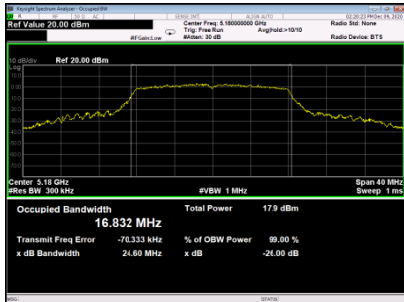

CH40

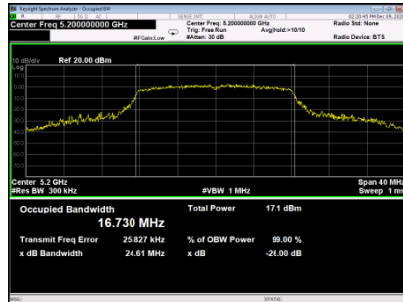


CH48

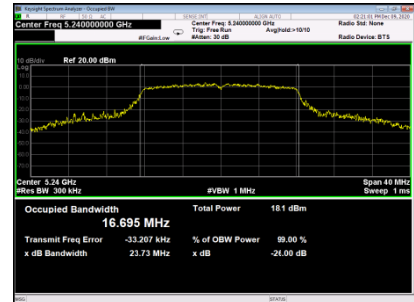


UNII-1_TX N (HT20) Mode			
Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Emission Bandwidth (MHz)
36	5180	25.62	17.696
40	5200	24.72	17.701
48	5240	24.30	17.740


CH36

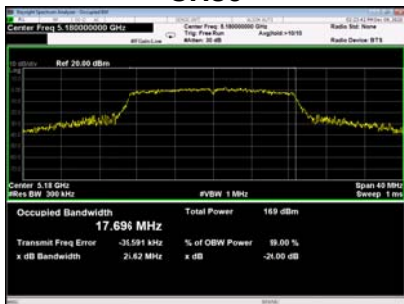

CH40

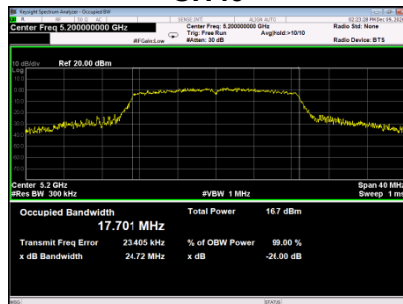


CH48

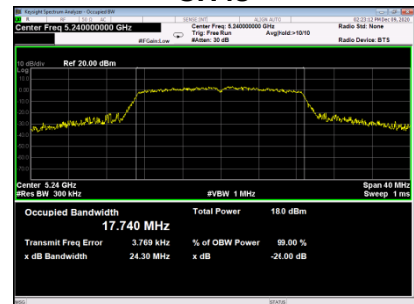


UNII-1_TX N (HT40) Mode

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Emission Bandwidth (MHz)
38	5190	72.26	36.644
46	5230	55.15	36.477

CH38

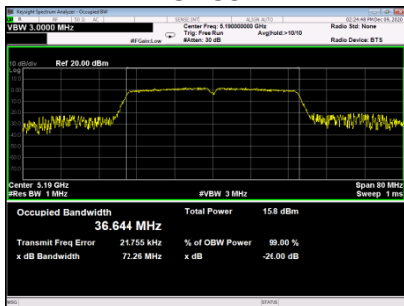


CH46

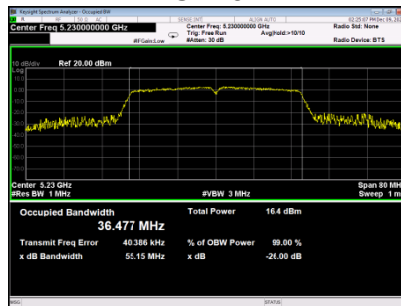


UNII-3_TX A Mode

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	99% Emission Bandwidth(MHz)	6dB Bandwidth Min. Limit(kHz)	Result
149	5745	14.99	16.651	500	PASS
157	5785	15.07	16.613	500	PASS
165	5825	16.31	16.571	500	PASS


CH149

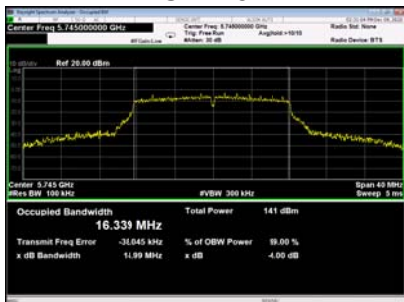

6 dB Bandwidth
CH157


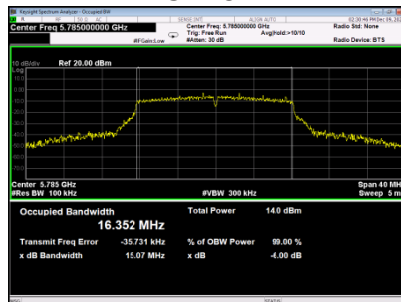


CH165

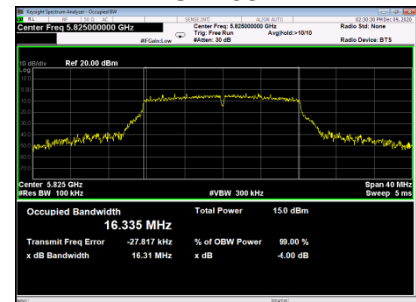


99% Emission Bandwidth CH157

CH149

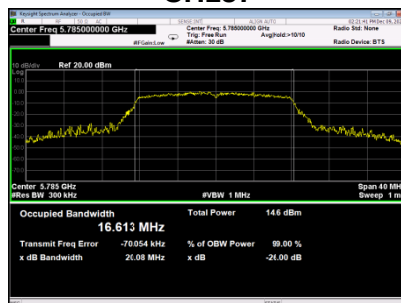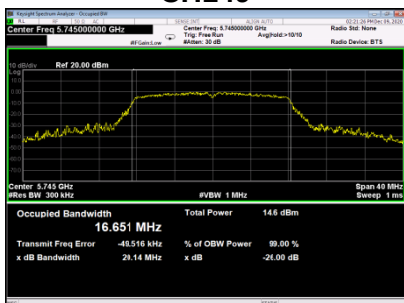


CH165

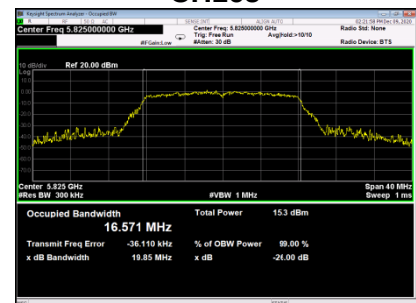


UNII-3_TX N (HT20) Mode					
Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	99% Emission Bandwidth(MHz)	6dB Bandwidth Min. Limit(kHz)	Result
149	5745	15.07	17.642	500	PASS
157	5785	15.44	17.668	500	PASS
165	5825	15.05	17.628	500	PASS


CH149

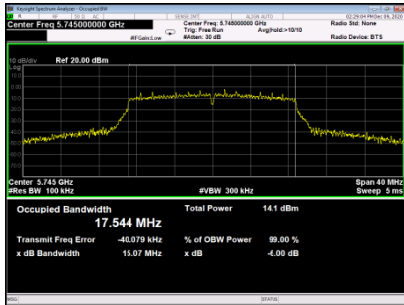


6 dB Bandwidth
CH157

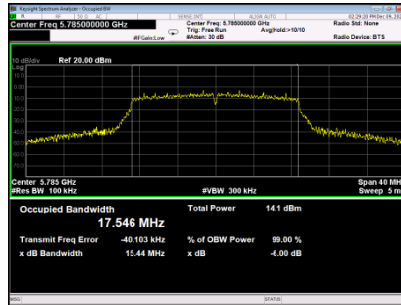


CH165

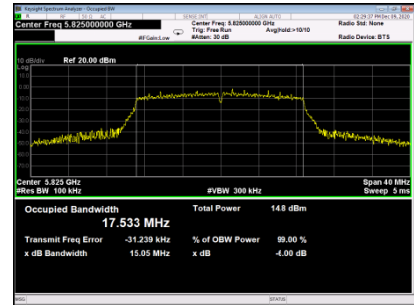


CH149

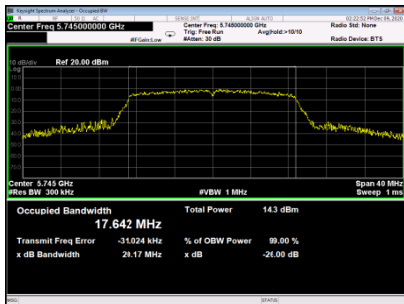

99% Emission Bandwidth
CH157

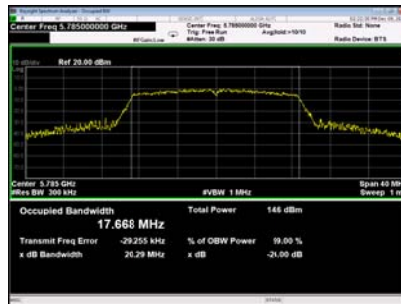


CH165

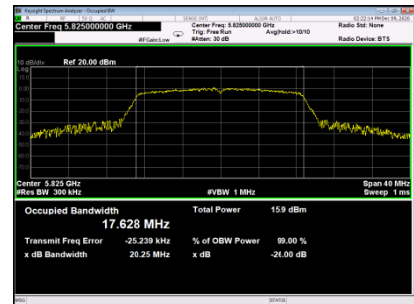


UNII-3_TX N (HT40) Mode					
Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	99% Emission Bandwidth(MHz)	6dB Bandwidth Min. Limit(kHz)	Result
151	5755	35.45	36.450	500	PASS
159	5795	35.43	36.572	500	PASS

6 dB Bandwidth

CH151

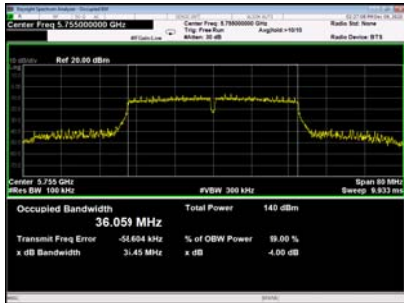


CH159

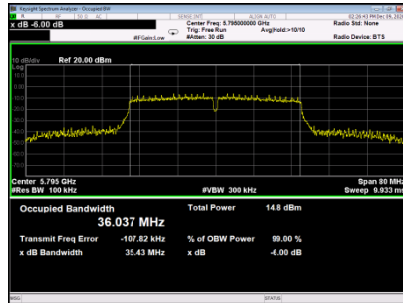


99% Emission Bandwidth

CH151

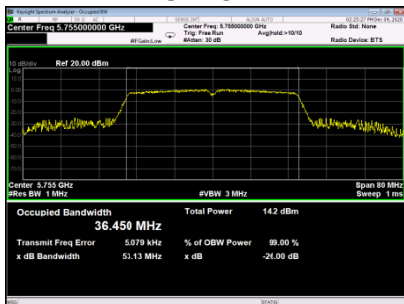

CH159

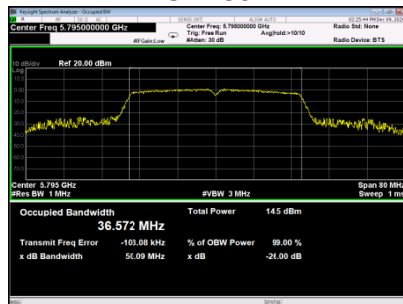

7 MAXIMUM OUTPUT POWER TEST

7.1 LIMIT

FCC Part15, Subpart E (15.407)&RSS-247			
Section	Test Item	Limit	Frequency Range (MHz)
RSS-247 6.2.1.1	EIRP Output Power	not exceed 200 mW or 10 + 10 logB, dBm, whichever power is less	5150-5250
15.407(a)	Maximum Output Power	AP device: 1 Watt (30dBm) Client device: 250mW (24dBm)	5150-5250
15.407(a) RSS-247 6.2.4.1	Maximum Output Power	1 Watt (30dBm)	5725-5850

Note:

- For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
- B is the 99% emission bandwidth in megahertz.


7.2 TEST PROCEDURE AND SETTING

- The EUT was directly connected to the power meter and antenna output port as show in the block diagram below.
- Test was performed in accordance with method of FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

7.3 MEASUREMENT INSTRUMENTS LIST

Item	Equipment	Manufacturer	Model No.	Serial No.	Calibrated until
1	Power Sensor	KEYSIGHT	U2021XA	MY55240009	05/24/2021
2	Attenuator	Mini-Circuits	BW-S10W2	101109	N/A
3	RF Cable	Micable	C10-01-01-1	100309	N/A
4	Test Software	KEYSIGHT	Power Panel	V3.11	N/A

7.4 TEST SETUP

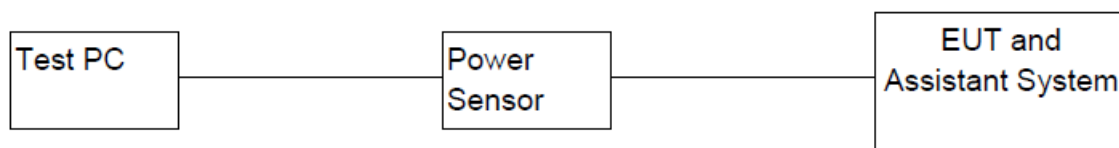

7.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

7.6 TEST RESULTS

UNII-1_TX A Mode_Ant 1 For FCC

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
36	5180	16.67	0.00	16.67	24.00	0.25	PASS
40	5200	16.19	0.00	16.19	24.00	0.25	PASS
48	5240	16.81	0.00	16.81	24.00	0.25	PASS

UNII-1_TX A Mode_Ant 2 For FCC

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
36	5180	16.28	0.00	16.28	24.00	0.25	PASS
40	5200	16.13	0.00	16.13	24.00	0.25	PASS
48	5240	16.68	0.00	16.68	24.00	0.25	PASS

UNII-1_TX A Mode_Ant 1 For IC

Channel	Frequency (MHz)	EIRP (dBm)	Duty Factor	EIRP + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
36	5180	19.67	0.00	19.67	23.00	0.2	PASS
40	5200	19.19	0.00	19.19	23.00	0.2	PASS
48	5240	19.81	0.00	19.81	23.00	0.2	PASS

UNII-1_TX A Mode_Ant 2 For IC

Channel	Frequency (MHz)	EIRP (dBm)	Duty Factor	EIRP + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
36	5180	19.28	0.00	19.28	23.00	0.2	PASS
40	5200	19.13	0.00	19.13	23.00	0.2	PASS
48	5240	19.68	0.00	19.68	23.00	0.2	PASS

EIRP Power=Output Power+Antenna Gain

UNII-1_TX N (HT20) Mode _Ant 1							
Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
36	5180	13.36	0.19	13.55	24.00	0.25	PASS
40	5200	12.94	0.19	13.13	24.00	0.25	PASS
48	5240	13.56	0.19	13.75	24.00	0.25	PASS

UNII-1_TX N (HT20) Mode _Ant 2							
Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
36	5180	13.65	0.19	13.84	24.00	0.25	PASS
40	5200	13.52	0.19	13.71	24.00	0.25	PASS
48	5240	13.48	0.19	13.67	24.00	0.25	PASS

UNII-1_TX N (HT20) Mode _Total For FCC					
Channel	Frequency (MHz)	Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
36	5180	16.71	24.00	0.25	PASS
40	5200	16.44	24.00	0.25	PASS
48	5240	16.72	24.00	0.25	PASS

UNII-1_TX N (HT20) Mode _Total For IC					
Channel	Frequency (MHz)	EIRP Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
36	5180	22.72	23.00	0.2	PASS
40	5200	22.45	23.00	0.2	PASS
48	5240	22.73	23.00	0.2	PASS

EIRP Power=Output Power+Directional Gain

MIMO Directional Gain=Ant 1 Gain+Ant 2 Gain=3dBi+3dBi=6.01dBi

UNII-1_TX N (HT40) Mode_Ant 1							
Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
38	5190	13.35	0.33	13.68	24.00	0.25	PASS
46	5230	13.47	0.33	13.80	24.00	0.25	PASS

UNII-1_TX N (HT40) Mode_Ant 2							
Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
38	5190	13.15	0.33	13.48	24.00	0.25	PASS
46	5230	13.41	0.33	13.74	24.00	0.25	PASS

UNII-1_TX N (HT40) Mode_Total For FCC					
Channel	Frequency (MHz)	Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
38	5190	16.59	24.00	0.25	PASS
46	5230	16.78	24.00	0.25	PASS

UNII-1_TX N (HT40) Mode_Total For IC					
Channel	Frequency (MHz)	EIRP Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
38	5190	22.60	23.00	0.2	PASS
46	5230	22.79	23.00	0.2	PASS

EIRP Power=Output Power+Directional Gain

MIMO Directional Gain=Ant 1 Gain+Ant 2 Gain=3dBi+3dBi=6.01dBi

UNII-3_TX A Mode_Ant1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
149	5745	16.57	0.00	16.57	30.00	1.00	PASS
157	5785	16.50	0.00	16.50	30.00	1.00	PASS
165	5825	16.70	0.00	16.70	30.00	1.00	PASS

UNII-3_TX A Mode_Ant2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
149	5745	16.39	0.00	16.39	30.00	1.00	PASS
157	5785	16.71	0.00	16.71	30.00	1.00	PASS
165	5825	16.16	0.00	16.16	30.00	1.00	PASS

UNII-3_TX N (HT20) Mode_Ant1							
Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
149	5745	15.40	0.19	15.59	30.00	1.00	PASS
157	5785	15.75	0.19	15.94	30.00	1.00	PASS
165	5825	15.61	0.19	15.80	30.00	1.00	PASS

UNII-3_TX N (HT20) Mode_Ant 2							
Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
149	5745	15.57	0.19	15.76	30.00	1.00	PASS
157	5785	15.21	0.19	15.40	30.00	1.00	PASS
165	5825	14.96	0.19	15.15	30.00	1.00	PASS

UNII-3_TX N (HT20) Mode_Total					
Channel	Frequency (MHz)	Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
149	5745	18.68	30.00	1.00	PASS
157	5785	18.69	30.00	1.00	PASS
165	5825	18.50	30.00	1.00	PASS

UNII-3_TX N (HT40) Mode_Ant 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
151	5755	15.59	0.33	15.92	30.00	1.00	PASS
159	5795	15.35	0.33	15.68	30.00	1.00	PASS

UNII-3_TX N (HT40) Mode_Ant 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
151	5755	15.60	0.33	15.93	30.00	1.00	PASS
159	5795	15.30	0.33	15.63	30.00	1.00	PASS

UNII-3_TX N (HT40) Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
151	5755	18.94	30.00	1.00	PASS
159	5795	18.67	30.00	1.00	PASS

8 POWER SPECTRAL DENSITY TEST

8.1 LIMIT

FCC Part15, Subpart E (15.407)&RSS-247			
Section	Test Item	Limit	Frequency Range (MHz)
RSS-247 6.2.1.2	EIRP Power Spectral Density	10dBm/MHz	5150-5250
15.407(a)	Power Spectral Density	AP device:17dBm/MHz Client device:11dBm/MHz	5150-5250
15.407(a) RSS-247 6.2.4.2	Power Spectral Density	30dBm/500kHz	5725-5850

8.2 TEST PROCEDURE AND SETTING

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- b. Spectrum Setting:

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RBW	= 1MHz.
VBW	≥ 3MHz.
Detector	RMS
Trace average	100 trace
Sweep Time	Auto

Note:

- 1.For UNII-3, according to KDB publication 789033 D02 General UNII Test Procedures New Rules v02r01, section II.F.5., it is acceptable to set RBW at 1MHz and VBW at 3MHz if the spectrum analyzer does not have 500kHz RBW.
- 2.The value measured with RBW=1MHz is to be added with $10\log(500\text{kHz}/1\text{MHz})$ which is -3dB. For example, if the measured value is +10dBm using RBW=1MHz (that is +10dBm/MHz), then the converted value will be +7dBm/500kHz.

8.3 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum analyzer	KEYSIGHT	N9010A	MY55150427	2021/05/24
2	Attenuator	Mini-Circuits	BW-S10W2	101109	N/A
3	RF Cable	Mi-cable	C10-01-01-1	100309	N/A

8.4 TEST SETUP



8.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

8.6 TEST RESULTS


UNII-1_TX A Mode_Ant 1 For FCC

Channel	Frequency (MHz)	Power Spectral Density (dBm/MHz)	Duty Factor	Power Spectral Density + Duty Factor (dBm/MHz)	Max. Limit (dBm/MHz)	Result
36	5180	2.23	0.00	2.23	11.00	PASS
40	5200	1.80	0.00	1.80	11.00	PASS
48	5240	3.20	0.00	3.20	11.00	PASS


UNII-1_TX A Mode_Ant 1 For IC

Channel	Frequency (MHz)	Power Spectral Density (dBm/MHz)	Duty Factor	EIRP Power Spectral Density + Duty Factor (dBm/MHz)	Max. Limit (dBm/MHz)	Result
36	5180	5.23	0.00	5.23	10.00	PASS
40	5200	4.80	0.00	4.80	10.00	PASS
48	5240	6.20	0.00	6.20	10.00	PASS


CH36

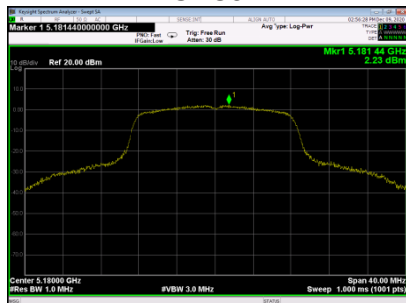

CH40

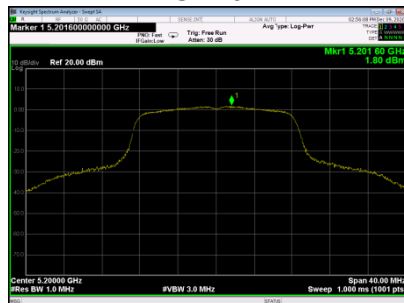

CH48

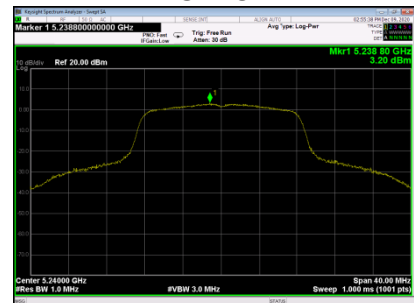

EIRP Power Spectral Density= Power Spectral Density+ Antenna Gain


UNII-1_TX A Mode_Ant2 For FCC

Channel	Frequency (MHz)	Power Spectral Density (dBm/MHz)	Duty Factor	Power Spectral Density + Duty Factor (dBm/MHz)	Max. Limit (dBm/MHz)	Result
36	5180	2.18	0.00	2.18	11.00	PASS
40	5200	2.10	0.00	2.10	11.00	PASS
48	5240	3.27	0.00	3.27	11.00	PASS


UNII-1_TX A Mode_Ant2 For IC

Channel	Frequency (MHz)	Power Spectral Density (dBm/MHz)	Duty Factor	EIRP Power Spectral Density + Duty Factor (dBm/MHz)	Max. Limit (dBm/MHz)	Result
36	5180	5.18	0.00	5.18	10.00	PASS
40	5200	5.10	0.00	5.10	10.00	PASS
48	5240	6.27	0.00	6.27	10.00	PASS


CH36

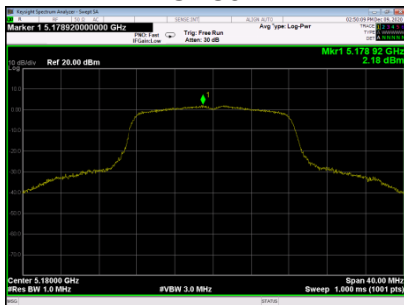

CH40

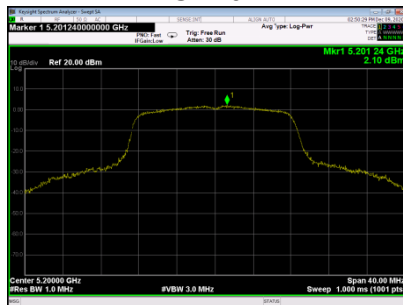

CH48

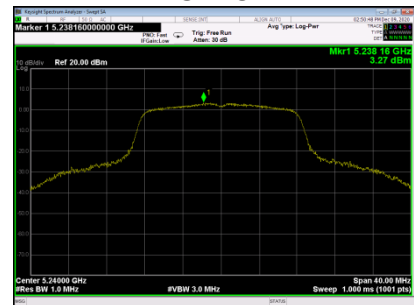


EIRP Power Spectral Density= Power Spectral Density+ Antenna Gain


UNII-1_TX N (HT20) Mode_Ant 1

Channel	Frequency (MHz)	Power Spectral Density (dBm/MHz)	Duty Factor	Power Spectral Density + Duty Factor (dBm/MHz)	Max. Limit (dBm/MHz)	Result
36	5180	-0.15	0.19	0.04	11.00	PASS
40	5200	-0.09	0.19	0.10	11.00	PASS
48	5240	0.75	0.19	0.94	11.00	PASS


CH36

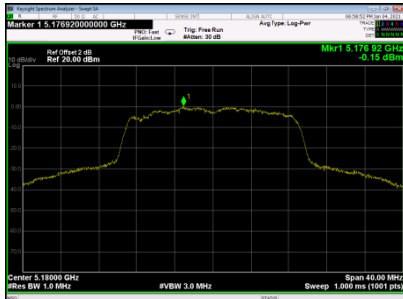

CH40

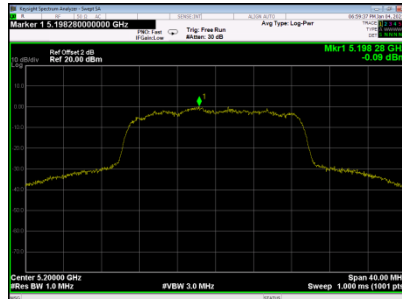


CH48

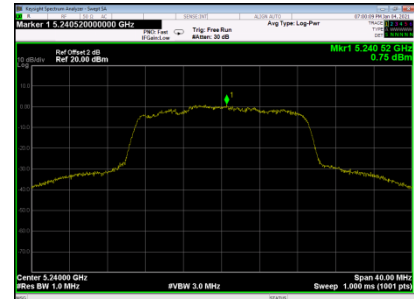


UNII-1_TX N (HT20) Mode_Ant 2

Channel	Frequency (MHz)	Power Spectral Density (dBm/MHz)	Duty Factor	Power Spectral Density + Duty Factor (dBm/MHz)	Max. Limit (dBm/MHz)	Result
36	5180	0.34	0.19	0.53	11.00	PASS
40	5200	-0.38	0.19	-0.19	11.00	PASS
48	5240	0.39	0.19	0.58	11.00	PASS


CH36

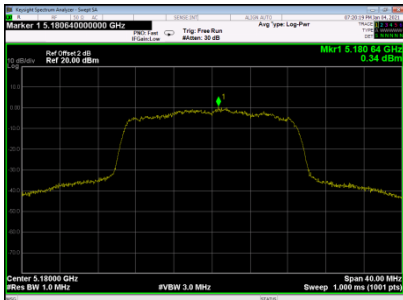

CH40

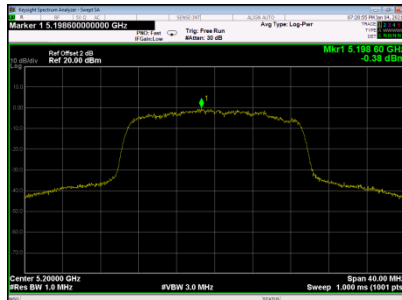

CH48

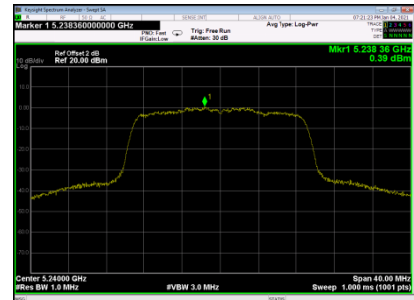

UNII-1_TX N (HT20) Mode_Total For FCC

Channel	Frequency (MHz)	Power Spectral Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
36	5180	3.30	11.00	PASS
40	5200	2.97	11.00	PASS
48	5240	3.77	11.00	PASS

UNII-1_TX N (HT20) Mode_Total For IC


Channel	Frequency (MHz)	EIRP Power Spectral Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
36	5180	9.31	10.00	PASS
40	5200	8.98	10.00	PASS
48	5240	9.78	10.00	PASS

EIRP Power Spectral Density= Power Spectral Density+ Directional Gain
MIMO Directional Gain=Ant 1 Gain+Ant 2 Gain=3dBi+3dBi=6.01dBi


UNII-1_TX N (HT40) Mode_Ant 1

Channel	Frequency (MHz)	Power Spectral Density (dBm/MHz)	Duty Factor	Power Spectral Density + Duty Factor (dBm/MHz)	Max. Limit (dBm/MHz)	Result
38	5190	-4.10	0.33	-3.77	11.00	PASS
46	5230	-3.45	0.33	-3.12	11.00	PASS

CH38

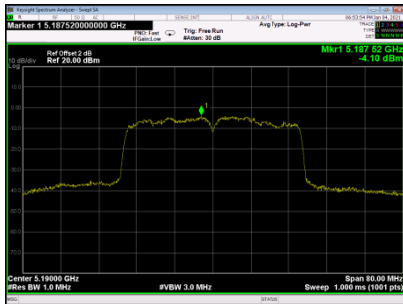


CH46

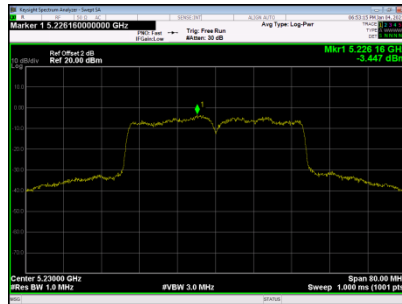


UNII-1_TX N (HT40) Mode_Ant2

Channel	Frequency (MHz)	Power Spectral Density (dBm/MHz)	Duty Factor	Power Spectral Density + Duty Factor (dBm/MHz)	Max. Limit (dBm/MHz)	Result
38	5190	-4.57	0.33	-4.24	11.00	PASS
46	5230	-4.50	0.33	-4.17	11.00	PASS

CH38

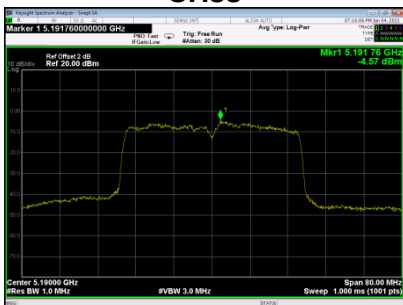

CH46

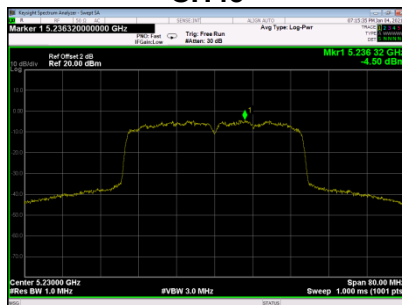

UNII-1_TX N (HT40) Mode_Total For FCC

Channel	Frequency (MHz)	Power Spectral Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
38	5190	-0.99	11.00	PASS
46	5230	-0.60	11.00	PASS

UNII-1_TX N (HT40) Mode_Total For IC


Channel	Frequency (MHz)	EIRP Power Spectral Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
38	5190	5.02	10.00	PASS
46	5230	5.41	10.00	PASS

EIRP Power Spectral Density= Power Spectral Density+ Directional Gain
MIMO Directional Gain=Ant 1 Gain+Ant 2 Gain=3dBi+3dBi=6.01dBi


UNII-3_TX A Mode_Ant 1

Channel	Frequency (MHz)	Power Spectral Density (dBm/500 kHz)	Duty Factor	Power Spectral Density + Duty Factor (dBm/500 kHz)	Max. Limit (dBm/500 kHz)	Result
149	5745	1.15	0.00	1.15	30.00	PASS
157	5785	1.44	0.00	1.44	30.00	PASS
165	5825	1.59	0.00	1.59	30.00	PASS


CH149

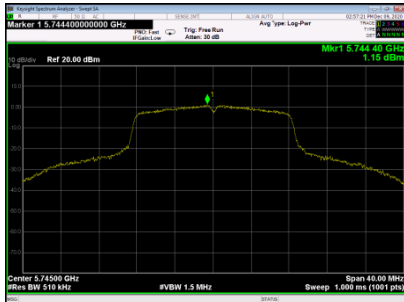

CH157

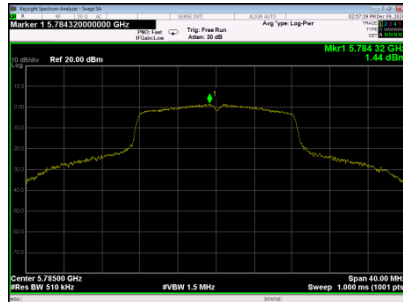


CH165

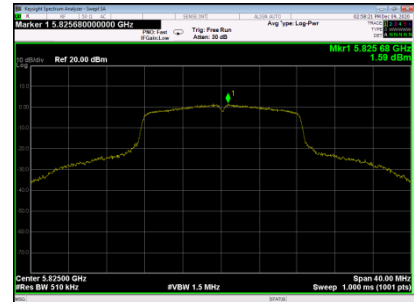


UNII-3_TX A Mode_Ant2

Channel	Frequency (MHz)	Power Spectral Density (dBm/500 kHz)	Duty Factor	Power Spectral Density + Duty Factor (dBm/500 kHz)	Max. Limit (dBm/500 kHz)	Result
149	5745	0.17	0.00	0.17	30.00	PASS
157	5785	0.30	0.00	0.30	30.00	PASS
165	5825	0.29	0.00	0.29	30.00	PASS


CH149

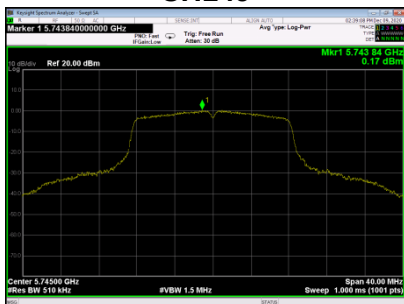

CH157

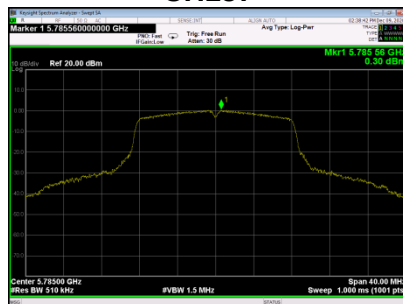


CH165

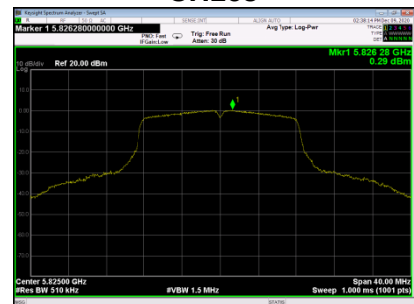


UNII-3_TX N (HT20) Mode_Ant 1

Channel	Frequency (MHz)	Power Spectral Density (dBm/500 kHz)	Duty Factor	Power Spectral Density + Duty Factor (dBm/500 kHz)	Max. Limit (dBm/500 kHz)	Result
149	5745	0.25	0.19	0.44	30.00	PASS
157	5785	1.15	0.19	1.34	30.00	PASS
165	5825	0.70	0.19	0.89	30.00	PASS


CH149

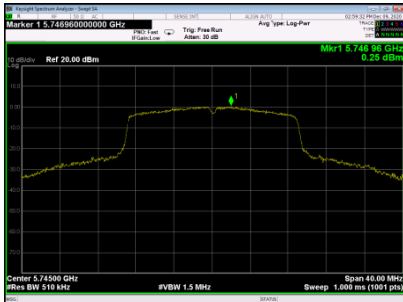

CH157

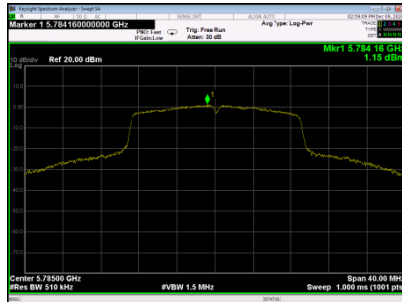


CH165

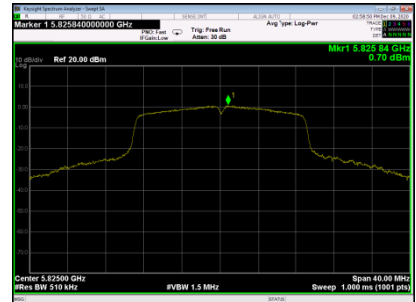


UNII-3_TX N (HT20) Mode_Ant2

Channel	Frequency (MHz)	Power Spectral Density (dBm/500 kHz)	Duty Factor	Power Spectral Density + Duty Factor (dBm/500 kHz)	Max. Limit (dBm/500 kHz)	Result
149	5745	-0.20	0.19	-0.01	30.00	PASS
157	5785	0.27	0.19	0.46	30.00	PASS
165	5825	0.19	0.19	0.38	30.00	PASS


CH149

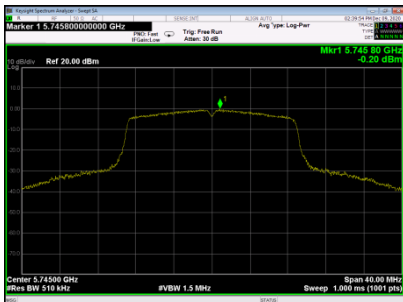

CH157

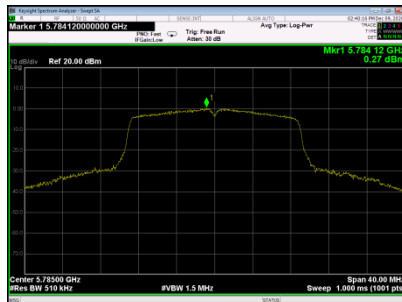

CH165

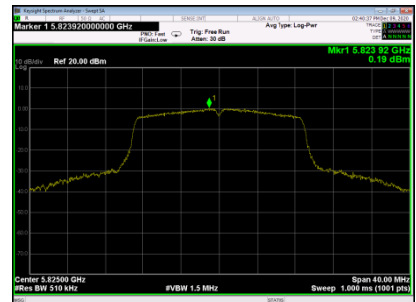

UNII-3_TX N (HT20) Mode_Total

Channel	Frequency (MHz)	Power Spectral Density (dBm/MHz)	Max. Limit (dBm/500 kHz)	Result
149	5745	3.23	30.00	PASS
157	5785	3.93	30.00	PASS
165	5825	3.65	30.00	PASS


UNII-3_TX N (HT40) Mode_Ant 1

Channel	Frequency (MHz)	Power Spectral Density (dBm/500 kHz)	Duty Factor	Power Spectral Density + Duty Factor (dBm/500 kHz)	Max. Limit (dBm/500 kHz)	Result
151	5755	-2.24	0.33	-1.91	30.00	PASS
159	5795	-2.00	0.33	-1.67	30.00	PASS

CH151




CH159

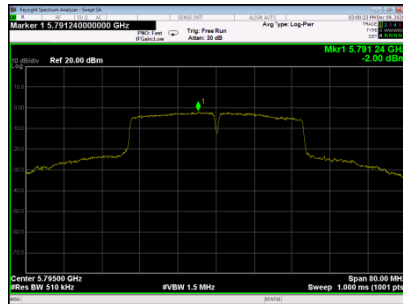


UNII-3_TX N (HT40) Mode_Ant2

Channel	Frequency (MHz)	Power Spectral Density (dBm/500 kHz)	Duty Factor	Power Spectral Density + Duty Factor (dBm/500 kHz)	Max. Limit (dBm/500 kHz)	Result
151	5755	-3.39	0.33	-3.06	30.00	PASS
159	5795	-3.10	0.33	-2.77	30.00	PASS

CH151

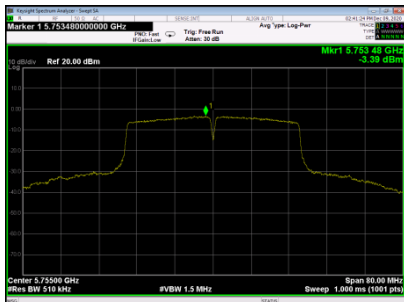

CH159

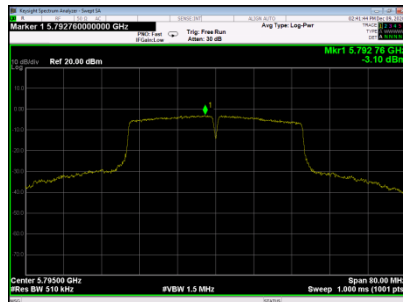

UNII-3_TX N (HT40) Mode_Total

Channel	Frequency (MHz)	Power Spectral Density (dBm/MHz)	Max. Limit (dBm/500 kHz)	Result
151	5755	0.56	30.00	PASS
159	5795	0.83	30.00	PASS

9 FREQUENCY STABILITY MEASUREMENT

9.1 LIMIT

FCC Part15, Subpart E (15.407)&RSS-GEN			
Section	Test Item	Limit	Frequency Range (MHz)
15.407(g) RSS-GEN 6.11	Frequency Stability	Specified in the user's manual	5150-5250
			5725-5850

9.2 TEST PROCEDURE AND SETTING


- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- Spectrum Setting:

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Entire absence of modulation emissions bandwidth
RBW	10 kHz
VBW	10kHz
Sweep Time	Auto

9.3 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum analyzer	KEYSIGHT	N9010A	MY55150427	2021/05/24
2	Attenuator	Mini-Circuits	BW-S10W2	101109	N/A
3	RF Cable	Mi-cable	C10-01-01-1	100309	N/A
4	Temperature conditioning	Guan Jian.HTH1000	-20-130℃	GJ1000-10D001	N/A
5	DC Power Supply	G.KE	IPR-10010D	010931954	N/A

9.4 TEST SETUP

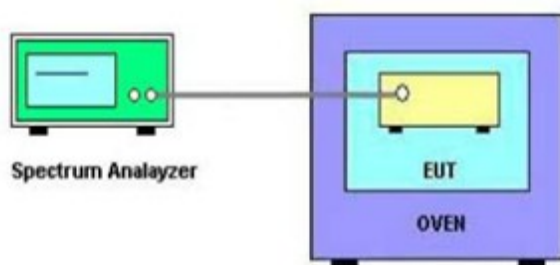

9.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

9.6 TEST RESULTS

	Temperature vs. Frequency Stability-UNII-1	
Voltage	Temperature	Measurement Frequency (MHz)
3.3V	(°C)	5180
	-20	5180.150
	25	5180.075
	50	5180.150
2.1V	25	5180.150
Max. Deviation (MHz)		0.15
Max. Deviation (ppm)		28.96

	Temperature vs. Frequency Stability-UNII-3	
Voltage	Temperature	Measurement Frequency (MHz)
3.3V	(°C)	5745
	-20	5745.077
	25	5745
	50	5745.075
2.1V	25	5745.097
Max. Deviation (MHz)		0.097
Max. Deviation (ppm)		16.88

Note: 2.1 V is the end point voltage, and products below 2.1V will cease working.

END OF TEST REPORT