Test Mode:	802.11a	Frequency(MHz):	5260
Polarity:	Vertical	Test Voltage:	DC 3.3V

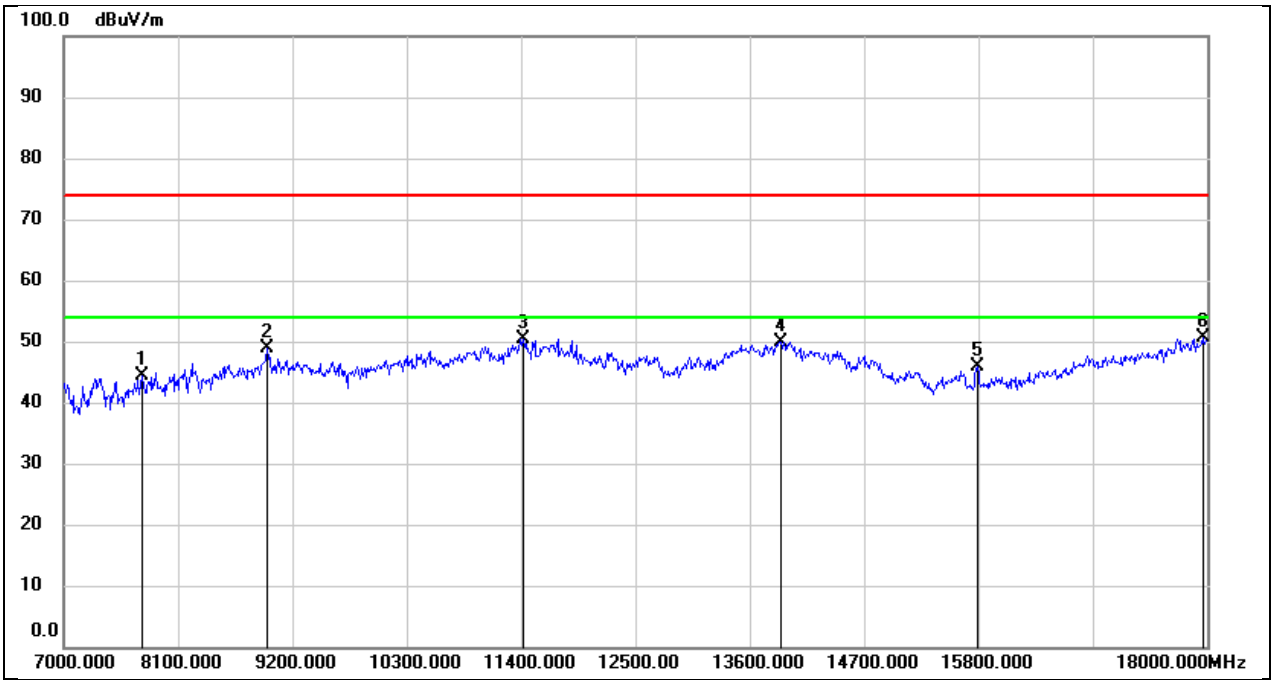

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7748.000	37.53	6.79	44.32	74.00	-29.68	peak
2	8958.000	37.56	11.24	48.80	74.00	-25.20	peak
3	11422.000	33.81	16.64	50.45	74.00	-23.55	peak
4	13897.000	27.48	22.47	49.95	74.00	-24.05	peak
5	15789.000	28.15	17.72	45.87	74.00	-28.13	peak
6	17956.000	23.82	26.78	50.60	74.00	-23.40	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11a	Frequency(MHz):	5280
Polarity:	Horizontal	Test Voltage:	DC 3.3V

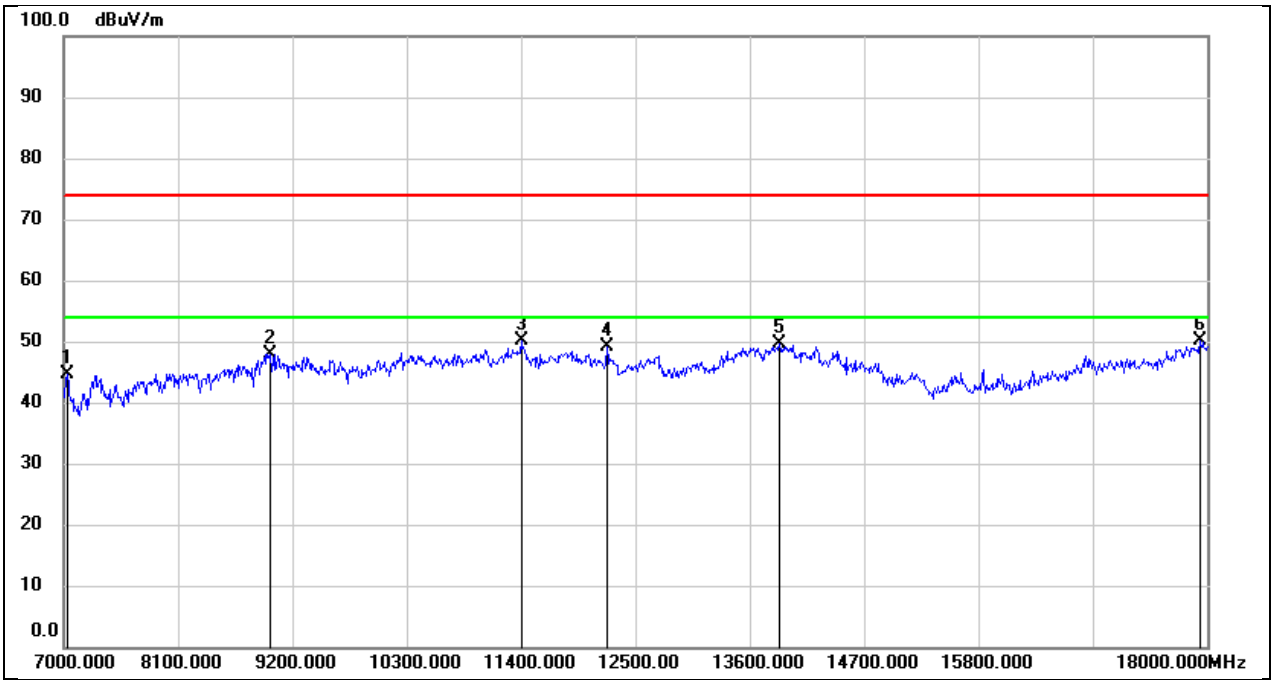

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7033.000	37.11	7.58	44.69	74.00	-29.31	peak
2	8980.000	36.37	11.57	47.94	74.00	-26.06	peak
3	11400.000	33.47	16.57	50.04	74.00	-23.96	peak
4	12225.000	30.55	18.63	49.18	74.00	-24.82	peak
5	13886.000	27.11	22.48	49.59	74.00	-24.41	peak
6	17934.000	23.41	26.69	50.10	74.00	-23.90	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11a	Frequency(MHz):	5280
Polarity:	Vertical	Test Voltage:	DC 3.3V

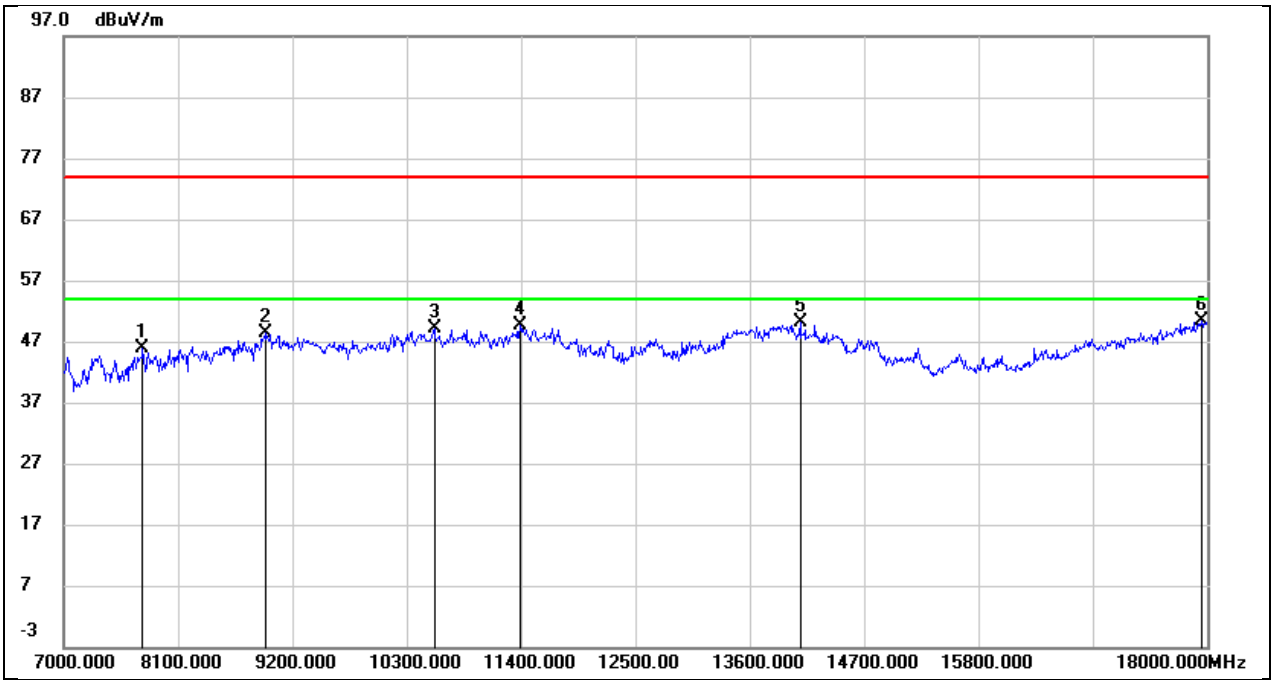

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7759.000	39.00	6.80	45.80	74.00	-28.20	peak
2	8936.000	37.38	10.91	48.29	74.00	-25.71	peak
3	10564.000	35.47	13.68	49.15	74.00	-24.85	peak
4	11389.000	33.20	16.51	49.71	74.00	-24.29	peak
5	14084.000	27.81	22.28	50.09	74.00	-23.91	peak
6	17945.000	23.62	26.74	50.36	74.00	-23.64	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11a	Frequency(MHz):	5320
Polarity:	Horizontal	Test Voltage:	DC 3.3V

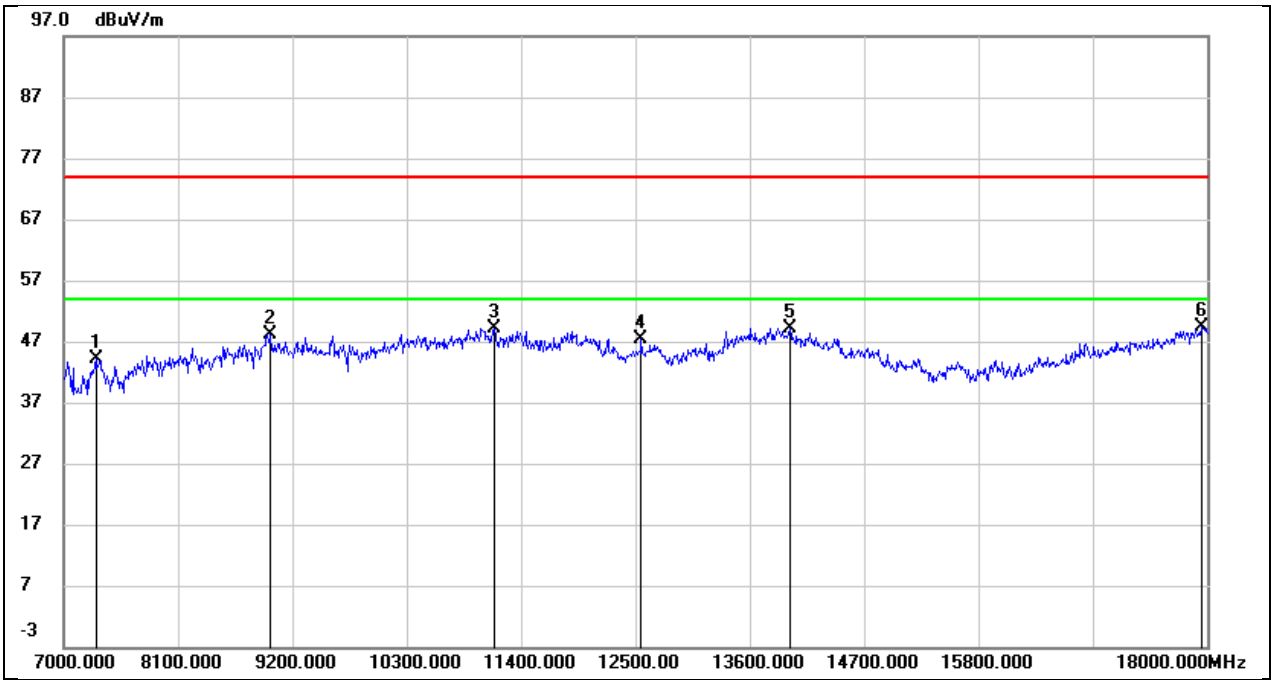

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7308.000	36.48	7.73	44.21	74.00	-29.79	peak
2	8991.000	36.39	11.73	48.12	74.00	-25.88	peak
3	11147.000	33.97	15.22	49.19	74.00	-24.81	peak
4	12555.000	28.87	18.43	47.30	74.00	-26.70	peak
5	13985.000	26.62	22.53	49.15	74.00	-24.85	peak
6	17945.000	22.76	26.74	49.50	74.00	-24.50	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11a	Frequency(MHz):	5320
Polarity:	Vertical	Test Voltage:	DC 3.3V

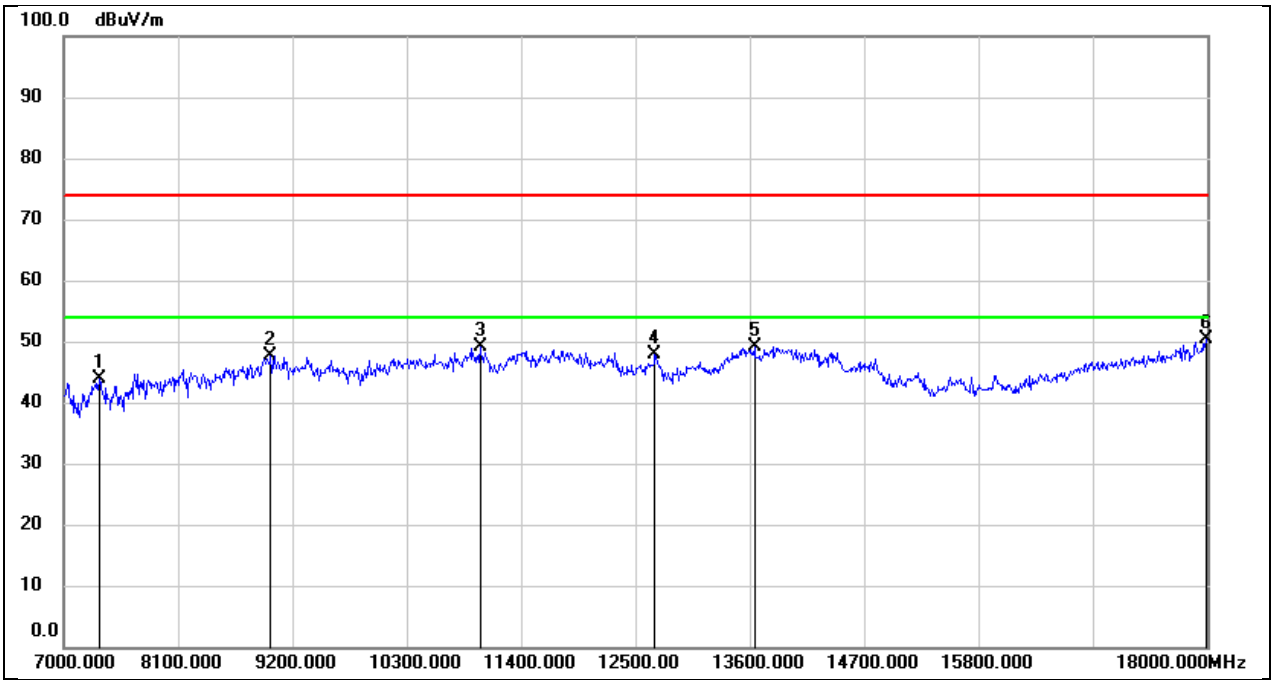

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7341.000	35.84	8.00	43.84	74.00	-30.16	peak
2	8991.000	35.84	11.73	47.57	74.00	-26.43	peak
3	11004.000	34.23	14.90	49.13	74.00	-24.87	peak
4	12687.000	29.35	18.53	47.88	74.00	-26.12	peak
5	13644.000	27.47	21.64	49.11	74.00	-24.89	peak
6	17989.000	23.47	26.92	50.39	74.00	-23.61	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11a	Frequency(MHz):	5500
Polarity:	Horizontal	Test Voltage:	DC 3.3V

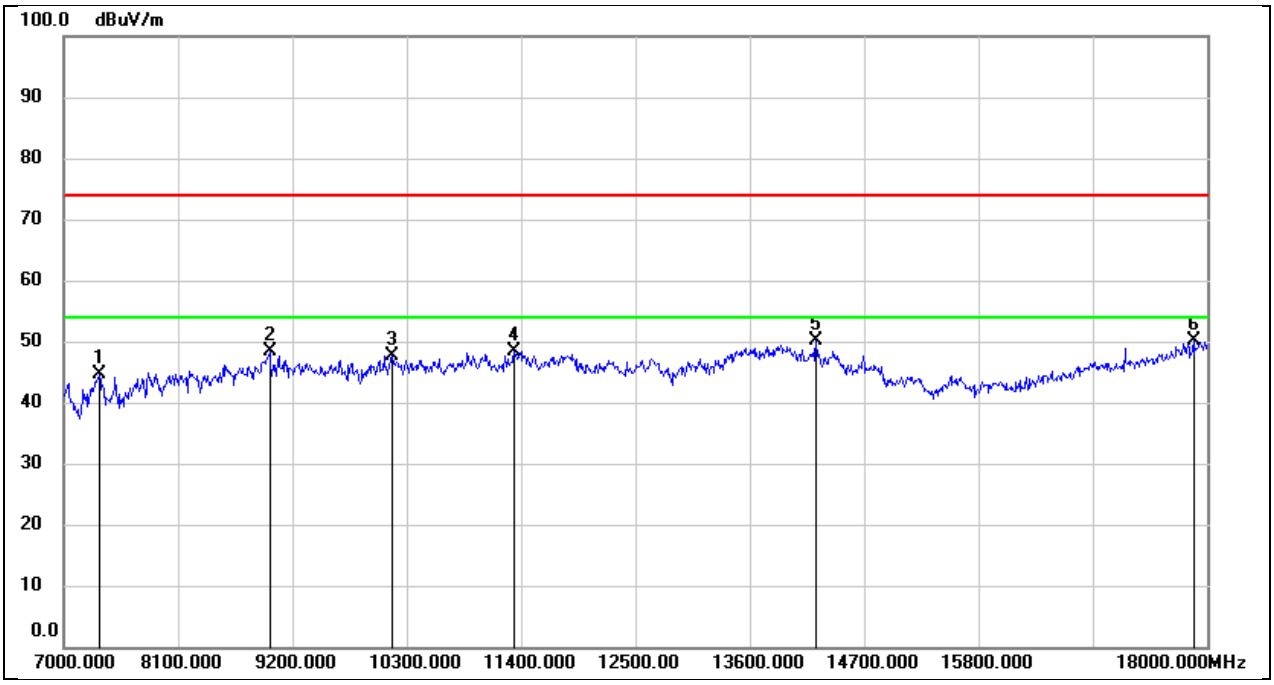

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7341.000	36.64	8.00	44.64	74.00	-29.36	peak
2	8980.000	36.86	11.57	48.43	74.00	-25.57	peak
3	10157.000	35.27	12.30	47.57	74.00	-26.43	peak
4	11334.000	32.16	16.16	48.32	74.00	-25.68	peak
5	14238.000	28.46	21.72	50.18	74.00	-23.82	peak
6	17868.000	23.68	26.41	50.09	74.00	-23.91	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11a	Frequency(MHz):	5500
Polarity:	Vertical	Test Voltage:	DC 3.3V

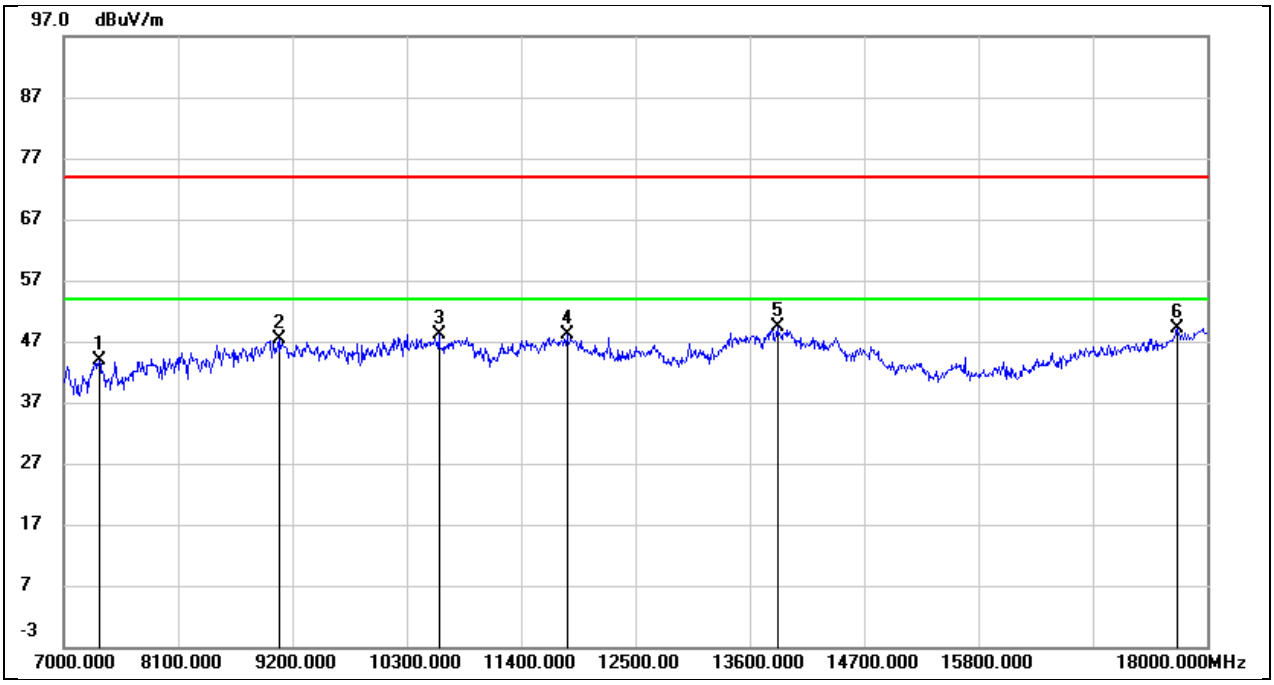

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7341.000	35.99	8.00	43.99	74.00	-30.01	peak
2	9068.000	36.14	11.25	47.39	74.00	-26.61	peak
3	10608.000	34.45	13.77	48.22	74.00	-25.78	peak
4	11840.000	30.35	17.76	48.11	74.00	-25.89	peak
5	13864.000	26.96	22.45	49.41	74.00	-24.59	peak
6	17714.000	23.97	25.14	49.11	74.00	-24.89	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11a	Frequency(MHz):	5580
Polarity:	Horizontal	Test Voltage:	DC 3.3V

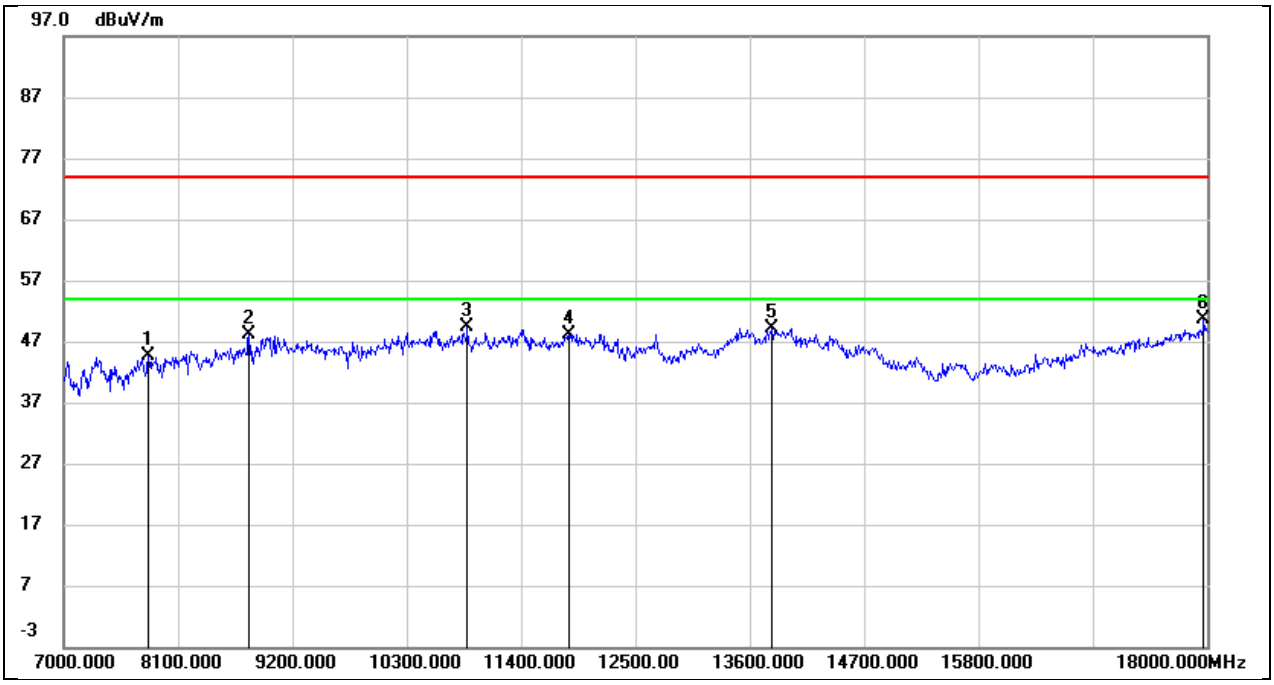

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7814.000	37.88	6.85	44.73	74.00	-29.27	peak
2	8782.000	39.15	8.89	48.04	74.00	-25.96	peak
3	10883.000	35.12	14.28	49.40	74.00	-24.60	peak
4	11862.000	30.33	17.88	48.21	74.00	-25.79	peak
5	13809.000	26.71	22.43	49.14	74.00	-24.86	peak
6	17967.000	23.78	26.83	50.61	74.00	-23.39	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11a	Frequency(MHz):	5580
Polarity:	Vertical	Test Voltage:	DC 3.3V

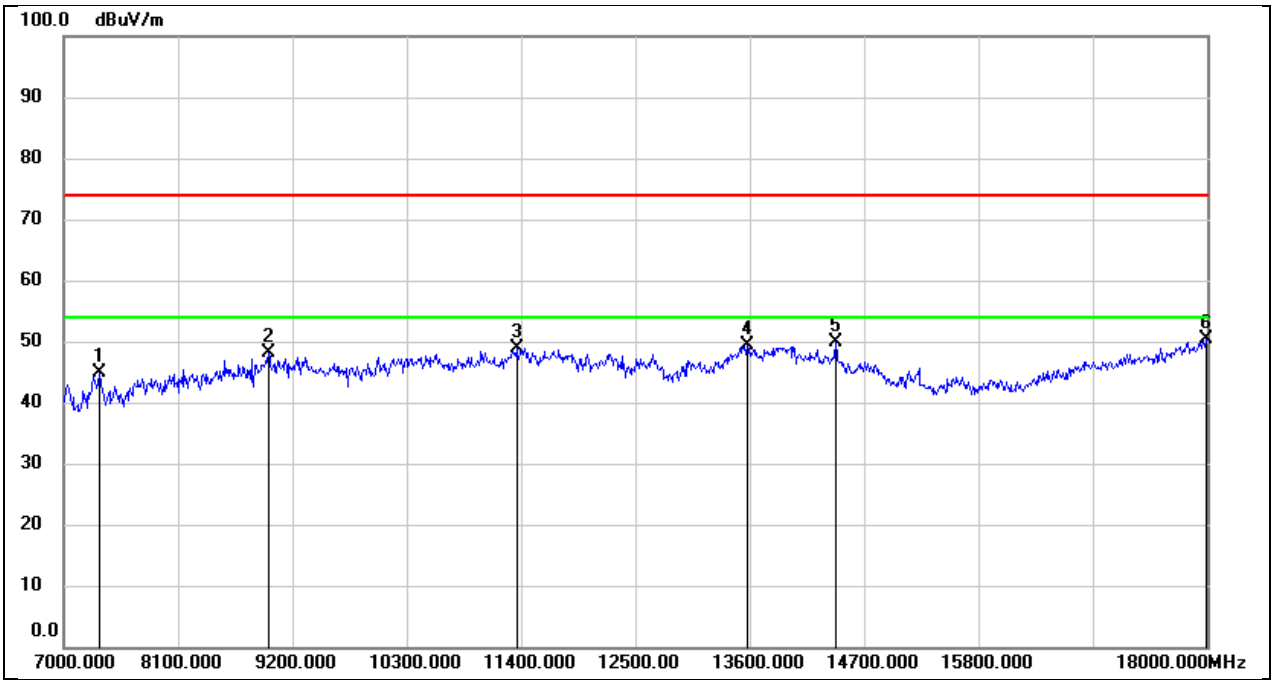

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7341.000	36.83	8.00	44.83	74.00	-29.17	peak
2	8969.000	36.82	11.40	48.22	74.00	-25.78	peak
3	11356.000	32.67	16.30	48.97	74.00	-25.03	peak
4	13578.000	27.98	21.42	49.40	74.00	-24.60	peak
5	14425.000	29.21	20.67	49.88	74.00	-24.12	peak
6	17989.000	23.53	26.92	50.45	74.00	-23.55	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11a	Frequency(MHz):	5700
Polarity:	Horizontal	Test Voltage:	DC 3.3V

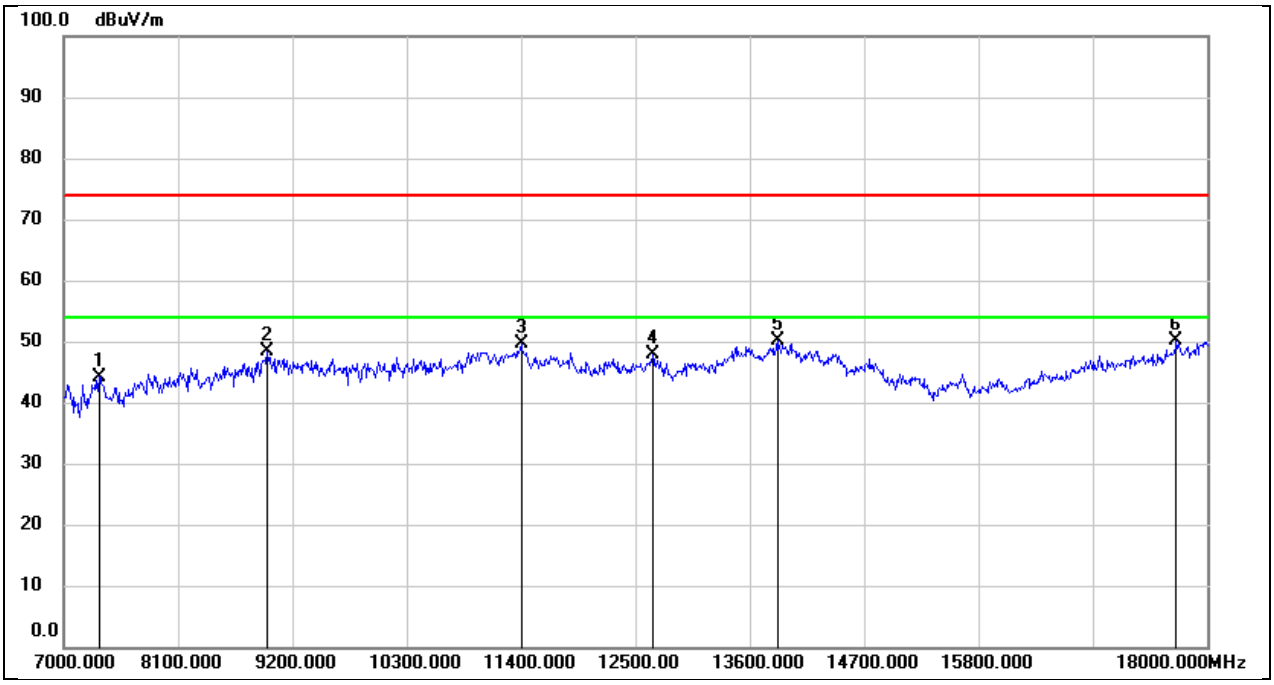

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7341.000	36.25	8.00	44.25	74.00	-29.75	peak
2	8958.000	37.17	11.24	48.41	74.00	-25.59	peak
3	11400.000	33.05	16.57	49.62	74.00	-24.38	peak
4	12665.000	29.50	18.48	47.98	74.00	-26.02	peak
5	13864.000	27.73	22.45	50.18	74.00	-23.82	peak
6	17703.000	25.00	25.01	50.01	74.00	-23.99	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11a	Frequency(MHz):	5700
Polarity:	Vertical	Test Voltage:	DC 3.3V

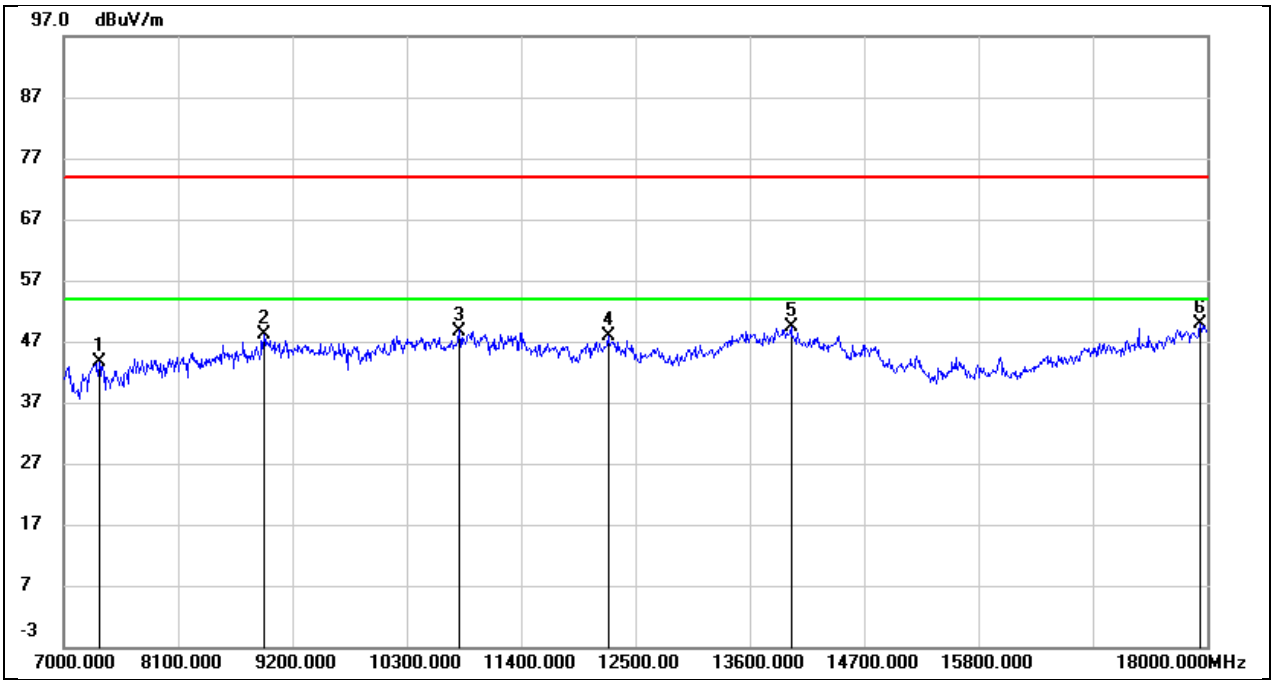

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7341.000	35.65	8.00	43.65	74.00	-30.35	peak
2	8925.000	37.29	10.75	48.04	74.00	-25.96	peak
3	10806.000	34.88	13.87	48.75	74.00	-25.25	peak
4	12236.000	29.11	18.66	47.77	74.00	-26.23	peak
5	13996.000	26.76	22.54	49.30	74.00	-24.70	peak
6	17934.000	23.21	26.69	49.90	74.00	-24.10	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11a	Frequency(MHz):	5720
Polarity:	Horizontal	Test Voltage:	DC 3.3V

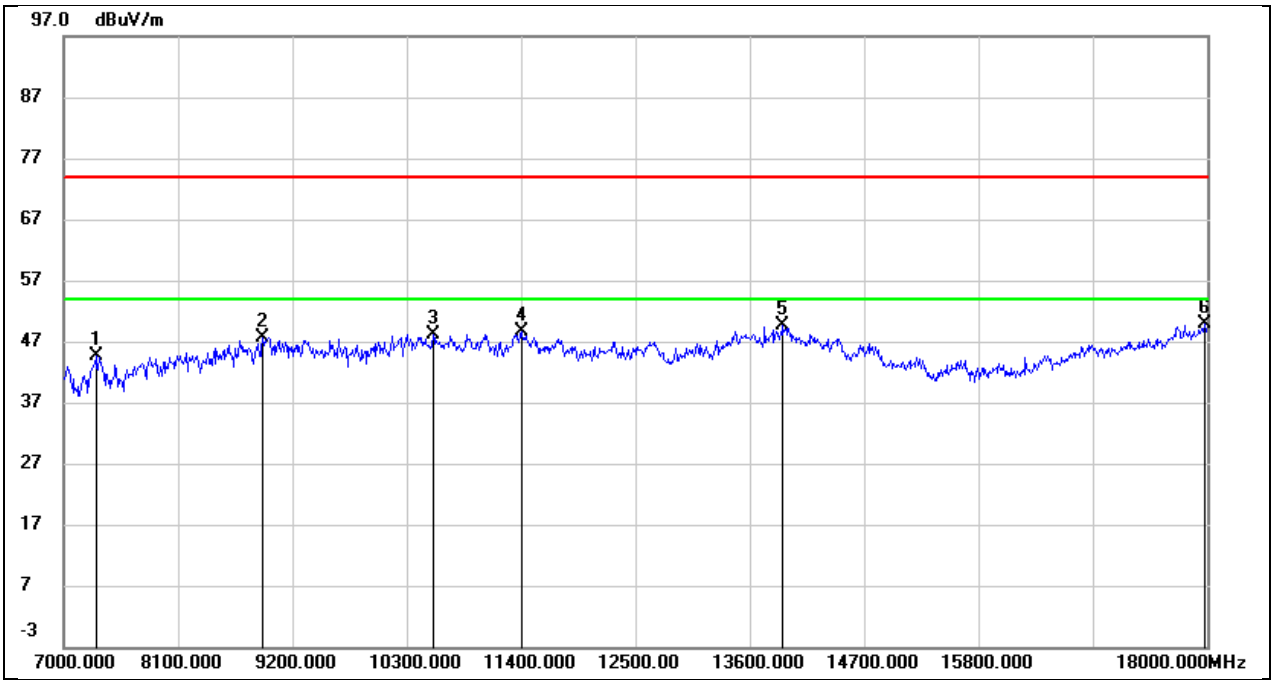

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7308.000	36.82	7.73	44.55	74.00	-29.45	peak
2	8914.000	37.02	10.58	47.60	74.00	-26.40	peak
3	10553.000	34.58	13.64	48.22	74.00	-25.78	peak
4	11400.000	32.01	16.57	48.58	74.00	-25.42	peak
5	13919.000	27.02	22.49	49.51	74.00	-24.49	peak
6	17978.000	22.90	26.88	49.78	74.00	-24.22	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11a	Frequency(MHz):	5720
Polarity:	Vertical	Test Voltage:	DC 3.3V

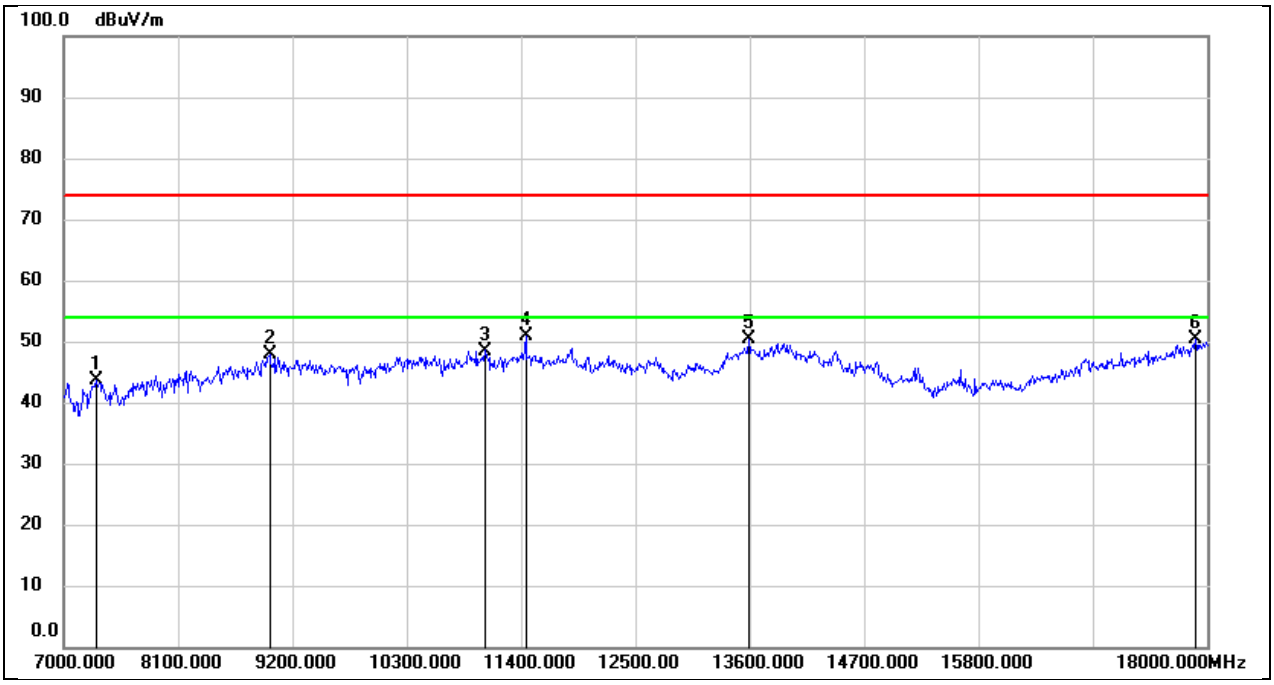

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7319.000	35.79	7.82	43.61	74.00	-30.39	peak
2	8980.000	36.27	11.57	47.84	74.00	-26.16	peak
3	11048.000	33.51	14.99	48.50	74.00	-25.50	peak
4	11444.000	34.05	16.71	50.76	74.00	-23.24	peak
5	13589.000	28.87	21.41	50.28	74.00	-23.72	peak
6	17890.000	23.77	26.50	50.27	74.00	-23.73	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11a	Frequency(MHz):	5745
Polarity:	Horizontal	Test Voltage:	DC 3.3V

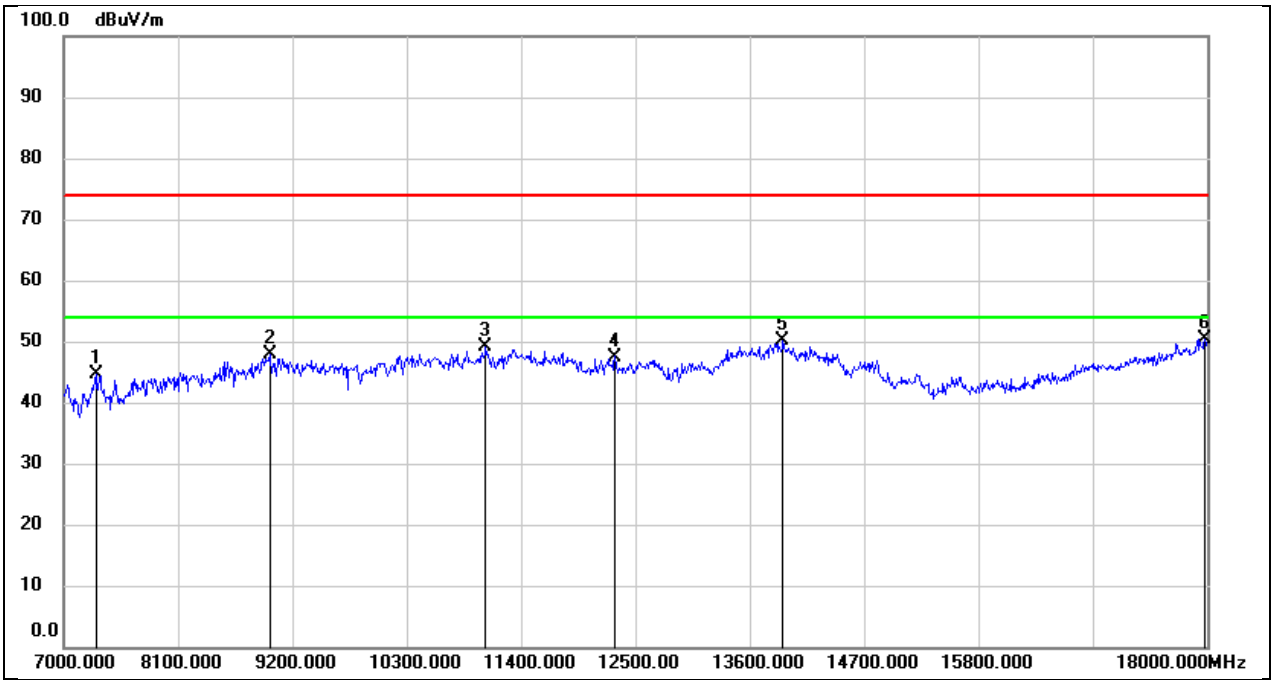

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7308.000	36.90	7.73	44.63	74.00	-29.37	peak
2	8980.000	36.33	11.57	47.90	74.00	-26.10	peak
3	11059.000	34.02	15.02	49.04	74.00	-24.96	peak
4	12302.000	28.71	18.79	47.50	74.00	-26.50	peak
5	13919.000	27.62	22.49	50.11	74.00	-23.89	peak
6	17978.000	23.53	26.88	50.41	74.00	-23.59	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11a	Frequency(MHz):	5745
Polarity:	Vertical	Test Voltage:	DC 3.3V

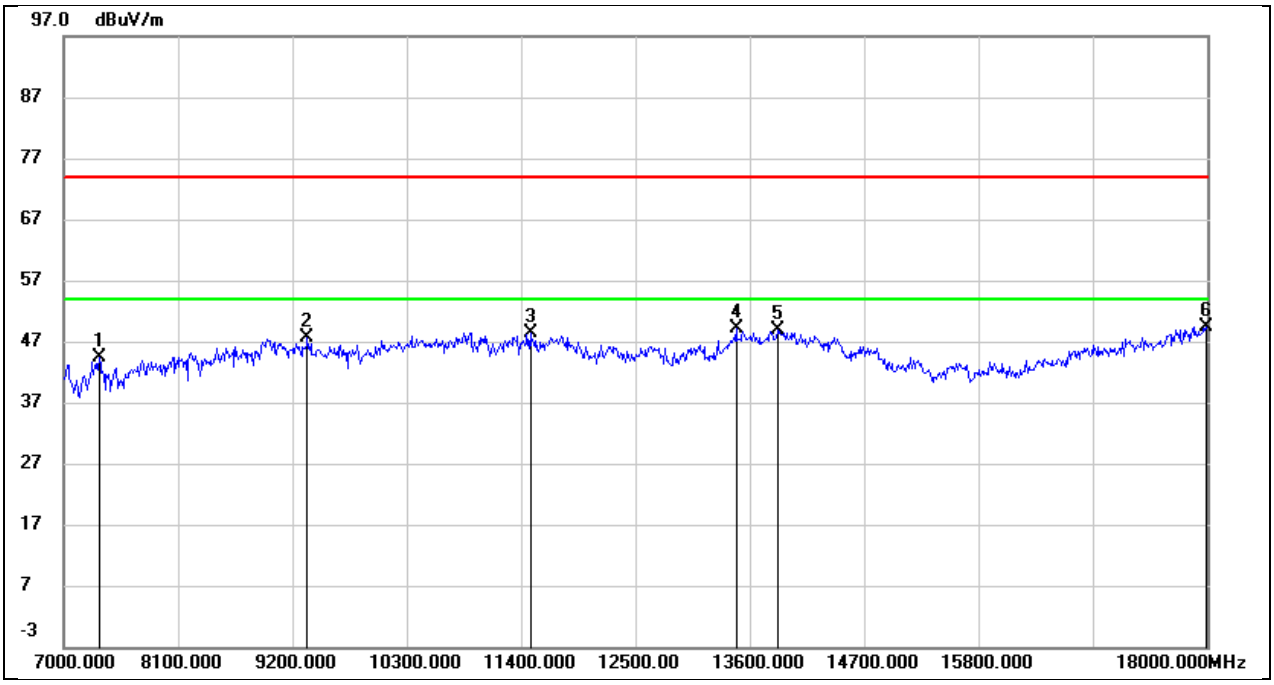

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7341.000	36.26	8.00	44.26	74.00	-29.74	peak
2	9343.000	37.21	10.49	47.70	74.00	-26.30	peak
3	11488.000	31.49	16.84	48.33	74.00	-25.67	peak
4	13468.000	27.74	21.31	49.05	74.00	-24.95	peak
5	13875.000	26.45	22.46	48.91	74.00	-25.09	peak
6	17989.000	22.48	26.92	49.40	74.00	-24.60	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11a	Frequency(MHz):	5785
Polarity:	Horizontal	Test Voltage:	DC 3.3V

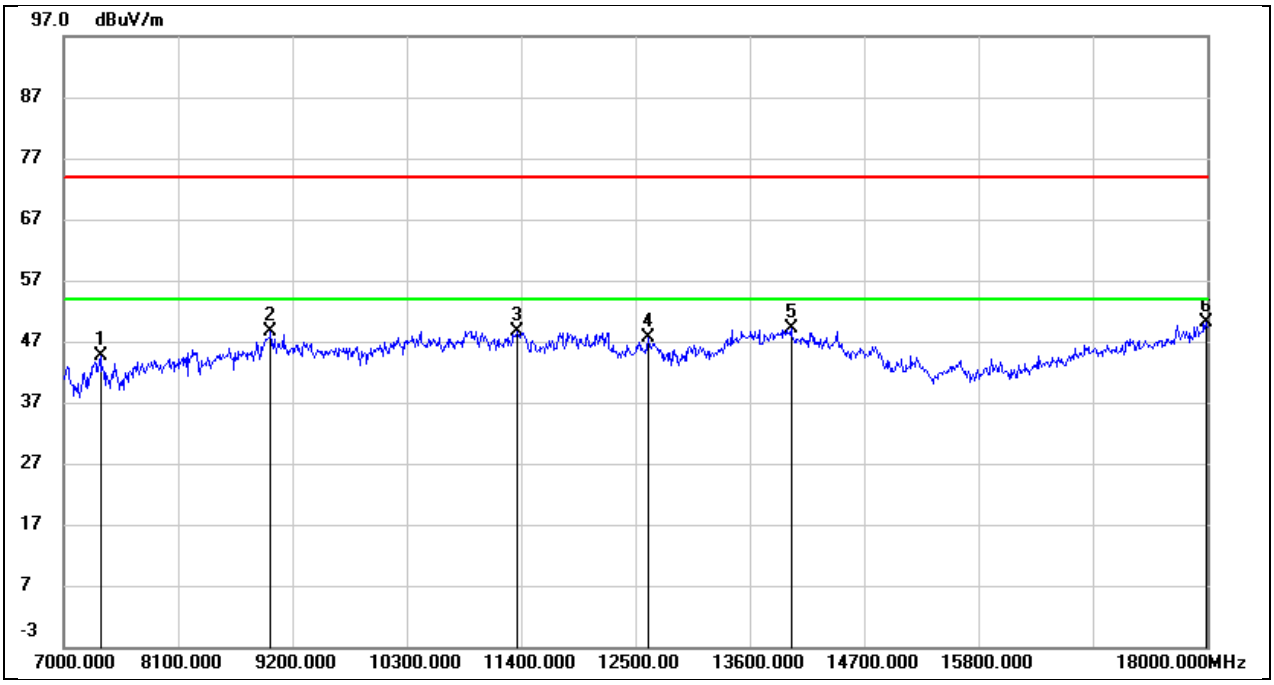

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7352.000	36.64	8.07	44.71	74.00	-29.29	peak
2	8991.000	36.88	11.73	48.61	74.00	-25.39	peak
3	11367.000	32.34	16.37	48.71	74.00	-25.29	peak
4	12621.000	29.13	18.38	47.51	74.00	-26.49	peak
5	13996.000	26.61	22.54	49.15	74.00	-24.85	peak
6	17989.000	23.20	26.92	50.12	74.00	-23.88	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11a	Frequency(MHz):	5785
Polarity:	Vertical	Test Voltage:	DC 3.3V

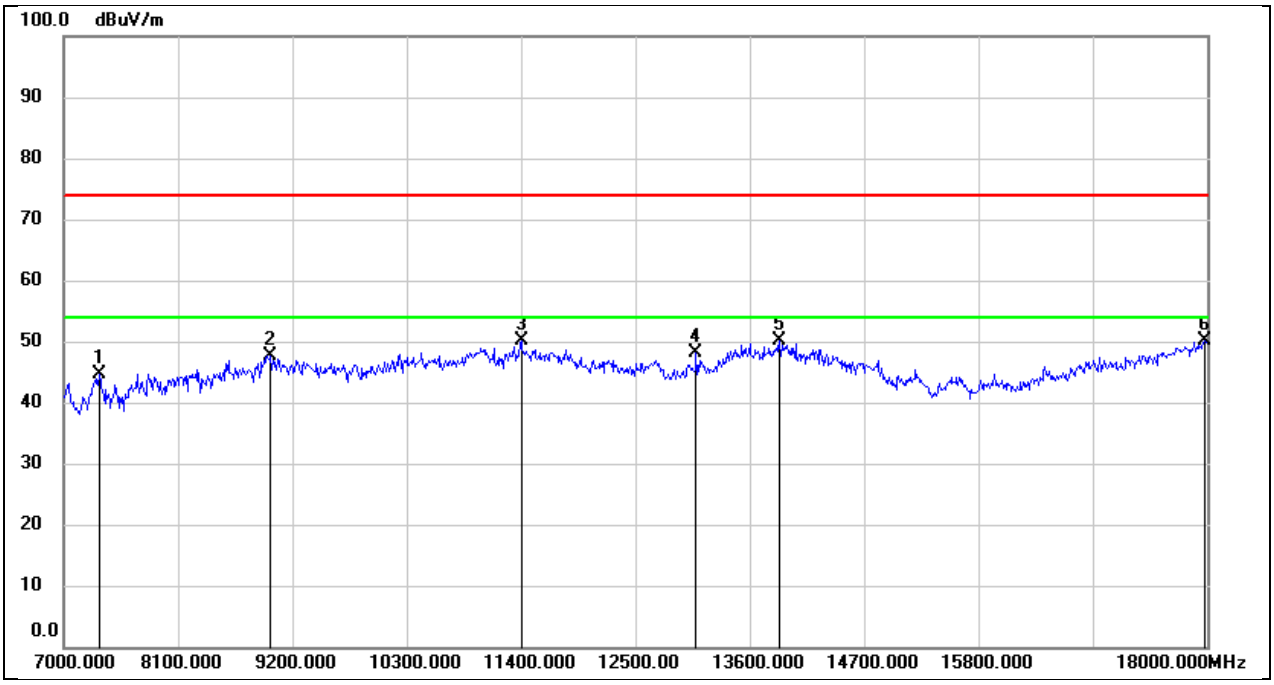

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7341.000	36.66	8.00	44.66	74.00	-29.34	peak
2	8991.000	35.92	11.73	47.65	74.00	-26.35	peak
3	11400.000	33.55	16.57	50.12	74.00	-23.88	peak
4	13083.000	28.68	19.48	48.16	74.00	-25.84	peak
5	13886.000	27.70	22.48	50.18	74.00	-23.82	peak
6	17978.000	23.22	26.88	50.10	74.00	-23.90	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11a	Frequency(MHz):	5825
Polarity:	Horizontal	Test Voltage:	DC 3.3V

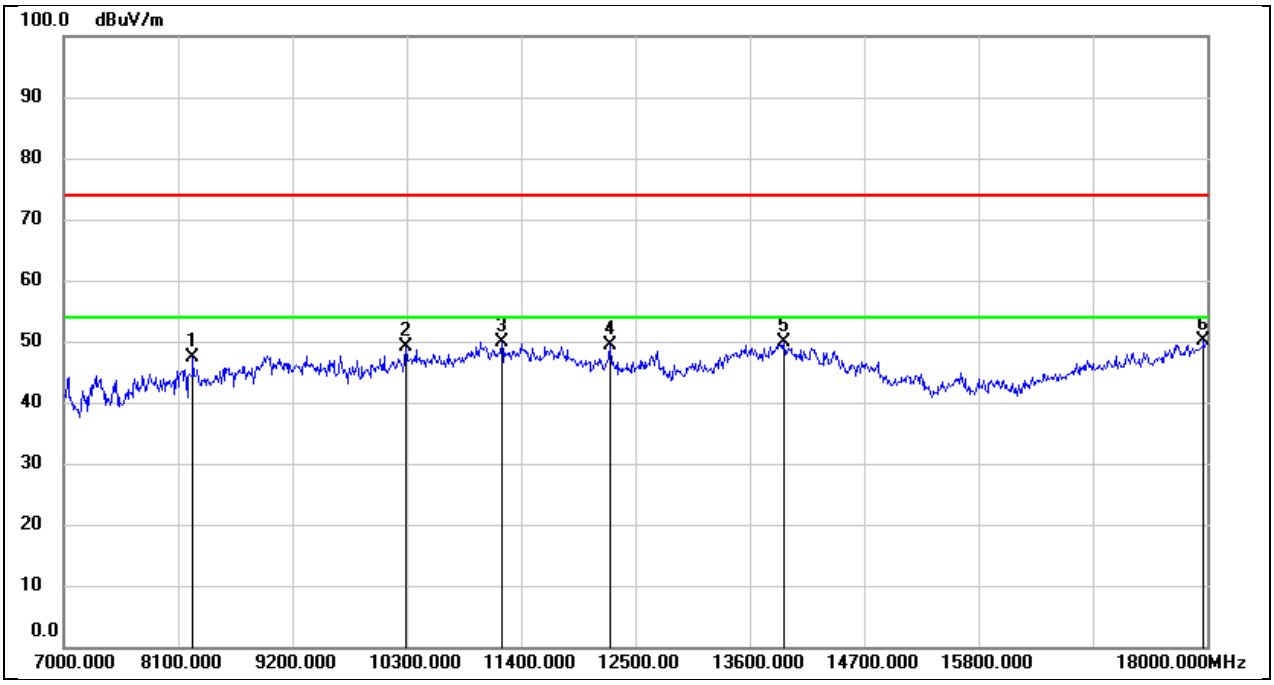

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8243.000	38.97	8.44	47.41	74.00	-26.59	peak
2	10289.000	36.38	12.74	49.12	74.00	-24.88	peak
3	11213.000	34.48	15.42	49.90	74.00	-24.10	peak
4	12258.000	30.76	18.70	49.46	74.00	-24.54	peak
5	13930.000	27.39	22.50	49.89	74.00	-24.11	peak
6	17967.000	23.29	26.83	50.12	74.00	-23.88	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11a	Frequency(MHz):	5825
Polarity:	Vertical	Test Voltage:	DC 3.3V

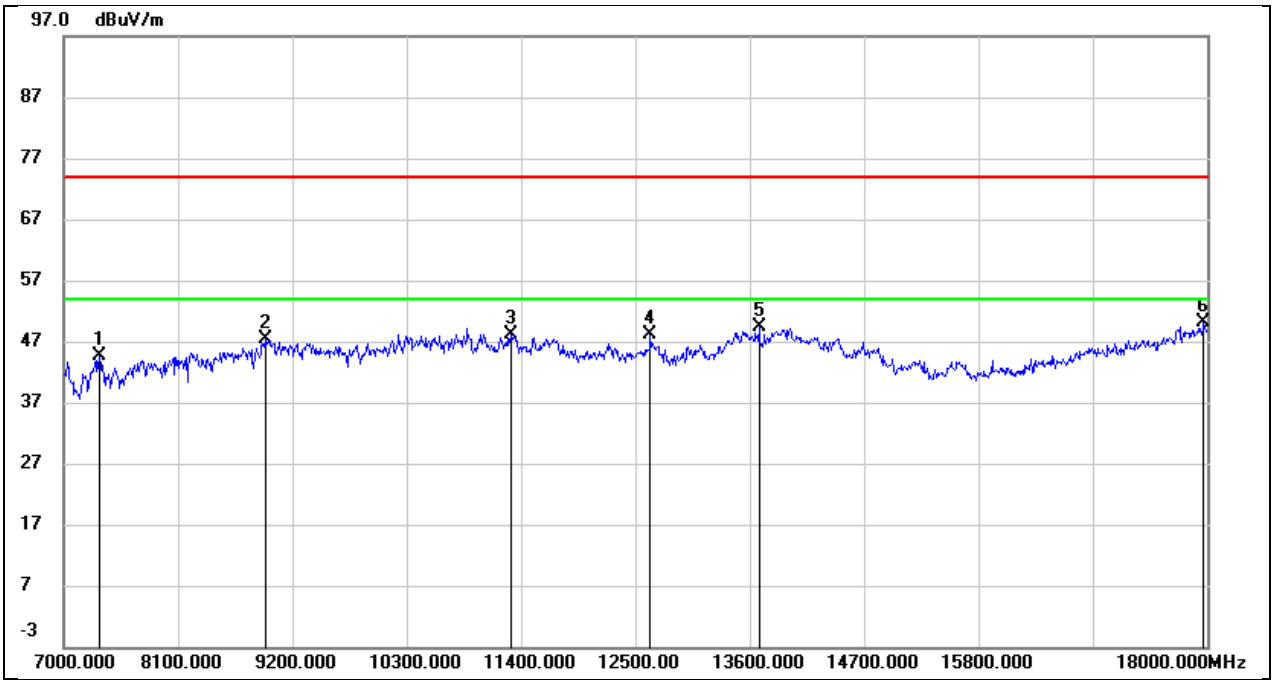

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7341.000	36.53	8.00	44.53	74.00	-29.47	peak
2	8936.000	36.48	10.91	47.39	74.00	-26.61	peak
3	11301.000	32.09	15.96	48.05	74.00	-25.95	peak
4	12643.000	29.60	18.43	48.03	74.00	-25.97	peak
5	13688.000	27.43	21.85	49.28	74.00	-24.72	peak
6	17967.000	23.24	26.83	50.07	74.00	-23.93	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11n HT20	Frequency(MHz):	5180
Polarity:	Horizontal	Test Voltage:	DC 3.3V

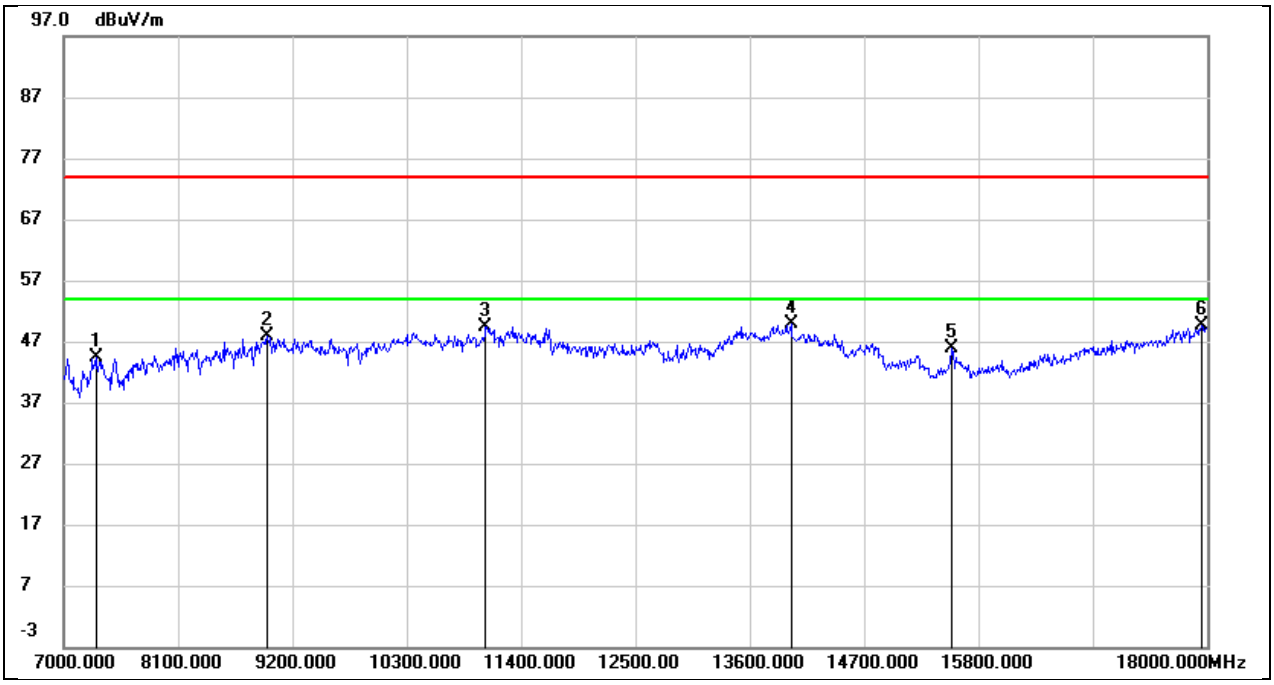

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7308.000	36.65	7.73	44.38	74.00	-29.62	peak
2	8958.000	36.73	11.24	47.97	74.00	-26.03	peak
3	11059.000	34.43	15.02	49.45	74.00	-24.55	peak
4	13996.000	27.34	22.54	49.88	74.00	-24.12	peak
5	15547.000	28.32	17.66	45.98	74.00	-28.02	peak
6	17945.000	22.86	26.74	49.60	74.00	-24.40	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11n HT20	Frequency(MHz):	5180
Polarity:	Vertical	Test Voltage:	DC 3.3V

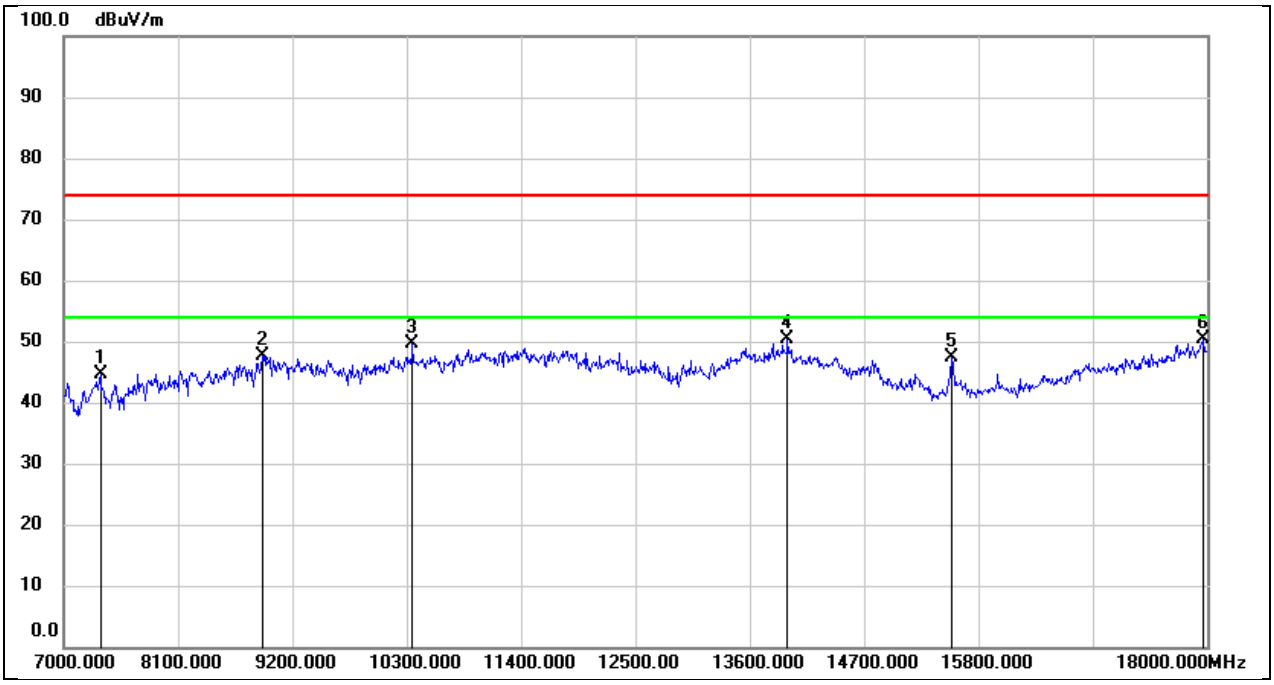

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7352.000	36.63	8.07	44.70	74.00	-29.30	peak
2	8914.000	37.13	10.58	47.71	74.00	-26.29	peak
3	10355.000	36.48	13.03	49.51	74.00	-24.49	peak
4	13963.000	27.80	22.51	50.31	74.00	-23.69	peak
5	15547.000	29.72	17.66	47.38	74.00	-26.62	peak
6	17967.000	23.47	26.83	50.30	74.00	-23.70	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11n HT20	Frequency(MHz):	5200
Polarity:	Horizontal	Test Voltage:	DC 3.3V

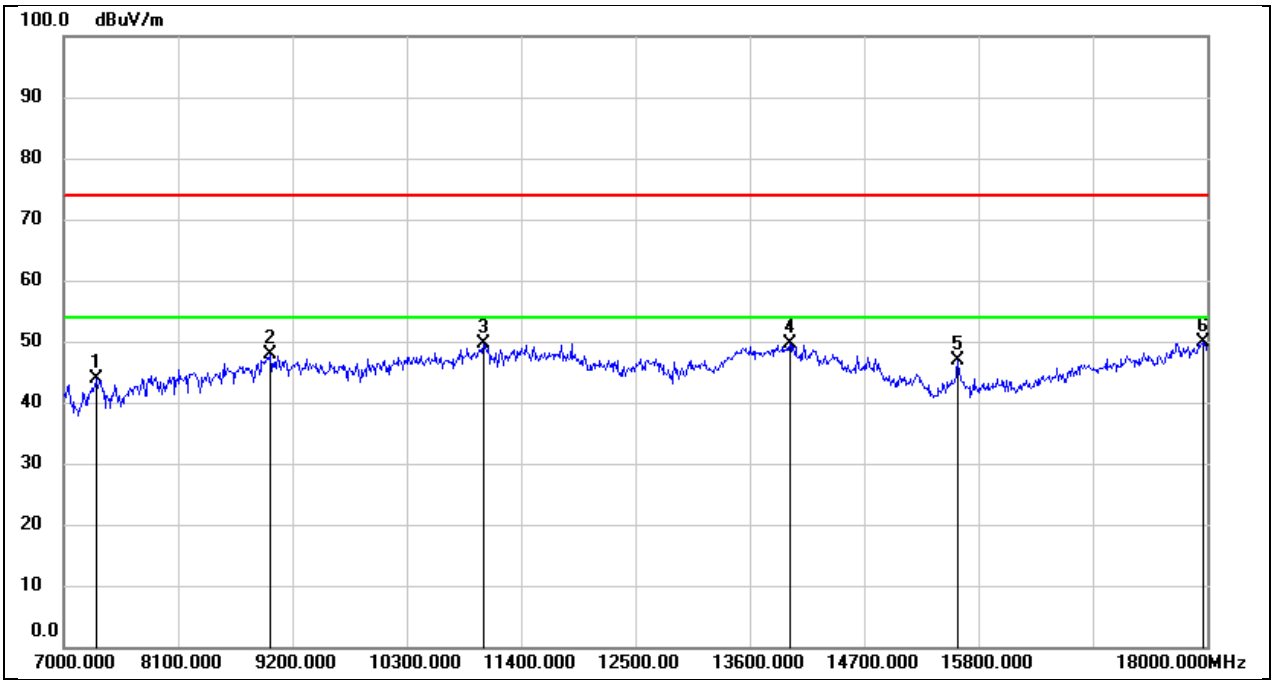

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7319.000	35.99	7.82	43.81	74.00	-30.19	peak
2	8991.000	36.14	11.73	47.87	74.00	-26.13	peak
3	11037.000	34.65	14.98	49.63	74.00	-24.37	peak
4	13985.000	27.20	22.53	49.73	74.00	-24.27	peak
5	15602.000	29.07	17.84	46.91	74.00	-27.09	peak
6	17956.000	22.99	26.78	49.77	74.00	-24.23	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11n HT20	Frequency(MHz):	5200
Polarity:	Vertical	Test Voltage:	DC 3.3V

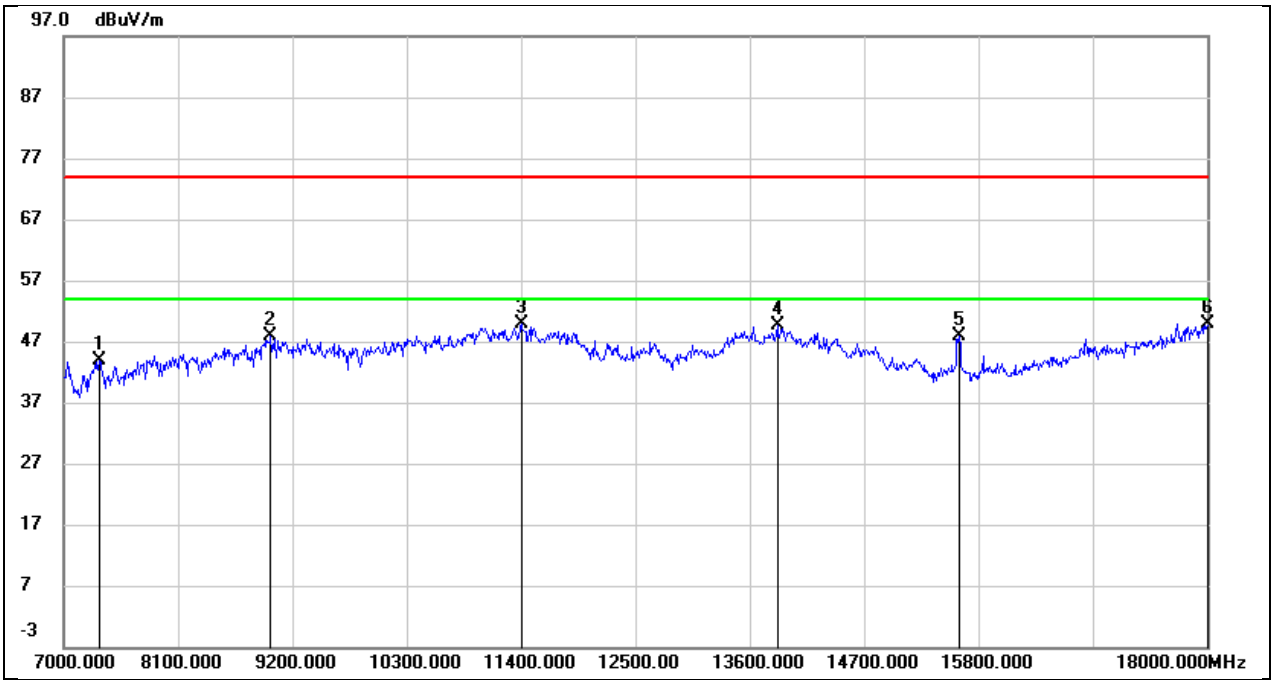

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7341.000	35.86	8.00	43.86	74.00	-30.14	peak
2	8991.000	36.16	11.73	47.89	74.00	-26.11	peak
3	11400.000	33.23	16.57	49.80	74.00	-24.20	peak
4	13864.000	27.16	22.45	49.61	74.00	-24.39	peak
5	15613.000	29.98	17.84	47.82	74.00	-26.18	peak
6	18000.000	23.01	26.97	49.98	74.00	-24.02	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11n HT20	Frequency(MHz):	5240
Polarity:	Horizontal	Test Voltage:	DC 3.3V

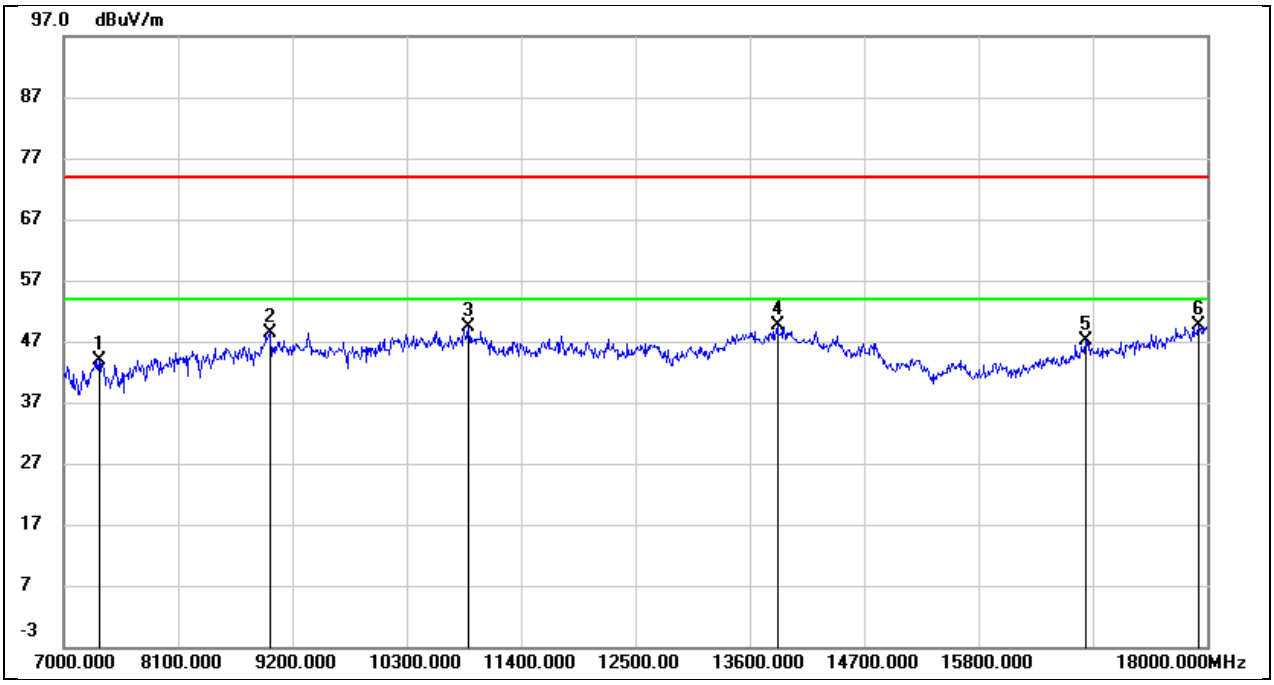

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7341.000	35.96	8.00	43.96	74.00	-30.04	peak
2	8980.000	36.84	11.57	48.41	74.00	-25.59	peak
3	10894.000	34.95	14.33	49.28	74.00	-24.72	peak
4	13864.000	27.16	22.45	49.61	74.00	-24.39	peak
5	16834.000	25.89	21.24	47.13	74.00	-26.87	peak
6	17912.000	23.05	26.60	49.65	74.00	-24.35	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11n HT20	Frequency(MHz):	5240
Polarity:	Vertical	Test Voltage:	DC 3.3V

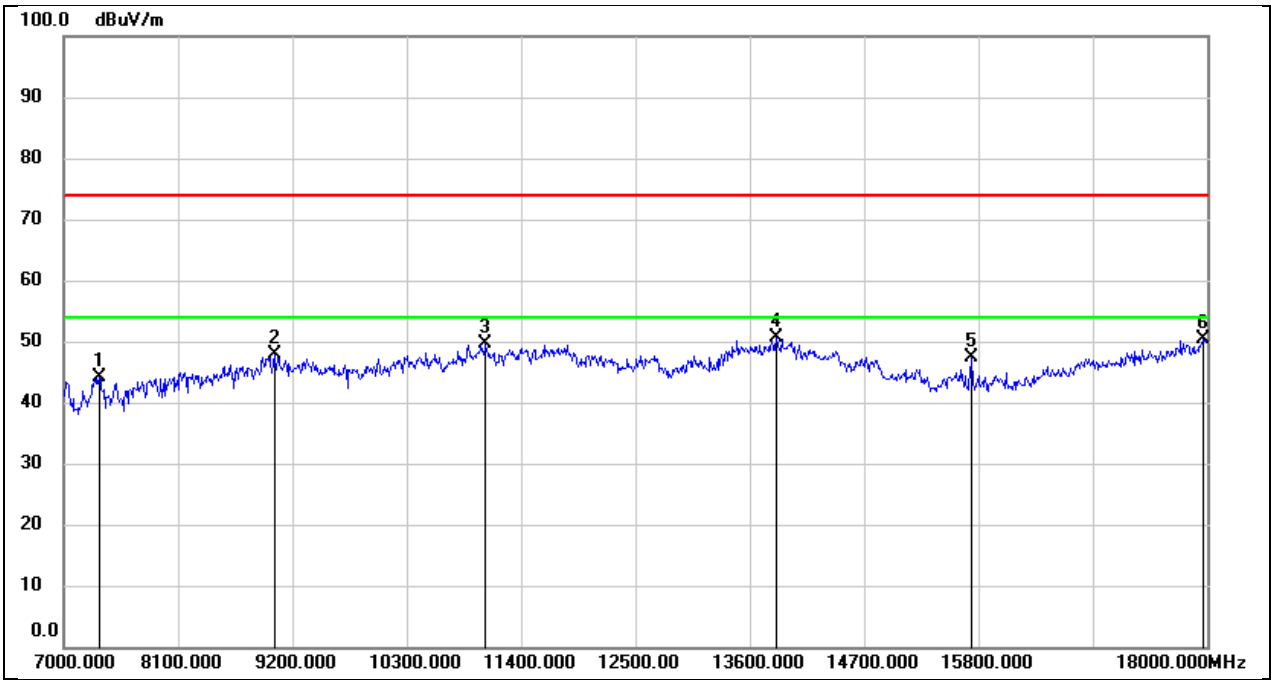

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7341.000	36.14	8.00	44.14	74.00	-29.86	peak
2	9024.000	36.27	11.65	47.92	74.00	-26.08	peak
3	11059.000	34.50	15.02	49.52	74.00	-24.48	peak
4	13853.000	28.20	22.46	50.66	74.00	-23.34	peak
5	15734.000	29.65	17.76	47.41	74.00	-26.59	peak
6	17956.000	23.57	26.78	50.35	74.00	-23.65	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11n HT20	Frequency(MHz):	5260
Polarity:	Horizontal	Test Voltage:	DC 3.3V

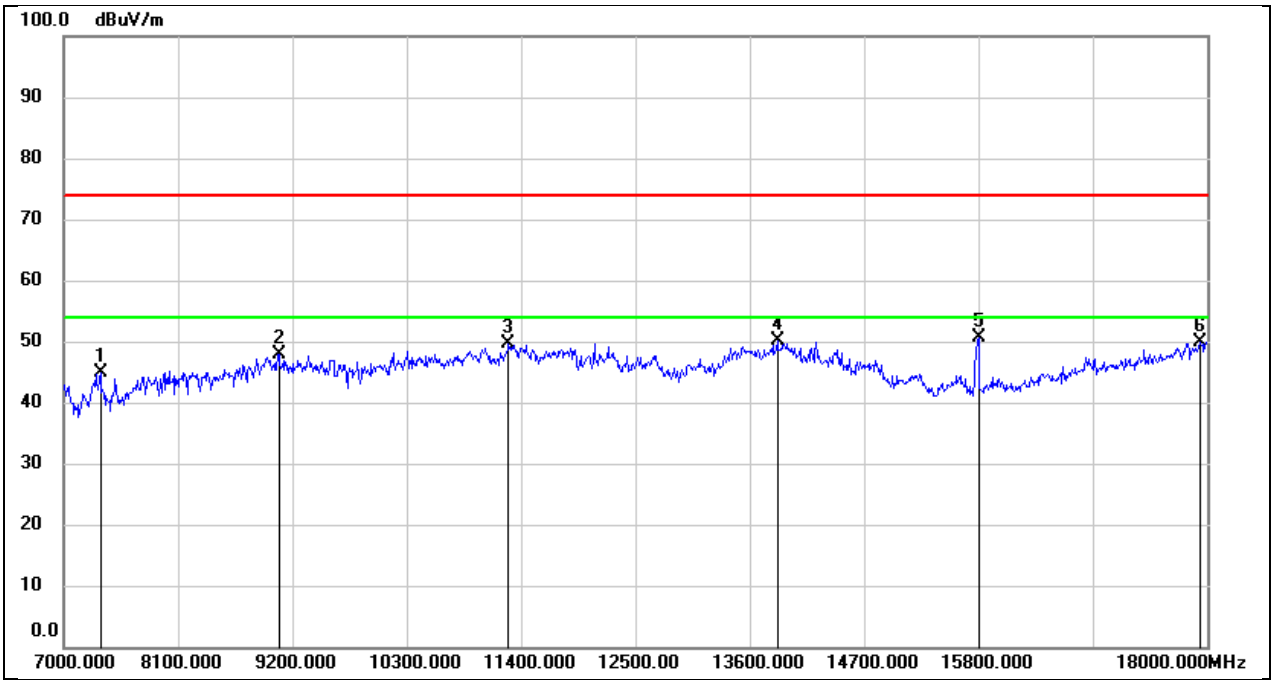

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7352.000	36.75	8.07	44.82	74.00	-29.18	peak
2	9068.000	36.70	11.25	47.95	74.00	-26.05	peak
3	11279.000	33.90	15.83	49.73	74.00	-24.27	peak
4	13864.000	27.58	22.45	50.03	74.00	-23.97	peak
5	15800.000	32.80	17.72	50.52	74.00	-23.48	peak
6	17934.000	23.22	26.69	49.91	74.00	-24.09	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11n HT20	Frequency(MHz):	5260
Polarity:	Vertical	Test Voltage:	DC 3.3V

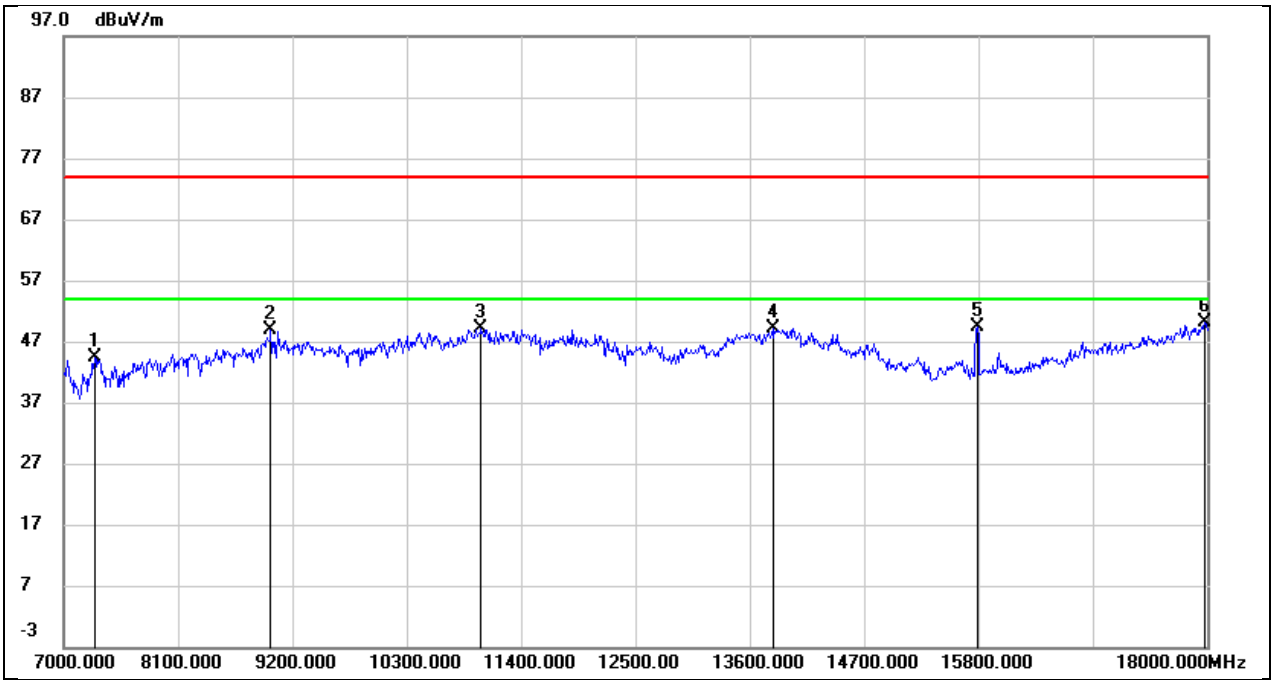

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7297.000	36.67	7.65	44.32	74.00	-29.68	peak
2	8991.000	37.15	11.73	48.88	74.00	-25.12	peak
3	11015.000	34.27	14.93	49.20	74.00	-24.80	peak
4	13820.000	26.72	22.43	49.15	74.00	-24.85	peak
5	15789.000	31.68	17.72	49.40	74.00	-24.60	peak
6	17978.000	23.13	26.88	50.01	74.00	-23.99	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11n HT20	Frequency(MHz):	5280
Polarity:	Horizontal	Test Voltage:	DC 3.3V

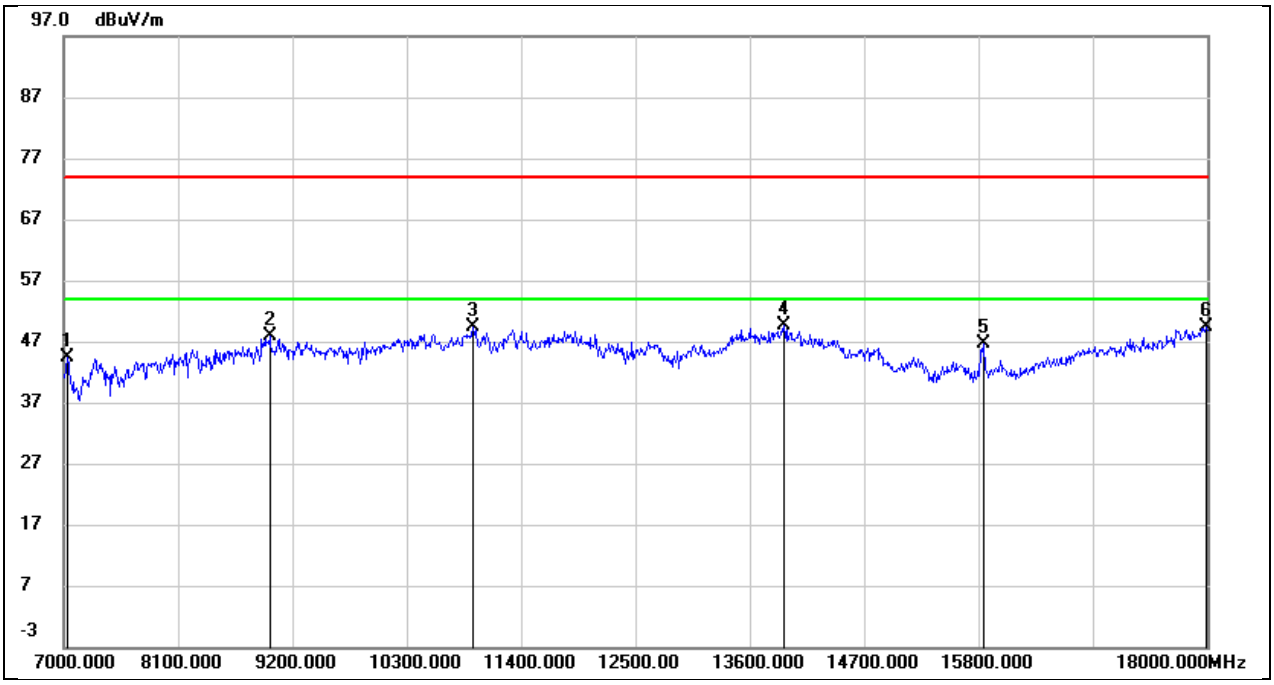

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7033.000	36.76	7.58	44.34	74.00	-29.66	peak
2	8980.000	36.20	11.57	47.77	74.00	-26.23	peak
3	10938.000	34.79	14.57	49.36	74.00	-24.64	peak
4	13930.000	27.11	22.50	49.61	74.00	-24.39	peak
5	15844.000	28.99	17.70	46.69	74.00	-27.31	peak
6	17989.000	22.44	26.92	49.36	74.00	-24.64	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11n HT20	Frequency(MHz):	5280
Polarity:	Vertical	Test Voltage:	DC 3.3V

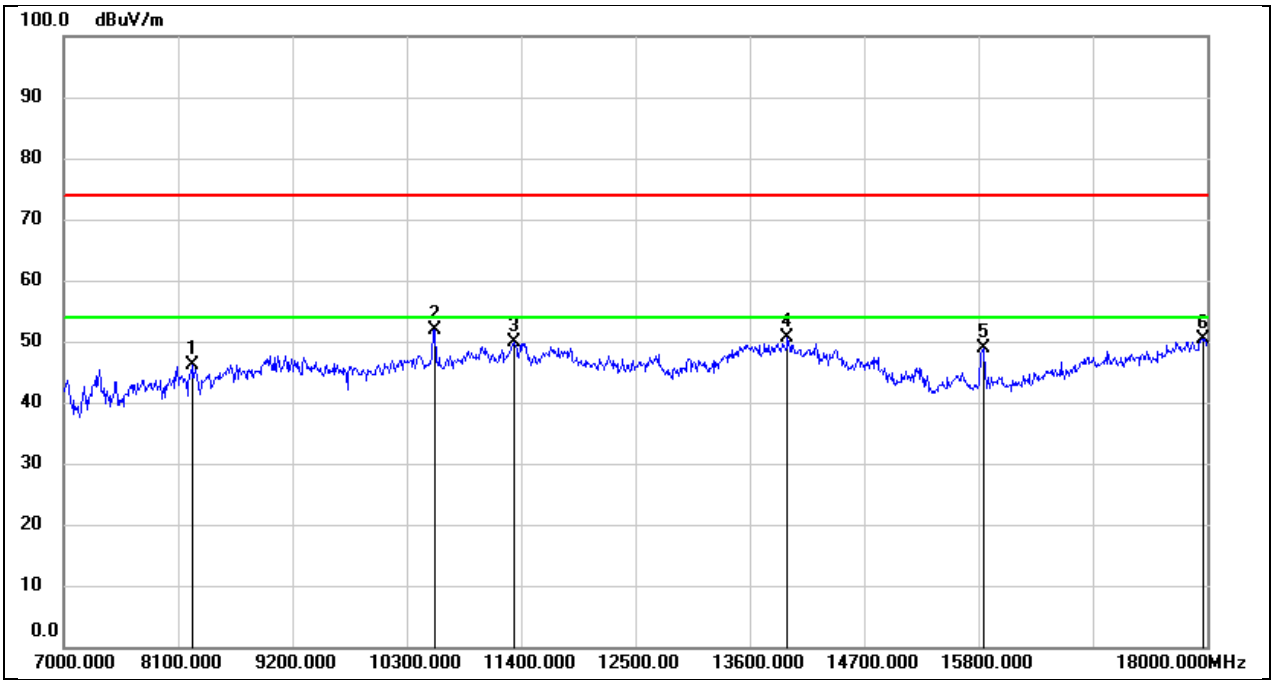

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8243.000	37.58	8.44	46.02	74.00	-27.98	peak
2	10575.000	38.14	13.70	51.84	74.00	-22.16	peak
3	11334.000	33.75	16.16	49.91	74.00	-24.09	peak
4	13963.000	28.13	22.51	50.64	74.00	-23.36	peak
5	15844.000	31.13	17.70	48.83	74.00	-25.17	peak
6	17967.000	23.54	26.83	50.37	74.00	-23.63	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11n HT20	Frequency(MHz):	5320
Polarity:	Horizontal	Test Voltage:	DC 3.3V

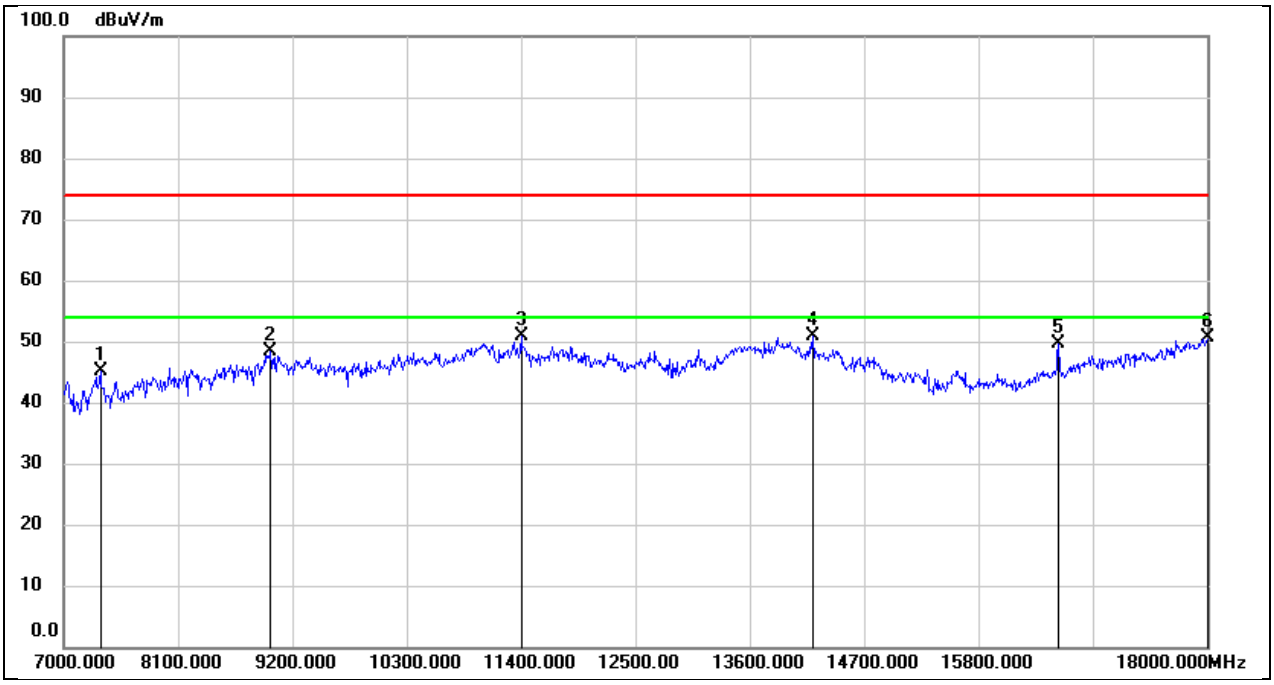

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7352.000	37.13	8.07	45.20	74.00	-28.80	peak
2	8991.000	36.75	11.73	48.48	74.00	-25.52	peak
3	11400.000	34.28	16.57	50.85	74.00	-23.15	peak
4	14205.000	29.03	21.91	50.94	74.00	-23.06	peak
5	16570.000	29.53	20.11	49.64	74.00	-24.36	peak
6	18000.000	23.57	26.97	50.54	74.00	-23.46	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11n HT20	Frequency(MHz):	5320
Polarity:	Vertical	Test Voltage:	DC 3.3V

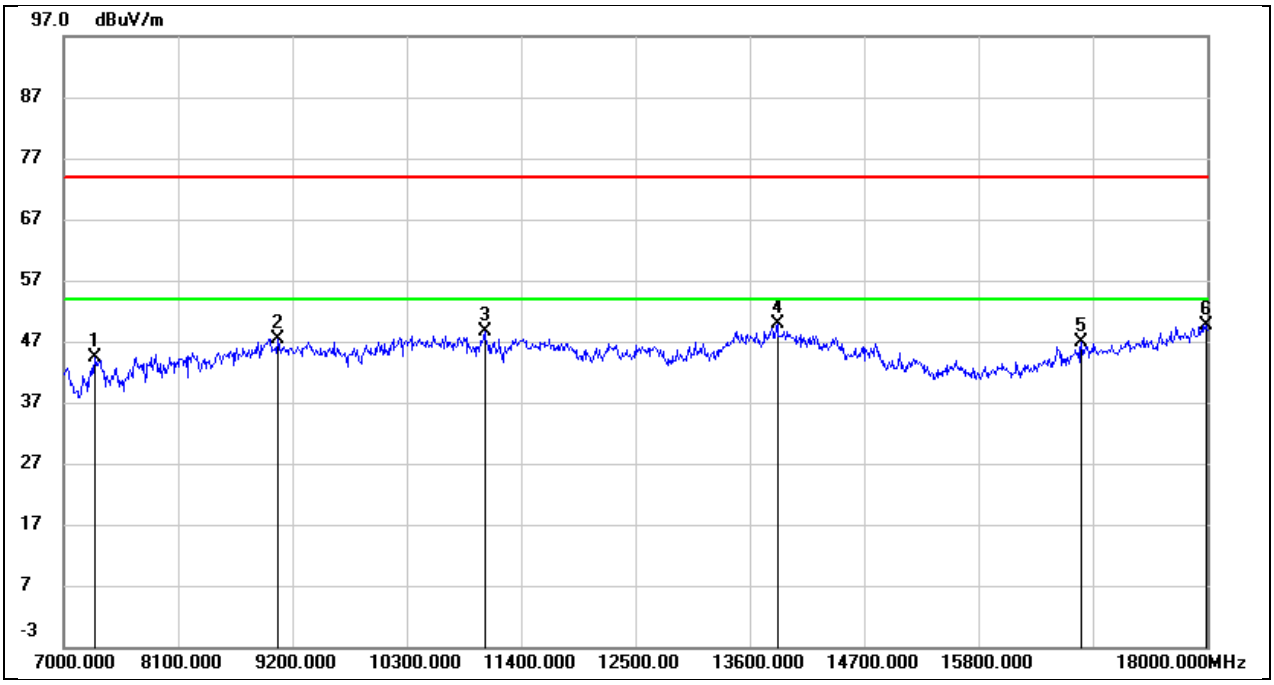

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7297.000	36.77	7.65	44.42	74.00	-29.58	peak
2	9057.000	36.03	11.35	47.38	74.00	-26.62	peak
3	11048.000	33.53	14.99	48.52	74.00	-25.48	peak
4	13864.000	27.54	22.45	49.99	74.00	-24.01	peak
5	16790.000	25.80	21.11	46.91	74.00	-27.09	peak
6	17989.000	22.83	26.92	49.75	74.00	-24.25	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11n HT20	Frequency(MHz):	5500
Polarity:	Horizontal	Test Voltage:	DC 3.3V

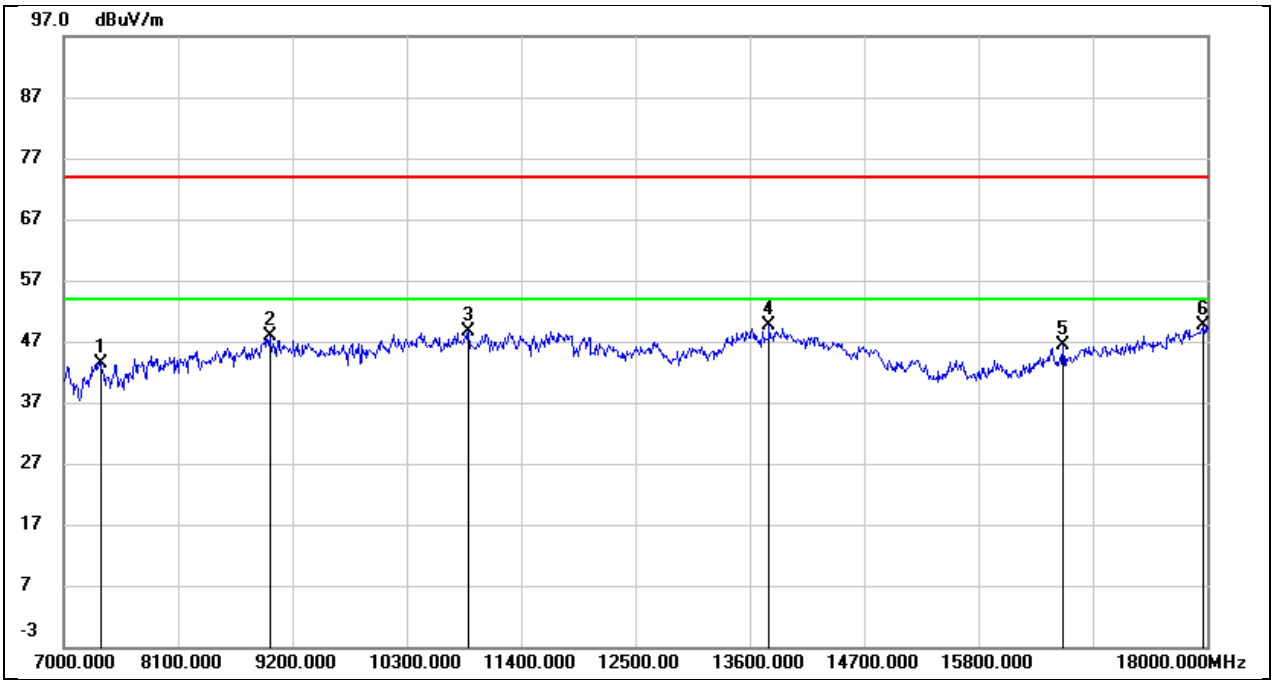

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7352.000	35.43	8.07	43.50	74.00	-30.50	peak
2	8980.000	36.33	11.57	47.90	74.00	-26.10	peak
3	10894.000	34.31	14.33	48.64	74.00	-25.36	peak
4	13787.000	27.19	22.36	49.55	74.00	-24.45	peak
5	16614.000	26.08	20.35	46.43	74.00	-27.57	peak
6	17967.000	22.78	26.83	49.61	74.00	-24.39	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11n HT20	Frequency(MHz):	5500
Polarity:	Vertical	Test Voltage:	DC 3.3V

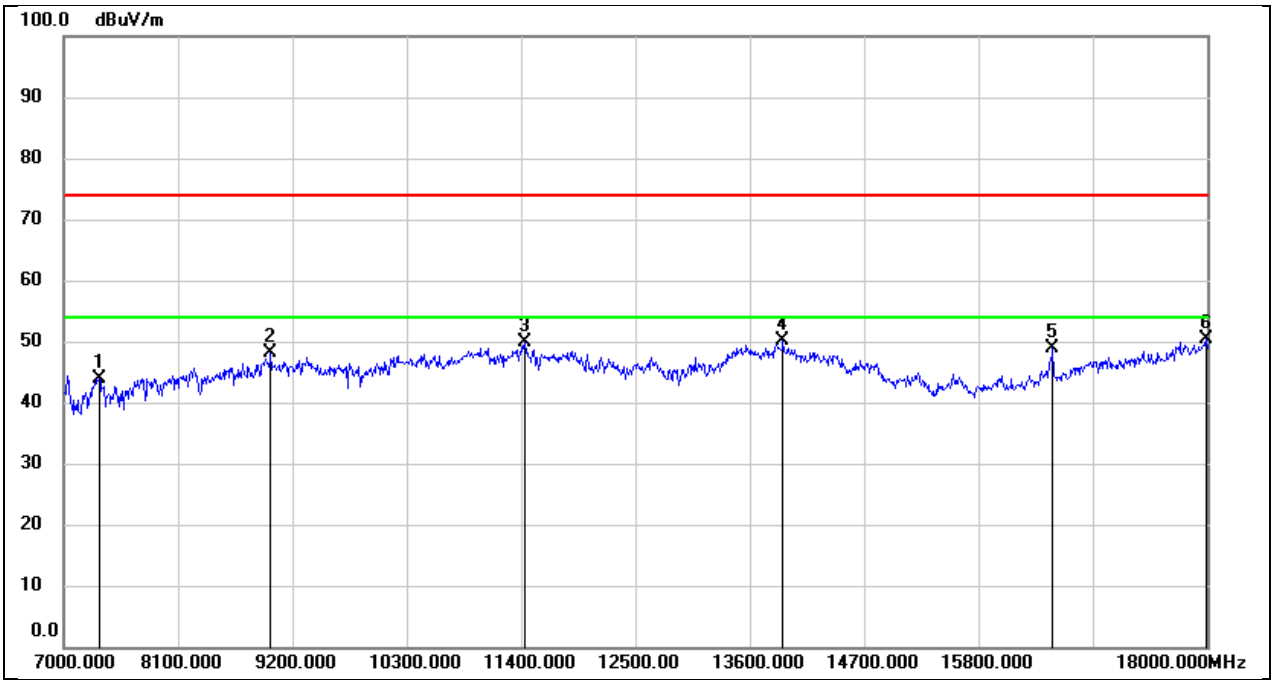

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7341.000	35.99	8.00	43.99	74.00	-30.01	peak
2	8991.000	36.40	11.73	48.13	74.00	-25.87	peak
3	11433.000	33.15	16.68	49.83	74.00	-24.17	peak
4	13919.000	27.52	22.49	50.01	74.00	-23.99	peak
5	16515.000	29.02	19.79	48.81	74.00	-25.19	peak
6	17989.000	23.56	26.92	50.48	74.00	-23.52	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11n HT20	Frequency(MHz):	5580
Polarity:	Horizontal	Test Voltage:	DC 3.3V

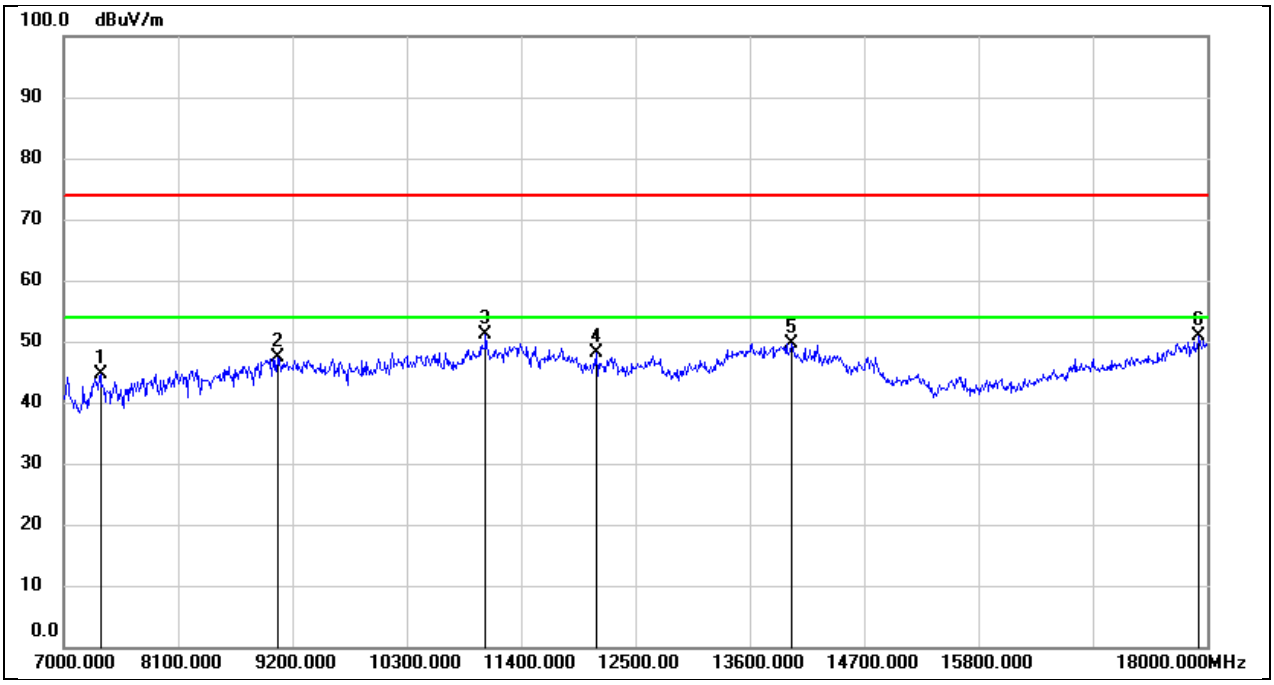

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7352.000	36.60	8.07	44.67	74.00	-29.33	peak
2	9057.000	36.04	11.35	47.39	74.00	-26.61	peak
3	11059.000	35.99	15.02	51.01	74.00	-22.99	peak
4	12126.000	29.56	18.59	48.15	74.00	-25.85	peak
5	13996.000	27.19	22.54	49.73	74.00	-24.27	peak
6	17923.000	24.14	26.64	50.78	74.00	-23.22	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11n HT20	Frequency(MHz):	5580
Polarity:	Vertical	Test Voltage:	DC 3.3V

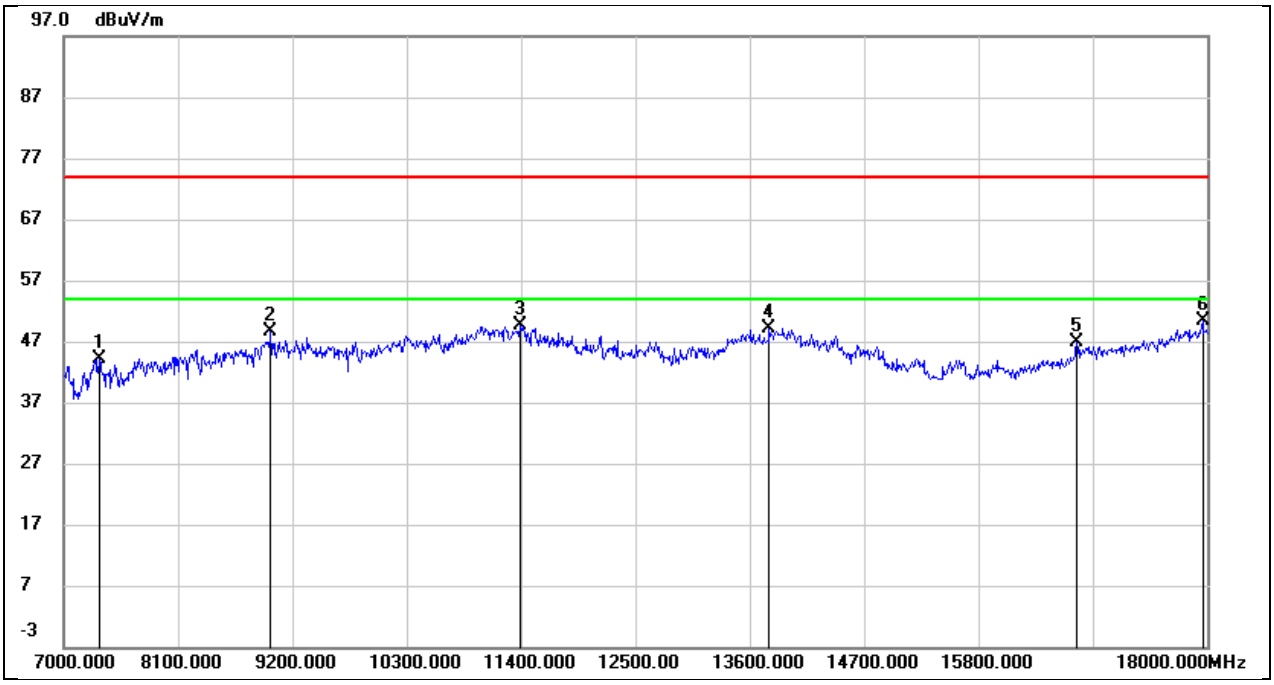

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7341.000	36.17	8.00	44.17	74.00	-29.83	peak
2	8991.000	36.84	11.73	48.57	74.00	-25.43	peak
3	11389.000	33.17	16.51	49.68	74.00	-24.32	peak
4	13787.000	26.83	22.36	49.19	74.00	-24.81	peak
5	16746.000	25.95	20.92	46.87	74.00	-27.13	peak
6	17956.000	23.54	26.78	50.32	74.00	-23.68	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11n HT20	Frequency(MHz):	5700
Polarity:	Horizontal	Test Voltage:	DC 3.3V

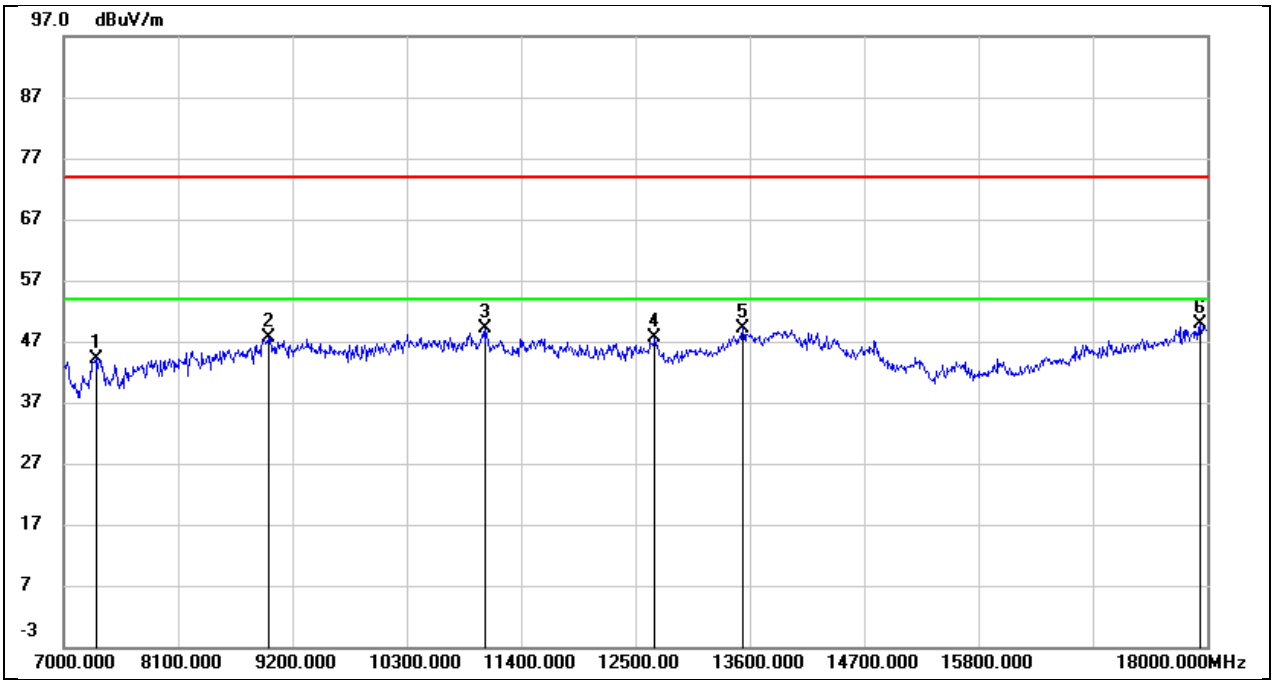

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7308.000	36.52	7.73	44.25	74.00	-29.75	peak
2	8969.000	36.17	11.40	47.57	74.00	-26.43	peak
3	11059.000	34.01	15.02	49.03	74.00	-24.97	peak
4	12687.000	29.17	18.53	47.70	74.00	-26.30	peak
5	13534.000	27.84	21.41	49.25	74.00	-24.75	peak
6	17934.000	23.20	26.69	49.89	74.00	-24.11	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11n HT20	Frequency(MHz):	5700
Polarity:	Vertical	Test Voltage:	DC 3.3V

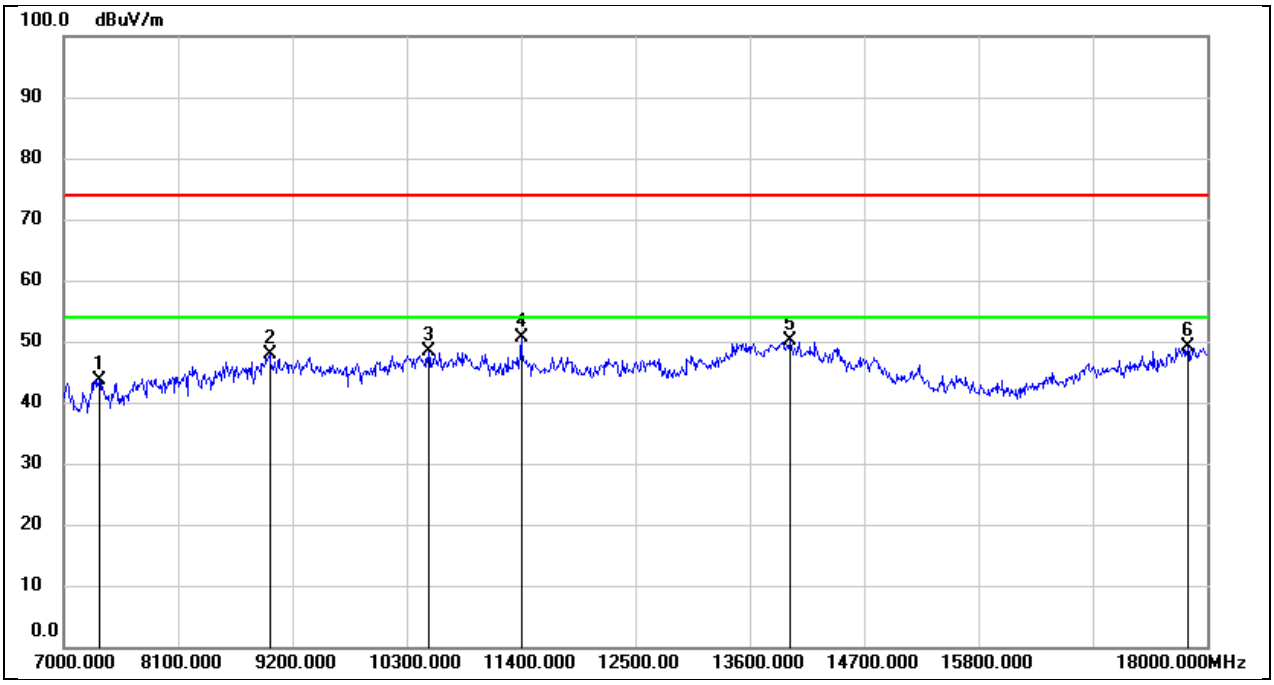

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7341.000	35.74	8.00	43.74	74.00	-30.26	peak
2	8980.000	36.27	11.57	47.84	74.00	-26.16	peak
3	10509.000	34.85	13.52	48.37	74.00	-25.63	peak
4	11400.000	34.10	16.57	50.67	74.00	-23.33	peak
5	13985.000	27.52	22.53	50.05	74.00	-23.95	peak
6	17813.000	22.99	26.18	49.17	74.00	-24.83	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11n HT20	Frequency(MHz):	5720
Polarity:	Horizontal	Test Voltage:	DC 3.3V

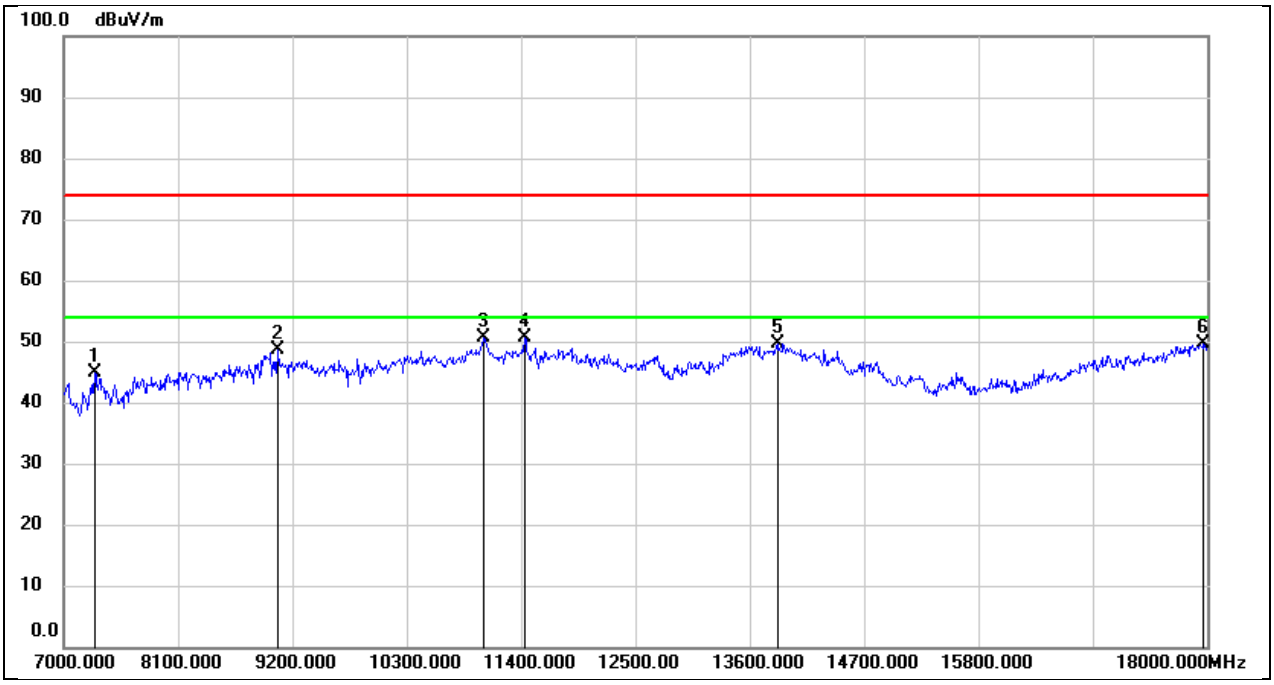

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7297.000	37.29	7.65	44.94	74.00	-29.06	peak
2	9057.000	37.39	11.35	48.74	74.00	-25.26	peak
3	11037.000	35.61	14.98	50.59	74.00	-23.41	peak
4	11433.000	33.97	16.68	50.65	74.00	-23.35	peak
5	13864.000	27.26	22.45	49.71	74.00	-24.29	peak
6	17967.000	22.74	26.83	49.57	74.00	-24.43	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11n HT20	Frequency(MHz):	5720
Polarity:	Vertical	Test Voltage:	DC 3.3V

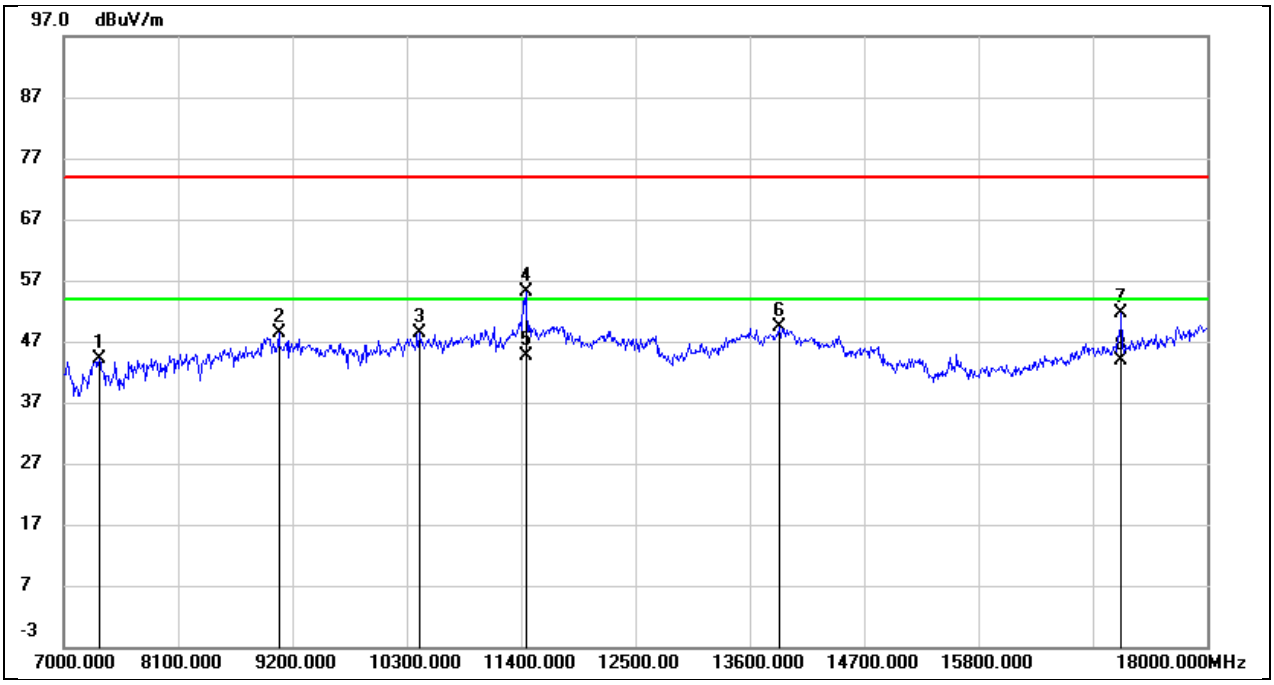

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7341.000	36.05	8.00	44.05	74.00	-29.95	peak
2	9068.000	37.05	11.25	48.30	74.00	-25.70	peak
3	10421.000	35.02	13.29	48.31	74.00	-25.69	peak
4	11444.000	38.38	16.71	55.09	74.00	-18.91	peak
5	11444.000	27.99	16.71	44.70	54.00	-9.30	AVG
6	13886.000	26.94	22.48	49.42	74.00	-24.58	peak
7	17175.000	28.94	22.57	51.51	74.00	-22.49	peak
8	17175.000	21.23	22.57	43.80	54.00	-10.20	AVG

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11n HT20	Frequency(MHz):	5745
Polarity:	Horizontal	Test Voltage:	DC 3.3V

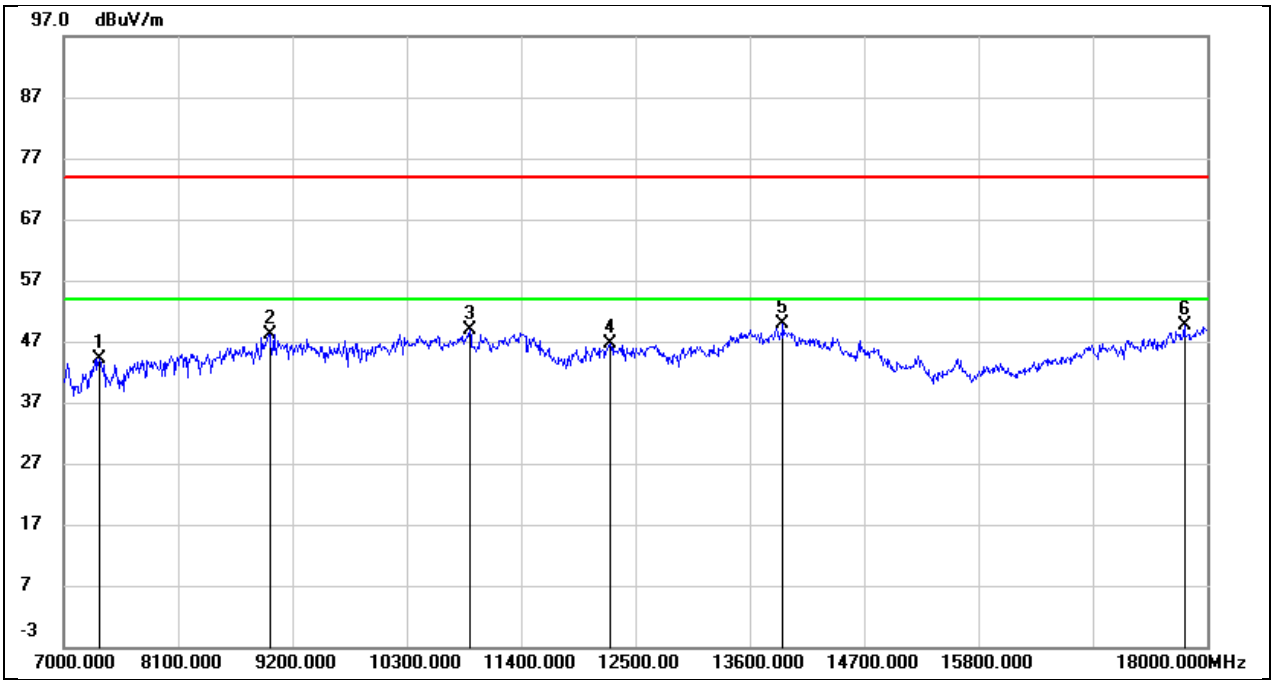

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7341.000	36.14	8.00	44.14	74.00	-29.86	peak
2	8980.000	36.66	11.57	48.23	74.00	-25.77	peak
3	10905.000	34.48	14.39	48.87	74.00	-25.13	peak
4	12258.000	28.02	18.70	46.72	74.00	-27.28	peak
5	13919.000	27.28	22.49	49.77	74.00	-24.23	peak
6	17780.000	23.64	25.89	49.53	74.00	-24.47	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11n HT20	Frequency(MHz):	5745
Polarity:	Vertical	Test Voltage:	DC 3.3V

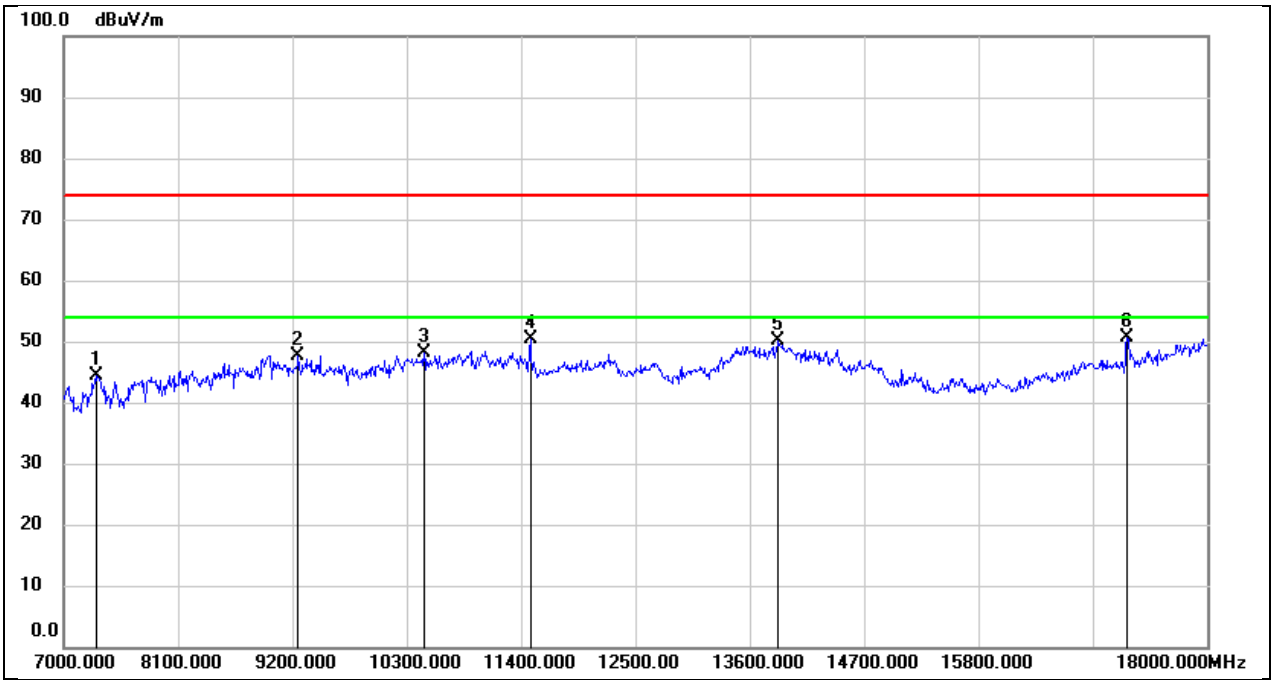

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7308.000	36.64	7.73	44.37	74.00	-29.63	peak
2	9255.000	37.48	10.22	47.70	74.00	-26.30	peak
3	10465.000	34.71	13.41	48.12	74.00	-25.88	peak
4	11488.000	33.48	16.84	50.32	74.00	-23.68	peak
5	13875.000	27.70	22.46	50.16	74.00	-23.84	peak
6	17230.000	27.80	22.80	50.60	74.00	-23.40	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11n HT20	Frequency(MHz):	5785
Polarity:	Horizontal	Test Voltage:	DC 3.3V

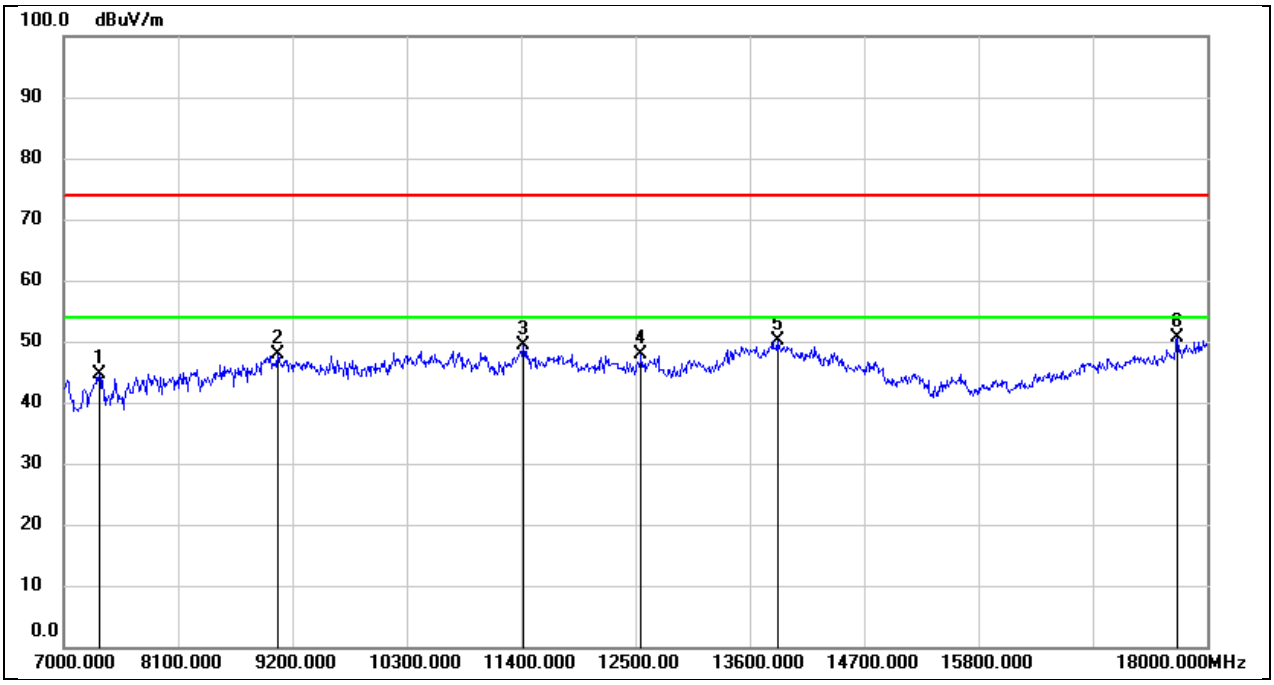

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7341.000	36.52	8.00	44.52	74.00	-29.48	peak
2	9057.000	36.61	11.35	47.96	74.00	-26.04	peak
3	11422.000	32.73	16.64	49.37	74.00	-24.63	peak
4	12555.000	29.49	18.43	47.92	74.00	-26.08	peak
5	13864.000	27.64	22.45	50.09	74.00	-23.91	peak
6	17714.000	25.47	25.14	50.61	74.00	-23.39	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11n HT20	Frequency(MHz):	5785
Polarity:	Vertical	Test Voltage:	DC 3.3V

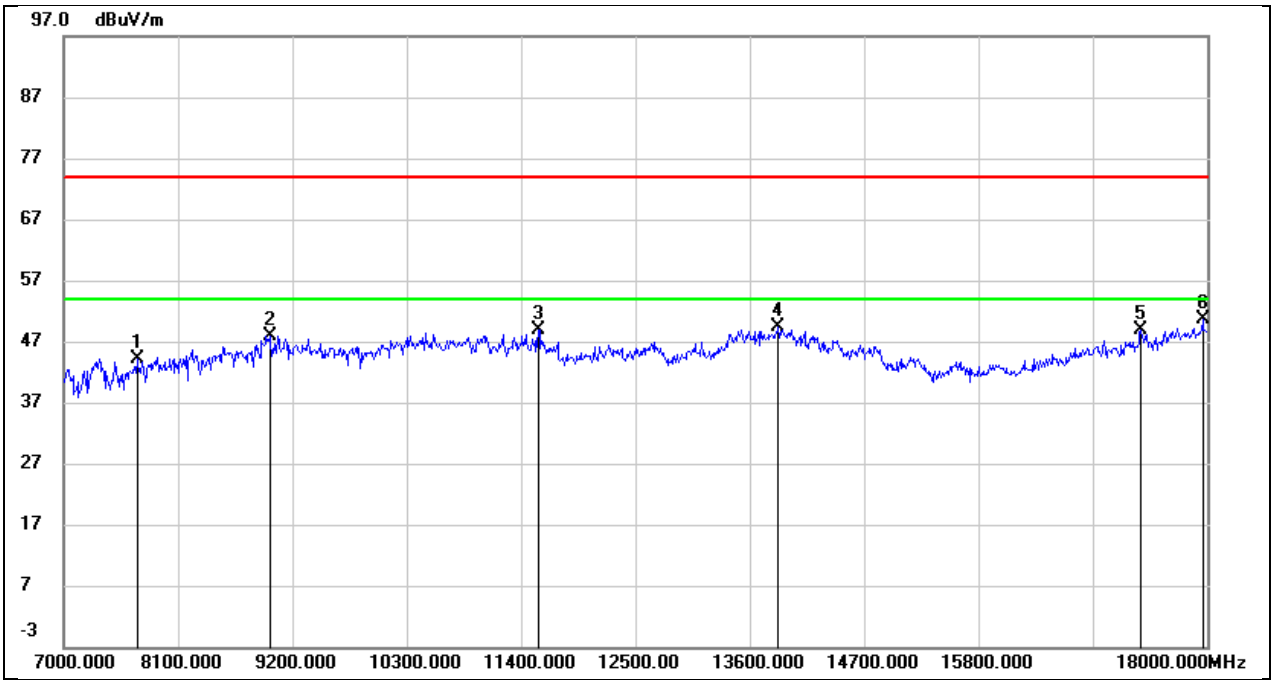

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7704.000	37.46	6.74	44.20	74.00	-29.80	peak
2	8980.000	36.33	11.57	47.90	74.00	-26.10	peak
3	11565.000	31.99	16.97	48.96	74.00	-25.04	peak
4	13875.000	26.92	22.46	49.38	74.00	-24.62	peak
5	17362.000	25.56	23.26	48.82	74.00	-25.18	peak
6	17956.000	23.83	26.78	50.61	74.00	-23.39	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11n HT20	Frequency(MHz):	5825
Polarity:	Horizontal	Test Voltage:	DC 3.3V

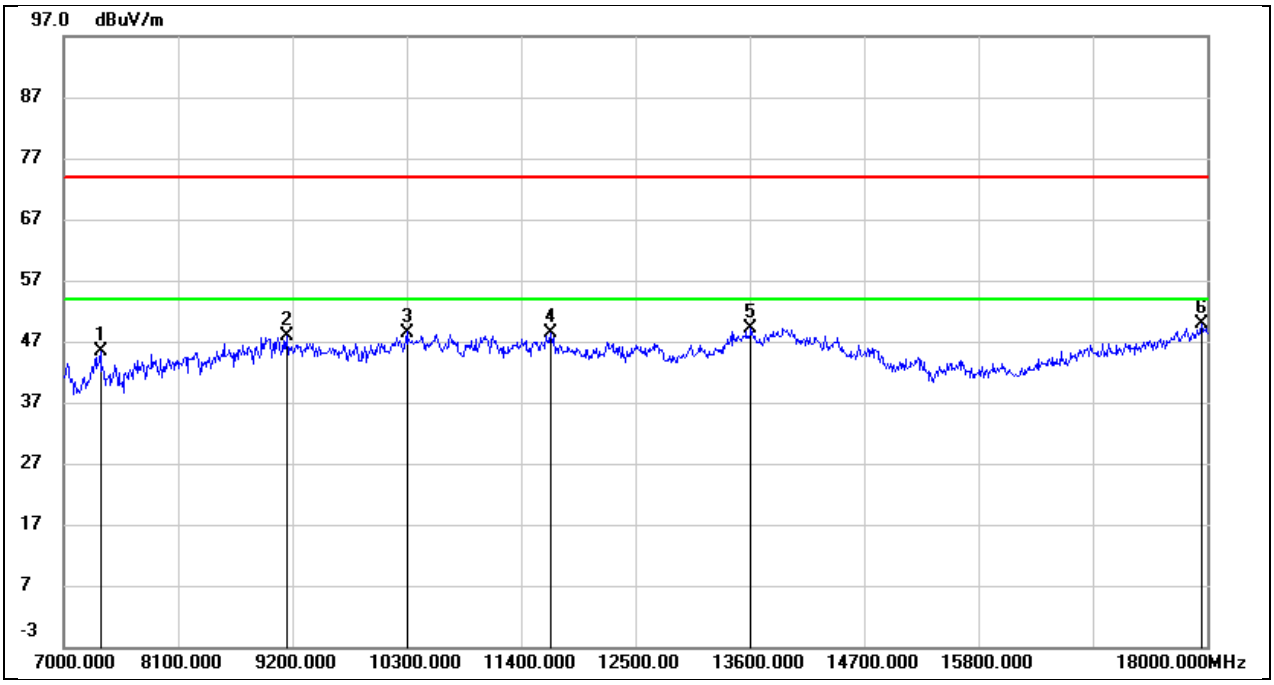

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7352.000	37.32	8.07	45.39	74.00	-28.61	peak
2	9145.000	37.40	10.54	47.94	74.00	-26.06	peak
3	10300.000	35.72	12.78	48.50	74.00	-25.50	peak
4	11686.000	31.06	17.25	48.31	74.00	-25.69	peak
5	13611.000	27.66	21.48	49.14	74.00	-24.86	peak
6	17945.000	23.03	26.74	49.77	74.00	-24.23	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11n HT20	Frequency(MHz):	5825
Polarity:	Vertical	Test Voltage:	DC 3.3V

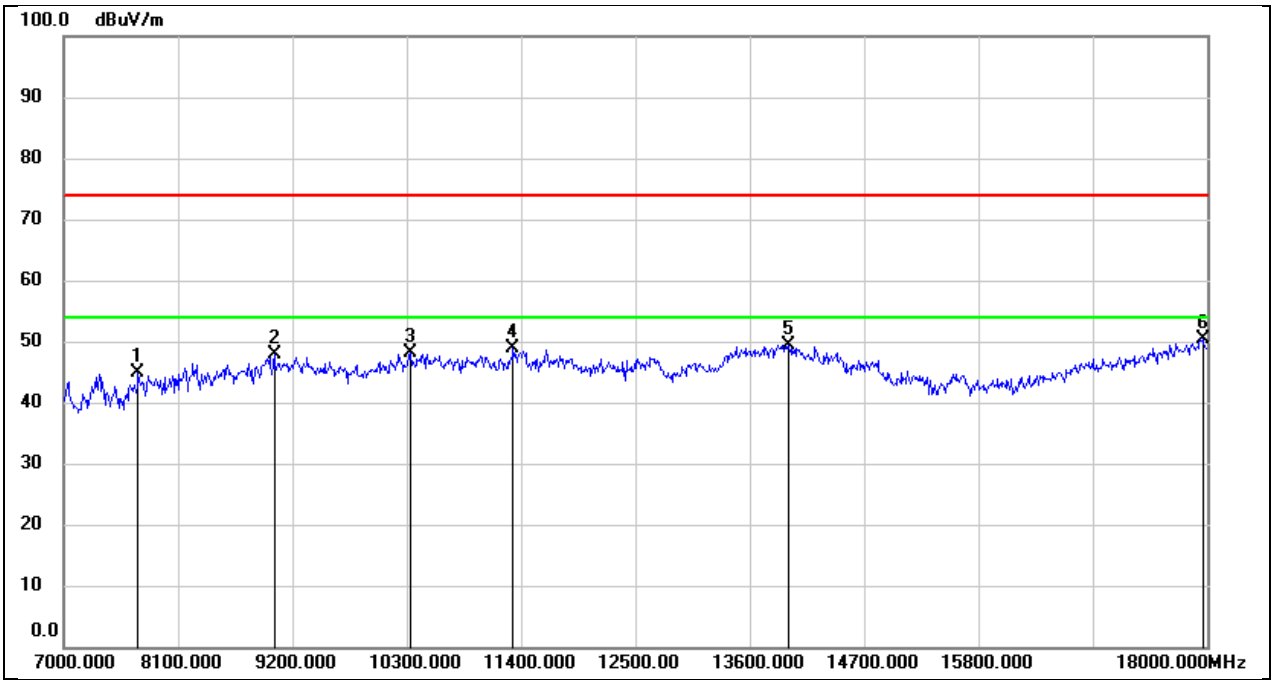

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7715.000	38.09	6.75	44.84	74.00	-29.16	peak
2	9024.000	36.17	11.65	47.82	74.00	-26.18	peak
3	10333.000	35.11	12.93	48.04	74.00	-25.96	peak
4	11323.000	32.72	16.10	48.82	74.00	-25.18	peak
5	13974.000	26.91	22.53	49.44	74.00	-24.56	peak
6	17956.000	23.58	26.78	50.36	74.00	-23.64	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11n HT40	Frequency(MHz):	5190
Polarity:	Horizontal	Test Voltage:	DC 3.3V

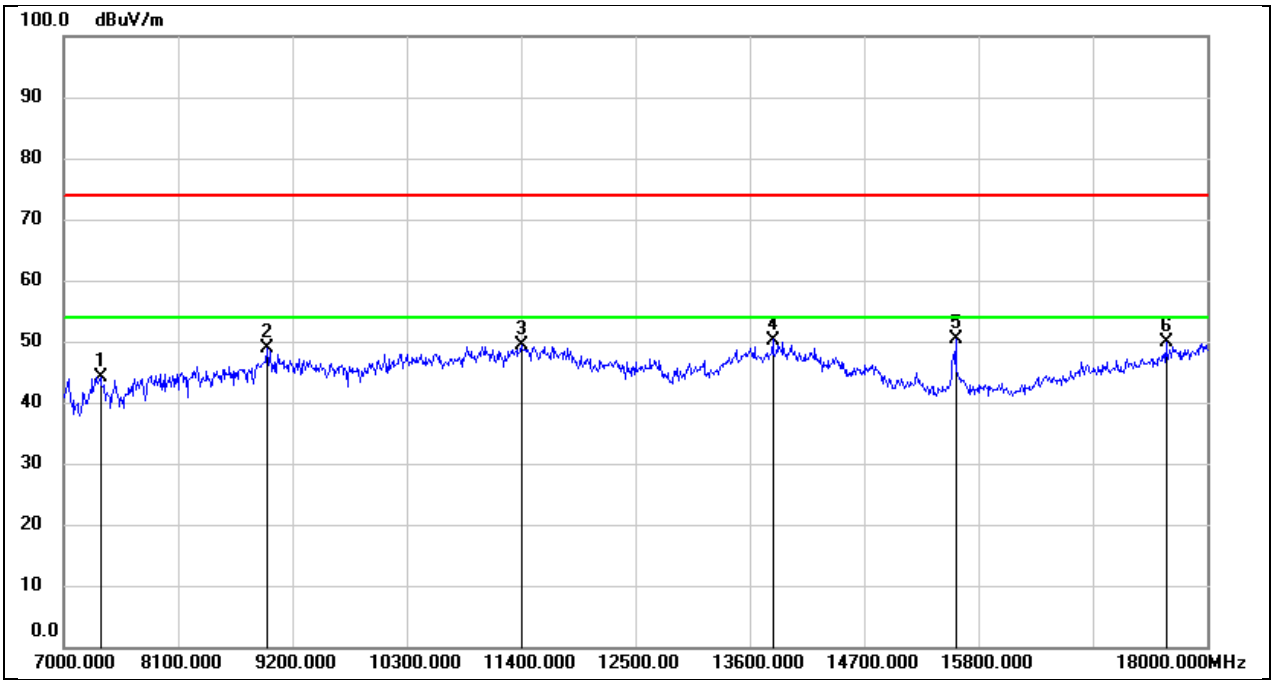

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7352.000	35.98	8.07	44.05	74.00	-29.95	peak
2	8958.000	37.55	11.24	48.79	74.00	-25.21	peak
3	11400.000	32.83	16.57	49.40	74.00	-24.60	peak
4	13820.000	27.82	22.43	50.25	74.00	-23.75	peak
5	15580.000	32.60	17.77	50.37	74.00	-23.63	peak
6	17604.000	25.90	23.87	49.77	74.00	-24.23	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11n HT40	Frequency(MHz):	5190
Polarity:	Vertical	Test Voltage:	DC 3.3V

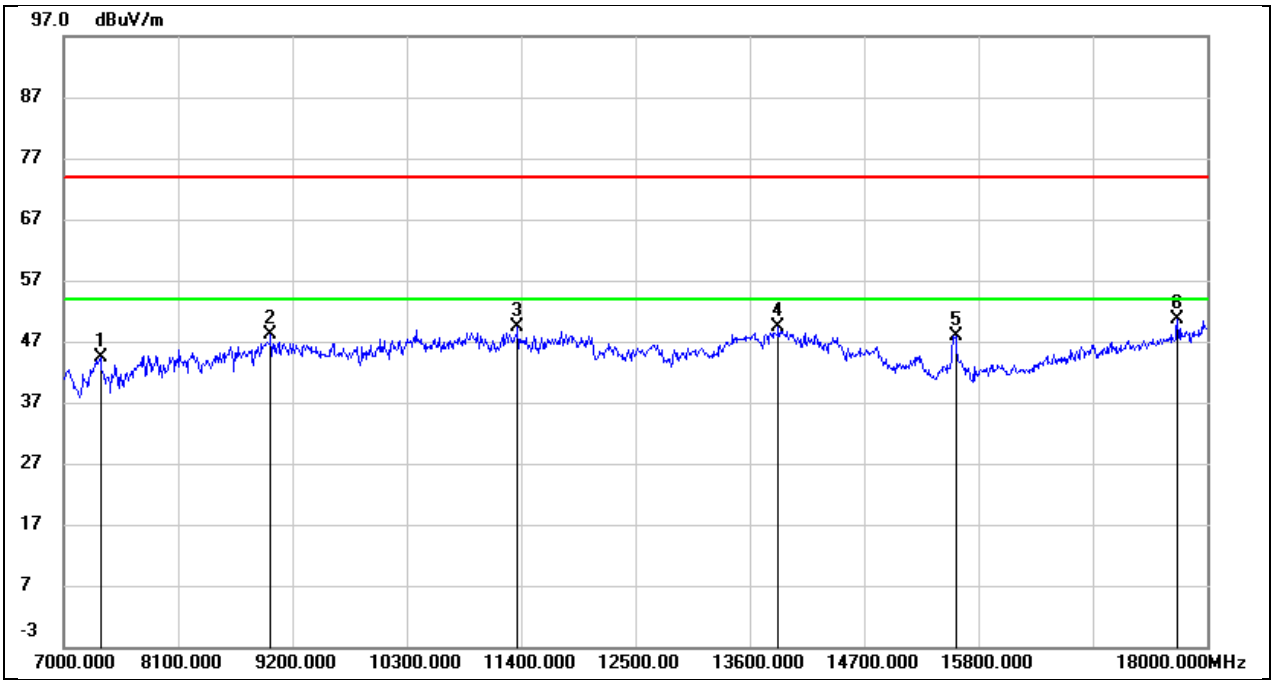

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7352.000	36.28	8.07	44.35	74.00	-29.65	peak
2	8991.000	36.28	11.73	48.01	74.00	-25.99	peak
3	11367.000	32.95	16.37	49.32	74.00	-24.68	peak
4	13875.000	26.83	22.46	49.29	74.00	-24.71	peak
5	15580.000	30.18	17.77	47.95	74.00	-26.05	peak
6	17714.000	25.53	25.14	50.67	74.00	-23.33	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11n HT40	Frequency(MHz):	5230
Polarity:	Horizontal	Test Voltage:	DC 3.3V

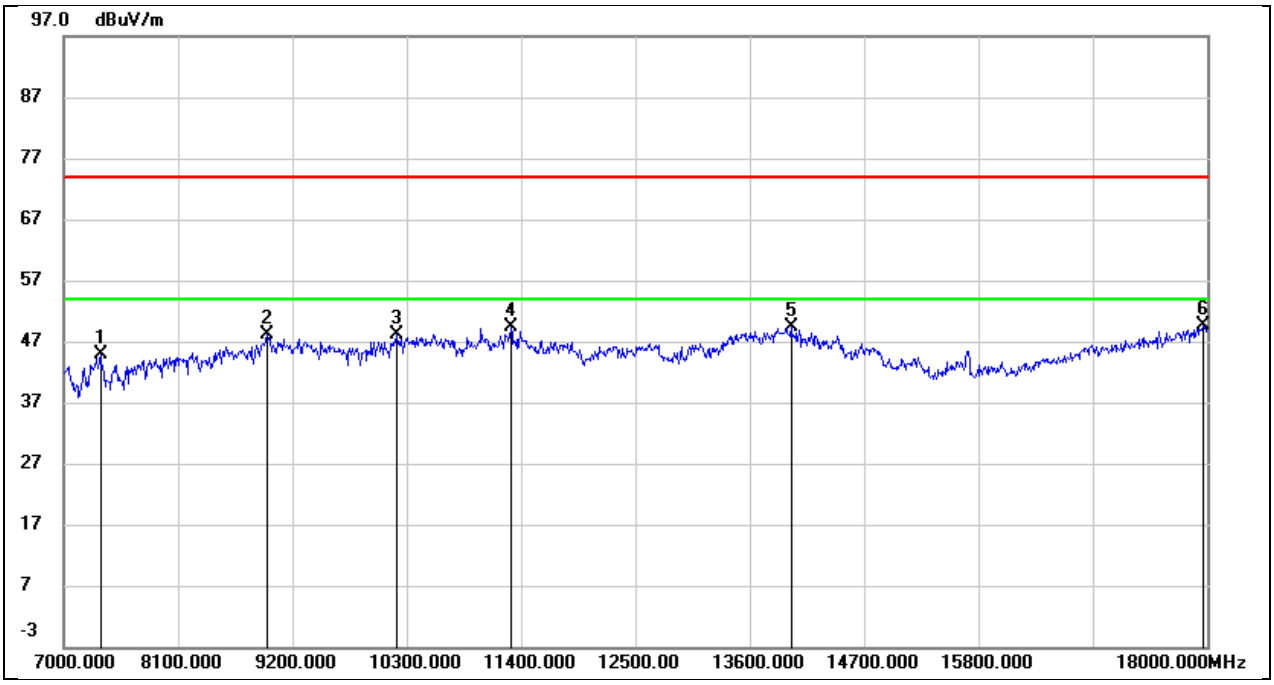

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7352.000	36.75	8.07	44.82	74.00	-29.18	peak
2	8958.000	36.80	11.24	48.04	74.00	-25.96	peak
3	10201.000	35.82	12.34	48.16	74.00	-25.84	peak
4	11301.000	33.54	15.96	49.50	74.00	-24.50	peak
5	13996.000	26.94	22.54	49.48	74.00	-24.52	peak
6	17967.000	22.79	26.83	49.62	74.00	-24.38	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11n HT40	Frequency(MHz):	5230
Polarity:	Vertical	Test Voltage:	DC 3.3V

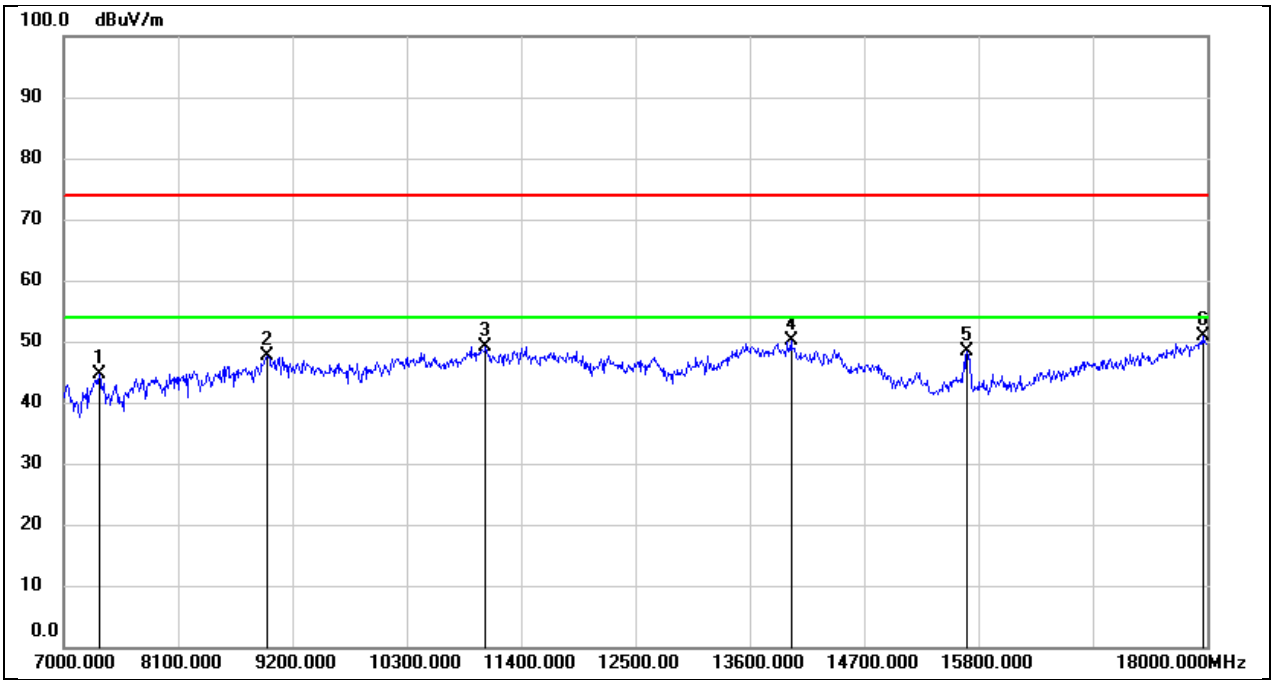

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7341.000	36.58	8.00	44.58	74.00	-29.42	peak
2	8958.000	36.34	11.24	47.58	74.00	-26.42	peak
3	11059.000	34.17	15.02	49.19	74.00	-24.81	peak
4	13996.000	27.68	22.54	50.22	74.00	-23.78	peak
5	15690.000	30.63	17.78	48.41	74.00	-25.59	peak
6	17956.000	24.07	26.78	50.85	74.00	-23.15	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11n HT40	Frequency(MHz):	5270
Polarity:	Horizontal	Test Voltage:	DC 3.3V

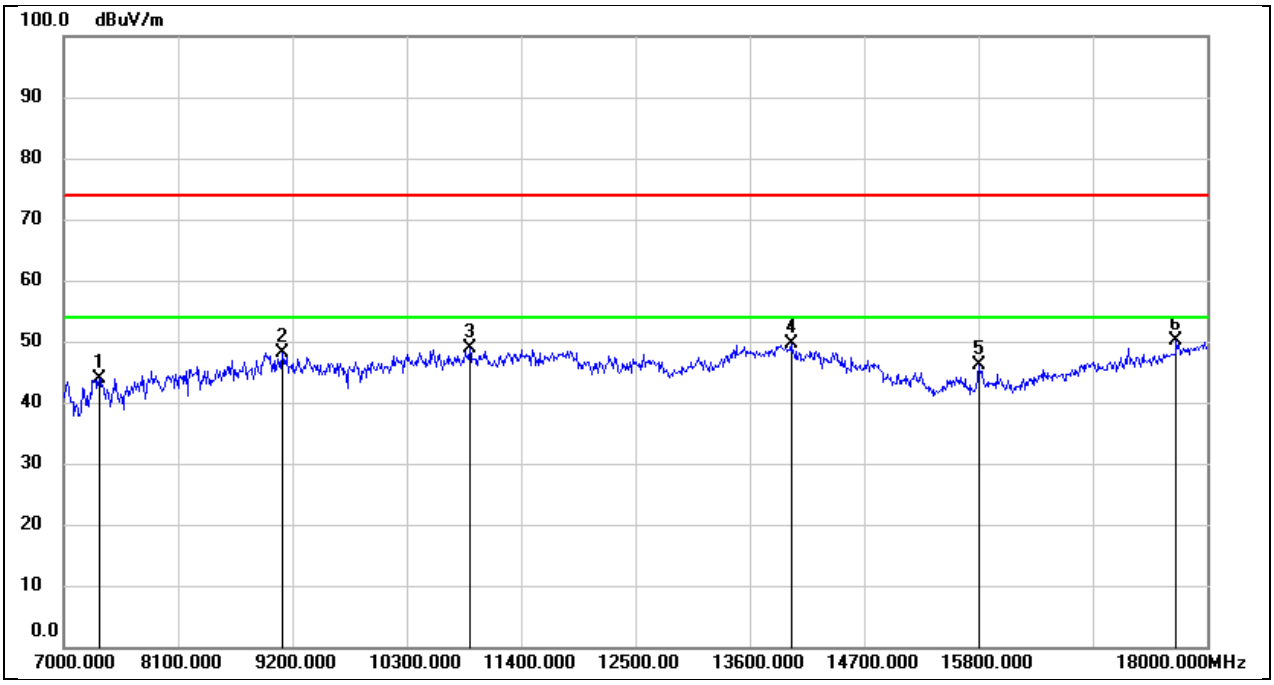

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7341.000	35.98	8.00	43.98	74.00	-30.02	peak
2	9101.000	37.19	10.94	48.13	74.00	-25.87	peak
3	10905.000	34.57	14.39	48.96	74.00	-25.04	peak
4	13996.000	27.13	22.54	49.67	74.00	-24.33	peak
5	15800.000	28.29	17.72	46.01	74.00	-27.99	peak
6	17703.000	25.06	25.01	50.07	74.00	-23.93	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11n HT40	Frequency(MHz):	5270
Polarity:	Vertical	Test Voltage:	DC 3.3V

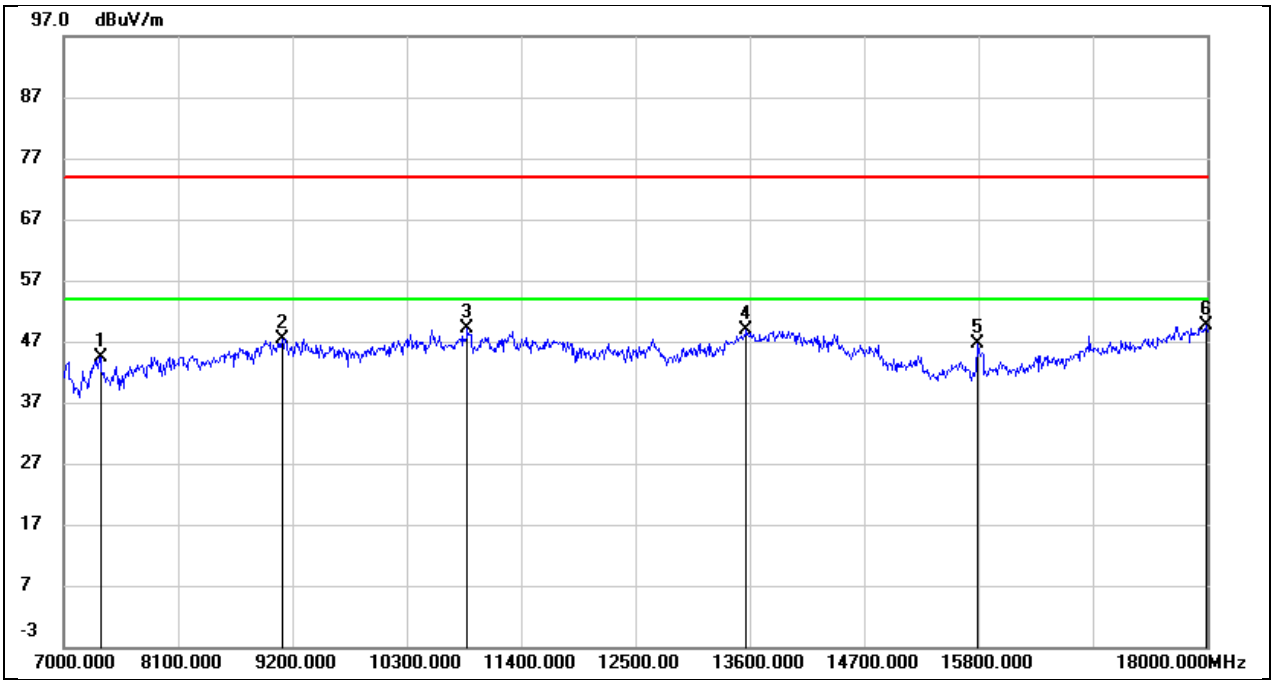

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7352.000	36.42	8.07	44.49	74.00	-29.51	peak
2	9101.000	36.49	10.94	47.43	74.00	-26.57	peak
3	10883.000	34.78	14.28	49.06	74.00	-24.94	peak
4	13567.000	27.45	21.41	48.86	74.00	-25.14	peak
5	15789.000	28.85	17.72	46.57	74.00	-27.43	peak
6	17989.000	22.77	26.92	49.69	74.00	-24.31	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11n HT40	Frequency(MHz):	5310
Polarity:	Horizontal	Test Voltage:	DC 3.3V

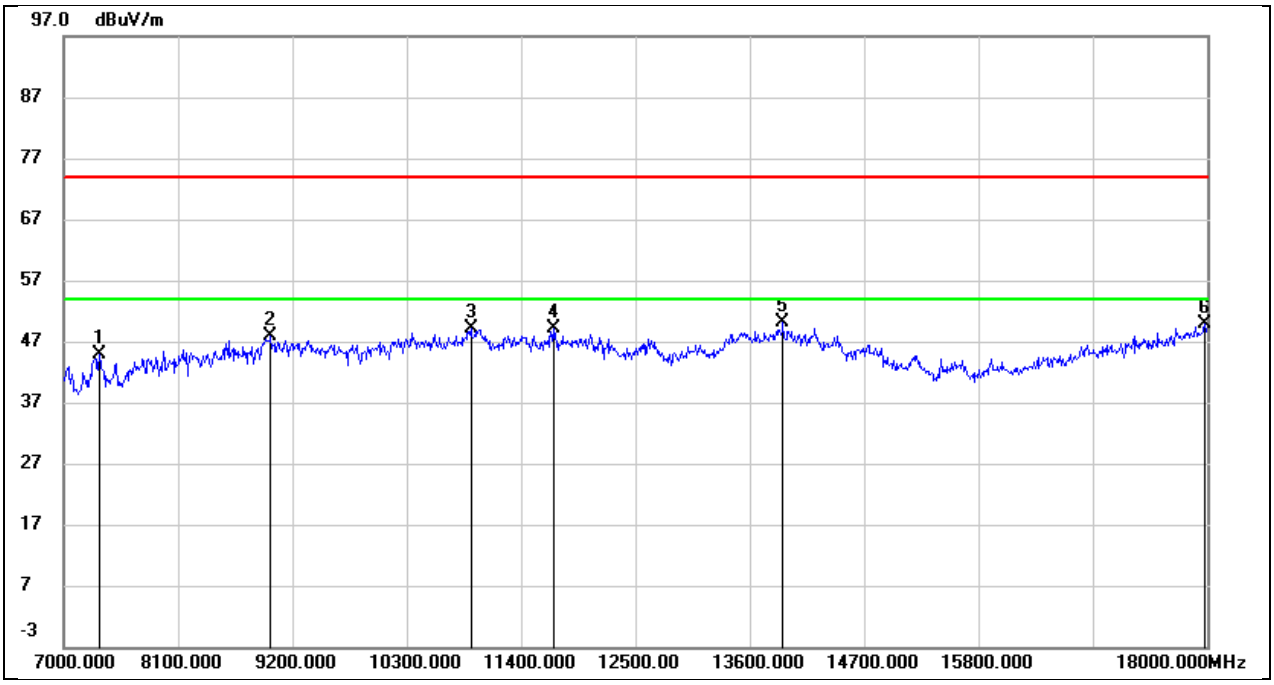

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7341.000	36.97	8.00	44.97	74.00	-29.03	peak
2	8991.000	36.12	11.73	47.85	74.00	-26.15	peak
3	10916.000	34.56	14.45	49.01	74.00	-24.99	peak
4	11708.000	31.70	17.31	49.01	74.00	-24.99	peak
5	13919.000	27.68	22.49	50.17	74.00	-23.83	peak
6	17978.000	23.12	26.88	50.00	74.00	-24.00	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11n HT40	Frequency(MHz):	5310
Polarity:	Vertical	Test Voltage:	DC 3.3V

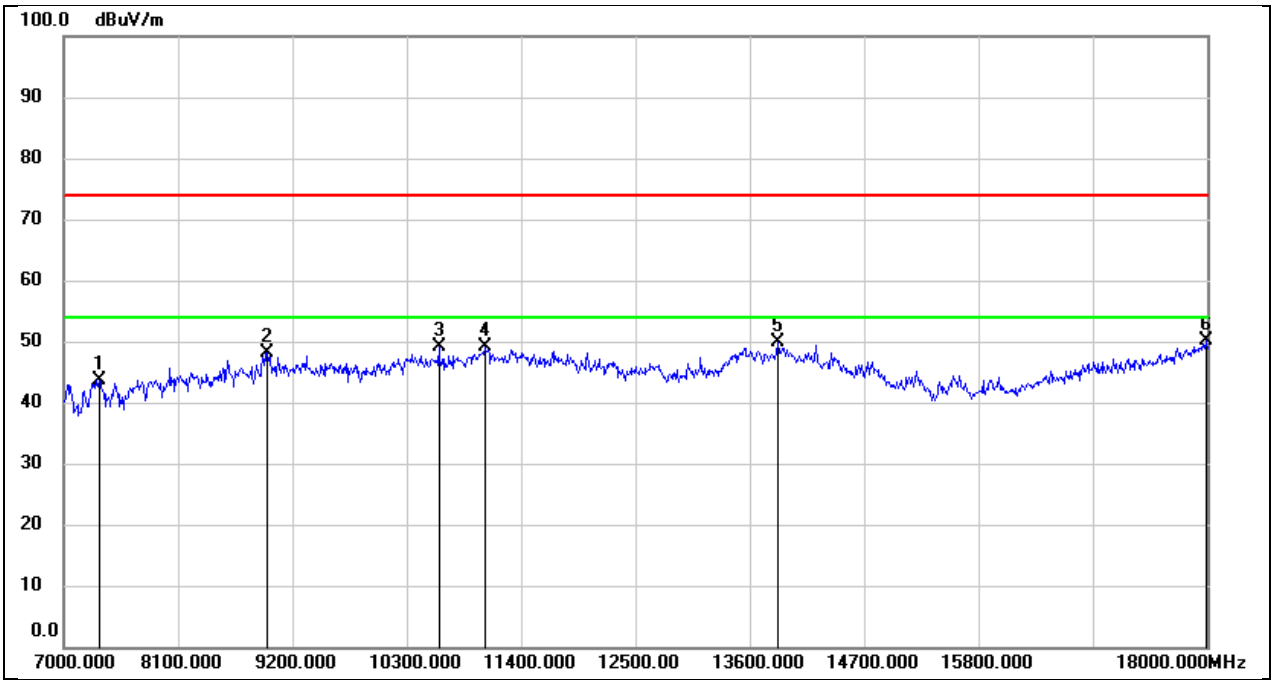

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7341.000	35.69	8.00	43.69	74.00	-30.31	peak
2	8958.000	36.81	11.24	48.05	74.00	-25.95	peak
3	10608.000	35.26	13.77	49.03	74.00	-24.97	peak
4	11048.000	34.06	14.99	49.05	74.00	-24.95	peak
5	13875.000	27.32	22.46	49.78	74.00	-24.22	peak
6	17989.000	23.13	26.92	50.05	74.00	-23.95	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11n HT40	Frequency(MHz):	5510
Polarity:	Horizontal	Test Voltage:	DC 3.3V

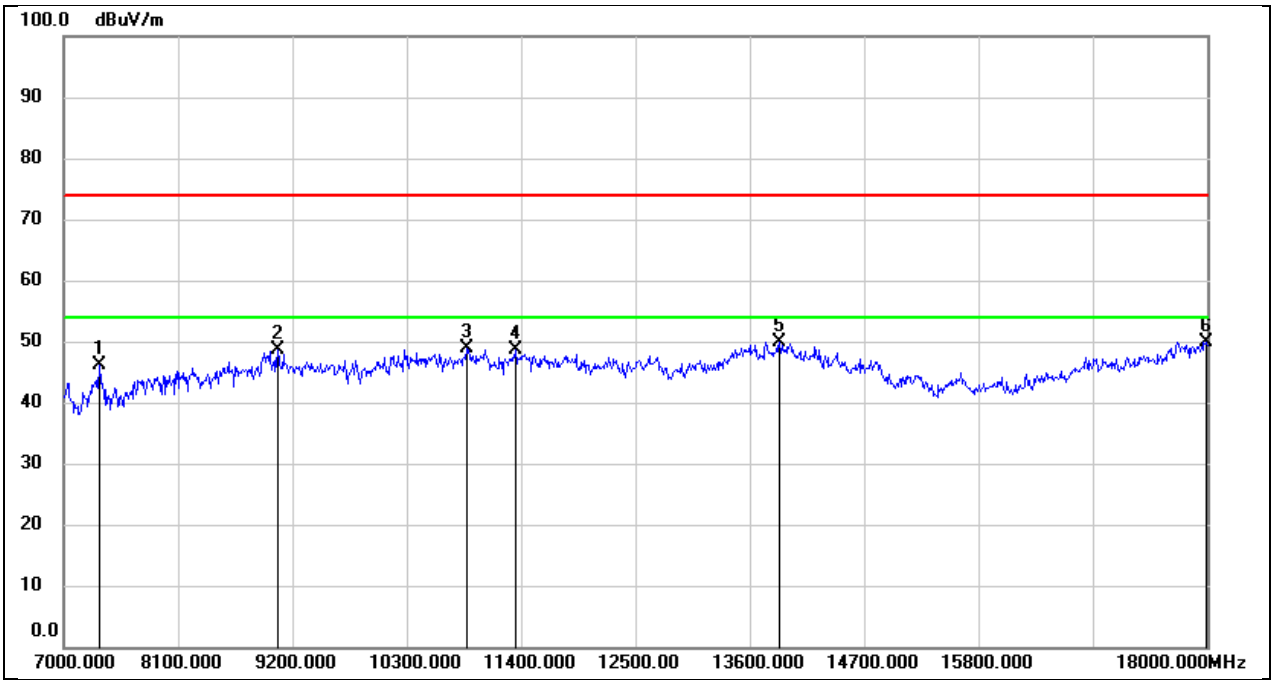

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7341.000	38.06	8.00	46.06	74.00	-27.94	peak
2	9057.000	37.19	11.35	48.54	74.00	-25.46	peak
3	10872.000	34.54	14.22	48.76	74.00	-25.24	peak
4	11345.000	32.34	16.24	48.58	74.00	-25.42	peak
5	13886.000	27.45	22.48	49.93	74.00	-24.07	peak
6	17989.000	22.91	26.92	49.83	74.00	-24.17	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11n HT40	Frequency(MHz):	5510
Polarity:	Vertical	Test Voltage:	DC 3.3V

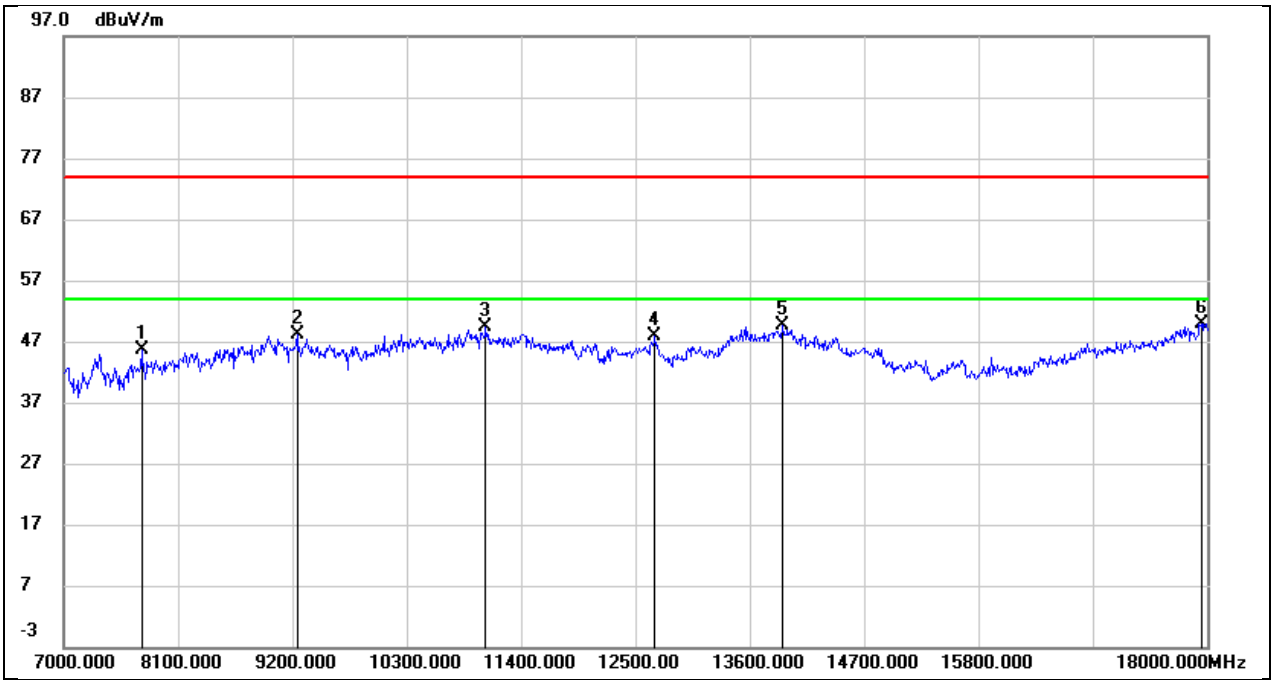

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7748.000	38.75	6.79	45.54	74.00	-28.46	peak
2	9244.000	38.02	10.18	48.20	74.00	-25.80	peak
3	11059.000	34.43	15.02	49.45	74.00	-24.55	peak
4	12687.000	29.39	18.53	47.92	74.00	-26.08	peak
5	13919.000	27.14	22.49	49.63	74.00	-24.37	peak
6	17945.000	23.23	26.74	49.97	74.00	-24.03	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11n HT40	Frequency(MHz):	5550
Polarity:	Horizontal	Test Voltage:	DC 3.3V

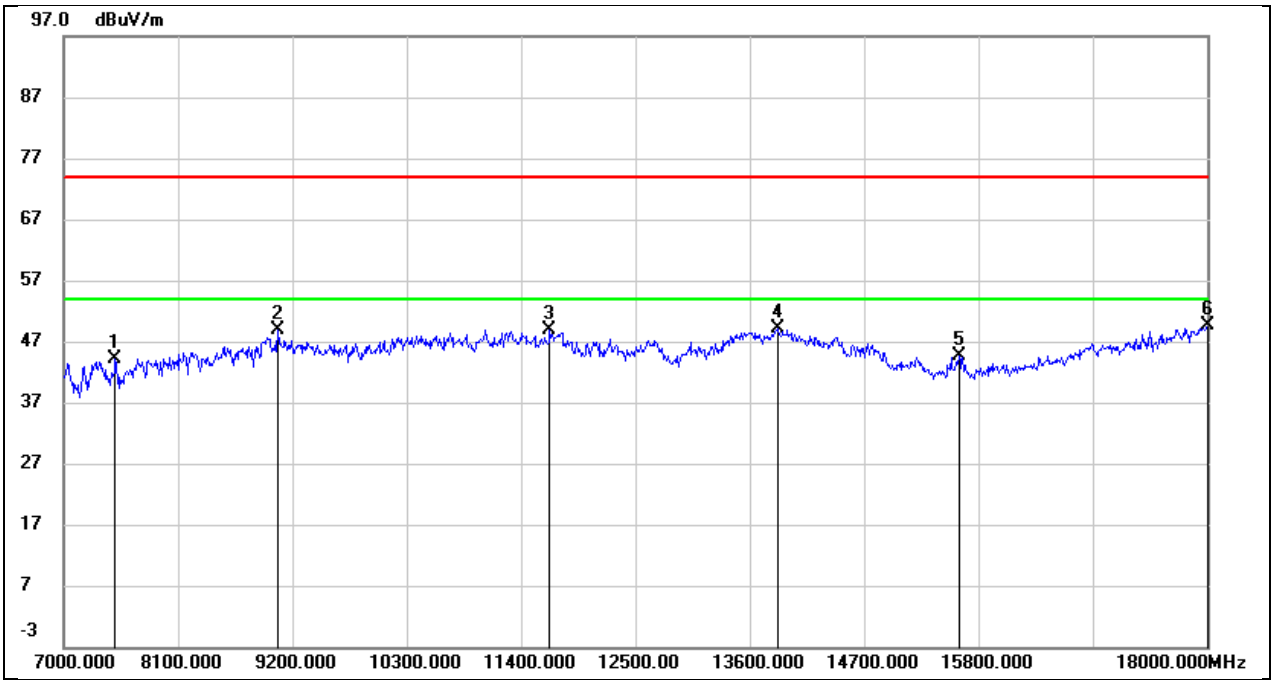

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7495.000	36.43	7.61	44.04	74.00	-29.96	peak
2	9057.000	37.43	11.35	48.78	74.00	-25.22	peak
3	11675.000	31.73	17.22	48.95	74.00	-25.05	peak
4	13875.000	26.73	22.46	49.19	74.00	-24.81	peak
5	15613.000	26.90	17.84	44.74	74.00	-29.26	peak
6	18000.000	22.54	26.97	49.51	74.00	-24.49	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11n HT40	Frequency(MHz):	5550
Polarity:	Vertical	Test Voltage:	DC 3.3V

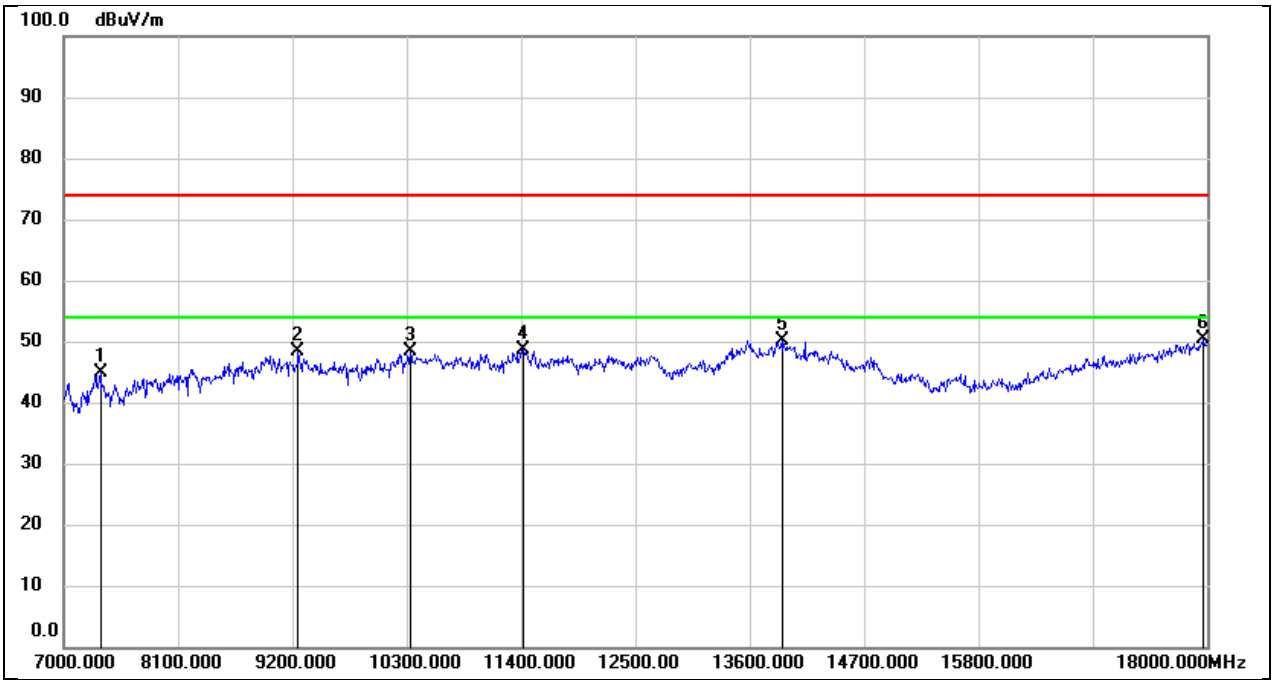

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7352.000	36.85	8.07	44.92	74.00	-29.08	peak
2	9255.000	38.27	10.22	48.49	74.00	-25.51	peak
3	10333.000	35.44	12.93	48.37	74.00	-25.63	peak
4	11422.000	32.08	16.64	48.72	74.00	-25.28	peak
5	13919.000	27.58	22.49	50.07	74.00	-23.93	peak
6	17967.000	23.45	26.83	50.28	74.00	-23.72	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11n HT40	Frequency(MHz):	5670
Polarity:	Horizontal	Test Voltage:	DC 3.3V

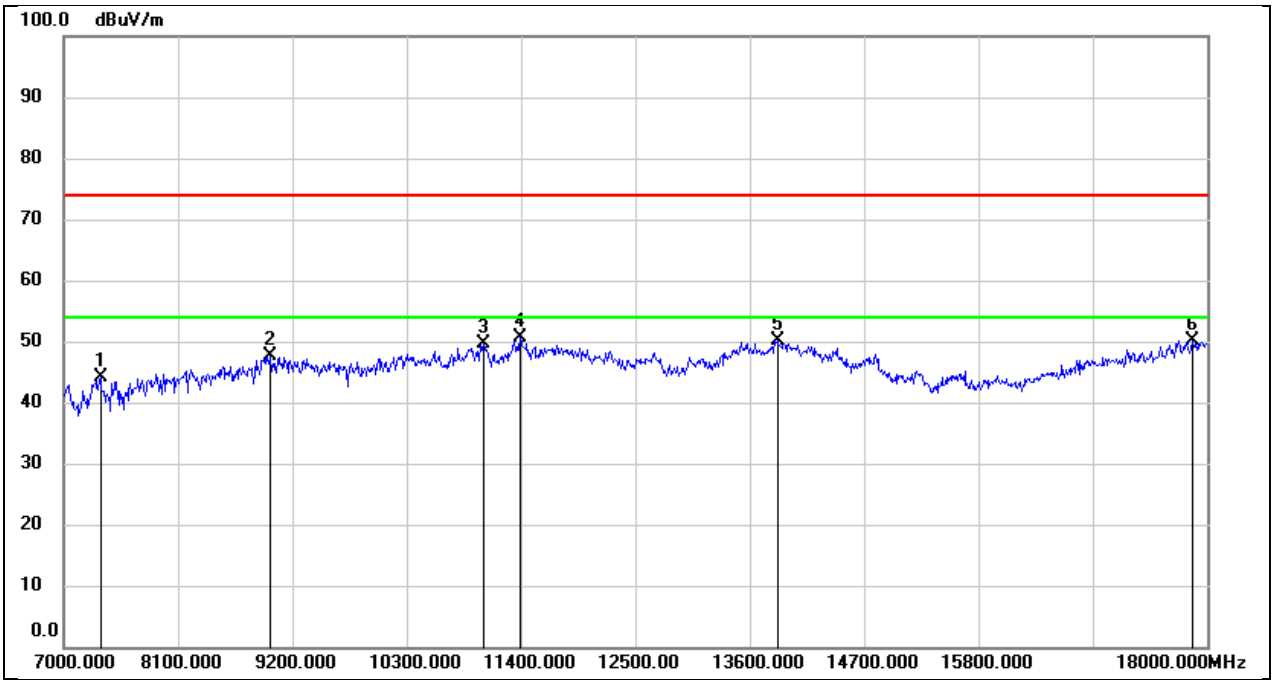

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7352.000	36.16	8.07	44.23	74.00	-29.77	peak
2	8980.000	36.17	11.57	47.74	74.00	-26.26	peak
3	11037.000	34.62	14.98	49.60	74.00	-24.40	peak
4	11389.000	34.21	16.51	50.72	74.00	-23.28	peak
5	13864.000	27.74	22.45	50.19	74.00	-23.81	peak
6	17857.000	23.84	26.36	50.20	74.00	-23.80	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11n HT40	Frequency(MHz):	5670
Polarity:	Vertical	Test Voltage:	DC 3.3V

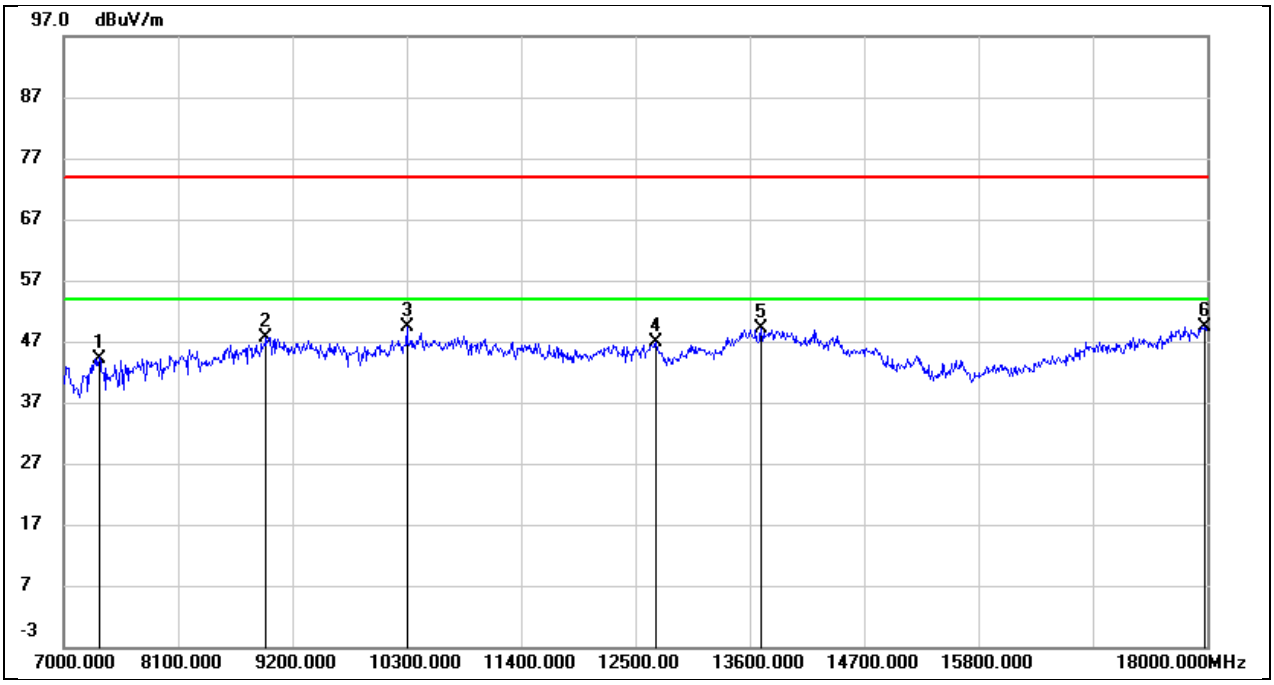

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7341.000	36.25	8.00	44.25	74.00	-29.75	peak
2	8947.000	36.60	11.08	47.68	74.00	-26.32	peak
3	10300.000	36.70	12.78	49.48	74.00	-24.52	peak
4	12698.000	28.38	18.56	46.94	74.00	-27.06	peak
5	13710.000	27.08	21.97	49.05	74.00	-24.95	peak
6	17978.000	22.60	26.88	49.48	74.00	-24.52	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11n HT40	Frequency(MHz):	5710
Polarity:	Horizontal	Test Voltage:	DC 3.3V

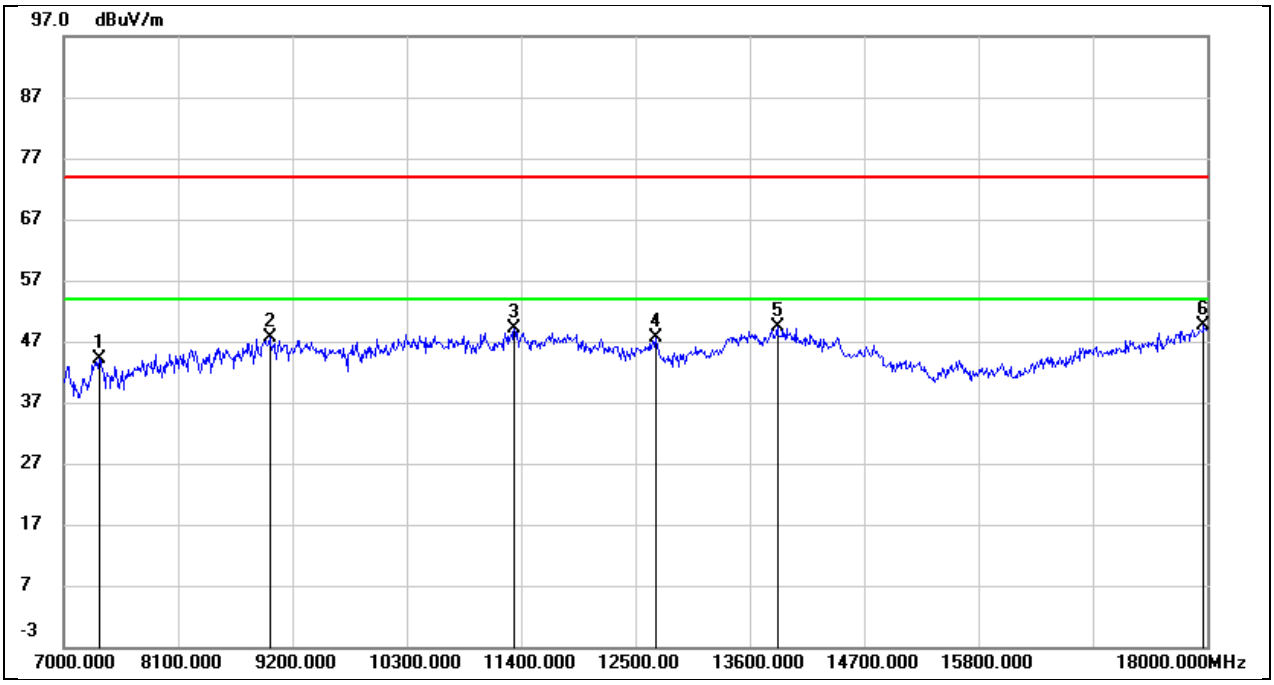

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7341.000	36.05	8.00	44.05	74.00	-29.95	peak
2	8980.000	36.11	11.57	47.68	74.00	-26.32	peak
3	11334.000	32.88	16.16	49.04	74.00	-24.96	peak
4	12698.000	29.09	18.56	47.65	74.00	-26.35	peak
5	13864.000	26.84	22.45	49.29	74.00	-24.71	peak
6	17967.000	22.69	26.83	49.52	74.00	-24.48	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11n HT40	Frequency(MHz):	5710
Polarity:	Vertical	Test Voltage:	DC 3.3V

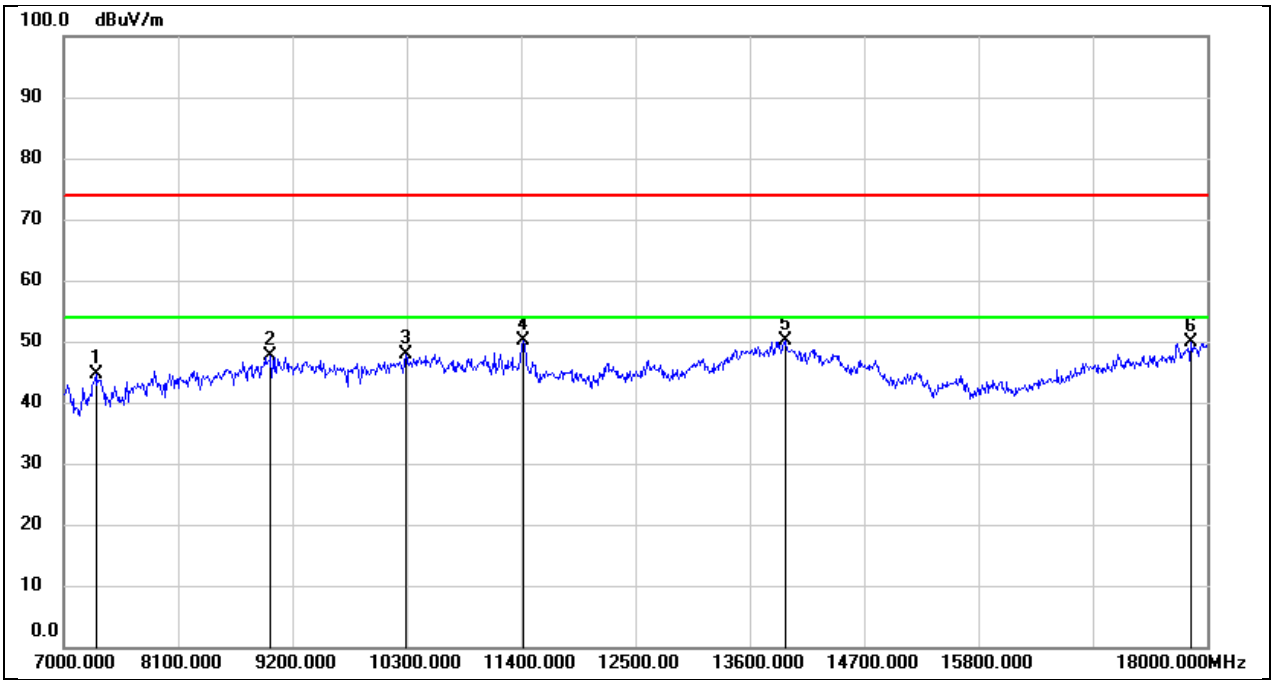

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7308.000	37.02	7.73	44.75	74.00	-29.25	peak
2	8991.000	35.78	11.73	47.51	74.00	-26.49	peak
3	10289.000	35.10	12.74	47.84	74.00	-26.16	peak
4	11422.000	33.51	16.64	50.15	74.00	-23.85	peak
5	13941.000	27.56	22.50	50.06	74.00	-23.94	peak
6	17846.000	23.48	26.32	49.80	74.00	-24.20	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11n HT40	Frequency(MHz):	5755
Polarity:	Horizontal	Test Voltage:	DC 3.3V

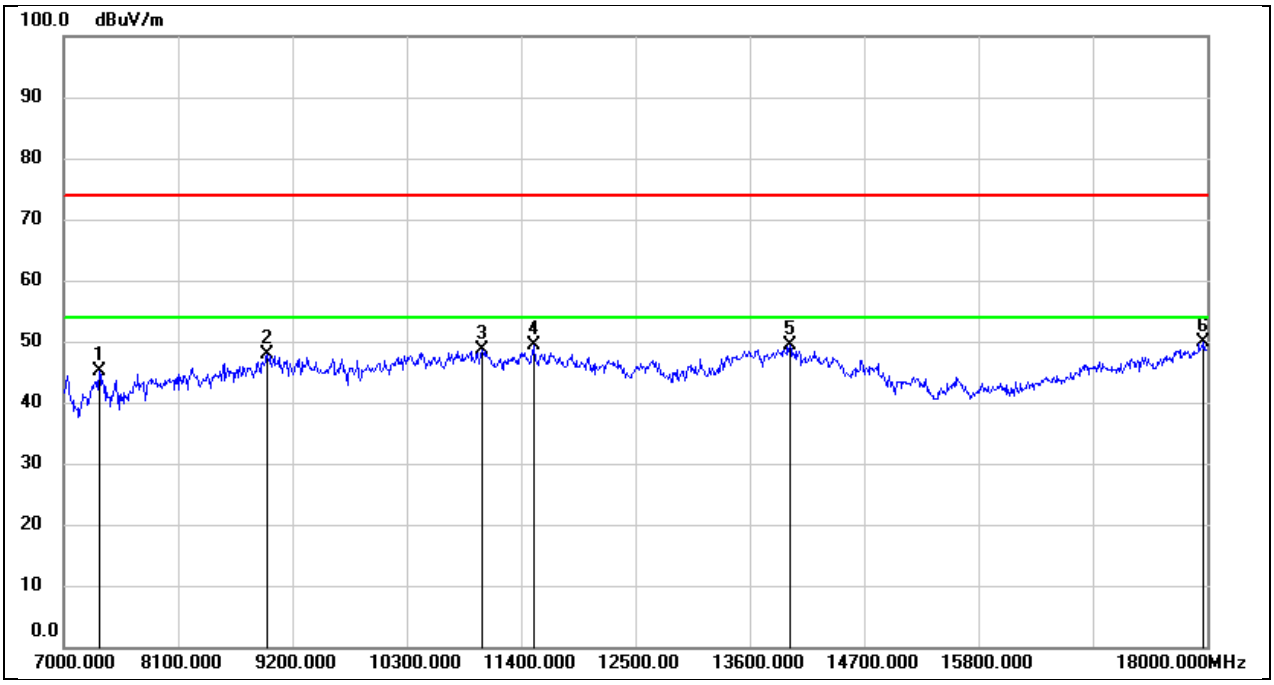

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7341.000	37.19	8.00	45.19	74.00	-28.81	peak
2	8958.000	36.54	11.24	47.78	74.00	-26.22	peak
3	11026.000	33.64	14.95	48.59	74.00	-25.41	peak
4	11521.000	32.50	16.92	49.42	74.00	-24.58	peak
5	13985.000	26.85	22.53	49.38	74.00	-24.62	peak
6	17967.000	23.16	26.83	49.99	74.00	-24.01	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11n HT40	Frequency(MHz):	5755
Polarity:	Vertical	Test Voltage:	DC 3.3V

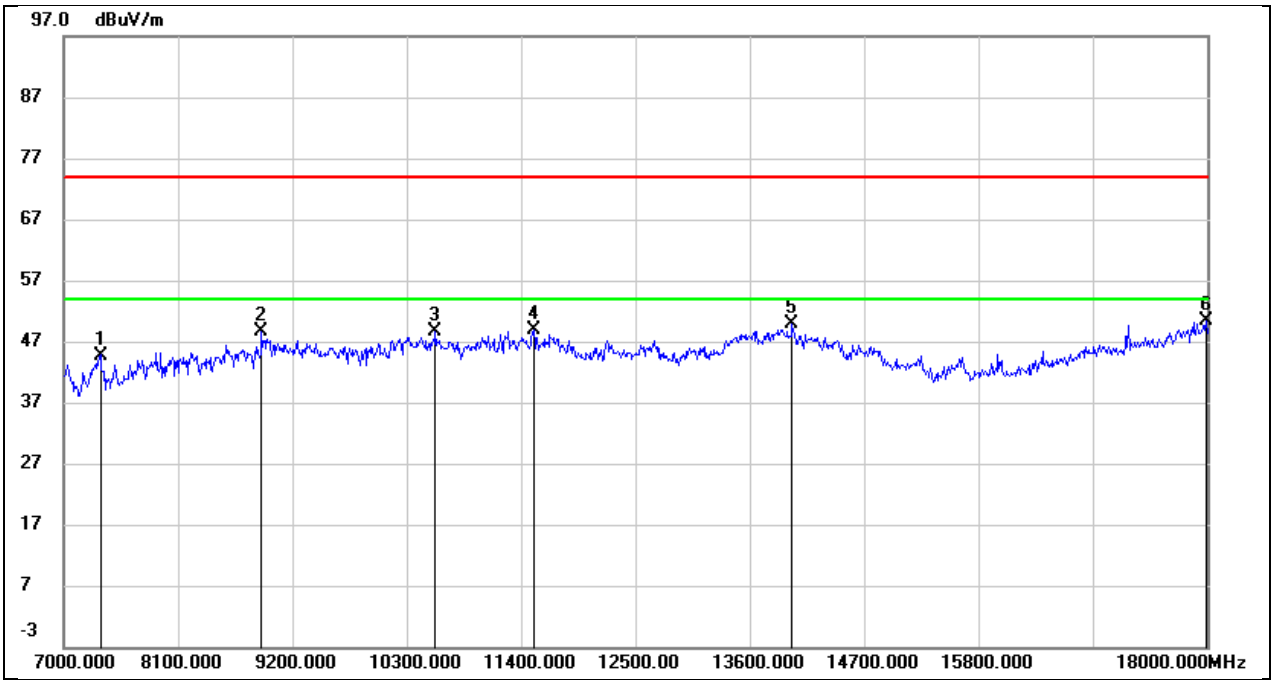

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7352.000	36.68	8.07	44.75	74.00	-29.25	peak
2	8903.000	38.25	10.41	48.66	74.00	-25.34	peak
3	10575.000	34.81	13.70	48.51	74.00	-25.49	peak
4	11521.000	31.90	16.92	48.82	74.00	-25.18	peak
5	14007.000	27.23	22.53	49.76	74.00	-24.24	peak
6	17989.000	23.52	26.92	50.44	74.00	-23.56	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11n HT40	Frequency(MHz):	5795
Polarity:	Horizontal	Test Voltage:	DC 3.3V

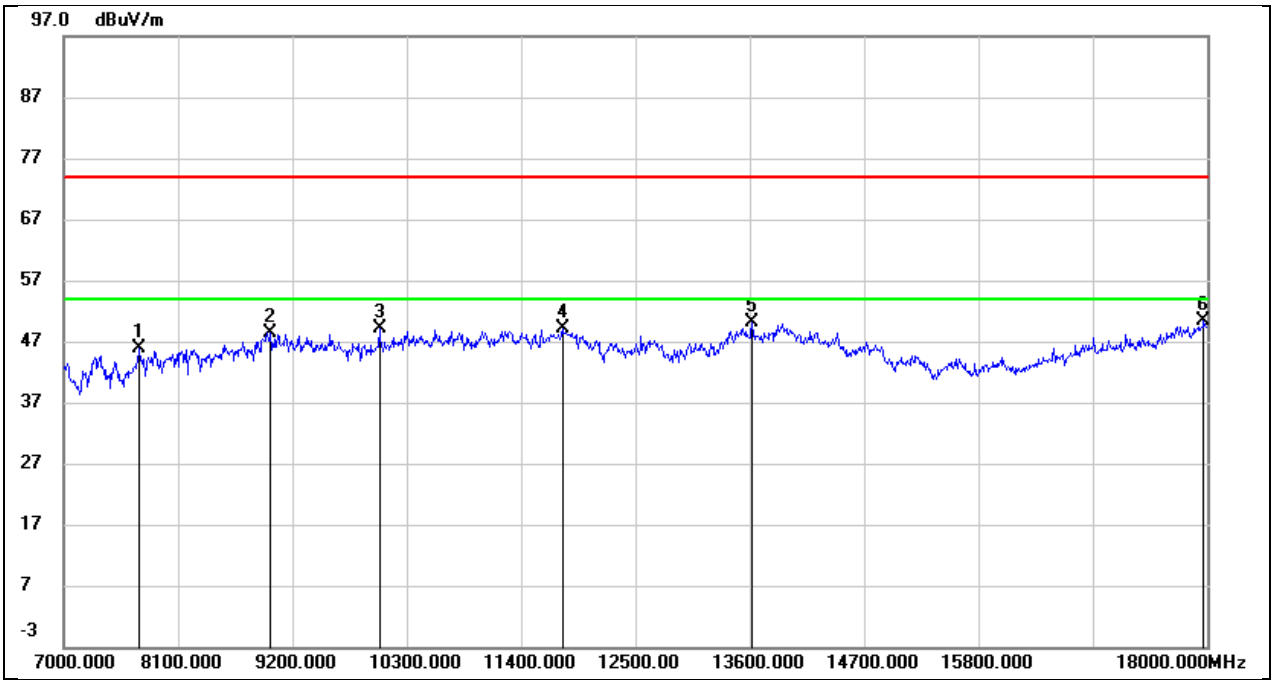

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7726.000	39.20	6.77	45.97	74.00	-28.03	peak
2	8991.000	36.74	11.73	48.47	74.00	-25.53	peak
3	10036.000	37.02	12.20	49.22	74.00	-24.78	peak
4	11796.000	31.54	17.55	49.09	74.00	-24.91	peak
5	13622.000	28.60	21.53	50.13	74.00	-23.87	peak
6	17967.000	23.49	26.83	50.32	74.00	-23.68	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11n HT40	Frequency(MHz):	5795
Polarity:	Vertical	Test Voltage:	DC 3.3V

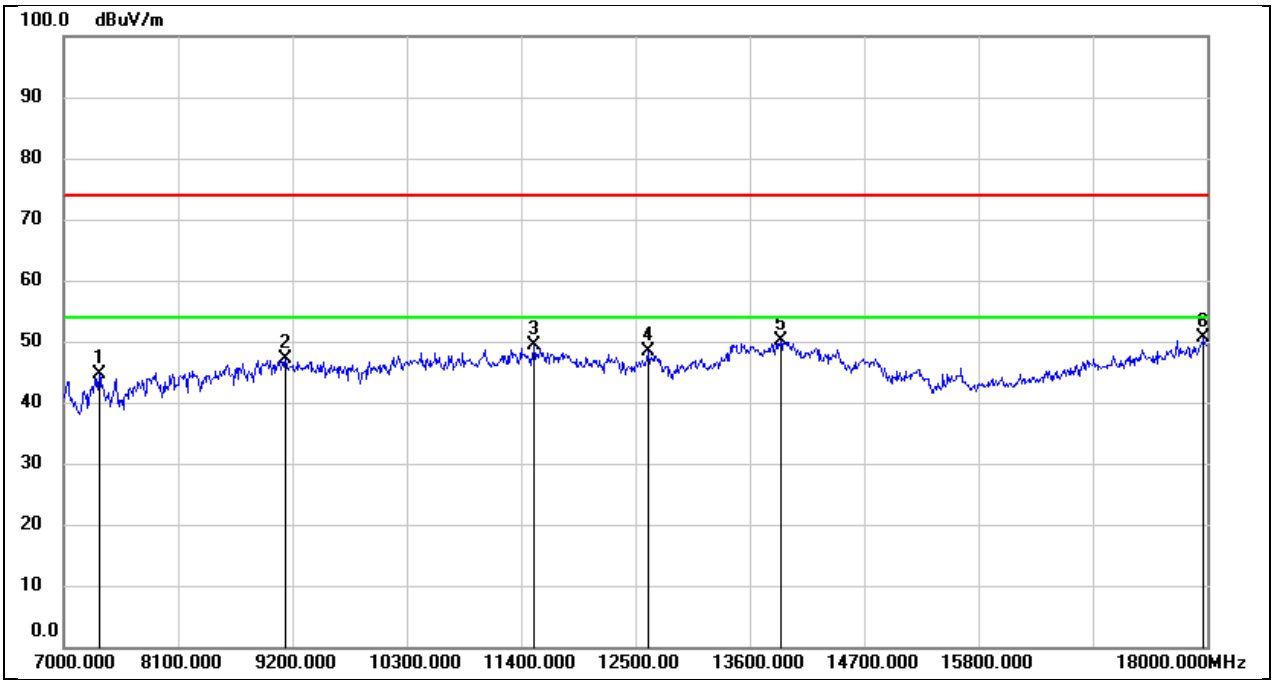

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7341.000	36.55	8.00	44.55	74.00	-29.45	peak
2	9134.000	36.44	10.64	47.08	74.00	-26.92	peak
3	11521.000	32.34	16.92	49.26	74.00	-24.74	peak
4	12621.000	29.95	18.38	48.33	74.00	-25.67	peak
5	13897.000	27.72	22.47	50.19	74.00	-23.81	peak
6	17967.000	23.76	26.83	50.59	74.00	-23.41	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ac VHT80	Frequency(MHz):	5210
Polarity:	Horizontal	Test Voltage:	DC 3.3V

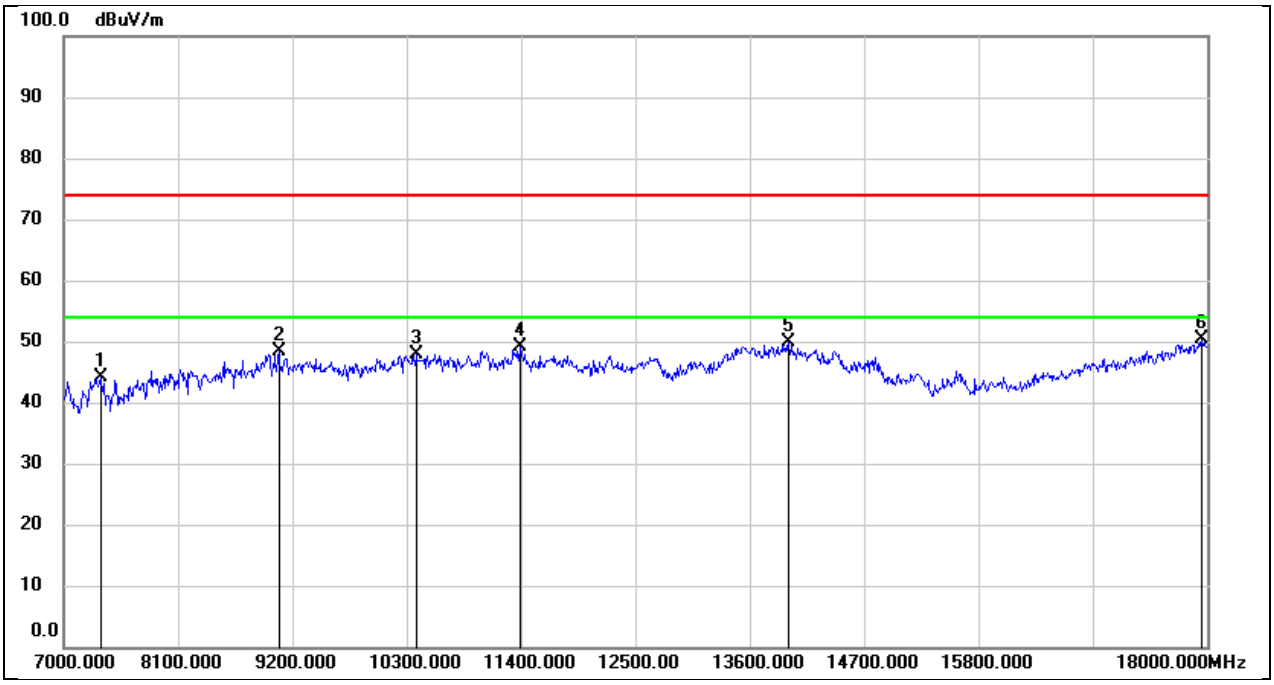

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7352.000	36.06	8.07	44.13	74.00	-29.87	peak
2	9068.000	37.03	11.25	48.28	74.00	-25.72	peak
3	10388.000	34.71	13.18	47.89	74.00	-26.11	peak
4	11389.000	32.56	16.51	49.07	74.00	-24.93	peak
5	13974.000	27.42	22.53	49.95	74.00	-24.05	peak
6	17945.000	23.67	26.74	50.41	74.00	-23.59	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ac VHT80	Frequency(MHz):	5210
Polarity:	Vertical	Test Voltage:	DC 3.3V

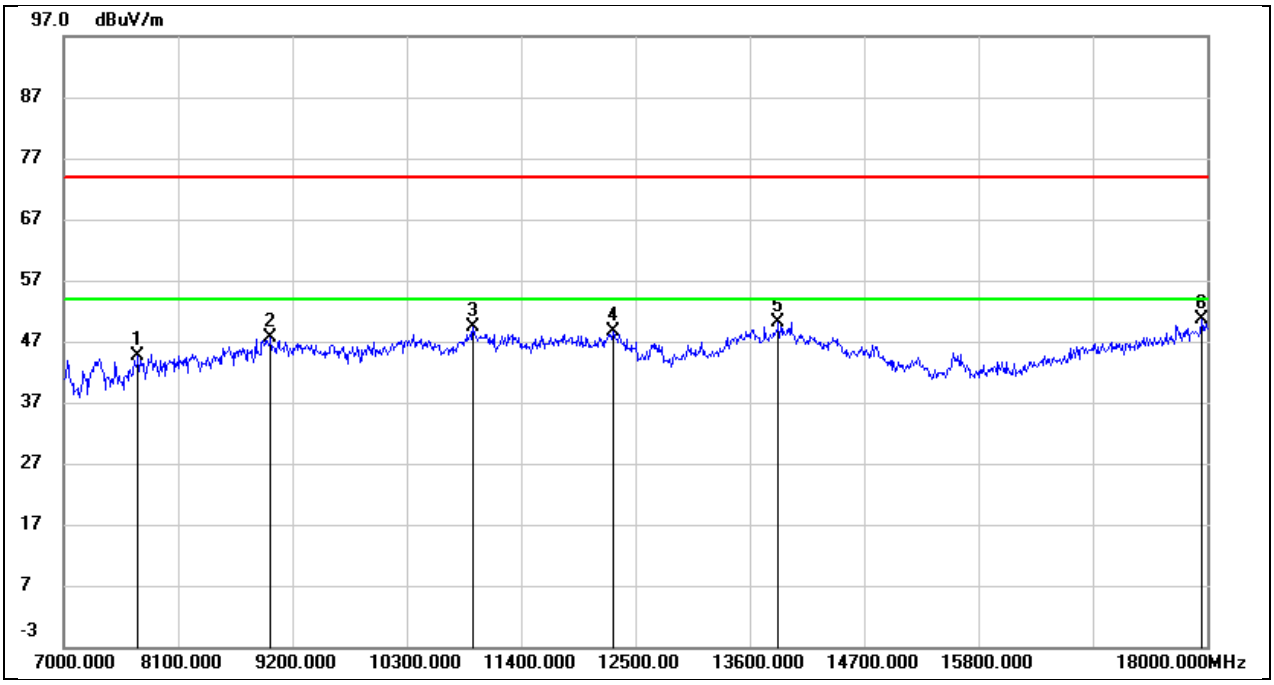

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7715.000	37.98	6.75	44.73	74.00	-29.27	peak
2	8991.000	35.83	11.73	47.56	74.00	-26.44	peak
3	10938.000	34.78	14.57	49.35	74.00	-24.65	peak
4	12291.000	29.77	18.77	48.54	74.00	-25.46	peak
5	13875.000	27.77	22.46	50.23	74.00	-23.77	peak
6	17945.000	23.82	26.74	50.56	74.00	-23.44	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ac VHT80	Frequency(MHz):	5290
Polarity:	Horizontal	Test Voltage:	DC 3.3V

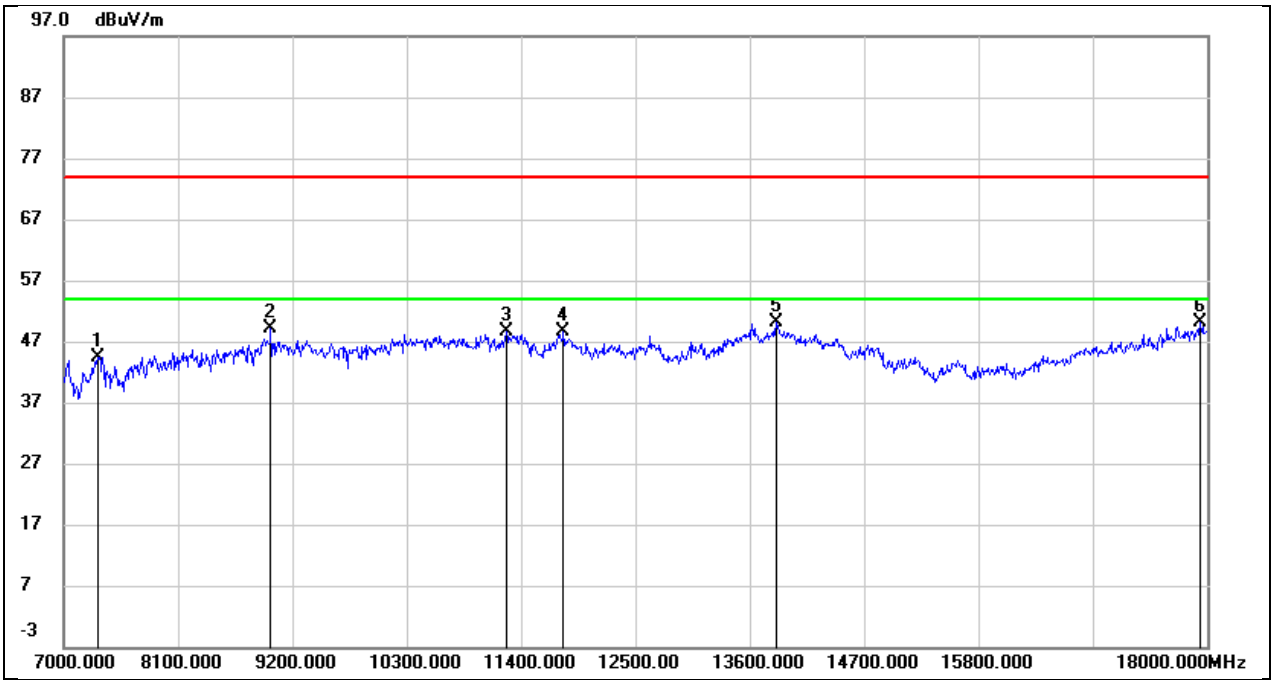

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7330.000	36.58	7.91	44.49	74.00	-29.51	peak
2	8991.000	37.46	11.73	49.19	74.00	-24.81	peak
3	11257.000	33.06	15.69	48.75	74.00	-25.25	peak
4	11807.000	31.04	17.60	48.64	74.00	-25.36	peak
5	13853.000	27.66	22.46	50.12	74.00	-23.88	peak
6	17934.000	23.54	26.69	50.23	74.00	-23.77	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ac VHT80	Frequency(MHz):	5290
Polarity:	Vertical	Test Voltage:	DC 3.3V

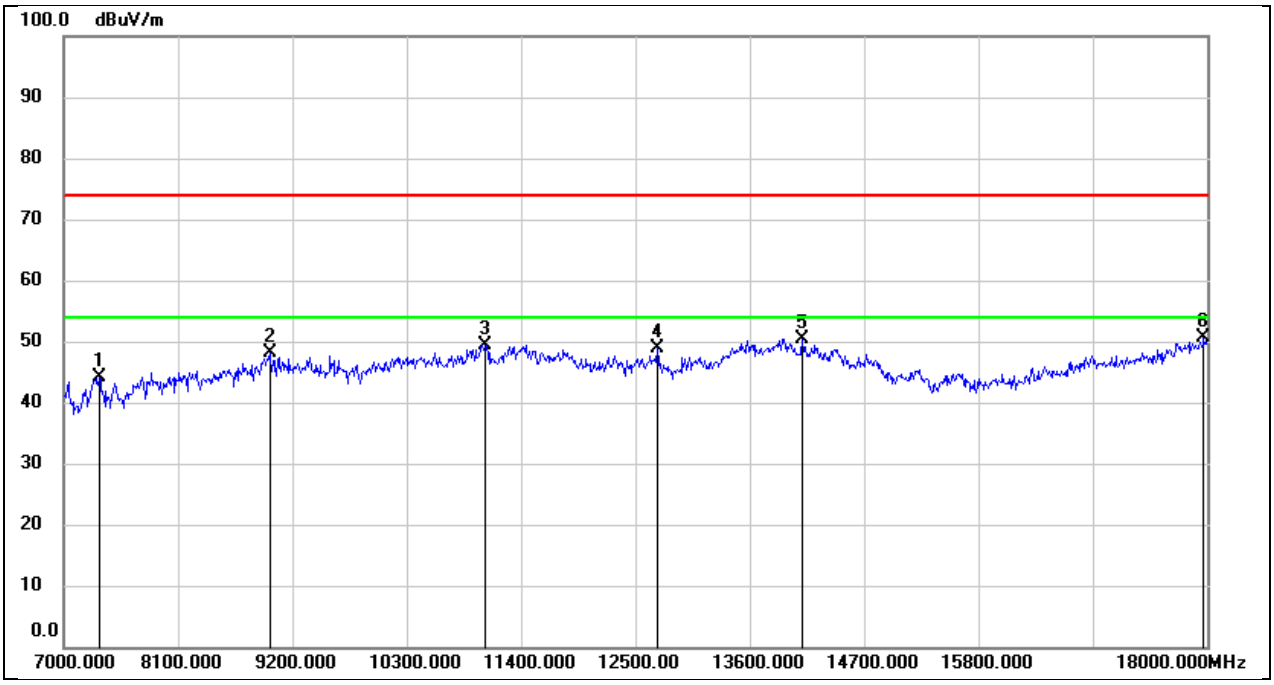

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7341.000	36.19	8.00	44.19	74.00	-29.81	peak
2	8980.000	36.54	11.57	48.11	74.00	-25.89	peak
3	11059.000	34.38	15.02	49.40	74.00	-24.60	peak
4	12709.000	30.21	18.59	48.80	74.00	-25.20	peak
5	14106.000	28.22	22.22	50.44	74.00	-23.56	peak
6	17967.000	23.81	26.83	50.64	74.00	-23.36	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ac VHT80	Frequency(MHz):	5530
Polarity:	Horizontal	Test Voltage:	DC 3.3V

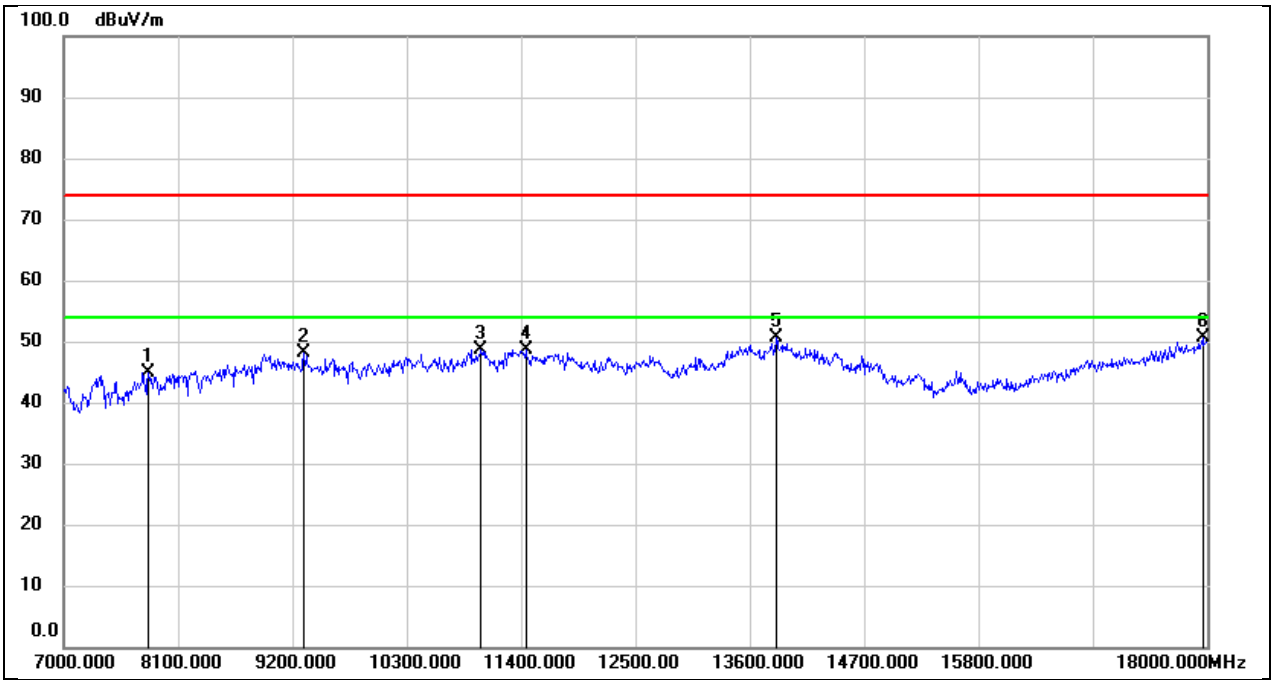

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7814.000	37.99	6.85	44.84	74.00	-29.16	peak
2	9310.000	37.63	10.39	48.02	74.00	-25.98	peak
3	11015.000	33.70	14.93	48.63	74.00	-25.37	peak
4	11444.000	32.02	16.71	48.73	74.00	-25.27	peak
5	13853.000	28.08	22.46	50.54	74.00	-23.46	peak
6	17956.000	23.84	26.78	50.62	74.00	-23.38	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ac VHT80	Frequency(MHz):	5530
Polarity:	Vertical	Test Voltage:	DC 3.3V

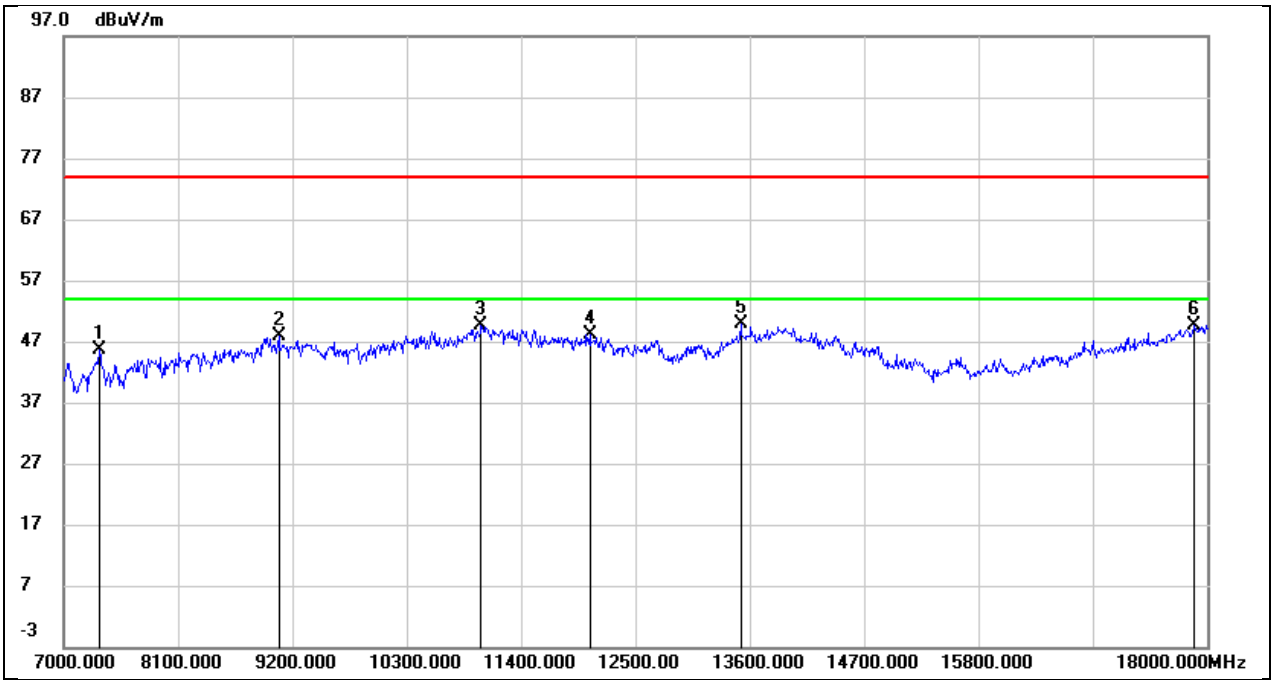

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7341.000	37.67	8.00	45.67	74.00	-28.33	peak
2	9068.000	36.67	11.25	47.92	74.00	-26.08	peak
3	11015.000	34.63	14.93	49.56	74.00	-24.44	peak
4	12060.000	29.55	18.59	48.14	74.00	-25.86	peak
5	13512.000	28.39	21.41	49.80	74.00	-24.20	peak
6	17879.000	23.09	26.46	49.55	74.00	-24.45	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ac VHT80	Frequency(MHz):	5610
Polarity:	Horizontal	Test Voltage:	DC 3.3V

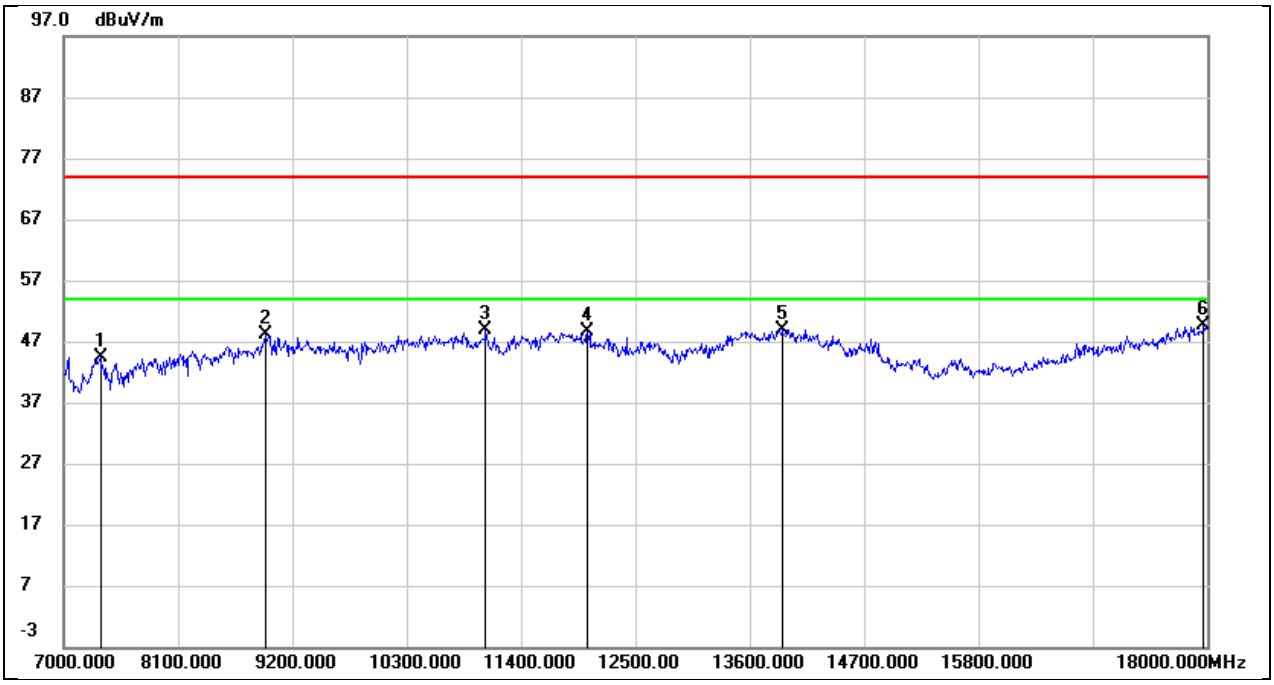

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7352.000	36.29	8.07	44.36	74.00	-29.64	peak
2	8947.000	37.11	11.08	48.19	74.00	-25.81	peak
3	11059.000	33.92	15.02	48.94	74.00	-25.06	peak
4	12038.000	30.02	18.60	48.62	74.00	-25.38	peak
5	13908.000	26.49	22.49	48.98	74.00	-25.02	peak
6	17967.000	22.70	26.83	49.53	74.00	-24.47	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ac VHT80	Frequency(MHz):	5610
Polarity:	Vertical	Test Voltage:	DC 3.3V

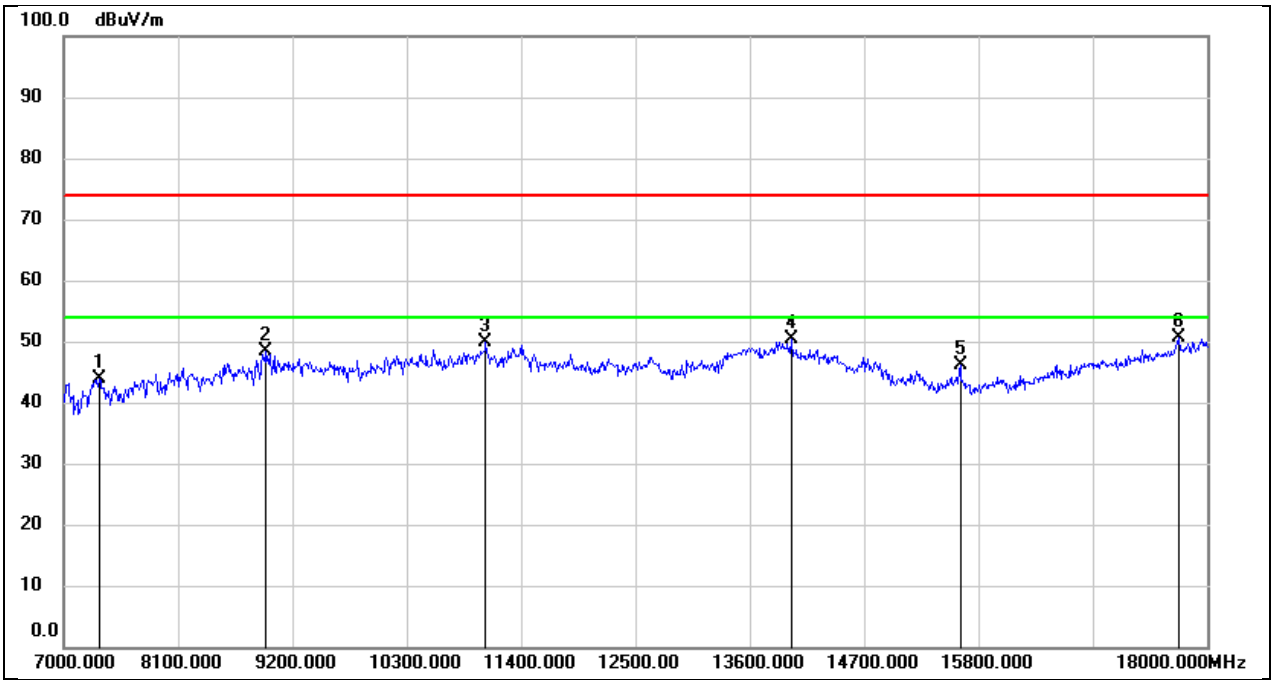

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7341.000	35.95	8.00	43.95	74.00	-30.05	peak
2	8947.000	37.40	11.08	48.48	74.00	-25.52	peak
3	11059.000	34.74	15.02	49.76	74.00	-24.24	peak
4	13996.000	27.80	22.54	50.34	74.00	-23.66	peak
5	15624.000	28.21	17.83	46.04	74.00	-27.96	peak
6	17725.000	25.46	25.26	50.72	74.00	-23.28	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ac VHT80	Frequency(MHz):	5690
Polarity:	Horizontal	Test Voltage:	DC 3.3V

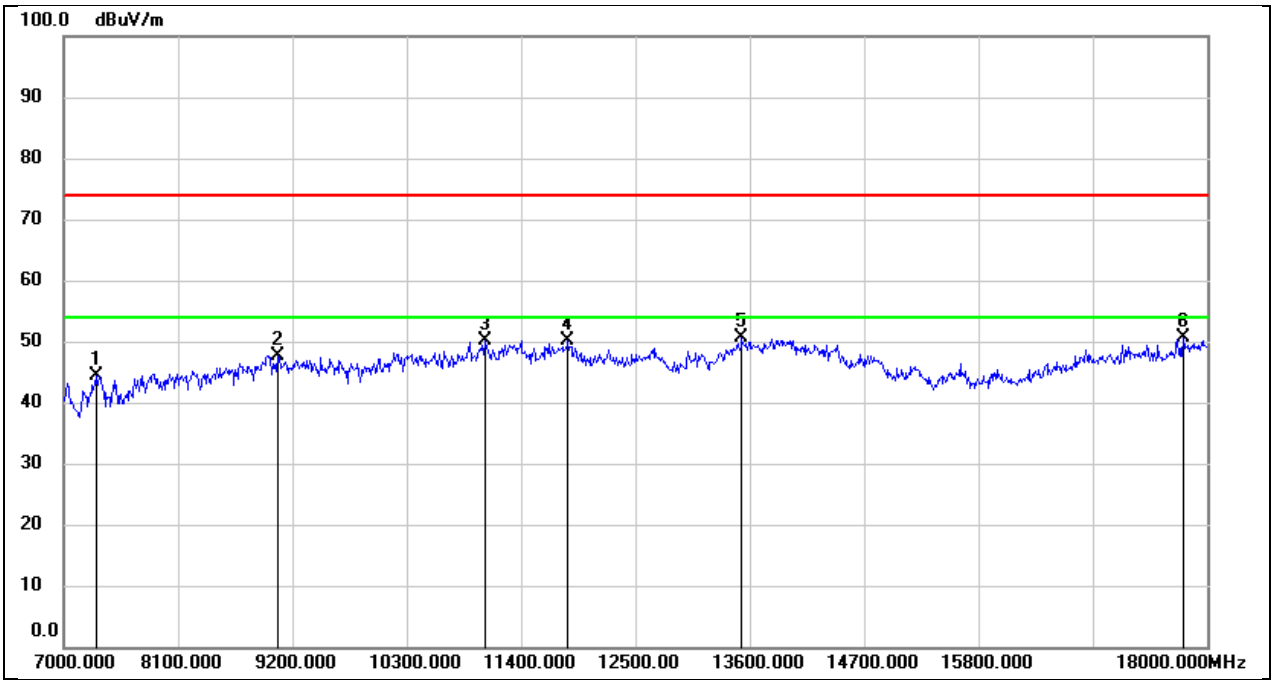

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7308.000	36.74	7.73	44.47	74.00	-29.53	peak
2	9057.000	36.31	11.35	47.66	74.00	-26.34	peak
3	11048.000	35.24	14.99	50.23	74.00	-23.77	peak
4	11851.000	32.23	17.83	50.06	74.00	-23.94	peak
5	13523.000	29.23	21.41	50.64	74.00	-23.36	peak
6	17769.000	24.89	25.76	50.65	74.00	-23.35	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ac VHT80	Frequency(MHz):	5690
Polarity:	Vertical	Test Voltage:	DC 3.3V

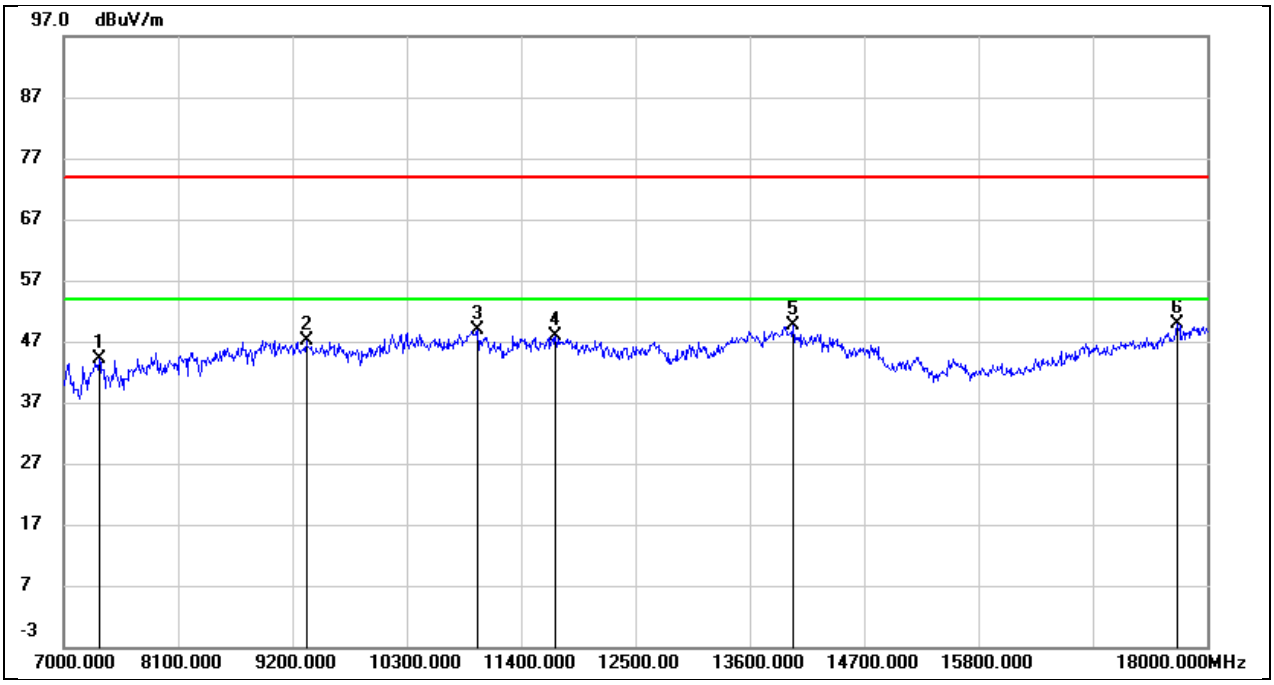

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7341.000	36.08	8.00	44.08	74.00	-29.92	peak
2	9332.000	36.68	10.45	47.13	74.00	-26.87	peak
3	10982.000	34.06	14.79	48.85	74.00	-25.15	peak
4	11730.000	30.59	17.37	47.96	74.00	-26.04	peak
5	14018.000	27.07	22.49	49.56	74.00	-24.44	peak
6	17714.000	24.71	25.14	49.85	74.00	-24.15	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ac VHT80	Frequency(MHz):	5775
Polarity:	Horizontal	Test Voltage:	DC 3.3V

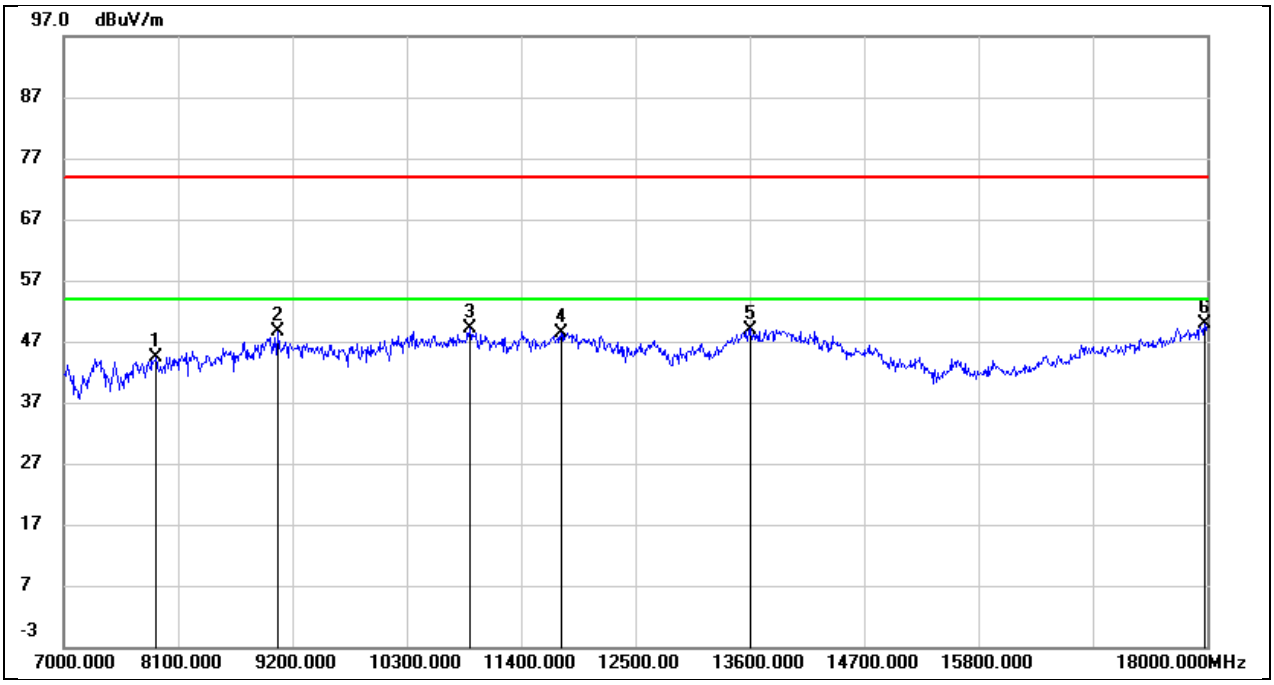

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7891.000	37.56	6.85	44.41	74.00	-29.59	peak
2	9057.000	37.35	11.35	48.70	74.00	-25.30	peak
3	10905.000	34.66	14.39	49.05	74.00	-24.95	peak
4	11785.000	30.93	17.52	48.45	74.00	-25.55	peak
5	13600.000	27.58	21.42	49.00	74.00	-25.00	peak
6	17978.000	23.06	26.88	49.94	74.00	-24.06	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ac VHT80	Frequency(MHz):	5775
Polarity:	Vertical	Test Voltage:	DC 3.3V

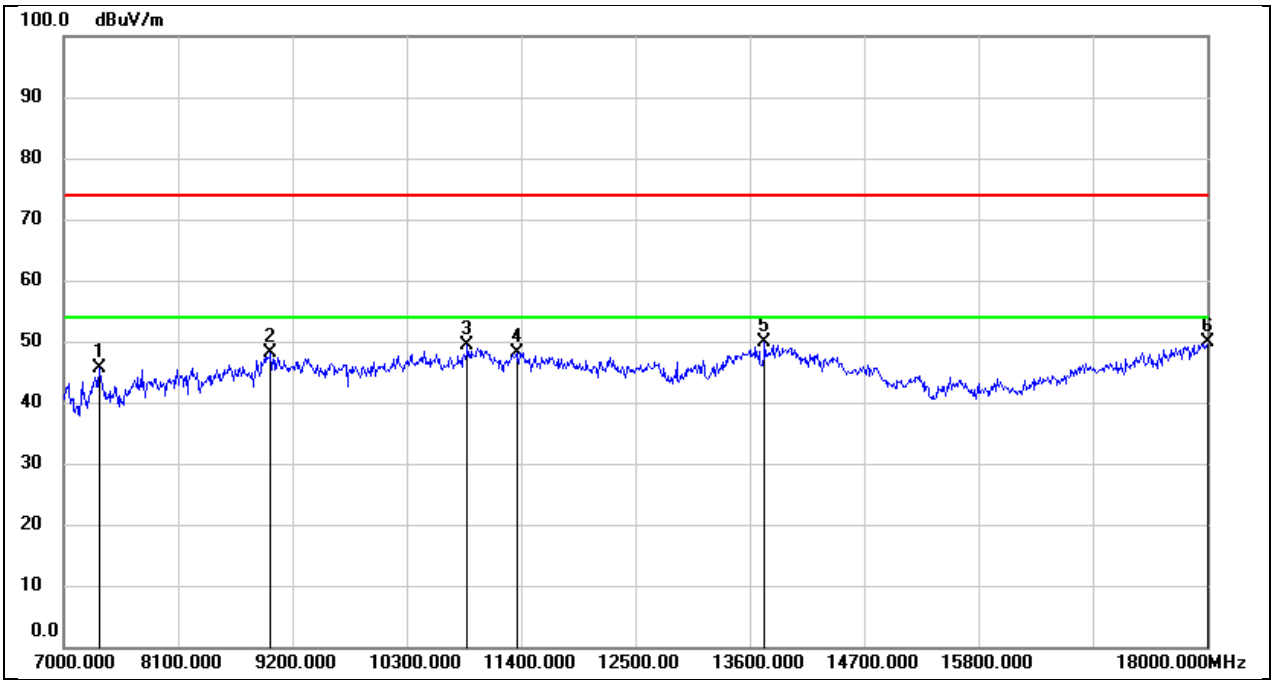

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7341.000	37.59	8.00	45.59	74.00	-28.41	peak
2	8991.000	36.43	11.73	48.16	74.00	-25.84	peak
3	10883.000	35.13	14.28	49.41	74.00	-24.59	peak
4	11356.000	31.90	16.30	48.20	74.00	-25.80	peak
5	13743.000	27.71	22.13	49.84	74.00	-24.16	peak
6	18000.000	22.99	26.97	49.96	74.00	-24.04	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ax HE20	Frequency(MHz):	5180
Polarity:	Horizontal	Test Voltage:	DC 3.3V

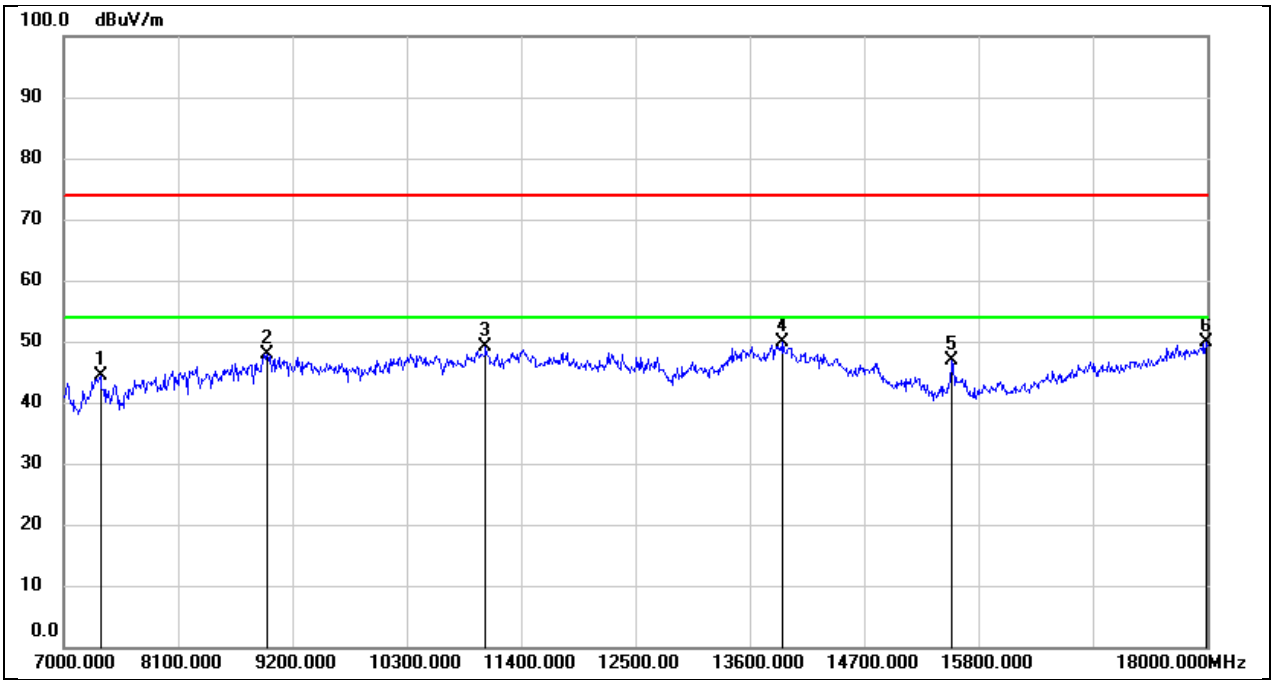

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7352.000	36.32	8.07	44.39	74.00	-29.61	peak
2	8958.000	36.69	11.24	47.93	74.00	-26.07	peak
3	11059.000	34.03	15.02	49.05	74.00	-24.95	peak
4	13919.000	27.28	22.49	49.77	74.00	-24.23	peak
5	15547.000	29.16	17.66	46.82	74.00	-27.18	peak
6	17989.000	22.85	26.92	49.77	74.00	-24.23	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ax HE20	Frequency(MHz):	5180
Polarity:	Vertical	Test Voltage:	DC 3.3V

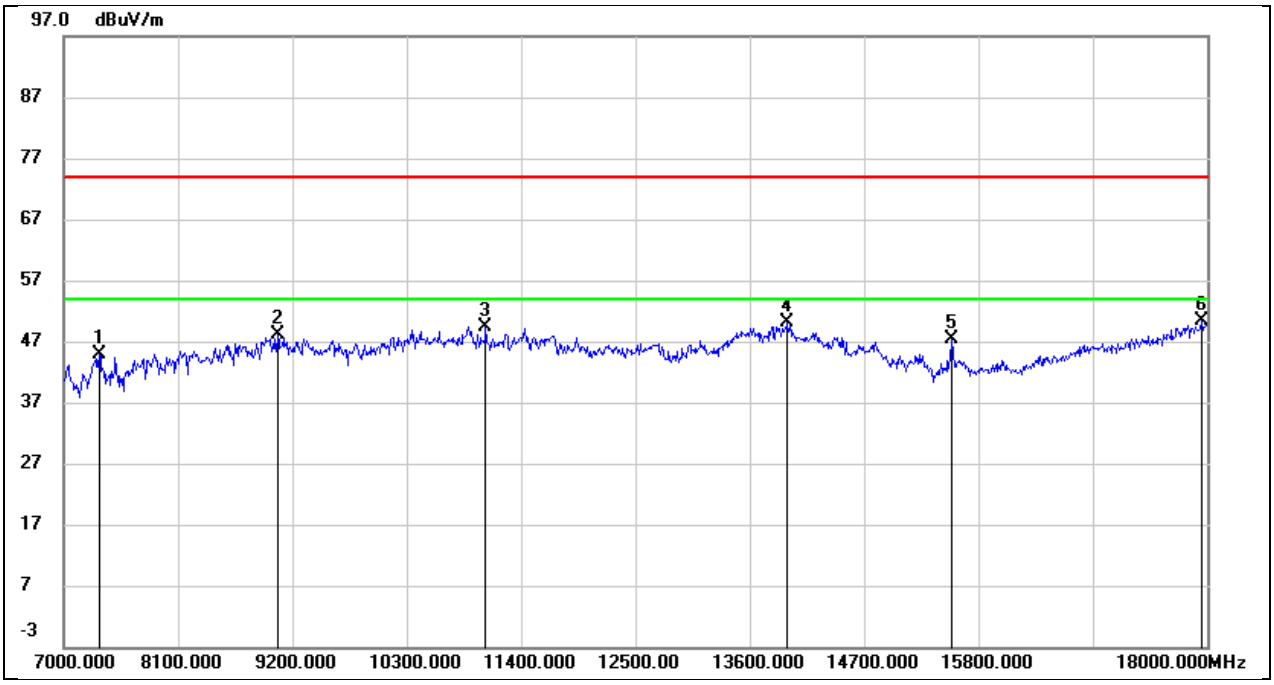

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7341.000	36.97	8.00	44.97	74.00	-29.03	peak
2	9057.000	36.80	11.35	48.15	74.00	-25.85	peak
3	11059.000	34.46	15.02	49.48	74.00	-24.52	peak
4	13963.000	27.69	22.51	50.20	74.00	-23.80	peak
5	15547.000	29.64	17.66	47.30	74.00	-26.70	peak
6	17945.000	23.63	26.74	50.37	74.00	-23.63	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ax HE20	Frequency(MHz):	5200
Polarity:	Horizontal	Test Voltage:	DC 3.3V

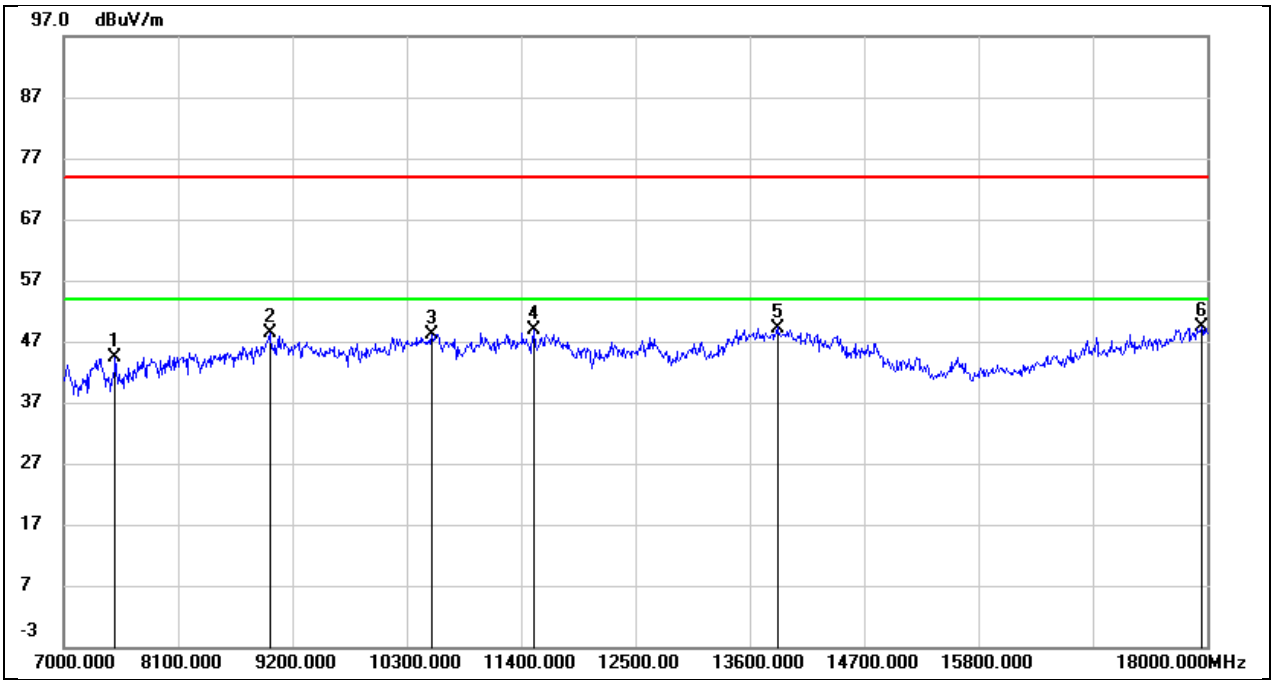

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7495.000	36.72	7.61	44.33	74.00	-29.67	peak
2	8980.000	36.73	11.57	48.30	74.00	-25.70	peak
3	10542.000	34.54	13.62	48.16	74.00	-25.84	peak
4	11521.000	31.86	16.92	48.78	74.00	-25.22	peak
5	13864.000	26.80	22.45	49.25	74.00	-24.75	peak
6	17945.000	22.60	26.74	49.34	74.00	-24.66	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ax HE20	Frequency(MHz):	5200
Polarity:	Vertical	Test Voltage:	DC 3.3V

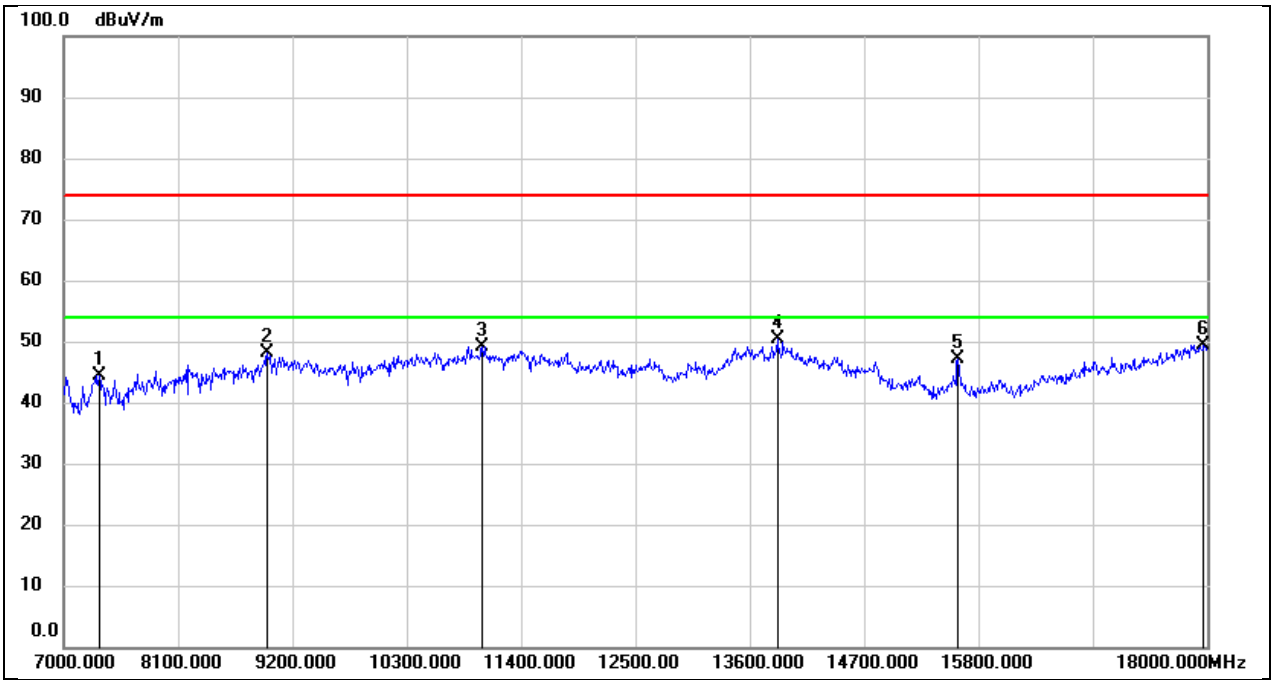

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7341.000	36.49	8.00	44.49	74.00	-29.51	peak
2	8958.000	36.79	11.24	48.03	74.00	-25.97	peak
3	11026.000	34.20	14.95	49.15	74.00	-24.85	peak
4	13864.000	27.85	22.45	50.30	74.00	-23.70	peak
5	15602.000	29.29	17.84	47.13	74.00	-26.87	peak
6	17967.000	22.53	26.83	49.36	74.00	-24.64	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ax HE20	Frequency(MHz):	5240
Polarity:	Horizontal	Test Voltage:	DC 3.3V

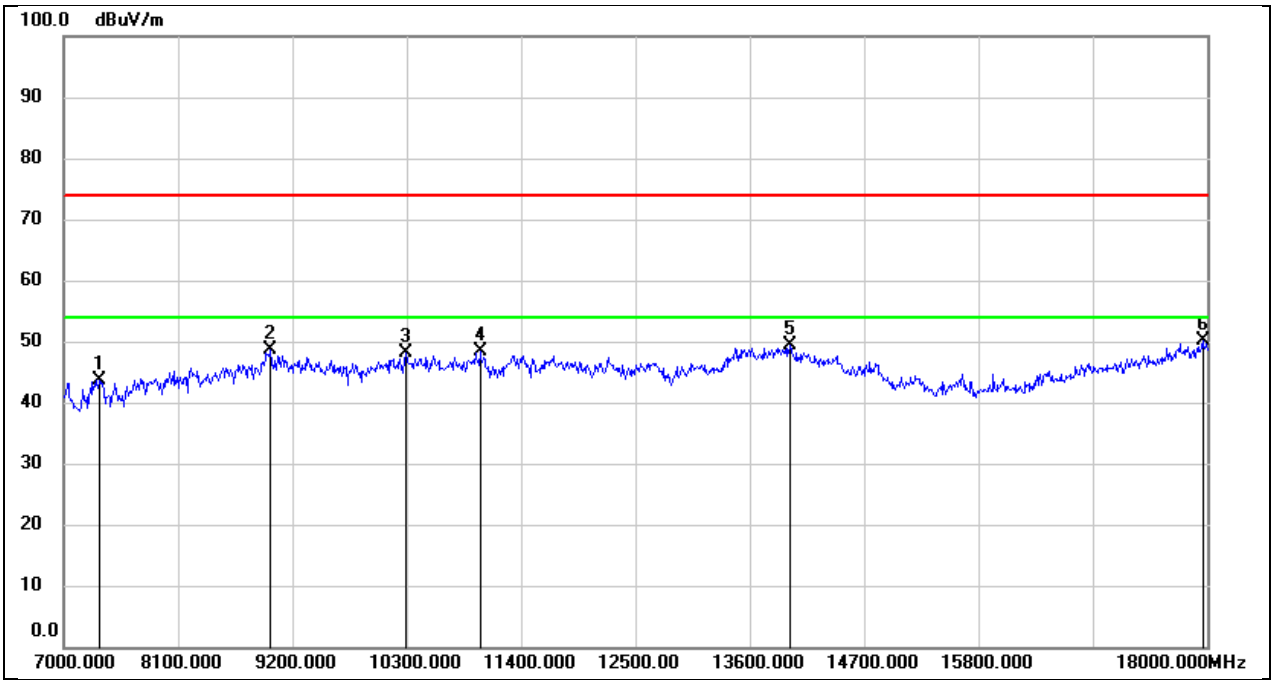

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7341.000	35.69	8.00	43.69	74.00	-30.31	peak
2	8991.000	36.83	11.73	48.56	74.00	-25.44	peak
3	10289.000	35.48	12.74	48.22	74.00	-25.78	peak
4	11004.000	33.37	14.90	48.27	74.00	-25.73	peak
5	13985.000	26.89	22.53	49.42	74.00	-24.58	peak
6	17956.000	23.30	26.78	50.08	74.00	-23.92	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ax HE20	Frequency(MHz):	5240
Polarity:	Vertical	Test Voltage:	DC 3.3V

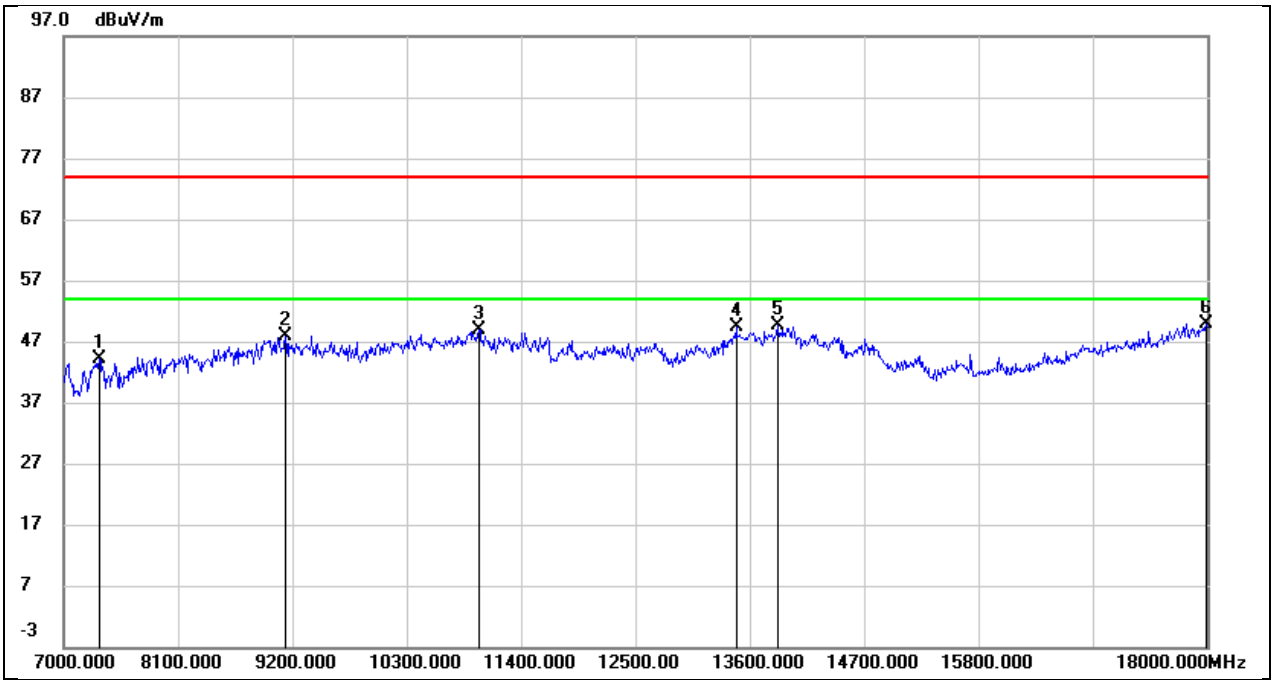

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7341.000	36.21	8.00	44.21	74.00	-29.79	peak
2	9134.000	37.30	10.64	47.94	74.00	-26.06	peak
3	10993.000	34.11	14.86	48.97	74.00	-25.03	peak
4	13468.000	28.08	21.31	49.39	74.00	-24.61	peak
5	13864.000	27.22	22.45	49.67	74.00	-24.33	peak
6	17989.000	22.89	26.92	49.81	74.00	-24.19	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ax HE20	Frequency(MHz):	5260
Polarity:	Horizontal	Test Voltage:	DC 3.3V

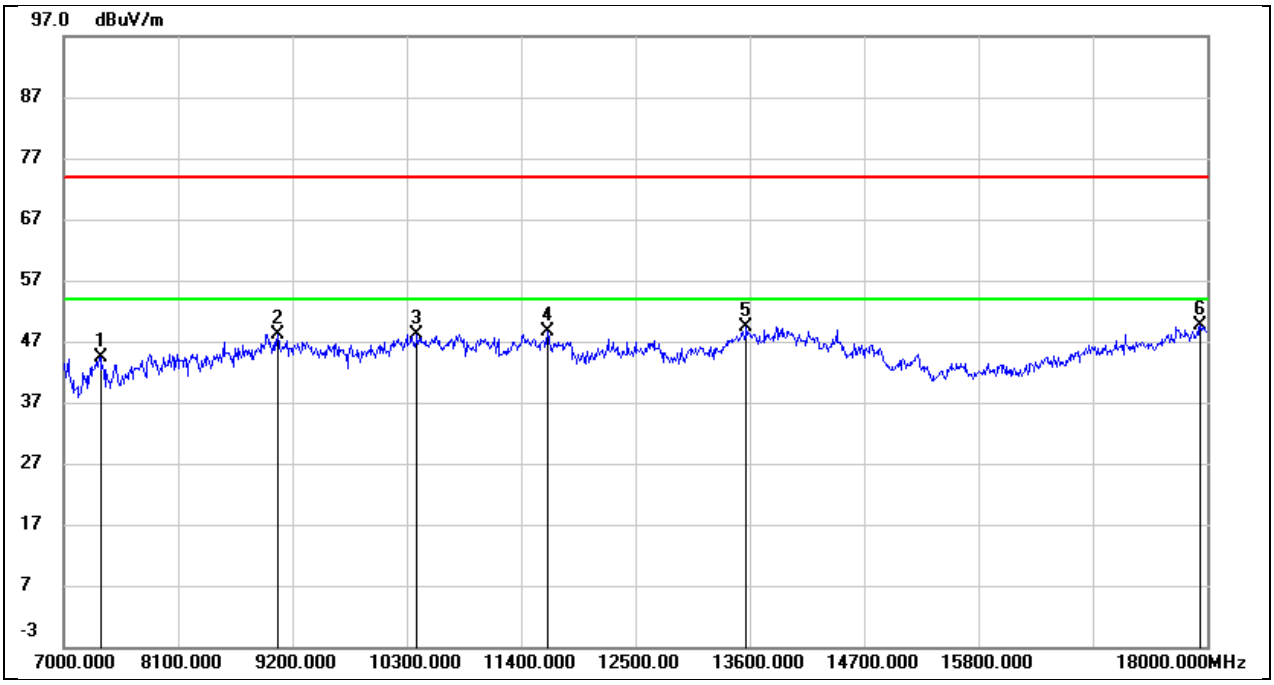

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7352.000	36.38	8.07	44.45	74.00	-29.55	peak
2	9057.000	36.81	11.35	48.16	74.00	-25.84	peak
3	10399.000	35.00	13.23	48.23	74.00	-25.77	peak
4	11653.000	31.40	17.16	48.56	74.00	-25.44	peak
5	13567.000	28.00	21.41	49.41	74.00	-24.59	peak
6	17934.000	22.88	26.69	49.57	74.00	-24.43	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ax HE20	Frequency(MHz):	5260
Polarity:	Vertical	Test Voltage:	DC 3.3V

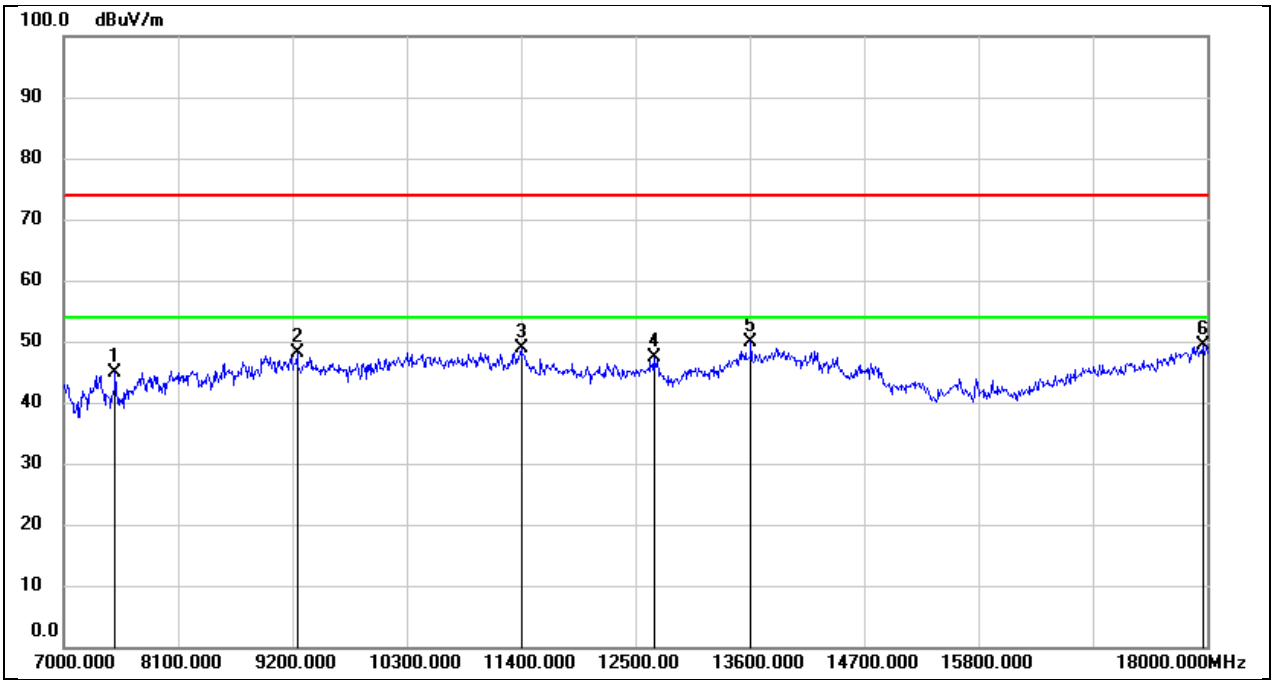

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7495.000	37.16	7.61	44.77	74.00	-29.23	peak
2	9244.000	37.88	10.18	48.06	74.00	-25.94	peak
3	11400.000	32.30	16.57	48.87	74.00	-25.13	peak
4	12676.000	28.76	18.50	47.26	74.00	-26.74	peak
5	13611.000	28.30	21.48	49.78	74.00	-24.22	peak
6	17956.000	22.71	26.78	49.49	74.00	-24.51	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ax HE20	Frequency(MHz):	5280
Polarity:	Horizontal	Test Voltage:	DC 3.3V

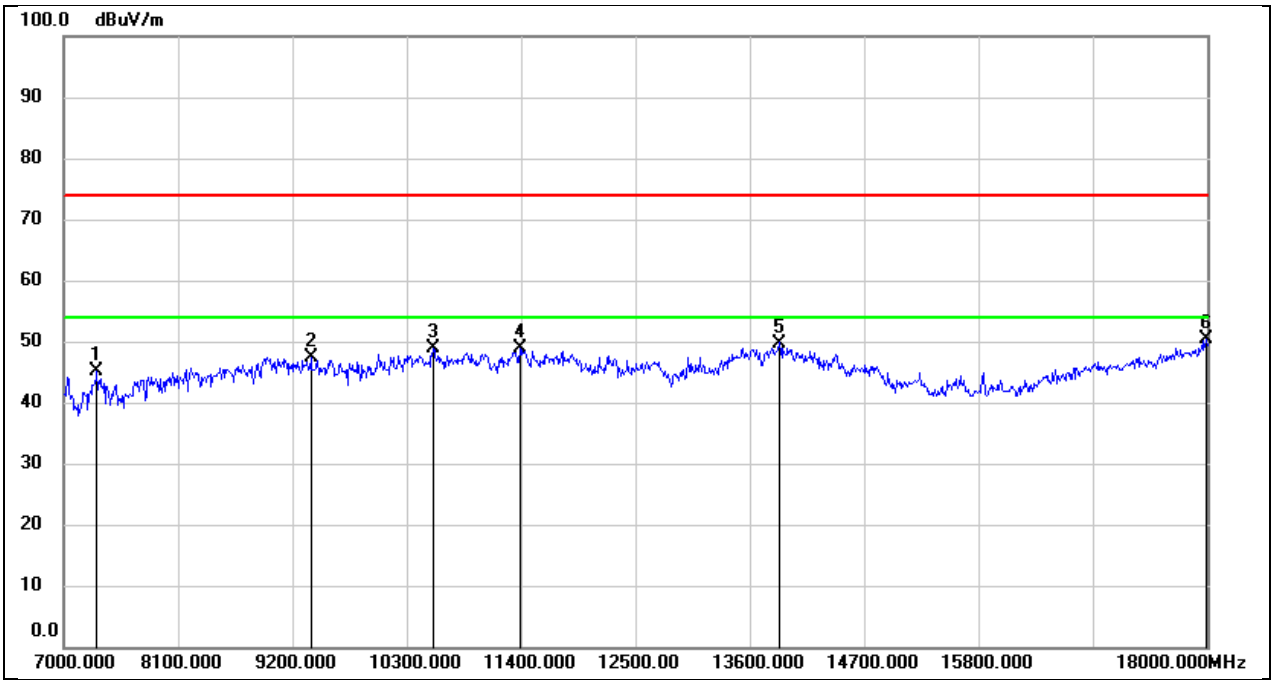

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7319.000	37.37	7.82	45.19	74.00	-28.81	peak
2	9376.000	36.84	10.60	47.44	74.00	-26.56	peak
3	10553.000	35.15	13.64	48.79	74.00	-25.21	peak
4	11389.000	32.43	16.51	48.94	74.00	-25.06	peak
5	13886.000	27.27	22.48	49.75	74.00	-24.25	peak
6	17989.000	23.39	26.92	50.31	74.00	-23.69	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ax HE20	Frequency(MHz):	5280
Polarity:	Vertical	Test Voltage:	DC 3.3V

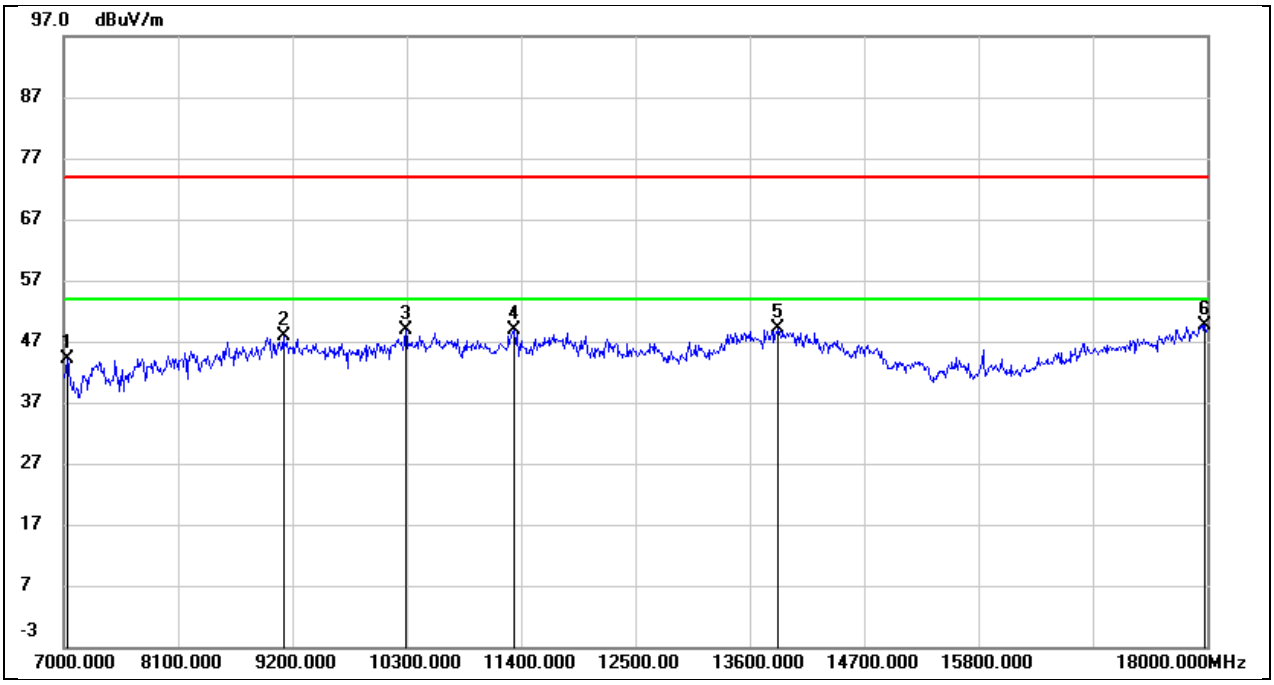

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7033.000	36.51	7.58	44.09	74.00	-29.91	peak
2	9112.000	36.98	10.85	47.83	74.00	-26.17	peak
3	10289.000	36.14	12.74	48.88	74.00	-25.12	peak
4	11334.000	32.82	16.16	48.98	74.00	-25.02	peak
5	13875.000	26.62	22.46	49.08	74.00	-24.92	peak
6	17978.000	22.70	26.88	49.58	74.00	-24.42	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ax HE20	Frequency(MHz):	5320
Polarity:	Horizontal	Test Voltage:	DC 3.3V

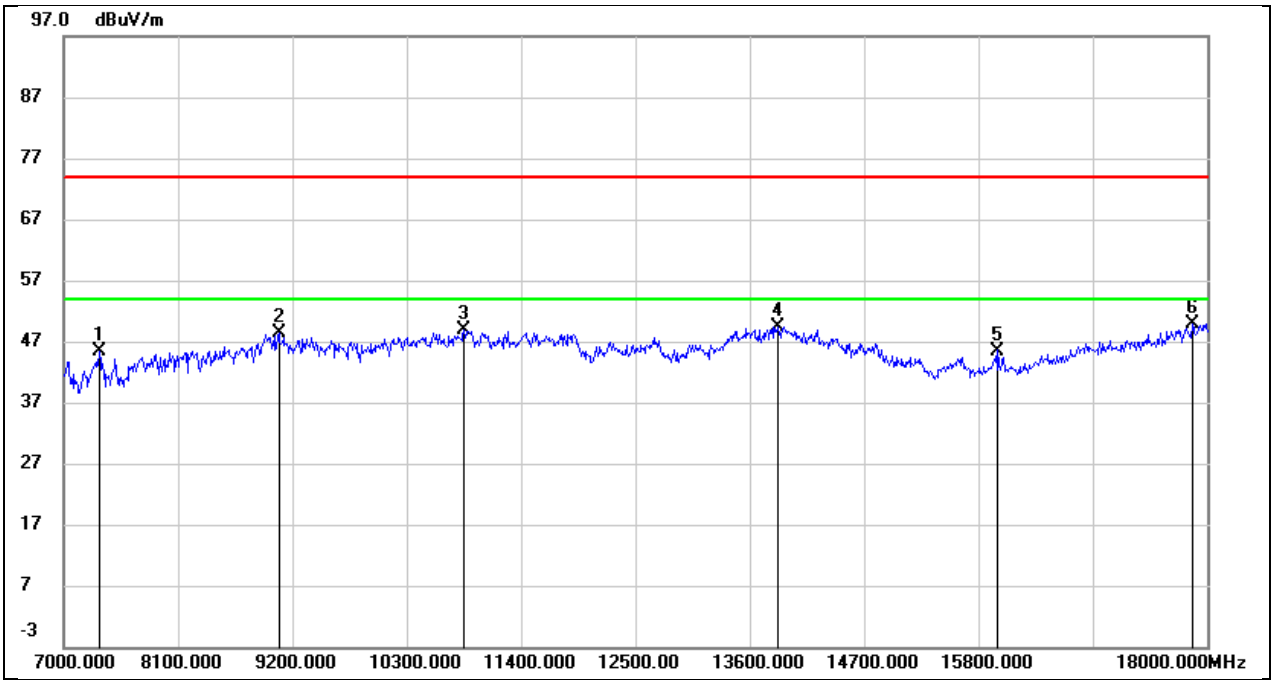

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7341.000	37.33	8.00	45.33	74.00	-28.67	peak
2	9068.000	37.02	11.25	48.27	74.00	-25.73	peak
3	10850.000	34.75	14.10	48.85	74.00	-25.15	peak
4	13864.000	26.83	22.45	49.28	74.00	-24.72	peak
5	15987.000	27.87	17.63	45.50	74.00	-28.50	peak
6	17857.000	23.51	26.36	49.87	74.00	-24.13	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ax HE20	Frequency(MHz):	5320
Polarity:	Vertical	Test Voltage:	DC 3.3V

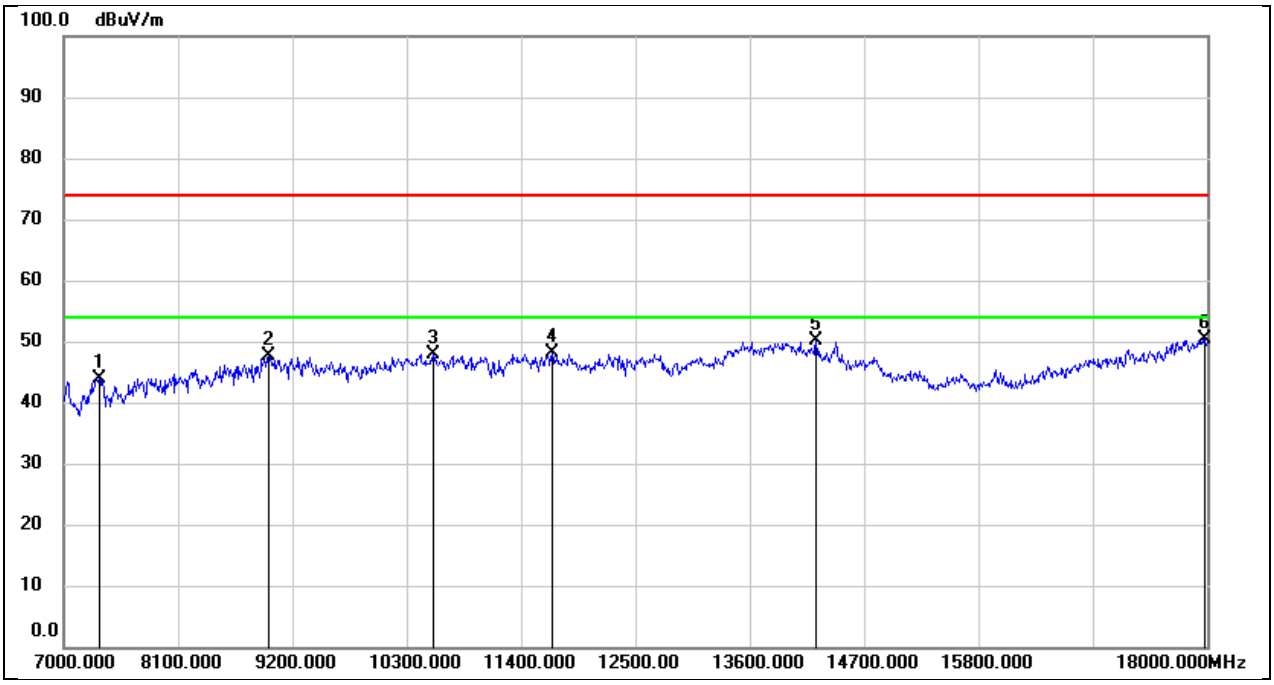

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7341.000	35.98	8.00	43.98	74.00	-30.02	peak
2	8969.000	36.13	11.40	47.53	74.00	-26.47	peak
3	10553.000	34.20	13.64	47.84	74.00	-26.16	peak
4	11697.000	30.89	17.29	48.18	74.00	-25.82	peak
5	14238.000	28.40	21.72	50.12	74.00	-23.88	peak
6	17978.000	23.58	26.88	50.46	74.00	-23.54	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ax HE20	Frequency(MHz):	5500
Polarity:	Horizontal	Test Voltage:	DC 3.3V

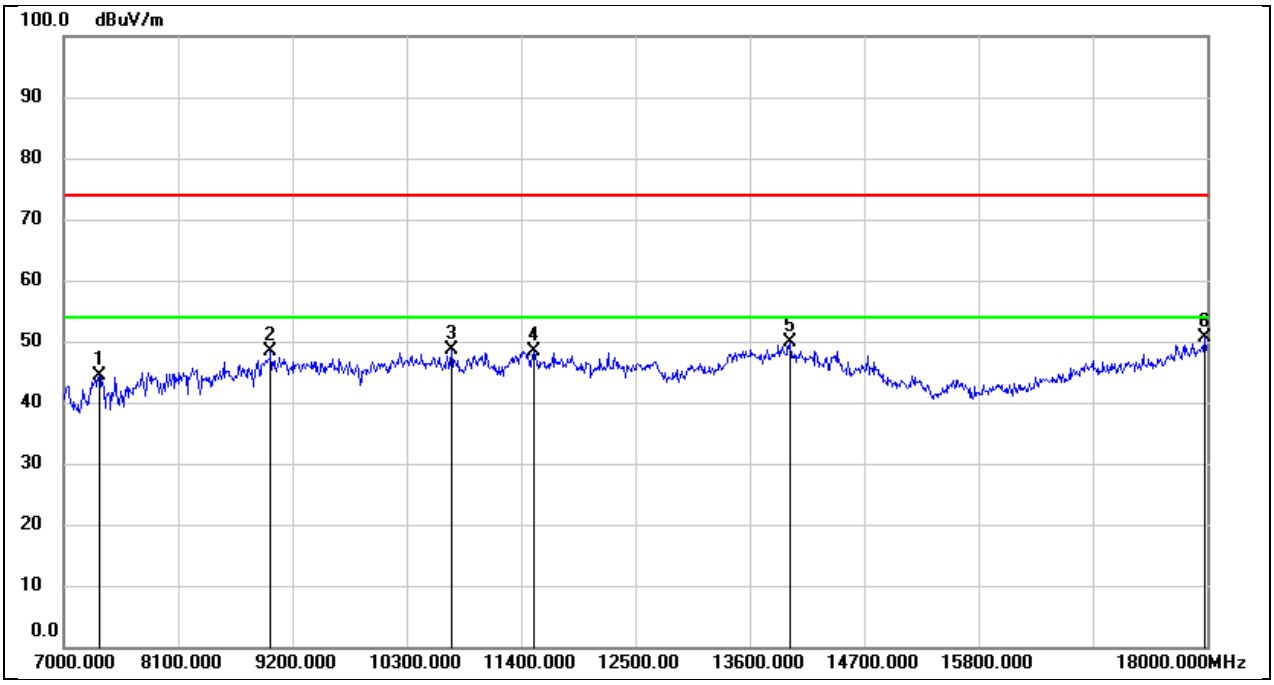

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7341.000	36.32	8.00	44.32	74.00	-29.68	peak
2	8991.000	36.70	11.73	48.43	74.00	-25.57	peak
3	10729.000	34.85	13.81	48.66	74.00	-25.34	peak
4	11521.000	31.51	16.92	48.43	74.00	-25.57	peak
5	13985.000	27.39	22.53	49.92	74.00	-24.08	peak
6	17978.000	23.63	26.88	50.51	74.00	-23.49	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ax HE20	Frequency(MHz):	5500
Polarity:	Vertical	Test Voltage:	DC 3.3V

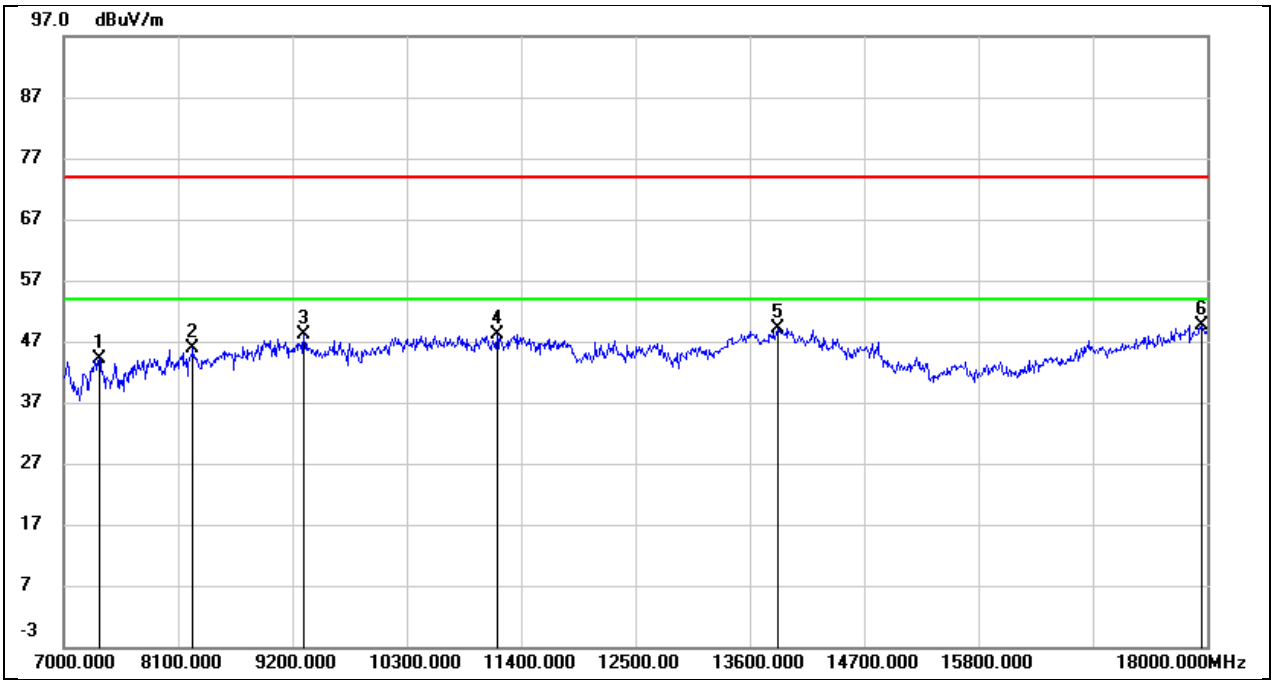

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7341.000	36.10	8.00	44.10	74.00	-29.90	peak
2	8243.000	37.32	8.44	45.76	74.00	-28.24	peak
3	9310.000	37.69	10.39	48.08	74.00	-25.92	peak
4	11169.000	32.98	15.27	48.25	74.00	-25.75	peak
5	13875.000	26.78	22.46	49.24	74.00	-24.76	peak
6	17945.000	23.01	26.74	49.75	74.00	-24.25	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ax HE20	Frequency(MHz):	5580
Polarity:	Horizontal	Test Voltage:	DC 3.3V

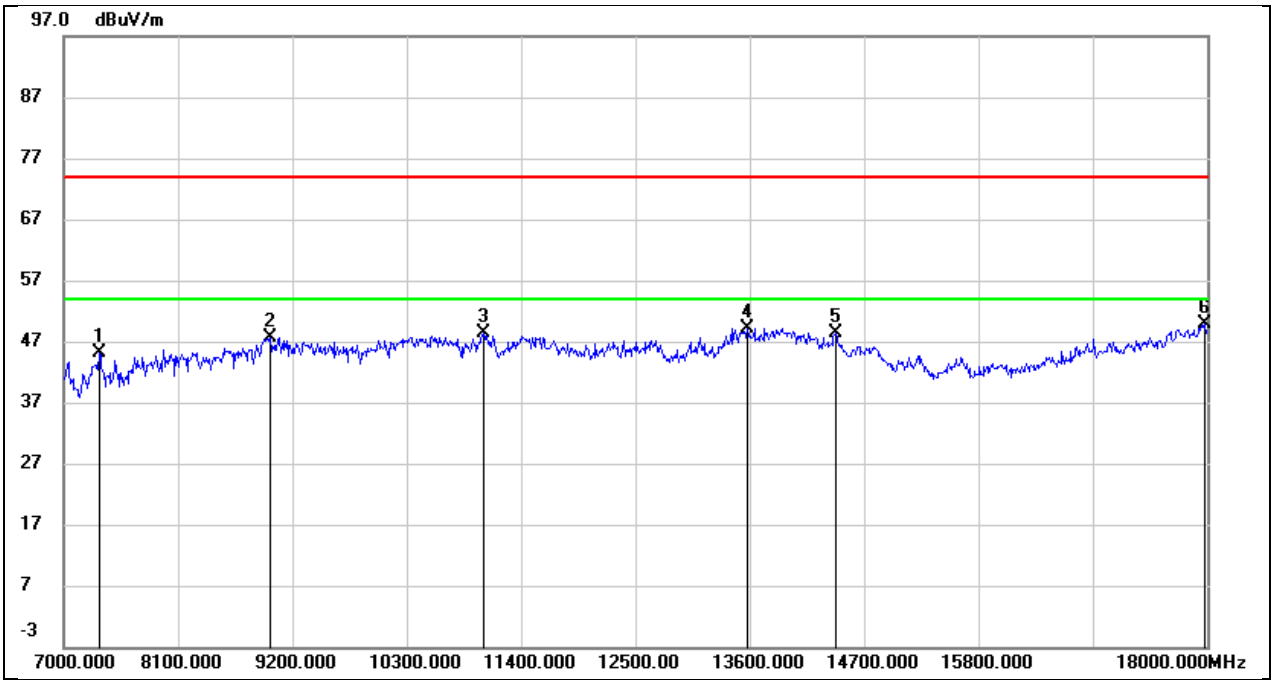

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7341.000	37.08	8.00	45.08	74.00	-28.92	peak
2	8980.000	36.09	11.57	47.66	74.00	-26.34	peak
3	11037.000	33.31	14.98	48.29	74.00	-25.71	peak
4	13578.000	27.73	21.42	49.15	74.00	-24.85	peak
5	14425.000	27.71	20.67	48.38	74.00	-25.62	peak
6	17978.000	23.08	26.88	49.96	74.00	-24.04	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ax HE20	Frequency(MHz):	5580
Polarity:	Vertical	Test Voltage:	DC 3.3V

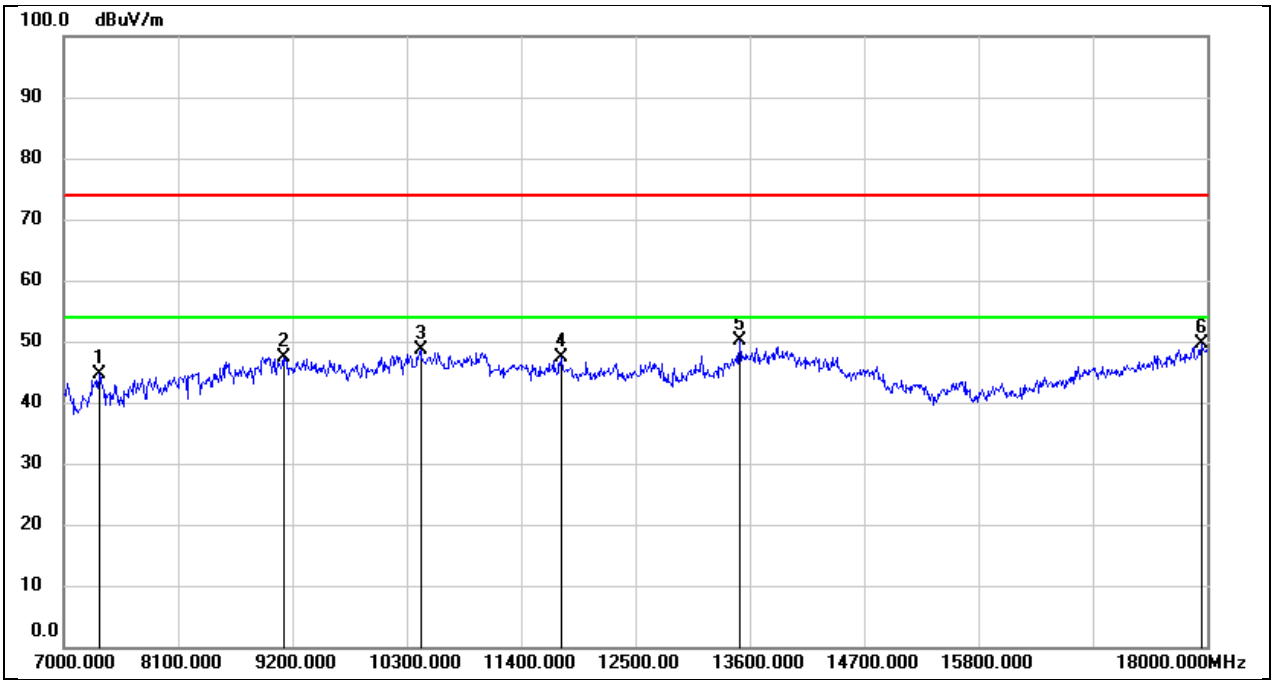

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7341.000	36.53	8.00	44.53	74.00	-29.47	peak
2	9112.000	36.55	10.85	47.40	74.00	-26.60	peak
3	10432.000	35.41	13.31	48.72	74.00	-25.28	peak
4	11785.000	29.90	17.52	47.42	74.00	-26.58	peak
5	13501.000	28.61	21.40	50.01	74.00	-23.99	peak
6	17945.000	22.96	26.74	49.70	74.00	-24.30	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ax HE20	Frequency(MHz):	5700
Polarity:	Horizontal	Test Voltage:	DC 3.3V

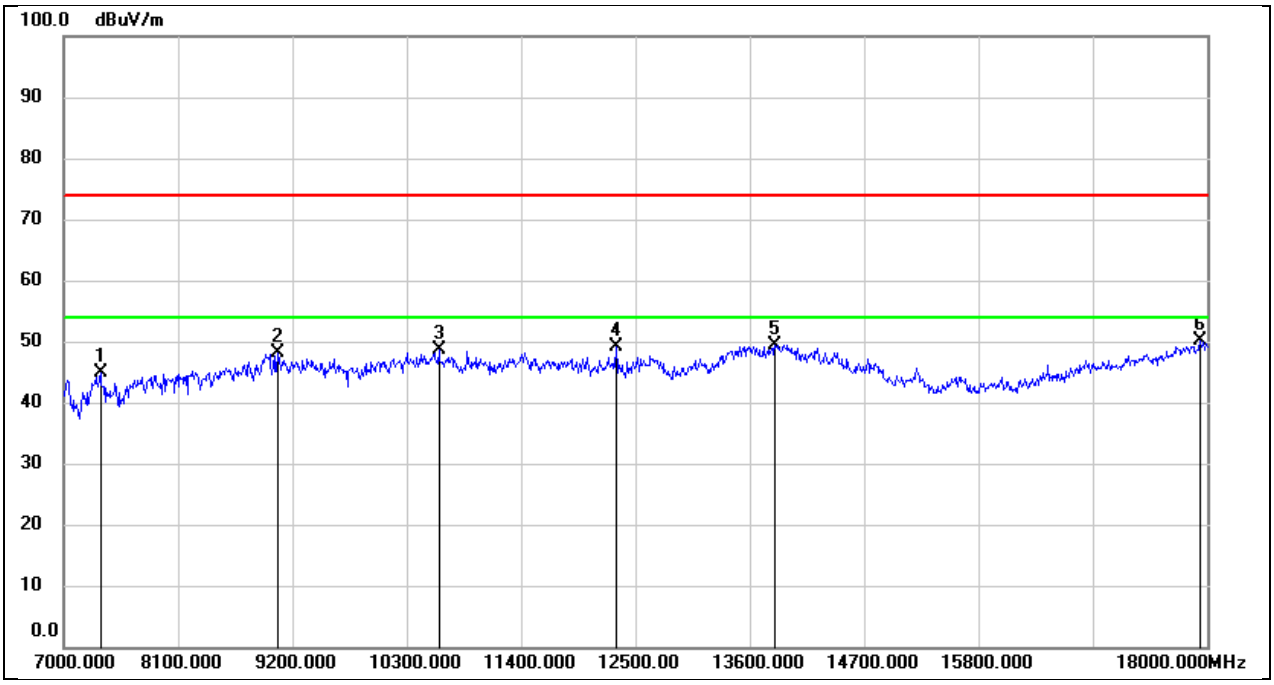

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7352.000	36.81	8.07	44.88	74.00	-29.12	peak
2	9057.000	36.84	11.35	48.19	74.00	-25.81	peak
3	10608.000	34.98	13.77	48.75	74.00	-25.25	peak
4	12313.000	30.20	18.81	49.01	74.00	-24.99	peak
5	13842.000	27.00	22.44	49.44	74.00	-24.56	peak
6	17934.000	23.45	26.69	50.14	74.00	-23.86	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ax HE20	Frequency(MHz):	5700
Polarity:	Vertical	Test Voltage:	DC 3.3V

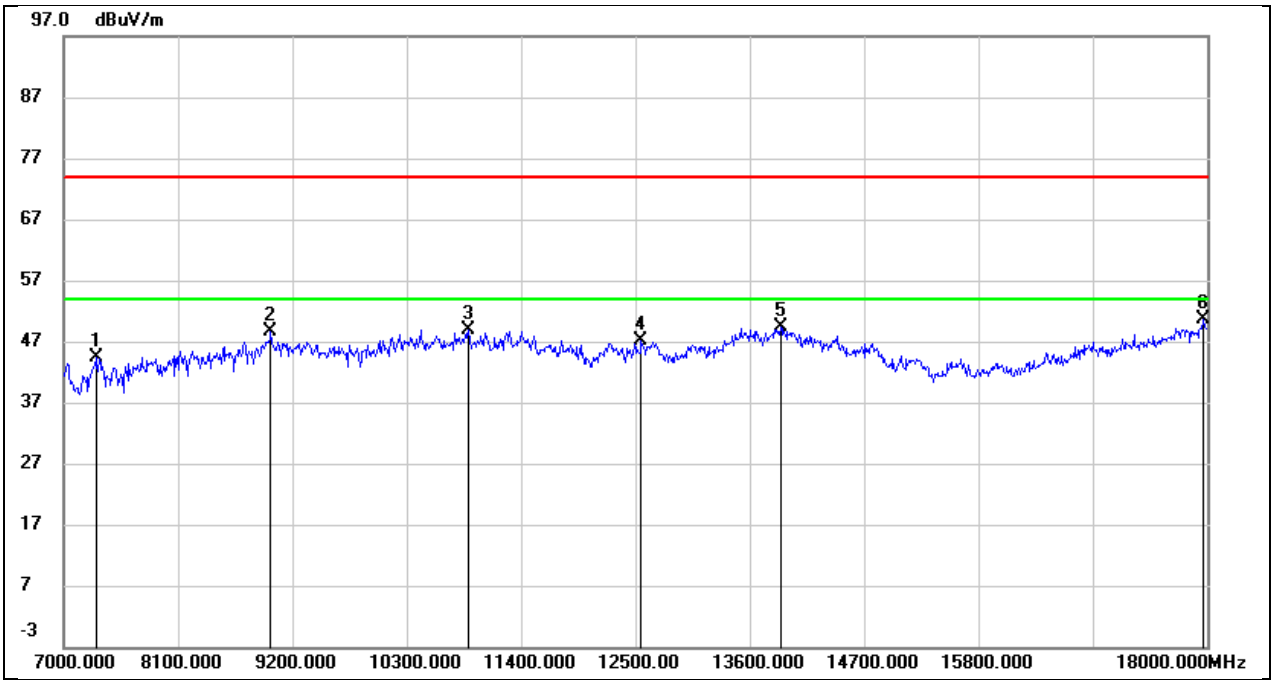

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7308.000	36.76	7.73	44.49	74.00	-29.51	peak
2	8991.000	36.80	11.73	48.53	74.00	-25.47	peak
3	10894.000	34.51	14.33	48.84	74.00	-25.16	peak
4	12555.000	28.75	18.43	47.18	74.00	-26.82	peak
5	13897.000	26.99	22.47	49.46	74.00	-24.54	peak
6	17967.000	23.80	26.83	50.63	74.00	-23.37	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ax HE20	Frequency(MHz):	5720
Polarity:	Horizontal	Test Voltage:	DC 3.3V

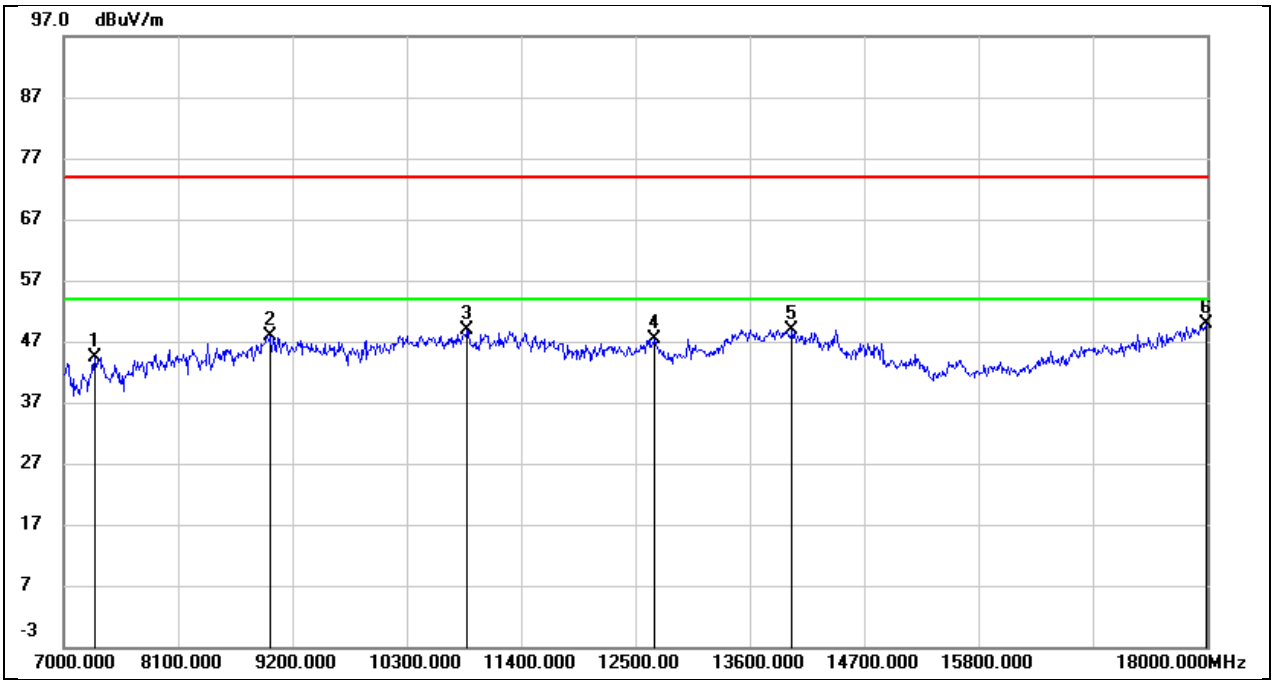

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7297.000	36.74	7.65	44.39	74.00	-29.61	peak
2	8991.000	36.18	11.73	47.91	74.00	-26.09	peak
3	10883.000	34.64	14.28	48.92	74.00	-25.08	peak
4	12687.000	28.93	18.53	47.46	74.00	-26.54	peak
5	14007.000	26.41	22.53	48.94	74.00	-25.06	peak
6	17989.000	22.87	26.92	49.79	74.00	-24.21	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ax HE20	Frequency(MHz):	5720
Polarity:	Vertical	Test Voltage:	DC 3.3V

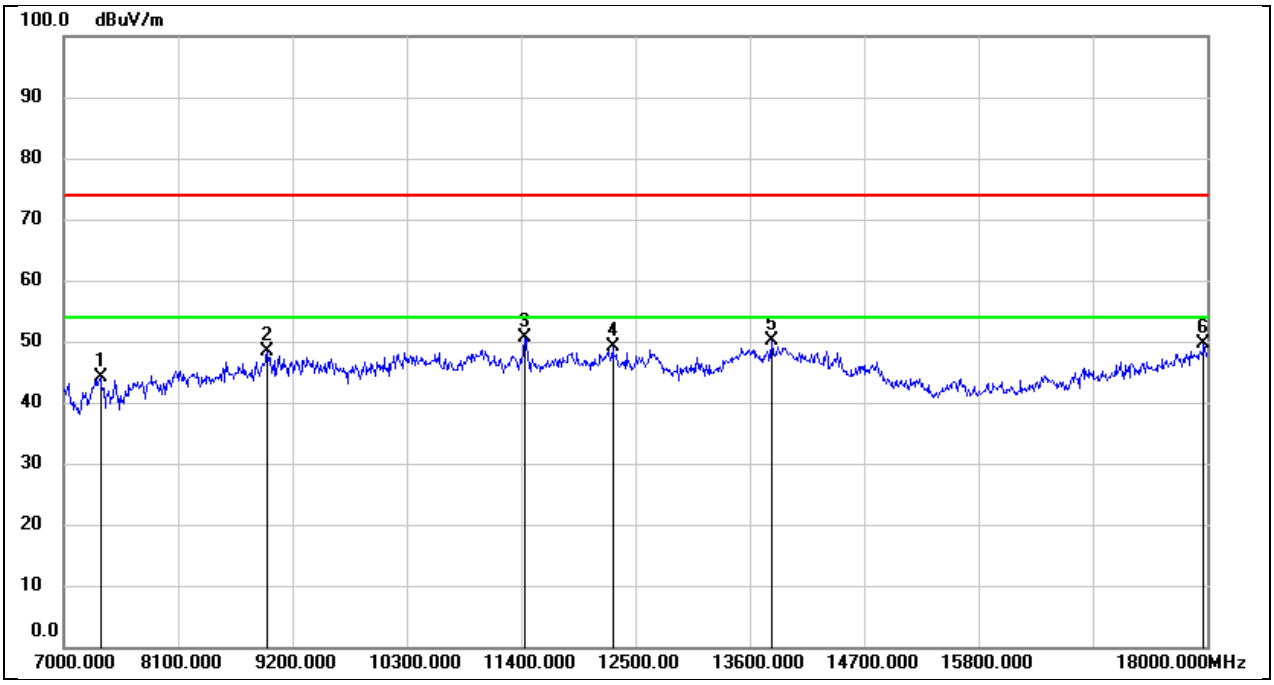

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7352.000	36.15	8.07	44.22	74.00	-29.78	peak
2	8958.000	37.21	11.24	48.45	74.00	-25.55	peak
3	11433.000	33.95	16.68	50.63	74.00	-23.37	peak
4	12280.000	30.28	18.74	49.02	74.00	-24.98	peak
5	13809.000	27.58	22.43	50.01	74.00	-23.99	peak
6	17967.000	22.78	26.83	49.61	74.00	-24.39	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ax HE20	Frequency(MHz):	5745
Polarity:	Horizontal	Test Voltage:	DC 3.3V

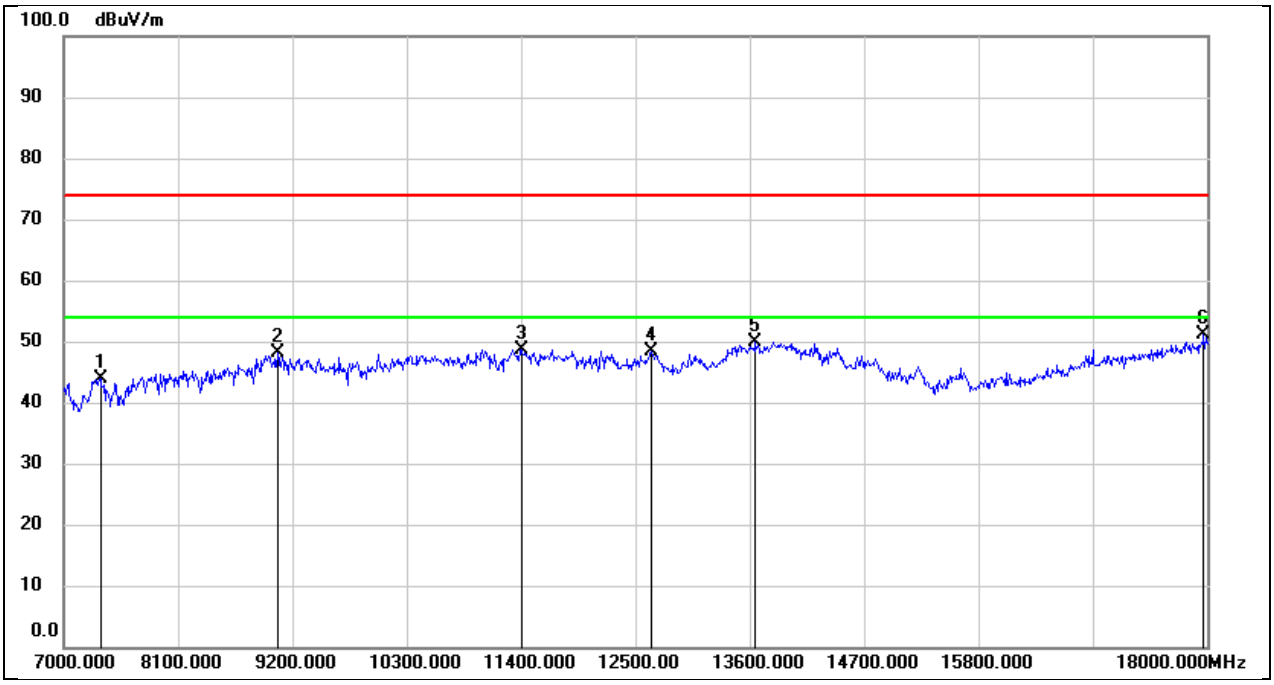

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7352.000	35.85	8.07	43.92	74.00	-30.08	peak
2	9057.000	36.83	11.35	48.18	74.00	-25.82	peak
3	11400.000	32.14	16.57	48.71	74.00	-25.29	peak
4	12654.000	29.84	18.44	48.28	74.00	-25.72	peak
5	13655.000	28.29	21.69	49.98	74.00	-24.02	peak
6	17967.000	24.30	26.83	51.13	74.00	-22.87	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ax HE20	Frequency(MHz):	5745
Polarity:	Vertical	Test Voltage:	DC 3.3V

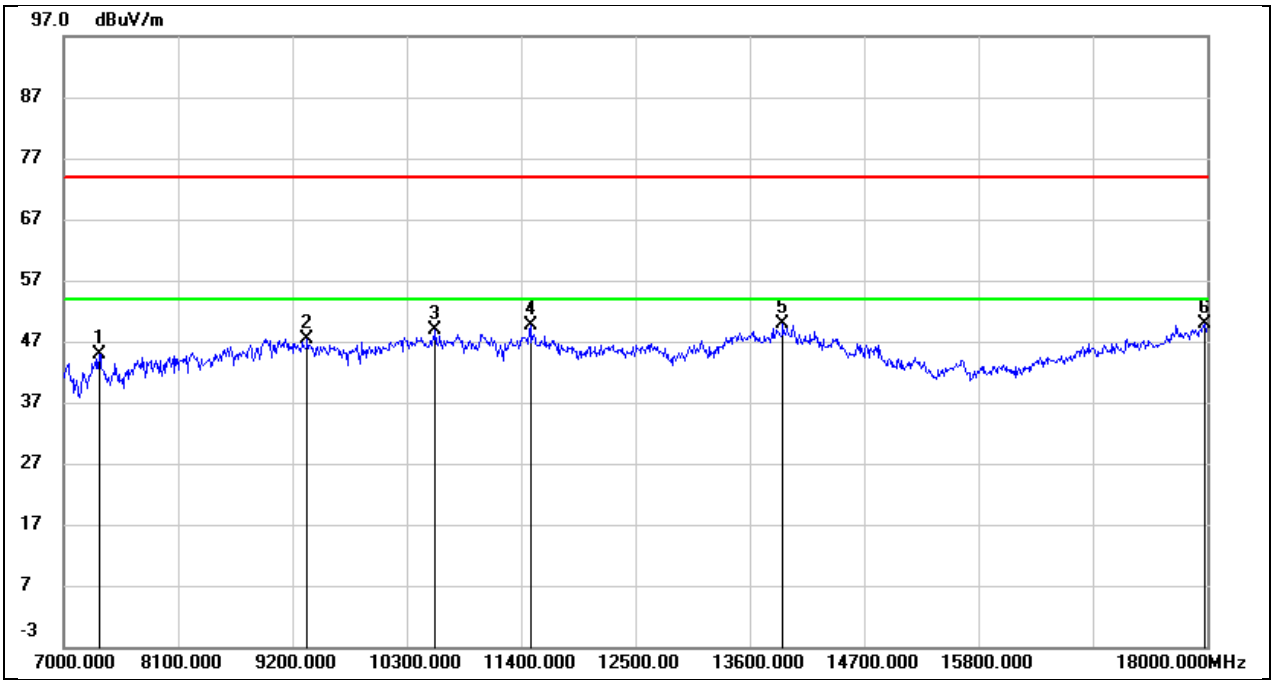

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7341.000	36.90	8.00	44.90	74.00	-29.10	peak
2	9343.000	36.99	10.49	47.48	74.00	-26.52	peak
3	10575.000	35.10	13.70	48.80	74.00	-25.20	peak
4	11488.000	32.79	16.84	49.63	74.00	-24.37	peak
5	13919.000	27.39	22.49	49.88	74.00	-24.12	peak
6	17978.000	23.05	26.88	49.93	74.00	-24.07	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ax HE20	Frequency(MHz):	5785
Polarity:	Horizontal	Test Voltage:	DC 3.3V

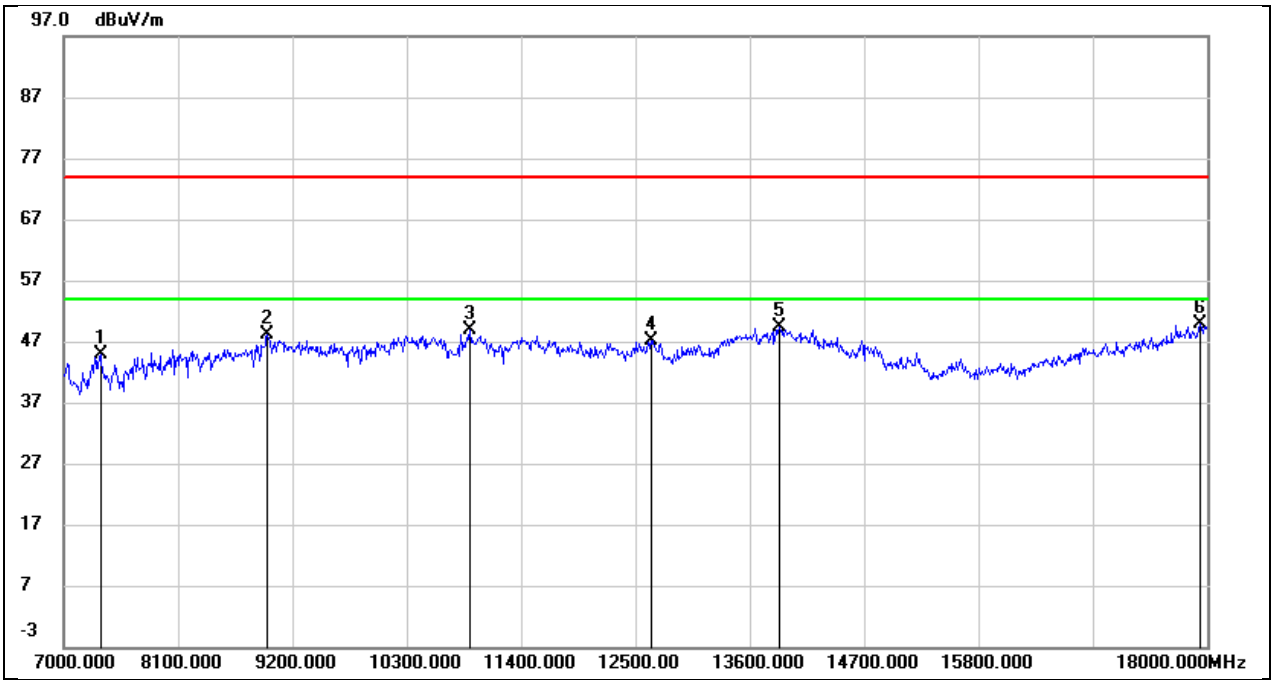

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7352.000	36.91	8.07	44.98	74.00	-29.02	peak
2	8958.000	36.95	11.24	48.19	74.00	-25.81	peak
3	10905.000	34.45	14.39	48.84	74.00	-25.16	peak
4	12654.000	28.81	18.44	47.25	74.00	-26.75	peak
5	13886.000	26.95	22.48	49.43	74.00	-24.57	peak
6	17934.000	23.07	26.69	49.76	74.00	-24.24	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ax HE20	Frequency(MHz):	5785
Polarity:	Vertical	Test Voltage:	DC 3.3V

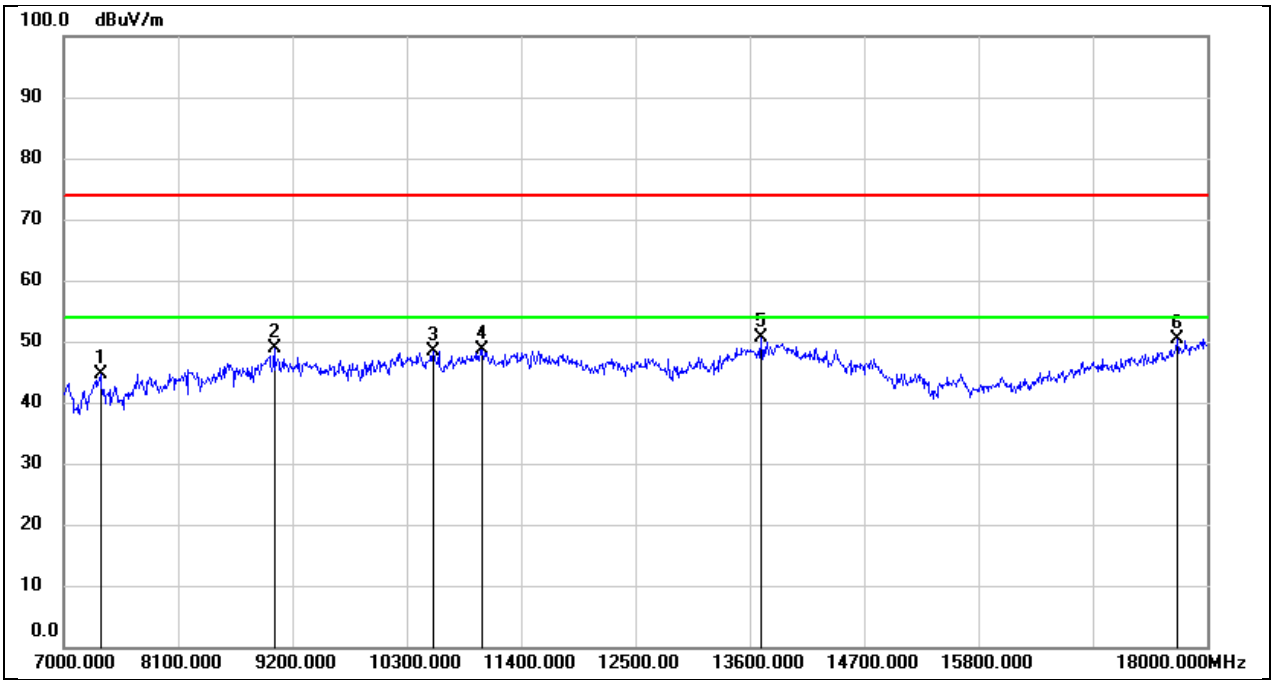

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7352.000	36.50	8.07	44.57	74.00	-29.43	peak
2	9024.000	37.11	11.65	48.76	74.00	-25.24	peak
3	10553.000	34.81	13.64	48.45	74.00	-25.55	peak
4	11026.000	33.72	14.95	48.67	74.00	-25.33	peak
5	13710.000	28.65	21.97	50.62	74.00	-23.38	peak
6	17714.000	25.18	25.14	50.32	74.00	-23.68	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ax HE20	Frequency(MHz):	5825
Polarity:	Horizontal	Test Voltage:	DC 3.3V

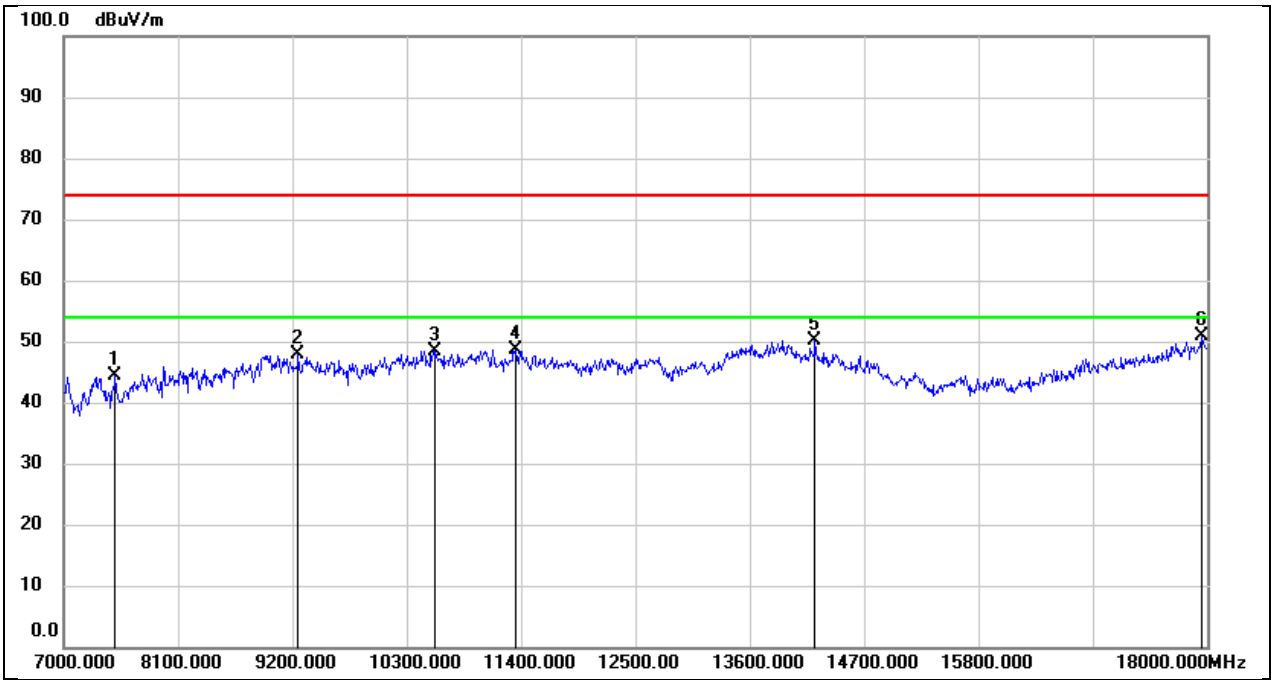

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7495.000	36.80	7.61	44.41	74.00	-29.59	peak
2	9255.000	37.55	10.22	47.77	74.00	-26.23	peak
3	10564.000	34.73	13.68	48.41	74.00	-25.59	peak
4	11345.000	32.34	16.24	48.58	74.00	-25.42	peak
5	14227.000	28.31	21.79	50.10	74.00	-23.90	peak
6	17945.000	24.25	26.74	50.99	74.00	-23.01	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ax HE20	Frequency(MHz):	5825
Polarity:	Vertical	Test Voltage:	DC 3.3V

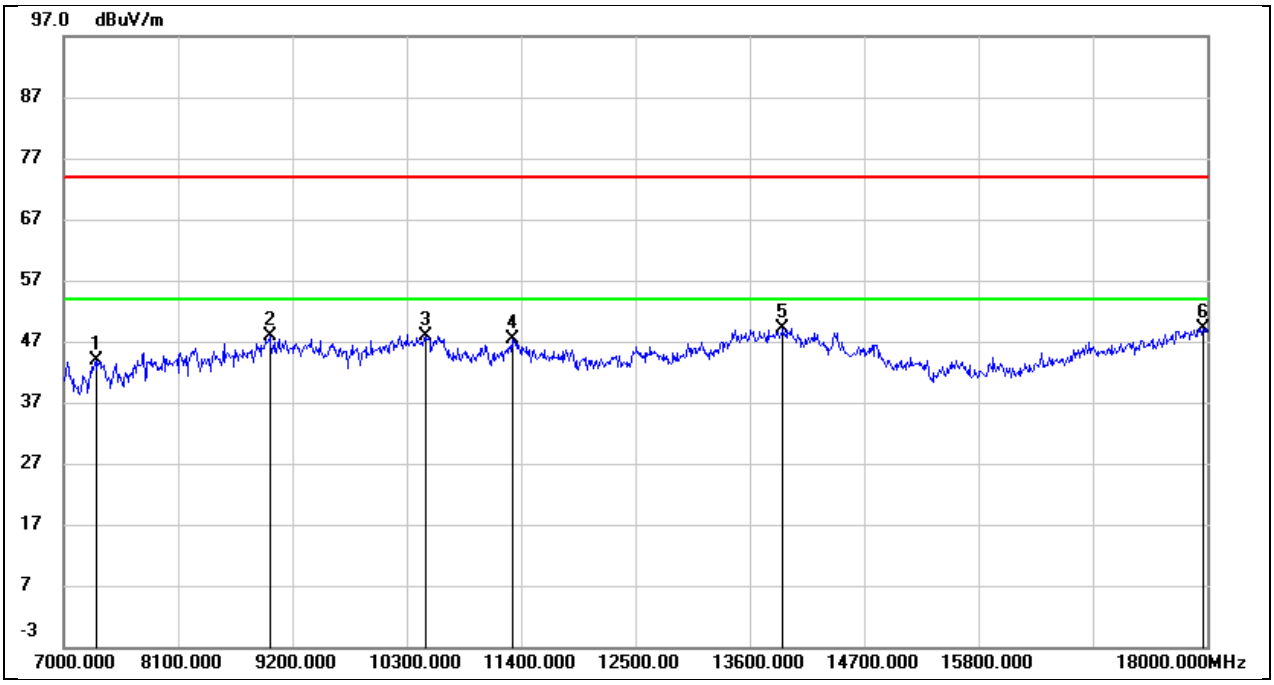

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7308.000	36.23	7.73	43.96	74.00	-30.04	peak
2	8980.000	36.30	11.57	47.87	74.00	-26.13	peak
3	10487.000	34.51	13.46	47.97	74.00	-26.03	peak
4	11312.000	31.26	16.03	47.29	74.00	-26.71	peak
5	13919.000	26.68	22.49	49.17	74.00	-24.83	peak
6	17967.000	22.37	26.83	49.20	74.00	-24.80	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ax HE40	Frequency(MHz):	5190
Polarity:	Horizontal	Test Voltage:	DC 3.3V

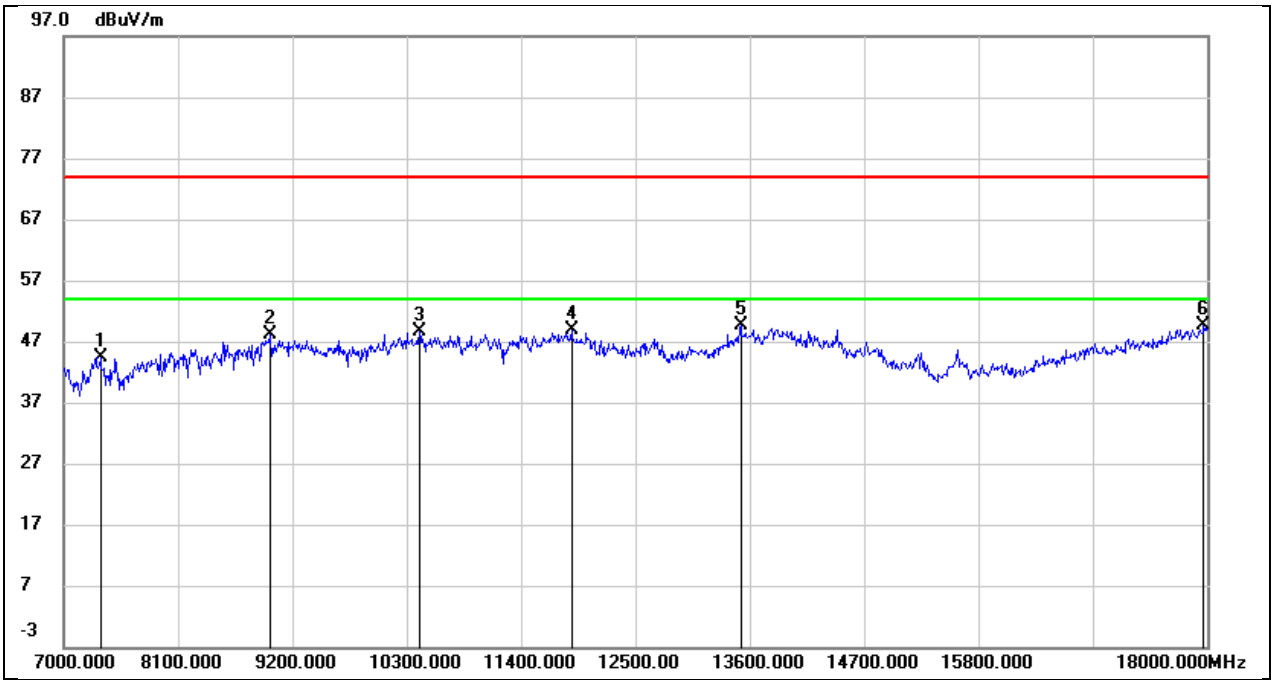

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7352.000	36.39	8.07	44.46	74.00	-29.54	peak
2	8980.000	36.49	11.57	48.06	74.00	-25.94	peak
3	10421.000	35.29	13.29	48.58	74.00	-25.42	peak
4	11884.000	30.81	18.00	48.81	74.00	-25.19	peak
5	13512.000	28.23	21.41	49.64	74.00	-24.36	peak
6	17967.000	22.90	26.83	49.73	74.00	-24.27	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ax HE40	Frequency(MHz):	5190
Polarity:	Vertical	Test Voltage:	DC 3.3V

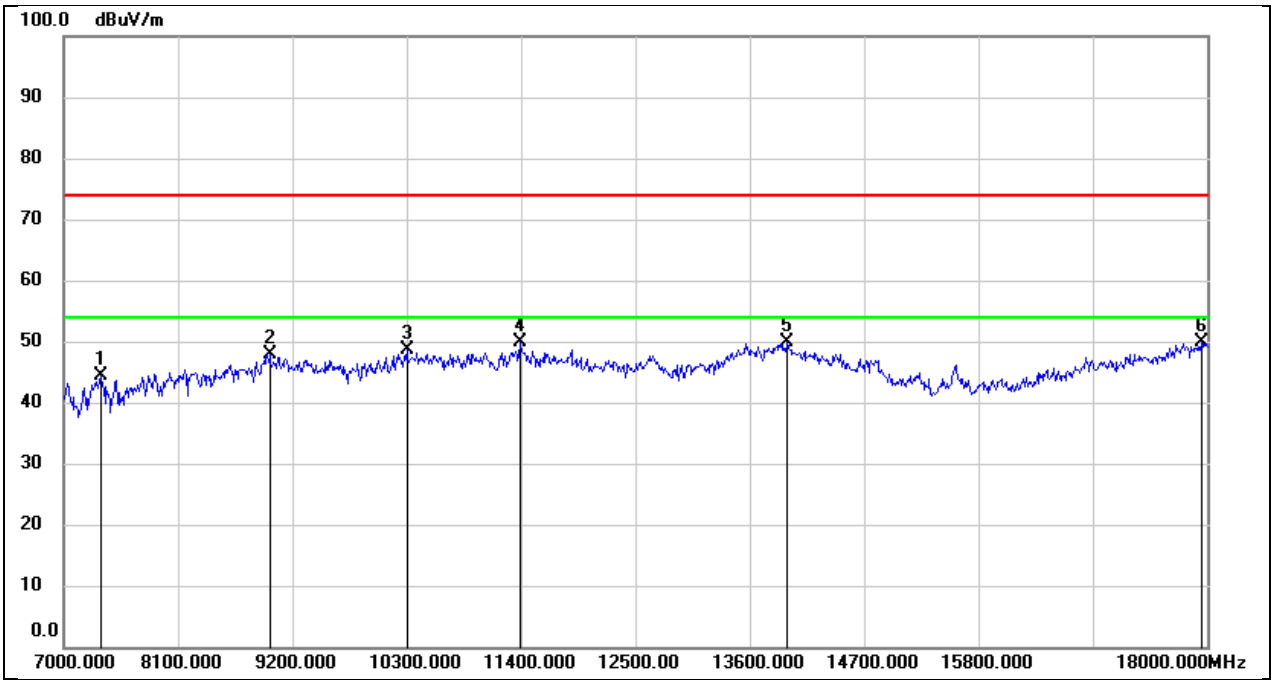

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7352.000	36.26	8.07	44.33	74.00	-29.67	peak
2	8980.000	36.26	11.57	47.83	74.00	-26.17	peak
3	10300.000	35.74	12.78	48.52	74.00	-25.48	peak
4	11389.000	33.36	16.51	49.87	74.00	-24.13	peak
5	13963.000	27.47	22.51	49.98	74.00	-24.02	peak
6	17945.000	23.02	26.74	49.76	74.00	-24.24	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ax HE40	Frequency(MHz):	5230
Polarity:	Horizontal	Test Voltage:	DC 3.3V

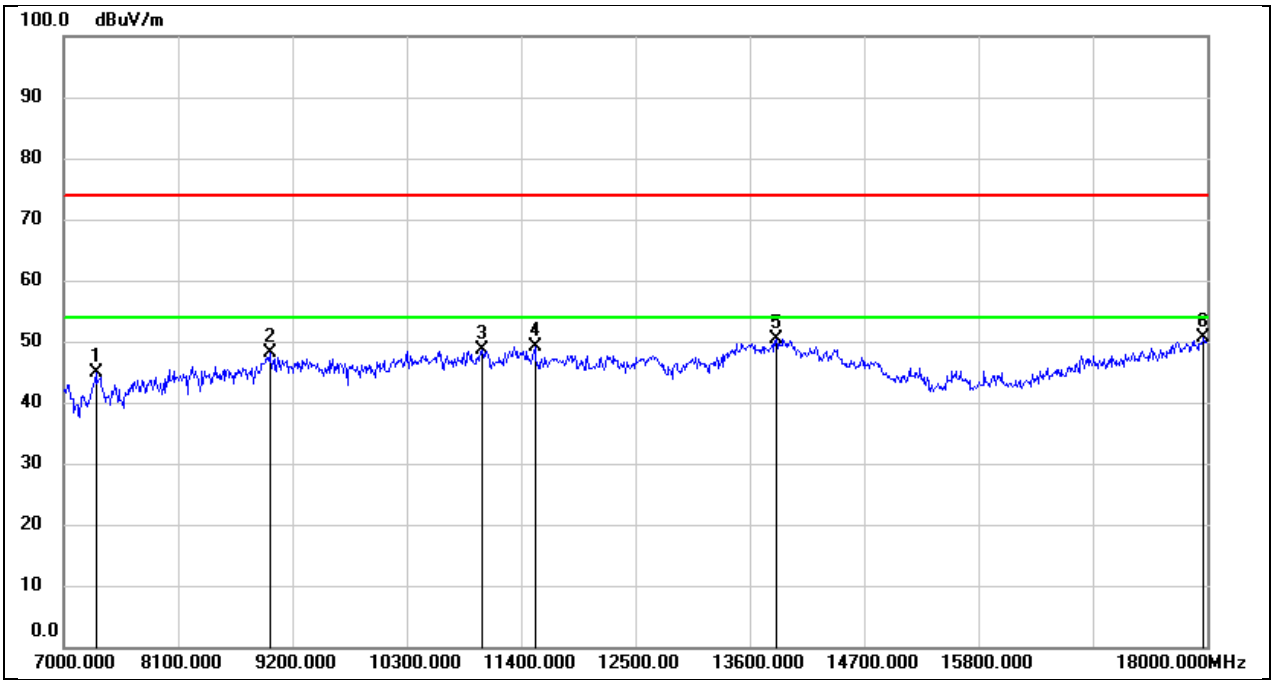

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7308.000	37.22	7.73	44.95	74.00	-29.05	peak
2	8980.000	36.58	11.57	48.15	74.00	-25.85	peak
3	11026.000	33.68	14.95	48.63	74.00	-25.37	peak
4	11532.000	32.30	16.93	49.23	74.00	-24.77	peak
5	13853.000	27.92	22.46	50.38	74.00	-23.62	peak
6	17967.000	23.84	26.83	50.67	74.00	-23.33	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ax HE40	Frequency(MHz):	5230
Polarity:	Vertical	Test Voltage:	DC 3.3V

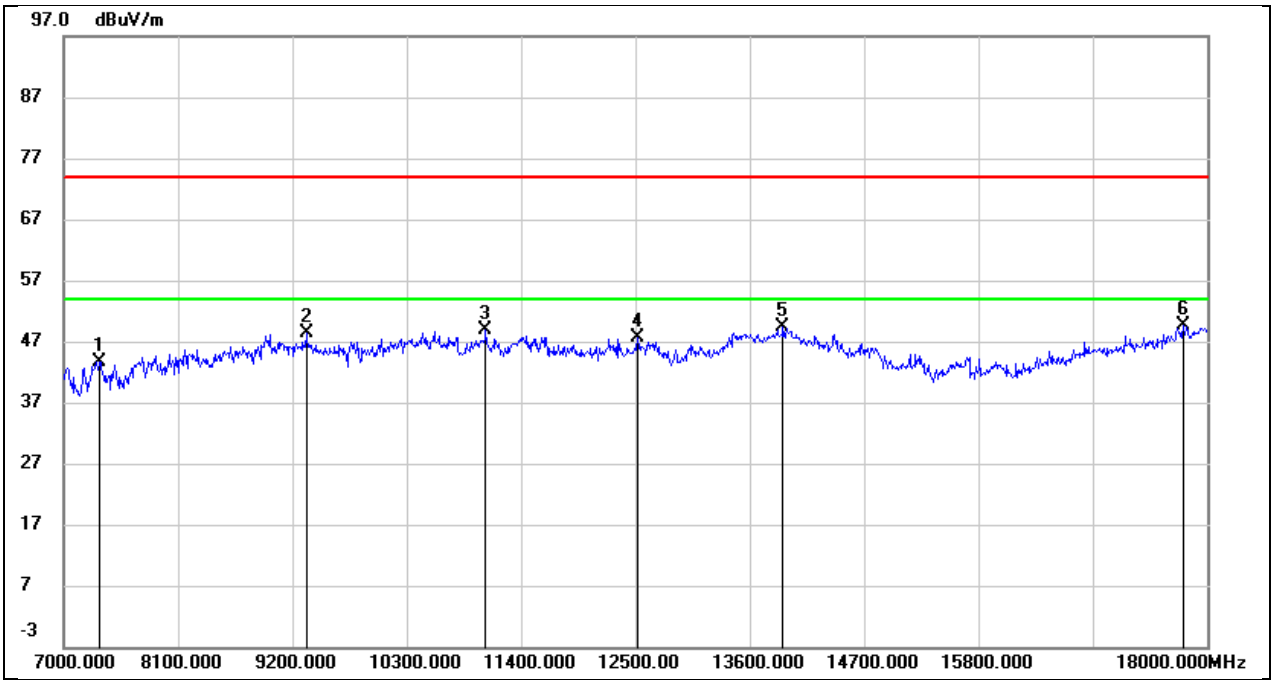

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7341.000	35.69	8.00	43.69	74.00	-30.31	peak
2	9332.000	37.85	10.45	48.30	74.00	-25.70	peak
3	11059.000	33.82	15.02	48.84	74.00	-25.16	peak
4	12522.000	29.16	18.52	47.68	74.00	-26.32	peak
5	13919.000	26.93	22.49	49.42	74.00	-24.58	peak
6	17769.000	23.92	25.76	49.68	74.00	-24.32	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ax HE40	Frequency(MHz):	5270
Polarity:	Horizontal	Test Voltage:	DC 3.3V

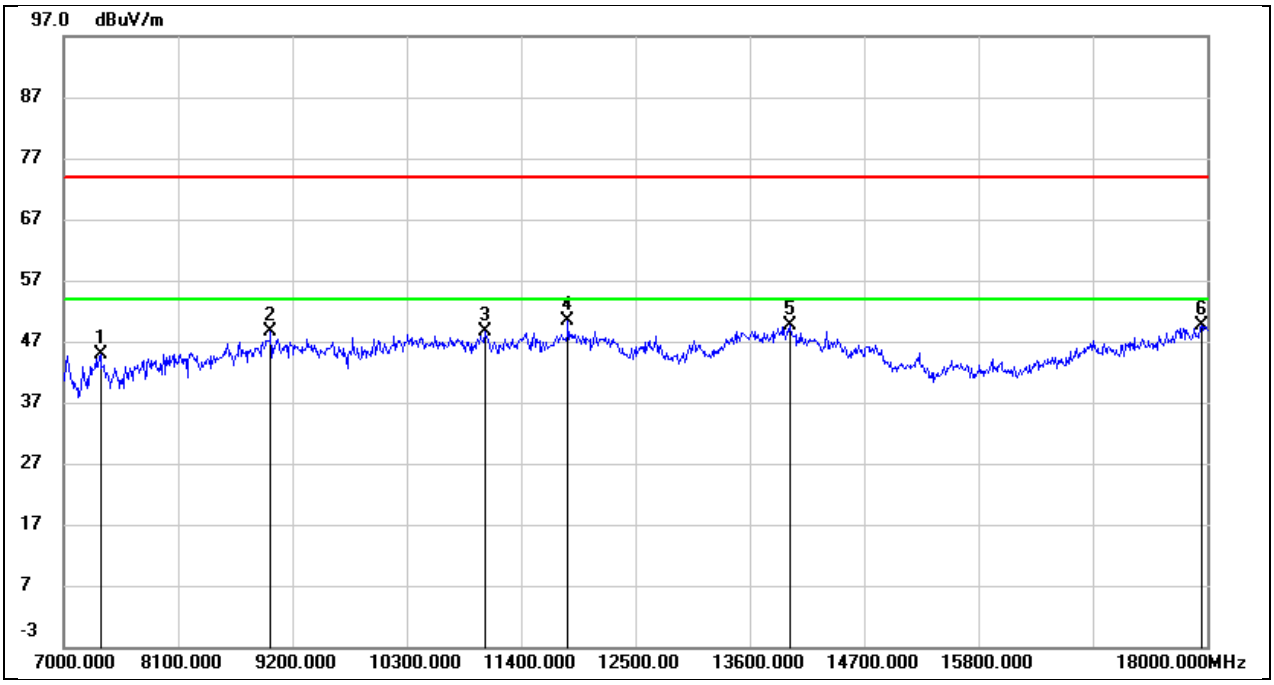

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7352.000	36.83	8.07	44.90	74.00	-29.10	peak
2	8991.000	36.96	11.73	48.69	74.00	-25.31	peak
3	11059.000	33.56	15.02	48.58	74.00	-25.42	peak
4	11851.000	32.50	17.83	50.33	74.00	-23.67	peak
5	13985.000	27.09	22.53	49.62	74.00	-24.38	peak
6	17945.000	22.84	26.74	49.58	74.00	-24.42	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ax HE40	Frequency(MHz):	5270
Polarity:	Vertical	Test Voltage:	DC 3.3V

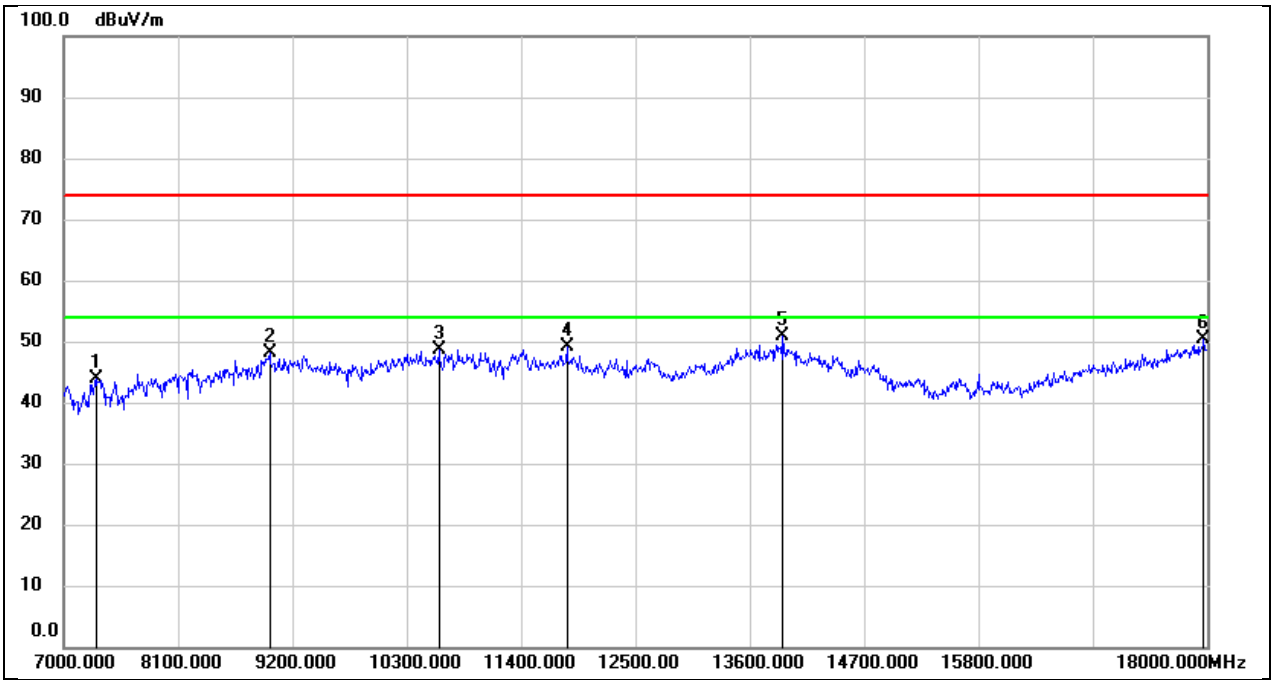

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7308.000	36.08	7.73	43.81	74.00	-30.19	peak
2	8980.000	36.44	11.57	48.01	74.00	-25.99	peak
3	10608.000	34.96	13.77	48.73	74.00	-25.27	peak
4	11840.000	31.46	17.76	49.22	74.00	-24.78	peak
5	13919.000	28.50	22.49	50.99	74.00	-23.01	peak
6	17967.000	23.55	26.83	50.38	74.00	-23.62	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ax HE40	Frequency(MHz):	5310
Polarity:	Horizontal	Test Voltage:	DC 3.3V

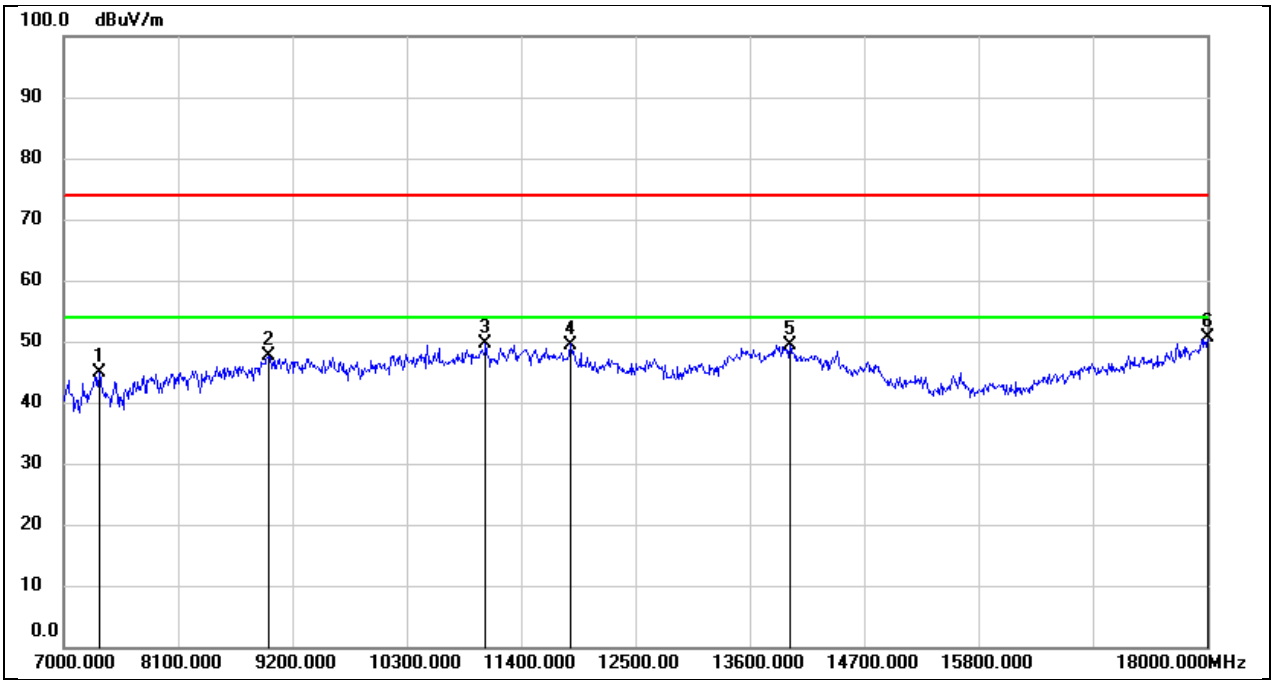

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7341.000	36.94	8.00	44.94	74.00	-29.06	peak
2	8969.000	36.17	11.40	47.57	74.00	-26.43	peak
3	11059.000	34.64	15.02	49.66	74.00	-24.34	peak
4	11873.000	31.56	17.94	49.50	74.00	-24.50	peak
5	13985.000	26.93	22.53	49.46	74.00	-24.54	peak
6	18000.000	23.77	26.97	50.74	74.00	-23.26	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ax HE40	Frequency(MHz):	5310
Polarity:	Vertical	Test Voltage:	DC 3.3V

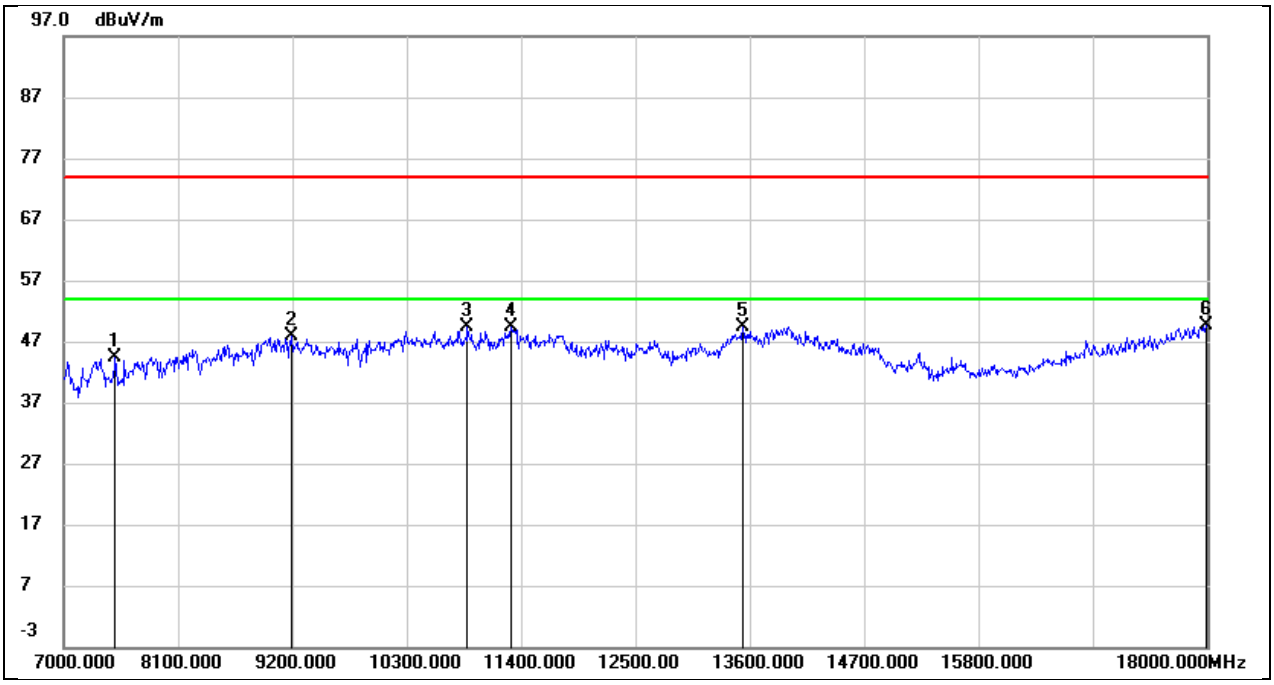

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7495.000	36.72	7.61	44.33	74.00	-29.67	peak
2	9189.000	37.69	10.13	47.82	74.00	-26.18	peak
3	10883.000	34.99	14.28	49.27	74.00	-24.73	peak
4	11301.000	33.51	15.96	49.47	74.00	-24.53	peak
5	13534.000	28.01	21.41	49.42	74.00	-24.58	peak
6	17989.000	22.63	26.92	49.55	74.00	-24.45	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ax HE40	Frequency(MHz):	5510
Polarity:	Horizontal	Test Voltage:	DC 3.3V

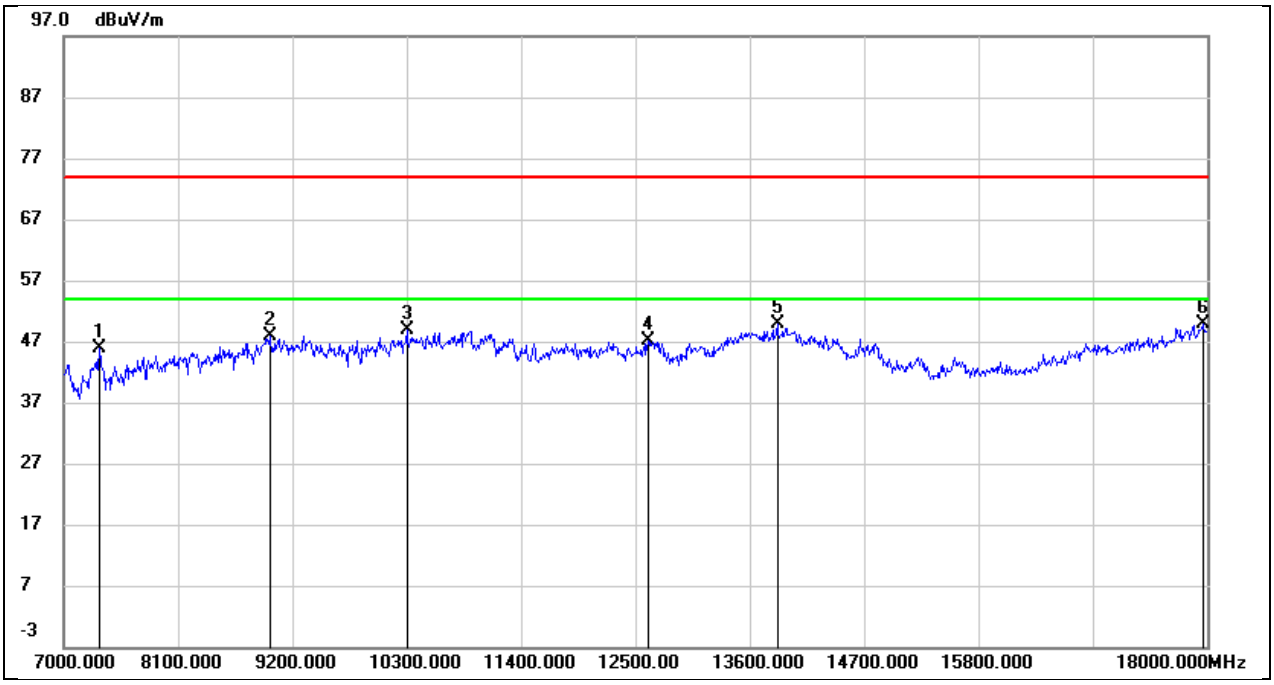

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7341.000	37.93	8.00	45.93	74.00	-28.07	peak
2	8980.000	36.27	11.57	47.84	74.00	-26.16	peak
3	10300.000	36.19	12.78	48.97	74.00	-25.03	peak
4	12621.000	28.75	18.38	47.13	74.00	-26.87	peak
5	13864.000	27.42	22.45	49.87	74.00	-24.13	peak
6	17956.000	23.04	26.78	49.82	74.00	-24.18	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ax HE40	Frequency(MHz):	5510
Polarity:	Vertical	Test Voltage:	DC 3.3V

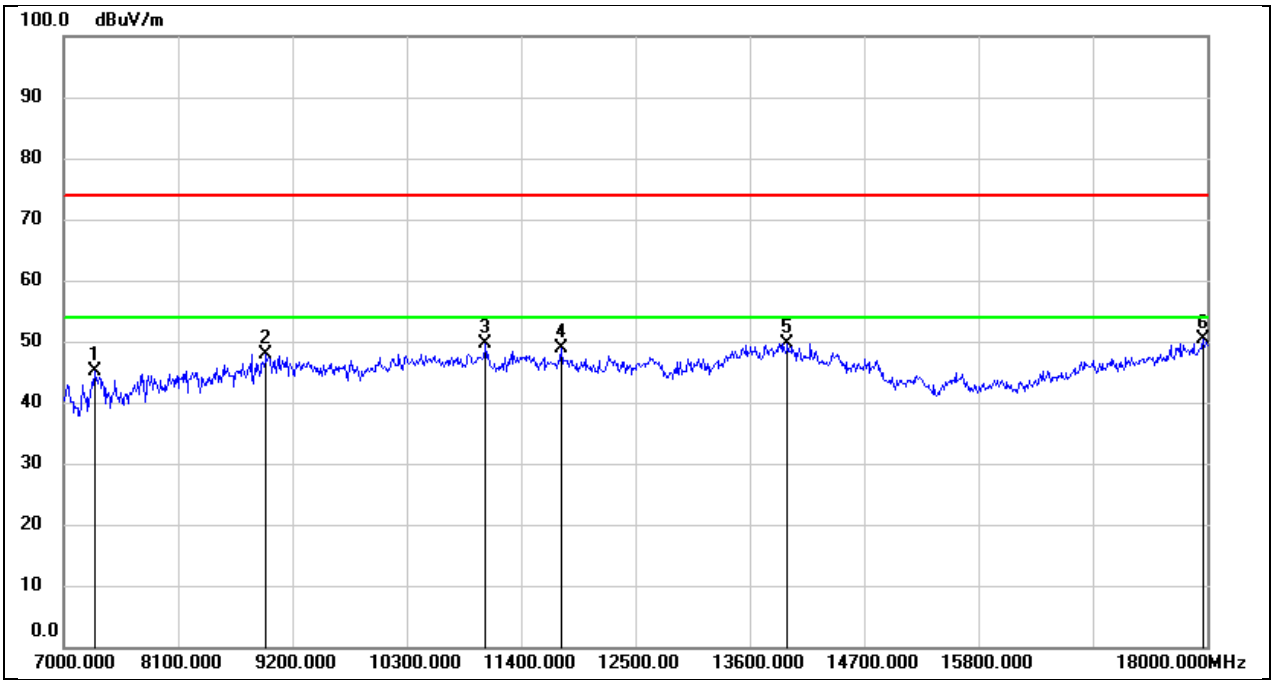

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7297.000	37.59	7.65	45.24	74.00	-28.76	peak
2	8947.000	36.73	11.08	47.81	74.00	-26.19	peak
3	11059.000	34.52	15.02	49.54	74.00	-24.46	peak
4	11785.000	31.25	17.52	48.77	74.00	-25.23	peak
5	13963.000	27.19	22.51	49.70	74.00	-24.30	peak
6	17956.000	23.62	26.78	50.40	74.00	-23.60	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ax HE40	Frequency(MHz):	5550
Polarity:	Horizontal	Test Voltage:	DC 3.3V

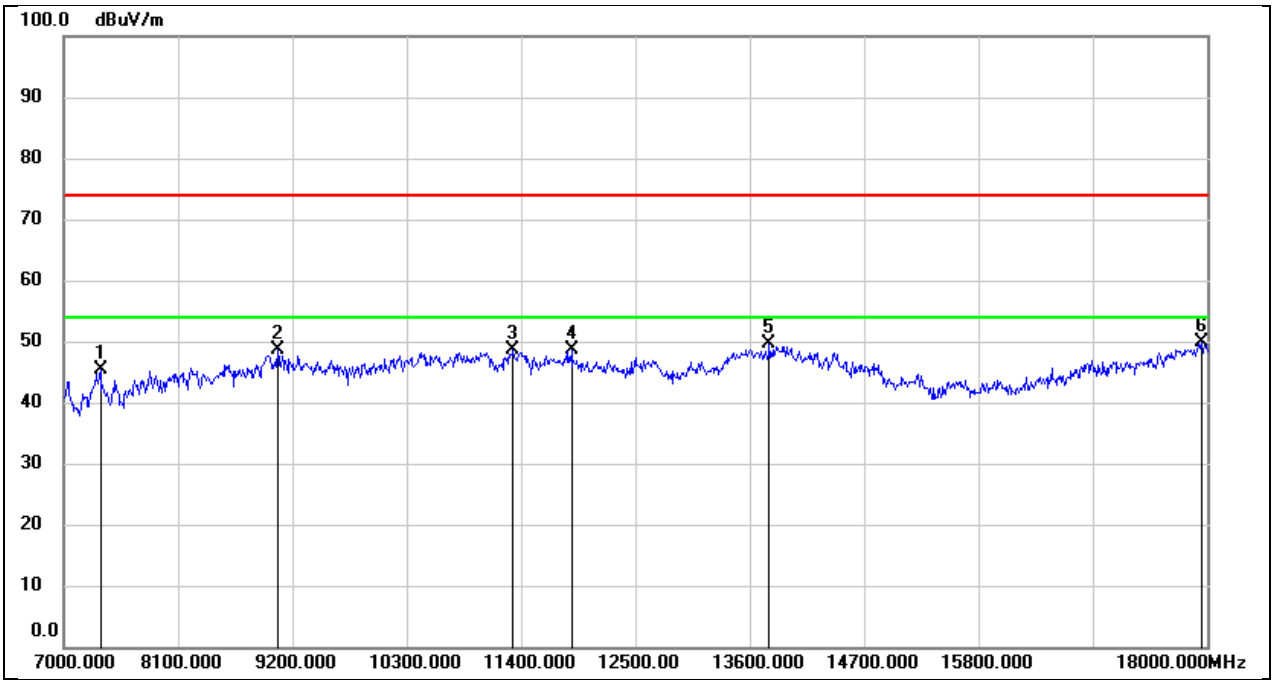

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7352.000	37.30	8.07	45.37	74.00	-28.63	peak
2	9057.000	37.26	11.35	48.61	74.00	-25.39	peak
3	11323.000	32.56	16.10	48.66	74.00	-25.34	peak
4	11884.000	30.70	18.00	48.70	74.00	-25.30	peak
5	13787.000	27.35	22.36	49.71	74.00	-24.29	peak
6	17945.000	23.17	26.74	49.91	74.00	-24.09	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ax HE40	Frequency(MHz):	5550
Polarity:	Vertical	Test Voltage:	DC 3.3V

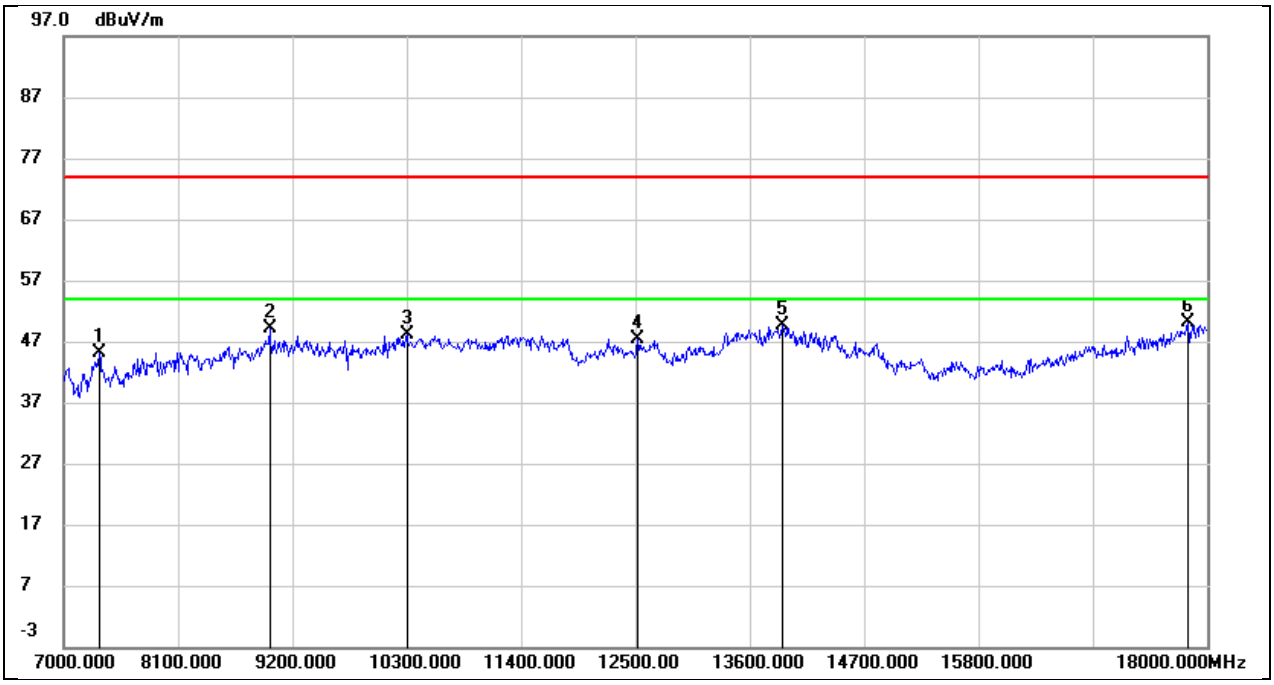

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7341.000	37.03	8.00	45.03	74.00	-28.97	peak
2	8980.000	37.58	11.57	49.15	74.00	-24.85	peak
3	10300.000	35.33	12.78	48.11	74.00	-25.89	peak
4	12522.000	28.83	18.52	47.35	74.00	-26.65	peak
5	13908.000	27.06	22.49	49.55	74.00	-24.45	peak
6	17813.000	23.97	26.18	50.15	74.00	-23.85	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ax HE40	Frequency(MHz):	5670
Polarity:	Horizontal	Test Voltage:	DC 3.3V

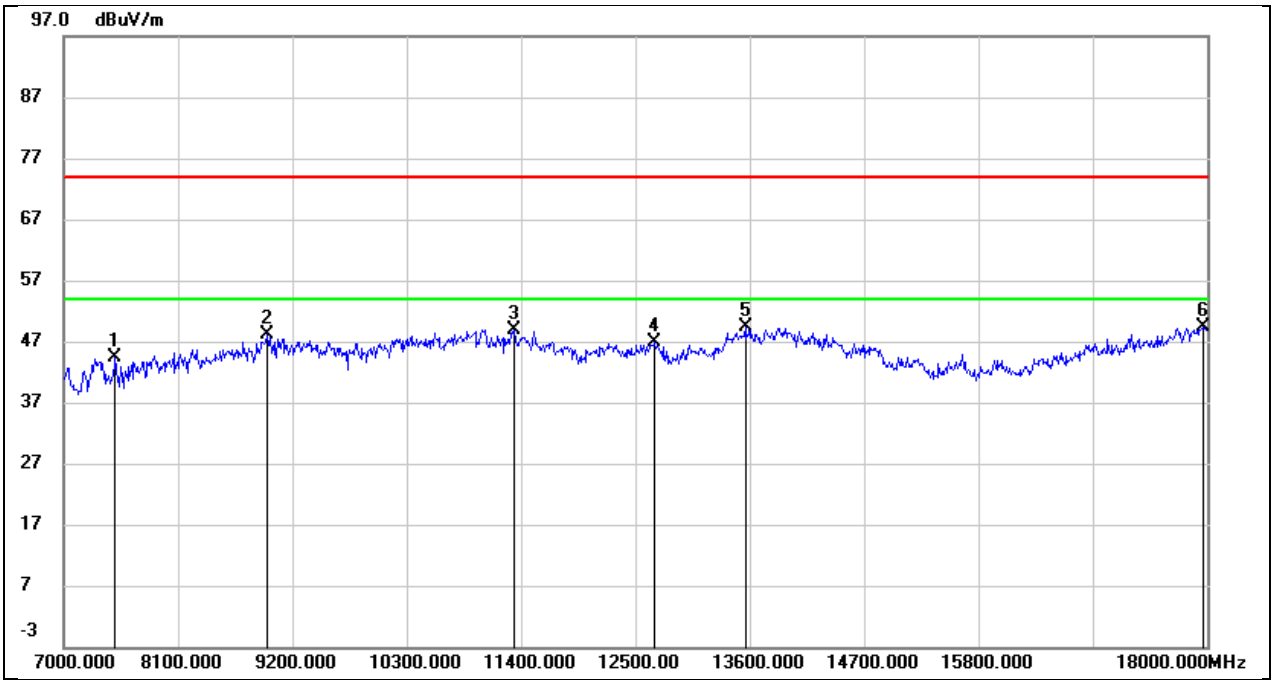

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7495.000	36.82	7.61	44.43	74.00	-29.57	peak
2	8958.000	36.84	11.24	48.08	74.00	-25.92	peak
3	11334.000	32.70	16.16	48.86	74.00	-25.14	peak
4	12687.000	28.38	18.53	46.91	74.00	-27.09	peak
5	13556.000	27.86	21.41	49.27	74.00	-24.73	peak
6	17956.000	22.71	26.78	49.49	74.00	-24.51	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ax HE40	Frequency(MHz):	5670
Polarity:	Vertical	Test Voltage:	DC 3.3V

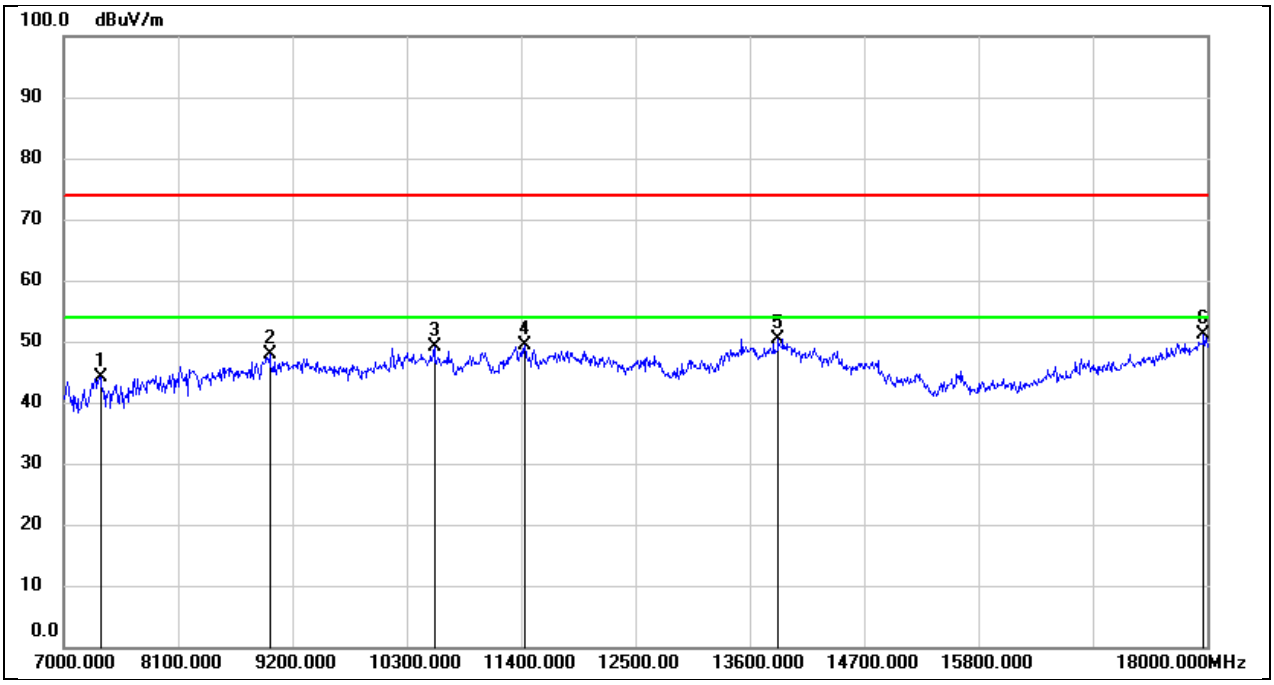

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7352.000	35.99	8.07	44.06	74.00	-29.94	peak
2	8980.000	36.35	11.57	47.92	74.00	-26.08	peak
3	10564.000	35.39	13.68	49.07	74.00	-24.93	peak
4	11433.000	32.61	16.68	49.29	74.00	-24.71	peak
5	13875.000	28.00	22.46	50.46	74.00	-23.54	peak
6	17967.000	24.22	26.83	51.05	74.00	-22.95	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ax HE40	Frequency(MHz):	5710
Polarity:	Horizontal	Test Voltage:	DC 3.3V

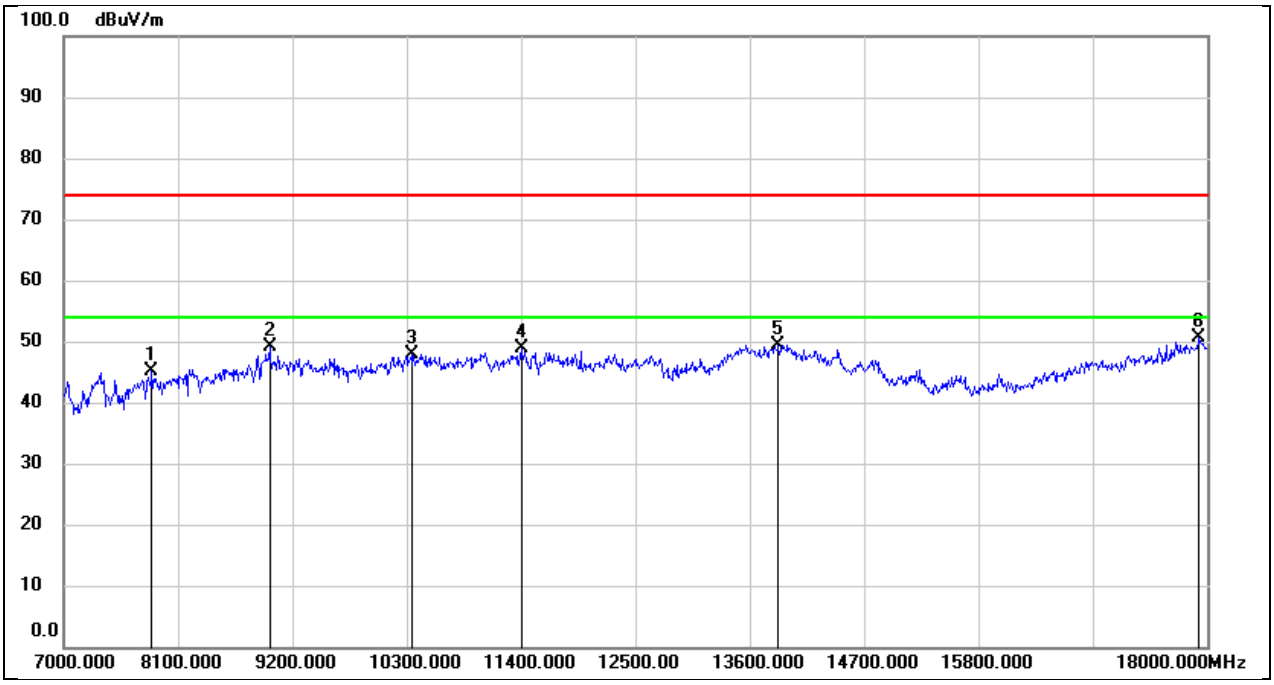

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7847.000	38.24	6.86	45.10	74.00	-28.90	peak
2	8980.000	37.61	11.57	49.18	74.00	-24.82	peak
3	10344.000	35.01	12.98	47.99	74.00	-26.01	peak
4	11400.000	32.31	16.57	48.88	74.00	-25.12	peak
5	13875.000	26.97	22.46	49.43	74.00	-24.57	peak
6	17923.000	23.98	26.64	50.62	74.00	-23.38	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ax HE40	Frequency(MHz):	5710
Polarity:	Vertical	Test Voltage:	DC 3.3V

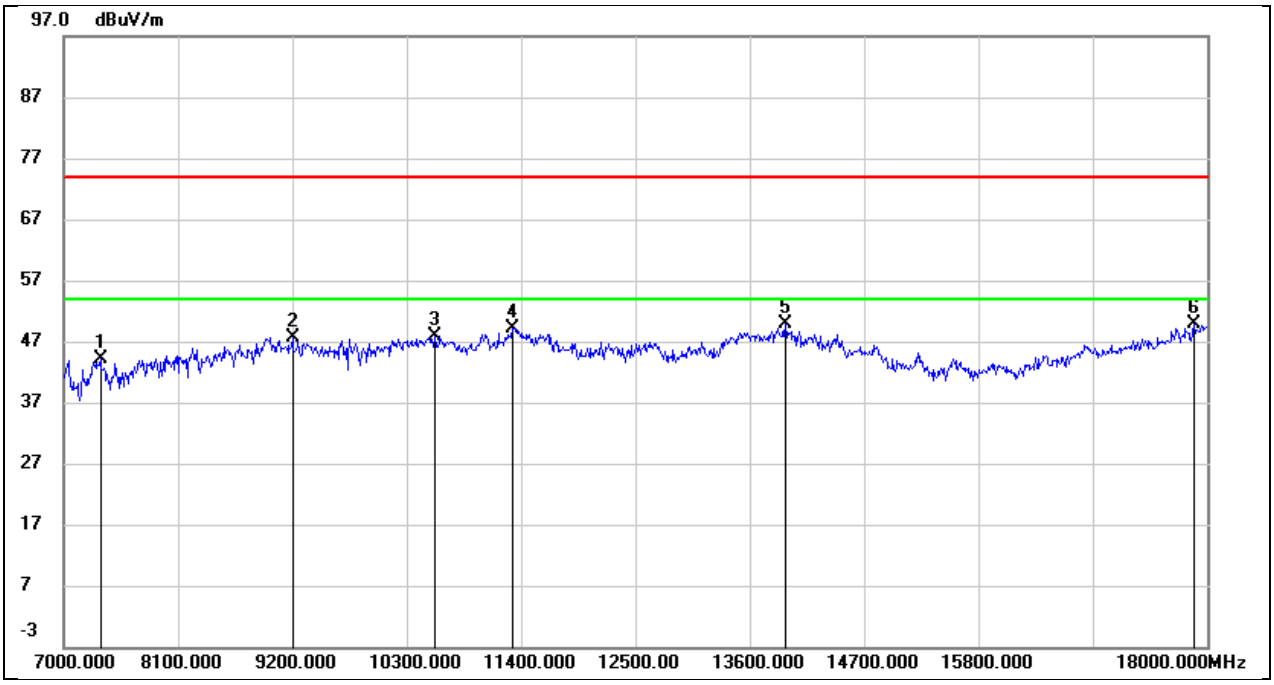

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7352.000	36.17	8.07	44.24	74.00	-29.76	peak
2	9200.000	37.68	10.04	47.72	74.00	-26.28	peak
3	10575.000	34.25	13.70	47.95	74.00	-26.05	peak
4	11312.000	33.18	16.03	49.21	74.00	-24.79	peak
5	13941.000	27.34	22.50	49.84	74.00	-24.16	peak
6	17868.000	23.59	26.41	50.00	74.00	-24.00	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ax HE40	Frequency(MHz):	5755
Polarity:	Horizontal	Test Voltage:	DC 3.3V

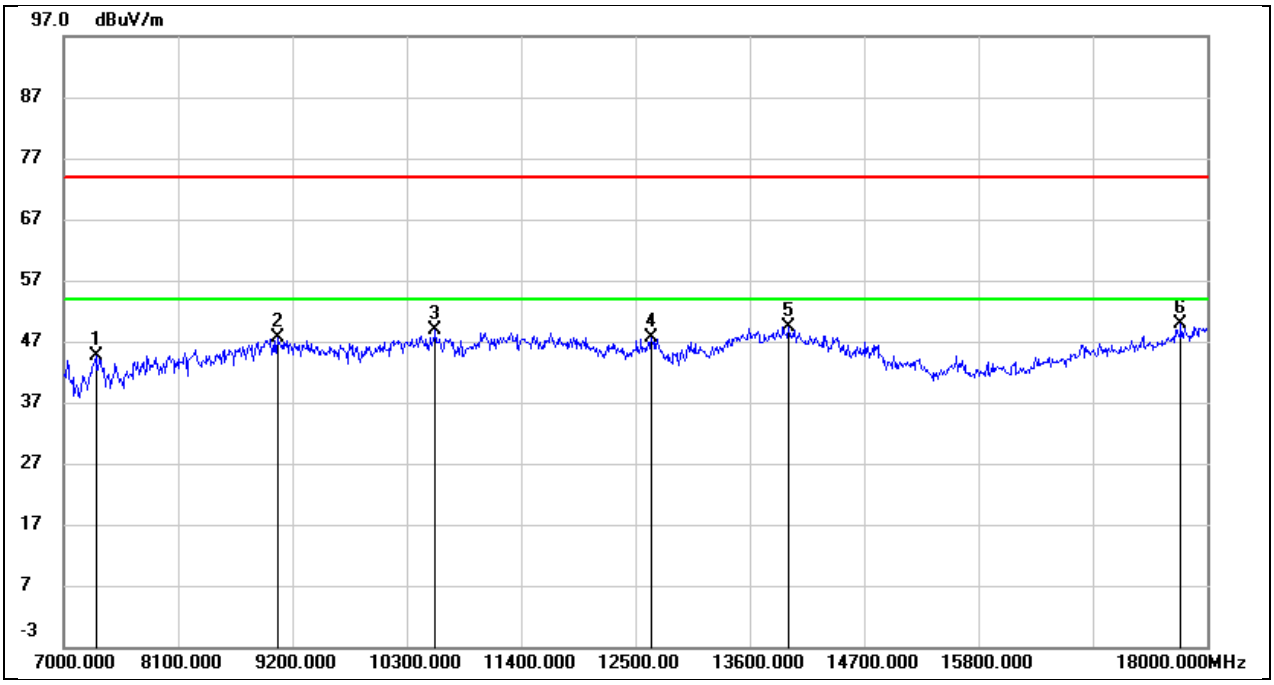

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7308.000	36.82	7.73	44.55	74.00	-29.45	peak
2	9057.000	36.26	11.35	47.61	74.00	-26.39	peak
3	10575.000	35.12	13.70	48.82	74.00	-25.18	peak
4	12654.000	29.27	18.44	47.71	74.00	-26.29	peak
5	13974.000	26.75	22.53	49.28	74.00	-24.72	peak
6	17747.000	24.24	25.52	49.76	74.00	-24.24	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ax HE40	Frequency(MHz):	5755
Polarity:	Vertical	Test Voltage:	DC 3.3V

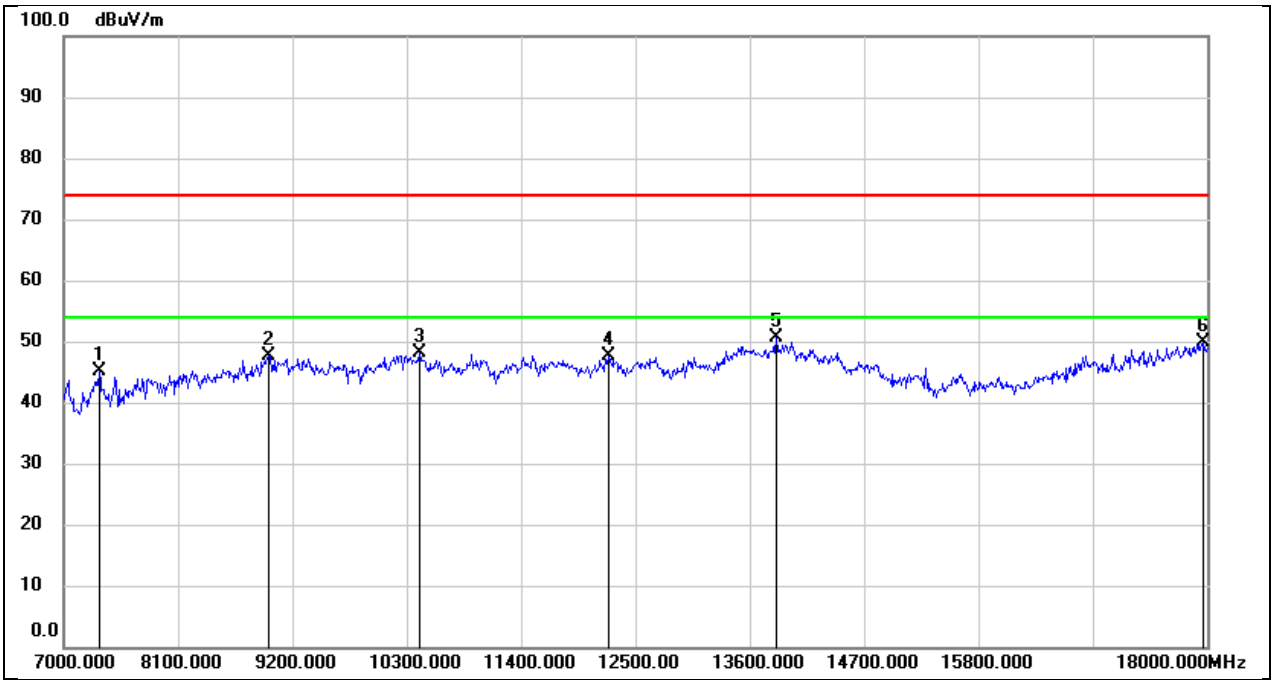

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7341.000	37.10	8.00	45.10	74.00	-28.90	peak
2	8969.000	36.22	11.40	47.62	74.00	-26.38	peak
3	10421.000	34.81	13.29	48.10	74.00	-25.90	peak
4	12247.000	29.02	18.68	47.70	74.00	-26.30	peak
5	13853.000	28.18	22.46	50.64	74.00	-23.36	peak
6	17967.000	23.03	26.83	49.86	74.00	-24.14	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ax HE40	Frequency(MHz):	5795
Polarity:	Horizontal	Test Voltage:	DC 3.3V

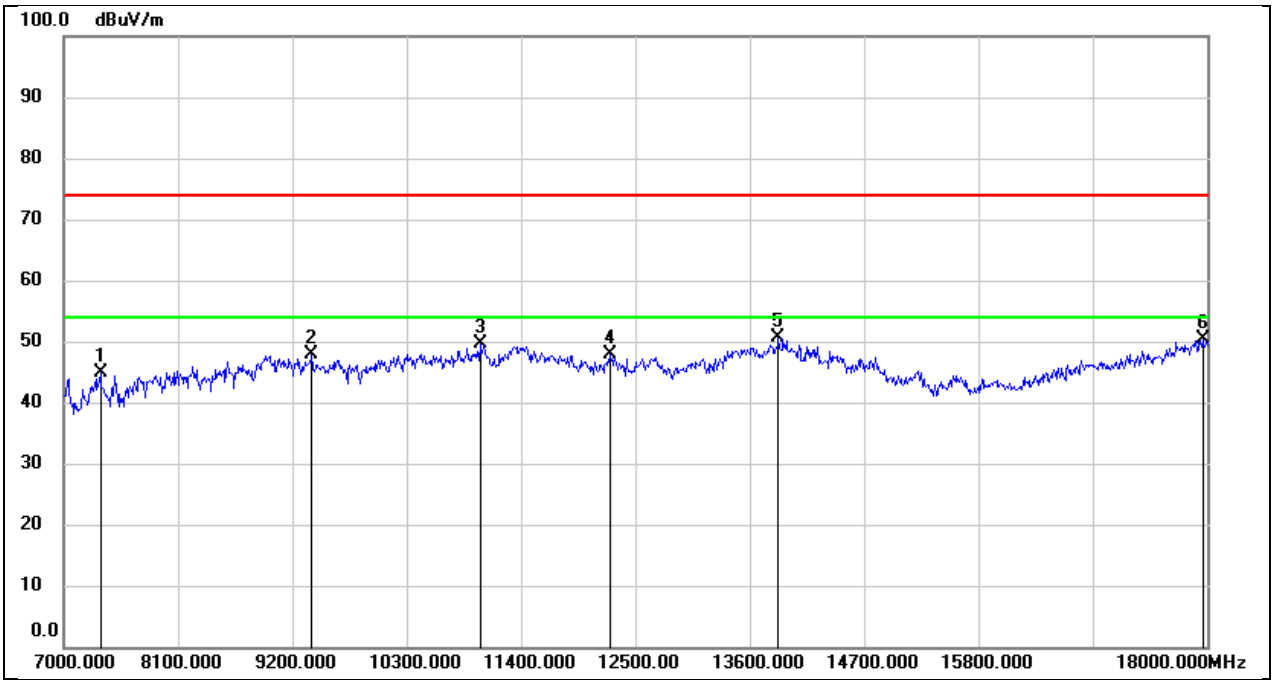

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7352.000	36.89	8.07	44.96	74.00	-29.04	peak
2	9387.000	37.16	10.63	47.79	74.00	-26.21	peak
3	11004.000	34.78	14.90	49.68	74.00	-24.32	peak
4	12258.000	29.26	18.70	47.96	74.00	-26.04	peak
5	13875.000	28.10	22.46	50.56	74.00	-23.44	peak
6	17956.000	23.56	26.78	50.34	74.00	-23.66	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ax HE40	Frequency(MHz):	5795
Polarity:	Vertical	Test Voltage:	DC 3.3V

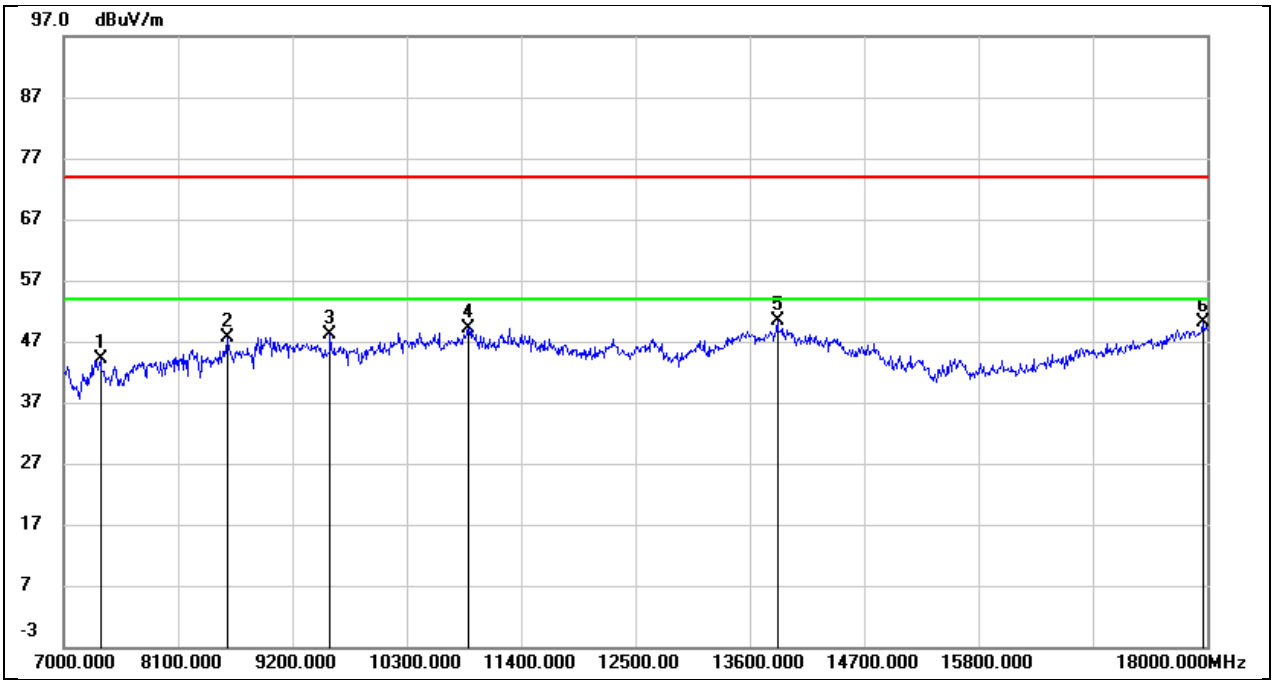

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7352.000	35.98	8.07	44.05	74.00	-29.95	peak
2	8573.000	38.77	8.92	47.69	74.00	-26.31	peak
3	9563.000	37.22	10.96	48.18	74.00	-25.82	peak
4	10894.000	34.87	14.33	49.20	74.00	-24.80	peak
5	13864.000	27.86	22.45	50.31	74.00	-23.69	peak
6	17956.000	23.29	26.78	50.07	74.00	-23.93	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ax HE80	Frequency(MHz):	5210
Polarity:	Horizontal	Test Voltage:	DC 3.3V

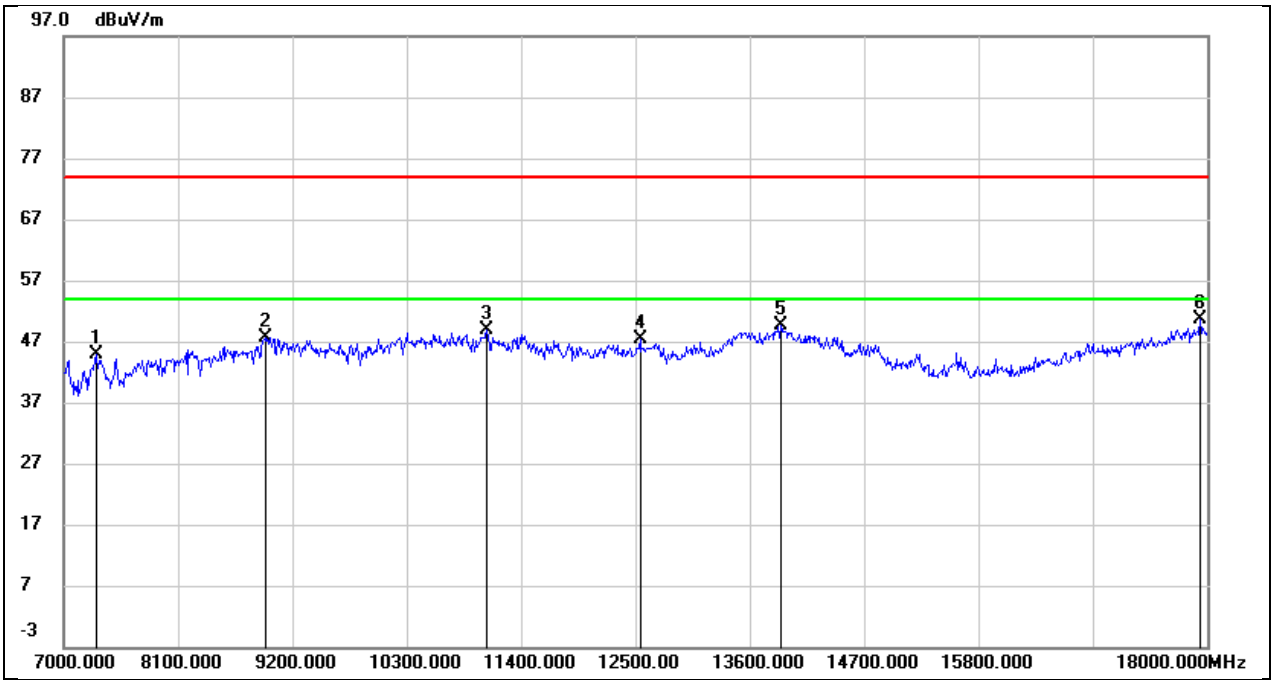

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7308.000	37.15	7.73	44.88	74.00	-29.12	peak
2	8936.000	36.69	10.91	47.60	74.00	-26.40	peak
3	11070.000	33.81	15.04	48.85	74.00	-25.15	peak
4	12544.000	28.80	18.46	47.26	74.00	-26.74	peak
5	13897.000	27.10	22.47	49.57	74.00	-24.43	peak
6	17934.000	23.83	26.69	50.52	74.00	-23.48	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ax HE80	Frequency(MHz):	5210
Polarity:	Vertical	Test Voltage:	DC 3.3V

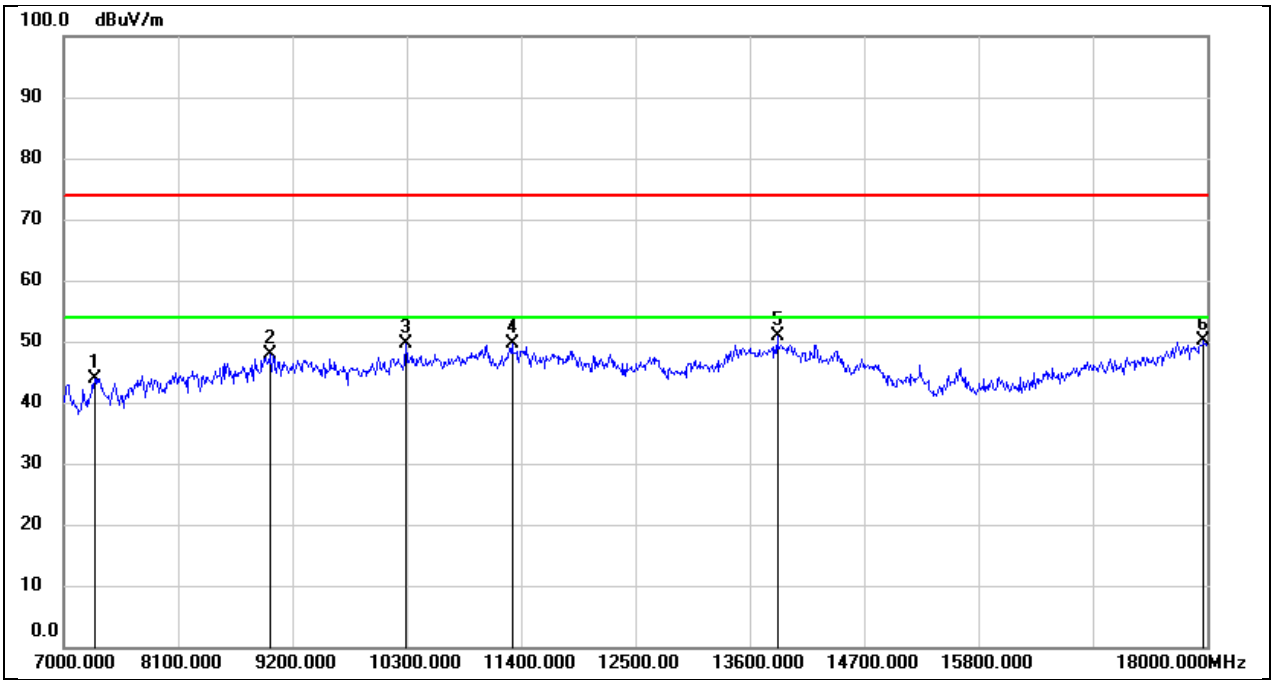

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7297.000	36.32	7.65	43.97	74.00	-30.03	peak
2	8980.000	36.20	11.57	47.77	74.00	-26.23	peak
3	10289.000	36.93	12.74	49.67	74.00	-24.33	peak
4	11312.000	33.63	16.03	49.66	74.00	-24.34	peak
5	13864.000	28.42	22.45	50.87	74.00	-23.13	peak
6	17967.000	23.37	26.83	50.20	74.00	-23.80	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ax HE80	Frequency(MHz):	5290
Polarity:	Horizontal	Test Voltage:	DC 3.3V

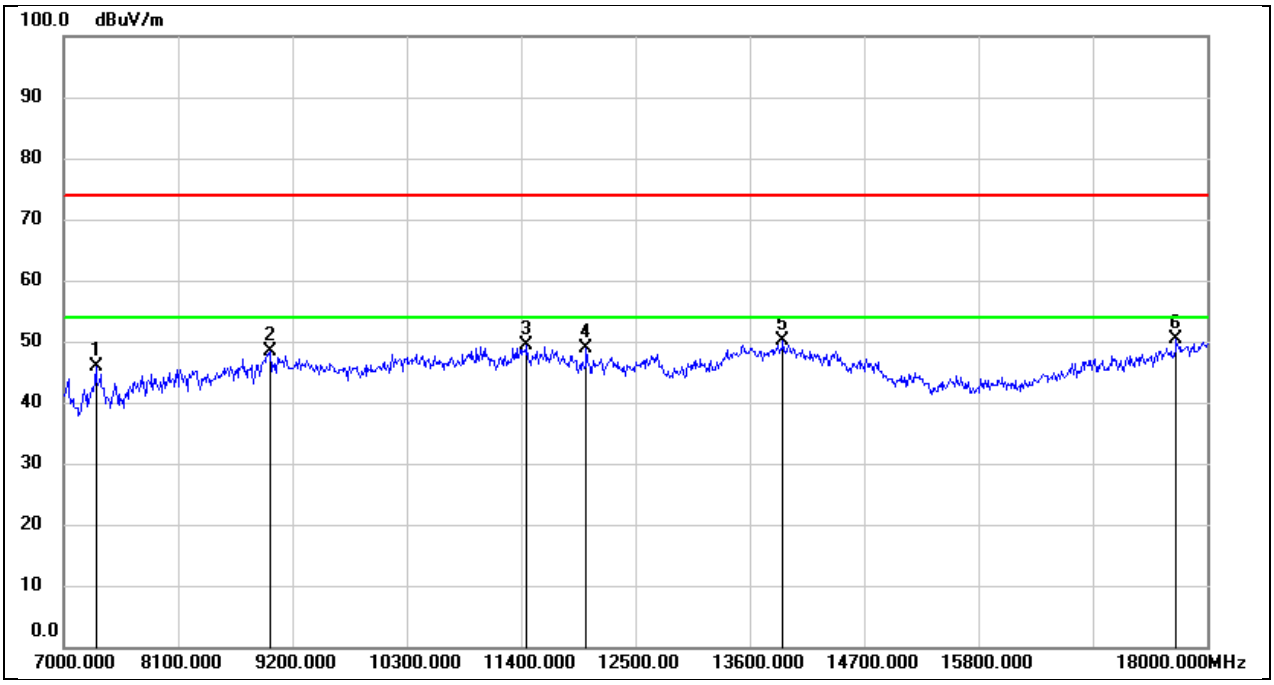

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7308.000	38.03	7.73	45.76	74.00	-28.24	peak
2	8991.000	36.70	11.73	48.43	74.00	-25.57	peak
3	11455.000	32.76	16.74	49.50	74.00	-24.50	peak
4	12027.000	30.20	18.60	48.80	74.00	-25.20	peak
5	13919.000	27.56	22.49	50.05	74.00	-23.95	peak
6	17703.000	25.32	25.01	50.33	74.00	-23.67	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ax HE80	Frequency(MHz):	5290
Polarity:	Vertical	Test Voltage:	DC 3.3V

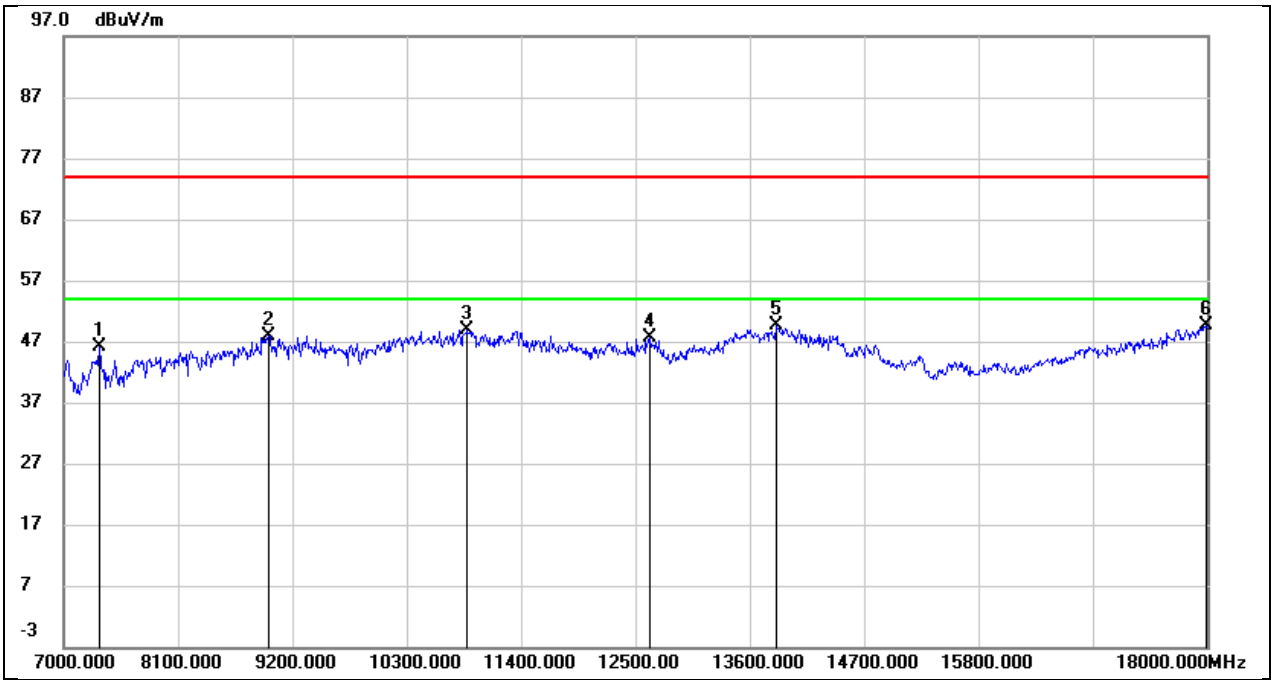

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7341.000	38.22	8.00	46.22	74.00	-27.78	peak
2	8969.000	36.55	11.40	47.95	74.00	-26.05	peak
3	10883.000	34.60	14.28	48.88	74.00	-25.12	peak
4	12643.000	29.18	18.43	47.61	74.00	-26.39	peak
5	13853.000	27.29	22.46	49.75	74.00	-24.25	peak
6	17989.000	22.67	26.92	49.59	74.00	-24.41	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ax HE80	Frequency(MHz):	5530
Polarity:	Horizontal	Test Voltage:	DC 3.3V

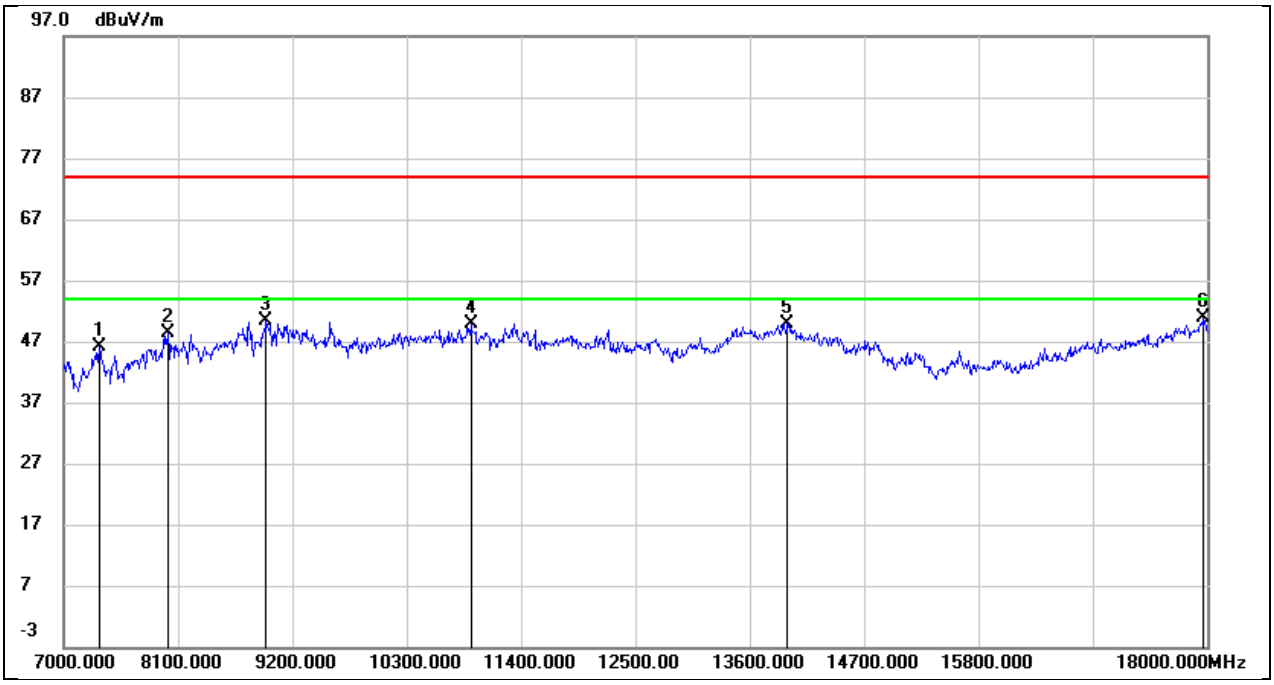

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7341.000	38.02	8.00	46.02	74.00	-27.98	peak
2	8001.000	41.47	6.89	48.36	74.00	-25.64	peak
3	8947.000	39.38	11.08	50.46	74.00	-23.54	peak
4	10916.000	35.44	14.45	49.89	74.00	-24.11	peak
5	13963.000	27.46	22.51	49.97	74.00	-24.03	peak
6	17967.000	24.02	26.83	50.85	74.00	-23.15	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ax HE80	Frequency(MHz):	5530
Polarity:	Vertical	Test Voltage:	DC 3.3V

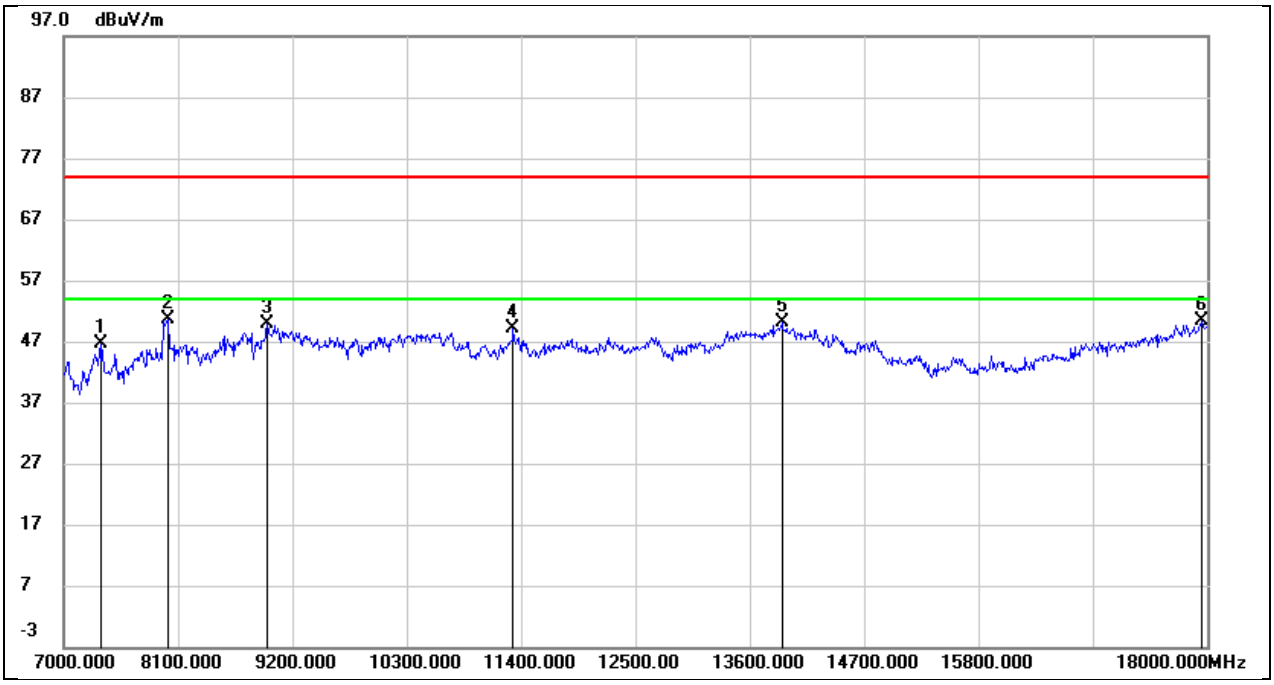

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7352.000	38.49	8.07	46.56	74.00	-27.44	peak
2	8001.000	43.78	6.89	50.67	74.00	-23.33	peak
3	8958.000	38.67	11.24	49.91	74.00	-24.09	peak
4	11323.000	32.95	16.10	49.05	74.00	-24.95	peak
5	13908.000	27.74	22.49	50.23	74.00	-23.77	peak
6	17945.000	23.68	26.74	50.42	74.00	-23.58	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ax HE80	Frequency(MHz):	5610
Polarity:	Horizontal	Test Voltage:	DC 3.3V

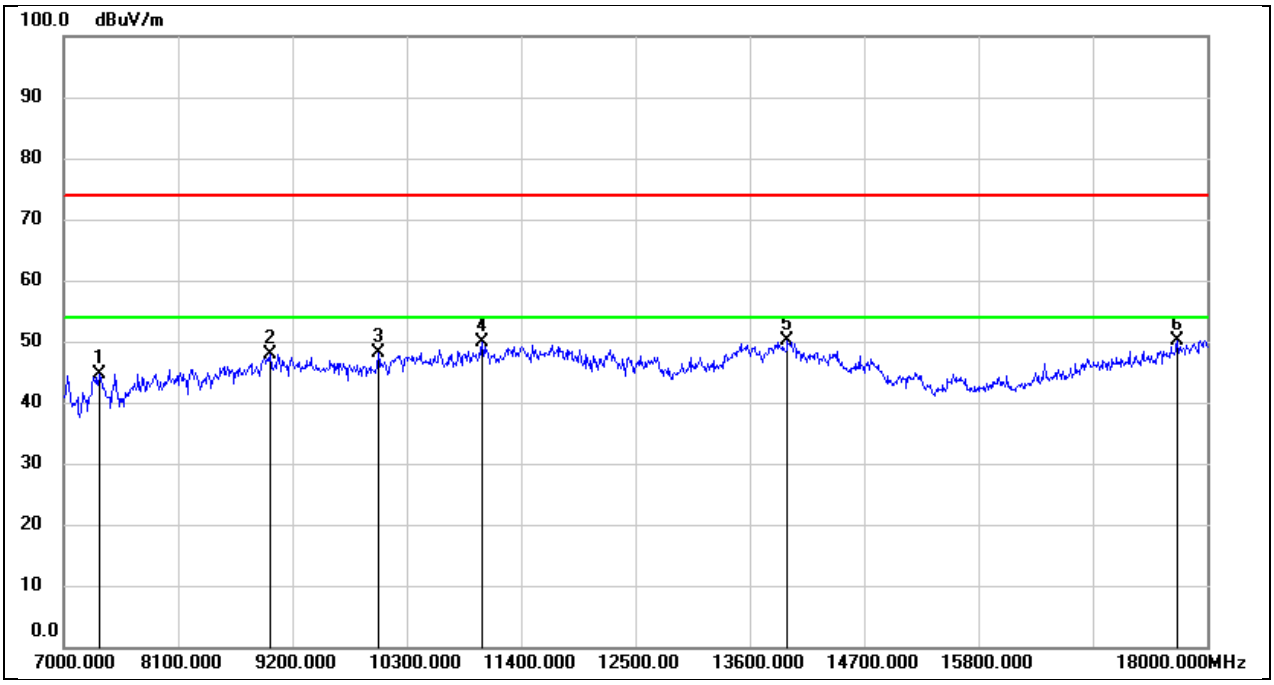

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7341.000	36.66	8.00	44.66	74.00	-29.34	peak
2	8991.000	36.25	11.73	47.98	74.00	-26.02	peak
3	10025.000	35.95	12.19	48.14	74.00	-25.86	peak
4	11026.000	34.96	14.95	49.91	74.00	-24.09	peak
5	13963.000	27.52	22.51	50.03	74.00	-23.97	peak
6	17714.000	25.06	25.14	50.20	74.00	-23.80	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ax HE80	Frequency(MHz):	5610
Polarity:	Vertical	Test Voltage:	DC 3.3V

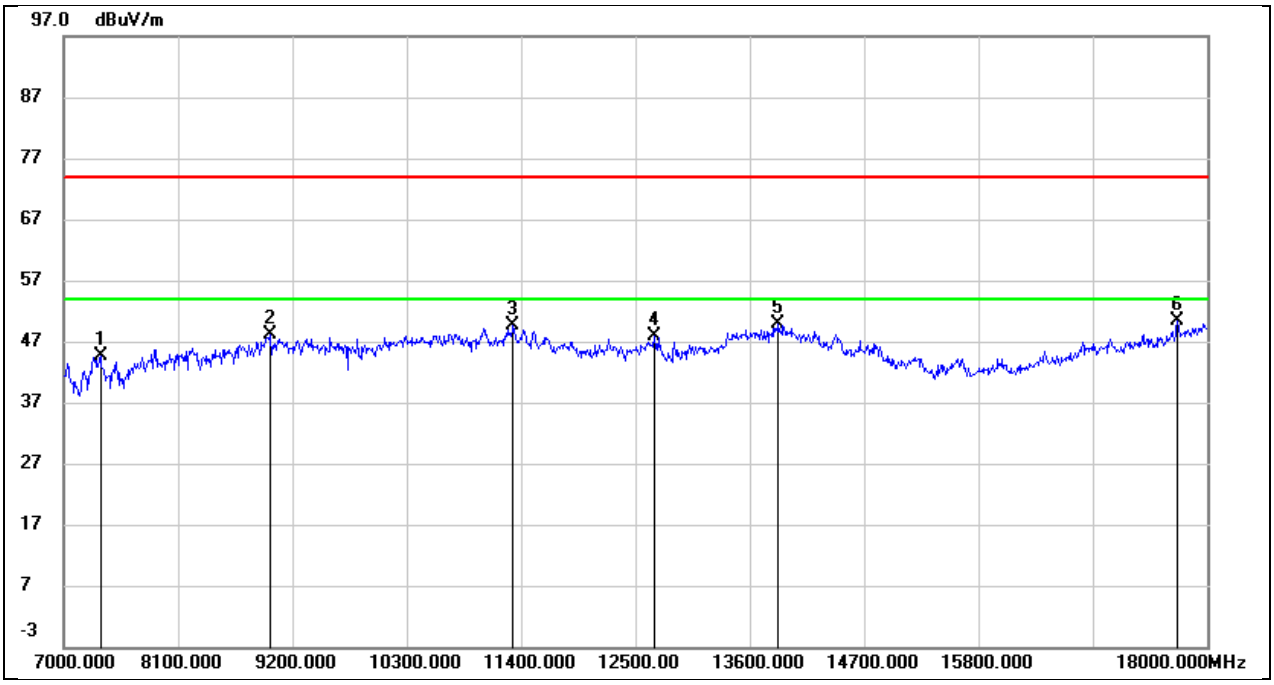

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7352.000	36.51	8.07	44.58	74.00	-29.42	peak
2	8980.000	36.45	11.57	48.02	74.00	-25.98	peak
3	11323.000	33.48	16.10	49.58	74.00	-24.42	peak
4	12676.000	29.28	18.50	47.78	74.00	-26.22	peak
5	13875.000	27.37	22.46	49.83	74.00	-24.17	peak
6	17714.000	25.13	25.14	50.27	74.00	-23.73	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ax HE80	Frequency(MHz):	5690
Polarity:	Horizontal	Test Voltage:	DC 3.3V

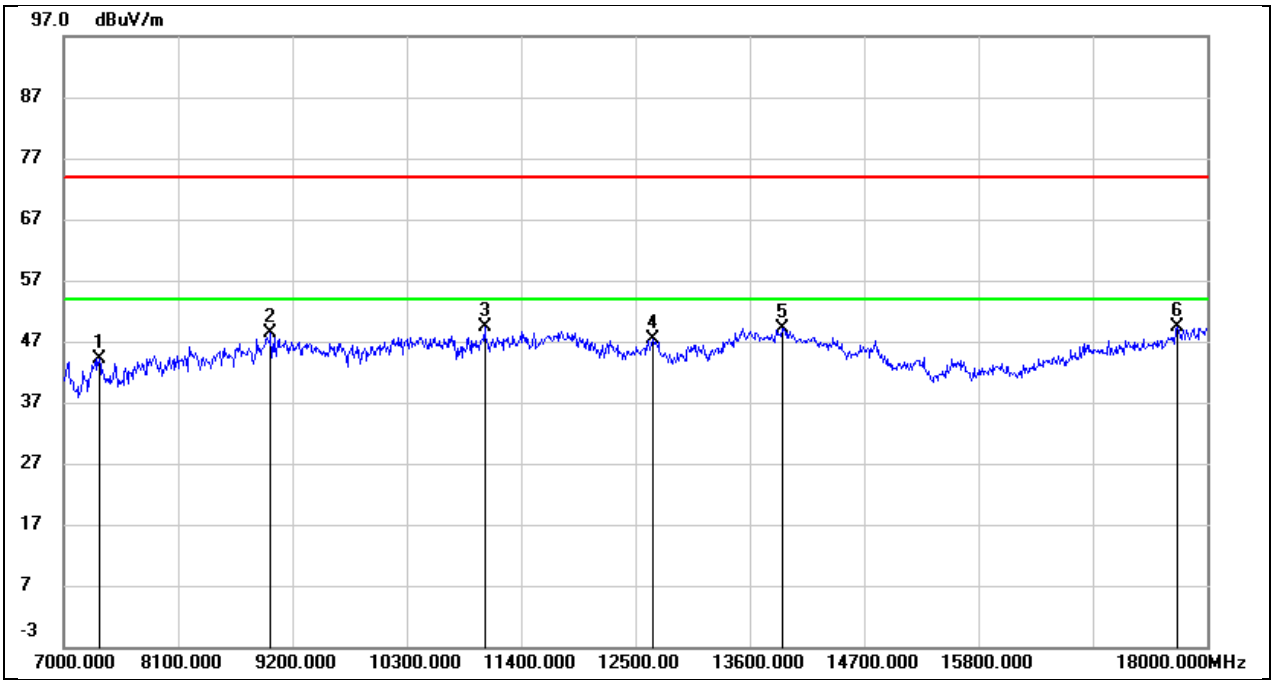

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7341.000	36.22	8.00	44.22	74.00	-29.78	peak
2	8991.000	36.54	11.73	48.27	74.00	-25.73	peak
3	11048.000	34.47	14.99	49.46	74.00	-24.54	peak
4	12665.000	28.85	18.48	47.33	74.00	-26.67	peak
5	13908.000	26.73	22.49	49.22	74.00	-24.78	peak
6	17714.000	24.23	25.14	49.37	74.00	-24.63	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ax HE80	Frequency(MHz):	5690
Polarity:	Vertical	Test Voltage:	DC 3.3V

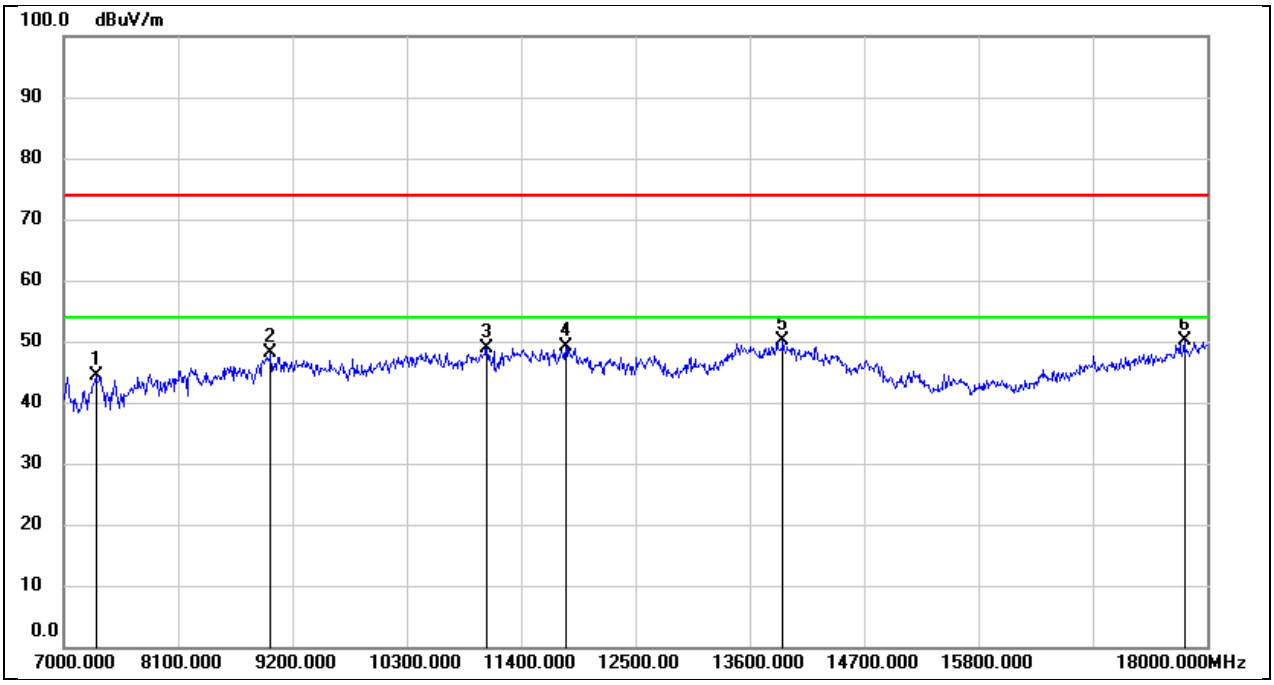

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7308.000	36.64	7.73	44.37	74.00	-29.63	peak
2	8991.000	36.45	11.73	48.18	74.00	-25.82	peak
3	11070.000	33.88	15.04	48.92	74.00	-25.08	peak
4	11829.000	31.33	17.71	49.04	74.00	-24.96	peak
5	13919.000	27.61	22.49	50.10	74.00	-23.90	peak
6	17780.000	24.23	25.89	50.12	74.00	-23.88	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ax HE80	Frequency(MHz):	5775
Polarity:	Horizontal	Test Voltage:	DC 3.3V

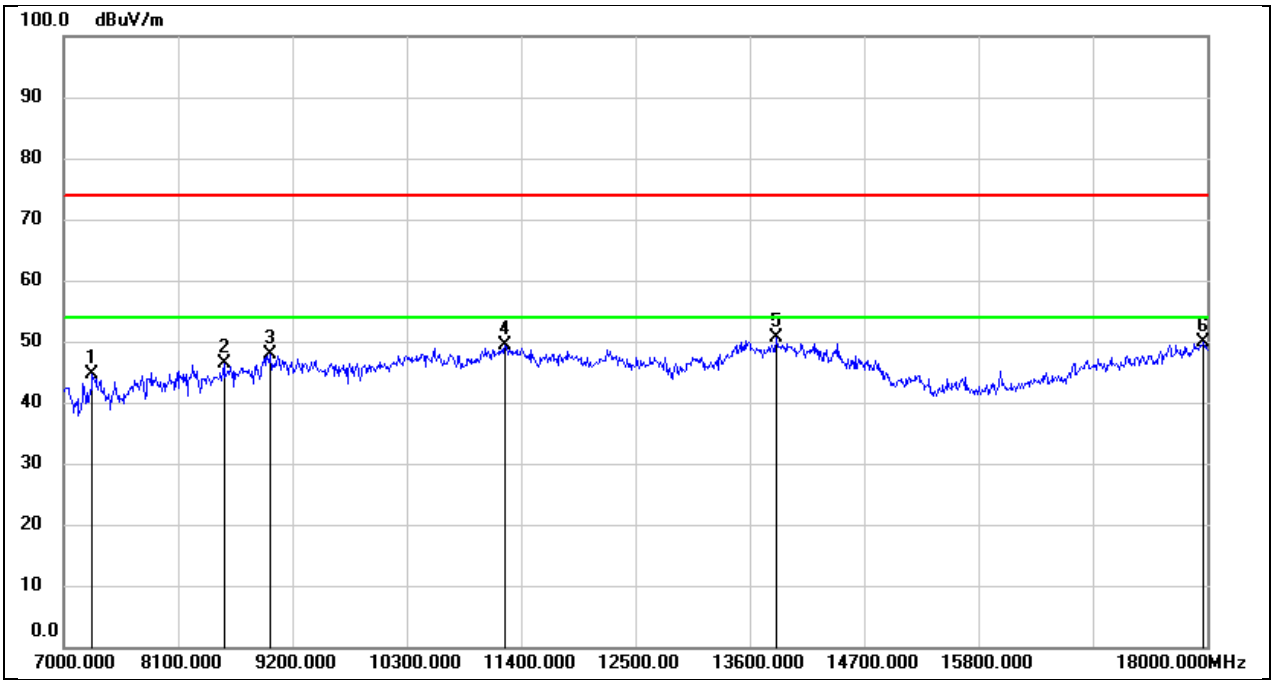

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7275.000	37.14	7.47	44.61	74.00	-29.39	peak
2	8540.000	37.61	8.68	46.29	74.00	-27.71	peak
3	8991.000	36.08	11.73	47.81	74.00	-26.19	peak
4	11246.000	33.70	15.62	49.32	74.00	-24.68	peak
5	13853.000	28.18	22.46	50.64	74.00	-23.36	peak
6	17967.000	22.96	26.83	49.79	74.00	-24.21	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ax HE80	Frequency(MHz):	5775
Polarity:	Vertical	Test Voltage:	DC 3.3V

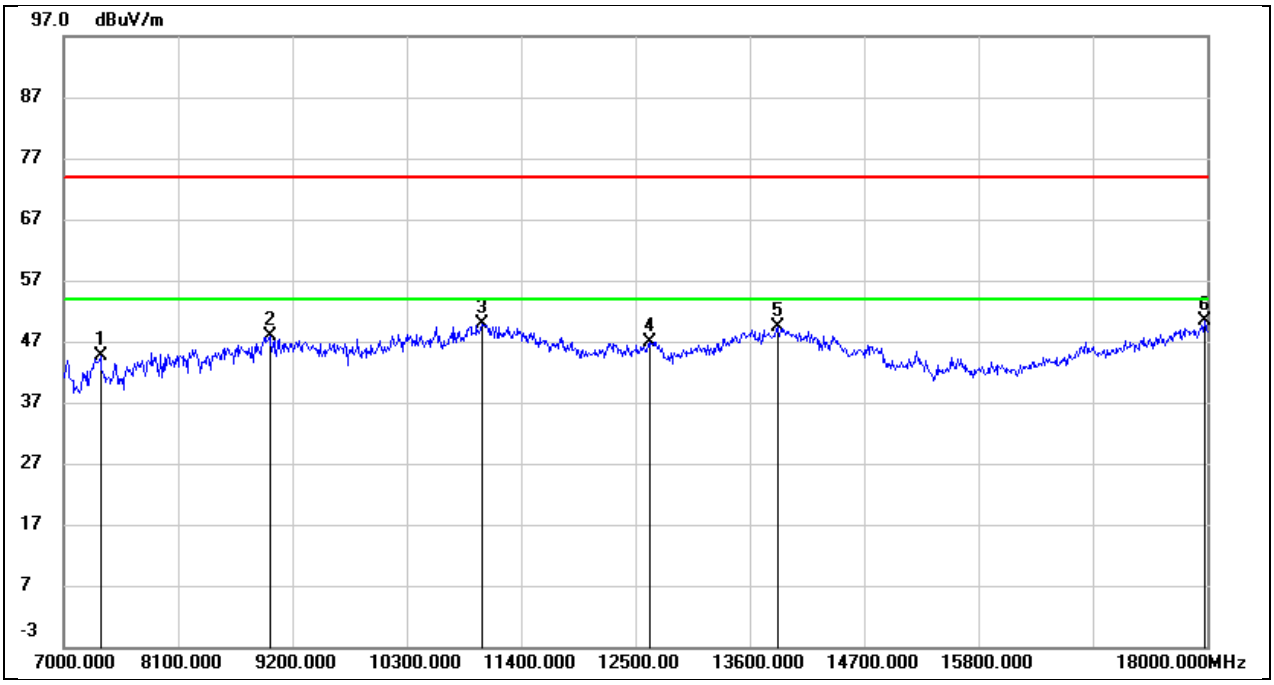

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7352.000	36.55	8.07	44.62	74.00	-29.38	peak
2	8980.000	36.38	11.57	47.95	74.00	-26.05	peak
3	11026.000	34.89	14.95	49.84	74.00	-24.16	peak
4	12632.000	28.38	18.40	46.78	74.00	-27.22	peak
5	13864.000	26.91	22.45	49.36	74.00	-24.64	peak
6	17978.000	23.45	26.88	50.33	74.00	-23.67	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

8.4. SPURIOUS EMISSIONS(9 KHZ~30 MHZ)

Test Mode:	802.11a20	Frequency(MHz):	5180
Polarity:	Horizontal	Test Voltage:	DC 3.3V

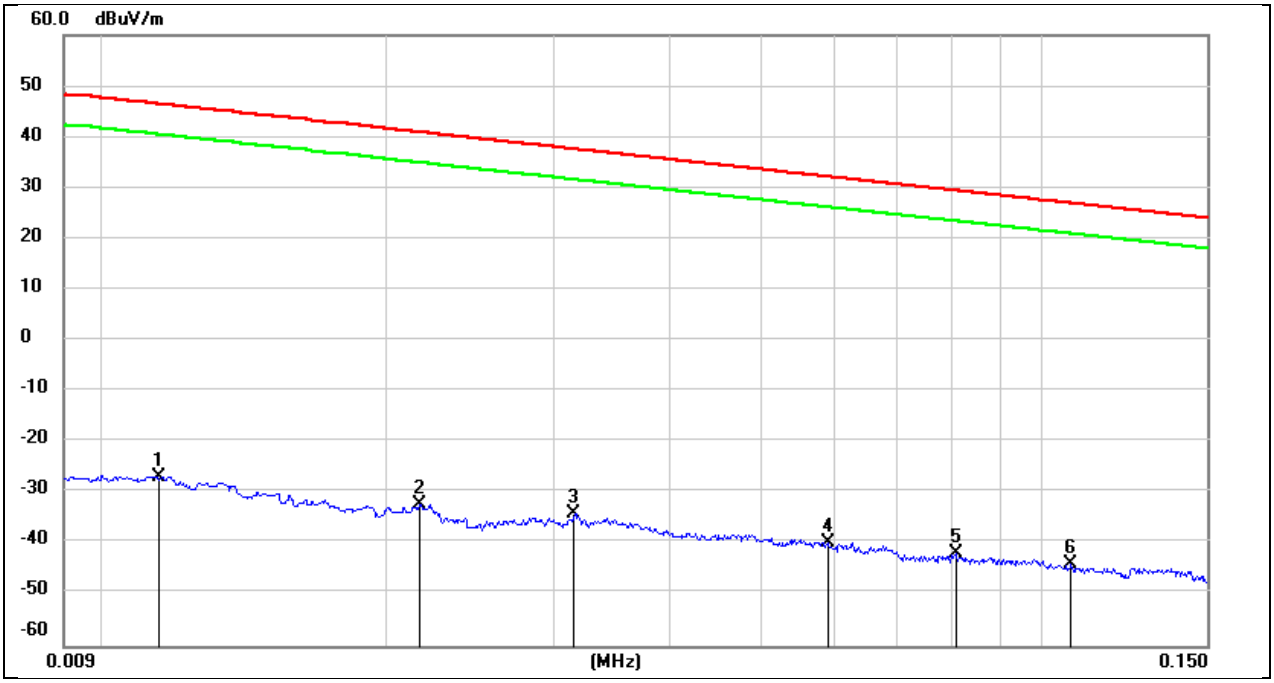

No.	Frequency	Reading	Correct	FCC Result	FCC Limit	ISED Result	ISED Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dBuA/m)	(dBuA/m)	(dB)	
1	0.0114	74.45	-101.40	-26.95	46.46	-78.45	-5.04	-73.41	peak
2	0.0216	69.19	-101.35	-32.16	40.91	-83.66	-10.59	-73.07	peak
3	0.0316	67.24	-101.40	-34.16	37.61	-85.66	-13.89	-71.77	peak
4	0.0589	61.81	-101.52	-39.71	32.20	-91.21	-19.30	-71.91	peak
5	0.0806	59.68	-101.63	-41.95	29.47	-93.45	-22.03	-71.42	peak
6	0.1073	57.80	-101.77	-43.97	26.99	-95.47	-24.51	-70.96	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11a20	Frequency(MHz):	5180
Polarity:	Horizontal	Test Voltage:	DC 3.3V

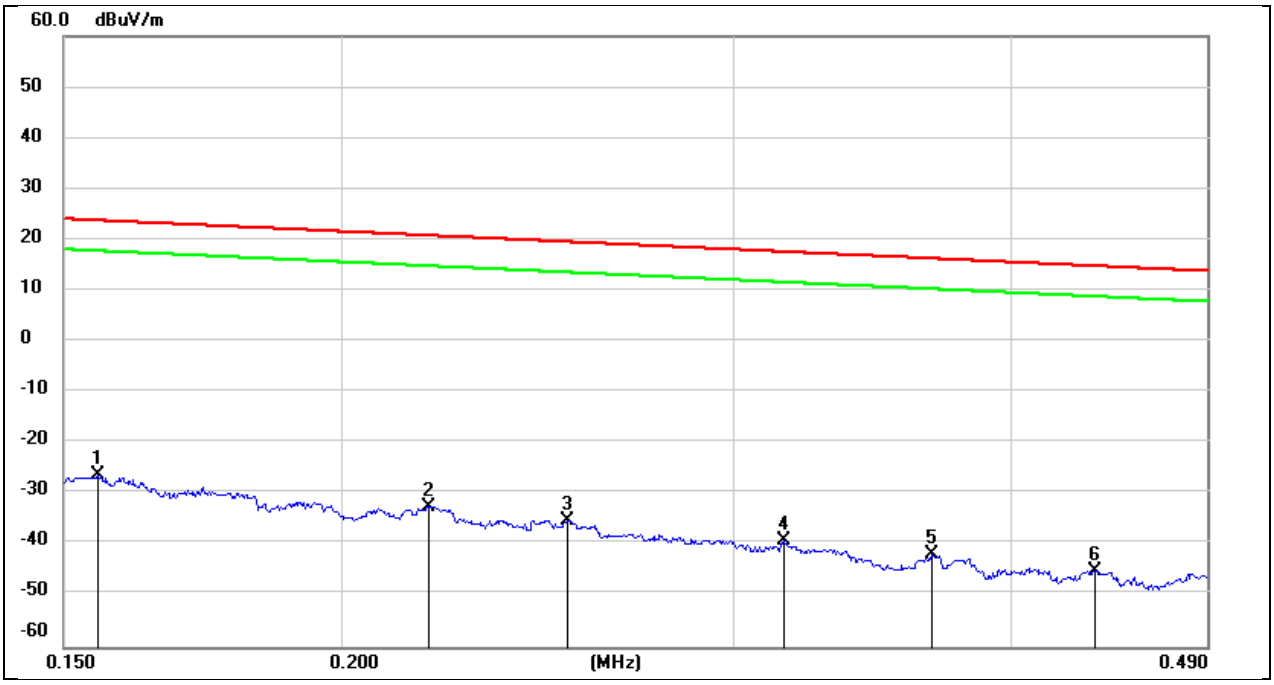

No.	Frequency	Reading	Correct	FCC Result	FCC Limit	ISED Result	ISED Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dBuA/m)	(dBuA/m)	(dB)	
1	0.1554	75.27	-101.65	-26.38	23.77	-77.88	-27.73	-50.15	peak
2	0.2190	69.27	-101.75	-32.48	20.79	-83.98	-30.71	-53.27	peak
3	0.2530	66.64	-101.80	-35.16	19.54	-86.66	-31.96	-54.70	peak
4	0.3163	62.70	-101.87	-39.17	17.60	-90.67	-33.90	-56.77	peak
5	0.3684	59.98	-101.93	-41.95	16.27	-93.45	-35.23	-58.22	peak
6	0.4364	56.86	-101.99	-45.13	14.80	-96.63	-36.70	-59.93	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11a20	Frequency(MHz):	5180
Polarity:	Horizontal	Test Voltage:	DC 3.3V

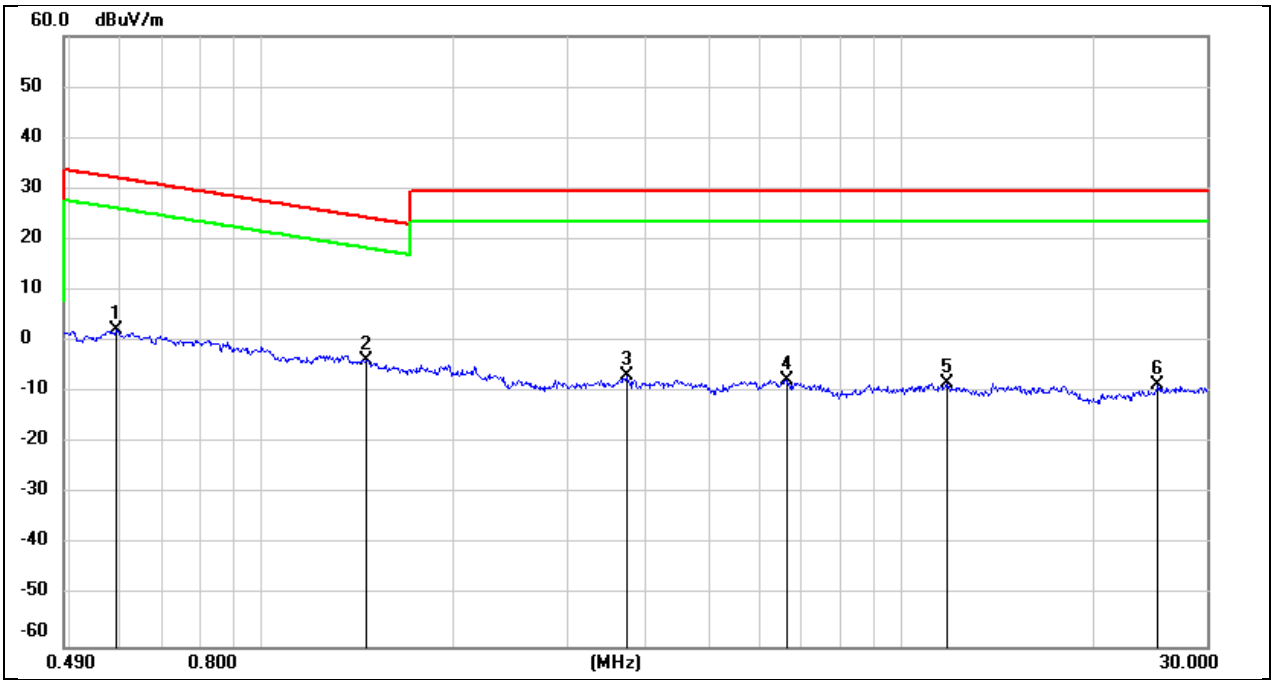

No.	Frequency	Reading	Correct	FCC Result	FCC Limit	ISED Result	ISED Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dBuA/m)	(dBuA/m)	(dB)	
1	0.5917	64.24	-62.08	2.16	32.16	-49.34	-19.34	-30.00	peak
2	1.4637	58.29	-62.06	-3.77	24.29	-55.27	-27.21	-28.06	peak
3	3.7100	54.70	-61.41	-6.71	29.54	-58.21	-21.96	-36.25	peak
4	6.5998	53.62	-61.27	-7.65	29.54	-59.15	-21.96	-37.19	peak
5	11.7628	52.53	-60.88	-8.35	29.54	-59.85	-21.96	-37.89	peak
6	25.1600	51.75	-60.44	-8.69	29.54	-60.19	-21.96	-38.23	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

8.5. SPURIOUS EMISSIONS(18 GHZ~26 GHZ)

Test Mode:	802.11a 20	Frequency(MHz):	5180
Polarity:	Horizontal	Test Voltage:	DC 3.3V

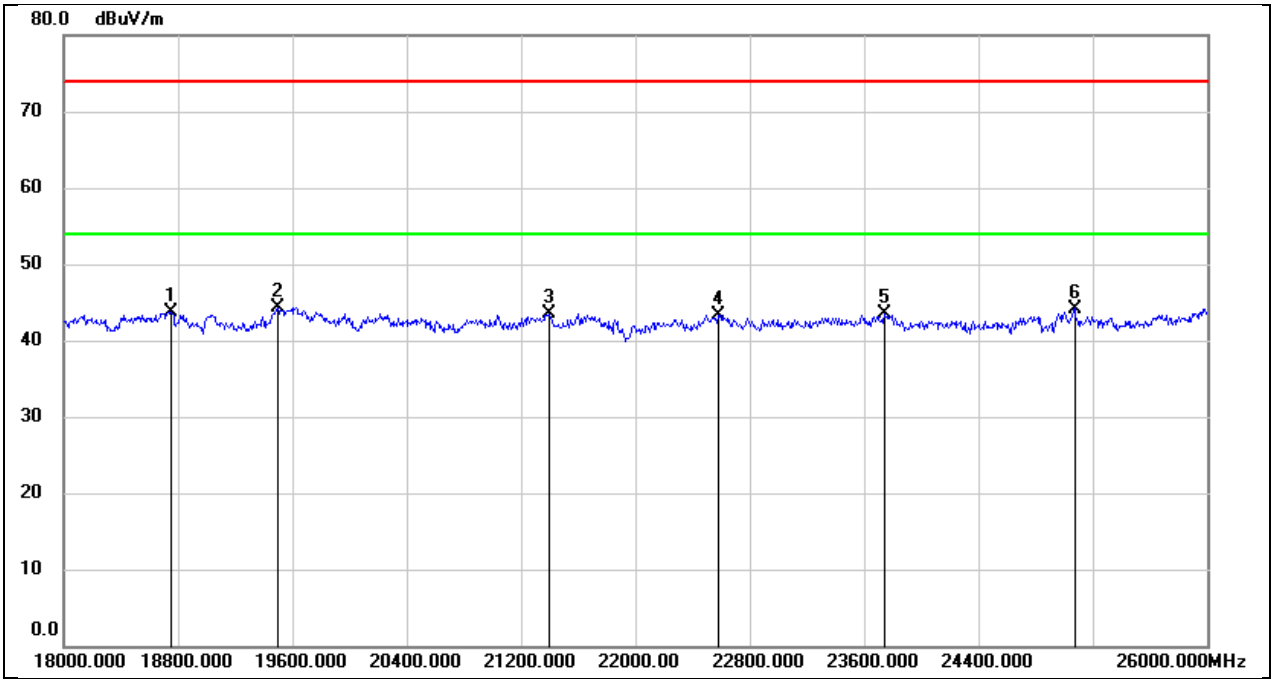

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	18752.000	49.20	-5.42	43.78	74.00	-30.22	peak
2	19496.000	49.79	-5.55	44.24	74.00	-29.76	peak
3	21392.000	48.23	-4.72	43.51	74.00	-30.49	peak
4	22576.000	47.11	-3.82	43.29	74.00	-30.71	peak
5	23744.000	46.65	-3.20	43.45	74.00	-30.55	peak
6	25072.000	46.17	-1.97	44.20	74.00	-29.80	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11a 20	Frequency(MHz):	5180
Polarity:	Vertical	Test Voltage:	DC 3.3V

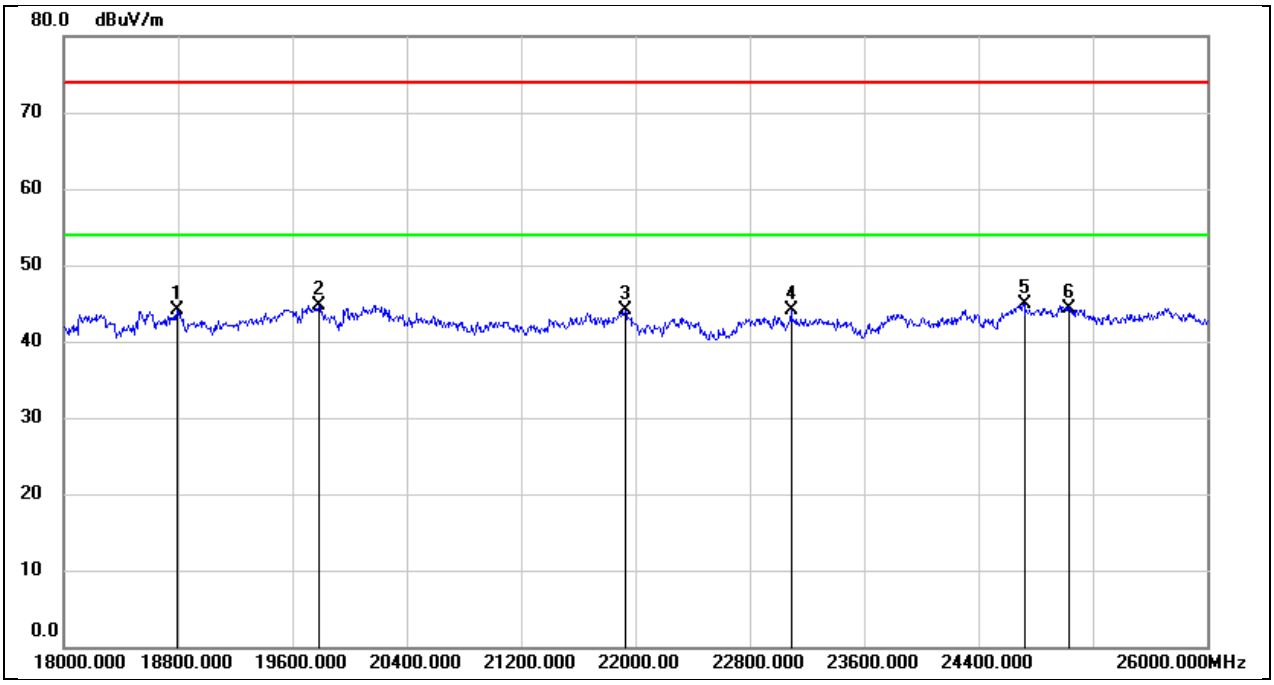

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	18792.000	49.45	-5.39	44.06	74.00	-29.94	peak
2	19784.000	50.07	-5.28	44.79	74.00	-29.21	peak
3	21928.000	48.55	-4.43	44.12	74.00	-29.88	peak
4	23088.000	47.52	-3.41	44.11	74.00	-29.89	peak
5	24720.000	47.22	-2.33	44.89	74.00	-29.11	peak
6	25032.000	46.44	-2.04	44.40	74.00	-29.60	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

8.6. SPURIOUS EMISSIONS(26 GHZ~40 GHZ)

Test Mode:	802.11a 20	Frequency(MHz):	5180
Polarity:	Horizontal	Test Voltage:	DC 3.3V

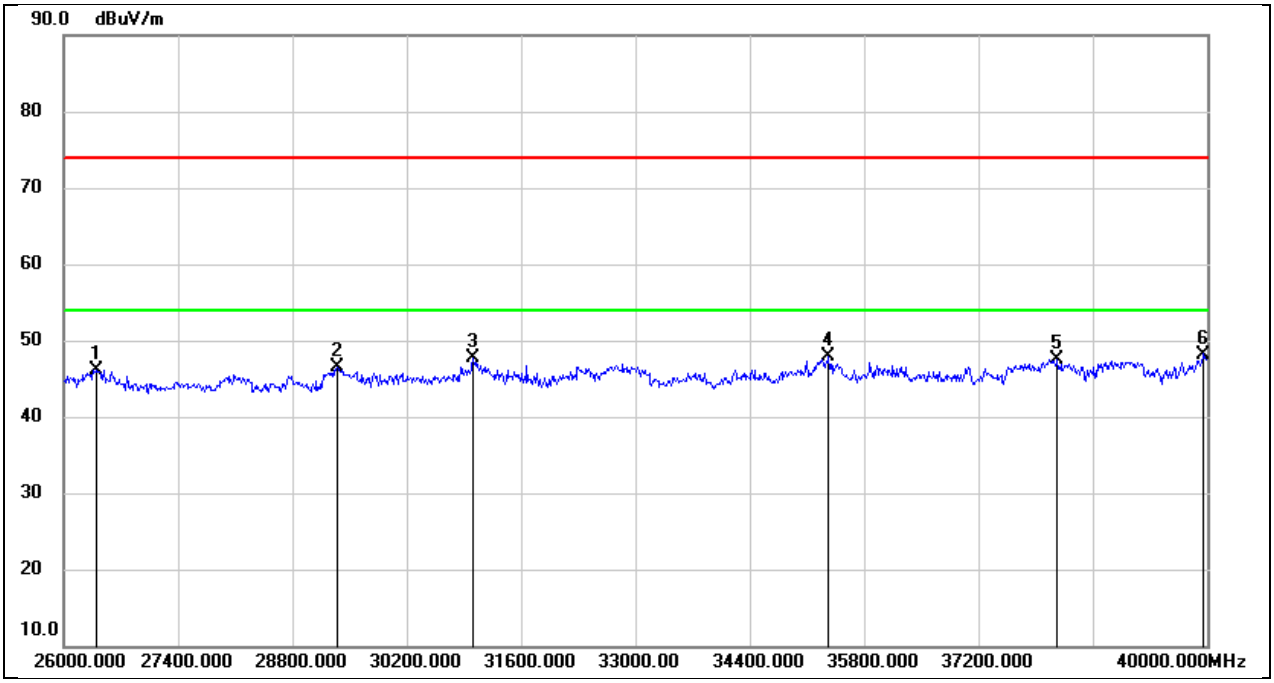

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	26392.000	51.09	-5.00	46.09	74.00	-27.91	peak
2	29346.000	47.38	-0.91	46.47	74.00	-27.53	peak
3	31012.000	48.33	-0.71	47.62	74.00	-26.38	peak
4	35366.000	45.40	2.59	47.99	74.00	-26.01	peak
5	38166.000	43.92	3.66	47.58	74.00	-26.42	peak
6	39958.000	43.08	5.12	48.20	74.00	-25.80	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11a 20	Frequency(MHz):	5180
Polarity:	Vertical	Test Voltage:	DC 3.3V

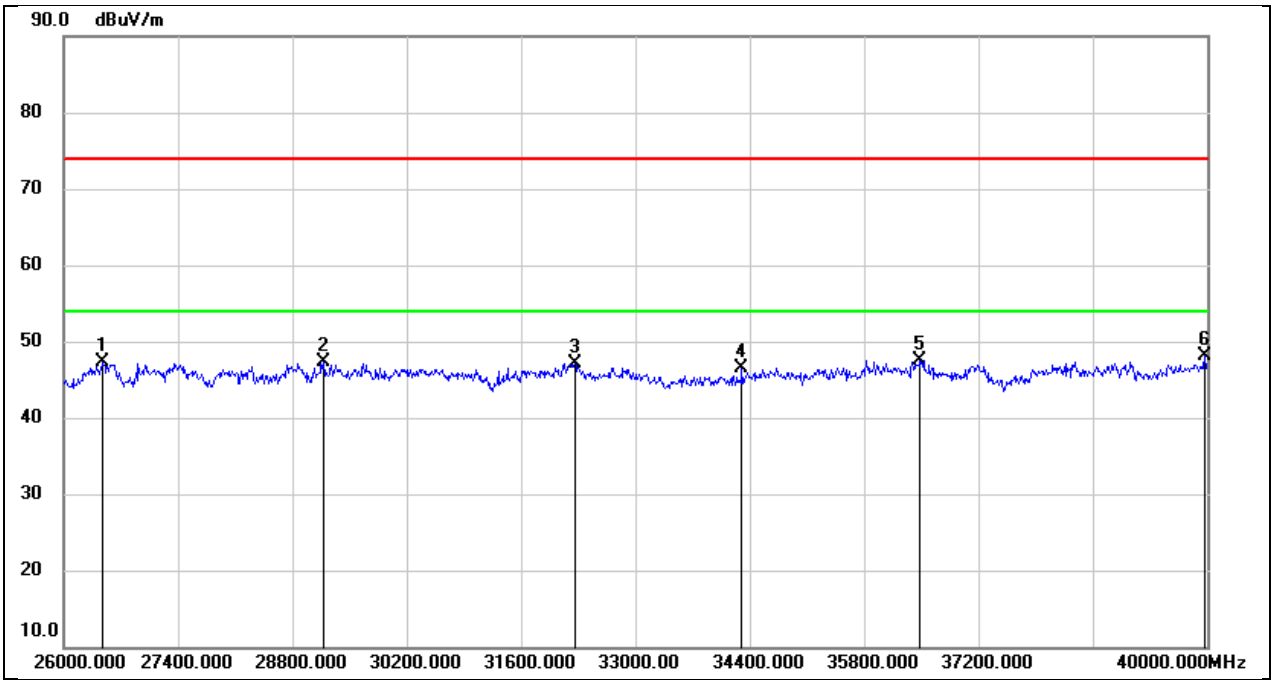

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	26476.000	52.03	-4.78	47.25	74.00	-26.75	peak
2	29178.000	48.43	-1.16	47.27	74.00	-26.73	peak
3	32258.000	48.38	-1.20	47.18	74.00	-26.82	peak
4	34302.000	45.45	1.10	46.55	74.00	-27.45	peak
5	36486.000	43.75	3.73	47.48	74.00	-26.52	peak
6	39972.000	42.95	5.13	48.08	74.00	-25.92	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

8.7. SPURIOUS EMISSIONS(30 MHZ~1 GHZ)

Test Mode:	802.11a 20	Frequency(MHz):	5180
Polarity:	Horizontal	Test Voltage:	DC 3.3V

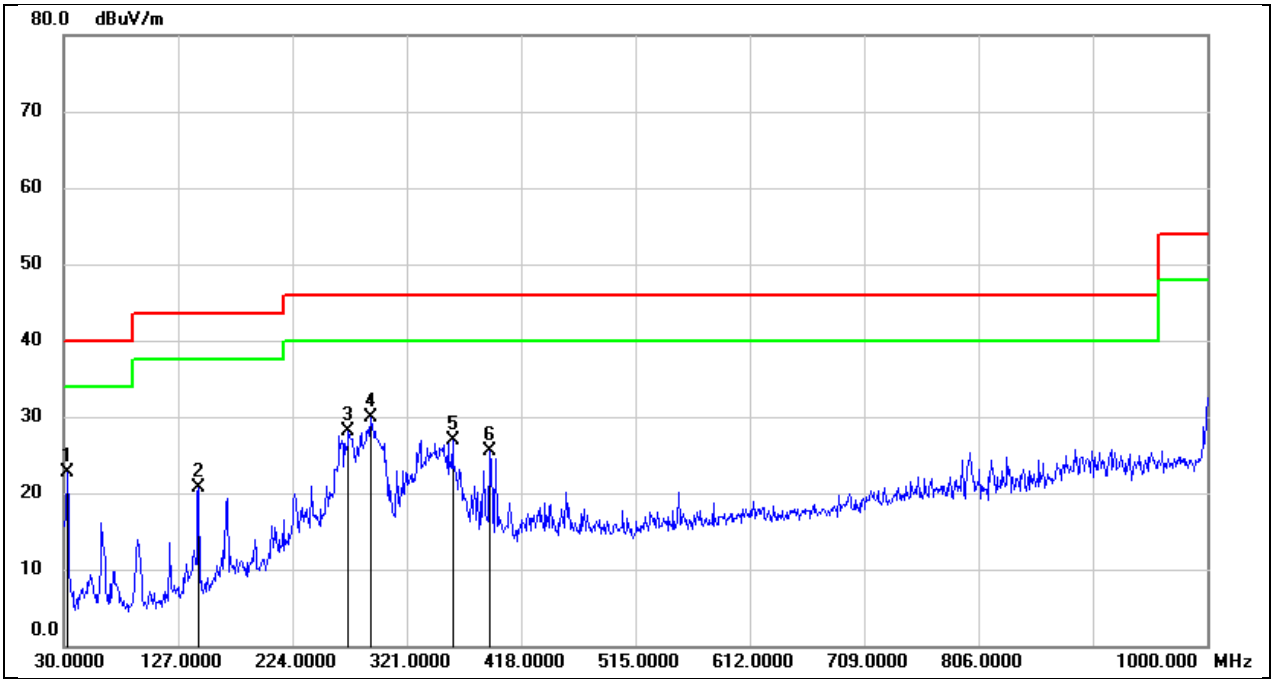

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	32.9100	37.22	-14.45	22.77	40.00	-17.23	QP
2	144.4600	34.49	-13.74	20.75	43.50	-22.75	QP
3	271.5300	41.33	-13.25	28.08	46.00	-17.92	QP
4	289.9600	41.96	-12.11	29.85	46.00	-16.15	QP
5	359.8000	36.46	-9.60	26.86	46.00	-19.14	QP
6	390.8400	35.29	-9.87	25.42	46.00	-20.58	QP

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11a 20	Frequency(MHz):	5180
Polarity:	Vertical	Test Voltage:	DC 3.3V

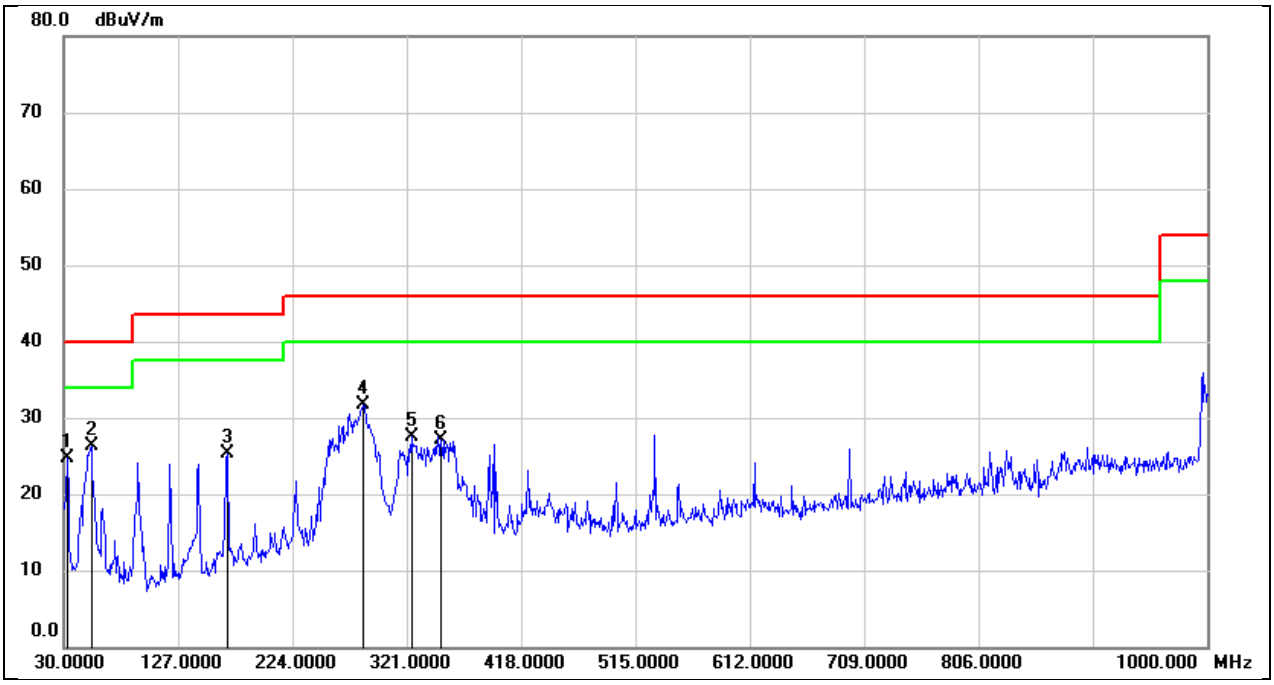

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	32.9100	39.22	-14.45	24.77	40.00	-15.23	QP
2	53.2800	41.69	-15.41	26.28	40.00	-13.72	QP
3	168.7100	37.54	-12.22	25.32	43.50	-18.18	QP
4	284.1400	44.16	-12.49	31.67	46.00	-14.33	QP
5	324.8800	38.12	-10.55	27.57	46.00	-18.43	QP
6	350.1000	36.76	-9.58	27.18	46.00	-18.82	QP

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.