



EMC Technologies (NZ) Ltd
PO Box 68-307
Newton, Auckland 1145
New Zealand
Phone 09 360 0862
Fax 09 360 0861
E-Mail Address: aucklab@ihug.co.nz
Web Site: www.emctech.com.au

TEST REPORT

**Payment Express BRF300
Secure Contactless Reader**

tested to the specification

47 Code of Federal Regulations

Part 15 - Radio Frequency Devices

Subpart C – Intentional Radiators

Section 15.225

Operation within the band 13.110 -14.010 MHz

for

Payment Express Ltd

A handwritten signature in blue ink, appearing to read "Andrew Cutler", is placed over a light blue rectangular background.

This test report is issued with the authority of:

Andrew Cutler - General Manager



All tests reported
herein have been
performed in accordance
with the laboratory's
scope of accreditation

Table of Contents

1. STATEMENT OF COMPLIANCE	3
2. RESULTS SUMMARY	3
3. INTRODUCTION	4
4. CLIENT INFORMATION	4
5. DESCRIPTION OF TEST SAMPLE	4
6. SETUPS AND PROCEDURES	5
7. TEST EQUIPMENT USED	14
8. ACCREDITATIONS	14
9. PHOTOGRAPHS	15

1. STATEMENT OF COMPLIANCE

The **Payment Express BRF300 Secure Contactless Reader** complies with FCC Part 15 Subpart C Section 15.225 as an Intentional Radiator when the methods as described in ANSI C63.10 - 2013 are applied.

2. RESULTS SUMMARY

The results from testing carried out in April and May 2017 are detailed in the following table:

Clause	Parameter	Result
15.201	Equipment authorisation requirement	Certification required.
15.203	Antenna requirement	Complies. Antennas internal to the device.
15.204	External PA and antenna modifications	Not applicable. No external devices.
15.205	Restricted bands of operation	Complies. Device transmits on a nominal frequency of 13.560 MHz.
15.207	Conducted limits	Complies.
15.209	Radiated emission limits - Emissions < 30 MHz	Complies.
15.209	Radiated emission limits – Emissions > 30 MHz	Complies.
15.225	Radiated emission limits - Fundamental	Complies.
15.225	Frequency stability	Complies.

3. INTRODUCTION

This report describes the tests and measurements performed for the purpose of determining compliance with the specification.

The client selected the test sample.

This report relates only to the sample tested.

This report contains no corrections or erasures.

Measurement uncertainties with statistical confidence intervals of 95% are shown below test results. Both Class A and Class B uncertainties have been accounted for, as well as influence uncertainties where appropriate.

4. CLIENT INFORMATION

Company Name Payment Express Ltd

Address PO Box 8400
33 Wilkinson Rd
Ellerslie

City Auckland 1060

Country New Zealand

Contact Mr Mark England

5. DESCRIPTION OF TEST SAMPLE

Brand Name Payment Express

Product Secure Contactless Reader

Model Number BRF300

Manufacturer Payment Express Ltd

Country of Origin New Zealand

Serial Number 2817140001

FCC ID 2AC2O-BRF300

The device tested is a NFC card reader that operates on 13.560 MHz that would normally be attached to another device that would supply power and data processing capabilities.

6. SETUPS AND PROCEDURES

Standard

The sample was tested in accordance with 47 CFR Part 15 Subpart C.

Methods and Procedures

The measurement methods and procedures as described in ANSI C63.10 - 2013 were used.

Section 15.201: Equipment authorisation requirement

Certification as detailed in Subpart J of Part 2 is required for this device.

Section 15.203: Antenna requirement

The device has a permanently attached 13.560 MHz antenna.

Result: Complies.

Section 15.204: External radio frequency power amplifiers and antenna modifications

It is NOT possible to attach an external power amplifier to this transmitter.

Result: Complies.

Section 15.205: Restricted bands of operation

The device transmits on a nominal frequency of 13.560 MHz.

13.560 MHz transmissions would fall into the 13.110 – 14.010 MHz band that is covered by Section 15.225.

Result: Complies.

Section 15.207: Conducted emissions testing

Conducted Emissions testing was carried out over the frequency range of 150 kHz to 30 MHz which was carried out at the laboratory's MacKelvie Street premises in a 2.4 m x 2.4 m x 2.4 m screened room

As it is possible for this device to be directly or indirectly connected to the Public AC mains supply testing was carried out using a representative AC power supply system that was powered at 120 Vac 60 Hz which supplied 12 Vdc to the device in order to test it.

The device operates on 13.560 MHz.

Testing was carried out with the NFC transmitter operating while periodically reading a card that was placed close to the device.

The device was placed on top of the emissions table, which is 1 m x 1.5 m, 80 cm above the screened room floor which acts as the horizontal ground plane.

In addition the device was positioned 40 cm away from the screened room wall which acts as the vertical ground plane.

The artificial mains network was bonded to the screened room floor.

At all times the device was kept more than 80 cm from the artificial mains network.

The Class B limits have been applied.

The supplied plot is combined plot showing the worst case quasi peak and average results of both the phase and neutral lines to the representative AC power supply.

Quasi peak and average detectors have been used with resolution bandwidths of 9 kHz.


Measurement uncertainty with a confidence interval of 95% is:

- AC Mains port (0.15-30 MHz) ± 2.8 dB

Conducted Emissions – AC Input Power Port

Setup: Device tested when powered at 120 Vac while operating continuously using an operating routine that was supplied by the client. Test carried out using a representative power supply.

Peak --- Average -- Quasi Peak X Average +

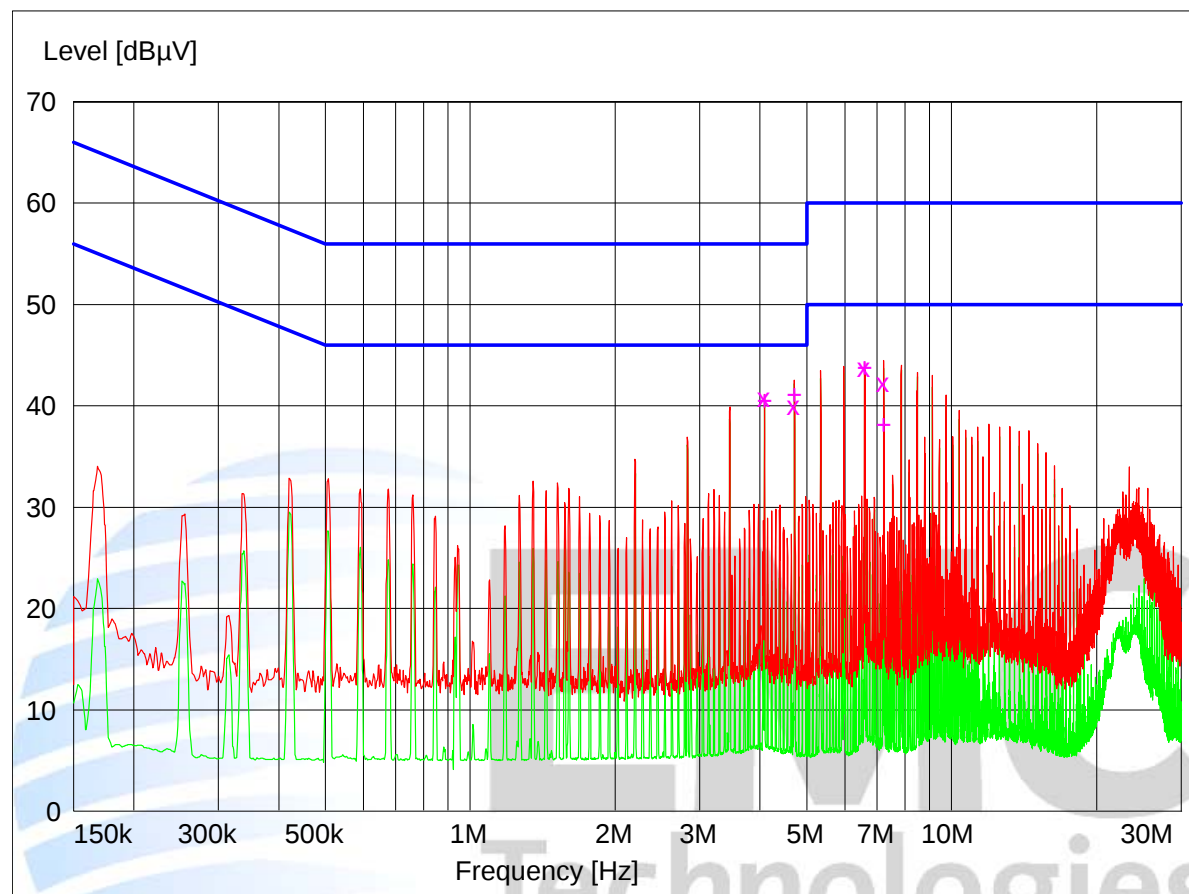

Final Quasi-Peak Measurements

Frequency MHz	Level dBμV	Limit dBμV	Margin dB	Phase	Rechecks dBμV
4.088000	40.80	56.0	15.2	N	
4.713500	40.10	56.0	15.9	N	
6.603500	43.80	60.0	16.2	N	
7.229000	42.30	60.0	17.7	N	
13.56000	57.00	60.0	3.0	N	

Final Average Measurements

Frequency MHz	Level dBμV	Limit dBμV	Margin dB	Phase	Rechecks dBμV
4.088000	40.50	46.0	5.5	N	
4.718000	41.10	46.0	4.9	N	
6.603500	43.80	50.0	6.2	N	
7.229000	38.20	50.0	11.8	N	
13.560000	28.80	50.0	20.2	N	

Section 15.209: Radiated emission limits, general requirements

Radiated emission testing was carried out over the frequency range of 10 kHz to 2000 MHz as the highest frequency declared by the client is higher than 108 MHz (168 MHz) but less than 500 MHz.

Testing was carried out at the laboratory's open area test site - located at Driving Creek, Orere Point, Auckland, New Zealand.

Testing was carried out using a representative AC power supply at 120 Vac 60 Hz that supplied 12.0 Vdc to the device under test.

Initial testing was carried out with the device being placed in the centre of the test table laying flat, standing vertically upright and when laying on an edge.

Final testing was carried out in the worst case orientation which was determined to be when it was laying flat on top of the test table.

Attached to the device was a data interface board that supplied voltage to the device that allowed a serial interface to a laptop computer that was attached to the serial port on the interface board.

The device was transmitting continuously on 13.560 MHz with a NFC card being placed close to the card reader which was periodically read by the card reader.

Correct operations were indicated by a beep and by all of the LED's flashing green together once a correct read was achieved.

When an emission is located, it is positively identified and its maximum level is found by rotating the automated turntable, and by varying the antenna height, where appropriate, with an automated antenna tower.

Below 30 MHz a magnetic loop is used with the centre of the loop being 1 metre above the ground with measurements being made using a quasi peak detector at a distance of 10 metres.

Above 30 MHz the emission is measured in both vertical and horizontal antenna polarisations, where appropriate at a distance of 3 metres

The emission level was determined in field strength by taking the following into consideration:

Level (dBμV/m) = Receiver Reading (dBμV) + Antenna Factor (dB/m) + Coax Loss (dB)

Result: Complies

Measurement uncertainty with a confidence interval of 95% is:

- Free radiation tests (30 – 2000 MHz) ± 4.1 dB
- Free radiation tests (100 kHz – 30 MHz) ± 4.8 dB

Section 15.209: 13.560 MHz transmitter below 30 MHz spurious emission measurements

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
27.120	10.0	48.6	38.6

Testing was carried out when the device was transmitting continuously.

Magnetic loop measurements were attempted at a distance of 10 metres.

A receiver with a quasi peak detector with a 9 kHz bandwidth was used between 490 kHz – 30.0 MHz.

The 30 metre limit between 1.705 MHz – 30 MHz has been scaled by a factor of 40 dB per decade, as per section 15.31 (f) (2).

The limit at 27.120 MHz when measured at 30 metres is 30 uV/m or 29.54 dBuV/m.

Therefore the scaled limit at 10 metres will be 48.6 dBuV/m.

The spurious emission observed does not exceed the level of the fundamental emission.

No other low frequency spurious emissions were detected from the device when measurements were attempted from 10 kHz - 30.0 MHz

Result: Complies.

Measurement uncertainty with a confidence interval of 95% is:

- Free radiation tests (10 kHz – 30 MHz) $\pm$ 4.8 dB

Section 15.209: Spurious Emissions (above 30 MHz)

Measurements between 30 – 2000 MHz have been made at a distance of 3 metres.

A receiver with a quasi peak detector with a 120 kHz bandwidth was used between 30 – 1000 MHz.

Between 1000 - 2000 MHz a peak and an average detector was used with a bandwidth of 1 MHz.

The limits as described in Section 15.209 have been applied.

Radio Emissions

Frequency (MHz)	Vertical (dBμV/m)	Horizontal (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	BW
40.680	35.5	29.6	40.0	4.5	Quasi Peak	120 kHz
67.800	27.1	34.9	40.0	5.1	Quasi Peak	120 kHz
108.480	18.1	26.9	43.5	16.6	Quasi Peak	120 kHz
122.000	25.6	33.5	43.5	10.0	Quasi Peak	120 kHz
135.600		30.2	43.5	13.3	Quasi Peak	120 kHz
149.160	22.8	32.0	43.5	11.5	Quasi Peak	120 kHz
162.720	26.8	30.7	43.5	12.8	Quasi Peak	120 kHz
176.280	32.5	31.7	43.5	11.0	Quasi Peak	120 kHz
189.840	31.1	34.2	43.5	9.3	Quasi Peak	120 kHz
216.960	20.1	29.5	46.0	16.5	Quasi Peak	120 kHz
284.760	22.1	33.1	46.0	12.9	Quasi Peak	120 kHz
311.880	27.3	27.8	46.0	18.2	Quasi Peak	120 kHz
393.240	22.1		46.0	23.9	Quasi Peak	120 kHz

Other Emissions

Frequency (MHz)	Vertical (dBμV/m)	Horizontal (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	BW
32.717	26.1		40.0	13.9	Quasi Peak	120 kHz
59.037	22.1		40.0	17.9	Quasi Peak	120 kHz

All other emissions observed had a margin to the limit that exceeded 20 dB when measurements were attempted over the range of 30 – 2000 MHz using both vertical and horizontal polarisations.

Result: Complies.

Measurement uncertainty with a confidence interval of 95% is:

- Free radiation tests (30 MHz – 1000 MHz) ± 4.1 dB

Section 15.225: Fundamental emission:

Measurements were made using a magnetic loop antenna and a receiver with a quasi peak detector using a 9 kHz bandwidth.

Measurements were made at a distance of 10 metres with the limit being determined by using the extrapolation factor of 40 dB per decade limit, as detailed in section 15.31 f (2).

The limit at 30 m at 13.560 MHz is 15,848 uV/m or 84.0 dBuV/m.


Applying the extrapolation factor of 40 dB/ per decade, the limit is 103.1 dBuV/m.

Testing was also carried out to determine whether a variation in the supply voltage would cause a significant change in field strength with the 12.0 Vdc supply to the device being varied by +/- 15% between 10.2 Vdc and 13.8 Vdc however no variation was observed as detailed below.


Voltage (Vdc)	Frequency (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
10.2	13.560	33.9	103.1	69.2
12.0	13.560	33.9	103.1	69.2
13.8	13.560	33.9	103.1	69.2

Representative spectrum analyser plots show the carrier and modulation peaks within +/- 250 kHz and +/- 1 MHz of the carrier.

Measurement Span: +/- 250 kHz

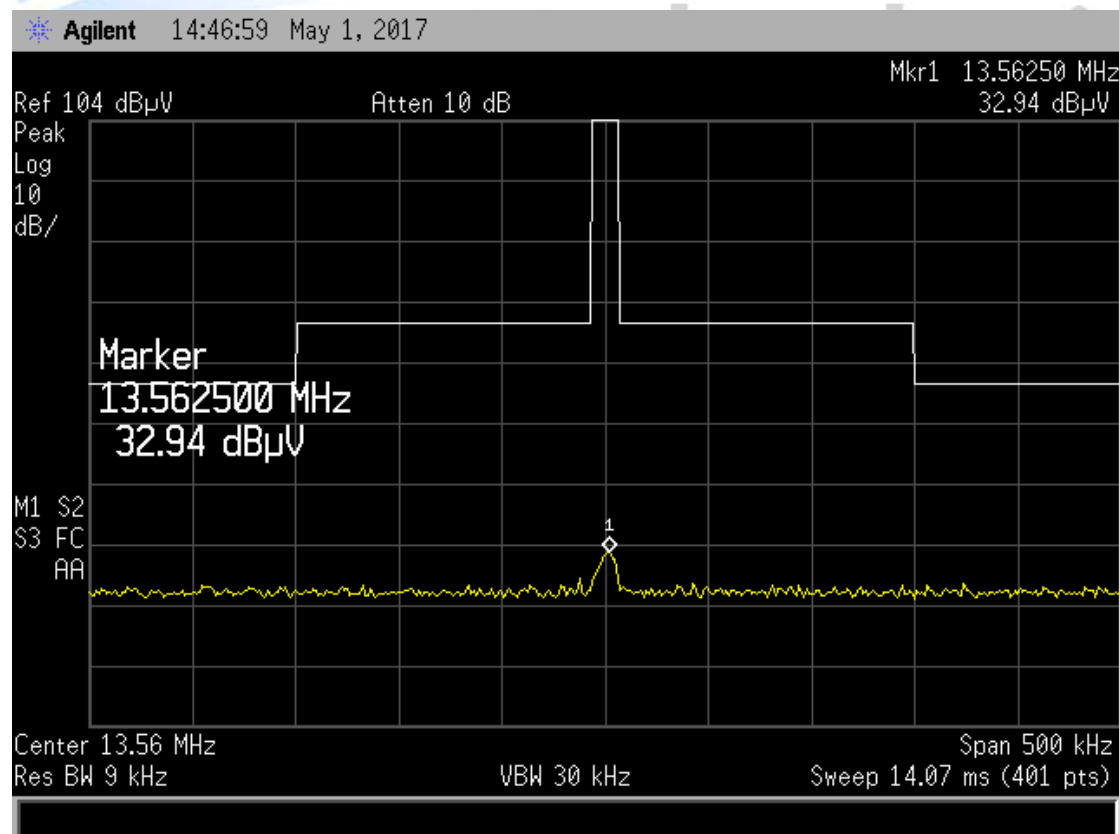

Measurement Span: +/- 1 MHz

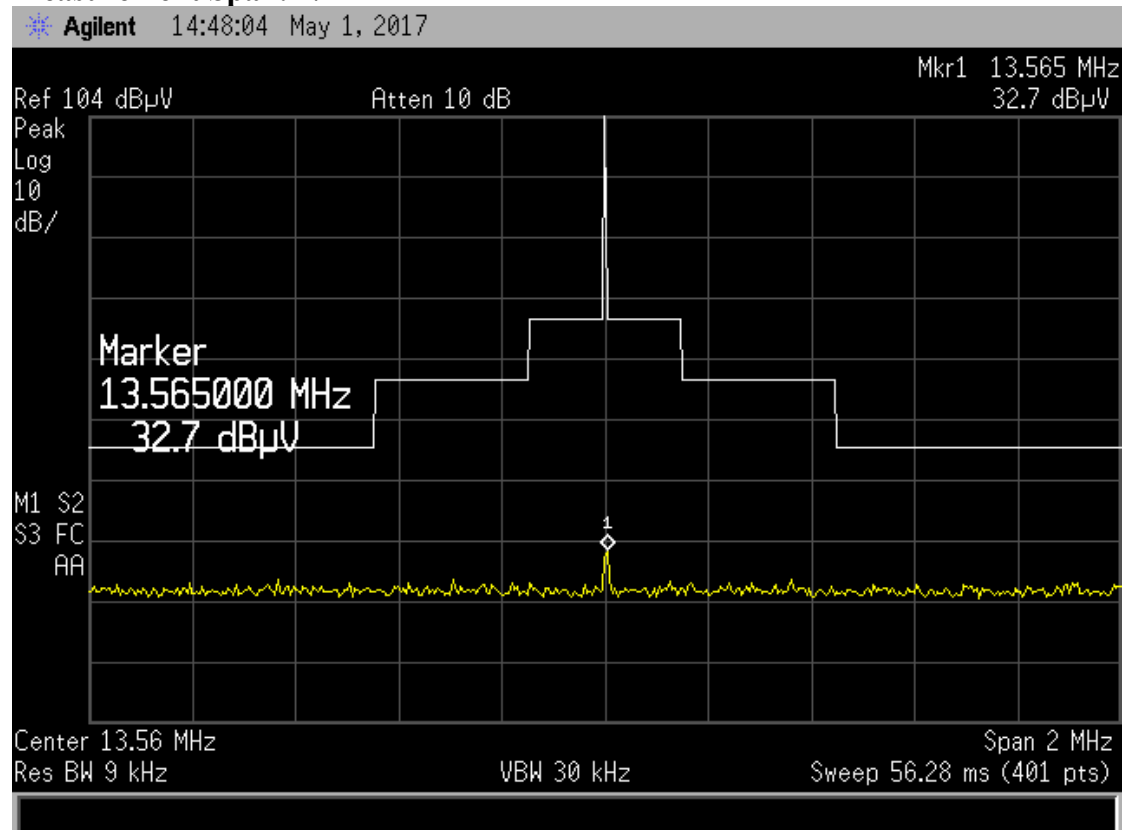

Result: Complies.

Measurement uncertainty with a confidence interval of 95% is:

- Free radiation tests (100 kHz – 30 MHz) ± 4.8 dB

Section 15.225: Frequency tolerance:

The frequency tolerance of the carrier is required to be +/- 0.01% of operating frequency when the temperature is varied between -20 degrees and +50 degrees.

The device operates nominally on 13.562 MHz which gives a frequency tolerance of +/- 1,356.2 Hz.

Temperature (°C)	Frequency (MHz)	Difference (Hz)
50.0	13.560 100	+100
40.0	13.560 125	+125
30.0	13.560 175	+175
20.0	13.560 200	+200
10.0	13.560 250	+250
0.0	13.560 250	+250
-10.0	13.560 250	+250
-20.0	13.560 250	+250

The device normally operates on 12 Vdc.

The DC supply was varied by +/- 15% at an ambient temperature of 20 degrees.

Voltage (Vdc)	Frequency (MHz)	Difference (Hz)
10.2	13.560 200	+200
12.0	13.560 200	+200
13.8	13.560 200	+200

Result: Complies.

Measurement uncertainty with a confidence interval of 95% is:

Frequency tolerance ± 50 Hz

7. TEST EQUIPMENT USED

Instrument	Manufacturer	Model	Serial No	Asset Ref	Cal Due	Period
Aerial Controller	EMCO	1090	9112-1062	RFS 3710	Not applic	Not applic
Aerial Mast	EMCO	1070-1	9203-1661	RFS 3708	Not applic	Not applic
Turntable	EMCO	1080-1-2.1	9109-1578	RFS 3709	Not applic	Not applic
Loop Antenna	EMCO	6502	9003-2485	3798	4 July 2017	3 years
VHF Balun	Schwarzbeck	VHA 9103	9594	3696	3 Feb 2018	3 years
Biconical Antenna	Schwarzbeck	BBA 9106	-	3680	3 Feb 2018	3 years
Log Periodic	Schwarzbeck	VUSLP 9111	9111-228	3785	1 Dec 2017	3 years
Horn Antenna	EMCO	3115	9511-4629	E1526	4 June 2017	3 years
Mains Network	R & S	ESH2-Z5	881362/001	3805	4 August 17	2 years
Receiver	R & S	ESHS 10	828404/005	3728	9 June 2018	2 years
Receiver	R & S	ESIB 40	100171	EMC4003	15 May 2017	1.5 year

8. ACCREDITATIONS

Testing was carried out in accordance with EMC Technologies Ltd registration with the Federal Communications Commission as a listed facility, registration number: 90838, which was updated in June 2014.

All testing was carried out in accordance with the terms of EMC Technologies (NZ) Ltd International Accreditation New Zealand (IANZ) Accreditation to NZS/ISO/IEC 17025.

All measurement equipment has been calibrated in accordance with the terms of the EMC Technologies (NZ) Ltd International Accreditation New Zealand (IANZ) Accreditation to NZS/ISO/IEC 17025.



International Accreditation New Zealand has Mutual Recognition Arrangements for testing and calibration with various accreditation bodies in a number of economies. This includes NATA (Australia), UKAS (UK), SANAS (South Africa), NVLAP (USA), A2LA (USA), SWEDAC (Sweden). Further details can be supplied on request.


9. PHOTOGRAPHS

External View Device Under Test






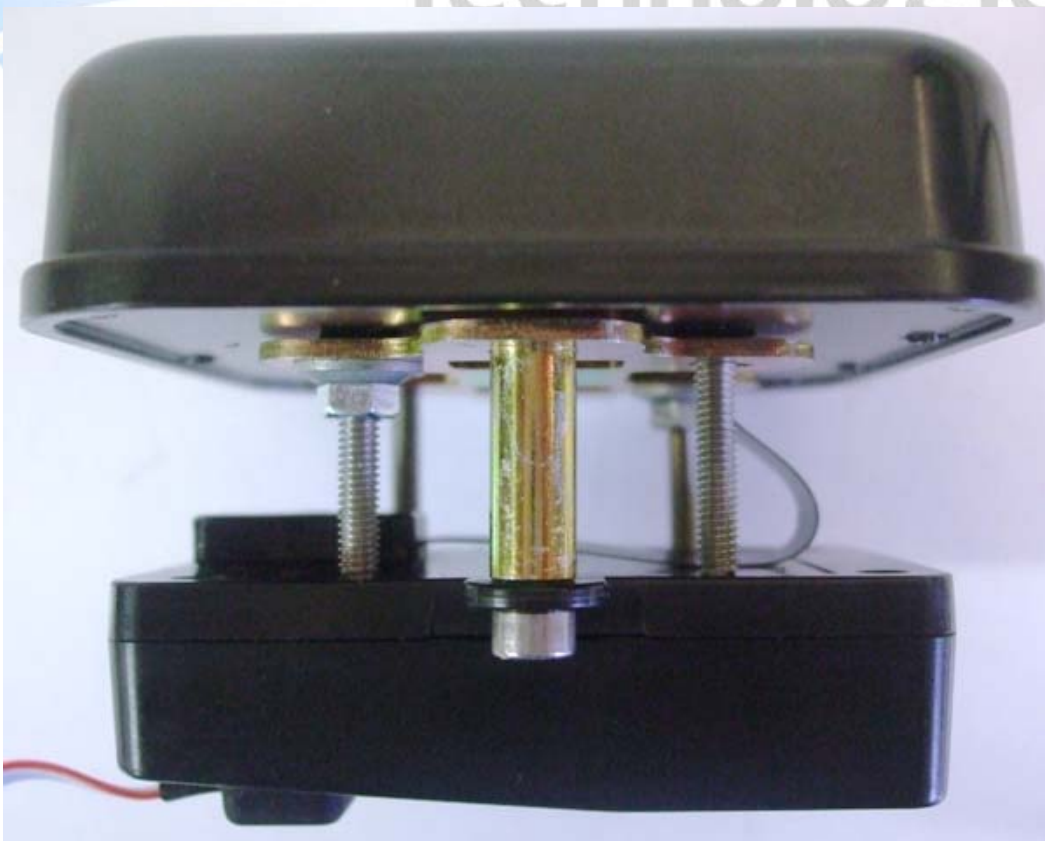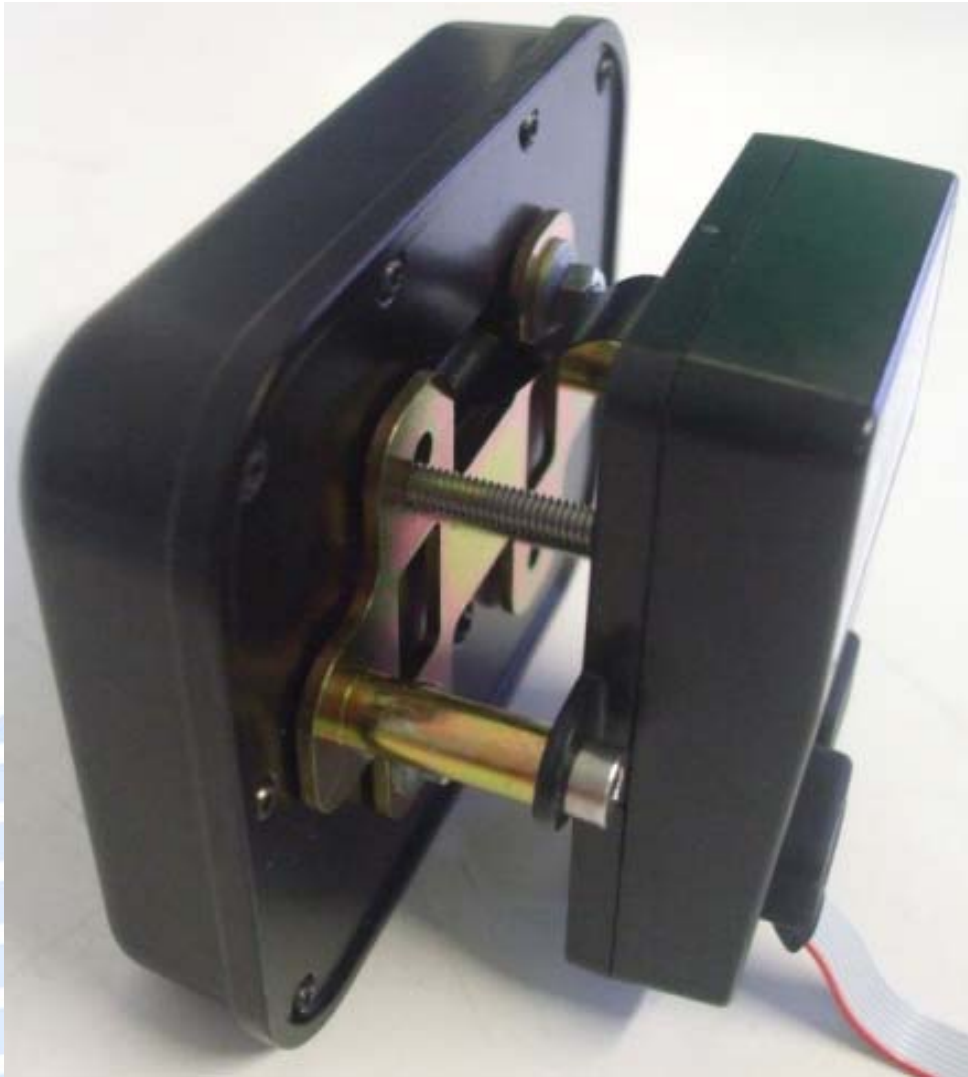

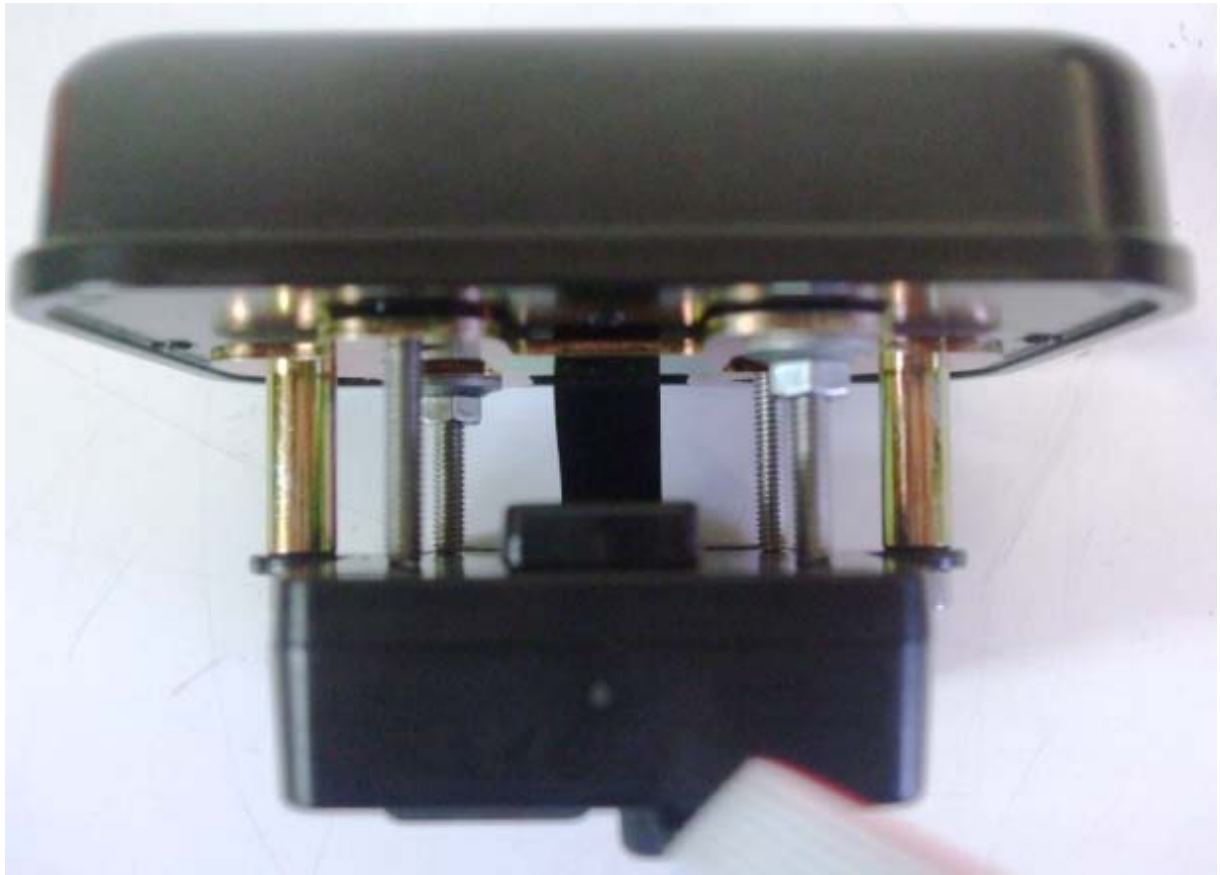

Ancillary Items - Serial to USB Interface and Power Supply Interface

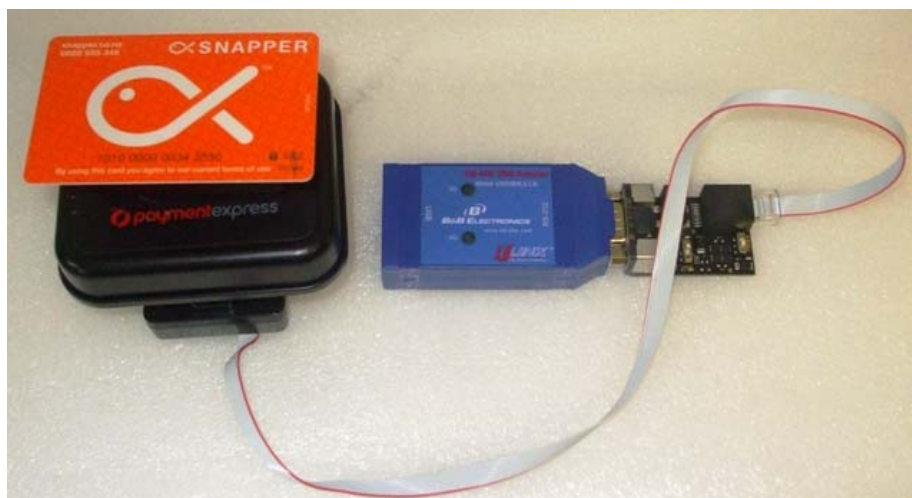


Internal Views - Transmitter device










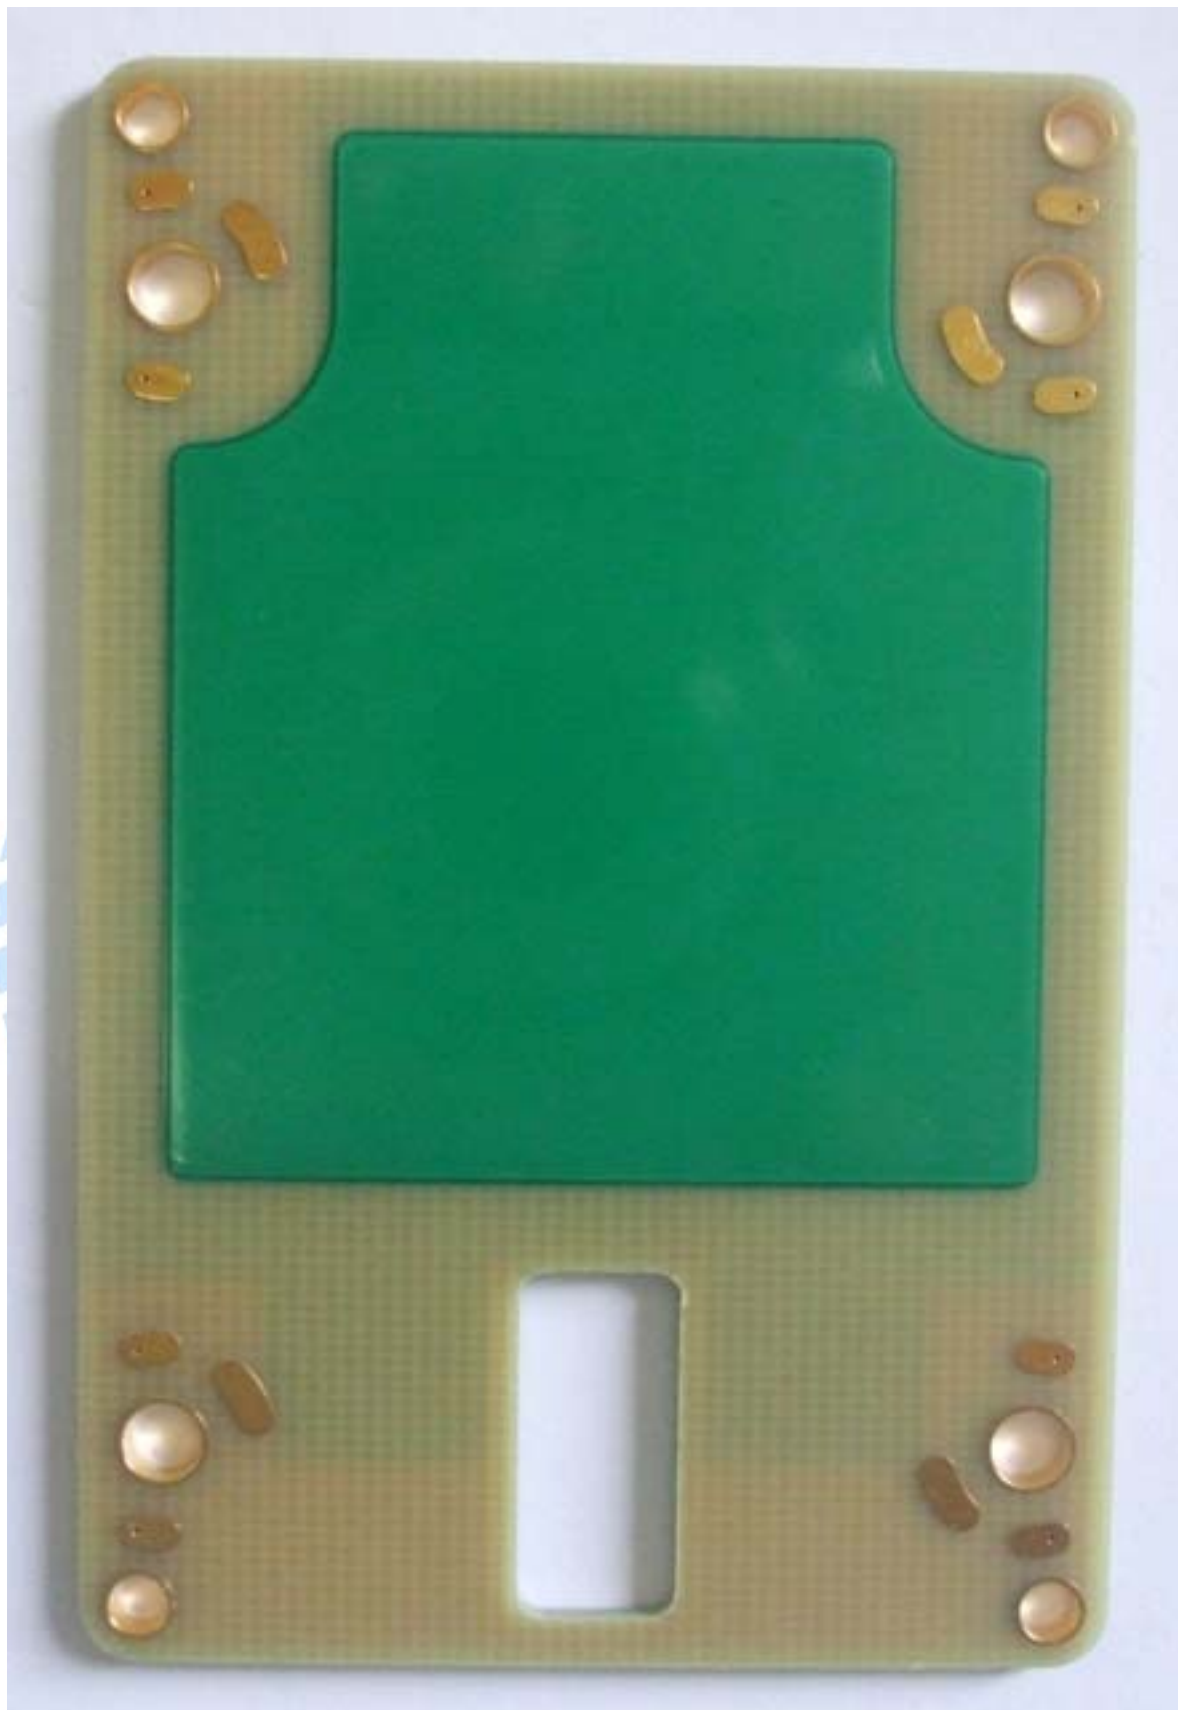






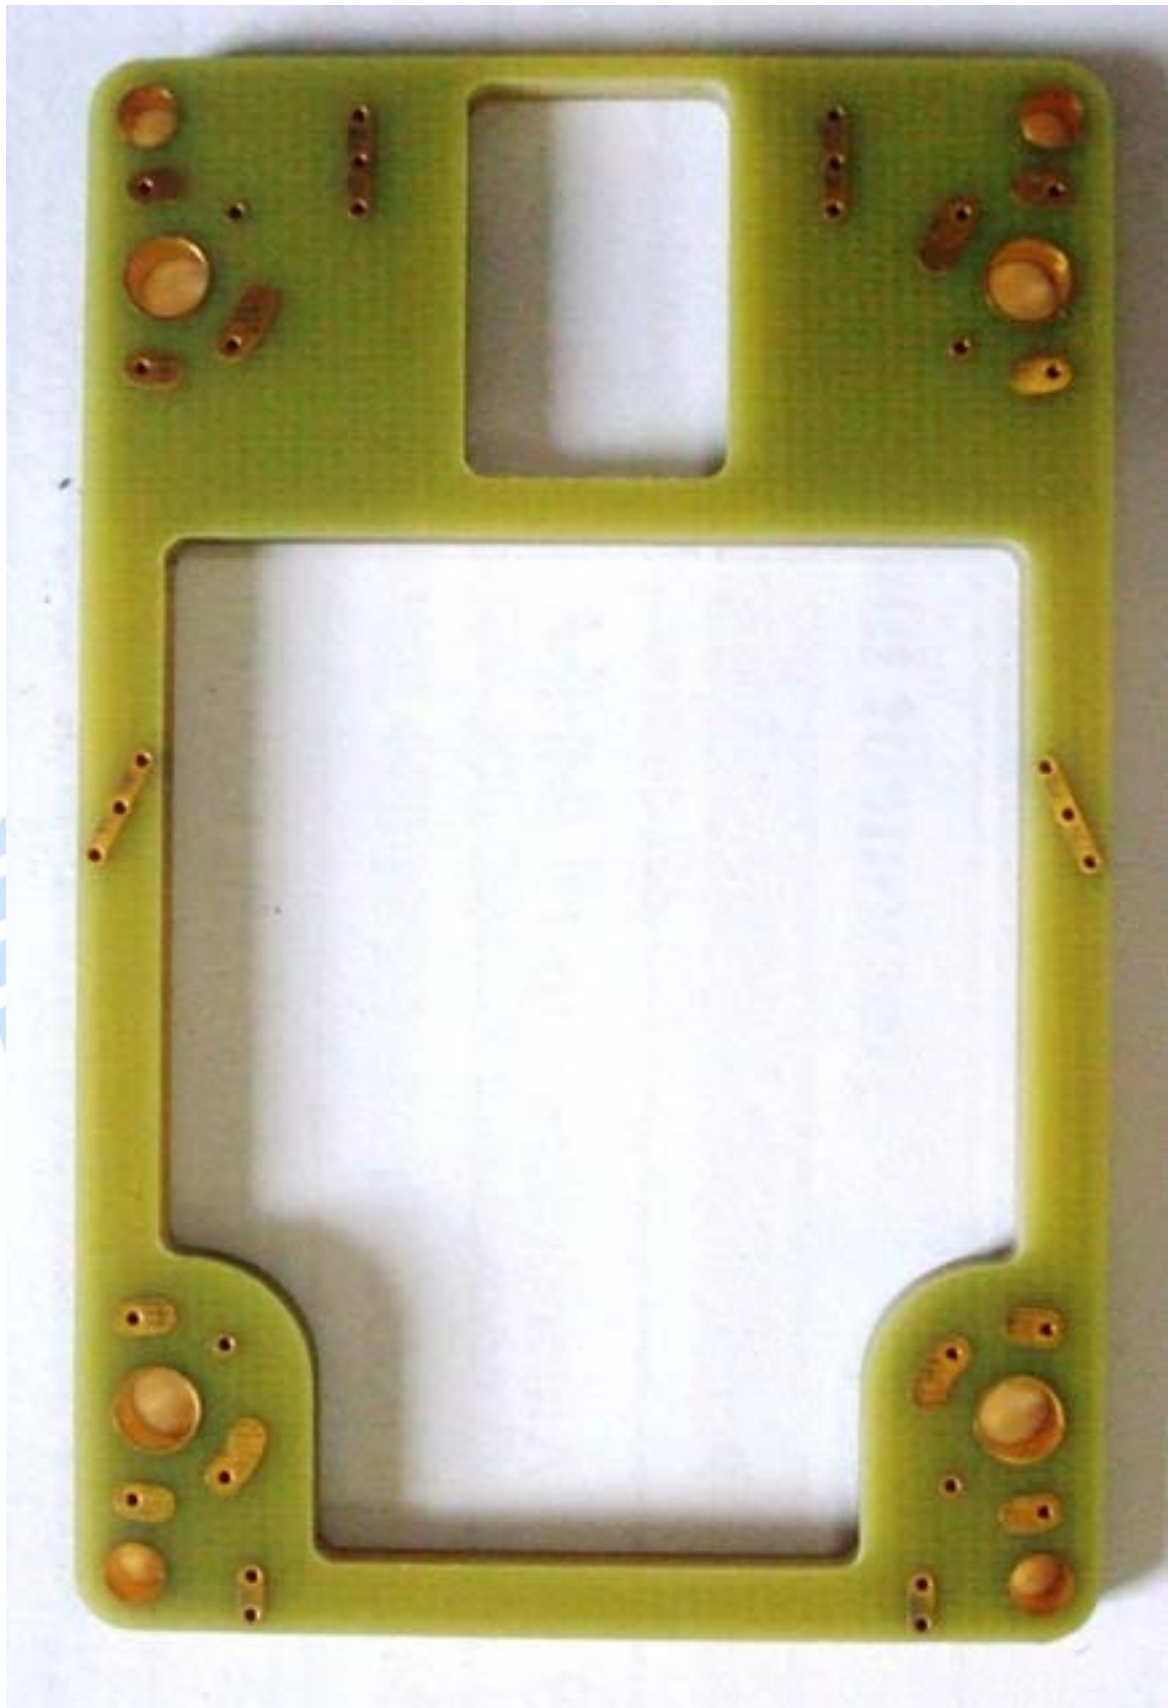



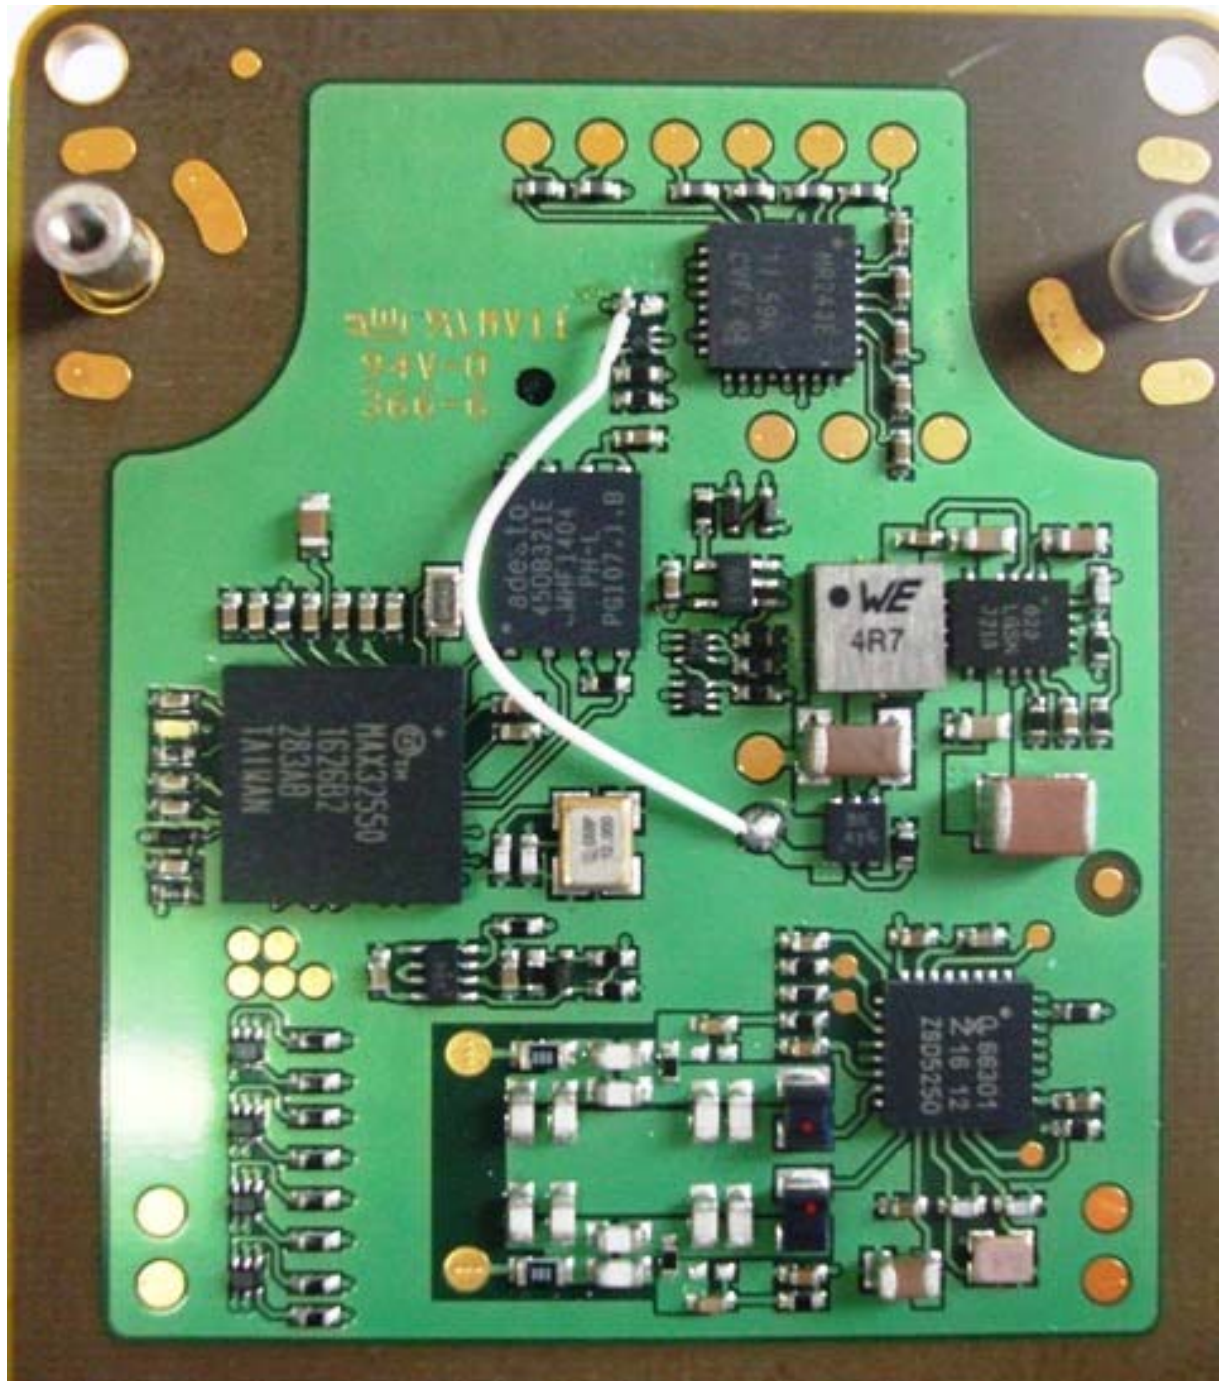


Internal Photos - Antenna and LED display





Conducted Emissions Test Set Up

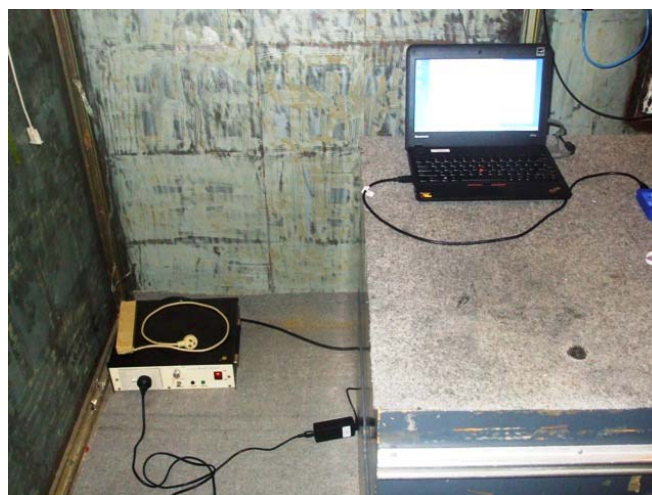

Radiated Emissions Test Set Up



