



EMC Technologies (NZ) Ltd
47 Mackelvie St, Grey Lynn
Auckland 1021
New Zealand
Phone 09 360 0862
E-Mail Address: auckland@emctech.co.nz
Web Site: www.emctech.co.nz

TEST REPORT

**Windcave CHU200T Rel C
Portable Payment Terminal**

tested to the

**47 Code of Federal Regulations
Part 15 - Radio Frequency Devices
Subpart C – Intentional Radiators**

Section 15.225

Operation within the band 13.110 -14.010 MHz

for

Windcave Ltd

A handwritten signature in black ink, appearing to read "Andrew Cutler".

This Test Report is issued with the authority of:

Andrew Cutler- General Manager



Table of Contents

1. STATEMENT OF COMPLIANCE	3
2. RESULTS SUMMARY	3
3. INTRODUCTION	4
4. CLIENT INFORMATION	4
5. DESCRIPTION OF TEST SAMPLE	5
6. SETUPS AND PROCEDURES	6
7. TEST EQUIPMENT USED	30
8. ACCREDITATIONS	30
9. PHOTOGRAPHS	31

1. STATEMENT OF COMPLIANCE

The **Windcave CHU200T Release C Portable Payment Terminal** complies with FCC Part 15 Subpart C Section 15.225 as an Intentional Radiator when the methods as described in ANSI C63.10 –2020 + Corrigendum 1-2023 are applied.

2. RESULTS SUMMARY

The results from testing carried out between 19th December 2025 and 7th January2026 are detailed in the following table:

Clause	Parameter	Result
15.201	Equipment authorisation requirement	Certification required
15.203	Antenna requirement	Complies Antenna internal to the device
15.204	External PA and antenna modifications	Not applicable No external devices
15.205	Restricted bands of operation	Complies Device transmits on 13.560 MHz
15.207	Conducted limits	Complies
15.209	Radiated emission limits - Emissions < 30 MHz	Complies
15.209	Radiated emission limits – Emissions > 30 MHz	Complies
15.225	Radiated emission limits - Fundamental	Complies
15.225	Frequency stability	Complies

3. INTRODUCTION

This report describes the tests and measurements performed for the purpose of determining compliance with the specification.

The client selected the test sample.

This report relates only to the sample tested.

Any corrections or erasures in this report are detailed in the revision table below.

Measurement uncertainties with statistical confidence intervals of 95% are shown below test results. Both Class A and Class B uncertainties have been accounted for, as well as influence uncertainties where appropriate.

All compliance statements have been made with respect of the specification limit with no reference to the measurement uncertainty.

All testing was carried out as per the standard in the worst-case configuration with no deviations being applied.

Report Revision Table

Version	Change Made	Date
251109.1	Initial Issue	16 th January 2026
251109.1A	ANSI C63.10 reference updated to ANSI C63.10 – 2020 + Corrigendum 1-2023 Radiated emission plots inserted into test report	24 th April 2025

4. CLIENT INFORMATION

Company Name	Windcave Ltd
Address	33 Wilkinson Rd, Ellerslie
State	Auckland 1060
Country	New Zealand
Contact	Mark Hawkins

5. DESCRIPTION OF TEST SAMPLE

Brand Name	Windcave
Product	Portable Payment Terminal
Model Number	CHU200T Release C
Manufacturer	Windcave Limited
Country of Origin	New Zealand
Serial Number(s)	3425430400
Firmware version	v3.0.1.0
Hardware version	CHU200T-C-01-00
Antenna type and gain	The NFC antenna is a 2-turn loop antenna around the perimeter of the LCD with gain of zero.
Rated supply voltage	12 Vdc representative power supply powered at 120 Vac
Modulation description	ASK
Highest clock frequency	12 MHz crystal CPU with 168 MHz internal PLL 500 MHz MIPI DSI
Modules installed	2.4 GHz WiFi Module. FCC ID: N7NHL78A
NFC Frequency	13.560 MHz
FCC ID	2AC2O-CHU200TRC

Product Description:

The device tested is a portable payment terminal for fixed and mobile retail environments.

The device was operated using a Notebook computer that was running supplied software that continuously operated the payment terminal.

Testing was carried out in EMC Emissions mode and NFC mode.

6. SETUPS AND PROCEDURES

Standard

The sample was tested in accordance with 47 CFR Part 15 Subpart C.

Methods and Procedures

The measurement methods and procedures as described in ANSI C63.10 – 2020 + Corrigendum 1-2023 were used.

Section 15.201: Equipment authorisation requirement

Certification as detailed in Subpart J of Part 2 is required for this device.

Section 15.203: Antenna requirement:

The device has a permanently attached internal 13.560 MHz antenna

Result: Complies

Section 15.204: External radio frequency power amplifiers and antenna modifications

It is NOT possible to attach an external power amplifier to this transmitter.

Result: Complies

Section 15.205: Restricted bands of operation


The 13.560 MHz device will fall into the band of 13.110 – 14.010 MHz that is covered by Section 15.225.

Measurements were made using a spectrum analyser with the 99% power points being determined.

Measurements were made using a span of 1 MHz with a resolution bandwidth of 10 kHz and a video bandwidth of 30 kHz.

Measurement was made at the test site when the device was being operated in EMC Emissions mode with the antenna at a distance of 0.50 m from the device under test.

A modulation bandwidth of 563.12625 kHz was measured.

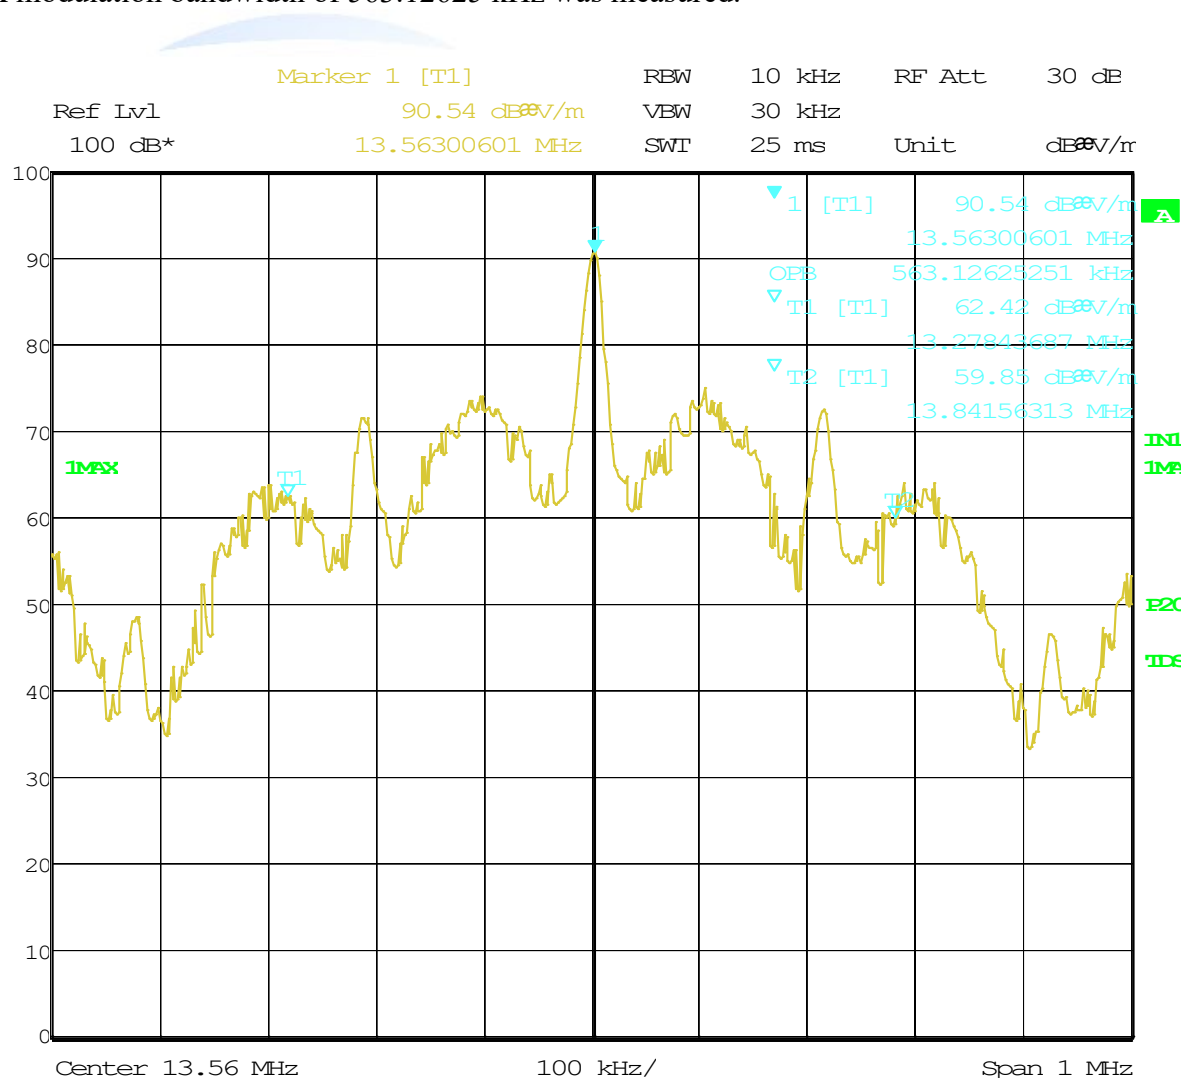

Date: 7.JAN.2026 13:00:49

Result: Complies

Section 15.207: Conducted emissions testing

Conducted Emissions testing was carried out over the frequency range of 150 kHz to 30 MHz which was carried out at the laboratory's MacKelvie Street premises in a 2.4 m x 2.4 m x 2.4 m screened room.

As it is possible for this device to be directly or indirectly connected to the Public AC mains supply testing was carried out using a representative AC power supply system that was powered at 120 Vac 60 Hz which powered the device under test via the USB to UART interface device.

The NFC Card Reader operates at 13.560 MHz.

Initially testing was carried out when the NFC Card Reader was operating normally with the internal antenna connected while continuously reading a card was that placed close to the reader.

As the device did not comply at 13.560 MHz an additional test was carried out with a Resistive Dummy load replacing the NFC antenna.

The device is deemed to comply when the emissions from the NFC device are observed to be less than the appropriate limits when the dummy load is attached.

The device was placed on top of the emissions table, which is 0.8 m x 0.8 m, 80 cm above the screened room floor which acts as the horizontal ground plane.

In addition, the device was positioned 40 cm away from the screened room wall which acts as the vertical ground plane.

The artificial mains network was bonded to the screened room floor.

At all times the device was kept more than 80 cm from the artificial mains network.

Initially a conducted emissions pre scan is carried out using a Peak detector (red trace) and an Average detector (green trace).

Worst case measurements are then made on the highest pre-scan emission levels on a limited number of frequencies using a Quasi Peak detector and an Average detector with the results of both the phase and neutral lines being recorded in the results table.

When either the Peak or Average detector pre scan emissions appear to be over the Quasi Peak or Average limit line each peak is individually checked and confirmed to be below the applicable limit.

The supplied plot is combined plot showing the worst case quasi peak and average results of both the phase and neutral lines to the representative AC power supply.

Quasi peak and average detectors have been used with resolution bandwidths of 9 kHz.

Result: Complies


Measurement uncertainty with a confidence interval of 95% is:

- AC Mains port (0.15-30 MHz) ± 2.8 dB

Conducted Emissions – AC Input Power Port – Normal Operating

Setup: Device tested when powered at 120 Vac. Emissions selected on laptop software program.

Peak --- Average -- Quasi Peak X Average +

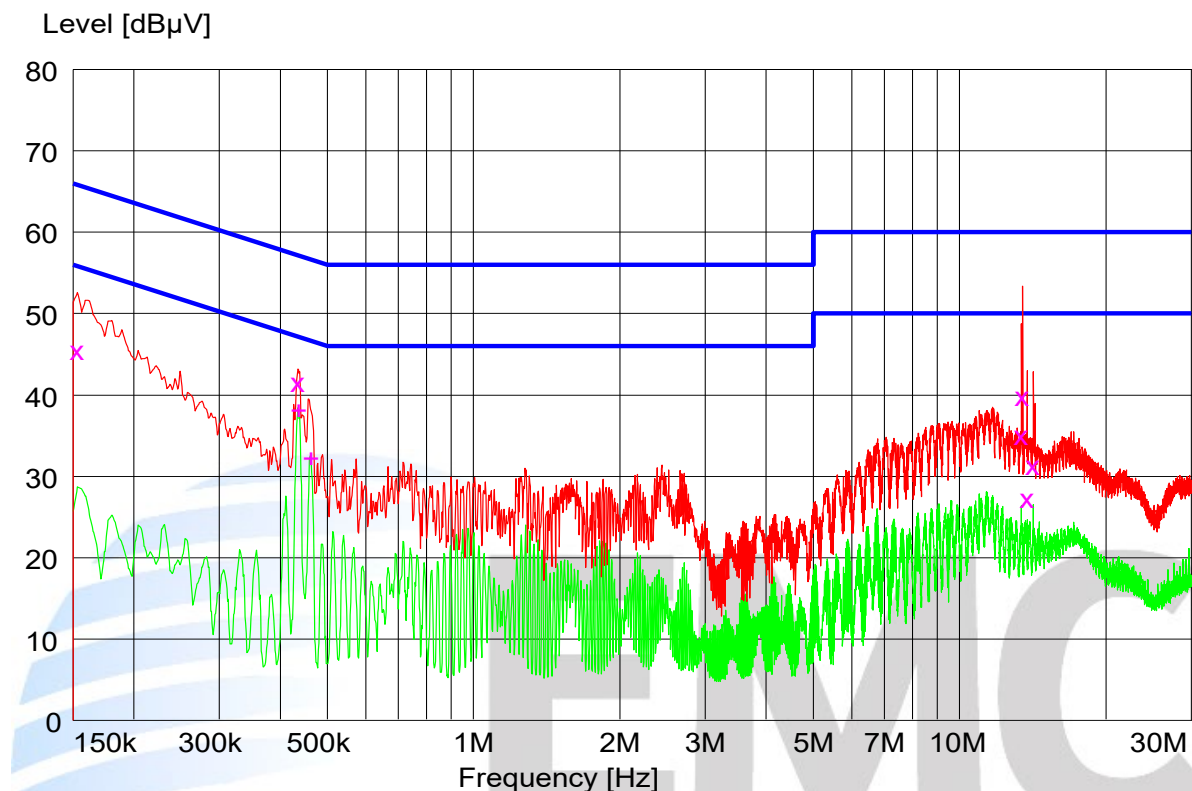

Final Quasi-Peak Measurements

Frequency MHz	Level dBμV	Limit dBμV	Margin dB	Phase	Rechecks dBμV
0.153000	45.70	65.8	20.1	N	Fundamental 27.7
0.435000	41.80	56.2	15.4	L1	
13.394000	35.20	60.0	24.9	L1	
13.484000	40.10	60.0	20.0	N	
13.560000	-	60.0	-	L1	
13.790000	27.50	60.0	32.5	L1	
14.190500	31.50	60.0	28.5	L1	


Final Average Measurements

Frequency MHz	Level dBμV	Limit dBμV	Margin dB	Phase	Rechecks dBμV
0.435000	38.30	47.2	8.9	L1	
0.462000	32.40	46.6	14.2	N	

Conducted Emissions – AC Input Power Port – Normal Operating

Setup: Device tested when powered at 120 Vac. NFC selected on laptop software program.

Peak --- Average -- Quasi Peak X Average +

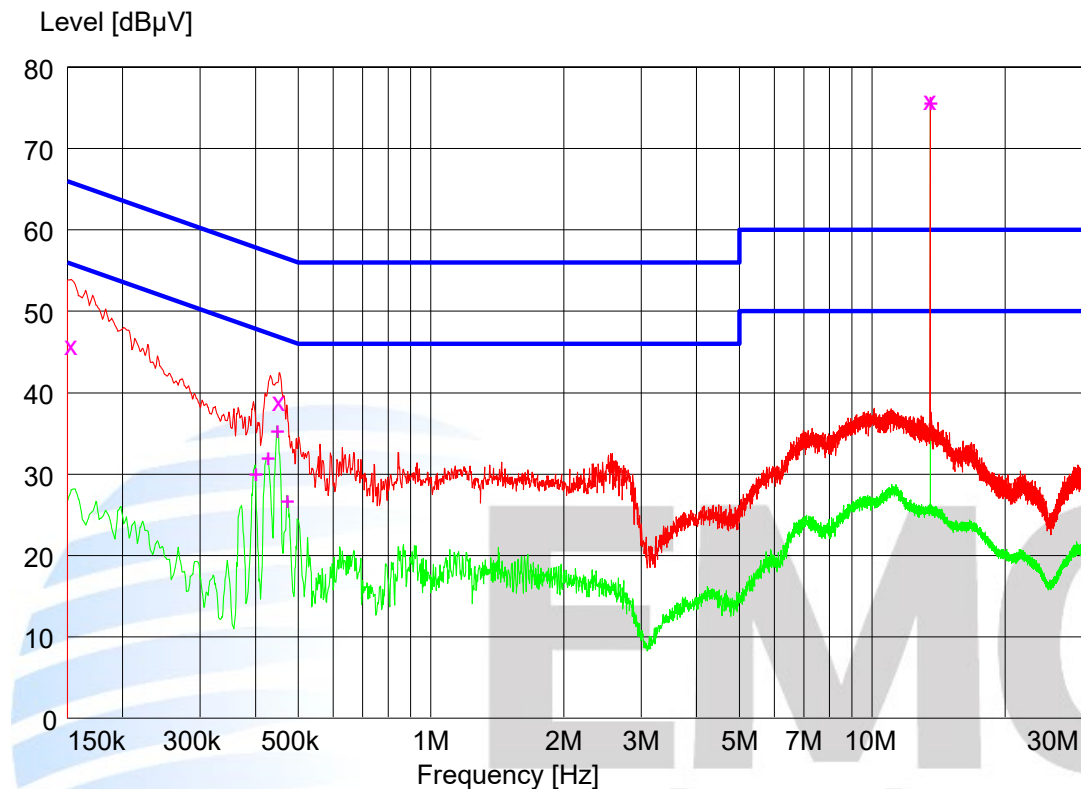

Final Quasi-Peak Measurements

Frequency MHz	Level dBμV	Limit dBμV	Margin dB	Phase	Rechecks dBμV
0.153000	46.00	65.8	19.8	N	Fundamental
0.453000	39.10	56.8	17.7	N	
13.560500	76.10	60.0	-16.1	L1	

Final Average Measurements


Frequency MHz	Level dBμV	Limit dBμV	Margin dB	Phase	Rechecks dBμV
0.399000	30.20	47.9	17.7	L1	Fundamental
0.426000	32.20	47.3	15.1	N	
0.447000	35.50	46.0	11.5	N	
0.471000	26.80	46.5	19.7	L1	
13.560500	75.80	50.0	-25.8	L1	

mode

Conducted Emissions – AC Input Power Port – Dummy Load Attached

Setup: Device tested when powered at 120 Vac. Dummy load. Software running NFC mode.

Peak --- Average -- Quasi Peak X Average +

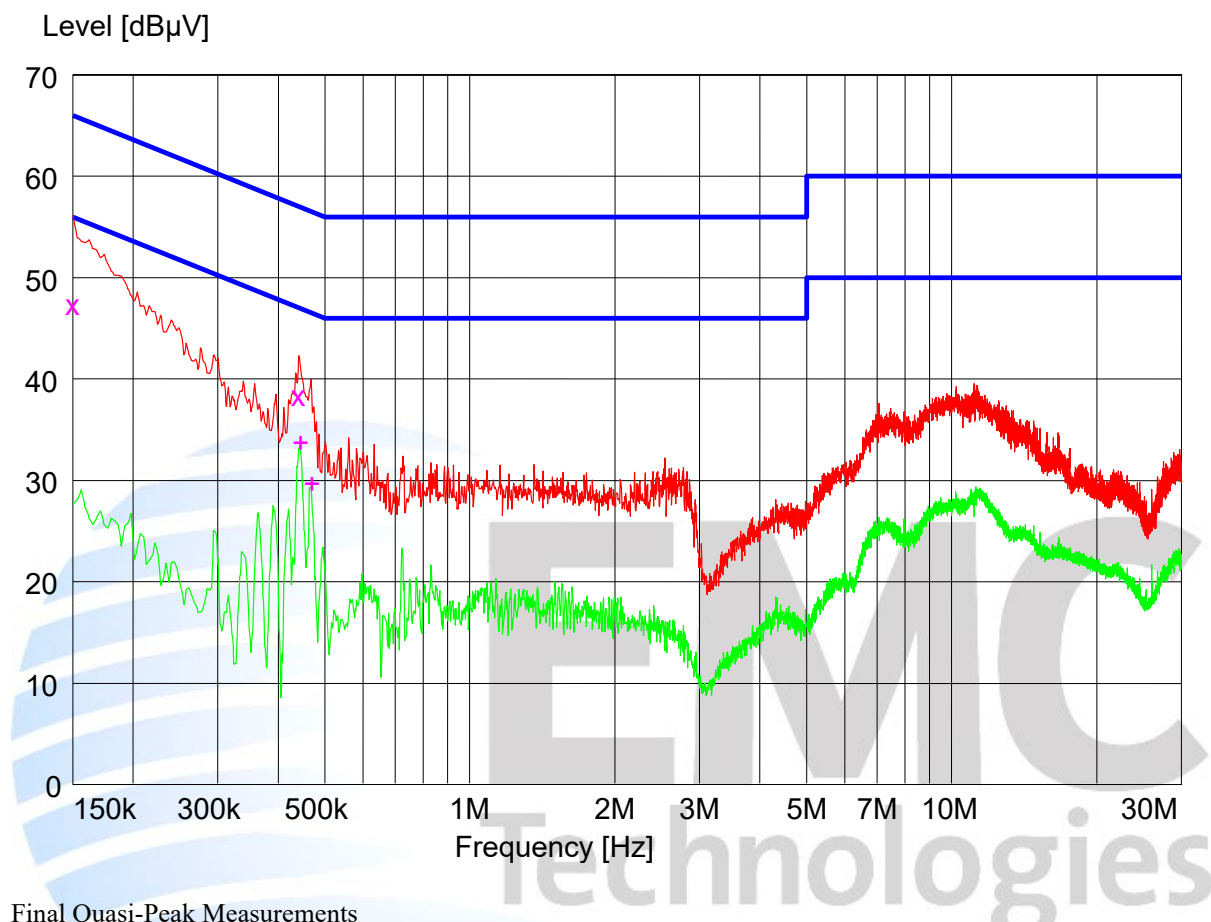

Final Quasi-Peak Measurements

Frequency MHz	Level dB μ V	Limit dB μ V	Margin dB	Phase	Rechecks dB μ V
0.150000	47.6	66.0	18.4	L1	
0.441000	38.6	57.0	18.4	N	

Final Average Measurements

Frequency MHz	Level dB μ V	Limit dB μ V	Margin dB	Phase	Rechecks dB μ V
0.444000	33.90	47.0	13.1	N	
0.468000	29.90	46.6	16.7	L1	

Section 15.209: Radiated emission limits, general requirements

Radiated emission testing was carried out over the frequency range of 10 kHz to 12000 MHz as the device contains a 2.4 GHz WiFi module.

Testing was carried out at the laboratory's open area test site - located at Driving Creek, Orere Point, Auckland, New Zealand.

The device was tested when placed in the centre of the test table 0.8 m above the test site ground plane.

The device was powered using a representative AC power supply that was powered at 120 Vac.

The laptop and USB to serial adaptor were placed to the right of the device.

The serial adaptor was attached via a 1 m Ethernet type cable that was inserted in the serial and charging port of the device.

The device was activated and it operated continuously using the Windcave exercise program.

A payment card was placed in the card slot and a NFC card placed on the device screen.

When an emission is located, it is positively identified and its maximum level is found by rotating the automated turntable, and by varying the antenna height with an automated antenna tower.

Below 30 MHz a magnetic loop is used with the centre of the loop being 1 metre above the ground with measurements being made using a quasi peak detector at a distance of 10 metres.

Between 30 and 12000 MHz measurements were made at a distance of 3 metres in both vertical and horizontal antenna polarisations.

A Quasi Peak detector with a 120 kHz bandwidth was used between 30 and 1000 MHz.

A Peak detector and an Average detector, with a bandwidth of 1 MHz, were used between 1000 – 12000 MHz.

During the test a number of ambient emissions were identified a list of which can be provided upon request.

The emission level is determined in field strength by taking the following into consideration:
Level (dBμV/m) = Receiver Reading (dBμV) + Antenna Factor (dB/m) + Coax Loss (dB)

For example, if an emission of 30 dBμV was observed at 30 MHz:
 $45.5 \text{ dB}\mu\text{V/m} = 30.0 \text{ dB}\mu\text{V} + 14 \text{ dB/m} + 1.5 \text{ dB}$

Section 15.209: Below 30 MHz spurious emission measurements

The results below were derived from the raw data plots detailed below.

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
27.120	10.7	48.6	37.9	Pass

The NFC device was transmitting continuously on 13.560 MHz.

Magnetic loop measurements were made at a distance of 10 metres.

Measurement receiver with a quasi-peak detector with a 9 kHz bandwidth was used.

The 30 metre limit has been scaled by a factor of 40 dB per decade, as per section 15.31 (f) (2).

The limit at 27.120 MHz when measured at 30 metres is 30 uV/m or 29.54 dBuV/m.

The scaled limit at 10 metres will be 48.6 dBuV/m.

The spurious emission observed does not exceed the level of the fundamental emission.

No other low frequency spurious emissions were detected from the device when measurements were attempted from 10 kHz - 30.0 MHz

Result: Complies


Measurement uncertainty with a confidence interval of 95% is:

- Free radiation tests (10 kHz – 30 MHz) $\pm$ 4.8 dB

Section 15.209: Spurious Emissions (less than 30 MHz)

Frequency Range: 150 – 500 kHz

Antenna: Loop

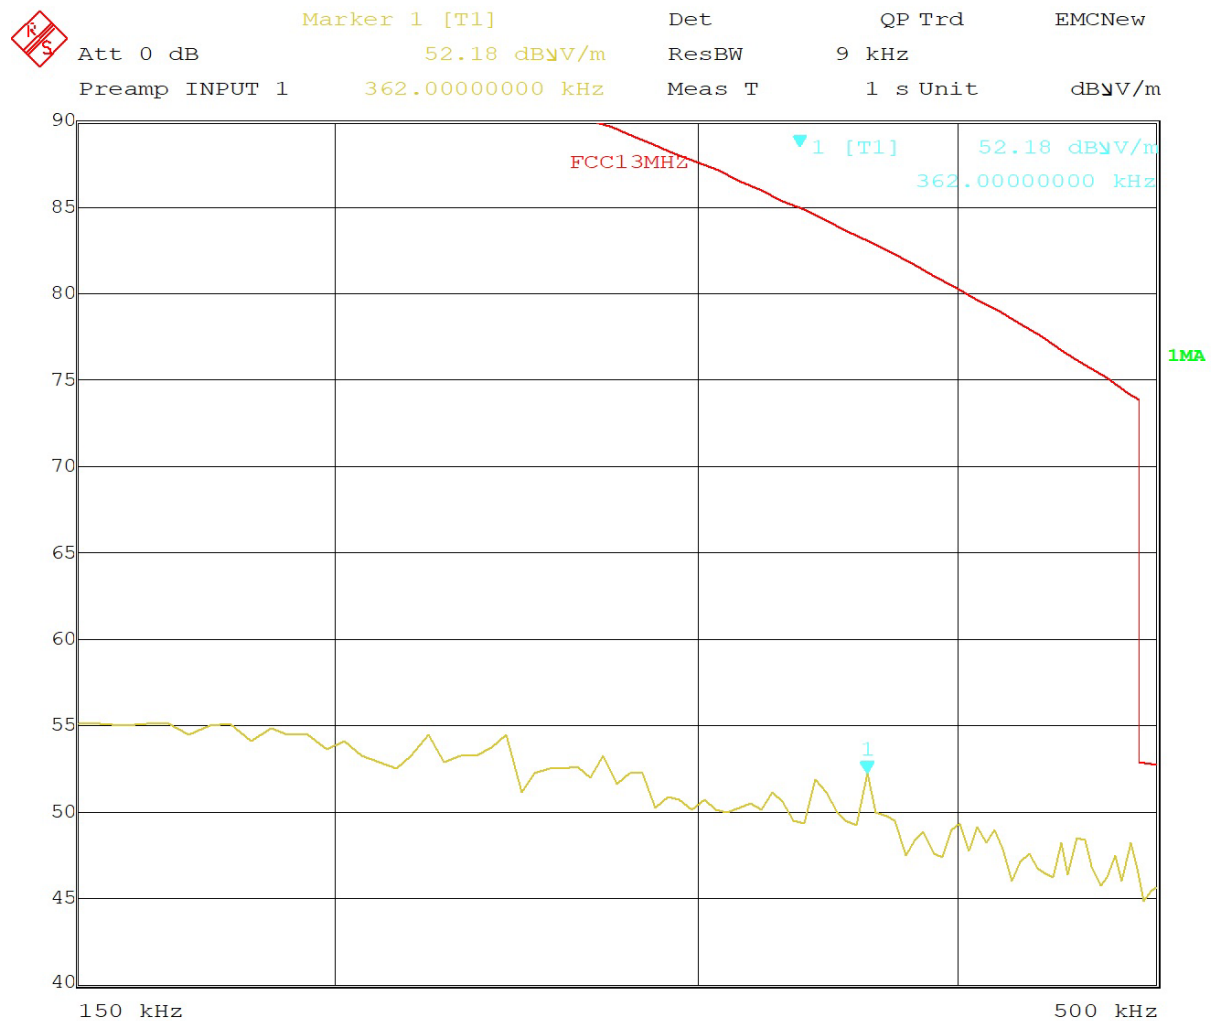


Date: 7.JAN.2026 13:20:51

Notes

No emissions detected from the product

Frequency Range: 500 – 2000 kHz

Antenna: Loop

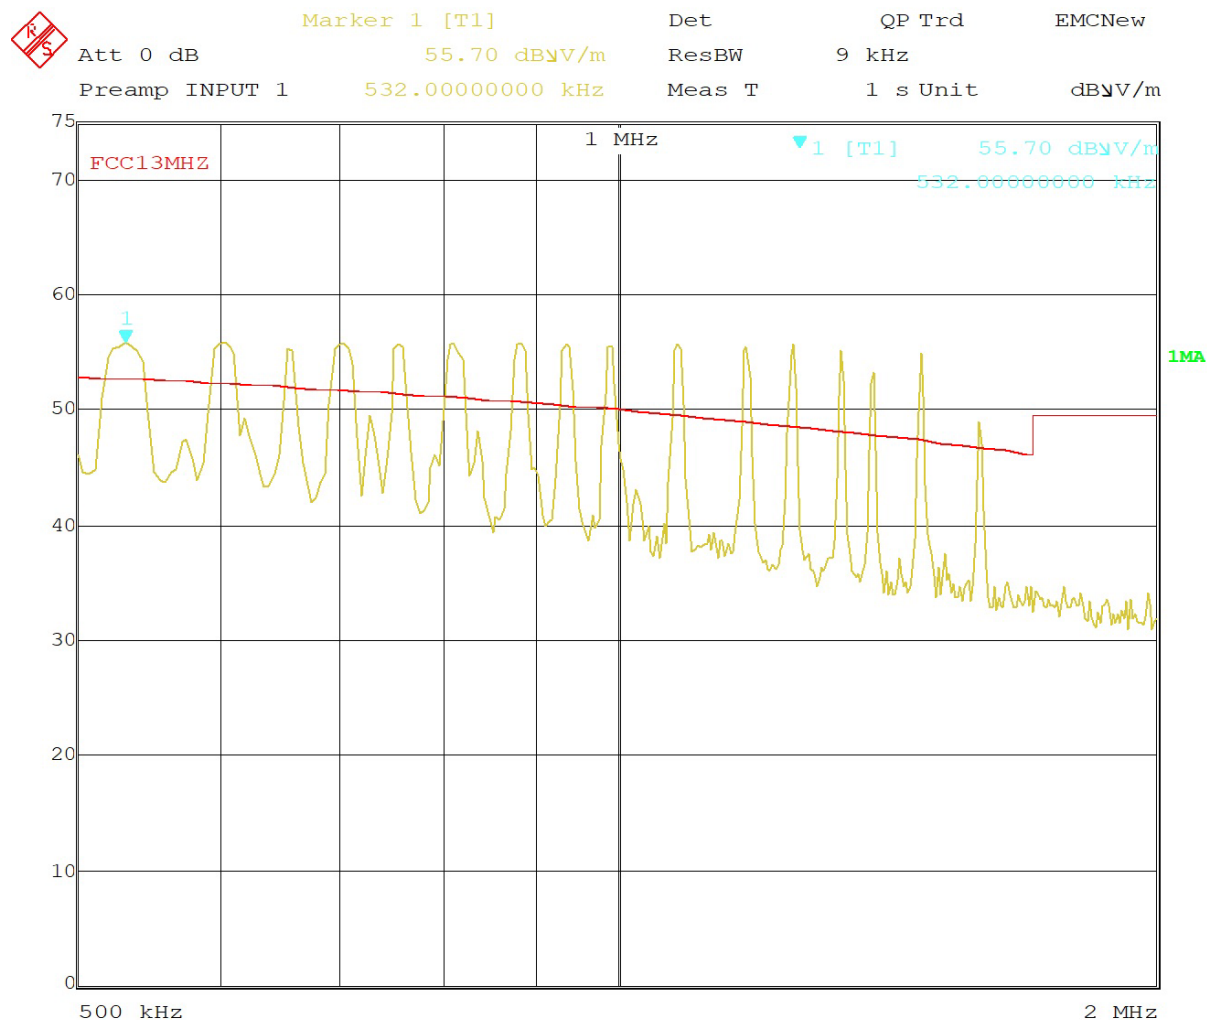

Date: 7.JAN.2026 13:19:07

Notes


No emissions detected from the product

AM broadcast emissions observed between 550 – 1705 kHz

Pretesting in the screened semi anechoic chamber in the laboratory identified no emissions from the device under test over this frequency range.

Frequency Range: 2.0 – 10.0 MHz

Antenna: Loop

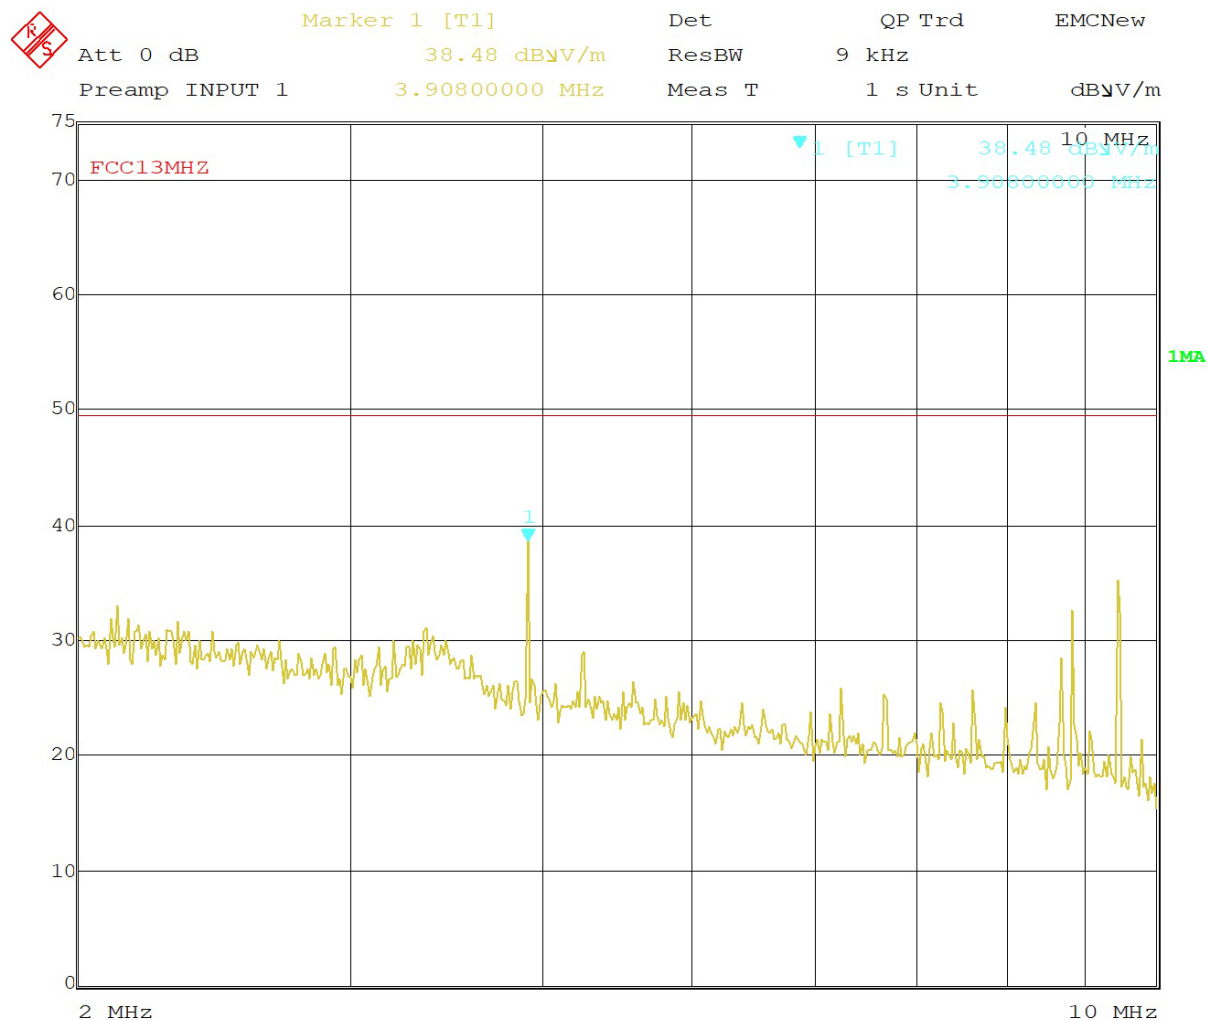

Date: 7.JAN.2026 13:17:56

Notes


No emissions detected from the device

Maritime FAX observed at 3908 kHz

Pretesting in the screened semi anechoic chamber in the laboratory identified no emissions from the device under test over this frequency range.

Frequency Range: 10.0 – 30.0 MHz

Antenna: Loop

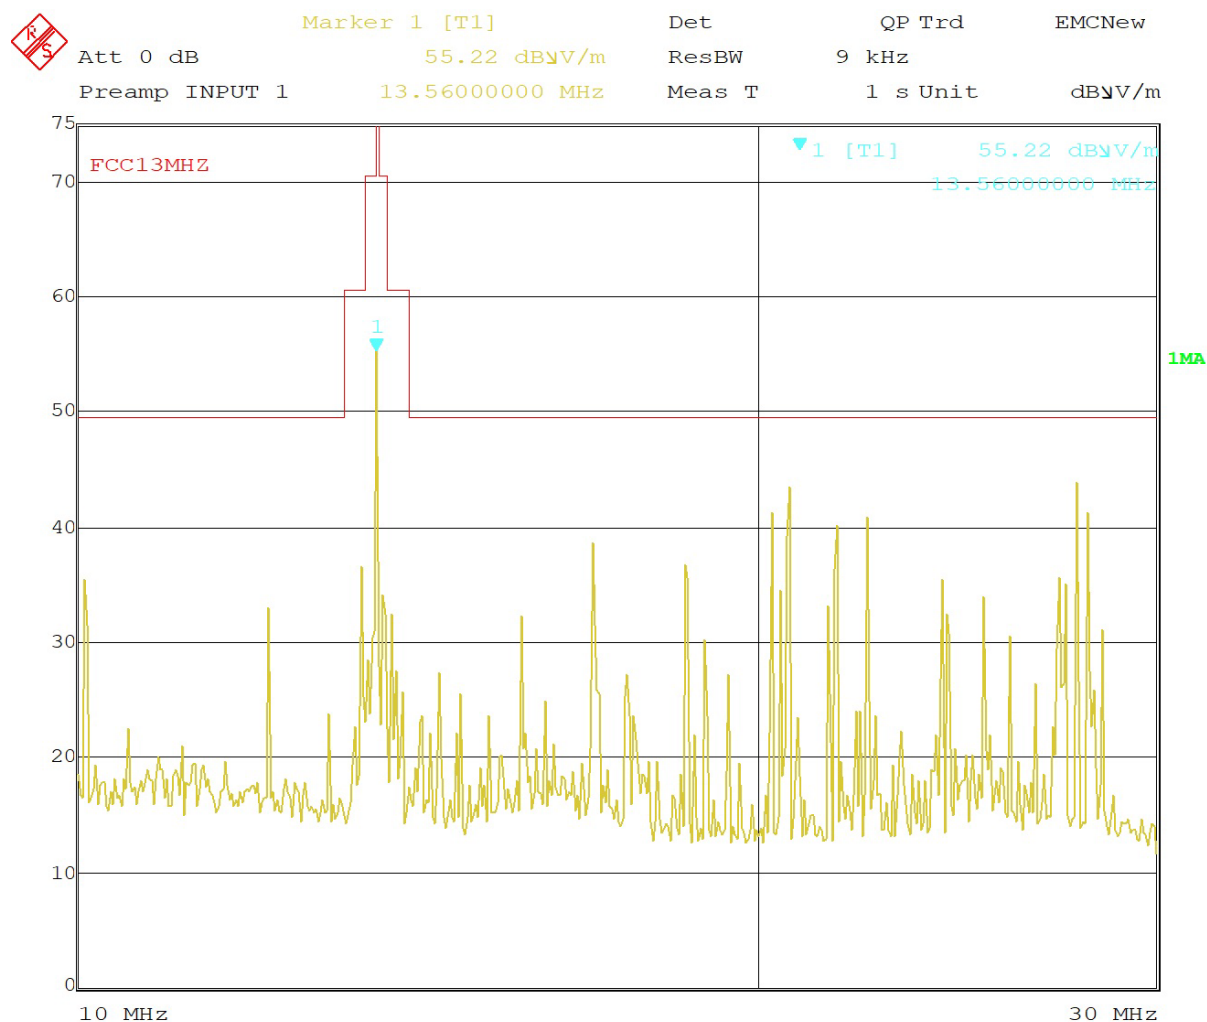

Date: 7.JAN.2026 13:16:30

Notes

Device observed transmitting on 13.560 MHz

A number of high frequency shortwave broadcast type emissions observed between 10 MHz and 30 MHz.

Pretesting in the screened semi anechoic chamber in the laboratory identified no emissions from the device under test over this frequency range except for the emission on 13.560 MHz and the 2nd Harmonic on 27.120 MHz.

Section 15.209: Spurious Emissions (above 30 MHz)

Measurements between 30 – 12000 MHz have been made at a distance of 3 metres as the device contains a 2.4 GHz WiFi module.

The results below were derived from the raw data plots detailed below.

The limits as described in Section 15.209 have been applied.

Frequency (MHz)	Vertical (dB μ V/m)	Horizontal (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result	Antenna Polarisation
33.680	30.0	-	40.0	10.0	Pass	Vertical
34.520	33.2	-	40.0	6.8	Pass	Vertical
35.600	30.0	-	40.0	10.0	Pass	Vertical
36.440	30.1	-	40.0	9.9	Pass	Vertical
40.680	27.1	24.1	40.0	12.9	Pass	Vertical
59.840	26.1	28.1	40.0	11.9	Pass	Horizontal
61.480	27.9	-	40.0	12.1	Pass	Vertical
61.520	-	29.7	40.0	10.4	Pass	Vertical
63.120	-	28.4	40.0	11.6	Pass	Vertical
72.000	22.1	-	40.0	17.9	Pass	Vertical
181.280	-	33.3	43.5	10.2	Pass	Horizontal
189.360	-	32.3	43.5	11.2	Pass	Horizontal
194.160	-	32.5	43.5	11.0	Pass	Horizontal
257.360	-	33.5	46.0	12.5	Pass	Horizontal
281.600	26.5	-	46.0	19.5	Pass	Vertical

No spurious emissions were detected from the WiFi module that was configured to continuously operate in Bluetooth advertising mode on 2402, 2426 and 2480 MHz.

All other emissions observed had a margin to the limit that exceed at least 15 dB when measurements were made between 30 – 12000 MHz using both vertical and horizontal polarisations.

Result: Complies


Measurement uncertainty with a confidence interval of 95% is:

Free radiation tests (30 – 12000 MHz) $\pm$ 4.1 dB

Section 15.209: Spurious Emissions (above 30 MHz)

Frequency Range: 30 – 300 MHz

Antenna polarisation: Vertical

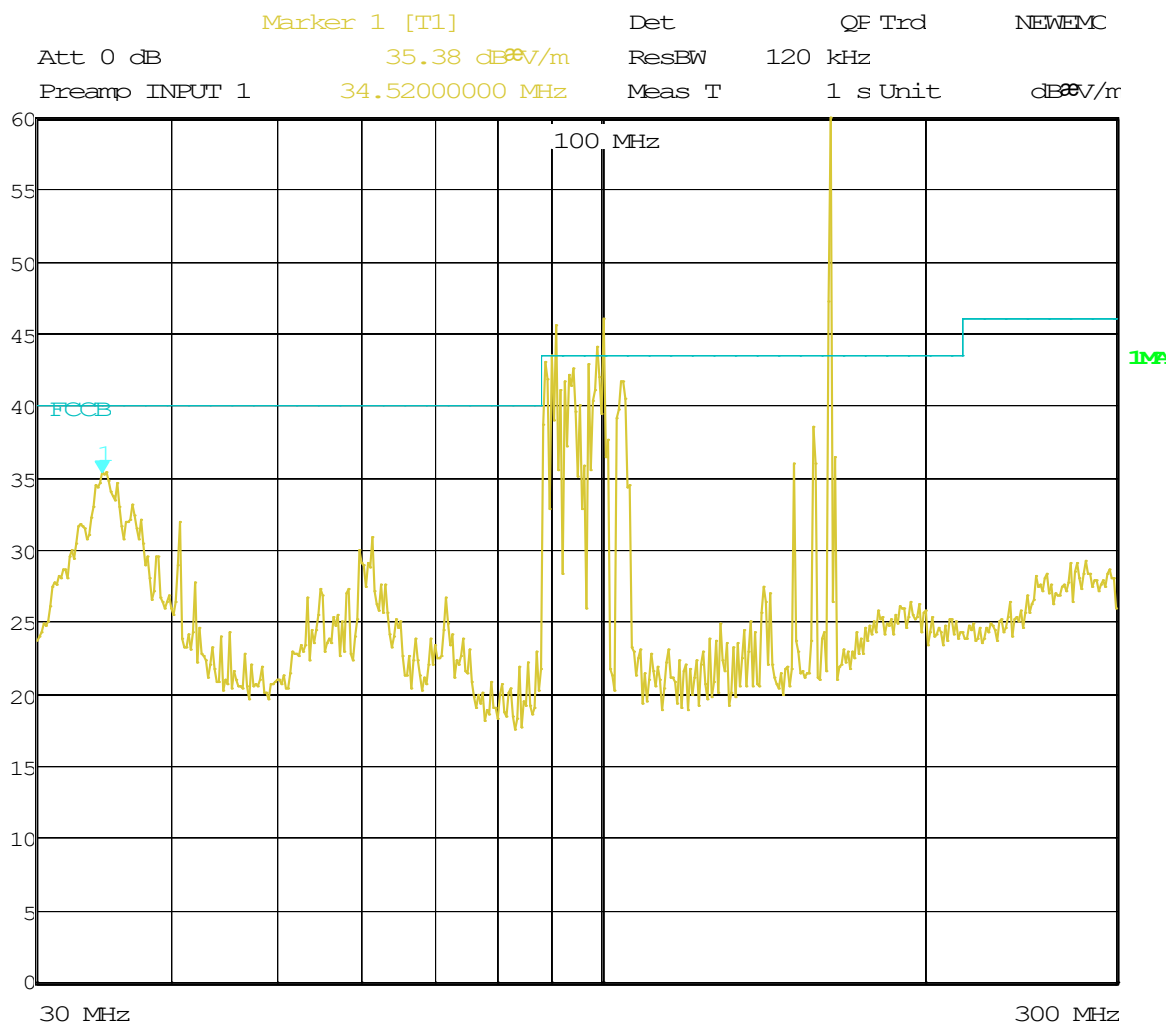

Date: 7.JAN.2026 09:28:54

Notes:

88 – 108 MHz: FM Broadcast ambient emissions

163.240 MHz: Local VHF land mobile repeater – intermittent ambient emission


140 – 160 MHz: VHF land mobile emissions

Pretesting in the screened semi anechoic chamber in the laboratory identified no emissions from the device under test in the FM broadcast band.

Section 15.209: Spurious Emissions (above 30 MHz)

Frequency Range: 30 – 300 MHz

Antenna polarisation: Horizontal

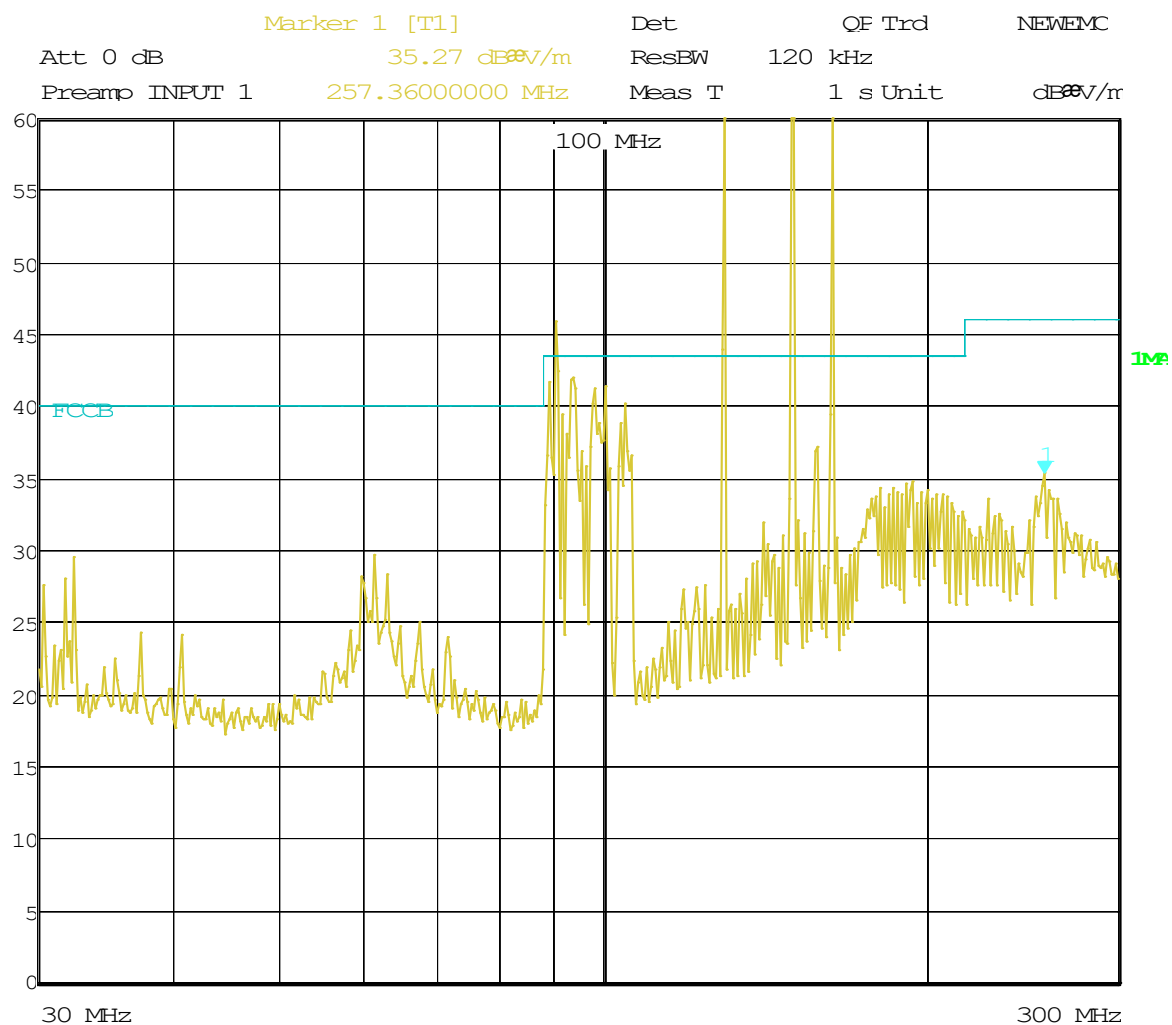

Date: 7.JAN.2026 10:02:43

Notes:

88 – 108 MHz: FM Broadcast ambient emissions


124.300 MHz, 151.300 MHz, 163.240 MHz: VHF aeronautical and land mobile local high level intermittent ambient emissions

Pretesting in the screened semi anechoic chamber in the laboratory identified no emissions from the device under test in the FM broadcast band.

Section 15.209: Spurious Emissions (above 30 MHz)

Frequency Range: 300 – 1000 MHz

Antenna polarisation: Vertical

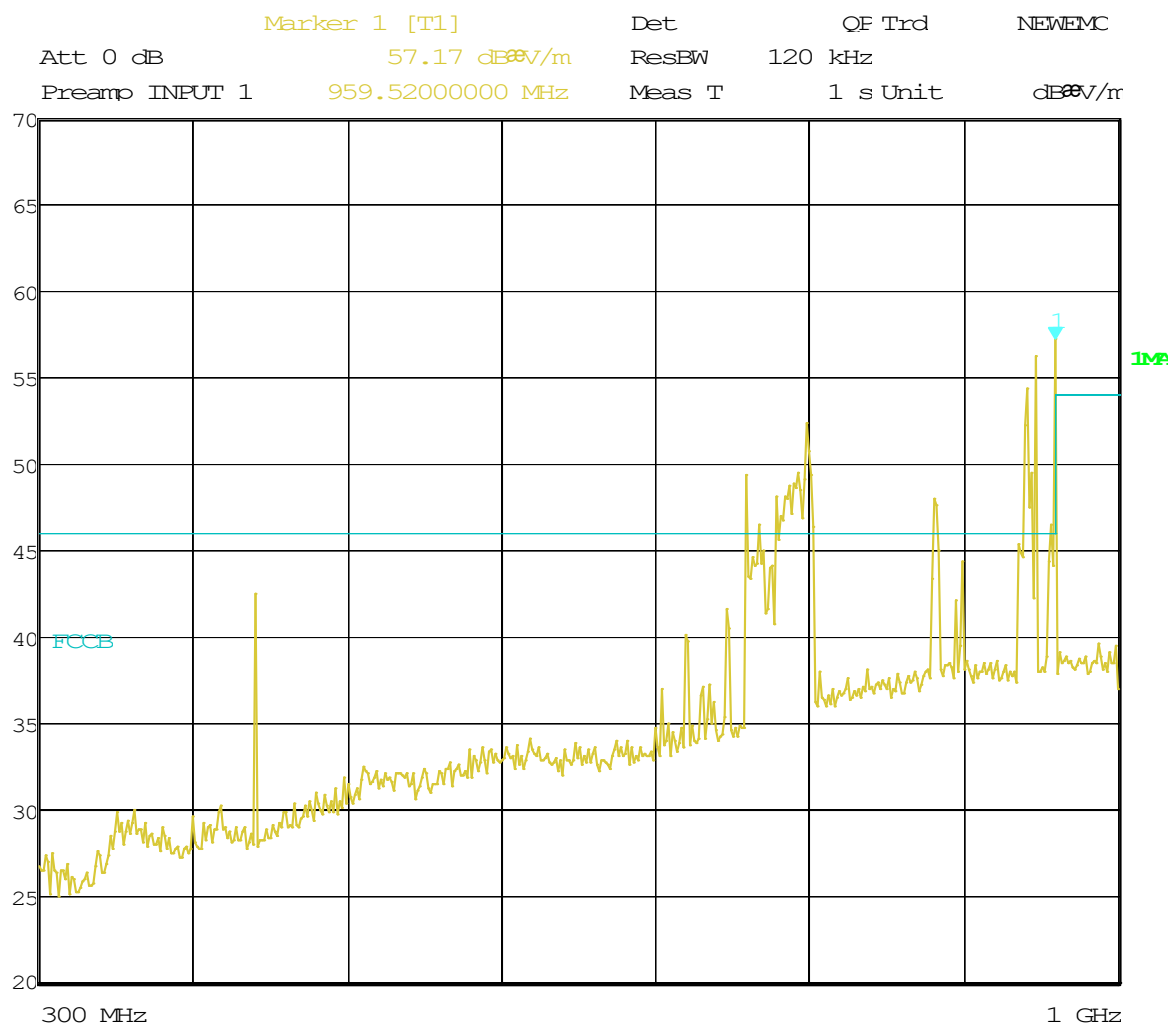

Date: 7.JAN.2026 10:34:03

Notes

No emissions detected from the product

High level intermittent UHF link transmitter on 454 MHz


High level cellular emissions from 700 – 800 MHz, 880 MHz and 947 – 959 MHz.

Pretesting in the screened semi anechoic chamber in the laboratory identified no emissions from the device under test in the cellular bands indicated above.

Section 15.209: Spurious Emissions (above 30 MHz)

Frequency Range: 300 – 1000 MHz

Antenna polarisation: Horizontal

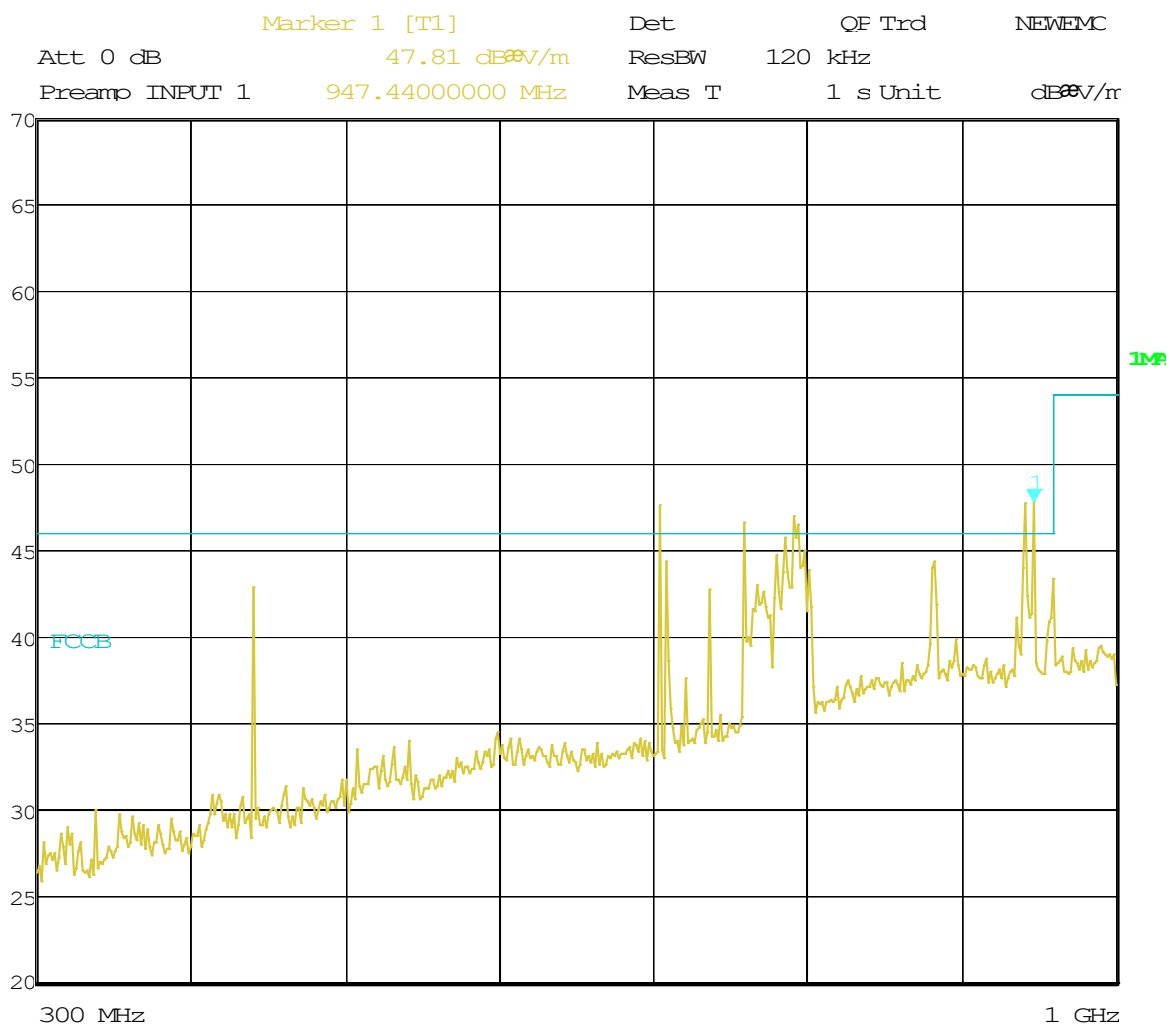

Date: 7.JAN.2026 10:41:28

Notes

No emissions detected from the product

High level intermittent UHF link transmitter on 454 MHz


High level cellular emissions from 700 – 800 MHz, 880 MHz and 947 – 959 MHz.

Pretesting in the screened semi anechoic chamber in the laboratory identified no emissions from the device under test in the cellular bands indicated above.

Section 15.209: Spurious Emissions (above 30 MHz)

Frequency Range: 1000 - 6000 MHz

Antenna polarisation: Vertical

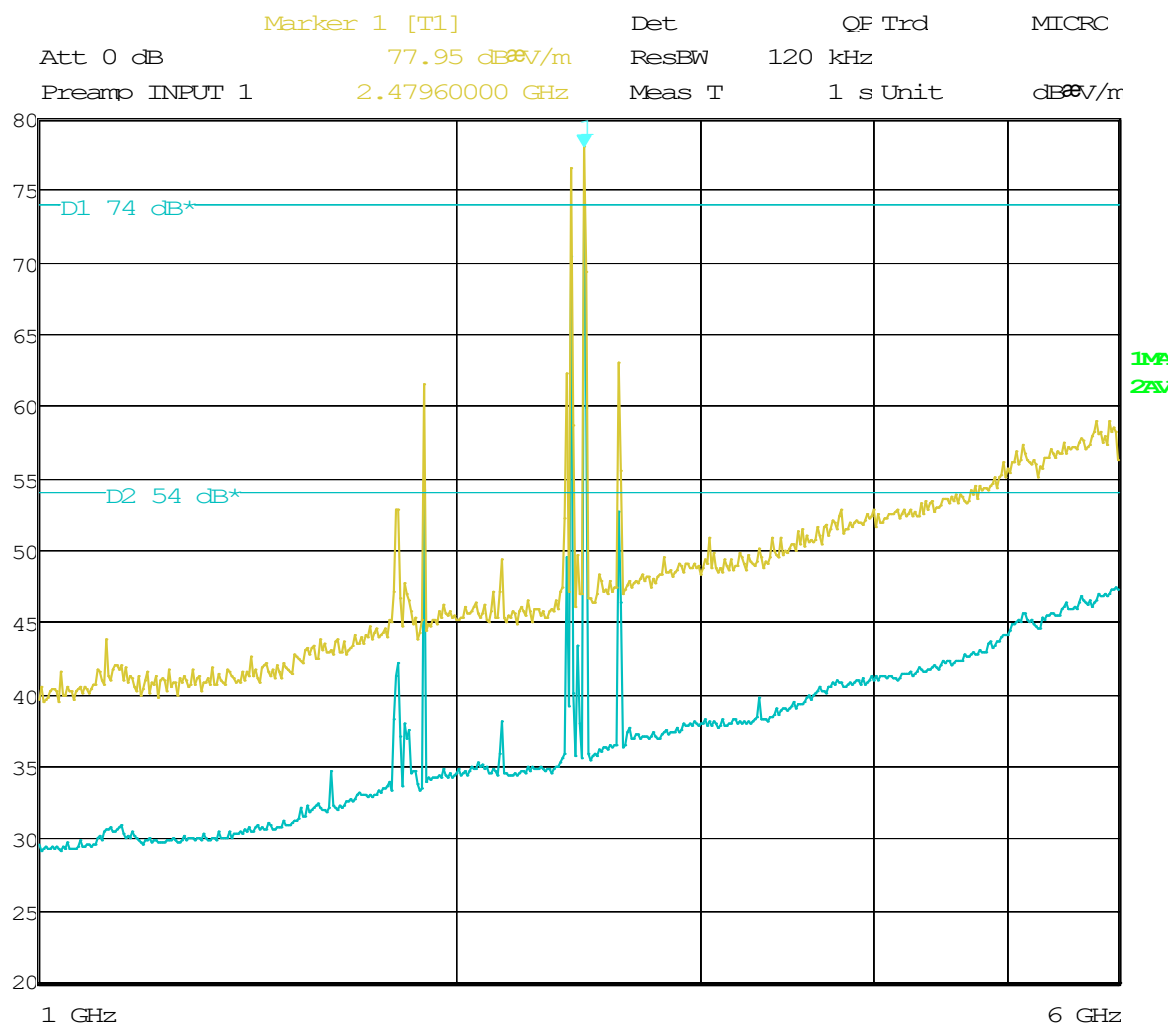

Date: 7.JAN.2026 13:26:01

Notes

WiFi / BT emissions observed from the product between 2400.0 – 2483.5 MHz

DECT phone observed operating on 1850 MHz


Cellular emissions observed at 1830, 2150 and 2600 MHz

Pretesting in the screened semi anechoic chamber in the laboratory identified no emissions from the device under test in the band indicated above.

Section 15.209: Spurious Emissions (above 30 MHz)

Frequency Range: 1000 - 6000 MHz

Antenna polarisation: Horizontal

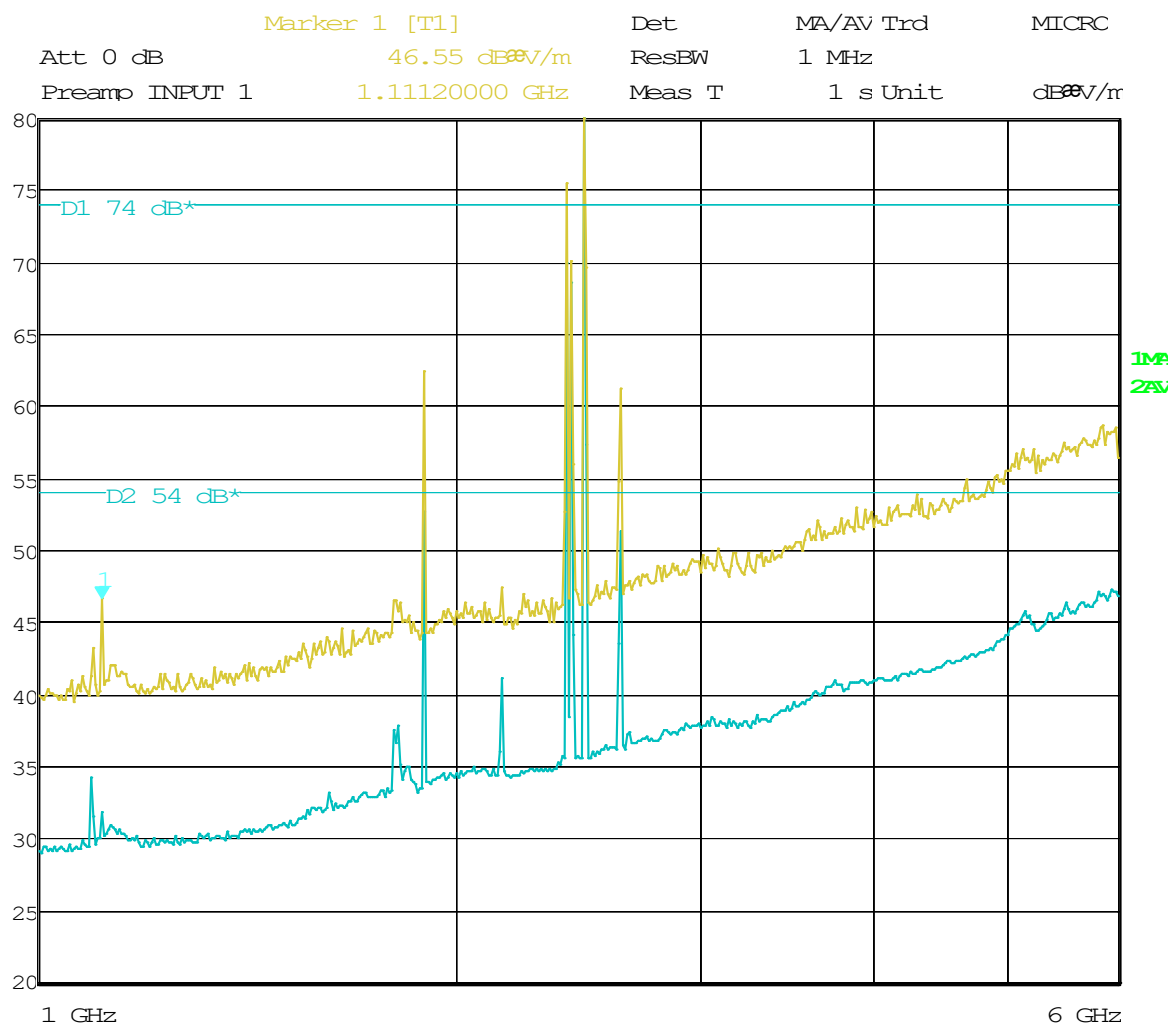

Date: 7.JAN.2026 13:39:45

Notes

WiFi / BT emissions observed from the product between 2400.0 – 2483.5 MHz

DECT phone observed operating on 1850 MHz

Cellular emissions observed at 1830, 2150 and 2600 MHz


ADSB intermittent emission at 1111.2 MHz

Pretesting in the screened semi anechoic chamber in the laboratory identified no emissions from the device under test in the band indicated above.

Section 15.209: Spurious Emissions (above 30 MHz)

Frequency Range: 6000 - 12500 MHz

Antenna polarisation: Vertical

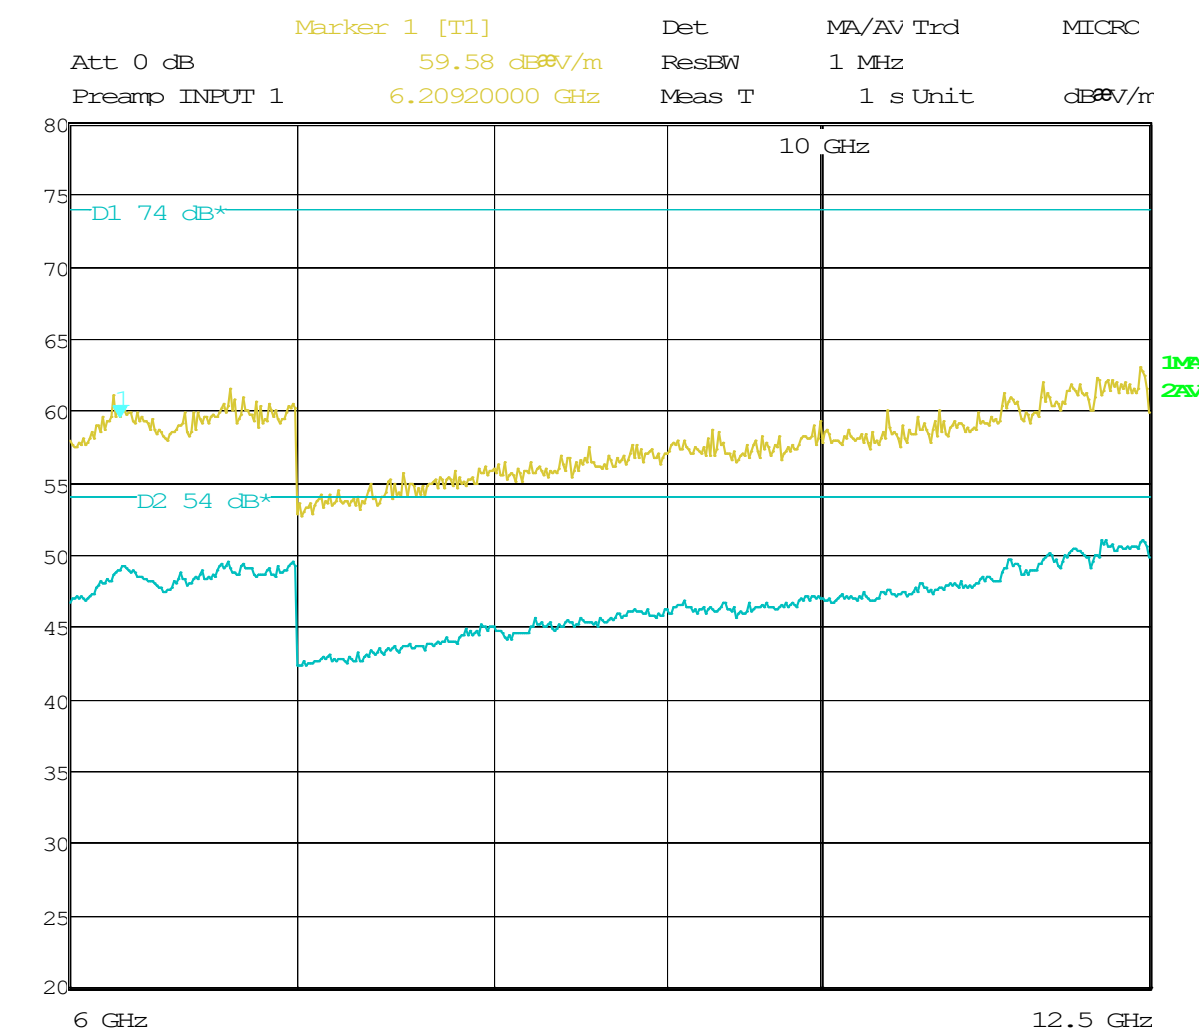

Date: 7.JAN.2026 13:50:40


Notes

No emissions detected

Section 15.209: Spurious Emissions (above 30 MHz)

Frequency Range: 6000 - 12500 MHz

Antenna polarisation: Horizontal

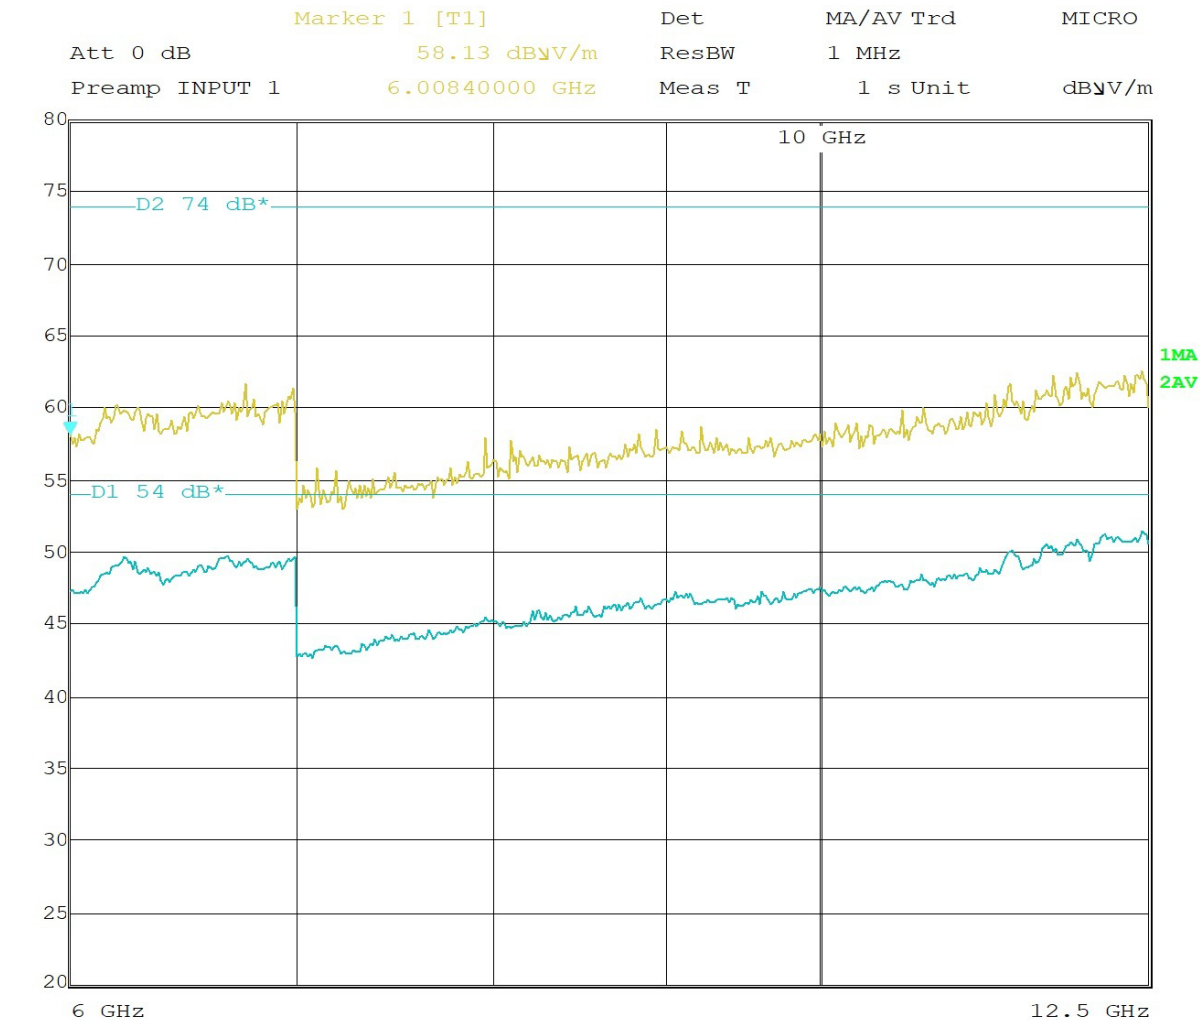

Date: 7.JAN.2026 14:20:58

Notes

No emissions detected

Section 15.225: Fundamental emission:

Measurements were made using a magnetic loop antenna and a receiver with a Quasi Peak detector using a 9 kHz bandwidth.

Measurements were made at a distance of 10 metres with the limit being determined by using the extrapolation factor of 40 dB per decade limit, as detailed in section 15.31 f (2).


The limit at 30 m at 13.560 MHz is 15,848 uV/m or 84.0 dBuV/m.

Applying the extrapolation factor of 40 dB/ per decade, the limit at 10 m is 103.1 dBuV/m.

The 12 Vdc supply to the device was varied by +/- 15% to determine whether a change in field strength would occur.


Voltage (Vdc)	Frequency (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
10.8	13.560	42.6	103.1	60.5
12.0	13.560	42.6	103.1	60.5
13.8	13.560	42.6	103.1	60.5

Spectrum analyser plot showing the carrier and modulation peaks within +/- 500 kHz

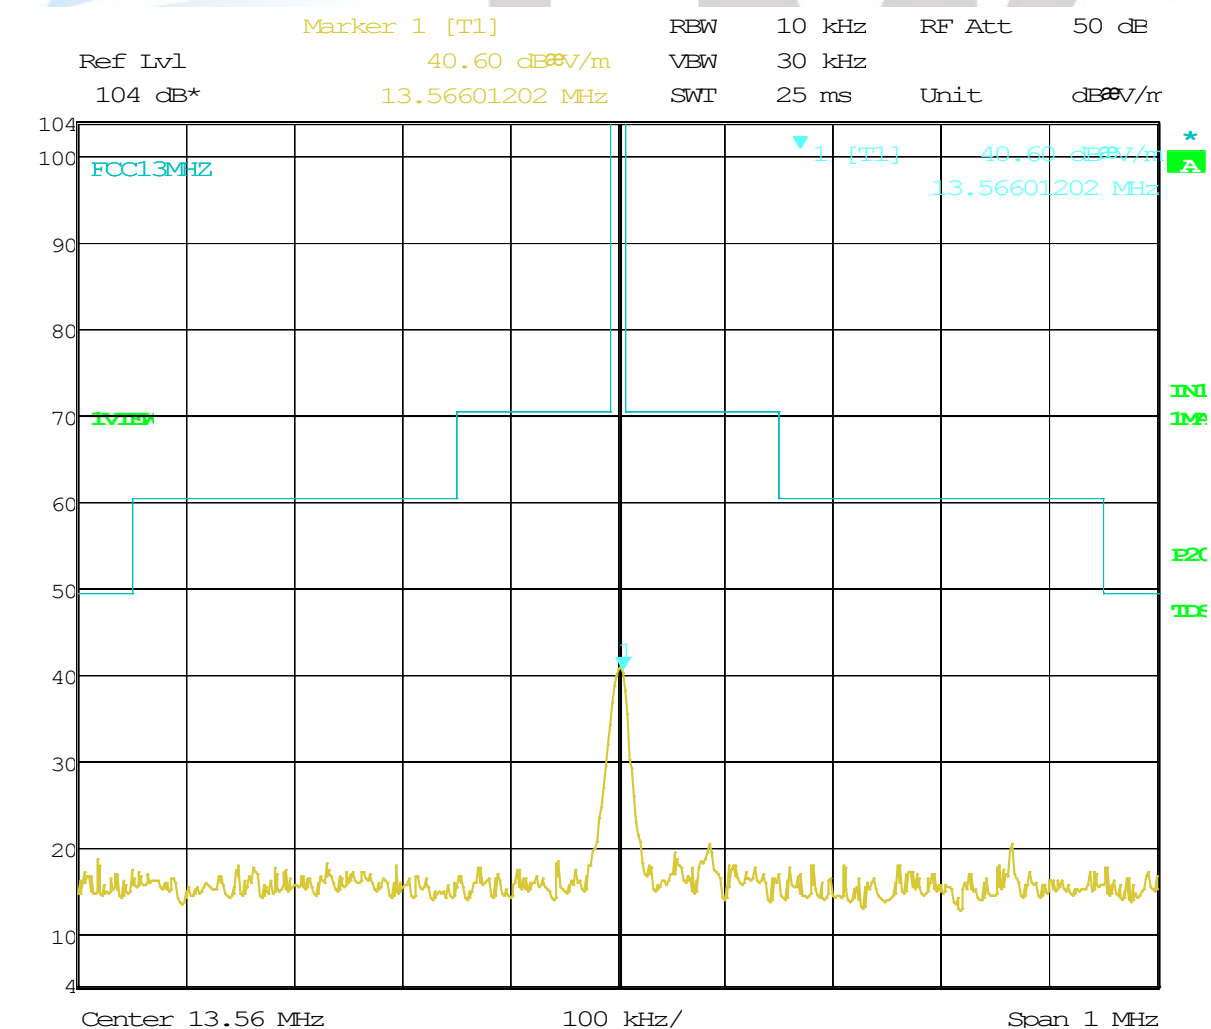

Date: 7.JAN.2026 12:27:23

Spectrum analyser plot showing the carrier and modulation peaks within +/- 2500 kHz

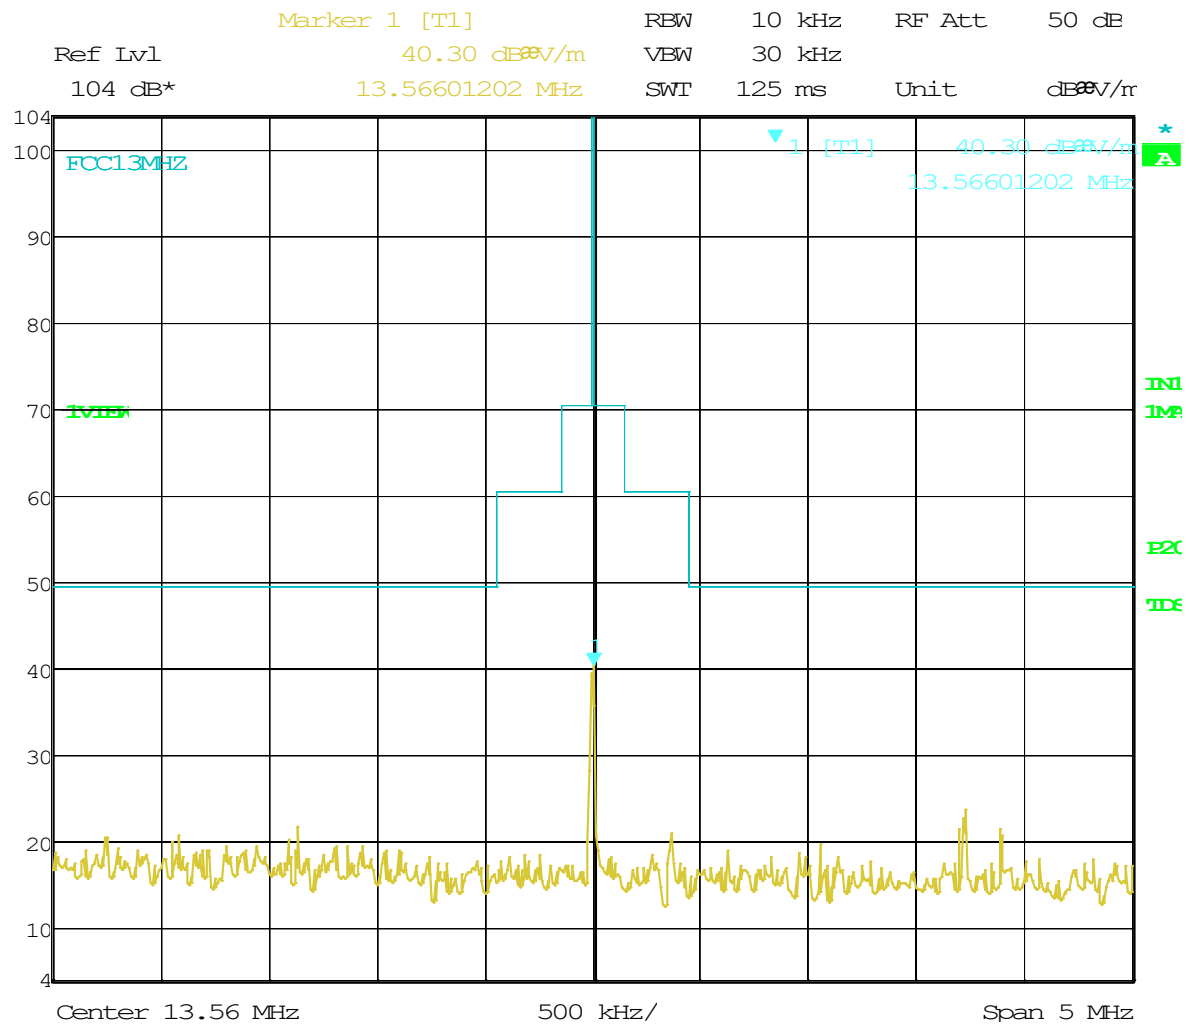

Date: 7.JAN.2026 12:28:39

Measurements were made at the test site.

Result: Complies

Measurement uncertainty with a confidence interval of 95% is:

- Free radiation tests (100 kHz – 30 MHz) $\pm$ 4.8 dB

Section 15.225: Frequency tolerance:

The frequency tolerance of the carrier is required to be +/- 0.01% of operating frequency when the temperature is varied between -20 degrees C and +50 degrees C.

The device operates nominally on 13.560 MHz which gives a frequency tolerance of +/- 1356 Hz.

Temperature (°C)	Frequency (MHz)	Difference (Hz)
50.0	13.560 095	+95
40.0	13.560 095	+95
30.0	13.560 096	+96
20.0	13.560 095	+95
10.0	13.560 095	+95
0.0	13.560 096	+96
-10.0	13.560 095	+95
-20.0	13.560 115	+115

As a worst case scenario the 12 Vdc supply to the device was varied by +/- 15% at 20 degrees C (ambient).

Voltage (Vdc)	Frequency (MHz)	Difference (Hz)
10.2	13.560 095	+95
12.0	13.560 095	+95
13.8	13.560 095	+95

The frequency tolerance above has been calculated by subtracting the Measured Frequency from the Nominal Frequency (13.560 MHz).

Result: Complies

Measurement uncertainty with a confidence interval of 95% is:

Frequency tolerance ± 50 Hz

7. TEST EQUIPMENT USED

Instrument	Manufacturer	Model	Serial No	Asset Ref	Cal Due	Period
Aerial Controller	EMCO	1090	9112-1062	RFS 3710	N/A	N/A
Aerial Mast	EMCO	1070-1	9203-1661	RFS 3708	N/A	N/A
Biconical Antenna	Schwarzbeck	BBA 9106	9124-420 + 04272023E	3802	02 May 2026	3 years
Heliac cable	Andrews	L6PNM-RPD	22869	Oats Cable	09 Jan 2027	1 year
Horn Antenna	EMCO	3115	9511-4629	E1526	24 Jun 2030	5 years
Log Periodic	Schwarzbeck	VUSLP 9111	9111-113 + 04272023D	EMC4026	02 May 2026	3 years
Loop Antenna	EMCO	6502	9003-2485	3798	24 Jun 2028	3 years
Mains Network	Rohde & Schwarz	ESH2-Z5	881362/034	3628	09 Jul 2027	3 years
Power Supply	Hewlett Packard	6654A	3236A-00874	EMC4041	N/A	N/A
Receiver	R & S	ESIB-40	100295	EMC4030	30 May 2026	2 years
Receiver	ESHS 10	828404/005	828404/005	3728	03 Dec 2026	2 years
Software	R & S	ESK 1 - 140	-	-	N/A	N/A
Spectrum Analyzer	Keysight	N9038A	MY57290153	EMC4033	20 Nov 2026	3 year
Thermal Chamber	Contherm	M180F	86025	3626	18 Oct 2027	3 year
Thermometer	DSIR	RT200	35	EMC4029	20 Apr 2027	5 years
Turntable	EMCO	1080-1-2.1	9109-1578	RFS 3709	N/A	N/A
VHF Balun	Schwarzbeck	VHBB9124	9124-420 + 04272023E	3801	02 May 2026	3 years
Voltage Variac	Powerdeck	SRV-5	RFS3800	-	N/A	N/A

All test equipment was within calibration at the time of testing.

8. ACCREDITATIONS

Testing was carried out in accordance with EMC Technologies NZ Ltd designation as a FCC Accredited Laboratory by International Accreditation New Zealand, designation number: NZ0002 under the APEC TEL MRA.

All testing was carried out in accordance with the terms of EMC Technologies (NZ) Ltd International Accreditation New Zealand (IANZ) Accreditation to NZS/ISO/IEC 17025, Accreditation Number 424 dated 26th June 1991.

All measurement equipment has been calibrated in accordance with the terms of the EMC Technologies (NZ) Ltd International Accreditation New Zealand (IANZ) Accreditation to NZS/ISO/IEC 17025.


International Accreditation New Zealand has International Laboratory Accreditation Council (ILAC) Mutual Recognition Arrangements for testing and calibration with various accreditation bodies in a number of economies.


This includes NATA (Australia), UKAS (UK), SANAS (South Africa), NVLAP (USA), A2LA (USA), SWEDAC (Sweden).

Further details can be supplied on request

9. PHOTOGRAPHS



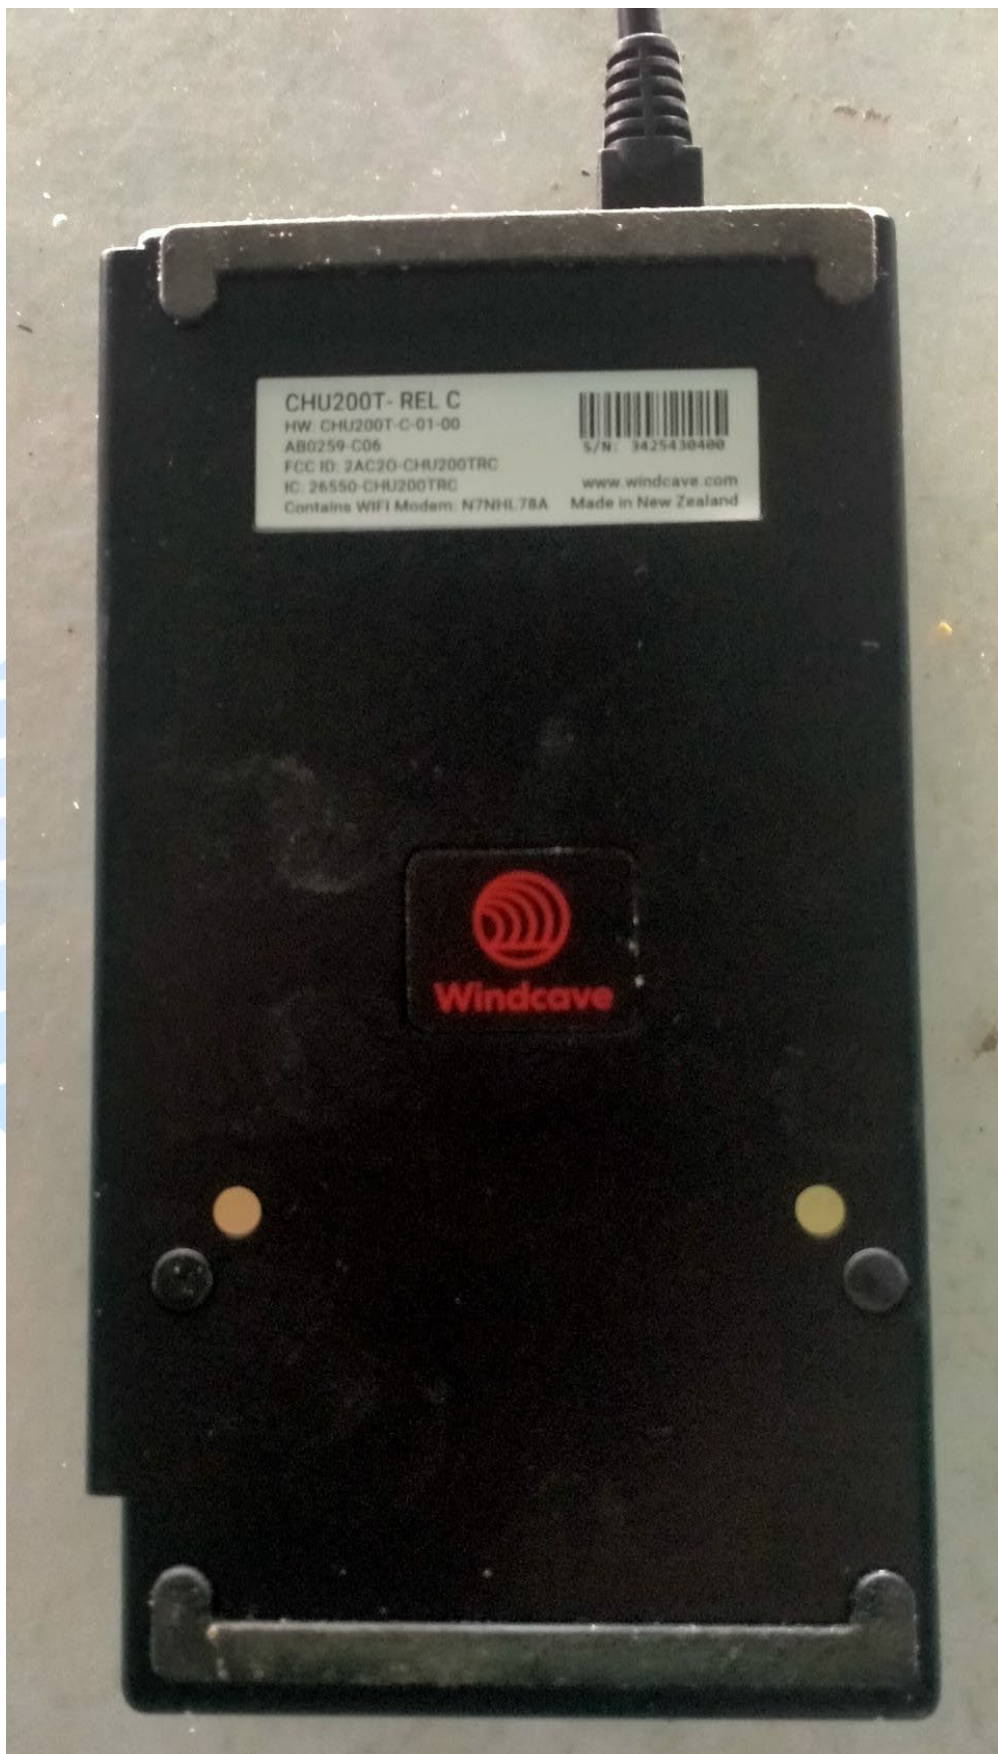

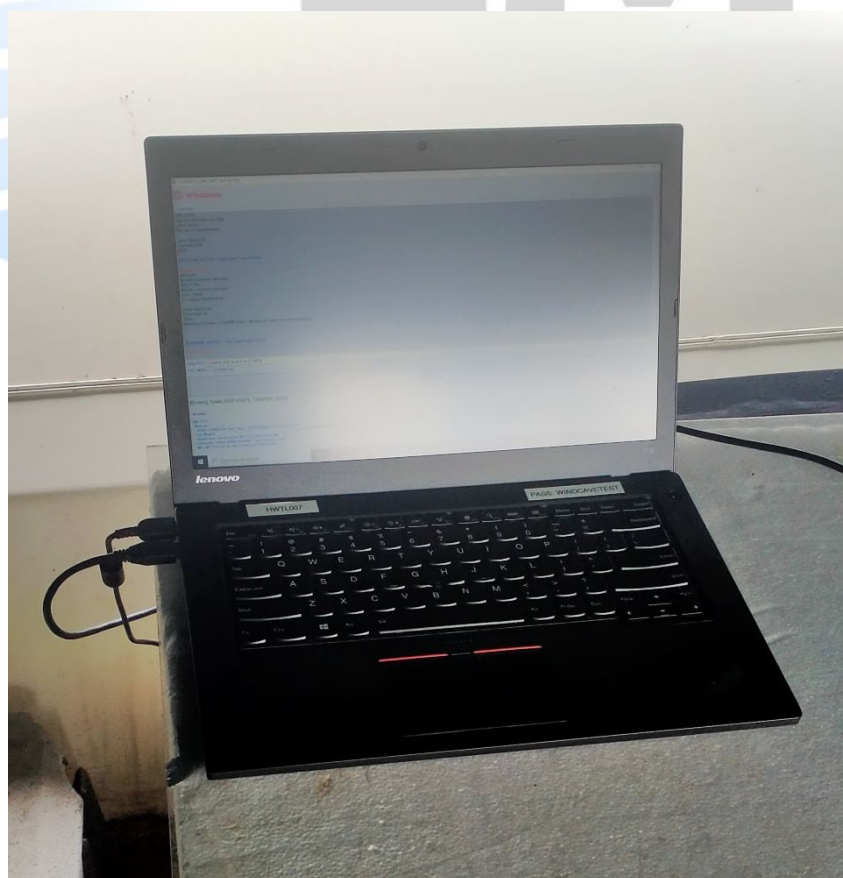

Conducted Emissions Test Setup






Radiated Emissions Test Setup







Radiated Emissions Test Setup - Loop Antenna

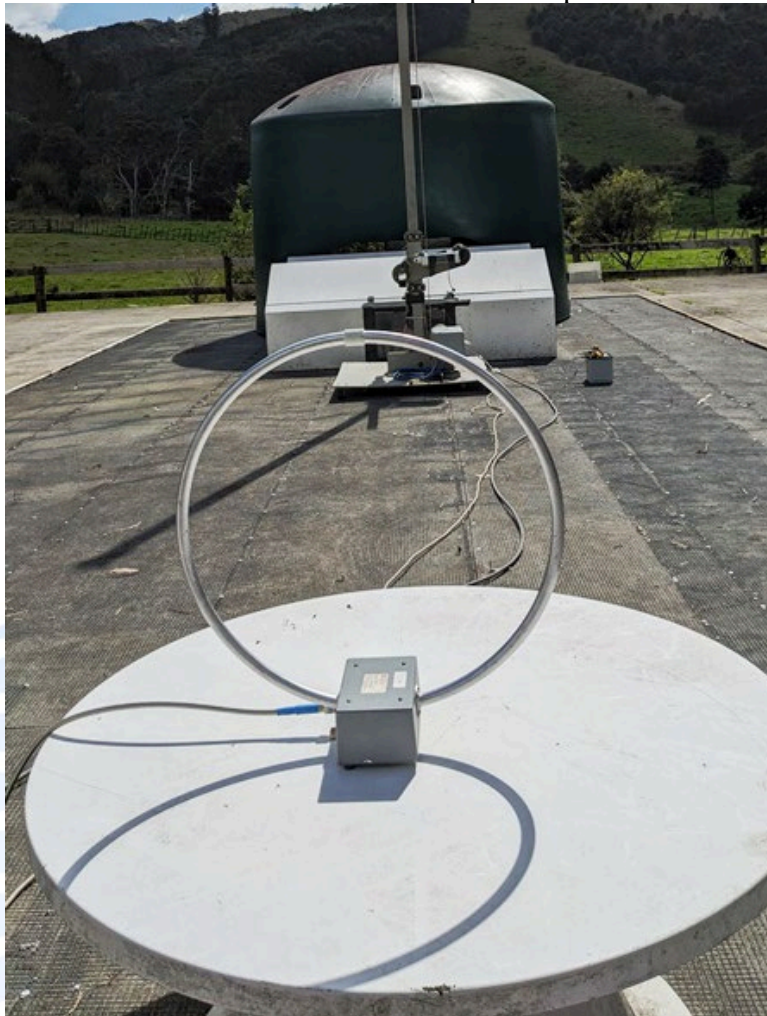

Radiated Emissions Test Setup - Biconical Antenna



Radiated Emissions Test Setup - Log Periodic Antenna



Radiated Emissions Test Setup - Horn Antenna

