



Compliance Certification Services Inc.

Report No: C140911S01-SF

FCC ID: 2AC343396993T703B

Date of Issue :September 19, 2014

GSM 850-Right Head Cheek Low CH128	3
GSM 850-Right Head Tilted Low CH128.....	4
GSM 850-Left Head Cheek Low CH128	5
GSM 850-Left Head Tilted Low CH128.....	6
GSM 1900-Right Head Cheek Low CH512	7
GSM 1900-Right Head Tilted Low CH512.....	8
GSM 1900-Left Head Cheek Low CH512	9
GSM 1900-Left Head Tilted Low CH512	10
WCDMA Band II-Right Head Cheek Low CH9262.....	11
WCDMA Band II-Right Head Tilted Low CH9262	12
WCDMA Band II-Left Head Cheek Low CH9262	13
WCDMA Band II-Left Head Tilted Low CH9262	14
WCDMA Band V-Right Head Cheek Middle CH4182	15
WCDMA Band V-Right Head Tilted Middle CH4182	16
WCDMA Band V-Left Head Cheek Middle CH4182.....	17
WCDMA Band V-Left Head Tilted Middle CH4182	18
WIFI-Right Head Cheek Middle CH6.....	19
WIFI-Right Head Tilted Middle CH6.....	20
WIFI-Left Head Cheek Middle CH6	21
WIFI-Left Head Tilted Middle CH6.....	22
GPRS 850-Body Front Low CH128	23
GPRS 850-Body Rear Low CH128	24
GPRS 850-Body-Left Low CH128.....	25
GPRS 850-Body-Top Low CH128.....	26
GSM 850-Body Low CH128.....	27
GSM 850-Body Rear Low CH128.....	28
GPRS 1900-Body Front Low CH512.....	29
GPRS 1900-Body Rear Low CH512	30
GPRS1900-Body-Left Low CH512.....	31
GPRS1900-Body-Top Low CH512.....	32
GSM 1900-Body Front Low CH512	33
GSM 1900-Body Rear Low CH512	34
WCDMA Band II-Body Front Low CH9262.....	35
WCDMA Band II-Body Rear Low CH926	36
WCDMA Band II-Body-Left Low CH9262	37
WCDMA Band II-Body-Top Low CH9262	38
WCDMA Band V-Body Front Middle CH4182.....	39
WCDMA Band V-Body Rear Middle CH4182	40
WCDMA Band V-Body Left Middle CH4182.....	41
WCDMA Band V-Body-Top High CH423	42



Compliance Certification Services Inc.

Report No: C140911S01-SF

FCC ID: 2AC343396993T703B

Date of Issue :September 19, 2014

WIFI-Body Front Middle CH6	43
WIFI-Body Rear Middle CH6	44
WIFI-Body-Left Middle CH6	45
WIFI-Body-Top Middle CH6	46



Test Laboratory: Compliance Certification Services Inc.

Date: 9/16/2014

GSM 850-Right Head Cheek Low CH128**DUT: WCDMA Smart Phone; Type: T703b; Serial: 356736038000005**

Communication System: UID 0, Generic GSM (0); Communication System Band: GSM850; Frequency: 824.2 MHz; Duty Cycle: 1:8.30042

Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.884$ S/m; $\epsilon_r = 41.343$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Right Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.3, 9.3, 9.3); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

GSM850/Right Head Cheek Low CH128/Area Scan (8x11x1): Measurement grid: dx=15mm, dy=15mm[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.499 W/kg


GSM850/Right Head Cheek Low CH128/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.54 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.844 W/kg

SAR(1 g) = 0.390 W/kg; SAR(10 g) = 0.218 W/kg[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.554 W/kg

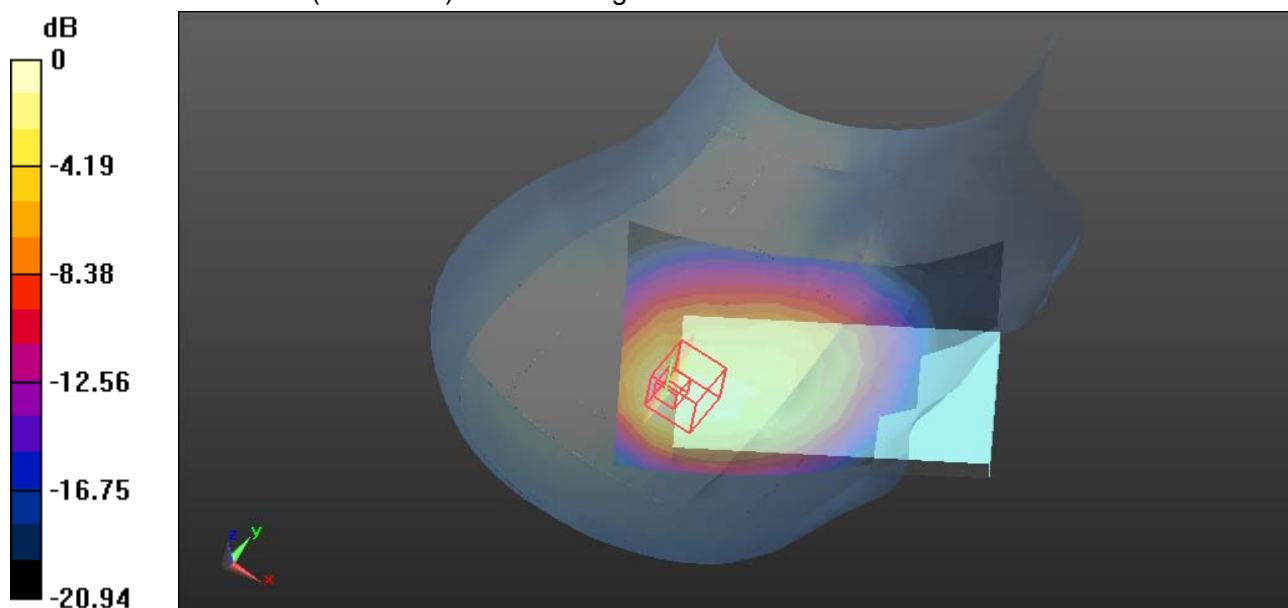

0 dB = 0.554 W/kg = -2.56 dBW/kg



Test Laboratory: Compliance Certification Services Inc.

Date: 9/16/2014

GSM 850-Right Head Tilted Low CH128**DUT: WCDMA Smart Phone; Type: T703b; Serial: 356736038000005**

Communication System: UID 0, Generic GSM (0); Communication System Band: GSM850; Frequency: 824.2 MHz; Duty Cycle: 1:8.30042

Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.884$ S/m; $\epsilon_r = 41.343$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Right Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.3, 9.3, 9.3); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

GSM850/Right Head Tilted Low CH128/Area Scan (8x11x1): Measurement grid: dx=15mm, dy=15mm[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.852 W/kg


GSM850/Right Head Tilted Low CH128/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 22.28 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 1.61 W/kg

SAR(1 g) = 0.623 W/kg; SAR(10 g) = 0.310 W/kg[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.01 W/kg

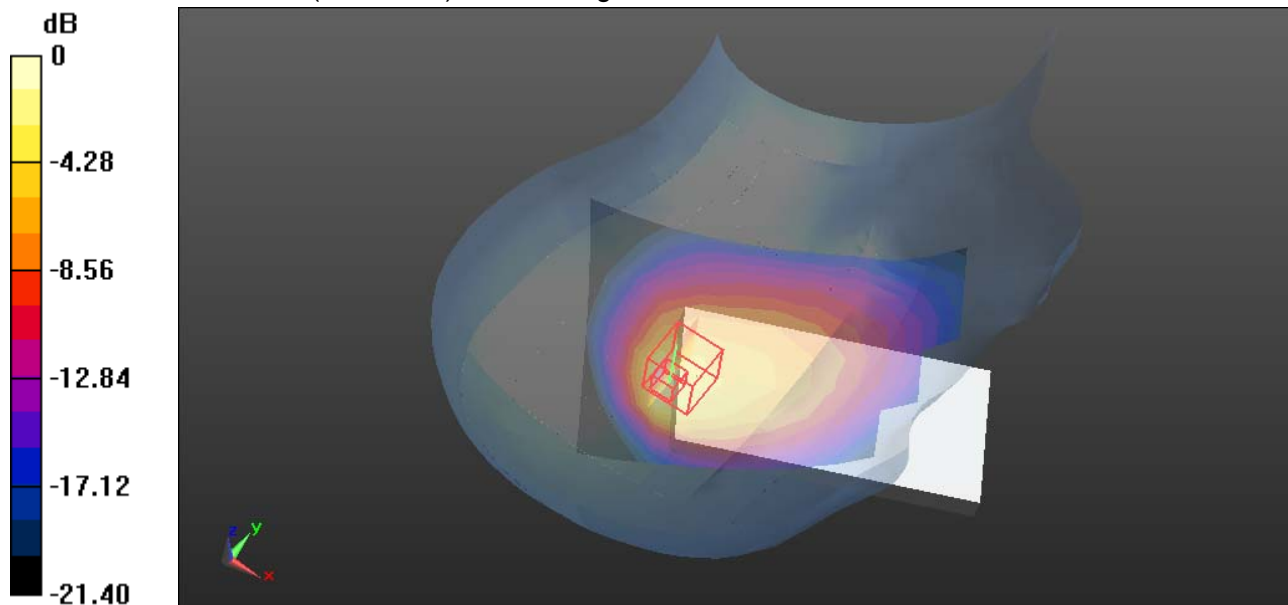

0 dB = 1.01 W/kg = 0.04 dBW/kg



Test Laboratory: Compliance Certification Services Inc.

Date: 9/16/2014

GSM 850-Left Head Cheek Low CH128**DUT: WCDMA Smart Phone; Type: T703b; Serial: 356736038000005**

Communication System: UID 0, Generic GSM (0); Communication System Band: GSM850; Frequency: 824.2 MHz; Duty Cycle: 1:8.30042

Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.884$ S/m; $\epsilon_r = 41.343$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Left Section

Measurement Standard: DASYS5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.3, 9.3, 9.3); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

GSM850/Left Head Cheek Low CH128/Area Scan (8x11x1): Measurement grid: dx=15mm, dy=15mm[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.483 W/kg


GSM850/Left Head Cheek Low CH128/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.63 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.686 W/kg

SAR(1 g) = 0.383 W/kg; SAR(10 g) = 0.244 W/kg[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.496 W/kg

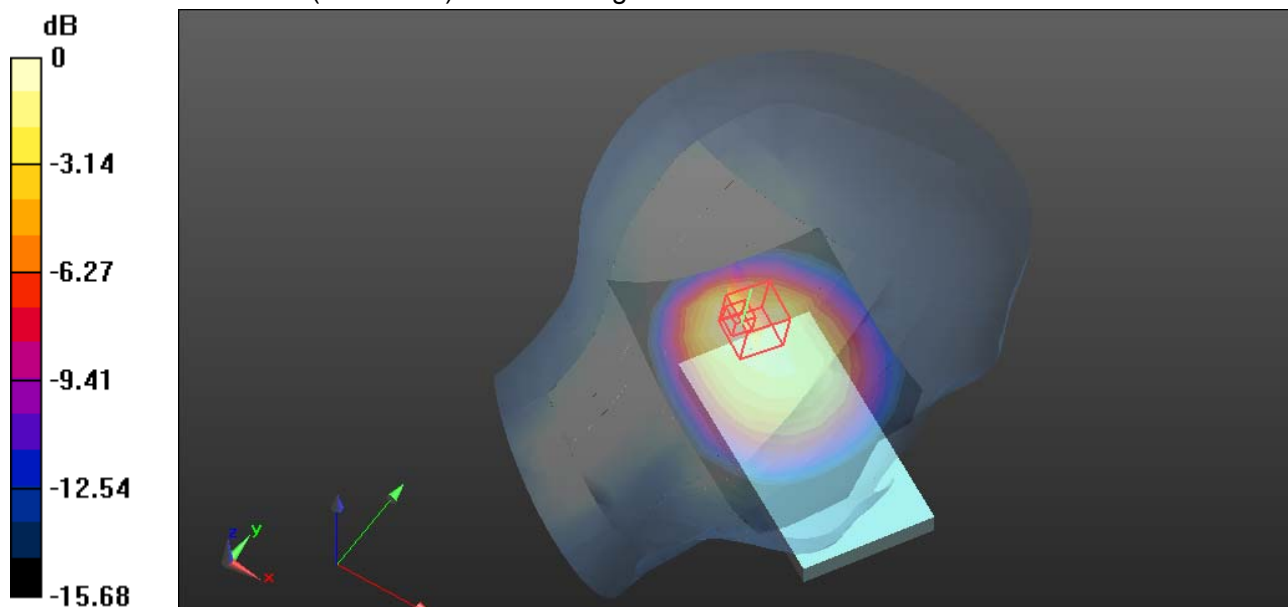

0 dB = 0.496 W/kg = -3.05 dBW/kg



Test Laboratory: Compliance Certification Services Inc.

Date: 9/16/2014

GSM 850-Left Head Tilted Low CH128**DUT: WCDMA Smart Phone; Type: T703b; Serial: 356736038000005**

Communication System: UID 0, Generic GSM (0); Communication System Band: GSM850; Frequency: 824.2 MHz; Duty Cycle: 1:8.30042

Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.884$ S/m; $\epsilon_r = 41.343$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Left Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.3, 9.3, 9.3); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

GSM850/Left Head Tilted Low CH128/Area Scan (8x11x1): Measurement grid: dx=15mm, dy=15mm[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.671 W/kg


GSM850/Left Head Tilted Low CH128/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 21.86 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 1.01 W/kg

SAR(1 g) = 0.475 W/kg; SAR(10 g) = 0.269 W/kg[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.666 W/kg

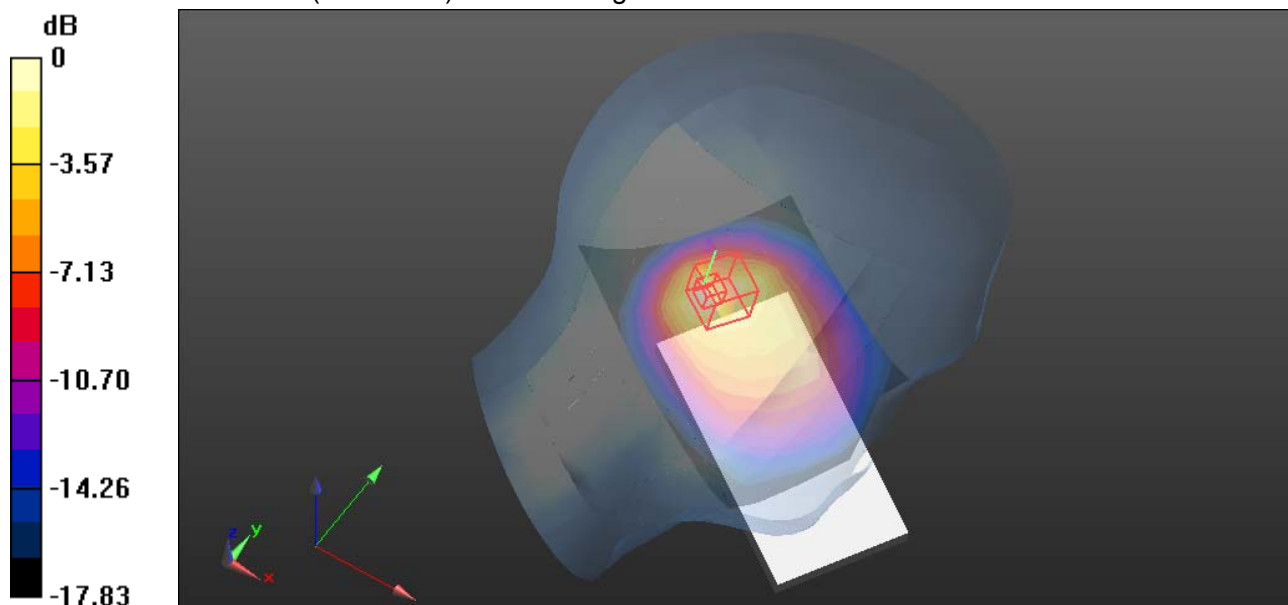

0 dB = 0.666 W/kg = -1.77 dBW/kg



Test Laboratory: Compliance Certification Services Inc.

Date: 9/17/2014

GSM 1900-Right Head Cheek Low CH512**DUT: WCDMA Smart Phone; Type: T703b; Serial: 356736038000005**

Communication System: UID 0, Generic GSM (0); Communication System Band: PCS1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8.30042

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.374$ S/m; $\epsilon_r = 39.573$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Right Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.75, 7.75, 7.75); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

GSM1900/Right Head Cheek Low CH512/Area Scan (8x12x1): Measurement grid: dx=15mm, dy=15mm[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.569 W/kg


GSM1900/Right Head Cheek Low CH512/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.15 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.927 W/kg

SAR(1 g) = 0.411 W/kg; SAR(10 g) = 0.190 W/kg[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.631 W/kg

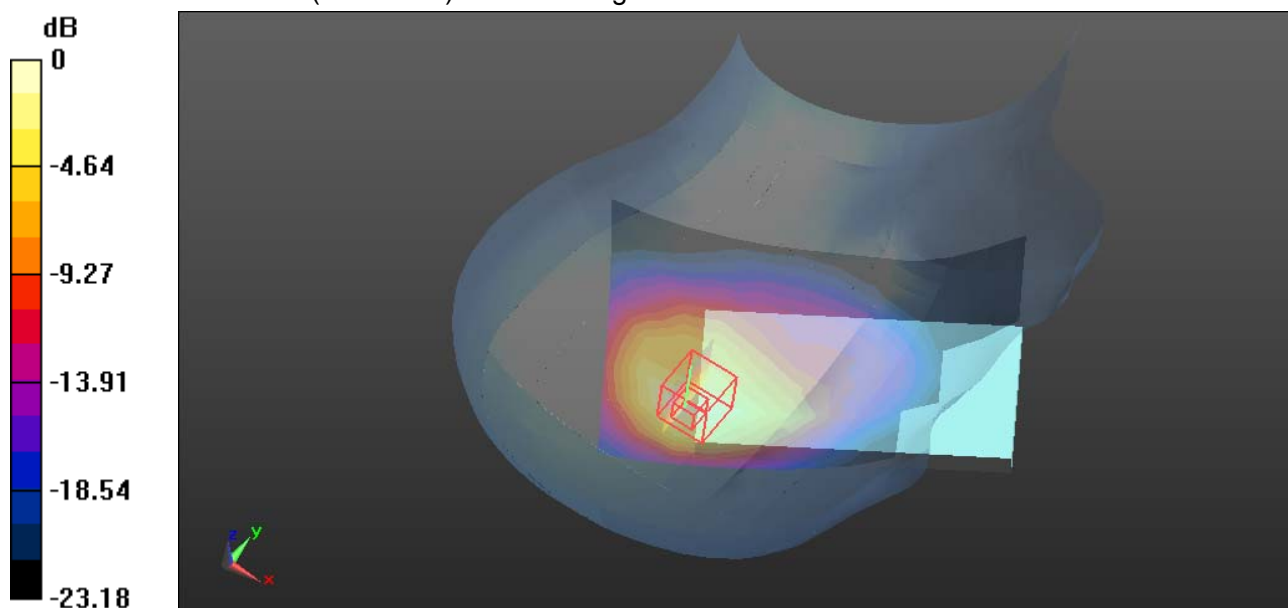

0 dB = 0.631 W/kg = -2.00 dBW/kg



Test Laboratory: Compliance Certification Services Inc.

Date: 9/17/2014

GSM 1900-Right Head Tilted Low CH512**DUT: WCDMA Smart Phone; Type: T703b; Serial: 356736038000005**

Communication System: UID 0, Generic GSM (0); Communication System Band: PCS1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8.30042

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.374$ S/m; $\epsilon_r = 39.573$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Right Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.75, 7.75, 7.75); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

GSM1900/Right Head Tilted Low CH512/Area Scan (8x12x1): Measurement grid: dx=15mm, dy=15mm[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.613 W/kg


GSM1900/Right Head Tilted Low CH512/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.91 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 0.938 W/kg

SAR(1 g) = 0.399 W/kg; SAR(10 g) = 0.201 W/kg[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.575 W/kg

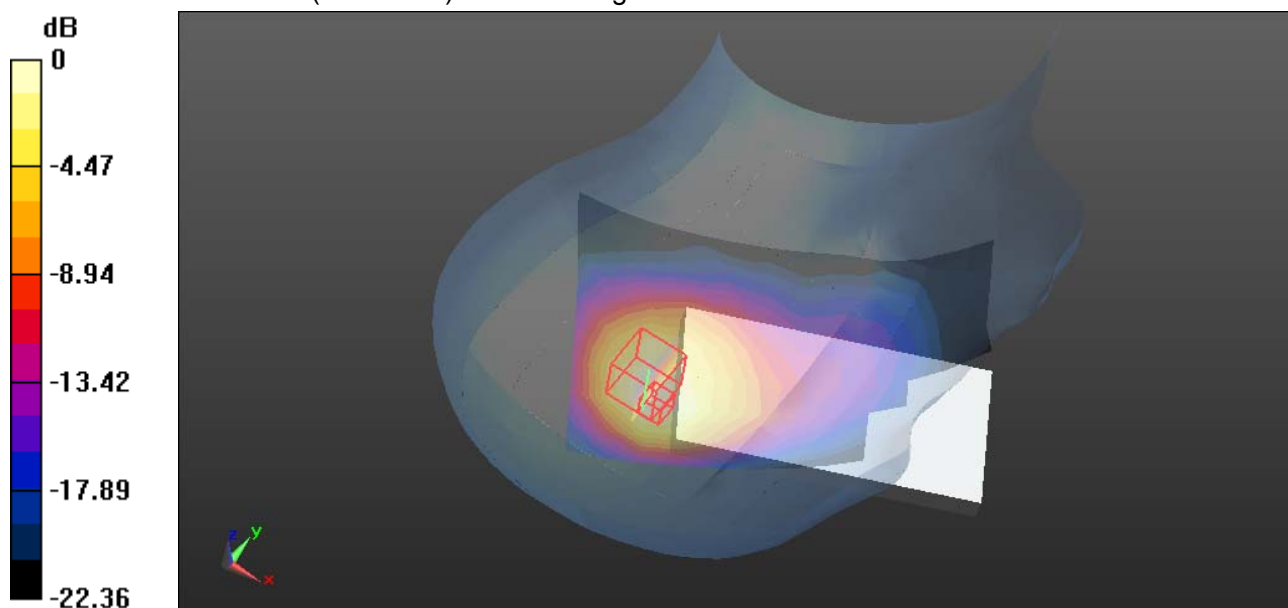

0 dB = 0.575 W/kg = -2.40 dBW/kg



Test Laboratory: Compliance Certification Services Inc.

Date: 9/17/2014

GSM 1900-Left Head Cheek Low CH512**DUT: WCDMA Smart Phone; Type: T703b; Serial: 356736038000005**

Communication System: UID 0, Generic GSM (0); Communication System Band: PCS1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8.30042

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.374$ S/m; $\epsilon_r = 39.573$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Left Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.75, 7.75, 7.75); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

GSM1900/Left Head Cheek Low CH512/Area Scan (8x11x1): Measurement grid: dx=15mm, dy=15mm[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.334 W/kg


GSM1900/Left Head Cheek Low CH512/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.27 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.508 W/kg

SAR(1 g) = 0.251 W/kg; SAR(10 g) = 0.135 W/kg[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.369 W/kg

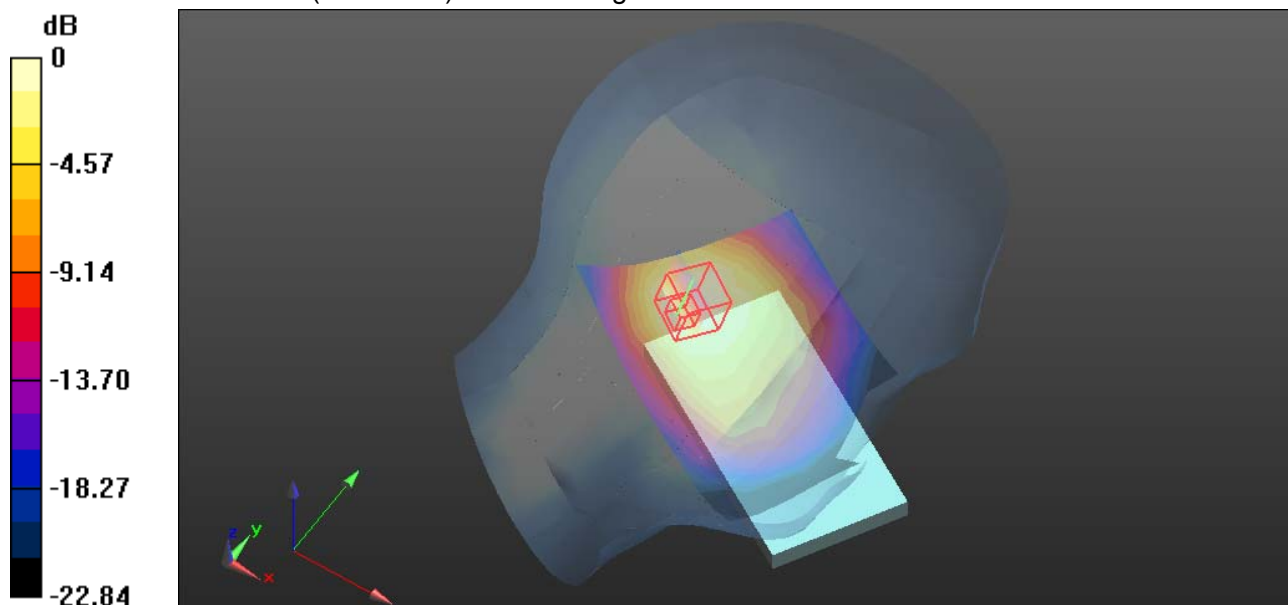

0 dB = 0.369 W/kg = -4.33 dBW/kg



Test Laboratory: Compliance Certification Services Inc.

Date: 9/17/2014

GSM 1900-Left Head Tilted Low CH512**DUT: WCDMA Smart Phone; Type: T703b; Serial: 356736038000005**

Communication System: UID 0, Generic GSM (0); Communication System Band: PCS1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8.30042

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.374$ S/m; $\epsilon_r = 39.573$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Left Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.75, 7.75, 7.75); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

GSM1900/Left Head Tilted Low CH512/Area Scan (8x11x1): Measurement grid: dx=15mm, dy=15mm[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.465 W/kg


GSM1900/Left Head Tilted Low CH512/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.83 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.714 W/kg

SAR(1 g) = 0.373 W/kg; SAR(10 g) = 0.190 W/kg[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.534 W/kg

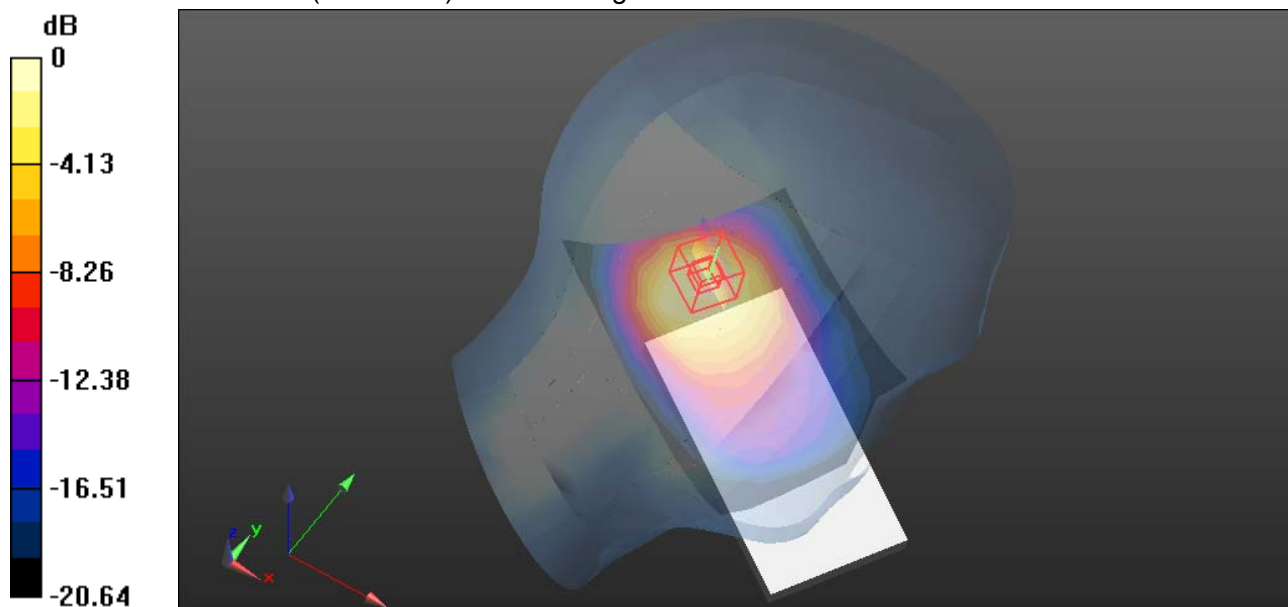

0 dB = 0.534 W/kg = -2.72 dBW/kg



Test Laboratory: Compliance Certification Services Inc.

Date: 9/17/2014

WCDMA Band II-Right Head Cheek Low CH9262**DUT: WCDMA Smart Phone; Type: T703b; Serial: 356736038000005**

Communication System: UID 0, FDD WCDMA (0); Communication System Band: Band II; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1852.4$ MHz; $\sigma = 1.376$ S/m; $\epsilon_r = 39.566$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Right Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.75, 7.75, 7.75); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

WCDMA Band II/Right Head Cheek Low CH9262/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.02 W/kg

WCDMA Band II/Right Head Cheek Low CH9262/Zoom Scan (5x5x7)/Cube 0: Measurement grid:


dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.94 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 1.88 W/kg

SAR(1 g) = 0.683 W/kg; SAR(10 g) = 0.361 W/kg[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.30 W/kg

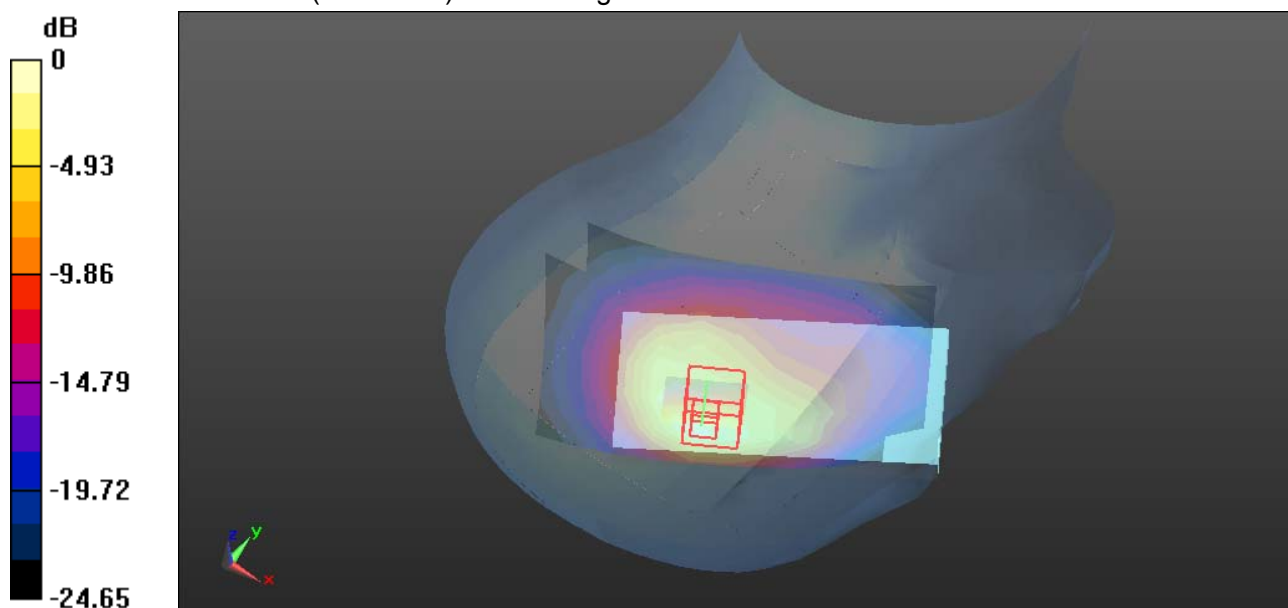

0 dB = 1.30 W/kg = 1.14 dBW/kg



Test Laboratory: Compliance Certification Services Inc.

Date: 9/17/2014

WCDMA Band II-Right Head Tilted Low CH9262**DUT: WCDMA Smart Phone; Type: T703b; Serial: 356736038000005**

Communication System: UID 0, FDD WCDMA (0); Communication System Band: Band II; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1852.4$ MHz; $\sigma = 1.376$ S/m; $\epsilon_r = 39.566$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Right Section

Measurement Standard: DASYS5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.75, 7.75, 7.75); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

WCDMA Band II/Right Head Tilted Low CH9262/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.931 W/kg

WCDMA Band II/Right Head Tilted Low CH9262/Zoom Scan (5x5x7)/Cube 0: Measurement grid:


dx=8mm, dy=8mm, dz=5mm

Reference Value = 21.48 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 1.39 W/kg

SAR(1 g) = 0.628 W/kg; SAR(10 g) = 0.384 W/kg[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.02 W/kg

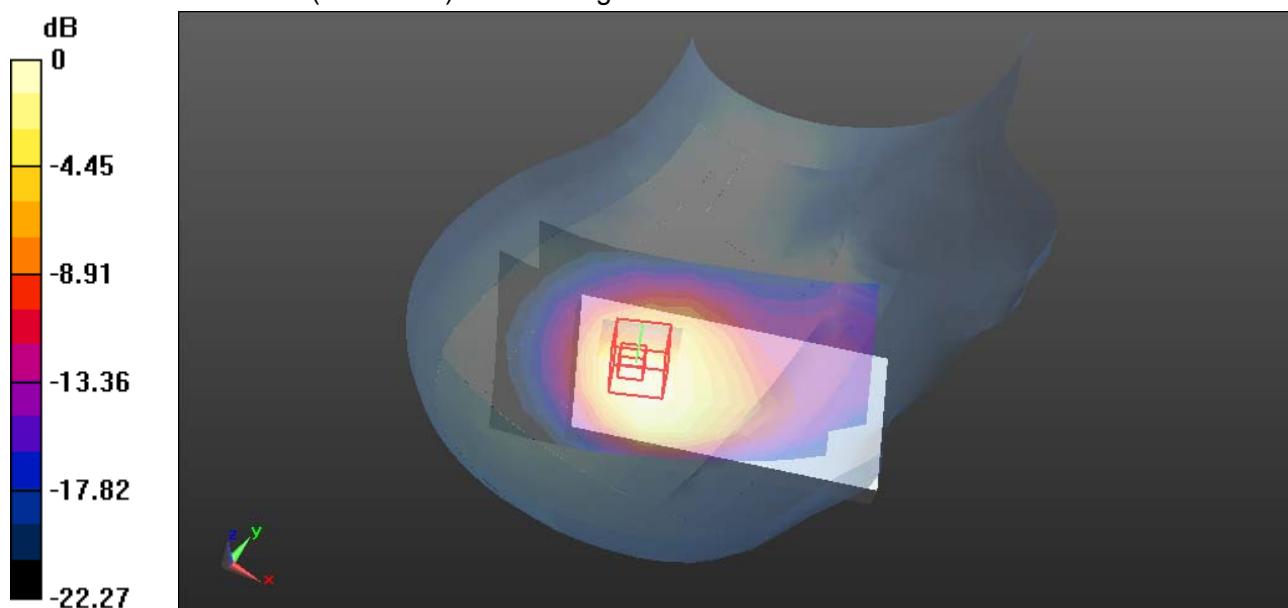

0 dB = 1.02 W/kg = 0.09 dBW/kg



Test Laboratory: Compliance Certification Services Inc.

Date: 9/17/2014

WCDMA Band II-Left Head Cheek Low CH9262**DUT: WCDMA Smart Phone; Type: T703b; Serial: 356736038000005**

Communication System: UID 0, FDD WCDMA (0); Communication System Band: Band II; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1852.4$ MHz; $\sigma = 1.376$ S/m; $\epsilon_r = 39.566$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Left Section

Measurement Standard: DASYS5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.75, 7.75, 7.75); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS5 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

WCDMA Band II/Left Head Cheek Low CH9262/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.701 W/kg

WCDMA Band II/Left Head Cheek Low CH9262/Zoom Scan (5x5x7)/Cube 0: Measurement grid:


dx=8mm, dy=8mm, dz=5mm

Reference Value = 19.75 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 1.06 W/kg

SAR(1 g) = 0.447 W/kg; SAR(10 g) = 0.188 W/kg[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.760 W/kg

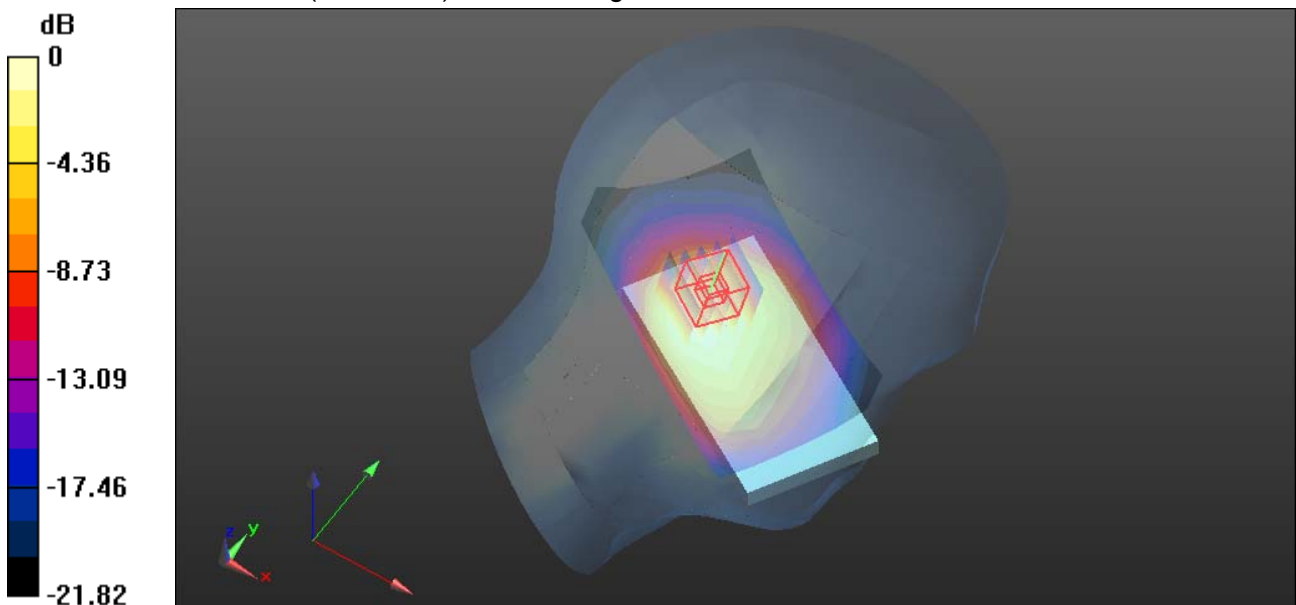

0 dB = 0.760 W/kg = -1.19 dBW/kg



Test Laboratory: Compliance Certification Services Inc.

Date: 9/17/2014

WCDMA Band II-Left Head Tilted Low CH9262**DUT: WCDMA Smart Phone; Type: T703b; Serial: 356736038000005**

Communication System: UID 0, FDD WCDMA (0); Communication System Band: Band II; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1852.4$ MHz; $\sigma = 1.376$ S/m; $\epsilon_r = 39.566$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Left Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.75, 7.75, 7.75); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

WCDMA Band II/Left Head Tilted Low CH9262/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.971 W/kg

WCDMA Band II/Left Head Tilted Low CH9262/Zoom Scan (5x5x7)/Cube 0: Measurement grid:


dx=8mm, dy=8mm, dz=5mm

Reference Value = 21.22 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 1.34 W/kg

SAR(1 g) = 0.601 W/kg; SAR(10 g) = 0.253 W/kg[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.937 W/kg

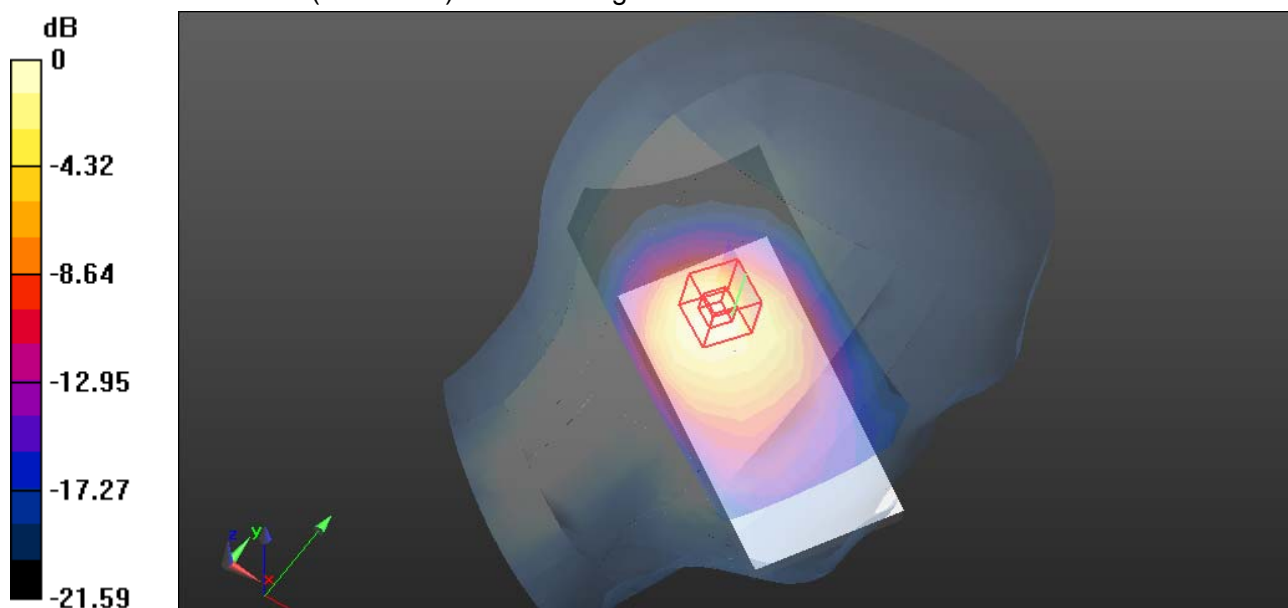

0 dB = 0.937 W/kg = -0.28 dBW/kg



Test Laboratory: Compliance Certification Services Inc.

Date: 9/16/2014

WCDMA Band V-Right Head Cheek Middle CH4182**DUT: WCDMA Smart Phone; Type: T703b; Serial: 356736038000005**

Communication System: UID 0, FDD WCDMA (0); Communication System Band: Band V; Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.895$ S/m; $\epsilon_r = 41.172$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Right Section

Measurement Standard: DASYS5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.3, 9.3, 9.3); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS5 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

WCDMA Band V/Right Head Cheek Middle CH4182/Area Scan (8x11x1): Measurement grid:
dx=15mm, dy=15mm[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.733 W/kg

WCDMA Band V/Right Head Cheek Middle CH4182/Zoom Scan (5x5x7)/Cube 0: Measurement grid:


dx=8mm, dy=8mm, dz=5mm

Reference Value = 27.47 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 1.26 W/kg

SAR(1 g) = 0.613 W/kg; SAR(10 g) = 0.366 W/kg[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.902 W/kg

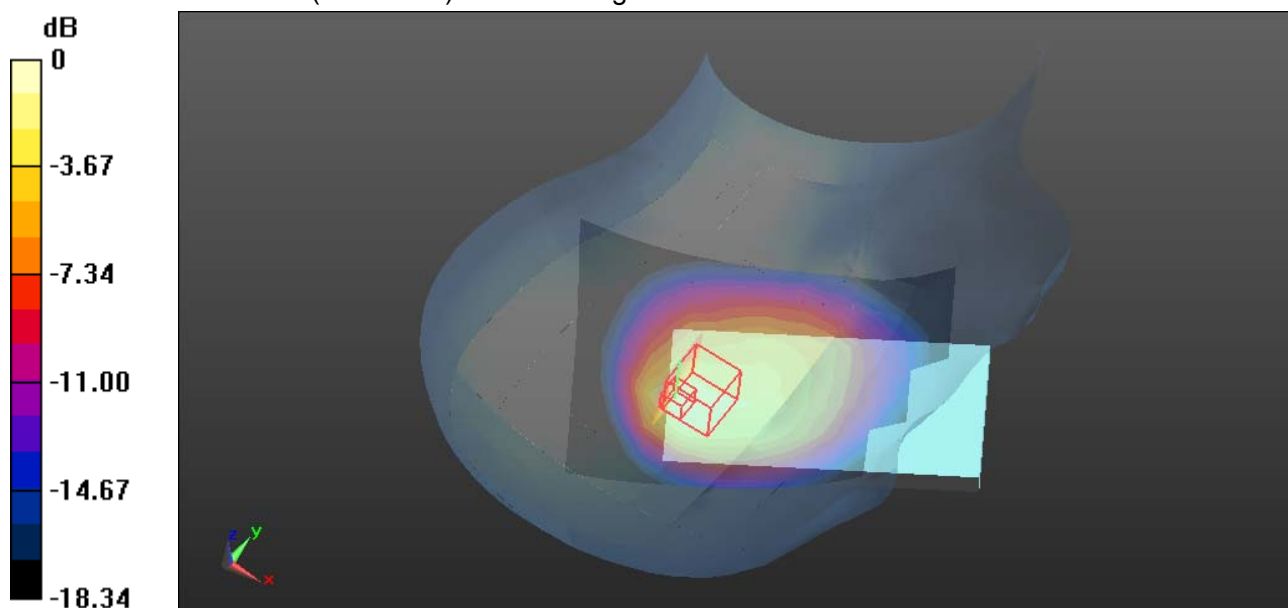

0 dB = 0.902 W/kg = -0.45 dBW/kg



Test Laboratory: Compliance Certification Services Inc.

Date: 9/16/2014

WCDMA Band V-Right Head Tilted Middle CH4182**DUT: WCDMA Smart Phone; Type: T703b; Serial: 356736038000005**

Communication System: UID 0, FDD WCDMA (0); Communication System Band: Band V; Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.895$ S/m; $\epsilon_r = 41.172$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Right Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.3, 9.3, 9.3); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

WCDMA Band V/Right Head Tilted Middle CH4182/Area Scan (8x11x1): Measurement grid:
dx=15mm, dy=15mm[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.872 W/kg

WCDMA Band V/Right Head Tilted Middle CH4182/Zoom Scan (5x5x7)/Cube 0: Measurement grid:


dx=8mm, dy=8mm, dz=5mm

Reference Value = 24.66 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 1.88 W/kg

SAR(1 g) = 0.745 W/kg; SAR(10 g) = 0.386 W/kg[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.25 W/kg

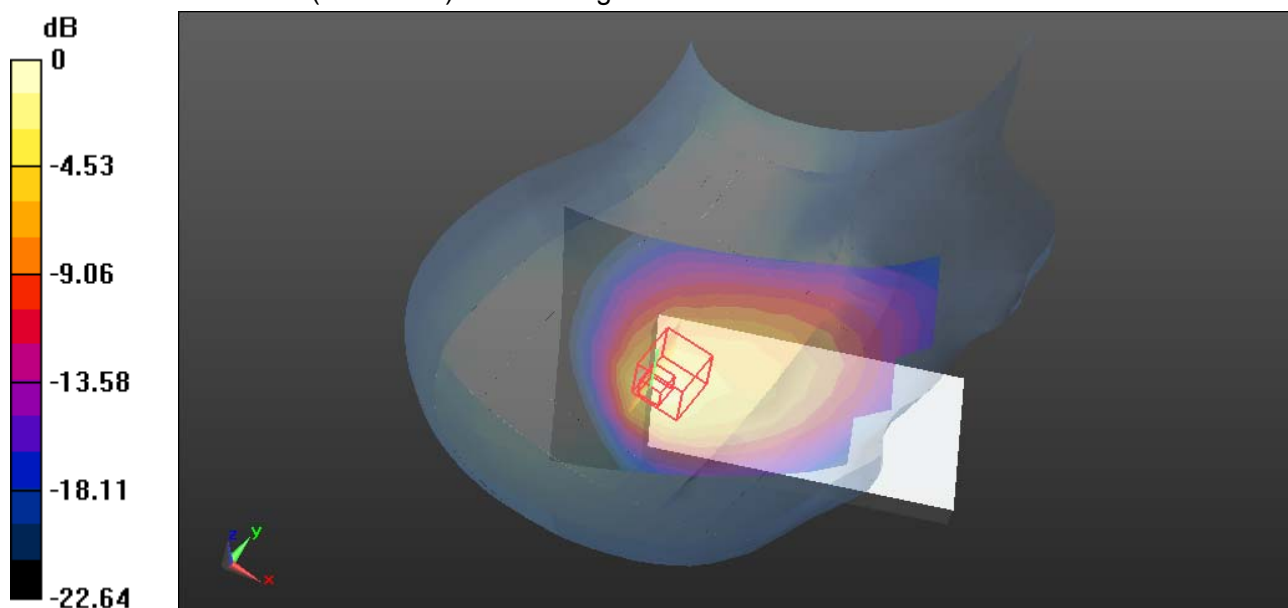

0 dB = 1.25 W/kg = 0.97 dBW/kg



Test Laboratory: Compliance Certification Services Inc.

Date: 9/16/2014

WCDMA Band V-Left Head Cheek Middle CH4182**DUT: WCDMA Smart Phone; Type: T703b; Serial: 356736038000005**

Communication System: UID 0, FDD WCDMA (0); Communication System Band: Band V; Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.895$ S/m; $\epsilon_r = 41.172$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Left Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.3, 9.3, 9.3); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

WCDMA Band V/Left Head Cheek Middle CH4182/Area Scan (8x11x1): Measurement grid: dx=15mm, dy=15mm[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.883 W/kg

WCDMA Band V/Left Head Cheek Middle CH4182/Zoom Scan (5x5x7)/Cube 0: Measurement grid:


dx=8mm, dy=8mm, dz=5mm

Reference Value = 33.78 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 1.44 W/kg

SAR(1 g) = 0.735 W/kg; SAR(10 g) = 0.447 W/kg[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.01 W/kg

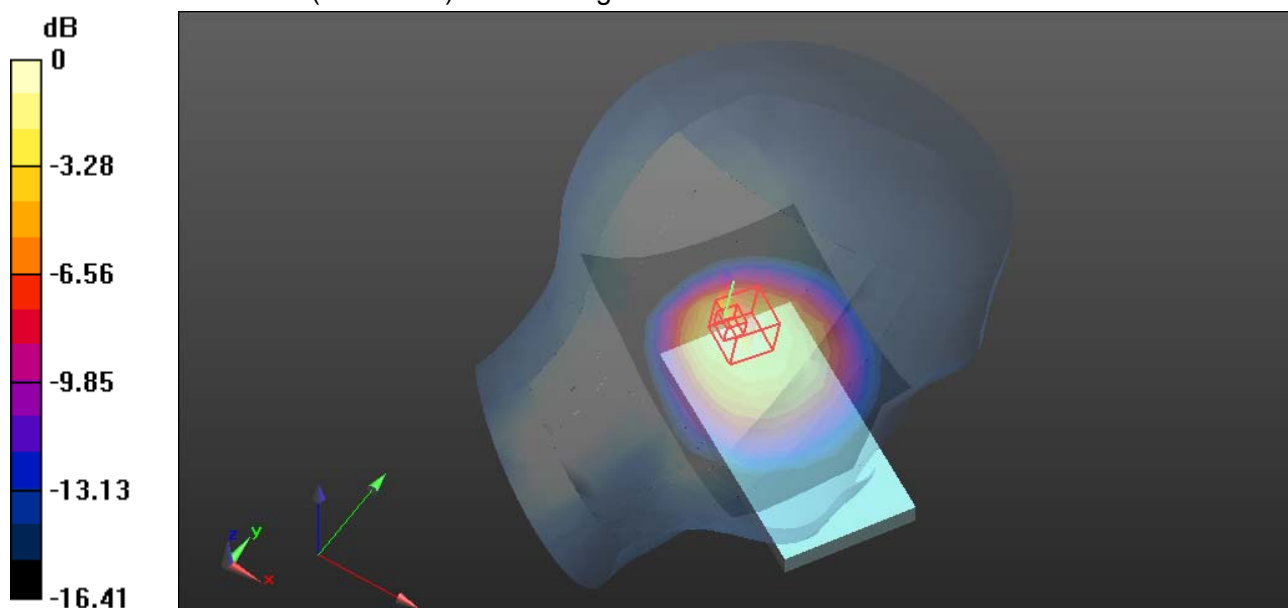

0 dB = 1.01 W/kg = 0.04 dBW/kg



Test Laboratory: Compliance Certification Services Inc.

Date: 9/16/2014

WCDMA Band V-Left Head Tilted Middle CH4182**DUT: WCDMA Smart Phone; Type: T703b; Serial: 356736038000005**

Communication System: UID 0, FDD WCDMA (0); Communication System Band: Band V; Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.895$ S/m; $\epsilon_r = 41.172$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Left Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.3, 9.3, 9.3); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

WCDMA Band V/Left Head Tilted Middle CH4182/Area Scan (8x11x1): Measurement grid: dx=15mm, dy=15mm[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.791 W/kg

WCDMA Band V/Left Head Tilted Middle CH4182/Zoom Scan (5x5x7)/Cube 0: Measurement grid:


dx=8mm, dy=8mm, dz=5mm

Reference Value = 31.02 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 1.50 W/kg

SAR(1 g) = 0.679 W/kg; SAR(10 g) = 0.371 W/kg[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.957 W/kg

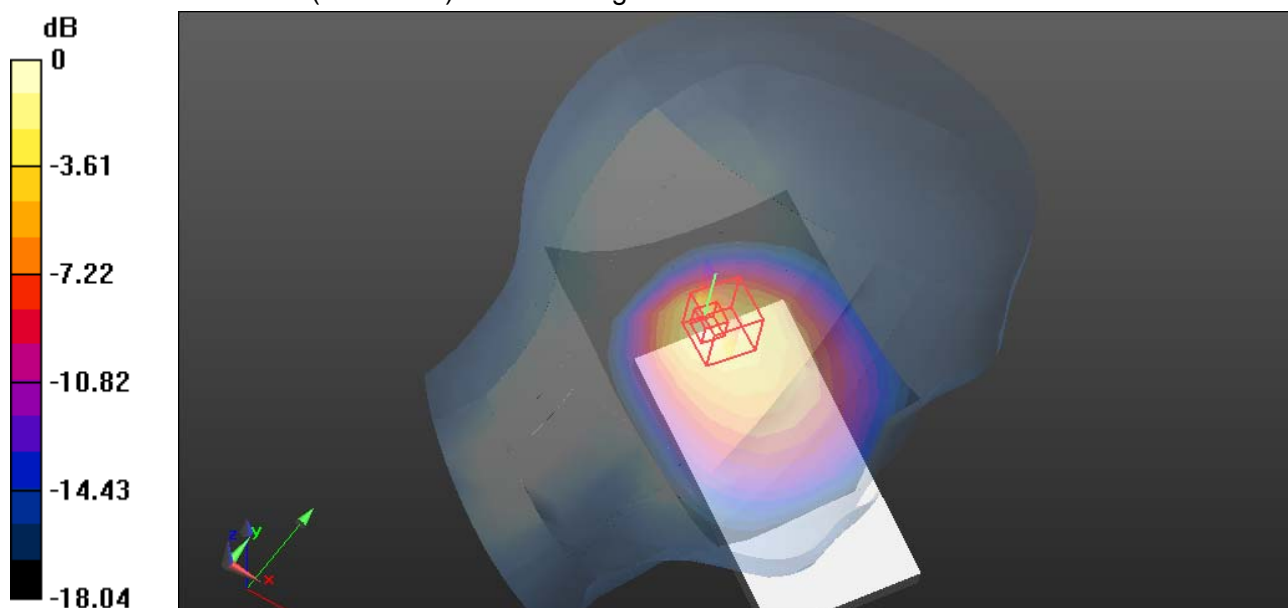

0 dB = 0.957 W/kg = -0.19 dBW/kg



Test Laboratory: Compliance Certification Services Inc.

Date: 9/18/2014

WIFI-Right Head Cheek Middle CH6**DUT: WCDMA Smart Phone; Type: T703b; Serial: 356736038000005**

Communication System: UID 0, IEEE 802.11b (0); Communication System Band: ISM 2.4GHz Band;

Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.776$ S/m; $\epsilon_r = 39.419$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Right Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.04, 7.04, 7.04); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

WIFI/Right Head Cheek Middle CH6/Area Scan (9x13x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.284 W/kg


WIFI/Right Head Cheek Middle CH6/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.967 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 0.456 W/kg

SAR(1 g) = 0.169 W/kg; SAR(10 g) = 0.075 W/kg

Maximum value of SAR (measured) = 0.286 W/kg

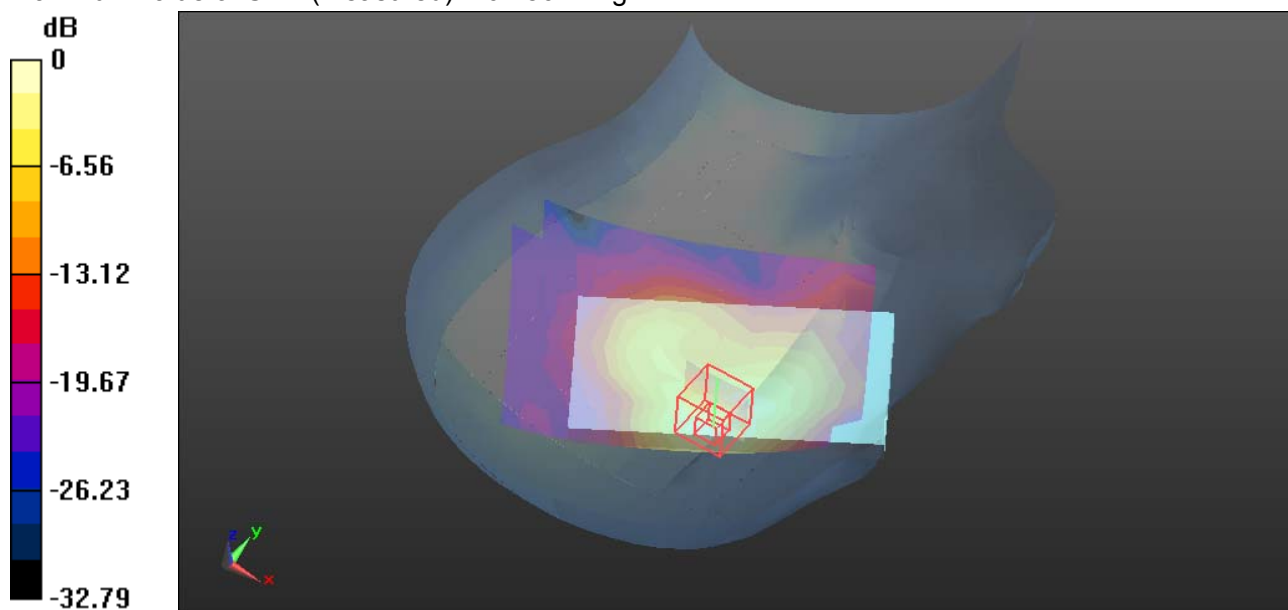

0 dB = 0.286 W/kg = -5.44 dBW/kg



Test Laboratory: Compliance Certification Services Inc.

Date: 9/18/2014

WIFI-Right Head Tilted Middle CH6**DUT: WCDMA Smart Phone; Type: T703b; Serial: 356736038000005**

Communication System: UID 0, IEEE 802.11b (0); Communication System Band: ISM 2.4GHz Band;

Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.776$ S/m; $\epsilon_r = 39.419$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Right Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.04, 7.04, 7.04); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

WIFI/Right Head Tilted Middle CH6/Area Scan (9x13x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.0991 W/kg


WIFI/Right Head Tilted Middle CH6/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.115 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 0.160 W/kg

SAR(1 g) = 0.065 W/kg; SAR(10 g) = 0.029 W/kg

Maximum value of SAR (measured) = 0.104 W/kg

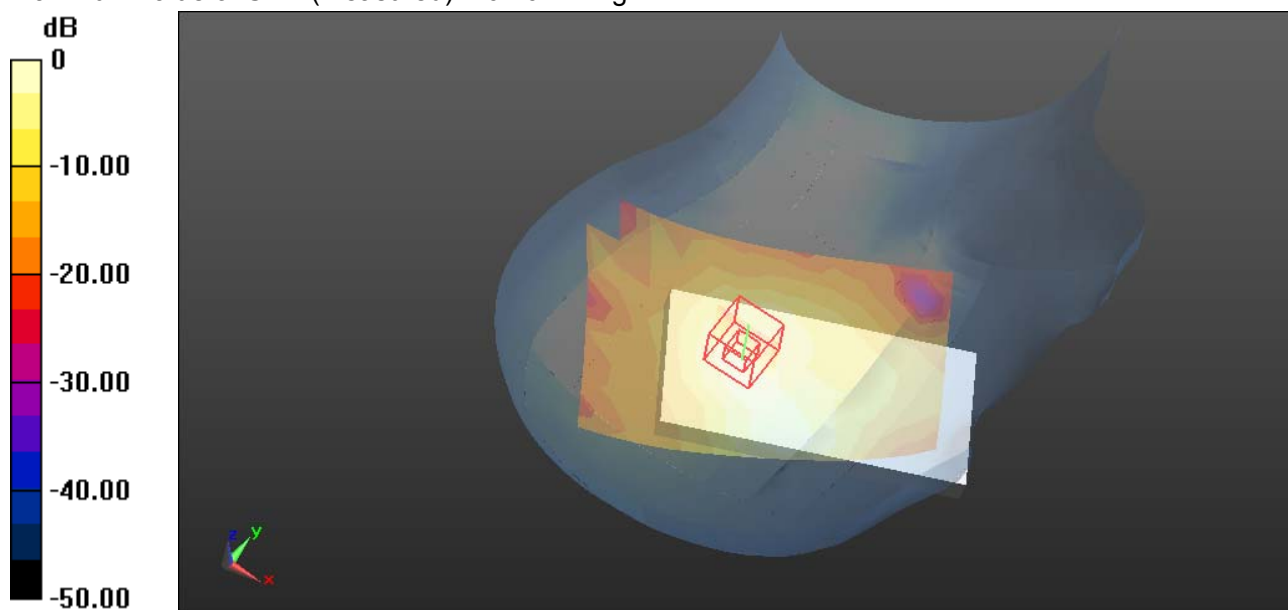

0 dB = 0.104 W/kg = -9.83 dBW/kg



Test Laboratory: Compliance Certification Services Inc.

Date: 9/18/2014

WIFI-Left Head Cheek Middle CH6**DUT: WCDMA Smart Phone; Type: T703b; Serial: 356736038000005**

Communication System: UID 0, IEEE 802.11b (0); Communication System Band: ISM 2.4GHz Band;

Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.776$ S/m; $\epsilon_r = 39.419$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Left Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.04, 7.04, 7.04); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)


WIFI/Left Head Cheek Middle CH6/Area Scan (9x13x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 0.0980 W/kg**WIFI/Left Head Cheek Middle CH6/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.812 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.181 W/kg

SAR(1 g) = 0.075 W/kg; SAR(10 g) = 0.038 W/kg

Maximum value of SAR (measured) = 0.117 W/kg

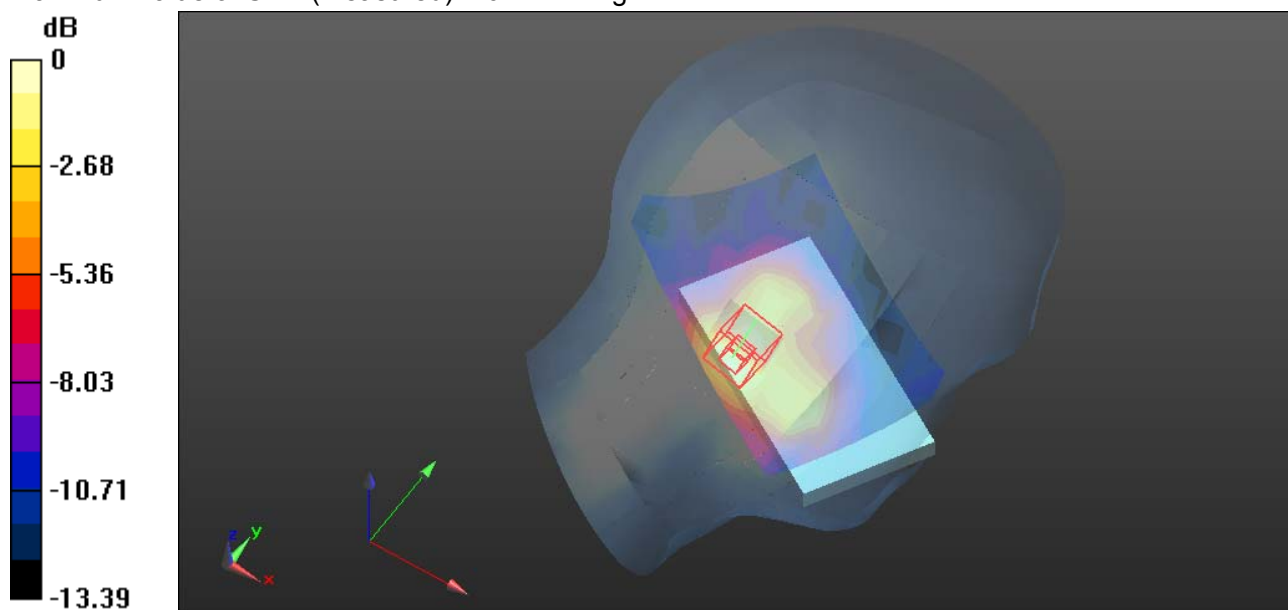

0 dB = 0.117 W/kg = -9.32 dBW/kg



Test Laboratory: Compliance Certification Services Inc.

Date: 9/18/2014

WIFI-Left Head Tilted Middle CH6**DUT: WCDMA Smart Phone; Type: T703b; Serial: 356736038000005**

Communication System: UID 0, IEEE 802.11b (0); Communication System Band: ISM 2.4GHz Band;

Frequency: 2412 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2412$ MHz; $\sigma = 1.763$ S/m; $\epsilon_r = 39.4$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Left Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.04, 7.04, 7.04); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

WIFI/Left Head Tilted Middle CH6/Area Scan (9x13x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.0627 W/kg


WIFI/Left Head Tilted Middle CH6/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.224 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.0960 W/kg

SAR(1 g) = 0.039 W/kg; SAR(10 g) = 0.017 W/kg

Maximum value of SAR (measured) = 0.0625 W/kg

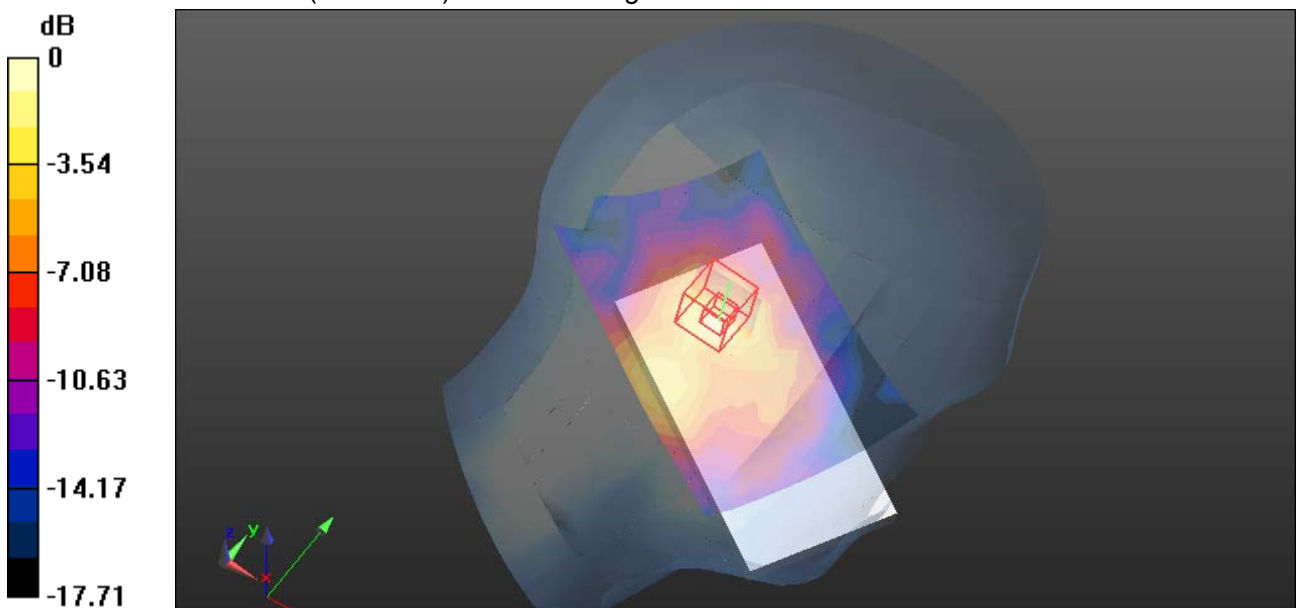

0 dB = 0.0625 W/kg = -12.04 dBW/kg



Test Laboratory: Compliance Certification Services Inc.

Date: 9/16/2014

GPRS 850-Body Front Low CH128**DUT: WCDMA Smart Phone; Type: T703b; Serial: 356736038000005**

Communication System: UID 0, Generic GSM (0); Communication System Band: GSM850; Frequency: 824.2 MHz; Duty Cycle: 1:2.0797

Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.977$ S/m; $\epsilon_r = 54.393$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.22, 9.22, 9.22); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

GPRS 850/Body Front Low CH128/Area Scan (12x8x1): Measurement grid: dx=15mm, dy=15mm[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.286 W/kg


GPRS 850/Body Front Low CH128/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 21.64 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 0.357 W/kg

SAR(1 g) = 0.264 W/kg; SAR(10 g) = 0.173 W/kg[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.317 W/kg

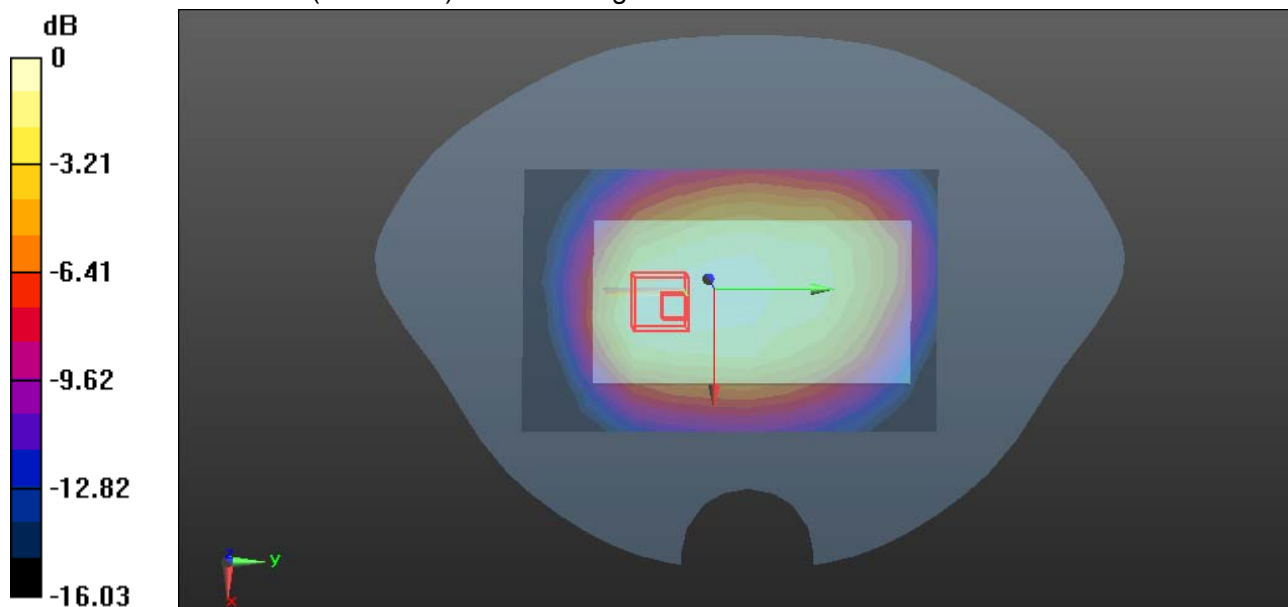

0 dB = 0.317 W/kg = -4.99 dBW/kg



Test Laboratory: Compliance Certification Services Inc.

Date: 9/16/2014

GPRS 850-Body Rear Low CH128**DUT: WCDMA Smart Phone; Type: T703b; Serial: 356736038000005**

Communication System: UID 0, Generic GSM (0); Communication System Band: GSM850; Frequency: 824.2 MHz; Duty Cycle: 1:2.0797

Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.977$ S/m; $\epsilon_r = 54.393$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.22, 9.22, 9.22); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

GPRS 850/Body Rear Low CH128/Area Scan (12x8x1): Measurement grid: dx=15mm, dy=15mm[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.582 W/kg


GPRS 850/Body Rear Low CH128/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 23.94 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.535 W/kg

SAR(1 g) = 0.407 W/kg; SAR(10 g) = 0.303 W/kg[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.478 W/kg

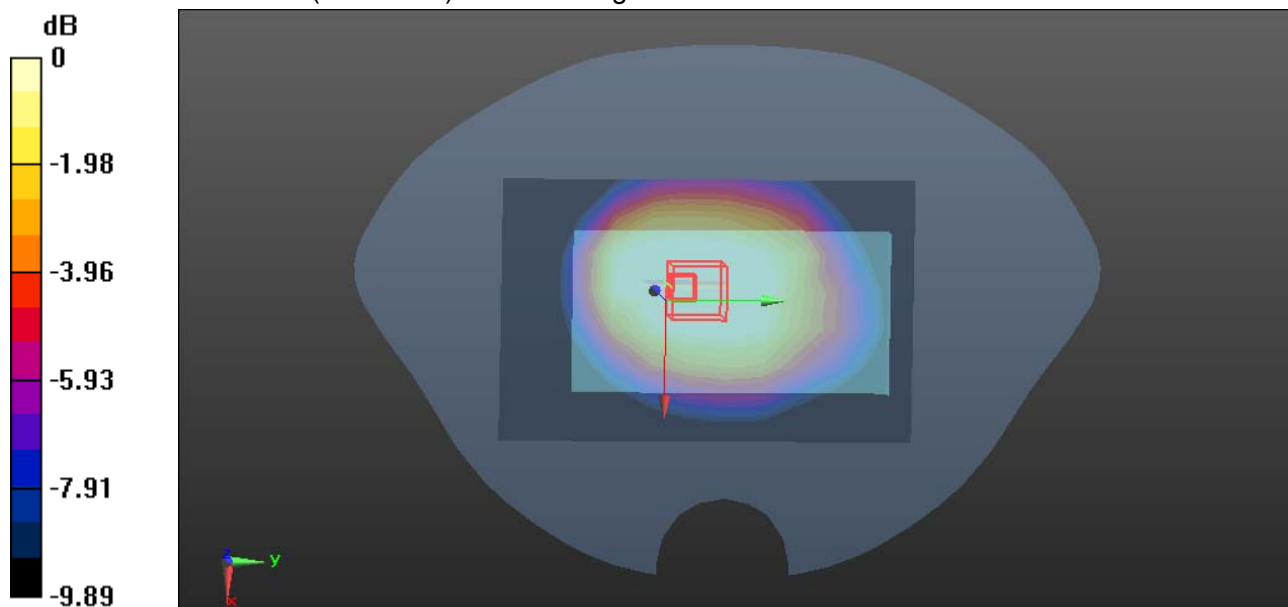

0 dB = 0.478 W/kg = -3.21 dBW/kg



Test Laboratory: Compliance Certification Services Inc.

Date: 9/16/2014

GPRS 850-Body-Left Low CH128**DUT: WCDMA Smart Phone; Type: T703b; Serial: 356736038000005**

Communication System: UID 0, Generic GSM (0); Communication System Band: GSM850; Frequency: 824.2 MHz; Duty Cycle: 1:2.0797

Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.977$ S/m; $\epsilon_r = 54.393$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.22, 9.22, 9.22); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

GPRS 850/Body Left Low CH128/Area Scan (12x7x1): Measurement grid: dx=15mm, dy=15mm[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.311 W/kg


GPRS 850/Body Left Low CH128/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.88 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.333 W/kg

SAR(1 g) = 0.240 W/kg; SAR(10 g) = 0.168 W/kg[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.292 W/kg

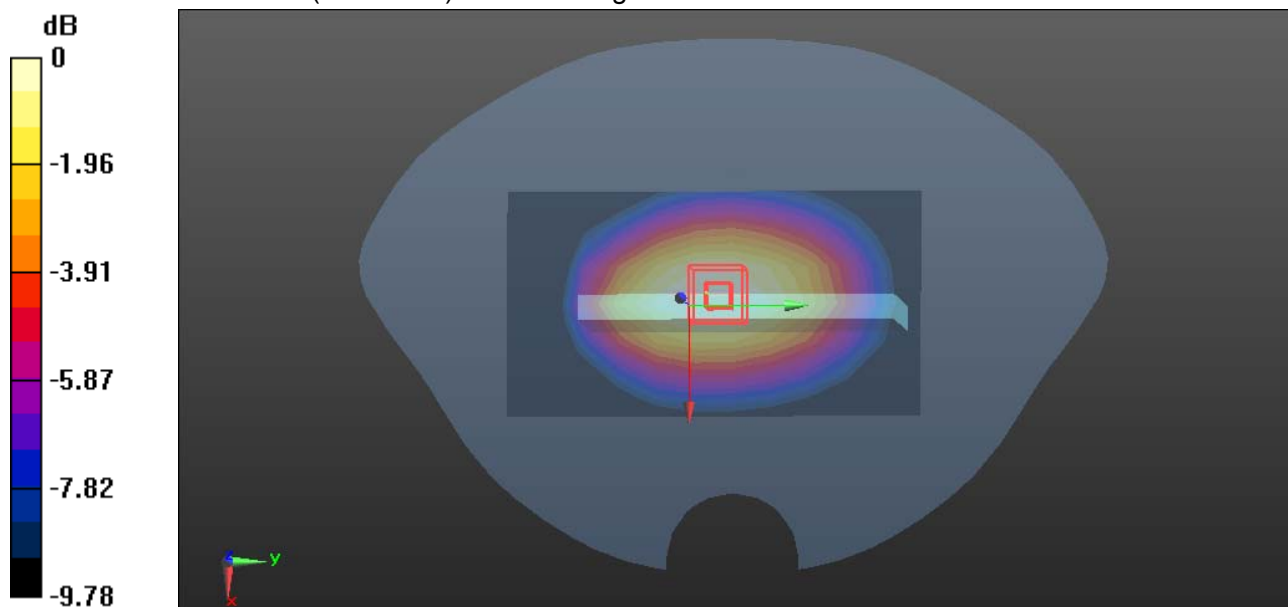

0 dB = 0.292 W/kg = -5.35 dBW/kg



Test Laboratory: Compliance Certification Services Inc.

Date: 9/16/2014

GPRS 850-Body-Top Low CH128**DUT: WCDMA Smart Phone; Type: T703b; Serial: 356736038000005**

Communication System: UID 0, Generic GSM (0); Communication System Band: GSM850; Frequency: 824.2 MHz; Duty Cycle: 1:2.0797

Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.977$ S/m; $\epsilon_r = 54.393$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.22, 9.22, 9.22); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

GPRS 850/Body Top Low CH128/Area Scan (8x7x1): Measurement grid: dx=15mm, dy=15mm[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.115 W/kg


GPRS 850/Body Top Low CH128/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.11 V/m; Power Drift = -0.20 dB

Peak SAR (extrapolated) = 0.159 W/kg

SAR(1 g) = 0.082 W/kg; SAR(10 g) = 0.048 W/kg[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.117 W/kg

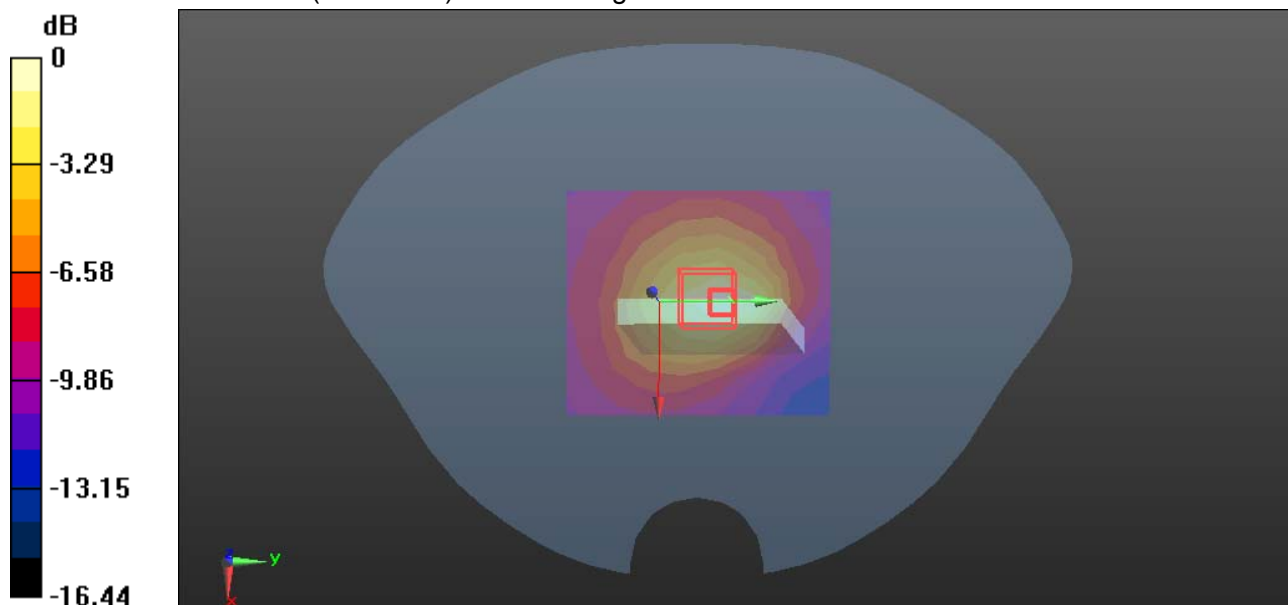

0 dB = 0.117 W/kg = -9.32 dBW/kg



Test Laboratory: Compliance Certification Services Inc.

Date: 9/16/2014

GSM 850-Body Low CH128**DUT: WCDMA Smart Phone; Type: T703b; Serial: 356736038000005**

Communication System: UID 0, Generic GSM (0); Communication System Band: GSM850; Frequency: 824.2 MHz; Duty Cycle: 1:8.30042

Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.977$ S/m; $\epsilon_r = 54.393$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.22, 9.22, 9.22); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

GSM 850/Body Front Low CH128/Area Scan (12x8x1): Measurement grid: dx=15mm, dy=15mm[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.158 W/kg


GSM 850/Body Front Low CH128/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.85 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.157 W/kg

SAR(1 g) = 0.121 W/kg; SAR(10 g) = 0.091 W/kg[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.141 W/kg

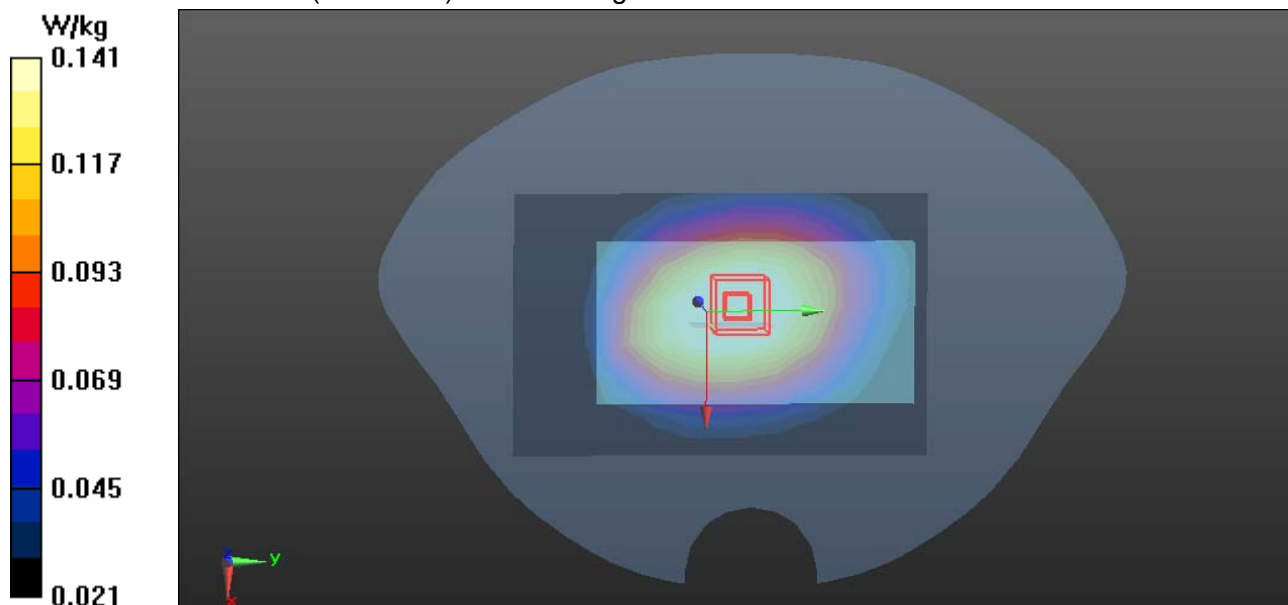



Test Laboratory: Compliance Certification Services Inc.

Date: 9/16/2014

GSM 850-Body Rear Low CH128**DUT: WCDMA Smart Phone; Type: T703b; Serial: 356736038000005**

Communication System: UID 0, Generic GSM (0); Communication System Band: GSM850; Frequency: 824.2 MHz; Duty Cycle: 1:8.30042

Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.977$ S/m; $\epsilon_r = 54.393$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.22, 9.22, 9.22); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

GSM 850/Body Rear Low CH128/Area Scan (12x8x1): Measurement grid: dx=15mm, dy=15mm[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.311 W/kg


GSM 850/Body Rear Low CH128/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.07 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 0.349 W/kg

SAR(1 g) = 0.272 W/kg; SAR(10 g) = 0.203 W/kg[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.316 W/kg

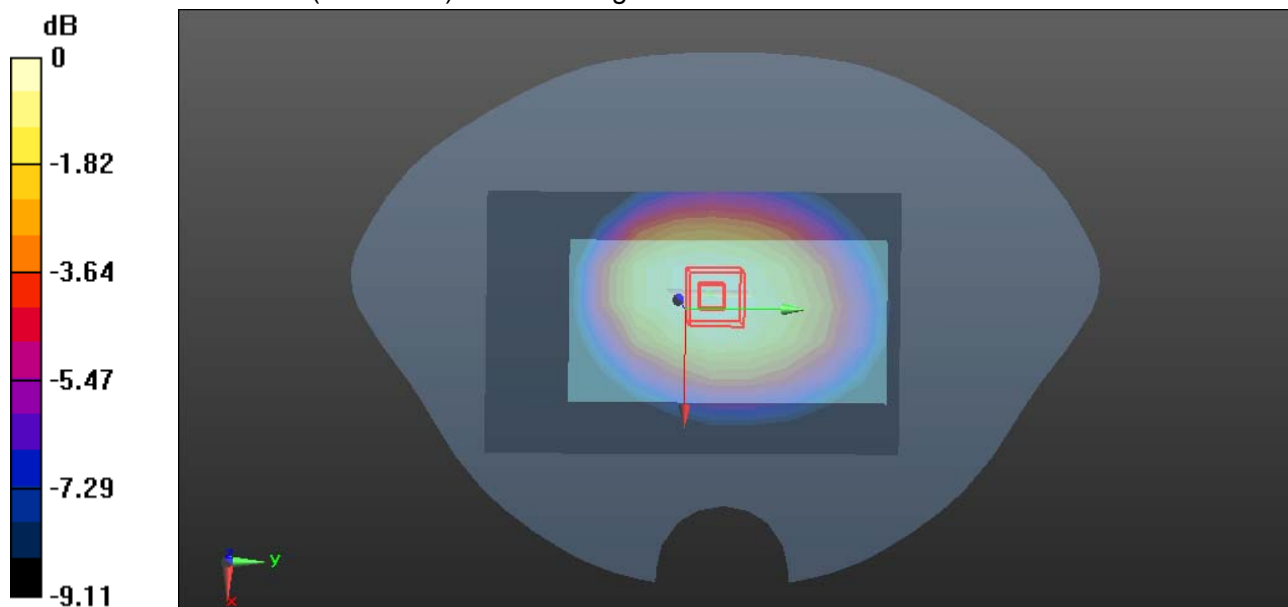

0 dB = 0.316 W/kg = -5.00 dBW/kg



Test Laboratory: Compliance Certification Services Inc.

Date: 9/17/2014

GPRS 1900-Body Front Low CH512**DUT: WCDMA Smart Phone; Type: T703b; Serial: 356736038000005**

Communication System: UID 0, Generic GSM (0); Communication System Band: PCS1900; Frequency: 1850.2 MHz; Duty Cycle: 1:2.0797

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.509$ S/m; $\epsilon_r = 52.896$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.09, 7.09, 7.09); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

GPRS 1900/Body Front Low CH512/Area Scan (12x8x1): Measurement grid: dx=15mm, dy=15mm[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.228 W/kg


GPRS 1900/Body Front Low CH512/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.217 V/m; Power Drift = -0.00 dB

Peak SAR (extrapolated) = 0.343 W/kg

SAR(1 g) = 0.174 W/kg; SAR(10 g) = 0.094 W/kg[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.252 W/kg

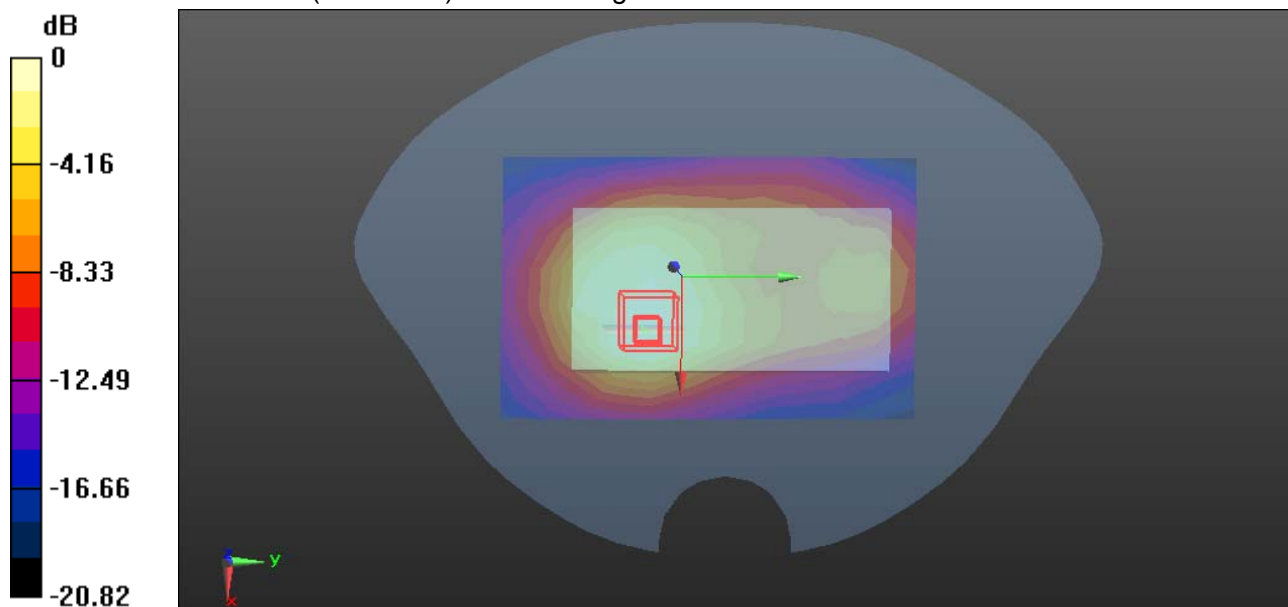

0 dB = 0.252 W/kg = -5.99 dBW/kg



Test Laboratory: Compliance Certification Services Inc.

Date: 9/17/2014

GPRS 1900-Body Rear Low CH512**DUT: WCDMA Smart Phone; Type: T703b; Serial: 356736038000005**

Communication System: UID 0, Generic GPRS; Communication System Band: GPRS1900; Frequency: 1850.2 MHz; Duty Cycle: 1:2.0797

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.509$ S/m; $\epsilon_r = 52.896$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.09, 7.09, 7.09); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

GPRS 1900/Body Rear Low CH512/Area Scan (12x8x1): Measurement grid: dx=15mm, dy=15mm[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.443 W/kg


GPRS 1900/Body Rear Low CH512/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.855 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.684 W/kg

SAR(1 g) = 0.330 W/kg; SAR(10 g) = 0.170 W/kg[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.474 W/kg

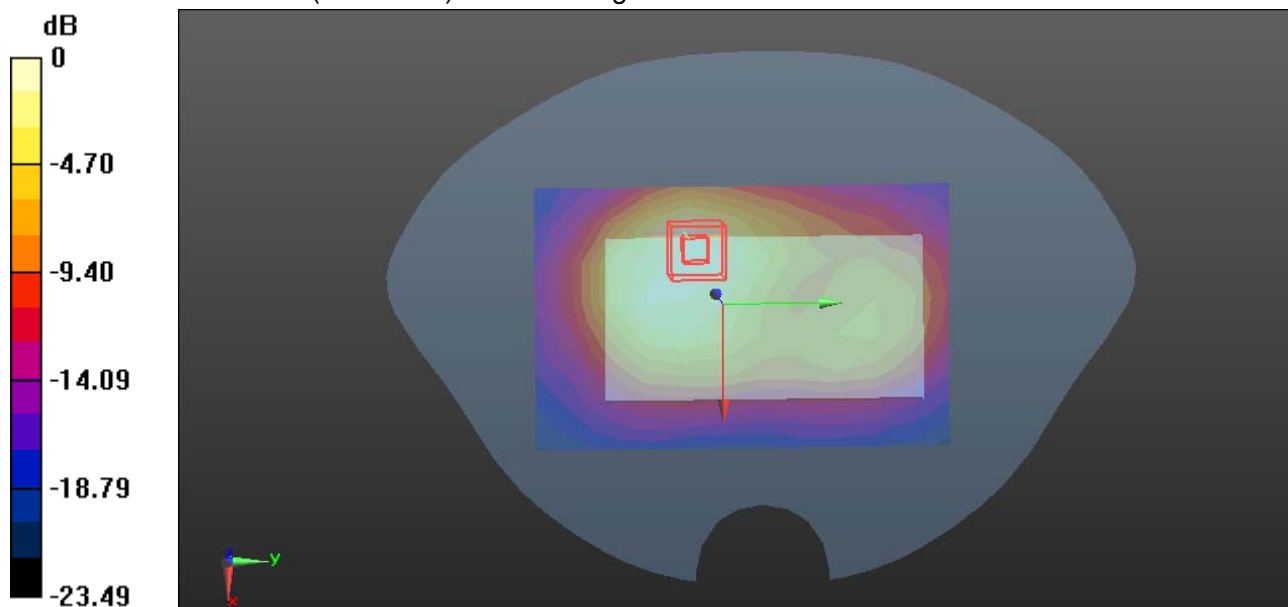

0 dB = 0.474 W/kg = -3.24 dBW/kg



Test Laboratory: Compliance Certification Services Inc.

Date: 9/17/2014

GPRS1900-Body-Left Low CH512**DUT: WCDMA Smart Phone; Type: T703b; Serial: 356736038000005**

Communication System: UID 0, Generic GSM (0); Communication System Band: PCS1900; Frequency: 1850.2 MHz; Duty Cycle: 1:2.0797

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.509$ S/m; $\epsilon_r = 52.896$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.09, 7.09, 7.09); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

GPRS 1900/Body Left Low CH512/Area Scan (12x7x1): Measurement grid: dx=15mm, dy=15mm[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.146 W/kg


GPRS 1900/Body Left Low CH512/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.335 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 0.216 W/kg

SAR(1 g) = 0.107 W/kg; SAR(10 g) = 0.054 W/kg[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.159 W/kg

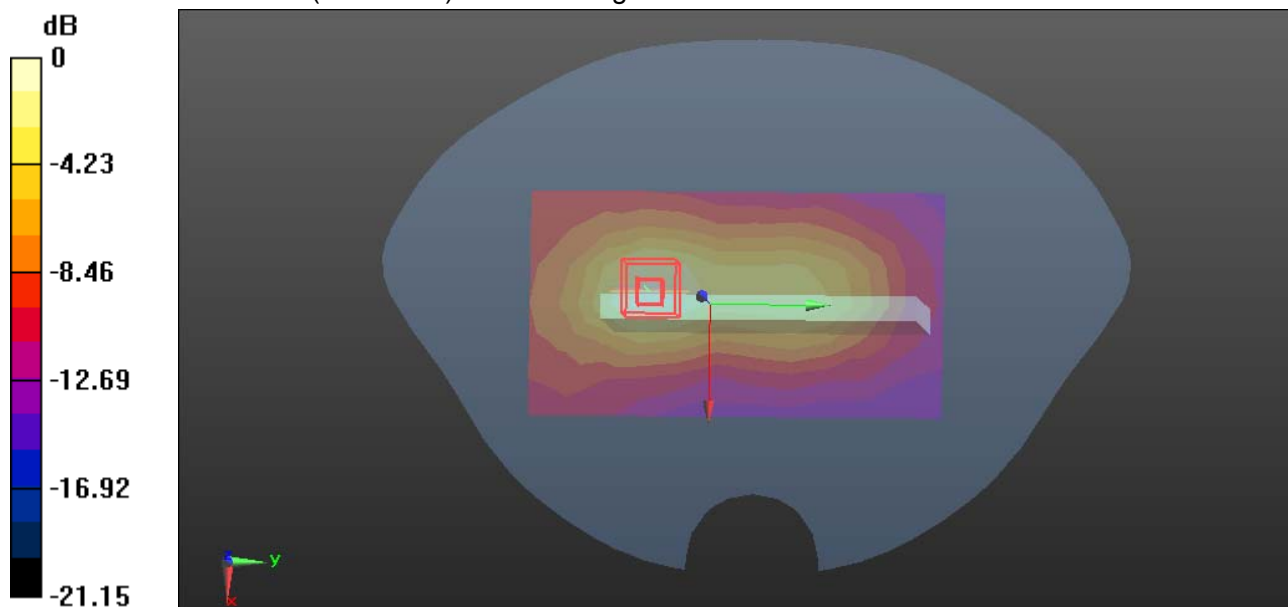

0 dB = 0.159 W/kg = -7.99 dBW/kg



Test Laboratory: Compliance Certification Services Inc.

Date: 9/17/2014

GPRS1900-Body-Top Low CH512**DUT: WCDMA Smart Phone; Type: T703b; Serial: 356736038000005**

Communication System: UID 0, Generic GSM (0); Communication System Band: PCS1900; Frequency: 1850.2 MHz; Duty Cycle: 1:2.0797

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.509$ S/m; $\epsilon_r = 52.896$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.09, 7.09, 7.09); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

GPRS 850/Body Top Low CH512/Area Scan (8x7x1): Measurement grid: dx=15mm, dy=15mm[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.280 W/kg


GPRS 850/Body Top Low CH512/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.78 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.397 W/kg

SAR(1 g) = 0.208 W/kg; SAR(10 g) = 0.107 W/kg[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.300 W/kg

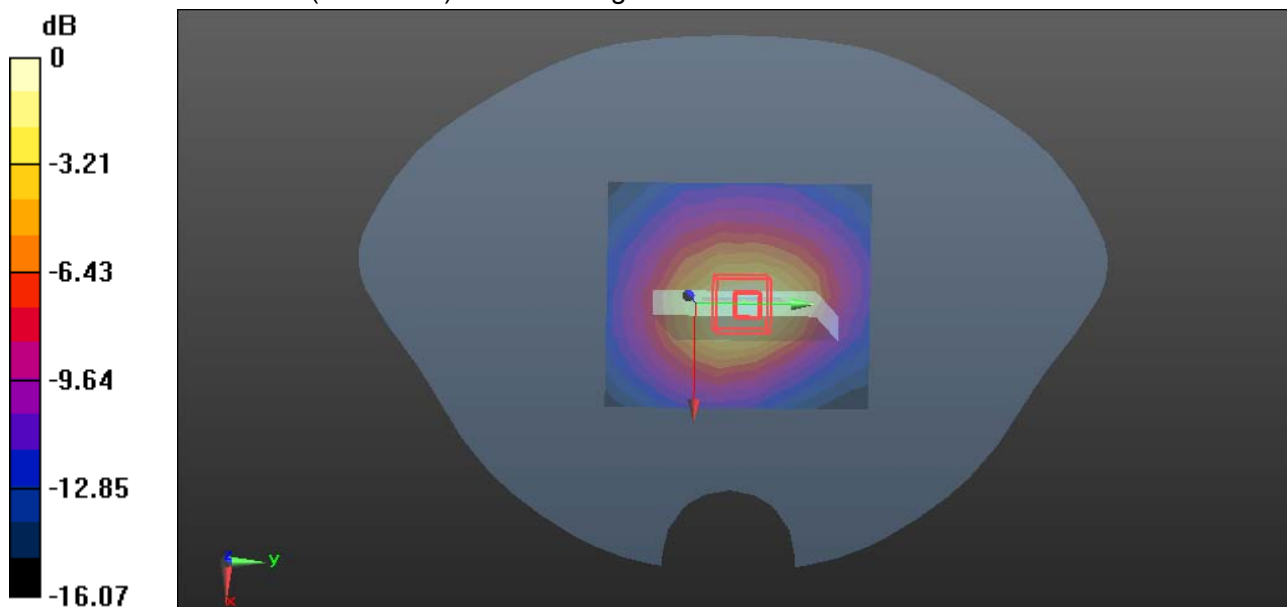

0 dB = 0.300 W/kg = -5.23 dBW/kg



Test Laboratory: Compliance Certification Services Inc.

Date: 9/17/2014

GSM 1900-Body Front Low CH512**DUT: WCDMA Smart Phone; Type: T703b; Serial: 356736038000005**

Communication System: UID 0, Generic GSM (0); Communication System Band: PCS1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8.30042

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.509$ S/m; $\epsilon_r = 52.896$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.09, 7.09, 7.09); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

GSM 1900/GSM1900 Body Front Low CH512/Area Scan (12x8x1): Measurement grid: dx=15mm, dy=15mm[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.190 W/kg

GSM 1900/GSM1900 Body Front Low CH512/Zoom Scan (5x5x7)/Cube 0: Measurement grid:


dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.617 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 0.256 W/kg

SAR(1 g) = 0.138 W/kg; SAR(10 g) = 0.078 W/kg[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.193 W/kg

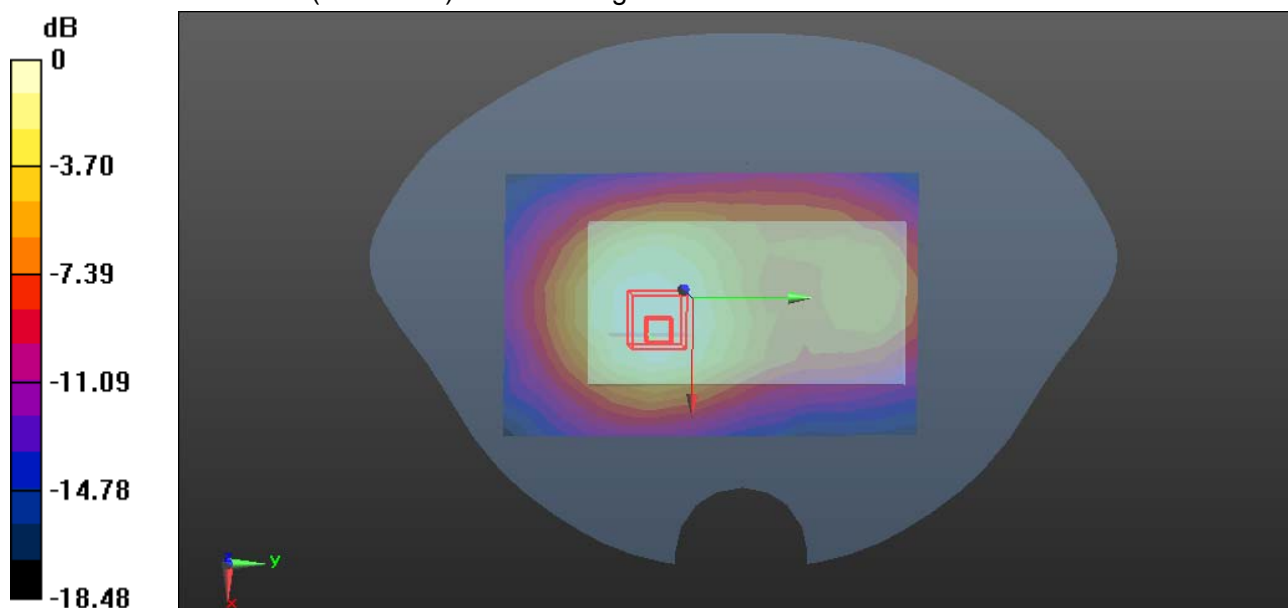

0 dB = 0.193 W/kg = -7.14 dBW/kg



Test Laboratory: Compliance Certification Services Inc.

Date: 9/17/2014

GSM 1900-Body Rear Low CH512**DUT: WCDMA Smart Phone; Type: T703b; Serial: 356736038000005**

Communication System: UID 0, Generic GSM (0); Communication System Band: PCS1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8.30042

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.509$ S/m; $\epsilon_r = 52.896$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.09, 7.09, 7.09); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

GSM 1900/GSM1900 Body Rear Low CH512/Area Scan (12x8x1): Measurement grid: dx=15mm, dy=15mm[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.268 W/kg

GSM 1900/GSM1900 Body Rear Low CH512/Zoom Scan (5x5x7)/Cube 0: Measurement grid:


dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.754 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.391 W/kg

SAR(1 g) = 0.205 W/kg; SAR(10 g) = 0.112 W/kg[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.291 W/kg

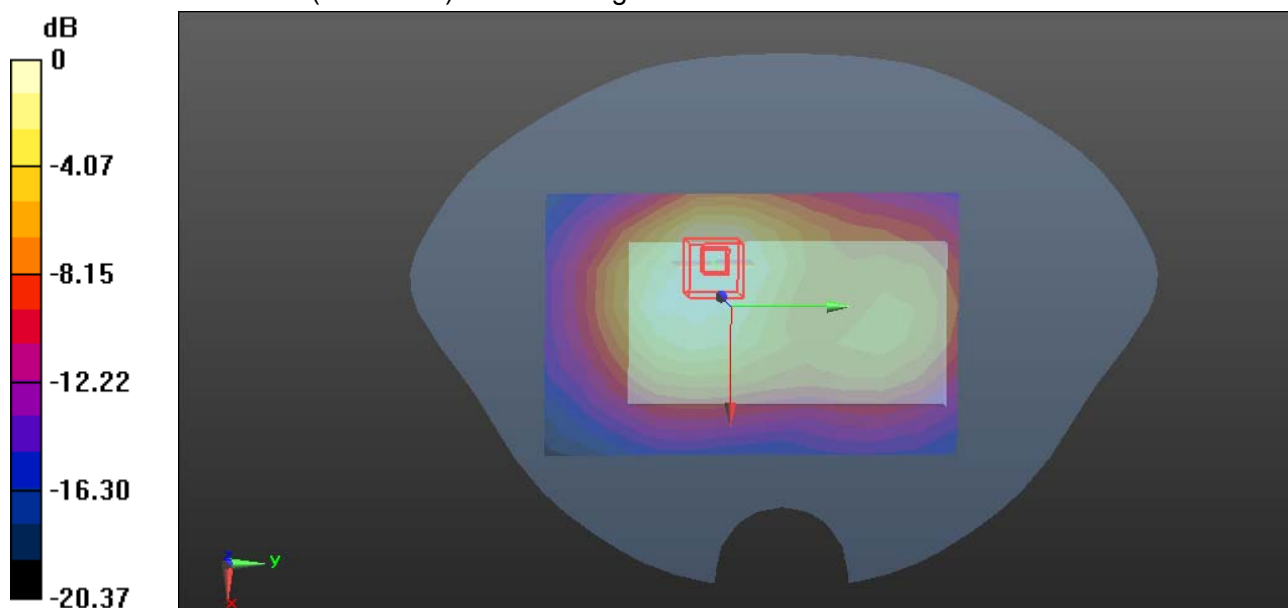

0 dB = 0.291 W/kg = -5.36 dBW/kg



Test Laboratory: Compliance Certification Services Inc.

Date: 9/17/2014

WCDMA Band II-Body Front Low CH9262**DUT: WCDMA Smart Phone; Type: T703b; Serial: 356736038000005**

Communication System: UID 0, FDD WCDMA (0); Communication System Band: Band II; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1852.4$ MHz; $\sigma = 1.511$ S/m; $\epsilon_r = 52.896$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.09, 7.09, 7.09); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

WCDMA Band II/Body Front Low CH9262/Area Scan (12x7x1): Measurement grid: dx=15mm, dy=15mm[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.370 W/kg


WCDMA Band II/Body Front Low CH9262/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.415 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.499 W/kg

SAR(1 g) = 0.265 W/kg; SAR(10 g) = 0.148 W/kg[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.376 W/kg

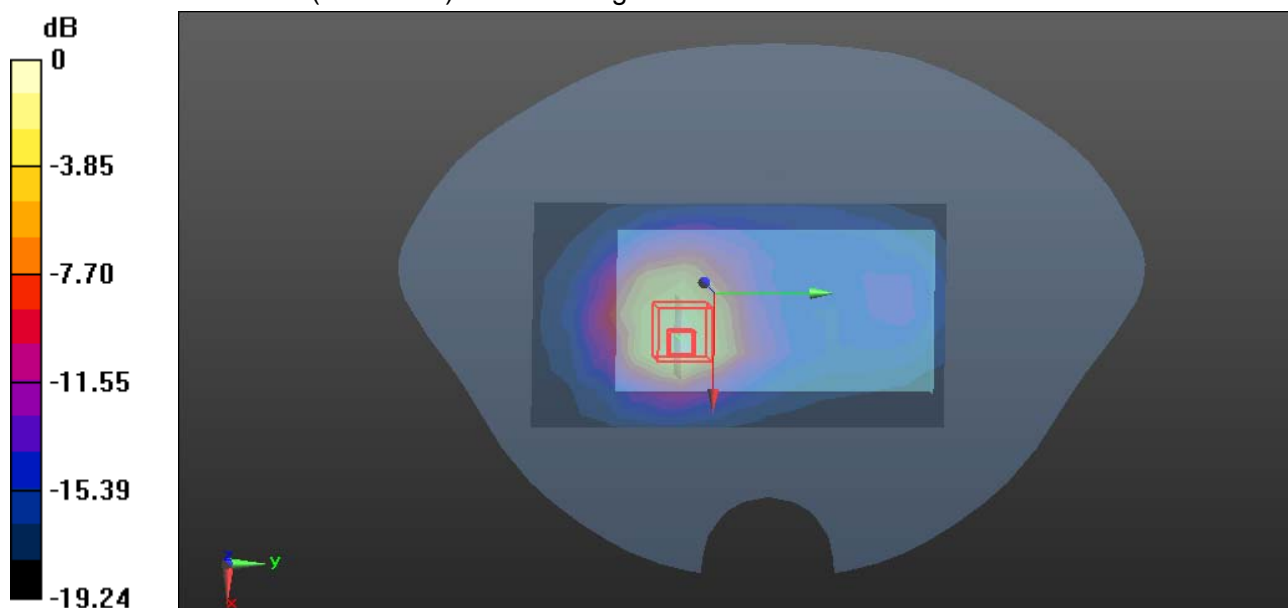

0 dB = 0.376 W/kg = -4.25 dBW/kg



Test Laboratory: Compliance Certification Services Inc.

Date: 9/17/2014

WCDMA Band II-Body Rear Low CH926**DUT: WCDMA Smart Phone; Type: T703b; Serial: 356736038000005**

Communication System: UID 0, FDD WCDMA (0); Communication System Band: Band II; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1852.4$ MHz; $\sigma = 1.511$ S/m; $\epsilon_r = 52.896$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.09, 7.09, 7.09); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

WCDMA Band II/Body Rear Low CH9262/Area Scan (12x7x1): Measurement grid: dx=15mm, dy=15mm[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.565 W/kg


WCDMA Band II/Body Rear Low CH9262/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.52 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.877 W/kg

SAR(1 g) = 0.442 W/kg; SAR(10 g) = 0.237 W/kg[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.640 W/kg

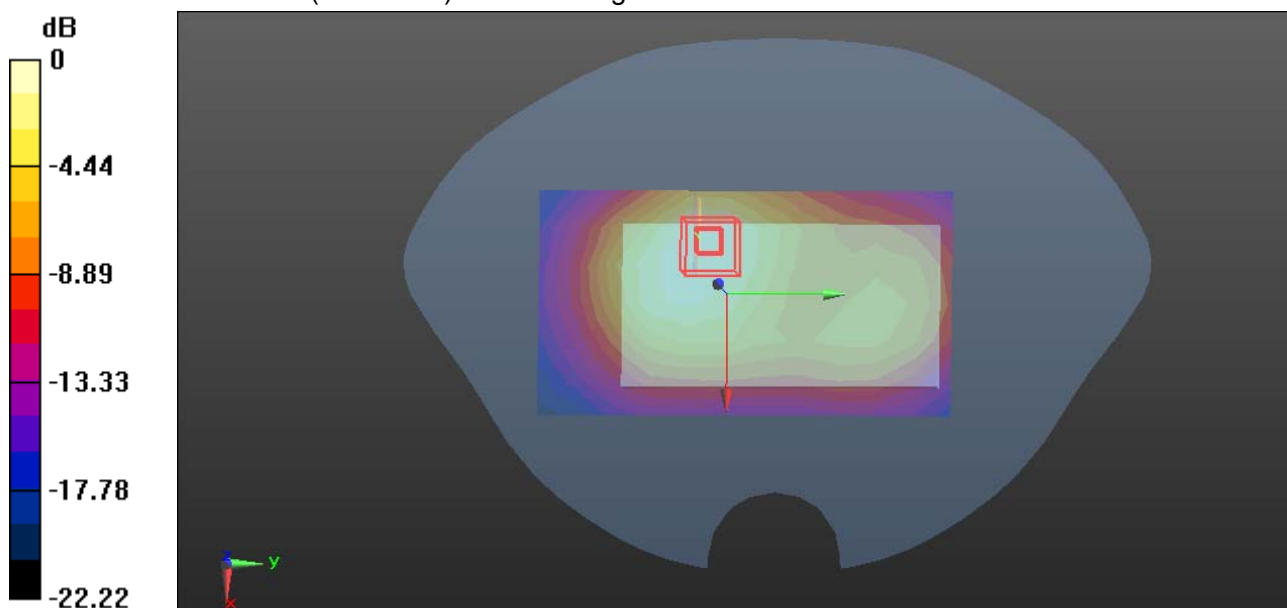

0 dB = 0.640 W/kg = -1.94 dBW/kg



Test Laboratory: Compliance Certification Services Inc.

Date: 9/17/2014

WCDMA Band II-Body-Left Low CH9262**DUT: WCDMA Smart Phone; Type: T703b; Serial: 356736038000005**

Communication System: UID 0, FDD WCDMA (0); Communication System Band: Band II; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1852.4$ MHz; $\sigma = 1.511$ S/m; $\epsilon_r = 52.896$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.09, 7.09, 7.09); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

WCDMA Band II/Body Left Low CH9262/Area Scan (12x7x1): Measurement grid: dx=15mm, dy=15mm[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.286 W/kg


WCDMA Band II/Body Left Low CH9262/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.093 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 0.717 W/kg

SAR(1 g) = 0.270 W/kg; SAR(10 g) = 0.112 W/kg[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.310 W/kg

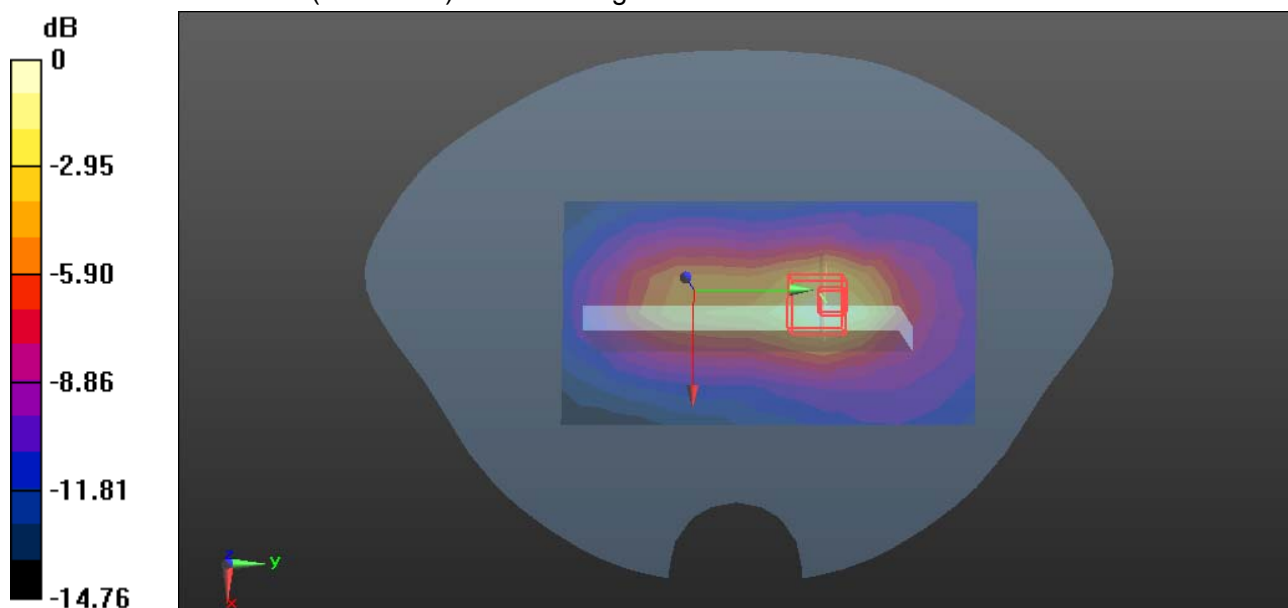

0 dB = 0.310 W/kg = -5.09 dBW/kg



Test Laboratory: Compliance Certification Services Inc.

Date: 9/17/2014

WCDMA Band II-Body-Top Low CH9262**DUT: WCDMA Smart Phone; Type: T703b; Serial: 356736038000005**

Communication System: UID 0, FDD WCDMA (0); Communication System Band: Band II; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1852.4$ MHz; $\sigma = 1.511$ S/m; $\epsilon_r = 52.896$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.09, 7.09, 7.09); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

WCDMA Band II/Body Top Low CH6262/Area Scan (8x7x1): Measurement grid: dx=15mm, dy=15mm[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.706 W/kg


WCDMA Band II/Body Top Low CH6262/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.77 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.965 W/kg

SAR(1 g) = 0.492 W/kg; SAR(10 g) = 0.246 W/kg[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.725 W/kg

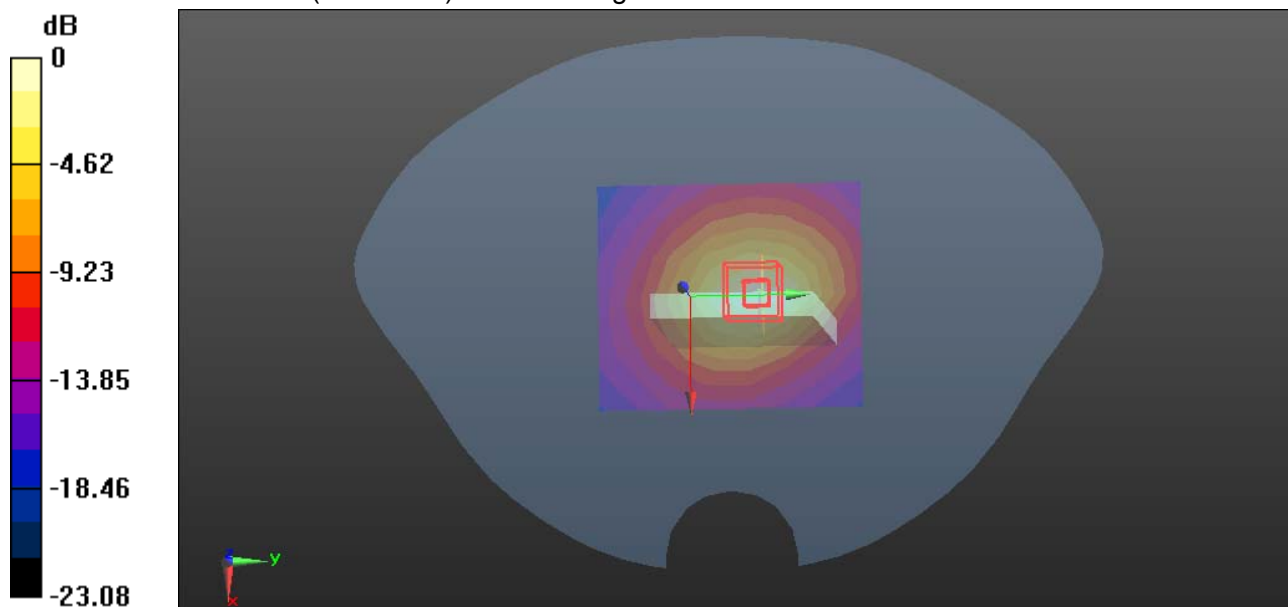

0 dB = 0.725 W/kg = -1.40 dBW/kg



Test Laboratory: Compliance Certification Services Inc.

Date: 9/16/2014

WCDMA Band V-Body Front Middle CH4182**DUT: WCDMA Smart Phone; Type: T703b; Serial: 356736038000005**

Communication System: UID 0, FDD WCDMA (0); Communication System Band: Band V; Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.989$ S/m; $\epsilon_r = 54.262$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.22, 9.22, 9.22); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

WCDMA Band V/Body Front Middle CH4182/Area Scan (11x8x1): Measurement grid: dx=15mm, dy=15mm[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.260 W/kg

WCDMA Band V/Body Front Middle CH4182/Zoom Scan (5x5x7)/Cube 0: Measurement grid:


dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.00 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 0.285 W/kg

SAR(1 g) = 0.219 W/kg; SAR(10 g) = 0.165 W/kg[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.256 W/kg

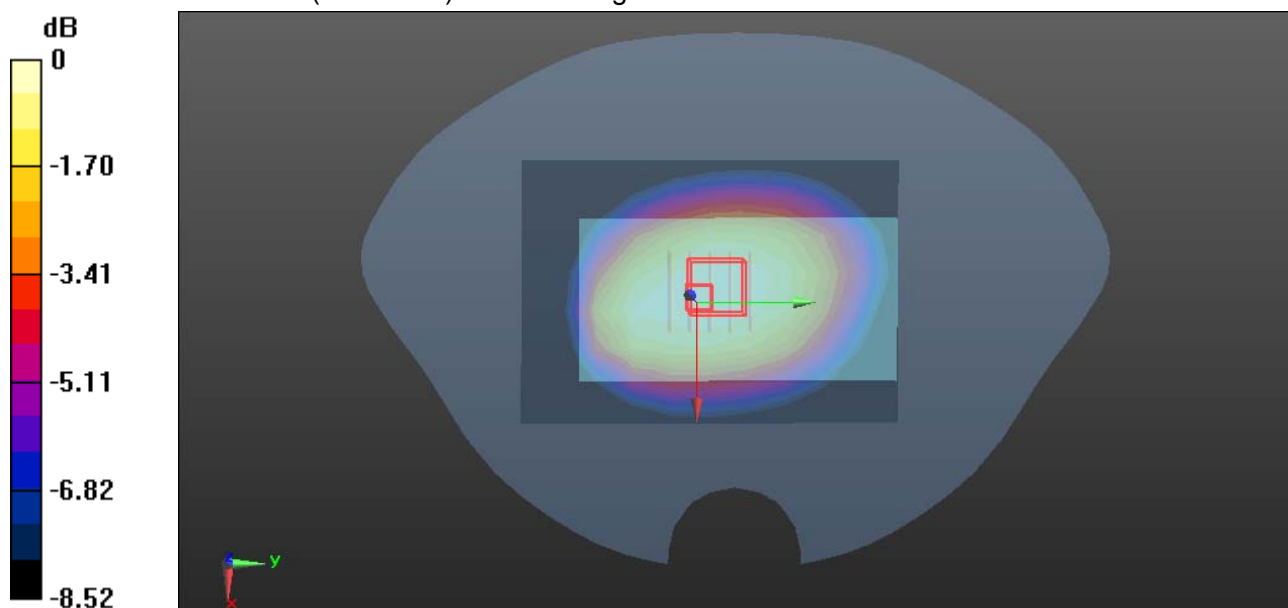

0 dB = 0.256 W/kg = -5.92 dBW/kg



Test Laboratory: Compliance Certification Services Inc.

Date: 9/16/2014

WCDMA Band V-Body Rear Middle CH4182**DUT: WCDMA Smart Phone; Type: T703b; Serial: 356736038000005**

Communication System: UID 0, FDD WCDMA (0); Communication System Band: Band V; Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 846.6$ MHz; $\sigma = 1$ S/m; $\epsilon_r = 54.144$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.22, 9.22, 9.22); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

WCDMA Band V/Body Rear Middle CH4182/Area Scan (11x7x1): Measurement grid: dx=15mm, dy=15mm[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.427 W/kg

WCDMA Band V/Body Rear Middle CH4182/Zoom Scan (5x5x7)/Cube 0: Measurement grid:


dx=8mm, dy=8mm, dz=5mm

Reference Value = 22.13 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 0.528 W/kg

SAR(1 g) = 0.354 W/kg; SAR(10 g) = 0.245 W/kg[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.420 W/kg

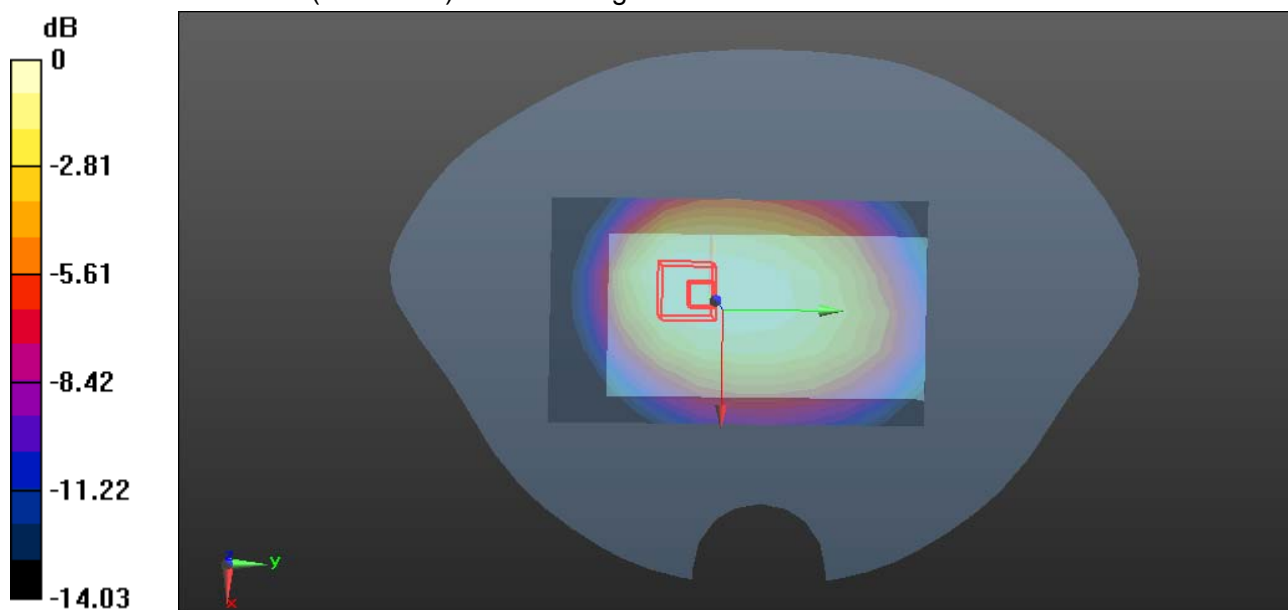

0 dB = 0.420 W/kg = -3.77 dBW/kg



Test Laboratory: Compliance Certification Services Inc.

Date: 9/16/2014

WCDMA Band V-Body Left Middle CH4182**DUT: WCDMA Smart Phone; Type: T703b; Serial: 356736038000005**

Communication System: UID 0, FDD WCDMA (0); Communication System Band: Band V; Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.989$ S/m; $\epsilon_r = 54.262$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.22, 9.22, 9.22); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

WCDMA Band II/Body Left Middle CH4182/Area Scan (11x7x1): Measurement grid: dx=15mm, dy=15mm[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.232 W/kg


WCDMA Band II/Body Left Middle CH4182/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.28 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.287 W/kg

SAR(1 g) = 0.206 W/kg; SAR(10 g) = 0.142 W/kg[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.251 W/kg

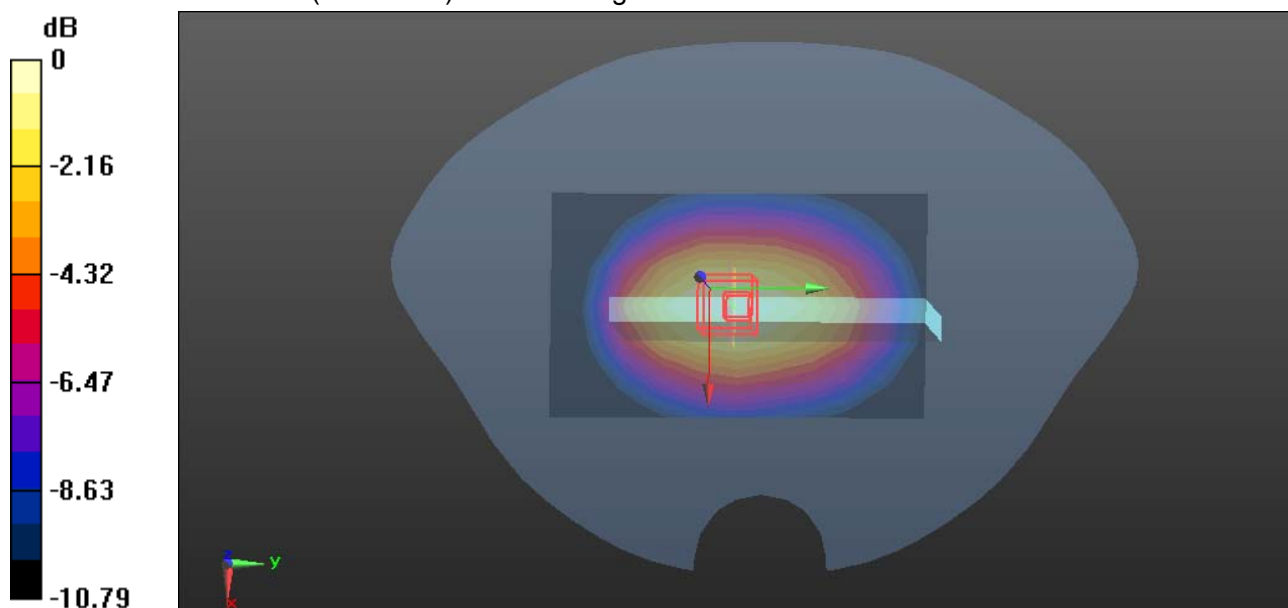

0 dB = 0.251 W/kg = -6.00 dBW/kg



Test Laboratory: Compliance Certification Services Inc.

Date: 9/16/2014

WCDMA Band V-Body-Top High CH423**DUT: WCDMA Smart Phone; Type: T703b; Serial: 356736038000005**

Communication System: UID 0, FDD WCDMA (0); Communication System Band: Band V; Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 846.6$ MHz; $\sigma = 1$ S/m; $\epsilon_r = 54.144$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.22, 9.22, 9.22); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

WCDMA Band V/Body Top High CH4233/Area Scan (8x7x1): Measurement grid: dx=15mm, dy=15mm[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.125 W/kg


WCDMA Band V/Body Top High CH4233/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.40 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 0.171 W/kg

SAR(1 g) = 0.087 W/kg; SAR(10 g) = 0.051 W/kg[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.122 W/kg

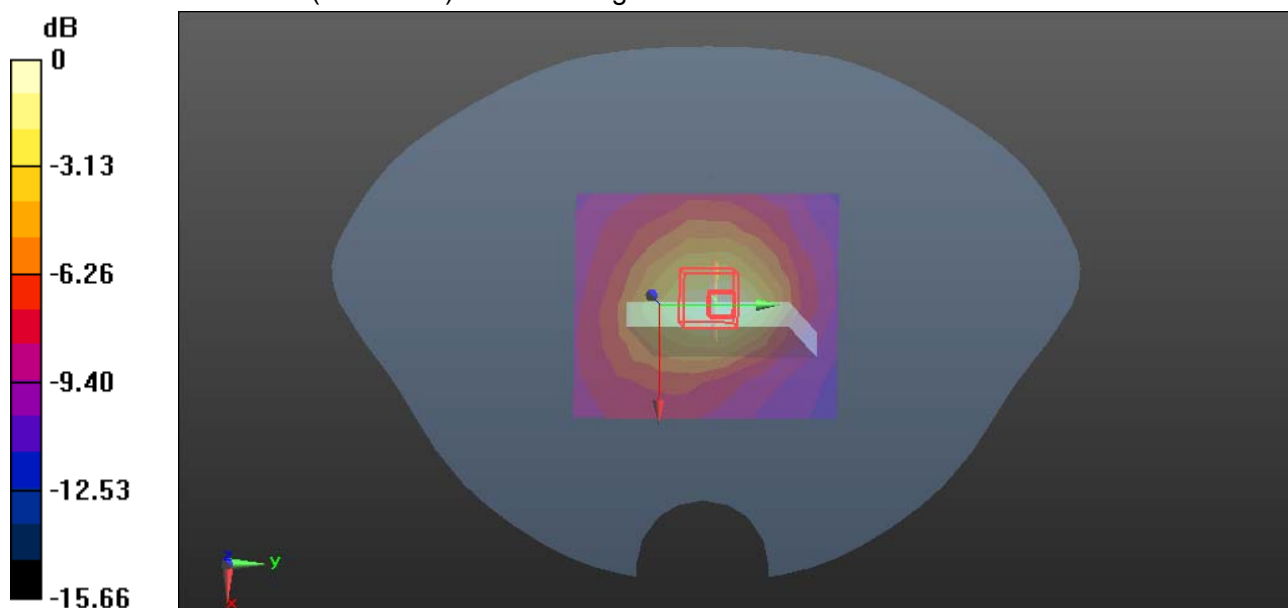

0 dB = 0.122 W/kg = -9.14 dBW/kg



Test Laboratory: Compliance Certification Services Inc.

Date: 9/18/2014

WIFI-Body Front Middle CH6**DUT: WCDMA Smart Phone; Type: T703b; Serial: 356736038000005**

Communication System: UID 0, IEEE 802.11b (0); Communication System Band: ISM 2.4GHz Band;

Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.899$ S/m; $\epsilon_r = 52.47$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(6.82, 6.82, 6.82); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

WIFI/Body Front Middle CH6/Area Scan (13x10x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.130 W/kg


WIFI/Body Front Middle CH6/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.912 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.218 W/kg

SAR(1 g) = 0.082 W/kg; SAR(10 g) = 0.036 W/kg

Maximum value of SAR (measured) = 0.136 W/kg

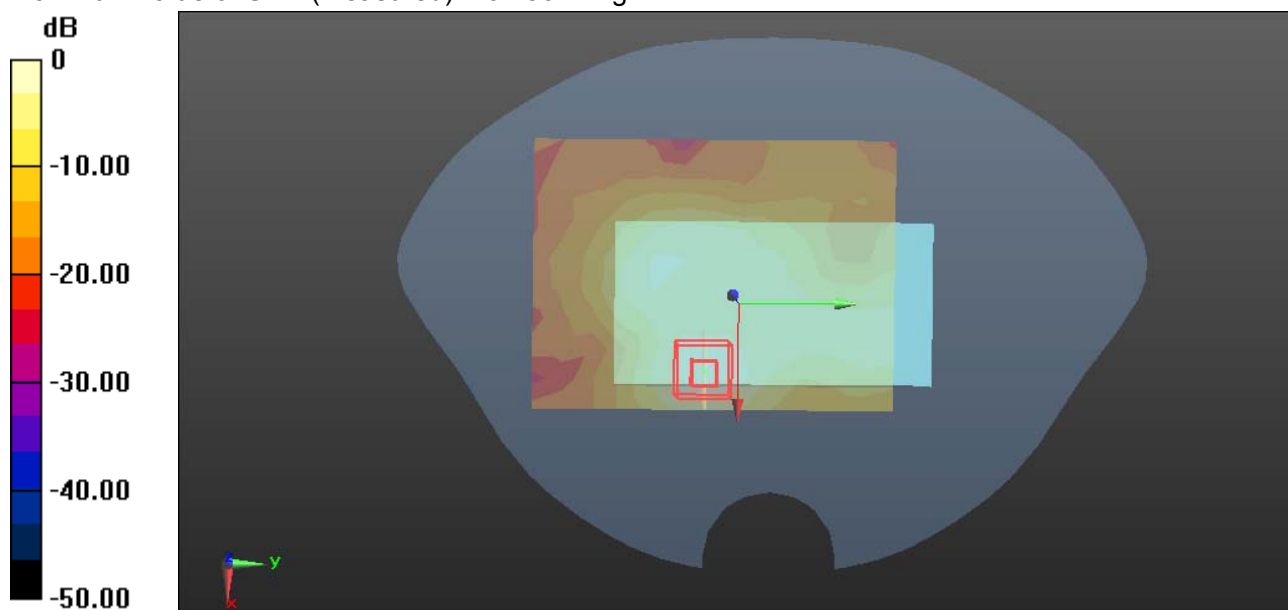

0 dB = 0.136 W/kg = -8.66 dBW/kg



Test Laboratory: Compliance Certification Services Inc.

Date: 9/18/2014

WIFI-Body Rear Middle CH6**DUT: WCDMA Smart Phone; Type: T703b; Serial: 356736038000005**

Communication System: UID 0, IEEE 802.11b (0); Communication System Band: ISM 2.4GHz Band;

Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.899$ S/m; $\epsilon_r = 52.47$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(6.82, 6.82, 6.82); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

WIFI/Body Rear Middle CH6/Area Scan (15x10x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.521 W/kg


WIFI/Body Rear Middle CH6/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.496 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 1.00 W/kg

SAR(1 g) = 0.331 W/kg; SAR(10 g) = 0.124 W/kg

Maximum value of SAR (measured) = 0.604 W/kg

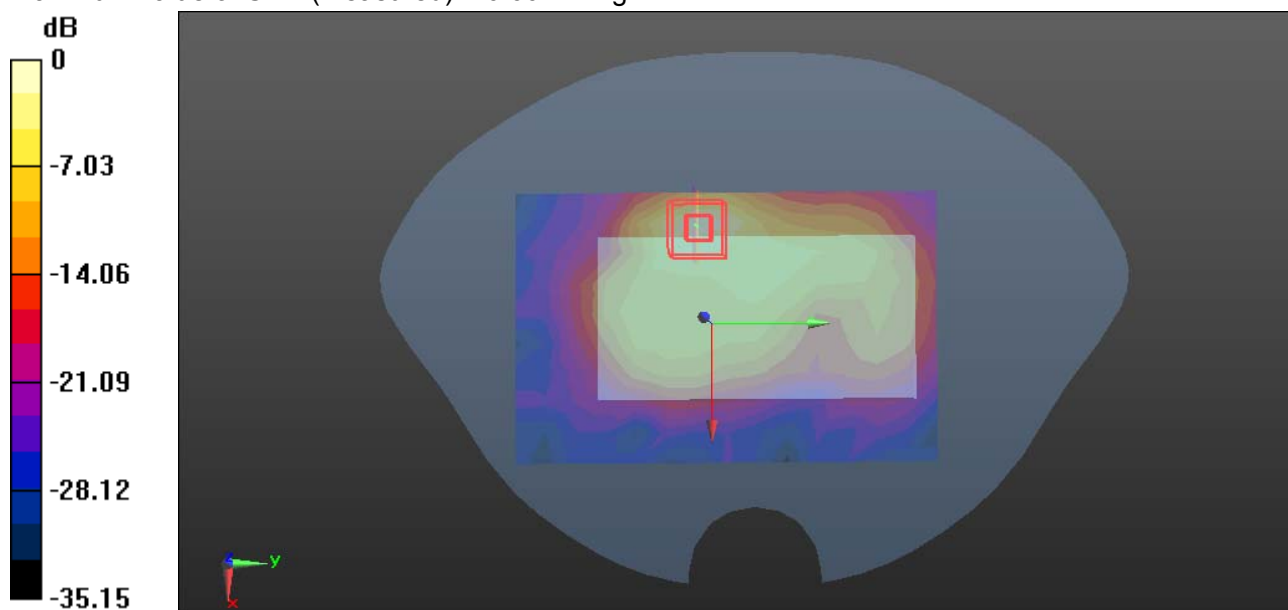



Test Laboratory: Compliance Certification Services Inc.

Date: 9/18/2014

WIFI-Body-Left Middle CH6**DUT: WCDMA Smart Phone; Type: T703b; Serial: 356736038000005**

Communication System: UID 0, IEEE 802.11b (0); Communication System Band: ISM 2.4GHz Band;

Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.899$ S/m; $\epsilon_r = 52.47$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(6.82, 6.82, 6.82); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

WIFI/Body Left Middle CH6/Area Scan (14x9x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.133 W/kg


WIFI/Body Left Middle CH6/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.150 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.233 W/kg

SAR(1 g) = 0.093 W/kg; SAR(10 g) = 0.040 W/kg

Maximum value of SAR (measured) = 0.155 W/kg

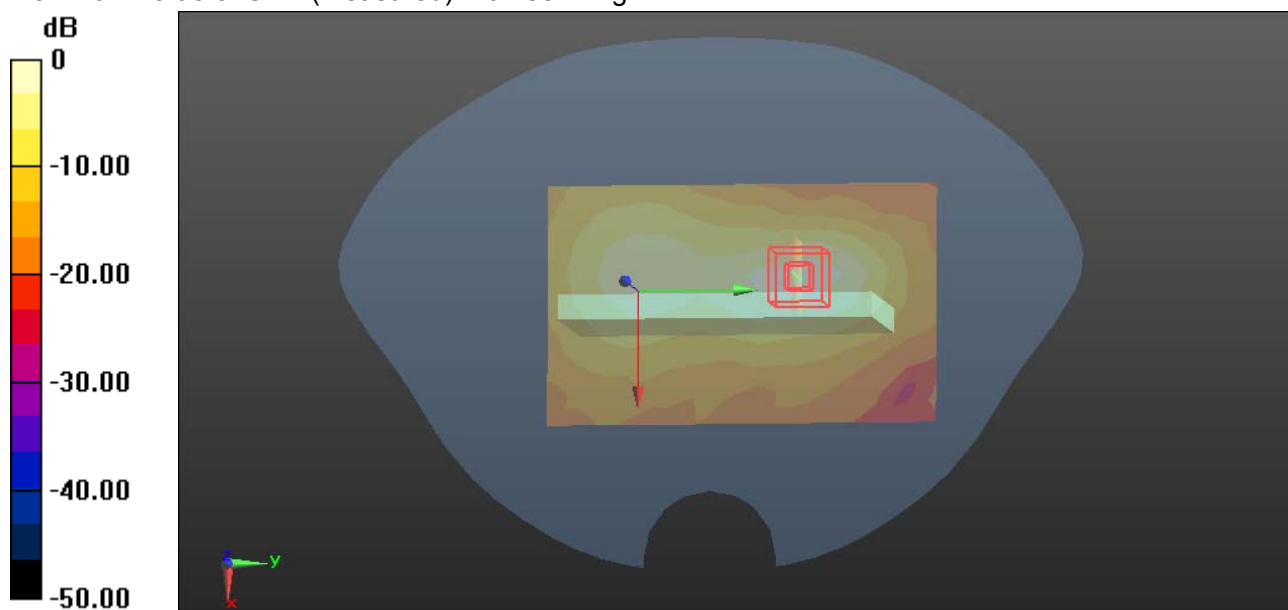

0 dB = 0.155 W/kg = -8.10 dBW/kg



Test Laboratory: Compliance Certification Services Inc.

Date: 9/18/2014

WIFI-Body-Top Middle CH6**DUT: WCDMA Smart Phone; Type: T703b; Serial: 356736038000005**

Communication System: UID 0, IEEE 802.11b (0); Communication System Band: ISM 2.4GHz Band;

Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.899$ S/m; $\epsilon_r = 52.47$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(6.82, 6.82, 6.82); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

WIFI/Body Top Low CH6/Area Scan (11x10x1):

Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.0340 W/kg


WIFI/Body Top Low CH6/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.130 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 0.0510 W/kg

SAR(1 g) = 0.022 W/kg; SAR(10 g) = 0.011 W/kg

Maximum value of SAR (measured) = 0.0366 W/kg

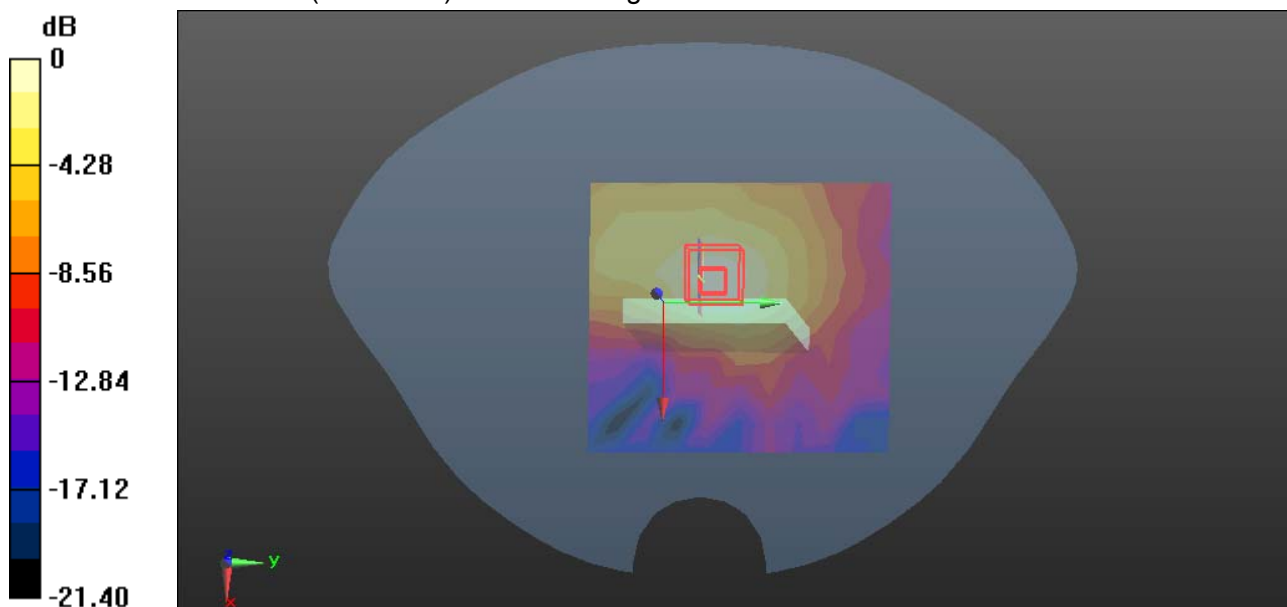

0 dB = 0.0366 W/kg = -14.37 dBW/kg