

## **COMPLIANCE WORLDWIDE INC. TEST REPORT 387-21**

**In Accordance with the Requirements of  
FCC PART 15.247, SUBPART C  
ISED Canada RSS-247, Issue 2**


**Issued to  
Building 36 Technologies  
150 A Street – Suite 104  
Needham, MA 02494  
781-474-0500**

**for the  
ADC-S40-DC Dry Contact Sensor  
Z-Wave LR Radio**

**FCC ID: 2AC3T-B36S40DCRA  
IC: 12323A-B36S40DCRA**


**Report Issued on November 30, 2021**

**Prepared by**

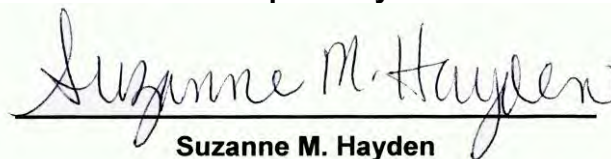

**Suzanne M. Hayden**

**Reviewed By**



**Larry K. Stillings**

## Table of Contents

|                                                                       |    |
|-----------------------------------------------------------------------|----|
| 1. Scope .....                                                        | 3  |
| 2. Product Details .....                                              | 3  |
| 2.1 Manufacturer .....                                                | 3  |
| 2.2 Model Number .....                                                | 3  |
| 2.3 Serial Number .....                                               | 3  |
| 2.4 Description .....                                                 | 3  |
| 2.5 Power Source .....                                                | 3  |
| 2.6 Hardware Revision .....                                           | 3  |
| 2.7 Software Revision .....                                           | 3  |
| 2.8 Modulation Type .....                                             | 3  |
| 2.9 Operating Frequency .....                                         | 3  |
| 2.10 EMC Modifications .....                                          | 3  |
| 3. Product Configuration .....                                        | 3  |
| 3.1 Operational Characteristics & Software .....                      | 3  |
| 3.2 EUT Hardware .....                                                | 3  |
| 3.3 EUT Cables/Transducers .....                                      | 3  |
| 3.4 Support Equipment .....                                           | 4  |
| 3.5 Block Diagram .....                                               | 4  |
| 4. Measurements Parameters .....                                      | 4  |
| 4.1 Measurement Equipment Used to Perform Test .....                  | 4  |
| 4.2 Measurement Software .....                                        | 5  |
| 4.3 Measurement & Equipment Setup .....                               | 5  |
| 4.4 Measurement Procedures .....                                      | 5  |
| 4.5 Measurement Uncertainty .....                                     | 6  |
| 5. Choice of Equipment for Test Suits .....                           | 6  |
| 5.1 Choice of Model .....                                             | 6  |
| 5.2 Presentation .....                                                | 6  |
| 5.3 Choice of Operating Frequencies .....                             | 6  |
| 5.4 EUT Positions for Emissions Measurements .....                    | 6  |
| 6. Measurement Summary .....                                          | 7  |
| 7. Measurement Data .....                                             | 8  |
| 7.1 Antenna Requirement .....                                         | 8  |
| 7.2 Minimum DTS Bandwidth .....                                       | 9  |
| 7.3 Maximum Peak Conducted Output Power .....                         | 11 |
| 7.4 Operation with directional antenna gains greater than 6 dBi ..... | 13 |
| 7.5 Transmitter Spurious Radiated Emissions .....                     | 14 |
| 7.6 Band Edge and Out of Band Measurements .....                      | 16 |
| 7.7 Emissions in Non-restricted Frequency Bands .....                 | 19 |
| 7.8 Peak Power Spectral Density .....                                 | 20 |
| 7.9 Conducted Emissions .....                                         | 22 |
| 7.10 Duty Cycle .....                                                 | 23 |
| 7.11 99% (Occupied) Bandwidth .....                                   | 25 |
| 7.12 Public Exposure to Radio Frequency Energy Levels .....           | 27 |
| 8. Test Setup Photographs .....                                       | 29 |
| 9. Test Site Description .....                                        | 34 |
| Appendix A - Transmitter Spurious Radiated Emissions Test Data .....  | 35 |
| Appendix B - Emissions in Non-restricted Frequency Bands .....        | 65 |

## 1. Scope

This test report certifies that the Building 36 Technologies ADC-S40-DC Dry Contact Sensor as tested, meets the FCC Part 15, Subpart C and ISED Canada RSS-247, Issue 2 requirements. The scope of this test report is limited to the test sample provided by the client, only in as much as that sample represents other production units. If any significant changes are made to the unit, the changes shall be evaluated and a retest may be required.

## 2. Product Details

- 2.1. Manufacturer:** Building 36 Technologies
- 2.2. Model Number:** ADC-S40-DC
- 2.3 Serial Number:** Pre-production prototype
- 2.4 Description of EUT:** The Building 36 Dry Contact Sensor is an electronic device that monitors normally open or normally closed circuits and any 24V circuit. The Dry Contact Sensor connects to the Building 36 ecosystem of products through the mesh networking protocol of Z-Wave.
- 2.5 Power Source:** 3 Volt Lithium Battery CR123
- 2.6 Hardware Revision:** Rev 2
- 2.7 Software Revision:** N/A
- 2.8. Modulation Type:** Gaussian frequency shift keying
- 2.9. Operating Frequencies:** 912 & 920 MHz
- 2.10. EMC Modifications:** None

## 3. Product Configuration

### 3.1. EUT Hardware

| Manufacturer             | Model      | Serial Number  | Input Volts | Freq (Hz) Or DC | Description/Function |
|--------------------------|------------|----------------|-------------|-----------------|----------------------|
| Building 36 Technologies | ADC-S40-DC | Pre-production | 3           | DC              | Wireless Sensor      |

### 3.2. Support Equipment

| Device | Manufacturer | Model | Serial No. | Comment            |
|--------|--------------|-------|------------|--------------------|
| Laptop | Lenovo       | P50   | PC0MHJ8Y   | For setting up EUT |

### 3.3. Cables

| Cable Type   | Length | Shield | From | To     |
|--------------|--------|--------|------|--------|
| Sensor Cable | 2M     | Yes    | EUT  | Sensor |


### 3. Product Configuration (continued)

#### 3.4. Operational Characteristics & Software

Install the battery to the device under test.

A proprietary software, provided by Silicon Labs for EMC testing, called MicroRFLink is used to configure the frequency, modulation type and bandwidth of the DUT. The device will be configured using this software to modulate test frequencies at 912 MHz and 920 MHz

#### 3.5. Block Diagram

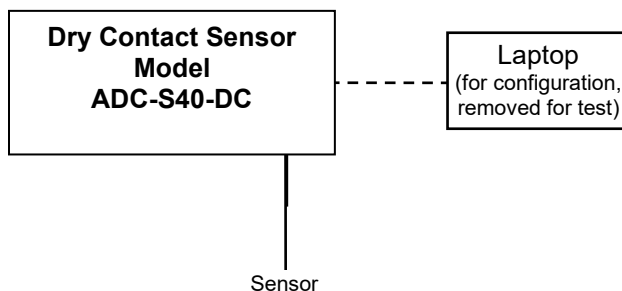

### 4. Measurements Parameters

#### 4.1. Measurement Equipment Used to Perform Test

| Device                                           | Manufacturer       | Model No. | Serial No. | Cal Due    | Interval |
|--------------------------------------------------|--------------------|-----------|------------|------------|----------|
| EMI Test Receiver, 9kHz - 7GHz <sup>1</sup>      | Rohde & Schwarz    | ESR7      | 101156     | 10/16/2023 | 2 Years  |
| EMI Test Receiver, 10 Hz - 7GHz <sup>1</sup>     | Rohde & Schwarz    | ESR7      | 101770     | 7/23/2023  | 2 Years  |
| Spectrum Analyzer, 2 Hz to 26.5 GHz <sup>2</sup> | Rohde & Schwarz    | FSW26     | 102057     | 6/24/2023  | 2 Years  |
| Spectrum Analyzer, 9 kHz to 40 GHz <sup>3</sup>  | Rohde & Schwarz    | FSV40     | 100899     | 8/12/2022  | 2 Years  |
| Spectrum Analyzer 10 Hz – 40 GHz <sup>4</sup>    | Rohde & Schwarz    | FSVR40    | 100909     | 9/18/2022  | 2 Years  |
| Loop Antenna 9 kHz - 30 MHz                      | EMCO               | 6512      | 9309-1139  | 1/28/2022  | 3 Years  |
| Biconilog Antenna, 30 MHz - 2 GHz                | Sunol Sciences     | JB1       | A050913    | 7/1/2023   | 2 Years  |
| Dbl Ridged Guide Antenna 1- 18 GHz               | ETS-Lindgren       | 3117      | 00143292   | 3/21/2022  | 3 Years  |
| Dbl Ridged Guide Antenna 1- 18 GHz               | ETS-Lindgren       | 3117      | 00227631   | 12/4/2022  | 3 Years  |
| Preamplifier, 1 GHz to 26.5 GHz                  | Hewlett Packard    | 8449B     | 3008A01323 | 11/30/2023 | 2 Years  |
| Preamplifier, 1 GHz to 26.5 GHz                  | Hewlett Packard    | 8449B H02 | 3008A00329 | 1/20/2024  | 2 Years  |
| 1.8 GHz - 9.3 GHz Passband Filter                | Mini-Circuits      | VHP-16    | 0341       | 3/23/2022  | 2 Years  |
| Barometric Pressure/Humidity & Temp Datalogger   | Extech Instruments | SD700     | Q590483    | 10/14/2022 | 1 Year   |

<sup>1</sup> ESR7 Firmware revision: V3.48 SP3, Date installed: 09/30/2020

<sup>2</sup> FSW26 Firmware revision: V4.71 SP1, Date installed: 11/16/2020

<sup>3</sup> FSV40 Firmware revision: V2.30 SP4, Date installed: 05/04/2016

<sup>4</sup> FSVR40 Firmware revision: V2.23 SP1, Date installed: 08/19/2016

Previous V3.48 SP2, installed 07/23/2020.

Previous V4.61, installed 08/11/2020.

Previous V2.30 SP1, installed 10/22/2014.

Previous V2.23, installed 10/22/2014.

#### 4. Measurements Parameters

##### 4.2. Measurement Software

| Manufacturer         | Software Description            | Title or Model #      | Rev. | Report Sections           |
|----------------------|---------------------------------|-----------------------|------|---------------------------|
| Compliance Worldwide | Test Report Generation Software | Test Report Generator | 1.0  | 7.10. Conducted Emissions |

##### 4.3. Measurement & Equipment Setup

|                                      |                                    |
|--------------------------------------|------------------------------------|
| Test Dates:                          | 9/13/2021 to 9/17/2021             |
| Test Engineers:                      | Sean Defelice                      |
| Normal Site Temperature (15 - 35°C): | 21.2                               |
| Relative Humidity (20 -75%RH):       | 35                                 |
| Frequency Range:                     | 30 kHz to 9.4 GHz                  |
| Measurement Distance:                | 3 Meters                           |
|                                      | 200 Hz – 9 to 150 kHz              |
| EMI Receiver IF Bandwidth:           | 9 kHz – 150 kHz to 30 MHz          |
|                                      | 120 kHz - 30 MHz to 1 GHz          |
|                                      | 1 MHz - Above 1 GHz                |
| EMI Receiver Average Bandwidth:      | $\geq 3 * IF (BW) \text{ or } RBW$ |
| Detector Function:                   | Peak, Quasi-Peak & Average         |

##### 4.4. Measurement Procedures

Test measurements were made in accordance FCC Part 15.247: Operation within the bands 902 - 928 MHz, 2400 - 2483.5 MHz, 5725 - 5850 MHz, and 24.0 - 24.25 GHz.

The measurement procedures in this report are in accordance with ANSI C63.10-2013: *American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices*. FCC OET Publication Number KDB 558074 D01 v05r02, *Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS), Frequency Hopping Spread Spectrum Systems, and Hybrid System Devices Operating Under §15.247*, dated April 2, 2019, was also referenced for the test procedures used to generate the data in this report. All references to these publications refer to this versions and dates detailed in this paragraph.

#### 4. Measurements Parameters

##### 4.5. Measurement Uncertainty

The following uncertainties are expressed for an expansion/coverage factor of K=2.

|                                  |                        |
|----------------------------------|------------------------|
| RF Frequency                     | $\pm 1 \times 10^{-8}$ |
| Radiated Emission of Transmitter | $\pm 4.55$ dB          |
| Radiated Emission of Receiver    | $\pm 4.55$ dB          |
| Temperature                      | $\pm 0.91^{\circ}$ C   |
| Humidity                         | $\pm 5\%$              |

#### 5. Choice of Equipment for Test Suits

##### 5.1 Choice of Model

This test report is based on the test samples supplied by the manufacturer and are reported by the manufacturer to be equivalent to the production units.

##### 5.2 Presentation

This test sample was tested complete with all required ancillary equipment. Refer to Section 3 of this report for product equipment configuration.

##### 5.3 Choice of Operating Frequencies

The device under test utilizes two operating frequencies: 912 MHz and 920 MHz. Both frequencies were tested.

##### 5.4 EUT Positions for Emissions Measurements

During all radiated mode measurement testing, the EUT was mounted on a polystyrene form to facilitate rotating the device through three orthogonal axes as required by ANSI C63.10-2013, section 5.10.1.

## 6. Measurement Summary

| Test Requirement                                            | FCC Rule Requirement | ISED Rule Requirement                  | Test Report Section | Result    |
|-------------------------------------------------------------|----------------------|----------------------------------------|---------------------|-----------|
| Antenna Requirement                                         | 15.203               | ---                                    | 7.1                 | Compliant |
| Minimum DTS Bandwidth                                       | 15.247 (a) (2)       | RSS-247<br>5.2 a)                      | 7.2                 | Compliant |
| Maximum Peak Conducted Output Power                         | 15.247 (b) (1)       | RSS-247<br>5.4 d)                      | 7.3                 | Compliant |
| Operation with directional antenna gains greater than 6 dBi | 15.247 (b) (4)       | ---                                    | 7.4                 | Compliant |
| Spurious Radiated Emissions                                 | 15.247 (d)           | RSS-GEN<br>6.13                        | 7.5                 | Compliant |
| Spurious Radiated Emissions (> GHz) - Harmonic Measurements | 15.247 (d)           | RSS-GEN<br>6.13                        |                     | Compliant |
| Band Edge and Out of Band Measurements                      | 15.247 (d)           | RSS-GEN<br>6.13                        | 7.6                 | Compliant |
| Emissions in Non-restricted Frequency Bands                 | 15.247(e)            | RSS-GEN<br>6.13                        | 7.7                 | Compliant |
| Peak Power Spectral Density                                 | 15.247(e)            | RSS-247<br>5.2 b)                      | 7.8                 | Compliant |
| AC Power Line Conducted Emissions                           | 15.207               | RSS-GEN<br>7.2                         | 7.9                 |           |
| Duty Cycle                                                  | 15.247               | N/A                                    | 7.10                | Compliant |
| 99% (Occupied) Bandwidth                                    | ---                  | RSS-GEN<br>6.7                         | 7.11                | Compliant |
| Public Exposure to Radio Frequency Energy Levels            | 1.1307 (b) (1)       | RSS-GEN, Issue 5, Section 3.4, RSS 102 | 7.12                | Compliant |

## 7. Measurement Data

### 7.1. Antenna Requirement (15.203)

Requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section.

Results: The EUT utilizes an etch antenna that is not user replaceable.

## 7. Measurement Data

### 7.2. Minimum DTS Bandwidth (15.247 (a) (2), ISSED\_RSS-247 5.2 a))

Requirement: (15.247 (a) (2))

Systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

Procedure: This test was performed in accordance with the procedure detailed in FCC OET publication number 558074, Section 8.1 Option 1, DTS (6 dB) Channel Bandwidth.

Results: The device under test meets the minimum 500 kHz DTS (6 dB) bandwidth requirement.

| Channel | Frequency (MHz) | -6 dB Bandwidth (kHz) | Minimum -6 dB Bandwidth (kHz) | Result    |
|---------|-----------------|-----------------------|-------------------------------|-----------|
| Low     | 912             | 623.40                | >500                          | Compliant |
| High    | 920             | 632.40                | >500                          | Compliant |


#### 7.2.1. Low Channel – 912 MHz



## 7. Measurement Data

### 7.2. Minimum DTS Bandwidth (15.247 (a) (2)) (continued)

#### 7.2.2. High Channel – 920 MHz

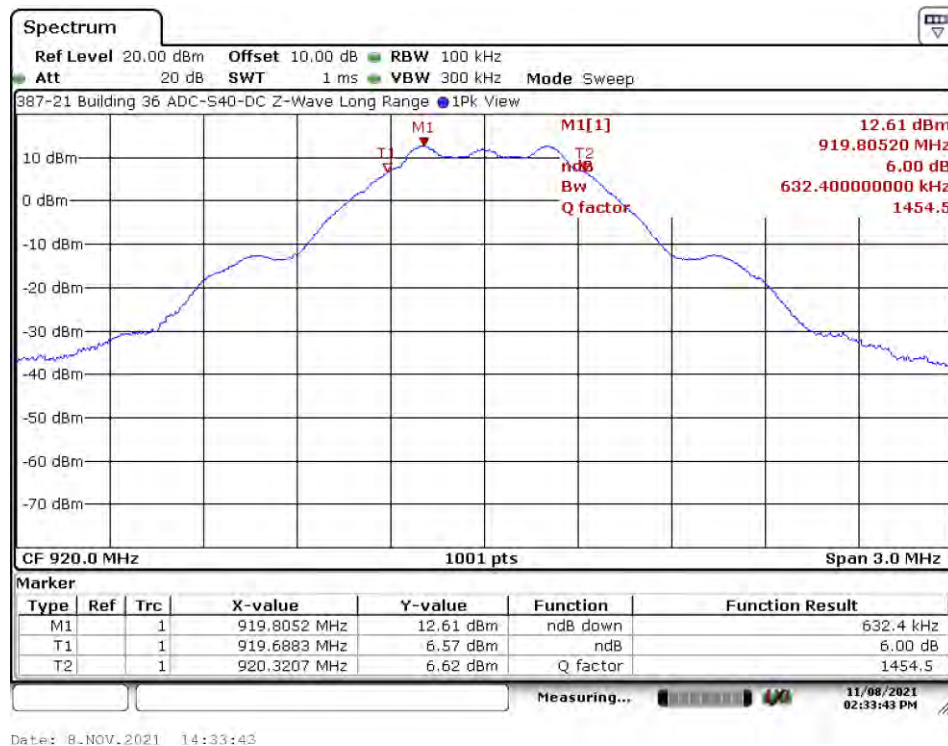

## 7. Measurement Data (continued)

### 7.3. Maximum Peak Conducted Output Power (FCC 15.247 (b)(3), ISED RSS-247 5.4 d)

Requirement: (15.247 (b) (3))

The maximum peak conducted output power of the intentional radiator shall not exceed the following: For systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 Watt (+30 dBm).


Procedure: This test was performed in accordance with the procedure detailed in FCC OET publication number KDB 558074, Section 9.1.1.

Test Note: A spectrum analyzer resolution bandwidth of 1 MHz and a video bandwidth of 3 MHz were used to meet the requirements of FCC OET publication number 558074, Section 9.1.1 and the measured product DTS bandwidth.

Results: The device under test meets the required maximum peak conducted output power level of 1 Watt (30 dBm).

| Channel | Frequency | Maximum Peak Conducted Output Power | Peak Limit | Margin | Result    |
|---------|-----------|-------------------------------------|------------|--------|-----------|
|         | (MHz)     | (dBm)                               | (dBm)      | (dB)   |           |
| Low     | 912       | 13.01                               | 30         | -16.99 | Compliant |
| High    | 920       | 12.96                               | 30         | -17.04 | Compliant |


#### 7.3.1. Low Channel – 912 MHz

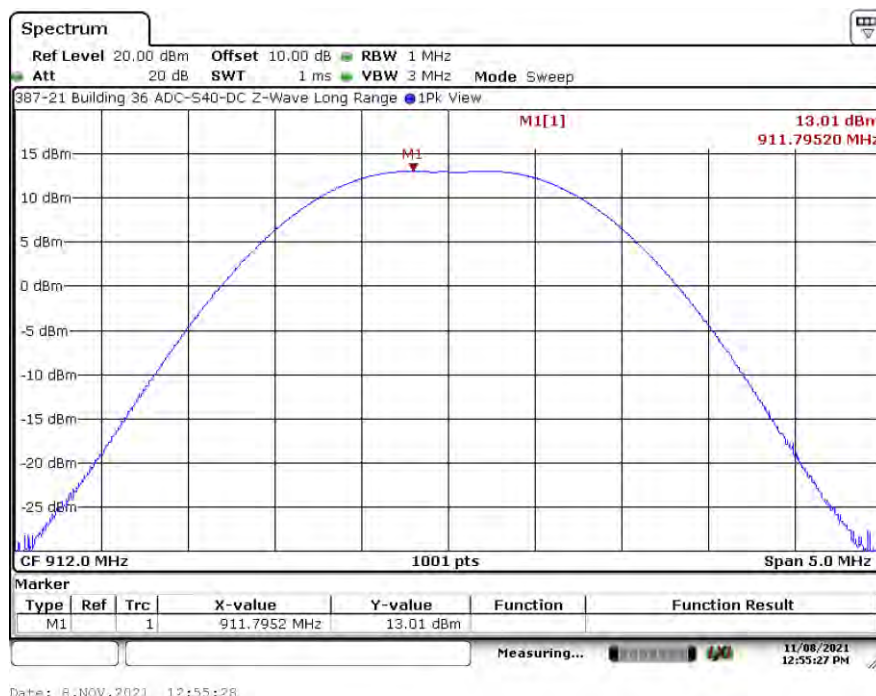

## 7. Measurement Data

### 7.3. Maximum Peak Conducted Output Power (continued)

#### 7.3.2. High Channel – 920 MHz

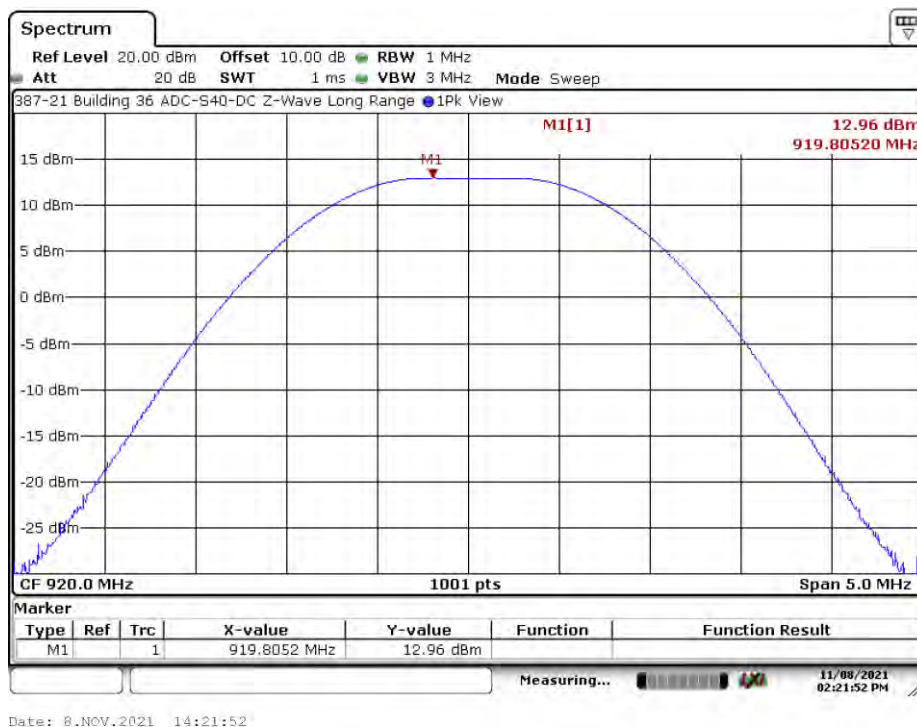

## 7. Measurement Data

### 7.4. Operation with directional antenna gains greater than 6 dBi (15.247 (b)(4))

Requirement: If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of FCC Part 15.247, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Systems operating in the 2400 – 2483.5 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum peak output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

Systems operating in the 5725 – 5850 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter peak output power.

Procedure: Not applicable for the device under test.

EUT Status: The EUT utilizes an antenna with an approximate peak gain of -1.1 dBi, and therefore is exempt from this requirement.

## 7. Measurement Data (continued)

### 7.5. Transmitter Spurious Radiated Emissions (30 kHz to 9.4 GHz) (FCC 15.209, ISED RSS-GEN 6.13)

#### 7.5.1 Transmitter Spurious Radiated Emissions

Requirement: (15.209) The Emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

| Frequency Range (MHz) | Distance (Meters) | Limit (dBμV/m) <sup>1</sup> |
|-----------------------|-------------------|-----------------------------|
| 0.009 to 0.490        | 3                 | 128.5 to 93.8               |
| 0.490 to 1.705        | 3                 | 73.8 to 63.0                |
| 1.705 to 30           | 3                 | 69.5                        |
| 30 to 88              | 3                 | 40.0                        |
| 88 to 216             | 3                 | 43.5                        |
| 216 to 960            | 3                 | 46.0                        |
| >960                  | 3                 | 54.0                        |

<sup>1</sup>Measurements in the 9 to 90 kHz, 110 to 490 kHz and above 1000 MHz ranges employ an average detector. Otherwise a quasi-peak detector is used.

Procedure: This test was performed in accordance with the procedure detailed in FCC OET publication number 558074, Section 12.0: Emissions in restricted frequency bands and FCC 47CFR Part 15.209: Radiated Emission Limits; General Requirements.

The test methods used to generate the data in this test report is in accordance with ANSI C63.10:2013, American National Standard for Testing Unlicensed Wireless Devices.

Results: The Emissions from the DUT did not exceed the field strength levels specified in the above table.

### Measurement Uncertainty

|                                         |                     |
|-----------------------------------------|---------------------|
| Horizontal Polarized Radiated Emissions | ± 4.76 dB           |
| Vertical Polarized Radiated Emissions   | ± 4.88 dB           |
| Frequency Range:                        | 30 MHz to 200 MHz   |
| Horizontal Polarized Radiated Emissions | ± 5.01 dB           |
| Vertical Polarized Radiated Emissions   | ± 5.00 dB           |
| Frequency Range:                        | 200 MHz to 1000 MHz |
| Measurement Distance:                   | 3 Meters            |

Sample Calculation: Final Result (dBμV/m) = Measurement Value (dBμV) + Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier Gain (dB) Internal or External.

**Note:** All correction factors are loaded into the measurement instrument prior to testing to determine the final result.

## 7. Measurement Data (continued)

### 7.5. Transmitter Spurious Radiated Emissions (30 kHz to 9.4 GHz) (FCC 15.209, ISED RSS-GEN 6.13)

#### 7.5.2. Transmitter Spurious Radiated Emissions (Harmonic Meas.) Test Results

Worst case measurements of Harmonics that fall into the restricted bands.

##### 7.5.2.1. Fundamental Frequency = 912 MHz

| Freq.<br>(MHz) | Field Strength<br>(dBμV/m) |         | Limit<br>(dBμV/m) |         | Margin<br>(dBμV/m) |         | Antenna<br>Polarity<br>(H/V) | Result    |
|----------------|----------------------------|---------|-------------------|---------|--------------------|---------|------------------------------|-----------|
|                | Peak                       | Average | Peak              | Average | Peak               | Average |                              |           |
| 2736.00        | 47.97                      | 33.89   | 74.00             | 54.00   | -26.03             | -20.11  | H                            | Compliant |
| 3648.00        | 49.66                      | 35.41   | 74.00             | 54.00   | -24.34             | -18.59  | H                            | Compliant |
| 4560.00        | 52.93                      | 37.64   | 74.00             | 54.00   | -21.07             | -16.36  | V                            | Compliant |
| 7296.00        | 52.89                      | 40.88   | 74.00             | 54.00   | -21.11             | -13.12  | H                            | Compliant |
| 8208.00        | 55.30                      | 43.15   | 74.00             | 54.00   | -18.70             | -10.85  | H                            | Compliant |
| 9120.00        | 53.05                      | 40.85   | 74.00             | 54.00   | -20.95             | -13.15  | H                            | Compliant |

<sup>1</sup> All correction factors are stored in the spectrum analyzer and applied to these column entries.

##### 7.5.2.2. Fundamental Frequency = 920 MHz

| Freq.<br>(MHz) | Field Strength<br>(dBμV/m) |         | Limit<br>(dBμV/m) |         | Margin<br>(dBμV/m) |         | Antenna<br>Polarity<br>(H/V) | Result    |
|----------------|----------------------------|---------|-------------------|---------|--------------------|---------|------------------------------|-----------|
|                | Peak                       | Average | Peak              | Average | Peak               | Average |                              |           |
| 2760.00        | 47.61                      | 33.94   | 74.00             | 54.00   | -26.39             | -20.06  | V                            | Compliant |
| 3680.00        | 50.05                      | 36.31   | 74.00             | 54.00   | -23.95             | -17.69  | V                            | Compliant |
| 4600.00        | 53.66                      | 37.58   | 74.00             | 54.00   | -20.34             | -16.42  | V                            | Compliant |
| 7360.00        | 52.53                      | 40.85   | 74.00             | 54.00   | -21.47             | -13.15  | V                            | Compliant |
| 8280.00        | 55.34                      | 42.91   | 74.00             | 54.00   | -18.66             | -11.09  | H                            | Compliant |
| 9200.00        | 52.76                      | 40.55   | 74.00             | 54.00   | -21.24             | -13.45  | H                            | Compliant |

<sup>1</sup> All correction factors are stored in the spectrum analyzer and applied to these column entries.

## 7. Measurement Data (continued)

### 7.6. Band Edge and Out of Band Measurements (FCC 15.209, ISSED RSS-GEN 6.13)

**Requirement:** 15.247(d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

**Procedure:** For the band edges, this measurement was performed in accordance with the procedure detailed in FCC OET publication number 558074, Section 11: Emissions in non-restricted frequency bands.

**Results:** The DUT met the 20 dB requirement at the band edges.

#### 7.6.1. Lower Band Edge


| Band Edge Frequency | Lowest Transmitter Frequency | Maximum PSD (100 kHz) | Band Edge Delta to Max PSD (100 kHz) | Minimum Required Delta | Result    |
|---------------------|------------------------------|-----------------------|--------------------------------------|------------------------|-----------|
| (MHz)               | (MHz)                        | (dBm)                 | (dB)                                 | (dB)                   |           |
| 902                 | 912                          | 12.64                 | -71.85                               | -20                    | Compliant |

**Note:** Reference the plot on the following page.

## 7. Measurement Data (continued)

### 7.6. Band Edge and Out of Band Measurements (continued)

#### Lower Band Edge

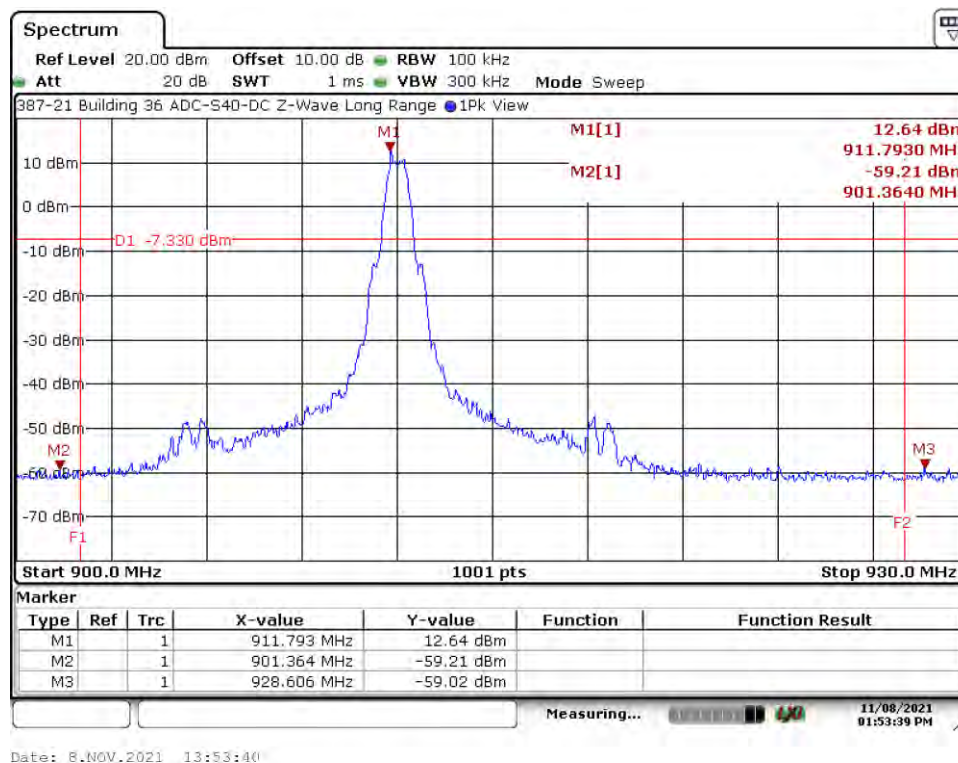

#### 7.6.2. Upper Band Edge


| Band Edge Frequency | Highest Transmitter Frequency | Maximum PSD (100 kHz) | Band Edge Delta to Max PSD (100 kHz) | Minimum Required Delta | Result    |
|---------------------|-------------------------------|-----------------------|--------------------------------------|------------------------|-----------|
| (MHz)               | (MHz)                         | (dBm)                 | (dB)                                 | (dB)                   |           |
| 928                 | 920                           | 11.76                 | -67.62                               | -20                    | Compliant |

**Note:** Reference the plot on the following page.

## 7. Measurement Data (continued)

### 7.6. Band Edge and Out of Band Measurements (continued)

#### Upper Band Edge

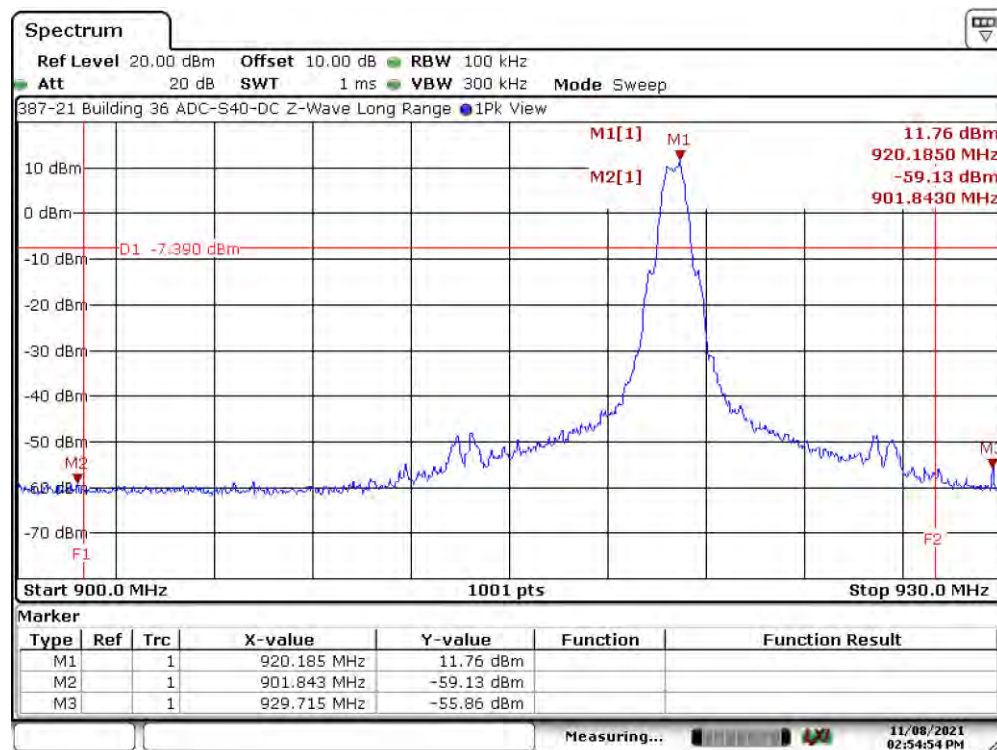

Date: 8.NOV.2021 14:54:33

## **7. Measurement Data (continued)**

### **7.7. Emissions in Non-restricted Frequency Bands**

**Requirement:** 15.247(d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

**Test Notes:** Peak in-band measurements were taken at the time the DTS (-6 dB) bandwidth measurements were made. These values were used as the reference levels for the following measurements. Refer to section 7.2 of this report for these values.

Reference Appendix B for the measurement data used for this test section.

**Results:** The DUT met the 20 dB requirement emission level delta requirement in the non restricted frequency bands.

#### **Emissions in Non-restricted Frequency Bands**

| <b>Maximum PSD<br/>(100 kHz)<br/>In-Band<sup>1</sup><br/>(dBm)</b> | <b>Worst Case<br/>Out-of-Band<br/>Frequency<br/>(MHz)</b> | <b>Maximum PSD<br/>(100 kHz)<br/>Out-of-Band<br/>(dBm)</b> | <b>Delta to<br/>Maximum PSD<br/>(dB)</b> | <b>Minimum<br/>Required<br/>Delta<br/>Level<br/>(dBm)</b> | <b>Result</b> |
|--------------------------------------------------------------------|-----------------------------------------------------------|------------------------------------------------------------|------------------------------------------|-----------------------------------------------------------|---------------|
| 12.67                                                              | 3680.8                                                    | -45.08                                                     | -57.75                                   | -7.33                                                     | Compliant     |

<sup>1</sup>Taken from Section 7.2 - DTS Bandwidth

## **7. Measurement Data (continued)**

### **7.8. Peak Power Spectral Density (FCC 15.247(e), ISED RSS-247, 5.2 b))**

**Requirement:** For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of FCC Part 15.247. The same method of determining the conducted output power shall be used to determine the power spectral density.

**Procedure:** FCC OET publication number 558074, Section 10.2: Method PKPSD (peak PSD). FCC OET 662911 was referenced to determine the procedure for measuring in-band power spectral density of transmitters with multiple outputs in the same band.

**Results:** The DUT met the required power spectral density limit at the tested frequencies.


#### **Measurement Results in 902-928 MHz Band**

| <b>Channel</b> | <b>Frequency</b> | <b>Maximum<br/>PSD<br/>Frequency</b> | <b>Maximum Power<br/>Spectral Density</b> | <b>Limit</b> | <b>Margin</b> | <b>Result</b> |
|----------------|------------------|--------------------------------------|-------------------------------------------|--------------|---------------|---------------|
|                | <b>(MHz)</b>     | <b>(MHz)</b>                         | <b>(dBm)</b>                              | <b>(dBm)</b> | <b>(dB)</b>   |               |
| Low            | 912              | 912.124                              | 3.09                                      | 8            | -4.91         | Compliant     |
| High           | 920              | 920.124                              | 3.00                                      | 8            | -5.00         | Compliant     |


## 7. Measurement Data (continued)

### 7.8. Peak Power Spectral Density (15.247(e)), ISED RSS-247, 5.2 b)) (continued)

#### 7.8.1. Low Channel – 912 MHz

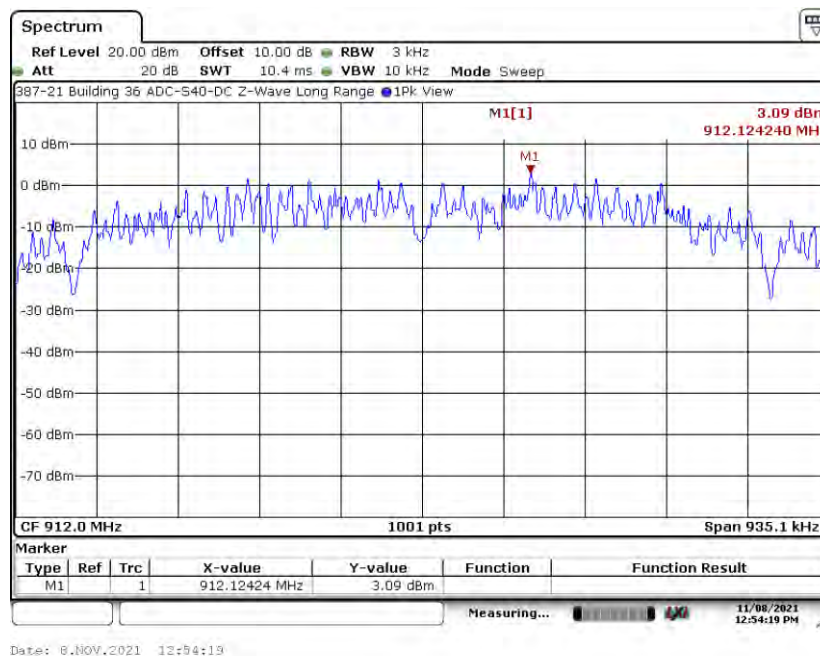

#### 7.8.2. High Channel – 920 MHz

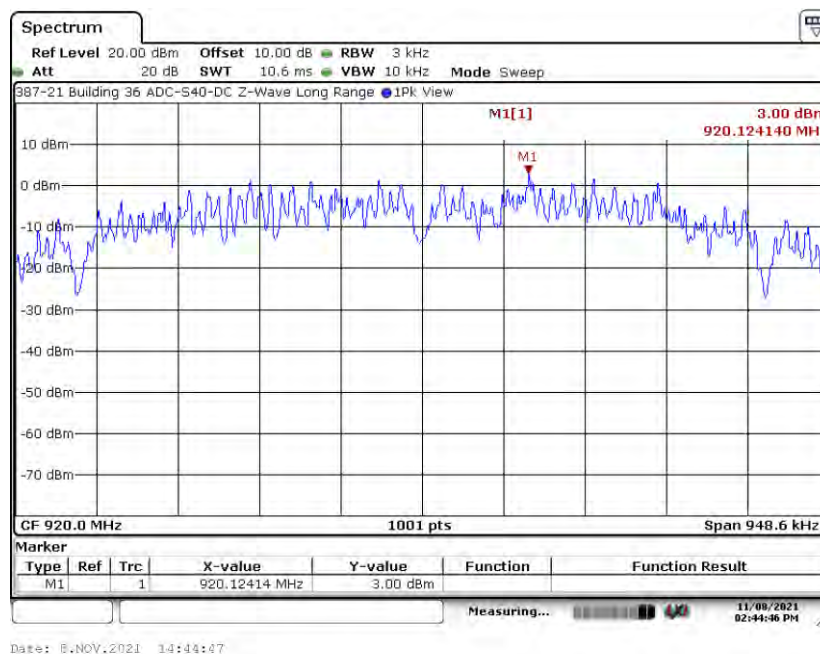

## 7. Measurement Data (continued)

### 7.9. Conducted Emissions

Requirement: 15.207 With certain exceptions, an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50  $\mu$ H/50 ohms line impedance stabilization network (LISN).

| Frequency Range (MHz)                            | Limits (dB $\mu$ V) |           |
|--------------------------------------------------|---------------------|-----------|
|                                                  | Quasi-Peak          | Average   |
| 0.15 to 0.50                                     | 66 to 56*           | 56 to 46* |
| 0.50 to 5.0                                      | 56                  | 46        |
| 5.0 to 30.0                                      | 60                  | 50        |
| * Decreases with the logarithm of the frequency. |                     |           |

Procedure: This test was performed in accordance with the procedure detailed in ANSI C63.10-2013, Section 6.2: Standard test method for ac power-line conducted emissions from unlicensed wireless devices.

Test Notes: The device was tested using the support equipment laptop.

Results: The device under test meets the FCC Part 15.207 test requirements.

#### Measurement & Equipment Setup

|                             |                                    |
|-----------------------------|------------------------------------|
| Test Date:                  | N/A                                |
| Test Engineer:              | N/A                                |
| Site Temperature (°C):      | N/A                                |
| Relative Humidity (%RH):    | N/A                                |
| Frequency Range:            | 0.15 MHz to 30 MHz                 |
| EMI Receiver IF Bandwidth:  | 9 kHz                              |
| EMI Receiver Avg Bandwidth: | $\geq 3 \times \text{IF BW (RBW)}$ |
| Detector Functions:         | Peak, Quasi-Peak & Average         |
| Measurement Uncertainty:    | $\pm 3.56 \text{ dB}$              |

**Note:** EUT is powered via 3 VDC Lithium Battery which is not rechargeable

Sample Calculation: Final Result (dB $\mu$ V) = Measurement Value (dB $\mu$ V) + LISN Insertion Loss (dB) + Cable Loss (dB).

**Note:** All correction factors are loaded into the measurement instrument prior to testing to determine the final result.

## 7. Measurement Data (continued)

### 7.10. Duty Cycle

Requirement: (FCC OET publication number 558074)


Preferably, all measurements of maximum conducted (average) output power will be performed with the EUT transmitting continuously (i.e., with a duty cycle of greater than or equal to 98%).

Procedure: Duty cycle measurements were made according to the procedure detailed ANSI C63.10-2013, Section 11.6(b). Various spans were analyzed to determine if there was any off time. 100 mS span was used.

Results: Duty cycle measurements are listed in the following table.

| Channel | Frequency | Time High | Time per Period | Duty Cycle |        |
|---------|-----------|-----------|-----------------|------------|--------|
|         | (MHz)     | (mS)      | (mS)            | (Numeric)  | (%)    |
| Low     | 912       | 1.000     | 1.000           | 1.0        | 100.00 |
| High    | 920       | 1.000     | 1.000           | 1.0        | 100.00 |


#### 7.10.1. Low Channel – 912 MHz

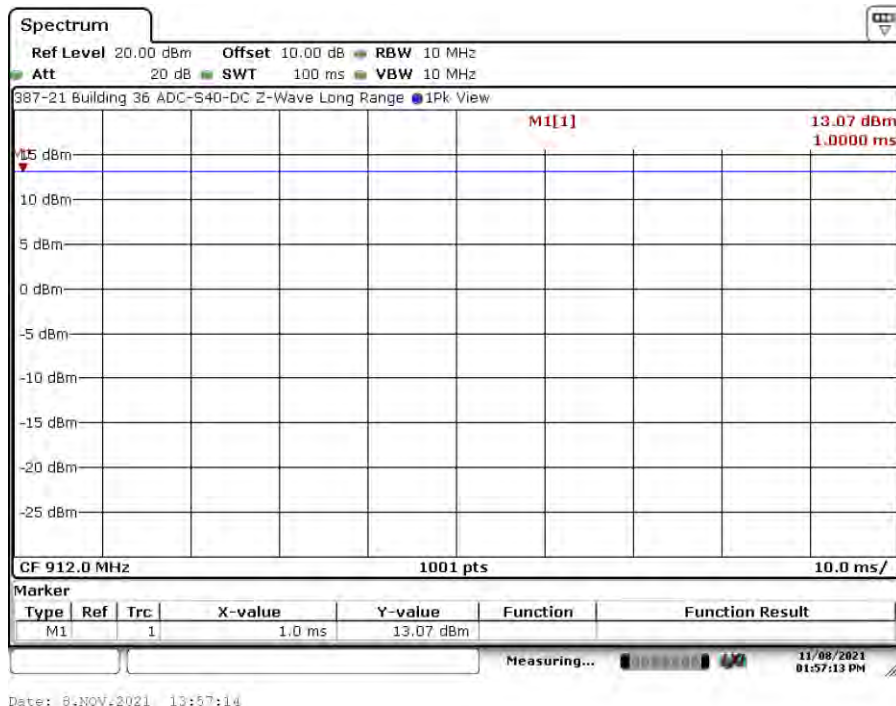

## 7. Measurement Data (continued)

### 7.10. Duty Cycle (continued)

#### 7.10.2. High Channel – 920 MHz

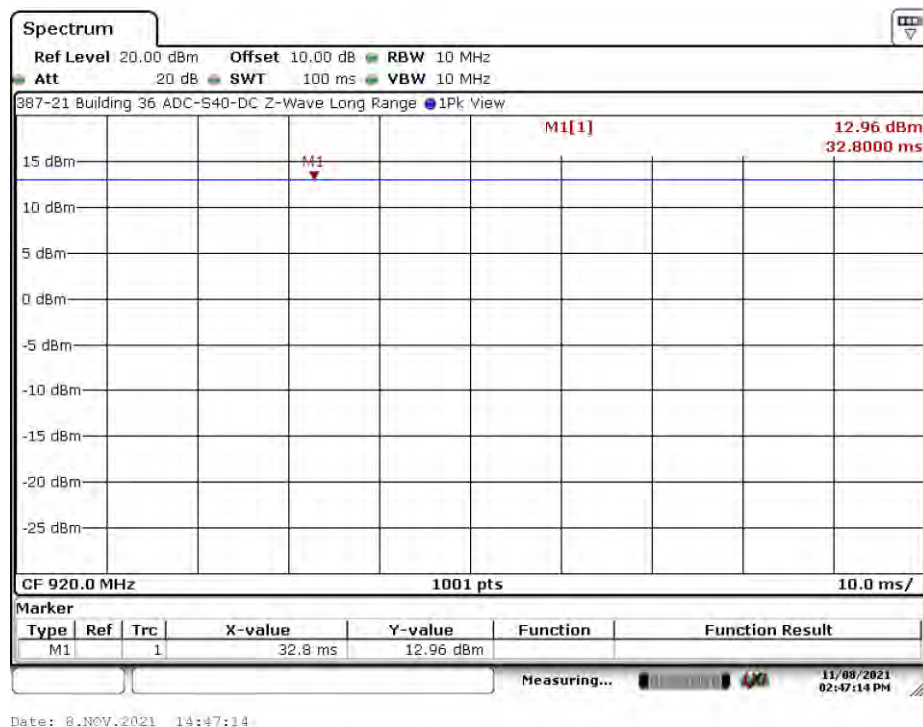

## 7. Measurement Data (continued)

### 7.11. 99% (Occupied) Bandwidth (RSS-GEN 6.7)

Requirement: The occupied bandwidth shall be reported for all equipment in addition to the specified bandwidth required in the applicable RSSs.


The resolution bandwidth (RBW) shall be in the range of 1% to 5% of the actual occupied / x dB bandwidth and the video bandwidth (VBW) shall not be smaller than three times the RBW value.

The sample detector of the spectrum analyzer shall be used to make the measurement.

#### 7.11.1. Measurement Results

| Channel | Channel Frequency (MHz) | 99% Power Bandwidth (kHz) |
|---------|-------------------------|---------------------------|
| Low     | 912                     | 919.08                    |
| High    | 920                     | 919.08                    |

##### 7.11.1.1. 99% Power Bandwidth – Low Frequency (912 MHz)

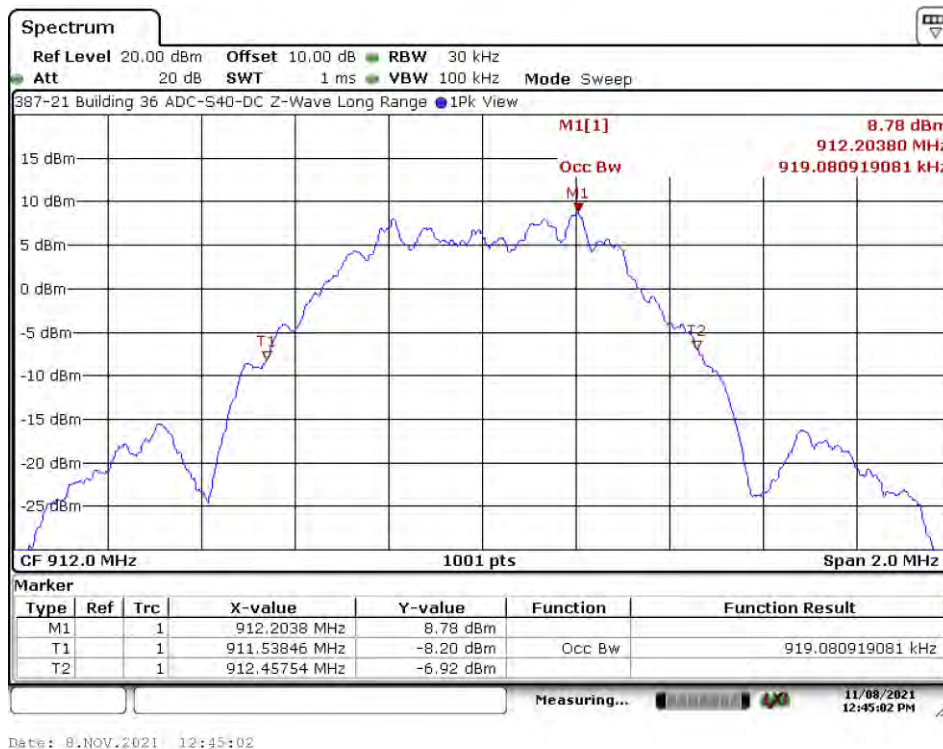

## 7. Measurement Data (continued)

### 7.11. 99% (Occupied) Bandwidth (RSS-GEN 6.7)

#### 7.11.1.4. 99% Power Bandwidth – High Frequency (920 MHz)



## 7. Measurement Data (continued)

### 7.12. Public Exposure to Radio Frequency Energy Levels ((1.1307 (b)(1)) RSS-GEN, ISSUE 5, RSS-102)

#### 7.12.1. 1.1307 (b) (1) Public Exposure

Requirement: Systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess of the Commission's guidelines.

| Frequency<br>(MHz) | MPE<br>Distance<br>(cm) | DUT<br>Output<br>Power<br>(dBm) | DUT<br>Antenna<br>Gain (dBi) | Power Density         |                     | Limit<br>(mW/cm <sup>2</sup> ) | Result    |
|--------------------|-------------------------|---------------------------------|------------------------------|-----------------------|---------------------|--------------------------------|-----------|
|                    |                         |                                 |                              | (mW/cm <sup>2</sup> ) | (W/m <sup>2</sup> ) |                                |           |
|                    |                         |                                 |                              | (4)                   |                     | (5)                            |           |
| 912.0000           | 20                      | 13.01                           | 0                            | 0.003978599           | 0.03978599          | 0.6080000                      | Compliant |
| 920.0000           | 20                      | 12.96                           | 0                            | 0.003933056           | 0.03933056          | 0.6133333                      | Compliant |

$$PD = \frac{OP + AG}{(4 \times \pi \times d^2)}$$

- PD = Power Density (mW/cm<sup>2</sup>)
- OP = DUT Output Power (dBm)
- AG = DUT Antenna Gain (dBi)
- d = MPE Distance (cm)

1. Reference CFR 2.1091: For purposes of this section, a mobile device is defined as a transmitting device designed to be used in other than fixed locations and to generally be used in such a way that a separation distance of at least 20 centimeters is normally maintained between the transmitter's radiating structure(s) and the body of the user or nearby persons.
2. Table 6.2 of this test report.
3. Estimated Antenna gain comparing radiated measurements to conducted measurements.
4. Power density is calculated from field strength measurement and antenna gain.
5. Reference CFR 1.1310, Table 1: Limits for Maximum Permissible Exposure (MPE), Section (B): Limits for General Population/Uncontrolled Exposure. Limit = f/1500, where f is in MHz.

**Results:** Passed - The device under test meets the exclusion requirement detailed for a device with a separation distance of 20 cm.

## 7. Measurement Data (continued)

### 7.12. Public Exposure to Radio Frequency Energy Levels ((1.1307 (b)(1)) RSS-GEN, ISSUE 5, RSS-102 continued)

#### 7.12.2. RSS-102 Issue 5 Requirements

Requirement: Requirement: RF exposure evaluation is required if the separation distance between the user and/or bystander and the device's radiating element is greater than 20 cm, except when the device operates as follows:

at or above 300 MHz and below 6 GHz and the source-based, time-averaged maximum e.i.r.p. of the device is equal to or less than  $1.31 \times 10^{-2} \times f^{0.6834}$  W (adjusted for tune-up tolerance), where  $f$  is in MHz.

Results: Compliant

| Frequency | Separation Distance | Maximum Power <sup>1</sup> |         | RSS-102 Exemption Limit <sup>2</sup> | Result    |
|-----------|---------------------|----------------------------|---------|--------------------------------------|-----------|
| (MHz)     | (cm)                | (mW)                       | (Watts) | (Watts)                              |           |
| 912.00    | ≥ 20                | 20.00                      | 0.02000 | 1.38                                 | Compliant |
| 920.00    | ≥ 20                | 19.77                      | 0.01977 | 1.39                                 | Compliant |

<sup>1</sup> Reference Section 6.2 of this report.

<sup>2</sup> Reference RSS-102, § 2.5.2 Exemption Limits for Routine Evaluation – RF Exposure Evaluation for distances greater than 20 cm.

The following formula was used to determine the exemption limit (W):

$$1.31 \times 10^{-2} \times f^{0.6834} \quad (f = \text{frequency (MHz)})$$

## 8. Test Setup Photographs

### 8.1. Spurious Radiated Emissions, 9 kHz to 1 GHz – Front



## 8. Test Setup Photographs

### 8.2. Spurious Radiated Emissions, < 30 MHz – Rear




## **8. Test Setup Photographs**

### **8.3. Spurious Radiated Emissions, 30 MHz to 1 GHz – Rear View**




## **8. Test Setup Photographs**

### **8.4. Radiated Emissions Above 1 GHz – Front**

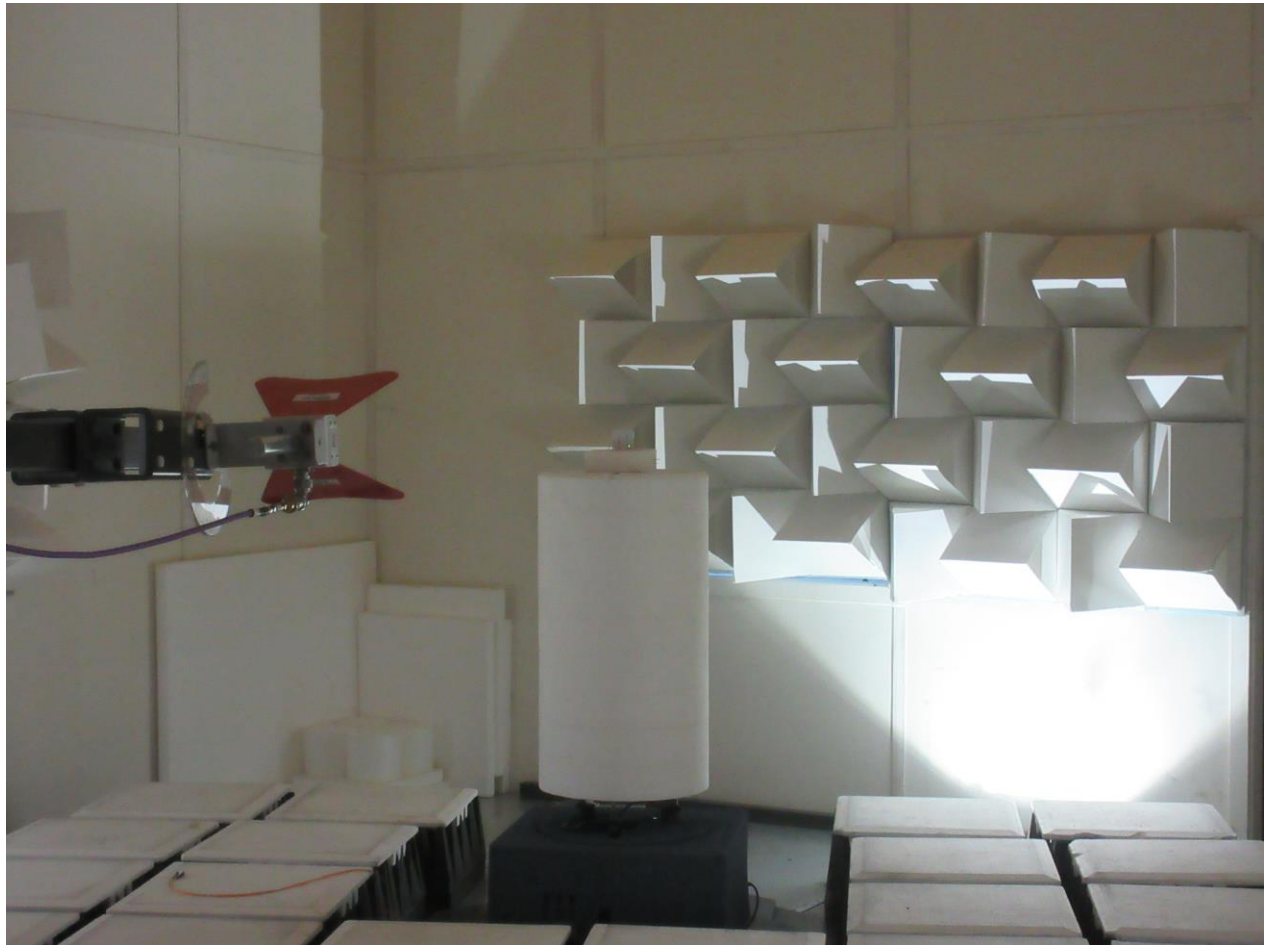

## 8. Test Setup Photographs

### 8.5. Radiated Emissions 1 to 18 GHz – Rear

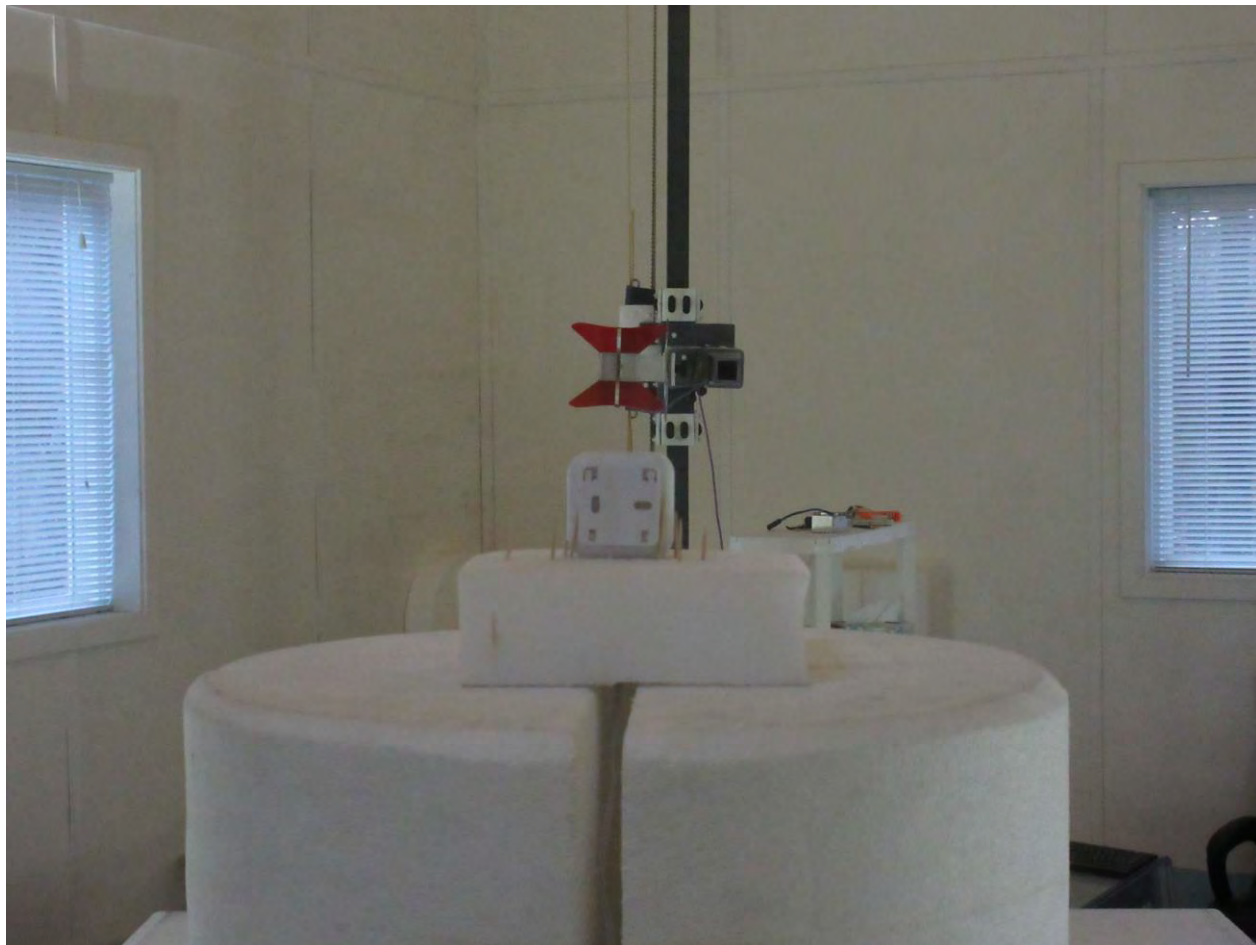

## 9. Test Site Description

Compliance Worldwide is located at 357 Main Street in Sandown, New Hampshire. The test sites at Compliance Worldwide are used for conducted and radiated emissions testing in accordance with the Federal Communications Commission (FCC) and Innovation Science and Economic Development Canada (ISED) standards. Through our American Association for Laboratory Accreditation (A2LA) ISO Guide 17025 Accreditation our test sites are designated with the FCC (designation number **US1091**), Industry Canada (file number **IC 3023A-1**) and VCCI (Member number 3168) under registration number A-0274.

Compliance Worldwide is also designated as a Phase 1 CAB under APEC-MRA (US0132) for Australia/New Zealand AS/NZS CISPR 22, Chinese-Taipei (Taiwan) BSMI CNS 13438 and Korea (RRA) KN 11, KN 13, KN 14-1, KN 22, KN 32, KN 61000-6-3, KN 61000-6-4.

The radiated emissions test site is a 3 and 10 meter enclosed open area test site (OATS). Personnel, support equipment and test equipment are located in the basement beneath the OATS ground plane.

The conducted emissions site is part of a 16' x 20' x 12' ferrite tile chamber and uses one of the walls for the vertical ground plane required by EN 55022. A second conducted emissions site is also located in the basement of the OATS site with a 2.3 x 2.5 meter ground plane and a 2.4 x 2.4 meter vertical wall.

The radiated emissions test site for measurements above 1GHz is a 3 Meter open area test site (OATS) with a 3.6 by 3.6 meter anechoic absorber floor patch to achieve a quasi-free space measurement environment per ANSI C63.4/C63.10 and CISPR 16-1-4 standards.


The sites are designed to test products or systems 1.5 meters W x 1.5 meters L x 2.0 meters H, floor standing or table top.

## Appendix A - Transmitter Spurious Radiated Emissions (9 kHz to 9.4 GHz)


### A1. Spurious Radiated Emissions (9 kHz – 150 kHz) Test Results

#### A1.1. Low Channel 912 MHz – X Axis

##### A1.1.1. Measurement Results: Parallel Antenna

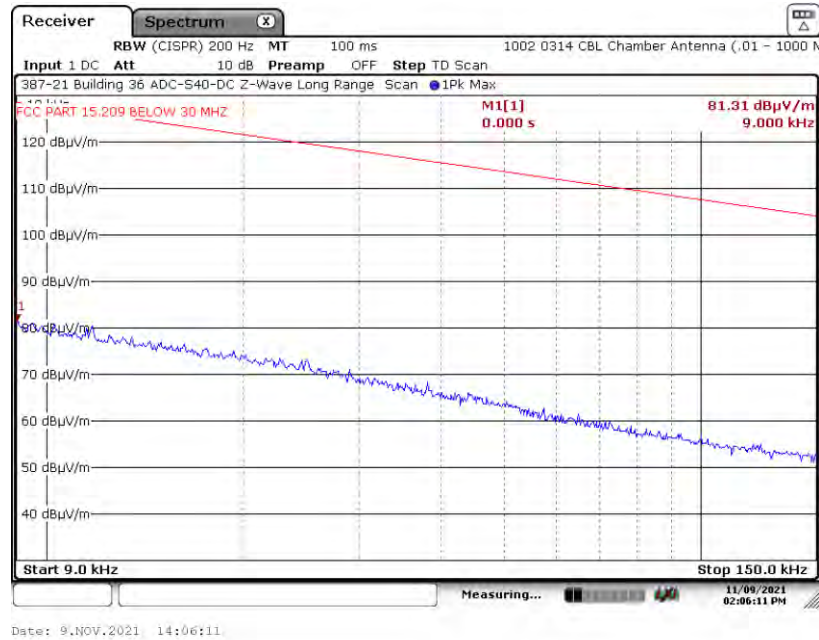

##### A1.1.2. Measurement Results: Perpendicular Antenna

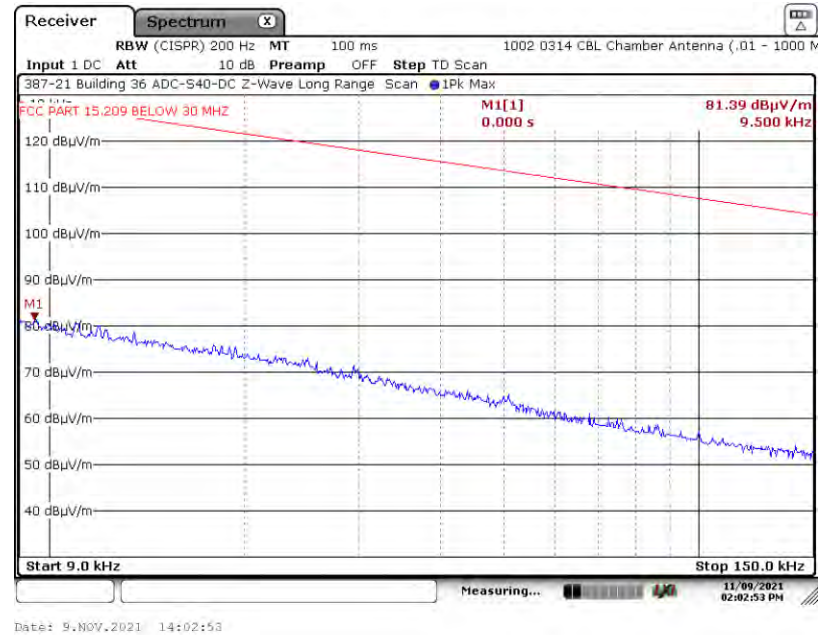


## Appendix A - Transmitter Spurious Radiated Emissions (9 kHz to 9.4 GHz)

### A1. Spurious Radiated Emissions (9 kHz – 150 kHz) Test Results


#### A1.1. Low Channel, 912 MHz – X Axis

##### A1.1.3. Measurement Results: Ground-Parallel Antenna

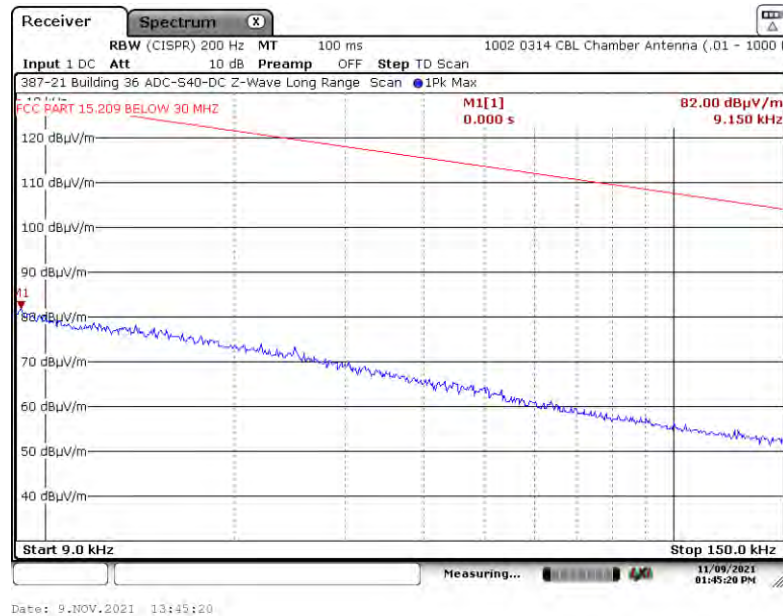

#### A1.2. High Channel, 920 MHz

##### A1.2.1. Measurement Results: Parallel Antenna

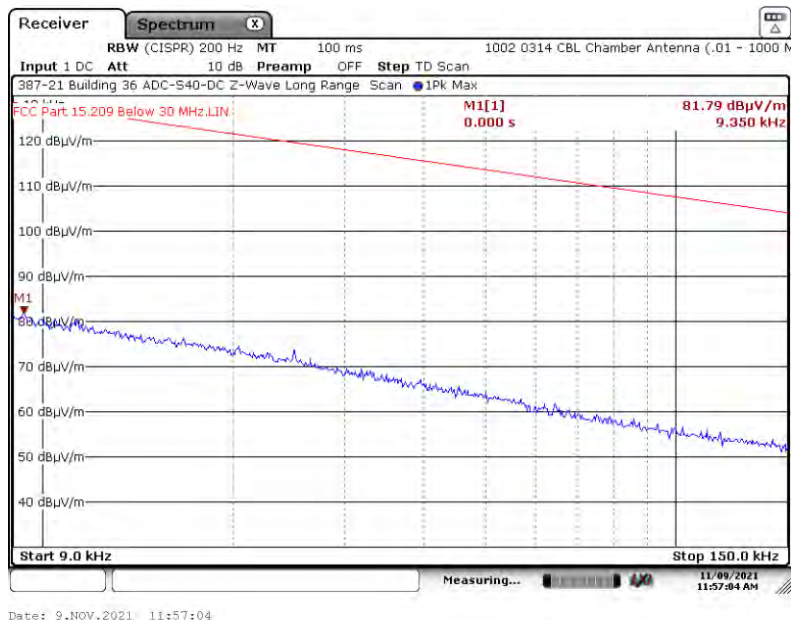


## Appendix A - Transmitter Spurious Radiated Emissions (9 kHz to 9.4 GHz)

### A1. Spurious Radiated Emissions (9 kHz – 150 kHz) Test Results

#### A1.2. High Channel, 920 MHz – X Axis

##### A1.2.2. Measurement Results: Perpendicular Antenna

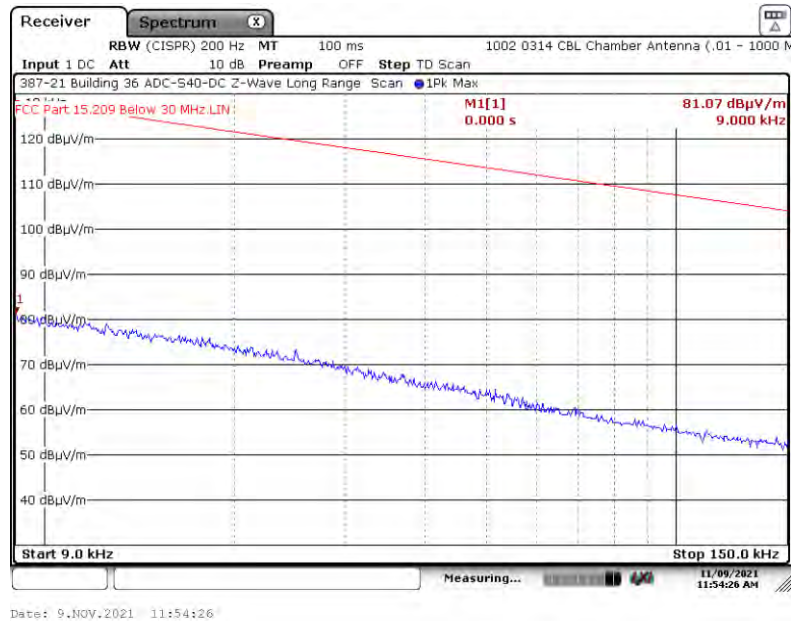

#### A1.2. High Channel, 920 MHz

##### A1.2.3. Measurement Results: Ground-Parallel Antenna




## Appendix A - Transmitter Spurious Radiated Emissions (9 kHz to 9.4 GHz)


### A1. Spurious Radiated Emissions (9 kHz – 150 kHz) Test Results

#### A1.3. Low Channel 912 MHz – Y Axis

##### A1.3.1. Measurement Results: Parallel Antenna

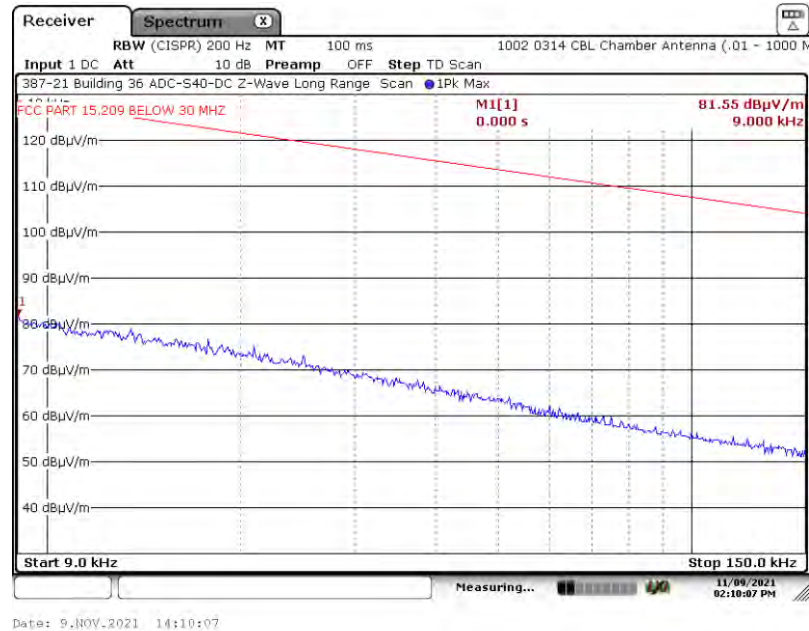

##### A1.3.2. Measurement Results: Perpendicular Antenna

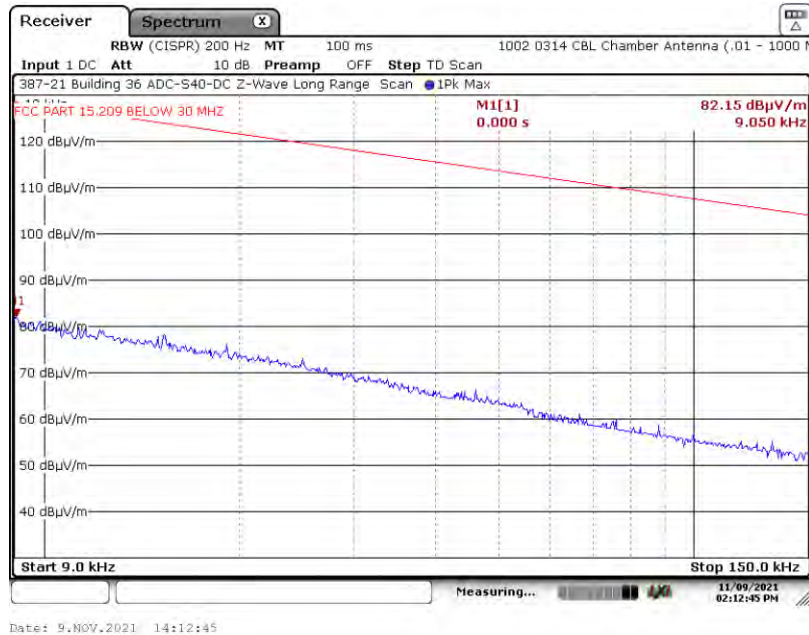


## Appendix A - Transmitter Spurious Radiated Emissions (9 kHz to 9.4 GHz)

### A1. Spurious Radiated Emissions (9 kHz – 150 kHz) Test Results


#### A1.3. Low Channel, 912 MHz – Y Axis

##### A1.3.3. Measurement Results: Ground-Parallel Antenna

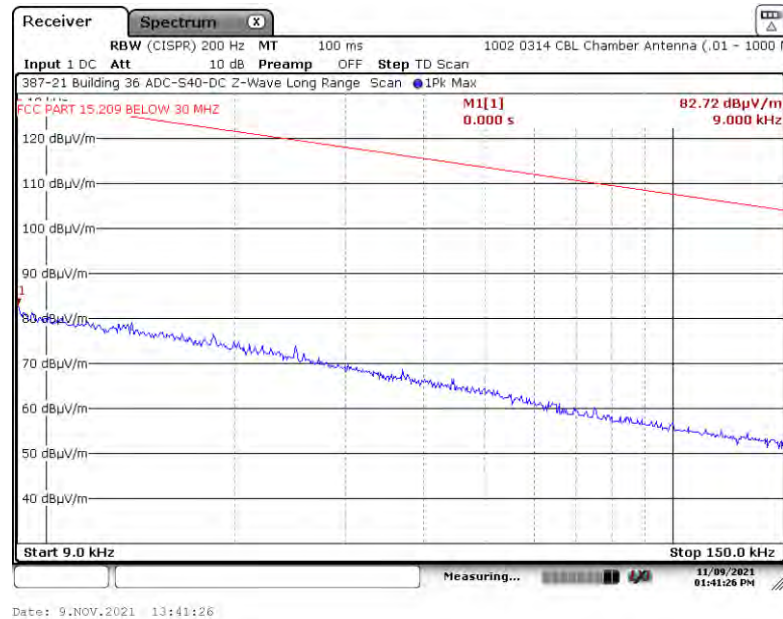

#### A1.4. High Channel, 920 MHz

##### A1.4.1. Measurement Results: Parallel Antenna

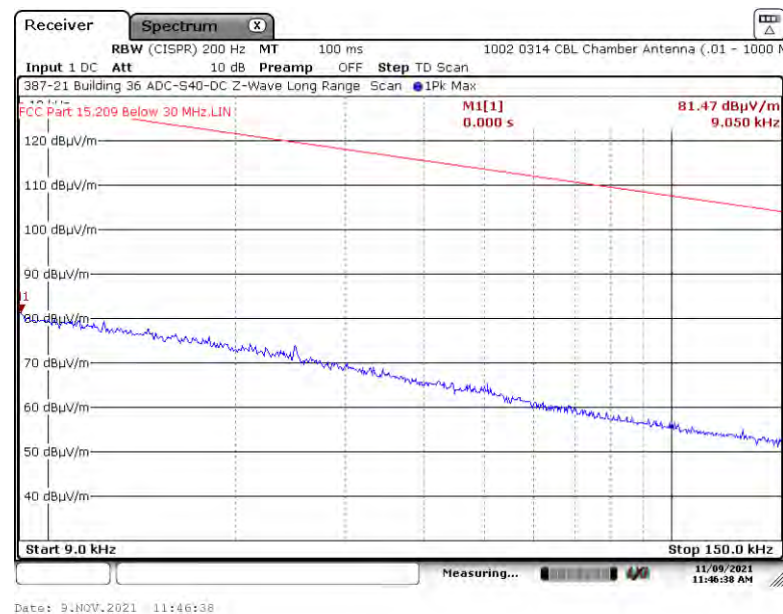


## Appendix A - Transmitter Spurious Radiated Emissions (9 kHz to 9.4 GHz)

### A1. Spurious Radiated Emissions (9 kHz – 150 kHz) Test Results


#### A1.4. High Channel, 920 MHz – Y Axis

##### A1.4.2. Measurement Results: Perpendicular Antenna

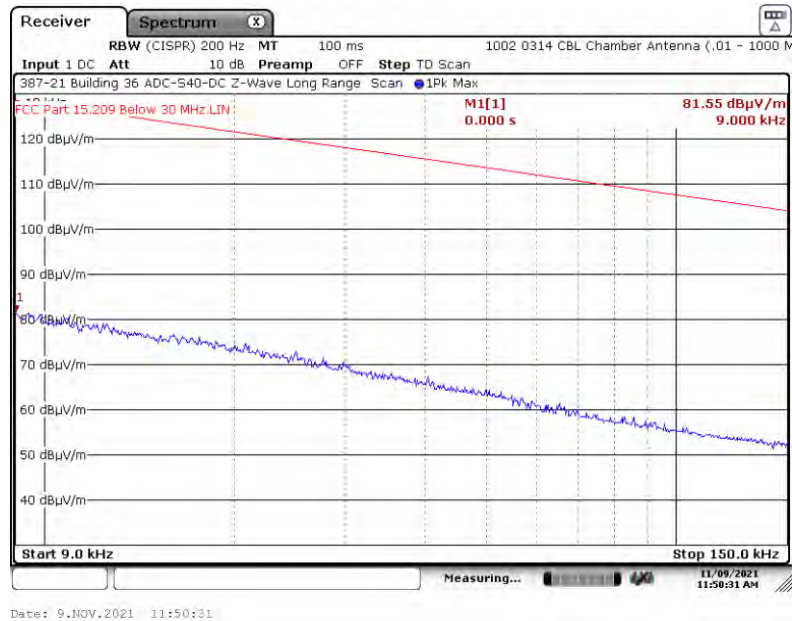

#### A1.4. High Channel, 920 MHz

##### A1.4.3. Measurement Results: Ground-Parallel Antenna

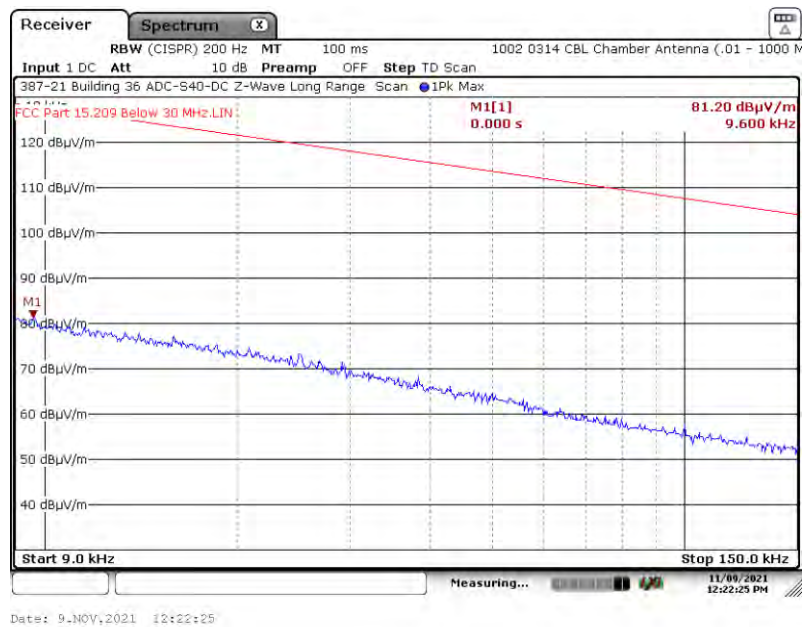


## Appendix A - Transmitter Spurious Radiated Emissions (9 kHz to 9.4 GHz)


### A1. Spurious Radiated Emissions (9 kHz – 150 kHz) Test Results

#### A1.5. Low Channel 912 MHz – Z Axis

##### A1.5.1. Measurement Results: Parallel Antenna

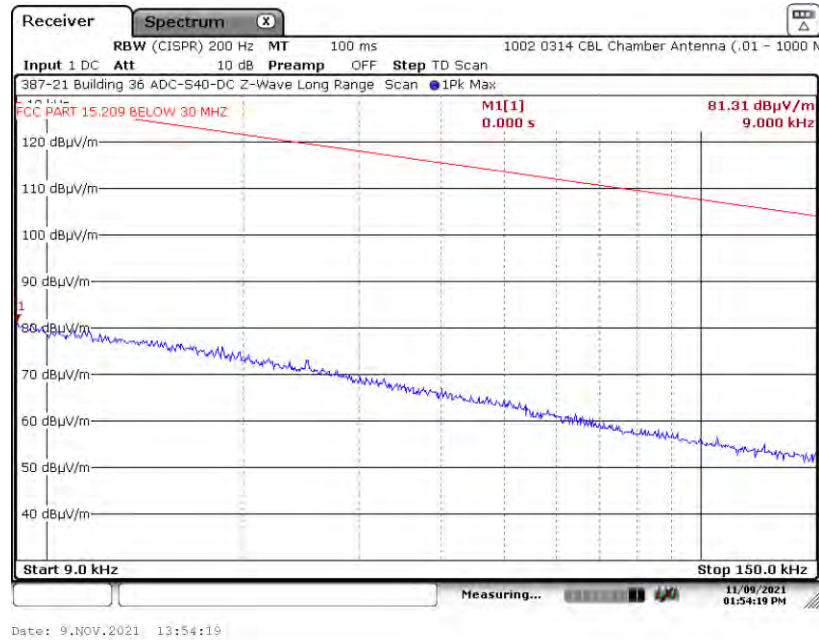

##### A1.5.2. Measurement Results: Perpendicular Antenna

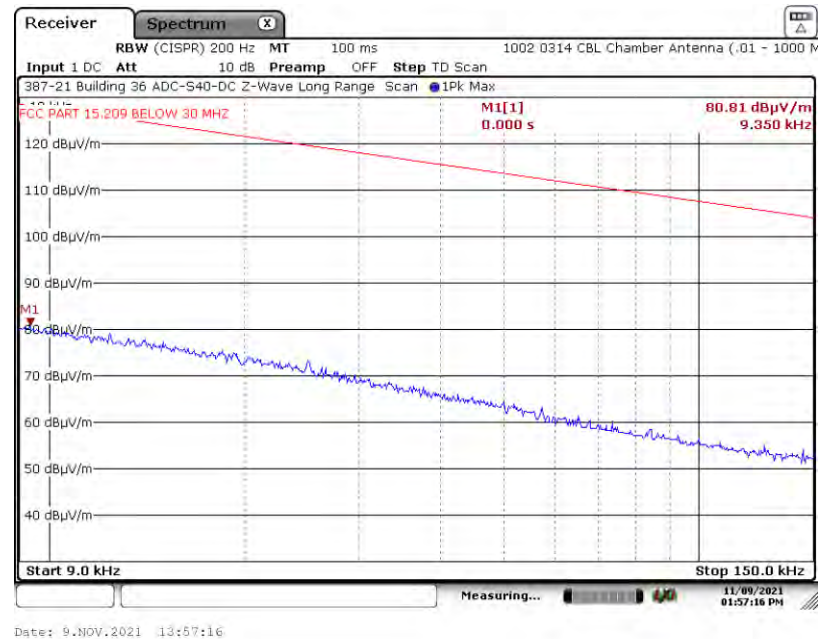


## Appendix A - Transmitter Spurious Radiated Emissions (9 kHz to 9.4 GHz)

### A1. Spurious Radiated Emissions (9 kHz – 150 kHz) Test Results


#### A1.5. Low Channel, 912 MHz – Z Axis

##### A1.5.3. Measurement Results: Ground-Parallel Antenna

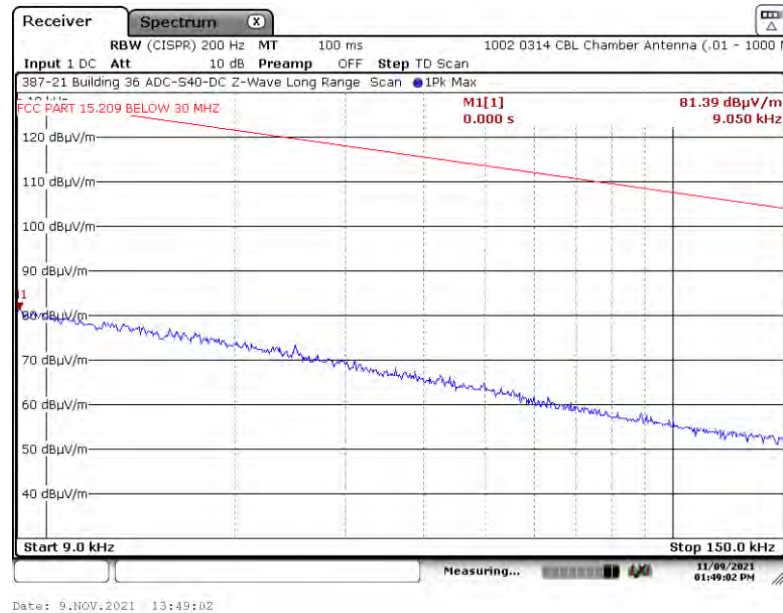

#### A1.6. High Channel, 920 MHz

##### A1.6.1. Measurement Results: Parallel Antenna

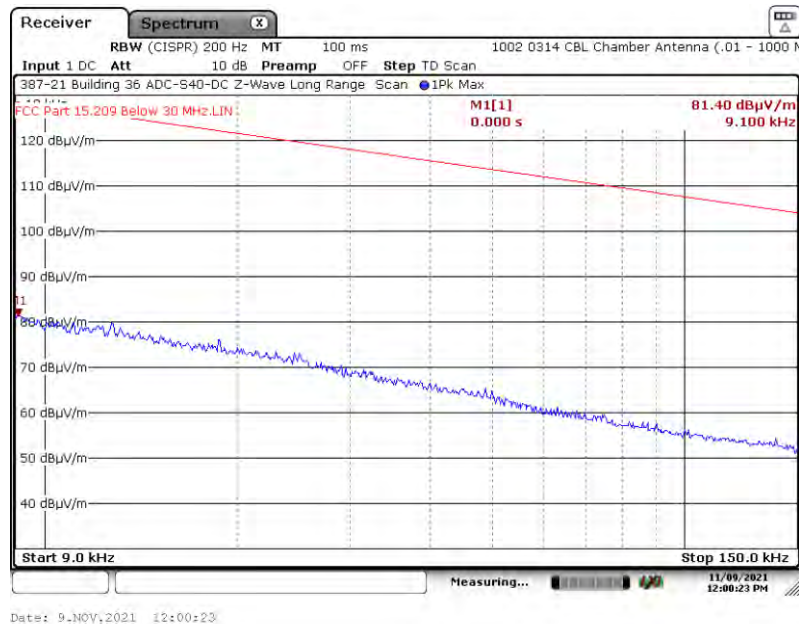


## Appendix A - Transmitter Spurious Radiated Emissions (9 kHz to 9.4 GHz)

### A1. Spurious Radiated Emissions (9 kHz – 150 kHz) Test Results


#### A1.6. High Channel, 920 MHz – Z Axis

##### A1.6.2. Measurement Results: Perpendicular Antenna

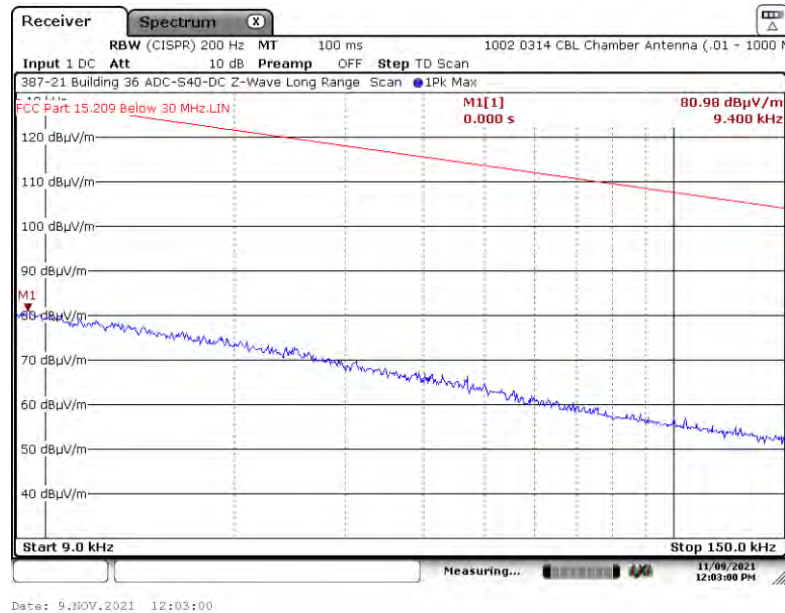

#### A1.6. High Channel, 920 MHz

##### A1.6.3. Measurement Results: Ground-Parallel Antenna

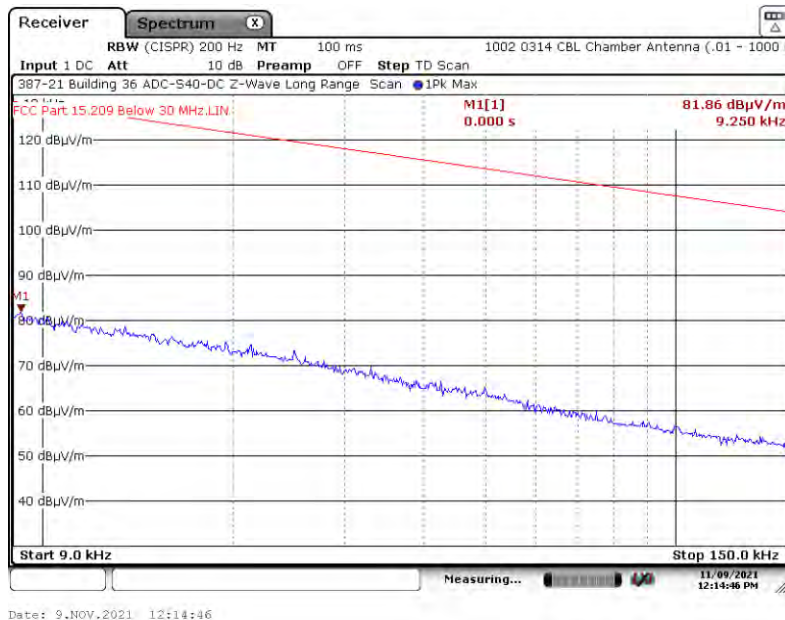


## Appendix A - Transmitter Spurious Radiated Emissions (9 kHz to 9.4 GHz)


### A2. Spurious Radiated Emissions (150 kHz – 30 MHz) Test Results

#### A2.1. Low Channel, 912 MHz – X Axis

##### A2.1.1. Measurement Results: Parallel Antenna

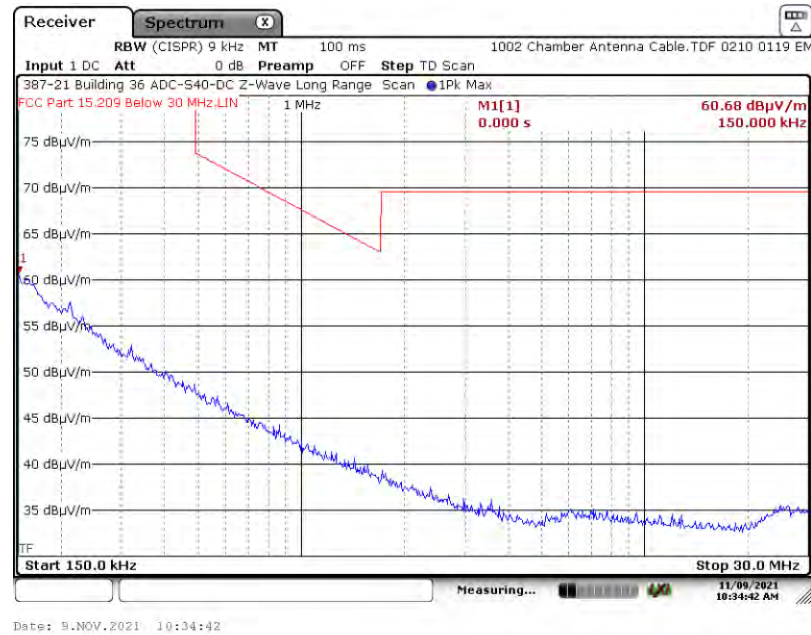

##### A2.1.2. Measurement Results: Perpendicular Antenna

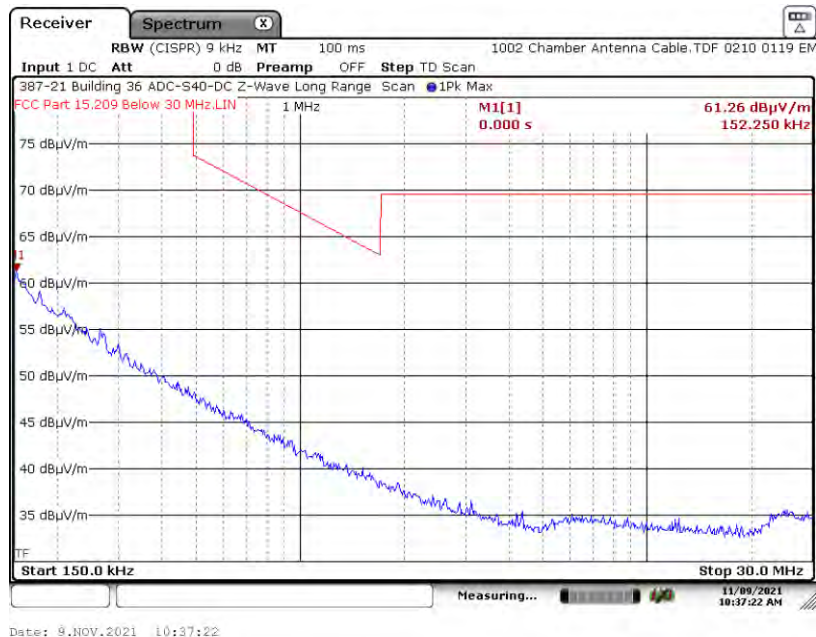


## Appendix A - Transmitter Spurious Radiated Emissions (9 kHz to 9.4 GHz)

### A2. Spurious Radiated Emissions (150 kHz – 30 MHz) Test Results


#### A2.1. Low Channel, 912 MHz – X Axis

##### A2.1.3. Measurement Results: Ground-Parallel Antenna

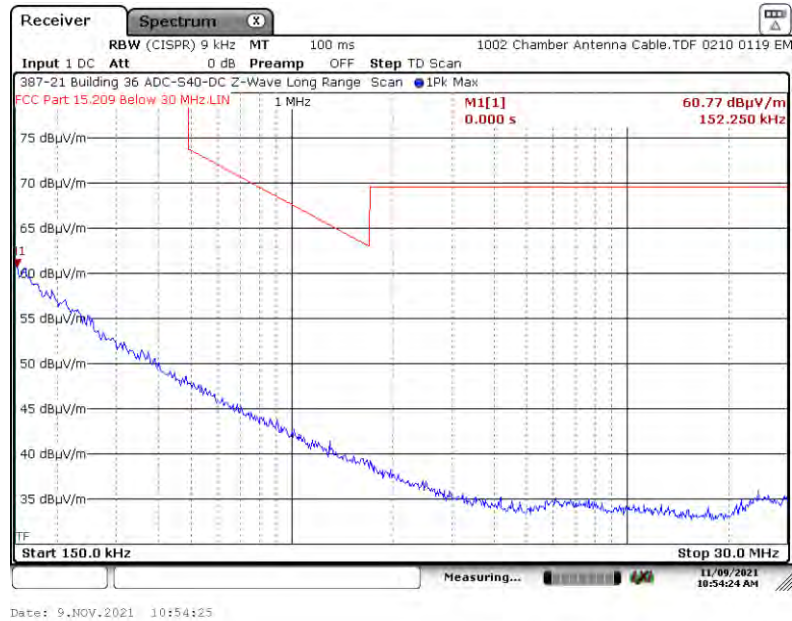

#### A2.2. High Channel, 920 MHz

##### A2.2.1. Measurement Results: Parallel Antenna

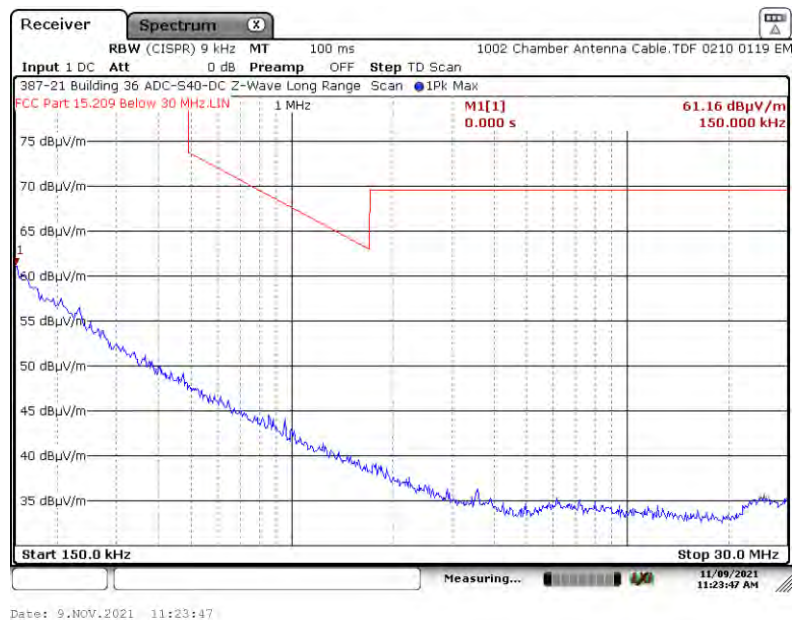


## Appendix A - Transmitter Spurious Radiated Emissions (9 kHz to 9.4 GHz)

### A2. Spurious Radiated Emissions (150 kHz – 30 MHz) Test Results

#### A2.2. High Channel, 920 MHz – X Axis

##### A2.2.2. Measurement Results: Perpendicular Antenna

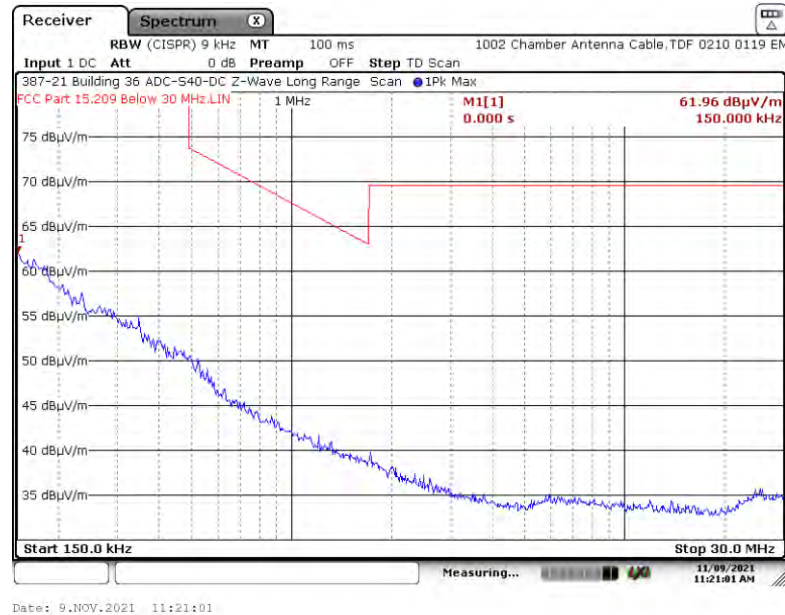

#### A2.2. High Channel, 920 MHz

##### A2.2.3. Measurement Results: Ground-Parallel Antenna



## Appendix A - Transmitter Spurious Radiated Emissions (9 kHz to 9.4 GHz)

### A2. Spurious Radiated Emissions (150 kHz – 30 MHz) Test Results

#### A2.3. Low Channel, 912 MHz – Y Axis

##### A2.3.1. Measurement Results: Parallel Antenna



##### A2.3.2. Measurement Results: Perpendicular Antenna




## Appendix A - Transmitter Spurious Radiated Emissions (9 kHz to 9.4 GHz)

### A2. Spurious Radiated Emissions (150 kHz – 30 MHz) Test Results


#### A2.3. Low Channel, 912 MHz – Y Axis

##### A2.3.3. Measurement Results: Ground-Parallel Antenna

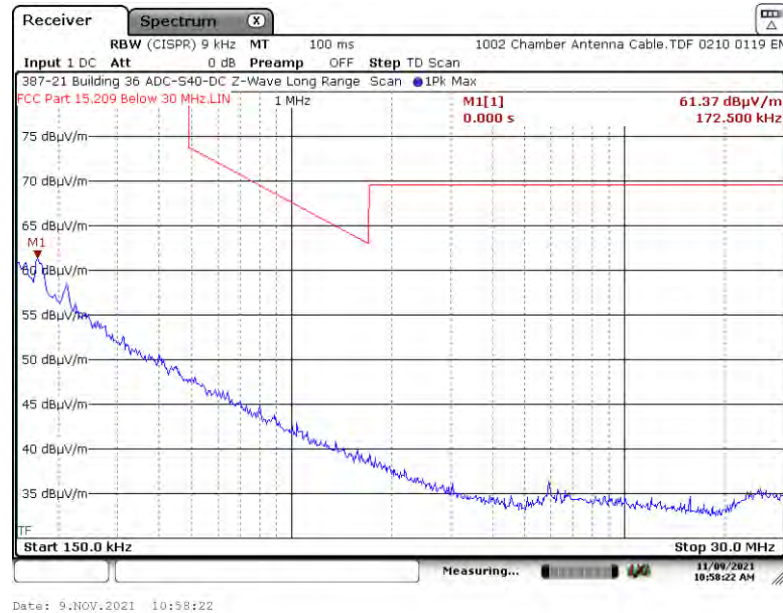

#### A2.4. High Channel, 920 MHz

##### A2.4.1. Measurement Results: Parallel Antenna

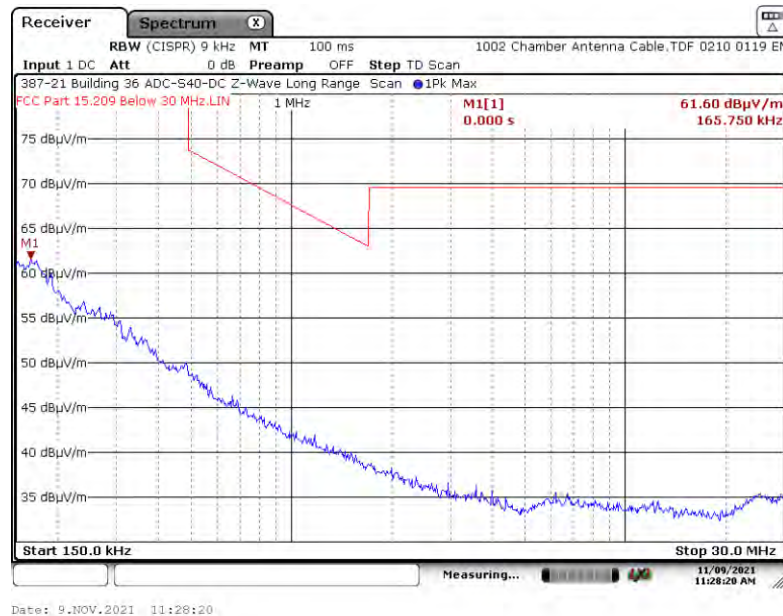


## Appendix A - Transmitter Spurious Radiated Emissions (9 kHz to 9.4 GHz)

### A2. Spurious Radiated Emissions (150 kHz – 30 MHz) Test Results


#### A2.4. High Channel, 920 MHz – Y Axis

##### A2.4.2. Measurement Results: Perpendicular Antenna

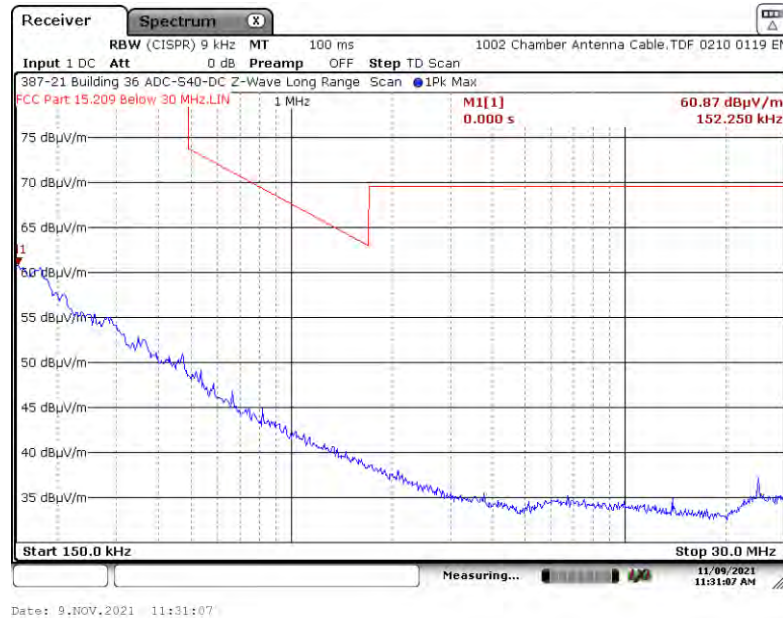

#### A2.4. High Channel, 920 MHz

##### A2.4.3. Measurement Results: Ground-Parallel Antenna

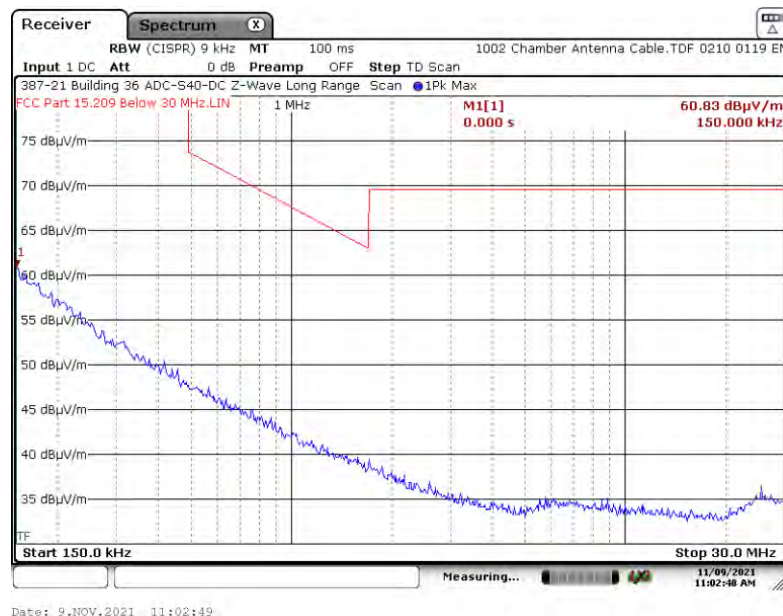


## Appendix A - Transmitter Spurious Radiated Emissions (9 kHz to 9.4 GHz)


### A2. Spurious Radiated Emissions (150 kHz – 30 MHz) Test Results

#### A2.5. Low Channel, 912 MHz – Z Axis

##### A2.5.1. Measurement Results: Parallel Antenna

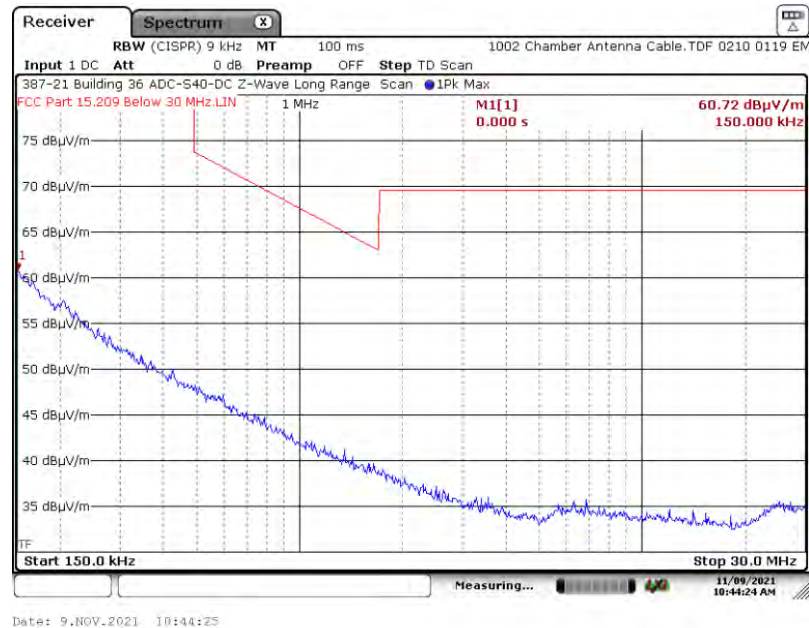

##### A2.5.2. Measurement Results: Perpendicular Antenna

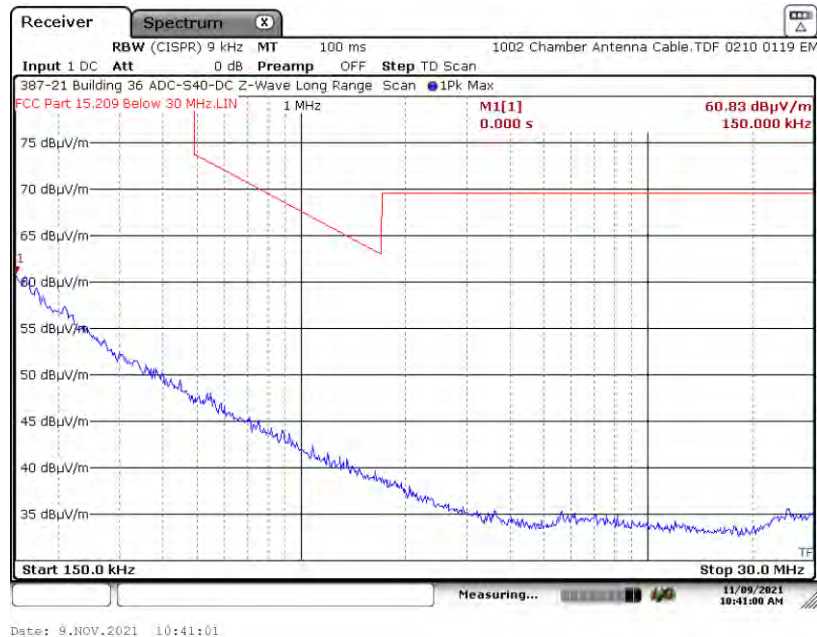

## Appendix A - Transmitter Spurious Radiated Emissions (9 kHz to 9.4 GHz)

### A2. Spurious Radiated Emissions (150 kHz – 30 MHz) Test Results

#### A2.5. Low Channel, 912 MHz – Z Axis

##### A2.5.3. Measurement Results: Ground-Parallel Antenna



#### A2.6. High Channel, 920 MHz

##### A2.6.1. Measurement Results: Parallel Antenna




## Appendix A - Transmitter Spurious Radiated Emissions (9 kHz to 9.4 GHz)

### A2. Spurious Radiated Emissions (150 kHz – 30 MHz) Test Results


#### A2.6. High Channel, 920 MHz – Z Axis

##### A2.6.2. Measurement Results: Perpendicular Antenna

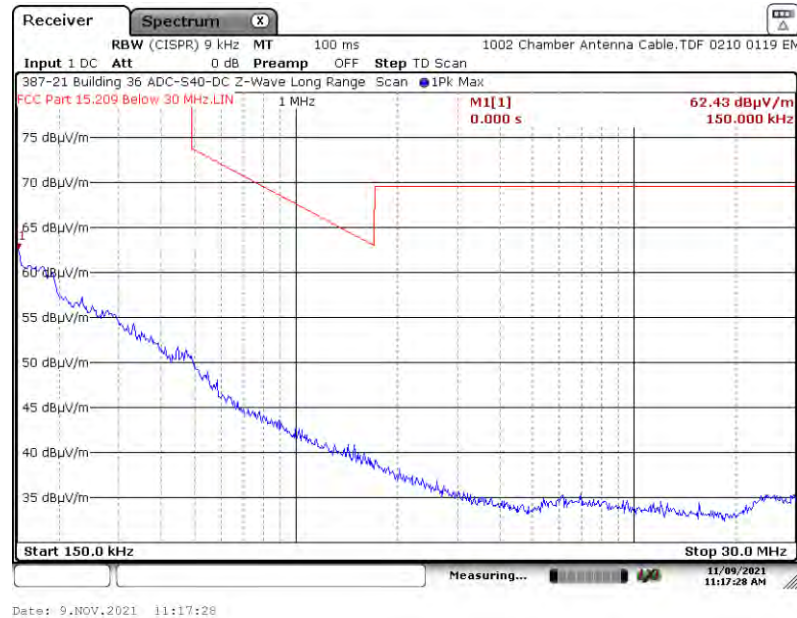

#### A2.6. High Channel, 920 MHz

##### A2.6.3. Measurement Results: Ground-Parallel Antenna

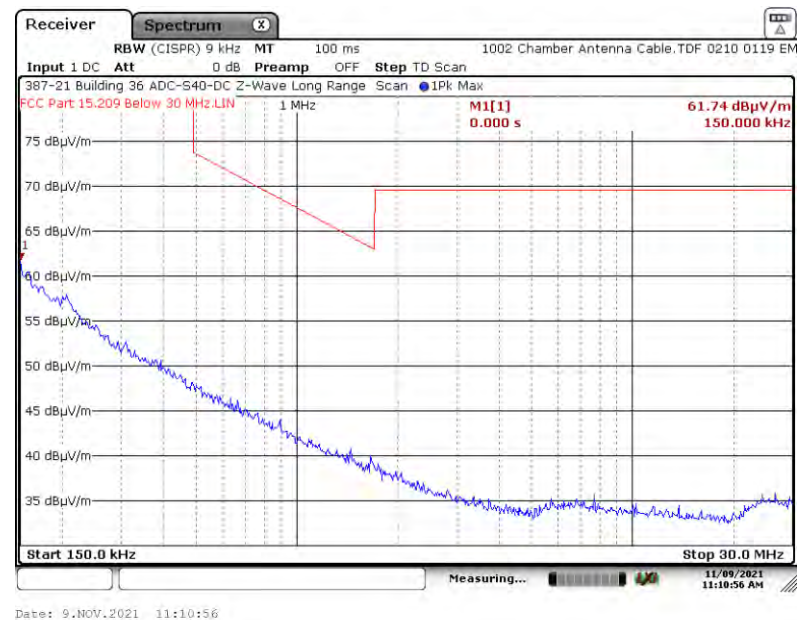


## Appendix A - Transmitter Spurious Radiated Emissions (9 kHz to 9.4 GHz)


### A3. Spurious Radiated Emissions (30 MHz – 1 GHz) Test Results

#### A3.1. Low Channel, 912 MHz – X Axis

##### A3.1.1. Measurement Results: Horizontal Antenna

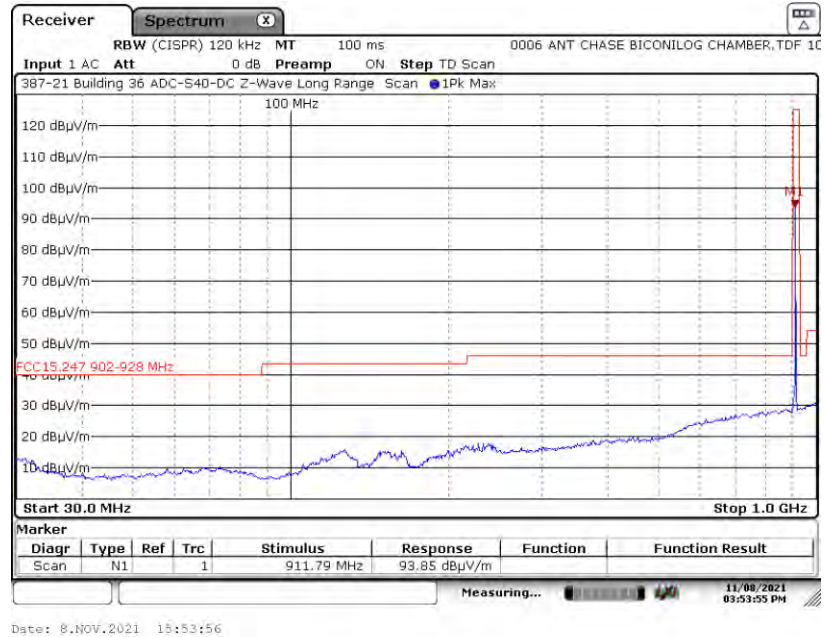

##### A3.1.2. Measurement Results: Vertical Antenna

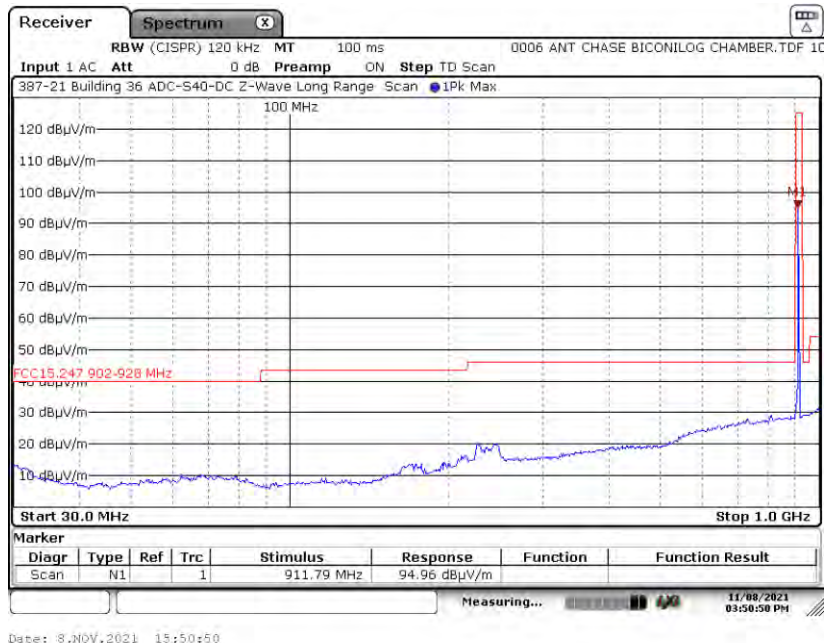


## Appendix A - Transmitter Spurious Radiated Emissions (9 kHz to 9.4 GHz)


### A3. Spurious Radiated Emissions (30 MHz – 1 GHz) Test Results

#### A3.2. High Channel, 920 MHz – X Axis

##### A3.2.1. Measurement Results: Horizontal Antenna

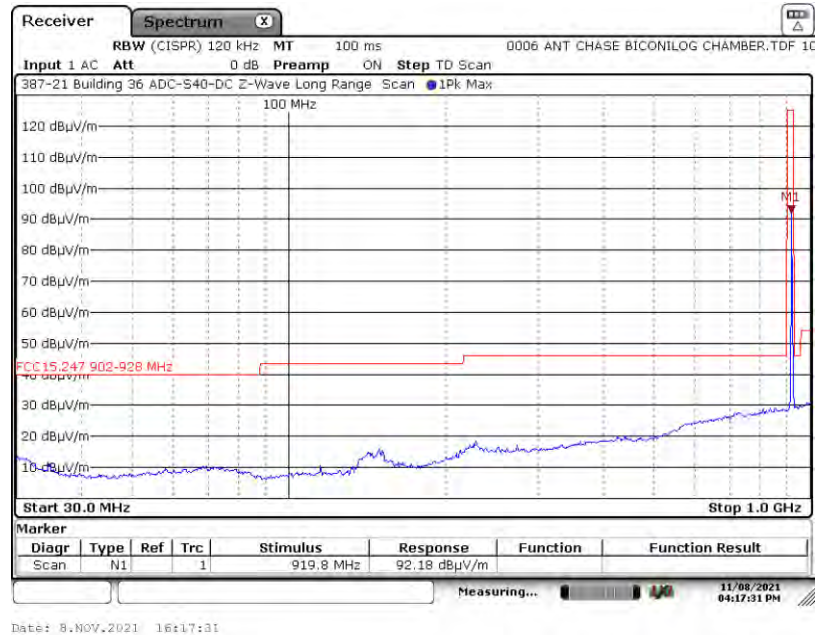

##### A3.2.2. Measurement Results: Vertical Antenna

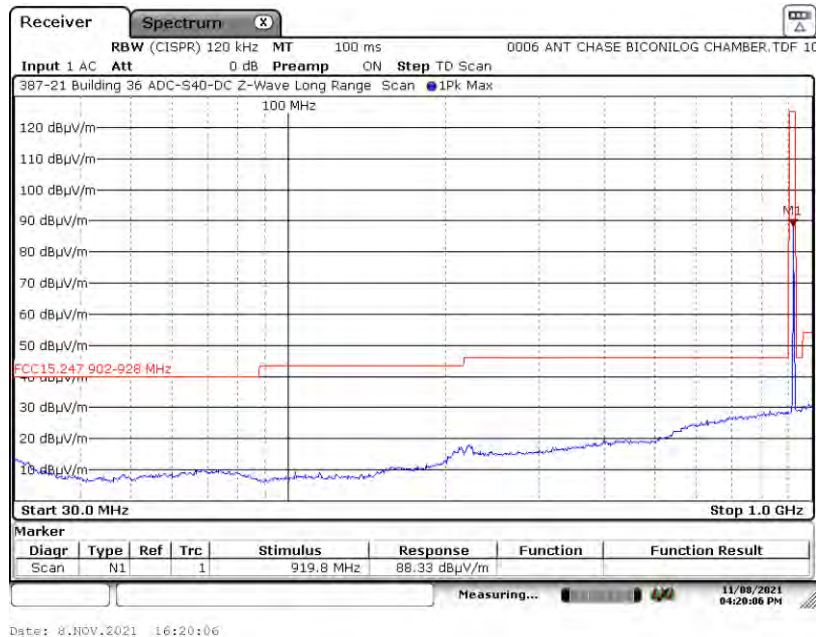


## Appendix A - Transmitter Spurious Radiated Emissions (9 kHz to 9.4 GHz)


### A3. Spurious Radiated Emissions (30 MHz – 1 GHz) Test Results

#### A3.3. Low Channel, 912 MHz – Y Axis

##### A3.3.1. Measurement Results: Horizontal Antenna

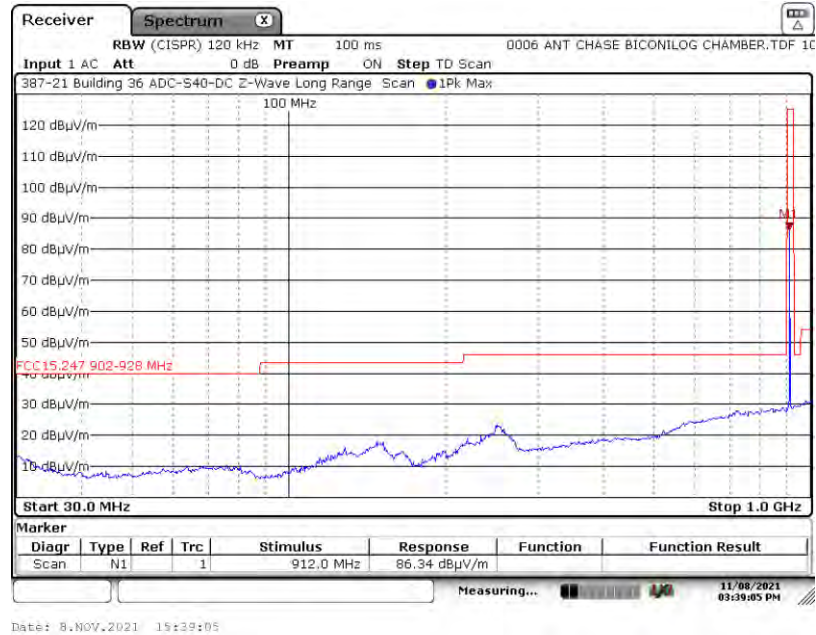

##### A3.3.2. Measurement Results: Vertical Antenna

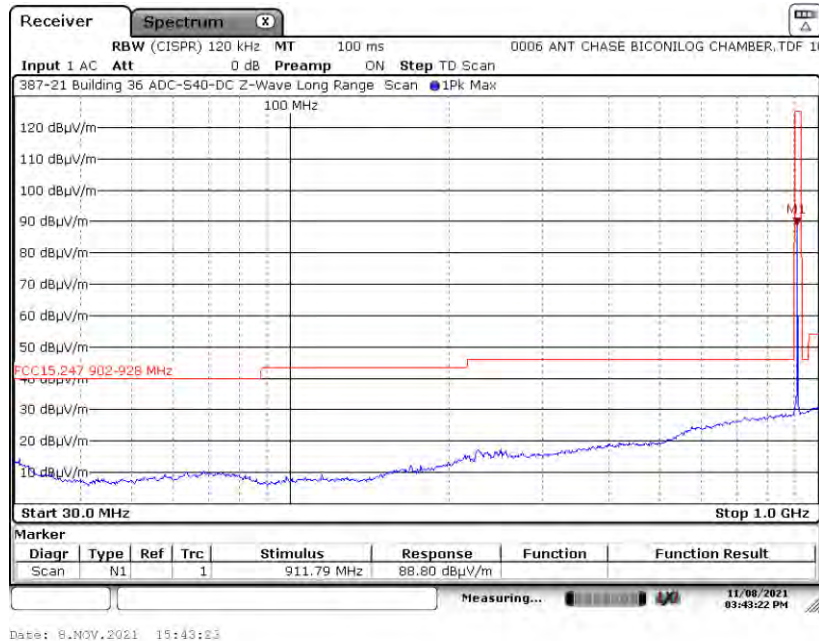


## Appendix A - Transmitter Spurious Radiated Emissions (9 kHz to 9.4 GHz)


### A3. Spurious Radiated Emissions (30 MHz – 1 GHz) Test Results

#### A3.4. High Channel, 920 MHz – Y Axis

##### A3.4.1. Measurement Results: Horizontal Antenna

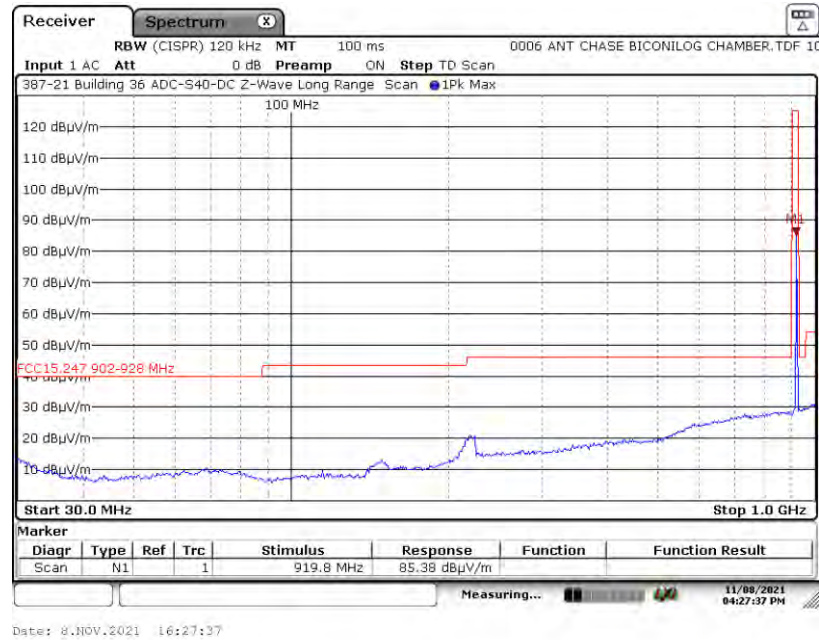

##### A3.4.2. Measurement Results: Vertical Antenna

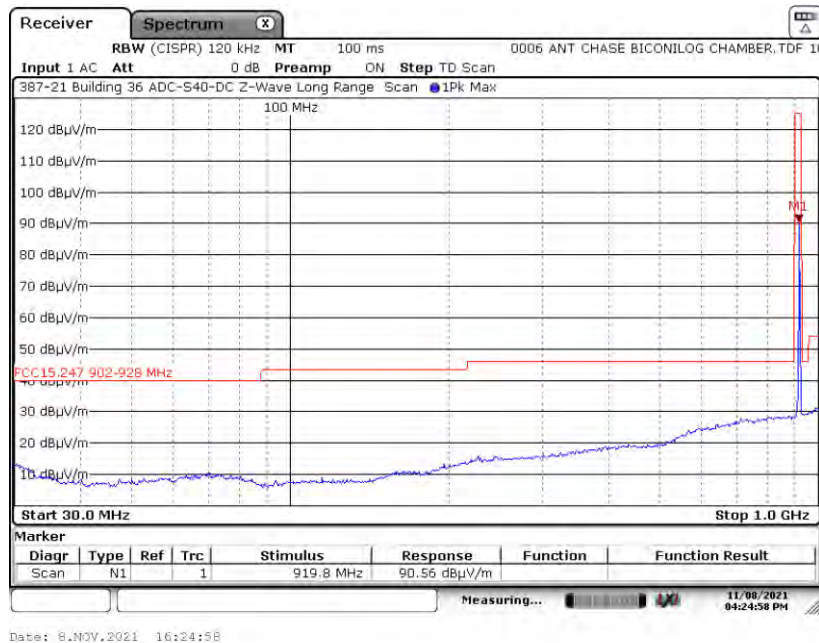


## Appendix A - Transmitter Spurious Radiated Emissions (9 kHz to 9.4 GHz)


### A3. Spurious Radiated Emissions (30 MHz – 1 GHz) Test Results

#### A3.5. Low Channel, 912 MHz – Z Axis

##### A3.5.1. Measurement Results: Horizontal Antenna

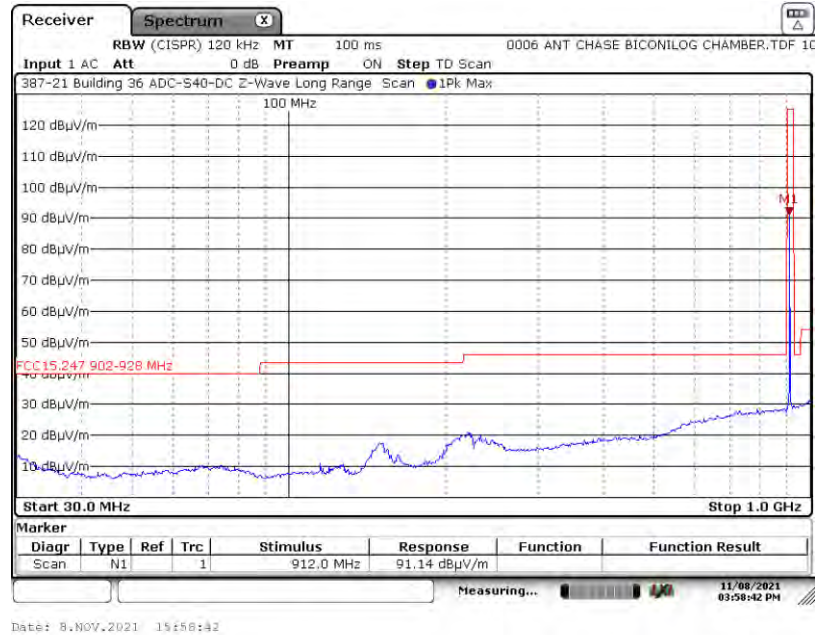

##### A3.5.2. Measurement Results: Vertical Antenna

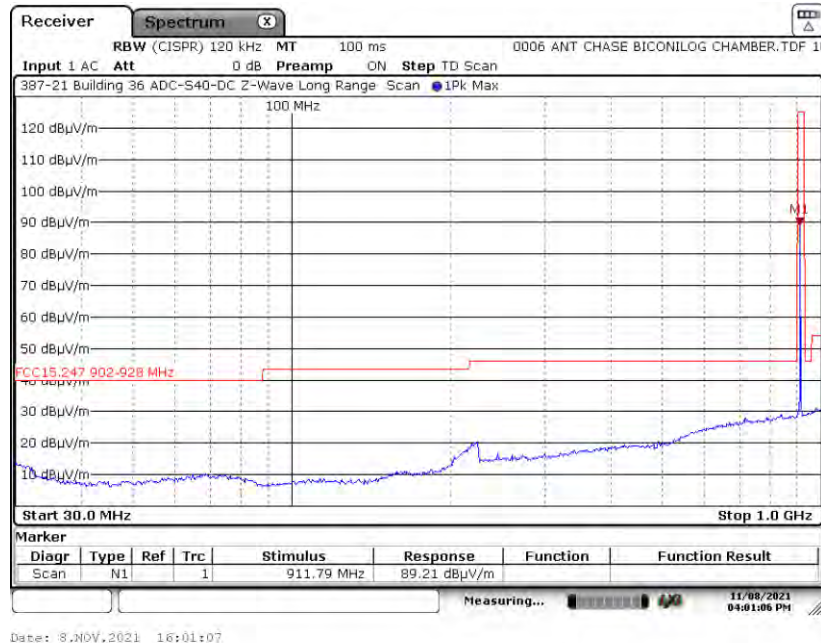


## Appendix A - Transmitter Spurious Radiated Emissions (9 kHz to 9.4 GHz)


### A3. Spurious Radiated Emissions (30 MHz – 1 GHz) Test Results

#### A3.6. High Channel, 920 MHz – Z Axis

##### A3.6.1. Measurement Results: Horizontal Antenna

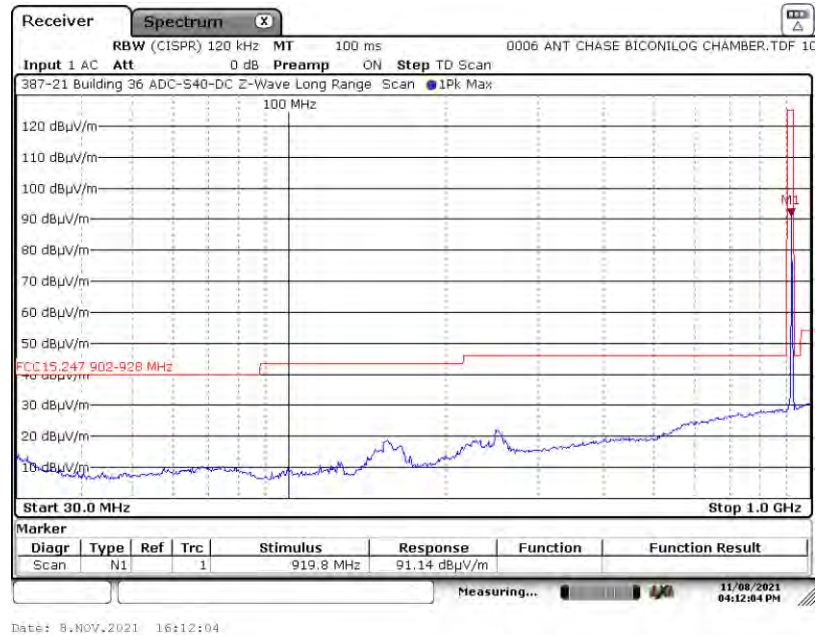

##### A3.4.2. Measurement Results: Vertical Antenna

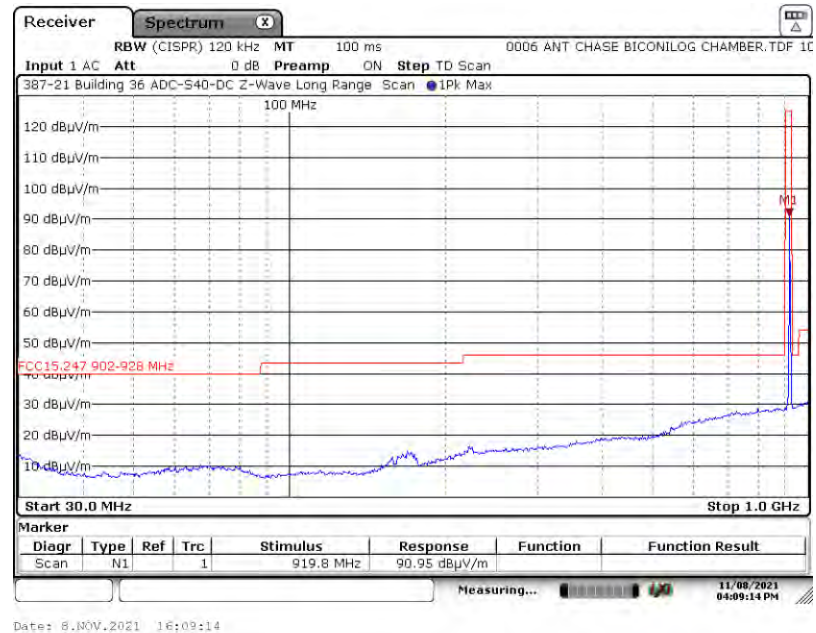


## Appendix A - Transmitter Spurious Radiated Emissions (9 kHz to 9.4 GHz)


### A4. Spurious Radiated Emissions (1 GHz – 9.4 GHz) Test Results

#### A4.1. Low Channel, 912 MHz – X Axis

##### A4.1.1. Measurement Results: Horizontal Antenna

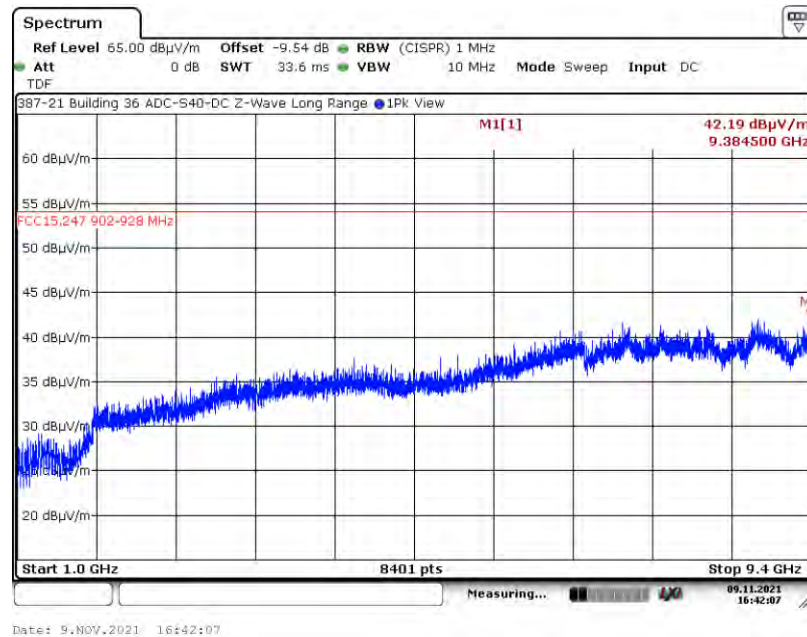

##### A4.1.2. Measurement Results: Vertical Antenna

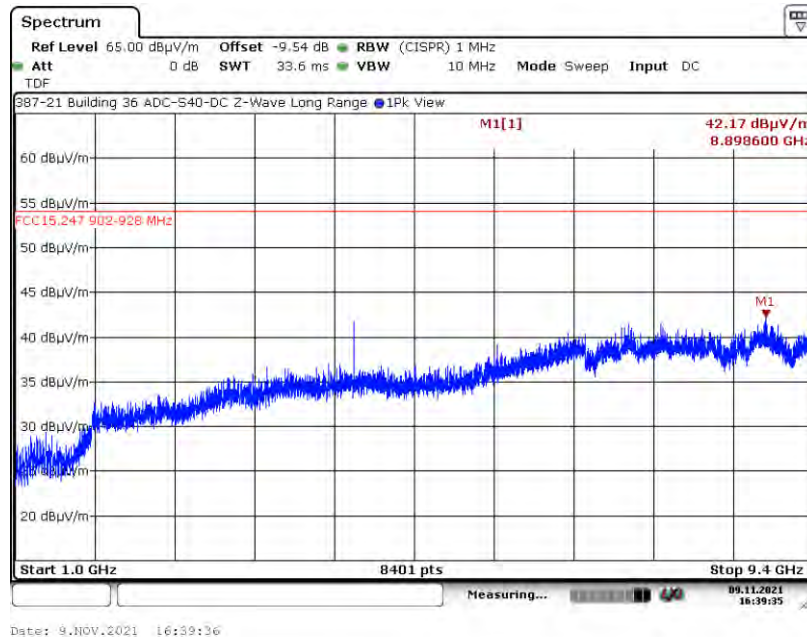


## Appendix A - Transmitter Spurious Radiated Emissions (9 kHz to 9.4 GHz)


### A4. Spurious Radiated Emissions 1 GHz – 9.4 GHz) Test Results

#### A4.2. High Channel, 920 MHz – X Axis

##### A4.2.1. Measurement Results: Horizontal Antenna

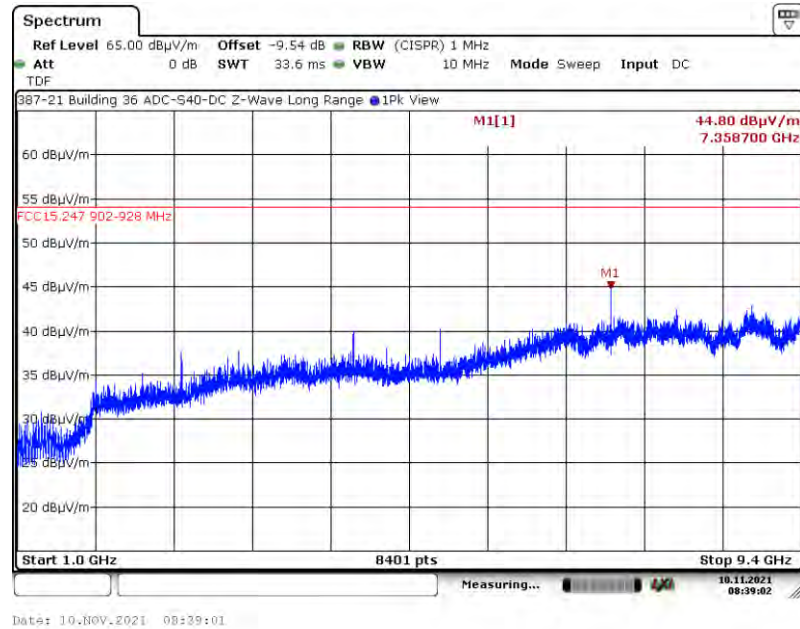

##### A4.2.2. Measurement Results: Vertical Antenna

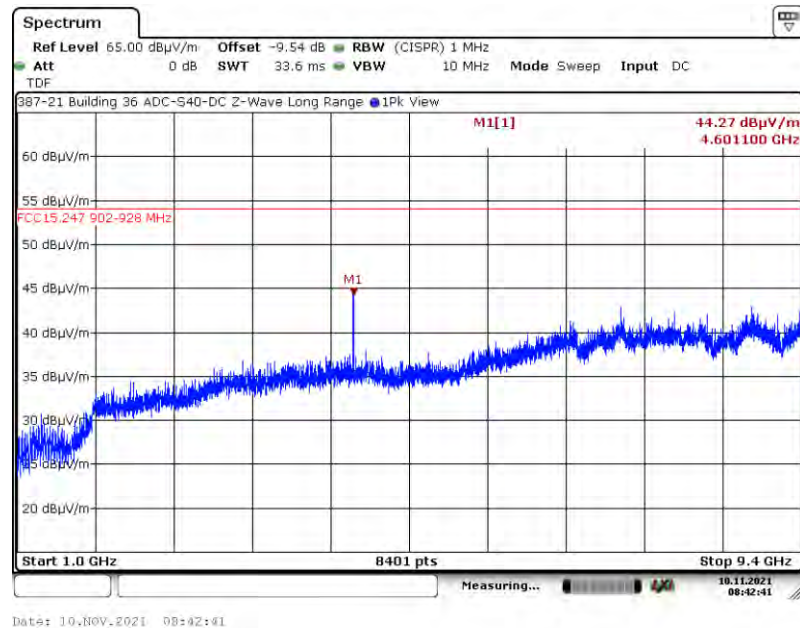


## Appendix A - Transmitter Spurious Radiated Emissions (9 kHz to 9.4 GHz)


### A4. Spurious Radiated Emissions (1 GHz – 9.4 GHz) Test Results

#### A4.3. Low Channel, 912 MHz – Y Axis

##### A4.3.1. Measurement Results: Horizontal Antenna

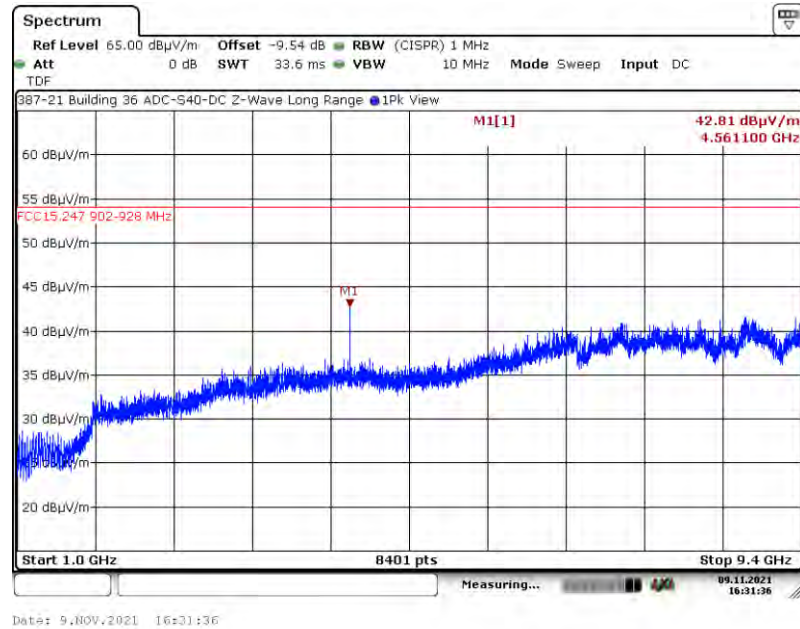

##### A4.3.2. Measurement Results: Vertical Antenna

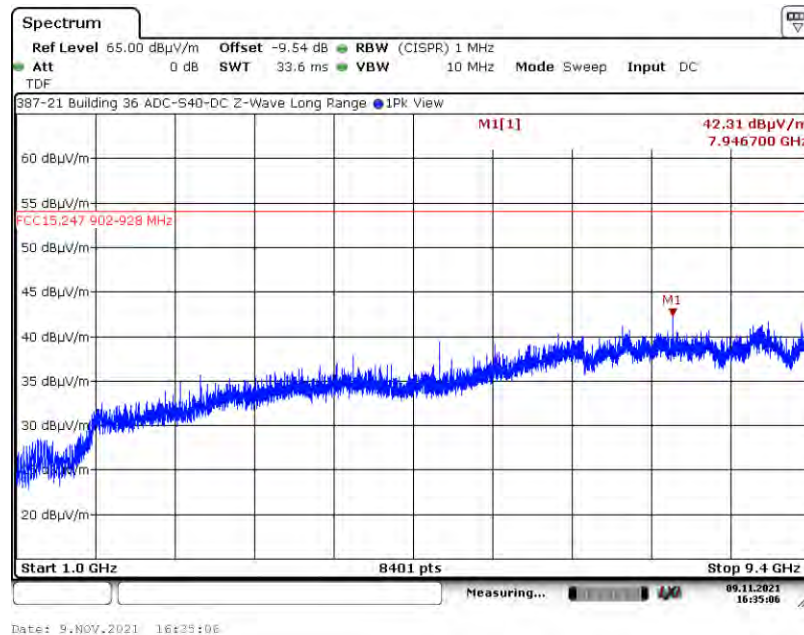


## Appendix A - Transmitter Spurious Radiated Emissions (9 kHz to 9.4 GHz)


### A4. Spurious Radiated Emissions 1 GHz – 9.4 GHz) Test Results

#### A4.4. High Channel, 920 MHz – Y Axis

##### A4.4.1. Measurement Results: Horizontal Antenna

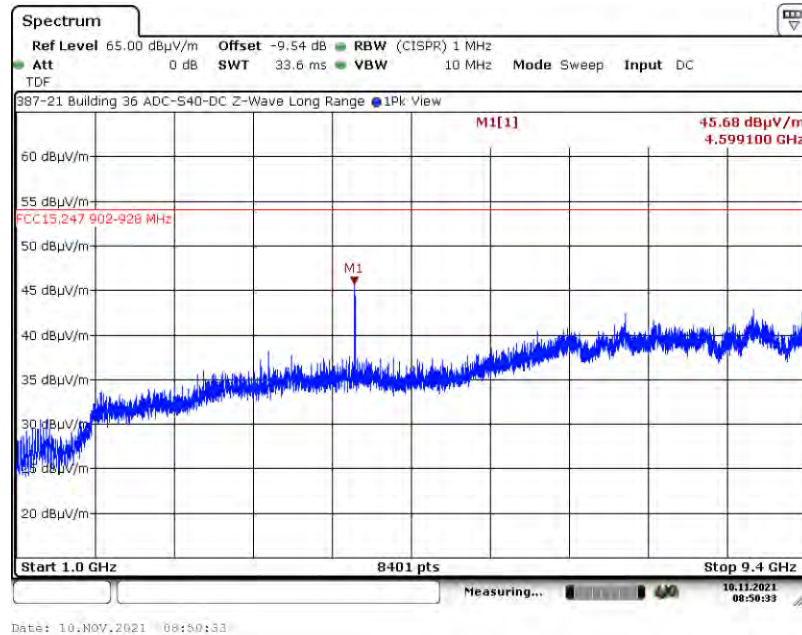

##### A4.4.2. Measurement Results: Vertical Antenna

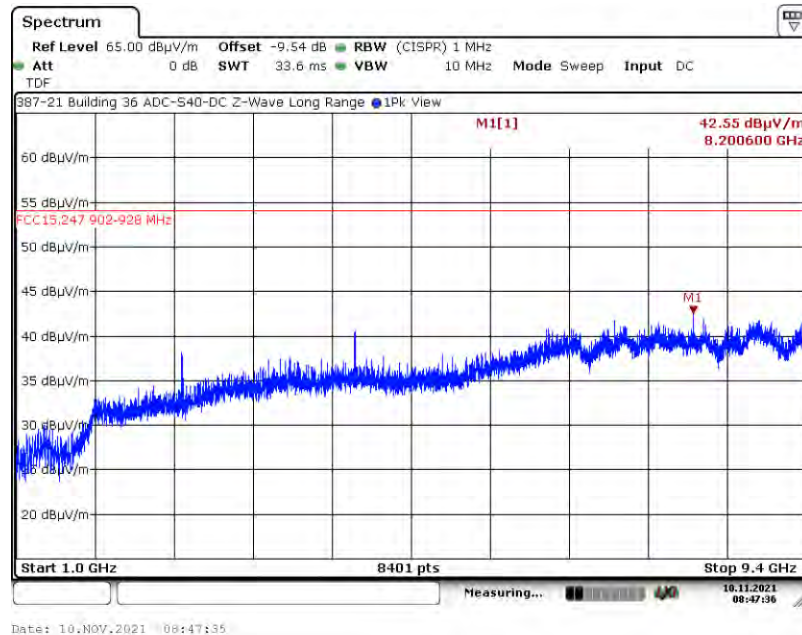


## Appendix A - Transmitter Spurious Radiated Emissions (9 kHz to 9.4 GHz)


### A4. Spurious Radiated Emissions (1 GHz – 9.4 GHz) Test Results

#### A4.5. Low Channel, 912 MHz – Z Axis

##### A4.5.1. Measurement Results: Horizontal Antenna

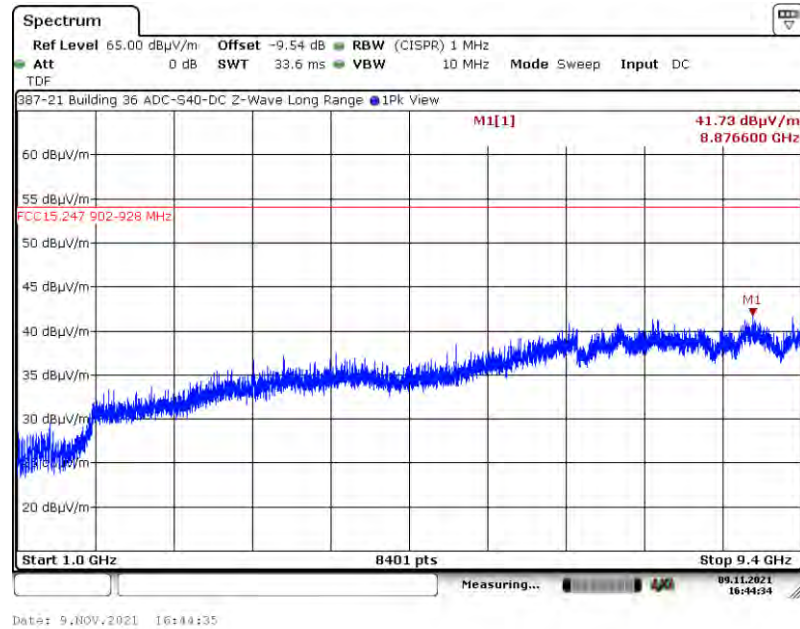

##### A4.5.2. Measurement Results: Vertical Antenna

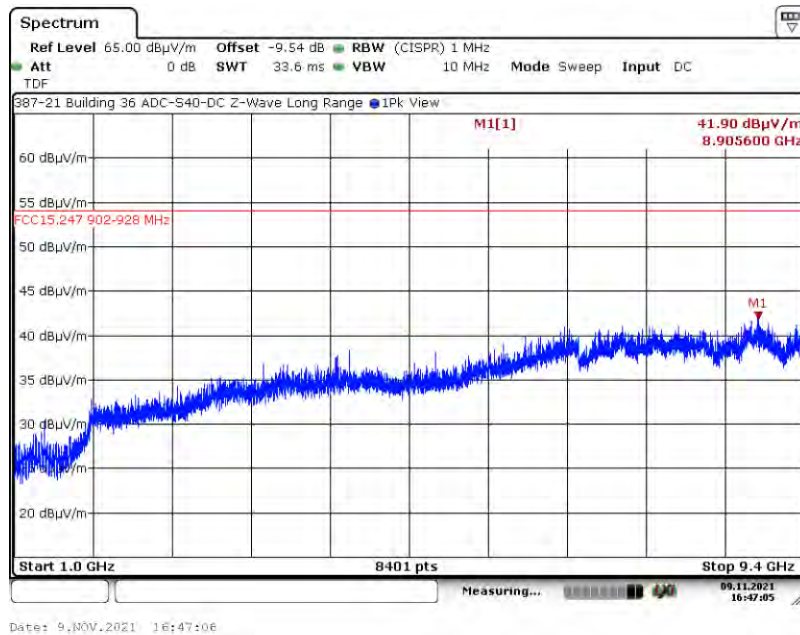


## Appendix A - Transmitter Spurious Radiated Emissions (9 kHz to 9.4 GHz)


### A4. Spurious Radiated Emissions 1 GHz – 9.4 GHz) Test Results

#### A4.6. High Channel, 920 MHz – Z Axis

##### A4.6.1. Measurement Results: Horizontal Antenna

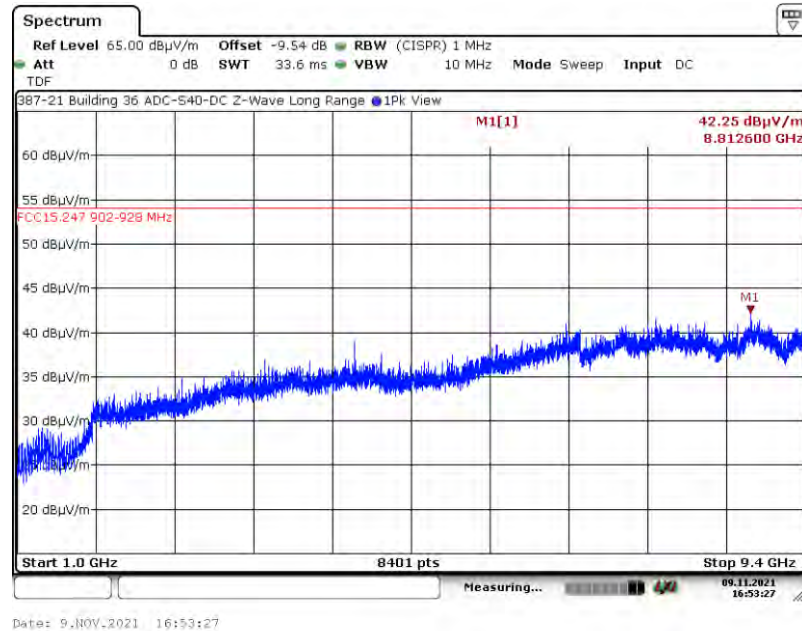

##### A4.6.2. Measurement Results: Vertical Antenna

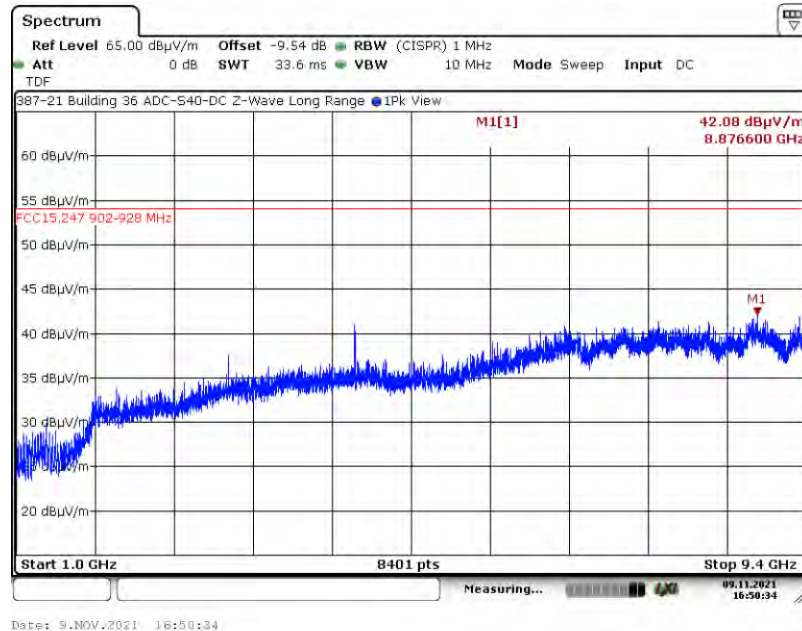


## Appendix B


### B1. Emissions in Non-restricted Frequency Bands (30 MHz to 9.28 GHz)

#### B1.1. Emissions in Non-restricted Frequency Bands (30 MHz – 9.28 GHz) Test Results

##### B1.1.1. Measurement Results, 912 MHz, 30 MHz – 902 MHz

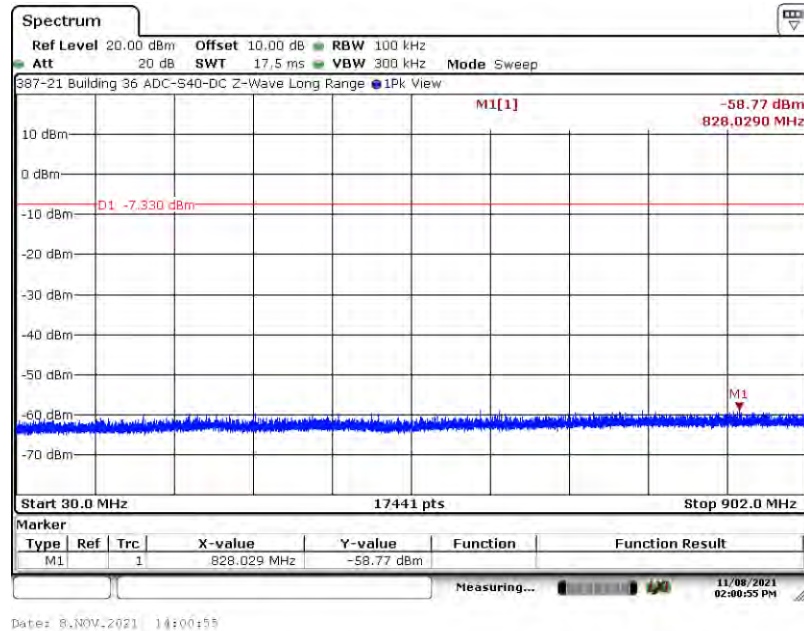

##### B1.1.2. Measurement Results, 912 MHz: 928 MHz – 9.28 GHz

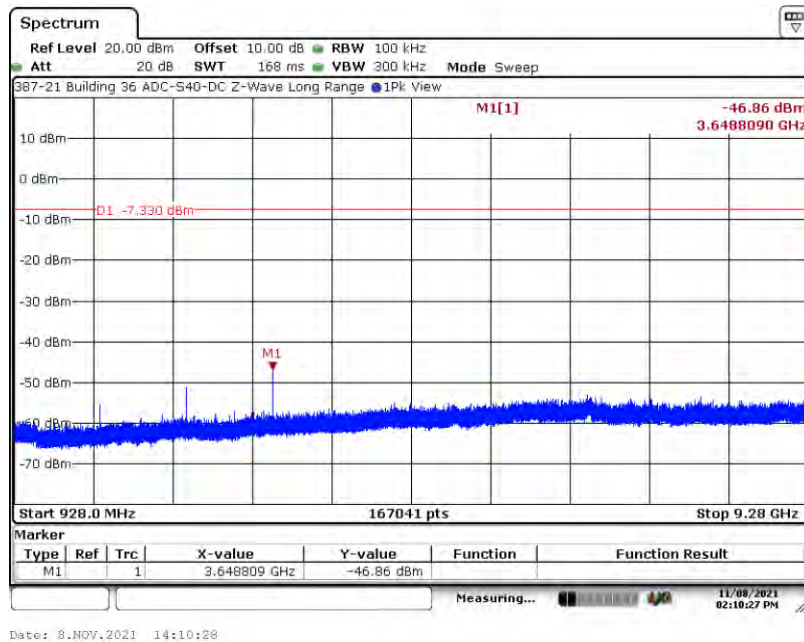


## Appendix B

### B1. Emissions in Non-restricted Frequency Bands (30 MHz to 9.28 GHz) (continued)

#### B1.1. Emissions in Non-restricted Frequency Bands (30 MHz – 9.28 GHz) Test Results

##### B1.2.1. Measurement Results, 920 MHz, 30 MHz – 902 GHz

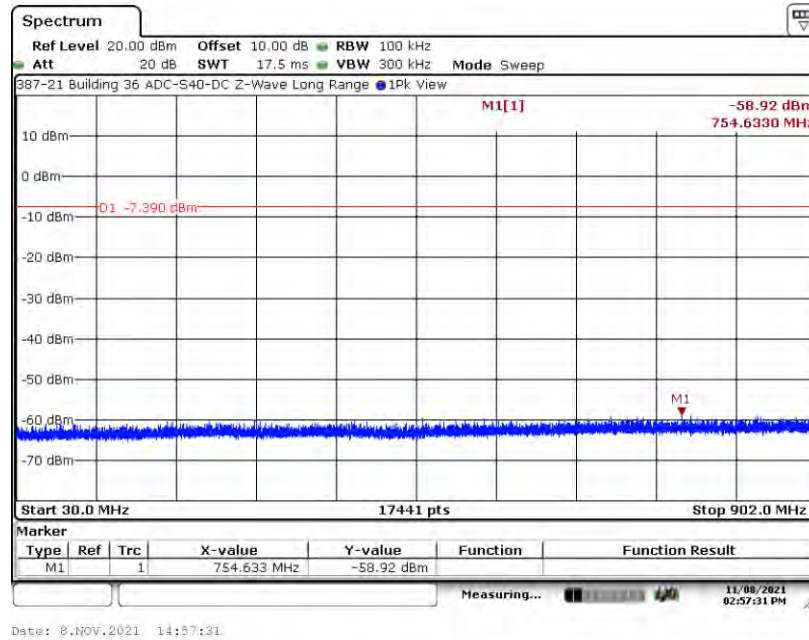

##### B1.2.2. Measurement Results, 920 MHz, 928 MHz – 9.28 GHz

