



849 NW State Road 45
Newberry, FL 32669 USA
Ph: 888.472.2424 or 352.472.5500
Fax: 352.472.2030
Email: info@timcoengr.com
Website: www.timcoengr.com

**FCC PART 15.249 & IC RSS-210 (i8) ANNEX A2.9
UNLICENSED INTENTIONAL RADIATOR
COMBINED TEST REPORT**

Applicant	BUILDING 36 TECHNOLOGIES, LLC
Address	35 HIGHLAND CIRCLE SUITE 300 NEEDHAM MA 02494 USA
FCC ID	2AC3T-B36T10RA
IC Certification Number	12323A-B36T10RA
Model Number	B36-T10
Product Description	THERMOSTAT
FCC Standard Applied	47 CFR §15.249
Industry Canada Standard Applied	RSS-210 Issue 8 Annex A2.9
Date Sample Received	9/11/2014
Date Tested	9/18/14
Tested By	Sid Sanders
Approved By	Cory Leverett
Report Number	1611AUT14TestReport.docx
Test Results	☒ PASS ☐ FAIL

**THE ATTACHED REPORT SHALL NOT BE REPRODUCED EXCEPT IN FULL
WITHOUT THE WRITTEN APPROVAL OF TIMCO ENGINEERING, INC.**

Table of Contents

GENERAL REMARKS	3
GENERAL INFORMATION	4
TEST RESULTS SUMMARY	4
TEST PROCEDURES	5
RADIATION INTERFERENCE.....	6
99% POWER OCCUPIED BANDWIDTH.....	8
LOWER BANDEDGE	10
UPPER BANDEDGE	11
DUTY CYCLE:	12
POWER LINE CONDUCTED INTERFERENCE	13
EMC EQUIPMENT LIST	14

APPLICANT: BUILDING 36 TECHNOLOGIES LLC.
FCC ID: 2AC3T-B36T10RA
IC: 12323A-B36T10RA
REPORT: V:\B\BUILDING 36\1611AUT14\1611AUT14TESTREPORTREV1.DOCX

GENERAL REMARKS

The attached report shall not be reproduced except in full without the written permission of Timco Engineering Inc.

Summary

The device under test does:

- ☒ fulfill the general approval requirements as identified in this test report
☐ not fulfill the general approval requirements as identified in this test report

Attestations

This equipment has been tested in accordance with the standards identified in this test report. To the best of my knowledge and belief, these tests were performed using the measurement procedures described in this report.

All instrumentation and accessories used to test products for compliance to the indicated standards are calibrated regularly in accordance with ISO 17025: 2005 requirements.

I attest that the necessary measurements were made, under my supervision, at:

Timco Engineering Inc.
849 NW State Road 45
Newberry, FL 32669

Authorized Signatory Name:



Sid Sanders
Project Manager
Date: 9/20/14

[Table of Contents](#)

APPLICANT: BUILDING 36 TECHNOLOGIES LLC.
FCC ID: 2AC3T-B36T10RA
IC: 12323A-B36T10RA
REPORT: V:\B\BUILDING 36\1611AUT14\1611AUT14TESTREPORTREV1.DOCX

GENERAL INFORMATION

EUT Specification

The test results relate only to the items tested.			
Applicable Standards	FCC Part 15.249 & IC RSS-210 (i8), RSS-GEN (i3)		
EUT Description	WIRELESS THERMOSTAT		
FCC ID	2AC3T-B36T10RA		
IC Certification Number	12323A-B36T10RA		
Model Number	B36-T10		
Operating Frequency	TX: 908.4 & 916 MHz	RX: Same	
No. of Channels	2	Modulations	
EUT Power Source	☐ 110–120Vac/50– 60Hz when Charging		
	☐ DC Power		
	☒ Battery Operated Exclusively		
Test Item	☐ Prototype	☐ Pre-Production	☒ Production
Type of Equipment	☒ Fixed	☐ Mobile	☐ Portable
Antenna Connector	FCC Rules require that the antenna connector be unique. There is no antenna connector, it has an integrated PCB antenna		
Test Facility	Timco Engineering Inc. located at 849 NW State Road 45 Newberry, FL 32669 USA.		
Conditions in the Test laboratory	Temperature: 26°C Relative humidity: 50%		
Test Exercise	Placed into continuous transmit mode with 100% duty cycle		
Revision History of EUT	None		

TEST RESULTS SUMMARY

FCC Rules Part No.	Industry Canada Rules	RESULTS – Pass/Fail/NA
15.249 Fundamental Emission	RSS-210 (i8) ANNEX A2.9, RSS-GEN (i3)	Pass
15.249 & 15.209 Harmonics & Spurious	RSS-210 (i8) ANNEX A2.9, RSS-GEN (i3)	Pass
15.205 & 2.202 Occupied Bandwidth	RSS-GEN (i3), 4.6	Pass
15.249 & 15.205 Bandedge Compliance	RSS-GEN (i3), 4.6	Pass
15.207 Power Line Emissions	RSS-GEN (i3), 7.2.4	N/A

[Table of Contents](#)

APPLICANT: BUILDING 36 TECHNOLOGIES LLC.

FCC ID: 2AC3T-B36T10RA

IC: 12323A-B36T10RA

REPORT: V:\B\BUILDING 36\1611AUT14\1611AUT14TESTREPORTREV1.DOCX

TEST PROCEDURES

Radiation Interference: ANSI C63.4-2003 using a spectrum analyzer, a preselector, a quasi-peak adapter, and an appropriate antenna. The analyzer was calibrated in dB above a microvolt at the output of the antenna. The resolution bandwidth was 100 kHz with an appropriate sweep speed and the video bandwidth was 300 kHz up to 1 GHz and 1 MHz with a video BW of 3 MHz above 1 GHz. When an emission was found, the table was rotated to produce the maximum signal strength. The antenna was placed in both the horizontal and vertical planes and the worst case emissions were reported. The spectrum was searched to at least the tenth (10) harmonic of the fundamental. Emissions were scanned from 30MHz to the tenth harmonic of the fundamental frequency at three places in the band. All emissions greater than 20 dB from the limit are not reported.

Formula Of Conversion Factors: The field strength at 3m was established by adding the meter reading of the spectrum analyzer (which is set to read in units of dBuV) to the antenna correction factor supplied by the antenna manufacturer. The antenna correction factors are stated in terms of dB. The gain of the preselector was accounted for in the spectrum analyzer meter reading.

Example:

Freq (MHz)	Meter Reading	+ ACF	+ CL	= FS
33	20 dBuV	+ 10.36 dB	+ 0.5	= 30.86 dBuV/m @ 3m

Power Line Conducted Interference: The procedure used was ANSI C63.4-2003 using a 50uH LISN. Both lines were observed. The bandwidth of the spectrum analyzer was 10kHz with an appropriate sweep speed. The spectrum was scanned from 0.15 to 30 MHz.

Occupied Bandwidth: A small sample of the transmitter output was fed into the spectrum analyzer and the attached plot was printed. The vertical scale is set to -10 dBm per division.

ANSI C63.4-2003 10.1 Measurement Procedures: The EUT was placed on a table 80 cm high and with dimensions of 1m by 1.5m. The EUT was placed in the center of the table (1.5m side). The table used for radiated measurements is capable of continuous rotation.

When an emission was found, the table was rotated to produce the maximum signal strength. At this point, the antenna was raised and lowered from 1m to 4m. The antenna was placed in both the horizontal and vertical planes. Emissions attenuated more than 20 dB below the permissible value are not reported.

[Table of Contents](#)

APPLICANT: BUILDING 36 TECHNOLOGIES LLC.
FCC ID: 2AC3T-B36T10RA
IC: 12323A-B36T10RA
REPORT: V:\B\BUILDING 36\1611AUT14\1611AUT14TESTREPORTREV1.DOCX

RADIATION INTERFERENCE

Rules Part No.: FCC 15.249, 15.209 & IC RSS-210 (i8) ANNEX A2.9, RSS-GEN (i3)

Requirements:

Frequency	Limits
Part 15.209 & RSS-GEN (i3)	
9 to 490 kHz	2400/F (kHz) $\mu\text{V/m}$ @ 300 meters
490 to 1705 kHz	24000/F (kHz) $\mu\text{V/m}$ @ 30 meters
1705 kHz to 30 MHz	29.54 dB $\mu\text{V/m}$ @ 30 meters
30 – 88	40.0 dB $\mu\text{V/m}$ @ 3 meters
80 – 216	43.5 dB $\mu\text{V/m}$ @ 3 meters
216 – 960	46.0 dB $\mu\text{V/m}$ @ 3 meters
Above 960	54.0 dB $\mu\text{V/m}$ @ 3 meters
Part 15.249 & RSS-210 (i8) ANNEX A.2.9	
Fundamental 902 – 928 MHz	94.0 dB $\mu\text{V/m}$ @ 3 meters
Fundamental 2.4 – 2.4835 GHz	94.0 dB $\mu\text{V/m}$ @ 3 meters
Harmonics	54.0 dB $\mu\text{V/m}$ @ 3 meters

Test Data: Peak Detector Used for all Measurement's.

Tuned Freq. MHz	Emission Freq. MHz	Meter Reading dBuV	Ant. Polarity	Coax Loss dB	Correction Factor dB/m	Field Strength dBuV/m	Margin dB
908.9	908.90	52.7	H	2.39	23.30	78.39	15.61
908.9	908.90	60.3	V	2.39	23.30	85.99	8.01
908.9	1,817.90	2.9	H	2.96	30.62	36.48	17.52
908.9	1,817.90	5.2	V	2.96	30.62	38.78	15.22
908.9	2,725.50	5.3	H	3.41	33.06	41.77	12.23
908.9	2,725.50	10.2	V	3.41	33.06	46.67	7.33
908.9	3,633.20	6.1	H	4.17	33.39	43.66	10.34
908.9	3,633.20	9.7	V	4.17	33.39	47.26	6.74
908.9	4,542.10	8.7	V	4.77	34.10	47.57	6.43
908.9	4,546.10	0.1	H	4.77	34.10	38.97	15.03
908.9	5,453.50	1.2	H	5.14	34.64	40.97	13.03
908.9	5,453.60	1.0	V	5.14	34.64	40.78	13.22
908.9	5,962.60	4.4	H	5.29	35.44	45.13	8.87
908.9	6,262.40	11.1	V	5.38	35.71	52.19	1.81
908.9	6,326.60	1.2	H	5.40	35.76	42.35	11.65
908.9	6,871.50	0.5	H	5.56	35.90	41.96	12.04
908.9	7,271.50	1.1	H	5.76	35.79	42.60	11.40
908.9	7,780.50	5.1	H	6.07	35.81	46.98	7.02
908.9	8,180.50	1.1	H	6.27	35.94	43.26	10.74
908.9	8,180.50	7.5	V	6.27	35.94	49.71	4.29
908.9	8,690.70	1.5	H	6.48	36.04	44.02	9.98
908.9	9,089.40	0.5	V	6.63	36.19	43.32	10.68
908.9	9,089.40	0.8	H	6.63	36.19	43.62	10.38

APPLICANT: BUILDING 36 TECHNOLOGIES LLC.

FCC ID: 2AC3T-B36T10RA

IC: 12323A-B36T10RA

REPORT: V:\B\BUILDING 36\1611AUT14\1611AUT14TESTREPORTREV1.DOCX

RADIATION INTERFERENCE

Tuned Freq. MHz	Emission Freq. MHz	Meter Reading dBuV	Ant. Polarity	Coax Loss dB	Correction Factor dB/m	Field Strength dBuV/m	Margin dB
916.0	916.00	45.4	H	2.40	23.36	71.16	22.84
916.0	916.00	53.6	V	2.40	23.36	79.36	14.64
916.0	1,832.00	4.3	V	2.99	30.69	37.98	16.02
916.0	1,832.00	5.6	H	2.99	30.69	39.28	14.72
916.0	2,748.00	10.3	V	3.42	33.10	46.82	7.18
916.0	2,748.00	14.2	H	3.42	33.10	50.68	3.32
916.0	3,664.00	9.3	V	4.20	33.43	46.93	7.07
916.0	3,664.00	15.1	H	4.20	33.43	52.76	1.24
916.0	3,664.00	15.1	H	4.20	33.43	52.76	1.24
916.0	4,580.00	4.1	V	4.79	34.10	42.99	11.01
916.0	4,580.00	10.2	H	4.79	34.10	49.09	4.91
916.0	5,496.00	1.1	V	5.15	34.70	40.95	13.05
916.0	5,496.00	1.6	H	5.15	34.70	41.45	12.55
916.0	6,412.00	5.3	H	5.42	35.83	46.55	7.45
916.0	6,412.00	6.4	V	5.42	35.83	47.65	6.35
916.0	7,328.00	2.7	V	5.80	35.77	44.27	9.73
916.0	7,328.00	4.0	H	5.80	35.77	45.57	8.43
916.0	8,244.00	3.2	H	6.30	35.95	45.45	8.55
916.0	8,244.00	4.3	V	6.30	35.95	46.55	7.45
916.0	9,160.00	0.6	H	6.65	36.26	43.51	10.49
916.0	9,160.00	0.6	V	6.65	36.26	43.51	10.49

Results: EUT meets the FCC & Industry Canada Requirements.

[Table of Contents](#)

APPLICANT: BUILDING 36 TECHNOLOGIES LLC.
 FCC ID: 2AC3T-B36T10RA
 IC: 12323A-B36T10RA
 REPORT: V:\B\BUILDING 36\1611AUT14\1611AUT14TESTREPORTREV1.DOCX

99 % POWER OCCUPIED BANDWIDTH

Rules Part No.: 15.249 (d)

Requirements: The field strength of any emissions appearing outside the bandedges and up to 10 kHz above and below the band edges shall be attenuated at least 50 dB below the level of the carrier or to the general limits of 15.249.

Test Data:

CH 1 99% OBW = 93.05 KHz



Date: 17.SEP.2014 16:46:53

[Table of Contents](#)

APPLICANT: BUILDING 36 TECHNOLOGIES LLC.
FCC ID: 2AC3T-B36T10RA
IC: 12323A-B36T10RA
REPORT: V:\B\BUILDING 36\1611AUT14\1611AUT14TESTREPORTREV1.DOCX


99 % POWER OCCUPIED BANDWIDTH

Rules Part No.: RSS-GEN (i3), 4.6

Requirements: . Emissions radiated outside of the specified frequency bands, except for the harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the highest general field strength limits listed in RSS-GEN, whichever is less stringent.

Test Data:

CH 2 99% OBW = 115.44 KHz

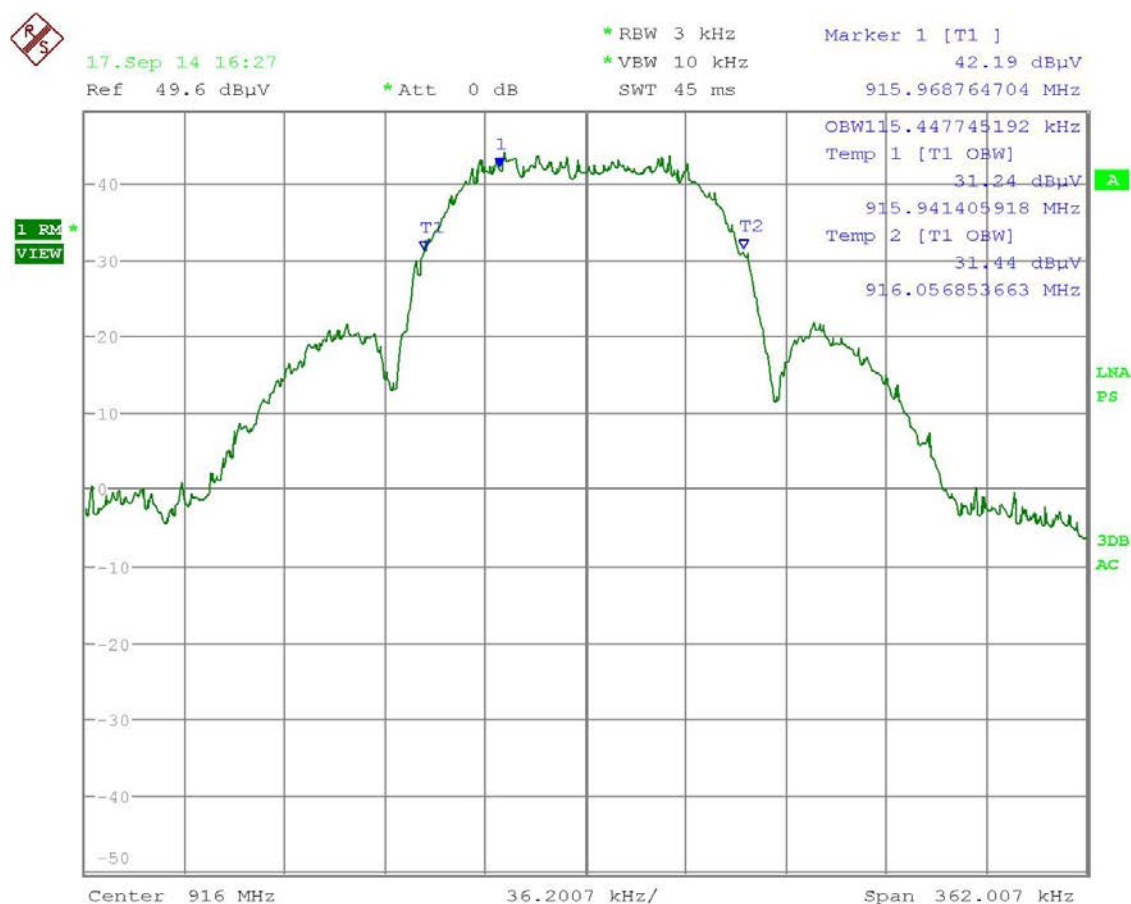

Date: 17.SEP.2014 16:27:32

Results: EUT meets the FCC & Industry Canada Requirements.

[Table of Contents](#)

APPLICANT: BUILDING 36 TECHNOLOGIES LLC.

FCC ID: 2AC3T-B36T10RA

IC: 12323A-B36T10RA

REPORT: V:\B\BUILDING 36\1611AUT14\1611AUT14TESTREPORTREV1.DOCX

LOWER BANDEDGE



22.Sep 14 14:33

Ref 82 dBμV

*Att 10 dB

*RBW 100 kHz

*VBW 300 kHz


SWT 5 ms

Marker 1 [T1]

59.50 dBμV

908.384615385 MHz

1 PK
MAX

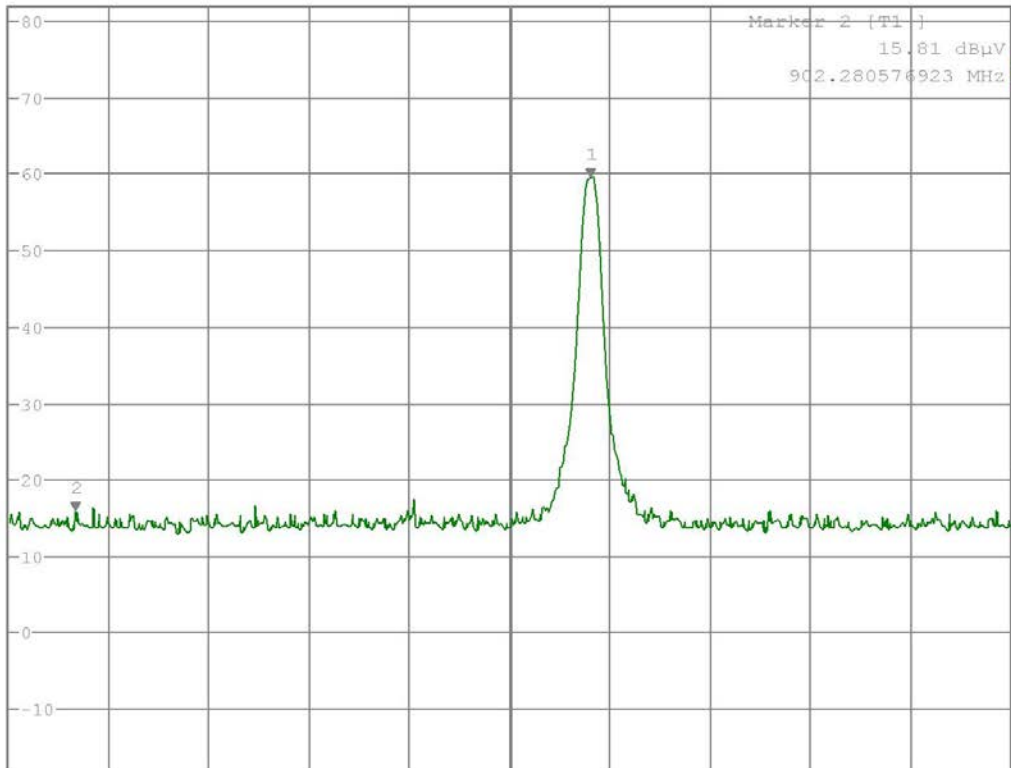

Start 901.5 MHz

1.188 MHz/

Stop 913.38 MHz

Date: 22.SEP.2014 14:33:02

RESULTS: MEETS FCC REQUIREMENTS


APPLICANT: BUILDING 36 TECHNOLOGIES LLC.

FCC ID: 2AC3T-B36T10RA

IC: 12323A-B36T10RA

REPORT: V:\B\BUILDING 36\1611AUT14\1611AUT14TESTREPORTREV1.DOCX

UPPER BANDEDGE

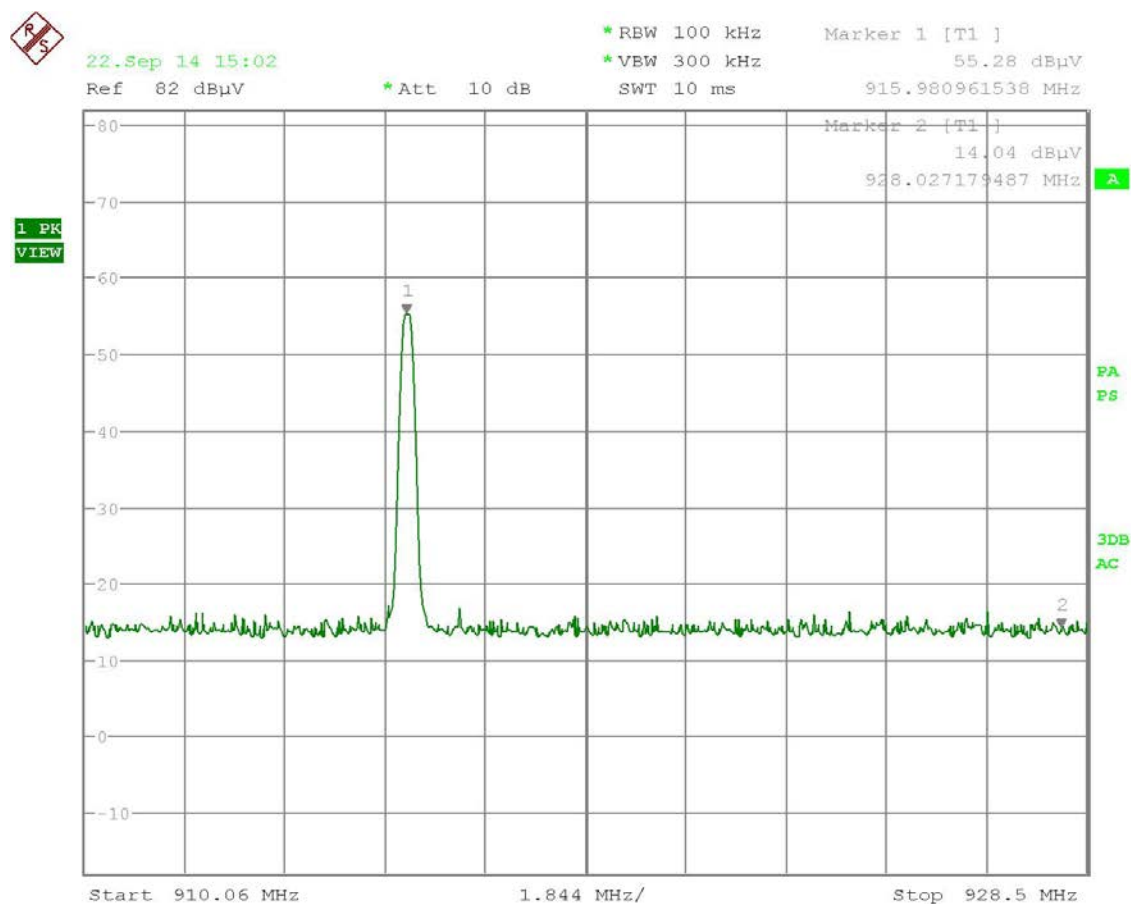

Date: 22.SEP.2014 15:02:42

RESULTS: MEETS FCC REQUIREMENTS

APPLICANT: BUILDING 36 TECHNOLOGIES LLC.
 FCC ID: 2AC3T-B36T10RA
 IC: 12323A-B36T10RA
 REPORT: V:\B\BUILDING 36\1611AUT14\1611AUT14TESTREPORTREV1.DOCX

DUTY CYCLE:

NOT APPLICABLE

[Table of Contents](#)

APPLICANT: BUILDING 36 TECHNOLOGIES LLC.
FCC ID: 2AC3T-B36T10RA
IC: 12323A-B36T10RA
REPORT: V:\B\BUILDING 36\1611AUT14\1611AUT14TESTREPORTREV1.DOCX

POWER LINE CONDUCTED INTERFERENCE

Rules Part No.: 15.207, & RSS-GEN (i3), 7.2.4

Requirements:

Frequency (MHz)	Quasi Peak Limits (dBuV)	Average Limits (dBuV)
0.15 – 0.5	66 – 56	56 – 46
0.5 – 5.0	56	46
5.0 – 30	60	50

Test Data: NOT APPLICABLE EUT is Battery powered.

[Table of Contents](#)

APPLICANT: BUILDING 36 TECHNOLOGIES LLC.

FCC ID: 2AC3T-B36T10RA

IC: 12323A-B36T10RA

REPORT: V:\B\BUILDING 36\1611AUT14\1611AUT14TESTREPORTREV1.DOCX

EMC EQUIPMENT LIST

Device	Manufacturer	Model	Serial Number	Cal/Char Date	Due Date
Antenna: Biconnical	Eaton Chamber	94455-1	1057	06/14/13	06/14/15
Antenna: Log-Periodic	Eaton	96005	1243	05/31/13	05/31/15
3-Meter Semi-Anechoic Chamber	Panashield	N/A	N/A	12/31/13	12/31/15
Antenna: Double-Ridged Horn/ETS Horn 1	ETS-Lindgren Chamber	3117	00035923	06/13/14	06/13/16
EMI Test Receiver R & S ESIB 40	Rohde & Schwarz	ESIB 40	100274	08/12/14	08/12/16
EMI Test Receiver R & S ESU 40	Rohde & Schwarz	ESU 40	100320	03/11/14	03/11/16

* EMI RECEIVER SOFTWARE VERSION

The receiver firmware used was version 4.43 Service Pack 3

[Table of Contents](#)

APPLICANT: BUILDING 36 TECHNOLOGIES LLC.
 FCC ID: 2AC3T-B36T10RA
 IC: 12323A-B36T10RA
 REPORT: V:\B\BUILDING 36\1611AUT14\1611AUT14TESTREPORTREV1.DOCX