



Continuation of chapter 41. FCC Part 15.247 Bandwidth 99PCT-20dB ~ BT LE 2 Msps

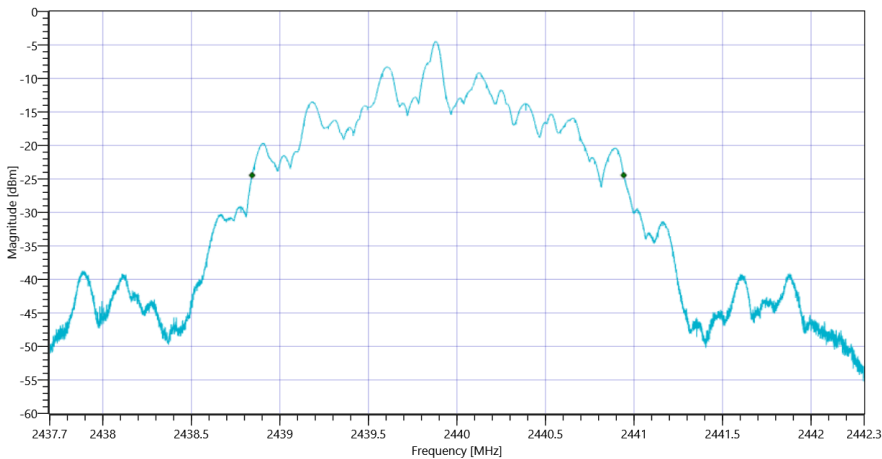

Plot_FCC Part 15.247 Bandwidth 99PCT-20dB ~ BT LE 2 Msps 20dB_24032021_093910.png

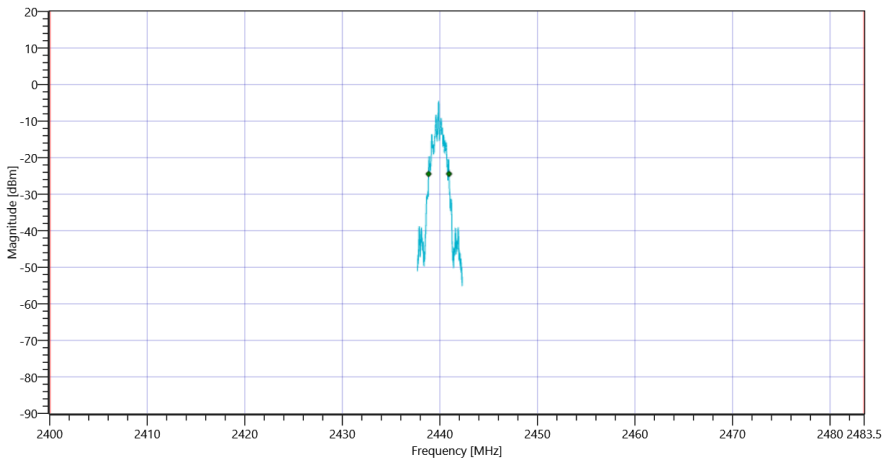

Plot_FCC Part 15.247 Bandwidth 99PCT-20dB ~ BT LE 2 Msps_24032021_093917.png

TEST FINISHED	
General Verdict	PASS

42. FCC Part 15.247 Bandwidth 99PCT-20dB ~ BT LE 2 Msps

Test References	
TC Start	24.03.2021 09:56:59
Ambit Temp [°C] Humidity [rel%]	0.0 0
System Version	2.0.0.4
Test Specification	FCC Part 15.247
Test Method	
TC Version	0.0.2
My Description	FCC 15.247 Bandwidth 99PCT-20dB DTS - BT LE 2 Msps
Add. Information	


Test Parameter	
Technology to test	BT LE 2 Msps
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2402
Frequency mid to test	False Freq [MHz] 2440
Frequency high to test	True Freq [MHz] 2480
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.7
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer
Devices in use	SA: Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60

Test at TX 2480 MHz


READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	1.20 11 10
Start [MHz] Stop [MHz]	2477.700 2482.300
RBW [MHz] VBW [MHz]	0.050000 0.200000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	50 200 10001 SWE

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	---	---	2034.377	kHz	INFO
T1 99%	2400.000000	---	2478.8754	MHz	PASS
T2 99%	---	2483.500000	2480.9098	MHz	PASS

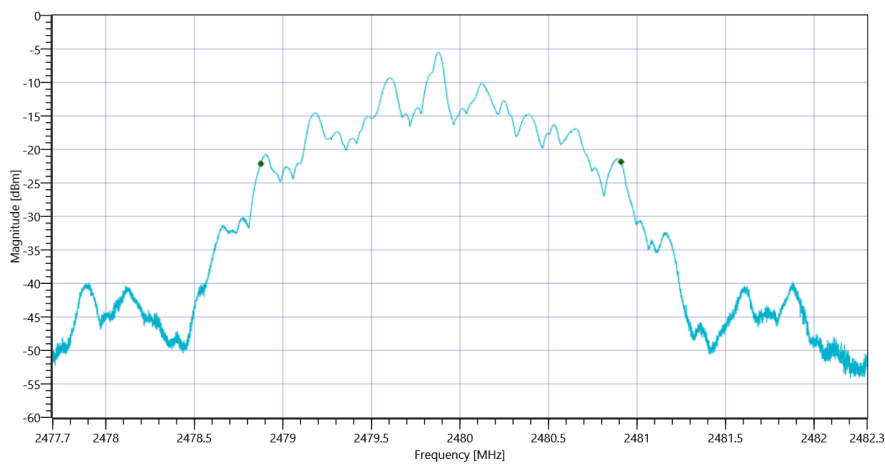


Plot_FCC Part 15.247 Bandwidth 99PCT-20dB ~ BT LE 2 Msps 99PCT_24032021_095729.png

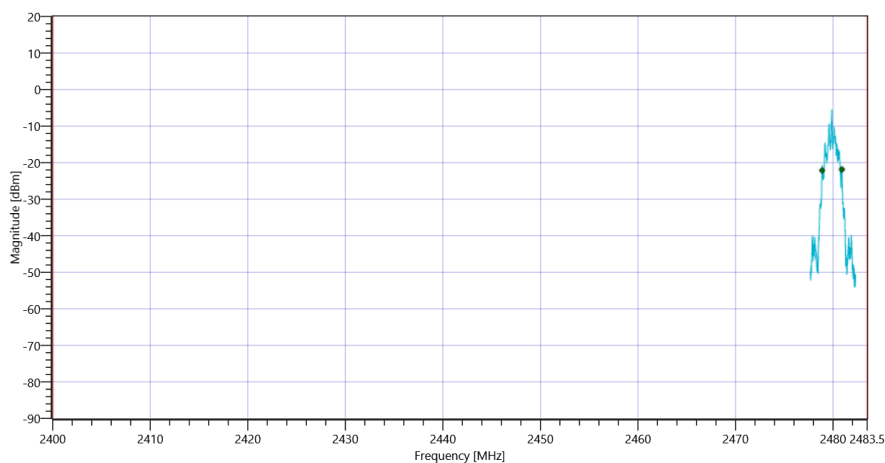


Plot_FCC Part 15.247 Bandwidth 99PCT-20dB ~ BT LE 2 Msps_24032021_095736.png

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 20dB	---	---	2098	kHz	INFO
T1 20dB	2400.000000	---	2478.8417	MHz	PASS
T2 20dB	---	2483.500000	2480.9398	MHz	PASS

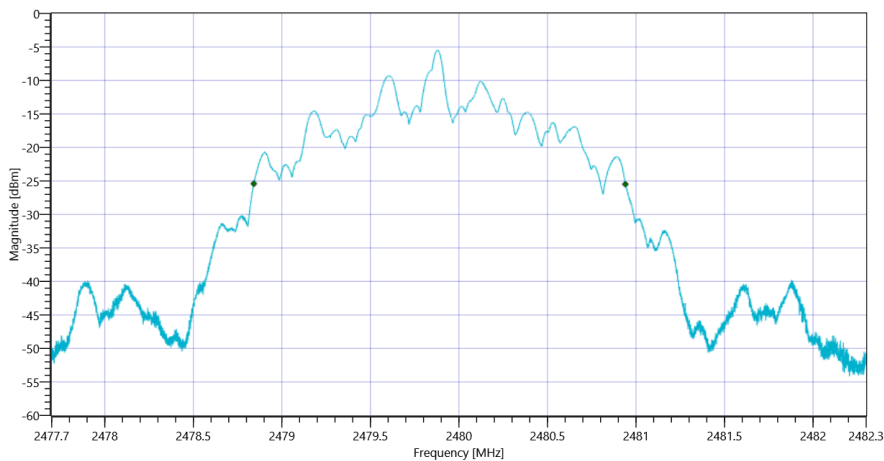

Plot_FCC Part 15.247 Bandwidth 99PCT-20dB ~ BT LE 2 Msps 20dB_24032021_095745.png

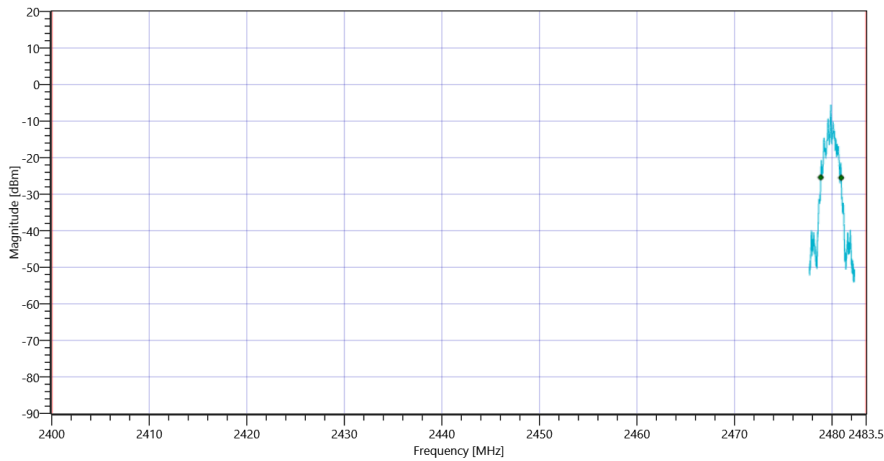

Plot_FCC Part 15.247 Bandwidth 99PCT-20dB ~ BT LE 2 Msps 24032021_095752.png

TEST FINISHED	
General Verdict	PASS

43. FCC Part 15.247 Bandwidth 99PCT-20dB ~ BT LE coded S8

Test References	
TC Start	24.03.2021 10:13:13
Ambit Temp [°C] Humidity [rel%]	0.0 0
System Version	2.0.0.4
Test Specification	FCC Part 15.247
Test Method	
TC Version	0.0.2
My Description	FCC 15.247 Bandwidth 99PCT-20dB DTS - BT LE coded S8
Add. Information	

Test Parameter	
Technology to test	BT LE coded S8
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2402
Frequency mid to test	False Freq [MHz] 2440
Frequency high to test	False Freq [MHz] 2480
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.7
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer
Devices in use	SA: Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60


Test at TX 2402 MHz

READ SA SETTINGS:


RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	2.71 10.86 10
Start [MHz] Stop [MHz]	2401.000 2403.000
RBW [MHz] VBW [MHz]	0.020000 0.100000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	50 200 10001 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	---	---	1043.496	kHz	INFO
T1 99%	2400.000000	---	2401.3725	MHz	PASS
T2 99%	---	2483.500000	2402.4160	MHz	PASS

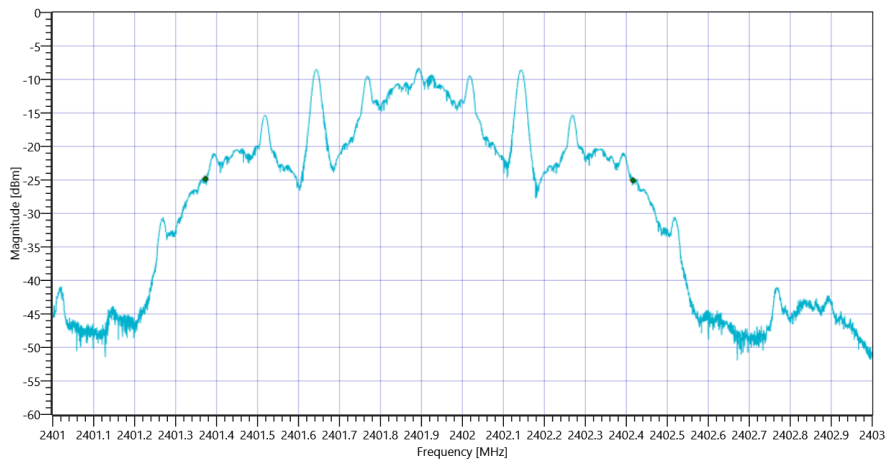


Plot_FCC Part 15.247 Bandwidth 99PCT-20dB ~ BT LE coded S8 99PCT_24032021_101344.png

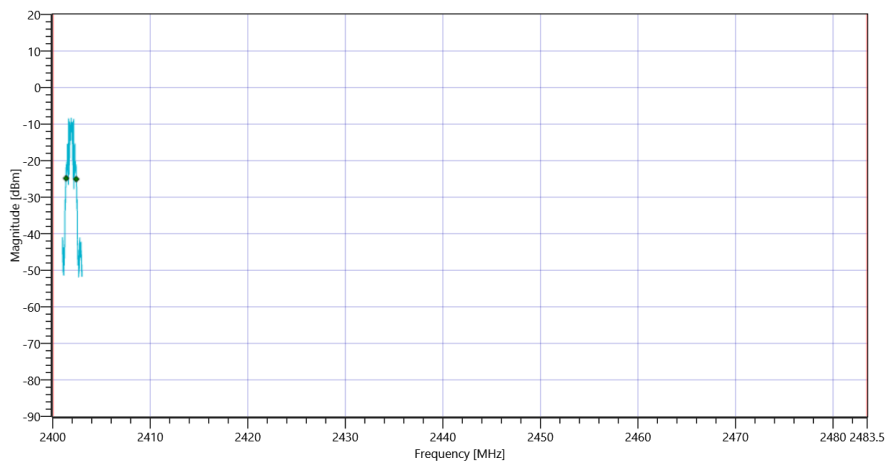


Plot_FCC Part 15.247 Bandwidth 99PCT-20dB ~ BT LE coded S8_24032021_101351.png

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 20dB	---	---	1133	kHz	INFO
T1 20dB	2400.000000	---	2401.3246	MHz	PASS
T2 20dB	---	2483.500000	2402.4580	MHz	PASS

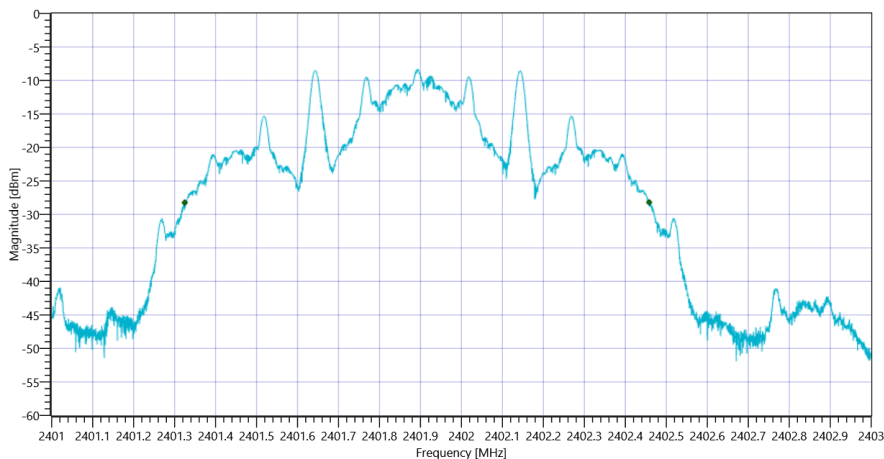

Plot_FCC Part 15.247 Bandwidth 99PCT-20dB ~ BT LE coded S8 20dB_24032021_101359.png

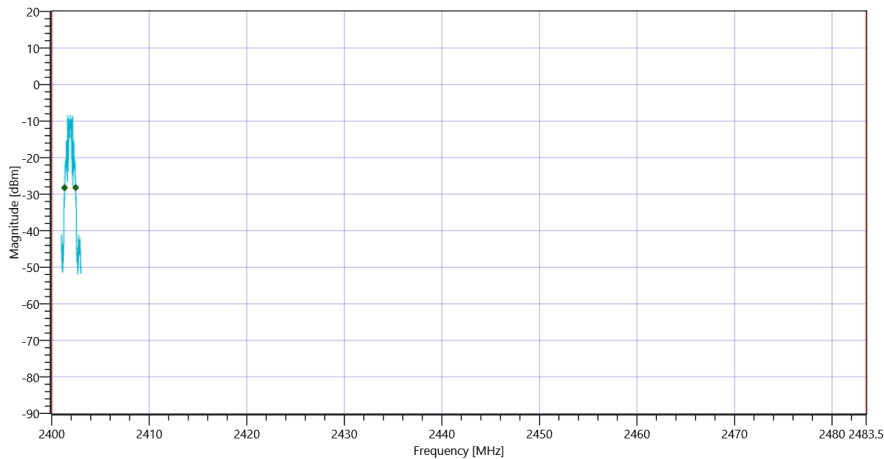

Plot_FCC Part 15.247 Bandwidth 99PCT-20dB ~ BT LE coded S8_24032021_101407.png

TEST FINISHED	
General Verdict	PASS

44. FCC Part 15.247 Bandwidth 99PCT-20dB ~ BT LE coded S8

Test References	
TC Start	24.03.2021 10:24:35
Ambit Temp [°C] Humidity [rel%]	0.0 0
System Version	2.0.0.4
Test Specification	FCC Part 15.247
Test Method	
TC Version	0.0.2
My Description	FCC 15.247 Bandwidth 99PCT-20dB DTS - BT LE coded S8
Add. Information	

Test Parameter	
Technology to test	BT LE coded S8
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2402
Frequency mid to test	True Freq [MHz] 2440
Frequency high to test	False Freq [MHz] 2480
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.7
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer
Devices in use	SA: Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60


Test at TX 2440 MHz

READ SA SETTINGS:


RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	2.23 10.94 10
Start [MHz] Stop [MHz]	2439.000 2441.000
RBW [MHz] VBW [MHz]	0.020000 0.100000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	50 200 10001 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	---	---	1042.696	kHz	INFO
T1 99%	2400.000000	---	2439.3709	MHz	PASS
T2 99%	---	2483.500000	2440.4136	MHz	PASS

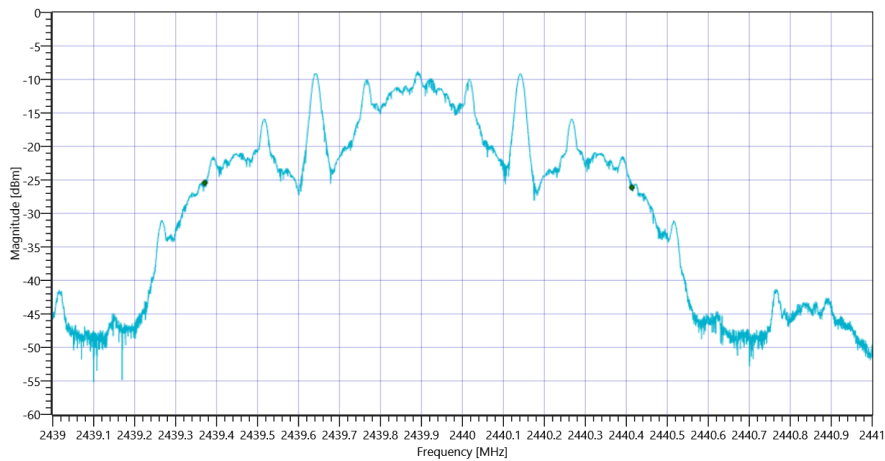


Plot_FCC Part 15.247 Bandwidth 99PCT-20dB ~ BT LE coded S8 99PCT_24032021_102506.png

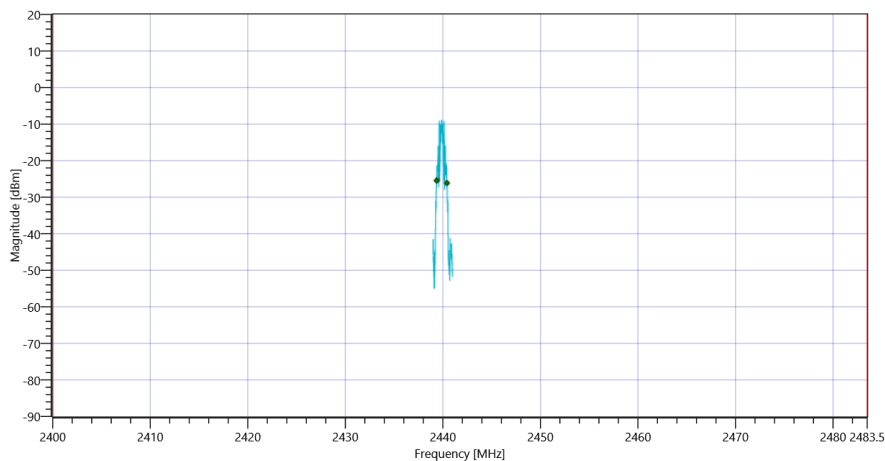


Plot_FCC Part 15.247 Bandwidth 99PCT-20dB ~ BT LE coded S8_24032021_102513.png

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 20dB	---	---	1135	kHz	INFO
T1 20dB	2400.000000	---	2439.3226	MHz	PASS
T2 20dB	---	2483.500000	2440.4572	MHz	PASS

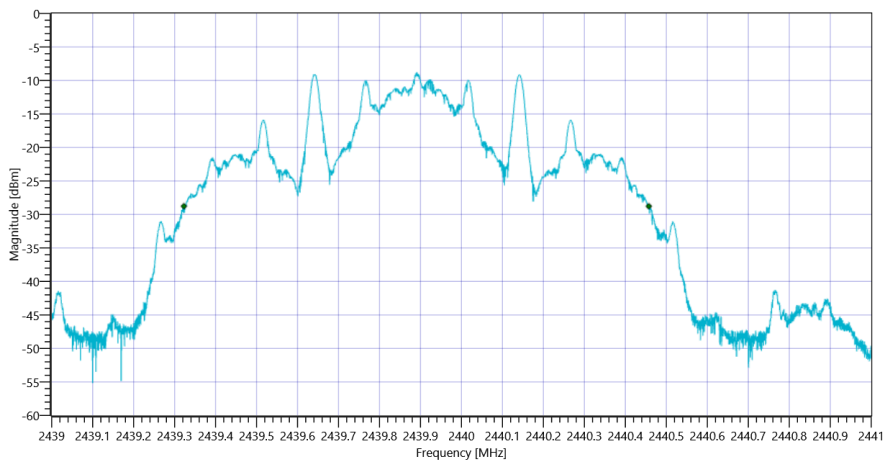

Plot_FCC Part 15.247 Bandwidth 99PCT-20dB ~ BT LE coded S8 20dB_24032021_102522.png

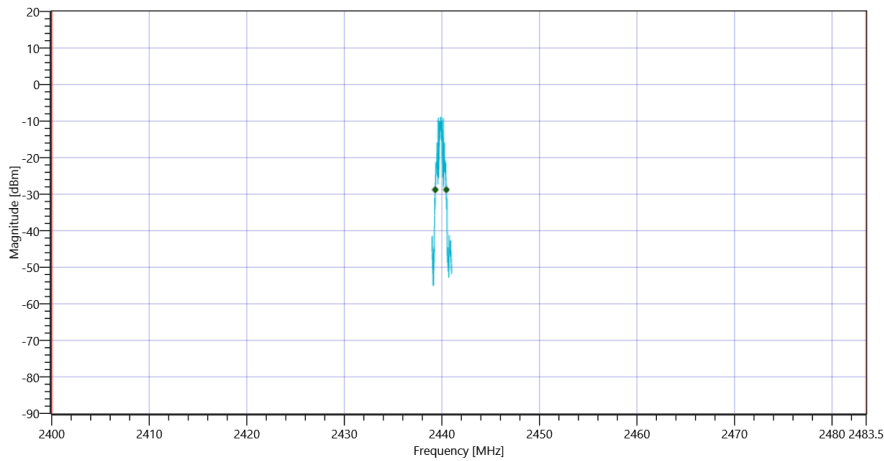

Plot_FCC Part 15.247 Bandwidth 99PCT-20dB ~ BT LE coded S8_24032021_102529.png

TEST FINISHED	
General Verdict	PASS

45. FCC Part 15.247 Bandwidth 99PCT-20dB ~ BT LE coded S8

Test References	
TC Start	24.03.2021 10:35:04
Ambit Temp [°C] Humidity [rel%]	0.0 0
System Version	2.0.0.4
Test Specification	FCC Part 15.247
Test Method	
TC Version	0.0.2
My Description	FCC 15.247 Bandwidth 99PCT-20dB DTS - BT LE coded S8
Add. Information	

Test Parameter	
Technology to test	BT LE coded S8
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2402
Frequency mid to test	False Freq [MHz] 2440
Frequency high to test	True Freq [MHz] 2480
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.7
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer
Devices in use	SA: Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60


Test at TX 2480 MHz

READ SA SETTINGS:


RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	1.15 11 10
Start [MHz] Stop [MHz]	2479.000 2481.000
RBW [MHz] VBW [MHz]	0.020000 0.100000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	50 200 10001 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	---	---	1041.696	kHz	INFO
T1 99%	2400.000000	---	2479.3701	MHz	PASS
T2 99%	---	2483.500000	2480.4118	MHz	PASS

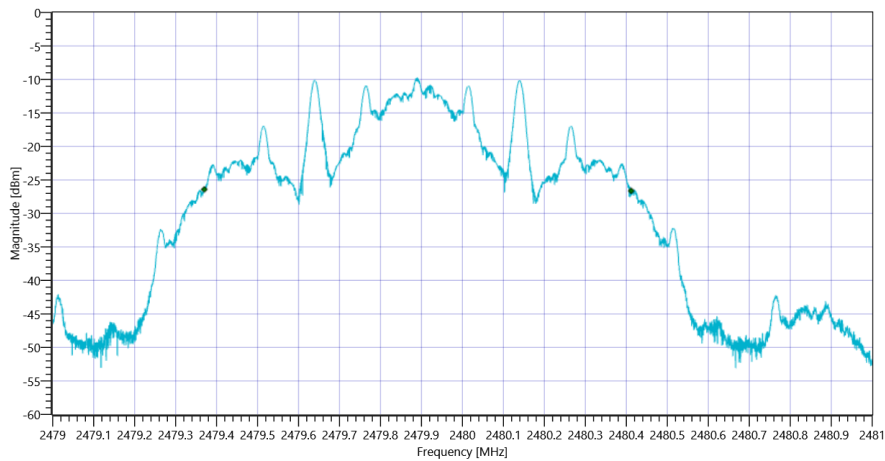


Plot_FCC Part 15.247 Bandwidth 99PCT-20dB ~ BT LE coded S8 99PCT_24032021_103535.png

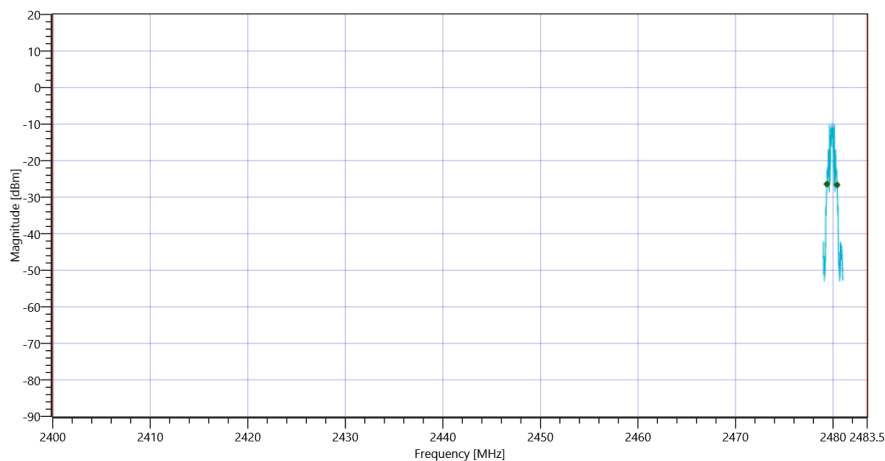


Plot_FCC Part 15.247 Bandwidth 99PCT-20dB ~ BT LE coded S8_24032021_103542.png

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 20dB	---	---	1132	kHz	INFO
T1 20dB	2400.000000	---	2479.3222	MHz	PASS
T2 20dB	---	2483.500000	2480.4546	MHz	PASS

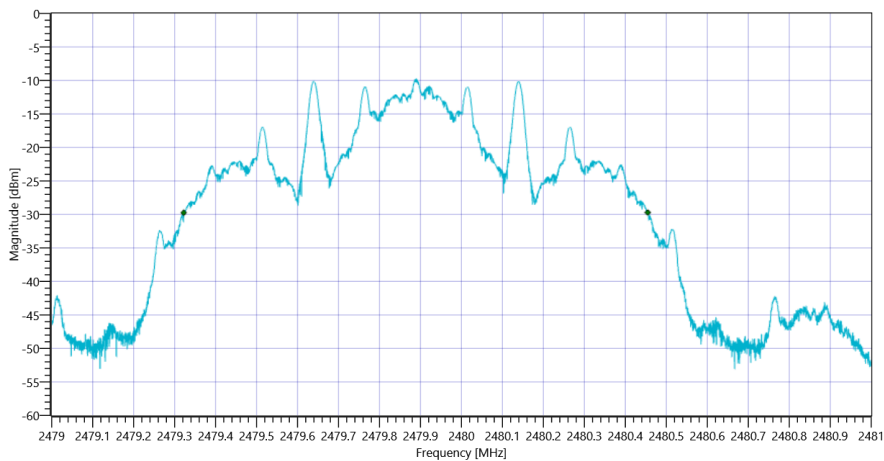

Plot_FCC Part 15.247 Bandwidth 99PCT-20dB ~ BT LE coded S8 20dB_24032021_103550.png

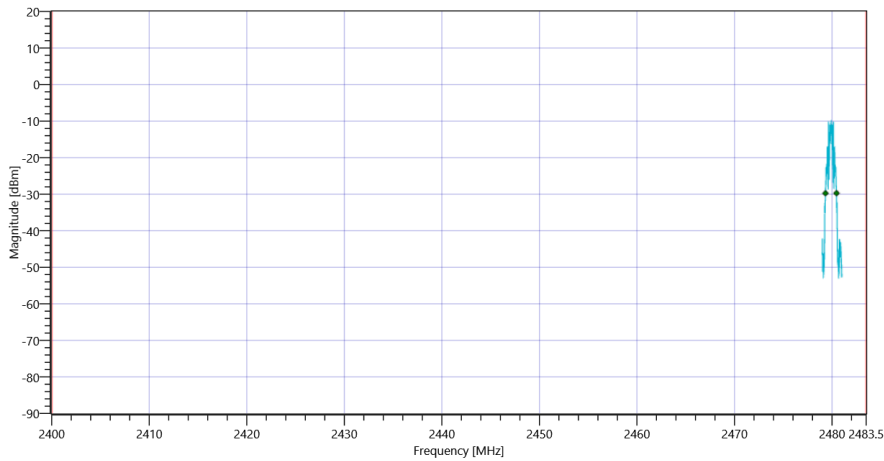

Plot_FCC Part 15.247 Bandwidth 99PCT-20dB ~ BT LE coded S8_24032021_103557.png

TEST FINISHED	
General Verdict	PASS

46. FCC Part 15.247 Bandwidth 99PCT-20dB ~ BT LE coded S2

Test References	
TC Start	24.03.2021 10:46:56
Ambit Temp [°C] Humidity [rel%]	0.0 0
System Version	2.0.0.4
Test Specification	FCC Part 15.247
Test Method	
TC Version	0.0.2
My Description	FCC 15.247 Bandwidth 99PCT-20dB DTS - BT LE coded S2
Add. Information	

Test Parameter	
Technology to test	BT LE coded S2
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2402
Frequency mid to test	False Freq [MHz] 2440
Frequency high to test	False Freq [MHz] 2480
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.7
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer
Devices in use	SA: Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60



Test at TX 2402 MHz

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	2.65 10.86 10
Start [MHz] Stop [MHz]	2401.000 2403.000
RBW [MHz] VBW [MHz]	0.020000 0.100000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	50 200 10001 SWE


RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	---	---	1017.698	kHz	INFO
T1 99%	2400.000000	---	2401.3821	MHz	PASS
T2 99%	---	2483.500000	2402.3998	MHz	PASS

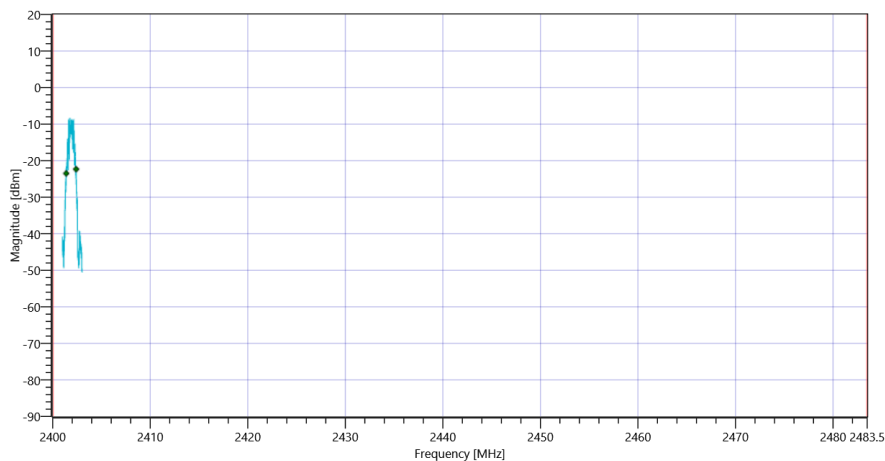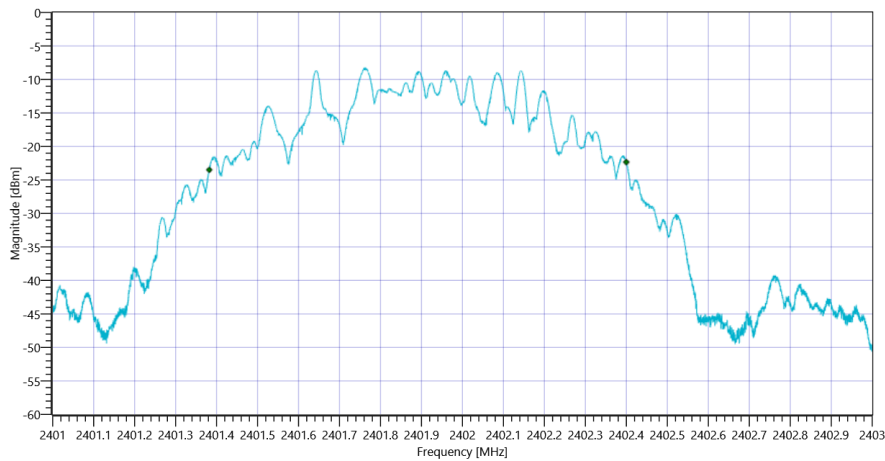


RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 20dB	---	---	1141	kHz	INFO
T1 20dB	2400.000000	---	2401.3056	MHz	PASS
T2 20dB	---	2483.500000	2402.4470	MHz	PASS

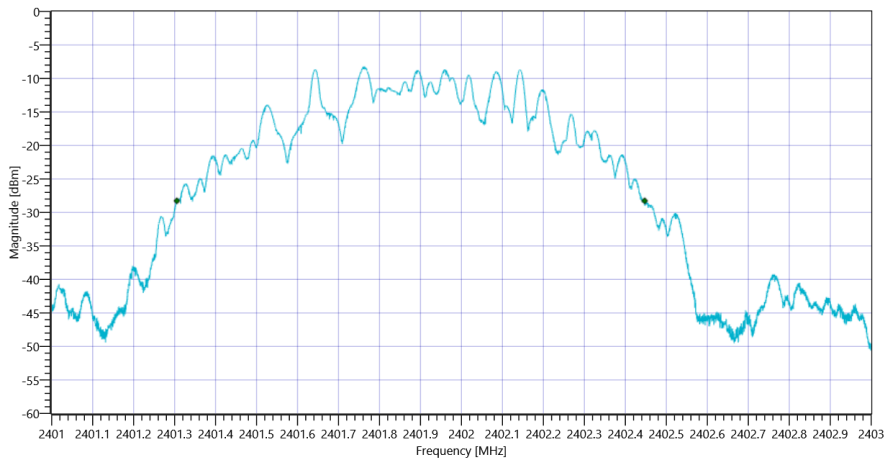

Plot_FCC Part 15.247 Bandwidth 99PCT-20dB ~ BT LE coded S2 20dB_24032021_104743.png

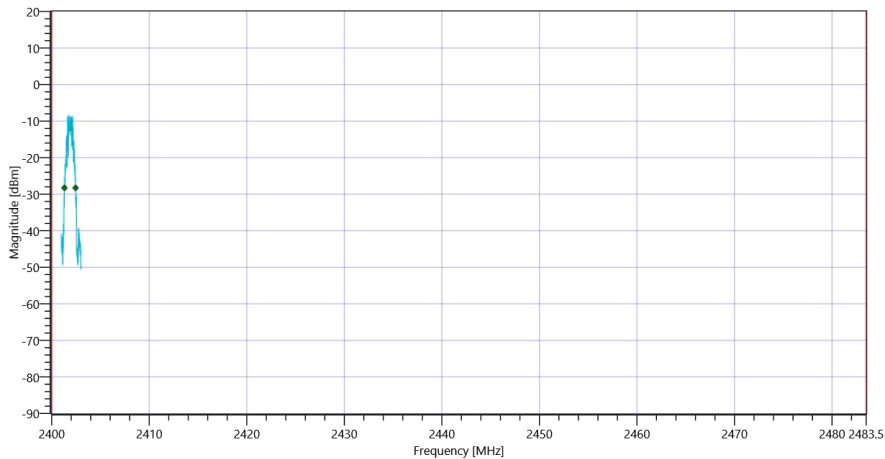

Plot_FCC Part 15.247 Bandwidth 99PCT-20dB ~ BT LE coded S2_24032021_104750.png

TEST FINISHED	
General Verdict	PASS

47. FCC Part 15.247 Bandwidth 99PCT-20dB ~ BT LE coded S2

Test References	
TC Start	24.03.2021 11:09:51
Ambit Temp [°C] Humidity [rel%]	0.0 0
System Version	2.0.0.4
Test Specification	FCC Part 15.247
Test Method	
TC Version	0.0.2
My Description	FCC 15.247 Bandwidth 99PCT-20dB DTS - BT LE coded S2
Add. Information	

Test Parameter	
Technology to test	BT LE coded S2
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2402
Frequency mid to test	True Freq [MHz] 2440
Frequency high to test	False Freq [MHz] 2480
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.7
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer
Devices in use	SA: Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60


Test at TX 2440 MHz

READ SA SETTINGS:


RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	2.06 10.94 10
Start [MHz] Stop [MHz]	2439.000 2441.000
RBW [MHz] VBW [MHz]	0.020000 0.100000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	50 200 10001 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	---	---	1017.698	kHz	INFO
T1 99%	2400.000000	---	2439.3801	MHz	PASS
T2 99%	---	2483.500000	2440.3978	MHz	PASS

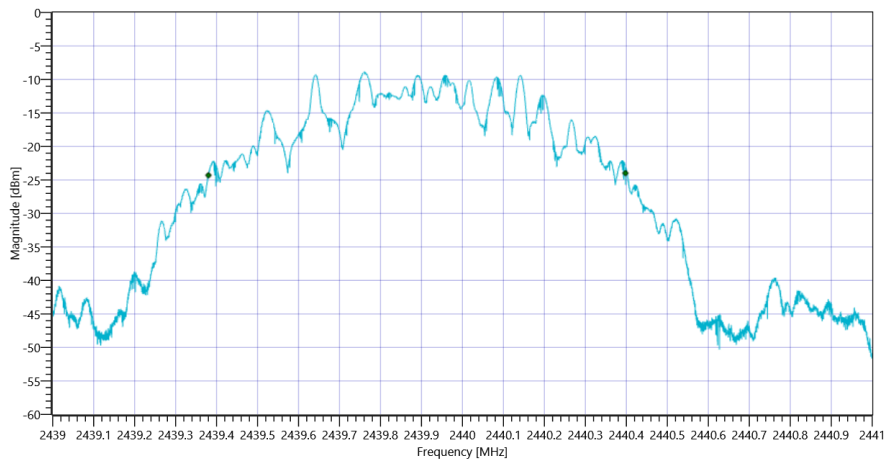


Plot_FCC Part 15.247 Bandwidth 99PCT-20dB ~ BT LE coded S2 99PCT_24032021_111022.png

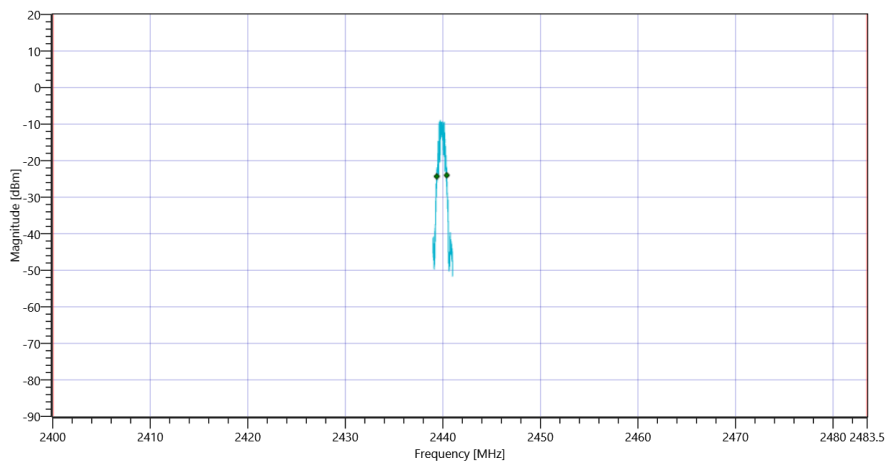


Plot_FCC Part 15.247 Bandwidth 99PCT-20dB ~ BT LE coded S2_24032021_111029.png

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 20dB	---	---	1140	kHz	INFO
T1 20dB	2400.000000	---	2439.3044	MHz	PASS
T2 20dB	---	2483.500000	2440.4440	MHz	PASS

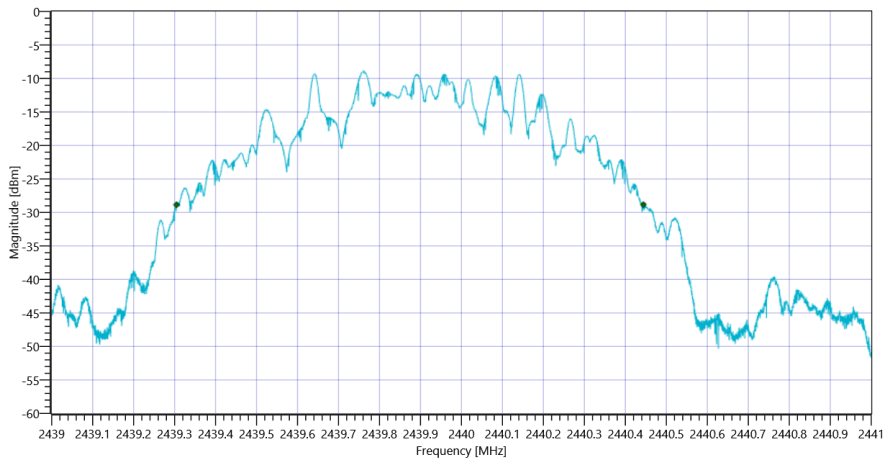

Plot_FCC Part 15.247 Bandwidth 99PCT-20dB ~ BT LE coded S2 20dB_24032021_111038.png

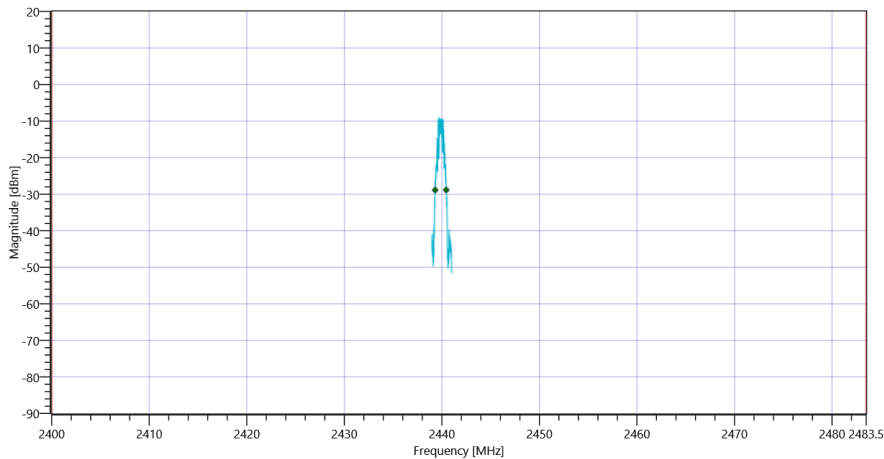

Plot_FCC Part 15.247 Bandwidth 99PCT-20dB ~ BT LE coded S2_24032021_111045.png

TEST FINISHED	
General Verdict	PASS

48. FCC Part 15.247 Bandwidth 99PCT-20dB ~ BT LE coded S2

Test References	
TC Start	24.03.2021 11:31:48
Ambit Temp [°C] Humidity [rel%]	0.0 0
System Version	2.0.0.4
Test Specification	FCC Part 15.247
Test Method	
TC Version	0.0.2
My Description	FCC 15.247 Bandwidth 99PCT-20dB DTS - BT LE coded S2
Add. Information	

Test Parameter	
Technology to test	BT LE coded S2
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2402
Frequency mid to test	False Freq [MHz] 2440
Frequency high to test	True Freq [MHz] 2480
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.7
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer
Devices in use	SA: Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60



Test at TX 2480 MHz

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	1.14 11 10
Start [MHz] Stop [MHz]	2479.000 2481.000
RBW [MHz] VBW [MHz]	0.020000 0.100000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	50 200 10001 SWE


RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	---	---	1017.898	kHz	INFO
T1 99%	2400.000000	---	2479.3787	MHz	PASS
T2 99%	---	2483.500000	2480.3966	MHz	PASS

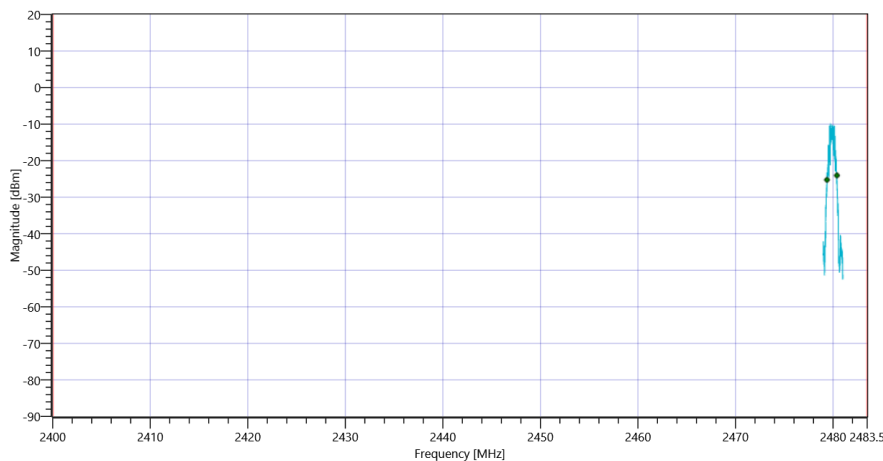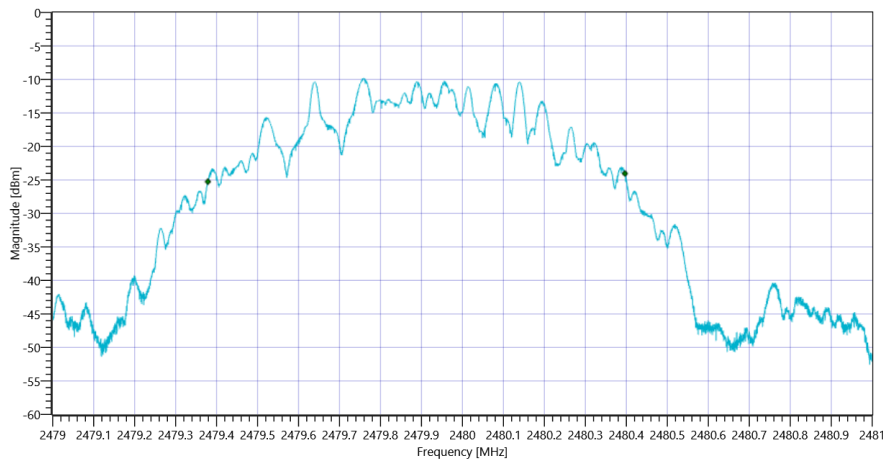


RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 20dB	---	---	1143	kHz	INFO
T1 20dB	2400.000000	---	2479.3018	MHz	PASS
T2 20dB	---	2483.500000	2480.4448	MHz	PASS

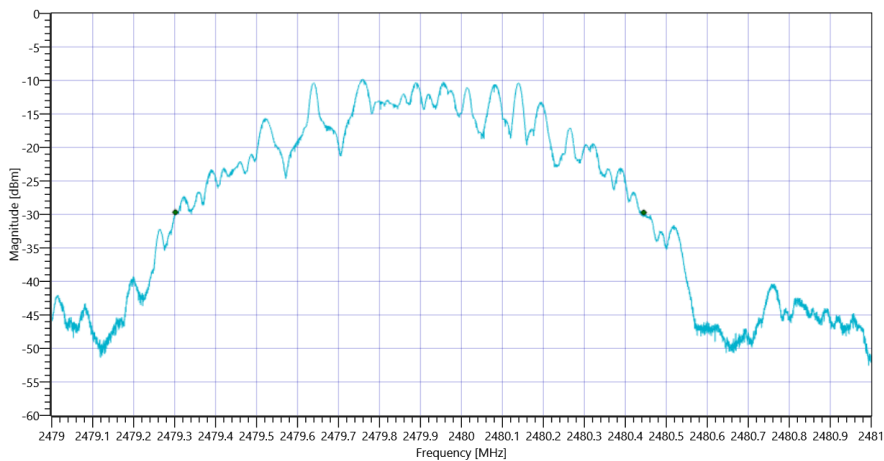

Plot_FCC Part 15.247 Bandwidth 99PCT-20dB ~ BT LE coded S2 20dB_24032021_113235.png

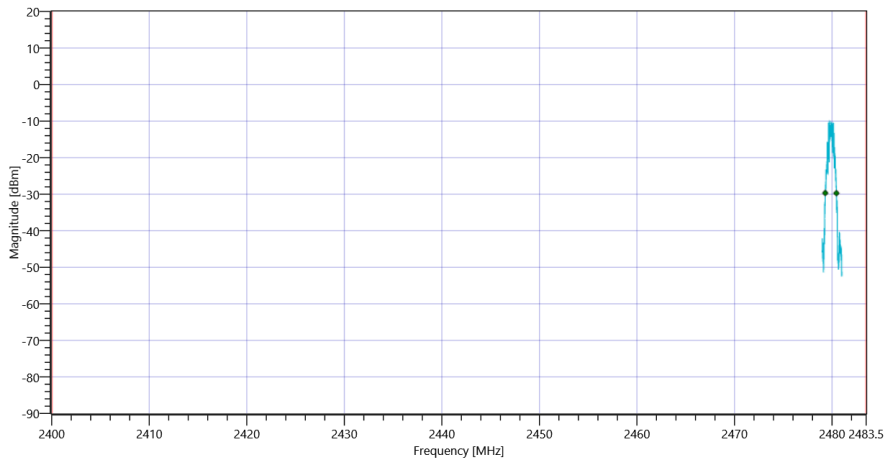

Plot_FCC Part 15.247 Bandwidth 99PCT-20dB ~ BT LE coded S2_24032021_113242.png

TEST FINISHED	
General Verdict	PASS

49. FCC Part 15.247 TX Spurious Conducted ~ BT LE 1 Msps

Test References	
TC Start	24.03.2021 08:41:55
Ambit Temp [°C] Humidity [rel%]	0.0 0
System Version	2.0.0.4
Test Specification	FCC Part 15.247
Test Method	IF DTS then 8.5 DTS emissions in non-restricted frequency bands: Subclause 11.11 of ANSI C63.10 is applicable.
TC Version	0.0.1
My Description	FCC 15.247 TX Emissions Conducted DTS - BT LE 1 Msps
Add. Information	

Test Parameter	
Technology to test	BT LE 1 Msps
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2402
Frequency mid to test	False Freq [MHz] 2440
Frequency high to test	False Freq [MHz] 2480
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.7
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer
Devices in use	SA: Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60


Test at TX 2402 MHz

READ SA SETTINGS:


RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	-1.65 0 15
Start [MHz] Stop [MHz]	24530.000 25030.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	500 8 3001 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Reference @ 2402.00 MHz	---	---	-2.39	dBm	INFO
No peaks detected	---	---			PASS
Lowest margin to limit 7205.667 MHz	0	---	24.11	dB	INFO

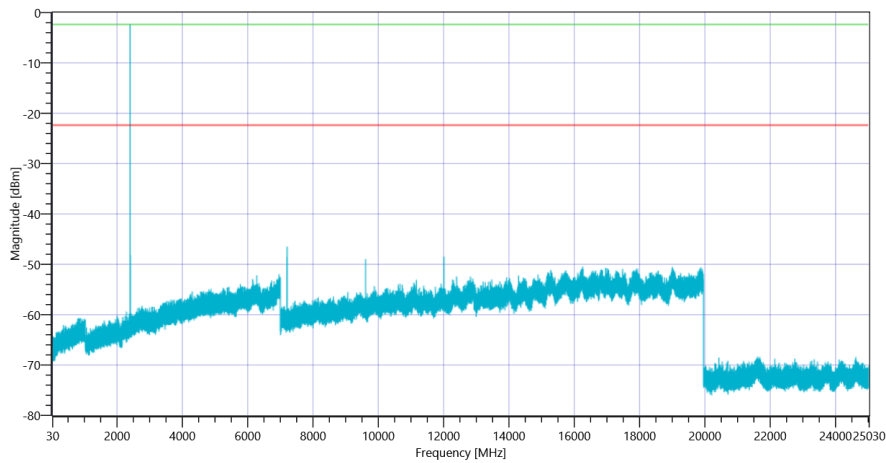

Plot_FCC Part 15.247 TX Spurious Conducted ~ BT LE 1 Msps 2402_24032021_084749.png

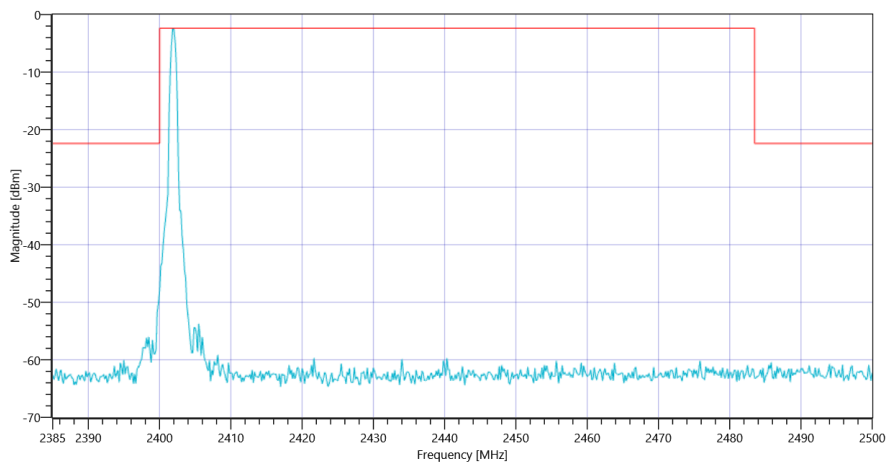

Plot_FCC Part 15.247 TX Spurious Conducted ~ BT LE 1 Msps 2402_24032021_084754.png

TEST FINISHED

General Verdict

PASS

50. FCC Part 15.247 TX Spurious Conducted ~ BT LE 1 Msp

Test References	
TC Start	24.03.2021 08:53:09
Ambit Temp [°C] Humidity [rel%]	0.0 0
System Version	2.0.0.4
Test Specification	FCC Part 15.247
Test Method	IF DTS then 8.5 DTS emissions in non-restricted frequency bands: Subclause 11.11 of ANSI C63.10 is applicable.
TC Version	0.0.1
My Description	FCC 15.247 TX Emissions Conducted DTS - BT LE 1 Msp
Add. Information	

Test Parameter	
Technology to test	BT LE 1 Msp
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2402
Frequency mid to test	True Freq [MHz] 2440
Frequency high to test	False Freq [MHz] 2480
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.7
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer
Devices in use	SA: Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60


Test at TX 2440 MHz

READ SA SETTINGS:


RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	-2.48 0 15
Start [MHz] Stop [MHz]	24530.000 25030.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	500 8 3001 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Reference @ 2440.00 MHz	---	---	-3.16	dBm	INFO
No peaks detected	---	---			PASS
Lowest margin to limit 7319.667 MHz	0	---	21.46	dB	INFO

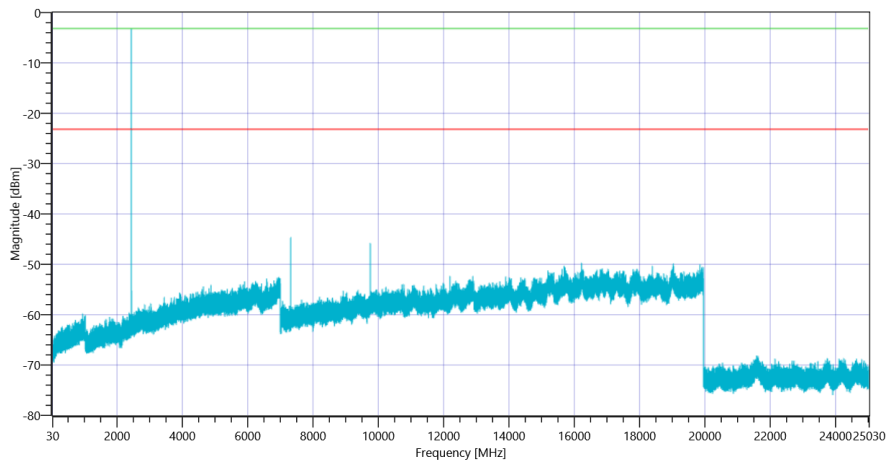

Plot_FCC Part 15.247 TX Spurious Conducted ~ BT LE 1 Msps 2440_24032021_085859.png

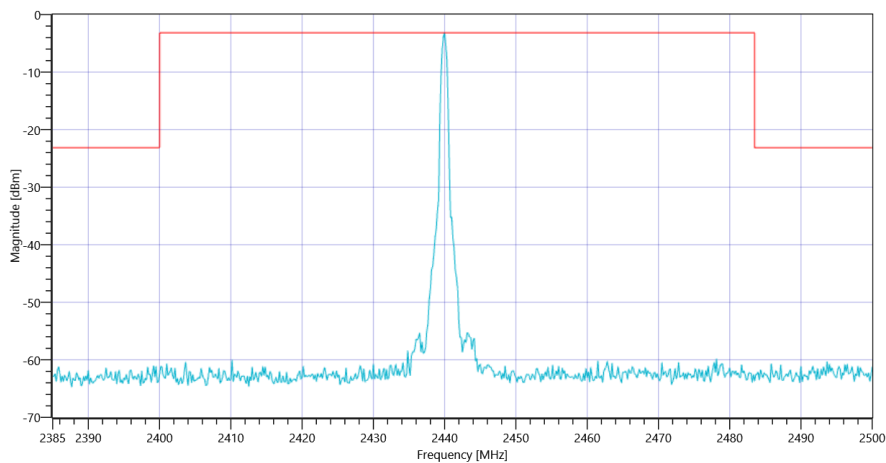

Plot_FCC Part 15.247 TX Spurious Conducted ~ BT LE 1 Msps 2440_24032021_085904.png

TEST FINISHED

General Verdict

PASS

51. FCC Part 15.247 TX Spurious Conducted ~ BT LE 1 Msps

Test References	
TC Start	24.03.2021 09:10:37
Ambit Temp [°C] Humidity [rel%]	0.0 0
System Version	2.0.0.4
Test Specification	FCC Part 15.247
Test Method	IF DTS then 8.5 DTS emissions in non-restricted frequency bands: Subclause 11.11 of ANSI C63.10 is applicable.
TC Version	0.0.1
My Description	FCC 15.247 TX Emissions Conducted DTS - BT LE 1 Msps
Add. Information	

Test Parameter	
Technology to test	BT LE 1 Msps
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2402
Frequency mid to test	False Freq [MHz] 2440
Frequency high to test	True Freq [MHz] 2480
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.7
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer
Devices in use	SA: Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60


Test at TX 2480 MHz

READ SA SETTINGS:


RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	-3.64 0 15
Start [MHz] Stop [MHz]	24530.000 25030.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	500 8 3001 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Reference @ 2480.00 MHz	---	---	-4.81	dBm	INFO
No peaks detected	---	---			PASS
Lowest margin to limit 7439.667 MHz	0	---	19.5	dB	INFO

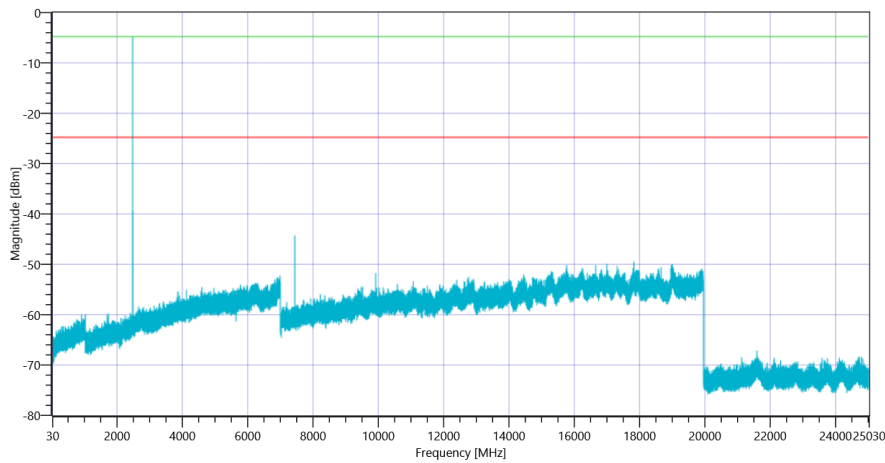

Plot_FCC Part 15.247 TX Spurious Conducted ~ BT LE 1 Msps 2480_24032021_091627.png

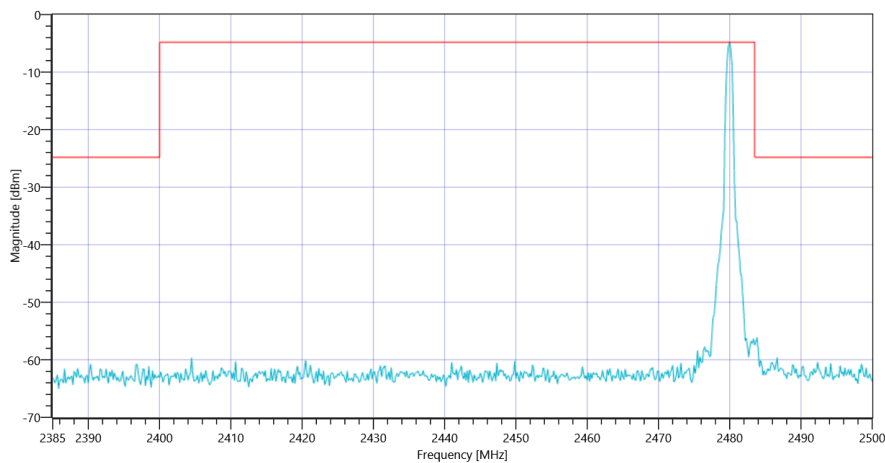

Plot_FCC Part 15.247 TX Spurious Conducted ~ BT LE 1 Msps 2480_24032021_091633.png

TEST FINISHED

General Verdict

PASS

52. FCC Part 15.247 TX Spurious Conducted ~ BT LE 2 Msps

Test References	
TC Start	24.03.2021 09:23:40
Ambit Temp [°C] Humidity [rel%]	0.0 0
System Version	2.0.0.4
Test Specification	FCC Part 15.247
Test Method	IF DTS then 8.5 DTS emissions in non-restricted frequency bands: Subclause 11.11 of ANSI C63.10 is applicable.
TC Version	0.0.1
My Description	FCC 15.247 TX Emissions Conducted DTS - BT LE 2 Msps
Add. Information	

Test Parameter	
Technology to test	BT LE 2 Msps
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2402
Frequency mid to test	False Freq [MHz] 2440
Frequency high to test	False Freq [MHz] 2480
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.7
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer
Devices in use	SA: Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60


Test at TX 2402 MHz

READ SA SETTINGS:


RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	-2.21 0 15
Start [MHz] Stop [MHz]	24530.000 25030.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	500 8 3001 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Reference @ 2401.83 MHz	---	---	-4.03	dBm	INFO
No peaks detected	---	---			PASS
Lowest margin to limit 2399.833 MHz	0	---	13.97	dB	INFO

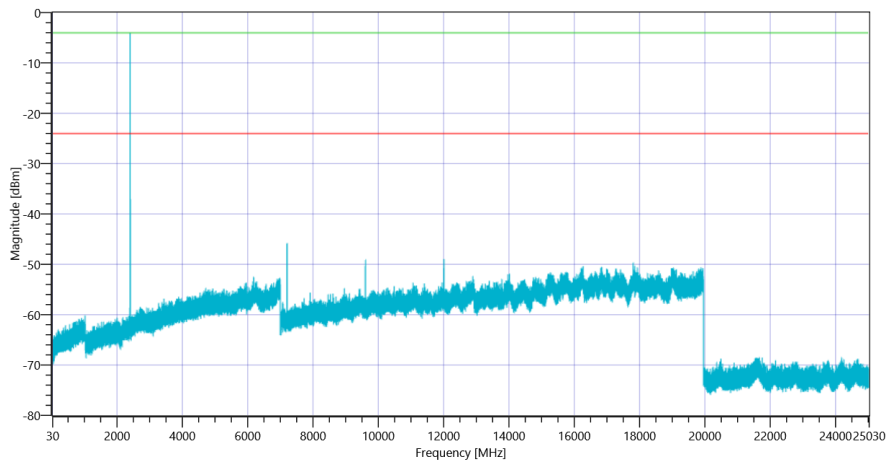

Plot_FCC Part 15.247 TX Spurious Conducted ~ BT LE 2 Msps 2402_24032021_092932.png

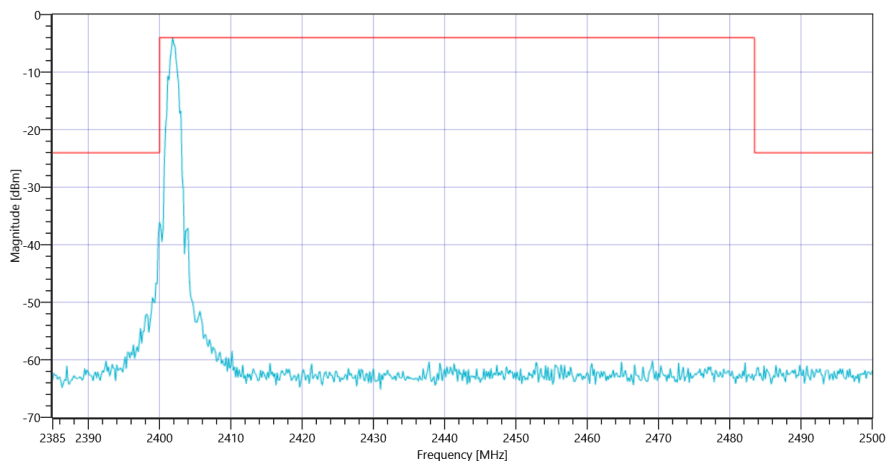

Plot_FCC Part 15.247 TX Spurious Conducted ~ BT LE 2 Msps 2402_24032021_092937.png

TEST FINISHED

General Verdict

PASS

53. FCC Part 15.247 TX Spurious Conducted ~ BT LE 2 Msps

Test References	
TC Start	24.03.2021 09:39:22
Ambit Temp [°C] Humidity [rel%]	0.0 0
System Version	2.0.0.4
Test Specification	FCC Part 15.247
Test Method	IF DTS then 8.5 DTS emissions in non-restricted frequency bands: Subclause 11.11 of ANSI C63.10 is applicable.
TC Version	0.0.1
My Description	FCC 15.247 TX Emissions Conducted DTS - BT LE 2 Msps
Add. Information	

Test Parameter	
Technology to test	BT LE 2 Msps
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2402
Frequency mid to test	True Freq [MHz] 2440
Frequency high to test	False Freq [MHz] 2480
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.7
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer
Devices in use	SA: Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60


Test at TX 2440 MHz

READ SA SETTINGS:


RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	-2.73 0 15
Start [MHz] Stop [MHz]	24530.000 25030.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	500 8 3001 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Reference @ 2439.83 MHz	---	---	-3.82	dBm	INFO
No peaks detected	---	---			PASS
Lowest margin to limit 30 MHz	0	---	-134.25	dB	INFO

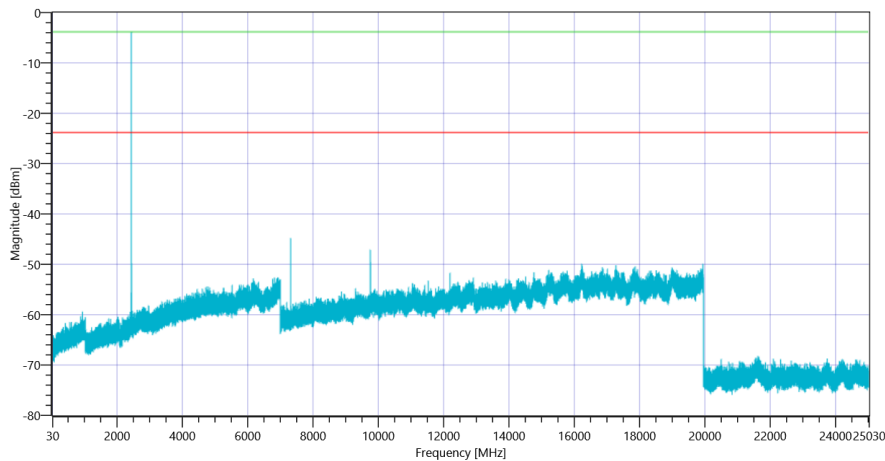

Plot_FCC Part 15.247 TX Spurious Conducted ~ BT LE 2 Msps 2440_24032021_094514.png

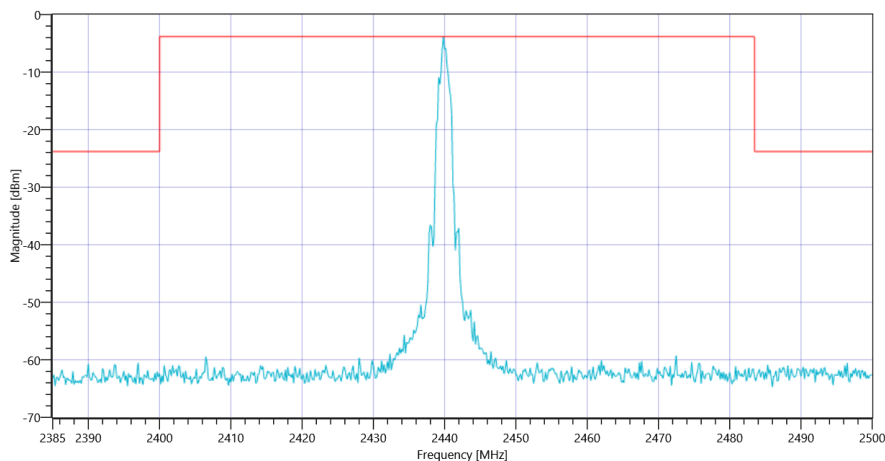

Plot_FCC Part 15.247 TX Spurious Conducted ~ BT LE 2 Msps 2440_24032021_094520.png

TEST FINISHED

General Verdict

PASS

54. FCC Part 15.247 TX Spurious Conducted ~ BT LE 2 Msps


Test References	
TC Start	24.03.2021 09:57:57
Ambit Temp [°C] Humidity [rel%]	0.0 0
System Version	2.0.0.4
Test Specification	FCC Part 15.247
Test Method	IF DTS then 8.5 DTS emissions in non-restricted frequency bands: Subclause 11.11 of ANSI C63.10 is applicable.
TC Version	0.0.1
My Description	FCC 15.247 TX Emissions Conducted DTS - BT LE 2 Msps
Add. Information	

Test Parameter	
Technology to test	BT LE 2 Msps
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2402
Frequency mid to test	False Freq [MHz] 2440
Frequency high to test	True Freq [MHz] 2480
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.7
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer
Devices in use	SA: Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60


Test at TX 2480 MHz

READ SA SETTINGS:					
RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]			-3.94 0 15		
Start [MHz] Stop [MHz]			24530.000 25030.000		
RBW [MHz] VBW [MHz]			0.100000 0.300000		
Detector TraceMode			POS MAXH		
Sweep: Time [ms] Count Points per Section Type			500 8 3001 SWE		

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Reference @ 2480.00 MHz	---	---	-4.50	dBm	INFO
No peaks detected	---	---			PASS
Lowest margin to limit 7439.667 MHz	0	---	19.38	dB	INFO

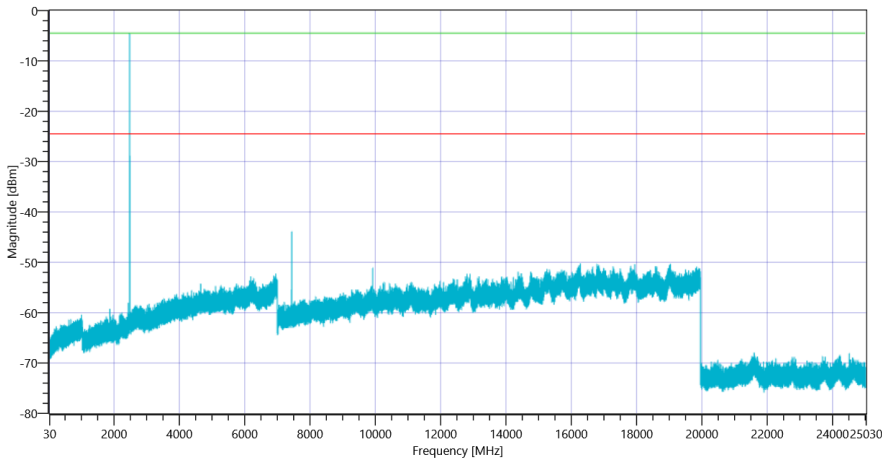

Plot_FCC Part 15.247 TX Spurious Conducted ~ BT LE 2 Msps 2480_24032021_100349.png

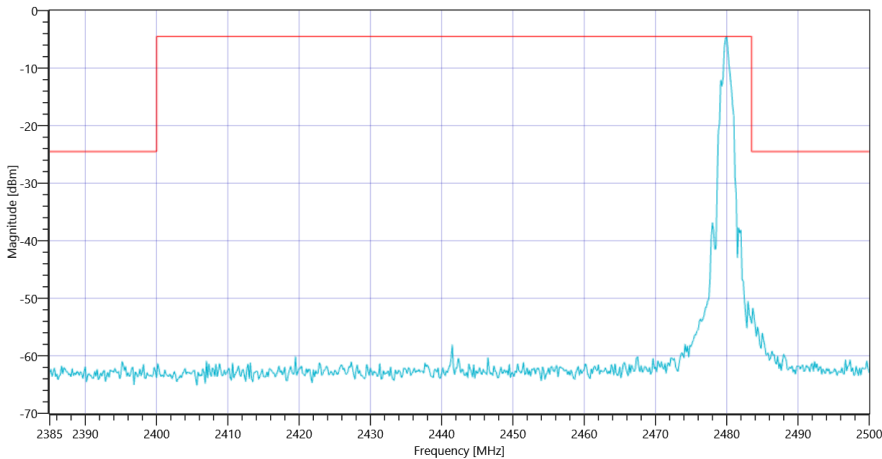

Plot_FCC Part 15.247 TX Spurious Conducted ~ BT LE 2 Msps 2480_24032021_100355.png

TEST FINISHED	
General Verdict	PASS

55. FCC Part 15.247 TX Spurious Conducted ~ BT LE coded S8

Test References	
TC Start	24.03.2021 10:14:13
Ambit Temp [°C] Humidity [rel%]	0.0 0
System Version	2.0.0.4
Test Specification	FCC Part 15.247
Test Method	IF DTS then 8.5 DTS emissions in non-restricted frequency bands: Subclause 11.11 of ANSI C63.10 is applicable.
TC Version	0.0.1
My Description	FCC 15.247 TX Emissions Conducted DTS - BT LE coded S8
Add. Information	

Test Parameter	
Technology to test	BT LE coded S8
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2402
Frequency mid to test	False Freq [MHz] 2440
Frequency high to test	False Freq [MHz] 2480
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.7
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer
Devices in use	SA: Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60


Test at TX 2402 MHz

READ SA SETTINGS:


RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	-2.31 0 15
Start [MHz] Stop [MHz]	24530.000 25030.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	500 8 3001 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Reference @ 2402.00 MHz	---	---	-3.35	dBm	INFO
No peaks detected	---	---			PASS
Lowest margin to limit 30 MHz	0	---	-133.47	dB	INFO

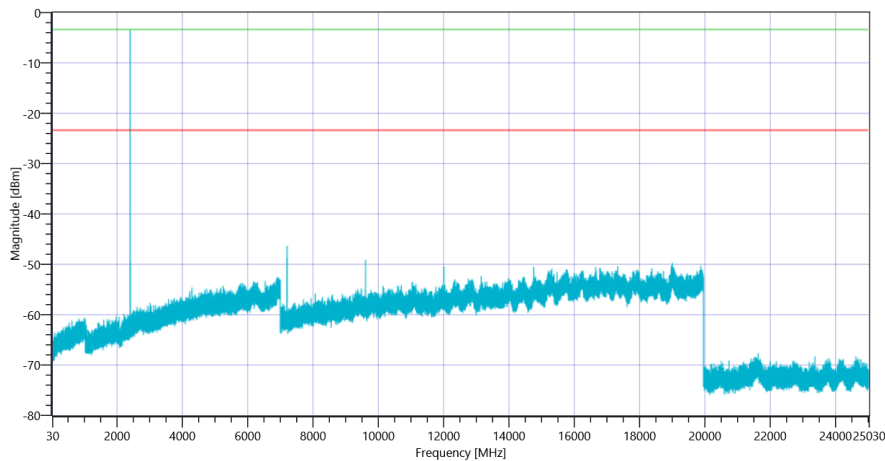

Plot_FCC Part 15.247 TX Spurious Conducted ~ BT LE coded S8 2402_24032021_102004.png

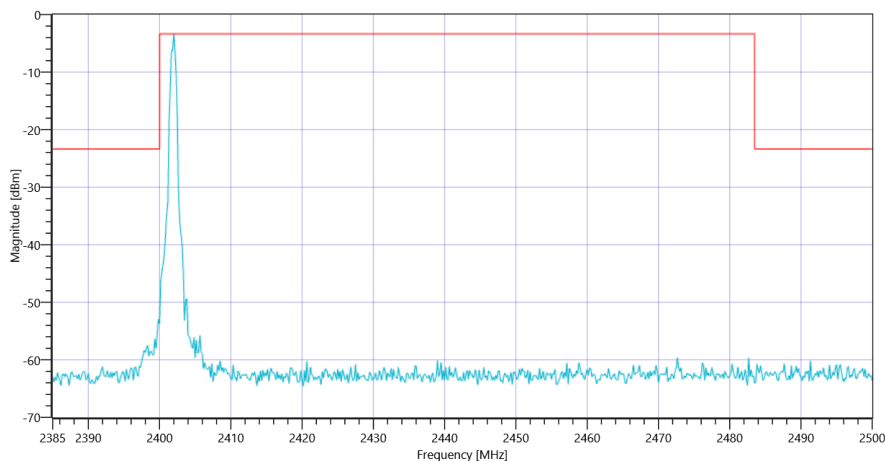

Plot_FCC Part 15.247 TX Spurious Conducted ~ BT LE coded S8 2402_24032021_102010.png

TEST FINISHED

General Verdict

PASS

56. FCC Part 15.247 TX Spurious Conducted ~ BT LE coded S8

Test References	
TC Start	24.03.2021 10:25:35
Ambit Temp [°C] Humidity [rel%]	0.0 0
System Version	2.0.0.4
Test Specification	FCC Part 15.247
Test Method	IF DTS then 8.5 DTS emissions in non-restricted frequency bands: Subclause 11.11 of ANSI C63.10 is applicable.
TC Version	0.0.1
My Description	FCC 15.247 TX Emissions Conducted DTS - BT LE coded S8
Add. Information	

Test Parameter	
Technology to test	BT LE coded S8
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2402
Frequency mid to test	True Freq [MHz] 2440
Frequency high to test	False Freq [MHz] 2480
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.7
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer
Devices in use	SA: Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60


Test at TX 2440 MHz

READ SA SETTINGS:


RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	-2.77 0 15
Start [MHz] Stop [MHz]	24530.000 25030.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	500 8 3001 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Reference @ 2439.83 MHz	---	---	-6.03	dBm	INFO
No peaks detected	---	---			PASS
Lowest margin to limit 7319.667 MHz	0	---	20.34	dB	INFO

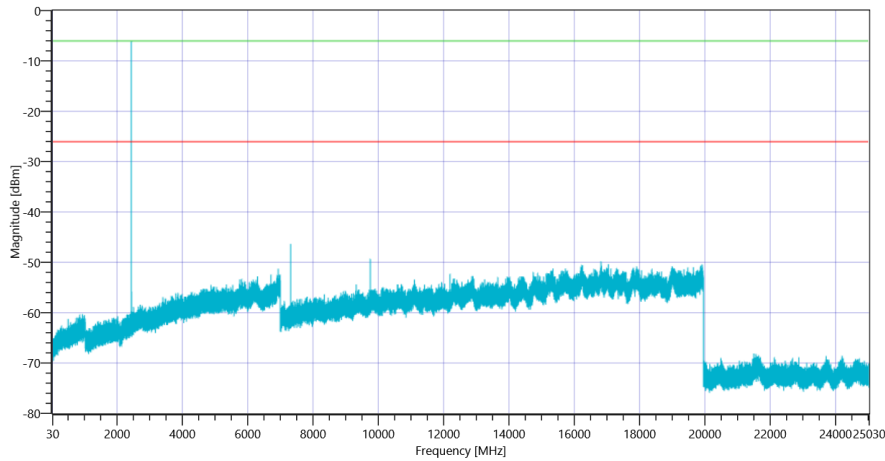

Plot_FCC Part 15.247 TX Spurious Conducted ~ BT LE coded S8 2440_24032021_103129.png

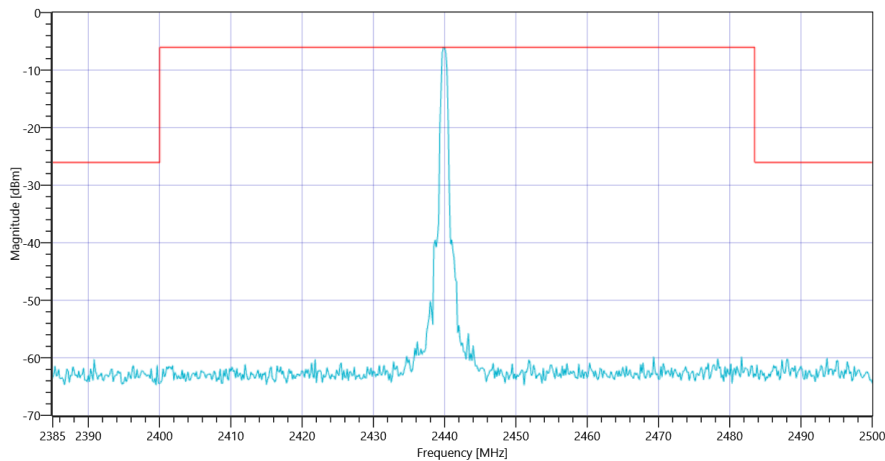

Plot_FCC Part 15.247 TX Spurious Conducted ~ BT LE coded S8 2440_24032021_103134.png

TEST FINISHED

General Verdict

PASS

57. FCC Part 15.247 TX Spurious Conducted ~ BT LE coded S8

Test References	
TC Start	24.03.2021 10:36:03
Ambit Temp [°C] Humidity [rel%]	0.0 0
System Version	2.0.0.4
Test Specification	FCC Part 15.247
Test Method	IF DTS then 8.5 DTS emissions in non-restricted frequency bands: Subclause 11.11 of ANSI C63.10 is applicable.
TC Version	0.0.1
My Description	FCC 15.247 TX Emissions Conducted DTS - BT LE coded S8
Add. Information	

Test Parameter	
Technology to test	BT LE coded S8
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2402
Frequency mid to test	False Freq [MHz] 2440
Frequency high to test	True Freq [MHz] 2480
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.7
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer
Devices in use	SA: Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60


Test at TX 2480 MHz

READ SA SETTINGS:


RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	-3.84 0 15
Start [MHz] Stop [MHz]	24530.000 25030.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	500 8 3001 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Reference @ 2480.00 MHz	---	---	-7.12	dBm	INFO
No peaks detected	---	---			PASS
Lowest margin to limit 30 MHz	0	---	-133.08	dB	INFO

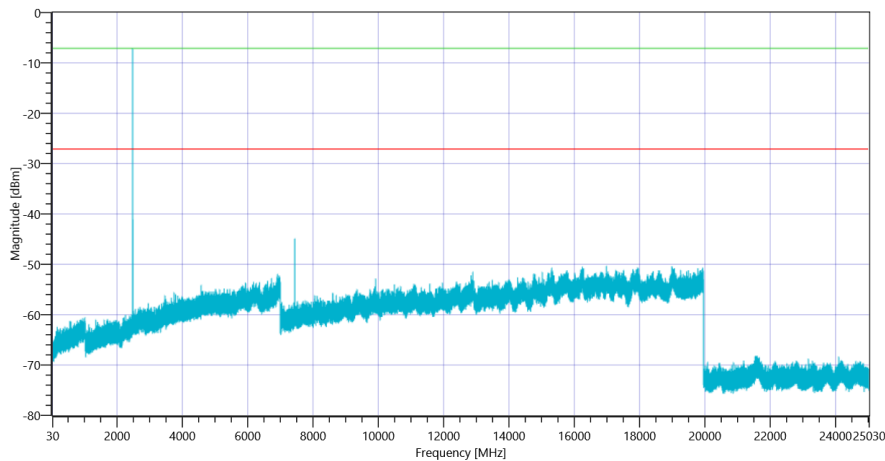

Plot_FCC Part 15.247 TX Spurious Conducted ~ BT LE coded S8 2480_24032021_104154.png

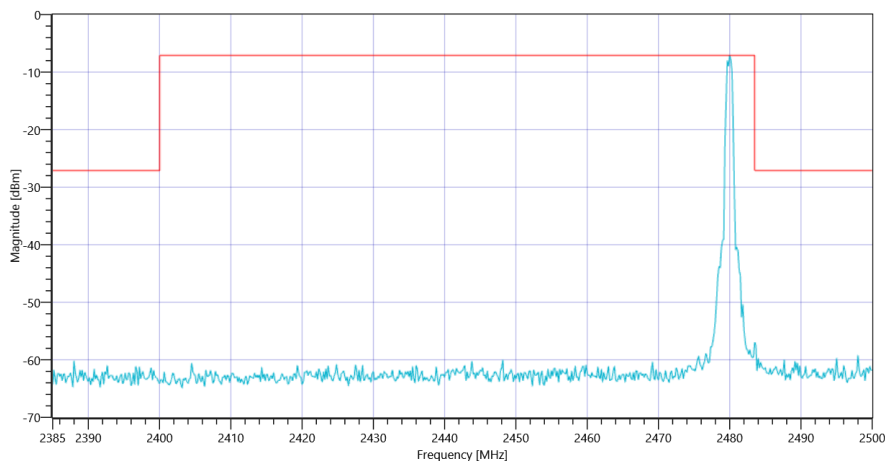

Plot_FCC Part 15.247 TX Spurious Conducted ~ BT LE coded S8 2480_24032021_104200.png

TEST FINISHED

General Verdict

PASS

58. FCC Part 15.247 TX Spurious Conducted ~ BT LE coded S2


Test References	
TC Start	24.03.2021 10:47:56
Ambit Temp [°C] Humidity [rel%]	0.0 0
System Version	2.0.0.4
Test Specification	FCC Part 15.247
Test Method	IF DTS then 8.5 DTS emissions in non-restricted frequency bands: Subclause 11.11 of ANSI C63.10 is applicable.
TC Version	0.0.1
My Description	FCC 15.247 TX Emissions Conducted DTS - BT LE coded S2
Add. Information	

Test Parameter	
Technology to test	BT LE coded S2
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2402
Frequency mid to test	False Freq [MHz] 2440
Frequency high to test	False Freq [MHz] 2480
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.7
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer
Devices in use	SA: Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60


Test at TX 2402 MHz

READ SA SETTINGS:	
RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	-2.42 0 15
Start [MHz] Stop [MHz]	24530.000 25030.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	500 8 3001 SWE

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Reference @ 2402.00 MHz	---	---	-4.23	dBm	INFO
No peaks detected	---	---			PASS
Lowest margin to limit 7205.5 MHz	0	---	21.83	dB	INFO

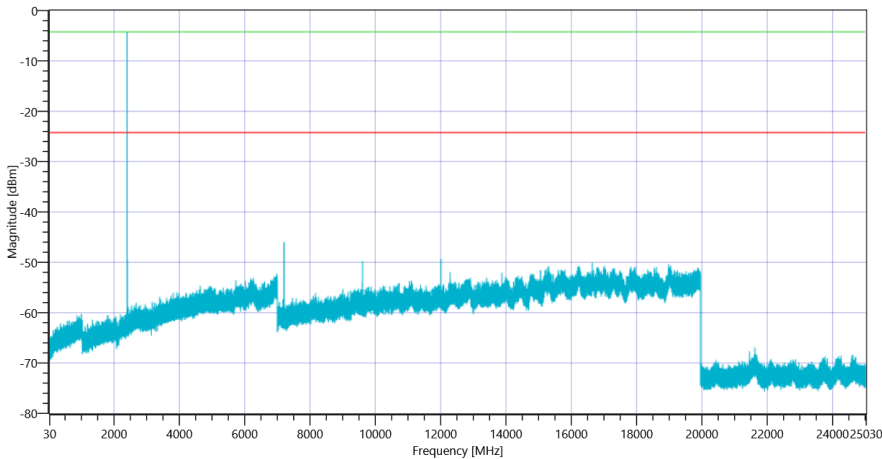

Plot_FCC Part 15.247 TX Spurious Conducted ~ BT LE coded S2 2402_24032021_105348.png

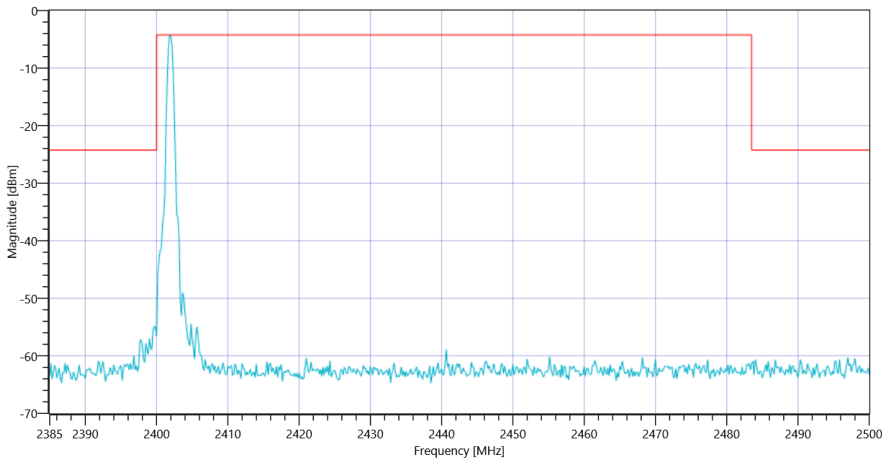

Plot_FCC Part 15.247 TX Spurious Conducted ~ BT LE coded S2 2402_24032021_105354.png

TEST FINISHED	
General Verdict	PASS

59. FCC Part 15.247 TX Spurious Conducted ~ BT LE coded S2

Test References	
TC Start	24.03.2021 11:10:51
Ambit Temp [°C] Humidity [rel%]	0.0 0
System Version	2.0.0.4
Test Specification	FCC Part 15.247
Test Method	IF DTS then 8.5 DTS emissions in non-restricted frequency bands: Subclause 11.11 of ANSI C63.10 is applicable.
TC Version	0.0.1
My Description	FCC 15.247 TX Emissions Conducted DTS - BT LE coded S2
Add. Information	

Test Parameter	
Technology to test	BT LE coded S2
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2402
Frequency mid to test	True Freq [MHz] 2440
Frequency high to test	False Freq [MHz] 2480
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.7
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer
Devices in use	SA: Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60


Test at TX 2440 MHz

READ SA SETTINGS:


RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	-2.91 0 15
Start [MHz] Stop [MHz]	24530.000 25030.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	500 8 3001 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Reference @ 2440.00 MHz	---	---	-5.37	dBm	INFO
No peaks detected	---	---			PASS
Lowest margin to limit 7319 MHz	0	---	20.5	dB	INFO

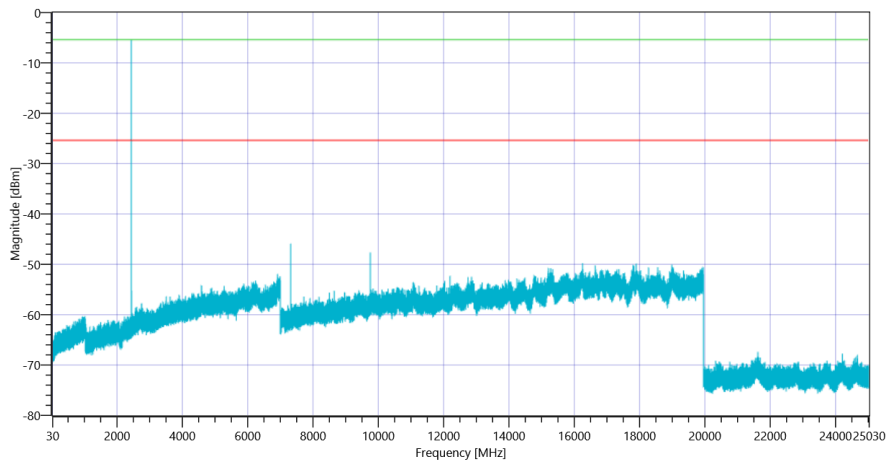

Plot_FCC Part 15.247 TX Spurious Conducted ~ BT LE coded S2 2440_24032021_111642.png

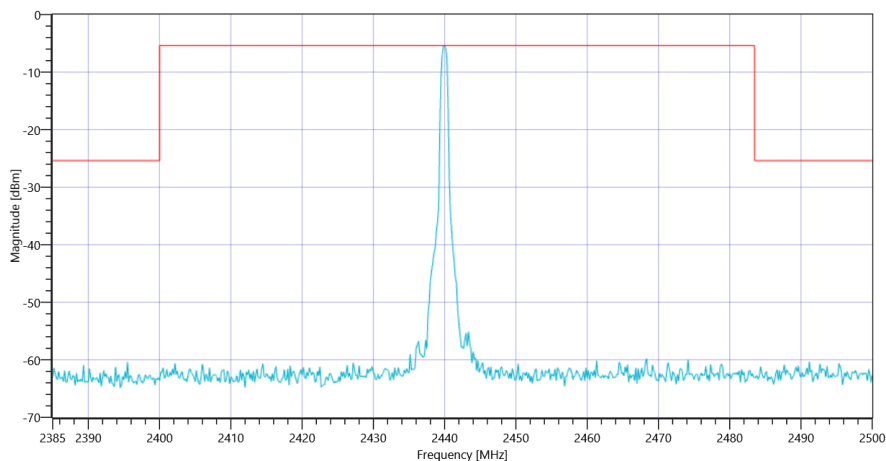

Plot_FCC Part 15.247 TX Spurious Conducted ~ BT LE coded S2 2440_24032021_111648.png

TEST FINISHED

General Verdict

PASS

60. FCC Part 15.247 TX Spurious Conducted ~ BT LE coded S2


Test References	
TC Start	24.03.2021 11:32:48
Ambit Temp [°C] Humidity [rel%]	0.0 0
System Version	2.0.0.4
Test Specification	FCC Part 15.247
Test Method	IF DTS then 8.5 DTS emissions in non-restricted frequency bands: Subclause 11.11 of ANSI C63.10 is applicable.
TC Version	0.0.1
My Description	FCC 15.247 TX Emissions Conducted DTS - BT LE coded S2
Add. Information	

Test Parameter	
Technology to test	BT LE coded S2
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2402
Frequency mid to test	False Freq [MHz] 2440
Frequency high to test	True Freq [MHz] 2480
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.7
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer
Devices in use	SA: Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60


Test at TX 2480 MHz

READ SA SETTINGS:	
RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	-3.95 0 15
Start [MHz] Stop [MHz]	24530.000 25030.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	500 8 3001 SWE

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Reference @ 2480.00 MHz	---	---	-5.12	dBm	INFO
No peaks detected	---	---			PASS
Lowest margin to limit 7439.667 MHz	0	---	18.08	dB	INFO

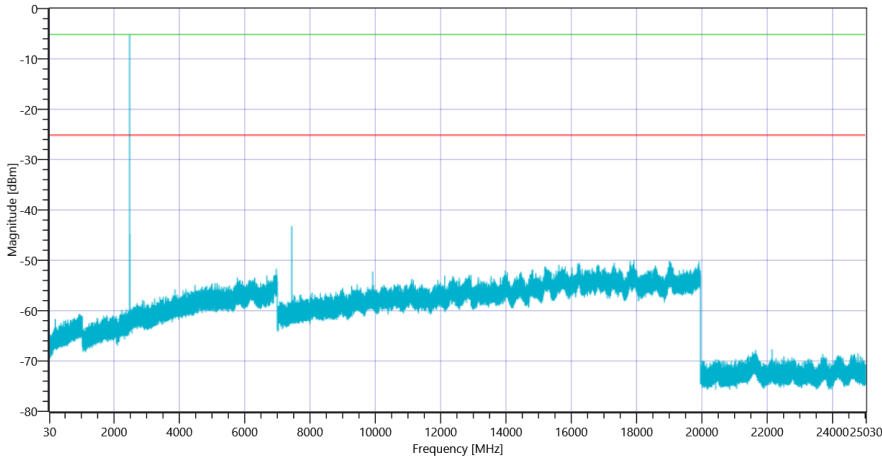

Plot_FCC Part 15.247 TX Spurious Conducted ~ BT LE coded S2 2480_24032021_113840.png

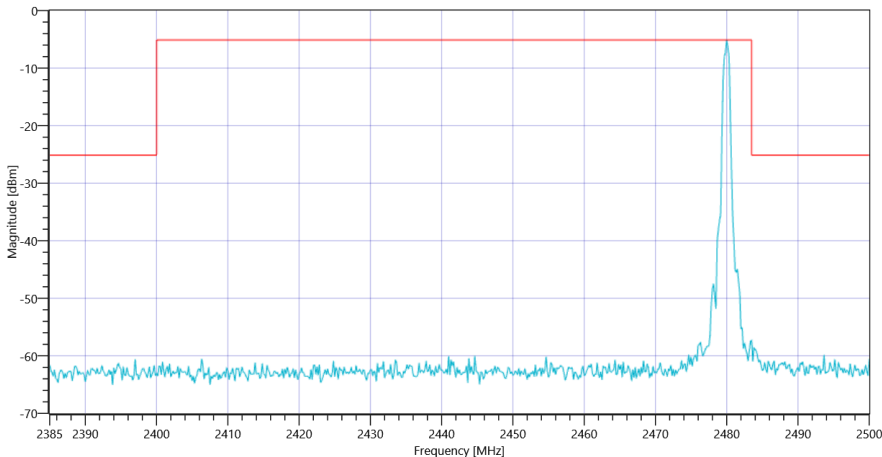

Plot_FCC Part 15.247 TX Spurious Conducted ~ BT LE coded S2 2480_24032021_113846.png

TEST FINISHED	
General Verdict	PASS

61. FCC Part 15.247 Restricted Band Edge Conducted Peak DTS Video Avg (cond) ~ BT LE 1 Msps

Test References	
TC Start	24.03.2021 08:48:00
Ambit Temp [°C] Humidity [rel%]	0.0 0
System Version	2.0.0.4
Test Specification	FCC Part 15.247
Test Method	DTS: KDB 558074 D01 V05 - 8.7.3 Integration Method; ANSI C63.10-2013 11.13.3.2 Peak Detection
TC Version	0.0.1
My Description	FCC 15.247 Restricted Band Edge Conducted Peak DTS - BT LE 1 Msps
Add. Information	


Test Parameter	
Technology to test	BT LE 1 Msps
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2402
Frequency mid to test	False Freq [MHz] 2440
Frequency high to test	False Freq [MHz] 2480
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.7
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer
Devices in use	SA: Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60

Test at TX 2402 MHz

READ SA SETTINGS:					
RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]			3.12 10.86 10		
Start [MHz] Stop [MHz]			2388.000 2390.000		
RBW [MHz] VBW [MHz]			0.100000 0.002000		
Detector TraceMode			POS MAXH		
Sweep: Time [ms] Count Points per Section Type			8 300 1001 SWE		

Antenna Gain	
Considered Antenna Gain: [dB]:	0

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Band Power	---	-41.23	-67.23	dBm	INCON

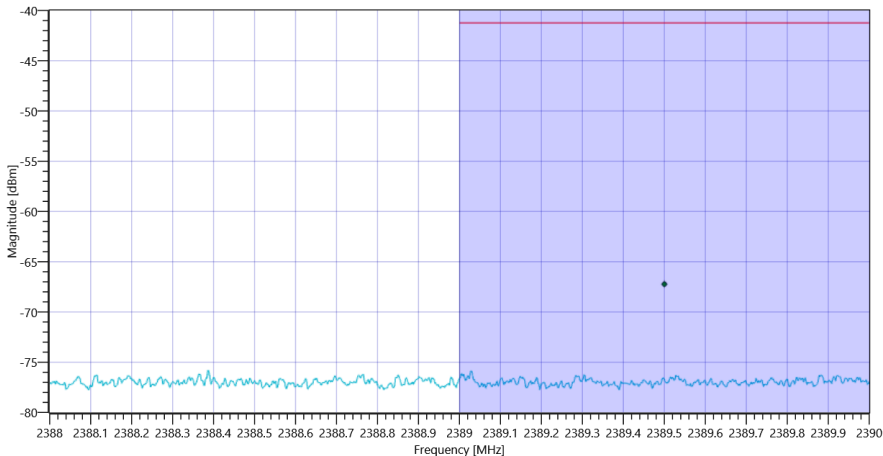

Plot_FCC Part 15.247 Restricted Band Edge Conducted Peak DTS Video Avg (cond) ~ BT LE 1 Msps_24032021_084823.png

TEST FINISHED	
General Verdict	INCON

62. FCC Part 15.247 Restricted Band Edge Conducted Peak DTS Video Avg (cond) ~ BT LE 1 Msp

Test References	
TC Start	24.03.2021 09:16:39
Ambit Temp [°C] Humidity [rel%]	0.0 0
System Version	2.0.0.4
Test Specification	FCC Part 15.247
Test Method	DTS: KDB 558074 D01 V05 - 8.7.3 Integration Method; ANSI C63.10-2013 11.13.3.2 Peak Detection
TC Version	0.0.1
My Description	FCC 15.247 Restricted Band Edge Conducted Peak DTS - BT LE 1 Msp
Add. Information	


Test Parameter	
Technology to test	BT LE 1 Msp
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2402
Frequency mid to test	False Freq [MHz] 2440
Frequency high to test	True Freq [MHz] 2480
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.7
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer
Devices in use	SA: Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60

Test at TX 2480 MHz

READ SA SETTINGS:	
RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	1.36 11 10
Start [MHz] Stop [MHz]	2483.500 2485.500
RBW [MHz] VBW [MHz]	0.100000 0.002000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	8 300 1001 SWE

Antenna Gain	
Considered Antenna Gain: [dB]:	0

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Band Power	---	-41.23	-62.77	dBm	INCON

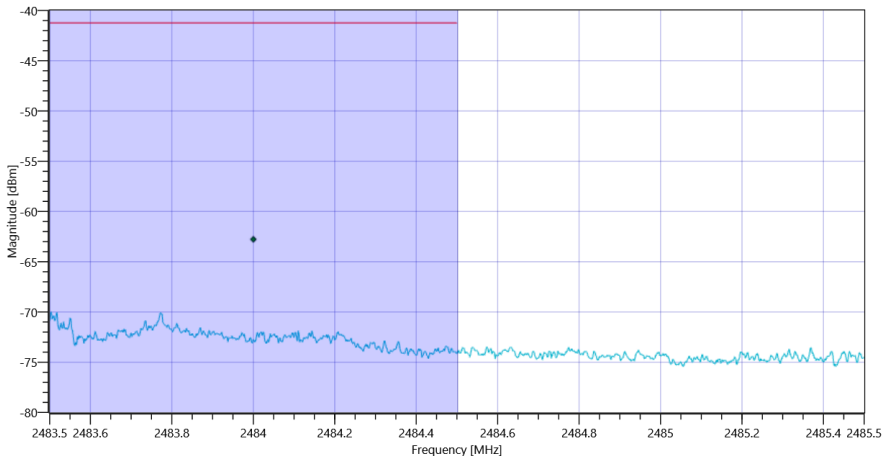

Plot_FCC Part 15.247 Restricted Band Edge Conducted Peak DTS Video Avg (cond) ~ BT LE 1 Msps_24032021_091701.png

TEST FINISHED	
General Verdict	INCON

63. FCC Part 15.247 Restricted Band Edge Conducted Peak DTS Video Avg (cond) ~ BT LE 2 Msps

Test References	
TC Start	24.03.2021 09:29:44
Ambit Temp [°C] Humidity [rel%]	0.0 0
System Version	2.0.0.4
Test Specification	FCC Part 15.247
Test Method	DTS: KDB 558074 D01 V05 - 8.7.3 Integration Method; ANSI C63.10-2013 11.13.3.2 Peak Detection
TC Version	0.0.1
My Description	FCC 15.247 Restricted Band Edge Conducted Peak DTS - BT LE 2 Msps
Add. Information	


Test Parameter	
Technology to test	BT LE 2 Msps
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2402
Frequency mid to test	False Freq [MHz] 2440
Frequency high to test	False Freq [MHz] 2480
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.7
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer
Devices in use	SA: Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60

Test at TX 2402 MHz

READ SA SETTINGS:	
RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	2.76 10.86 10
Start [MHz] Stop [MHz]	2388.000 2390.000
RBW [MHz] VBW [MHz]	0.100000 0.002000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	8 300 1001 SWE

Antenna Gain	
Considered Antenna Gain: [dB]:	0

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Band Power	---	-41.23	-66.44	dBm	INCON

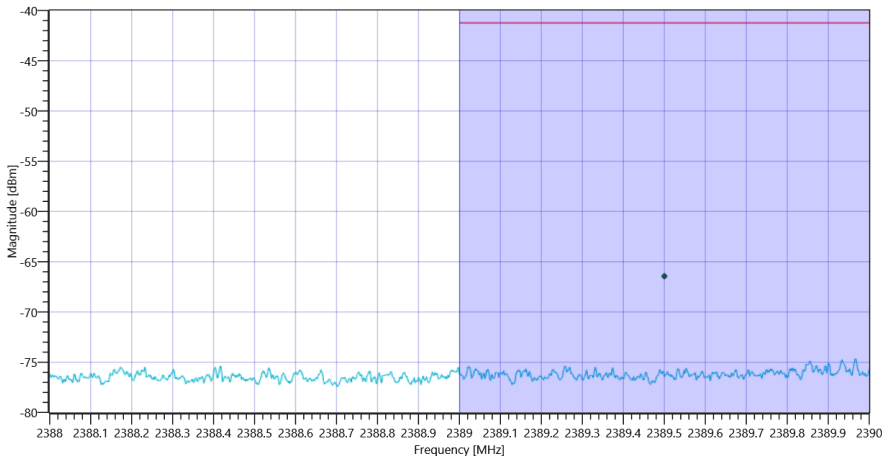

TEST FINISHED	
General Verdict	INCON

64. FCC Part 15.247 Restricted Band Edge Conducted Peak DTS Video Avg (cond) ~ BT LE 2 Msps

Test References	
TC Start	24.03.2021 10:04:01
Ambit Temp [°C] Humidity [rel%]	0.0 0
System Version	2.0.0.4
Test Specification	FCC Part 15.247
Test Method	DTS: KDB 558074 D01 V05 - 8.7.3 Integration Method; ANSI C63.10-2013 11.13.3.2 Peak Detection
TC Version	0.0.1
My Description	FCC 15.247 Restricted Band Edge Conducted Peak DTS - BT LE 2 Msps
Add. Information	


Test Parameter	
Technology to test	BT LE 2 Msps
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2402
Frequency mid to test	False Freq [MHz] 2440
Frequency high to test	True Freq [MHz] 2480
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.7
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer
Devices in use	SA: Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60

Test at TX 2480 MHz

READ SA SETTINGS:					
RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]			1.28 11 10		
Start [MHz] Stop [MHz]			2483.500 2485.500		
RBW [MHz] VBW [MHz]			0.100000 0.002000		
Detector TraceMode			POS MAXH		
Sweep: Time [ms] Count Points per Section Type			8 300 1001 SWE		

Antenna Gain	
Considered Antenna Gain: [dB]:	0

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Band Power	---	-41.23	-57.04	dBm	INCON

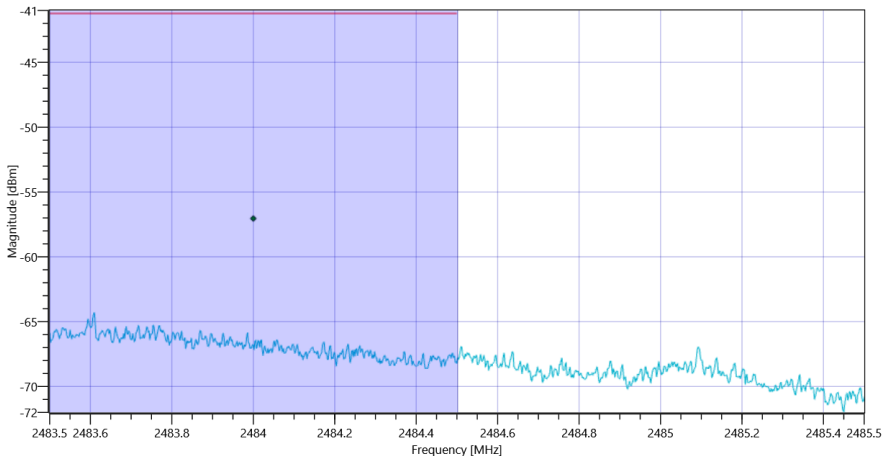

Plot_FCC Part 15.247 Restricted Band Edge Conducted Peak DTS Video Avg (cond) ~ BT LE 2 Msps_24032021_100424.png

TEST FINISHED	
General Verdict	INCON

65. FCC Part 15.247 Restricted Band Edge Conducted Peak DTS Video Avg (cond) ~ BT LE coded S8

Test References	
TC Start	24.03.2021 10:20:17
Ambit Temp [°C] Humidity [rel%]	0.0 0
System Version	2.0.0.4
Test Specification	FCC Part 15.247
Test Method	DTS: KDB 558074 D01 V05 - 8.7.3 Integration Method; ANSI C63.10-2013 11.13.3.2 Peak Detection
TC Version	0.0.1
My Description	FCC 15.247 Restricted Band Edge Conducted Peak DTS - BT LE coded S8
Add. Information	


Test Parameter	
Technology to test	BT LE coded S8
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2402
Frequency mid to test	False Freq [MHz] 2440
Frequency high to test	False Freq [MHz] 2480
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.7
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer
Devices in use	SA: Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60

Test at TX 2402 MHz

READ SA SETTINGS:		
RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	2.67 10.86 10	
Start [MHz] Stop [MHz]	2388.000 2390.000	
RBW [MHz] VBW [MHz]	0.100000 0.000200	
Detector TraceMode	POS MAXH	
Sweep: Time [ms] Count Points per Section Type	78 300 1001 SWE	

Antenna Gain	
Considered Antenna Gain: [dB]:	0

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Band Power	---	-41.23	-69.05	dBm	INCON

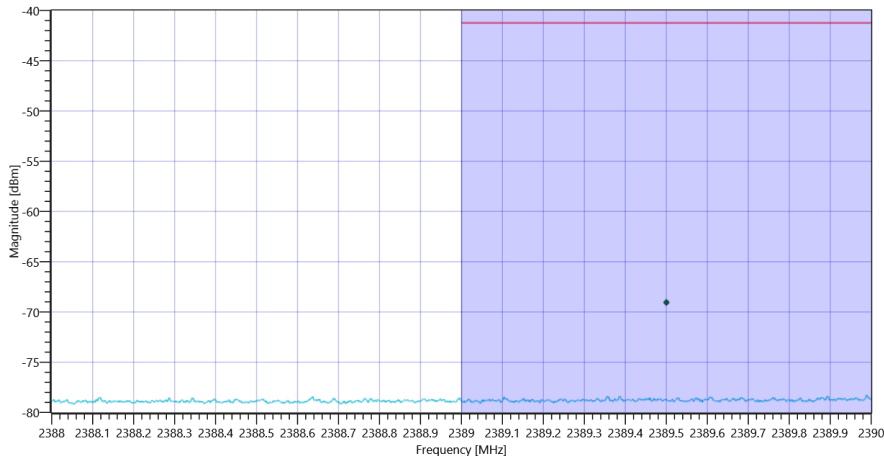

Plot_FCC Part 15.247 Restricted Band Edge Conducted Peak DTS Video Avg (cond) ~ BT LE coded S8_24032021_102103.png

TEST FINISHED	
General Verdict	INCON

66. FCC Part 15.247 Restricted Band Edge Conducted Peak DTS Video Avg (cond) ~ BT LE coded S8

Test References	
TC Start	24.03.2021 10:42:07
Ambit Temp [°C] Humidity [rel%]	0.0 0
System Version	2.0.0.4
Test Specification	FCC Part 15.247
Test Method	DTS: KDB 558074 D01 V05 - 8.7.3 Integration Method; ANSI C63.10-2013 11.13.3.2 Peak Detection
TC Version	0.0.1
My Description	FCC 15.247 Restricted Band Edge Conducted Peak DTS - BT LE coded S8
Add. Information	


Test Parameter	
Technology to test	BT LE coded S8
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2402
Frequency mid to test	False Freq [MHz] 2440
Frequency high to test	True Freq [MHz] 2480
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.7
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer
Devices in use	SA: Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60

Test at TX 2480 MHz

READ SA SETTINGS:		
RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	1.16 11 10	
Start [MHz] Stop [MHz]	2483.500 2485.500	
RBW [MHz] VBW [MHz]	0.100000 0.000200	
Detector TraceMode	POS MAXH	
Sweep: Time [ms] Count Points per Section Type	78 300 1001 SWE	

Antenna Gain	
Considered Antenna Gain: [dBi]:	0

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Band Power	---	-41.23	-64.23	dBm	INCON

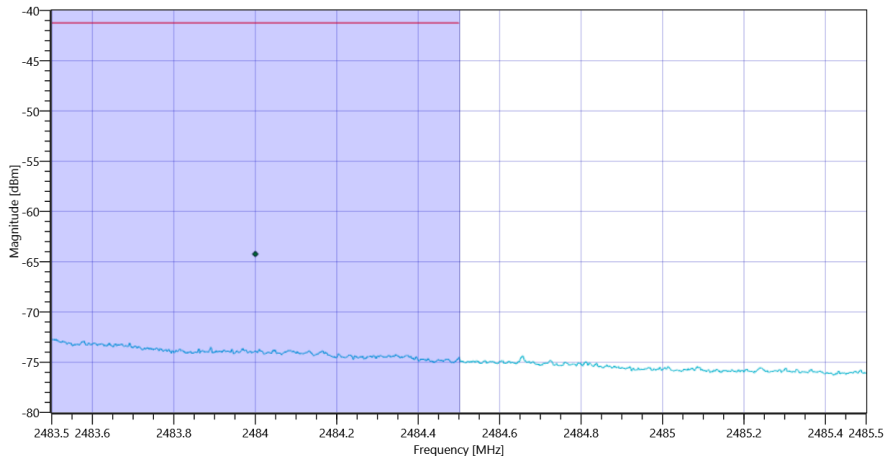

Plot_FCC Part 15.247 Restricted Band Edge Conducted Peak DTS Video Avg (cond) ~ BT LE coded S8_24032021_104253.png

TEST FINISHED	
General Verdict	INCON

67. FCC Part 15.247 Restricted Band Edge Conducted Peak DTS Video Avg (cond) ~ BT LE coded S2

Test References	
TC Start	24.03.2021 10:54:00
Ambit Temp [°C] Humidity [rel%]	0.0 0
System Version	2.0.0.4
Test Specification	FCC Part 15.247
Test Method	DTS: KDB 558074 D01 V05 - 8.7.3 Integration Method; ANSI C63.10-2013 11.13.3.2 Peak Detection
TC Version	0.0.1
My Description	FCC 15.247 Restricted Band Edge Conducted Peak DTS - BT LE coded S2
Add. Information	


Test Parameter	
Technology to test	BT LE coded S2
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2402
Frequency mid to test	False Freq [MHz] 2440
Frequency high to test	False Freq [MHz] 2480
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.7
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer
Devices in use	SA: Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60

Test at TX 2402 MHz

READ SA SETTINGS:		
RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	2.64 10.86 10	
Start [MHz] Stop [MHz]	2388.000 2390.000	
RBW [MHz] VBW [MHz]	0.100000 0.000500	
Detector TraceMode	POS MAXH	
Sweep: Time [ms] Count Points per Section Type	31 300 1001 SWE	

Antenna Gain	
Considered Antenna Gain: [dB]:	0

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Band Power	---	-41.23	-68.6	dBm	INCON

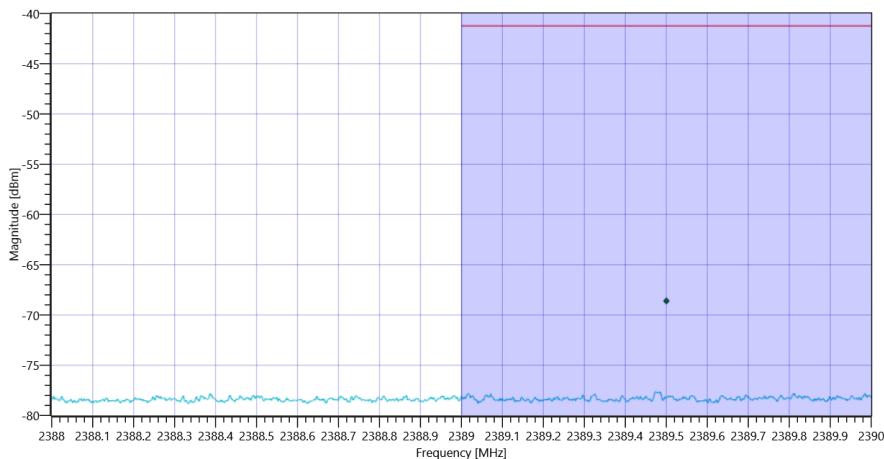

Plot_FCC Part 15.247 Restricted Band Edge Conducted Peak DTS Video Avg (cond) ~ BT LE coded S2_24032021_105431.png

TEST FINISHED	
General Verdict	INCON

68. FCC Part 15.247 Restricted Band Edge Conducted Peak DTS Video Avg (cond) ~ BT LE coded S2

Test References	
TC Start	24.03.2021 11:38:53
Ambit Temp [°C] Humidity [rel%]	0.0 0
System Version	2.0.0.4
Test Specification	FCC Part 15.247
Test Method	DTS: KDB 558074 D01 V05 - 8.7.3 Integration Method; ANSI C63.10-2013 11.13.3.2 Peak Detection
TC Version	0.0.1
My Description	FCC 15.247 Restricted Band Edge Conducted Peak DTS - BT LE coded S2
Add. Information	


Test Parameter	
Technology to test	BT LE coded S2
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2402
Frequency mid to test	False Freq [MHz] 2440
Frequency high to test	True Freq [MHz] 2480
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.7
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer
Devices in use	SA: Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60

Test at TX 2480 MHz

READ SA SETTINGS:		
RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	1.02 11 10	
Start [MHz] Stop [MHz]	2483.500 2485.500	
RBW [MHz] VBW [MHz]	0.100000 0.000500	
Detector TraceMode	POS MAXH	
Sweep: Time [ms] Count Points per Section Type	31 300 1001 SWE	

Antenna Gain	
Considered Antenna Gain: [dB]:	0

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Band Power	---	-41.23	-63.98	dBm	INCON

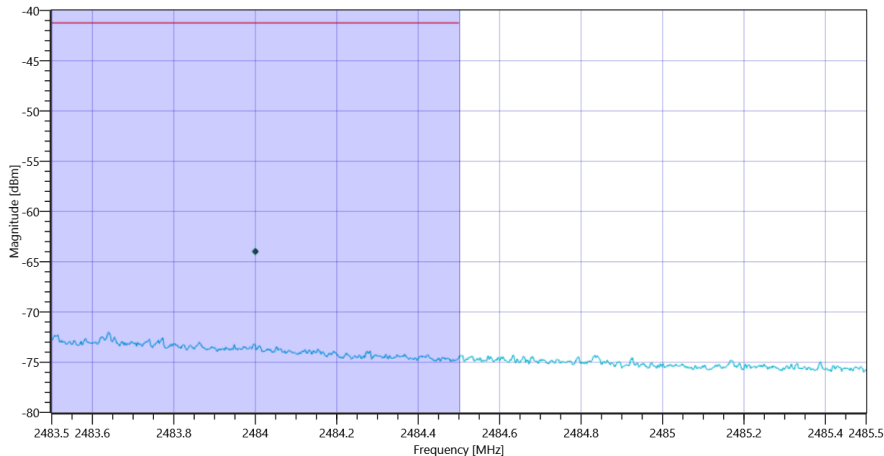

Plot_FCC Part 15.247 Restricted Band Edge Conducted Peak DTS Video Avg (cond) ~ BT LE coded S2_24032021_113924.png

TEST FINISHED	
General Verdict	INCON

69. Common2G4 Peak OP 3MHz/3MHz ~ BT LE 1 Msps


Test References	
TC Start	24.03.2021 08:38:13
Ambit Temp [°C] Humidity [rel%]	0.0 0
System Version	2.0.0.4
Test Specification	None
Test Method	
TC Version	0.0.1
My Description	Peak Output Power conducted 3MHz/3MHz - BT LE 1 Msps
Add. Information	

Test Parameter	
Technology to test	BT LE 1 Msps
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2402
Frequency mid to test	False Freq [MHz] 2440
Frequency high to test	False Freq [MHz] 2480
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.7
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer
Devices in use	SA: Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60

Test at TX 2402 MHz

READ SA SETTINGS:					
RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]			8.52 10.86 15		
Start [MHz] Stop [MHz]			2399.500 2404.500		
RBW [MHz] VBW [MHz]			3.000000 3.000000		
Detector TraceMode			POS MAXH		
Sweep: Time [ms] Count Points per Section Type			1000 10 1001 SWE		

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Peak Power	---	---	-1.56	dBm	Info
Peak Power	---	---	0.698232	mW	Info
Frequency at Peak	---	---	2401.945	MHz	Info

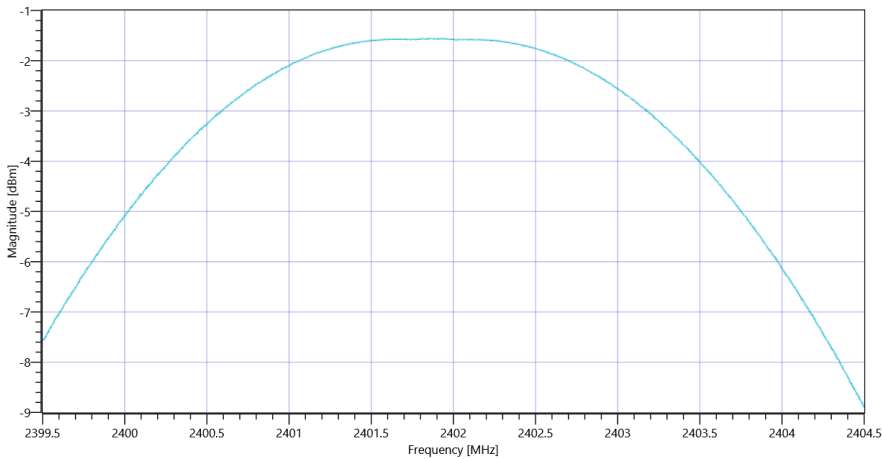

Plot_Common2G4 Peak OP 3MHz-3MHz ~ BT LE 1 Msps_24032021_083842.png

TEST FINISHED	
General Verdict	PASS

70. Common2G4 Peak OP 3MHz/3MHz ~ BT LE 1 Msps


Test References	
TC Start	24.03.2021 08:49:25
Ambit Temp [°C] Humidity [rel%]	0.0 0
System Version	2.0.0.4
Test Specification	None
Test Method	
TC Version	0.0.1
My Description	Peak Output Power conducted 3MHz/3MHz - BT LE 1 Msps
Add. Information	

Test Parameter	
Technology to test	BT LE 1 Msps
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2402
Frequency mid to test	True Freq [MHz] 2440
Frequency high to test	False Freq [MHz] 2480
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.7
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer
Devices in use	SA: Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60

Test at TX 2440 MHz

READ SA SETTINGS:	
RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	7.58 10.94 15
Start [MHz] Stop [MHz]	2437.500 2442.500
RBW [MHz] VBW [MHz]	3.000000 3.000000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	1000 10 1001 SWE

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Peak Power	---	---	-2.48	dBm	Info
Peak Power	---	---	0.564937	mW	Info
Frequency at Peak	---	---	2439.865	MHz	Info

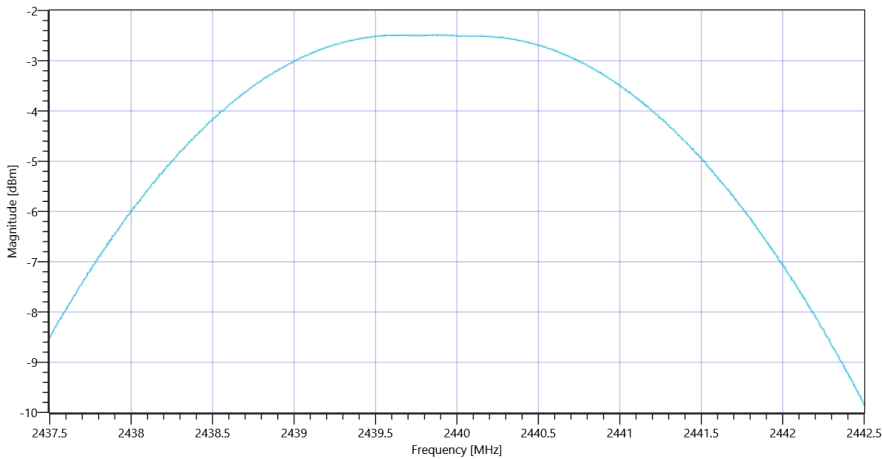

Plot_Common2G4 Peak OP 3MHz-3MHz ~ BT LE 1 Msps_24032021_084953.png

TEST FINISHED	
General Verdict	PASS

71. Common2G4 Peak OP 3MHz/3MHz ~ BT LE 1 Msps


Test References	
TC Start	24.03.2021 09:06:53
Ambit Temp [°C] Humidity [rel%]	0.0 0
System Version	2.0.0.4
Test Specification	None
Test Method	
TC Version	0.0.1
My Description	Peak Output Power conducted 3MHz/3MHz - BT LE 1 Msps
Add. Information	

Test Parameter	
Technology to test	BT LE 1 Msps
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2402
Frequency mid to test	False Freq [MHz] 2440
Frequency high to test	True Freq [MHz] 2480
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.7
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer
Devices in use	SA: Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60

Test at TX 2480 MHz

READ SA SETTINGS:	
RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	6.30 11 15
Start [MHz] Stop [MHz]	2477.500 2482.500
RBW [MHz] VBW [MHz]	3.000000 3.000000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	1000 10 1001 SWE

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Peak Power	---	---	-3.71	dBm	Info
Peak Power	---	---	0.425598	mW	Info
Frequency at Peak	---	---	2479.92	MHz	Info

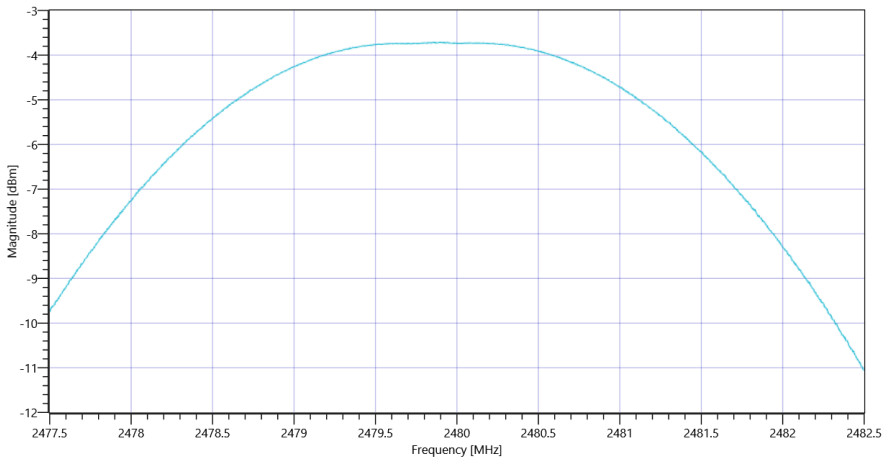

Plot_Common2G4 Peak OP 3MHz-3MHz ~ BT LE 1 Msps_24032021_090722.png

TEST FINISHED	
General Verdict	PASS

- END OF DOCUMENT -