

TEST REPORT

Report No.: BCTC2207438565E

Applicant: Shenzhen Zhibotong Eletronics Co., Ltd.

Product Name: Wireless Router

Model/Type
reference: Z2101

Tested Date: 2022-06-23 to 2022-07-09

Issued Date: 2022-08-03

Shenzhen BCTC Testing Co., Ltd.



FCC ID: 2AC47-Z2101

Product Name: Wireless Router

Trademark: N/A

Model/Type reference: Z2101
Z6001,WE2806,WG827,WE5930,WE2001,WE2002,WE2003,WE2005,WE2006,
WE2007,WE2008,RP2001,RP2002,RP2801,RP2002,Z5001AX,Z5002AX,
Z5003AX,Z5005AX,Z5006AX,Z5007AX,Z5008AX,Z5009AX,Z8101AX,Z8102AX,
Z8103AX,Z8105AX,Z8106AX,Z8107AX,Z8108AX,N3201,N3202,N3203,N3205,
WG2101,WG2102,WG2103,WG2105,WG2106,WG2107,WG2108,CPE2802,
CPE2803,CPE2805,CPE2806,CPE9302,UF1601,UF1602,UF1603,UF0901,
UF0902,UF0903,UF2001,MIFI1601,MIFI1602

Prepared For: Shenzhen Zhibotong Eletronics Co., Ltd.

Address: Floor 4, Bldg. A2, Hedian Industrial Park, NO.9 Shijing Rd, Guanlan, Longhua District, ShenZhen, China

Manufacturer: Shenzhen Zhibotong Eletronics Co., Ltd.

Address: Floor 4, Bldg. A2, Hedian Industrial Park, NO.9 Shijing Rd, Guanlan, Longhua District, ShenZhen, China

Prepared By: Shenzhen BCTC Testing Co., Ltd.

Address: 1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Tangwei, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China

Sample Received Date: 2022-06-23

Sample tested Date: 2022-06-23 to 2022-07-09


Report No.: BCTC2207438565E

Test Standards: FCC Part15.247
ANSI C63.10-2013

Test Results: PASS

Remark: This is WIFI-2.4GHz band radio test report.

Tested by:



Brave Zeng/ Project Handler

Approved by:




Zero Zhou/Reviewer

The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen BCTC Testing Co., Ltd, this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client.

Table of Content

Test Report Declaration	Page
1. Version	5
2. Test Summary	6
3. Measurement Uncertainty	7
4. Product Information and Test Setup	8
4.2 Test Setup Configuration	9
4.3 Support Equipment	9
4.4 Channel List	10
4.5 Test Mode	10
4.6 Table Of Parameters Of Text Software Setting	11
4.7 Antenna	11
5. Test Facility And Test Instrument Used	12
5.1 Test Facility	12
5.2 Test Instrument Used	12
6. Conducted Emissions	14
6.1 Block Diagram Of Test Setup	14
6.2 Limit	14
6.3 Test procedure	14
6.4 EUT operating Conditions	14
6.5 Test Result	15
7. Radiated Emissions	17
7.1 Block Diagram Of Test Setup	17
7.2 Limit	18
7.3 Test procedure	19
7.4 EUT Operating Conditions	20
7.5 Test Result	20
8. Radiated Band Emission Measurement and Restricted Bands Of Operation	29
8.1 Block Diagram Of Test Setup	29
8.2 Limit	29
8.3 Test procedure	30
8.4 EUT Operating Conditions	30
8.5 Test Result	31
9. Power Spectral Density Test	34
9.1 Block Diagram Of Test Setup	34
9.2 Limit	34
9.3 Test procedure	34
9.4 EUT Operating Conditions	34
9.5 Test Result	35
10. Bandwidth Test	55
10.1 Block Diagram Of Test Setup	55
10.2 Limit	55
10.3 Test procedure	55
10.4 EUT Operating Conditions	55
10.5 Test Result	56
11. Peak Output Power Test	66

11.1	Block Diagram Of Test Setup.....	66
11.2	Limit	66
11.3	Test Procedure	66
11.4	EUT Operating Conditions	66
11.5	Test Result.....	67
12.	100 kHz Bandwidth Of Frequency Band Edge	69
12.1	Block Diagram Of Test Setup.....	69
12.2	Limit	69
12.3	Test Procedure	69
12.4	EUT Operating Conditions	69
12.5	Test Result.....	70
13.	Duty Cycle Of Test Signal	100
13.1	Standard Requirement.....	100
13.2	Formula.....	100
13.3	Test Procedure	100
13.4	Test Result.....	100
14.	Antenna Requirement	101
14.1	Limit	101
14.1	Test Result.....	101
15.	EUT Test Setup Photographs.....	102

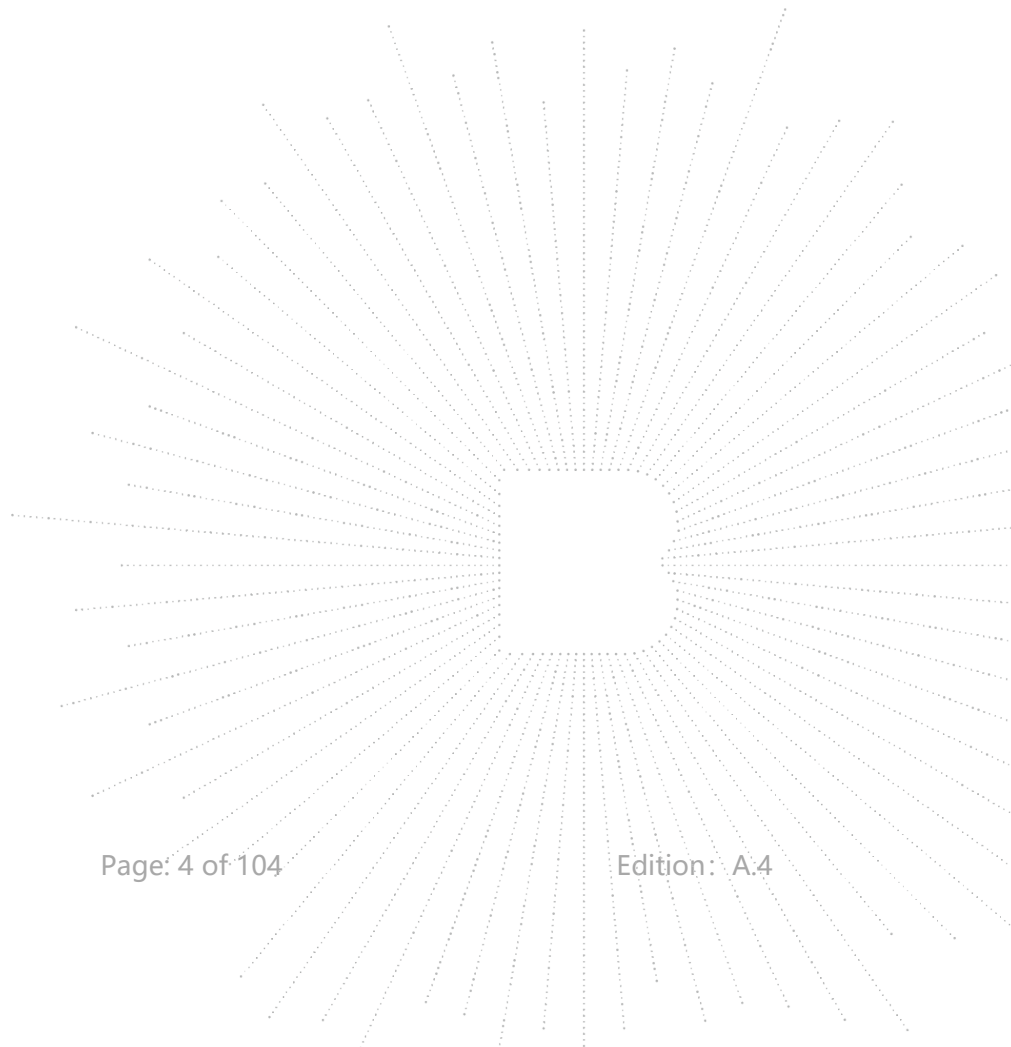

1. Version

Report No.	Issue Date	Description	Approved
BCTC2207438565E	2022-08-03	Original	Valid

2. Test Summary

The Product has been tested according to the following specifications:

No.	Test Parameter	Clause No.	Results
1	Conducted Emission	15.207	PASS
2	6dB Bandwidth	15.247 (a)(2)	PASS
3	Peak Output Power	15.247 (b)	PASS
4	Radiated Spurious Emission	15.247 (d)	PASS
5	Power Spectral Density	15.247 (e)	PASS
6	Restricted Band of Operation	15.205	PASS
7	Band Edge (Out of Band Emissions)	15.247 (d)	PASS
8	Antenna Requirement	15.203	PASS

3. Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

No.	Item	Uncertainty
1	3m chamber Radiated spurious emission(30MHz-1GHz)	U=4.3dB
2	3m chamber Radiated spurious emission(9KHz-30MHz)	U=3.7dB
3	3m chamber Radiated spurious emission(1GHz-18GHz)	U=4.5dB
4	3m chamber Radiated spurious emission(18GHz-40GHz)	U=3.34dB
5	Conducted Emission (150kHz-30MHz)	U=3.20dB
6	Conducted Adjacent channel power	U=1.38dB
7	Conducted output power uncertainty Above 1G	U=1.576dB
8	Conducted output power uncertainty below 1G	U=1.28dB
9	humidity uncertainty	U=5.3%
10	Temperature uncertainty	U=0.59°C

4. Product Information and Test Setup


4.1 Product Information

Model/Type Ref.	Z2101 Z6001,WE2806,WG827,WE5930,WE2001,WE2002,WE2003,WE2005,WE2006, WE2007,WE2008,RP2001,RP2002,RP2801,RP2002,Z5001AX,Z5002AX, Z5003AX,Z5005AX,Z5006AX,Z5007AX,Z5008AX,Z5009AX,Z8101AX,Z8102AX, Z8103AX,Z8105AX,Z8106AX,Z8107AX,Z8108AX,N3201,N3202,N3203,N3205, WG2101,WG2102,WG2103,WG2105,WG2106,WG2107,WG2108,CPE2802, CPE2803,CPE2805,CPE2806,CPE9302,UF1601,UF1602,UF1603,UF0901, UF0902,UF0903,UF2001,MIFI1601,MIFI1602
Model differences:	All the model are the same circuit and RF module, except model names.
Hardware Version:	N/A
Software Version:	N/A
IEEE 802.11 WLAN Mode Supported	802.11b 802.11g 802.11n(20MHz channel bandwidth) 802.11n(40MHz channel bandwidth) 802.11ax(HE20) 802.11ax(HE40)
Operation Frequency:	802.11b/g/n/ax 20MHz:2412~2462 MHz 802.11n/ax 40MHz:2422~2452 MHz
Type of Modulation:	DSSS with DBPSK/DQPSK/CCK for 802.11b; OFDM with BPSK/QPSK/16QAM/64QAM for 802.11g/n; OFDMA with 1024QAM for 802.11AX HE
Number Of Channel:	11 channels for 802.11b/g n(HT20)/ax(HE20); 7 Channels for 802.11n(HT40)/ax(HE40);
Transmit Power Max	20.74dBm
Antenna installation:	External antenna*2
Antenna Gain:	Antenna A&B: 4dBi
Power supply:	DC12V/3A for adapter
Adapter:	Input: 100-240VAC,50/60Hz, 0.8A Max Output: DC12V/2A


4.2 Test Setup Configuration

See test photographs attached in *EUT TEST SETUP PHOTOGRAPHS* for the actual connections between Product and support equipment.

Conducted Emission:



Radiated Spurious Emission



4.3 Support Equipment

No.	Device Type	Brand	Model	Series No.	Note
E-1	Wireless Router	N/A	Z2101	N/A	N/A
E-2	Adapter	N/A	WA-36N12R	N/A	N/A

Item	Shielded Type	Ferrite Core	Length	Note
N/A	N/A	N/A	N/A	N/A

Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

4.4 Channel List

Channel List for 802.11b/g/n/ax(20)					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2412	02	2417	03	2422
04	2427	05	2432	06	2437
07	2442	08	2447	09	2452
10	2457	11	2462		

Channel List for 802.11n/ax(40)					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
03	2422	04	2427	05	2432
06	2437	07	2442	08	2447
09	2452				

4.5 Test Mode

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

For All Mode	Description	Modulation Type
Mode 1	CH 01	802.11b
Mode 2	CH 06	
Mode 3	CH 11	
Mode 4	CH 01	802.11g
Mode 5	CH 06	
Mode 6	CH 11	
Mode 7	CH 01	802.11n/ax 20
Mode 8	CH 06	
Mode 9	CH 11	
Mode 10	CH 03	802.11n/ax 40
Mode 11	CH 06	
Mode 12	CH 09	
Mode 13	Link mode (Conducted emission and Radiated emission)	

Notes:

1. The measurements are performed at the highest, middle, lowest available channels.
2. The measurements are performed at all Bit Rate of Transmitter, the worst data was reported
3. According to ANSI C63.10 standards, the test results are both the "worst case" and "worst setup" 11Mbps for 802.11b, 6Mbps for 802.11g, 13Mbps for 802.11/ax 20, 54Mbps for 802.11 n/ax 40,

4.6 Table Of Parameters Of Text Software Setting

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters

Test software Version	CMD		
Frequency	2412 MHz	2437 MHz	2462 MHz
Parameters	DEF	DEF	DEF
Frequency	2422MHz	2437MHz	2452MHz
Parameters	DEF	DEF	DEF

4.7 Antenna

Table for External antenna

Ant.	Brand	Model Name	Antenna Type	Gain (dBi)	NOTE
A	N/A	N/A	External antenna	4	N/A
B	N/A	N/A	External antenna	4	N/A

EUT has two External antennas with Max gain GANT 4dBi on every antenna, CDD device with one spatial streams, also can operat with one spatial streams according to KDB662911 D01 v02r01,

Directional gain = GANT + 10 log (NANT) dBi=4+10log (2) =7.0dBi

5. Test Facility And Test Instrument Used

5.1 Test Facility

All measurement facilities used to collect the measurement data are located at Shenzhen BCTC Testing Co., Ltd. Address:1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Tangwei, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

FCC Test Firm Registration Number: 712850

IC Registered No.: 23583

5.2 Test Instrument Used


Conducted Emissions Test					
Equipment	Manufacturer	Model#	Serial#	Last Cal.	Next Cal.
Receiver	R&S	ESR3	102075	May 24, 2022	May 23, 2023
LISN	R&S	ENV216	101375	May 24, 2022	May 23, 2023
Software	Frad	EZ-EMC	EMC-CON 3A1	\	\
Attenuator	\	10dB DC-6GHz	1650	May 24, 2022	May 23, 2023

RF Conducted Test					
Equipment	Manufacturer	Model#	Serial#	Last Cal.	Next Cal.
Power Metter	Keysight	E4419	\	May 24, 2022	May 23, 2023
Power Sensor (AV)	Keysight	E9300A	\	May 24, 2022	May 23, 2023
Signal Analyzer20kHz-26.5GHz	Keysight	N9020A	MY49100060	May 24, 2022	May 23, 2023
Spectrum Analyzer9kHz-40GHz	R&S	FSP40	\	May 24, 2022	May 23, 2023

Radiated Emissions Test (966 Chamber)					
Equipment	Manufacturer	Model#	Serial#	Last Cal.	Next Cal.
966 chamber	ChengYu	966 Room	966	Jun. 06. 2020	Jun. 05, 2023
Receiver	R&S	ESR3	102075	May 24, 2022	May 23, 2023
Receiver	R&S	ESRP	101154	May 24, 2022	May 23, 2023
Amplifier	SKET	LAPA_01G18 G-45dB	\	May 24, 2022	May 23, 2023
Amplifier	Schwarzbeck	BBV9744	9744-0037	May 24, 2022	May 23, 2023
TRILOG Broadband Antenna	Schwarzbeck	VULB9163	942	May 26, 2022	May 25, 2023
Horn Antenna	Schwarzbeck	BBHA9120D	1541	May 24, 2022	May 23, 2023
Horn Antenn(18GH z-40GHz)	Schwarzbeck	BBHA9170	00822	May 24, 2022	May 23, 2023
Amplifier(18G Hz-40GHz)	MITEQ	TTA1840-35- HG	2034381	May 24, 2022	May 23, 2023
Loop Antenna(9KHz -30MHz)	Schwarzbeck	FMZB1519B	00014	May 26, 2022	May 25, 2023
RF cables1(9kHz- 30MHz)	Huber+Suhnar	9kHz-30MHz	B1702988-000 8	May 26, 2022	May 25, 2023
RF cables2(30MH z-1GHz)	Huber+Suhnar	30MHz-1GHz	1486150	May 26, 2022	May 25, 2023
RF cables3(1GHz -40GHz)	Huber+Suhnar	1GHz-40GHz	1607106	May 24, 2022	May 23, 2023
Power Metter	Keysight	E4419	\	May 26, 2022	May 25, 2023
Power Sensor (AV)	Keysight	E9300A	\	May 26, 2022	May 25, 2023
Signal Analyzer20kH z-26.5GHz	Keysight	N9020A	MY49100060	May 26, 2022	May 25, 2023
Spectrum Analyzer9kHz- 40GHz	R&S	FSP40	\	May 26, 2022	May 25, 2023
Software	Frad	EZ-EMC	FA-03A2 RE	\	\

6. Conducted Emissions

6.1 Block Diagram Of Test Setup

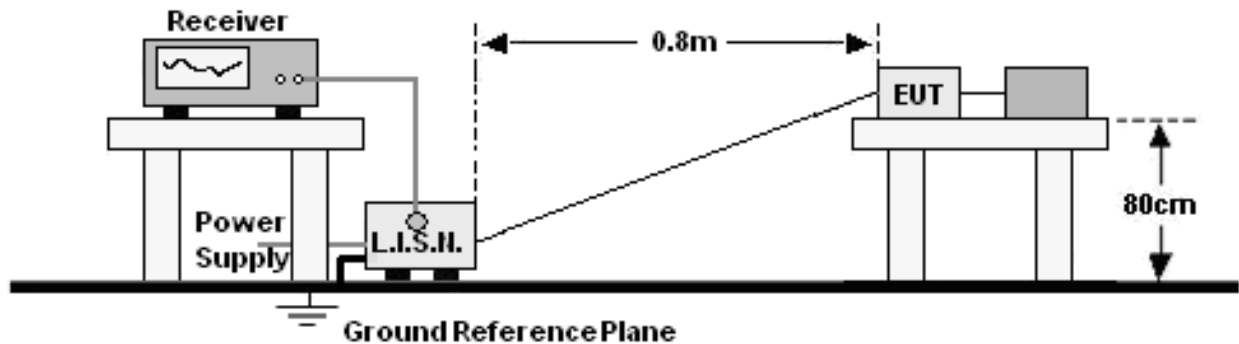

6.2 Limit

Frequency (MHz)	Limit (dBuV)	
	Quas-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

Notes:

- *Decreasing linearly with logarithm of frequency.
- The lower limit shall apply at the transition frequencies.

6.3 Test procedure

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz


- The Product was placed on a nonconductive table 0.8 m above the horizontal ground reference plane, and 0.4 m from the vertical ground reference plane, and connected to the main through Line Impedance Stability Network (L.I.S.N).
- The RBW of the receiver was set at 9 kHz in 150 kHz ~ 30MHz with Peak and AVG detector in Max Hold mode. Run the receiver's pre-scan to record the maximum disturbance generated from Product in all power lines in the full band.
- For each frequency whose maximum record was higher or close to limit, measure its QP and AVG values and record.

6.4 EUT operating Conditions

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

6.5 Test Result

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Test Voltage :	AC120V/60Hz
Test Mode:	Mode 13	Polarization :	L

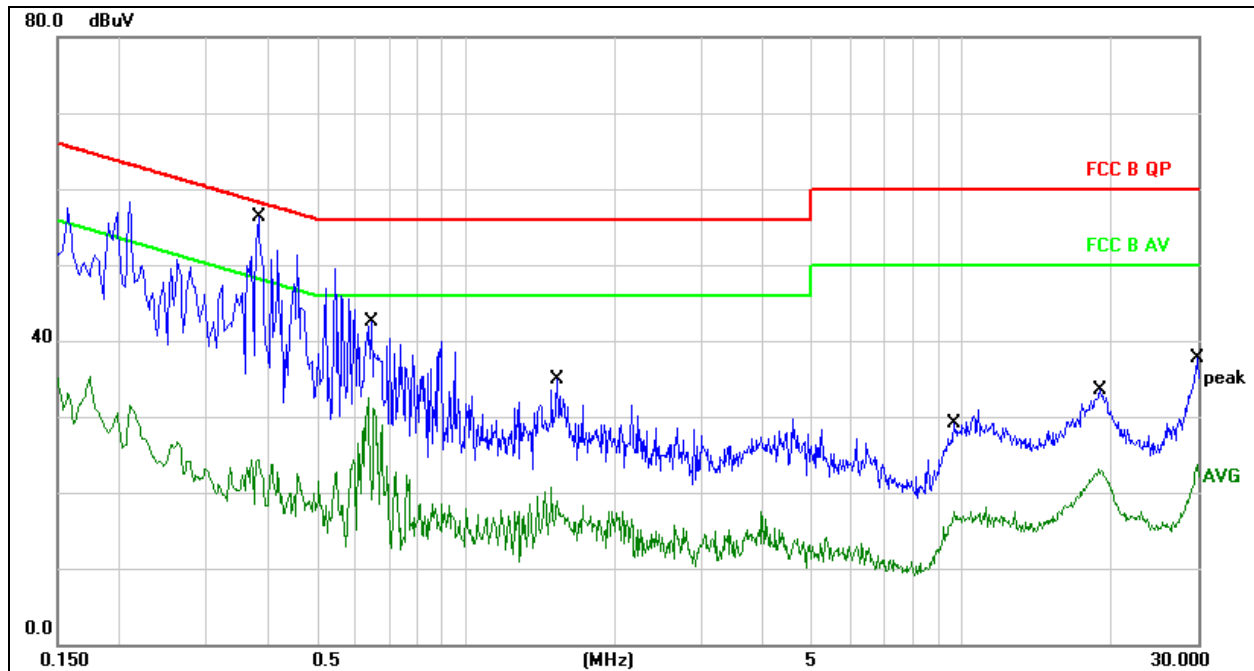


Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.
3. Measurement = Reading Level + Correct Factor
4. Over = Measurement - Limit

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1 *	0.3820	46.18	10.07	56.25	58.23	-1.98	QP	
2	0.3820	14.30	10.07	24.37	48.23	-23.86	AVG	
3	0.6460	32.28	10.15	42.43	56.00	-13.57	QP	
4	0.6460	22.30	10.15	32.45	46.00	-13.55	AVG	
5	1.5300	24.79	10.17	34.96	56.00	-21.04	QP	
6	1.5300	10.59	10.17	20.76	46.00	-25.24	AVG	
7	9.6540	18.27	10.92	29.19	60.00	-30.81	QP	
8	9.6540	6.50	10.92	17.42	50.00	-32.58	AVG	
9	19.0540	22.62	10.88	33.50	60.00	-26.50	QP	
10	19.0540	12.17	10.88	23.05	50.00	-26.95	AVG	
11	29.8700	26.73	11.05	37.78	60.00	-22.22	QP	
12	29.8700	12.62	11.05	23.67	50.00	-26.33	AVG	

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Test Voltage :	AC120V/60Hz
Test Mode:	Mode 13	Polarization :	N

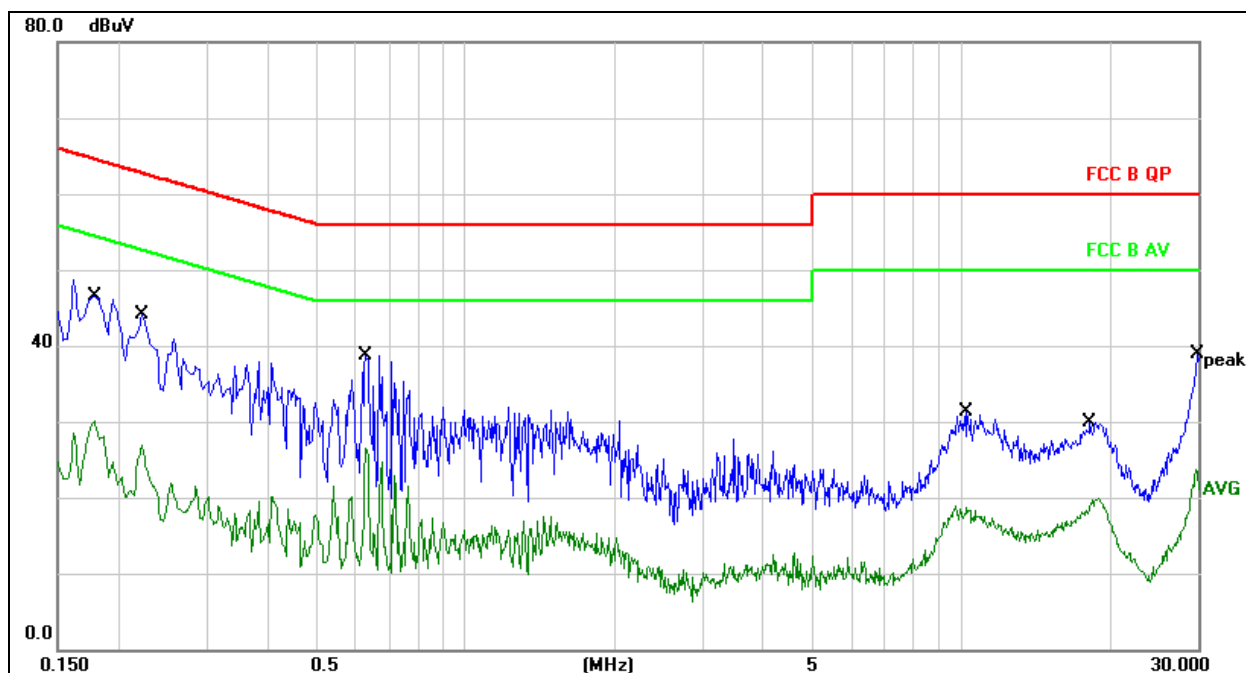
Remark:


1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.
3. Measurement = Reading Level + Correct Factor
4. Over = Measurement - Limit

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1	0.1780	36.57	9.98	46.55	64.57	-18.02	QP	
2	0.1780	20.17	9.98	30.15	54.57	-24.42	AVG	
3	0.2220	34.06	10.01	44.07	62.74	-18.67	QP	
4	0.2220	16.92	10.01	26.93	52.74	-25.81	AVG	
5 *	0.6300	28.52	10.14	38.66	56.00	-17.34	QP	
6	0.6300	16.36	10.14	26.50	46.00	-19.50	AVG	
7	10.2459	20.31	10.93	31.24	60.00	-28.76	QP	
8	10.2459	7.95	10.93	18.88	50.00	-31.12	AVG	
9	18.2139	19.04	10.88	29.92	60.00	-30.08	QP	
10	18.2139	9.01	10.88	19.89	50.00	-30.11	AVG	
11	29.9980	27.91	11.05	38.96	60.00	-21.04	QP	
12	29.9980	10.65	11.05	21.70	50.00	-28.30	AVG	


7. Radiated Emissions

7.1 Block Diagram Of Test Setup


(A) Radiated Emission Test-Up Frequency Below 30MHz

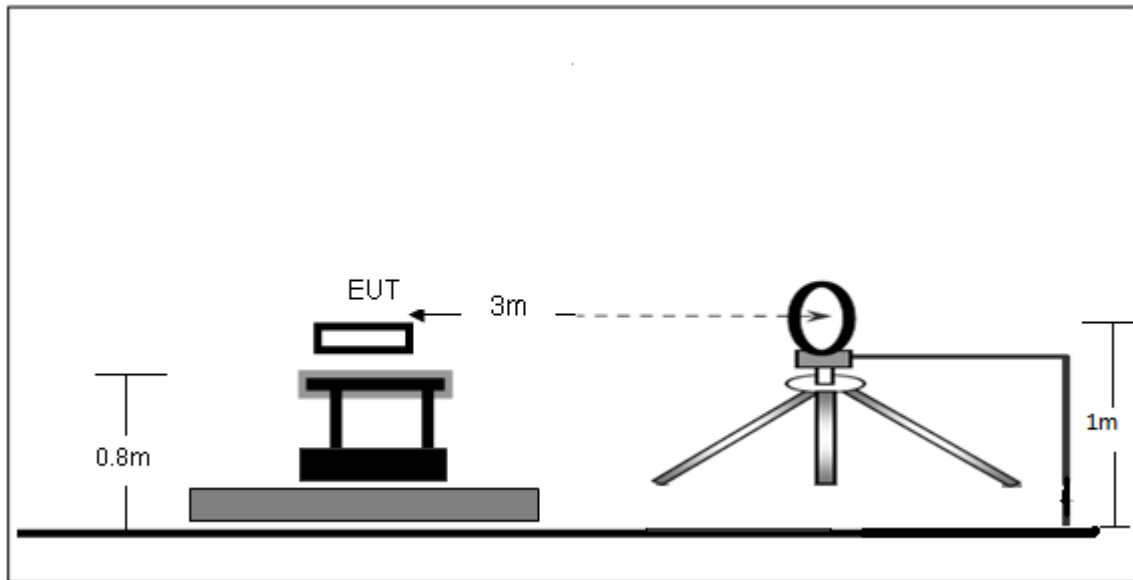

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

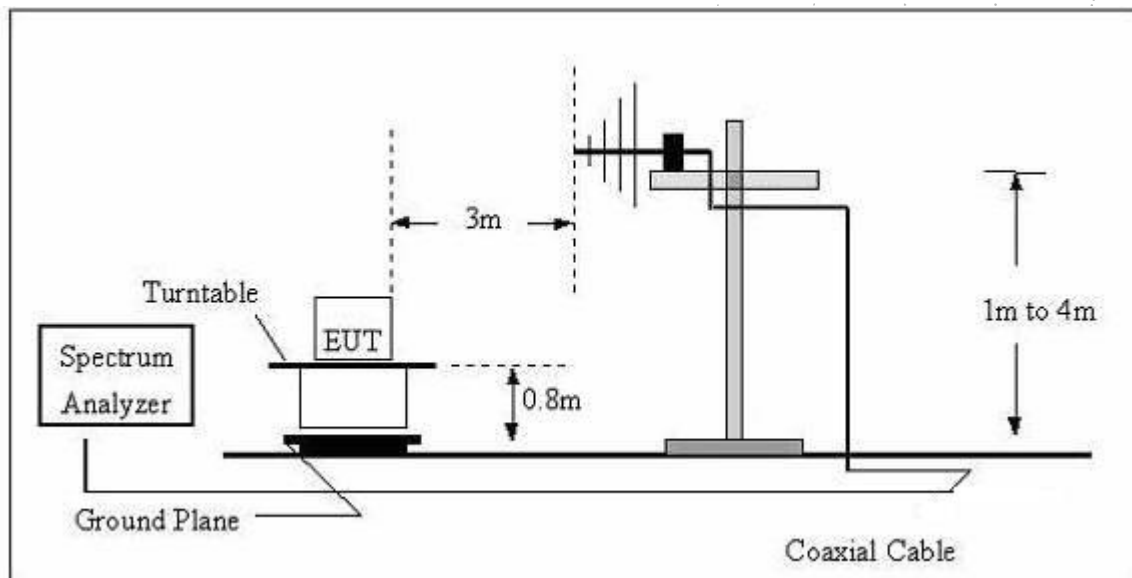

(C) Radiated Emission Test-Up Frequency Above 1GHz

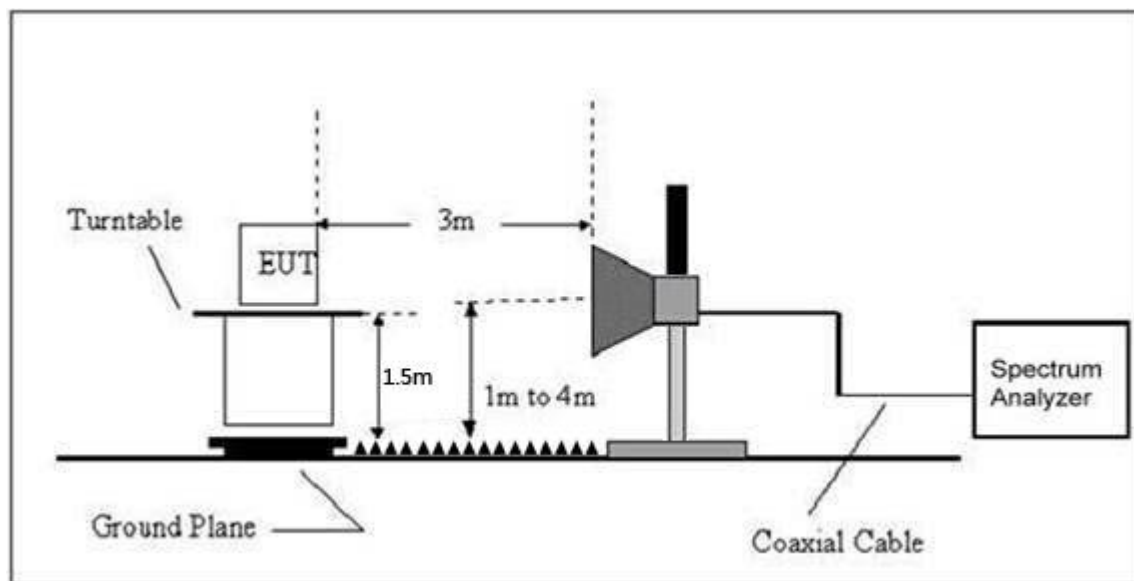

7.2 Limit

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequency (MHz)	Field Strength uV/m	Distance (m)	Field Strength Limit at 3m Distance	
			uV/m	dBuV/m
0.009 ~ 0.490	$2400/F(\text{kHz})$	300	$10000 * 2400/F(\text{kHz})$	$20\log^{(2400/F(\text{kHz}))} + 80$
0.490 ~ 1.705	$24000/F(\text{kHz})$	30	$100 * 24000/F(\text{kHz})$	$20\log^{(24000/F(\text{kHz}))} + 40$
1.705 ~ 30	30	30	$100 * 30$	$20\log^{(30)} + 40$
30 ~ 88	100	3	100	$20\log^{(100)}$
88 ~ 216	150	3	150	$20\log^{(150)}$
216 ~ 960	200	3	200	$20\log^{(200)}$
Above 960	500	3	500	$20\log^{(500)}$

Limits Of Radiated Emission Measurement (Above 1000MHz)

Frequency (MHz)	Limit (dBuV/m) (at 3M)	
	Peak	Average
Above 1000	74	54

Notes:

- (1)The limit for radiated test was performed according to FCC PART 15C.
- (2)The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

Frequency Range Of Radiated Measurement

(a) For an intentional radiator the spectrum shall be investigated from the lowest radio frequency signal generated in the device, without going below 9 kHz, up to at least the frequency shown in this paragraph:

- (1) If the intentional radiator operates below 10 GHz: to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.
- (2) If the intentional radiator operates at or above 10 GHz and below 30 GHz: to the fifth harmonic of the highest fundamental frequency or to 100 GHz, whichever is lower.
- (3) If the intentional radiator operates at or above 30 GHz: to the fifth harmonic of the highest fundamental frequency or to 200 GHz, whichever is lower, unless specified otherwise elsewhere in the rules.
- (4) If the intentional radiator operates at or above 95 GHz: To the third harmonic of the highest fundamental frequency or to 750 GHz, whichever is lower, unless specified otherwise elsewhere in the rules.
- (5) If the intentional radiator contains a digital device, regardless of whether this digital device controls the functions of the intentional radiator or the digital device is used for additional control or function purposes other than to enable the operation of the intentional radiator, the frequency range shall be investigated up to the range specified in paragraphs (a) (1)through (4) of this section or the range applicable to the digital device, as shown in paragraph (b)(1) of this section, whichever is the higher frequency range of investigation.

7.3 Test procedure

Receiver Parameter	Setting
Attenuation	Auto
9kHz~150kHz	RBW 200Hz for QP
150kHz~30MHz	RBW 9kHz for QP
30MHz~1000MHz	RBW 120kHz for QP

Spectrum Parameter	Setting
1-25GHz	RBW 1 MHz /VBW 1 MHz for Peak, RBW 1 MHz / VBW 10Hz for Average

Below 1GHz test procedure as below:

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- Test the EUT in the lowest channel, the middlest channel, the Highest channel.

Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported.

7.4 EUT Operating Conditions

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

7.5 Test Result

Below 30MHz

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Test Voltage :	AC120V/60Hz
Test Mode:	Mode 1	Polarization:	---

Freq.	Reading	Limit	Margin	State
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F
--	--	--	--	PASS
--	--	--	--	PASS


Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor = $40 \log (\text{specific distance/test distance})$ (dB);

Limit line = specific limits(dBuv) + distance extrapolation factor.

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Test Voltage :	AC120V/60Hz
Test Mode:	Mode 13	Polarization :	Horizontal

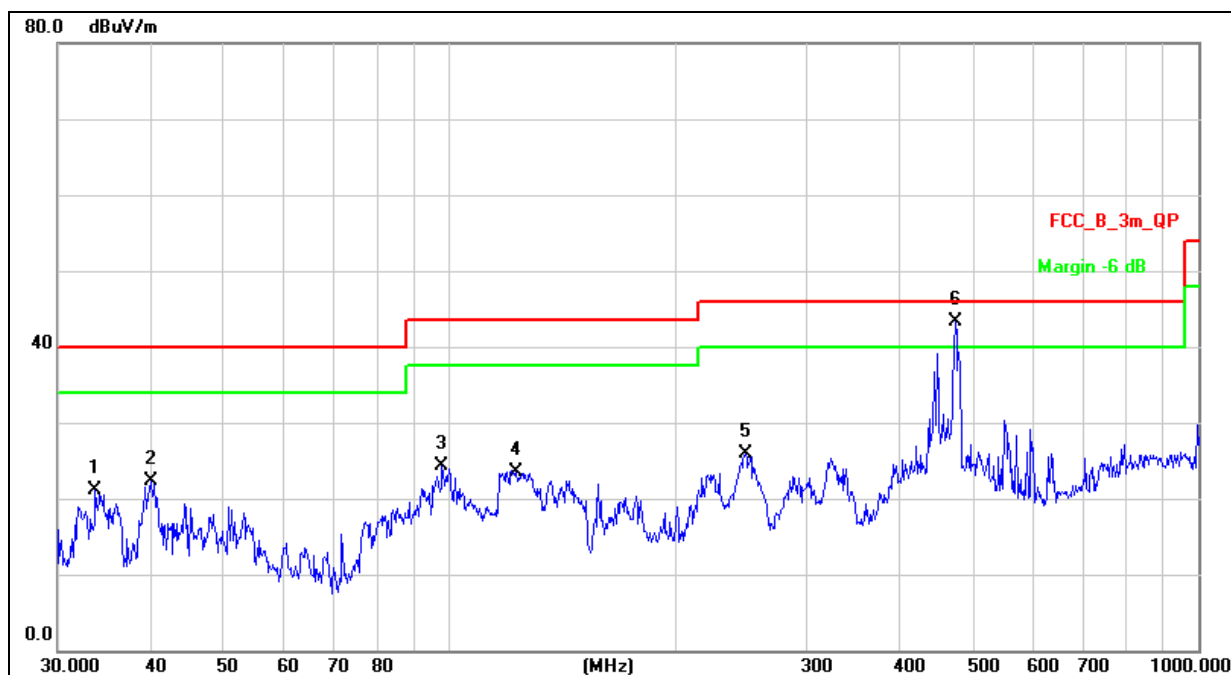


Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.
2. Measurement = Reading Level + Correct Factor
3. Over = Measurement - Limit

No. Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree
1	33.6802	30.61	-9.45	21.16	40.00	-18.84	QP	
2	39.9941	32.77	-10.43	22.34	40.00	-17.66	QP	
3	97.7980	37.59	-13.29	24.30	43.50	-19.20	QP	
4	122.8340	34.14	-10.61	23.53	43.50	-19.97	QP	
5	248.5517	35.33	-9.37	25.96	46.00	-20.04	QP	
6 *	473.8346	45.74	-2.46	43.28	46.00	-2.72	QP	

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Test Voltage :	AC120V/60Hz
Test Mode:	Mode 13	Polarization :	Vertical

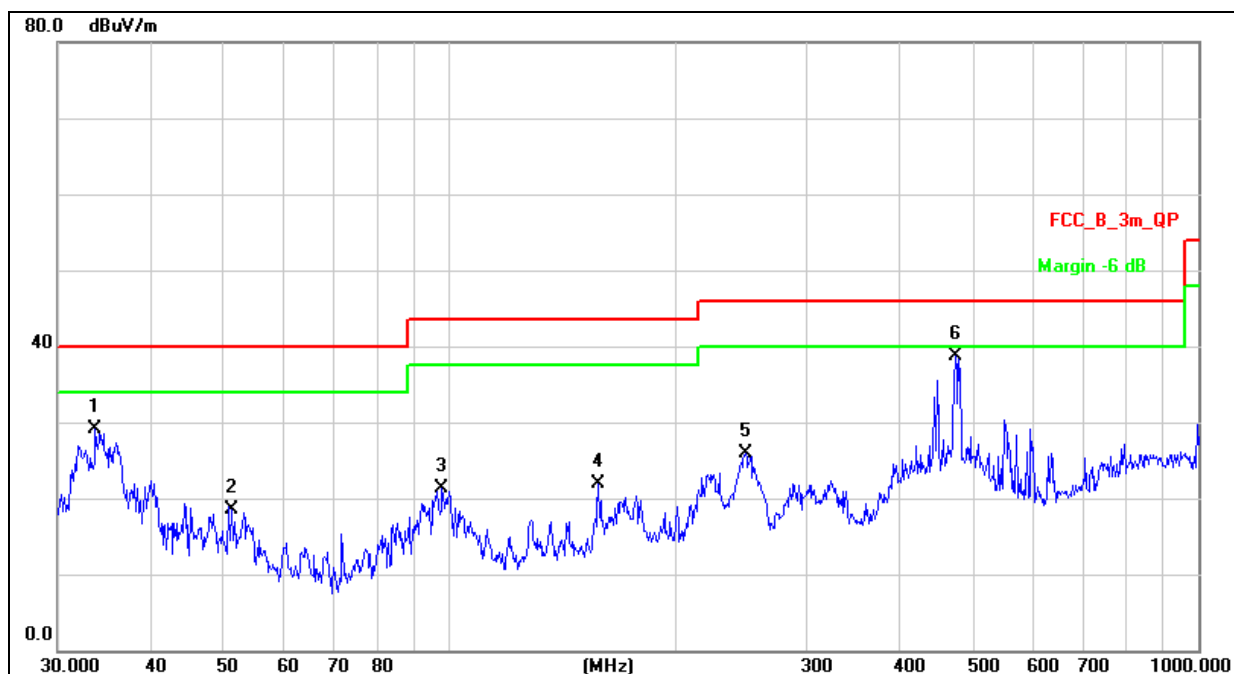

Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.
2. Measurement = Reading Level + Correct Factor
3. Over = Measurement - Limit

No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	33.6802	38.61	-9.45	29.16	40.00	-10.84	QP		
2	51.3005	29.29	-10.76	18.53	40.00	-21.47	QP		
3	97.7983	34.59	-13.29	21.30	43.50	-22.20	QP		
4	158.1123	30.07	-8.25	21.82	43.50	-21.68	QP		
5	248.5519	35.33	-9.37	25.96	46.00	-20.04	QP		
6 *	473.8347	41.24	-2.46	38.78	46.00	-7.22	QP		

Between 1GHz – 25GHz

802.11b

Polar (H/V)	Frequency	Reading Level	Correct Factor	Measure- ment	Limits	Over	Detector Type
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Low channel:2412MHz							
V	4824.00	54.84	-0.43	54.41	74.00	-19.59	PK
V	4824.00	46.19	-0.43	45.76	54.00	-8.24	AV
V	7236.00	47.56	8.31	55.87	74.00	-18.13	PK
V	7236.00	37.25	8.31	45.56	54.00	-8.44	AV
H	4824.00	51.50	-0.43	51.07	74.00	-22.93	PK
H	4824.00	42.28	-0.43	41.85	54.00	-12.15	AV
H	7236.00	46.12	8.31	54.43	74.00	-19.57	PK
H	7236.00	38.03	8.31	46.34	54.00	-7.66	AV
Middle channel:2437MHz							
V	4874.00	53.14	-0.38	52.76	74.00	-21.24	PK
V	4874.00	46.99	-0.38	46.61	54.00	-7.39	AV
V	7311.00	42.76	8.83	51.59	74.00	-22.41	PK
V	7311.00	34.57	8.83	43.40	54.00	-10.60	AV
H	4874.00	49.99	-0.38	49.61	74.00	-24.39	PK
H	4874.00	39.07	-0.38	38.69	54.00	-15.31	AV
H	7311.00	40.94	8.83	49.77	74.00	-24.23	PK
H	7311.00	33.65	8.83	42.48	54.00	-11.52	AV
High channel:2462MHz							
V	4924.00	54.63	-0.32	54.31	74.00	-19.69	PK
V	4924.00	45.43	-0.32	45.11	54.00	-8.89	AV
V	7386.00	46.14	9.35	55.49	74.00	-18.51	PK
V	7386.00	36.54	9.35	45.89	54.00	-8.11	AV
H	4924.00	52.17	-0.32	51.85	74.00	-22.15	PK
H	4924.00	41.64	-0.32	41.32	54.00	-12.68	AV
H	7386.00	44.15	9.35	53.50	74.00	-20.50	PK
H	7386.00	36.38	9.35	45.73	54.00	-8.27	AV

Remark:

- 1.Emission Level = Meter Reading + Factor, Factor = Antenna Factor + Cable Loss – Pre-amplifier, Over= Emission Level - Limit
2. In restricted bands of operation, The spurious emissions below the permissible value more than 20dB
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
4. The worst case is Antenna A.

802.11g

Polar (H/V)	Frequency	Reading Level	Correct Factor	Measure- ment	Limits	Over	Detector Type
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Low channel:2412MHz							
V	4824.00	53.20	-0.43	52.77	74.00	-21.23	PK
V	4824.00	42.83	-0.43	42.40	54.00	-11.60	AV
V	7236.00	46.06	8.31	54.37	74.00	-19.63	PK
V	7236.00	36.09	8.31	44.40	54.00	-9.60	AV
H	4824.00	50.43	-0.43	50.00	74.00	-24.00	PK
H	4824.00	41.07	-0.43	40.64	54.00	-13.36	AV
H	7236.00	44.61	8.31	52.92	74.00	-21.08	PK
H	7236.00	36.60	8.31	44.91	54.00	-9.09	AV
Middle channel:2437MHz							
V	4874.00	51.95	-0.38	51.57	74.00	-22.43	PK
V	4874.00	43.93	-0.38	43.55	54.00	-10.45	AV
V	7311.00	43.18	8.83	52.01	74.00	-21.99	PK
V	7311.00	34.95	8.83	43.78	54.00	-10.22	AV
H	4874.00	48.41	-0.38	48.03	74.00	-25.97	PK
H	4874.00	37.71	-0.38	37.33	54.00	-16.67	AV
H	7311.00	41.08	8.83	49.91	74.00	-24.09	PK
H	7311.00	33.46	8.83	42.29	54.00	-11.71	AV
High channel:2462MHz							
V	4924.00	54.60	-0.32	54.28	74.00	-19.72	PK
V	4924.00	45.50	-0.32	45.18	54.00	-8.82	AV
V	7386.00	48.16	9.35	57.51	74.00	-16.49	PK
V	7386.00	37.89	9.35	47.24	54.00	-6.76	AV
H	4924.00	52.56	-0.32	52.24	74.00	-21.76	PK
H	4924.00	42.61	-0.32	42.29	54.00	-11.71	AV
H	7386.00	45.45	9.35	54.80	74.00	-19.20	PK
H	7386.00	38.40	9.35	47.75	54.00	-6.25	AV

Remark:

1.Emission Level = Meter Reading + Factor,

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Over= Emission Level - Limit

2. In restricted bands of operation, The spurious emissions below the permissible value more than 20dB

3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

4. The worst case is Antenna A.

802.11n20

Polar (H/V)	Frequency	Reading Level	Correct Factor	Measure- ment	Limits	Over	Detector Type
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Low channel:2412MHz							
V	4824.00	52.42	-0.43	51.99	74.00	-22.01	PK
V	4824.00	42.65	-0.43	42.22	54.00	-11.78	AV
V	7236.00	42.79	8.31	51.10	74.00	-22.90	PK
V	7236.00	33.00	8.31	41.31	54.00	-12.69	AV
H	4824.00	48.51	-0.43	48.08	74.00	-25.92	PK
H	4824.00	37.59	-0.43	37.16	54.00	-16.84	AV
H	7236.00	40.80	8.31	49.11	74.00	-24.89	PK
H	7236.00	32.07	8.31	40.38	54.00	-13.62	AV
Middle channel:2437MHz							
V	4874.00	49.61	-0.38	49.23	74.00	-24.77	PK
V	4874.00	42.70	-0.38	42.32	54.00	-11.68	AV
V	7311.00	39.07	8.83	47.90	74.00	-26.10	PK
V	7311.00	30.87	8.83	39.70	54.00	-14.30	AV
H	4874.00	44.68	-0.38	44.30	74.00	-29.70	PK
H	4874.00	35.08	-0.38	34.70	54.00	-19.30	AV
H	7311.00	37.88	8.83	46.71	74.00	-27.29	PK
H	7311.00	29.11	8.83	37.94	54.00	-16.06	AV
High channel:2462MHz							
V	4924.00	52.46	-0.32	52.14	74.00	-21.86	PK
V	4924.00	43.31	-0.32	42.99	54.00	-11.01	AV
V	7386.00	44.74	9.35	54.09	74.00	-19.91	PK
V	7386.00	34.20	9.35	43.55	54.00	-10.45	AV
H	4924.00	50.50	-0.32	50.18	74.00	-23.82	PK
H	4924.00	40.70	-0.32	40.38	54.00	-13.62	AV
H	7386.00	43.44	9.35	52.79	74.00	-21.21	PK
H	7386.00	36.26	9.35	45.61	54.00	-8.39	AV

Remark:

1. Emission Level = Meter Reading + Factor,
Factor = Antenna Factor + Cable Loss – Pre-amplifier.
Over = Emission Level - Limit
2. In restricted bands of operation, The spurious emissions below the permissible value more than 20dB
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
4. The worst case is Antenna A.

802.11n40

Polar (H/V)	Frequency	Reading Level	Correct Factor	Measure- ment	Limits	Over	Detector Type
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Low channel:2422MHz							
V	4844.00	54.73	-0.43	54.30	74.00	-19.70	PK
V	4844.00	45.42	-0.43	44.99	54.00	-9.01	AV
V	7266.00	44.05	8.31	52.36	74.00	-21.64	PK
V	7266.00	34.35	8.31	42.66	54.00	-11.34	AV
H	4844.00	52.68	-0.43	52.25	74.00	-21.75	PK
H	4844.00	43.38	-0.43	42.95	54.00	-11.05	AV
H	7266.00	42.30	8.31	50.61	74.00	-23.39	PK
H	7266.00	34.69	8.31	43.00	54.00	-11.00	AV
Middle channel:2437MHz							
V	4874.00	52.89	-0.38	52.51	74.00	-21.49	PK
V	4874.00	45.59	-0.38	45.21	54.00	-8.79	AV
V	7311.00	45.43	8.83	54.26	74.00	-19.74	PK
V	7311.00	37.34	8.83	46.17	54.00	-7.83	AV
H	4874.00	49.18	-0.38	48.80	74.00	-25.20	PK
H	4874.00	38.30	-0.38	37.92	54.00	-16.08	AV
H	7311.00	43.76	8.83	52.59	74.00	-21.41	PK
H	7311.00	35.03	8.83	43.86	54.00	-10.14	AV
High channel:2452MHz							
V	4904.00	53.88	-0.32	53.56	74.00	-20.44	PK
V	4904.00	44.43	-0.32	44.11	54.00	-9.89	AV
V	7356.00	45.61	9.35	54.96	74.00	-19.04	PK
V	7356.00	35.86	9.35	45.21	54.00	-8.79	AV
H	4904.00	50.88	-0.32	50.56	74.00	-23.44	PK
H	4904.00	39.90	-0.32	39.58	54.00	-14.42	AV
H	7356.00	43.00	9.35	52.35	74.00	-21.65	PK
H	7356.00	34.86	9.35	44.21	54.00	-9.79	AV

Remark:

1. Emission Level = Meter Reading + Factor,
Factor = Antenna Factor + Cable Loss – Pre-amplifier.
Over= Emission Level - Limit
2. In restricted bands of operation, The spurious emissions below the permissible value more than 20dB
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
4. The worst case is Antenna A.

802.11ax20

Polar (H/V)	Frequency	Reading Level	Correct Factor	Measure- ment	Limits	Over	Detector Type
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Low channel:2412MHz							
V	4824.00	53.80	-0.43	53.37	74.00	-20.63	PK
V	4824.00	44.03	-0.43	43.60	54.00	-10.40	AV
V	7236.00	43.92	8.31	52.23	74.00	-21.77	PK
V	7236.00	33.55	8.31	41.86	54.00	-12.14	AV
H	4824.00	49.51	-0.43	49.08	74.00	-24.92	PK
H	4824.00	39.53	-0.43	39.10	54.00	-14.90	AV
H	7236.00	41.23	8.31	49.54	74.00	-24.46	PK
H	7236.00	33.00	8.31	41.31	54.00	-12.69	AV
Middle channel:2437MHz							
V	4874.00	50.80	-0.38	50.42	74.00	-23.58	PK
V	4874.00	42.76	-0.38	42.38	54.00	-11.62	AV
V	7311.00	42.31	8.83	51.14	74.00	-22.86	PK
V	7311.00	33.02	8.83	41.85	54.00	-12.15	AV
H	4874.00	48.87	-0.38	48.49	74.00	-25.51	PK
H	4874.00	38.99	-0.38	38.61	54.00	-15.39	AV
H	7311.00	40.24	8.83	49.07	74.00	-24.93	PK
H	7311.00	33.09	8.83	41.92	54.00	-12.08	AV
High channel:2462MHz							
V	4924.00	51.94	-0.32	51.62	74.00	-22.38	PK
V	4924.00	42.49	-0.32	42.17	54.00	-11.83	AV
V	7386.00	44.72	9.35	54.07	74.00	-19.93	PK
V	7386.00	35.32	9.35	44.67	54.00	-9.33	AV
H	4924.00	49.23	-0.32	48.91	74.00	-25.09	PK
H	4924.00	38.38	-0.32	38.06	54.00	-15.94	AV
H	7386.00	43.66	9.35	53.01	74.00	-20.99	PK
H	7386.00	36.27	9.35	45.62	54.00	-8.38	AV

Remark:

1. Emission Level = Meter Reading + Factor,
Factor = Antenna Factor + Cable Loss – Pre-amplifier.
Over= Emission Level - Limit
2. In restricted bands of operation, The spurious emissions below the permissible value more than 20dB
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
4. The worst case is Antenna A.

802.11ax40

Polar (H/V)	Frequency	Reading Level	Correct Factor	Measure- ment	Limits	Over	Detector Type
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Low channel:2422MHz							
V	4844.00	53.36	-0.43	52.93	74.00	-21.07	PK
V	4844.00	43.17	-0.43	42.74	54.00	-11.26	AV
V	7266.00	45.85	8.31	54.16	74.00	-19.84	PK
V	7266.00	35.09	8.31	43.40	54.00	-10.60	AV
H	4844.00	49.66	-0.43	49.23	74.00	-24.77	PK
H	4844.00	40.32	-0.43	39.89	54.00	-14.11	AV
H	7266.00	43.37	8.31	51.68	74.00	-22.32	PK
H	7266.00	35.74	8.31	44.05	54.00	-9.95	AV
Middle channel:2437MHz							
V	4874.00	52.36	-0.38	51.98	74.00	-22.02	PK
V	4874.00	44.63	-0.38	44.25	54.00	-9.75	AV
V	7311.00	42.79	8.83	51.62	74.00	-22.38	PK
V	7311.00	33.30	8.83	42.13	54.00	-11.87	AV
H	4874.00	48.34	-0.38	47.96	74.00	-26.04	PK
H	4874.00	38.51	-0.38	38.13	54.00	-15.87	AV
H	7311.00	41.61	8.83	50.44	74.00	-23.56	PK
H	7311.00	33.11	8.83	41.94	54.00	-12.06	AV
High channel:2452MHz							
V	4904.00	53.41	-0.32	53.09	74.00	-20.91	PK
V	4904.00	44.70	-0.32	44.38	54.00	-9.62	AV
V	7356.00	47.36	9.35	56.71	74.00	-17.29	PK
V	7356.00	37.21	9.35	46.56	54.00	-7.44	AV
H	4904.00	51.41	-0.32	51.09	74.00	-22.91	PK
H	4904.00	41.85	-0.32	41.53	54.00	-12.47	AV
H	7356.00	45.12	9.35	54.47	74.00	-19.53	PK
H	7356.00	37.25	9.35	46.60	54.00	-7.40	AV

Remark:

1.Emission Level = Meter Reading + Factor,

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Over= Emission Level - Limit

2. In restricted bands of operation, The spurious emissions below the permissible value more than 20dB


3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

4. The worst case is Antenna A.

8. Radiated Band Emission Measurement and Restricted Bands Of Operation

8.1 Block Diagram Of Test Setup

Radiated Emission Test-Up Frequency Above 1GHz

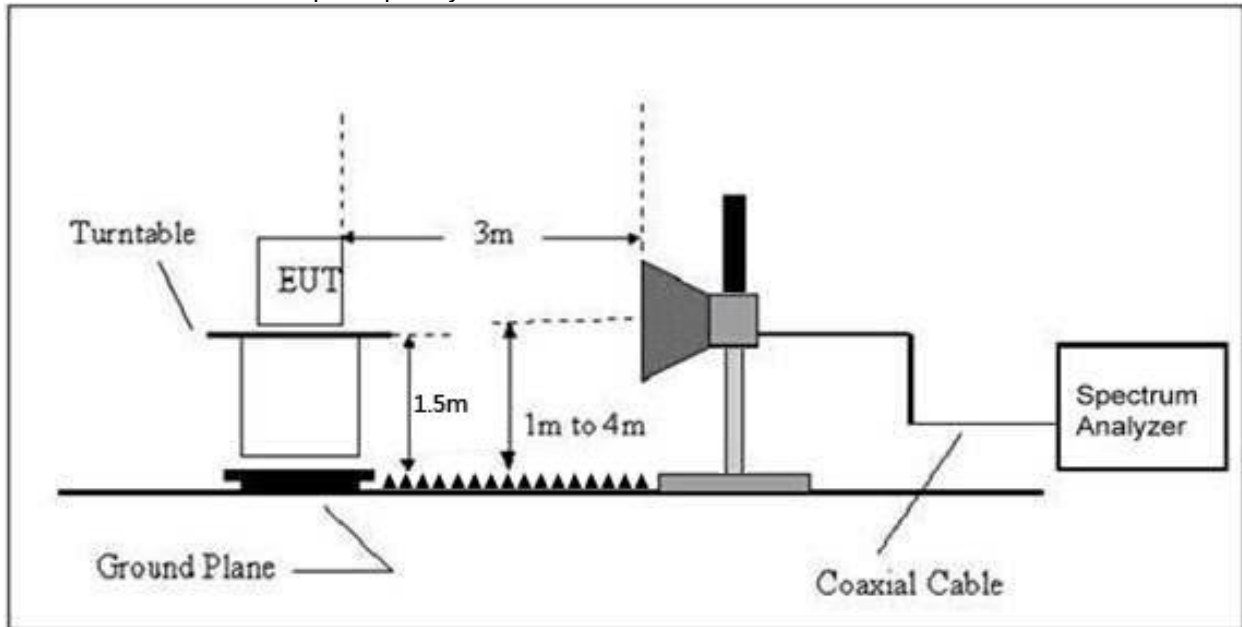

8.2 Limit

FCC Part15 C Section 15.209 and 15.205

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(2)
13.36-13.41			

Limits Of Radiated Emission Measurement (Above 1000MHz)

Frequency (MHz)	Limit (dBuV/m) (at 3M)	
	Peak	Average
Above 1000	74	54

Notes:

- (1)The limit for radiated test was performed according to FCC PART 15C.
- (2)The tighter limit applies at the band edges.
- (3)Emission level (dBuV/m)=20log Emission level (uV/m).

8.3 Test procedure

Receiver Parameter	Setting
Attenuation	Auto
Start Frequency	2300MHz
Stop Frequency	2520
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

Above 1GHz test procedure as below:

- a.The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b.The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c.The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d.For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e.The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel, the middle channel, the Highest channel.

Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported.

8.4 EUT Operating Conditions

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

8.5 Test Result

Test mode	Polar (H/V)	Frequency (MHz)	Reading Level (dBuV/m)	Correct Factor (dB)	Measurement (dBuV/m)	Limits (dBuV/m)		Result
					PK	PK	AV	
802.11b	Low Channel 2412MHz							
	H	2390.00	53.48	-6.70	46.78	74.00	54.00	PASS
	H	2400.00	56.54	-6.71	49.83	74.00	54.00	PASS
	V	2390.00	54.18	-6.70	47.48	74.00	54.00	PASS
	V	2400.00	54.24	-6.71	47.53	74.00	54.00	PASS
	High Channel 2462MHz							
	H	2483.50	53.49	-6.79	46.70	74.00	54.00	PASS
	H	2500.00	48.84	-6.81	42.03	74.00	54.00	PASS
	V	2483.50	52.29	-6.79	45.50	74.00	54.00	PASS
	V	2500.00	48.95	-6.81	42.14	74.00	54.00	PASS
802.11g	Low Channel 2412MHz							
	H	2390.00	52.70	-6.70	46.00	74.00	54.00	PASS
	H	2400.00	56.47	-6.71	49.76	74.00	54.00	PASS
	V	2390.00	51.90	-6.70	45.20	74.00	54.00	PASS
	V	2400.00	52.94	-6.71	46.23	74.00	54.00	PASS
	High Channel 2462MHz							
	H	2483.50	52.17	-6.79	45.38	74.00	54.00	PASS
	H	2500.00	49.15	-6.81	42.34	74.00	54.00	PASS
	V	2483.50	50.71	-6.79	43.92	74.00	54.00	PASS
	V	2500.00	46.81	-6.81	40.00	74.00	54.00	PASS
Remark:								
1. Emission Level = Meter Reading + Factor, Factor = Antenna Factor + Cable Loss – Pre-amplifier. Over= Emission Level – Limit								
2. If the PK measured levels comply with average limit, then the average level were deemed to comply with average limit.								
3 In restricted bands of operation, The spurious emissions below the permissible value more than 20dB								
4.The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.								
5.The worst case is Antenna A.								

Test mode	Polar (H/V)	Frequency (MHz)	Reading Level (dBuV/m)	Correct Factor (dB)	Measure- ment (dBuV/m)	Limits (dBuV/m)		Result
					PK	PK	AV	
802.11n20	Low Channel 2412MHz							
	H	2390.00	53.02	-6.70	46.32	74.00	54.00	PASS
	H	2400.00	56.61	-6.71	49.90	74.00	54.00	PASS
	V	2390.00	52.06	-6.70	45.36	74.00	54.00	PASS
	V	2400.00	52.55	-6.71	45.84	74.00	54.00	PASS
	High Channel 2462MHz							
	H	2483.50	51.52	-6.79	44.73	74.00	54.00	PASS
	H	2500.00	48.39	-6.81	41.58	74.00	54.00	PASS
	V	2483.50	50.23	-6.79	43.44	74.00	54.00	PASS
	V	2500.00	46.46	-6.81	39.65	74.00	54.00	PASS
802.11n40	Low Channel 2422MHz							
	H	2390.00	52.41	-6.70	45.71	74.00	54.00	PASS
	H	2400.00	56.33	-6.71	49.62	74.00	54.00	PASS
	V	2390.00	51.58	-6.70	44.88	74.00	54.00	PASS
	V	2400.00	52.38	-6.71	45.67	74.00	54.00	PASS
	High Channel 2452MHz							
	H	2483.50	51.02	-6.79	44.23	74.00	54.00	PASS
	H	2500.00	47.45	-6.81	40.64	74.00	54.00	PASS
	V	2483.50	50.15	-6.79	43.36	74.00	54.00	PASS
	V	2500.00	47.05	-6.81	40.24	74.00	54.00	PASS
Remark: 1. Emission Level = Meter Reading + Factor, Factor = Antenna Factor + Cable Loss – Pre-amplifier. Over= Emission Level – Limit 2. If the PK measured levels comply with average limit, then the average level were deemed to comply with average limit. 3 In restricted bands of operation, The spurious emissions below the permissible value more than 20dB 4.The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported. 5.Test Mode is MIMO Mode.								

Test mode	Polar (H/V)	Frequency (MHz)	Reading Level (dBuV/m)	Correct Factor (dB)	Measure- ment (dBuV/m)	Limits (dBuV/m)		Result
					PK	PK	AV	
802.11ax20	Low Channel 2412MHz							
	H	2390.00	53.89	-6.70	47.19	74.00	54.00	PASS
	H	2400.00	56.91	-6.71	50.20	74.00	54.00	PASS
	V	2390.00	53.19	-6.70	46.49	74.00	54.00	PASS
	V	2400.00	53.69	-6.71	46.98	74.00	54.00	PASS
	High Channel 2462MHz							
	H	2483.50	51.91	-6.79	45.12	74.00	54.00	PASS
	H	2500.00	50.28	-6.81	43.47	74.00	54.00	PASS
	V	2483.50	52.31	-6.79	45.52	74.00	54.00	PASS
	V	2500.00	48.04	-6.81	41.23	74.00	54.00	PASS
802.11ax40	Low Channel 2422MHz							
	H	2390.00	53.97	-6.70	47.27	74.00	54.00	PASS
	H	2400.00	58.69	-6.71	51.98	74.00	54.00	PASS
	V	2390.00	53.73	-6.70	47.03	74.00	54.00	PASS
	V	2400.00	54.15	-6.71	47.44	74.00	54.00	PASS
	High Channel 2452MHz							
	H	2483.50	54.25	-6.79	47.46	74.00	54.00	PASS
	H	2500.00	49.62	-6.81	42.81	74.00	54.00	PASS
	V	2483.50	54.02	-6.79	47.23	74.00	54.00	PASS
	V	2500.00	50.32	-6.81	43.51	74.00	54.00	PASS
Remark:								
1. Emission Level = Meter Reading + Factor, Factor = Antenna Factor + Cable Loss – Pre-amplifier. Over= Emission Level – Limit								
2. If the PK measured levels comply with average limit, then the average level were deemed to comply with average limit.								
3 In restricted bands of operation, The spurious emissions below the permissible value more than 20dB								
4.The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.								
5.Test Mode is MIMO Mode.								

9. Power Spectral Density Test

9.1 Block Diagram Of Test Setup



9.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247	Power Spectral Density	8 dBm (in any 3KHz)	2400-2483.5	PASS

Limits Of Radiated Emission Measurement (Above 1000MHz)

9.3 Test procedure

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to: 3 kHz
4. Set the VBW $\geq 3 \times$ RBW.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

9.4 EUT Operating Conditions

The EUT tested system was configured as the statements of 4.6 Unless otherwise a special operating condition is specified in the follows during the testing.

Note: Power Spectral Density(dBm)=Reading+Cable Loss


9.5 Test Result

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Test Voltage:	AC120V/60Hz

Test Mode	Frequency	Ant. A Power Spectral Density (dBm/3kHz)	Ant. B Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)	Result
TX b Mode	2412 MHz	-7.38	-4.63	8	PASS
	2437 MHz	-6.97	-5.40	8	PASS
	2462 MHz	-6.29	-5.02	8	PASS
TX g Mode	2412 MHz	-11.55	-10.49	8	PASS
	2437 MHz	-10.99	-10.42	8	PASS
	2462 MHz	-12.01	-10.39	8	PASS
TX n Mode(20M)	2412 MHz	-12.1	-11.23	8	PASS
	2437 MHz	-10.2	-11.39	8	PASS
	2462 MHz	-11.55	-11.46	8	PASS
TX n Mode(40M)	2422 MHz	-14.82	-14.56	8	PASS
	2437 MHz	-14.52	-13.35	8	PASS
	2452 MHz	-12.89	-13.22	8	PASS
TX ax Mode(20M)	2412 MHz	-12.74	-13.35	8	PASS
	2437 MHz	-12.25	-11.68	8	PASS
	2462 MHz	-13.34	-12.02	8	PASS
TX ax Mode(40M)	2422 MHz	-15.37	-14.71	8	PASS
	2437 MHz	-15.05	-15.64	8	PASS
	2452 MHz	-14.35	-16.17	8	PASS


For 2T2R



Test Mode	Frequency	Power Spectral Density(dBm/3kHz)	Limit (dBm/3kHz)	Result
TX n Mode(20M)	2412 MHz	-8.63	8	PASS
	2437 MHz	-7.74	8	PASS
	2462 MHz	-8.49	8	PASS
TX n Mode(40M)	2422 MHz	-11.68	8	PASS
	2437 MHz	-10.89	8	PASS
	2452 MHz	-10.04	8	PASS
TX ax Mode(20M)	2412 MHz	-10.02	8	PASS
	2437 MHz	-8.95	8	PASS
	2462 MHz	-9.62	8	PASS
TX ax Mode(40M)	2422 MHz	-12.02	8	PASS
	2437 MHz	-12.32	8	PASS
	2452 MHz	-12.16	8	PASS

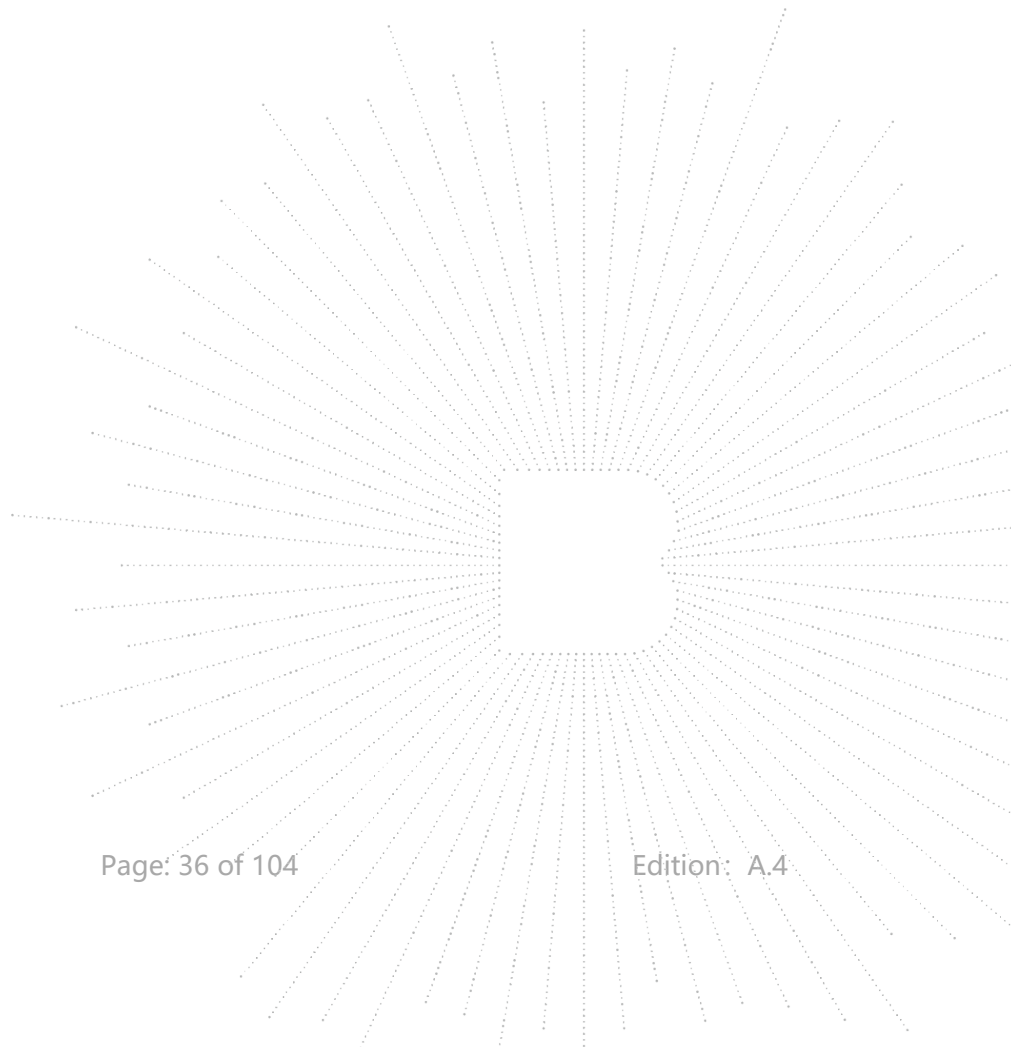








Ant. A:


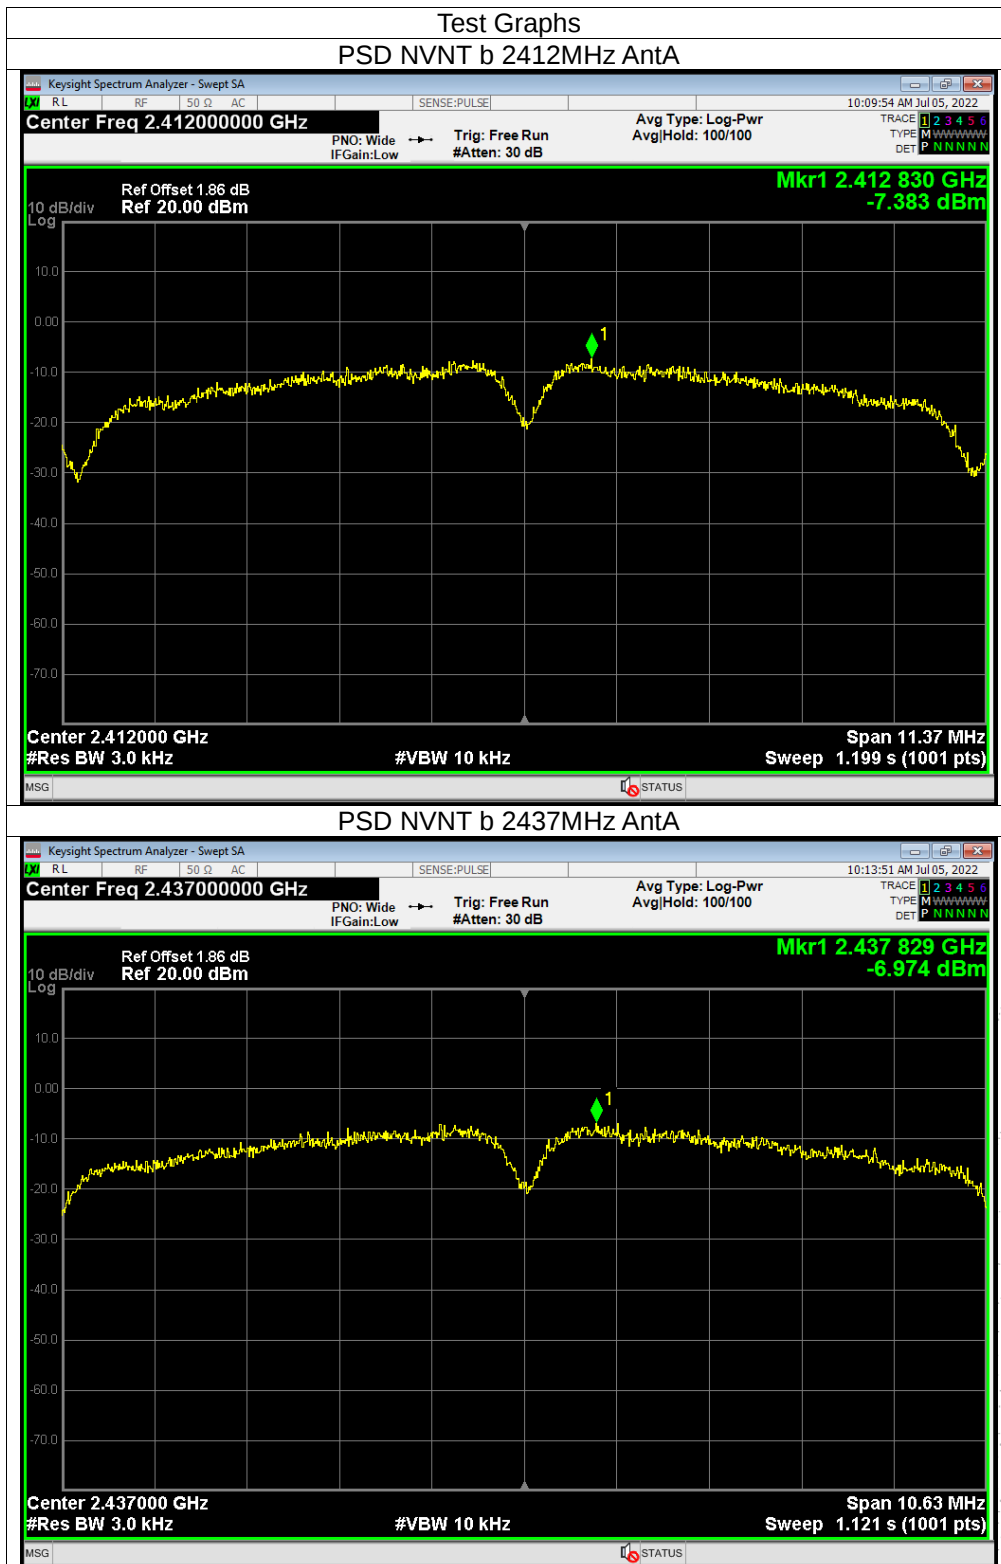


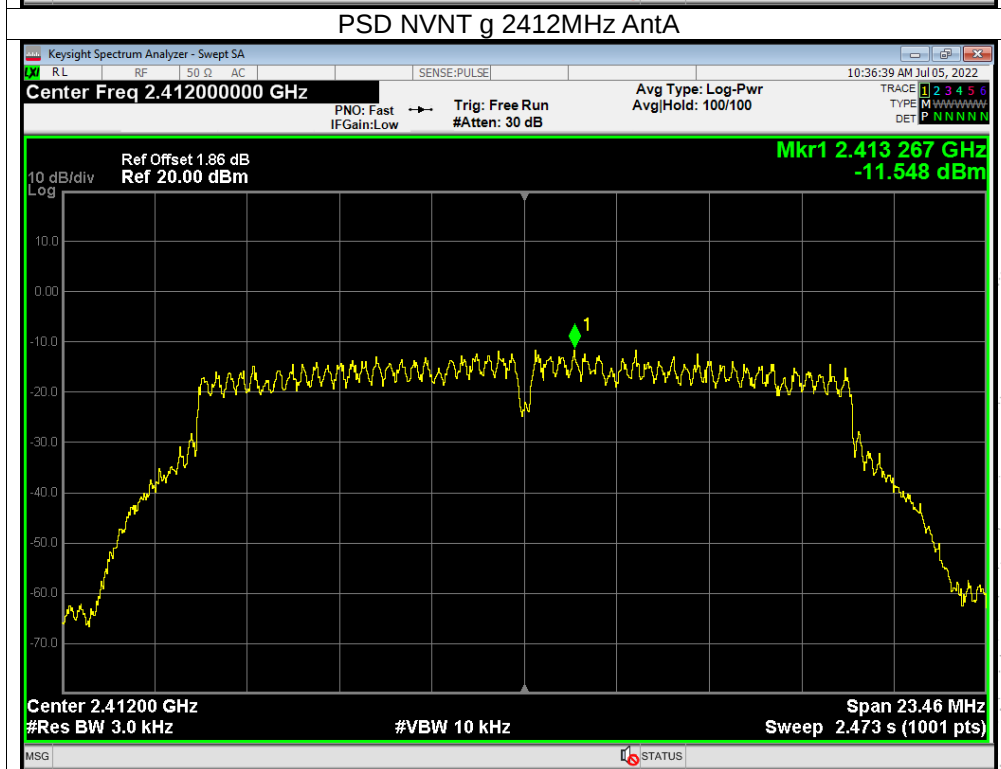
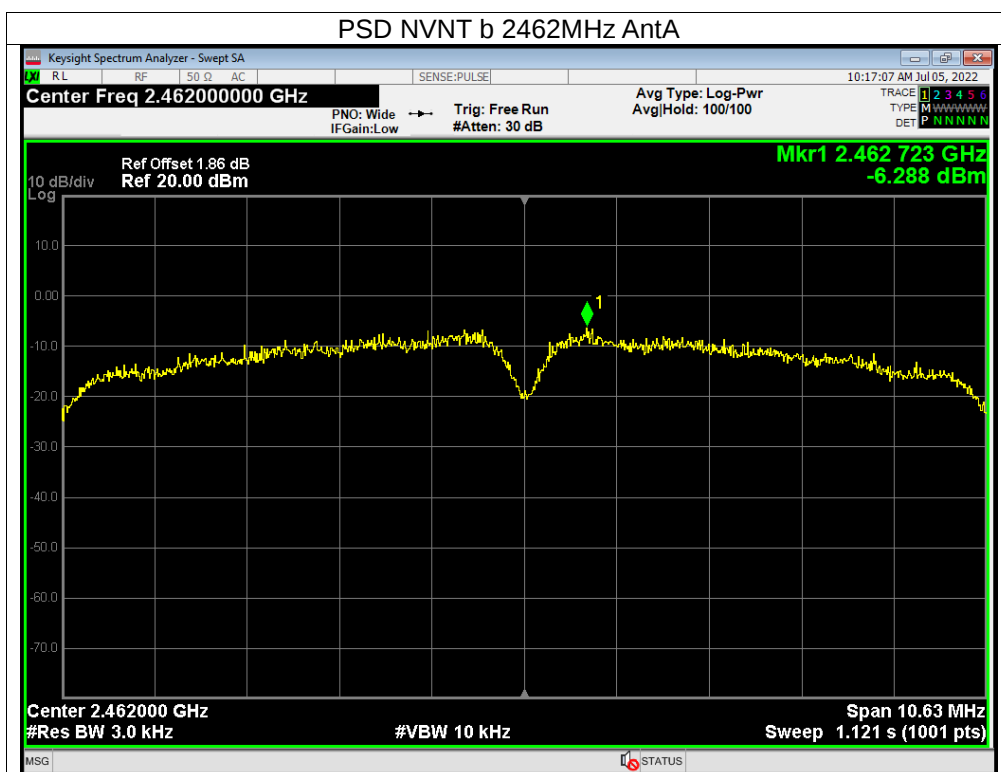



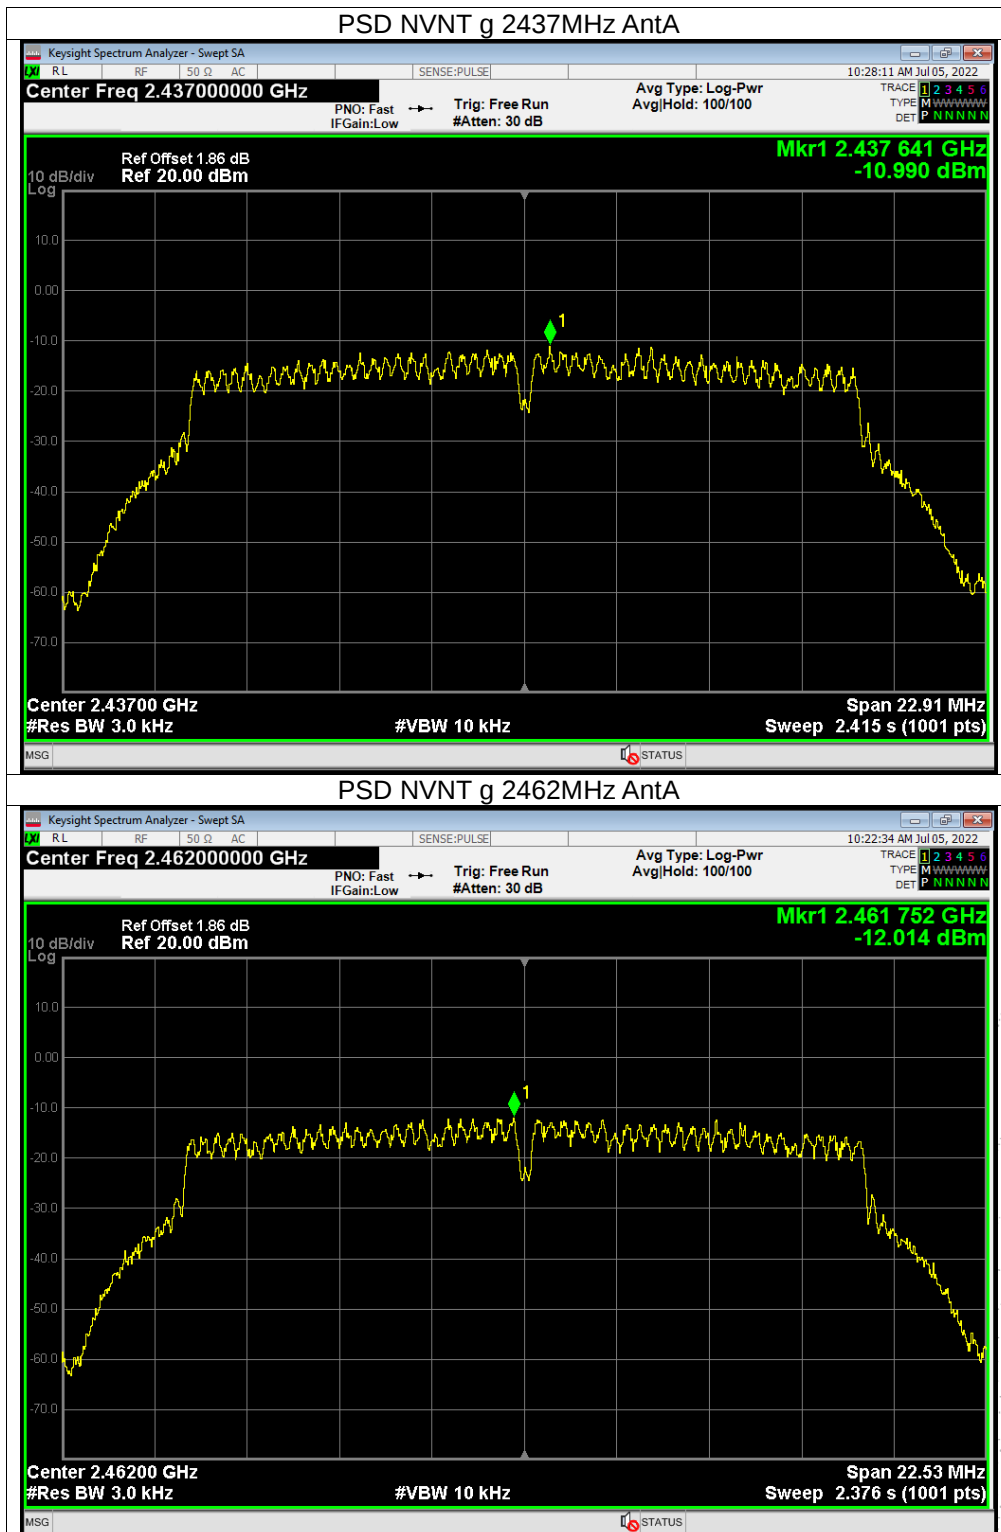


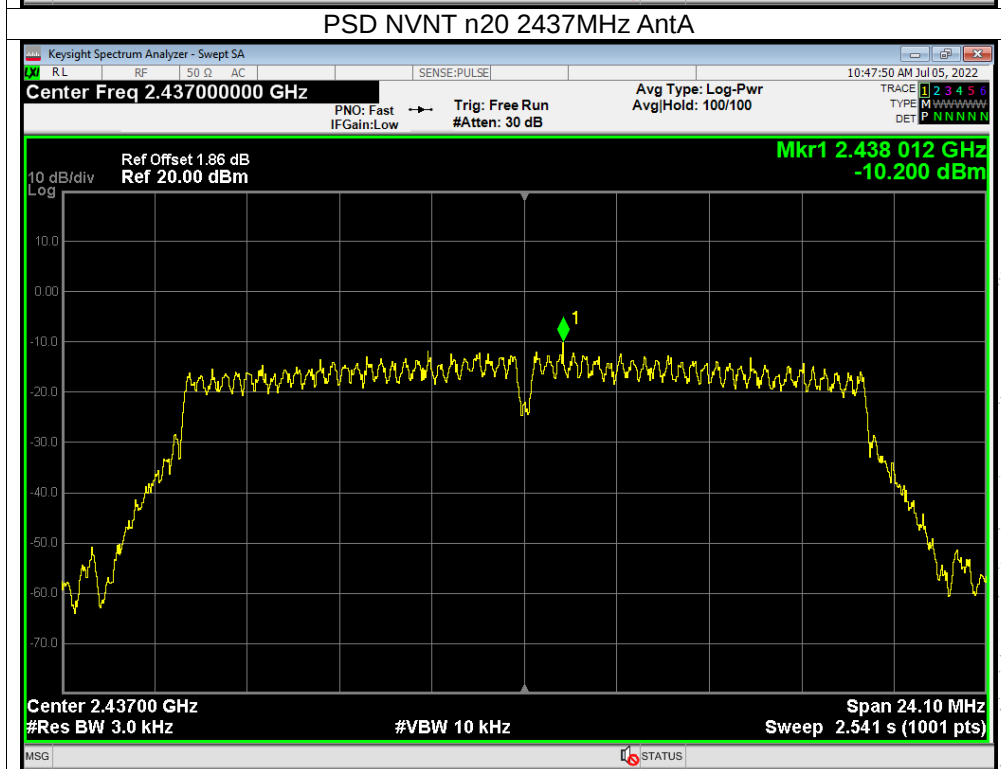
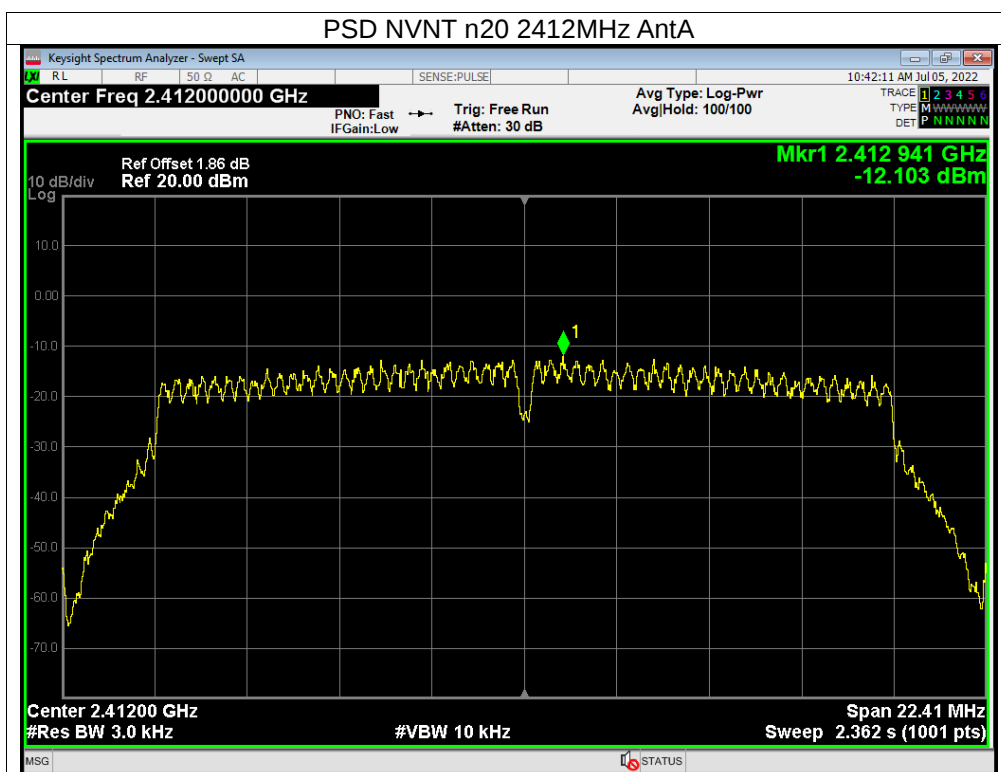


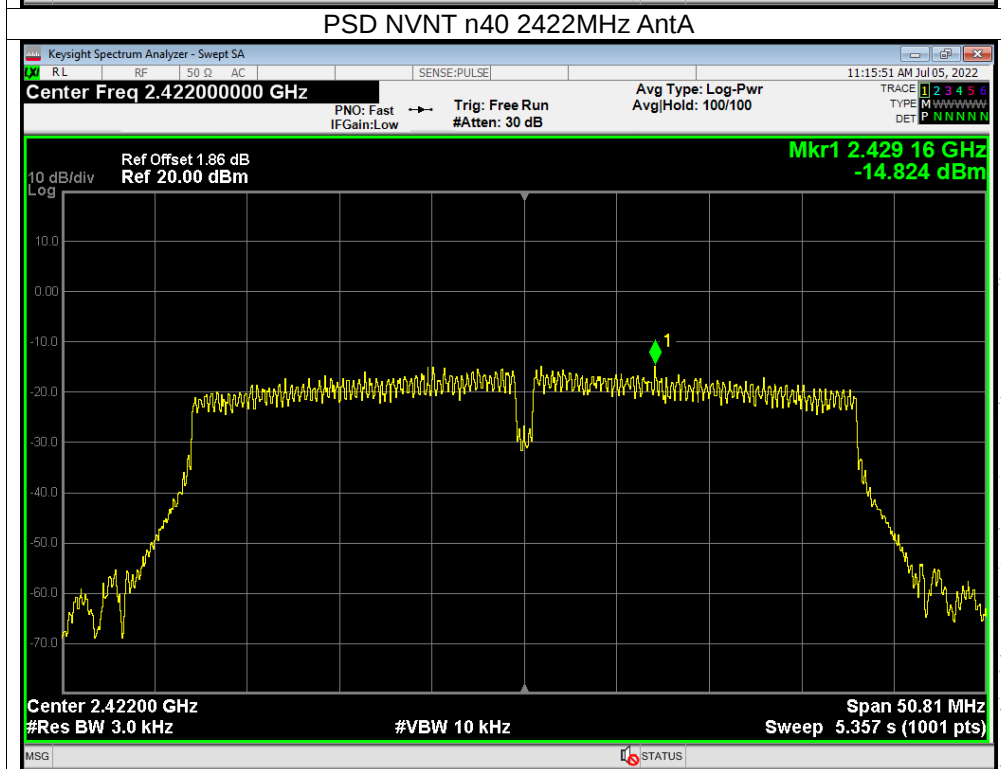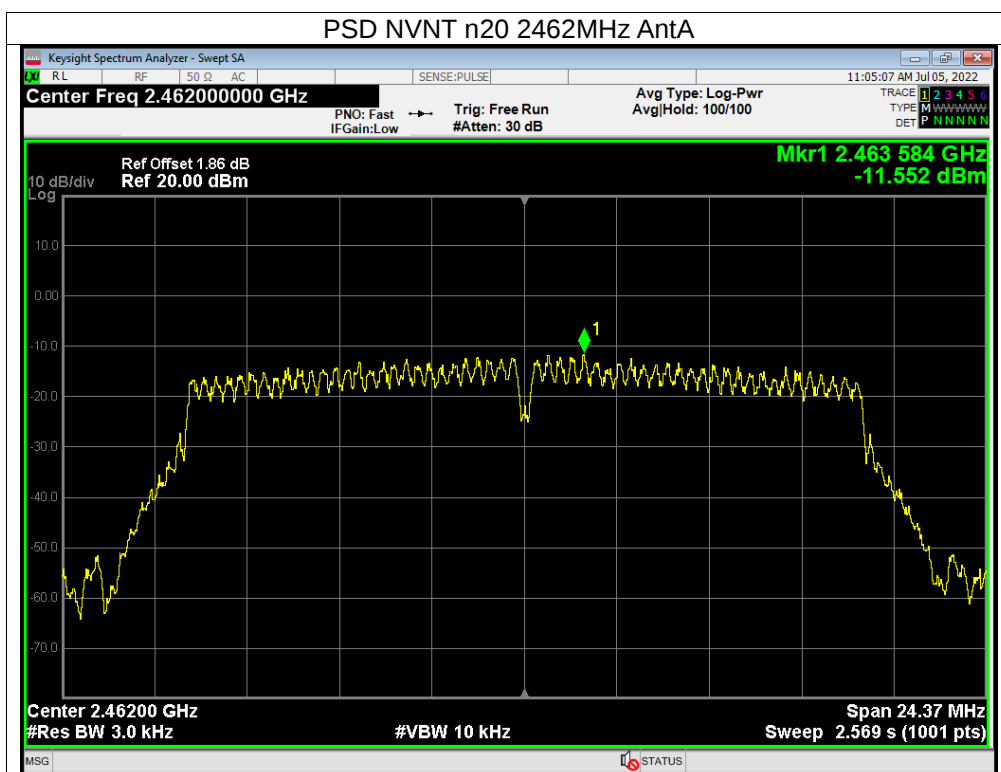

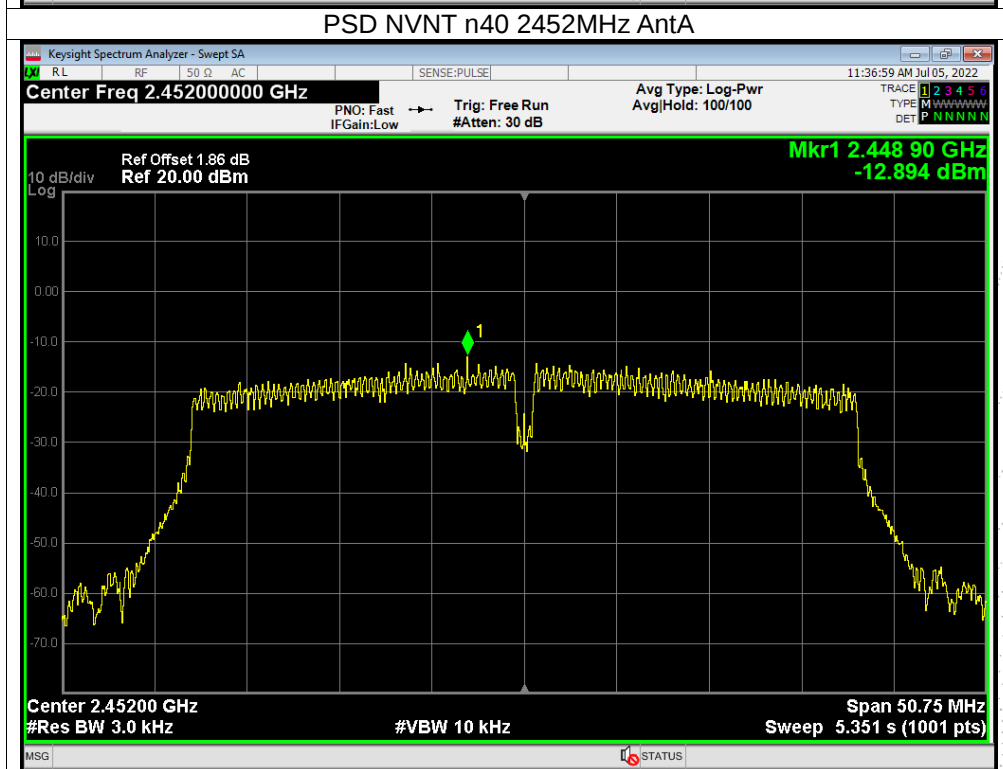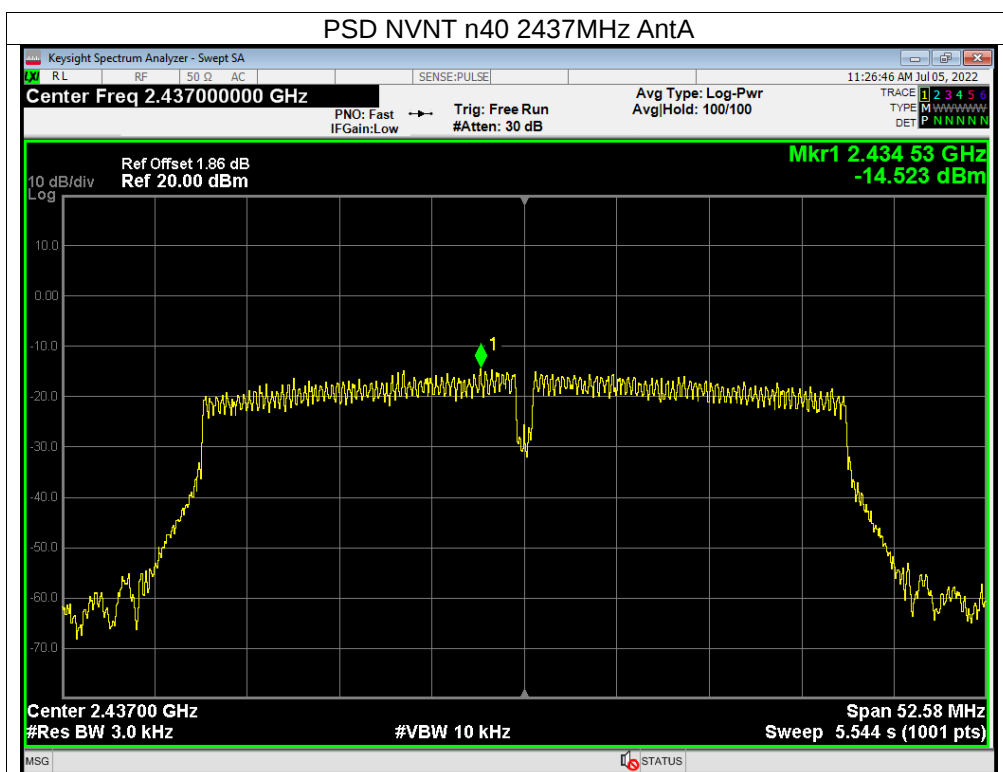

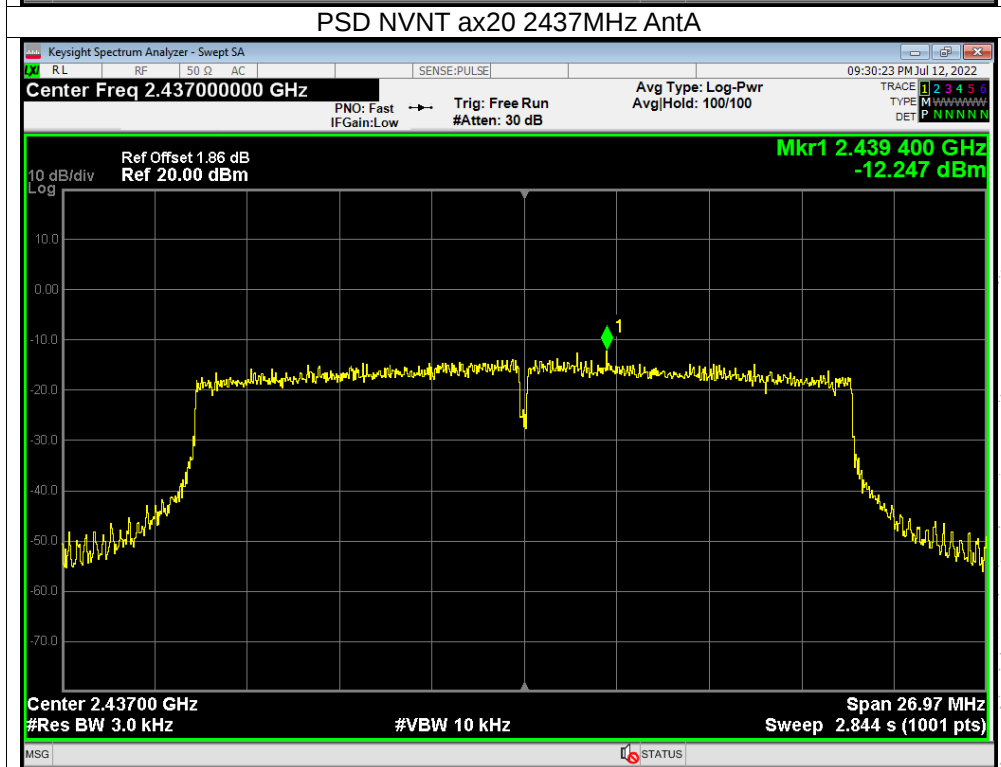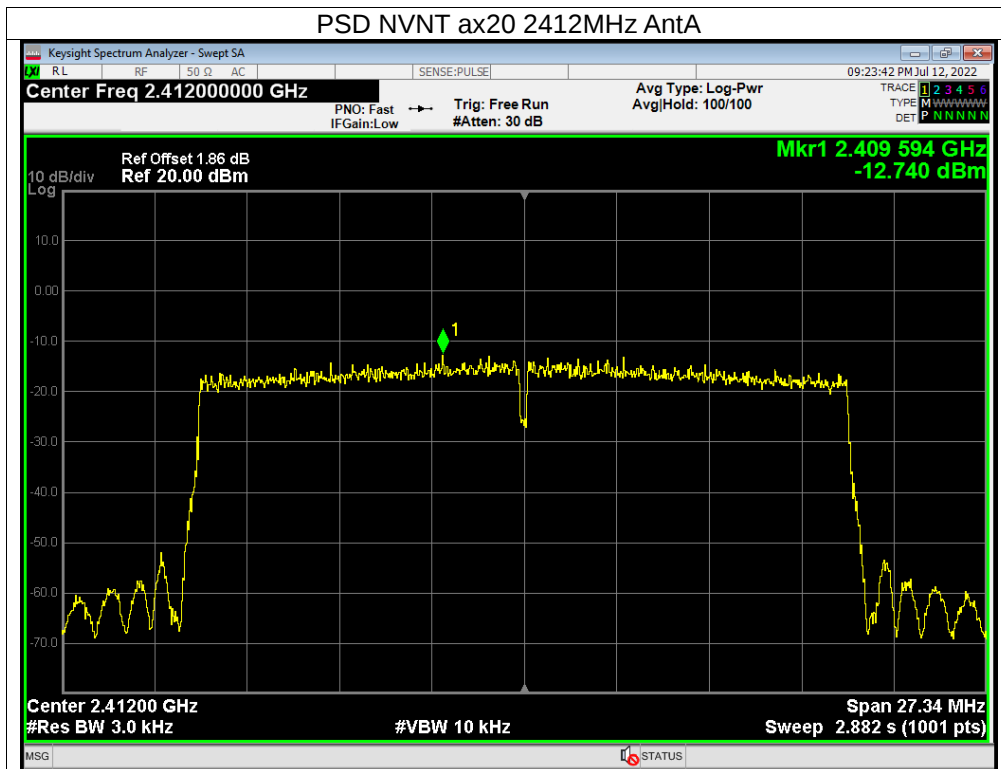

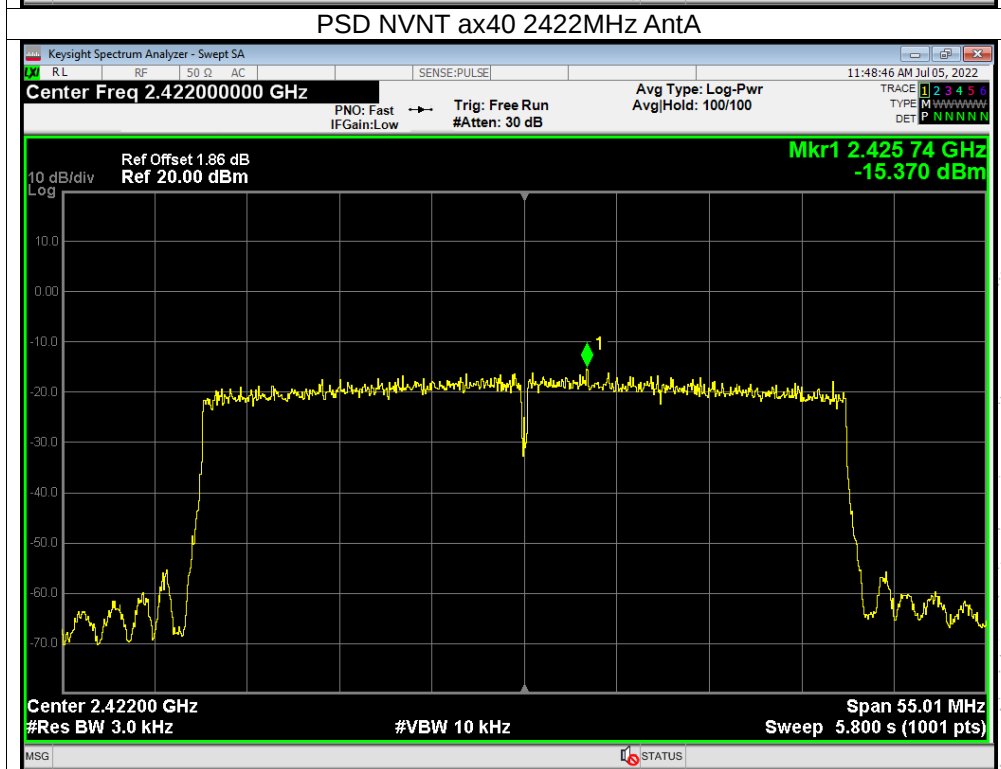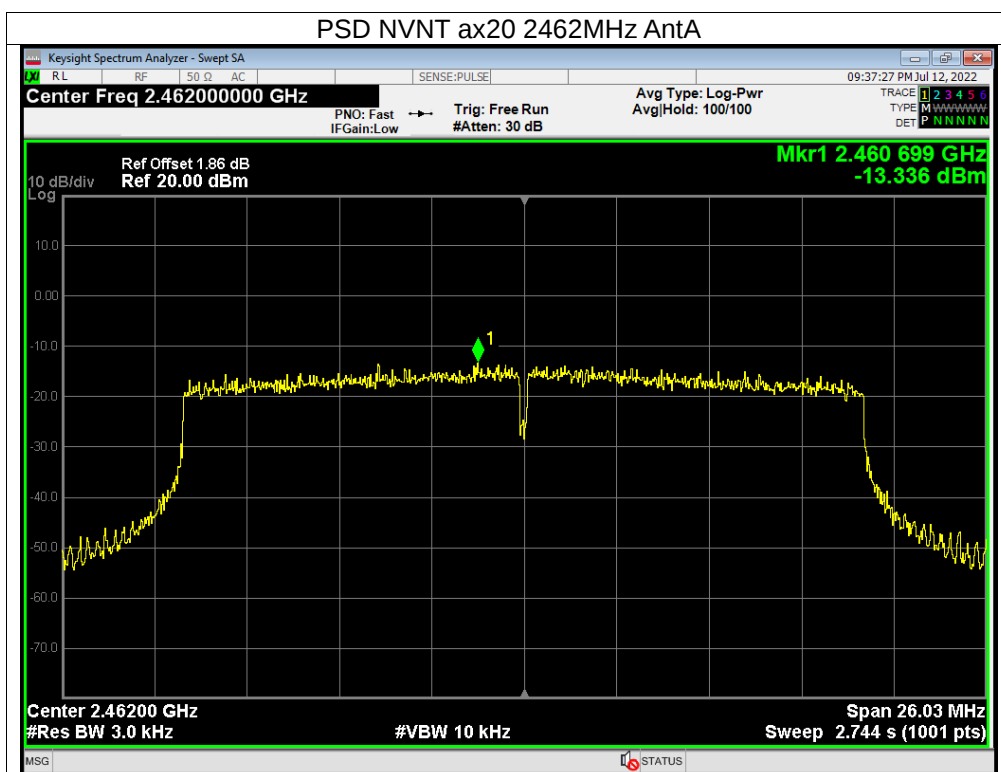

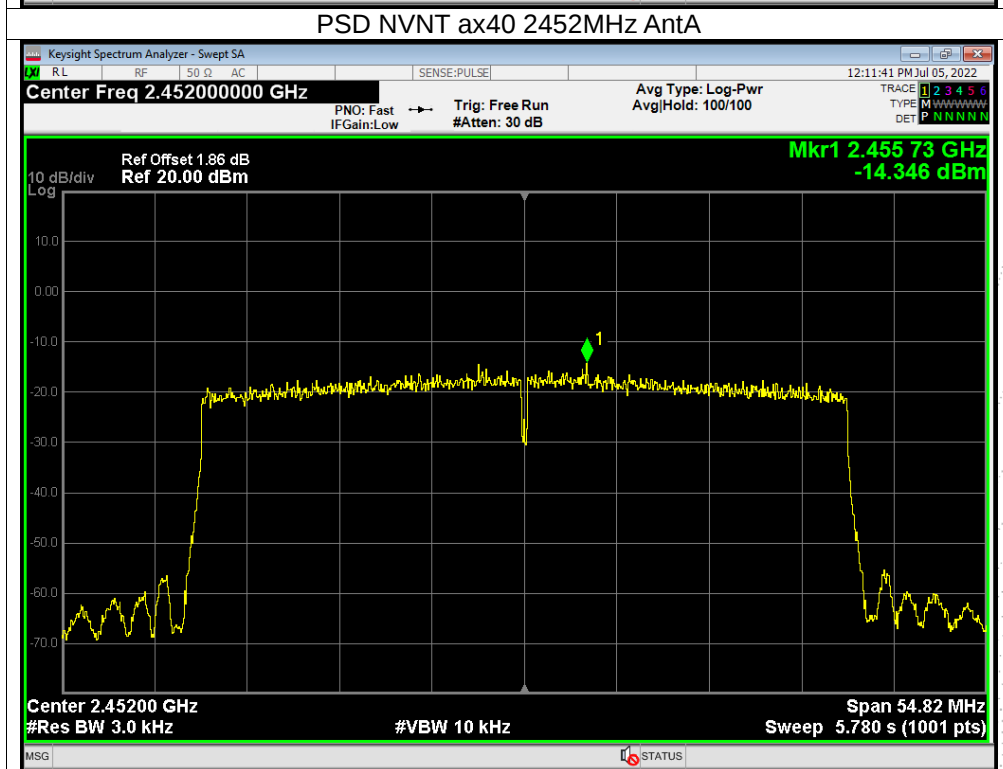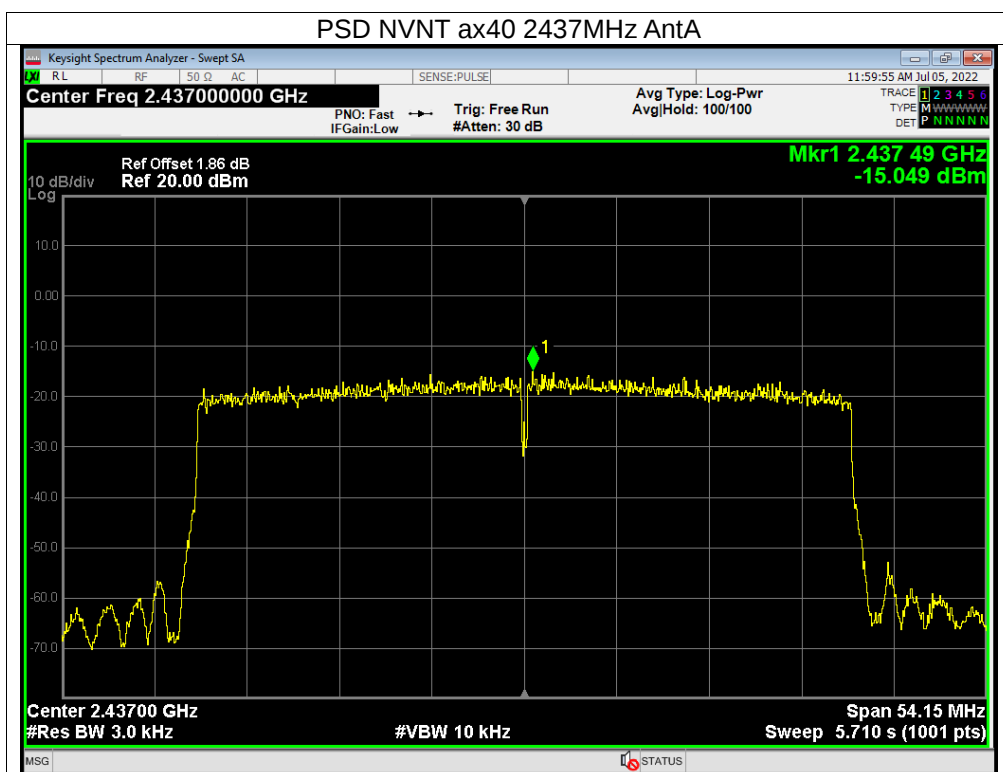





Ant. B:



Test Graphs



PSD NVNT b 2412MHz AntB


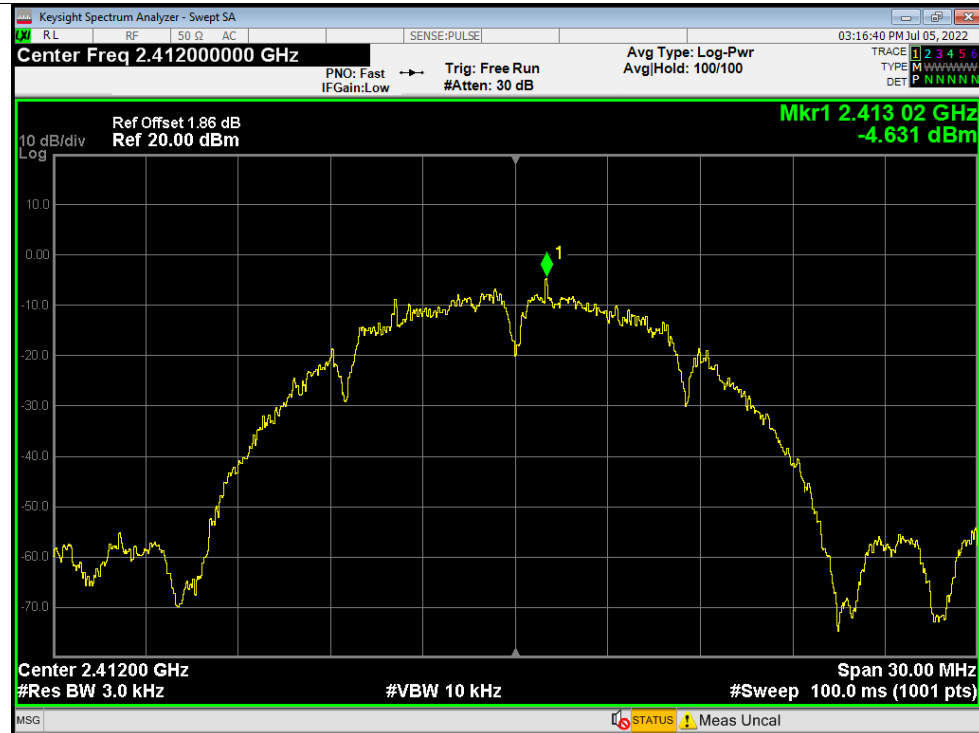




PSD NVNT b 2437MHz AntB


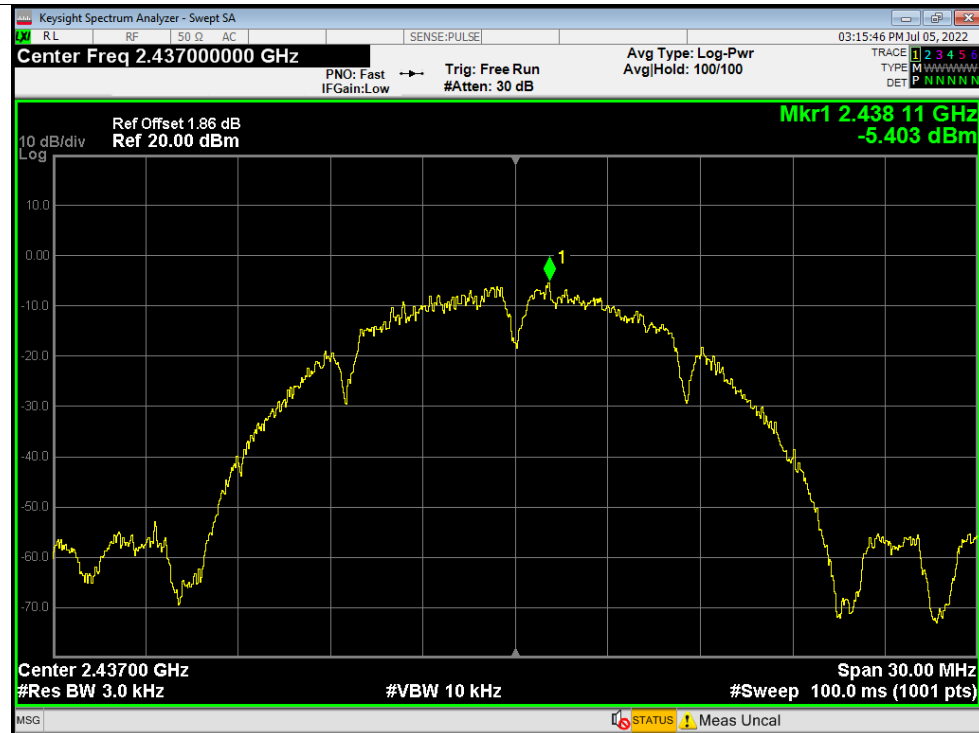


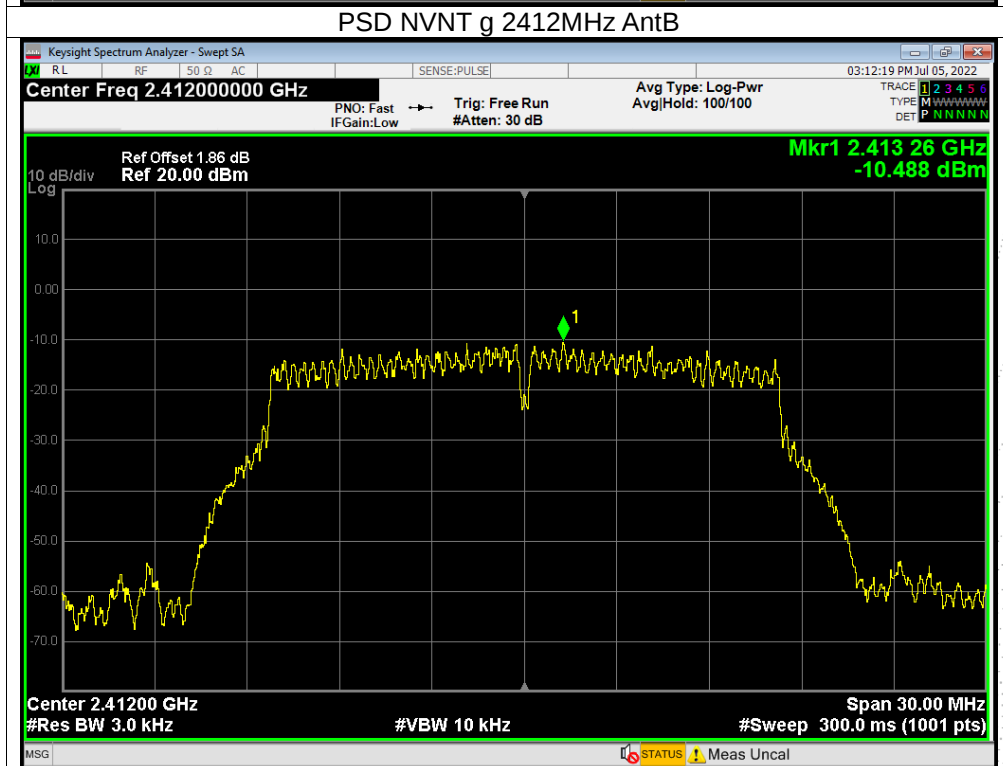
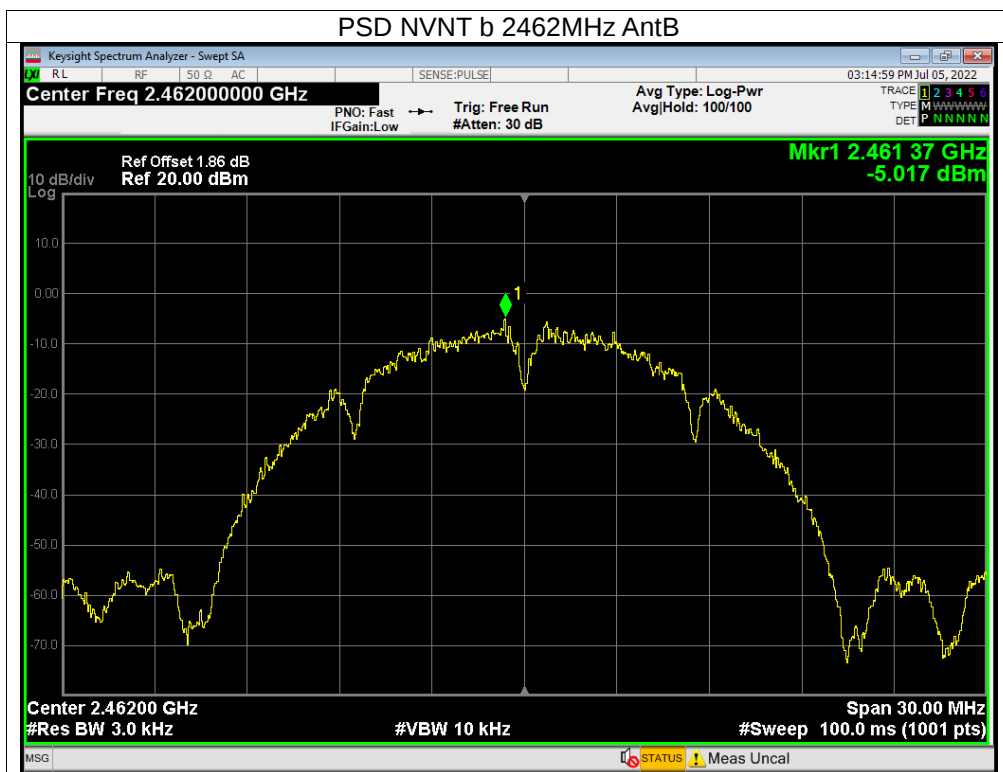


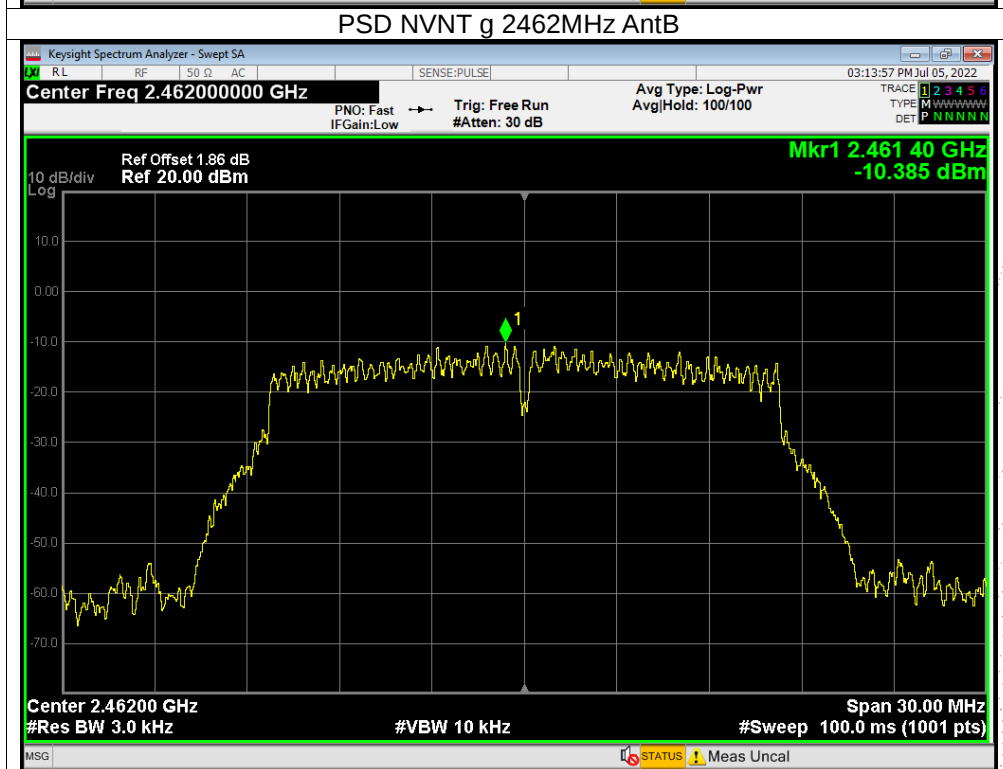
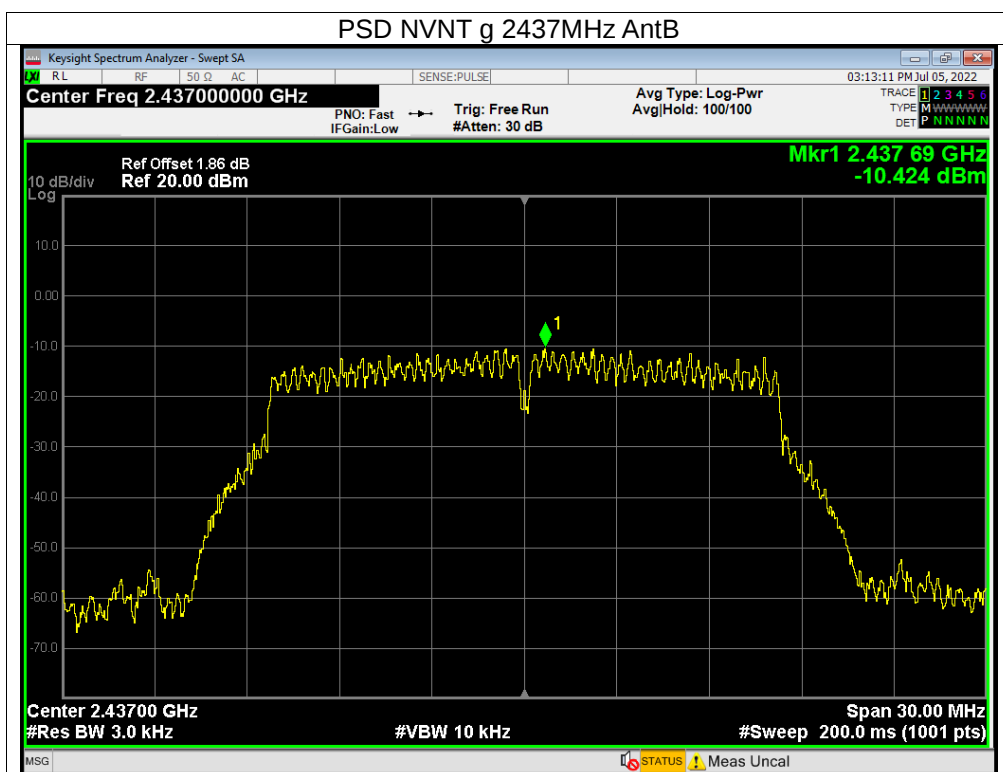


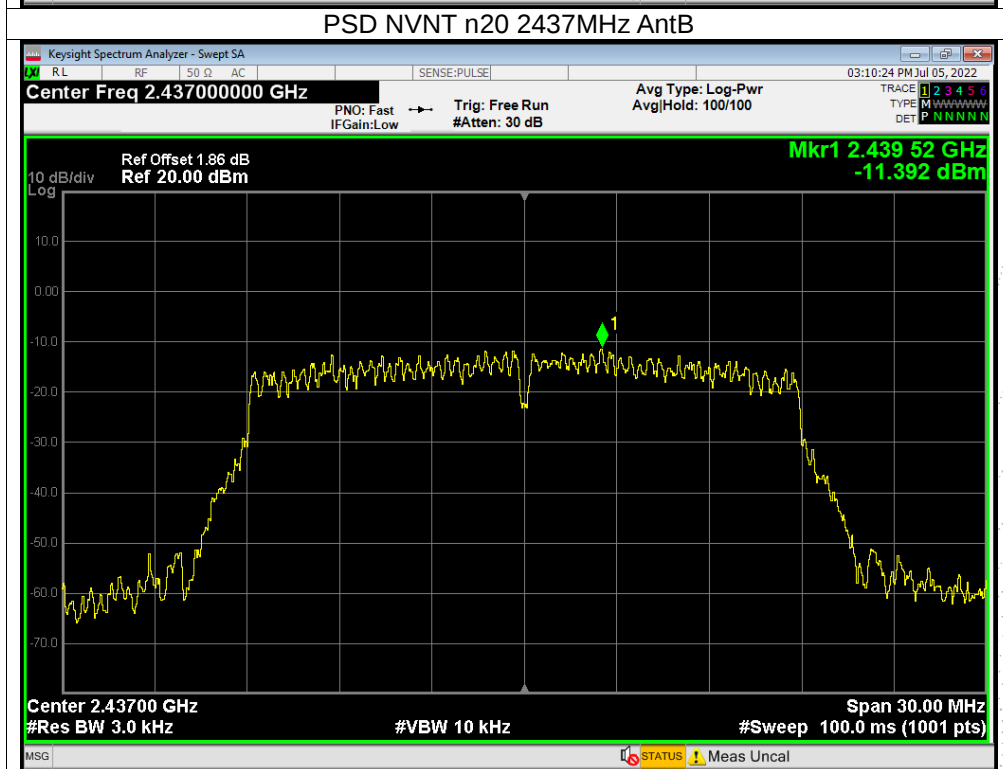
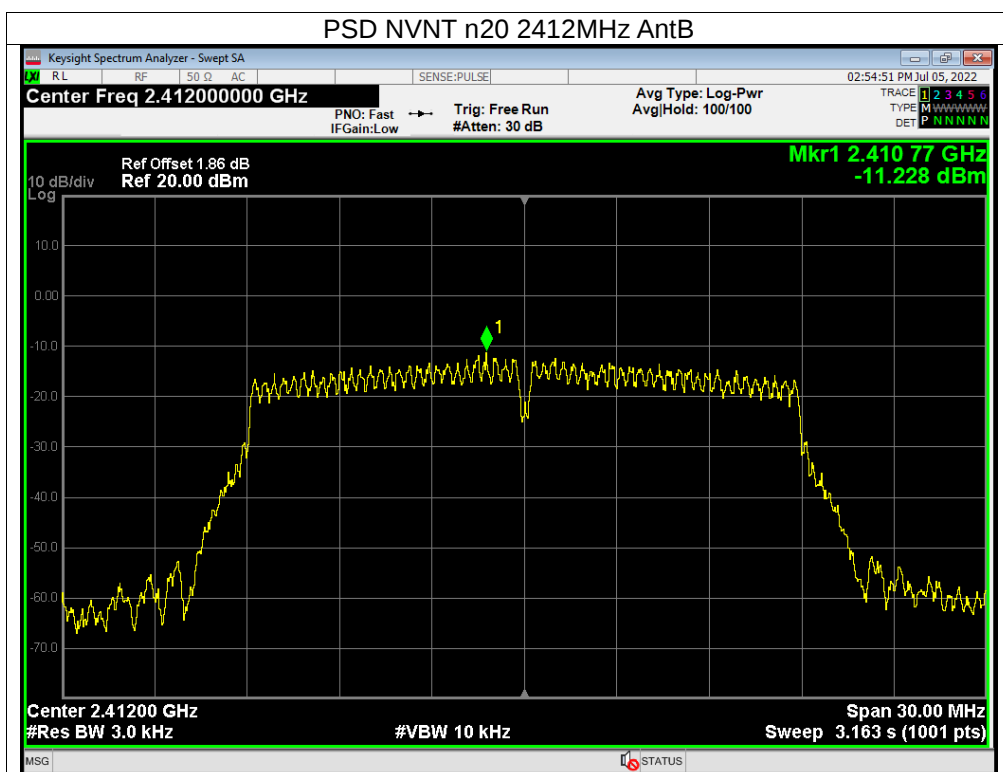


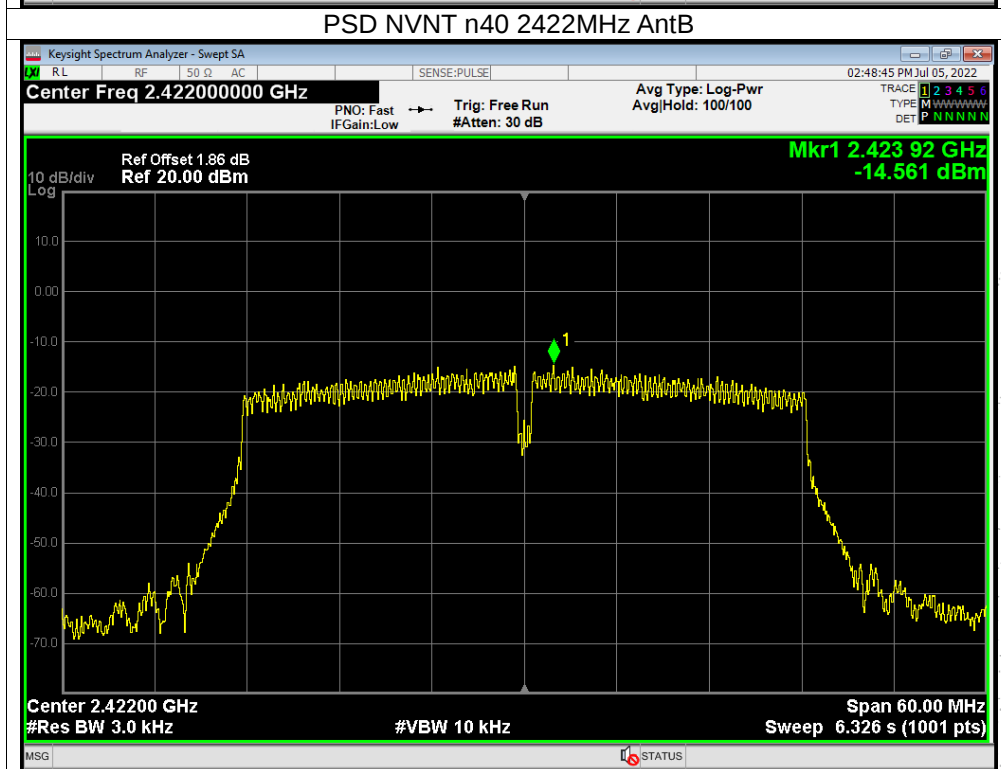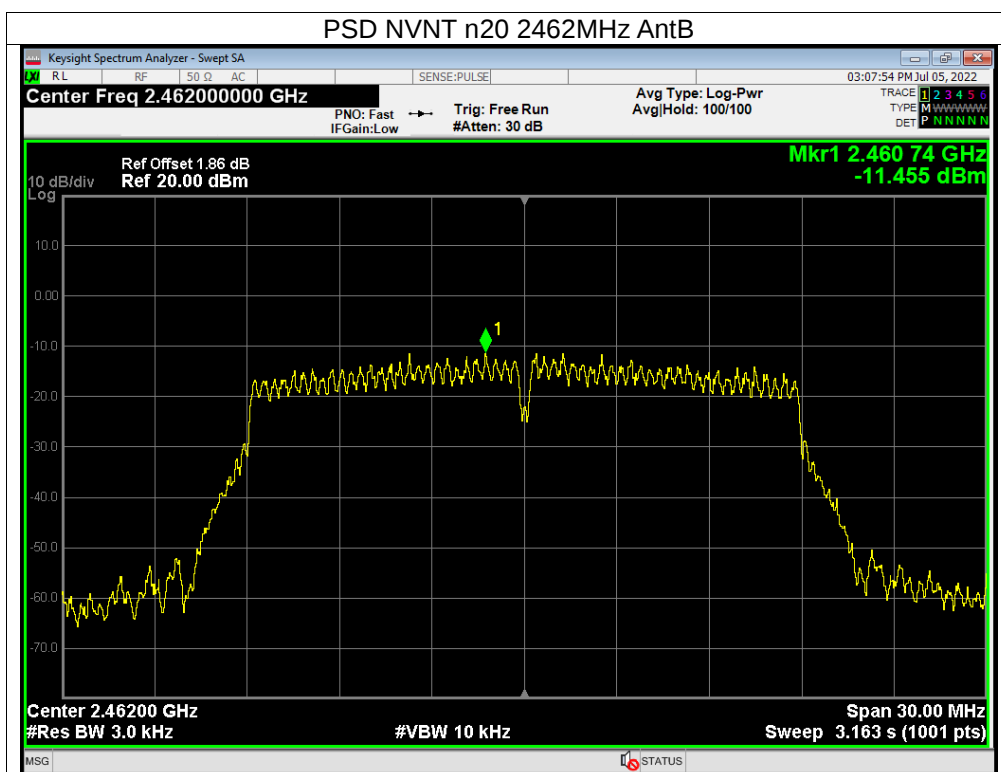

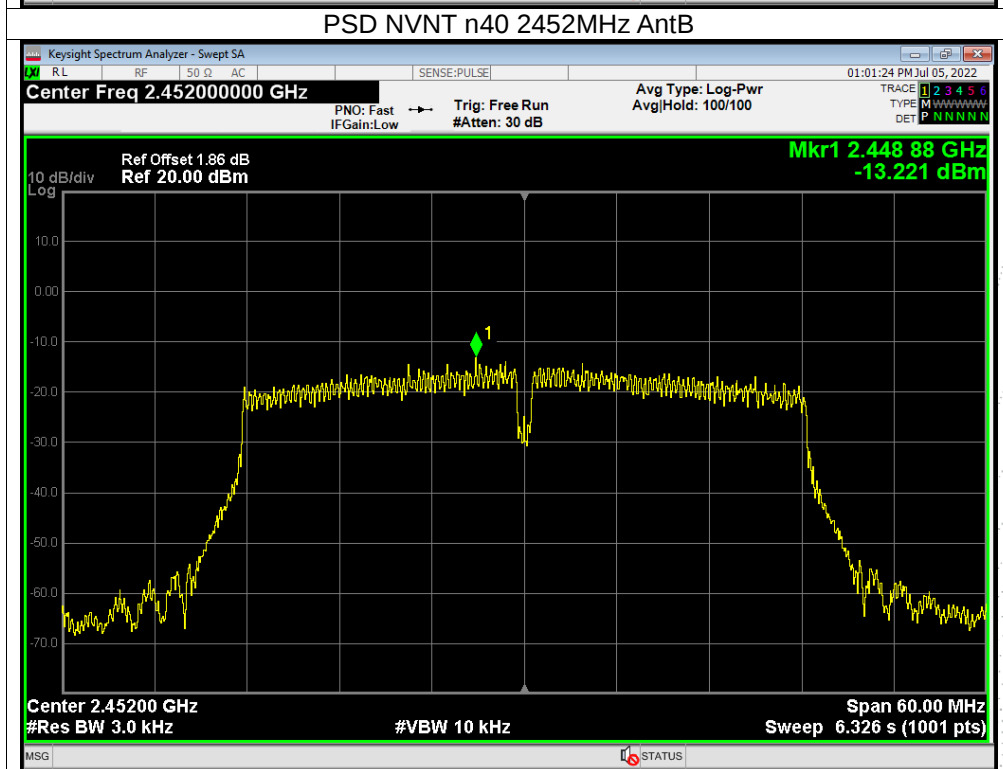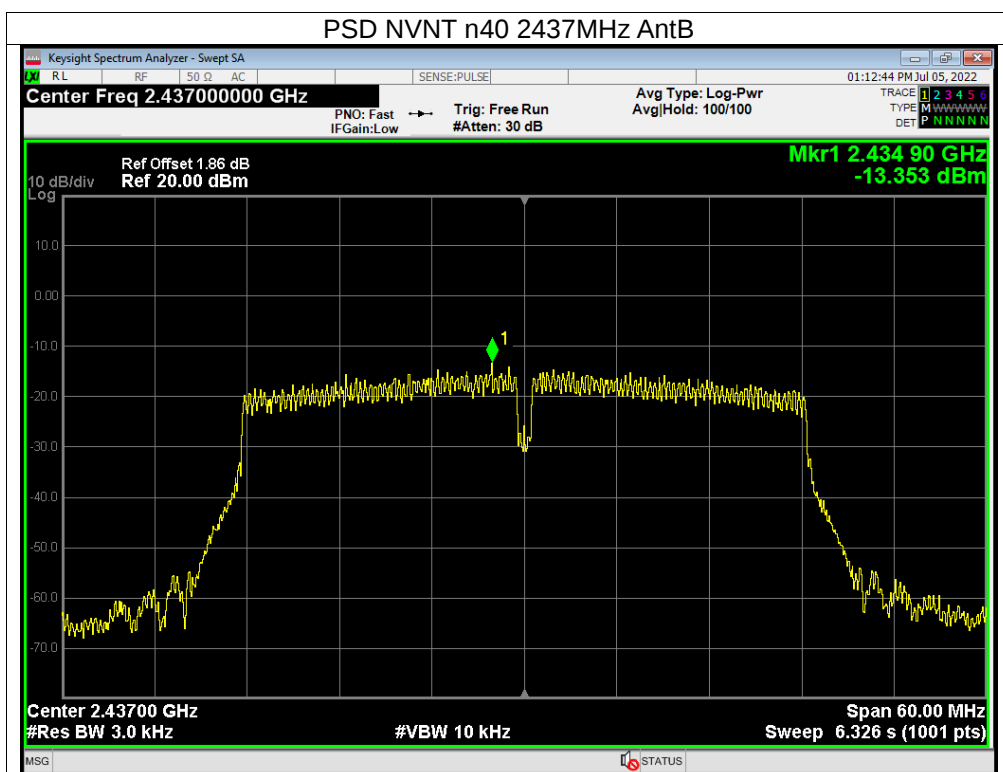

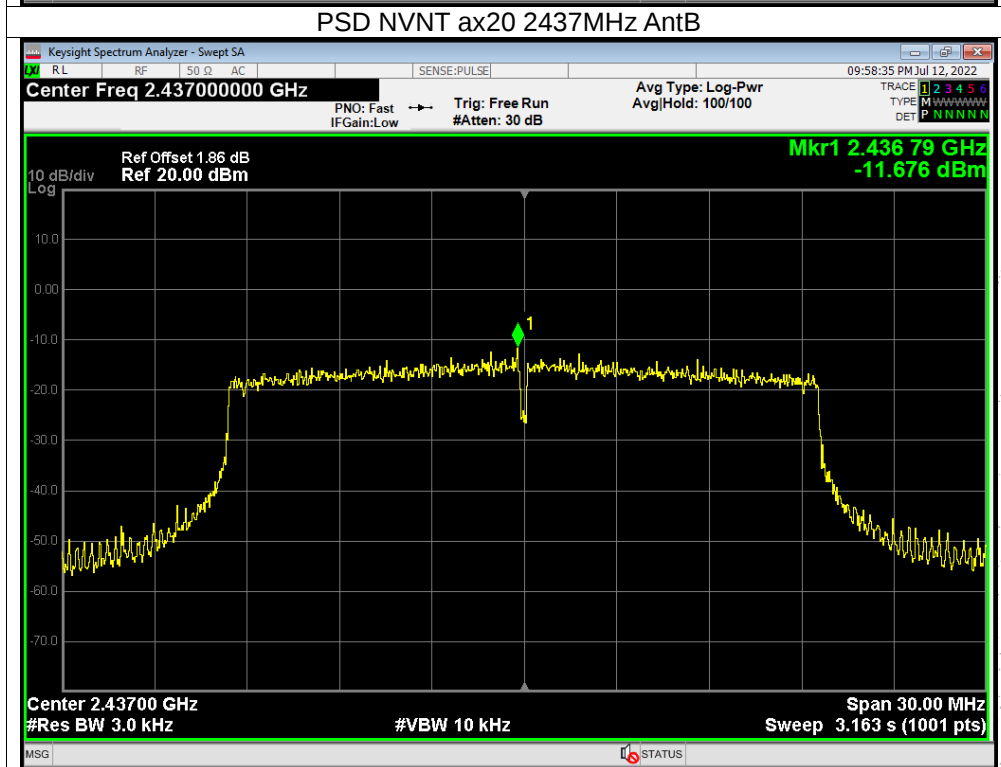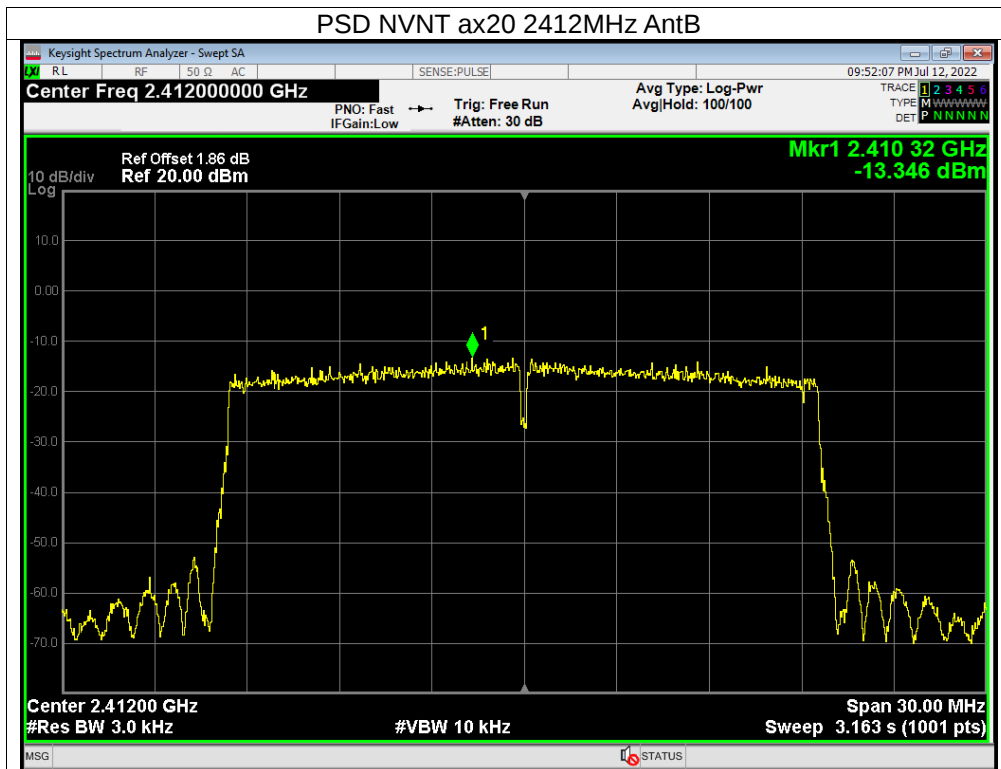

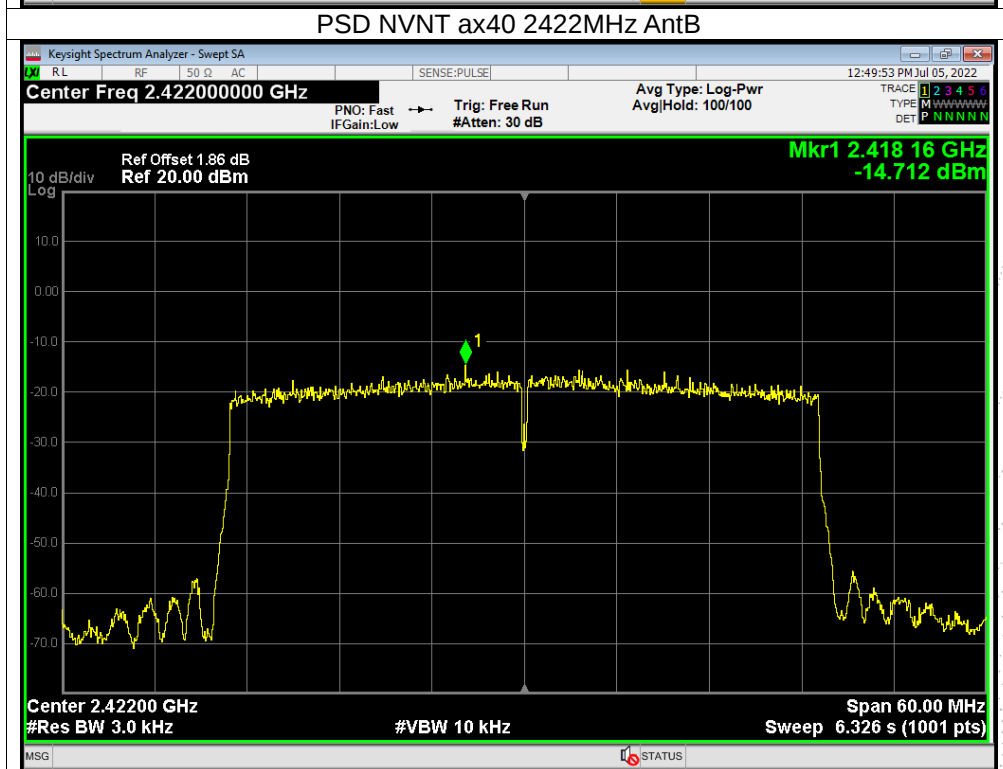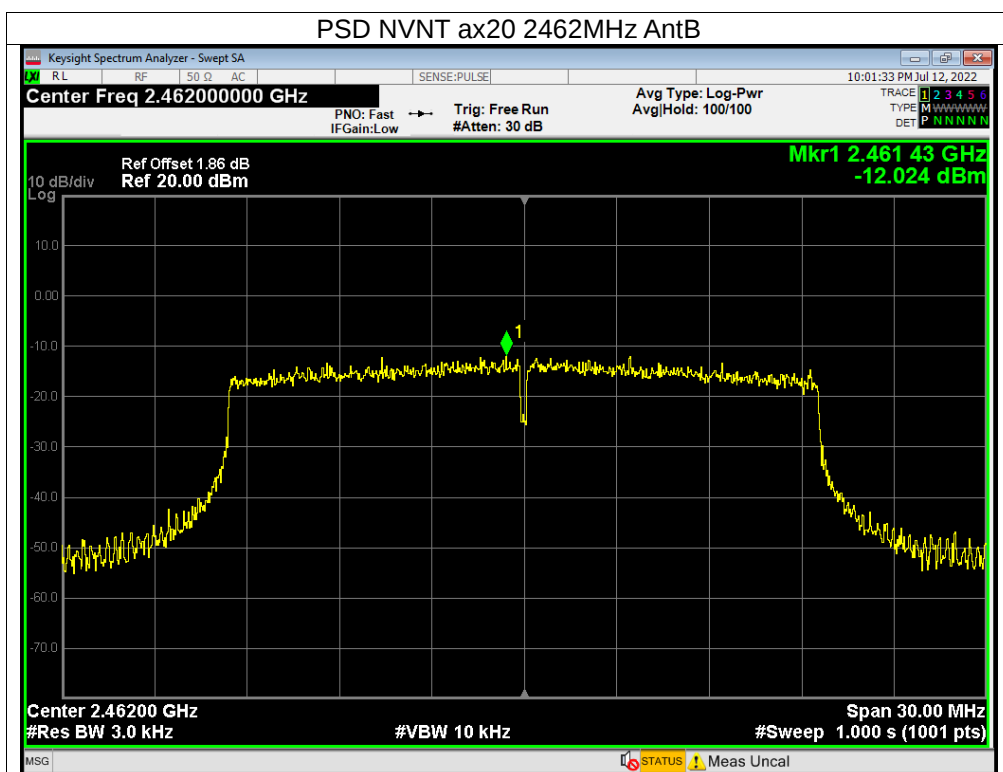

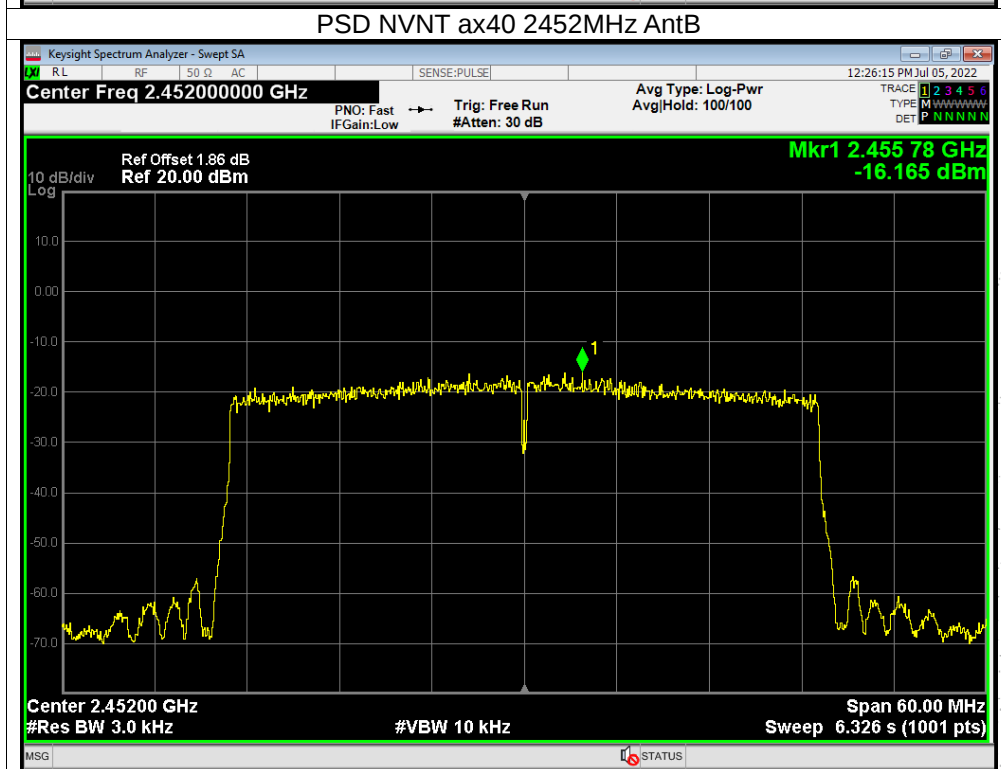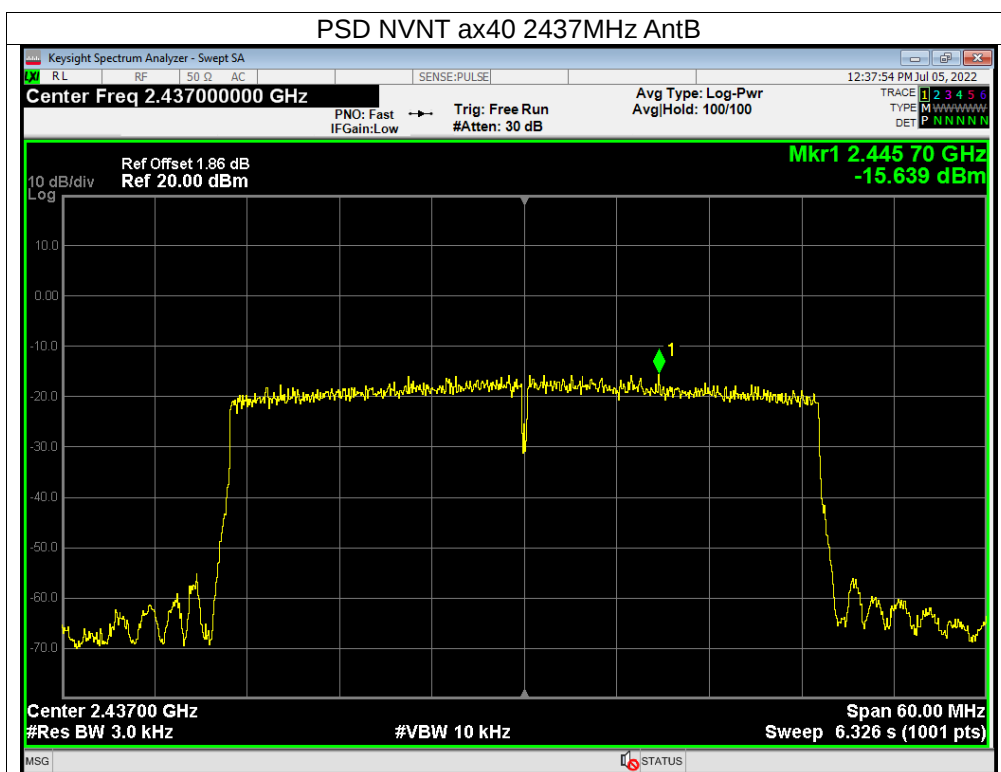

10. Bandwidth Test

10.1 Block Diagram Of Test Setup



10.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(2)	Bandwidth	$\geq 500\text{KHz}$ (-6dB bandwidth)	2400-2483.5	PASS

10.3 Test procedure

1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

10.4 EUT Operating Conditions

The EUT tested system was configured as the statements of 4.6 Unless otherwise a special operating condition is specified in the follows during the testing.



Note: Power Spectral Density(dBm)=Reading+Cable Loss



10.5 Test Result



Note: A(B) Represent the value of antenna A and B, The worst data is Antenna A, only shown Antenna A Plot.



Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Test Voltage:	AC120V/60Hz



Test Mode	Frequency (MHz)	-6dB bandwidth (MHz)	Limit (kHz)	Result
TX b Mode	2412	7.581	500	Pass
	2437	7.088	500	Pass
	2462	7.085	500	Pass
TX g Mode	2412	15.637	500	Pass
	2437	15.27	500	Pass
	2462	15.023	500	Pass
TX n Mode(20M)	2412	14.937	500	Pass
	2437	16.069	500	Pass
	2462	16.246	500	Pass
TX n Mode(40M)	2422	33.872	500	Pass
	2437	35.054	500	Pass
	2452	33.83	500	Pass
TX ax Mode(20M)	2412	18.22	500	Pass
	2437	17.98	500	Pass
	2462	17.35	500	Pass
TX ax Mode(40M)	2422	36.67	500	Pass
	2437	36.10	500	Pass
	2452	36.55	500	Pass

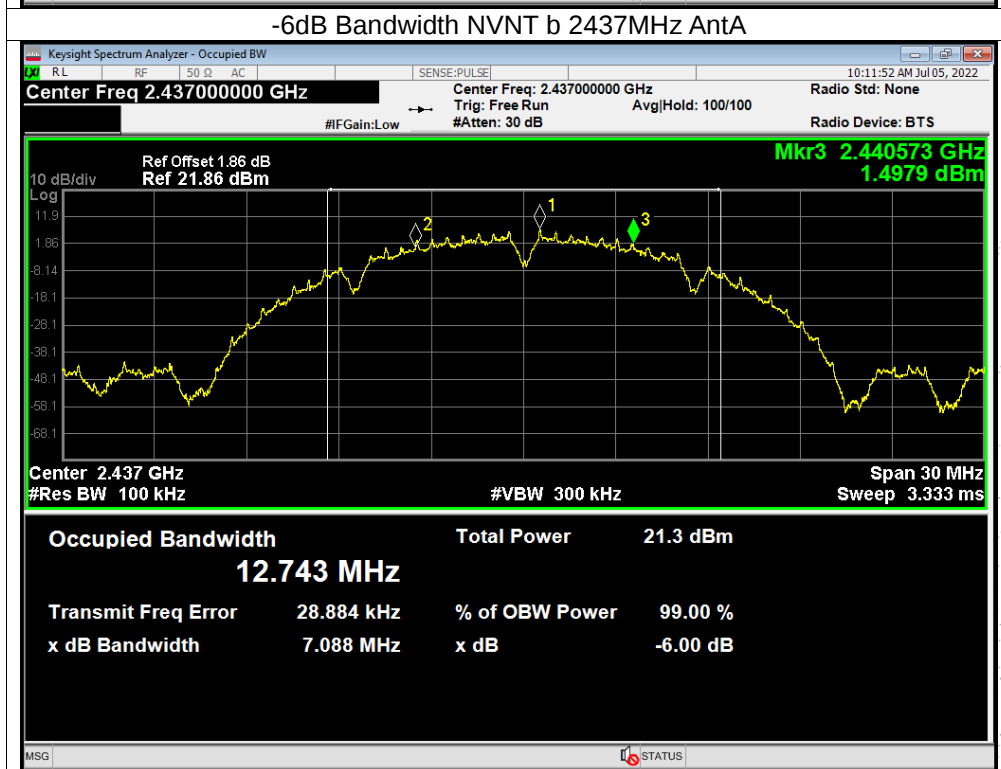
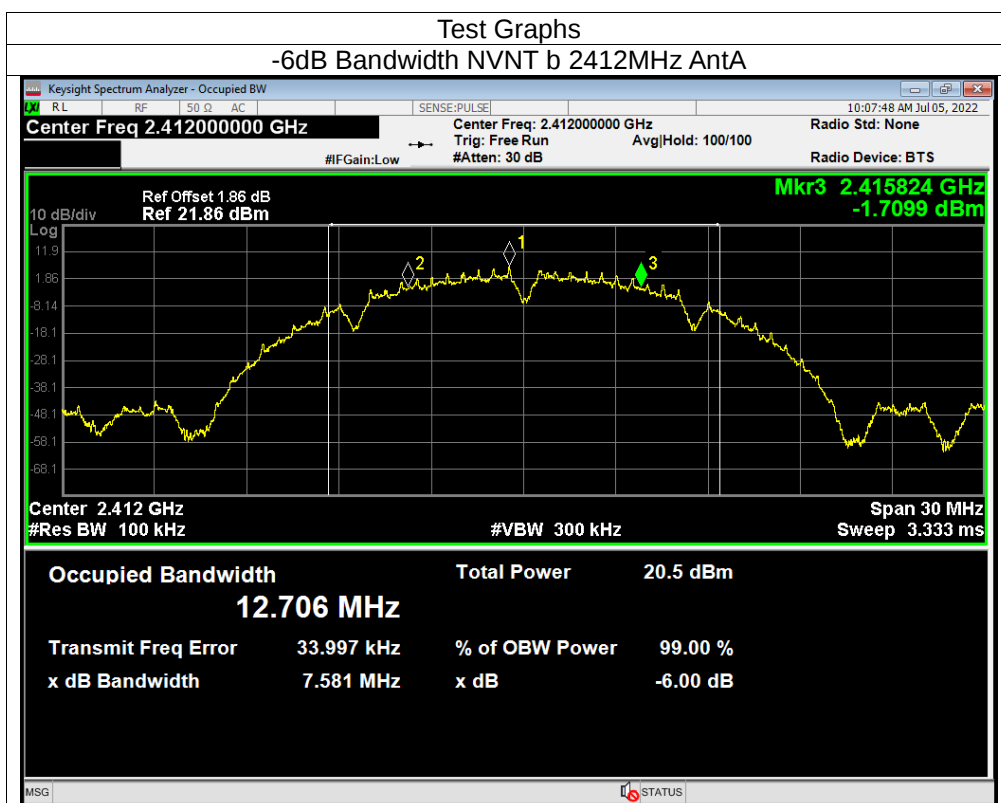


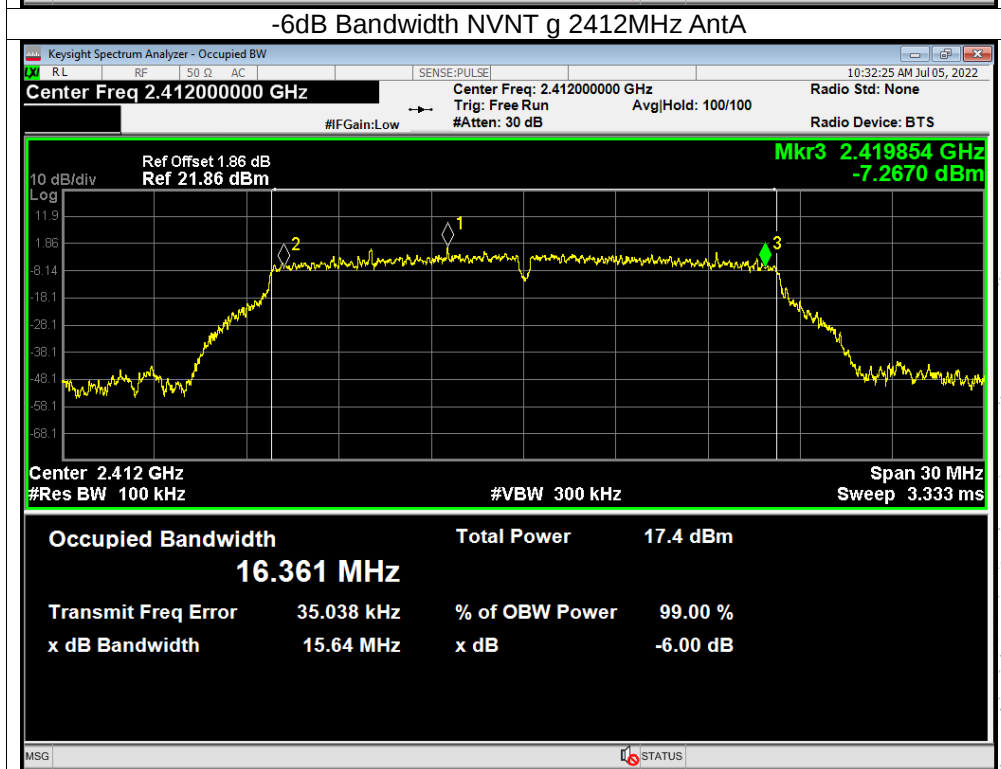
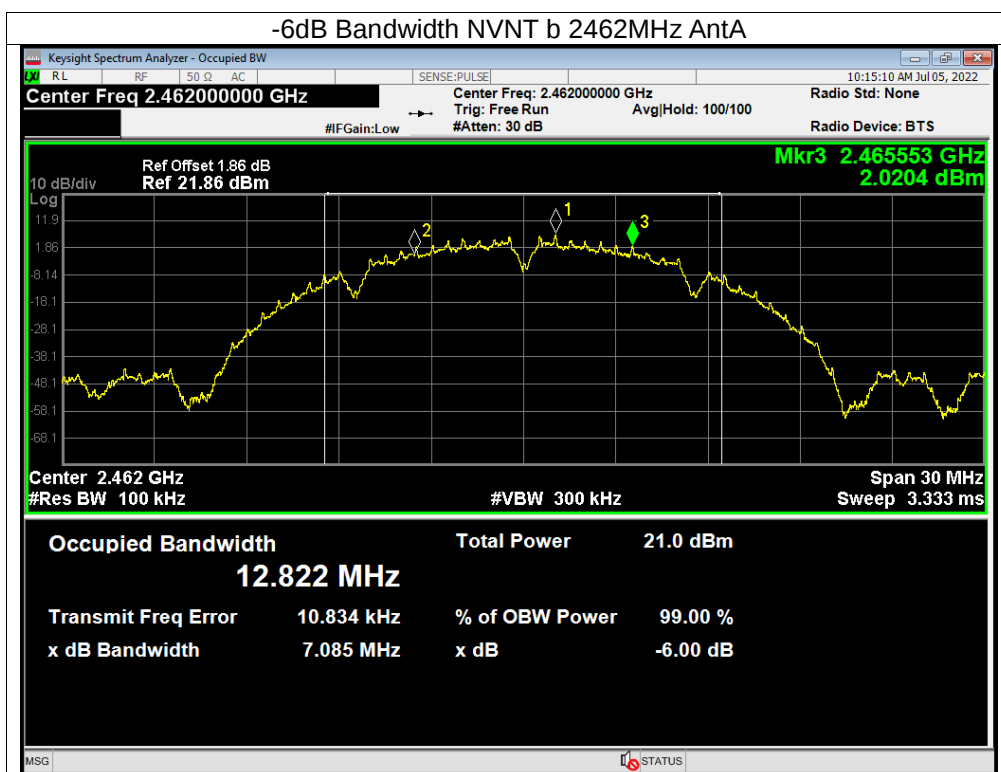


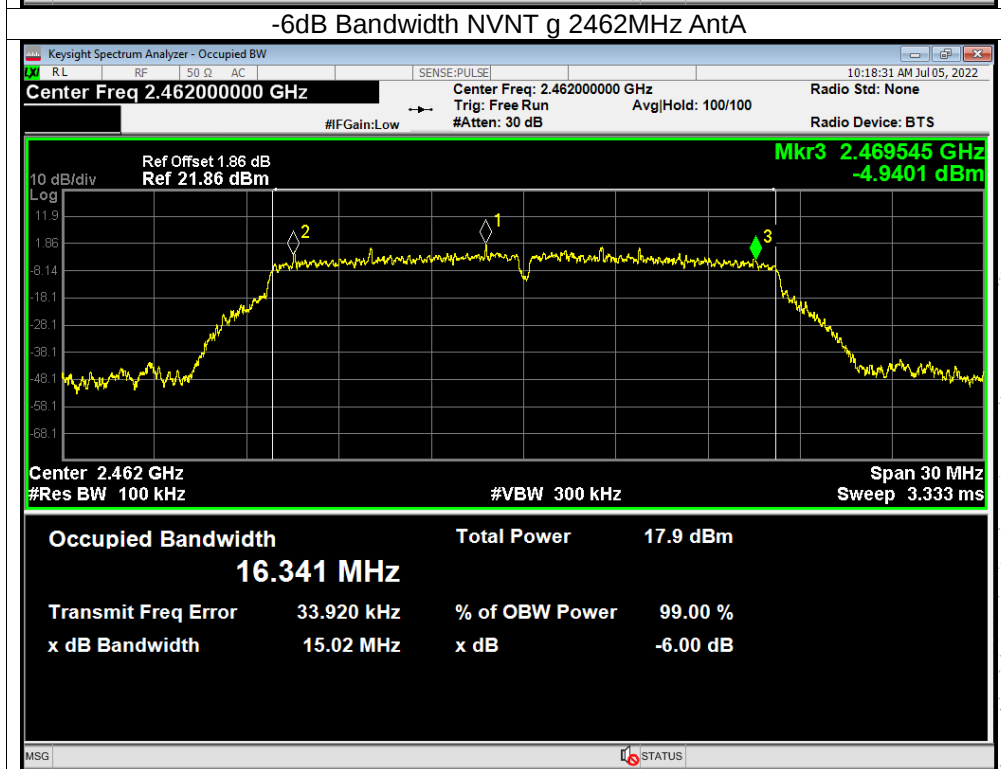
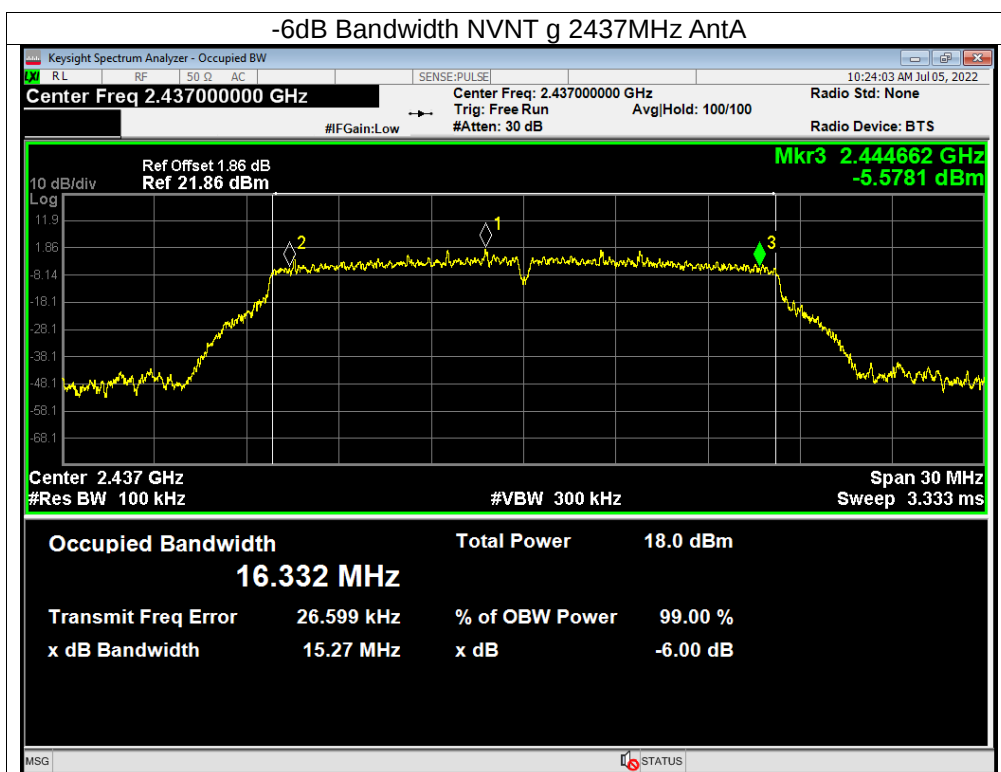


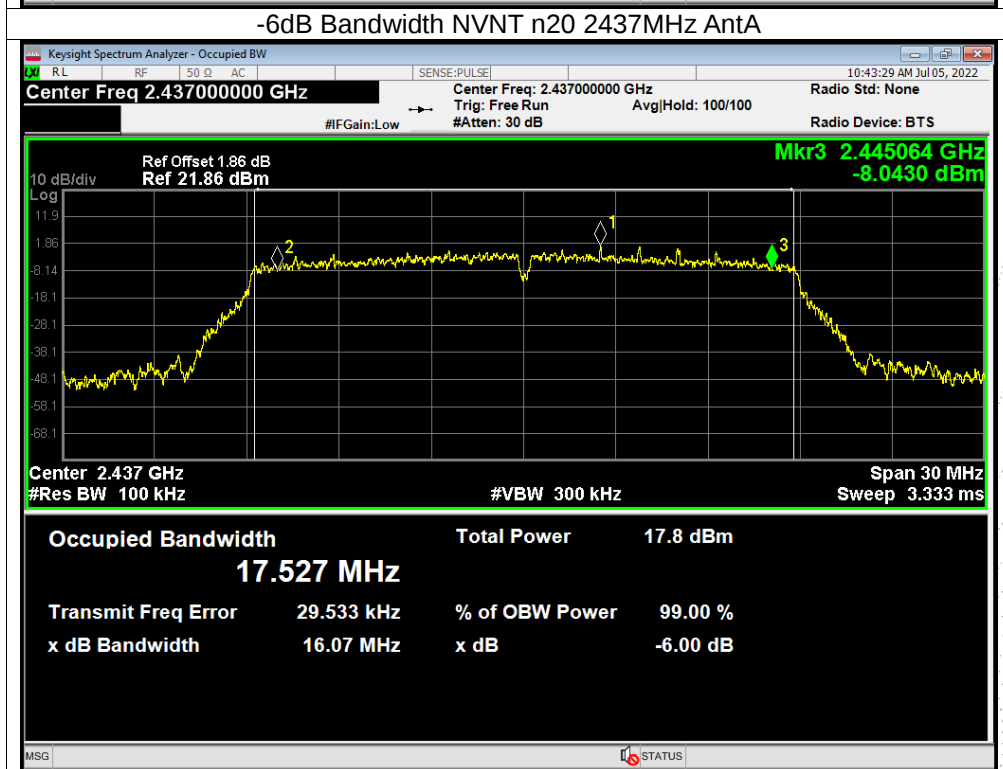
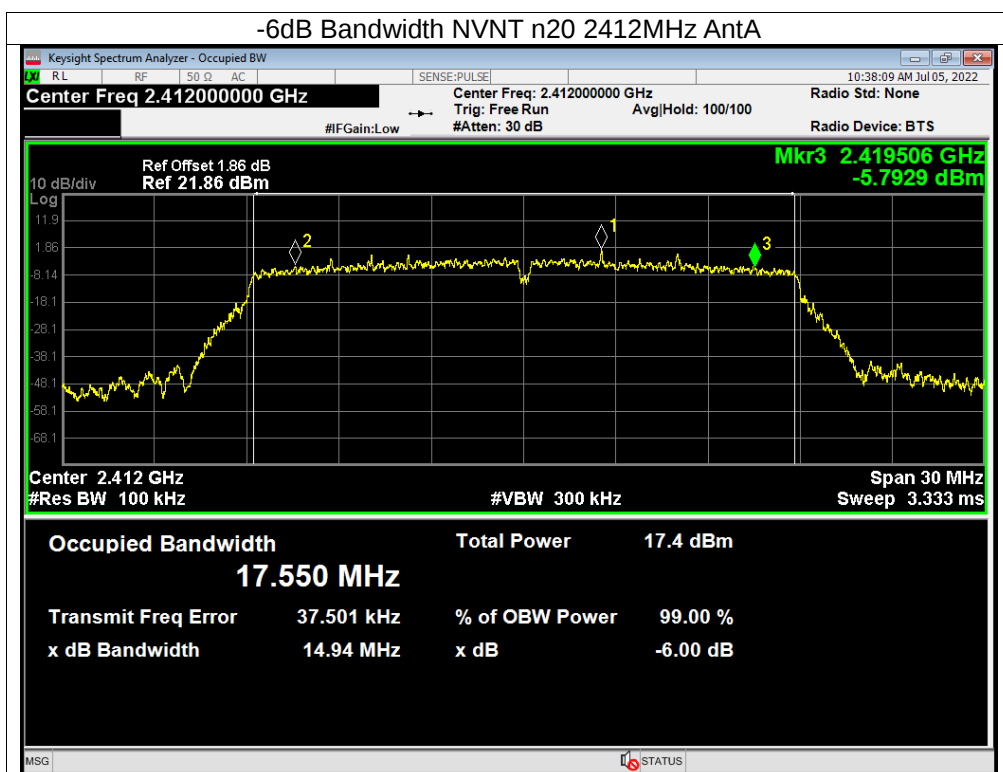


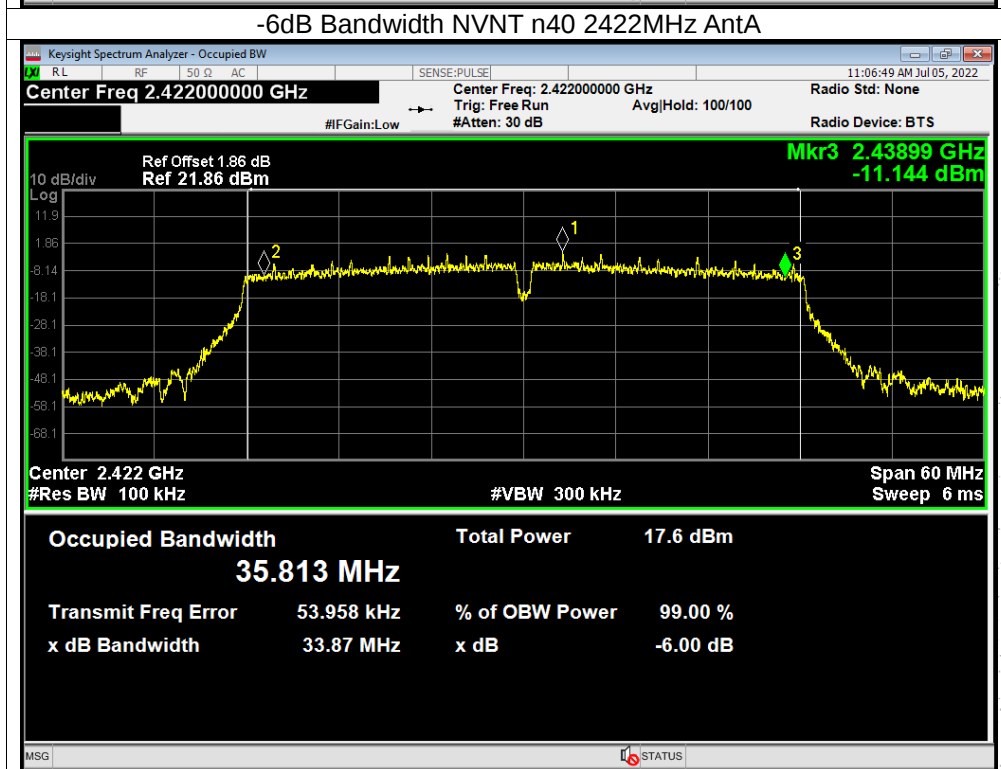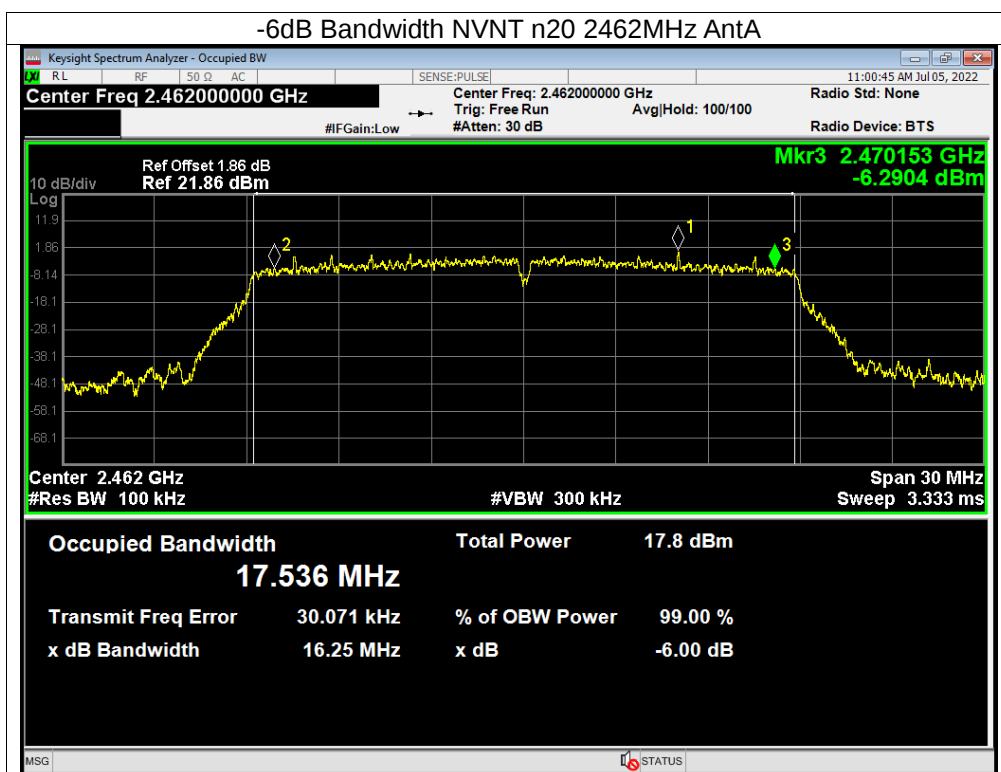

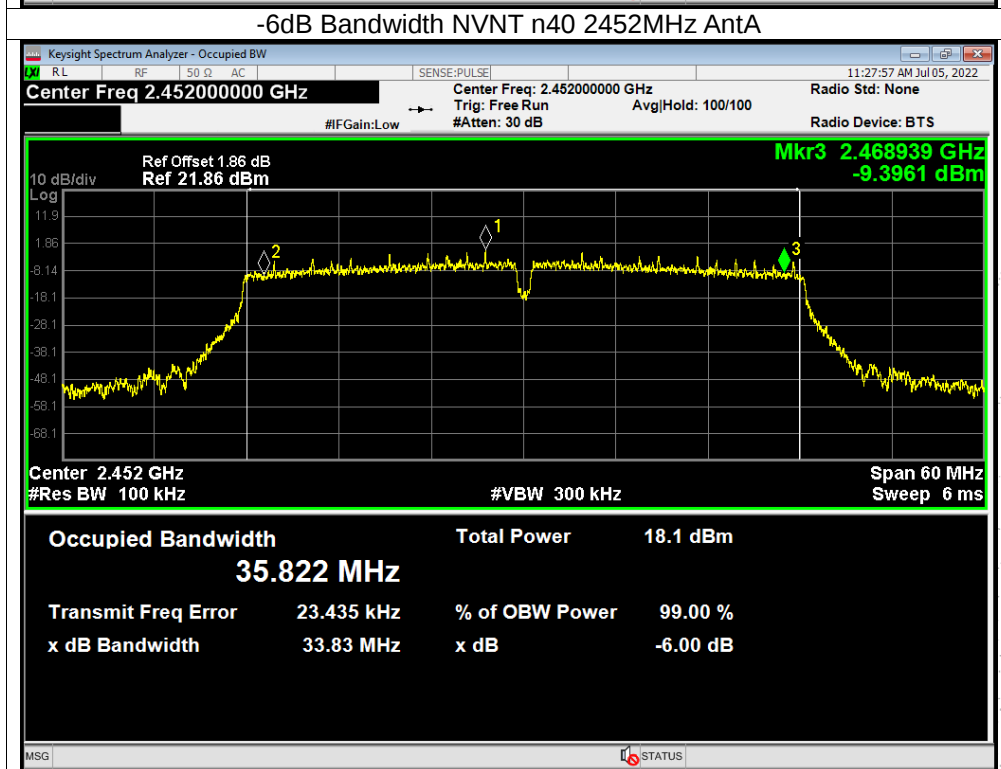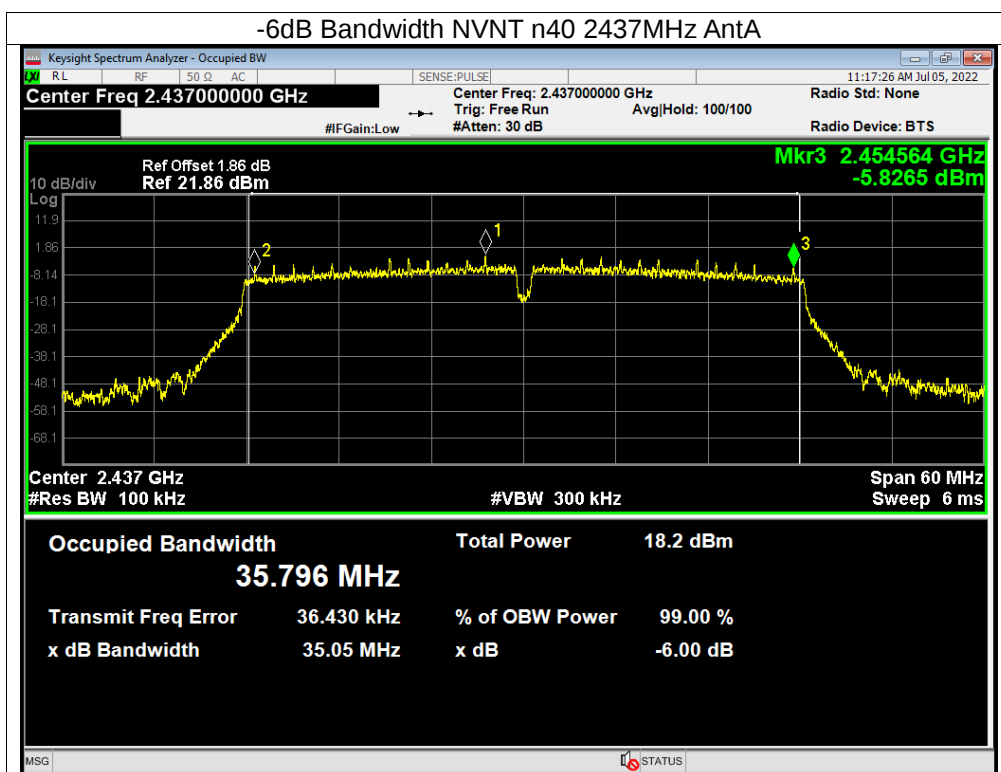

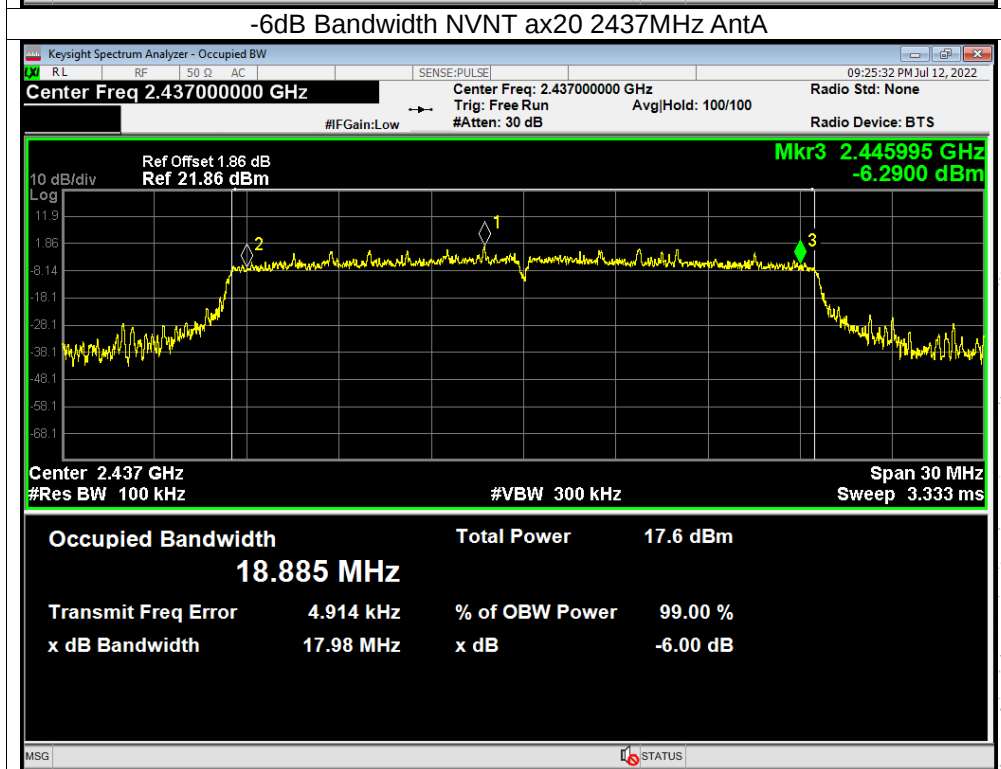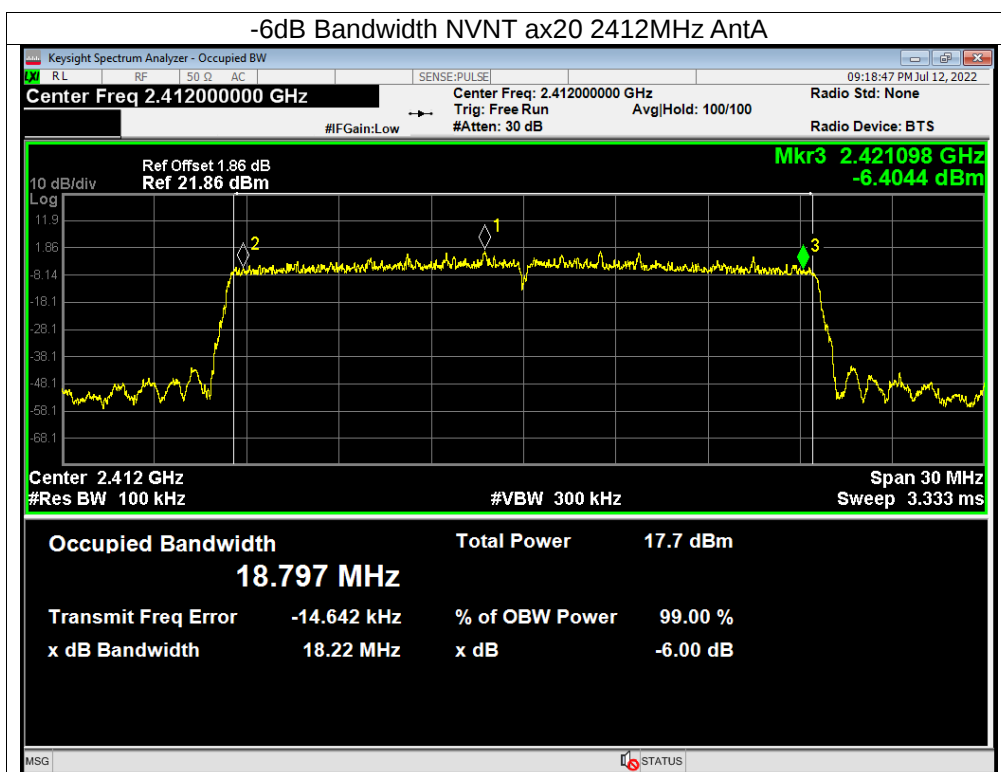

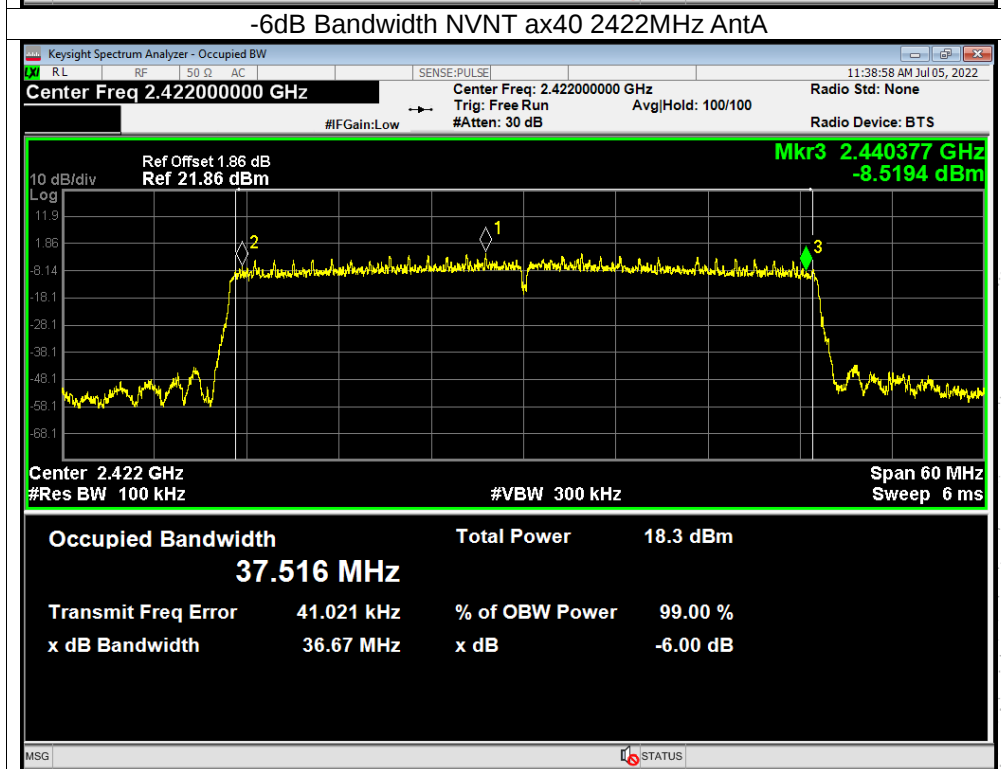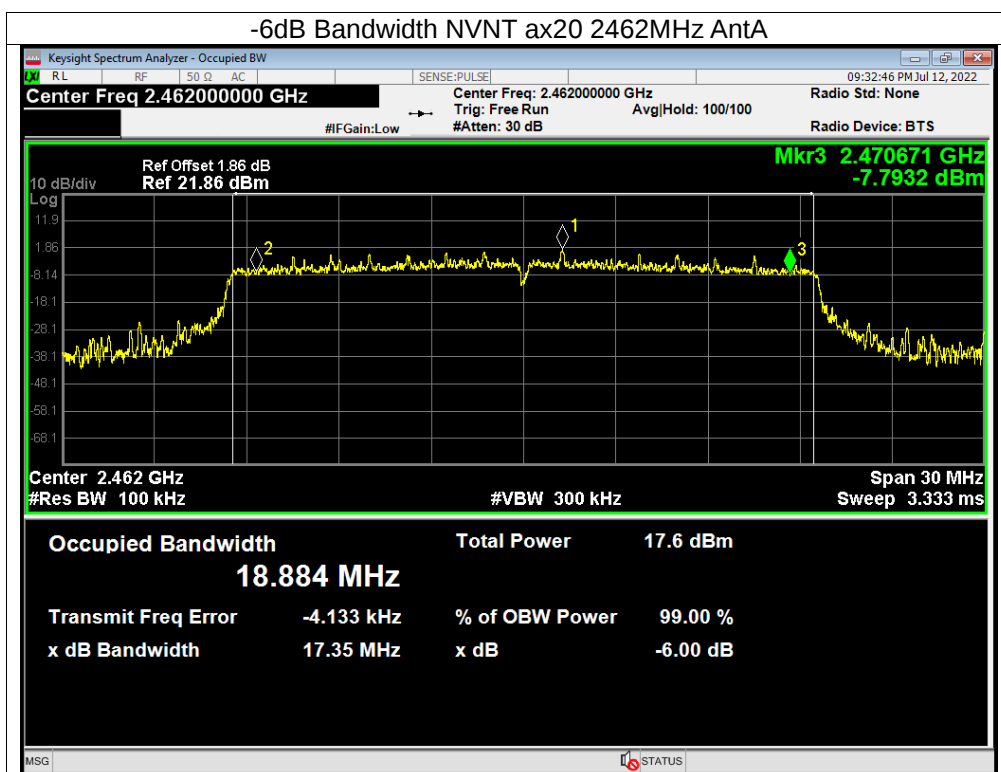

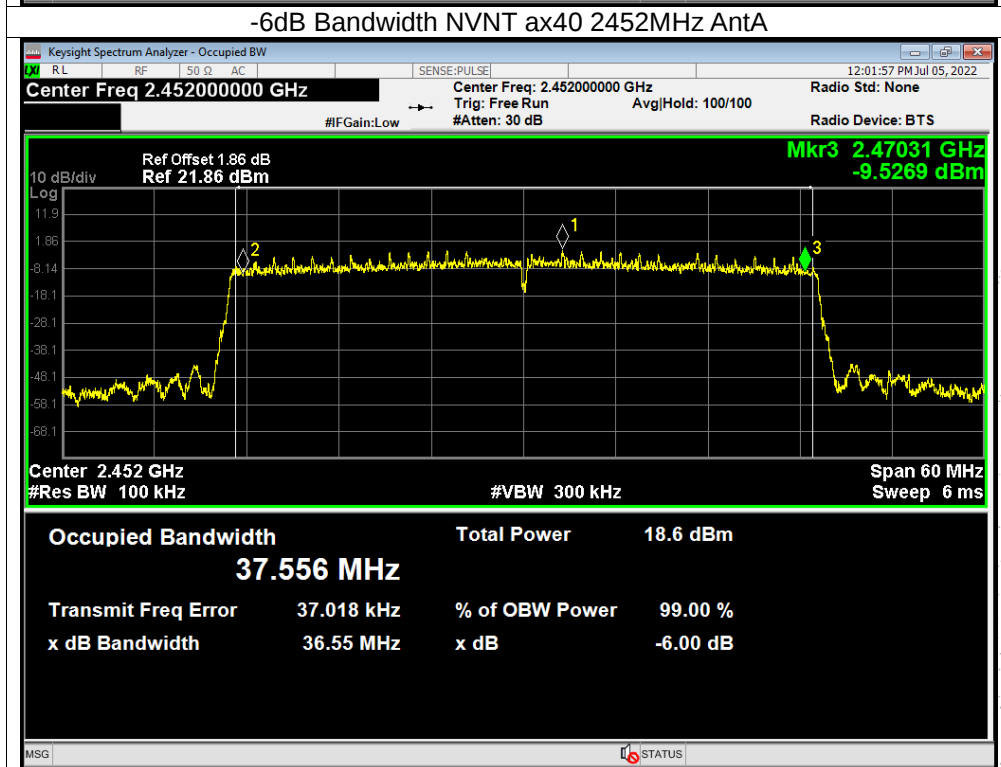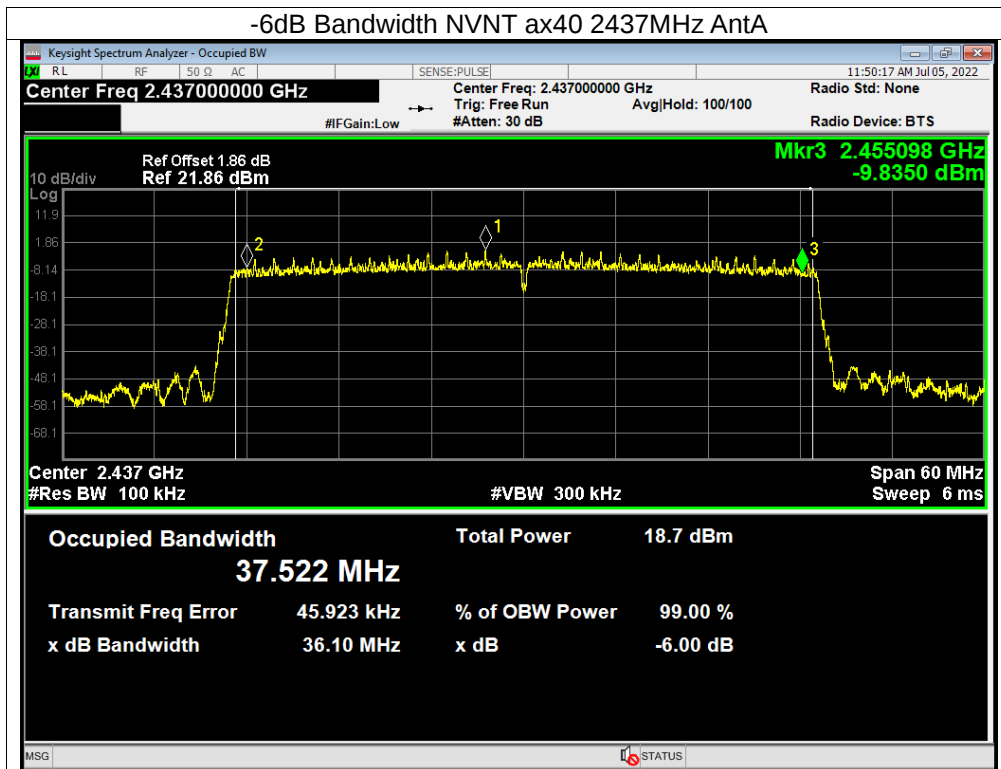

11. Peak Output Power Test

11.1 Block Diagram Of Test Setup



11.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Peak Output Power	1 watt or 30dBm	2400-2483.5	PASS

11.3 Test Procedure

- a. The EUT was directly connected to the Power meter

11.4 EUT Operating Conditions

The EUT tested system was configured as the statements of 4.6 Unless otherwise a special operating condition is specified in the follows during the testing.

Note: Power Spectral Density(dBm)=Reading+Cable Loss

11.5 Test Result

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Test Voltage:	AC120V/60Hz

Test Mode	Frequency(MHz)	Ant A Maximum Conducted Output Power(PK) (dBm)	Ant B Maximum Conducted Output Power(PK) (dBm)	Limit (dBm)
802.11b	2412	15.44	15.73	30
	2437	16.16	16.29	30
	2462	15.97	16.18	30
802.11g	2412	16.13	16.38	30
	2437	16.61	16.79	30
	2462	16.56	16.68	30
802.11n20	2412	16.10	16.26	30
	2437	16.53	16.73	30
	2462	16.47	16.59	30
802.11n40	2422	16.07	16.19	30
	2437	16.55	16.66	30
	2452	16.60	16.66	30
802.11ax20	2412	17.01	17.05	30
	2437	16.92	16.98	30
	2462	16.86	16.91	30
802.11ax40	2422	17.13	17.24	30
	2437	17.71	17.75	30
	2452	17.60	16.60	30

For 2T2R

Test Mode	Frequency	Maximum Conducted Output Power(PK) (dBm)	Limit (dBm)	Result
802.11n20	2412 MHz	19.19	29	PASS
	2437 MHz	19.64	29	PASS
	2462 MHz	19.54	29	PASS
802.11n40	2422 MHz	19.14	29	PASS
	2437 MHz	19.62	29	PASS
	2452 MHz	19.64	29	PASS
802.11ax20	2412 MHz	20.04	29	PASS
	2437 MHz	19.96	29	PASS
	2462 MHz	19.90	29	PASS
802.11ax40	2422 MHz	20.20	29	PASS
	2437 MHz	20.74	29	PASS
	2452 MHz	20.14	29	PASS

12. 100 kHz Bandwidth Of Frequency Band Edge

12.1 Block Diagram Of Test Setup



12.2 Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

12.3 Test Procedure

Using the following spectrum analyzer setting:

- a) Set the RBW = 100KHz.
- b) Set the VBW = 300KHz.
- c) Sweep time = auto couple.
- d) Detector function = peak.
- e) Trace mode = max hold.
- f) Allow trace to fully stabilize..


12.4 EUT Operating Conditions



The EUT tested system was configured as the statements of 4.6 Unless otherwise a special operating condition is specified in the follows during the testing.



Note: Power Spectral Density(dBm)=Reading+Cable Loss


12.5 Test Result



Note: A(B) Represent the value of antenna A and B, The worst data is Antenna A, only shown Antenna A Plot.


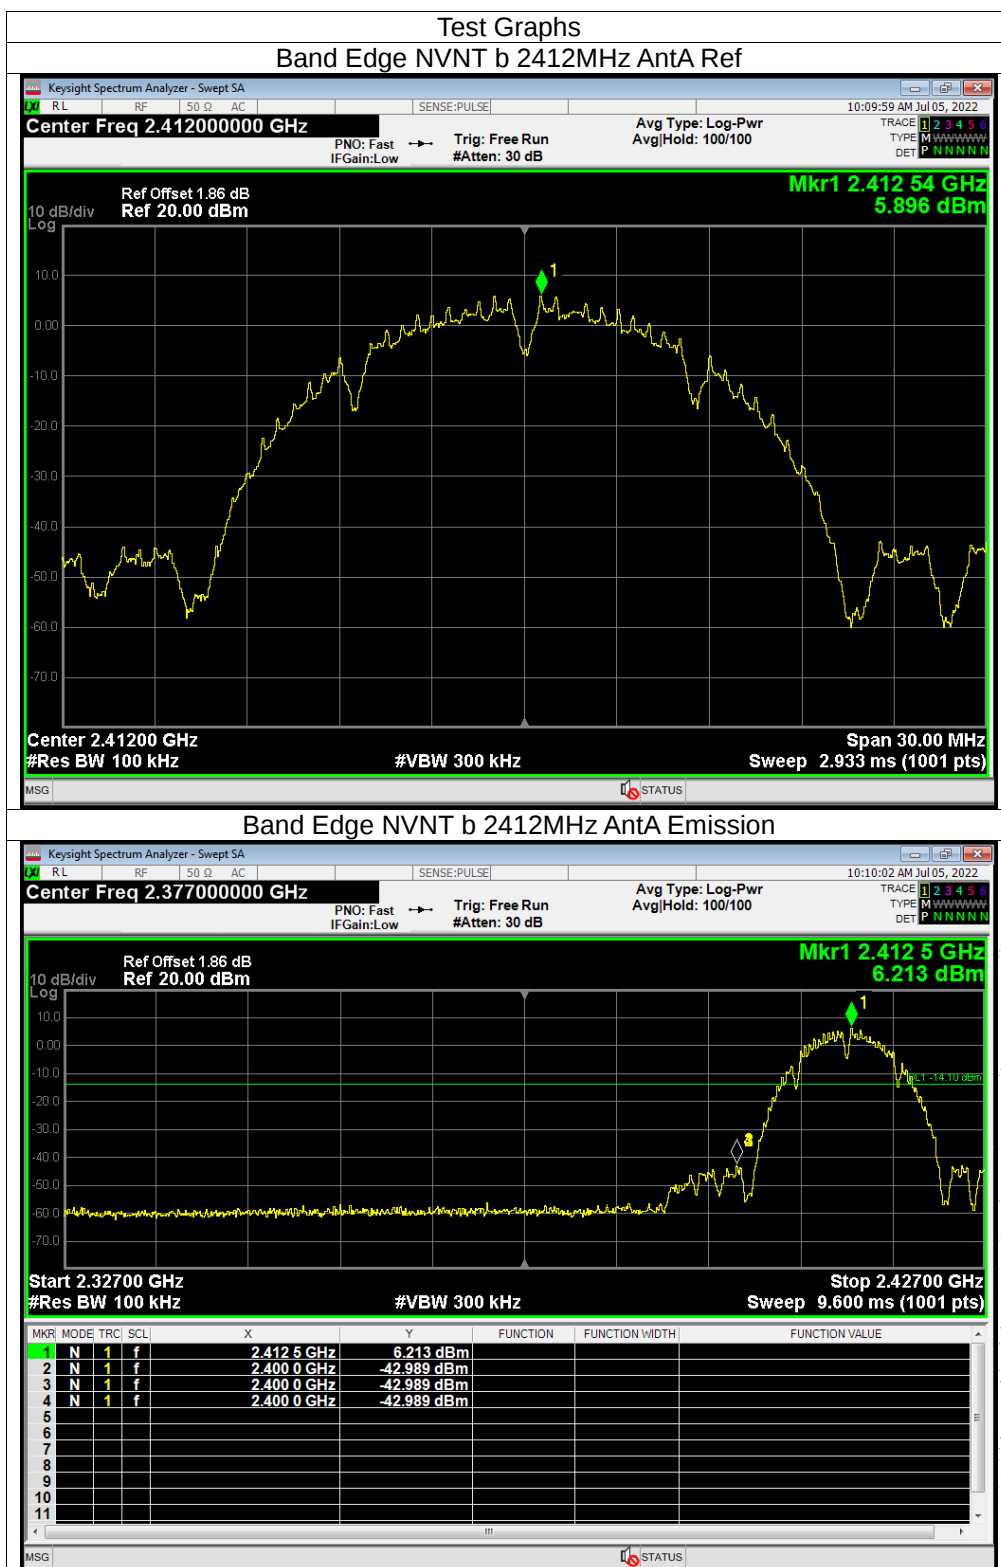


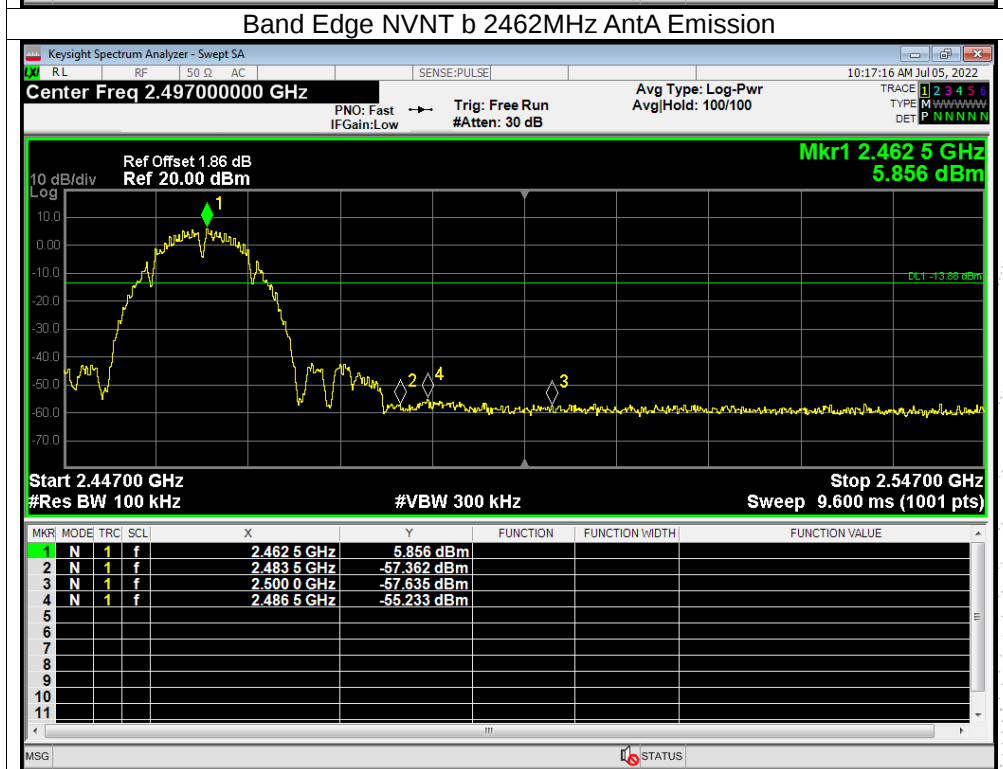
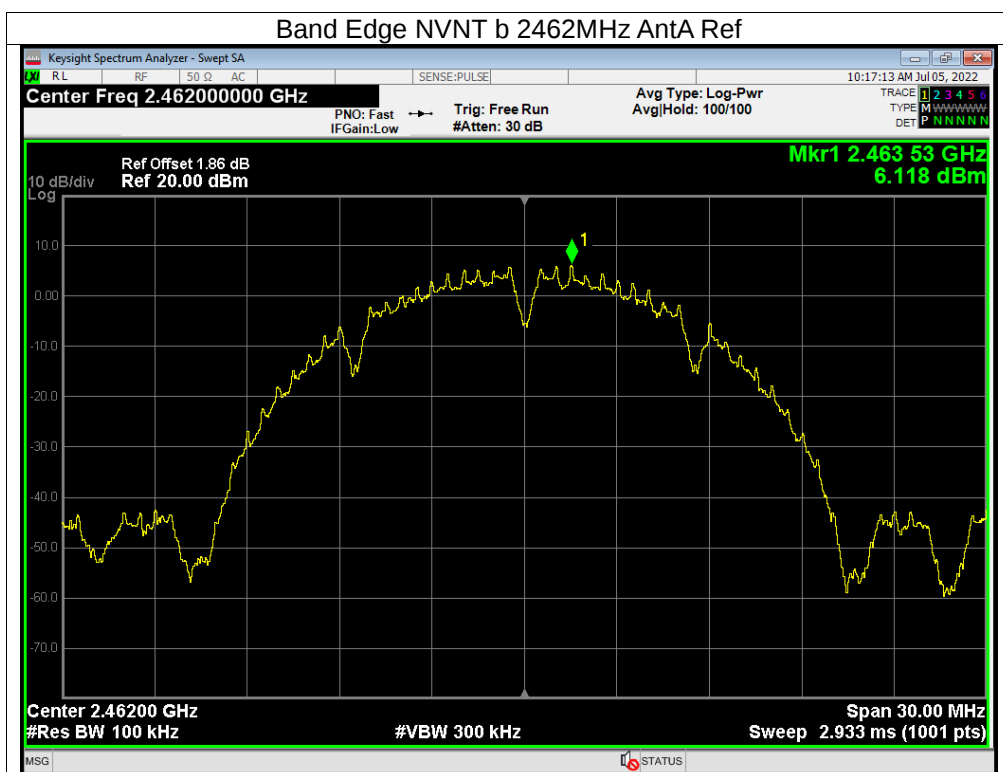


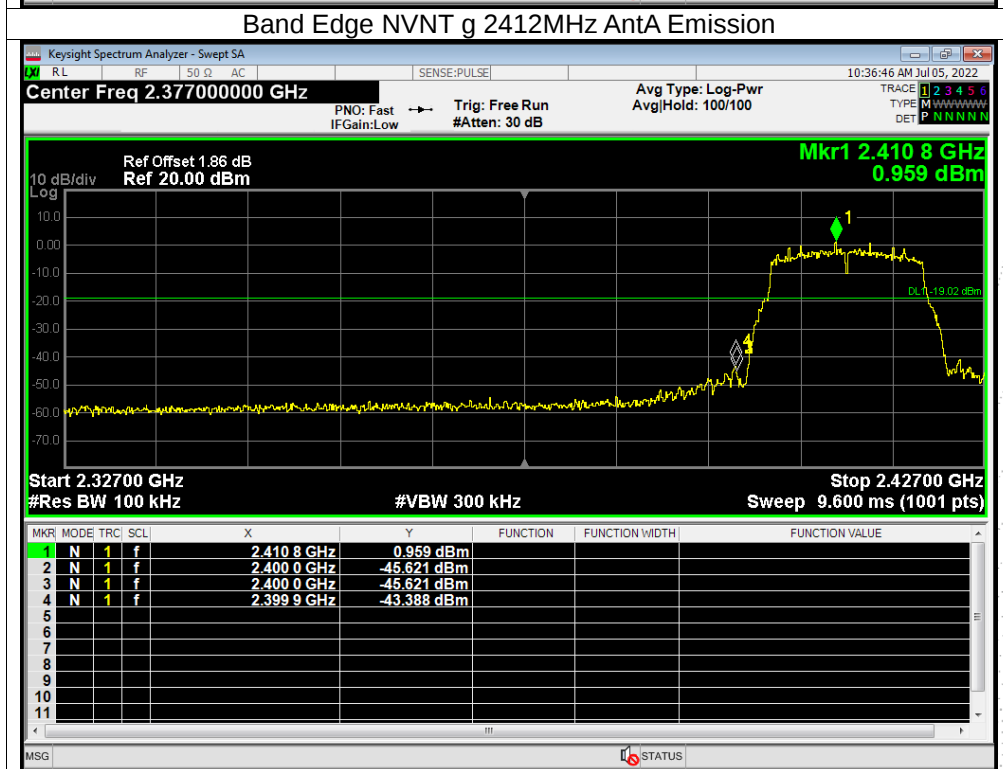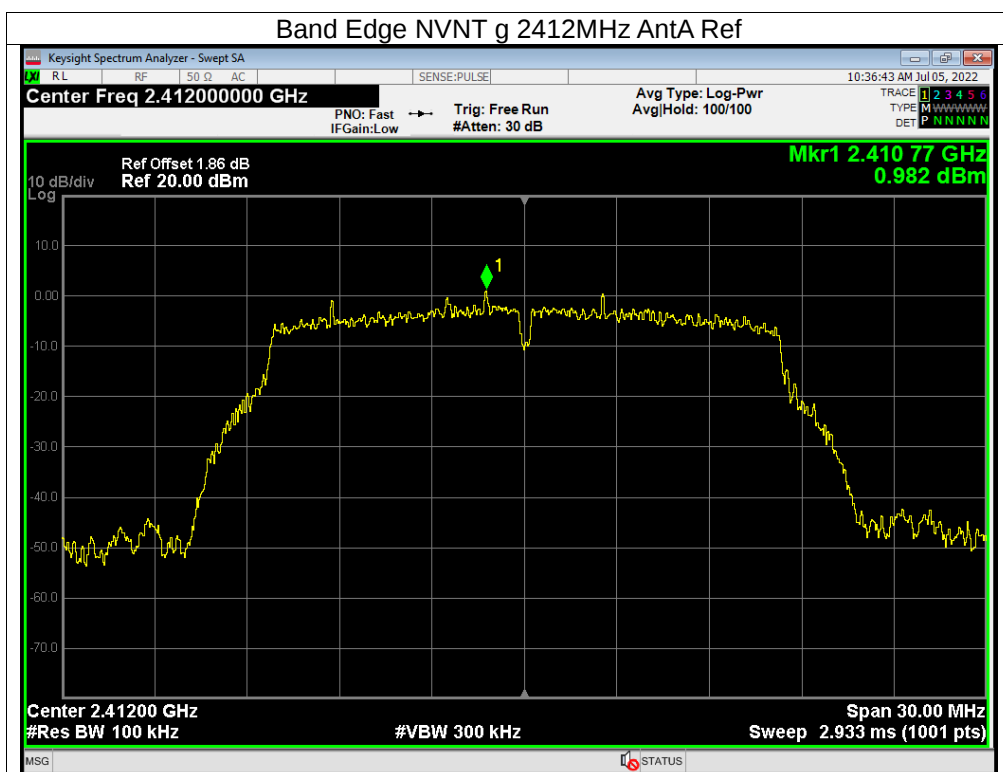



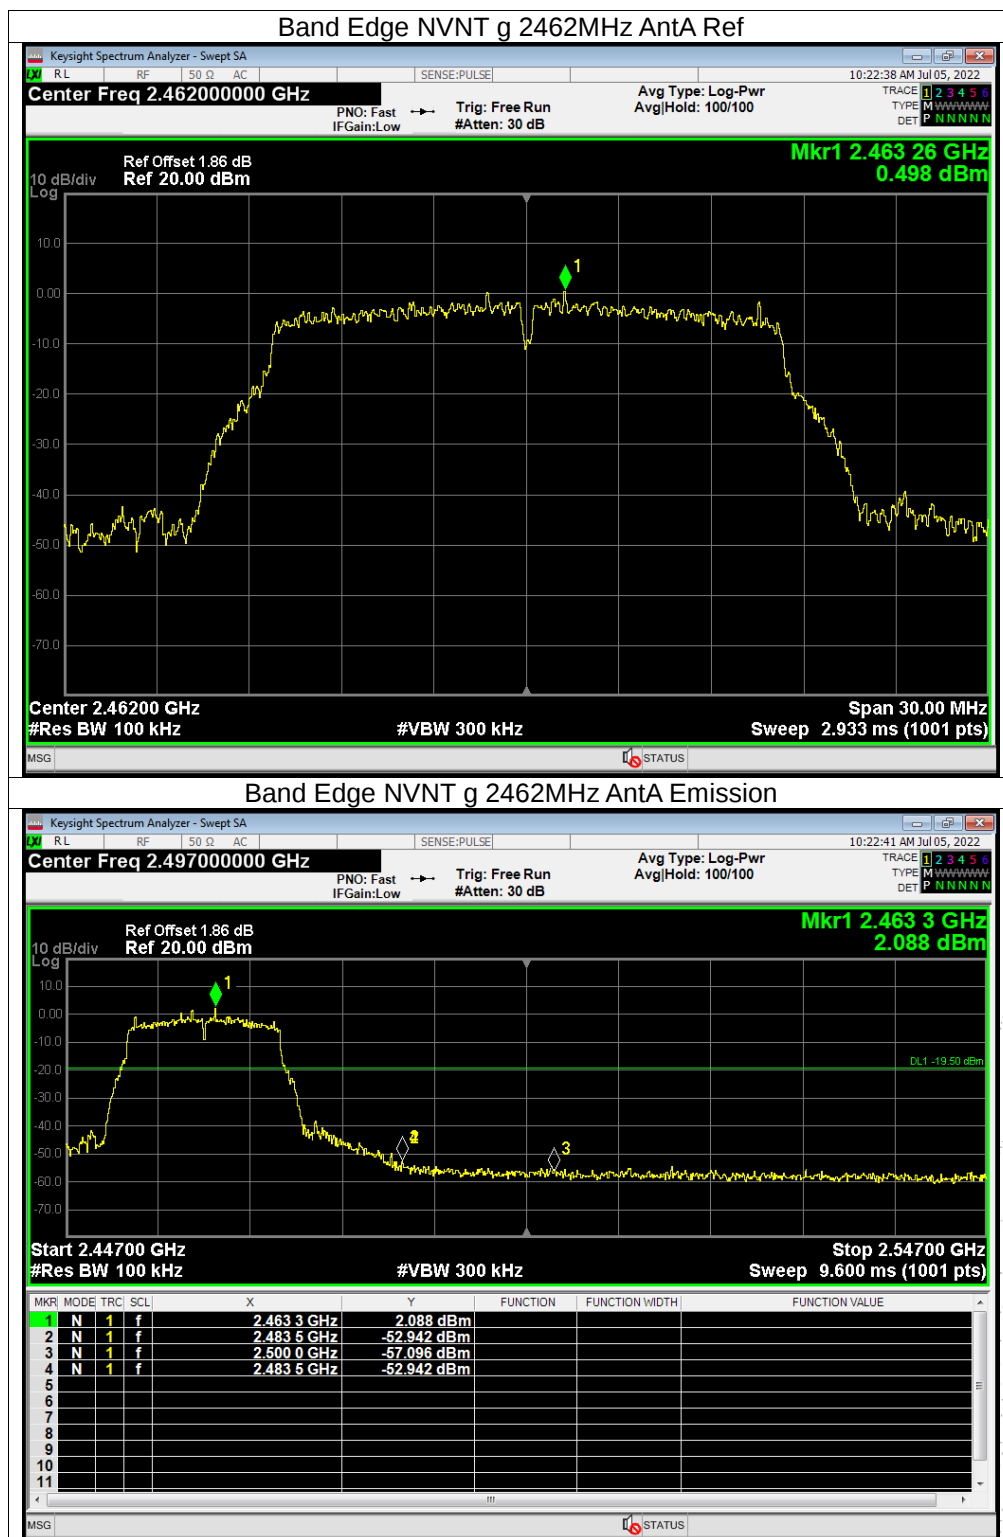


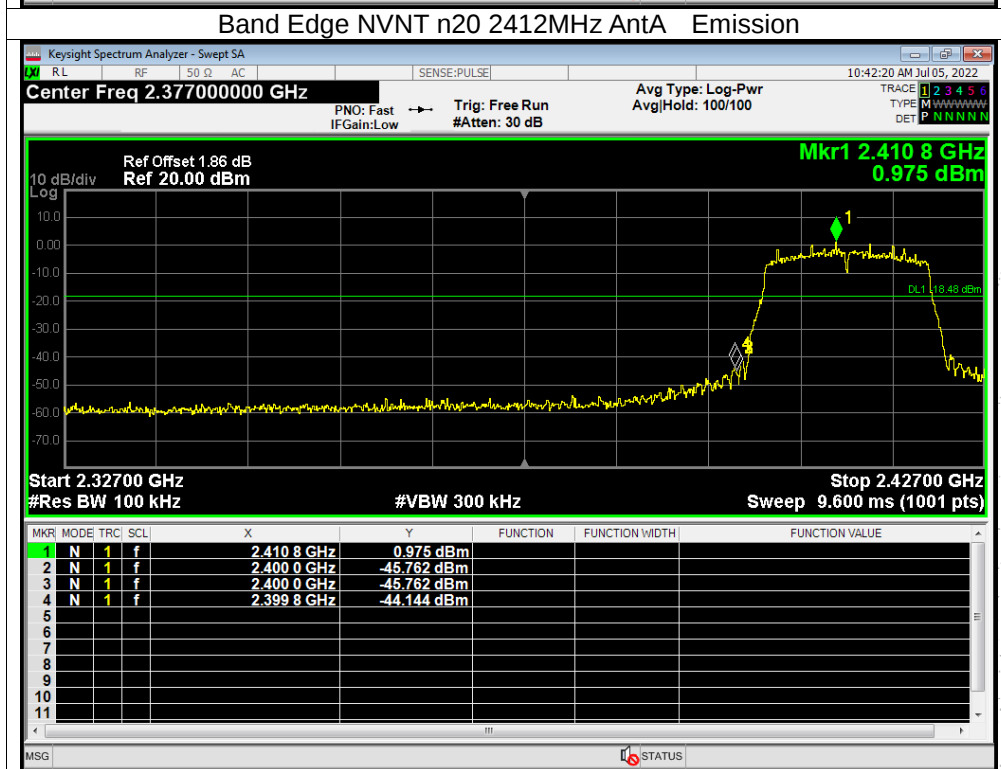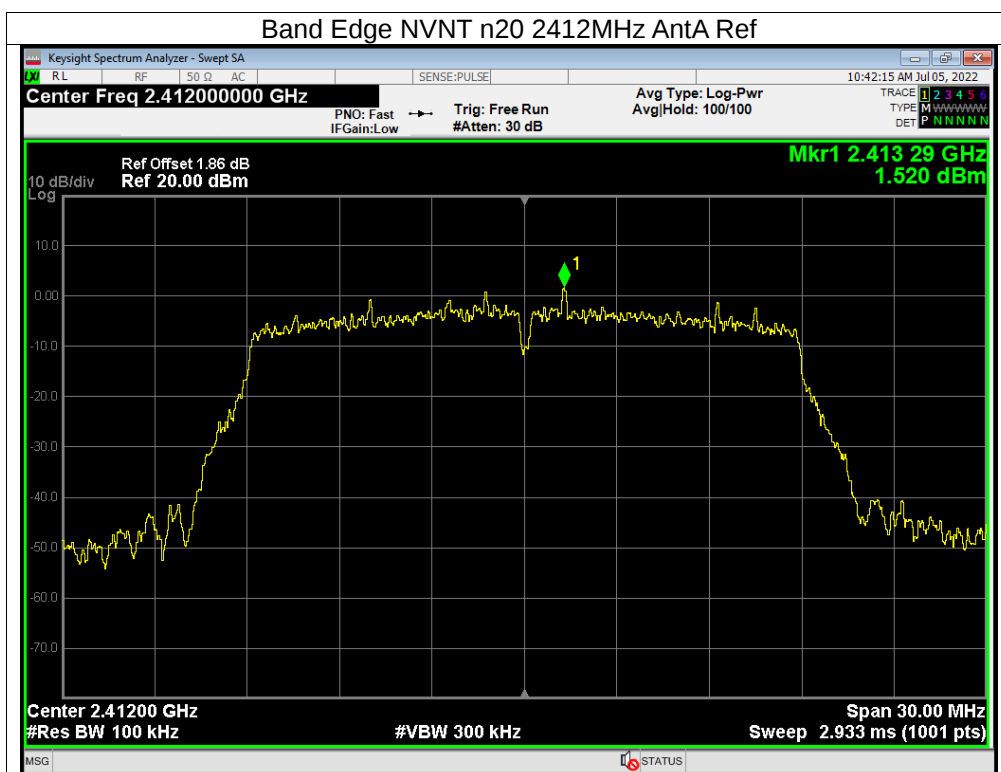


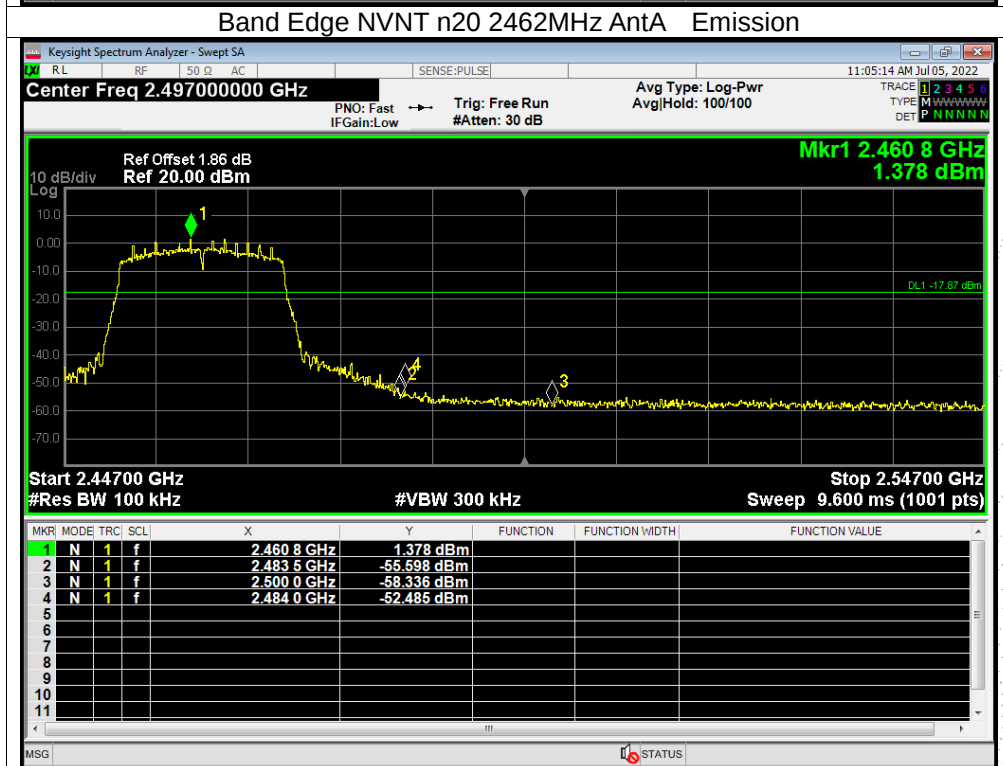
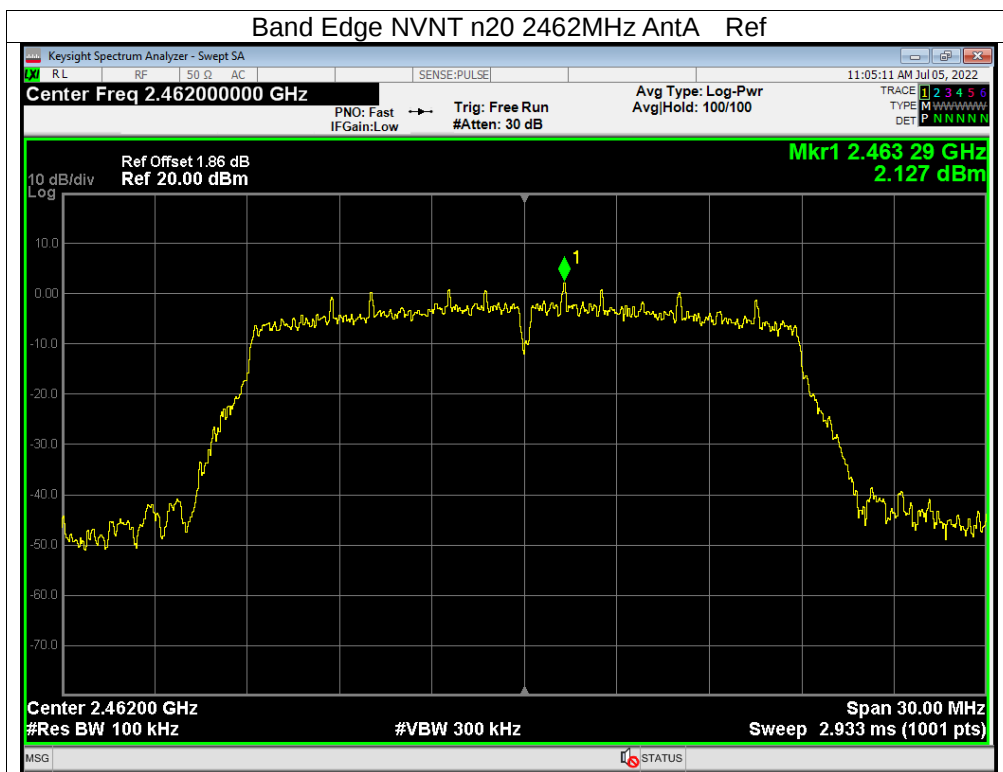


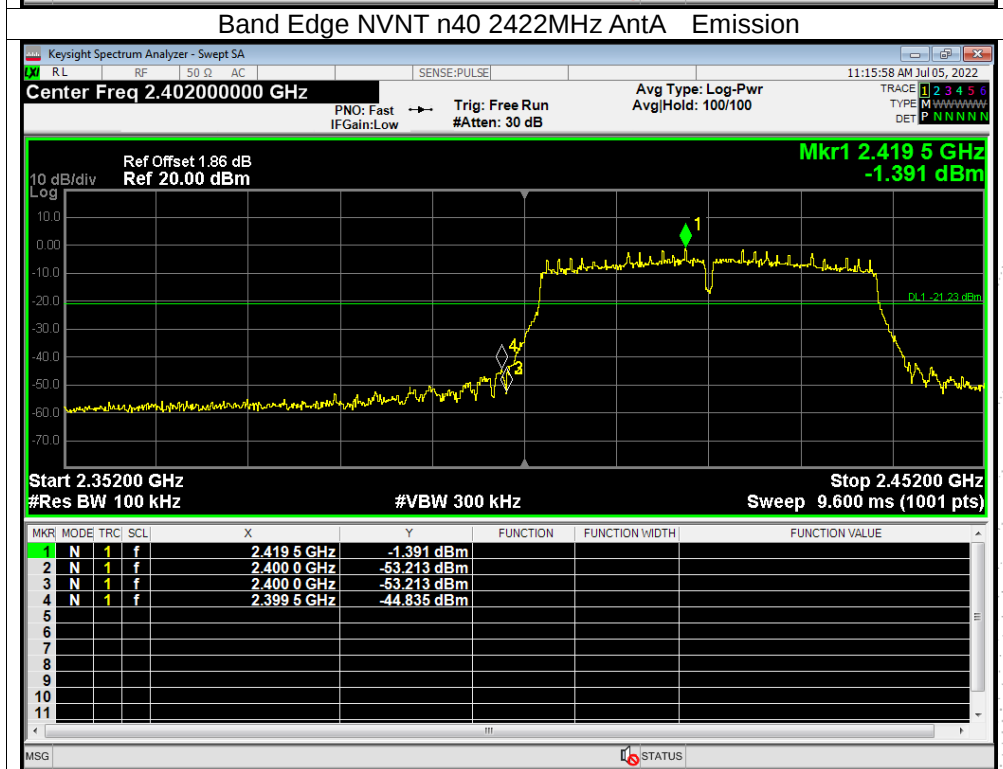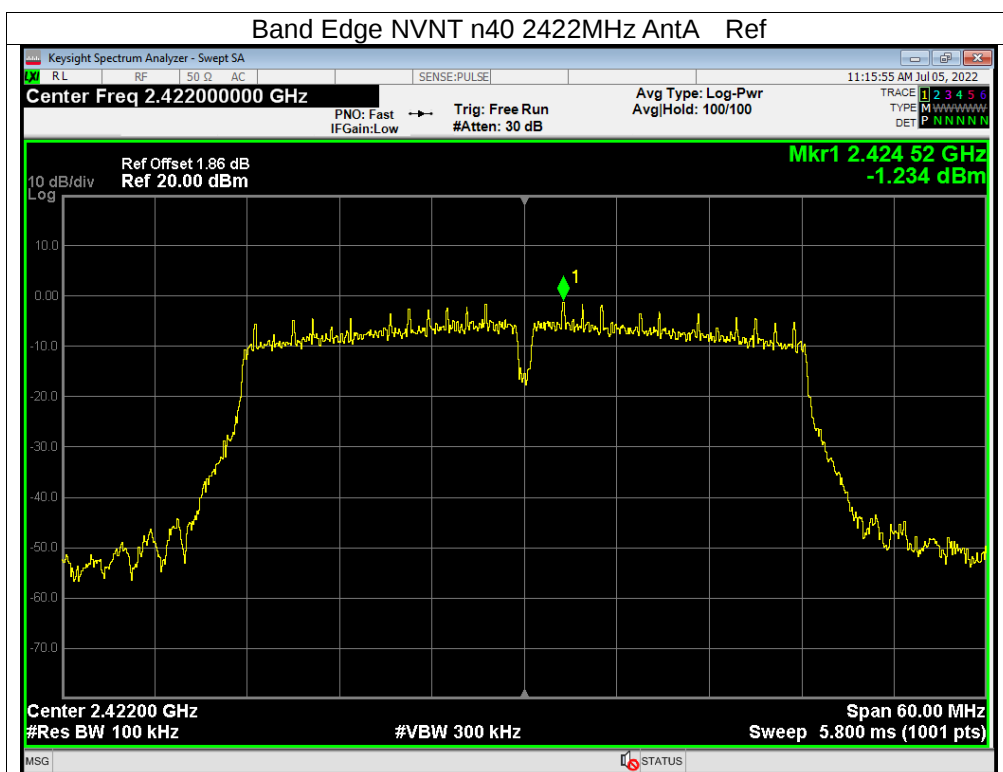


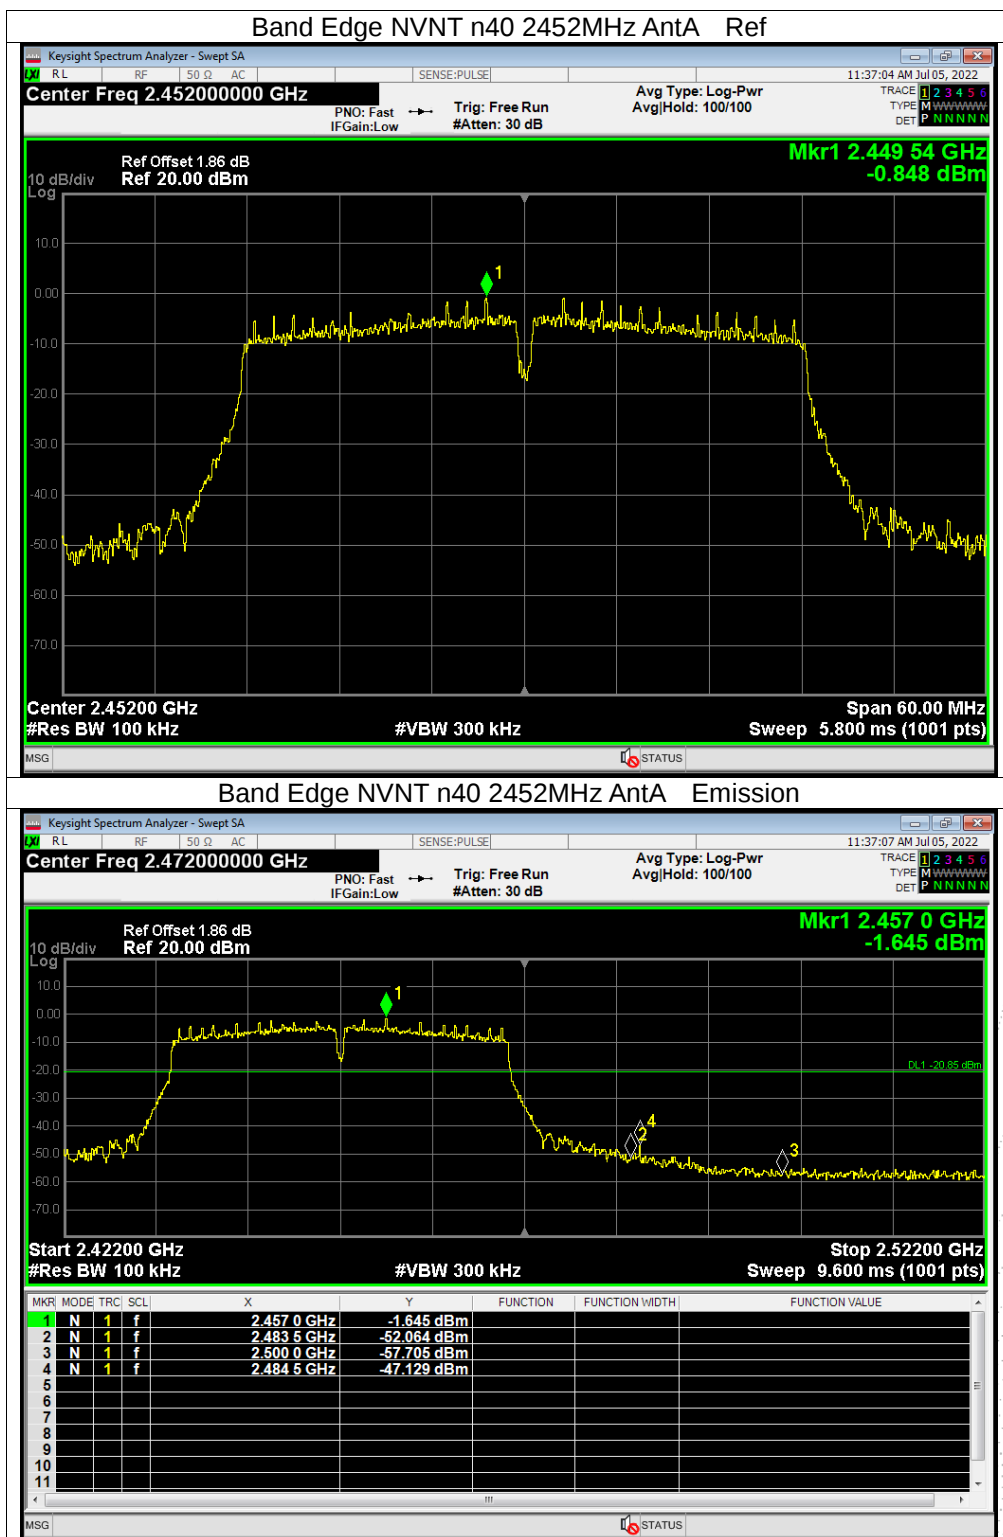


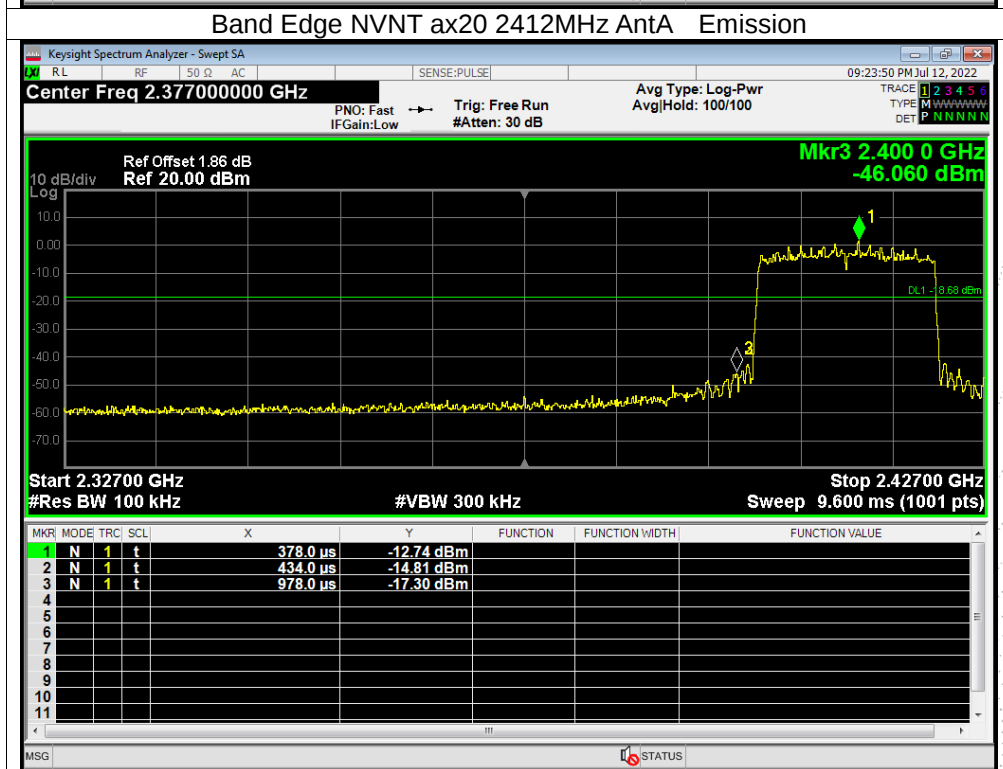
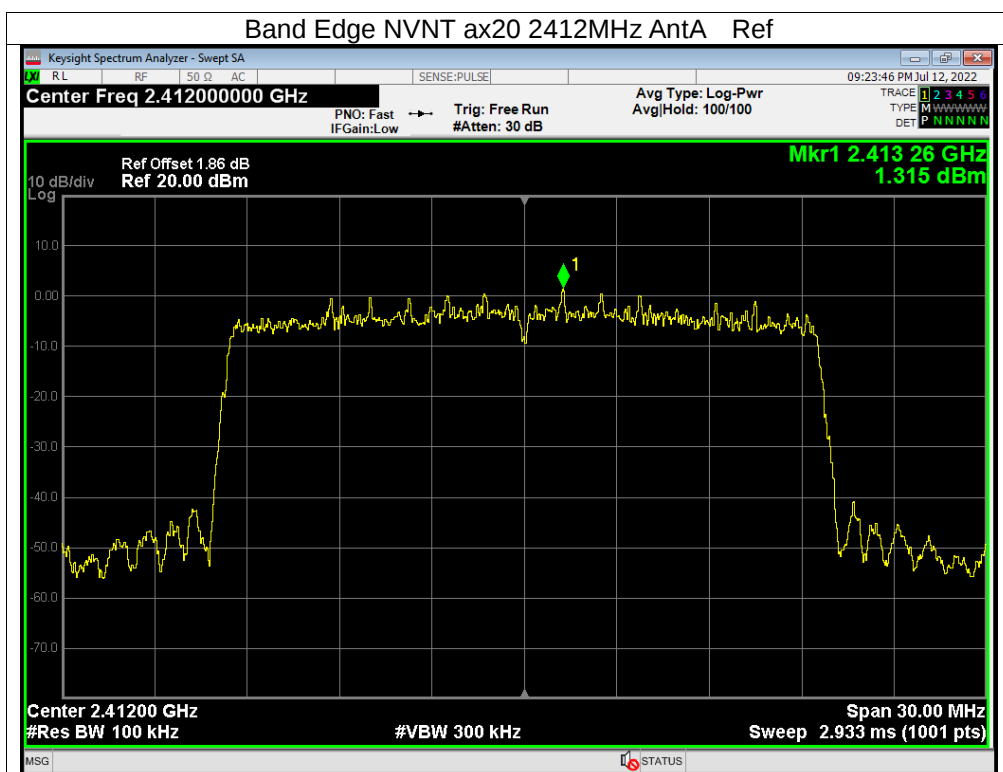



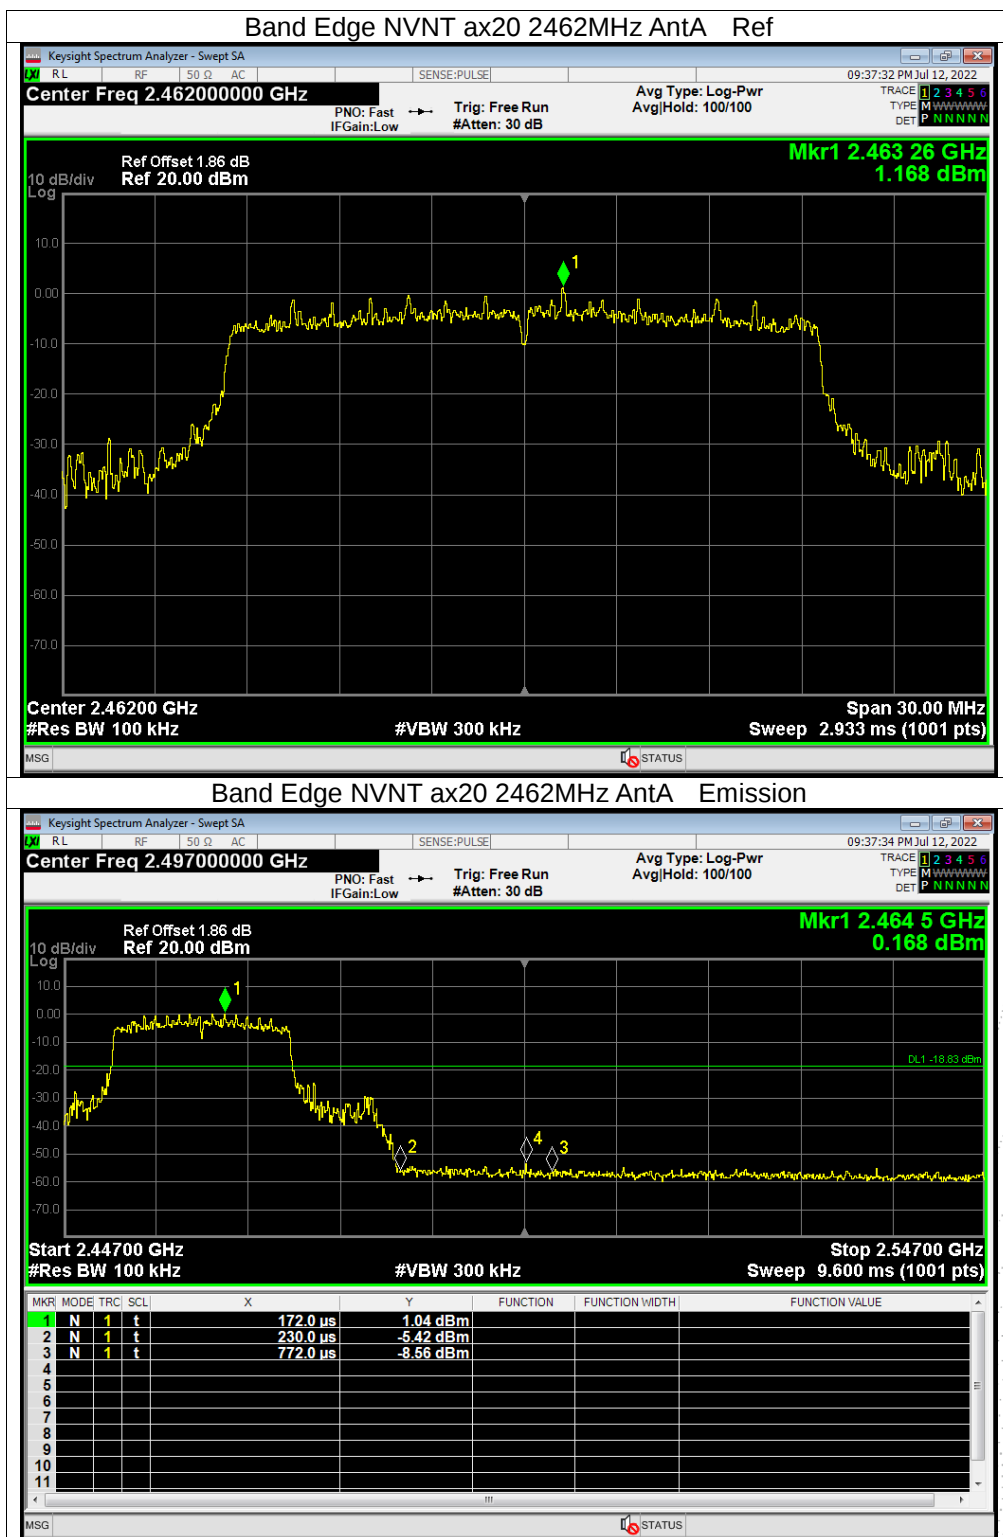


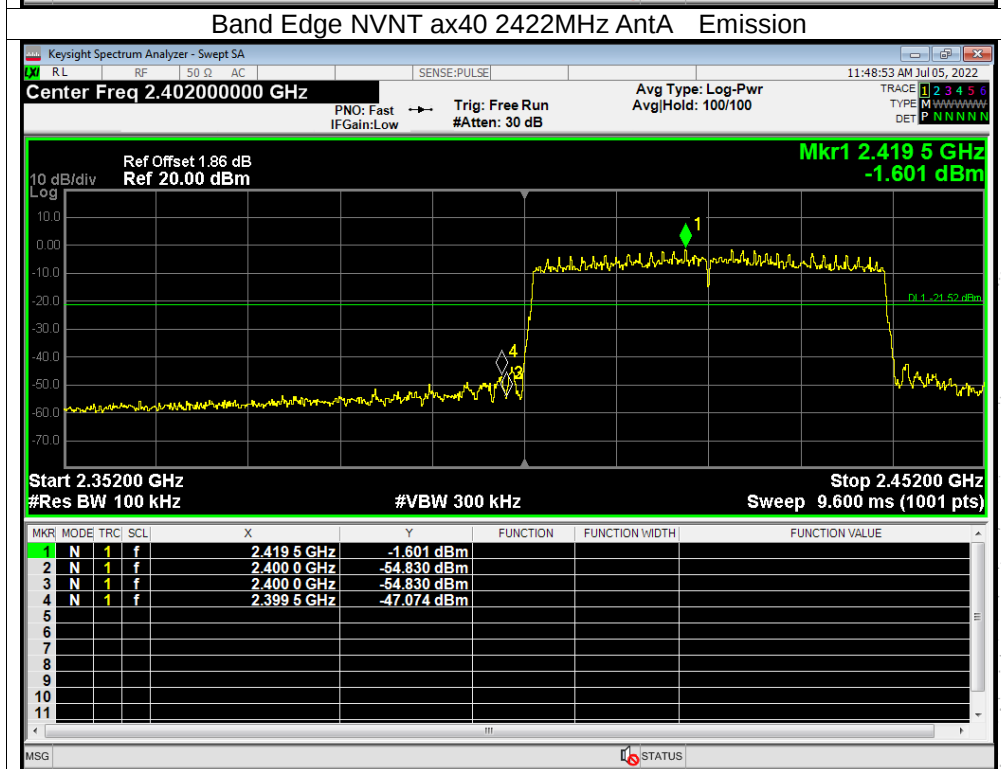
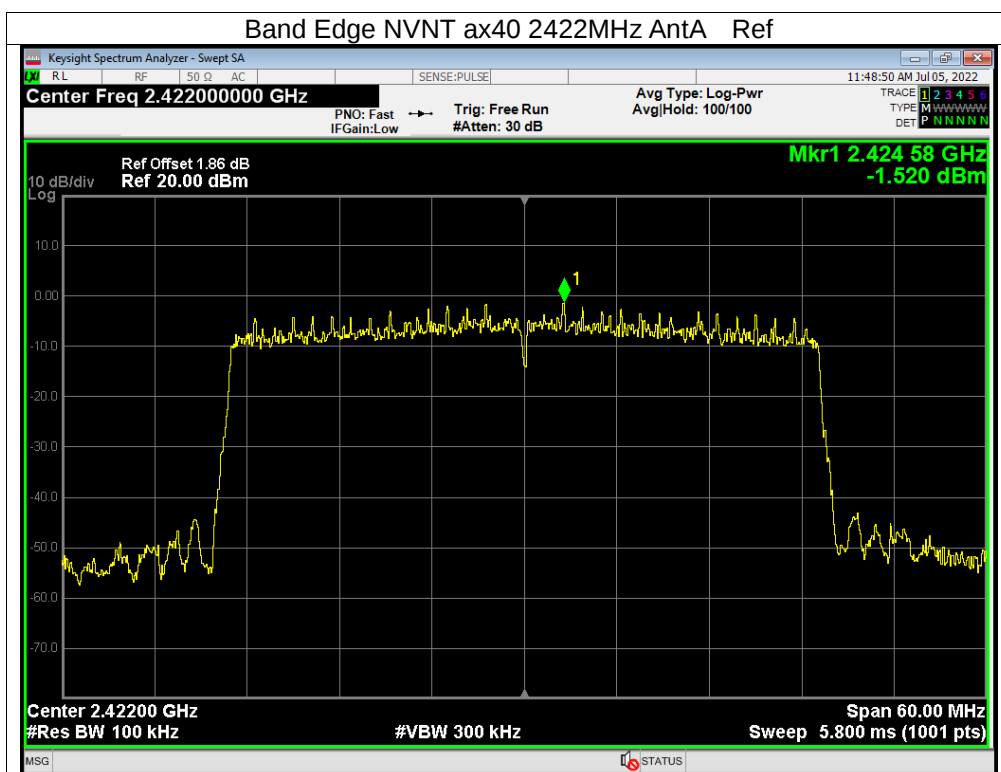



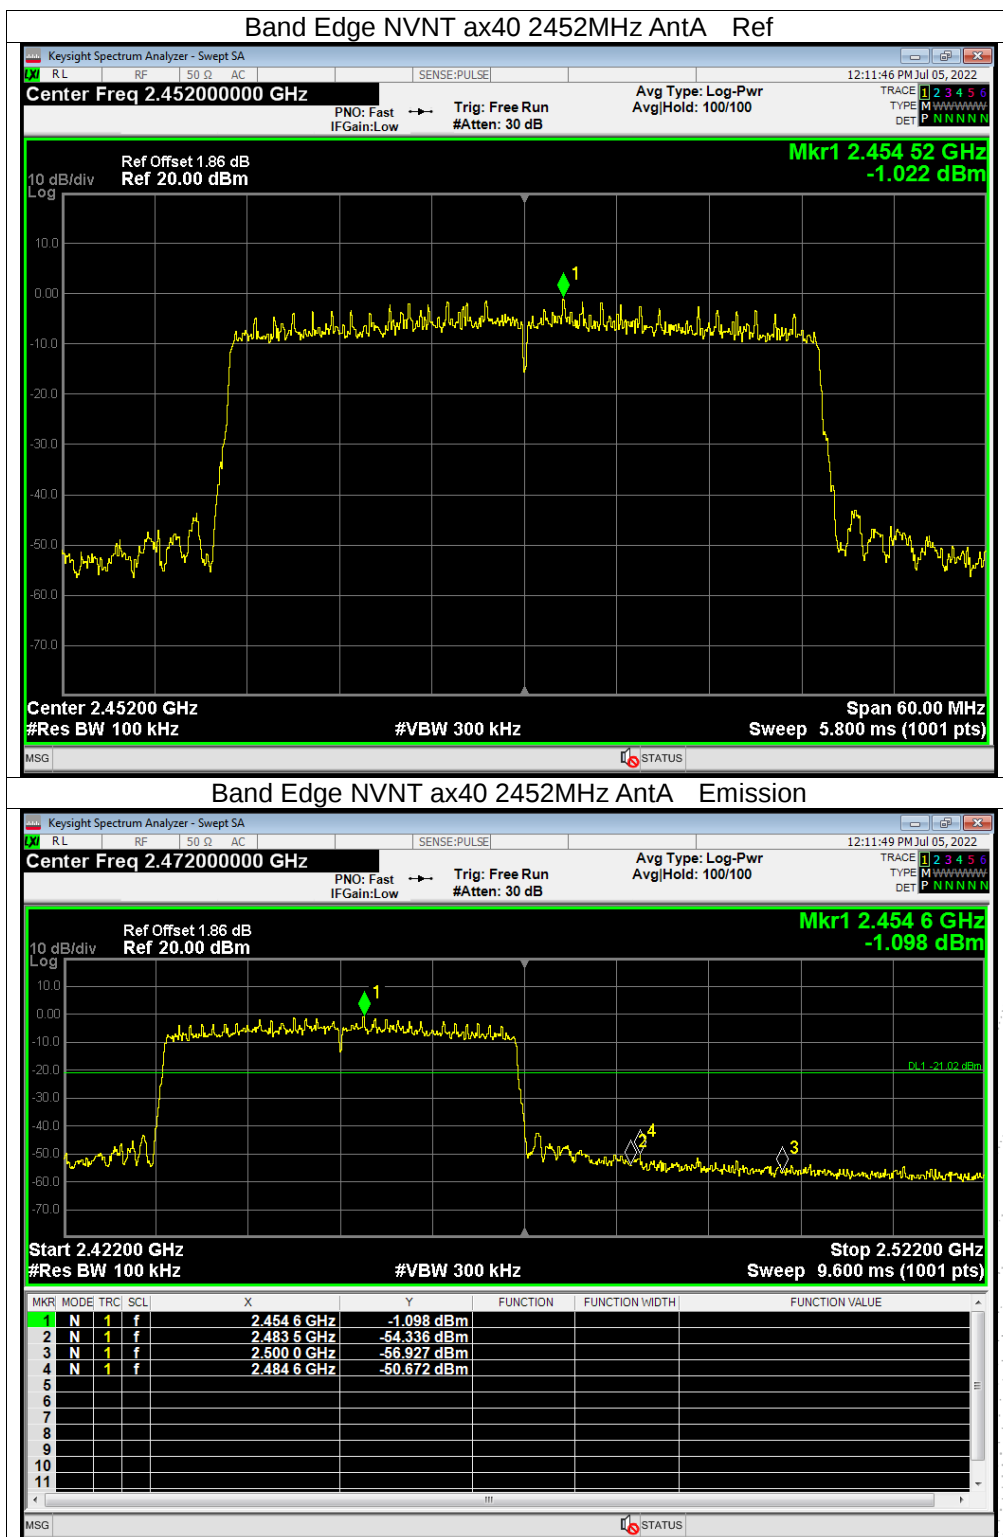



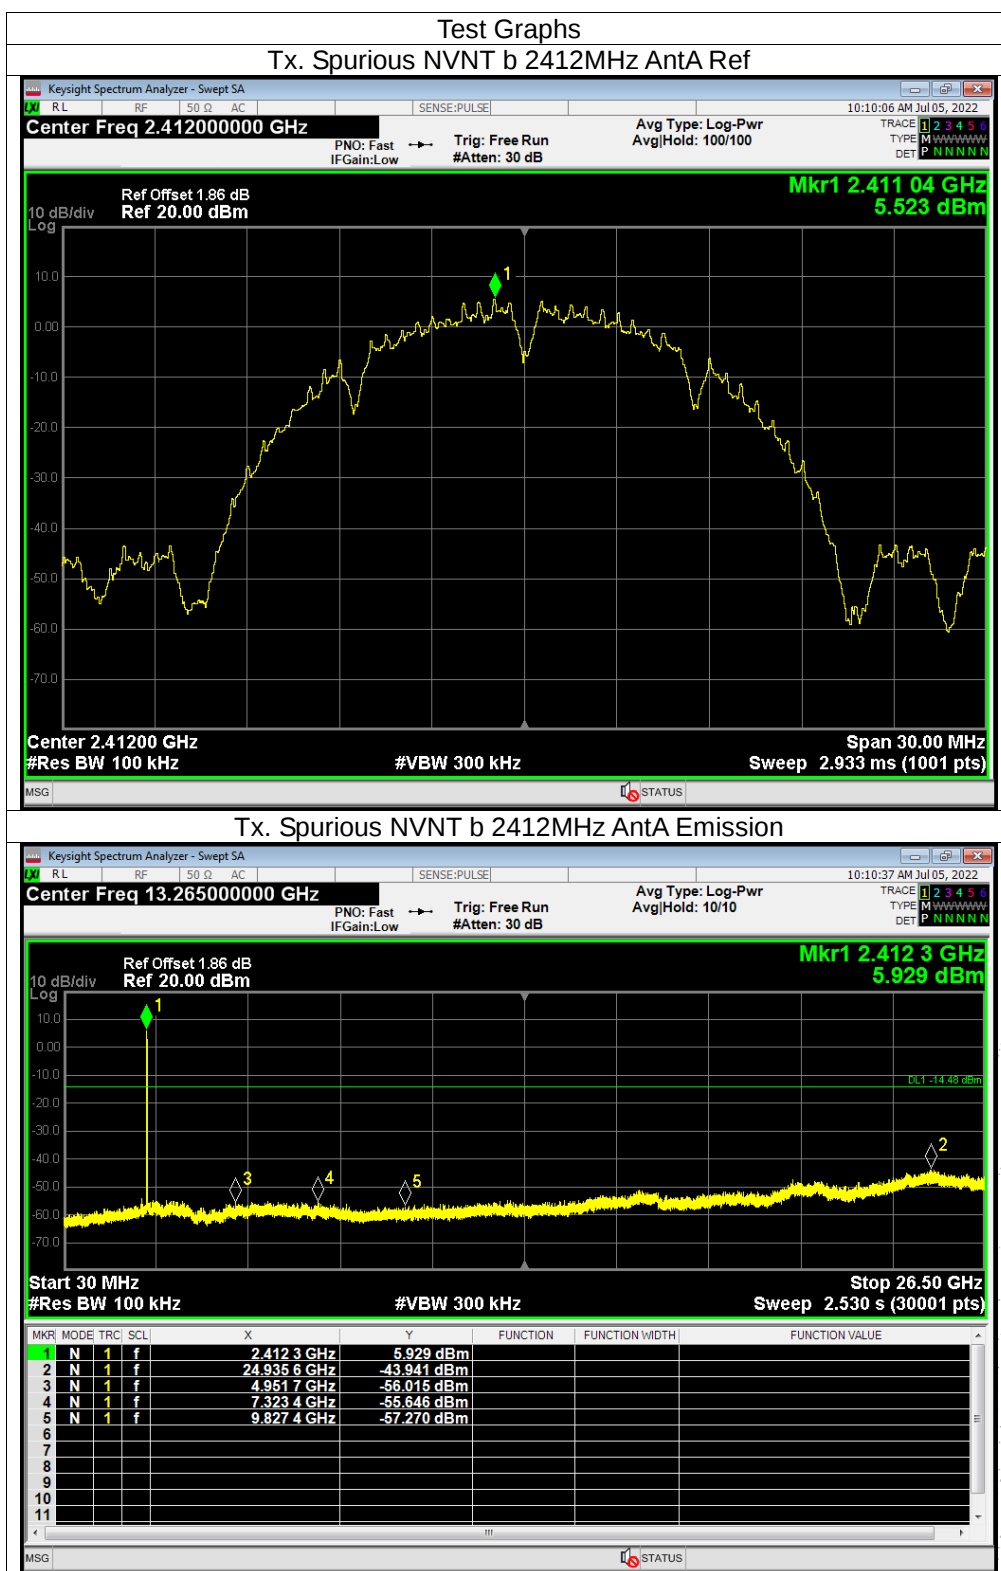


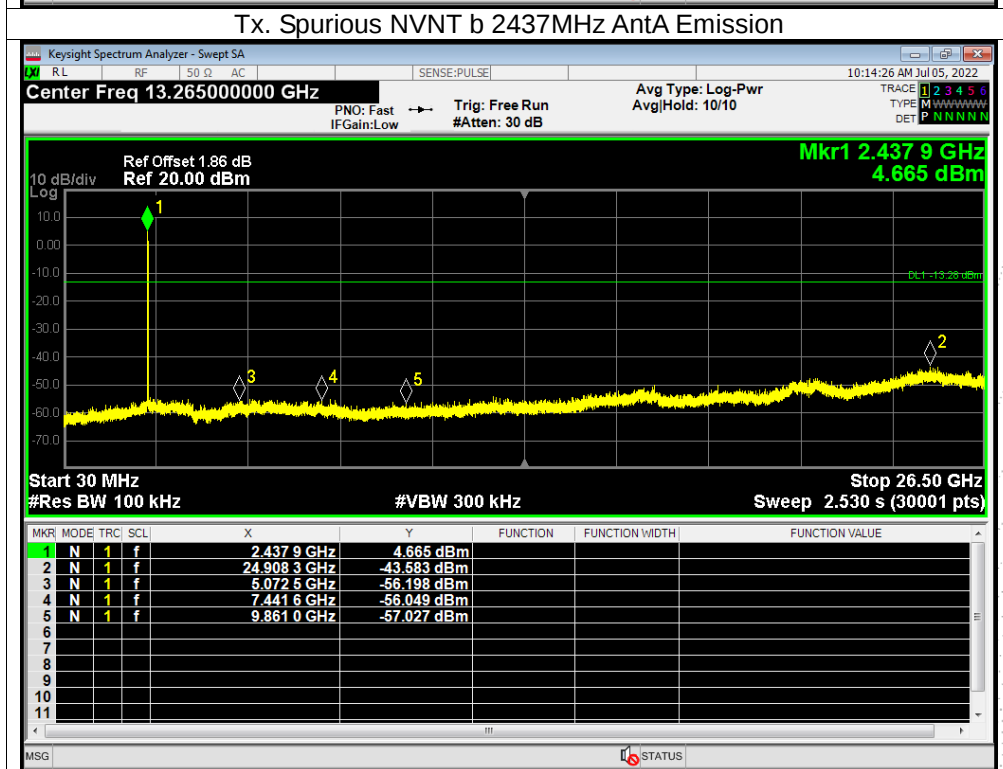
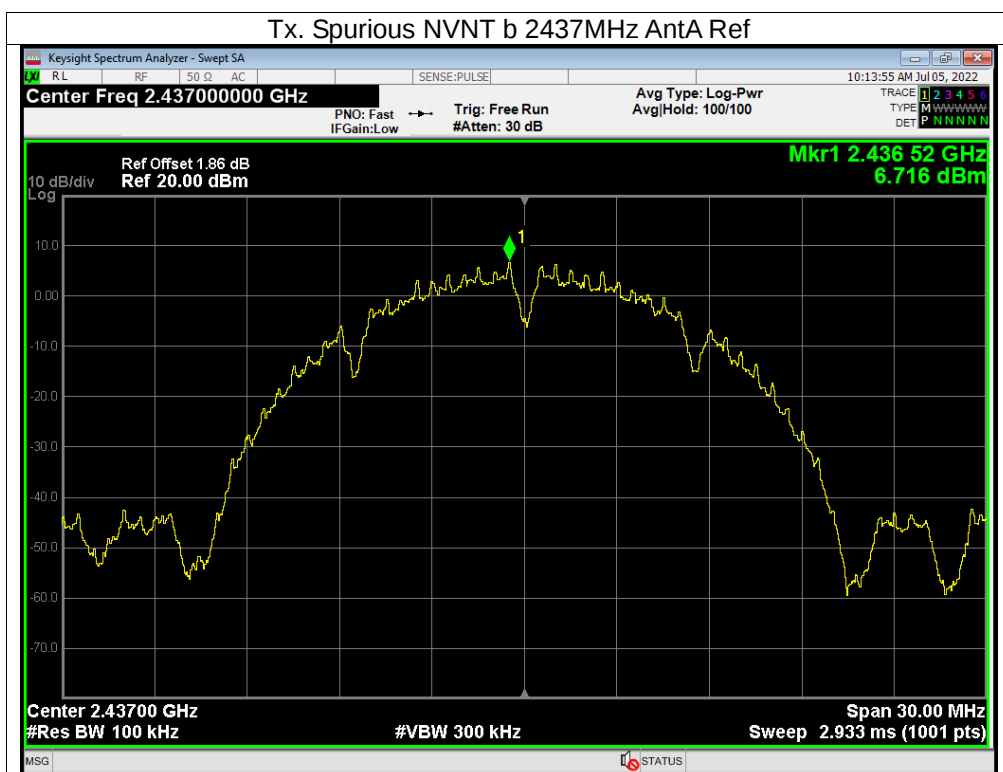


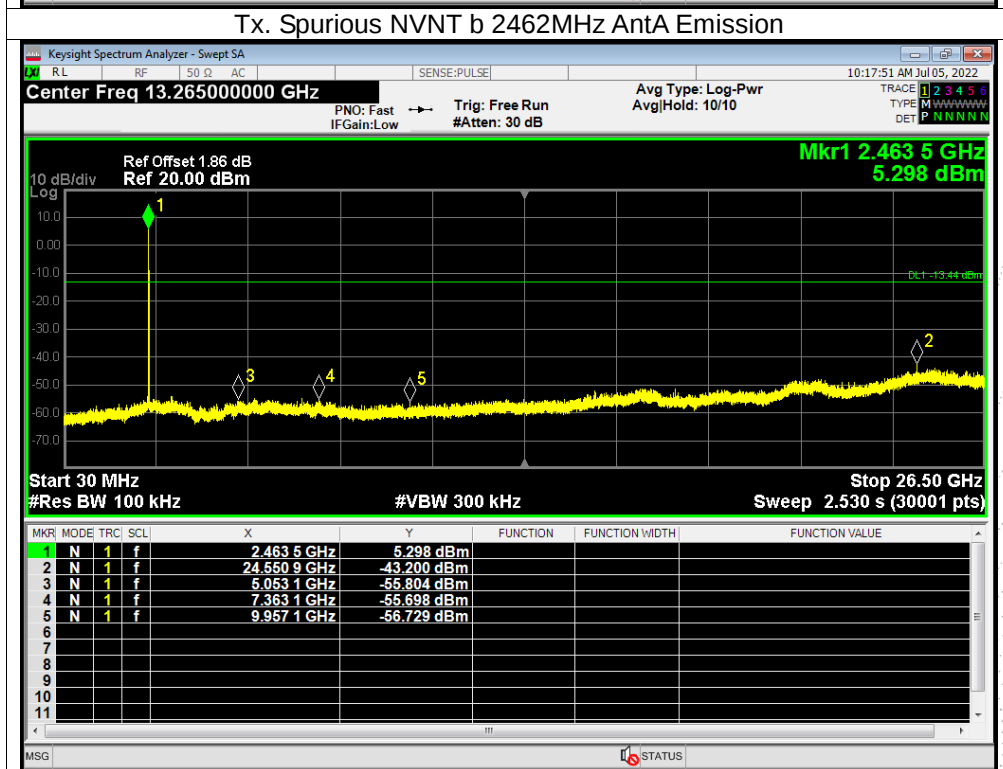
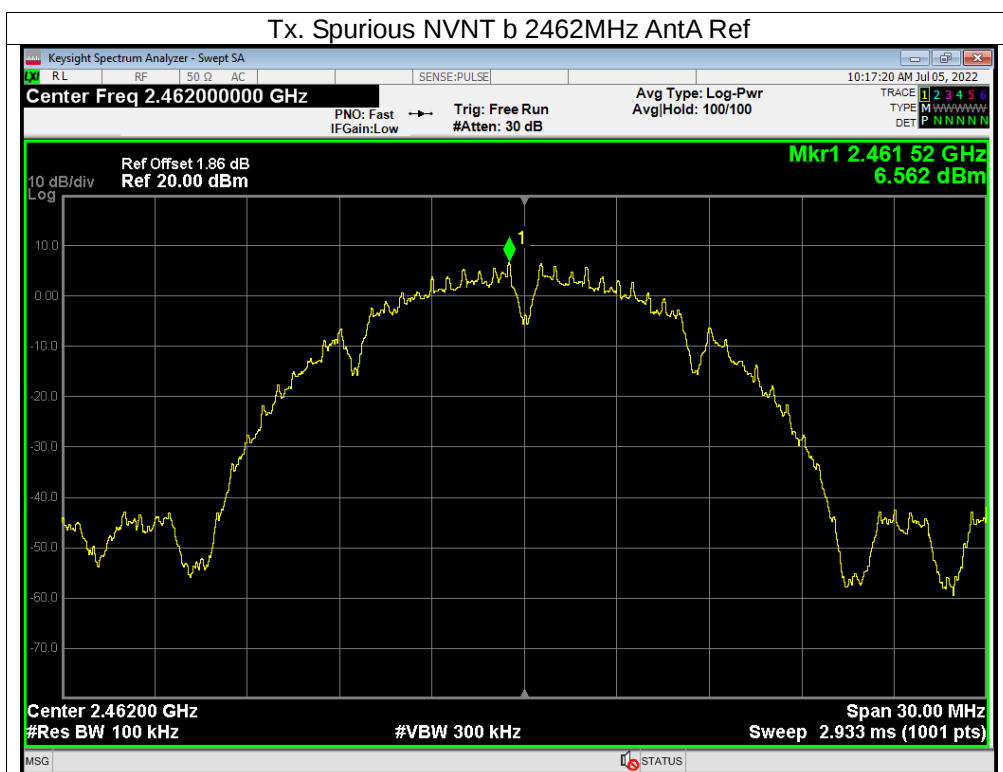


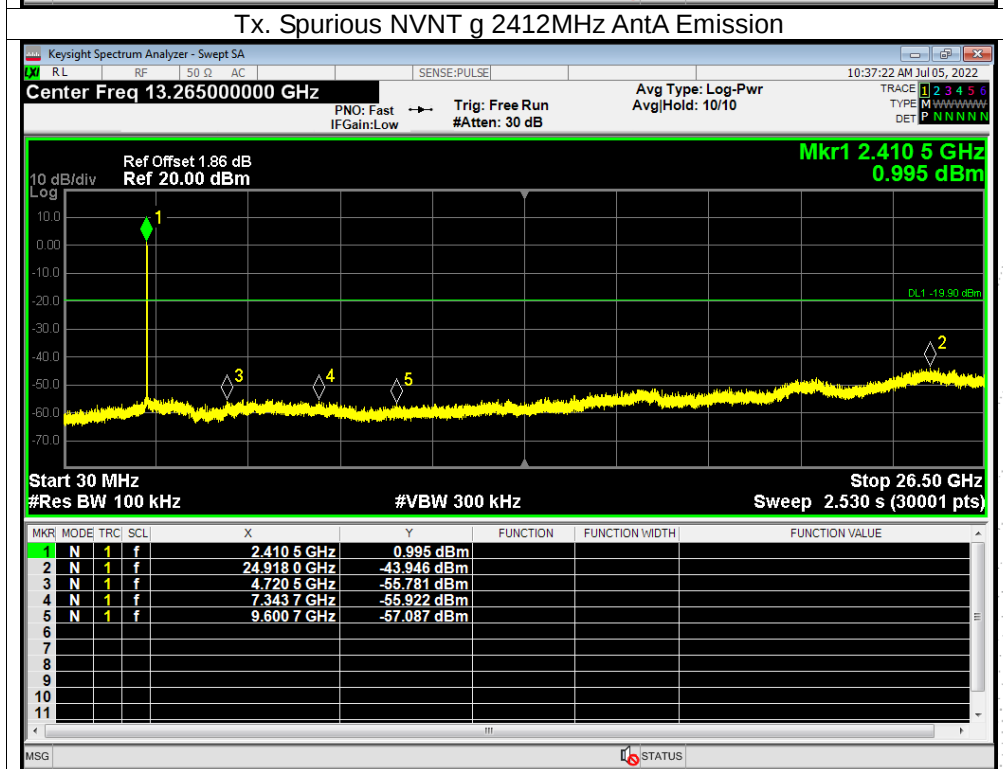
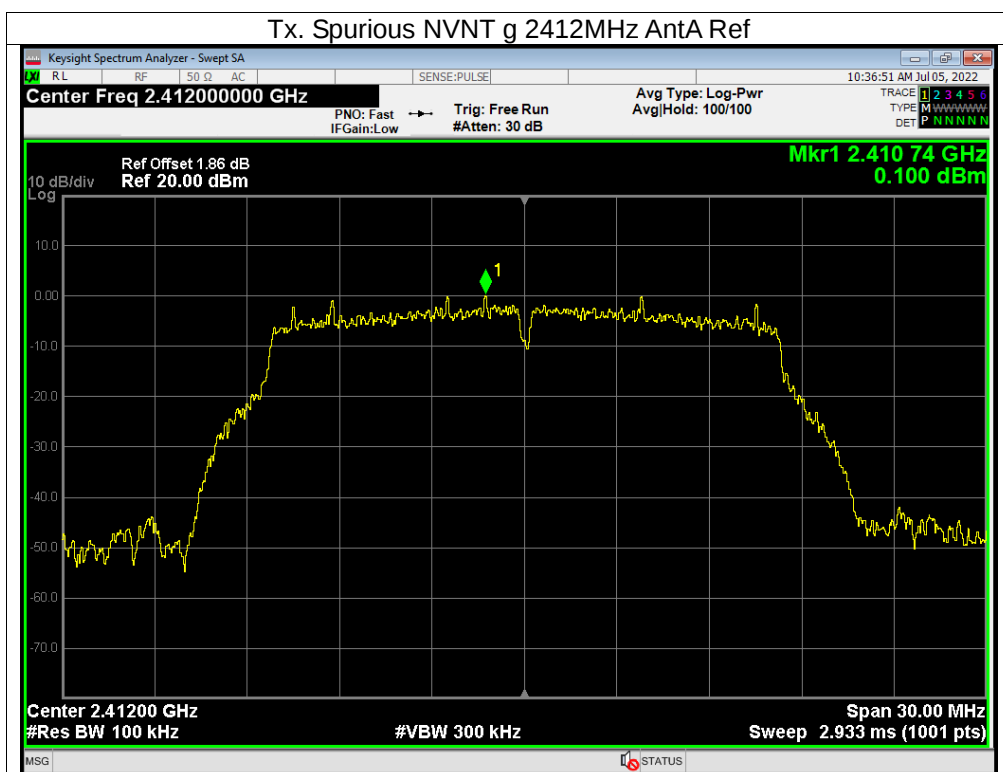


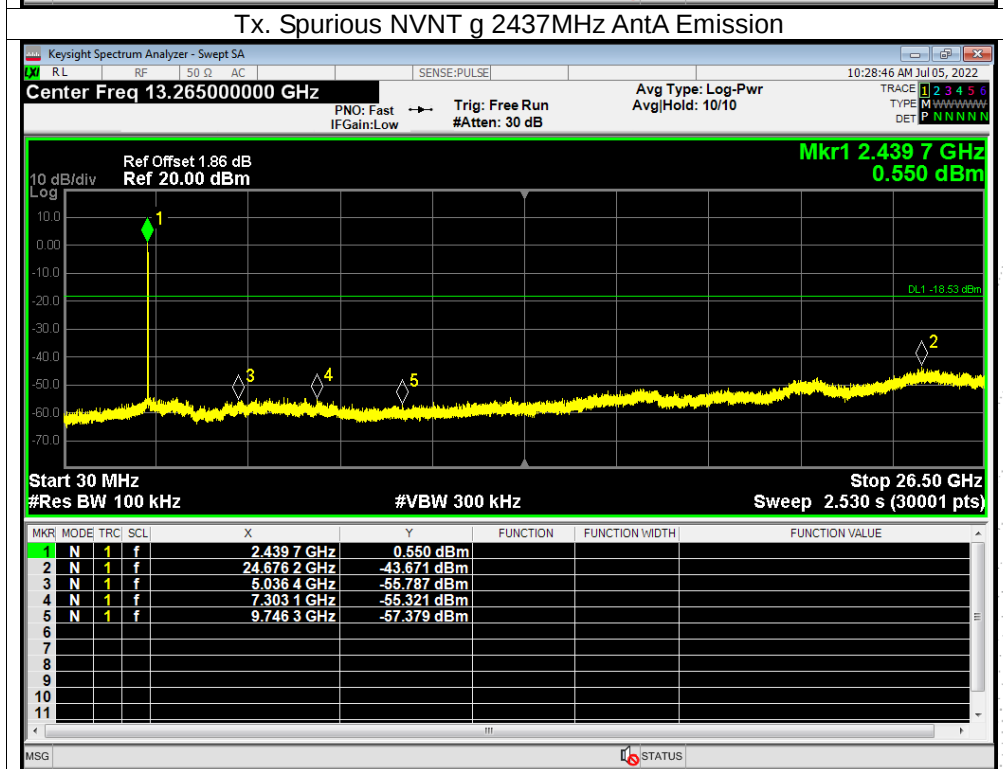
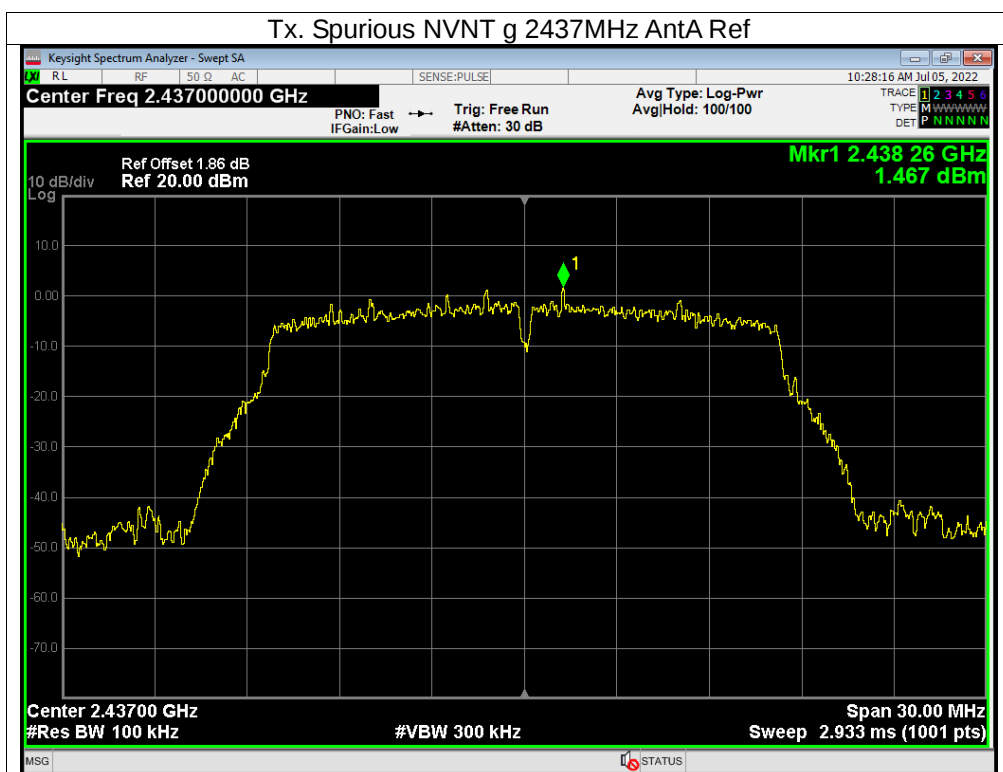


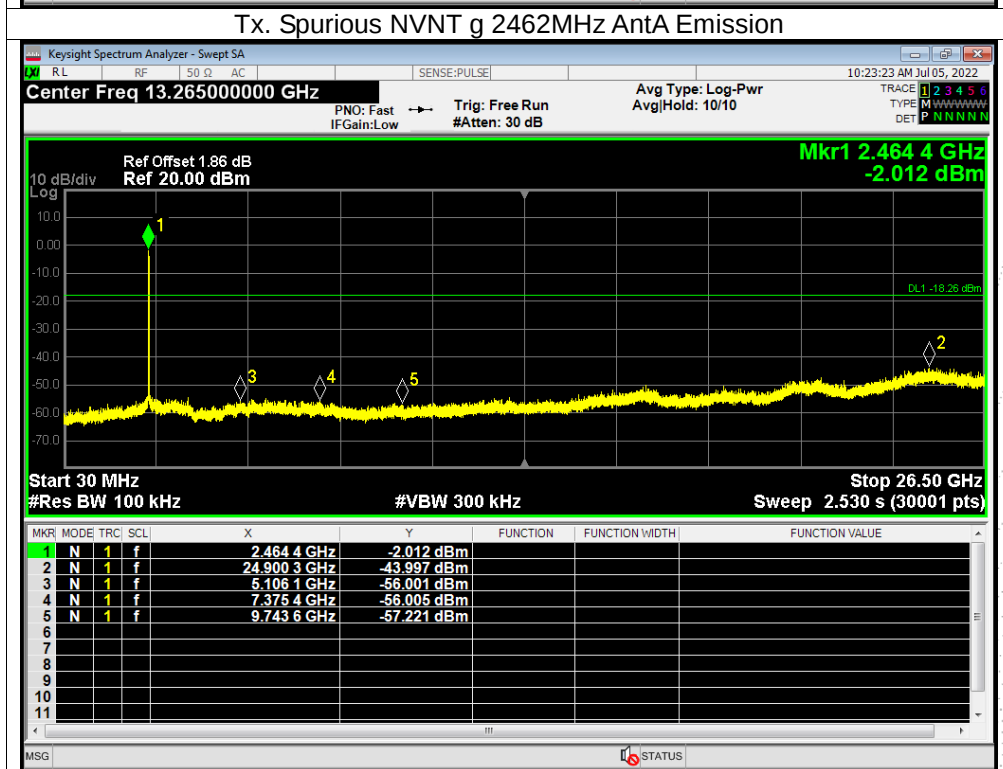
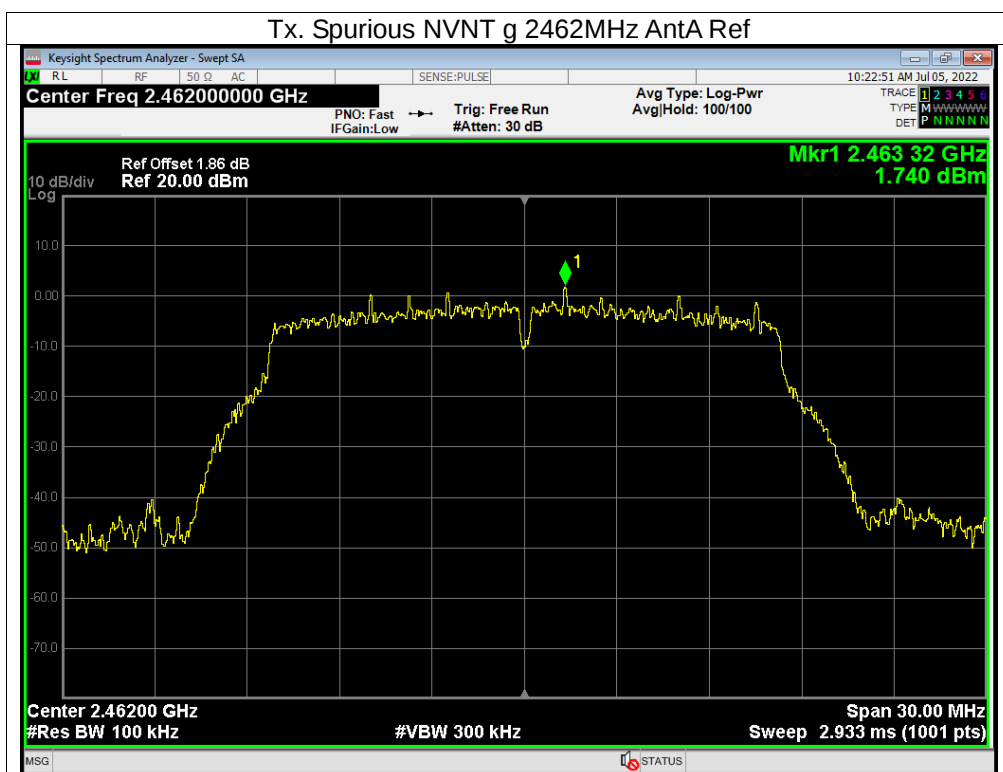


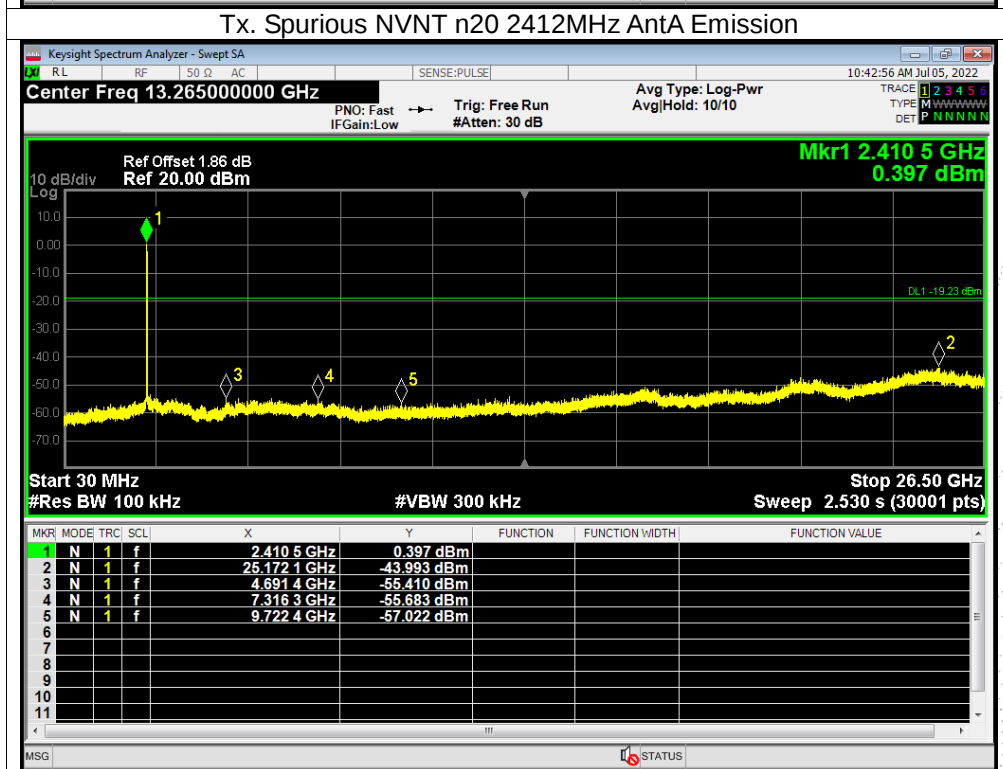
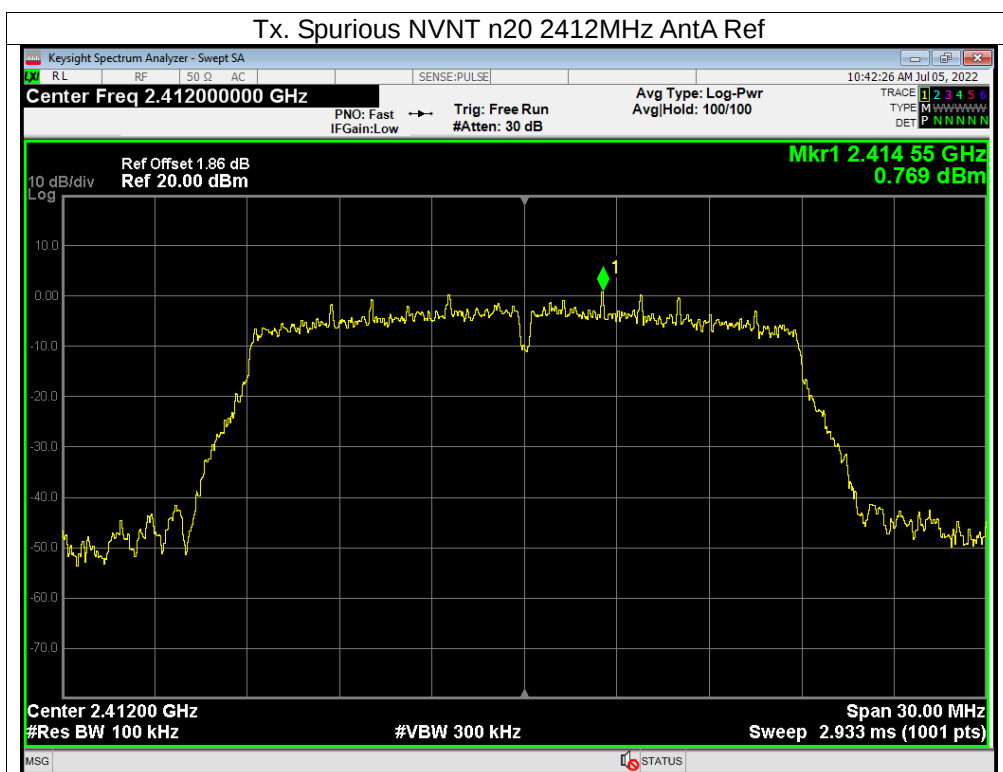


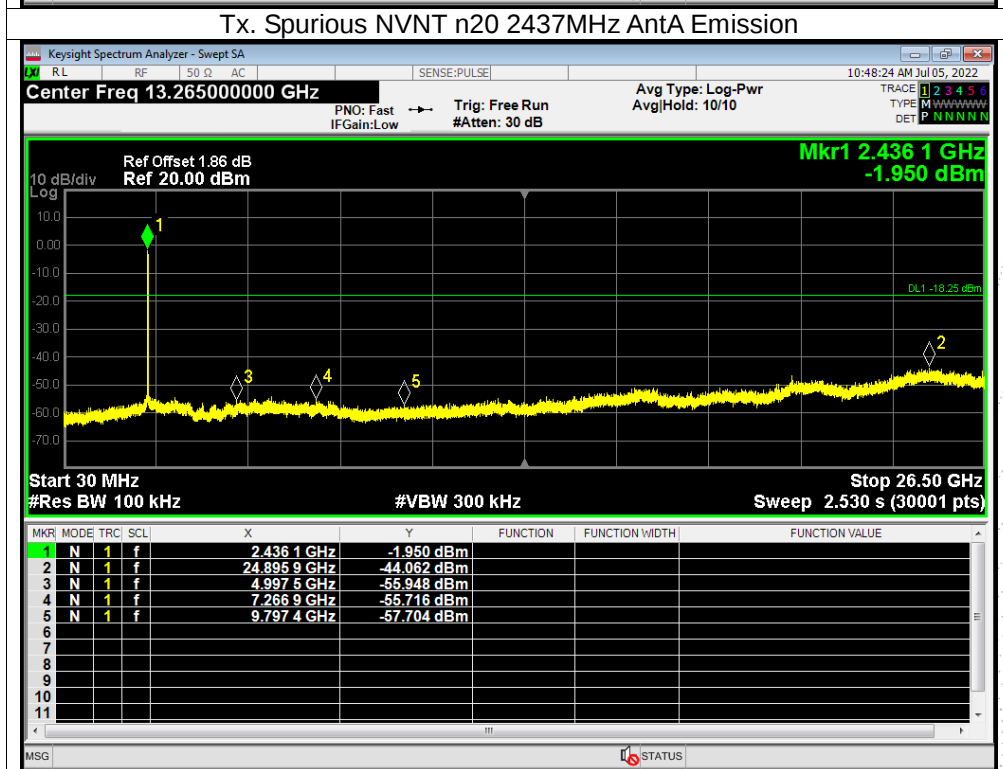
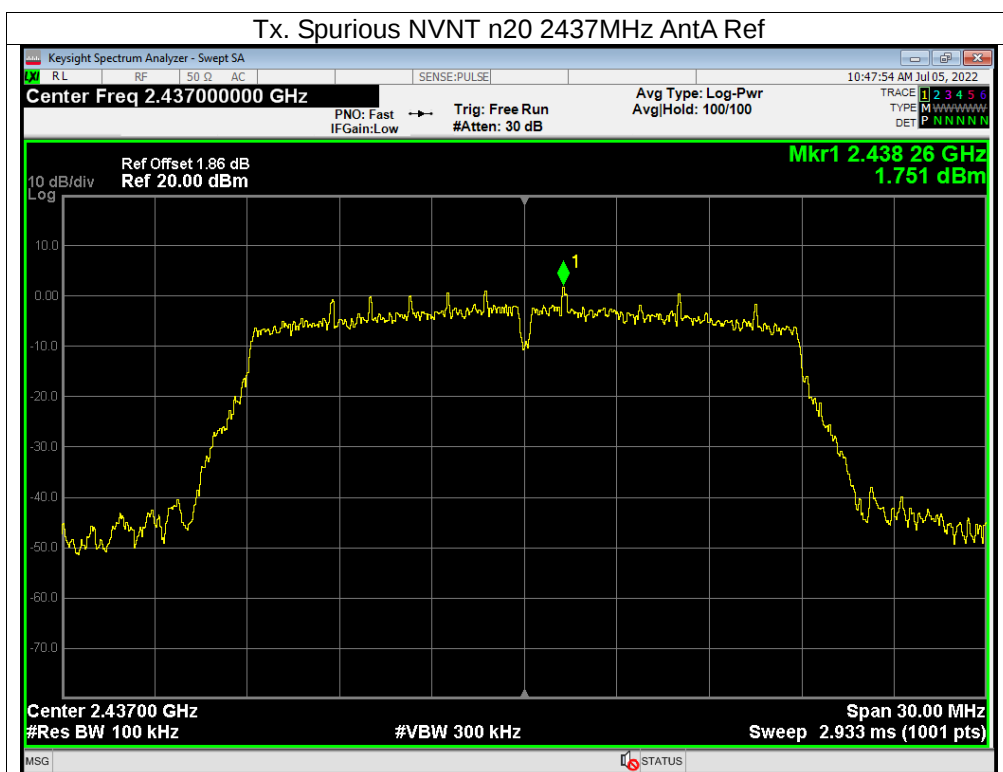


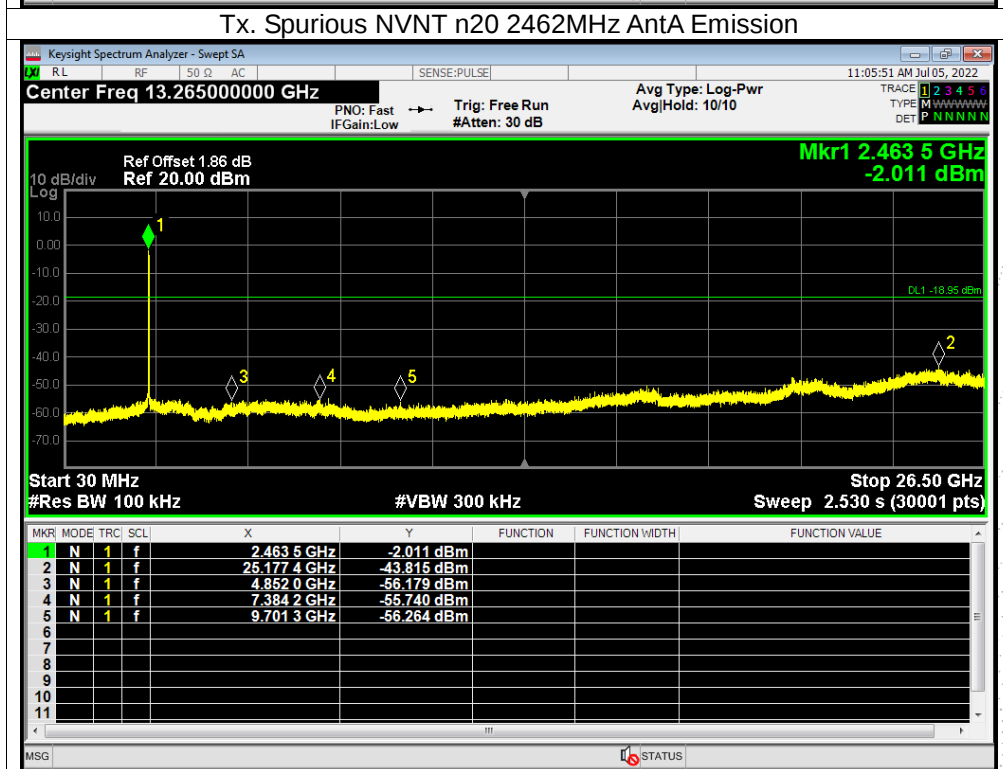
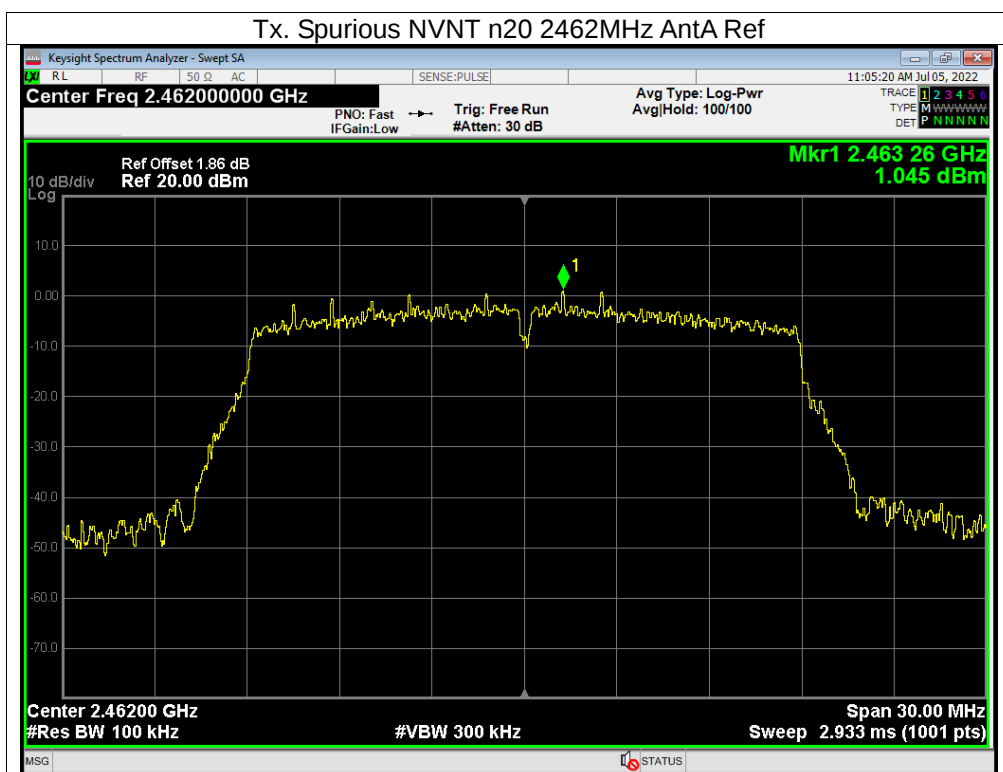


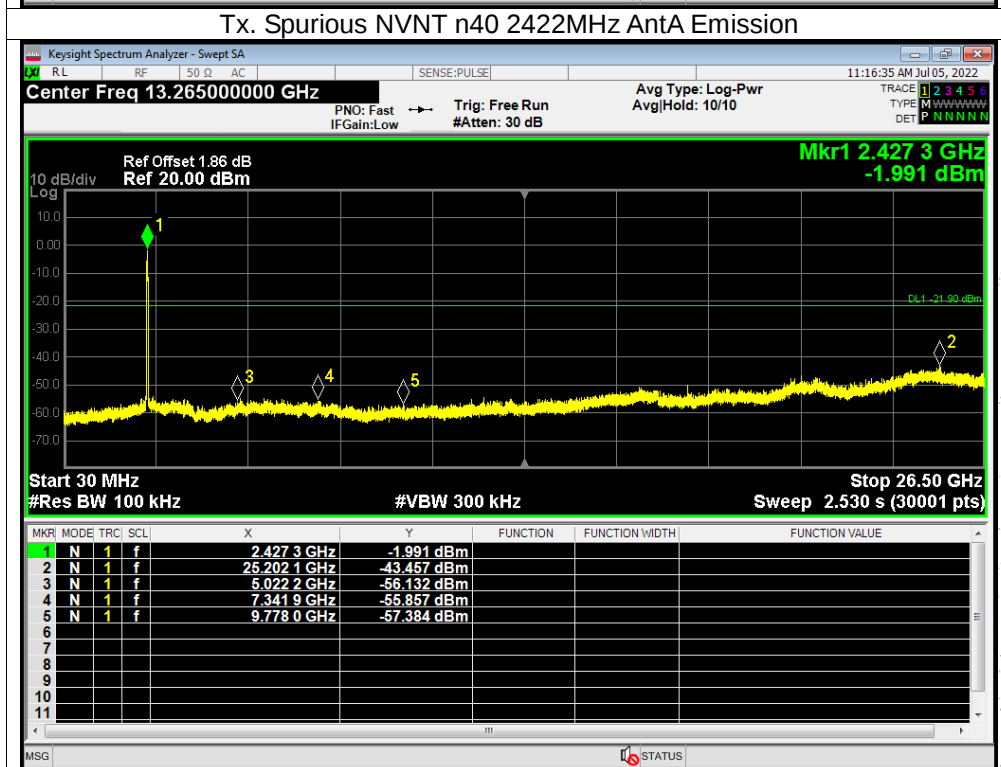
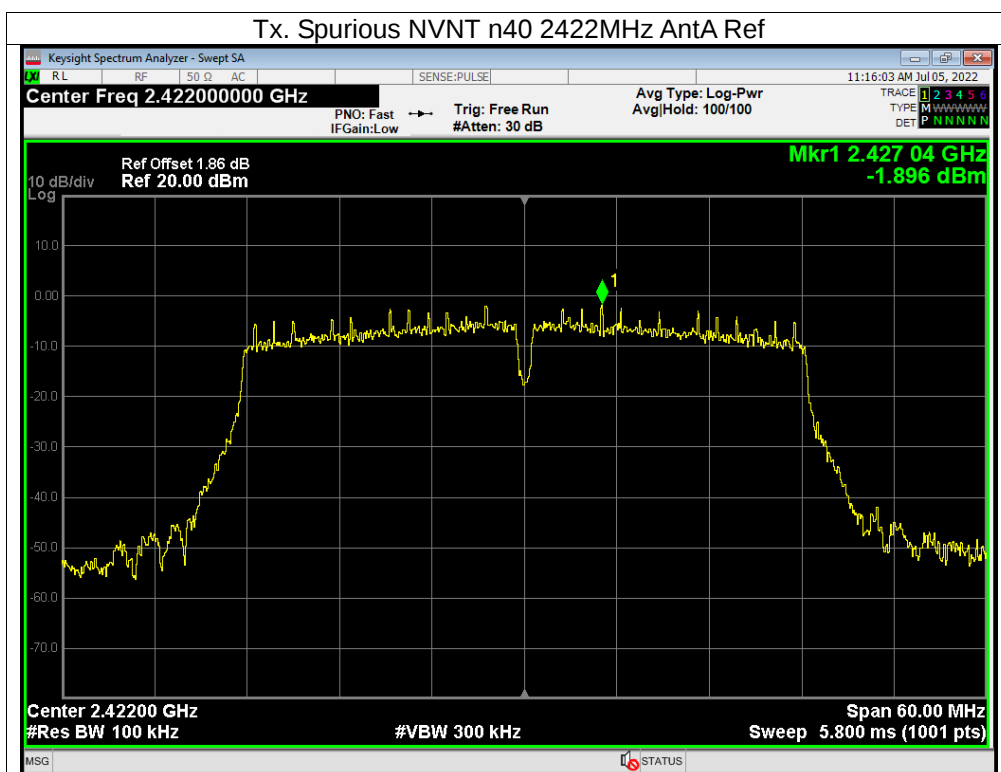


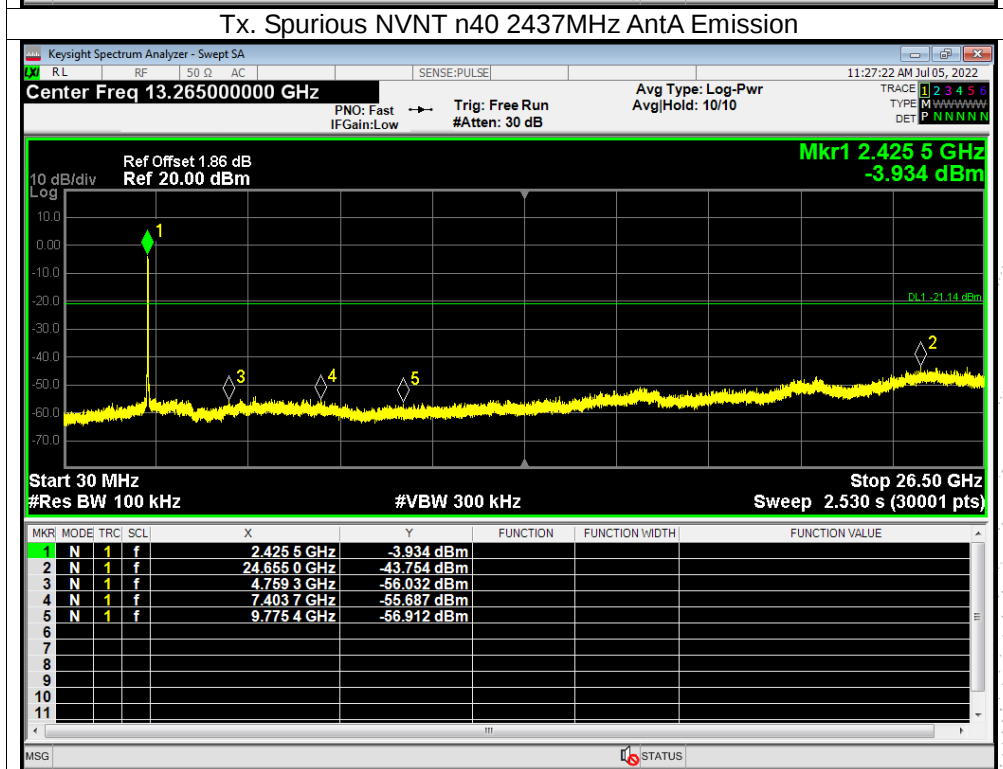
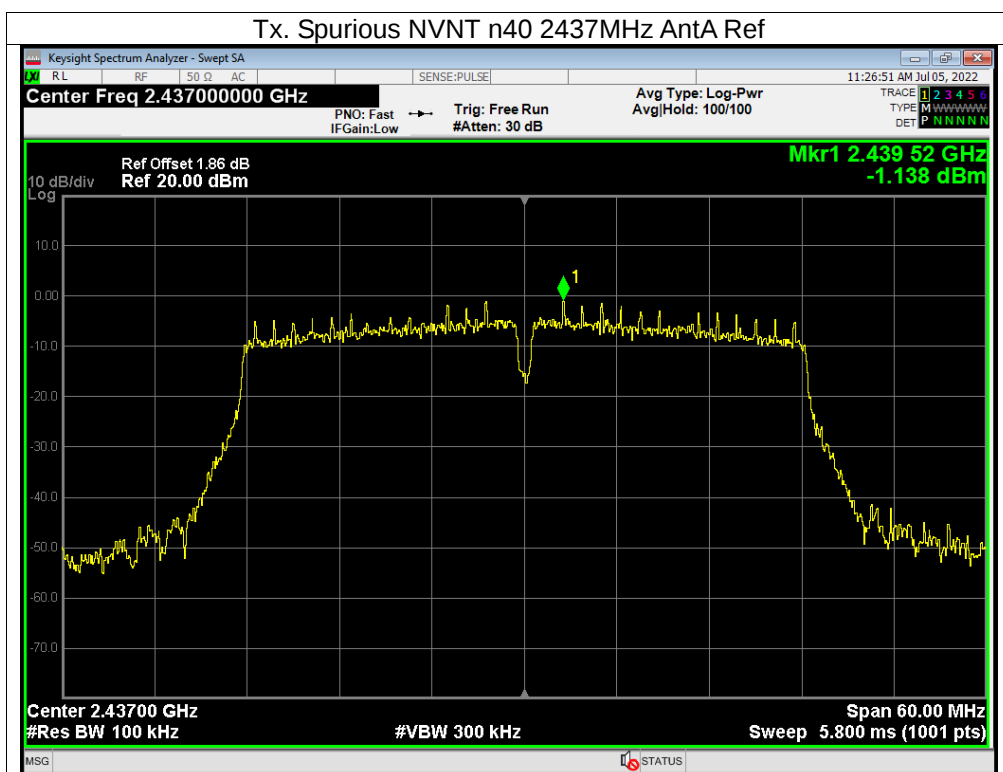


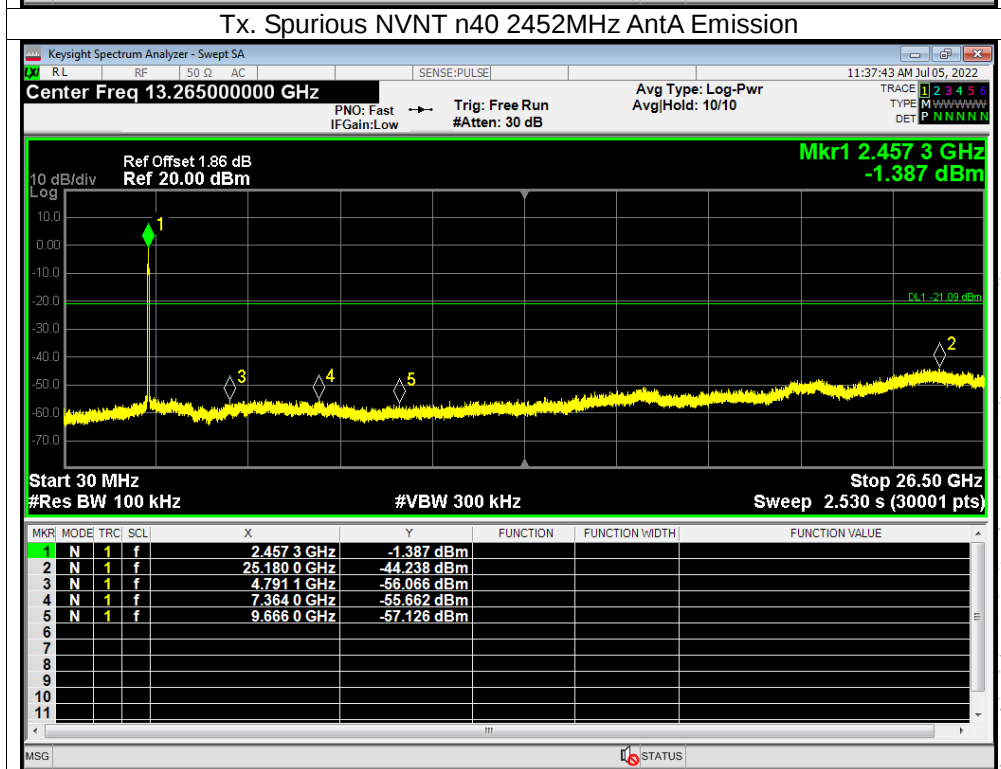
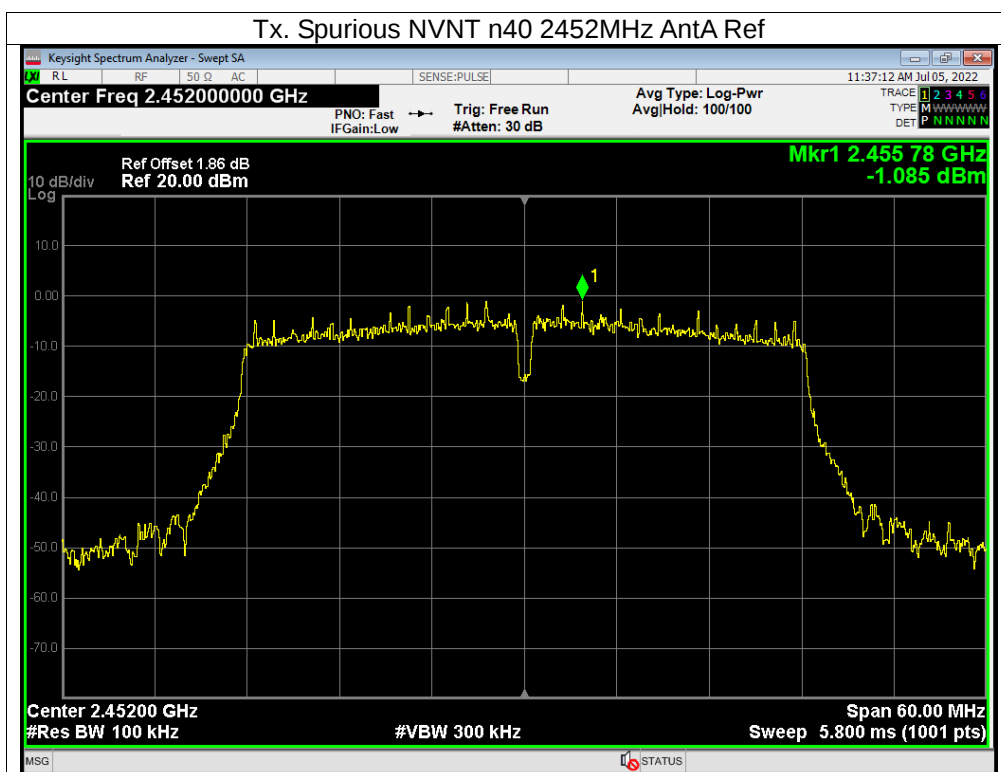


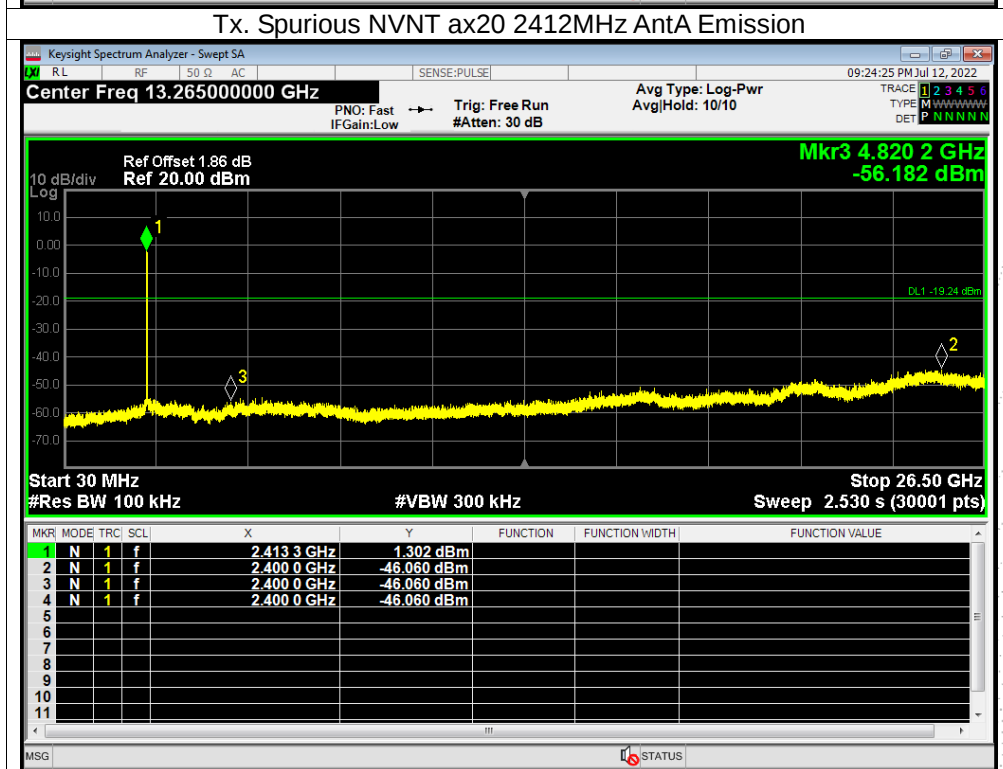
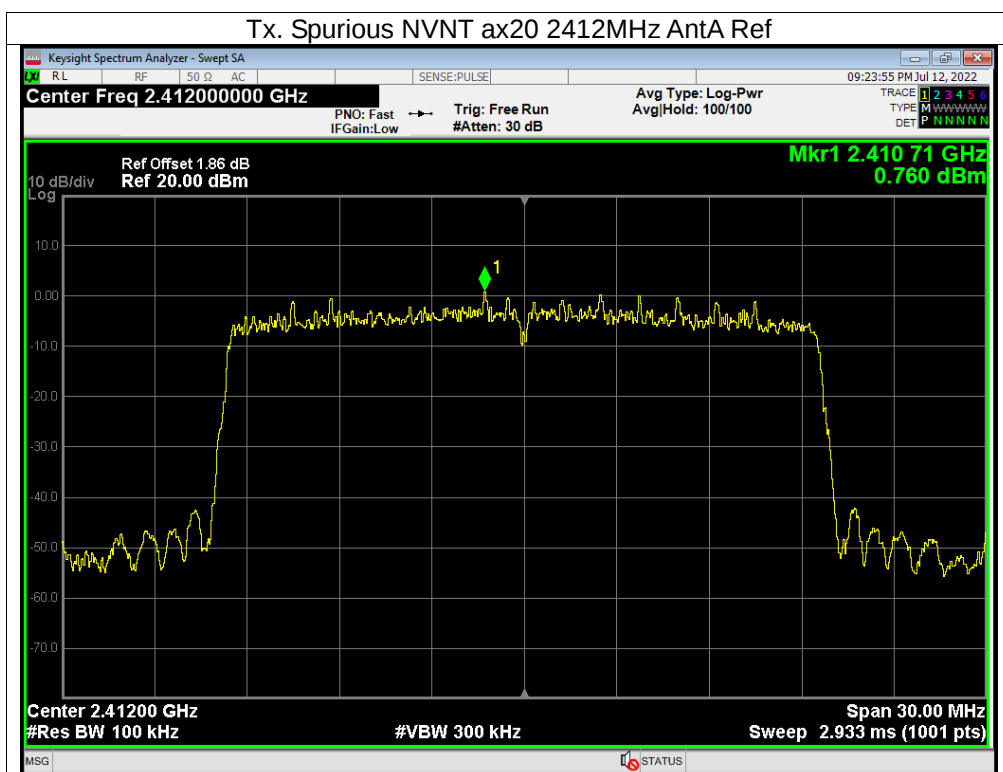


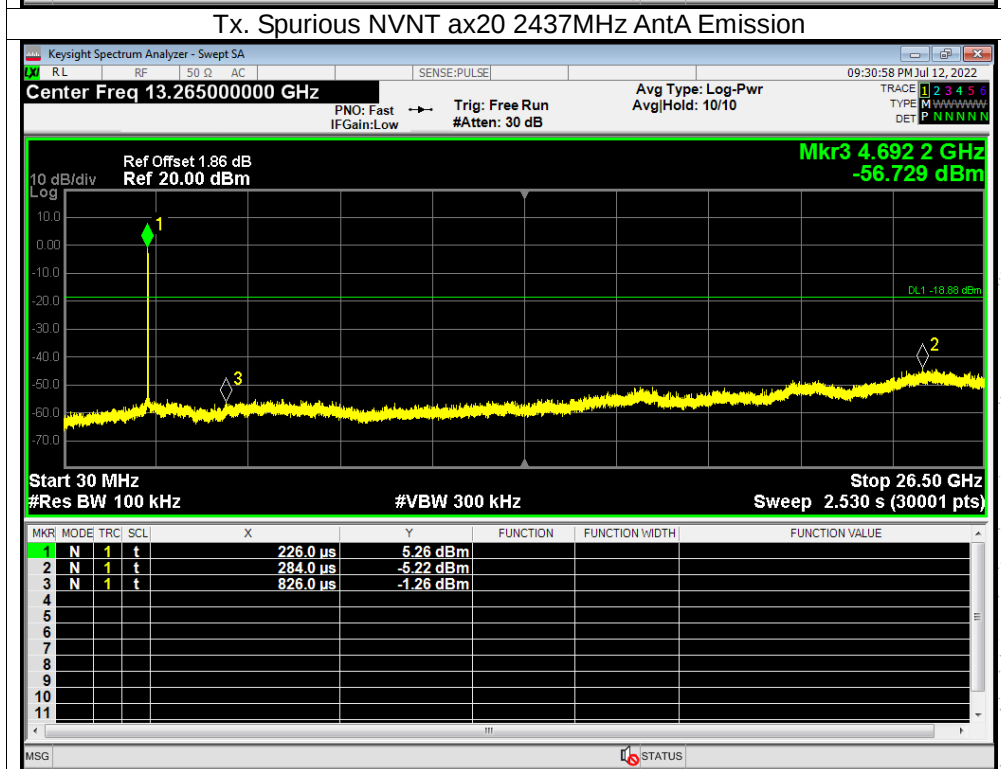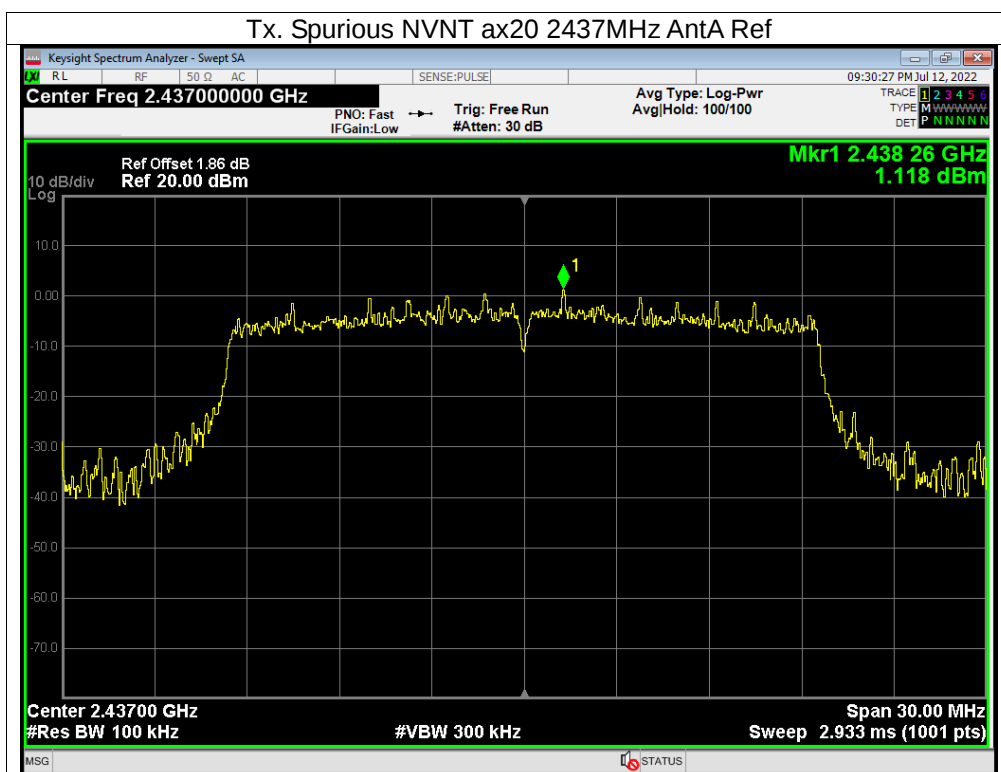

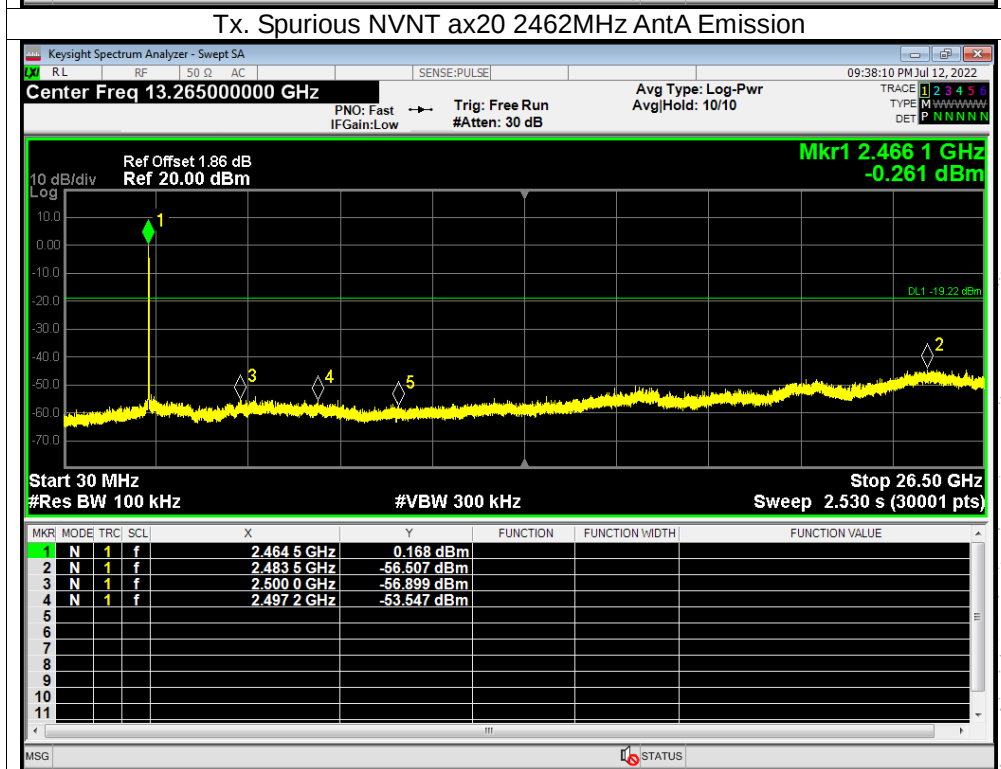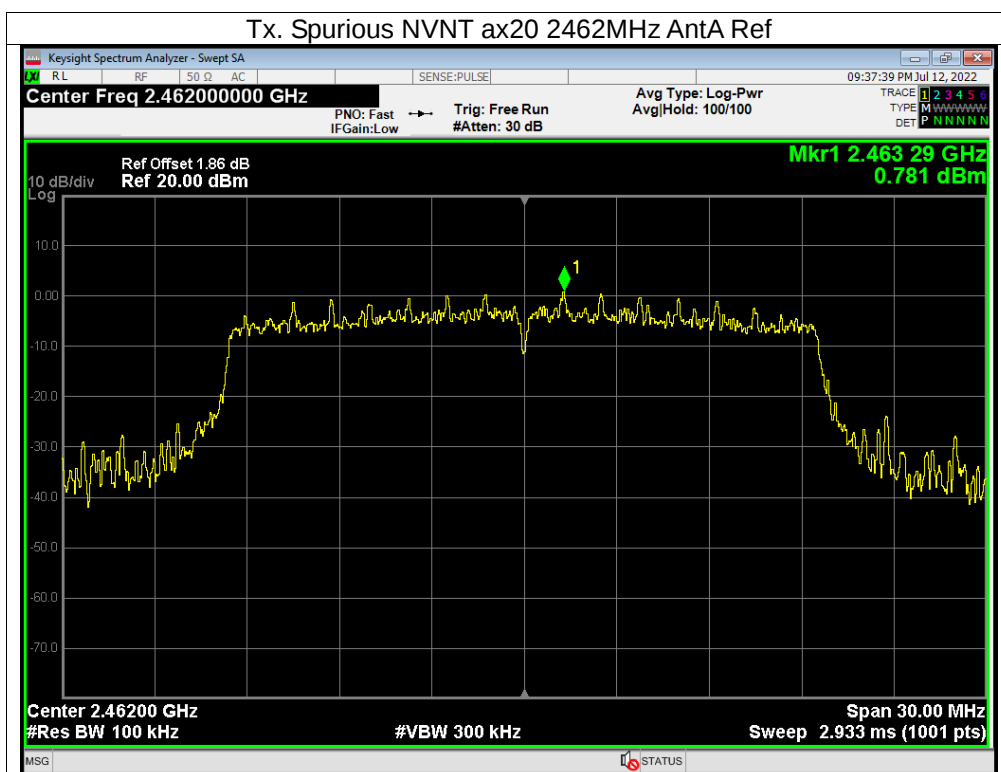

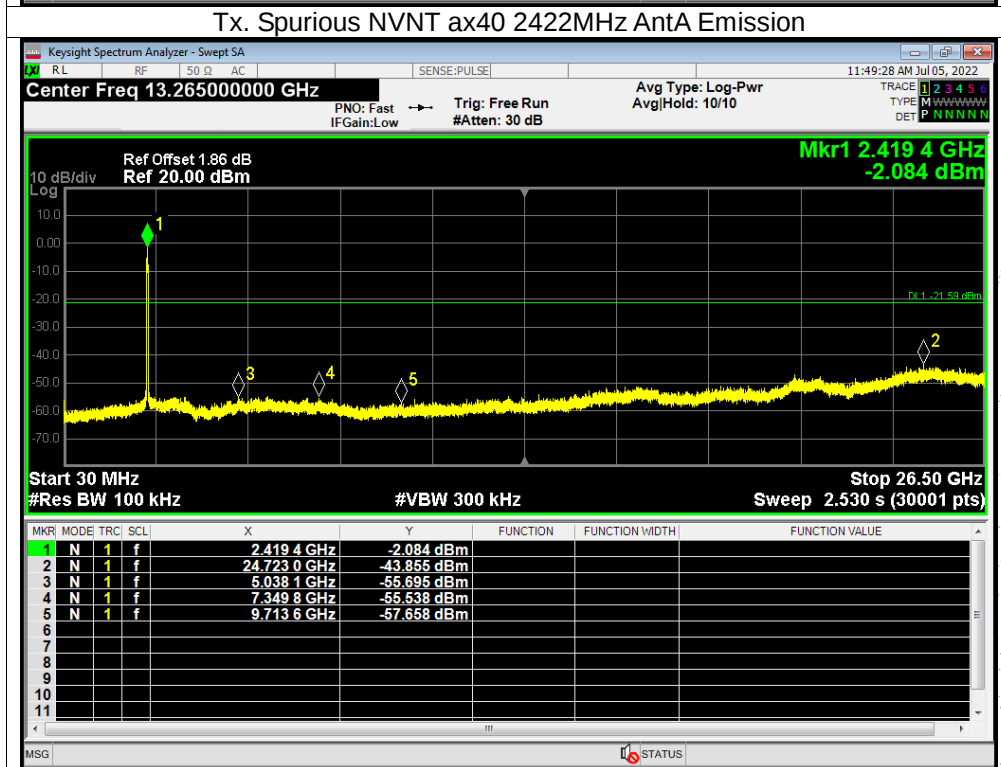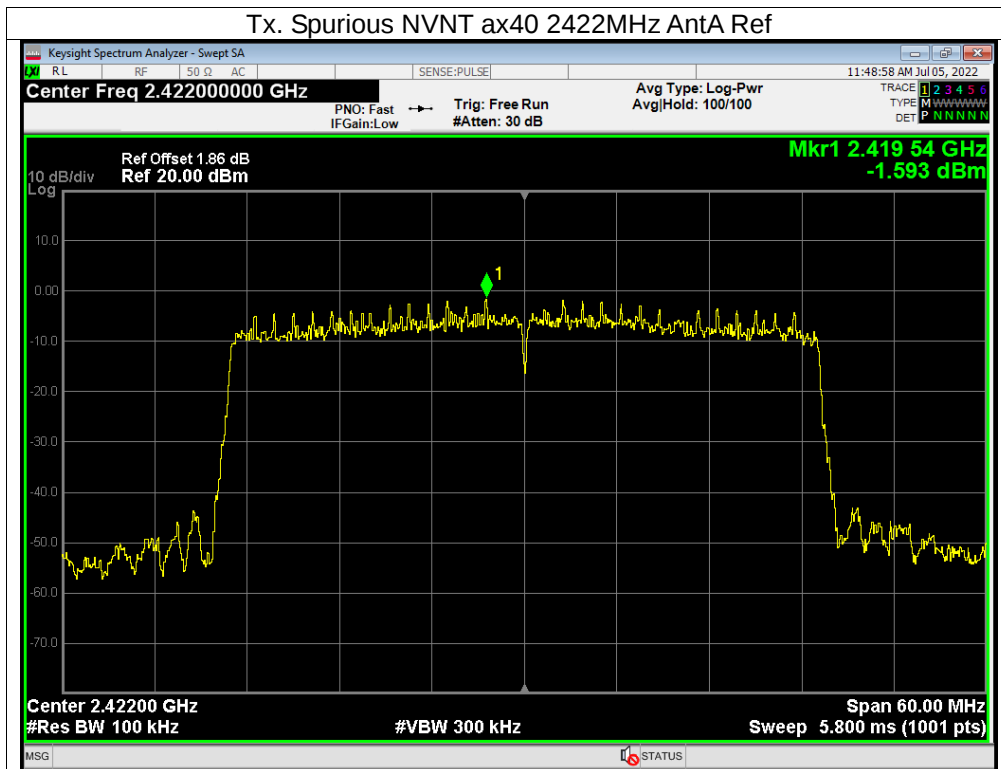

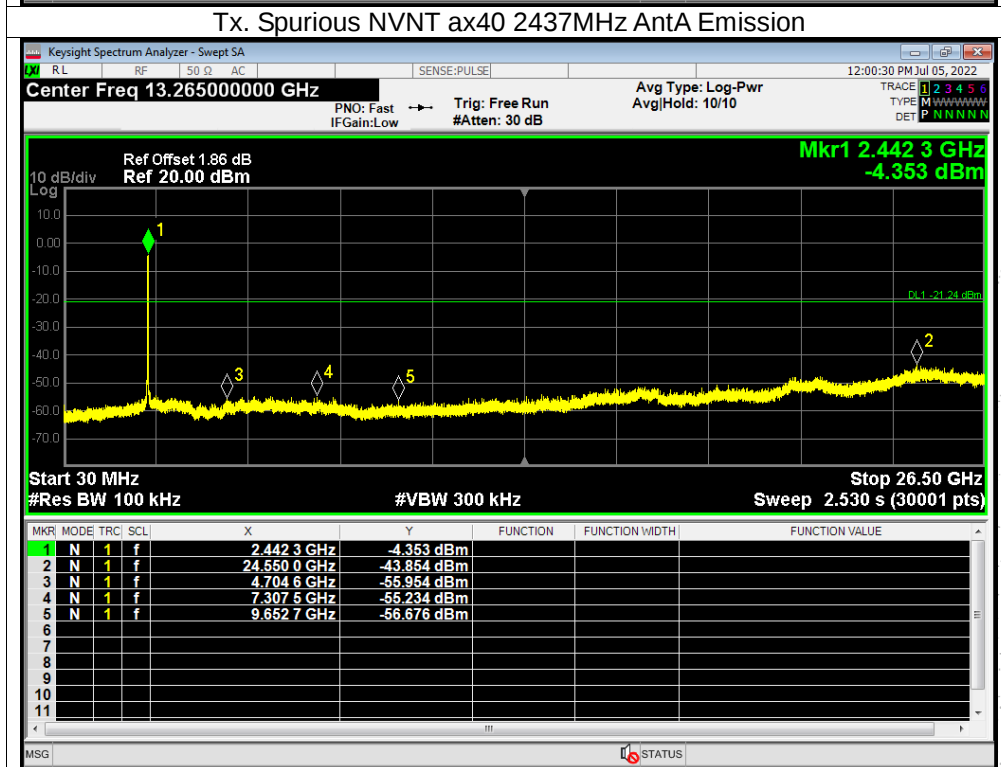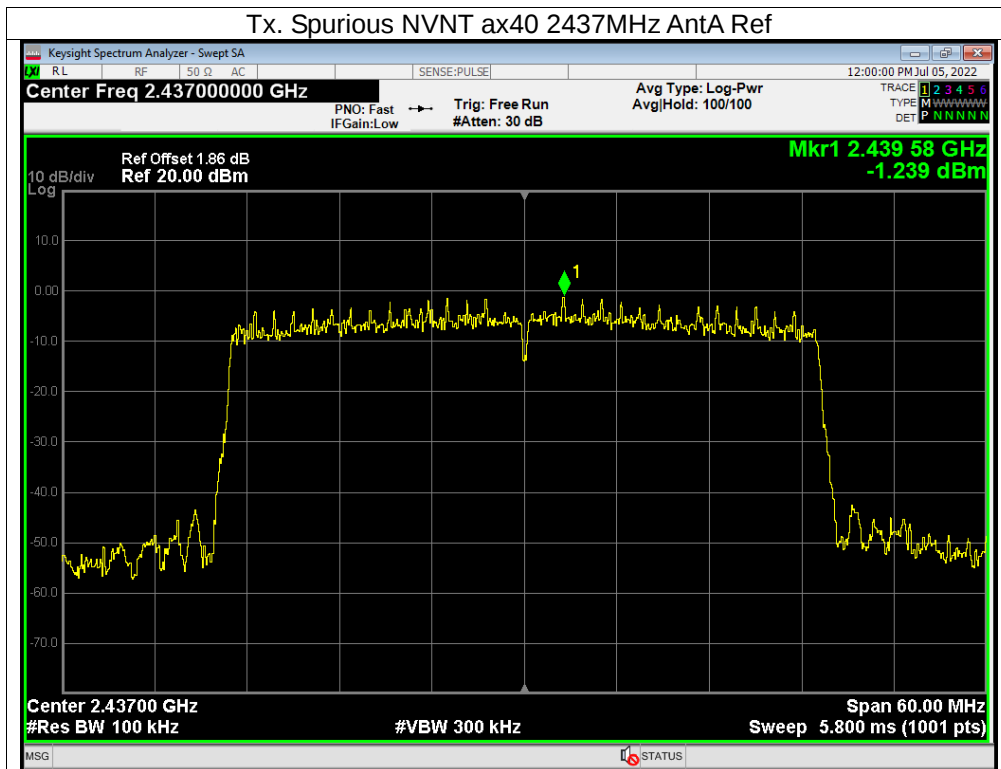

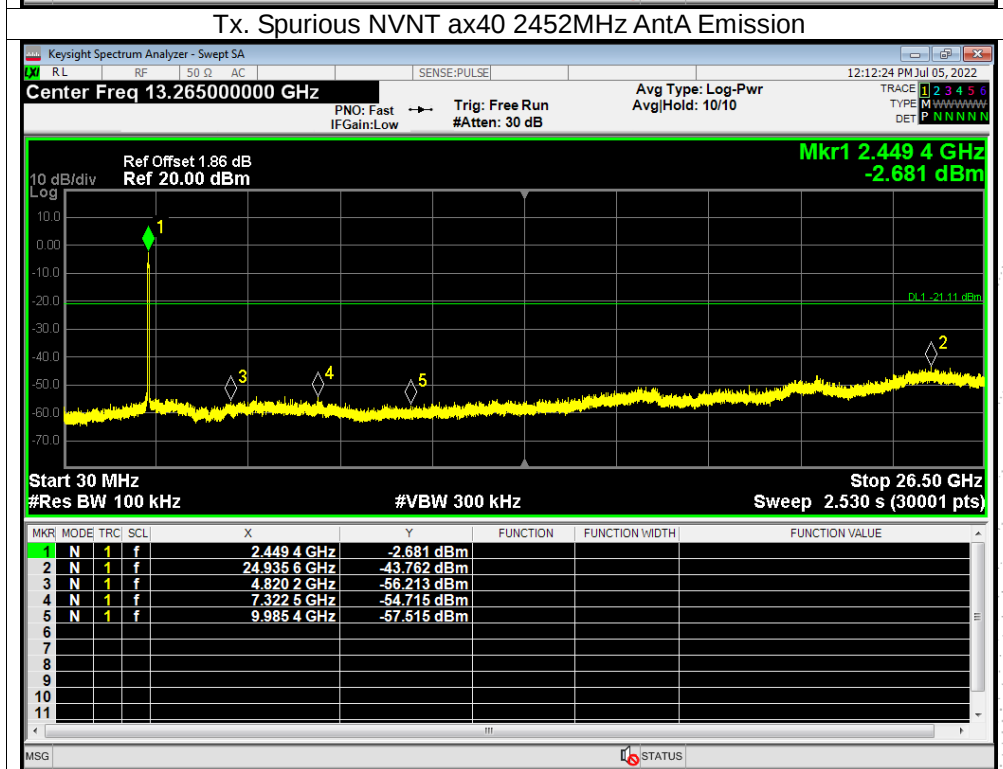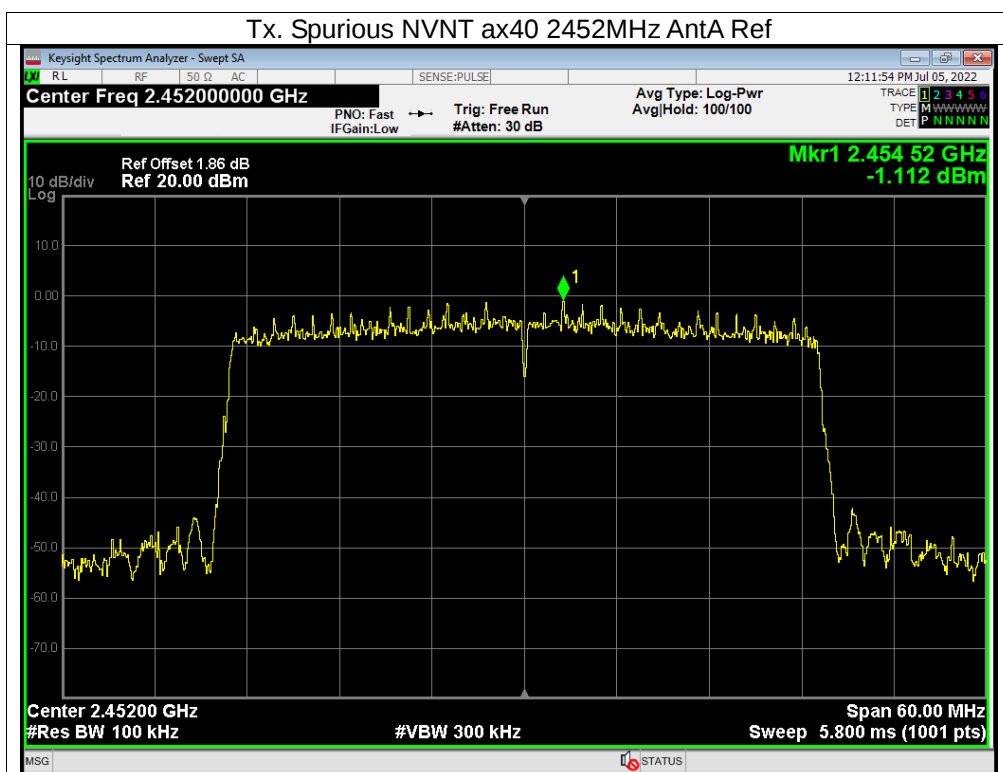

13. Duty Cycle Of Test Signal

13.1 Standard Requirement

Pre-analysis Check: While conducting average power measurement, duty cycle of each mode shall be checked to ensure its duty cycle in order to compensate for the loss due to insufficient ratio of duty cycle.

All duty cycle is pre-scanned, and result as obtained below shows only the most representative ones where duty cycle is conducted as the given transmission with given virtual operation that expresses the percentage.

13.2 Formula

Duty Cycle = $T_{on} / (T_{on} + T_{off})$

13.3 Test Procedure

1. Set span = Zero
2. RBW = 8MHz
3. VBW = 8MHz,
4. Detector = Peak

13.4 Test Result

Condition	Mode	Frequency (MHz)	Antenna	Antenna	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	b	2412	AntA	AntB	100	0	0
NVNT	b	2462	AntA	AntB	100	0	0
NVNT	g	2412	AntA	AntB	100	0	0
NVNT	g	2462	AntA	AntB	100	0	0
NVNT	n20	2412	AntA	AntB	100	0	0
NVNT	n20	2462	AntA	AntB	100	0	0
NVNT	n40	2422	AntA	AntB	100	0	0
NVNT	n40	2452	AntA	AntB	100	0	0
NVNT	ax20	2412	AntA	AntB	100	0	0
NVNT	ax20	2462	AntA	AntB	100	0	0
NVNT	ax40	2422	AntA	AntB	100	0	0
NVNT	ax40	2452	AntA	AntB	100	0	0

14. Antenna Requirement

14.1 Limit

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

14.1 Test Result


The EUT antenna is External antenna, non-removable; fulfill the requirement of this section.

15. EUT Test Setup Photographs

Conducted emissions Photo



Radiated Measurement Photos

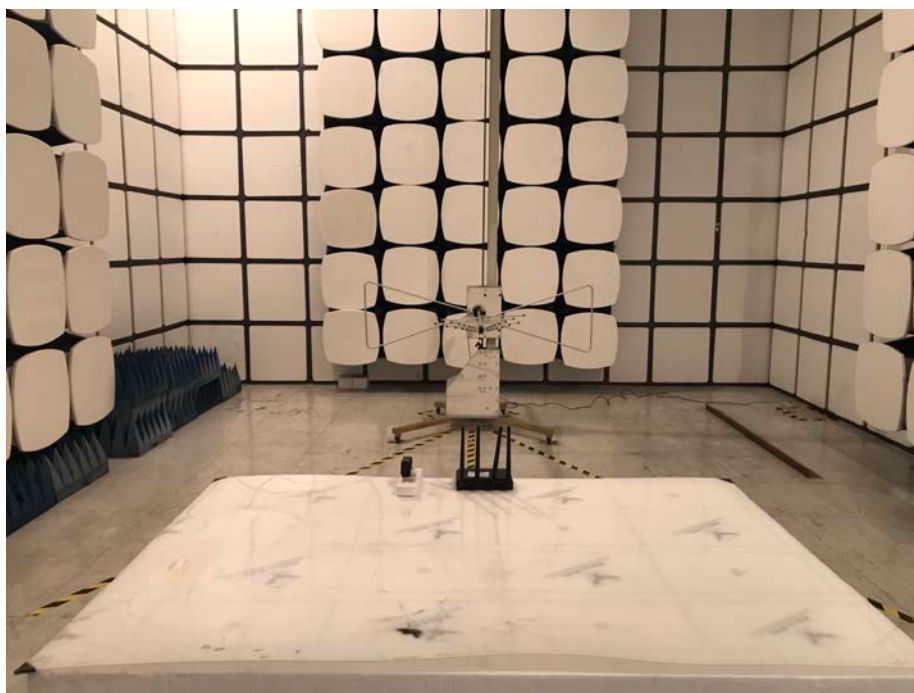

STATEMENT

- 1.The equipment lists are traceable to the national reference standards.
- 2.The test report can not be partially copied unless prior written approval is issued from our lab.
- 3.The test report is invalid without stamp of laboratory.
- 4.The test report is invalid without signature of person(s) testing and authorizing.
- 5.The test process and test result is only related to the Unit Under Test.
- 6.The quality system of our laboratory is in accordance with ISO/IEC17025.
- 7.If there is any objection to report, the client should inform issuing laboratory within 15 days from the date of receiving test report.

Address:

1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Tangwei, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China

TEL: 400-788-9558

P.C.: 518103

FAX: 0755-33229357

Website: <http://www.chnbctc.com>

E-Mail: bctc@bctc-lab.com.cn

***** END *****