

TEST REPORT

Applicant Name: Xiamen VBeT Electronics Co., Ltd.
Address: N403, Weiye Building, Xiamen Pioneering Park for Overseas Chinese Scholars, PRC, Xiamen, China
Report Number: 2601P01899E-EM-00
FCC ID: 2AC67-HS034

Test Standard (s)

FCC Part 15, Subpart B (Class B)

Sample Description

Product Type: UC Headset
Model No.: VT NEXUS 34 Duo
Multiple Model(s) No.: NEXUS 34 Duo, VT N3400 Duo, N3400 Duo, VT NEXUS 34, NEXUS 34, VT N3400, N3400
Trade Mark: VT
Date Received: 2026/01/20
Issue Date: 2026/03/24

Test Result:	Pass▲
--------------	-------

▲ In the configuration tested, the EUT complied with the standards above.

Prepared and Checked By:

Alex Yan

Alex Yan
EMC Engineer

Approved By:

Moon Liu

Moon Liu
EMC Supervisor

Note: The information marked # is provided by the applicant, the laboratory is not responsible for its authenticity and this information can affect the validity of the result in the test report. Customer model name, addresses, names, trademarks etc. are included.

This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

This report must not be used by the customer to claim product certification, approval, or endorsement by NVLAP or any agency of the U.S. Government.

This report may contain data that are not covered by the NVLAP accreditation and are marked with an asterisk "▼".

Bay Area Compliance Laboratories Corp. (Shenzhen)

5F(B-West), 6F, 7F, the 3rd Phase of Wan Li Industrial Building D, Shihua Rd, FuTian Free Trade Zone, Shenzhen, China

Tel: +86-755-33320018 Fax: +86-755-33320008 www.baclcorp.com.cn

TABLE OF CONTENTS

DOCUMENT REVISION HISTORY	3
GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
TEST METHODOLOGY	4
MEASUREMENT UNCERTAINTY.....	4
TEST FACILITY	5
SYSTEM TEST CONFIGURATION.....	6
DESCRIPTION OF TEST CONFIGURATION	6
EUT EXERCISE SOFTWARE	6
EQUIPMENT MODIFICATIONS	6
SUPPORT EQUIPMENT LIST AND DETAILS	6
EXTERNAL I/O CABLE.....	6
BLOCK DIAGRAM OF TEST SETUP	7
SUMMARY OF TEST RESULTS	8
TEST EQUIPMENT LIST	9
FCC §15.107 - AC LINE CONDUCTED EMISSIONS.....	10
APPLICABLE STANDARD	10
EUT SETUP	10
EMI TEST RECEIVER SETUP.....	10
TEST PROCEDURE	11
LEVEL & OVER LIMIT CALCULATION	11
TEST DATA	11
FCC §15.109 - RADIATED EMISSIONS	14
APPLICABLE STANDARD	14
EUT SETUP	14
EMI TEST RECEIVER AND SPECTRUM ANALYZER SETUP	15
TEST PROCEDURE	15
LEVEL & OVER LIMIT CALCULATION	15
TEST DATA	15
EUT PHOTOGRAPHS.....	18
TEST SETUP PHOTOGRAPHS	19

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
0	2601P01899E-EM-00	Original Report	2026/03/24

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Product	UC Headset
Tested Model	VT NEXUS 34 Duo
Multiple Model(s)	NEXUS 34 Duo, VT N3400 Duo, N3400 Duo, VT NEXUS 34, NEXUS 34, VT N3400, N3400
Voltage Range	DC 5V from USB port
Highest operating frequency [#]	12 MHz (Provided by the applicant)
Equipment Class	Class B
Sample number	3GF1-1 (Assigned by BACL, Shenzhen)
Sample/EUT Status	Good condition
Adapter Information	N/A
Note: The Multiple models are electrically identical with the test model except for model names, distribution chains and quantity of the speakers. Please refer to the declaration letter [#] for more detail, which was provided by manufacturer.	

Objective

This test report is in accordance with Part 2-Subpart J, Part 15B Subparts A and B of the Federal Communication Commissions rules.

The objective of the manufacturer is to determine the compliance of the EUT with FCC Part 15B.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2014, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters. Each test item follows test standards and with no deviation.

Measurement Uncertainty

Item	Frequency Range		Expanded Measurement uncertainty
Conducted Emissions	AC Mains	150 kHz ~30MHz	3.72dB(k=2, 95% level of confidence)
Radiated Disturbance	30MHz~1000MHz	Horizontal	5.10dB(k=2, 95% level of confidence)
	30MHz~1000MHz	Vertical	6.28dB(k=2, 95% level of confidence)

Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 5F(B-West) , 6F, 7F, the 3rd Phase of Wan Li Industrial Building D, Shihua Rd, FuTian Free Trade Zone, Shenzhen, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, test firm registration No.: 715558, the FCC Designation No.: CN5045.

Each test item follows test standards and with no deviation.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in worst case condition.

Test mode: Playing

EUT exercise software

No exercise software was used.

Equipment Modifications

No modification was made to the EUT tested.

Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
DELL	PC1	P48F001	GNDLKC2
DELL	PC2	Latitude E6520	DL0ZCS1
DELL	Adapter	DA90PE1-00	WK890

External I/O Cable


Cable Description	Length (m)	From/Port	To
Un-shielded un-detachable USB cable	2.1	EUT	PC1/PC2
shielded un-detachable AC cable	1.0	Adapter	LISN/ Mains
shielded un-detachable with core DC cable	1.5	PC1/ PC2	Adapter

Block Diagram of Test Setup

For Conduction emission:

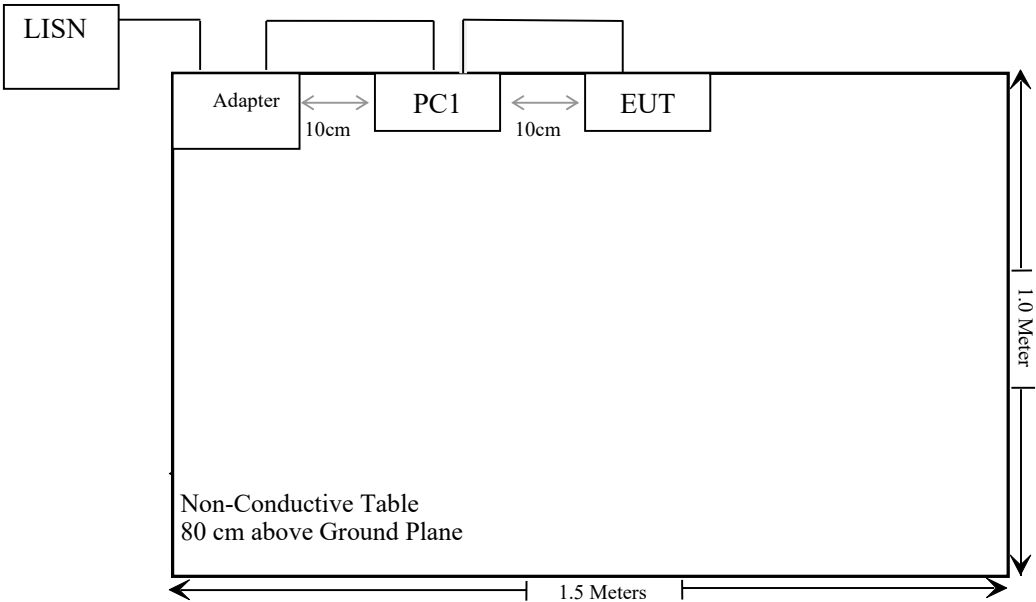

For Radiation emission:

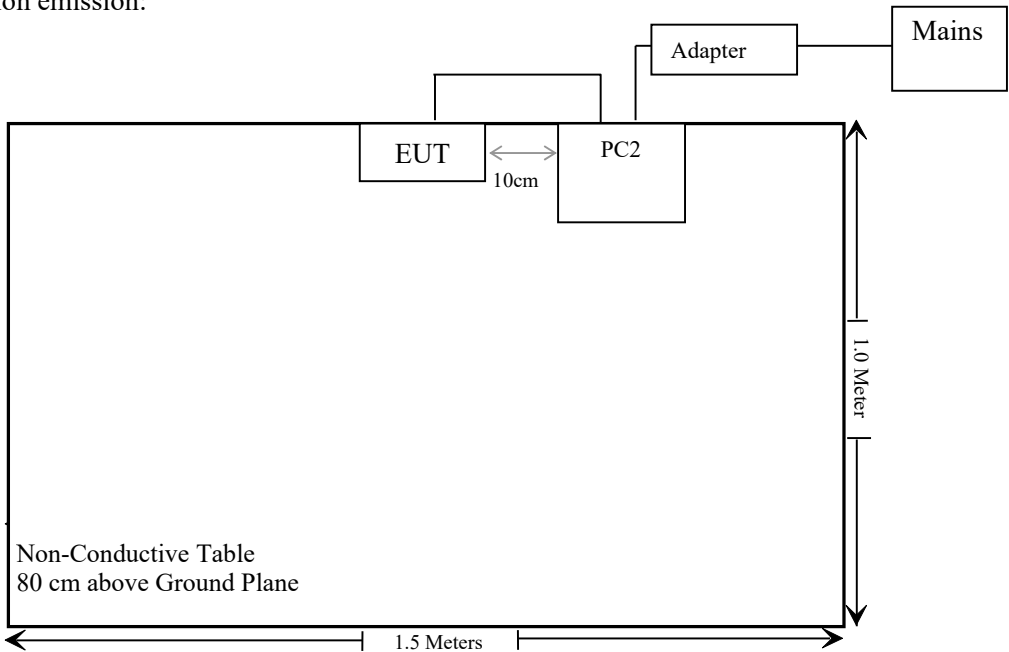

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Results
§15.107	AC Line Conducted Emissions	Compliant
§15.109	Radiated Emissions	Compliant

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
AC Line Conducted Emission Test					
Rohde & Schwarz	EMI Test Receiver	ESCI	101120	2025/09/01	2026/08/31
Rohde & Schwarz	LISN	ENV216	101613	2025/09/18	2026/09/17
Rohde & Schwarz	Transient Limiter	ESH3Z2	DE25985	2025/09/18	2026/09/17
Unknown	CE Cable	Unknown	UF A210B-1-0720-504504	2025/09/18	2026/09/17
Audix	EMI Test software	E3	191218 V9(c)	NCR	NCR
Radiated Emission Test					
Rohde & Schwarz	EMI Test Receiver	ESR3	102455	2025/09/01	2026/08/31
Sonoma instrument	Pre-amplifier	310 N	186238	2025/09/08	2026/09/07
Sunol Sciences	Broadband Antenna	JB1	A040904-1	2023/07/20	2026/07/19
Unknown	Chamber A Cable	Cable A1	Cable A1	2025/09/08	2026/09/07
Unknown	Chamber A Cable	Cable A2	Cable A2	2025/09/08	2026/09/07
Audix	EMI Test software	E3	19821b(V9)	NCR	NCR
TDK	Chamber	Chamber A	2#	2023/07/12	2026/07/11


* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC §15.107 - AC LINE CONDUCTED EMISSIONS

Applicable Standard

According to FCC§15.107

EUT Setup

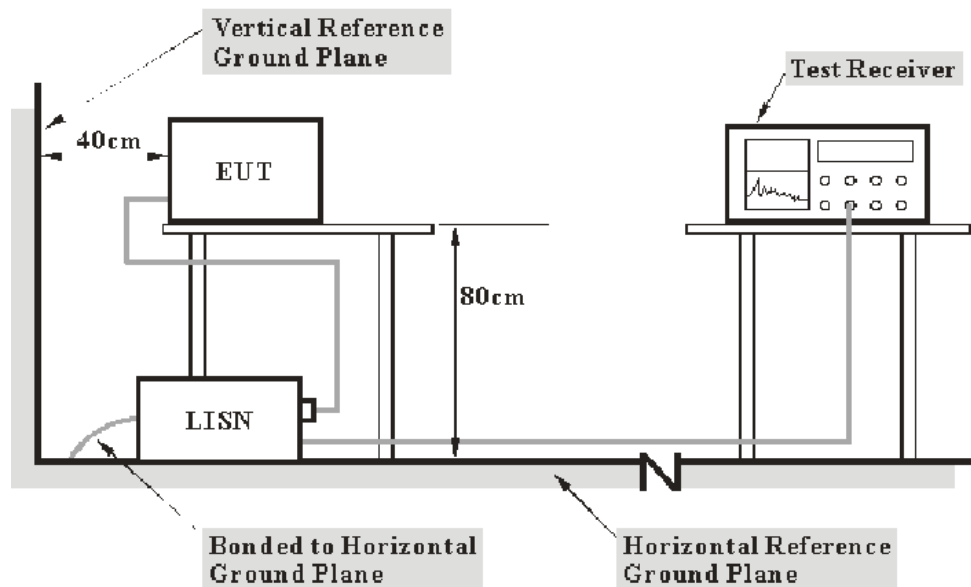

- Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The measurement procedure of EUT setup is according with ANSI C63.4-2014. The related limit was specified in FCC Part 15.107.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	RBW
150 kHz – 30 MHz	9 kHz

Test Procedure

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

Level & Over Limit Calculation

The Level is calculated by adding the LISN Factor, Cable Loss and the Read Level. The basic equation is as follows:

$$\text{Level (dBuV)} = \text{Read Level (dBuV)} + \text{LISN Factor} + \text{Cable Loss}$$

The “**Over limit**” column of the following data tables indicates the degree of compliance with the applicable limit.

$$\text{Over Limit (dB)} = \text{Level (dBuV)} - \text{Limit Line (dBuV)}$$


Note: The term "cable loss" refers to the combination of a cable and a 10dB transient limiter (attenuator).

Test Data

Environmental Conditions

Temperature:	23.9 °C
Relative Humidity:	50 %
ATM Pressure:	101.4 kPa

The testing was performed by Macy Shi on 2026-01-31.

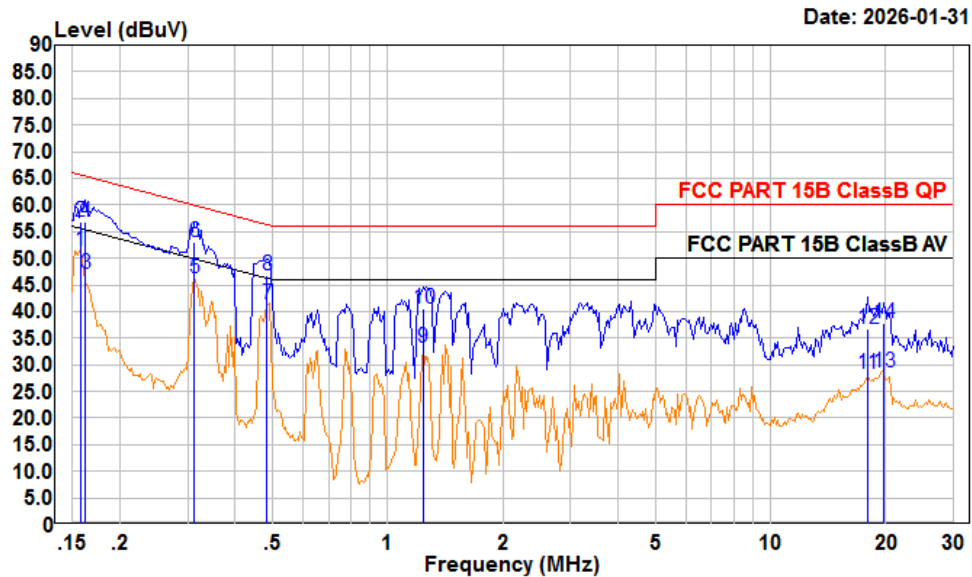*Test mode: Playing***AC 120V/60 Hz, Line**


Condition: Line

Project : 2601P01899E-EM

test Mode: Playing

tester : Macy.shi Setting:RBW:9kHz

	Freq	Read Level	LISN Level	LISN Factor	Cable Loss	Limit Line	Over Limit	Remark
	MHz	dBuV	dBuV	dB	dB	dBuV	dB	
1	0.158	31.77	51.39	9.60	10.02	55.59	-4.20	Average
2	0.158	37.10	56.72	9.60	10.02	65.59	-8.87	QP
3	0.162	27.45	47.07	9.60	10.02	55.34	-8.27	Average
4	0.162	37.21	56.83	9.60	10.02	65.34	-8.51	QP
5	0.313	26.71	46.34	9.60	10.03	49.89	-3.55	Average
6	0.313	33.29	52.92	9.60	10.03	59.89	-6.97	QP
7	0.485	21.80	41.43	9.60	10.03	46.26	-4.83	Average
8	0.485	27.13	46.76	9.60	10.03	56.26	-9.50	QP
9	1.234	13.44	33.26	9.60	10.22	46.00	-12.74	Average
10	1.234	20.70	40.52	9.60	10.22	56.00	-15.48	QP
11	17.891	8.21	28.32	9.70	10.41	50.00	-21.68	Average
12	17.891	16.66	36.77	9.70	10.41	60.00	-23.23	QP
13	19.761	8.39	28.52	9.70	10.43	50.00	-21.48	Average
14	19.761	17.56	37.69	9.70	10.43	60.00	-22.31	QP

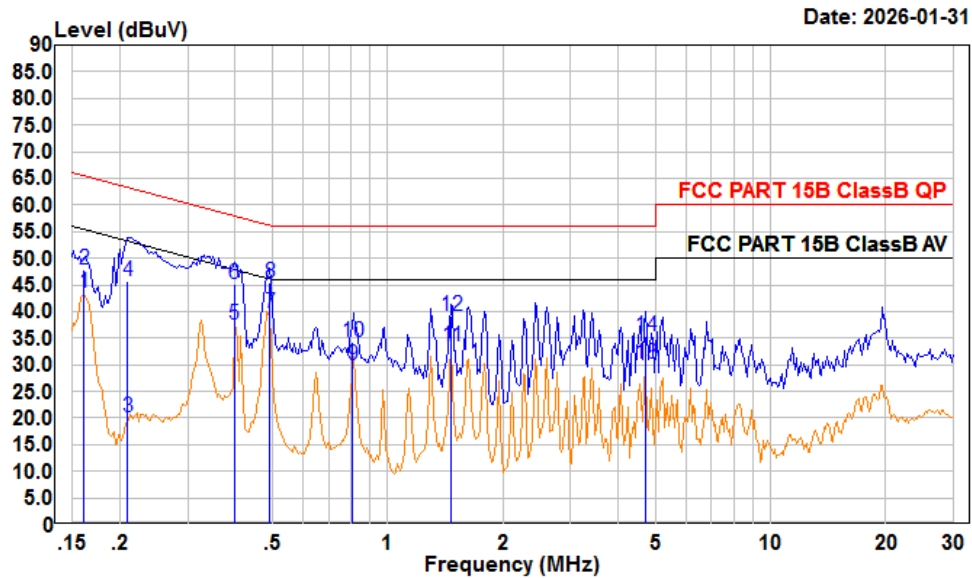AC 120V/60 Hz, Neutral

Condition: neutral

Project : 2601P01899E-EM

test Mode: Playing

tester : Macy.shi Setting:RBW:9kHz

	Freq	Read Level	LISN Level	LISN Factor	Cable Loss	Limit Line	Over Limit	Remark
	MHz	dBuV	dBuV	dB	dB	dBuV	dB	
1	0.161	23.94	43.56	9.60	10.02	55.42	-11.86	Average
2	0.161	28.17	47.79	9.60	10.02	65.42	-17.63	QP
3	0.209	0.54	20.17	9.60	10.03	53.23	-33.06	Average
4	0.209	26.07	45.70	9.60	10.03	63.23	-17.53	QP
5	0.397	17.89	37.52	9.60	10.03	47.91	-10.39	Average
6	0.397	25.48	45.11	9.60	10.03	57.91	-12.80	QP
7	0.491	20.19	39.82	9.60	10.03	46.14	-6.32	Average
8	0.491	25.71	45.34	9.60	10.03	56.14	-10.80	QP
9	0.808	10.27	29.91	9.60	10.04	46.00	-16.09	Average
10	0.808	14.60	34.24	9.60	10.04	56.00	-21.76	QP
11	1.464	13.78	33.59	9.60	10.21	46.00	-12.41	Average
12	1.464	19.42	39.23	9.60	10.21	56.00	-16.77	QP
13	4.712	10.38	30.24	9.63	10.23	46.00	-15.76	Average
14	4.712	15.52	35.38	9.63	10.23	56.00	-20.62	QP


FCC §15.109 - RADIATED EMISSIONS

Applicable Standard


FCC §15.109

EUT Setup

Below 1GHz for Radiated Emissions

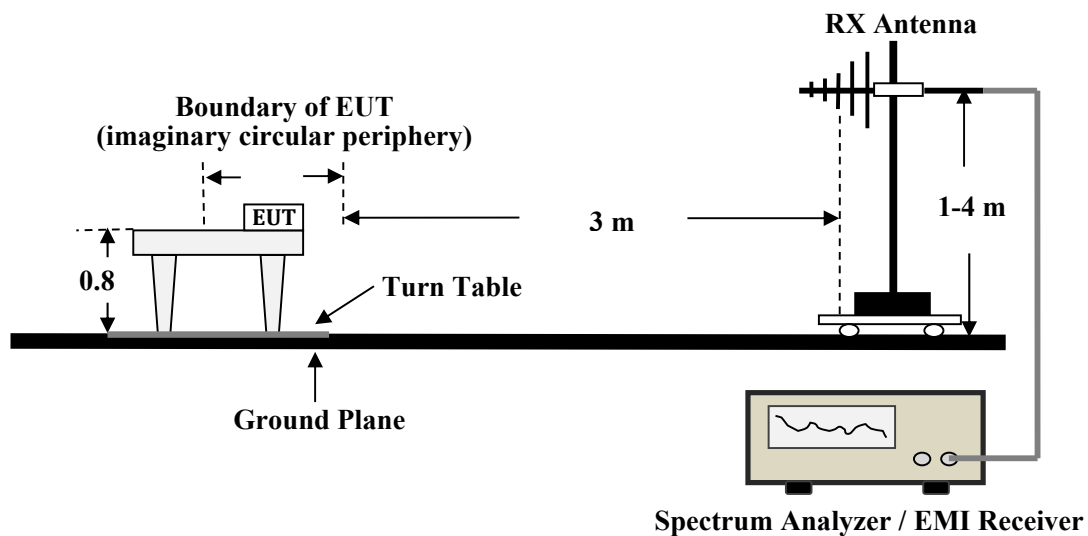

Radiated Emissions Setup Configuration

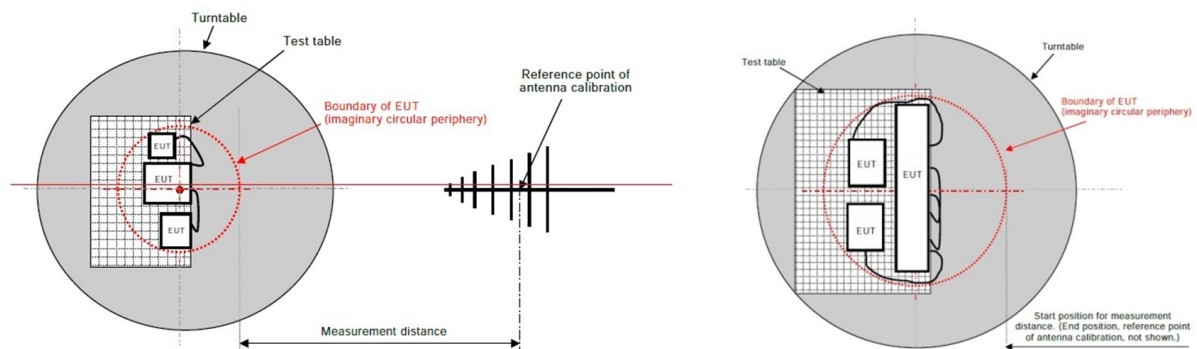

The radiated emission tests were performed in the 3 meters chamber test site, using the setup accordance with the ANSI C63.4-2014. The related limit was specified in FCC Part 15B.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

EMI Test Receiver and Spectrum analyzer Setup

During the radiated emission test, the EMI test receiver and spectrum analyzer setup was set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
30 MHz – 1000 MHz	120 kHz	500 kHz	/	PK
	/	/	120 kHz	QP

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

If the emission level of the EUT in Peak mode was 6dB lower than the limit specified, Peak values of EUT will be reported. Otherwise, the emission will be repeated by using the Quasi-Peak method and reported for frequency range below 1GHz.

Level & Over Limit Calculation

The Level is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Read Level. The basic equation is as follows:

$$\text{Factor} = \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

$$\text{Level} = \text{Read Level} + \text{Factor}$$

The “Over limit” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over limit of -6 dB means the emission is 6dB below the limit for Class B. The equation for Over Limit calculation is as follows:


$$\text{Over limit} = \text{Level} - \text{Limit}$$

Test Data

Environmental Conditions

Temperature:	24.2 °C
Relative Humidity:	44 %
ATM Pressure:	101.4 kPa


The testing was performed by Nico Wu on 2026-02-04.

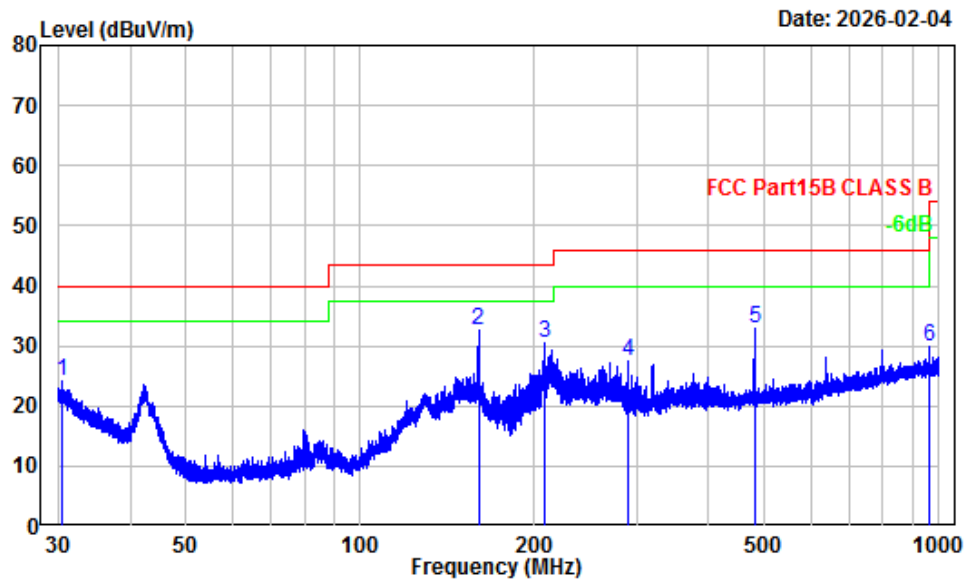*Test mode: Playing***30 MHz~1 GHz****Horizontal**

Site : Chamber A
Condition : 3m Horizontal
Project Number : 2601P01899E-EM
Test Mode : Playing
Detector: Peak RBW/VBW: 120/500kHz
Tester : Nico Wu

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	30.57	-6.26	30.49	24.23	40.00	-15.77	Peak
2	159.99	-12.72	45.38	32.66	43.50	-10.84	Peak
3	208.58	-13.86	44.32	30.46	43.50	-13.04	Peak
4	290.65	-11.21	38.58	27.37	46.00	-18.63	Peak
5	480.11	-6.34	39.39	33.05	46.00	-12.95	Peak
6	960.06	-0.86	30.80	29.94	54.00	-24.06	Peak

Vertical

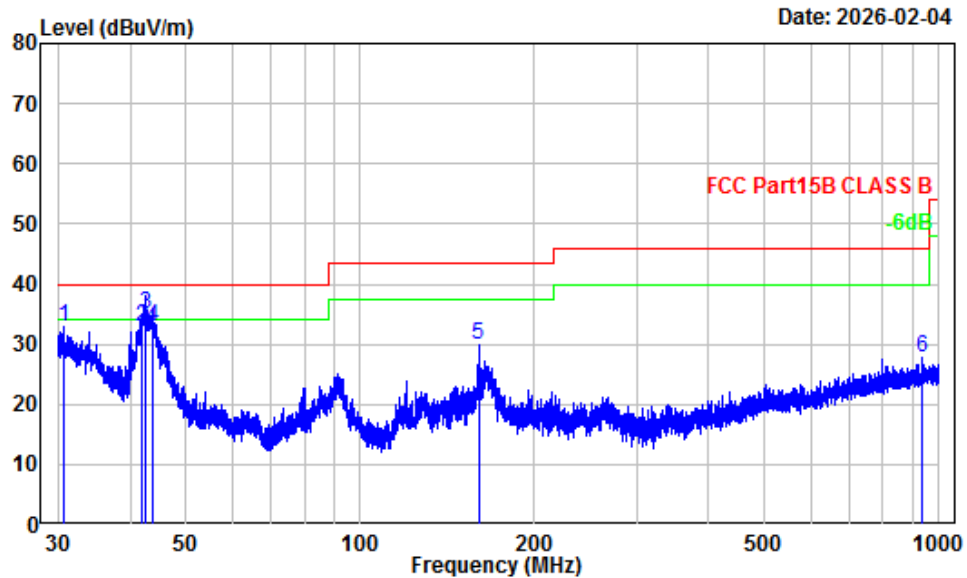

Site : Chamber A
Condition : 3m Vertical
Project Number : 2601P01899E-EM
Test Mode : Playing
Detector: Peak RBW/VBW: 120/500kHz
Detector: QP RBW : 120kHz
Tester : Nico Wu

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	30.76	-6.35	39.17	32.82	40.00	-7.18	Peak
2	41.79	-13.70	46.56	32.86	40.00	-7.14	QP
3	42.45	-14.19	49.34	35.15	40.00	-4.85	QP
4	43.72	-15.00	47.96	32.96	40.00	-7.04	QP
5	159.99	-12.72	42.58	29.86	43.50	-13.64	Peak
6	936.37	-1.05	28.85	27.80	46.00	-18.20	Peak

EUT PHOTOGRAPHS

Please refer to the attachment 2601P01899E-EM-EXP External photo and 2601P01899E-EM-INP Internal photo.

TEST SETUP PHOTOGRAPHS

Please refer to the attachment 2601P01899E-EM-TSP Test Setup photo.

******* END OF REPORT *******