



RF TEST REPORT

Report No.: SET2016-00722

Product Name: Mobile Data Terminal

FCC ID: 2AC6AC4000-A

Model No. : C4000/C4050

Applicant: ShenZhen Chainway Information Technology Co.,Ltd.

Address: 9/F, Building 2, Phase 2, Daqian Industrial Park, Longchang Rd.,
District 67, Bao'an, Shenzhen

Dates of Testing: 12/28/2015 — 01/12/2016

Issued by: CCIC-SET

Lab Location: Electronic Testing Building, Shahe Road, Xili, Nanshan District,
Shenzhen, 518055, P. R. China

Tel: 86 755 26627338 **Fax:** 86 755 26627238

This test report consists of **16** pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CCIC-SET. The test results in the report only apply to the tested sample. The test report shall be invalid without all the signatures of testing engineers, reviewer and approver. Any objections must be raised to CCIC-SET within 20 days since the date when the report is received. It will not be taken into consideration beyond this limit.



Test Report

Product Name: Mobile Data Terminal

Brand Name: CHAINWAY

Trade Name: CHAINWAY

Applicant.....: ShenZhen Chainway Information Technology Co.,Ltd.

Applicant Address.....: 9/F, Building 2, Phase 2, Daqian Industrial Park,
Longchang Rd., District 67, Bao'an, Shenzhen

Manufacturer: ShenZhen Chainway Information Technology Co.,Ltd.

Manufacturer Address: 9/F, Building 2, Phase 2, Daqian Industrial Park,
Longchang Rd., District 67, Bao'an, Shenzhen

Test Standards.....: **47 CFR FCC Part 15.209**

Test Result: PASS

Tested by

2016.01.13

Lu Lei, Test Engineer

Reviewed by

2016.01.13

Zhu Qi, Senior Engineer

Approved by

2016.01.13

Wu Li'an, Manager

Table of contents

RF TEST REPORT	1
1. GENERAL INFORMATION	4
1.1. EUT Description	4
1.2. Test Standards and Results.....	5
1.3. Facilities and Accreditations	5
2. 47 CFR PART 15C REQUIREMENTS.....	6
2.1. Antenna requirement.....	6
2.2. AC Power-line Conducted Emission	7
2.3. Radiated Spurious Emission	11
3. LIST OF MEASURING EQUIPMENT	16

Change History		
Issue	Date	Reason for change
1.0	2016.01.13	First edition

1. General Information

1.1. EUT Description

EUT Type	Mobile Data Terminal
Hardware Version	N/A
Software Version	N/A
Power Supply	5.0Vdc(adapter or host equipment) 3.7Vdc(Li-ion battery)
Frequency Range	125kHz
Operating Rang	125kHz
Number of channel	1
Modulation Type	ASK
Antenna Type	PATCH Antenna
Antenna Gain	0dBi

1.2. Test Standards and Results

The objective of the report is to perform testing according to 47 CFR Part 15 Subpart C (Bluetooth, 2.4GHz ISM band radiators) for the EUT FCC ID Certification:

No.	Identity	Document Title
1	47 CFR Part 15 Subpart C 2013	Radio Frequency Devices
2	ANSI C63.10 2009	American National Standard for Testing Unlicensed Wireless Devices

Test detailed items/section required by FCC rules and results are as below:

No.	Ref. Std Clause	Description	Result
1	15.203	Antenna Requirement	PASS
2	15.207	Conducted Emission	PASS
3	15.209	Radiated Band Edges and Spurious Emission	PASS

1.3. Facilities and Accreditations

CNAS-Lab Code: L1659

CCIC Southern Electronic Product Testing (Shenzhen) Co., Ltd. CCIC is a third party testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L1659. A 12.8*6.8*6.4 (m) fully anechoic chamber was used for the radiated spurious emissions test.

FCC-Registration No.: 406086

CCIC Southern Electronic Product Testing (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. Registration 406086, valid time is until October 28, 2017.

IC-Registration No.: 11185A-1

CCIC Southern Electronic Product Testing (Shenzhen) Co., Ltd. EMC Laboratory has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Registration No. 11185A-1 on July. 15, 2013, valid time is until July. 15, 2016.

2. 47 CFR Part 15C Requirements

2.1. Antenna requirement

2.1.1. Applicable Standard

According to FCC 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

And according to FCC 47 CFR Section 15.247(c), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

2.1.2. Antenna Information

Antenna Category: Integral antenna

Antenna General Information:

No.	EUT Model	Ant. Cat.	Gain(dBi)
1	ALR-H450	PATCH antenna	0

2.1.3. Result: comply

The EUT has a permanently and irreplaceable attached antenna. Please refer to the EUT internal photos.

2.2. AC Power-line Conducted Emission

2.2.1. Limit of Conducted Emission


For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency range (MHz)	Conducted Limit (dB μ V)	
	Quai-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
0.50 - 30	60	50

2.2.2. Measuring Instruments

The measuring equipment is listed in the section 3 of this test report.

2.2.3. Test Setup

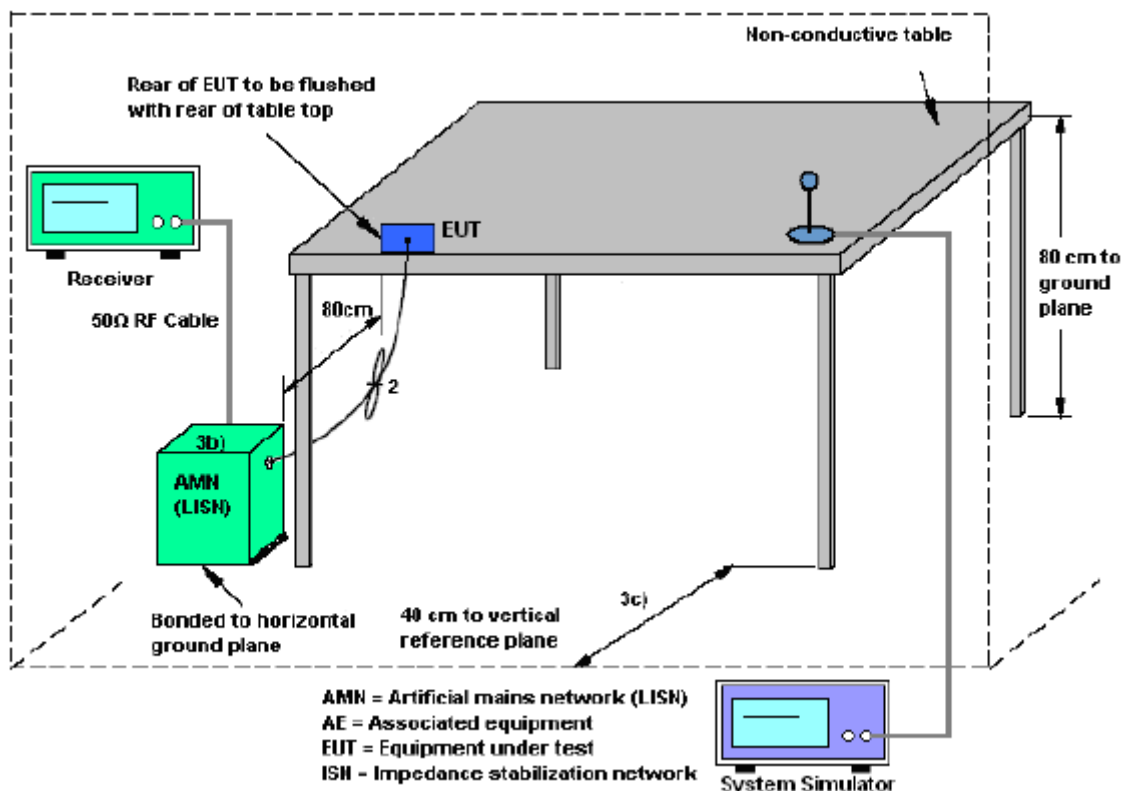


2.2.4. Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 micrometry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

2.9.3. Test Results of Conducted Emission

The EUT configuration of the emission tests is RFID Link + USB Cable (Charging from Adapter)


FCC Part 15 Class B Voltage Test

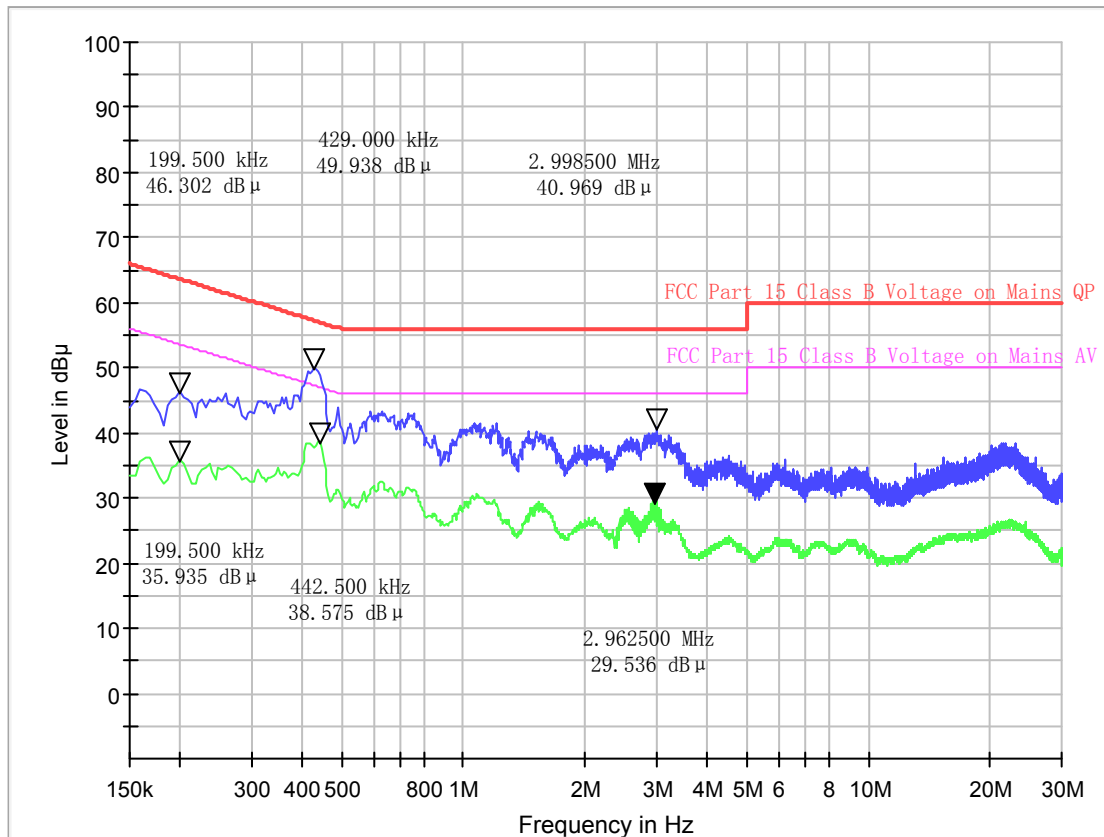

(Plot A: L Phase)

Conducted Disturbance at Mains Terminals					
L Test Data					
QP			AV		
Frequency (MHz)	Limits (dB μ V)	Measurement Value (dB μ V)	Frequency (MHz)	Limits (dB μ V)	Measurement Value (dB μ V)
0.200	63.6	46.302	0.200	53.6	35.935
0.429	57.3	49.938	0.443	47.0	38.575
2.999	56.0	40.969	2.963	46.0	29.536

FCC Part 15 Class B Voltage Test

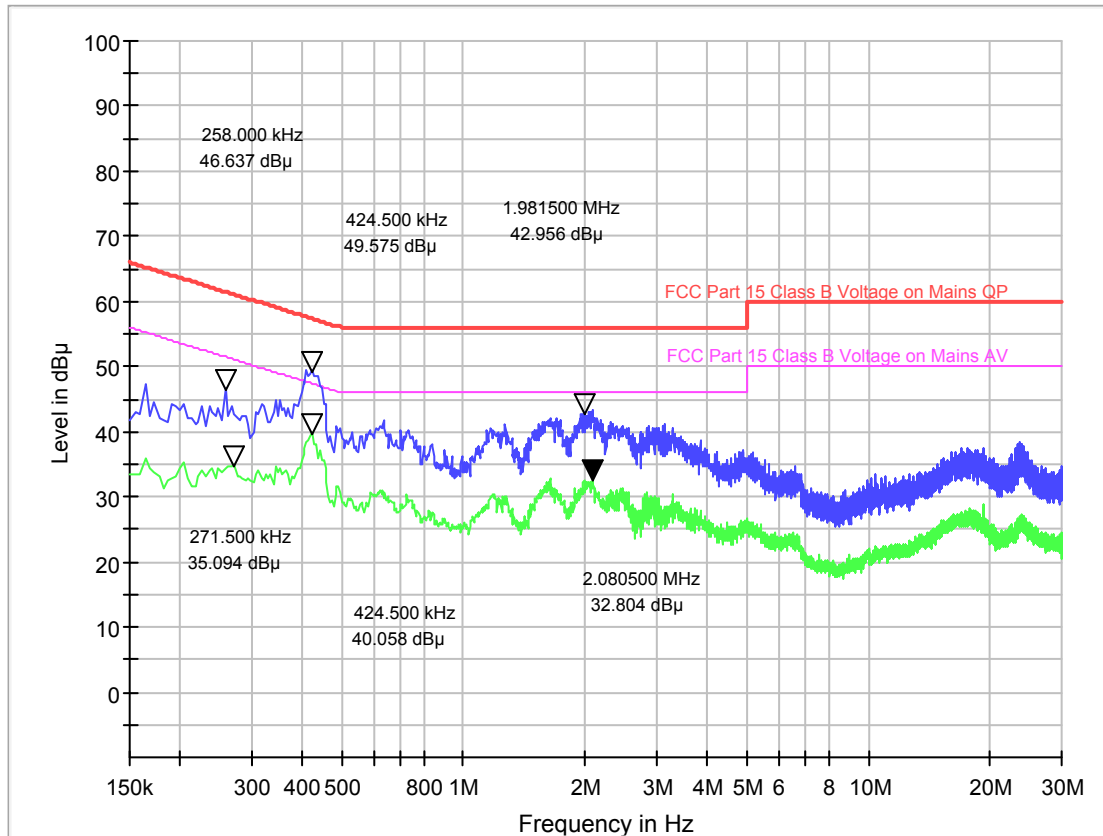

(Plot B: N Phase)

Conducted Disturbance at Mains Terminals					
N Test Data					
QP			AV		
Frequency (MHz)	Limits (dB μ V)	Measurement Value (dB μ V)	Frequency (MHz)	Limits (dB μ V)	Measurement Value (dB μ V)
0.258	61.5	46.637	0.272	51.1	35.094
0.425	57.3	49.575	0.425	47.3	40.058
1.982	56.0	42.956	2.081	46.0	32.804

Test Result: PASS

2.3. Radiated Spurious Emission

2.3.1. Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. In addition, radiated emissions which fall in the restricted bands must also comply with the FCC section 15.209 limits as below.


Frequency (MHz)	Field Strength ($\mu\text{V/m}$)	Field Strength (dBuV/m)	Measurement Distance (m)
0.009 - 0.490	$2400/F(\text{kHz})$	48.5 - 13.8	300
0.490 - 1.705	$24000/F(\text{kHz})$	33.8 - 23	30
1.705 - 30.0	30	29	30
30 - 88	100	40	3
88 - 216	150	43.5	3
216 - 960	200	46	3
Above 960	500	54	3

2.3.2. Measuring Instruments


The measuring equipment is listed in the section 3 of this test report.

2.3.3. Test Setup

- 1) For radiated emissions from 9kHz to 30MHz

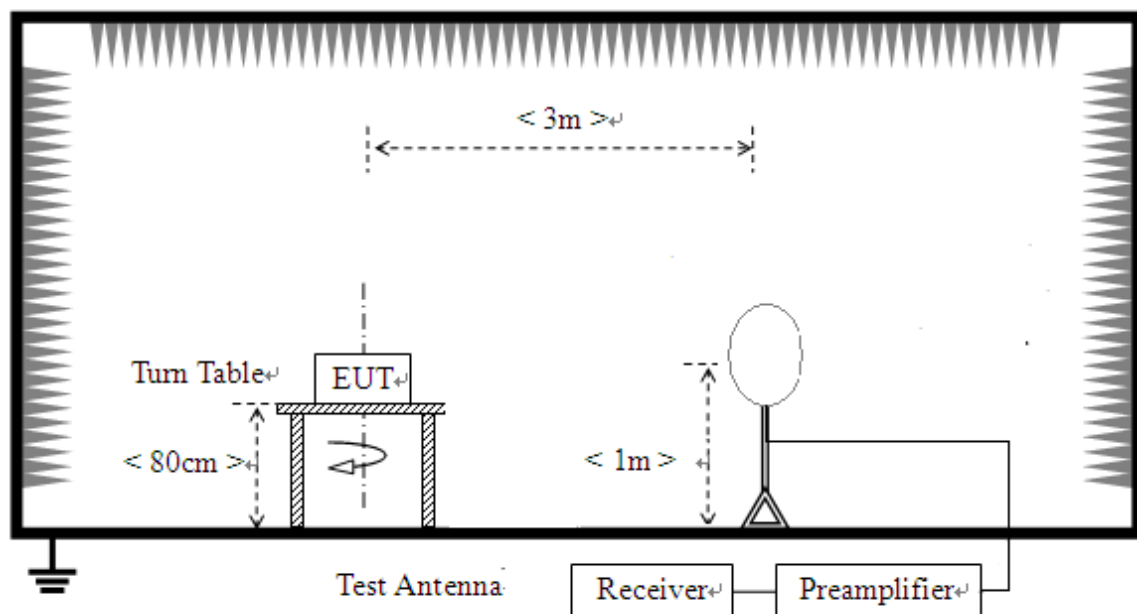

- 2) For radiated emissions from 30MHz to 1GHz

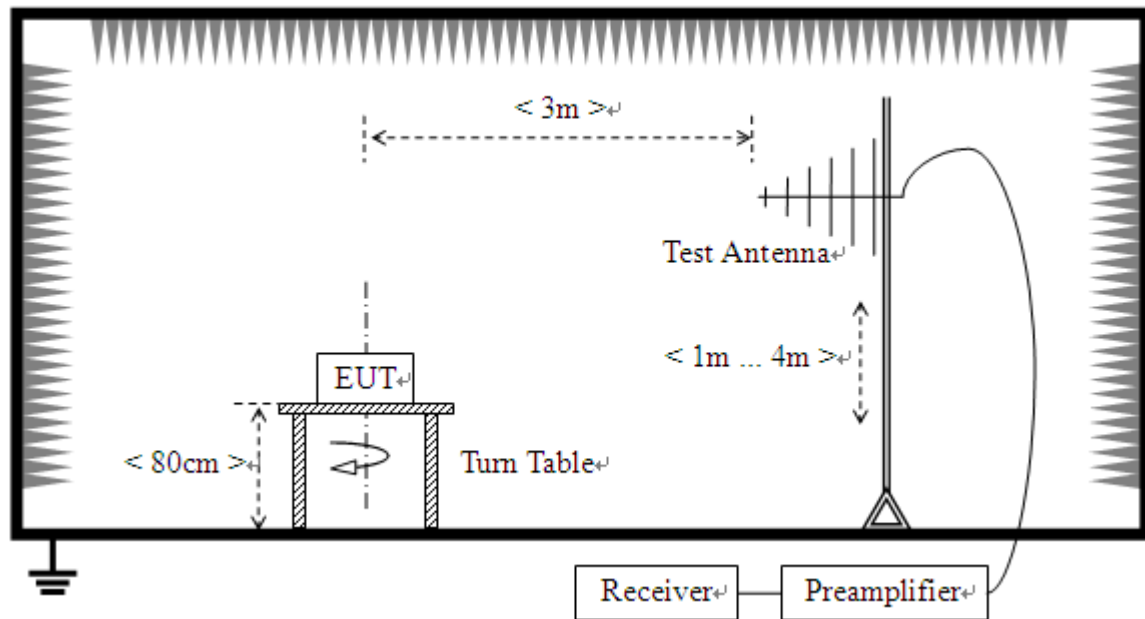

2.3.1. Test Procedure

1. The testing follows the guidelines in Spurious Radiated Emissions of FCC Public Notice DA 00-705 Measurement Guidelines.
2. The EUT was placed on a turntable with 0.8 meter above ground.
3. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
4. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
5. Set to the maximum power setting and enable the EUT transmit continuously.
6. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz, RBW=1MHz for $f > 1$ GHz ; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold for peak
 - (3) For average measurement: use duty cycle correction factor method per 15.35(c).
Duty cycle = On time/100 milliseconds

On time = $N_1 * L_1 + N_2 * L_2 + \dots + N_{n-1} * L_{N_{n-1}} + N_n * L_n$


Where N_1 is number of type 1 pulses, L_1 is length of type 1 pulses, etc.

Average Emission Level = Peak Emission Level + $20 * \log(\text{Duty cycle})$

7. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level


2.3.2. Test Results of Radiated Band Edge and Spurious Emission

For 9 KHz to 30MHz

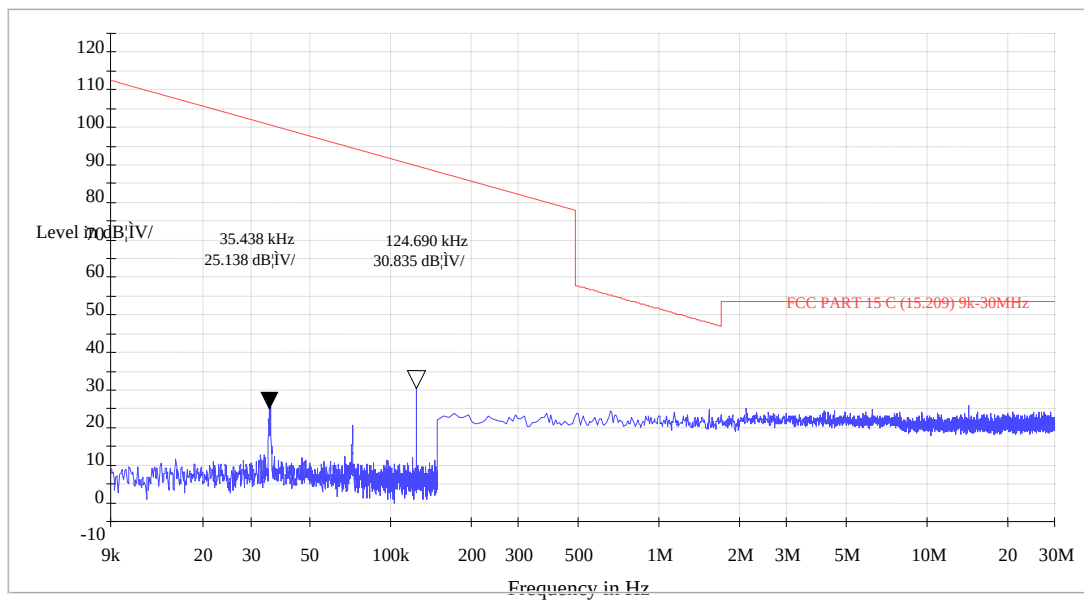


Frequency (kHz)	QuasiPeak (dB μ V/m)	Antenna height (cm)	Verdict
35.438	25.138	100.0	Pass
124.690	30.835	100.0	

For 30MHz to 1000MHz

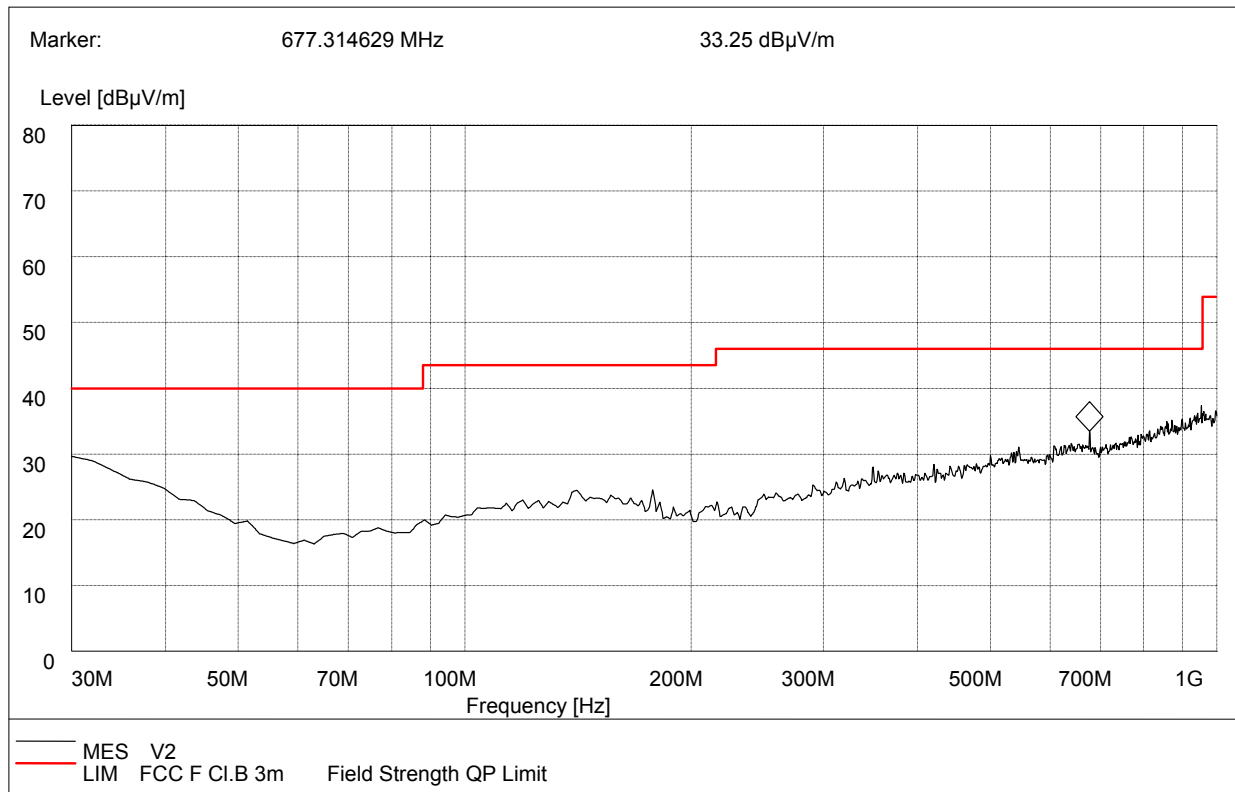

Frequency (MHz)	QuasiPeak (dB μ V/m)	Bandwidth (kHz)	Antenna height (cm)	Limit (dB μ V/m)	Antenna	Verdict
677.315	33.25	120.000	100.0	46.00	Vertical	Pass

(Plot A: 30MHz to 1GHz, Antenna Vertical)

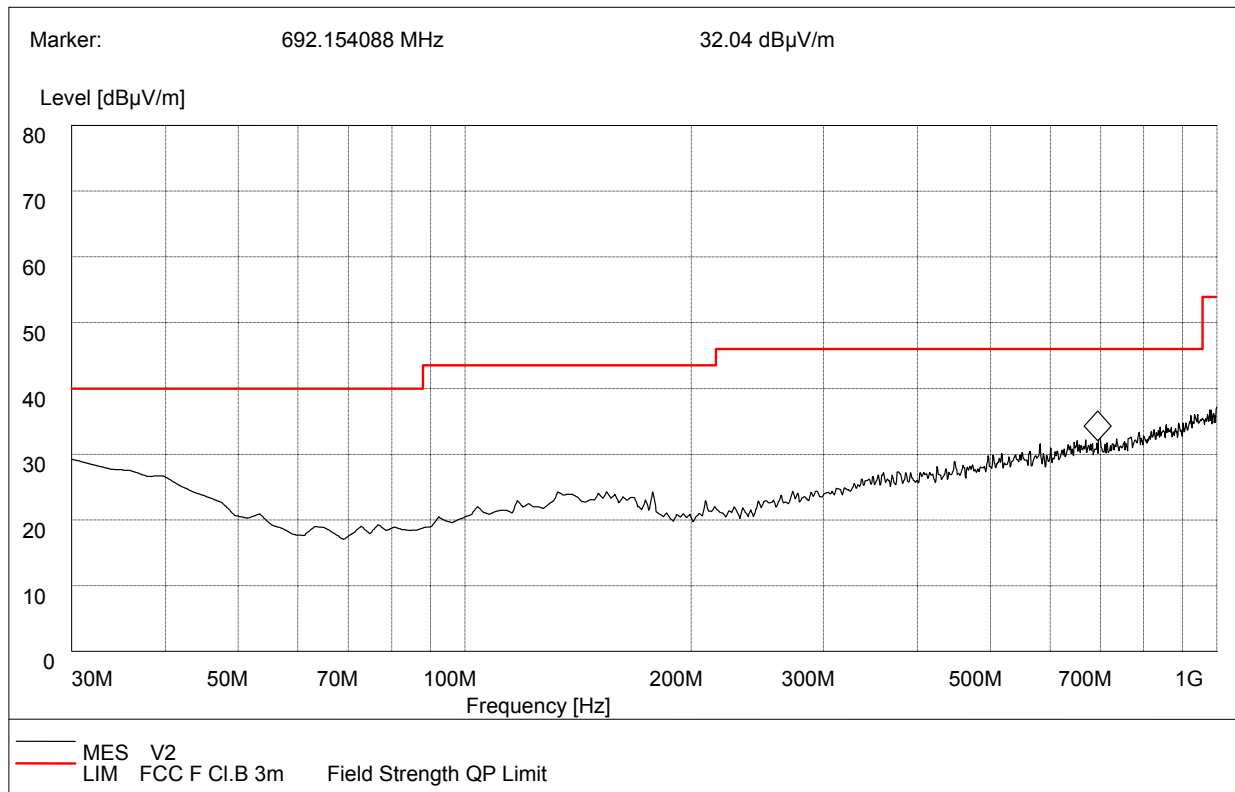

Frequency (MHz)	QuasiPeak (dB μ V/m)	Bandwidth (kHz)	Antenna height (cm)	Limit (dB μ V/m)	Antenna	Verdict
692.154	32.04	120.000	100.0	46.0	Horizontal	Pass

(Plot B: 30MHz to 1GHz, Antenna Horizontal)

3. List of measuring equipment

Description	Manufacturer	Model	Serial No.	Test Date	Due Date	Remark
EMI Test Receiver	R&S	ESIB26	A0304218	2015.06.02	2016.06.01	Radiation
Full-Anechoic Chamber	Albatross	12.8m*6.8m*6.4m	A0412372	2015.01.05	2016.01.04	Radiation
Loop Antenna	Schwarz beck	HFH2-Z2	100047	2015.06.02	2016.06.01	Radiation
Bilog Antenna	Schwarzbeck	VULB 9163	9163-274	2015.06.02	2016.06.01	Radiation
Double ridge horn antenna	R&S	HF906	100150	2015.06.02	2016.06.01	Radiation
Ultra-wideband antenna	R&S	HL562	100089	2015.06.02	2016.06.01	Radiation
Amplifier 20M~3GHz	R&S	PAP-0203H	22018	2015.06.02	2016.06.01	Radiation
Spectrum Analyzer	R&S	FSP40	1164.4391.40	2015.07.07	2016.07.06	Conducted
LISN	ROHDE&SCHWARZ	ESH2-Z5	A0304221	2015.06.02	2016.06.01	Conducted
Test Receiver	R&S	ESCS30	A0304260	2015.06.02	2016.06.01	Conducted
Cable	SUNHNER	SUCOFLEX 100	/	2015.06.02	2016.06.01	Radiation
Cable	SUNHNER	SUCOFLEX 104	/	2015.06.02	2016.06.01	Radiation

**** END OF REPORT ****