



MEASUREMENT REPORT

FCC PART 15.225 NFC 13.56MHz

FCC ID: 2AC6AC4000

APPLICANT: Shenzhen Chainway Information Technology Co., Ltd.

Application Type: Certification

Product: Mobile Data Terminal

Model No.: C4000

Brand Name: CHAINWAY

FCC Classification: Part 15 Low Power Communication Device Transmitter
(DXX)

FCC Rule Part(s): Part 15.225

Test Procedure(s): ANSI C63.10-2009

Test Date: Aug. 27 ~ Sept. 13, 2014

Reviewed By : Robin Wu
(Robin Wu)

Approved By : Marlin Chen
(Marlin Chen)

The test results relate only to the samples tested.

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.10. Test results reported herein relate only to the item(s) tested.

The test report shall not be reproduced except in full without the written approval of MRT Technology (Suzhou) Co., Ltd.

Revision History

Report No.	Version	Description	Issue Date
1408RSU03404	Rev. 01	Initial report	09-15-2014

CONTENTS

Description	Page
§2.1033 General Information	5
1. INTRODUCTION	6
1.1. Scope	6
1.2. MRT Test Location	6
2. PRODUCT INFORMATION	7
2.1. Equipment Description.....	7
2.2. Test Mode	7
2.3. Device Capabilities	7
2.4. Test Configuration	7
2.5. EMI Suppression Device(s)/Modifications.....	8
2.6. Labeling Requirements.....	8
3. DESCRIPTION OF TEST	9
3.1. Evaluation Procedure	9
3.2. AC Line Conducted Emissions	9
3.3. Radiated Emissions	10
4. ANTENNA REQUIREMENTS	11
5. TEST EQUIPMENT CALIBRATION DATE	12
6. MEASUREMENT UNCERTAINTY	13
7. TEST RESULT	14
7.1. Summary	14
7.2. In-band Emission.....	15
7.2.1. Test Limit	15
7.2.2. Test Procedure Used	15
7.2.3. Test Setup.....	16
7.2.4. Test Result.....	17
7.3. Out-band Emission	18
7.3.1. Test Limit	18
7.3.2. Test Procedure Used	18
7.3.3. Test Setup.....	19
7.3.4. Test Result.....	20
7.4. 20dB Bandwidth	21
7.4.1. Test Limit	21
7.4.2. Test Procedure Used	21

7.4.3.	Test Setup.....	21
7.4.4.	Test Result.....	22
7.5.	Frequency Tolerance.....	23
7.5.1.	Test Limit	23
7.5.2.	Test Procedure Used	23
7.5.3.	Test Setup.....	23
7.5.4.	Test Result.....	24
7.6.	AC Conducted Emissions Measurement.....	25
7.6.1.	Test Limit	25
7.6.2.	Test Setup.....	25
7.6.3.	Test Result.....	26
8.	CONCLUSION.....	28

§2.1033 General Information

Applicant:	Shenzhen Chainway Information Technology Co., Ltd.
Applicant Address:	6F, Building A, Tsinghua Information Harbor, Hi-tech & Industrial Park, Nanshan, Shenzhen, Guangdong, China
Manufacturer:	Shenzhen Chainway Information Technology Co., Ltd.
Manufacturer Address:	6F, Building A, Tsinghua Information Harbor, Hi-tech & Industrial Park, Nanshan, Shenzhen, Guangdong, China
Test Site:	MRT Technology (Suzhou) Co., Ltd
Test Site Address:	D8 Building, Youxin Industrial Park, No.2 Tian'edang Rd., Wuzhong Economic Development Zone, Suzhou, China
MRT Registration No.:	809388
FCC Rule Part(s):	Part 15.225
Model No.:	C4000
FCC ID:	2AC6AC4000
Test Device Serial No.:	N/A ☐ Production ☒ Pre-Production ☐ Engineering
FCC Classification:	Part 15 Low Power Communication Device Transmitter (DXX)
Date(s) of Test:	Aug. 27 ~ Sept. 13, 2014
Test Report S/N:	1408RSU03406

Test Facility / Accreditations

Measurements were performed at MRT Laboratory located in Tian'edang Rd., Suzhou, China.

- MRT Lab is accredited to ISO 17025 by the American Association for Laboratory Accreditation (A2LA) under the American Association for Laboratory Accreditation Program (A2LA Cert. No. 3628.01) in EMC, Telecommunications and Radio testing for FCC, Industry Canada, EU and TELEC Rules.
- MRT facility is a FCC registered (MRT Reg. No. 809388) test facility with the site description report on file and has met all the requirements specified in Section 2.948 of the FCC Rules and Industry Canada (11384A-1).
- MRT facility is an IC registered (11384A-1) test laboratory with the site description on file at Industry Canada.

1. INTRODUCTION

1.1. Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Industry Canada Certification and Engineering Bureau.

1.2. MRT Test Location

The map below shows the location of the MRT LABORATORY, its proximity to the Taihu Lake. These measurement tests were conducted at the MRT Technology (Suzhou) Co., Ltd. Facility located at D8 Building, Youxin Industrial Park, No.2 Tian'edang Rd., Wuzhong Economic Development Zone, Suzhou, China. The detailed description of the measurement facility was found to be in compliance with the requirements of § 2.948 according to ANSI C63.4-2009 on September 30, 2013.



2. PRODUCT INFORMATION

2.1. Equipment Description

Product Name	Mobile Data Terminal
Model No.	C4000
Brand Name	CHAINWAY
NFC Frequency	13.56MHz
Type of Modulation	ASK
Data Rate	106kbit/s
Antenna Type	Internal

2.2. Test Mode

Test Mode
Mode 1: Transmit by NFC

□

2.3. Device Capabilities

This device contains the following capabilities:

850/1900 GSM/GPRS/EDGE, 850 WCDMA/HSPA, 802.11b/g/n WLAN (DTS), Bluetooth (1x, EDR), NFC

2.4. Test Configuration

The **Mobile Data Terminal FCC ID: 2AC6AC4000** was set to continuous transmission. This was performance using manufacturer software loaded on the terminal to allow for continuous transmission. This device was tested in accordance with the guidance of ANSI C63.10-2009. ANSI C63.4-2009 was used to reference the appropriate EUT setup for radiated spurious emissions testing and AC line conducted testing.

2.5. EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

2.6. Labeling Requirements

Per 2.1074 & 15.19; Docket 95-19

The label shall be permanently affixed at a conspicuous location on the device; instruction manual or pamphlet supplied to the user and be readily visible to the purchaser at the time of purchase.

However, when the device is so small wherein placement of the label with specified statement is not practical, only the trade name and FCC ID must be displayed on the device per Section 15.19(a)(5).

Please see attachment for FCC ID label and label location.

3. DESCRIPTION OF TEST

3.1. Evaluation Procedure

The measurement procedures described in the American National Standard for Testing Unlicensed Wireless Devices (ANSI C63.10-2009) was used in the measurement of the **Mobile Data Terminal FCC ID: 2AC6AC4000**.

Deviation from measurement procedure.....None

3.2. AC Line Conducted Emissions

The line-conducted facility is located inside an 8'x4'x4' shielded enclosure. A 1m x 2m wooden table 80cm high is placed 40cm away from the vertical wall and 80cm away from the sidewall of the shielded room. Two 10kHz-30MHz, 50Ω/50uH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room floor. Power to the LISNs is filtered by external high-current high-insertion loss power line filters. These filters attenuate ambient signal noise from entering the measurement lines. These filters are also bonded to the shielded enclosure.

The EUT is powered from one LISN and the support equipment is powered from the second LISN. All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion) and draped over the back edge of the test table. All cables were at least 40cm above the horizontal reference ground-plane. Power cables for support equipment were routed down to the second LISN while ensuring that that cables were not draped over the second LISN.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the receiver and exploratory measurements were made to determine the frequencies producing the maximum emission from the EUT. The receiver was scanned from 150kHz to 30MHz. The detector function was set to peak mode for exploratory measurements while the bandwidth of the analyzer was set to 9kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Each emission was also maximized by varying: power lines, the mode of operation or data exchange speed, or support equipment whichever determined the worst-case emission. Once the worst case emissions have been identified, the one EUT cable configuration/arrangement and mode of operation that produced these emissions are used for final measurements on the same test site. The analyzer is set to CISPR quasi-peak and average detectors with a 9kHz resolution bandwidth for final measurements.

An extension cord was used to connect to a single LISN which powered by EUT. The extension cord was calibrated with LISN, the impedance and insertion loss are compliance with the requirements as stated in ANSI C63.10-2009 at Clause 4.3.

Line conducted emissions test results are shown in Section 7.8.

3.3. Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. For measurements above 1GHz absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections. For measurements below 1GHz, the absorbers are removed. A MF Model 210SS turntable is used for radiated measurement. It is a continuously rotatable, remote controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. An 80cm high PVC support structure is placed on top of the turntable.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33(b)(1) depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up was placed on top of the 0.8 meter high, 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, clock speed, mode of operation or video resolution, if applicable, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, whichever produced the worst-case emissions. According to 3dB Beam-Width of horn antenna, the horn antenna should be always directed to the EUT when rising height.

4. ANTENNA REQUIREMENTS

Excerpt from §15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antenna of the Mobile Data Terminal is **permanently attached**.
- There are no provisions for connection to an external antenna.

Conclusion:

The **Mobile Data Terminal FCC ID: 2AC6AC4000** unit complies with the requirement of §15.203.

5. TEST EQUIPMENT CALIBRATION DATE

Conducted Emissions

Instrument	Manufacturer	Type No.	Serial No.	Cali. Interval	Cali. Due Date
EMI Test Receiver	R&S	ESR7	101209	1 year	2014/11/08
Two-Line V-Network	R&S	ENV216	101683	1 year	2014/11/08
Two-Line V-Network	R&S	ENV216	101684	1 year	2014/11/08
Temperature/ Meter Humidity	Anymetre	TH101B	SR2-01	1 year	2014/11/15

Radiated Emission

Instrument	Manufacturer	Type No.	Serial No.	Cali. Interval	Cali. Due Date
Spectrum Analyzer	Agilent	E4447A	MY45300136	1 year	2014/11/18
EMI Test Receiver	R&S	ESR7	101209	1 year	2014/11/08
Preamplifier	MRT	AP18G40	1310001	1 year	2014/10/07
Preamplifier	MRT	AP01G18	1310002	1 year	2014/10/07
Loop Antenna	Schwarzbeck	FMZB1519	1519-041	1 year	2014/11/24
TRILOG Antenna	Schwarzbeck	VULB9162	9162-047	1 year	2014/11/24
Broad-Band Horn Antenna	Schwarzbeck	BBHA9120D	9120D-1167	1 year	2014/11/24
Broadband Horn Antenna	Schwarzbeck	BBHA9170	9170-549	1 year	2014/12/11
Temperature/Humidity Meter	Anymetre	TH101B	AC1-01	1 year	2014/11/15

Conducted Test Equipment

Instrument	Manufacturer	Type No.	Serial No.	Cali. Interval	Cali. Due Date
Spectrum Analyzer	Agilent	N9010A	MY5144016A	1 year	2015/01/04
Wideband Peak Power Meter	Anritsu	ML2495A	0905006	1 year	2015/01/12
Power Sensor	Anritsu	MA2411B	0846014	1 year	2015/01/12
Temperature/Humidity Meter	Anymetre	TH101B	TR3-01	1 year	2014/11/15

6. MEASUREMENT UNCERTAINTY

Where relevant, the following test uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.

AC Conducted Emission Measurement
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): 150kHz~30MHz: $\pm 3.46\text{dB}$
Radiated Emission Measurement
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): 9kHz ~ 1GHz: $\pm 4.18\text{dB}$

7. TEST RESULT

7.1. Summary

Company Name: Shenzhen Chainway Information Technology Co., Ltd.

FCC ID: 2AC6AC4000

Frequency Examined: 13.56MHz

FCC Part Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
15.225 (a), (b), (c)	In-Band Emission	15,848uV/m @ 30m 13.553 ~ 13.567 MHz 334uV/m @ 30m 13.410 ~ 13.553 MHz 13.567 ~ 13.710 MHz 106uV/m @ 30m 13.110 ~ 13.410 MHz 13.710 ~ 14.010 MHz	Radiated	Pass	Section 7.2
15.225(d)	Out-Band Emission	Emissions outside of the specified band (13.110~14.010 MHz) must meet the radiated limits detailed in 15.209		Pass	Section 7.3
2.1049	20dB Bandwidth	N/A		Pass	Section 7.4
15.225(e)	Frequency Stability Tolerance	±0.01% of operating frequency		Pass	Section 7.5
15.207	AC Conducted Emissions 150kHz - 30MHz	< FCC 15.207 limits	Line Conducted	Pass	Section 7.6

Notes:

- 1) All modes of operation and data rates were investigated. For radiated emission test, every axis (X, Y, Z) was also verified. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables and attenuators.

7.2. In-band Emission

7.2.1. Test Limit

FCC Part 15 Subpart C Paragraph 15.225		
Frequency (MHz)	Distance (m)	Level (uV/m)
13.553 ~13.567	30	15,848
13.410 ~13.553 13.567 ~13.710	30	334.5
13.110 ~13.410 13.710 ~14.010	30	106

Note 1: The lower limit shall apply at the transition frequency.

Note 2: Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

Note 3: E field strength (dBuV/m) = 20 log E field strength (uV/m)

7.2.2. Test Procedure Used

The EUT was setup according to ANSI C63.4, 2009 and tested according to ANSI C63.10: 2009 for compliance to FCC 47CFR 15.247 requirements.


The EUT is placed on a turn table which is 0.8 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.4:2009 on radiated measurement.


The EUT should be operate in transmission mode.

7.2.3. Test Setup

9kHz ~ 30MHz Test Setup:

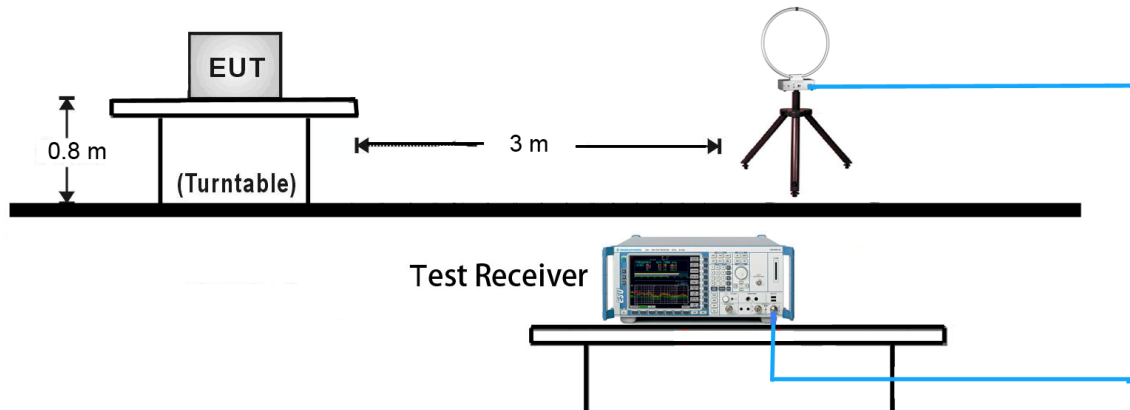

30MHz ~ 1GHz Test Setup:

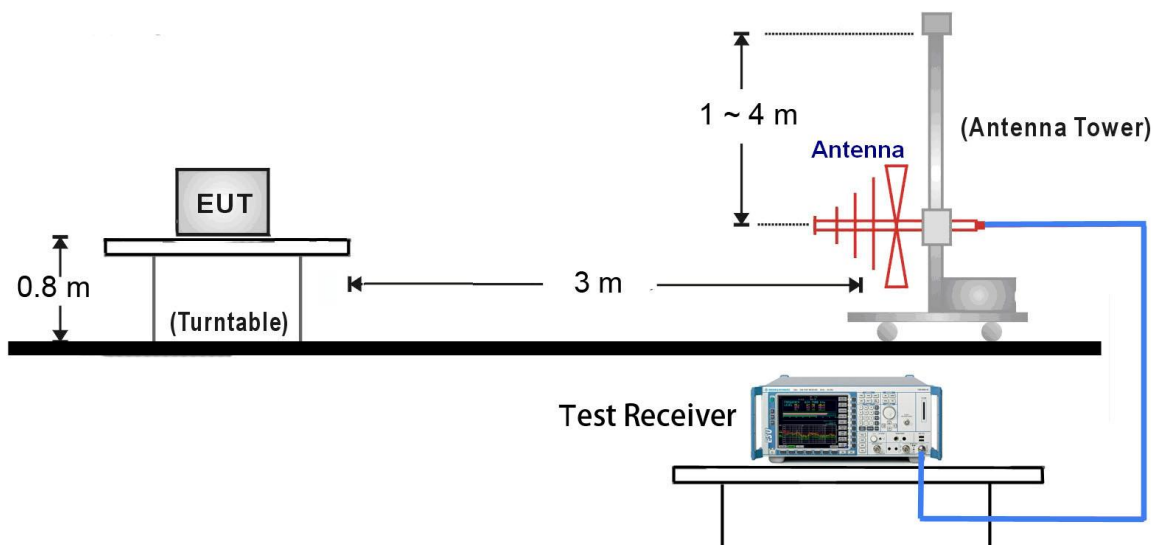

7.2.4. Test Result

Test Engineer	Milo Li	Temperature	26°C
Test Time	09-03-2014	Relative Humidity	54%
Test Mode	Mode1	Test Site	AC1

Frequency	Reading Level(dBuV/m)	Factor	Measure Level(dBuV/m)	Limit(3m) [dBuV/m]	Margin [dB]
Face On					
13.24	4.90	19.87	24.77	80.51	-55.74
13.42	15.49	19.86	35.35	90.47	-55.12
13.56	38.53	19.87	58.40	123.99	-65.59
13.59	7.51	19.86	27.37	90.47	-63.10
13.92	5.92	19.85	25.77	80.51	-54.74
Face Off					
13.28	6.17	19.86	26.03	80.51	-54.48
13.47	7.45	19.86	27.31	90.47	-63.16
13.56	19.43	19.87	39.30	123.99	-84.69
13.66	6.68	19.86	26.54	90.47	-63.93
13.90	6.79	19.86	26.65	80.51	-53.86

Note1: All measurements were performed using a loop antenna. The antenna was positioned in two orthogonal (face on and face off) and the position with the highest emission level was recorded.

Note2: Measurements were tested at 3m and the data was extrapolated to the specified measurement distance of 30m using the square of an inverse linear extrapolation factor (40 dB/decade) as specified in §15.31(f)(2).

Extrapolation Factor = $40 \cdot \log(30/3) = 40 \text{ dB}$

Note3: All measurements were recorded using a EMI test receiver employing a quasi-peak detector.

7.3. Out-band Emission

7.3.1. Test Limit

FCC Part 15 Subpart C Paragraph 15.209		
Frequency (MHz)	Distance (m)	Level (uV/m)
0.009 – 0.490	300	2400/F (kHz)
0.490 – 1.705	30	2400/F (kHz)
1.705 – 30	30	30
30 - 88	3	100
88 - 216	3	150
216 - 960	3	200
Above 960	3	500

Note 1: The lower limit shall apply at the transition frequency.

Note 2: Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.


Note 3: E field strength (dBuV/m) = 20 log E field strength (uV/m)

7.3.2. Test Procedure Used


The EUT was tested from 9kHz up to the 1GHz excluding the band 13.110-14.010 MHz. All measurements were recorded with a spectrum analyzer employing an average detector for emissions below 30MHz. Above 30MHz a Quasi-peak detector was used. All out-of-band emissions must not exceed the limits shown as stated per Section 15.209. A loop antenna was used for searching for emissions below 30MHz.

7.3.3. Test Setup

9kHz ~ 30MHz Test Setup:

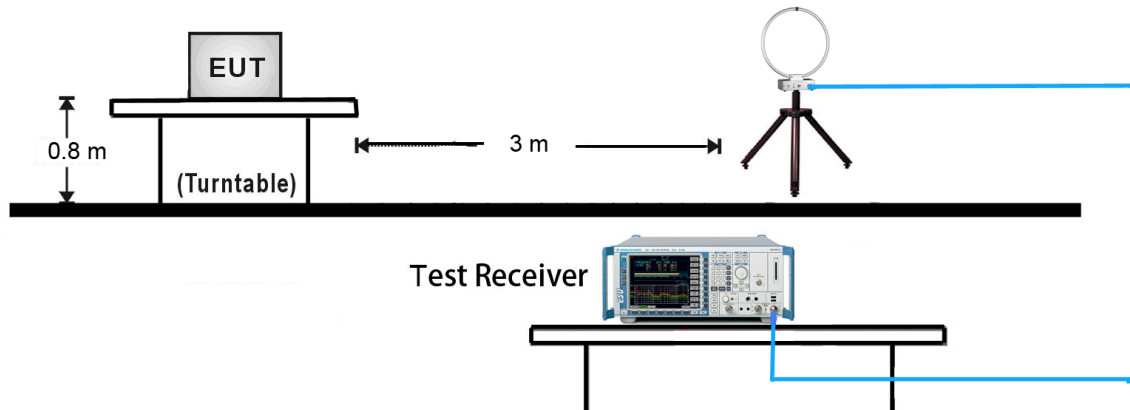

30MHz ~ 1GHz Test Setup:

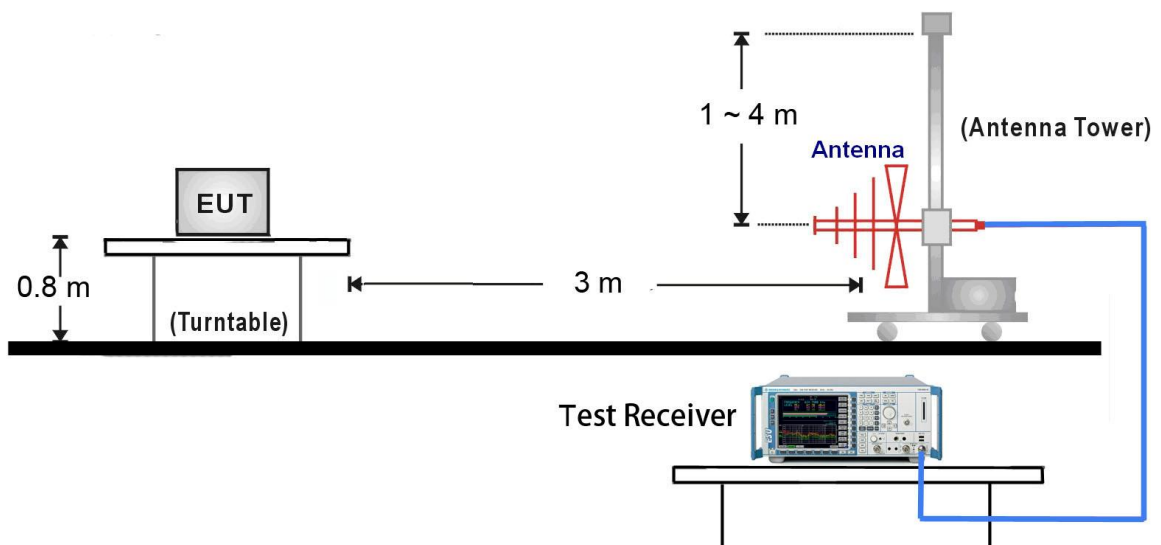

7.3.4. Test Result

Test Engineer	Milo Li	Temperature	26°C
Test Time	09-03-2014	Relative Humidity	54%
Test Mode	Mode1	Test Site	AC1

Out-Band Emission Below 30MHz						
Frequency (MHz)	Reading Level (dBuV/m)	Factor (dB)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
Face On						
27.12	6.49	19.51	26.00	69.54	-43.54	QP
Face Off						
27.12	4.03	19.51	23.54	69.54	-46.00	QP

Out-Band Emission Above 30MHz							
Antenna	Frequency (MHz)	Reading Level (dBuV/m)	Factor (dB)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
H	78.02	16.68	8.89	25.57	40.00	-14.43	QP
H	85.78	28.09	9.96	38.05	40.00	-1.95	QP
H	128.46	26.77	9.93	36.70	43.50	-6.80	QP
H	135.73	18.62	9.40	28.02	43.50	-15.48	QP
H	160.95	19.26	9.56	28.82	43.50	-14.68	QP
V	85.78	26.05	9.96	36.01	40.00	-3.99	QP
V	128.94	31.98	9.88	41.86	43.50	-1.64	QP
V	135.73	30.26	9.40	39.66	43.50	-3.84	QP
V	160.95	22.05	9.56	31.61	43.50	-11.89	QP
V	171.62	24.76	10.03	34.79	43.50	-8.71	QP

Note1: All measurements were performed using a loop antenna. The antenna was positioned in two orthogonal (face on and face off) and the position with the highest emission level was recorded.

Note2: Measurements were tested at 3m and the data was extrapolated to the specified measurement distance of 30m using the square of an inverse linear extrapolation factor (40 dB/decade) as specified in &15.31(f)(2).

Extrapolation Factor = $40 \times \text{LOG}(30/3) = 40 \text{ dB}$

Note3: All measurements were recorded using a EMI test receiver employing a quasi-peak detector for emissions below 960MHz.

7.4. 20dB Bandwidth


7.4.1. Test Limit

N/A

7.4.2. Test Procedure Used

The 20dB bandwidth is measured with a spectrum analyzer connected via a receive antenna placed near the EUT while the EUT is operating in transmission mode.


7.4.3. Test Setup

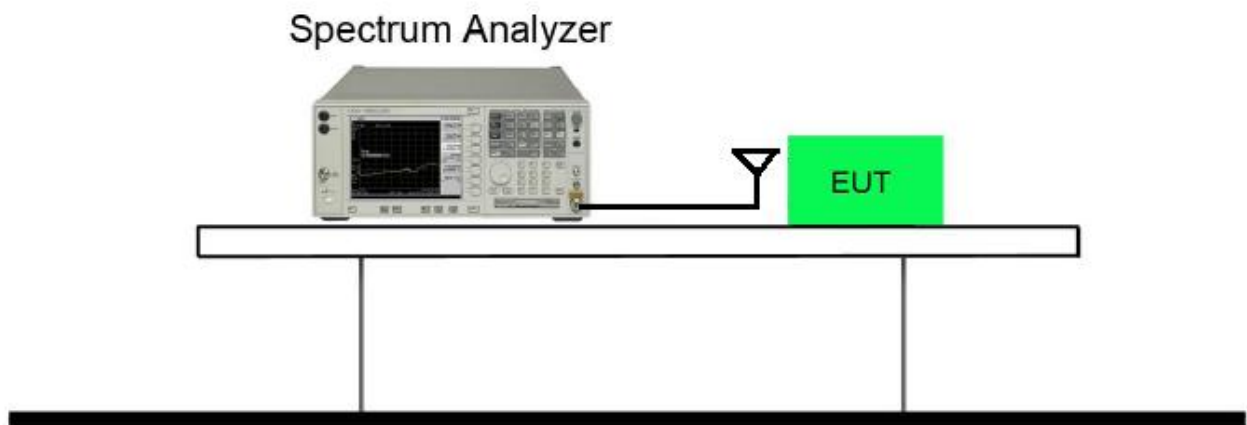

7.4.4. Test Result

Test Engineer	Milo Li	Temperature	26°C
Test Time	09-03-2014	Relative Humidity	54%
Test Mode	Mode1	Test Site	AC1

Frequency (MHz)	Occupied Bandwidth (kHz)
13.56	26.65

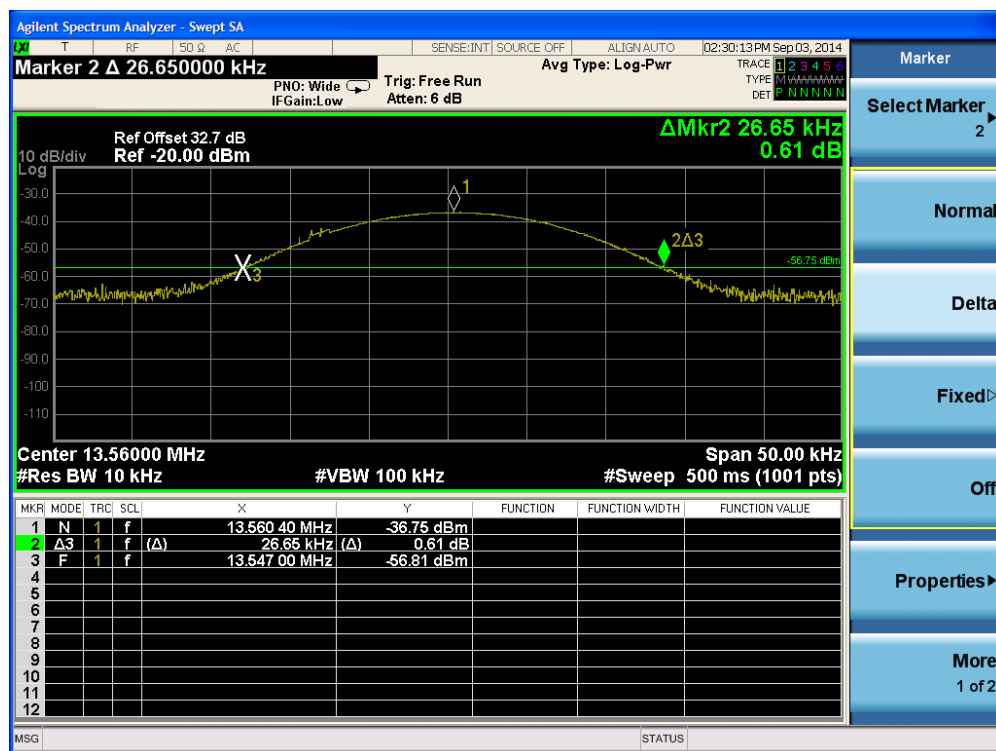

7.5. Frequency Tolerance


7.5.1. Test Limit

The frequency tolerance of the carrier signal shall be maintained within $\pm 0.01\%$ of the operating frequency.

7.5.2. Test Procedure Used

The equipment under test was connected to an external AC or DC power supply and input rated voltage. RF output was connected to a frequency counter or spectrum analyzer via feed through attenuators. The EUT was placed inside the temperature chamber. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT 20°C operating frequency as reference frequency. Turn EUT off and set the chamber temperature to highest. After the temperature stabilized for approximately 30 minutes recorded the frequency. Repeat step measure with 10°C decreased per stage until the lowest temperature reached.

7.5.3. Test Setup

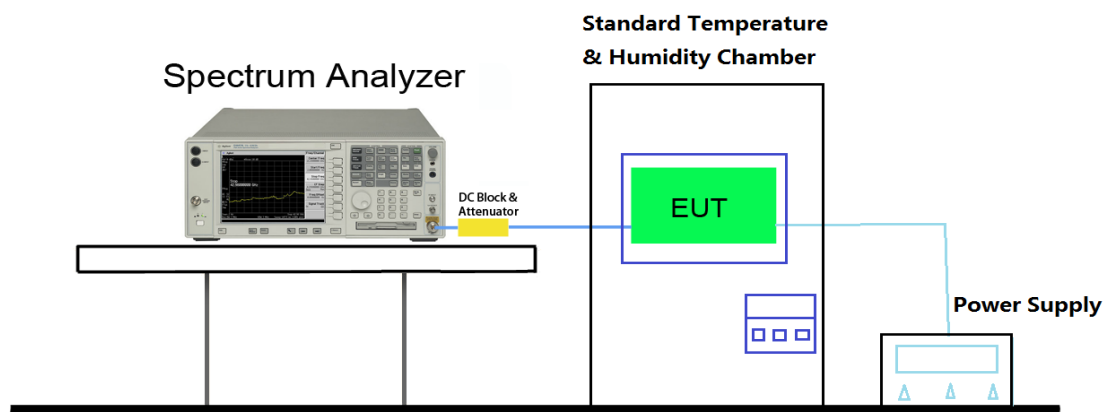

7.5.4. Test Result

Test Engineer	Milo Li	Temperature	26°C
Test Time	09-03-2014	Relative Humidity	54%
Test Mode	Mode1	Test Site	AC1

Operating Frequency: 13.56MHz					
Reference Voltage: 3.7Vdc					
Deviation Limit: +/- 0.01% = 1356Hz					
Voltage (%)	Power Battery	TEMP (°C)	FREQ. (Hz)	FREQ. Dev. (Hz)	Deviation (%)
100%	3.7	+20(Ref)	13,560,106	153	0.001128
100%		-20	13,560,113	127	0.000937
100%		-10	13,560,122	-84	-0.000619
100%		0	13,559,940	168	0.001239
100%		+10	13,560,096	-69	-0.000509
100%		+20	13,559,926	96	0.000708
100%		+30	13,560,085	76	0.000560
100%		+40	13,560,119	-136	-0.001003
100%		+50	13,559,913	-94	-0.000693
Battery End Point	3.6	+20	13,559,922	-78	-0.000575
115%	4.2	+20	13,560,058	58	0.000428

7.6. AC Conducted Emissions Measurement


7.6.1. Test Limit

FCC Part 15 Subpart C Paragraph 15.207 Limits		
Frequency (MHz)	QP (dBuV)	AV (dBuV)
0.15 - 0.50	66 - 56	56 – 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.


Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

7.6.2. Test Setup

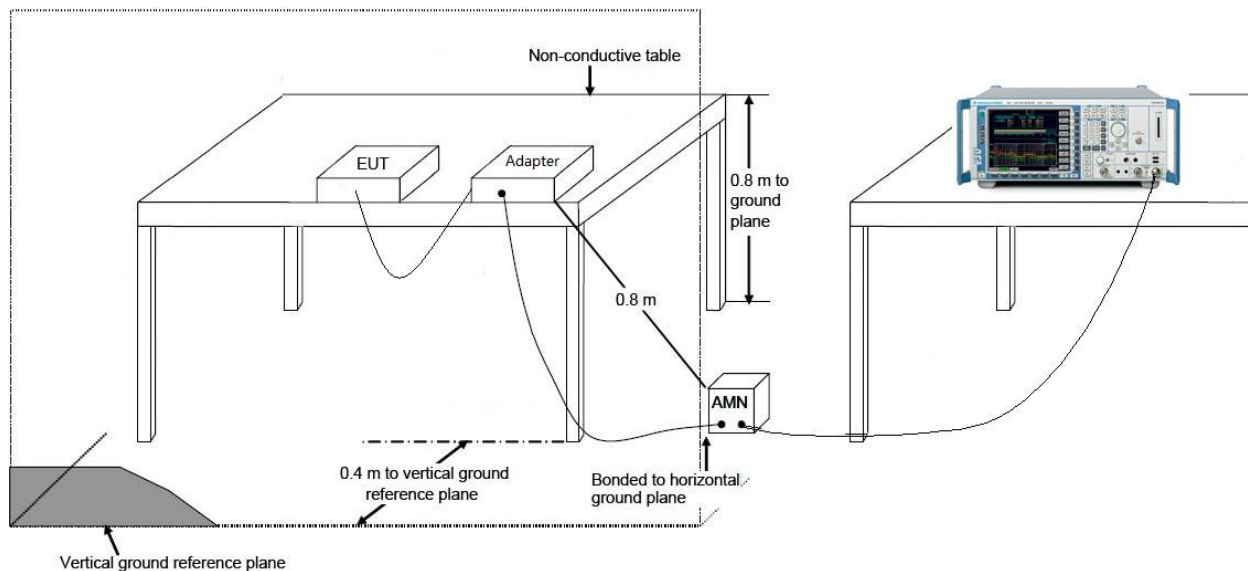

7.6.3. Test Result

Engineer: Milo Li	
Site: SR2	Time: 2014/09/13 - 10:58
Limit: FCC_Part15.107_CE_AC Power_ClassB	Margin: 0
Probe: ENV216_101683_Filter On	Polarity: Line
EUT: Mobile Data Terminal	Power: AC 120V/60Hz
Note: Nomal operating	

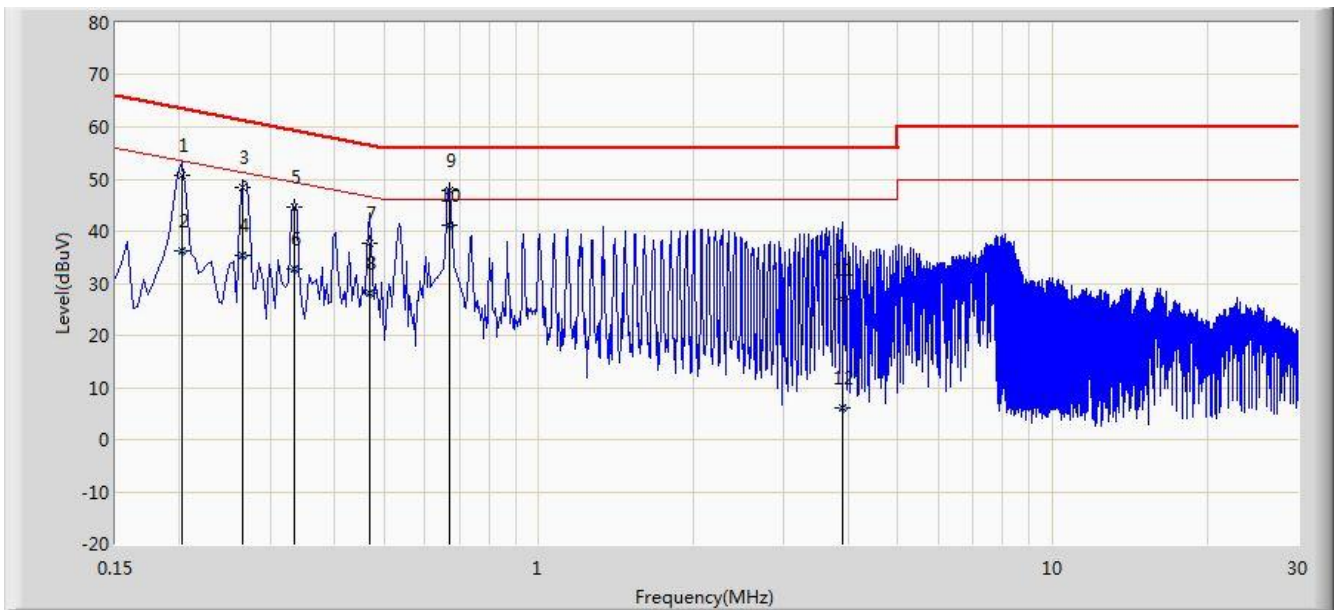


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV)	Factor	Type
1			0.202	50.799	40.806	-12.729	63.528	9.993	QP
2			0.202	36.232	26.239	-17.296	53.528	9.993	AV
3			0.266	48.505	38.528	-12.737	61.242	9.977	QP
4			0.266	35.418	25.441	-15.824	51.242	9.977	AV
5			0.334	44.573	34.542	-14.778	59.351	10.031	QP
6			0.334	32.719	22.687	-16.632	49.351	10.031	AV
7			0.470	37.643	27.501	-18.871	56.514	10.142	QP
8			0.470	28.040	17.898	-18.474	46.514	10.142	AV
9			0.670	47.733	37.655	-8.267	56.000	10.079	QP
10		*	0.670	41.207	31.128	-4.793	46.000	10.079	AV
11			3.890	27.090	17.132	-28.910	56.000	9.958	QP
12			3.890	6.098	-3.861	-39.902	46.000	9.958	AV

Note: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB).

Engineer: Milo Li	
Site: SR2	Time: 2014/09/13 - 10:58
Limit: FCC_Part15.107_CE_AC Power_ClassB	Margin: 0
Probe: ENV216_101683_Filter On	Polarity: Neutral
EUT: Mobile Data Terminal	Power: AC 120V/60Hz
Note: Nomal operating	

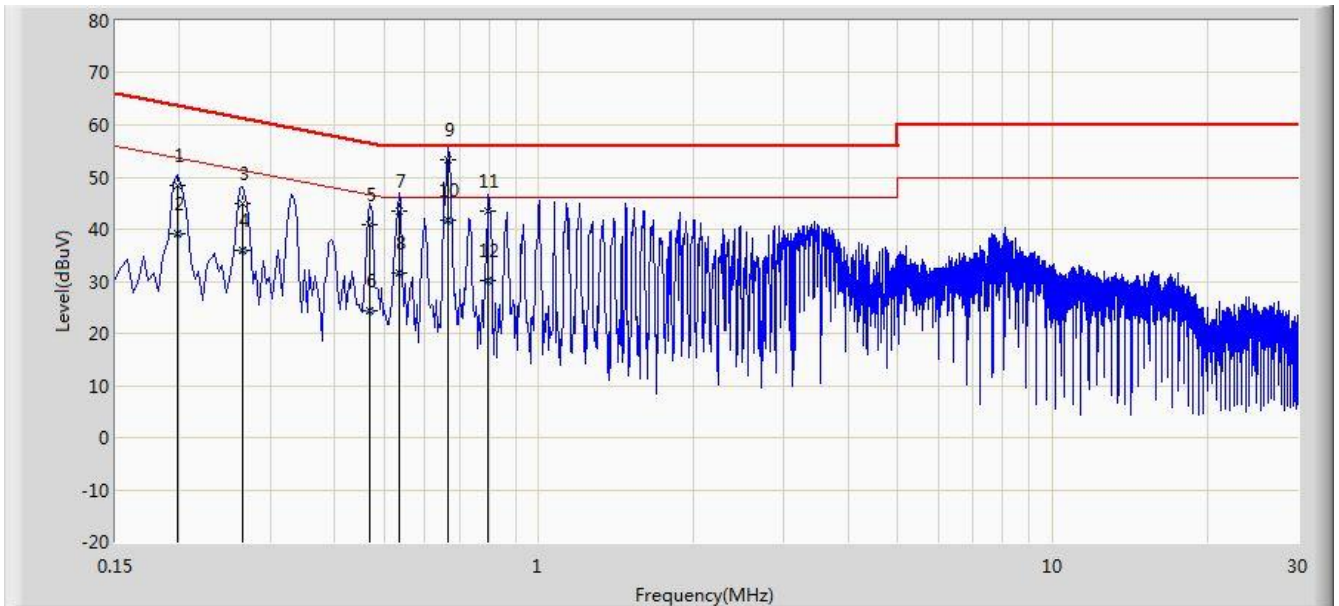

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV)	Factor	Type
1			0.198	48.264	38.250	-15.430	63.694	10.015	QP
2			0.198	39.044	29.030	-14.650	53.694	10.015	AV
3			0.266	44.872	34.859	-16.370	61.242	10.013	QP
4			0.266	36.046	26.033	-15.196	51.242	10.013	AV
5			0.470	40.948	30.783	-15.566	56.514	10.164	QP
6			0.470	24.384	14.219	-22.130	46.514	10.164	AV
7			0.534	43.382	33.215	-12.618	56.000	10.168	QP
8			0.534	31.493	21.326	-14.507	46.000	10.168	AV
9		*	0.666	53.404	43.310	-2.596	56.000	10.094	QP
10			0.666	41.667	31.573	-4.333	46.000	10.094	AV
11			0.798	43.360	33.340	-12.640	56.000	10.020	QP
12			0.798	30.019	19.999	-15.981	46.000	10.020	AV

Note: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB).

8. CONCLUSION

The data collected relate only the item(s) tested and show that the **Mobile Data Terminal FCC ID: 2AC6AC4000** is in compliance with Part 15C of the FCC Rules.

The End