

Appendix B:SAR Measurement results Plots

Table of contents
ASK 900
WiFi 2.4G
WiFi 5G(U-NII-1&U-NII-2A)
WiFi 5G(U-NII-2C)
WiFi 5G(U-NII-3)

Test Laboratory: CTI SAR Lab

C76 902.75MHz Top Side 0mm

DUT: Mobile Data Terminal; Type: C76; Serial: NA

Communication System: UID 0, ASK (0); Communication System Band: ASK; Frequency: 902.75 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 903 \text{ MHz}$; $\sigma = 1.001 \text{ S/m}$; $\epsilon_r = 55.129$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7328; ConvF(10.03, 10.03, 10.03); Calibrated: 2/23/2018;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1458; Calibrated: 5/7/2018
- Phantom: Twin SAM V5.0; Type: QD000P40CD; Serial: 1875
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (9x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.791 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 27.29 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.868 W/kg

SAR(1 g) = 0.743 W/kg; SAR(10 g) = 0.590 W/kg

Maximum value of SAR (measured) = 0.814 W/kg

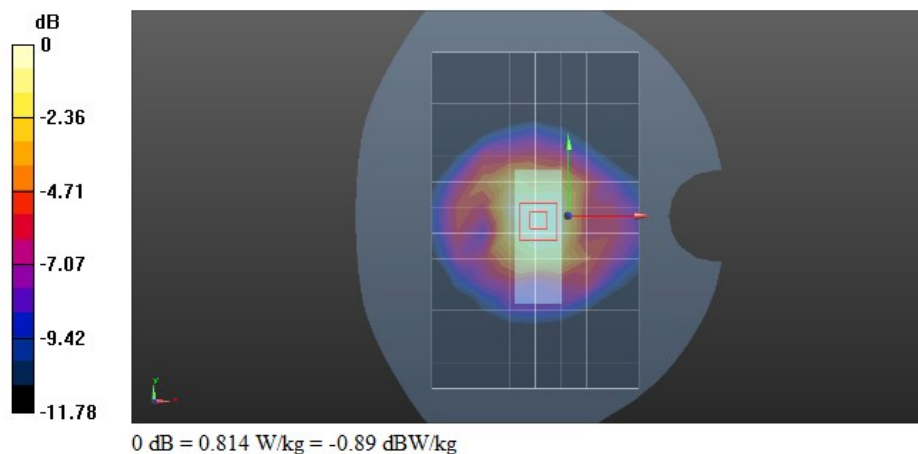

Test Laboratory: CTI SAR Lab

C76 WiFi 802.11b 11CH Right Side 0mm

DUT: Mobile Data Terminal; Type: C76; Serial: NA

Communication System: UID 0, WiFi 802.11 a/b/g/n/ac (0); Communication System Band: WiFi; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2462$ MHz; $\sigma = 2.013$ S/m; $\epsilon_r = 53.112$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7328; ConvF(7.69, 7.69, 7.69); Calibrated: 2/23/2018;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1458; Calibrated: 5/7/2018
- Phantom: Twin SAM V5.0; Type: QD000P40CD; Serial: 1875
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (9x16x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.187 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 5.207 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.272 W/kg

SAR(1 g) = 0.130 W/kg; SAR(10 g) = 0.057 W/kg

Maximum value of SAR (measured) = 0.219 W/kg

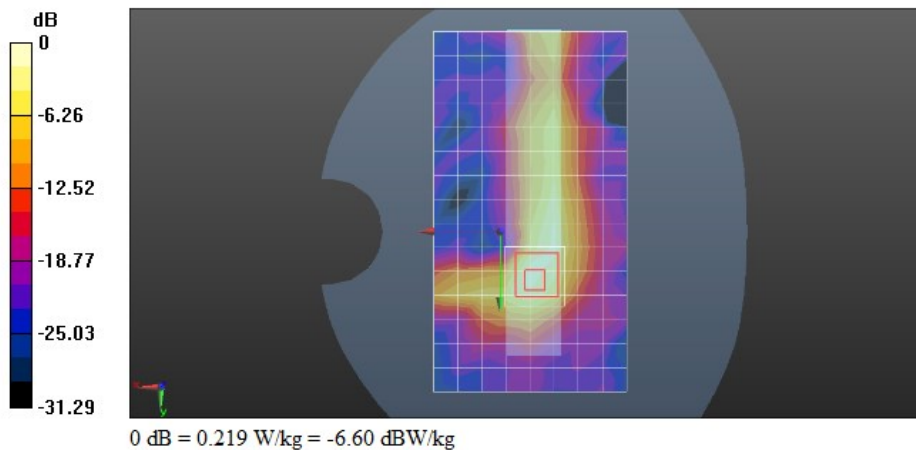

Test Laboratory: CTI SAR Lab

C76 WiFi 802.11a 64CH Right Side 0mm

DUT: Mobile Data Terminal; Type: C76; Serial: NA

Communication System: UID 0, WiFi 802.11 a/b/g/n/ac (0); Communication System Band: WiFi 5.3G; Frequency: 5320 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5320$ MHz; $\sigma = 5.218$ S/m; $\epsilon_r = 48.958$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7328; ConvF(4.33, 4.33, 4.33); Calibrated: 2/23/2018;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1458; Calibrated: 5/7/2018
- Phantom: Twin SAM V5.0; Type: QD000P40CD; Serial: 1875
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (11x16x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 0.795 W/kg


Configuration/Body/Zoom Scan (8x8x16)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 6.840 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 1.55 W/kg

SAR(1 g) = 0.386 W/kg; SAR(10 g) = 0.195 W/kg

Maximum value of SAR (measured) = 0.529 W/kg

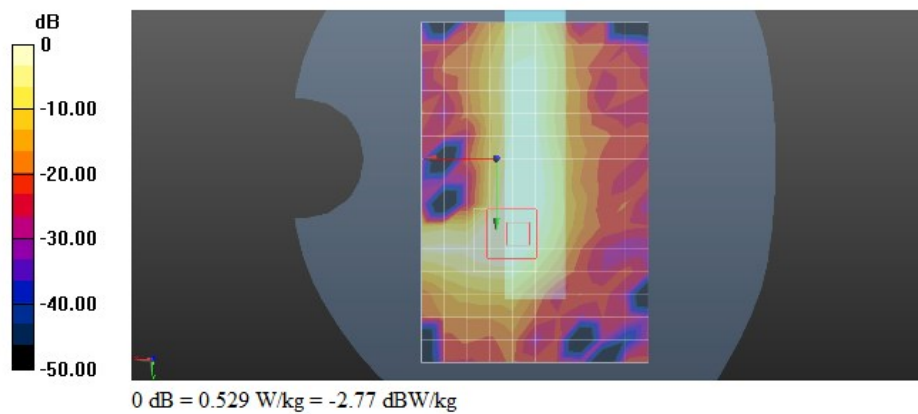

Test Laboratory: CTI SAR Lab

C76 WiFi 802.11a 110CH Top Side 0mm

DUT: Mobile Data Terminal; Type: C76; Serial: NA

Communication System: UID 0, WiFi 802.11 a/b/g/n/ac (0); Communication System Band: WiFi 5.5G; Frequency: 5550 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5550$ MHz; $\sigma = 5.613$ S/m; $\epsilon_r = 47.813$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7328; ConvF(3.92, 3.92, 3.92); Calibrated: 2/23/2018;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1458; Calibrated: 5/7/2018
- Phantom: Twin SAM V5.0; Type: QD000P40CD; Serial: 1875
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (12x16x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 0.543 W/kg


Configuration/Body/Zoom Scan (8x8x16)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 5.788 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.587 W/kg

SAR(1 g) = 0.410 W/kg; SAR(10 g) = 0.223 W/kg

Maximum value of SAR (measured) = 0.553 W/kg

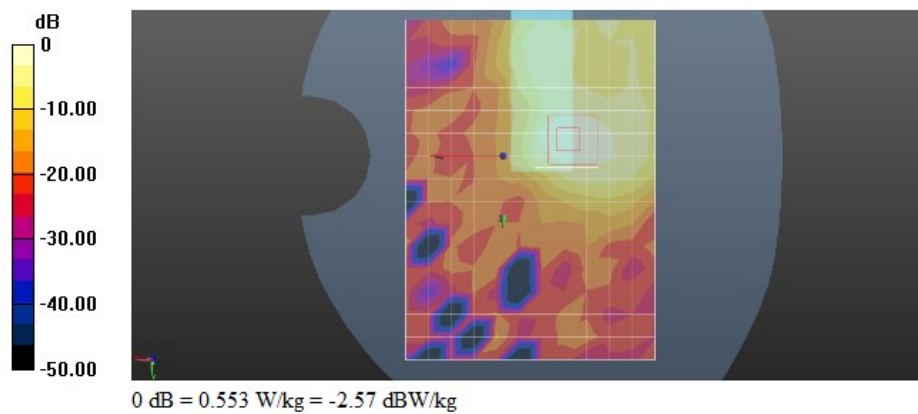

Test Laboratory: CTI SAR Lab

C76 WiFi 802.11a 157CH Right Side 0mm

DUT: Mobile Data Terminal; Type: C76; Serial: NA

Communication System: UID 0, WiFi 802.11 a/b/g/n/ac (0); Communication System Band: WiFi 5.8G; Frequency: 5785 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5785$ MHz; $\sigma = 5.968$ S/m; $\epsilon_r = 47.633$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7328; ConvF(3.93, 3.93, 3.93); Calibrated: 2/23/2018;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1458; Calibrated: 5/7/2018
- Phantom: Twin SAM V5.0; Type: QD000P40CD; Serial: 1875
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (12x16x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 0.539 W/kg

Configuration/Body/Zoom Scan (8x8x16)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 4.211 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.458 W/kg

SAR(1 g) = 0.343 W/kg; SAR(10 g) = 0.180 W/kg

Maximum value of SAR (measured) = 0.446 W/kg

