


Plot 29:

Test Date	2026-05-18
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Right head
Device Position	Cheek
Band	U-NII-2A
Signal	IEEE 802.11a
Frequency	5260
SAR 10g (W/Kg)	0.135
SAR 1g (W/Kg)	0.416
ConvF	1.16
Relative permittivity	36.60
Conductivity (S/m)	4.93

Maximum location: X=9.00, Y=13.00 ; SAR Peak: 2.70 W/kg




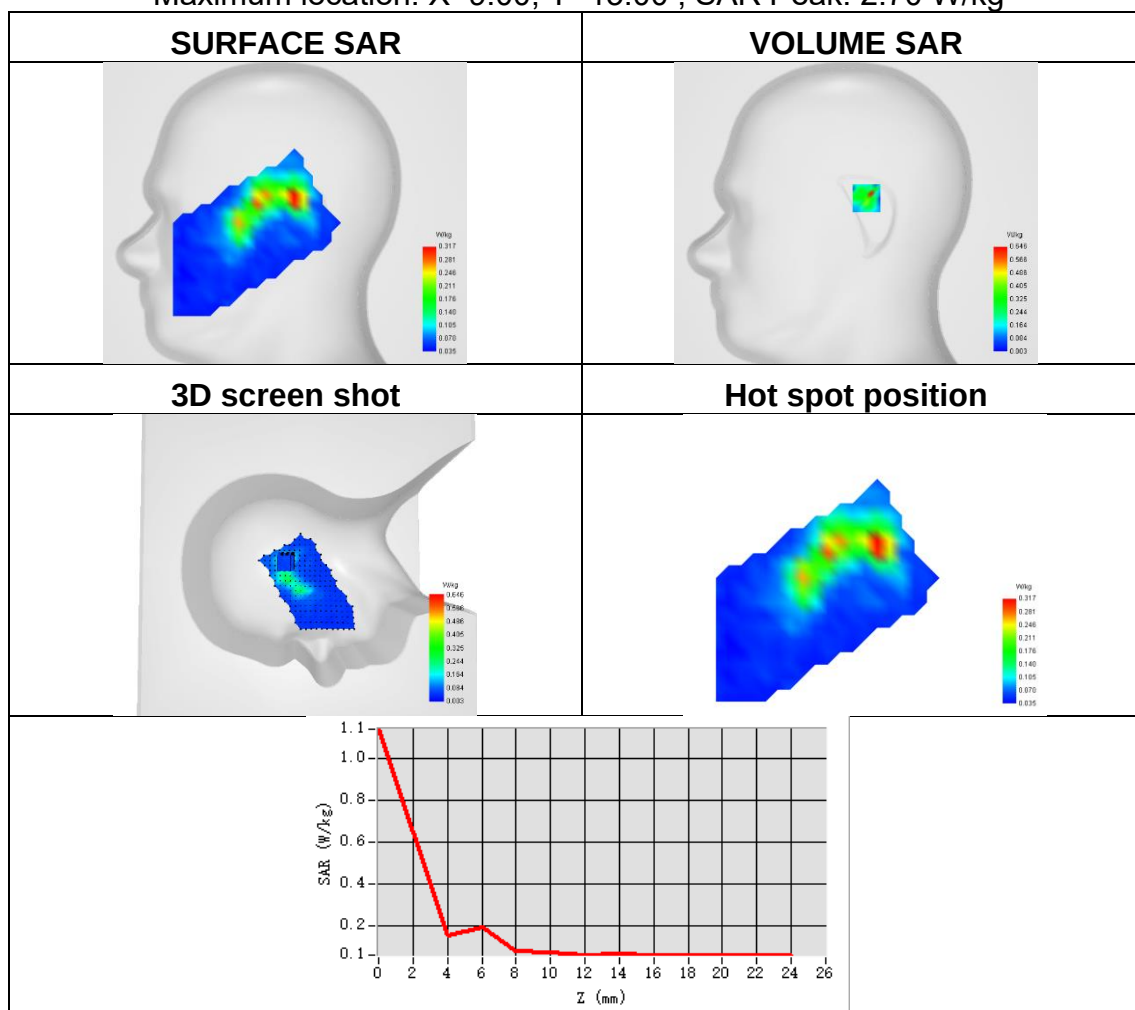

Plot 30:

Test Date	2026-05-18
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Left Side
Band	U-NII-2A
Signal	IEEE 802.11a
Frequency	5260
SAR 10g (W/Kg)	0.078
SAR 1g (W/Kg)	0.204
ConvF	1.16
Relative permittivity	36.60
Conductivity (S/m)	4.93

Maximum location: X=0.00, Y=-21.00 ; SAR Peak: 0.63 W/kg

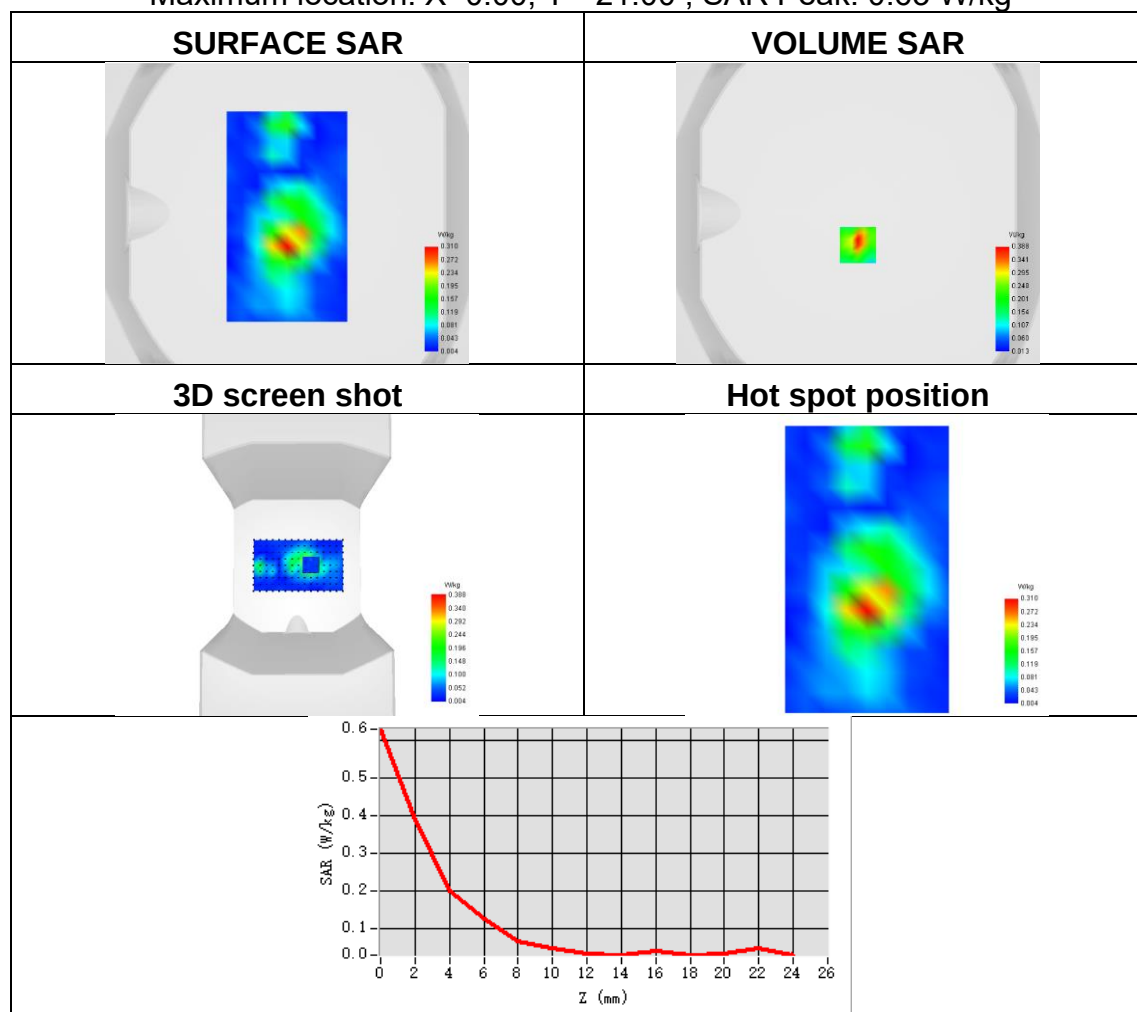




Plot 31:

Test Date	2026-05-18
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Right head
Device Position	Cheek
Band	U-NII-2A
Signal	IEEE 802.11n
Frequency	5270
SAR 10g (W/Kg)	0.092
SAR 1g (W/Kg)	0.219
ConvF	1.16
Relative permittivity	36.60
Conductivity (S/m)	4.93

Maximum location: X=-34.00, Y=0.00 ; SAR Peak: 0.75 W/kg

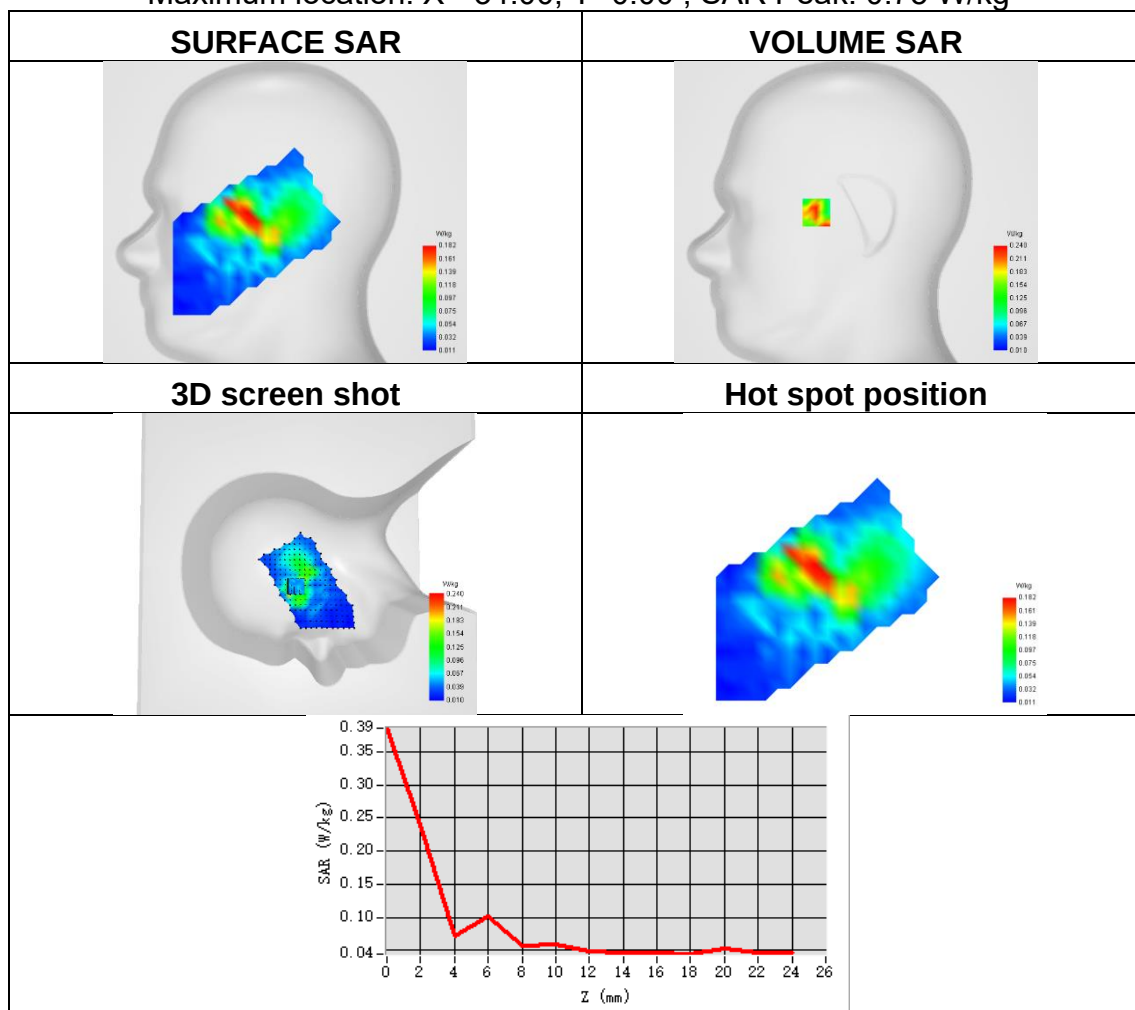




Plot 32:

Test Date	2026-05-18
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	U-NII-2A
Signal	IEEE 802.11n
Frequency	5270
SAR 10g (W/Kg)	0.073
SAR 1g (W/Kg)	0.209
ConvF	1.16
Relative permittivity	36.60
Conductivity (S/m)	4.93

Maximum location: X=10.00, Y=33.00 ; SAR Peak: 2.59 W/kg

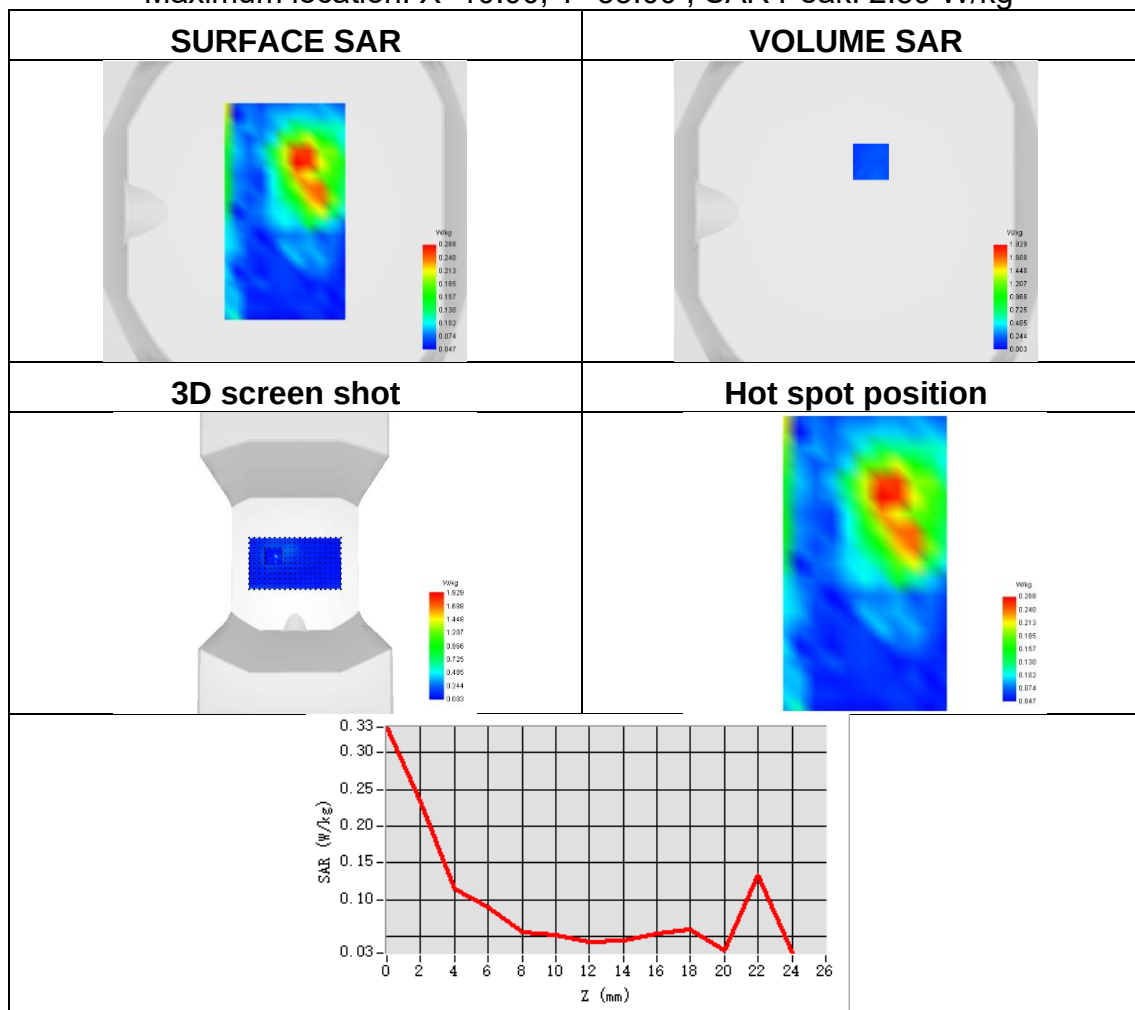




Plot 33:

Test Date	2026-05-18
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Right head
Device Position	Cheek
Band	U-NII-2A
Signal	IEEE 802.11n
Frequency	5270
SAR 10g (W/Kg)	0.093
SAR 1g (W/Kg)	0.221
ConvF	1.16
Relative permittivity	36.60
Conductivity (S/m)	4.93

Maximum location: X=-25.00, Y=-9.00 ; SAR Peak: 0.66 W/kg

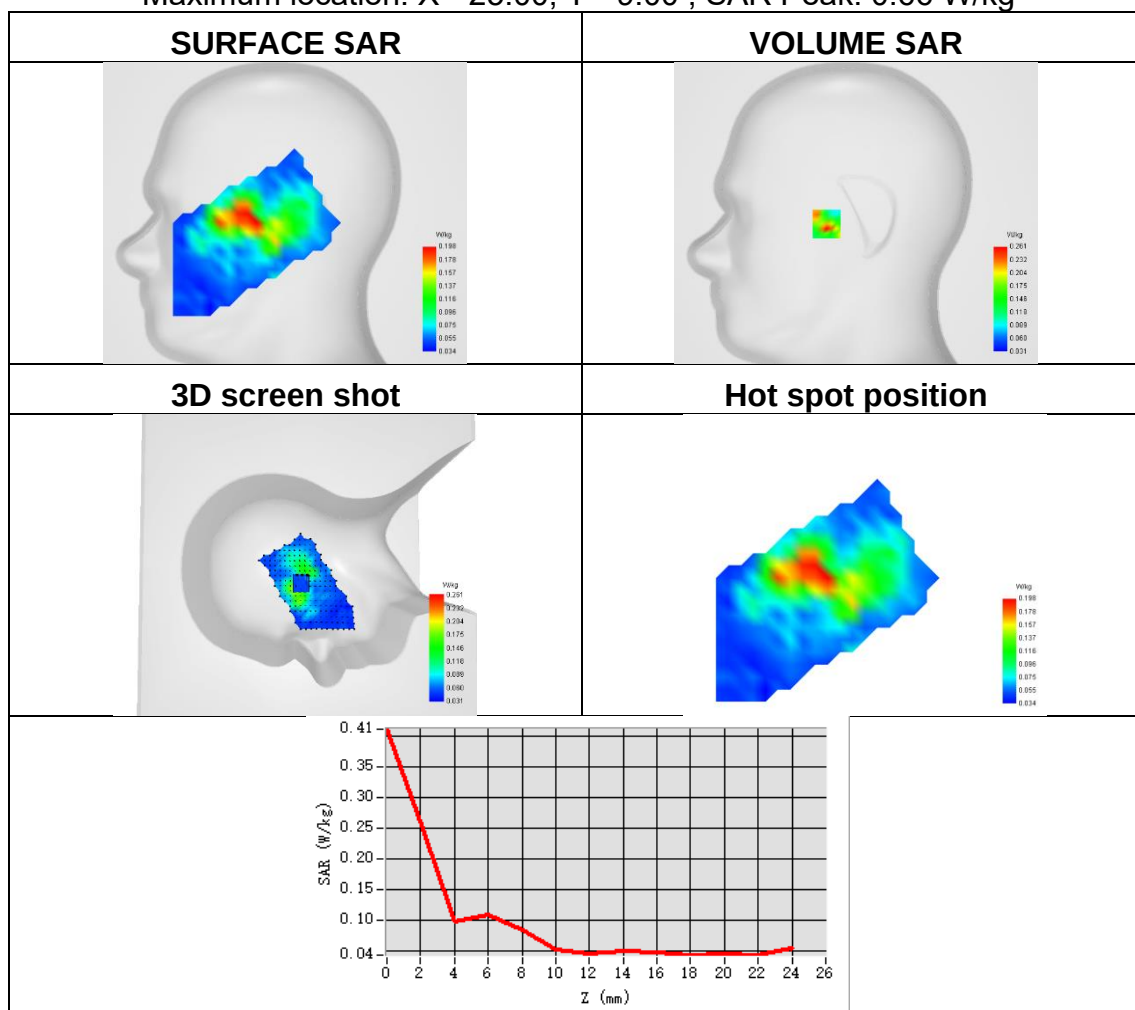




Plot 34:

Test Date	2026-05-18
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Left Side
Band	U-NII-2A
Signal	IEEE 802.11n
Frequency	5270
SAR 10g (W/Kg)	0.051
SAR 1g (W/Kg)	0.120
ConvF	1.16
Relative permittivity	36.60
Conductivity (S/m)	4.93

Maximum location: X=24.00, Y=-8.00 ; SAR Peak: 0.38 W/kg

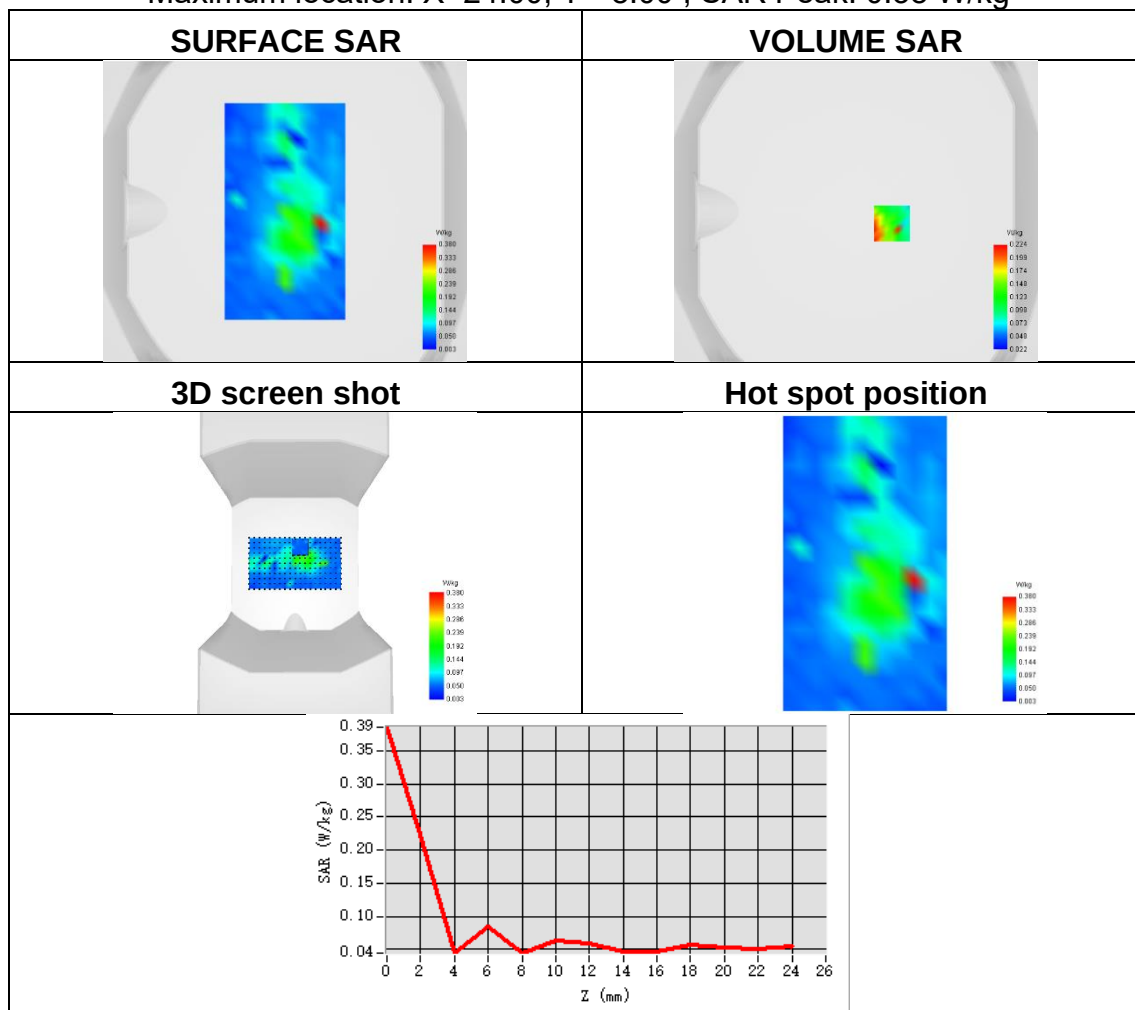




Plot 35:

Test Date	2026-05-24
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Left head
Device Position	Cheek
Band	U-NII-2C
Signal	IEEE 802.11a
Frequency	5500
SAR 10g (W/Kg)	0.094
SAR 1g (W/Kg)	0.237
ConvF	1.07
Relative permittivity	36.69
Conductivity (S/m)	5.05

Maximum location: X=2.00, Y=-24.00 ; SAR Peak: 0.95 W/kg

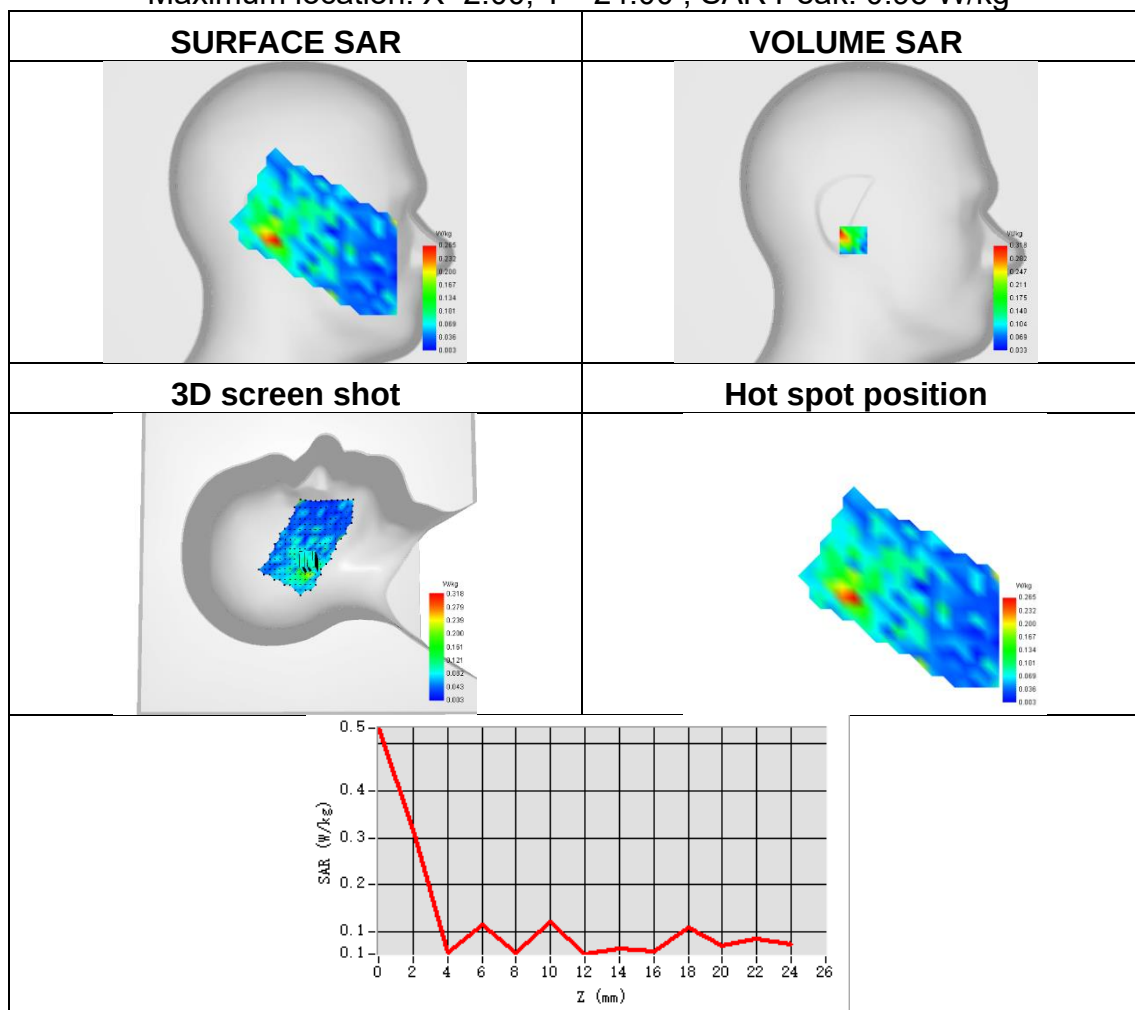




Plot 36:

Test Date	2026-05-24
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	U-NII-2C
Signal	IEEE 802.11a
Frequency	5500
SAR 10g (W/Kg)	0.112
SAR 1g (W/Kg)	0.565
ConvF	1.07
Relative permittivity	36.69
Conductivity (S/m)	5.05

Maximum location: X=8.00, Y=16.00 ; SAR Peak: 13.77 W/kg

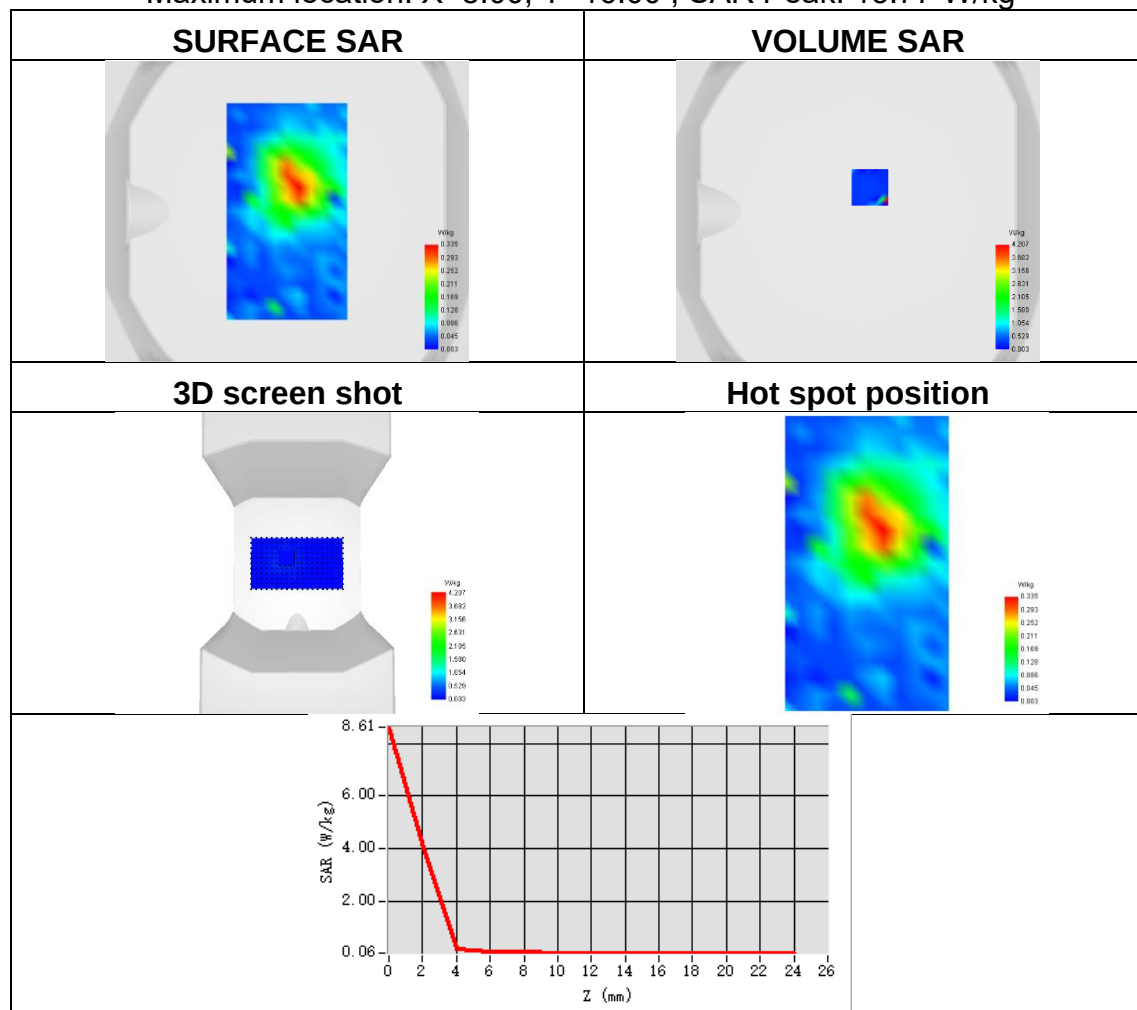




Plot 37:

Test Date	2026-05-24
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Right head
Device Position	Cheek
Band	U-NII-2C
Signal	IEEE 802.11a
Frequency	5580
SAR 10g (W/Kg)	0.249
SAR 1g (W/Kg)	0.685
ConvF	1.07
Relative permittivity	36.69
Conductivity (S/m)	5.05

Maximum location: X=-46.00, Y=1.00 ; SAR Peak: 2.49 W/kg

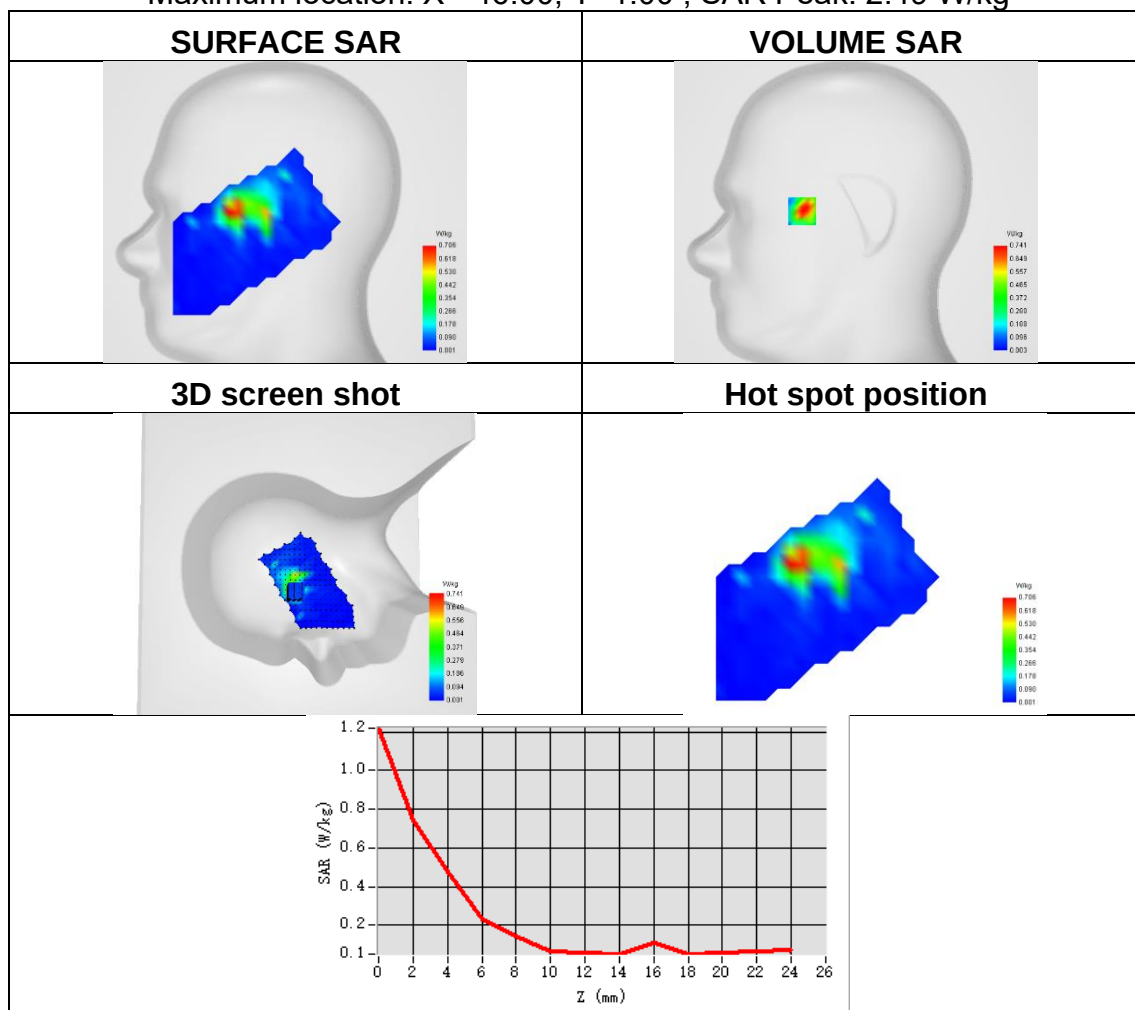




Plot 38:

Test Date	2026-05-24
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Left Side
Band	U-NII-2C
Signal	IEEE 802.11a
Frequency	5580
SAR 10g (W/Kg)	0.137
SAR 1g (W/Kg)	0.276
ConvF	1.07
Relative permittivity	36.69
Conductivity (S/m)	5.05

Maximum location: X=6.00, Y=-16.00 ; SAR Peak: 1.37 W/kg

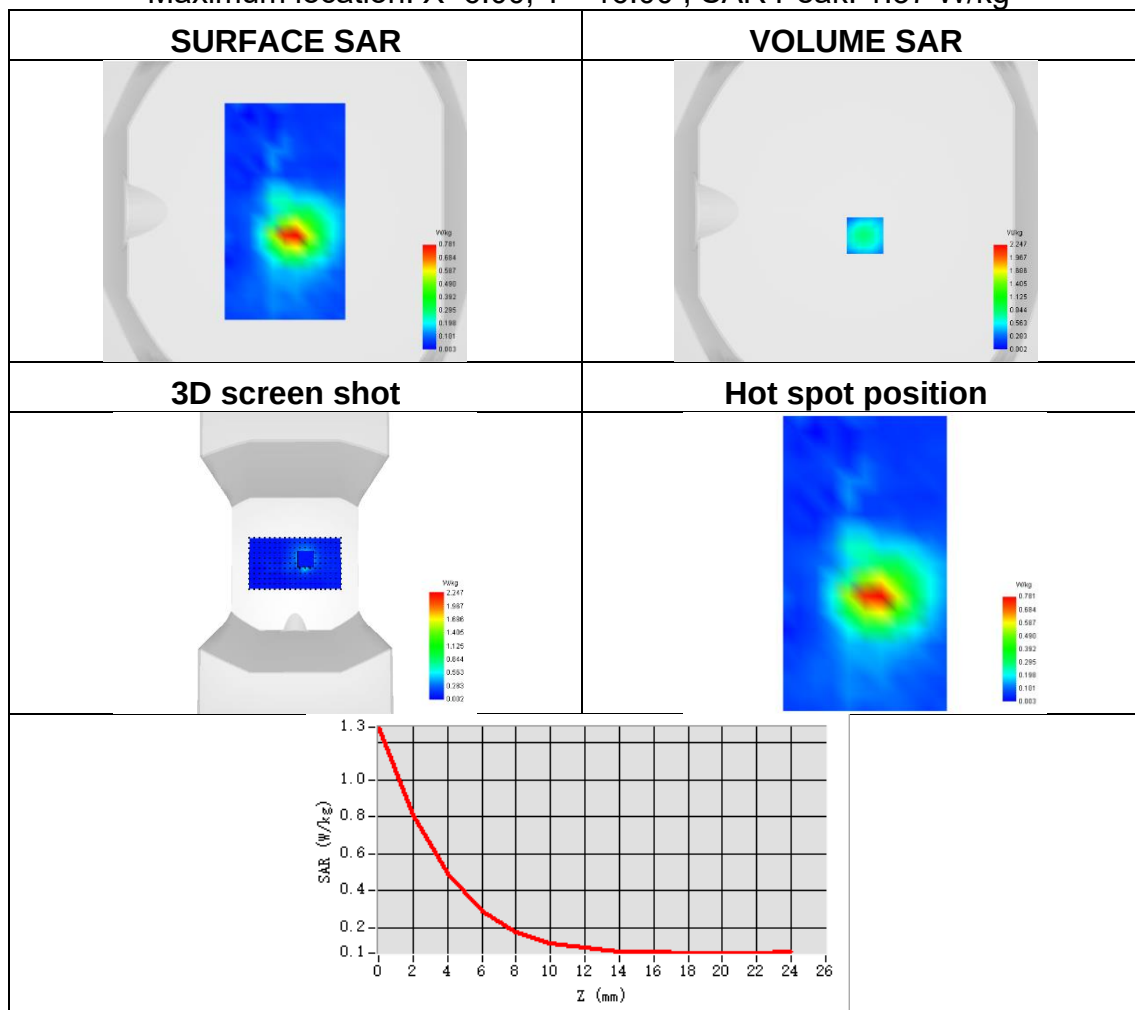




Plot 39:

Test Date	2026-05-24
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Right head
Device Position	Cheek
Band	U-NII-2C
Signal	IEEE 802.11ax
Frequency	5510
SAR 10g (W/Kg)	0.220
SAR 1g (W/Kg)	0.369
ConvF	1.07
Relative permittivity	36.69
Conductivity (S/m)	5.05

Maximum location: X=-32.00, Y=9.00 ; SAR Peak: 0.97 W/kg

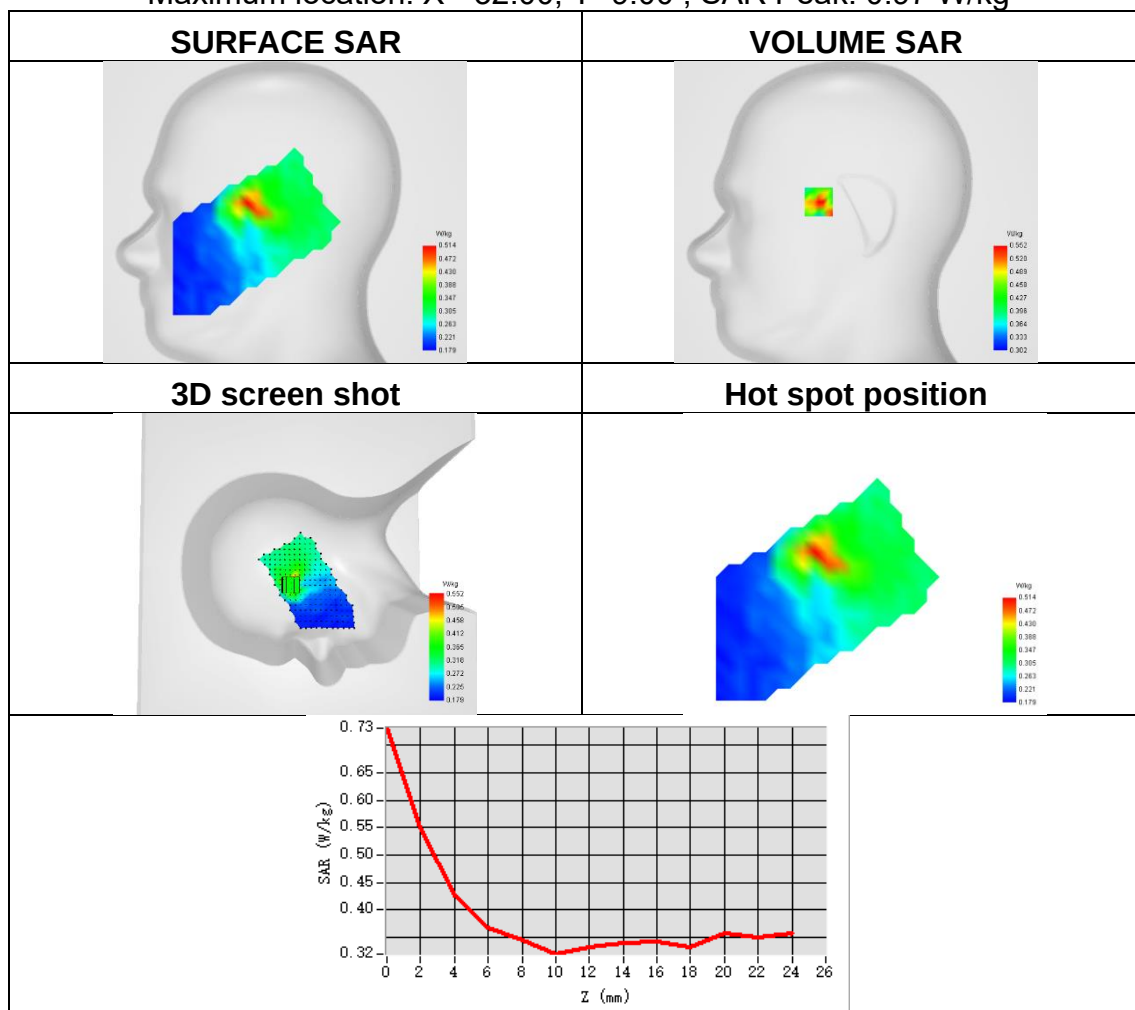




Plot 40:

Test Date	2026-05-24
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Left Side
Band	U-NII-2C
Signal	IEEE 802.11ax
Frequency	5510
SAR 10g (W/Kg)	0.168
SAR 1g (W/Kg)	0.276
ConvF	1.07
Relative permittivity	35.74
Conductivity (S/m)	5.05

Maximum location: X=7.00, Y=-13.00 ; SAR Peak: 0.57 W/kg

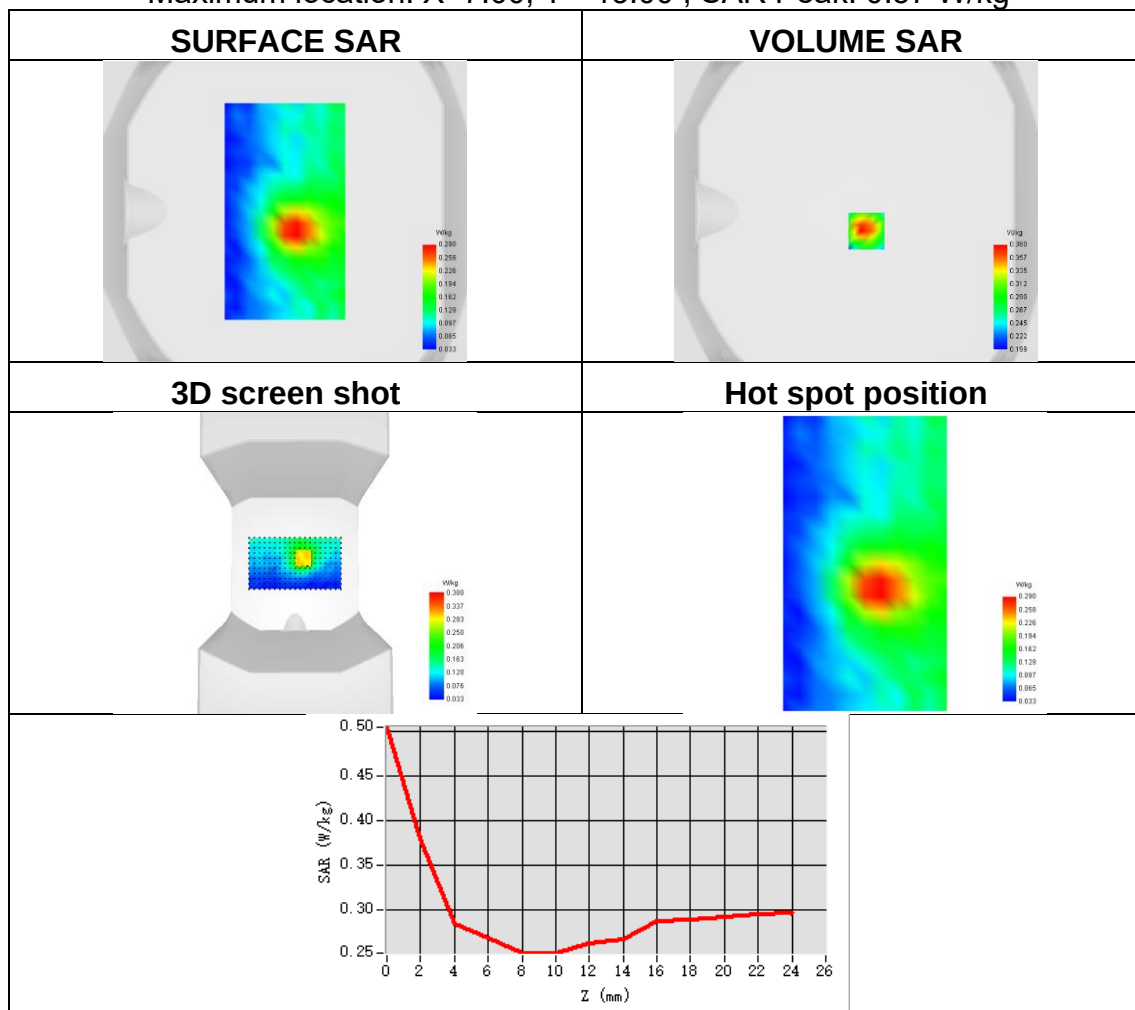




Plot 41:

Test Date	2026-05-24
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Right head
Device Position	Cheek
Band	U-NII-2C
Signal	IEEE 802.11ax
Frequency	5510
SAR 10g (W/Kg)	0.129
SAR 1g (W/Kg)	0.294
ConvF	1.07
Relative permittivity	36.69
Conductivity (S/m)	5.05

Maximum location: X=-32.00, Y=9.00 ; SAR Peak: 1.02 W/kg

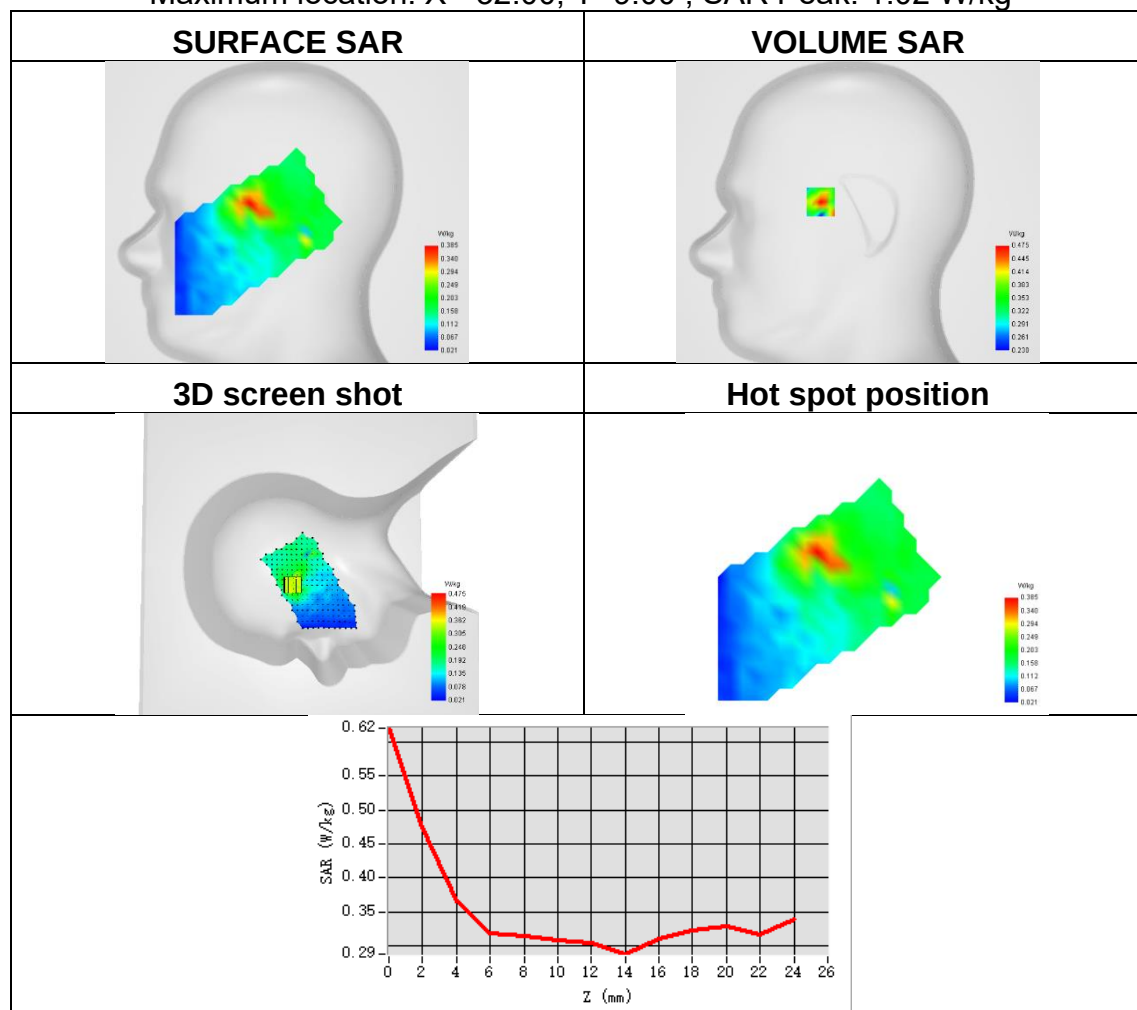




Plot 42:

Test Date	2026-05-24
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	U-NII-2C
Signal	IEEE 802.11ax
Frequency	5510
SAR 10g (W/Kg)	0.239
SAR 1g (W/Kg)	0.398
ConvF	1.07
Relative permittivity	36.69
Conductivity (S/m)	5.05

Maximum location: X=24.00, Y=7.00 ; SAR Peak: 1.10 W/kg

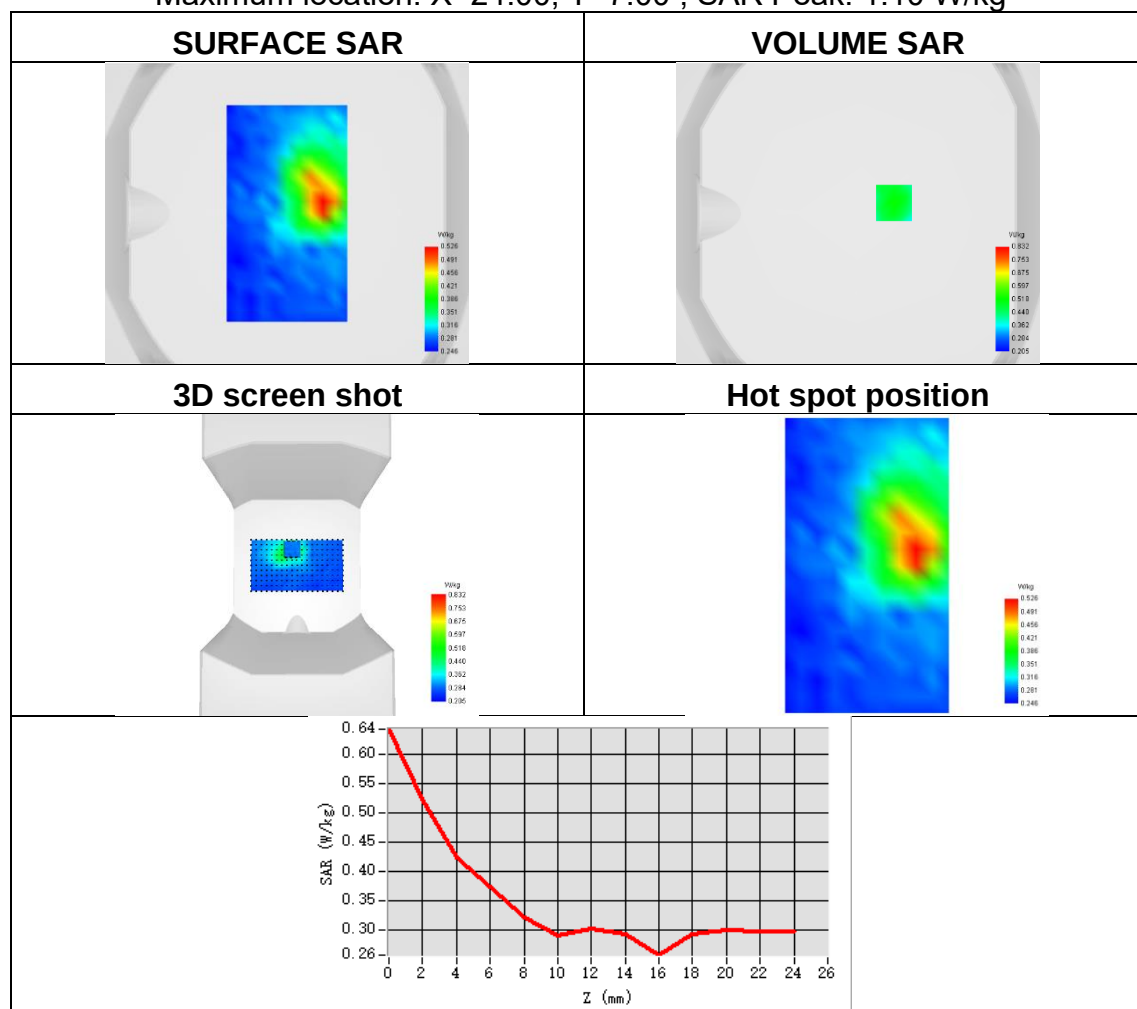




Plot 43:

Test Date	2026-05-25
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Left head
Device Position	Cheek
Band	U-NII-3
Signal	IEEE 802.11a
Frequency	5785
SAR 10g (W/Kg)	0.324
SAR 1g (W/Kg)	0.517
ConvF	1.19
Relative permittivity	35.57
Conductivity (S/m)	5.24

Maximum location: X=8.00, Y=-25.00 ; SAR Peak: 1.40 W/kg

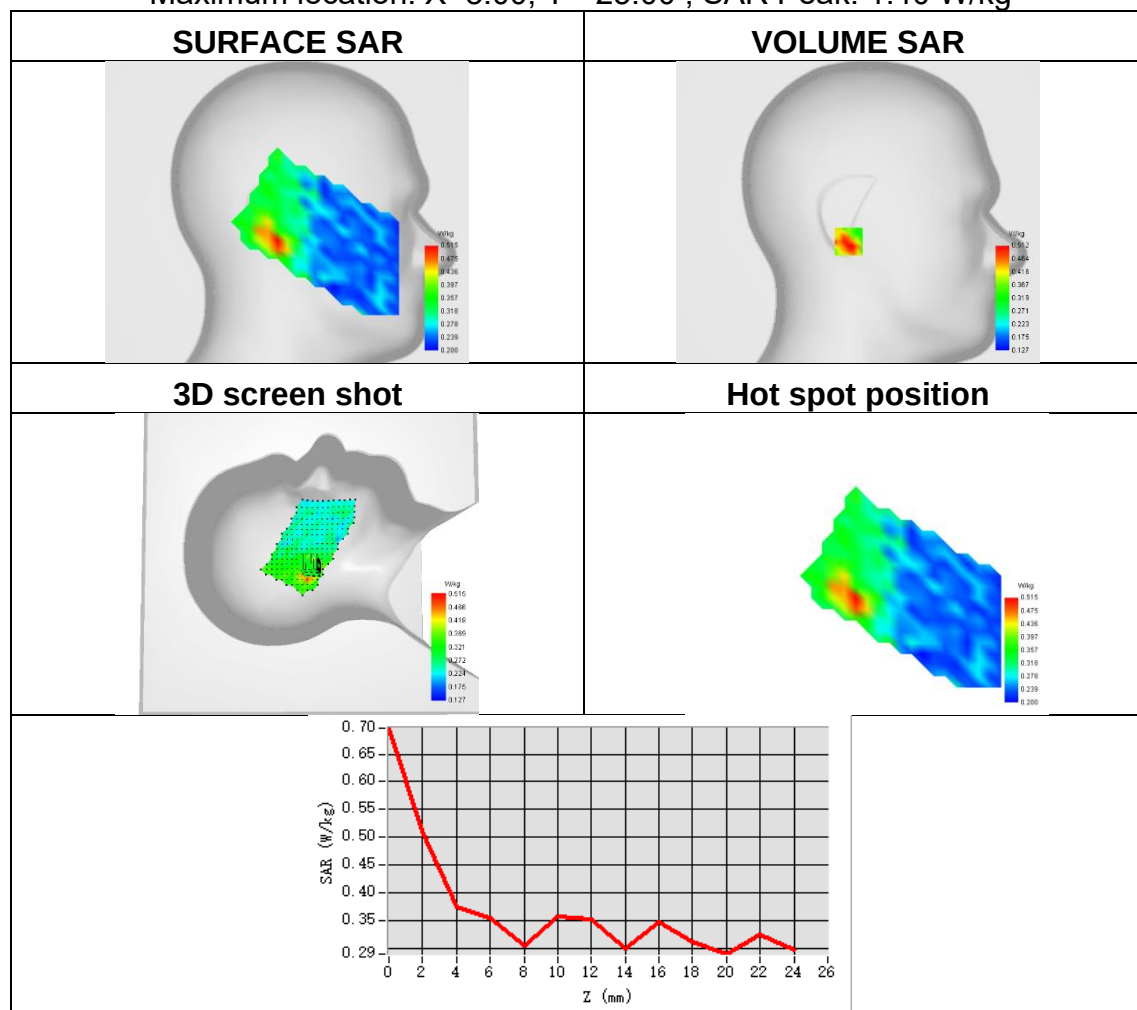




Plot 44:

Test Date	2026-05-25
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	U-NII-3
Signal	IEEE 802.11a
Frequency	5785
SAR 10g (W/Kg)	0.352
SAR 1g (W/Kg)	0.624
ConvF	1.19
Relative permittivity	35.57
Conductivity (S/m)	5.24

Maximum location: X=23.00, Y=6.00 ; SAR Peak: 1.14 W/kg

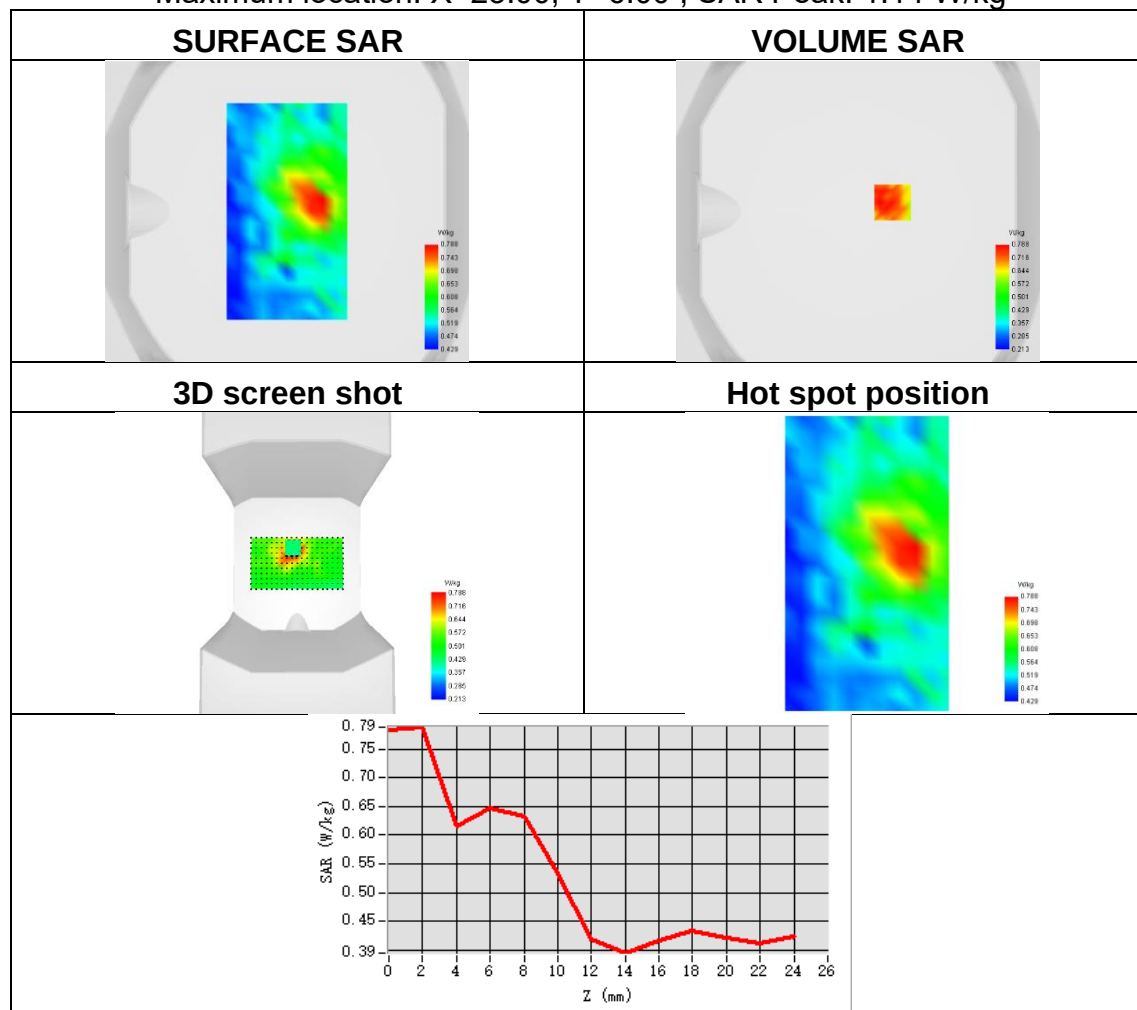




Plot 45:

Test Date	2026-05-25
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Right head
Device Position	Cheek
Band	U-NII-3
Signal	IEEE 802.11a
Frequency	5785
SAR 10g (W/Kg)	0.243
SAR 1g (W/Kg)	0.335
ConvF	1.19
Relative permittivity	35.57
Conductivity (S/m)	5.24

Maximum location: X=-32.00, Y=15.00 ; SAR Peak: 1.89 W/kg

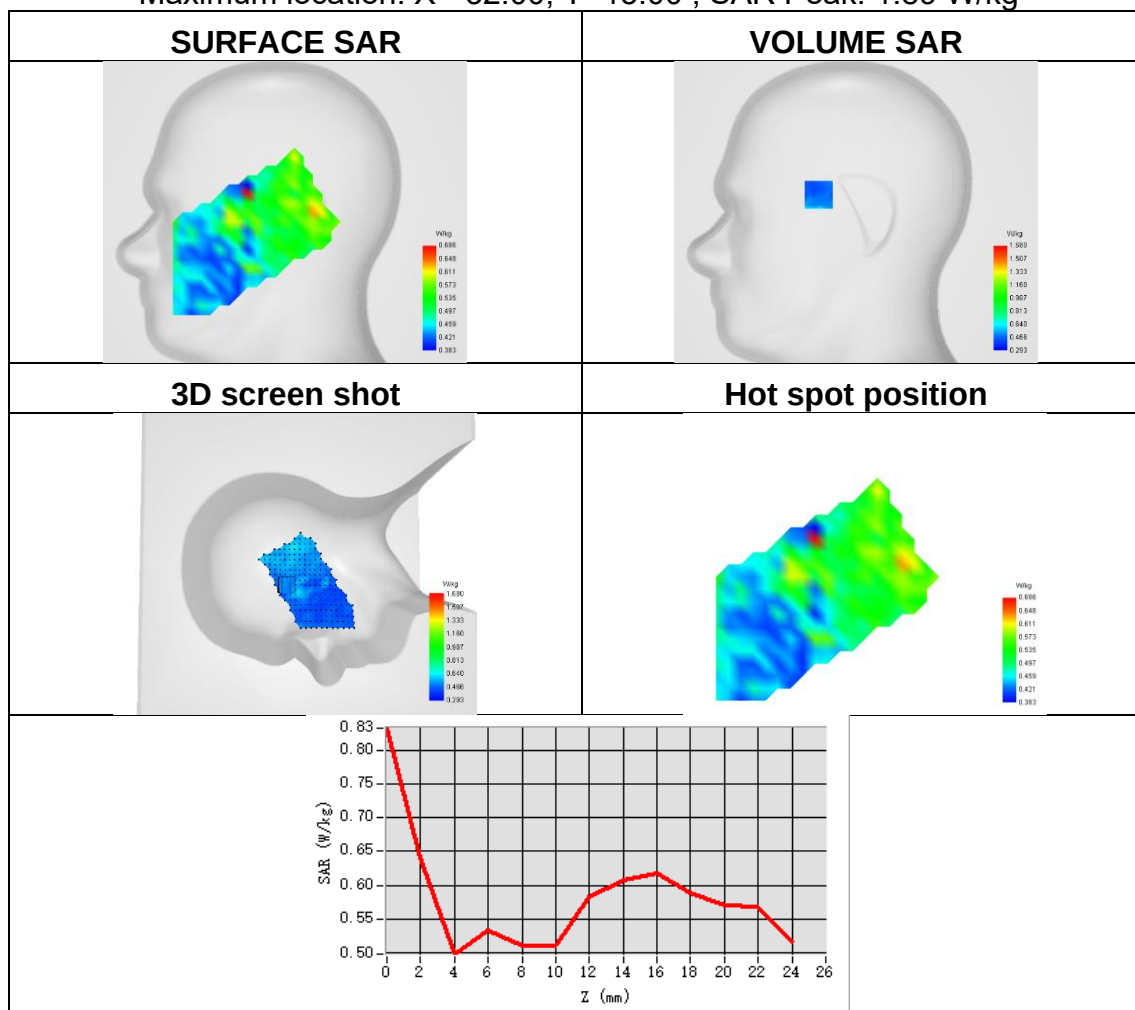




Plot 46:

Test Date	2026-05-25
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Left Side
Band	U-NII-3
Signal	IEEE 802.11a
Frequency	5785
SAR 10g (W/Kg)	0.315
SAR 1g (W/Kg)	0.516
ConvF	1.19
Relative permittivity	35.57
Conductivity (S/m)	5.24

Maximum location: X=8.00, Y=-16.00 ; SAR Peak: 0.99 W/kg

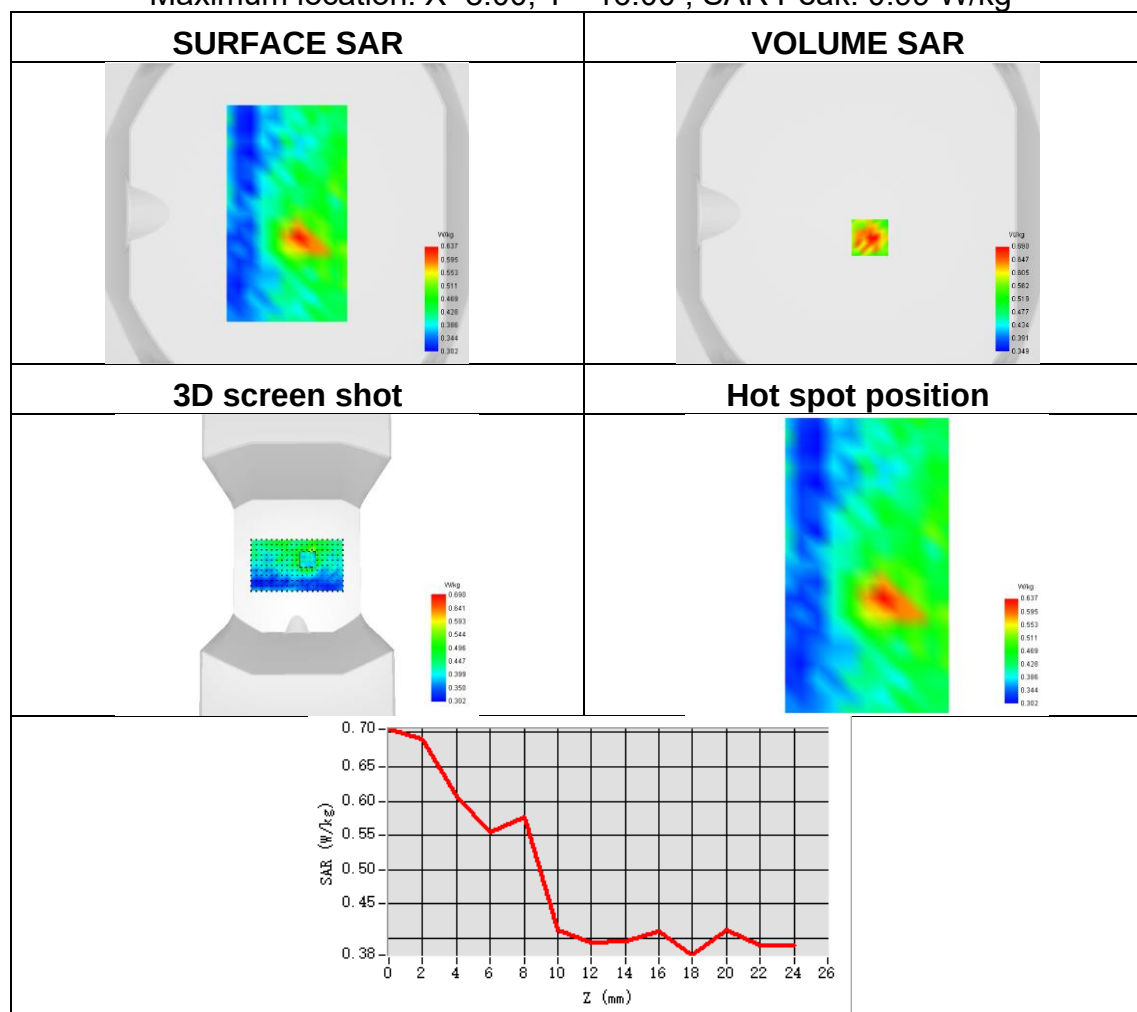




Plot 47:

Test Date	2026-05-25
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Right head
Device Position	Cheek
Band	U-NII-3
Signal	IEEE 802.11ax
Frequency	5755
SAR 10g (W/Kg)	0.173
SAR 1g (W/Kg)	0.323
ConvF	1.19
Relative permittivity	35.57
Conductivity (S/m)	5.24

Maximum location: X=-40.00, Y=0.00 ; SAR Peak: 1.16 W/kg

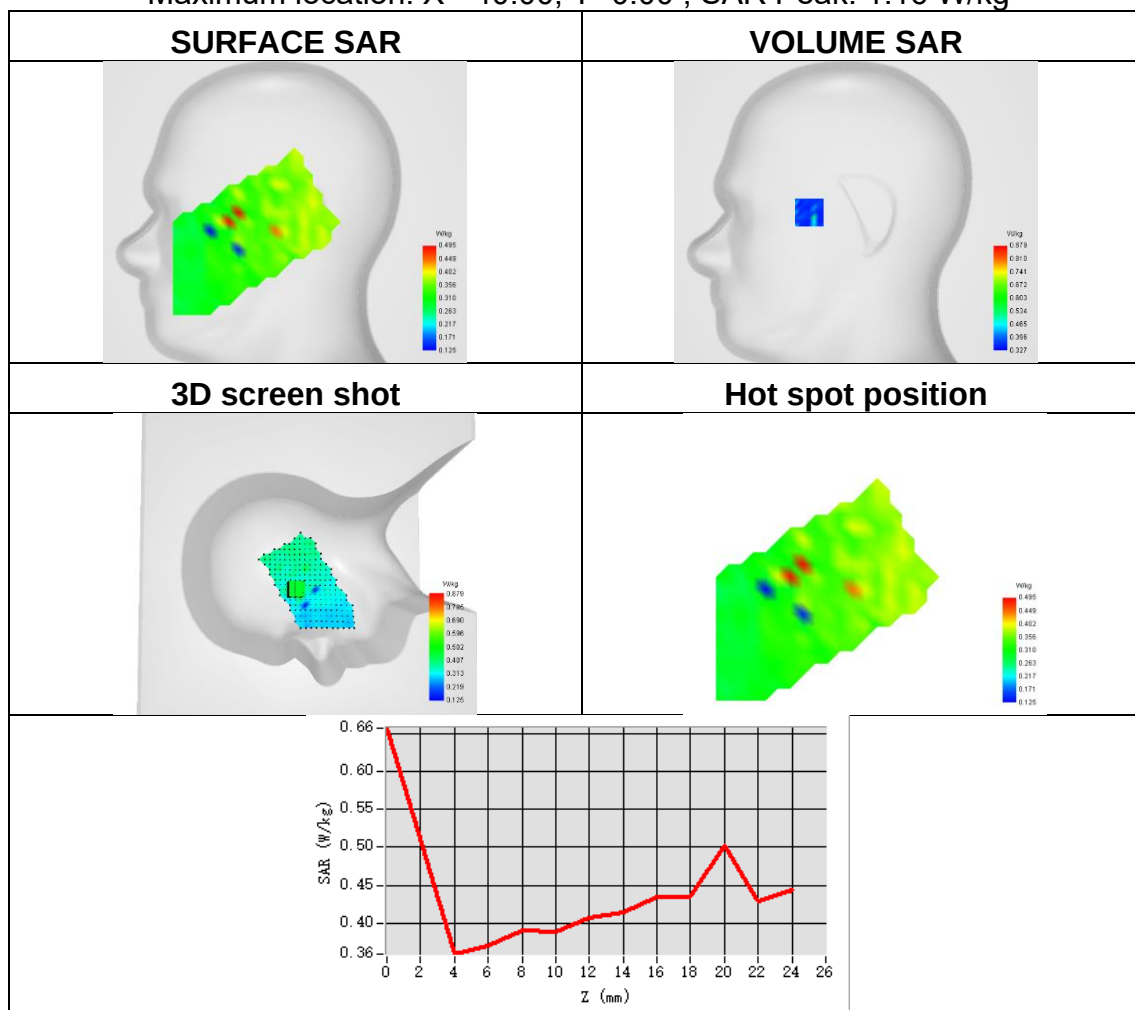




Plot 48:

Test Date	2026-05-25
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Left Side
Band	U-NII-3
Signal	IEEE 802.11ax
Frequency	5755
SAR 10g (W/Kg)	0.232
SAR 1g (W/Kg)	0.387
ConvF	1.19
Relative permittivity	35.57
Conductivity (S/m)	5.24

Maximum location: X=-20.00, Y=47.00 ; SAR Peak: 0.57 W/kg

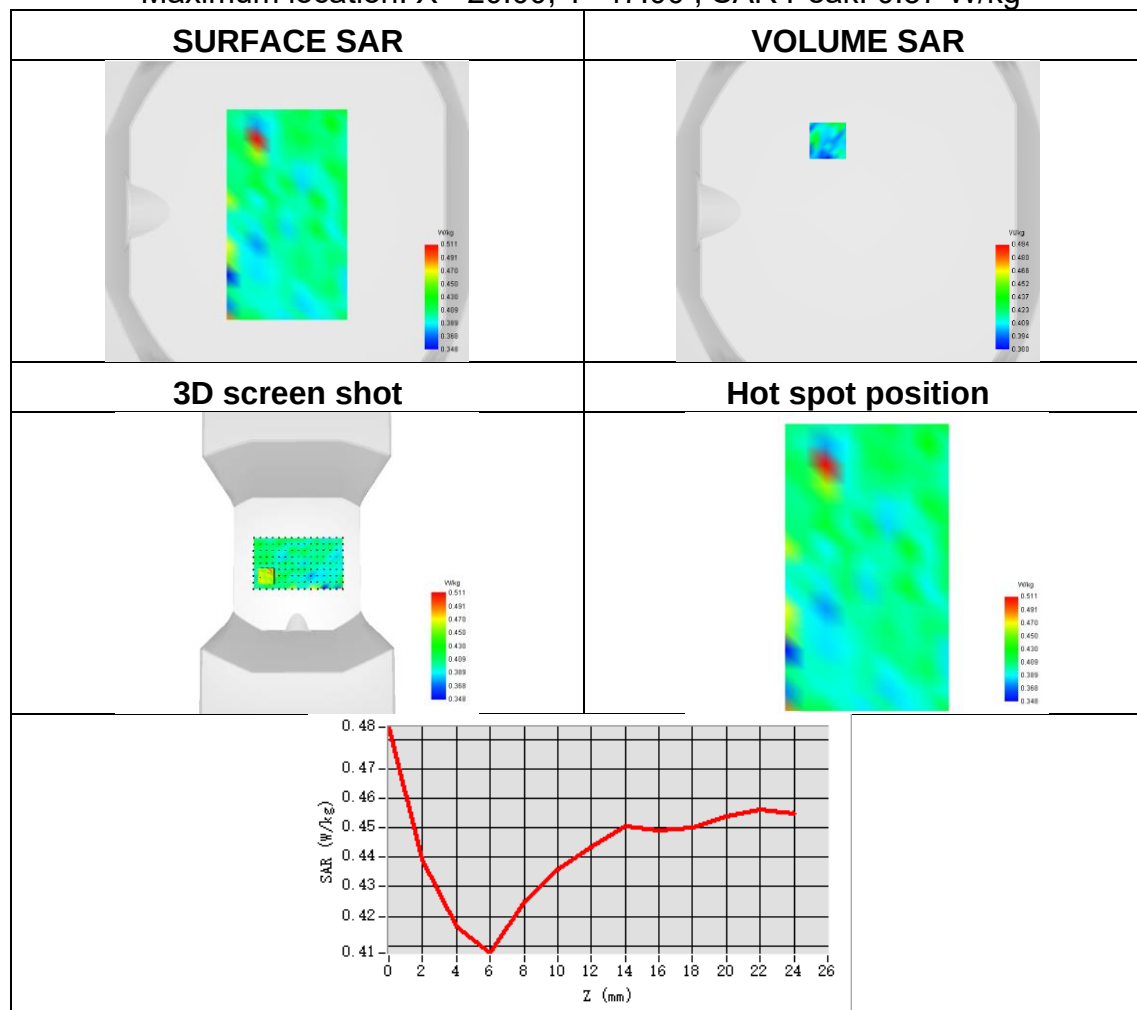




Plot 49:

Test Date	2026-05-25
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Right head
Device Position	Cheek
Band	U-NII-3
Signal	IEEE 802.11ax
Frequency	5755
SAR 10g (W/Kg)	0.180
SAR 1g (W/Kg)	0.268
ConvF	1.19
Relative permittivity	35.57
Conductivity (S/m)	5.24

Maximum location: X=15.00, Y=-15.00 ; SAR Peak: 0.90 W/kg

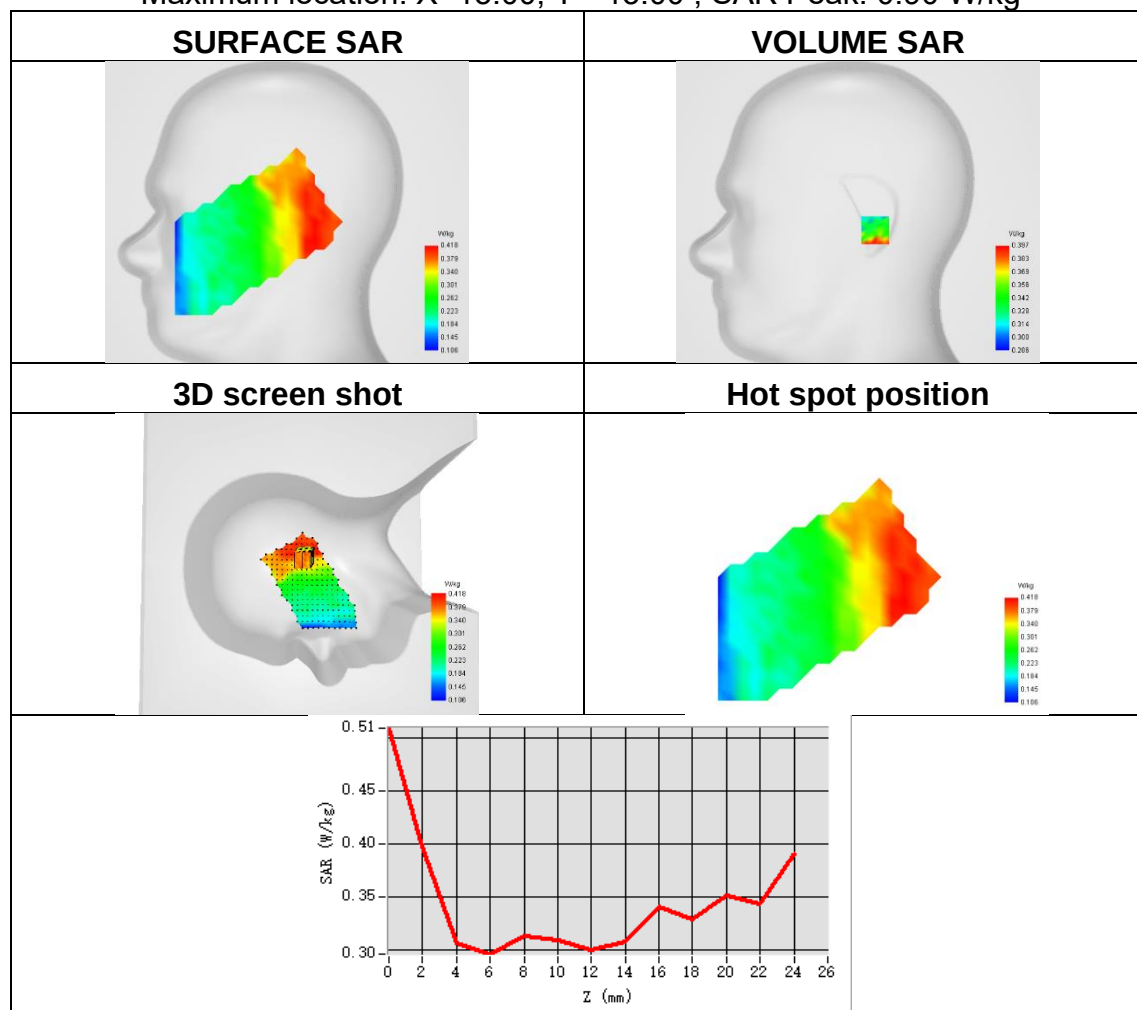




Plot 50:

Test Date	2026-05-25
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	U-NII-3
Signal	IEEE 802.11ax
Frequency	5755
SAR 10g (W/Kg)	0.207
SAR 1g (W/Kg)	0.310
ConvF	1.19
Relative permittivity	35.57
Conductivity (S/m)	5.24

Maximum location: X=8.00, Y=19.00 ; SAR Peak: 0.66 W/kg

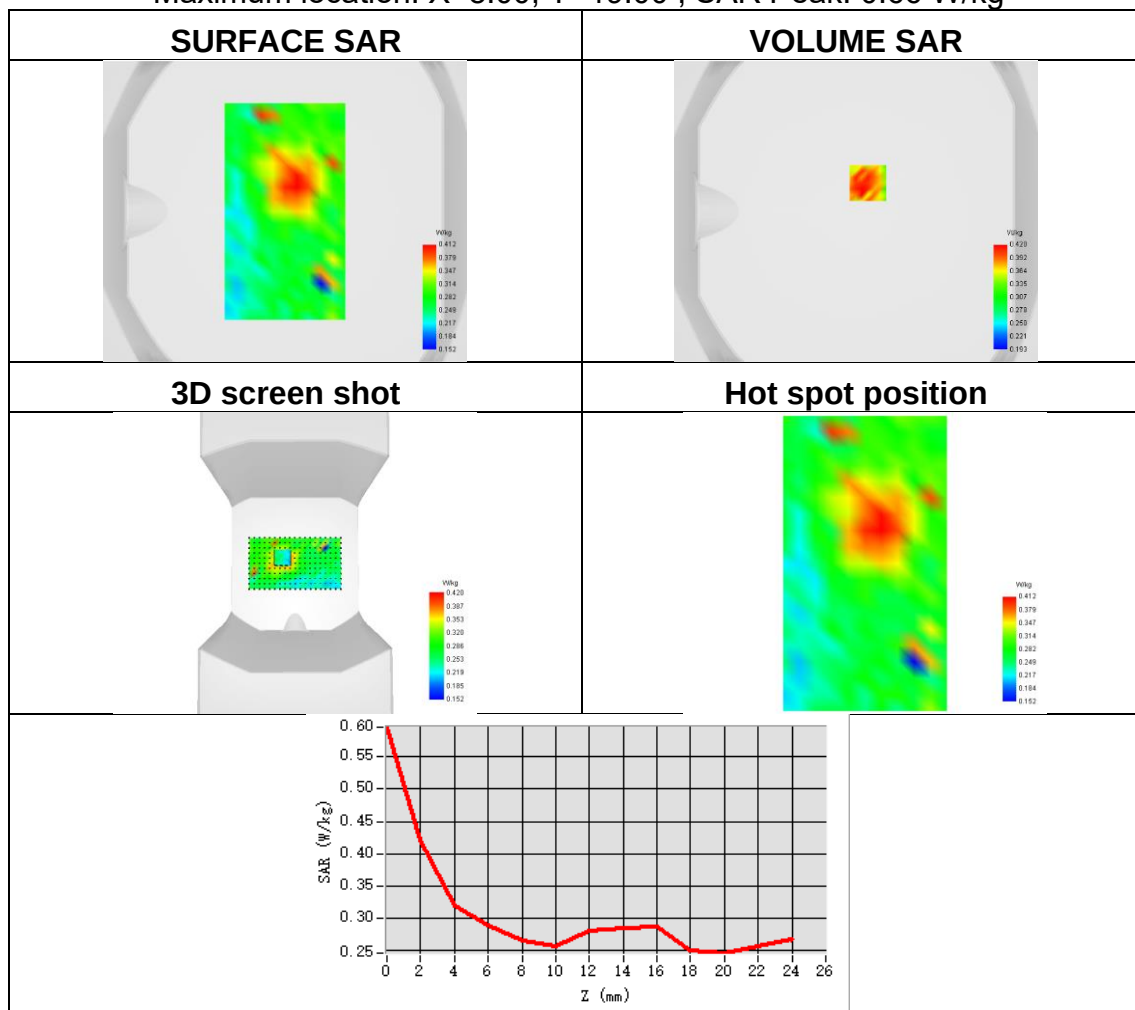




Plot 51:

Test Date	2026-05-17
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Cheek
Band	Bluetooth
Signal	Bluetooth
Frequency	2440
SAR 10g (W/Kg)	0.041
SAR 1g (W/Kg)	0.116
ConvF	1.03
Relative permittivity	40.08
Conductivity (S/m)	1.84

Maximum location: X=-1.00, Y=-10.00 ; SAR Peak: 0.78 W/kg

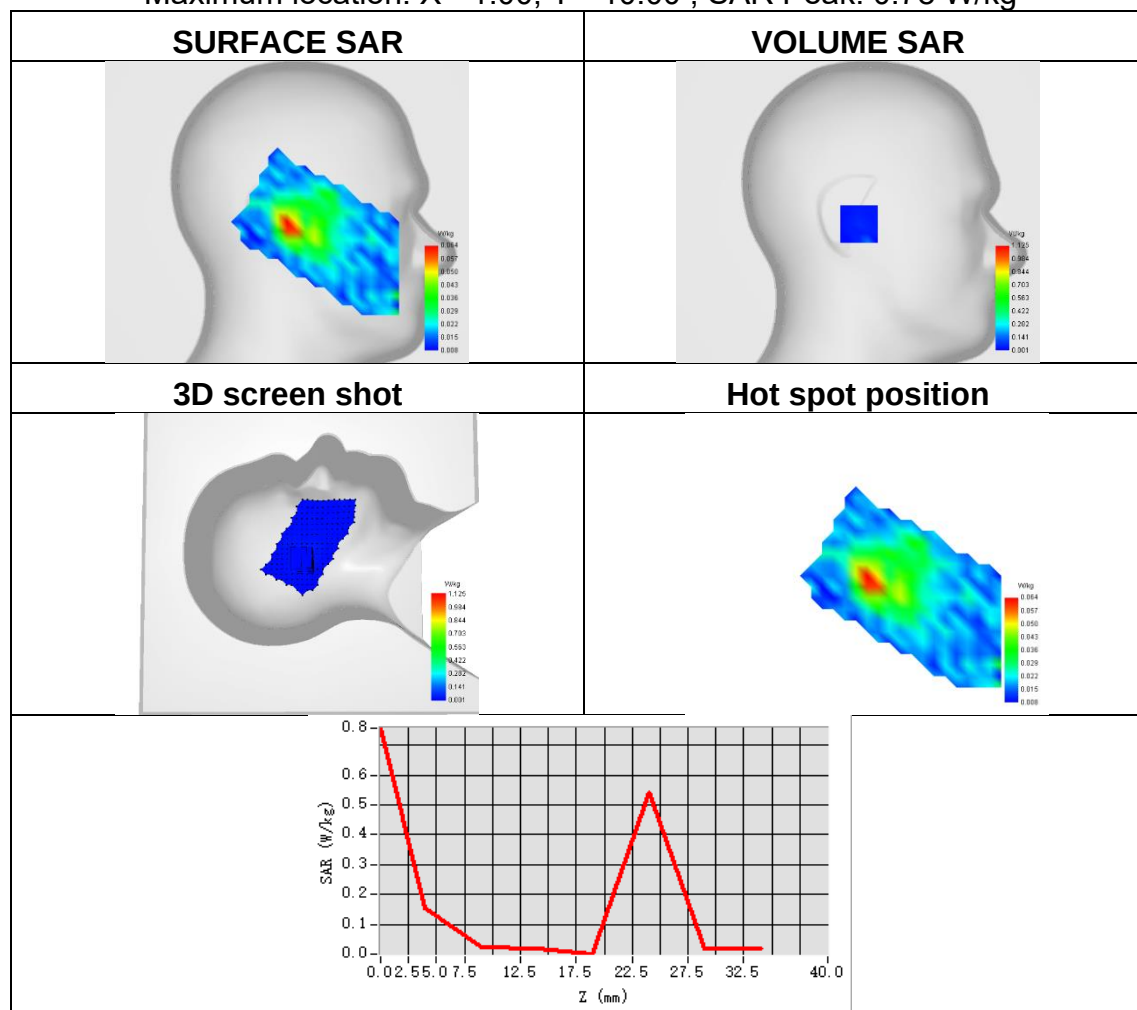




Plot 52:

Test Date	2026-05-17
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	Bluetooth
Signal	Bluetooth
Frequency	2440
SAR 10g (W/Kg)	0.019
SAR 1g (W/Kg)	0.039
ConvF	1.03
Relative permittivity	40.08
Conductivity (S/m)	1.84

Maximum location: X=0.00, Y=24.00 ; SAR Peak: 0.07 W/kg

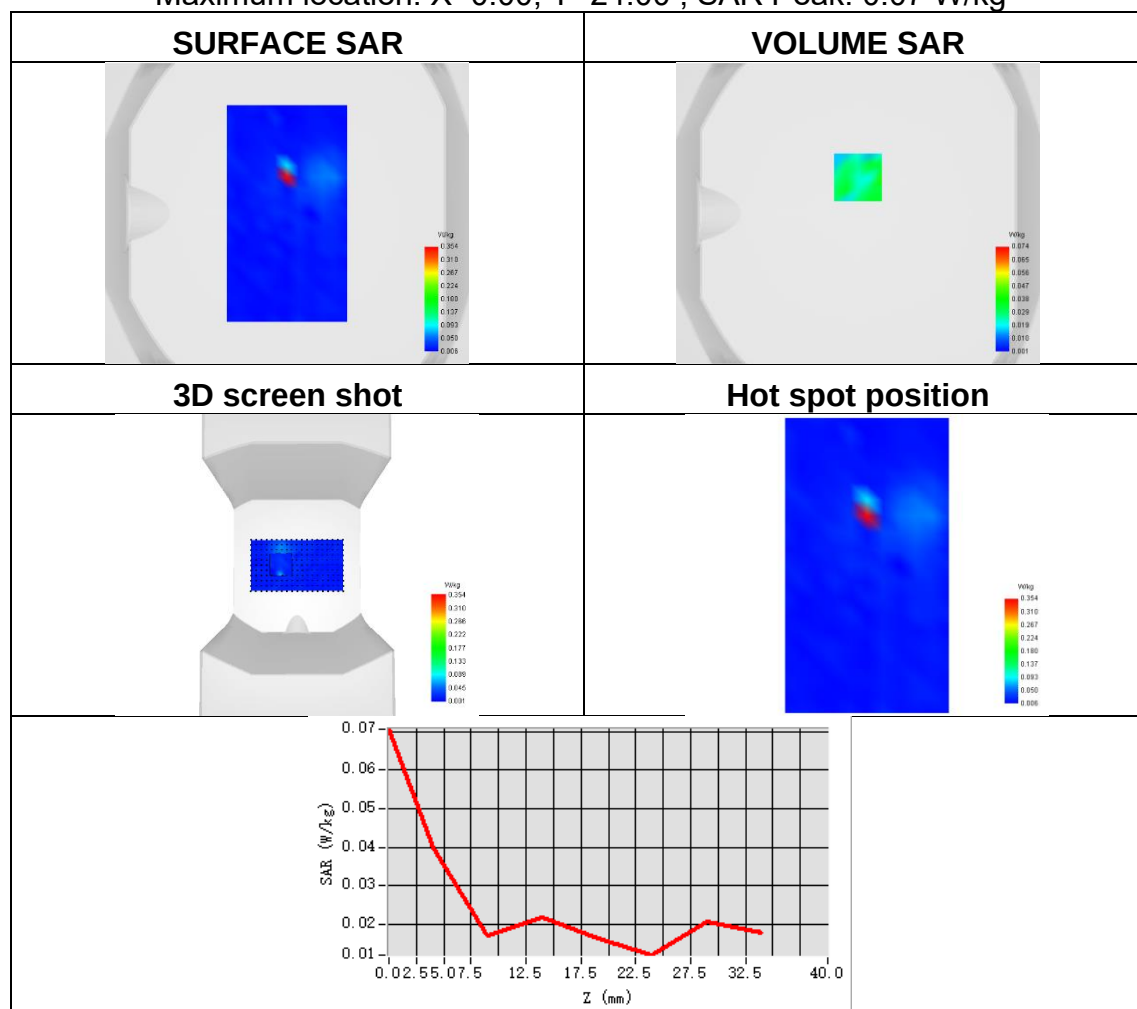




Plot 53:

Test Date	2026-05-07
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Right head
Device Position	Cheek
Band	LTE band 2
Signal	LTE FDD
Frequency	1860
SAR 10g (W/Kg)	0.134
SAR 1g (W/Kg)	0.209
ConvF	0.90
Relative permittivity	40.74
Conductivity (S/m)	1.36

Maximum location: X=-57.00, Y=-8.00 ; SAR Peak: 0.29 W/kg

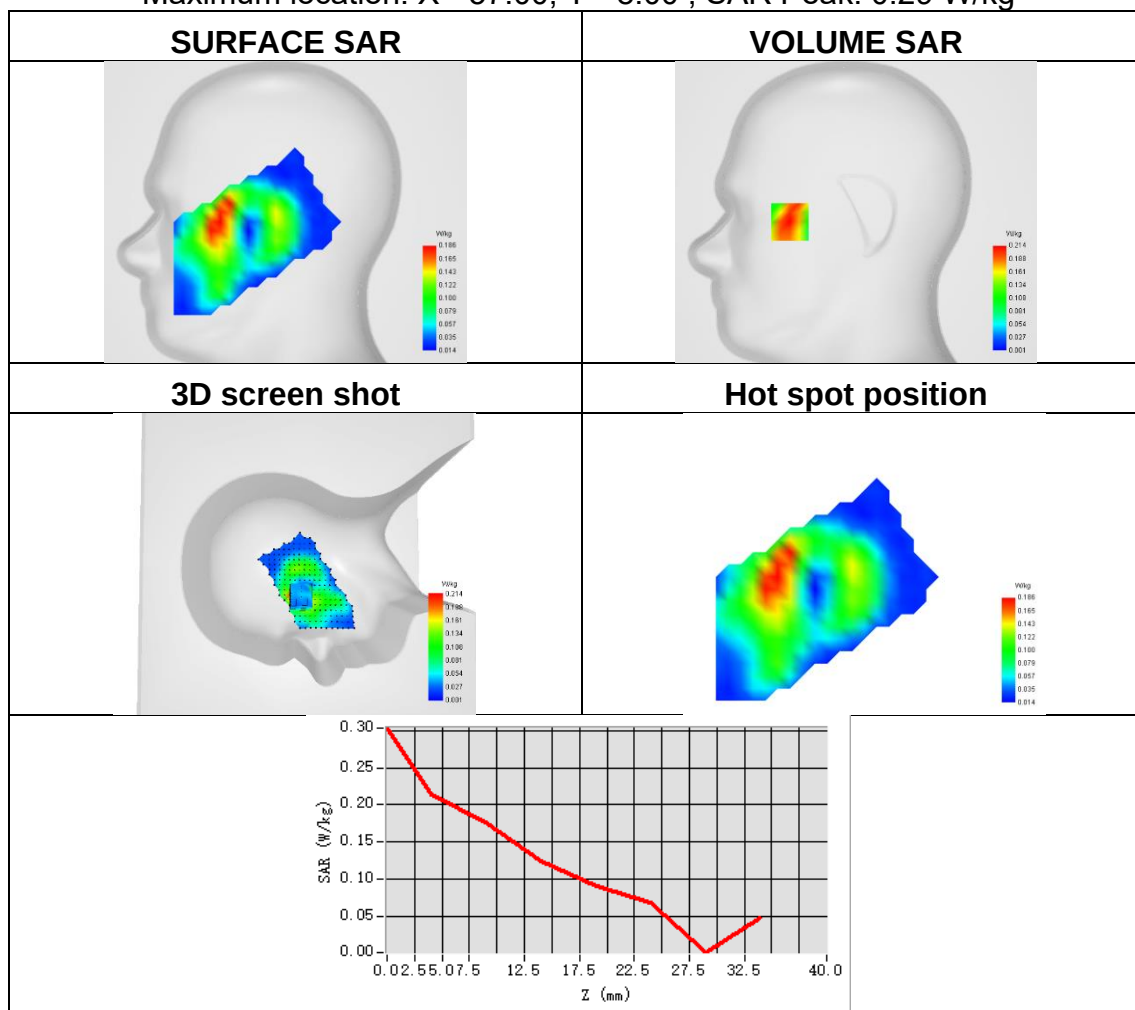




Plot 54:

Test Date	2026-05-07
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Left Side
Band	LTE band 2
Signal	LTE FDD
Frequency	1860
SAR 10g (W/Kg)	0.219
SAR 1g (W/Kg)	0.451
ConvF	0.90
Relative permittivity	40.74
Conductivity (S/m)	1.36

Maximum location: X=-9.00, Y=37.00 ; SAR Peak: 0.87 W/kg

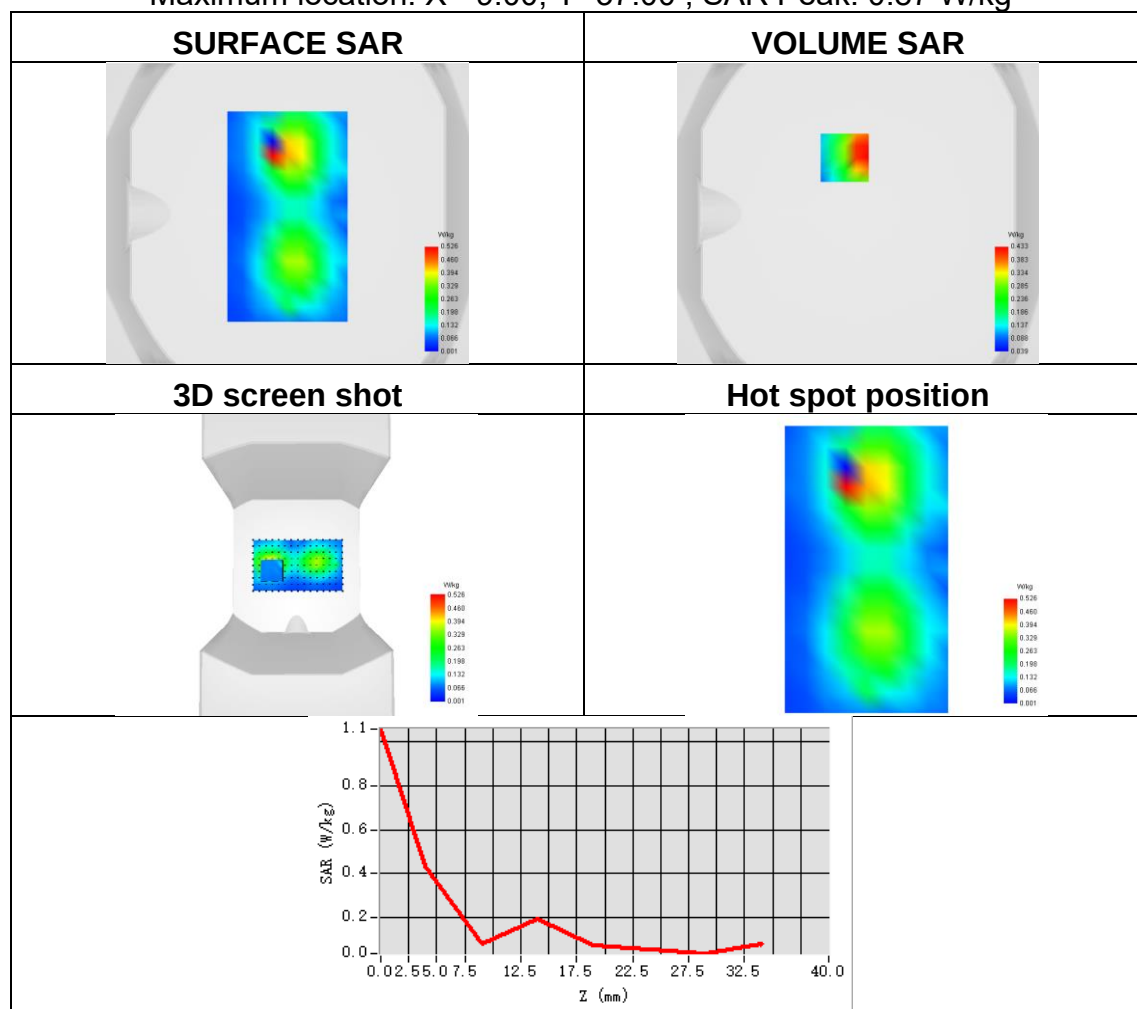




Plot 55:

Test Date	2026-05-11
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Right head
Device Position	Cheek
Band	LTE band 4
Signal	LTE FDD
Frequency	1732.5
SAR 10g (W/Kg)	0.187
SAR 1g (W/Kg)	0.281
ConvF	0.69
Relative permittivity	40.91
Conductivity (S/m)	1.38

Maximum location: X=-62.00, Y=-16.00 ; SAR Peak: 0.39 W/kg

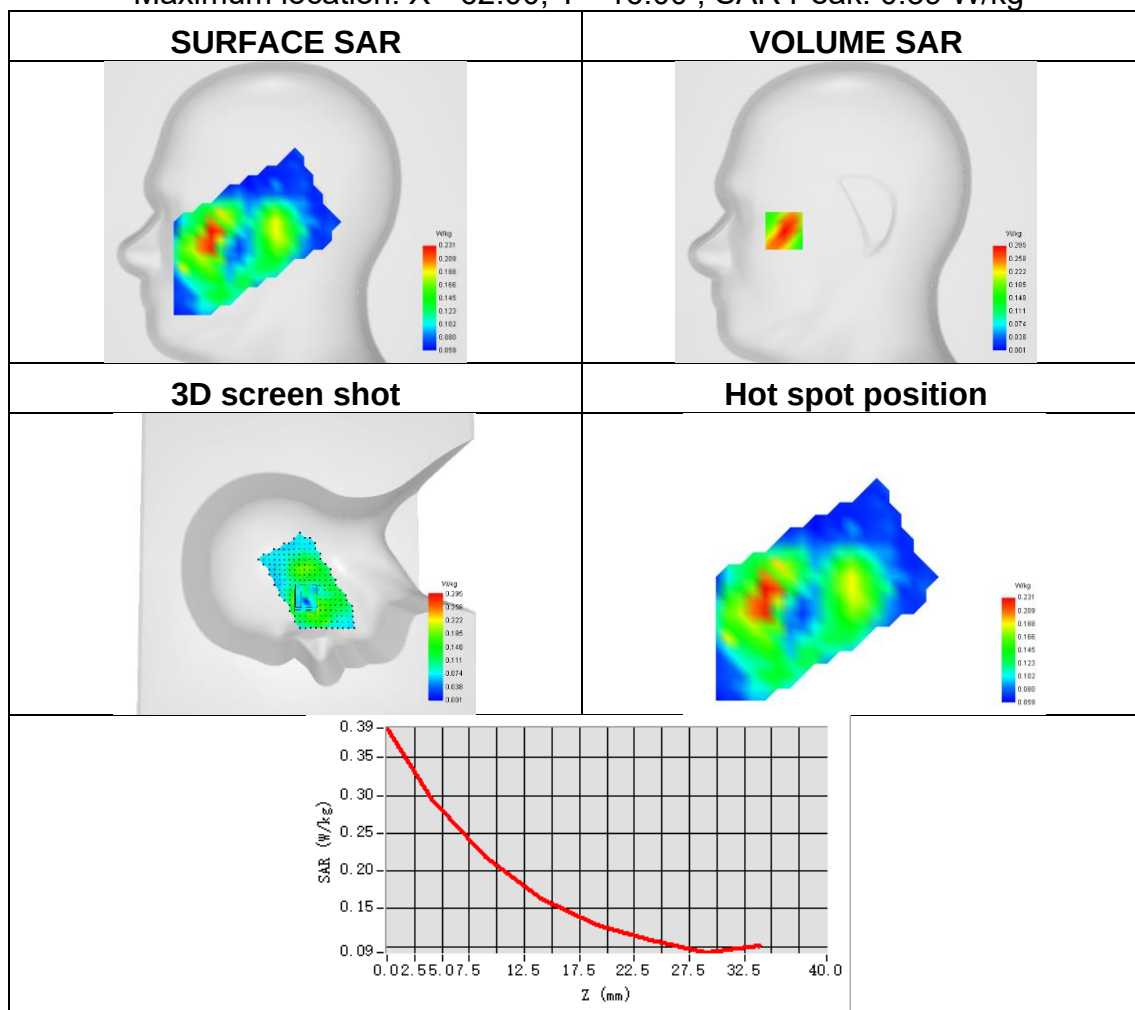




Plot 56:

Test Date	2026-05-11
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Left Side
Band	LTE band 4
Signal	LTE FDD
Frequency	1732.5
SAR 10g (W/Kg)	0.304
SAR 1g (W/Kg)	0.523
ConvF	0.69
Relative permittivity	40.91
Conductivity (S/m)	1.38

Maximum location: X=3.00, Y=49.00 ; SAR Peak: 0.89 W/kg

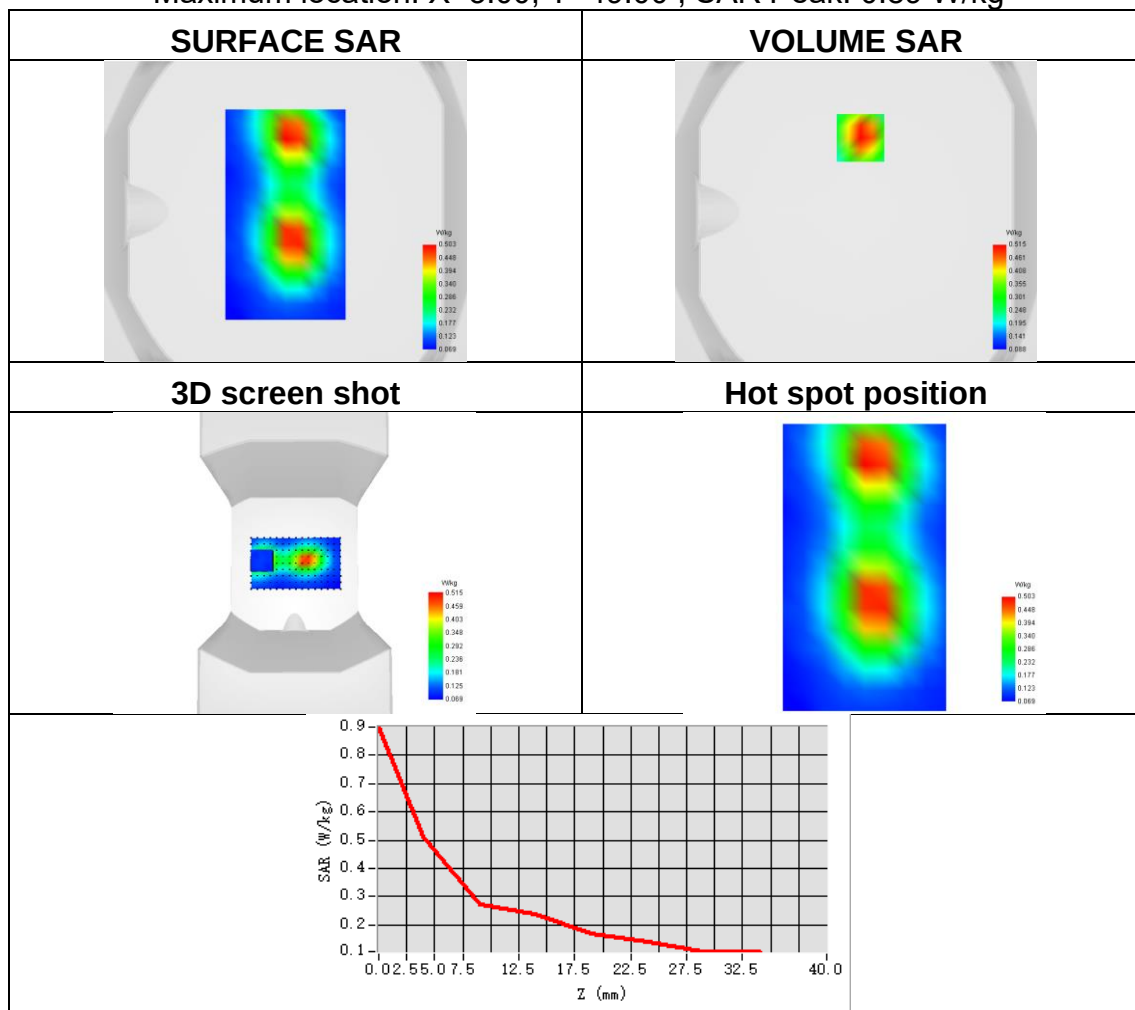




Plot 57:

Test Date	2026-05-08
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Right head
Device Position	Cheek
Band	LTE band 5
Signal	LTE FDD
Frequency	844
SAR 10g (W/Kg)	0.309
SAR 1g (W/Kg)	0.399
ConvF	0.69
Relative permittivity	41.87
Conductivity (S/m)	0.91

Maximum location: X=-41.00, Y=-54.00 ; SAR Peak: 0.50 W/kg

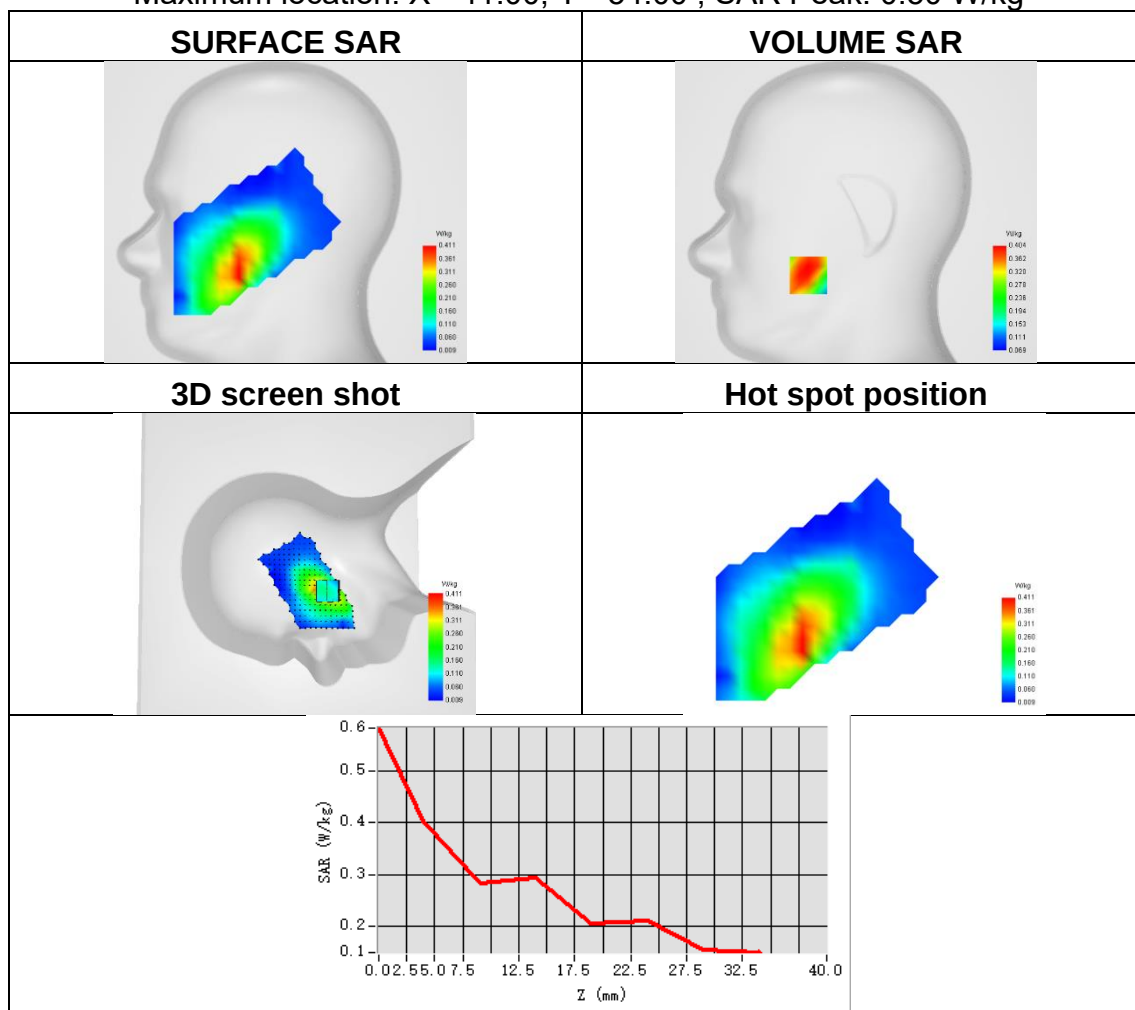




Plot 58:

Test Date	2026-05-08
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE band 5
Signal	LTE FDD
Frequency	844
SAR 10g (W/Kg)	0.606
SAR 1g (W/Kg)	0.859
ConvF	0.69
Relative permittivity	41.87
Conductivity (S/m)	0.91

Maximum location: X=-6.00, Y=-8.00 ; SAR Peak: 1.49 W/kg

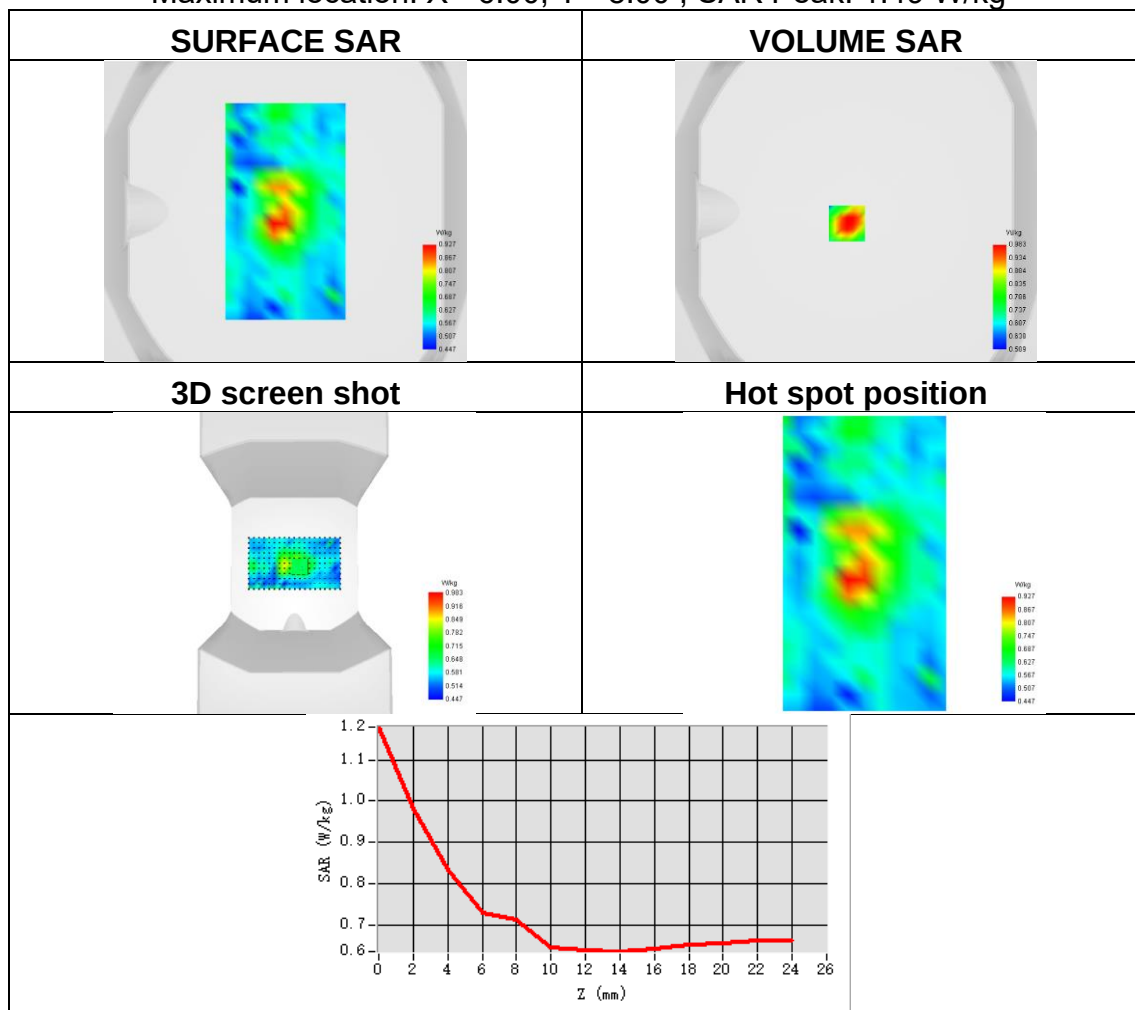




Plot 59:

Test Date	2026-05-14
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Right head
Device Position	Cheek
Band	LTE band 7
Signal	LTE FDD
Frequency	2510
SAR 10g (W/Kg)	0.111
SAR 1g (W/Kg)	0.357
ConvF	0.98
Relative permittivity	39.04
Conductivity (S/m)	1.90

Maximum location: X=24.00, Y=-8.00 ; SAR Peak: 1.24 W/kg

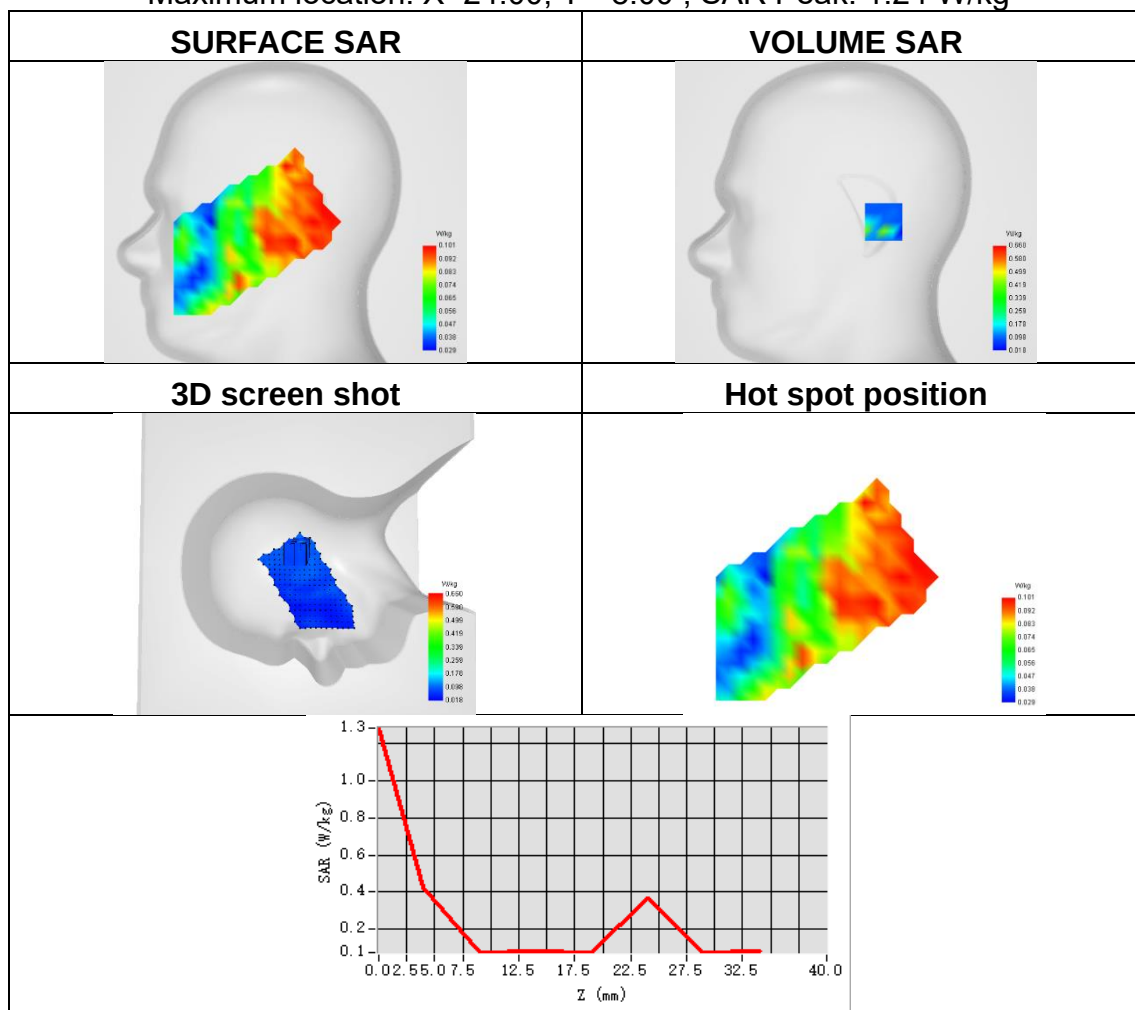




Plot 60:

Test Date	2026-05-14
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Left Side
Band	LTE band 7
Signal	LTE FDD
Frequency	2510
SAR 10g (W/Kg)	0.116
SAR 1g (W/Kg)	0.179
ConvF	0.98
Relative permittivity	40.21
Conductivity (S/m)	2.01

Maximum location: X=19.00, Y=42.00 ; SAR Peak: 0.31 W/kg

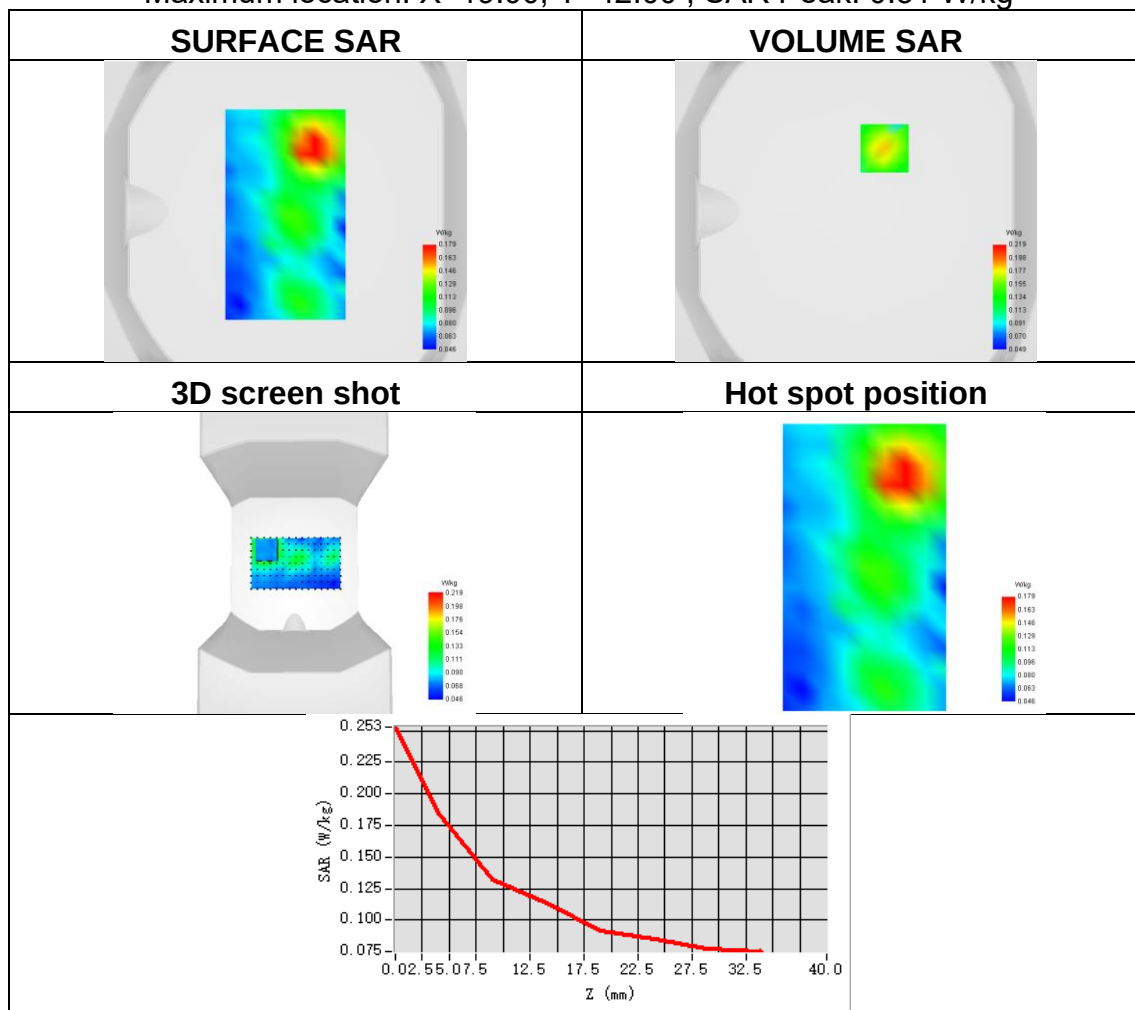




Plot 61:

Test Date	2026-05-10
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Right head
Device Position	Cheek
Band	LTE band 12
Signal	LTE FDD
Frequency	711
SAR 10g (W/Kg)	0.224
SAR 1g (W/Kg)	0.341
ConvF	0.71
Relative permittivity	41.66
Conductivity (S/m)	0.90

Maximum location: X=-41.00, Y=-50.00 ; SAR Peak: 0.45 W/kg

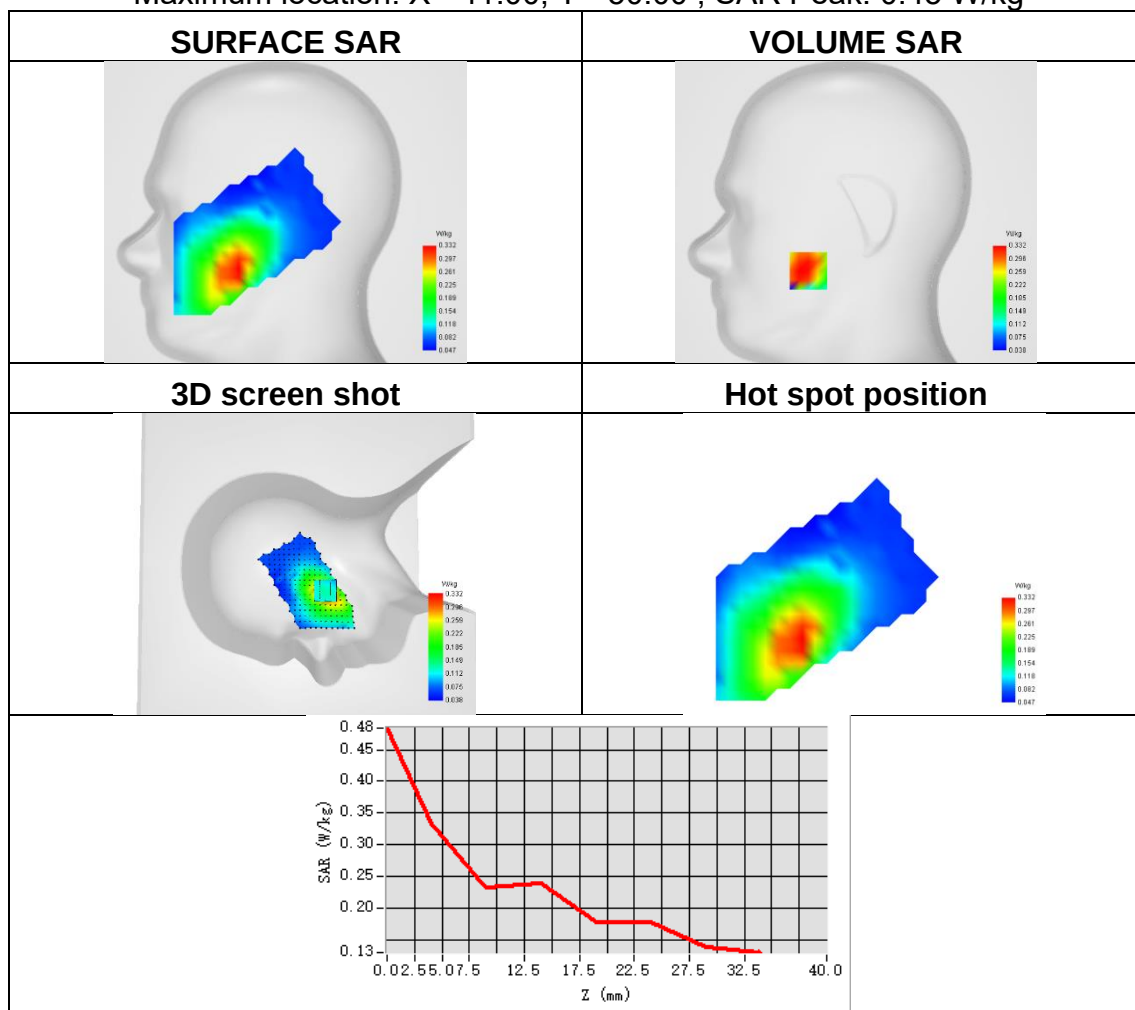




Plot 62:

Test Date	2026-05-10
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE band 12
Signal	LTE FDD
Frequency	711
SAR 10g (W/Kg)	0.297
SAR 1g (W/Kg)	0.522
ConvF	0.71
Relative permittivity	41.66
Conductivity (S/m)	0.90

Maximum location: X=1.00, Y=27.00 ; SAR Peak: 0.83 W/kg

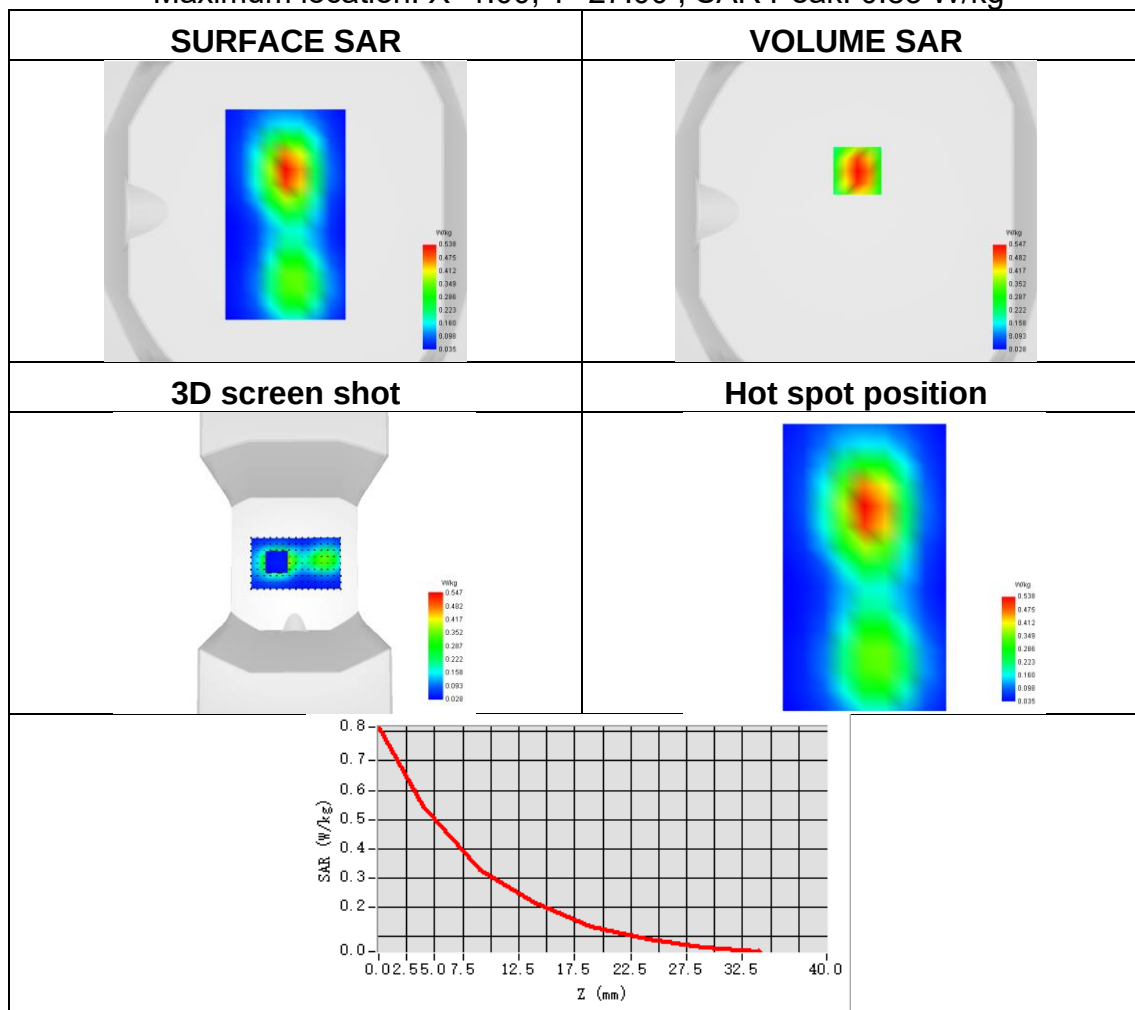




Plot 63:

Test Date	2026-05-10
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Right head
Device Position	Cheek
Band	LTE band 13
Signal	LTE FDD
Frequency	782
SAR 10g (W/Kg)	0.376
SAR 1g (W/Kg)	0.500
ConvF	0.71
Relative permittivity	41.66
Conductivity (S/m)	0.90

Maximum location: X=-41.00, Y=-50.00 ; SAR Peak: 0.70 W/kg

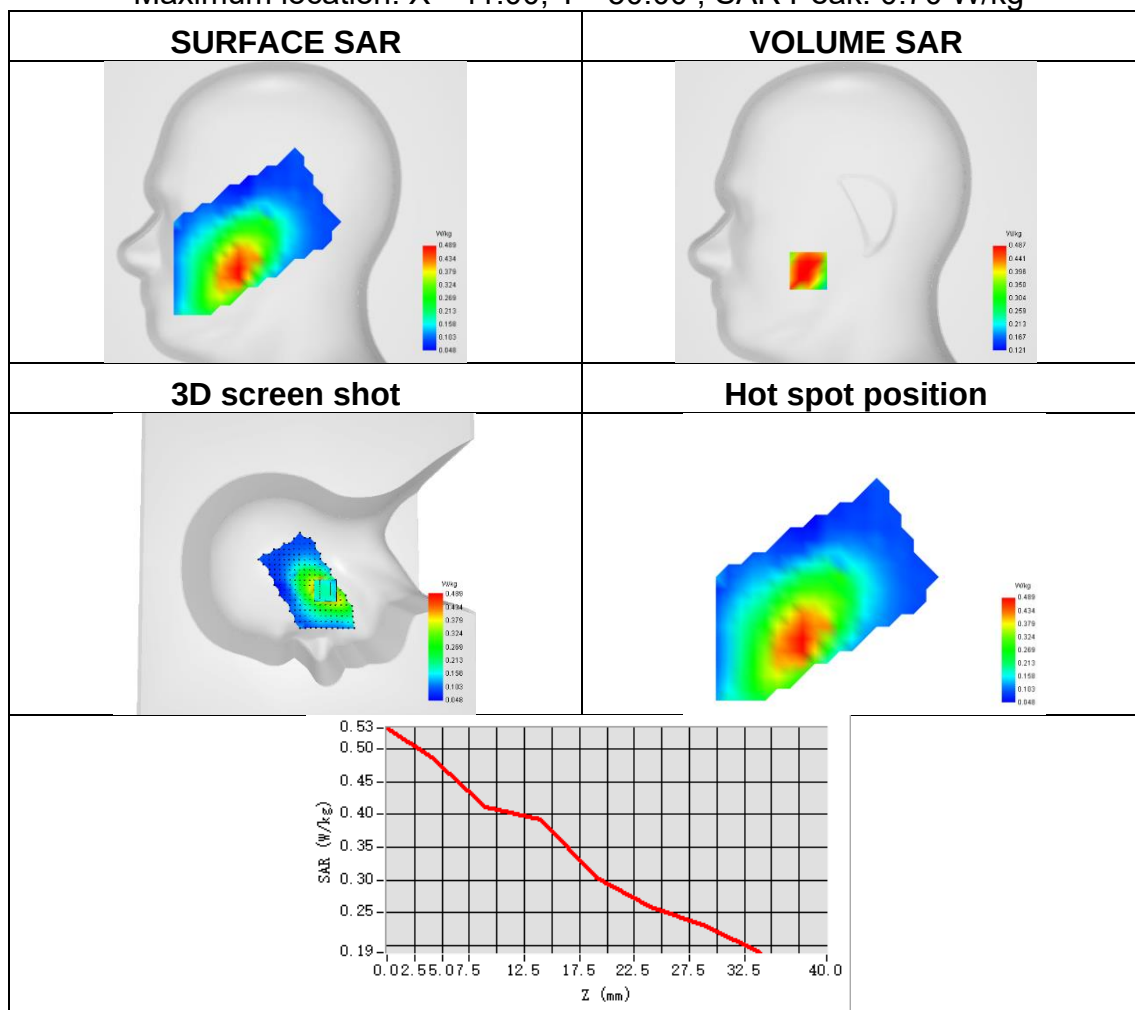




Plot 64:

Test Date	2026-05-10
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE band 13
Signal	LTE FDD
Frequency	782
SAR 10g (W/Kg)	0.455
SAR 1g (W/Kg)	0.679
ConvF	0.71
Relative permittivity	41.66
Conductivity (S/m)	0.90

Maximum location: X=-11.00, Y=-7.00 ; SAR Peak: 0.93 W/kg

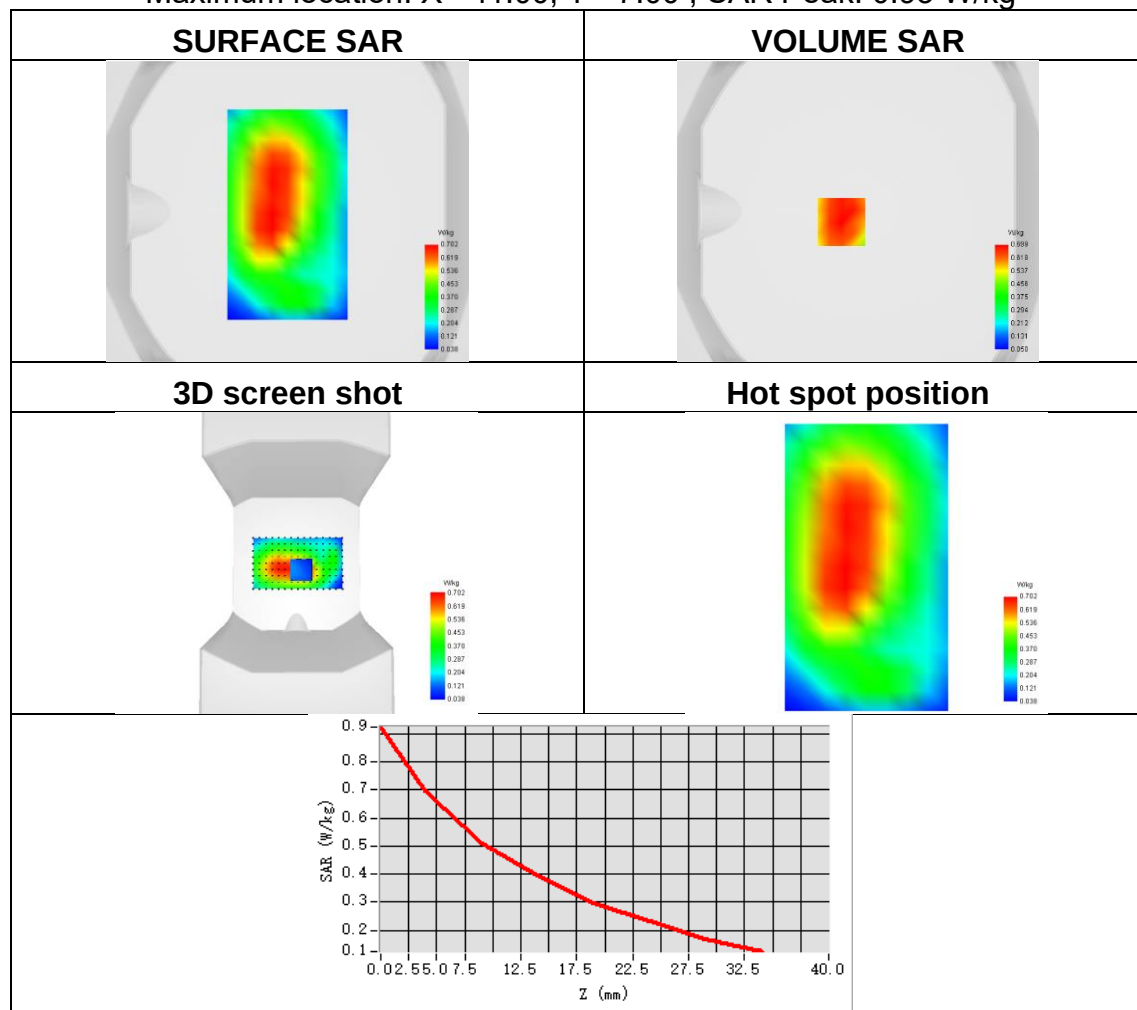




Plot 65:

Test Date	2026-05-10
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Right head
Device Position	Cheek
Band	LTE band 17
Signal	LTE FDD
Frequency	711
SAR 10g (W/Kg)	0.315
SAR 1g (W/Kg)	0.419
ConvF	0.71
Relative permittivity	41.66
Conductivity (S/m)	0.90

Maximum location: X=-41.00, Y=-49.00 ; SAR Peak: 0.52 W/kg

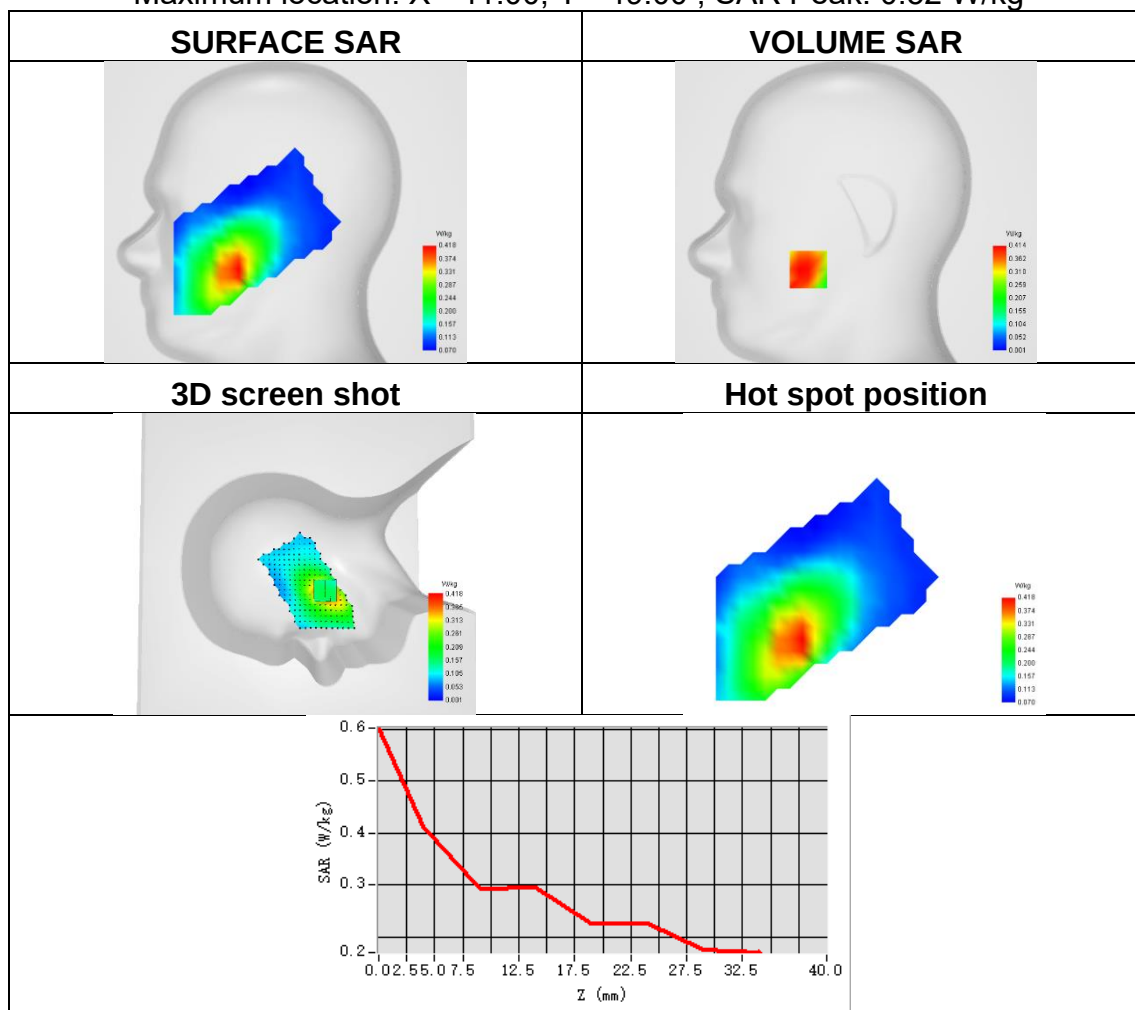




Plot 66:

Test Date	2026-05-10
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE band 17
Signal	LTE FDD
Frequency	711
SAR 10g (W/Kg)	0.466
SAR 1g (W/Kg)	0.648
ConvF	0.71
Relative permittivity	41.66
Conductivity (S/m)	0.90

Maximum location: X=-8.00, Y=-1.00 ; SAR Peak: 0.83 W/kg

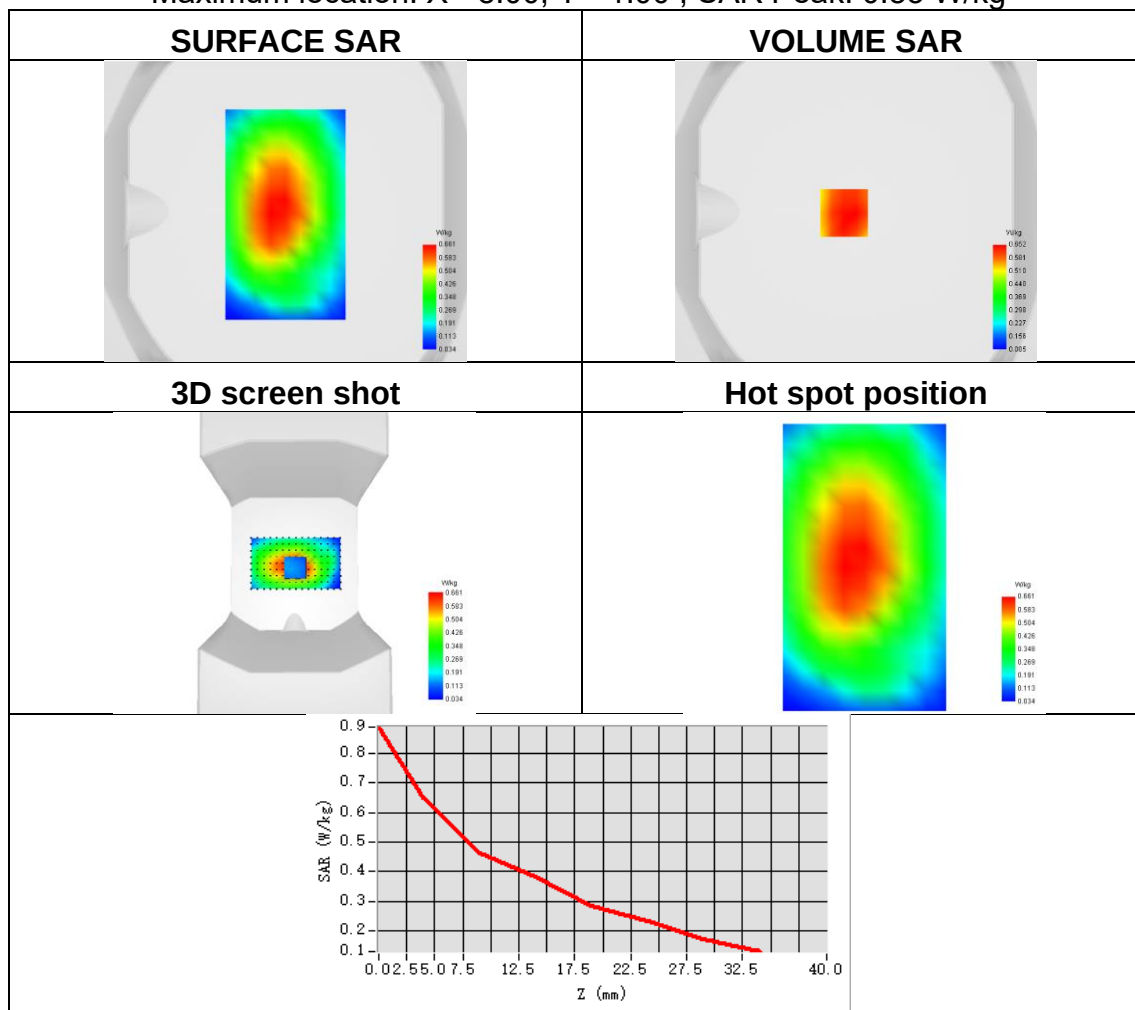




Plot 67:

Test Date	2026-05-07
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Right head
Device Position	Cheek
Band	LTE band 25
Signal	LTE FDD
Frequency	1860
SAR 10g (W/Kg)	0.149
SAR 1g (W/Kg)	0.232
ConvF	0.90
Relative permittivity	40.74
Conductivity (S/m)	1.36

Maximum location: X=-55.00, Y=-7.00 ; SAR Peak: 0.36 W/kg

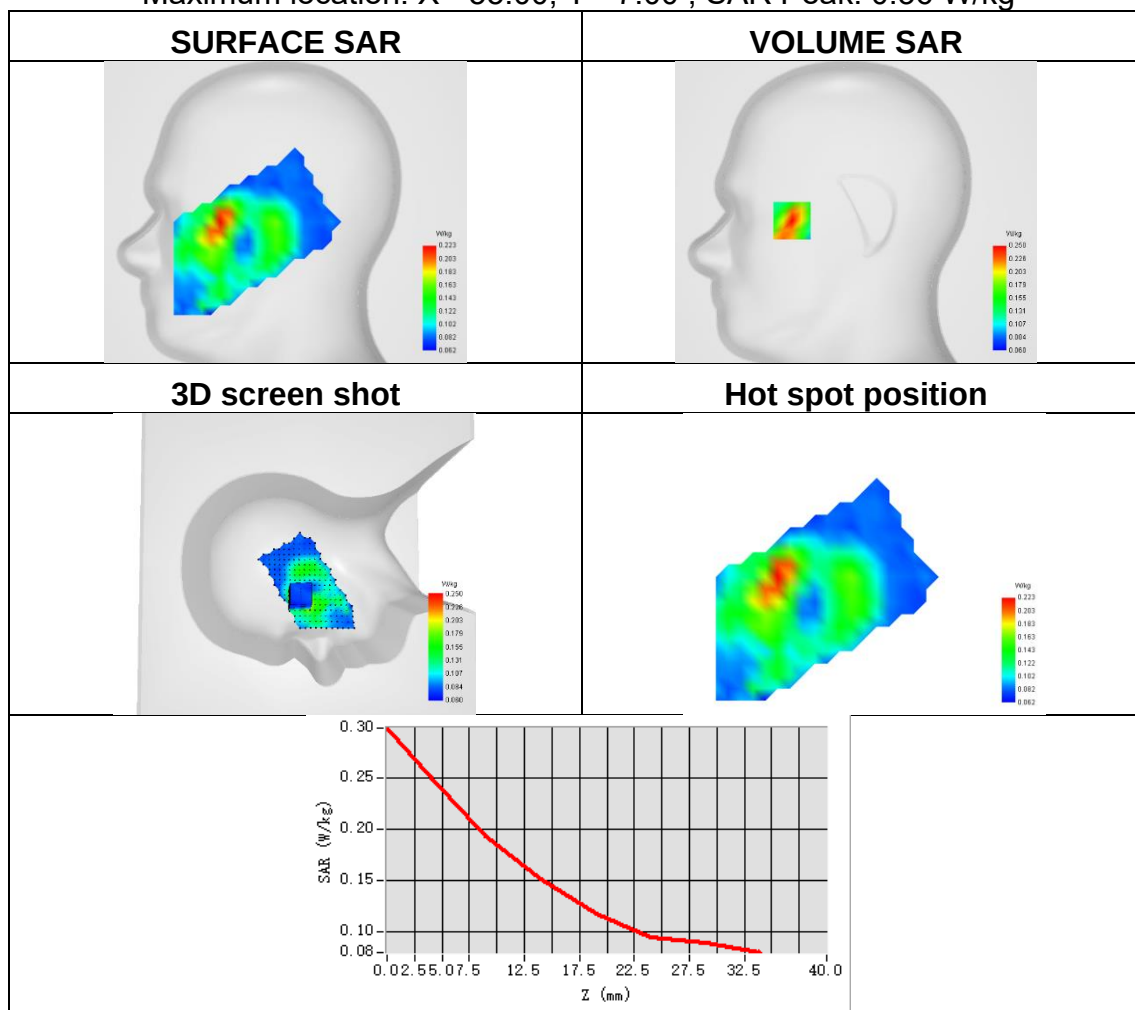




Plot 68:

Test Date	2026-05-07
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Left Side
Band	LTE band 25
Signal	LTE FDD
Frequency	1860
SAR 10g (W/Kg)	0.245
SAR 1g (W/Kg)	0.455
ConvF	0.90
Relative permittivity	40.74
Conductivity (S/m)	1.36

Maximum location: X=9.00, Y=6.00 ; SAR Peak: 0.88 W/kg

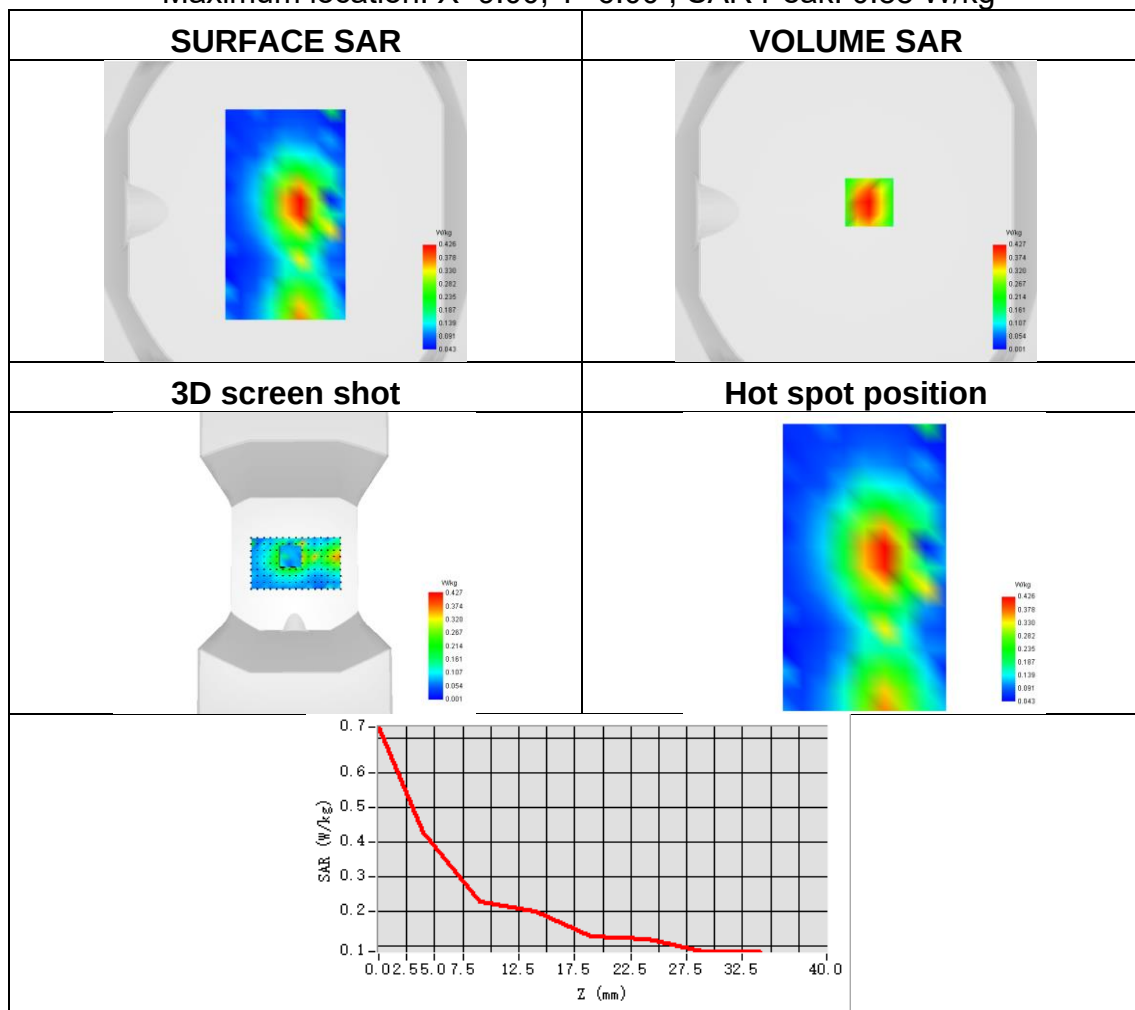




Plot 69:

Test Date	2026-05-08
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Right head
Device Position	Cheek
Band	LTE band 26
Signal	LTE FDD
Frequency	821.5
SAR 10g (W/Kg)	0.271
SAR 1g (W/Kg)	0.344
ConvF	0.69
Relative permittivity	41.87
Conductivity (S/m)	0.91

Maximum location: X=-41.00, Y=-51.00 ; SAR Peak: 0.43 W/kg

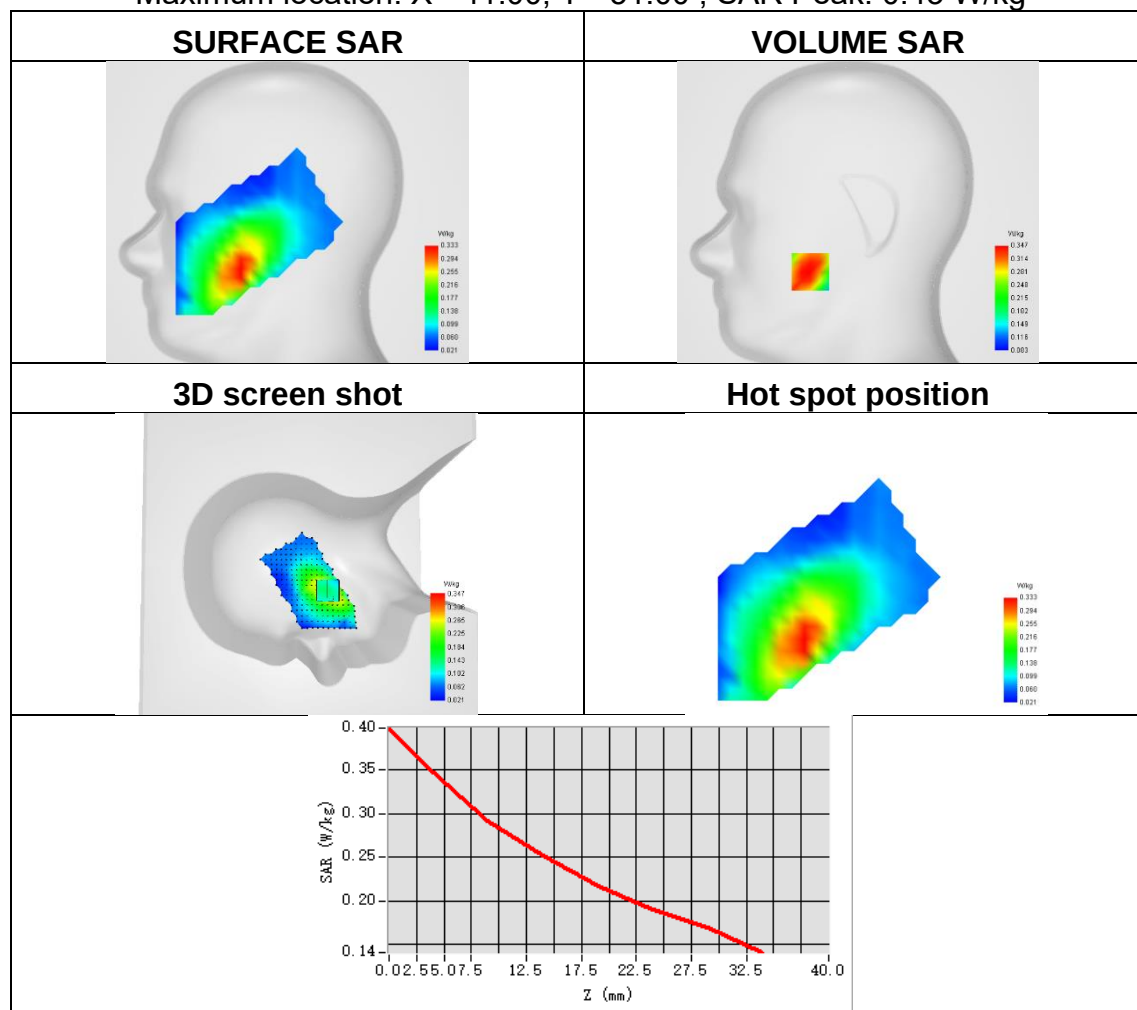




Plot 70:

Test Date	2026-05-08
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back side
Band	LTE band 26
Signal	LTE FDD
Frequency	821.5
SAR 10g (W/Kg)	0.339
SAR 1g (W/Kg)	0.484
ConvF	0.69
Relative permittivity	41.87
Conductivity (S/m)	0.91

Maximum location: X=-13.00, Y=2.00 ; SAR Peak: 0.63 W/kg

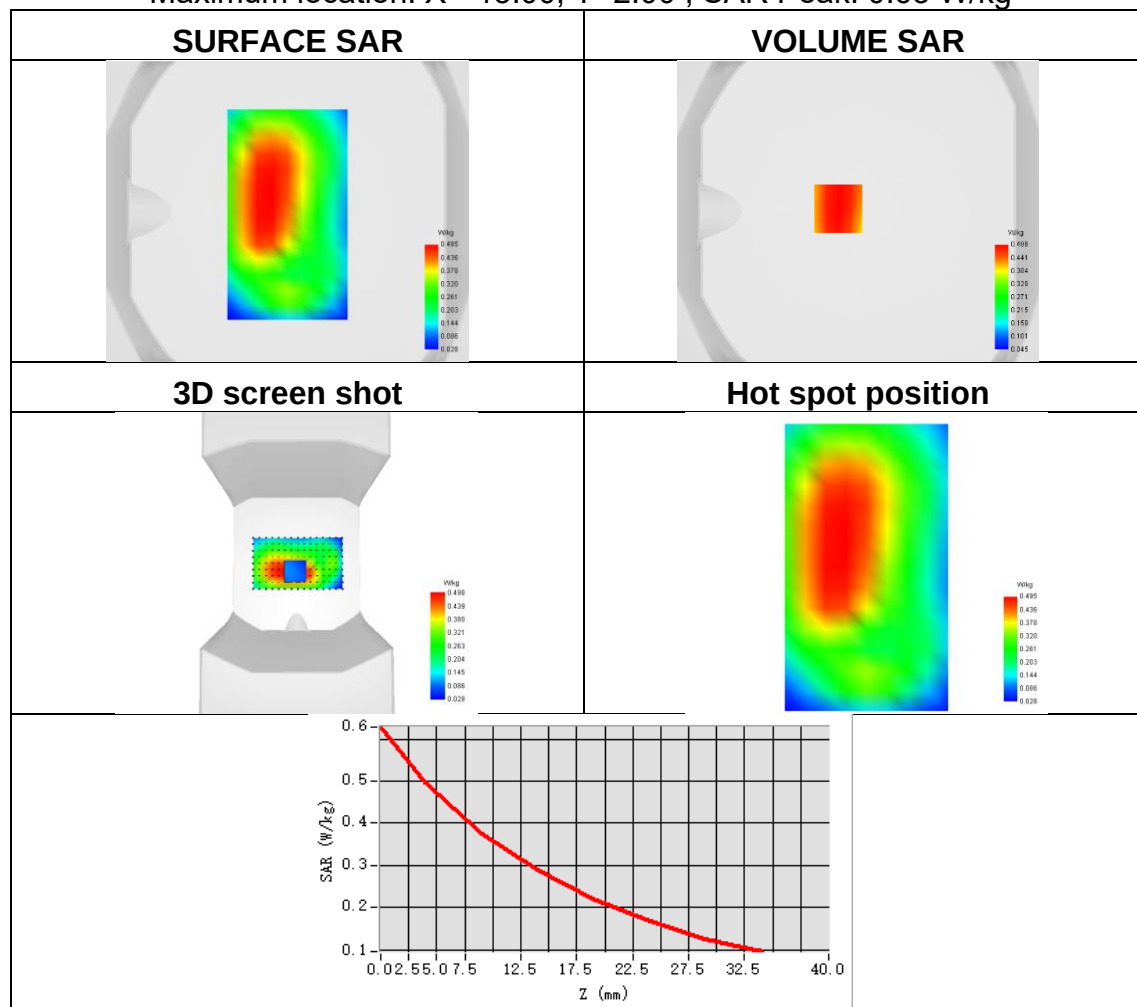




Plot 71:

Test Date	2026-05-14
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Right head
Device Position	Cheek
Band	LTE band 38
Signal	LTE FDD
Frequency	2610
SAR 10g (W/Kg)	0.089
SAR 1g (W/Kg)	0.127
ConvF	0.98
Relative permittivity	40.21
Conductivity (S/m)	2.01

Maximum location: X=8.00, Y=-9.00 ; SAR Peak: 0.19 W/kg

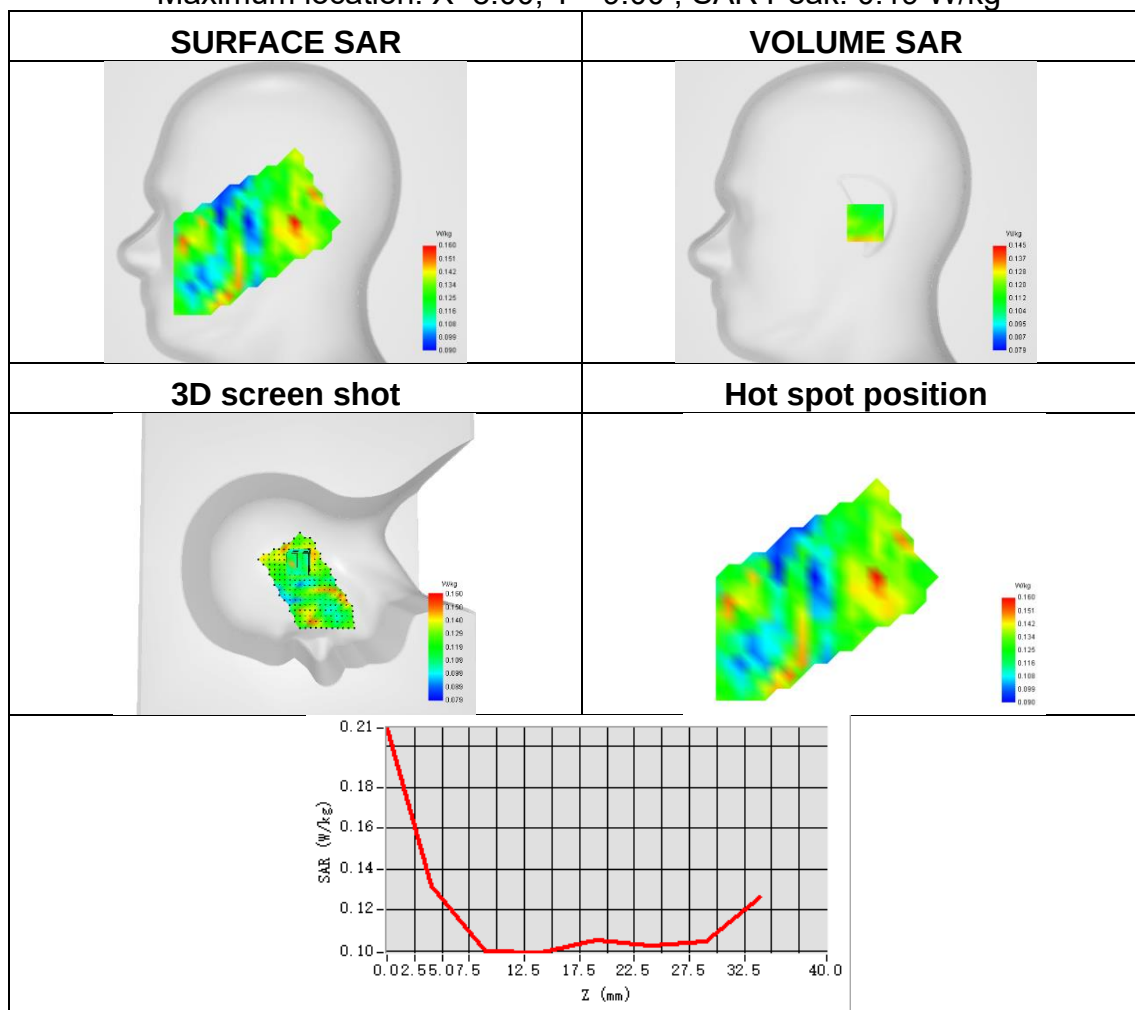




Plot 72:

Test Date	2026-05-14
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Left Side
Band	LTE band 38
Signal	LTE FDD
Frequency	2610
SAR 10g (W/Kg)	0.200
SAR 1g (W/Kg)	0.543
ConvF	0.98
Relative permittivity	40.21
Conductivity (S/m)	2.01

Maximum location: X=20.00, Y=1.00 ; SAR Peak: 1.65 W/kg

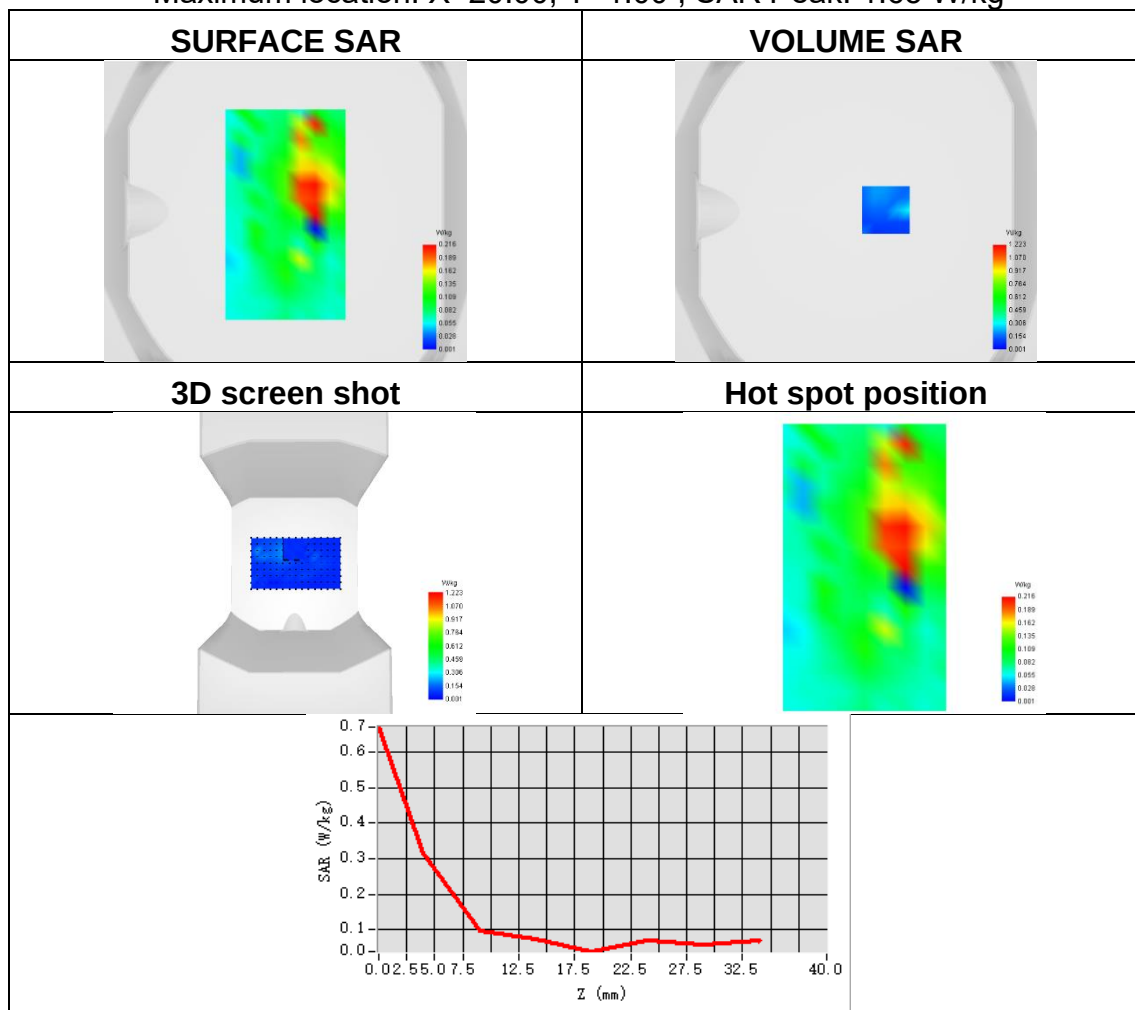




Plot 73:

Test Date	2026-05-11
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Right head
Device Position	Cheek
Band	LTE band 40
Signal	LTE FDD
Frequency	2350
SAR 10g (W/Kg)	0.114
SAR 1g (W/Kg)	0.151
ConvF	0.97
Relative permittivity	39.80
Conductivity (S/m)	1.67

Maximum location: X=-47.00, Y=-47.00 ; SAR Peak: 0.18 W/kg

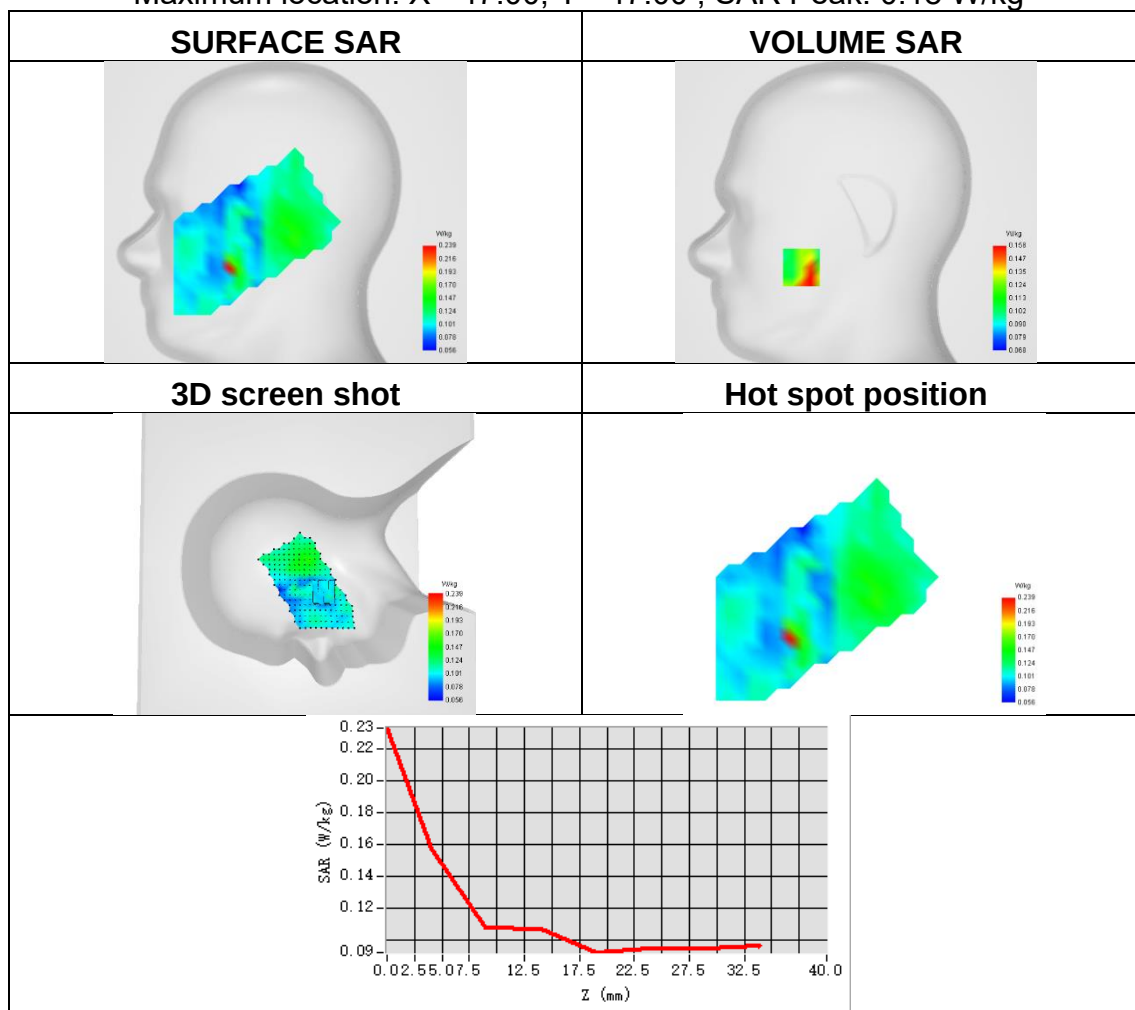




Plot 74:

Test Date	2026-05-11
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Left Side
Band	LTE band 40
Signal	LTE FDD
Frequency	2350
SAR 10g (W/Kg)	0.131
SAR 1g (W/Kg)	0.206
ConvF	0.97
Relative permittivity	39.80
Conductivity (S/m)	1.67

Maximum location: X=0.00, Y=8.00 ; SAR Peak: 0.26 W/kg

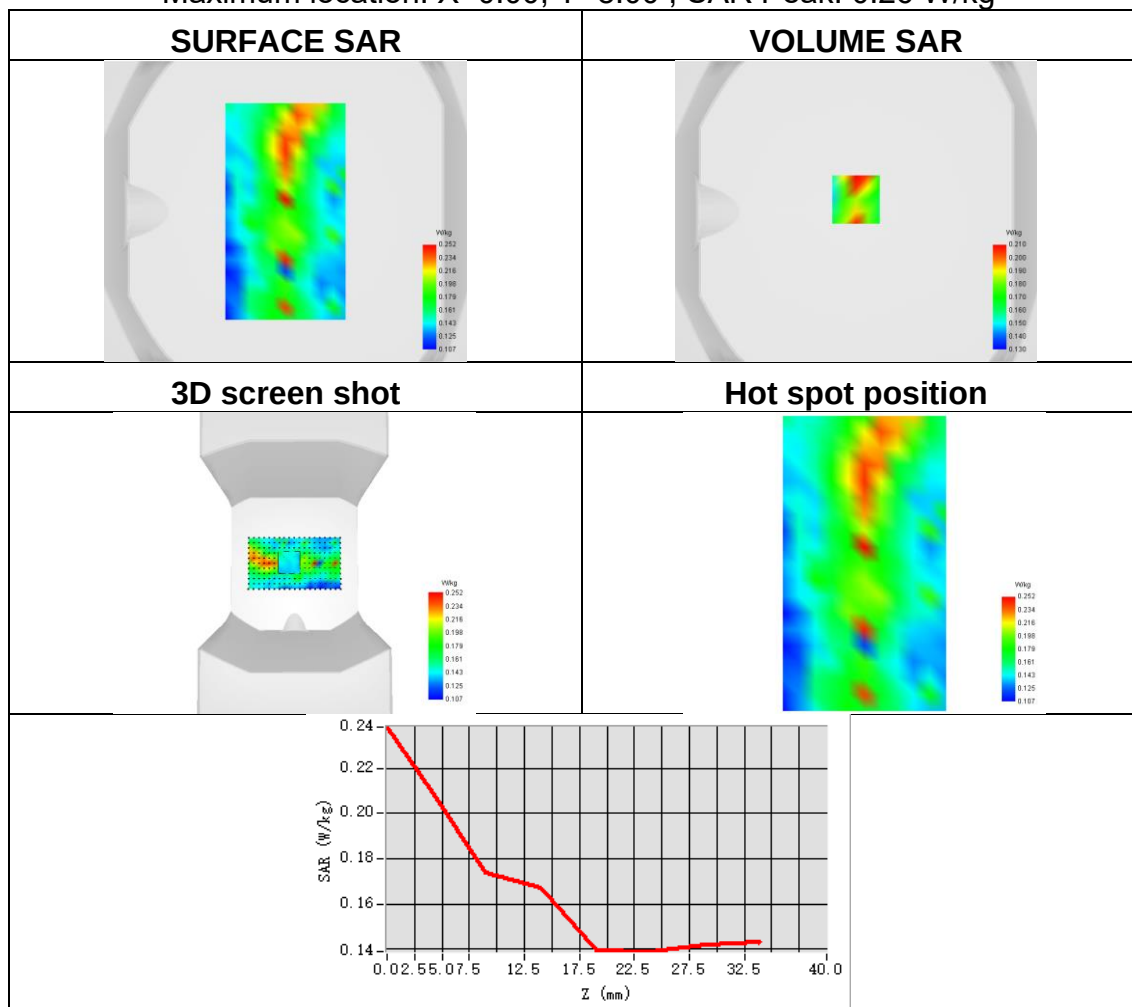




Plot 75:

Test Date	2026-05-14
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Right head
Device Position	Cheek
Band	LTE band 41
Signal	LTE FDD
Frequency	2680
SAR 10g (W/Kg)	0.132
SAR 1g (W/Kg)	0.159
ConvF	0.98
Relative permittivity	40.21
Conductivity (S/m)	2.01

Maximum location: X=-80.00, Y=-24.00 ; SAR Peak: 0.21 W/kg

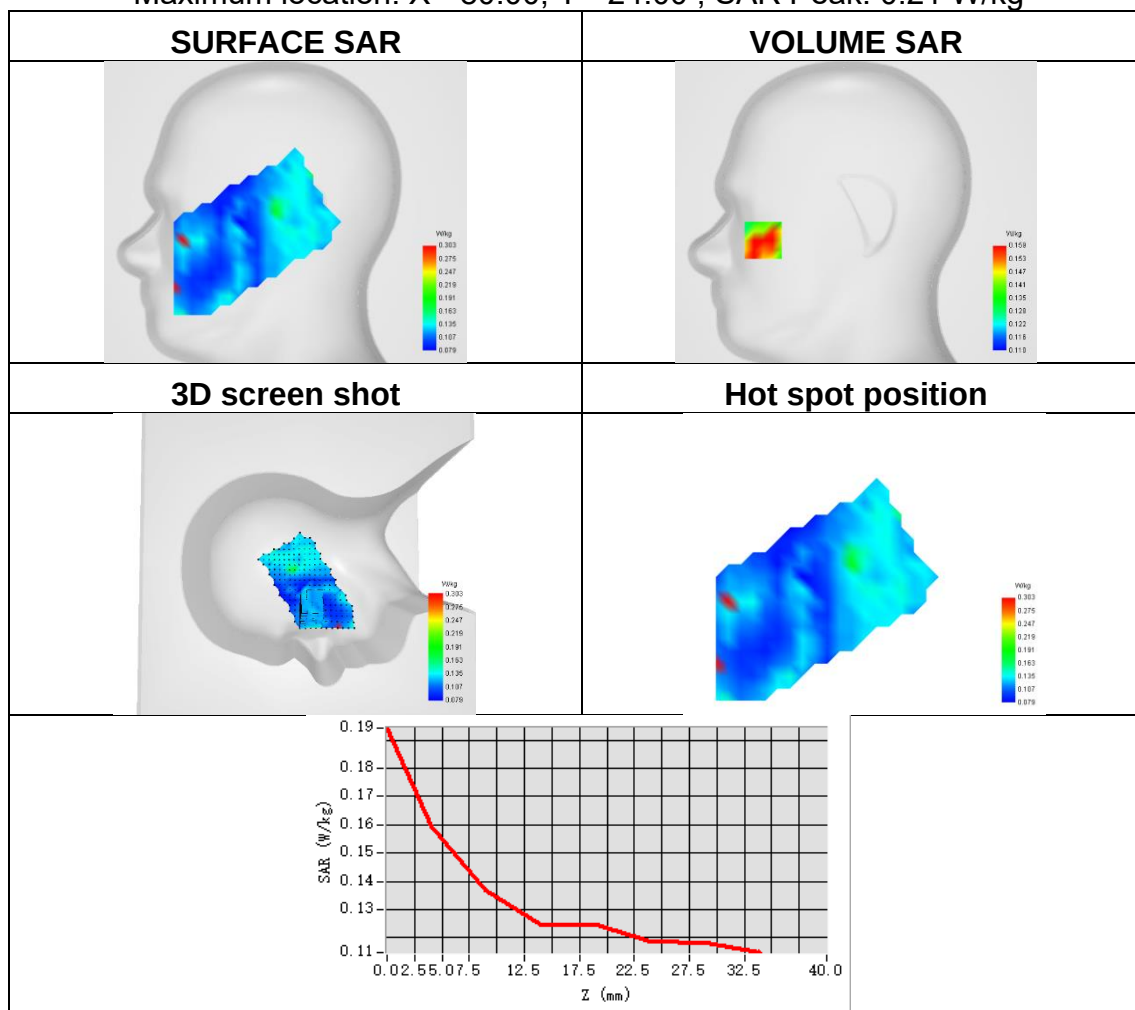




Plot 76:

Test Date	2026-05-14
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Left Side
Band	LTE band 41
Signal	LTE FDD
Frequency	2680
SAR 10g (W/Kg)	0.236
SAR 1g (W/Kg)	0.302
ConvF	0.98
Relative permittivity	40.21
Conductivity (S/m)	2.01

Maximum location: X=14.00, Y=10.00 ; SAR Peak: 0.38 W/kg

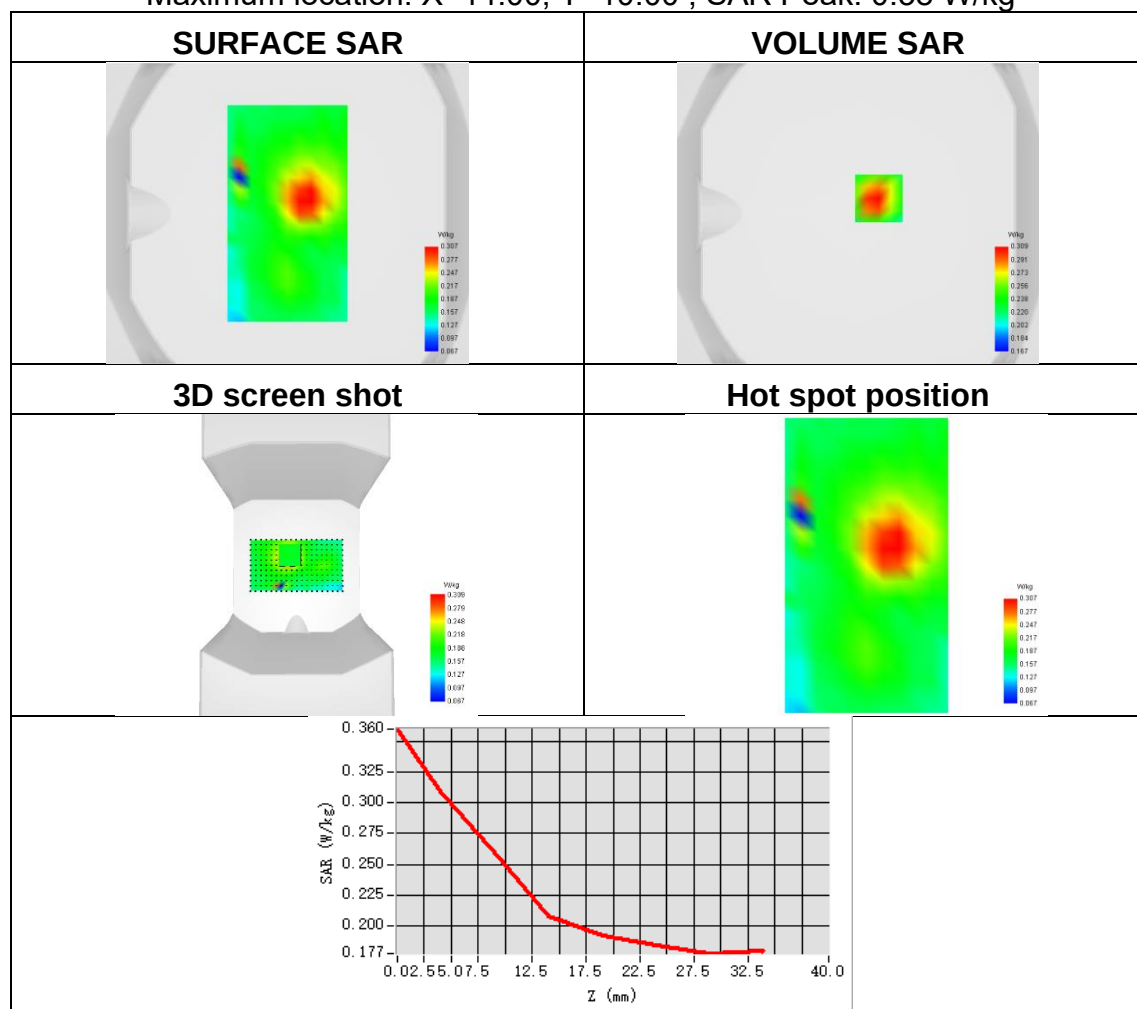



Appendix C. Probe Calibration and Dipole Calibration Report

Refer the appendix Calibration Report.

※※※※※END OF THE REPORT※※※※※