ACCREDITED
TESTING LABORATORY
CERTIFICATE # 4821.01

BACL
Bay Area Compliance Labs Corp.

SAR TEST REPORT

For

HONGKONG UCLOUDLINK NETWORK TECHNOLOGY LIMITED

Suite 603 6/F, Laws Commercial Plaza, 788 Chueng Sha Wan Road, Kowloon Hong Kong

FCC ID: 2AC88-GLMU20A01

Report Type:	**Product Type:**
Original Report	TD-LTE Wireless Data Terminal

Report Number:	RDG200911002-SA	
Report Date:	2020-12-31	
Reviewed By:	Alvin Huang Lab Manager	Alvin Huang
	Bay Area Compliance Laboratories Corp. (Shenzhen) 6/F., West Wing, Third Phase of Wanli Industrial Building, Shihua Road, Futian Free Trade Zone, Shenzhen, Guangdong, China Tel: +86-755-33320018 Fax: +86-755-33320008 www.baclcorp.com.cn	

Note: This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk "★". BACL is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with an asterisk '*'. Customer model name, addresses, names, trademarks etc. are not considered data. This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

Attestation of Test Results			
EUT Information	EUT Description	TD-LTE Wireless Data Terminal	
	Tested Model	GLMU20A01	
	FCC ID	2AC88-GLMU20A01	
	Serial Number	RDG200911002-SA-S1	
	Test Date	2020/12/19 to 2020/12/23	
MODE		Max. SAR Level(s) Reported(W/kg)	Limit (W/kg)
GPRS 850	1g Body SAR	0.23	1.6
GPRS 1900	1g Body SAR	0.46	
WCDMA Band 2	1g Body SAR	0.79	
WCDMA Band 5	1g Body SAR	0.31	
LTE Band 2	1g Body SAR	1.05	
LTE Band 7	1g Body SAR	1.15	
LTE Band 12	1g Body SAR	0.61	
LTE Band 13	1g Body SAR	0.30	
LTE Band 26(Contains LTE Band 5)	1g Body SAR	0.79	
LTE Band 40 Lower	1g Body SAR	0.58	
LTE Band 40 Upper	1g Body SAR	0.59	
LTE Band 41 (Contains LTE Band 38)	1g Body SAR	0.55	
LTE Band 66(Contains LTE Band 4)	1g Body SAR	**1.39**	
WIFI 2.4G	1g Body SAR	0.19	
Simultaneous	1g Body SAR	**1.42(Hotspot)**	

Applicable Standards	**FCC 47 CFR part 2.1093** Radiofrequency radiation exposure evaluation: portable devices
	IEEE1528:2013 IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques
	IEC 62209-1:2016 Measurement procedure for the assessment of specific absorption rate of human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices – Part 1: Devices used next to the ear (Frequency range of 300 MHz to 6 GHz)
	KDB procedures KDB 447498 D01 General RF Exposure Guidance v06 KDB 648474 D04 Handset SAR v01r03 KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04 KDB 865664 D02 RF Exposure Reporting v01r02 KDB 941225 D01 3G SAR Procedures v03r01 KDB 941225 D05 SAR for LTE Devices v02r05 KDB 941225 D06 Hotspot Mode v02r01 KDB 248227 D01 802.11 Wi-Fi SAR v02r02
Note: This wireless device has been shown to be capable of compliance for localized specific absorption rate (SAR) for General Population/Uncontrolled Exposure limits specified in **FCC 47 CFR part 2.1093** and has been tested in accordance with the measurement procedures specified in IEEE 1528-2013 and RF exposure KDB procedures. **The results and statements contained in this report pertain only to the device(s) evaluated.**	

TABLE OF CONTENTS

DOCUMENT REVISION HISTORY **5**
EUT DESCRIPTION **6**
TECHNICAL SPECIFICATION 6
REFERENCE, STANDARDS, AND GUIDELINES **7**
SAR LIMITS 8
FACILITIES **9**
DESCRIPTION OF TEST SYSTEM **10**
EQUIPMENT LIST AND CALIBRATION **16**
EQUIPMENTS LIST & CALIBRATION INFORMATION 16
SAR MEASUREMENT SYSTEM VERIFICATION **17**
LIQUID VERIFICATION 17
SYSTEM ACCURACY VERIFICATION 20
SAR SYSTEM VALIDATION DATA 21
EUT TEST STRATEGY AND METHODOLOGY **29**
TEST POSITIONS FOR BODY-WORN AND OTHER CONFIGURATIONS 29
TEST DISTANCE FOR SAR EVALUATION 29
SAR EVALUATION PROCEDURE 30
CONDUCTED OUTPUT POWER MEASUREMENT **31**
PROVISION APPLICABLE 31
TEST PROCEDURE 31
RADIO CONFIGURATION 31
MAXIMUM TARGET OUTPUT POWER 35
TEST RESULTS: 36
STANDALONE SAR TEST EXCLUSION CONSIDERATIONS **66**
ANTENNA DISTANCE TO EDGE 66
SAR TEST EXCLUSION FOR THE EUT EDGE CONSIDERATIONS RESULT 67
SAR MEASUREMENT RESULTS **68**
SAR TEST DATA 68
SAR MEASUREMENT VARIABILITY **84**
SAR SIMULTANEOUS TRANSMISSION DESCRIPTION **85**
SAR PLOTS **89**
APPENDIX A MEASUREMENT UNCERTAINTY **90**
APPENDIX B EUT TEST POSITION PHOTOS **92**
APPENDIX C PROBE CALIBRATION CERTIFICATES **93**
APPENDIX D DIPOLE CALIBRATION CERTIFICATES **94**

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
0	RDG200911002-SA	Original Report	2020-12-31

EUT DESCRIPTION

This report has been prepared on behalf of ***HONGKONG UCLOUDLINK NETWORK TECHNOLOGY LIMITED*** and their product ***TD-LTE Wireless Data Terminal***, Model: ***GLMU20A01***, FCC ID: ***2AC88-GLMU20A01*** or the EUT (Equipment under Test) as referred to in the rest of this report.

**All measurement and test data in this report was gathered from production sample serial number: RDG200911002-SA-S1 (Assigned by BACL, Shenzhen). The EUT supplied by the applicant was received on 2020-09-13.*

Technical Specification

Device Type:	Portable
Exposure Category:	Population / Uncontrolled
Antenna Type(s):	Internal Antenna
DTM Type:	Class B
Multi-slot Class:	GPRS/EGPRS (Class 12)
Proximity sensor for SAR reduction:	None
Body-Worn Accessories:	Headset
Face-Head Accessories:	None
Operation Mode :	GPRS/ EGPRS Data, WCDMA(R99 (Data), HSDPA/HSUPA), FDD/TDD-LTE, WLAN,
Frequency Band:	GPRS 850: 824-849 MHz(TX); 869-894 MHz(RX) GPRS 1900: 1850-1910 MHz(TX); 1930-1990 MHz(RX) WCDMA Band 2: 1850-1910 MHz(TX); 1930-1990 MHz(RX) WCDMA Band 5: 824-849 MHz(TX); 869-894 MHz(RX) LTE Band 2: 1850-1910 MHz(TX); 1930-1990 MHz(RX) LTE Band 4: 1710-1755 MHz(TX) ; 2110-2155 MHz(RX) LTE Band 5: 824-849 MHz(TX) ; 869-894 MHz(RX) LTE Band 7: 2500-2570 MHz(TX); 2620-2690MHz(RX) LTE Band 12: 699-716 MHz(TX) ; 729-746 MHz(RX) LTE Band 13: 777-787 MHz(TX); 746-756 MHz(RX) LTE Band 26: 814-849 MHz(TX); 859-894 MHz(RX) LTE Band 38: 2570-2620 MHz(TX); 2570-2620 MHz(RX) LTE Band 40 Lower: 2305-2315 MHz(TX); 2305-2315 MHz(RX) LTE Band 40 Upper: 2350-2360 MHz(TX); 2350-2360 MHz(RX) LTE Band 41: 2496-2690 MHz(TX); 2496-2690 MHz(RX) LTE Band 66: 1710-1780MHz(TX) ; 2110-2180 MHz(RX) WLAN (2.4G): 2412~2462MHz/2422-2452MHz
Conducted RF Power:	GPRS 850 : 32.61 dBm ； GPRS 1900: 31.99 dBm WCDMA Band 2: 23.15 dBm； WCDMA Band 5: 22.35 dBm LTE Band 2: 24.66 dBm； LTE Band 4: 24.23 dBm LTE Band 5: 24.15 dBm； LTE Band 7: 24.71 dBm LTE Band 12: 24.17 dBm； LTE Band 13: 27.79 dBm LTE Band 26: 24.42 dBm； LTE Band 38: 24.21 dBm LTE Band 40 Lower: 22.49 dBm； LTE Band 40 Upper: 22.35 dBm LTE Band 41: 24.41 dBm; LTE Band 66: 24.33 dBm WLAN (2.4G): 15.84 dBm；
Power Source:	Rechargeable Battery
Normal Operation:	Body-worn

REFERENCE, STANDARDS, AND GUIDELINES

FCC:

The Report and Order requires routine SAR evaluation prior to equipment authorization of portable transmitter devices, including portable telephones. For consumer products, the applicable limit is 1.6 mW/g as recommended by the ANSI/IEEE standard C95.1-1992 [6] for an uncontrolled environment (Paragraph 65). According to the Supplement C of OET Bulletin 65 “Evaluating Compliance with FCC Guide-lines for Human Exposure to Radio frequency Electromagnetic Fields", released on Jun 29, 2001 by the FCC, the device should be evaluated at maximum output power (radiated from the antenna) under “worst-case” conditions for normal or intended use, incorporating normal antenna operating positions, device peak performance frequencies and positions for maximum RF energy coupling.

This report describes the methodology and results of experiments performed on wireless data terminal. The objective was to determine if there is RF radiation and if radiation is found, what is the extent of radiation with respect to safety limits. SAR (Specific Absorption Rate) is the measure of RF exposure determined by the amount of RF energy absorbed by human body (or its parts) – to determine how the RF energy couples to the body or head which is a primary health concern for body worn devices. The limit below which the exposure to RF is considered safe by regulatory bodies in North America is 1.6 mW/g average over 1 gram of tissue mass.

CE:

The order requires routine SAR evaluation prior to equipment authorization of portable transmitter devices, including portable telephones. For consumer products, the applicable limit is 2 mW/g as recommended by EN62209-1 for an uncontrolled environment. According to the Standard, the device should be evaluated at maximum output power (radiated from the antenna) under “worst-case” conditions for normal or intended use, incorporating normal antenna operating positions, device peak performance frequencies and positions for maximum RF energy coupling.

This report describes the methodology and results of experiments performed on wireless data terminal. The objective was to determine if there is RF radiation and if radiation is found, what is the extent of radiation with respect to safety limits. SAR (Specific Absorption Rate) is the measure of RF exposure determined by the amount of RF energy absorbed by human body (or its parts) – to determine how the RF energy couples to the body or head which is a primary health concern for body worn devices. The limit below which the exposure to RF is considered safe by regulatory bodies in Europe is 2 mW/g average over 10 gram of tissue mass.

The test configurations were laid out on a specially designed test fixture to ensure the reproducibility of measurements. Each configuration was scanned for SAR. Analysis of each scan was carried out to characterize the above effects in the device.

SAR Limits

FCC Limit(1g Tissue)

EXPOSURE LIMITS	SAR (W/kg)	
	(General Population / Uncontrolled Exposure Environment)	(Occupational / Controlled Exposure Environment)
Spatial Average (averaged over the whole body)	0.08	0.4
Spatial Peak (averaged over any 1 g of tissue)	**1.60**	8.0
Spatial Peak (hands/wrists/feet/ankles averaged over 10 g)	4.0	20.0

CE Limit(10g Tissue)

EXPOSURE LIMITS	SAR (W/kg)	
	(General Population / Uncontrolled Exposure Environment)	(Occupational / Controlled Exposure Environment)
Spatial Average (averaged over the whole body)	0.08	0.4
Spatial Peak (averaged over any 10 g of tissue)	2.0	10
Spatial Peak (hands/wrists/feet/ankles averaged over 10 g)	4.0	20.0

Population/Uncontrolled Environments are defined as locations where there is the exposure of individual who have no knowledge or control of their exposure.

Occupational/Controlled Environments are defined as locations where there is exposure that may be incurred by people who are aware of the potential for exposure (i.e. as a result of employment or occupation).

General Population/Uncontrolled environments Spatial Peak limit 1.6W/kg (FCC) & 2 W/kg (CE) applied to the EUT.

FACILITIES

The test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect data is located at 6/F., West Wing, Third Phase of Wanli Industrial Building, Shihua Road, Futian Free Trade Zone, Shenzhen, Guangdong, China.

The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No.: 342867, the FCC Designation No.: CN1221.

The test site has been registered with ISED Canada under ISED Canada Registration Number 3062B.

DESCRIPTION OF TEST SYSTEM

These measurements were performed with the automated near-field scanning system DASY6 from Schmid & Partner Engineering AG (SPEAG) which is the Fifth generation of the system shown in the figure hereinafter:

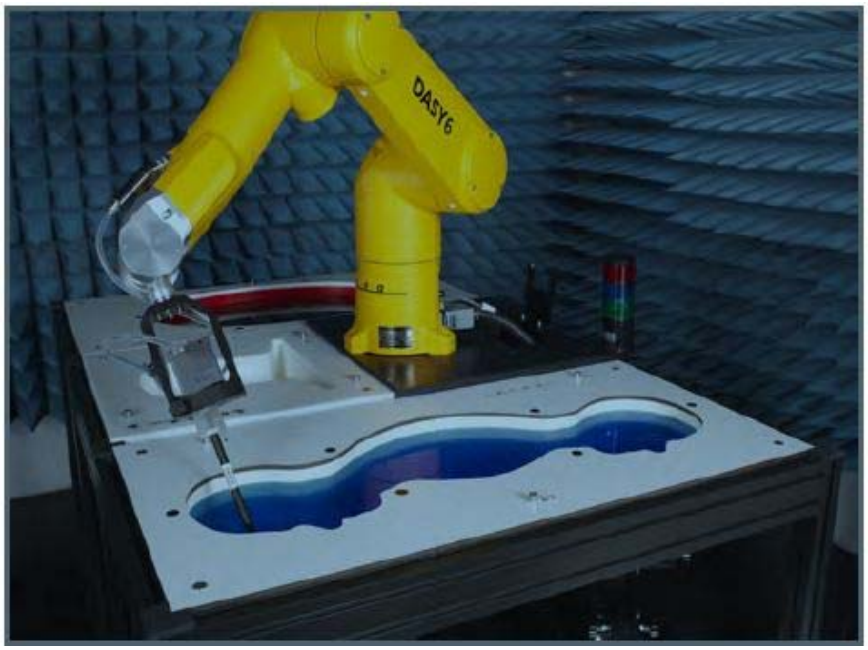

DASY6 System Description

The DASY6 system for performing compliance tests consists of the following items:

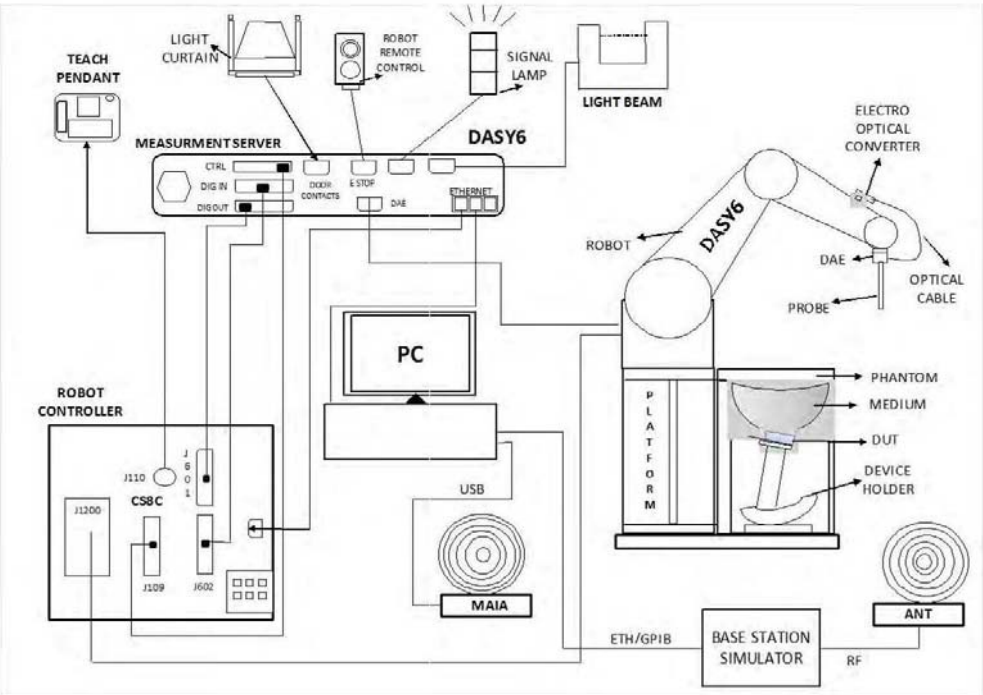

- A standard high precision 6-axis robot (Staubli TX=RX family) with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal application, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running Win7 professional operating system and the DASY52 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

DASY6 Measurement Server

The DASY6 measurement server is based on a PC/104 CPU board with a 400 MHz Intel ULV Celeron, 128 MB chip-disk and 128 MB RAM. The necessary circuits for communication with the DAE4 (or DAE3) electronics box, as well as the 16-bit AD converter system for optical detection and digital I/O interface are contained on the DASY6 I/O board, which is directly connected to the PC/104 bus of the CPU board.

The measurement server performs all real-time data evaluations of field measurements and surface detection, controls robot movements, and handles safety operations. The PC operating system cannot interfere with these time-critical processes. All connections are supervised by a watchdog, and disconnection of any of the cables to the measurement server will automatically disarm the robot and disable all program- controlled robot movements. Furthermore, the measurement server is equipped with an expansion port, which is reserved for future applications. Please note that this expansion port does not have a standardized pinout, and therefore only devices provided by SPEAG can be connected. Connection of devices from any other supplier could seriously damage the measurement server.

Data Acquisition Electronics

The data acquisition electronics (DAE4) consist of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder with a control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information, as well as an optical uplink for commands and the clock.

The mechanical probe mounting device includes two different sensor systems for frontal and sideways probe contacts. They are used for mechanical surface detection and probe collision detection.

The input impedance of both the DAE4 as well as of the DAE3 box is 200MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.

EX3DV4 E-Field Probes

Frequency	10 MHz to > 6 GHz Linearity: ± 0.2 dB (30 MHz to 6 GHz)
Directivity	± 0.3 dB in TSL (rotation around probe axis) ± 0.5 dB in TSL (rotation normal to probe axis)
Dynamic Range	10 µW/g to > 100 mW/g Linearity: ± 0.2 dB (noise: typically < 1 µW/g)
Dimensions	Overall length: 337 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm
Application	High precision dosimetric measurements in any exposure scenario (e.g., very strong gradient fields); the only probe that enables compliance testing for frequencies up to 6 GHz with precision of better 30%.
Compatibility	DASY3, DASY4, DASY52 SAR and higher, EASY4/MRI

SAM Twin Phantom

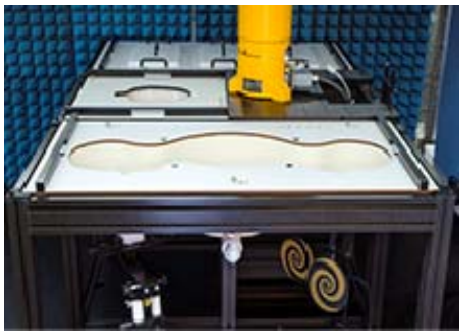

The SAM Twin Phantom (shown in front of DASY6) is a fiberglass shell phantom with shell thickness 2 mm, except in the ear region where the thickness is increased to 6 mm. The phantom has three measurement areas: 1) Left Head, 2) Right Head, and 3) Flat Section. For larger devices, the use of the ELI-Phantom (shown behind DASY6) is required. For devices such as glasses with a wireless link, the Face Down Phantom is the most suitable (between the SAM Twin and ELI phantoms).

When the phantom is mounted inside allocated slot of the DASY6 platform, phantom reference points can be taught directly in the DASY5 V5.2 software. When the DASY6 platform is used to mount the

Phantom, some of the phantom teaching points cannot be reached by the robot in DASY5 V5.2. A special tool called P1a-P2aX-Former is provided to transform two of the three points, P1 and P2, to reachable locations. To use these new teaching points, a revised phantom configuration file is required.

In addition to our standard broadband liquids, the phantom can be used with the following tissue simulating liquids:

Sugar-water-based liquids can be left permanently in the phantom. Always cover the liquid when the system is not in use to prevent changes in liquid parameters due to water evaporation.

DGBE-based liquids should be used with care. As DGBE is a softener for most plastics, the liquid should be taken out of the phantom, and the phantom should be dried when the system is not in use (desirable at least once a week).

Do not use other organic solvents without previously testing the solvent resistivity of the phantom.

Approximately 25 liters of liquid is required to fill the SAM Twin phantom.

ELI Phantom

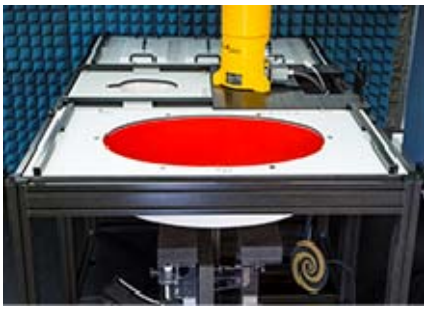

The ELI phantom is intended for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30MHz to 6 GHz. ELI is fully compatible with the latest draft of the standard IEC 62209-2 and the use of all known tissue simulating liquids. ELI has been optimized for performance and can be integrated into a SPEAG standard phantom table. A cover is provided to prevent evaporation of water and changes in liquid parameters. Reference markings on the phantom allow installation of the complete setup, including all predefined phantom positions and measurement grids, by teaching three points.

The phantom can be used with the following tissue simulating liquids:

- Sugar-water-based liquids can be left permanently in the phantom. Always cover the liquid when the system is not in use to prevent changes in liquid parameters due to water evaporation.
- DGBE-based liquids should be used with care. As DGBE is a softener for most plastics, the liquid should be taken out of the phantom, and the phantom should be dried when the system is not in use (desirable at least once a week).
- Do not use other organic solvents without previously testing the solvent resistivity of the phantom.

Approximately 25 liters of liquid is required to _fill the ELI phantom.

Robots

The DASY6 system uses the high-precision industrial robots TX60L, TX90XL, and RX160L from St aubli SA (France). The TX robot family - the successor of the well-known RX robot family - continues to offer the features important for DASY6 applications:

- High precision (repeatability 0.02mm)
- High reliability (industrial design)
- Low maintenance costs (virtually maintenance free due to direct drive gears; no belt drives)
- Jerk-free straight movements (brushless synchrony motors; no stepper motors)
- Low ELF interference (motor control fields shielded via the closed metallic construction shields)

The robots are controlled by the Staubli CS8c robot controllers. All information regarding the use and maintenance of the robot arm and the robot controller is provided

Calibration Frequency Points for EX3DV4 E-Field Probes SN: 7522 Calibrated: 2020/04/01

Calibration Frequency Point(MHz)	Frequency Range(MHz)		Conversion Factor		
	From	To	X	Y	Z
750 Head	650	850	9.92	9.92	9.92
900 Head	850	1000	9.4	9.4	9.4
1750 Head	1650	1850	8.21	8.21	8.21
1900 Head	1850	2000	7.95	7.95	7.95
2300 Head	2200	2400	7.53	7.53	7.53
2450 Head	2400	2550	7.15	7.15	7.15
2600 Head	2550	2700	7.04	7.04	7.04
5200 Head	5090	5250	5.2	5.2	5.2
5300 Head	5250	5410	4.96	4.96	4.96
5600 Head	5490	5700	4.55	4.55	4.55
5800 Head	5700	5910	4.65	4.65	4.65

Area Scans

Area scans are defined prior to the measurement process being executed with a user defined variable spacing between each measurement point (integral) allowing low uncertainty measurements to be conducted. Scans defined for FCC applications utilize a 15mm 2 step integral, with 1.5mm interpolation used to locate the peak SAR area used for zoom scan assessments.

Where the system identifies multiple SAR peaks (which are within 25% of peak value) the system will provide the user with the option of assessing each peak location individually for zoom scan averaging.

Zoom Scan (Cube Scan Averaging)

The averaging zoom scan volume utilized in the DASY5 software is in the shape of a cube and the side dimension of a 1 g or 10 g mass is dependent on the density of the liquid representing the simulated tissue. A density of 1000 kg/m^3 is used to represent the head and body tissue density and not the phantom liquid density, in order to be consistent with the definition of the liquid dielectric properties, i.e. the side length of the 1g cube is 10mm,with the side length of the 10g cube is 21.5mm.

When the cube intersects with the surface of the phantom, it is oriented so that 3 vertices touch the surface of the shell or the center of a face is tangent to the surface. The face of the cube closest to the surface is modified in order to conform to the tangent surface.

The zoom scan integer steps can be user defined so as to reduce uncertainty, but normal practice for typical test applications (including FCC) utilize a physical step of 7 x7 x 7 (5mmx5mmx5mm) providing a volume of 30 mm in the X & Y & Z axis.

Tissue Dielectric Parameters for Head and Body Phantoms

The head tissue dielectric parameters recommended by the IEC 62209-1:2016

Recommended Tissue Dielectric Parameters for Head and Body

Table A.3 – Dielectric properties of the head tissue-equivalent liquid

Frequency MHz	Relative permittivity ε_r	Conductivity (σ) S/m
300	45,3	0,87
450	43,5	0,87
750	*41,9*	*0,89*
835	41,5	0,90
900	41,5	0,97
1 450	40,5	1,20
1 500	*40,4*	*1,23*
1 640	*40,2*	*1,31*
1 750	*40,1*	*1,37*
1 800	40,0	1,40
1 900	40,0	1,40
2 000	40,0	1,40
2 100	*39,8*	*1,49*
2 300	*39,5*	*1,67*
2 450	39,2	1,80
2 600	*39,0*	*1,96*
3 000	38,5	2,40
3 500	*37,9*	*2,91*
4 000	*37,4*	*3,43*
4 500	*36,8*	*3,94*
5 000	*36,2*	*4,45*
5 200	*36,0*	*4,66*
5 400	*35,8*	*4,86*
5 600	*35,5*	*5,07*
5 800	*35,3*	*5,27*
6 000	*35,1*	*5,48*

NOTE For convenience, permittivity and conductivity values at those frequencies which are not part of the original data provided by Drossos et al. [33] or the extension to 5 800 MHz are provided (i.e. the values shown *in italics*). These values were linearly interpolated between the values in this table that are immediately above and below these values, except the values at 6 000 MHz that were linearly extrapolated from the values at 3 000 MHz and 5 800 MHz.

EQUIPMENT LIST AND CALIBRATION

Equipments List & Calibration Information

Equipment	Model	S/N	Calibration Date	Calibration Due Date
DASY5 Test Software	DASY52 52.10.2	N/A	NCR	NCR
DASY6 Measurement Server	DASY6 6.0.31	N/A	NCR	NCR
Data Acquisition Electronics	DAE4	1562	2020/03/03	2021/03/02
E-Field Probe	EX3DV4	7522	2020/04/01	2021/03/31
Mounting Device	MD4HHTV5	SD 000 H01 KA	NCR	NCR
SAM Twin Phantom	SAM-Twin V8.0	1962	NCR	NCR
Dipole, 750MHz	D750V3	1194	2020/1/13	2023/1/12
Dipole, 900MHz	D900V2	132	2020/10/15	2023/10/14
Dipole, 1800MHz	D1800V2	2d018	2020/10/15	2023/10/14
Dipole, 1900MHz	D1900V2	5d231	2020/1/14	2023/1/13
Dipole, 2300MHz	D2300V2	1103	2020/1/13	2023/1/12
Dipole, 2450MHz	D2450V2	751	2020/10/13	2023/10/12
Dipole, 2600MHz	D2600V2	1162	2019/10/2	2022/10/1
Tissue Liquid Head	HBBL600-10000V6	180622-2	Each Time	
Network Analyzer	8753D	3410A08288	2020/7/31	2021/7/30
Dielectric Assessment Kit	DAK-3.5	1248	NCR	NCR
MXG Analog Signal Generator	N5181A	MY48180408	2020/7/31	2021/7/30
USB wideband power sensor	U2021XA	MY54250003	2020/7/31	2021/7/30
Power Amplifier	5S1G4	71377	NCR	NCR
Amplifier	ZVE-8G+	558401902	NCR	NCR
Directional Coupler	Oct-42	3307	NCR	NCR
Attenuator	6dB	773-6	NCR	NCR
Universal Radio Communication Tester	CMU200	115500	2020/8/4	2021/8/3
WIDEBAND RADIO COMMUNICATION TESTER	CMW500	116218	2020/7/31	2021/7/30
Wireless communication tester	8960	MY48367501	2020/7/31	2021/7/30

SAR MEASUREMENT SYSTEM VERIFICATION

Liquid Verification

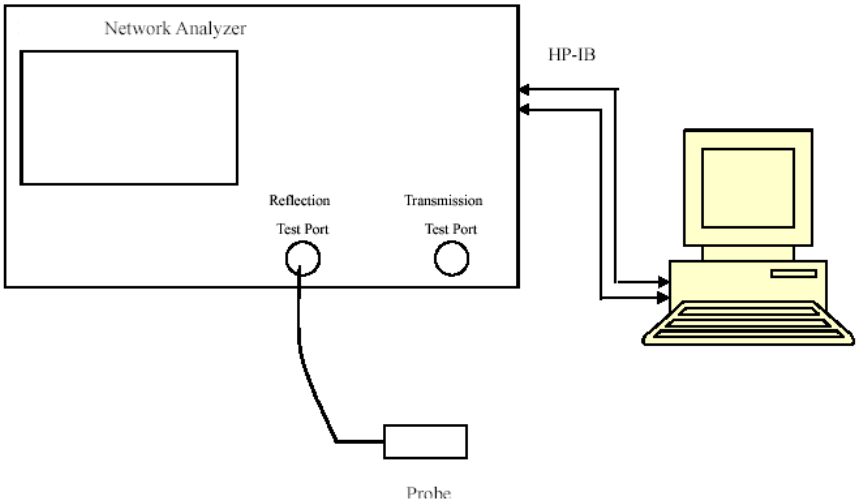

Liquid Verification Setup Block Diagram

Liquid Verification Results

Frequency (MHz)	Liquid Type	Liquid Parameter		Target Value		Delta (%)		Tolerance (%)
		ε_r	σ (S/m)	ε_r	σ (S/m)	$\Delta\varepsilon_r$	Δσ	
750	Tissue Liquid Head	42.792	0.864	41.90	0.89	2.13	-2.92	±5
821.5	Tissue Liquid Head	40.607	0.884	41.56	0.90	-2.29	-1.78	±5
826.4	Tissue Liquid Head	40.557	0.885	41.54	0.90	-2.37	-1.67	±5
831.5	Tissue Liquid Head	40.412	0.893	41.52	0.90	-2.67	-0.78	±5
836.6	Tissue Liquid Head	40.642	0.893	41.50	0.90	-2.07	-0.78	±5
841.5	Tissue Liquid Head	40.744	0.895	41.50	0.91	-1.82	-1.65	±5
846.6	Tissue Liquid Head	40.592	0.899	41.50	0.91	-2.19	-1.21	±5

**Liquid Verification above was performed on 2020/12/19.*

Frequency (MHz)	Liquid Type	Liquid Parameter		Target Value		Delta (%)		Tolerance (%)
		ε_r	σ (S/m)	ε_r	σ (S/m)	$\Delta\varepsilon_r$	Δσ	
704	Tissue Liquid Head	43.001	0.87	42.15	0.89	2.02	-2.25	±5
707.5	Tissue Liquid Head	43.007	0.864	42.13	0.89	2.08	-2.92	±5
711	Tissue Liquid Head	43.019	0.858	42.11	0.89	2.16	-3.6	±5
750	Tissue Liquid Head	42.756	0.872	41.90	0.89	2.04	-2.02	±5
782	Tissue Liquid Head	42.128	0.879	41.75	0.89	0.91	-1.24	±5
824.2	Tissue Liquid Head	40.695	0.885	41.55	0.90	-2.06	-1.67	±5
836.6	Tissue Liquid Head	40.649	0.894	41.5	0.90	-2.05	-0.67	±5
848.8	Tissue Liquid Head	40.722	0.898	41.5	0.91	-1.87	-1.32	±5

**Liquid Verification above was performed on 2020/12/20.*

Frequency (MHz)	Liquid Type	Liquid Parameter		Target Value		Delta (%)		Tolerance (%)
		ε_r	σ (S/m)	ε_r	σ (S/m)	$\Delta\varepsilon_r$	Δσ	
1720	Tissue Liquid Head	40.376	1.324	40.13	1.35	0.61	-1.93	±5
1745	Tissue Liquid Head	40.776	1.342	40.10	1.37	1.69	-2.04	±5
1770	Tissue Liquid Head	40.242	1.365	40.06	1.38	0.45	-1.09	±5
1800	Tissue Liquid Head	40.266	1.414	40.0	1.40	0.66	1	±5

**Liquid Verification above was performed on 2020/12/23.*

Frequency (MHz)	Liquid Type	Liquid Parameter		Target Value		Delta (%)		Tolerance (%)
		ε_r	σ (S/m)	ε_r	σ (S/m)	$\Delta\varepsilon_r$	Δσ	
1850.2	Tissue Liquid Head	39.654	1.373	40.0	1.40	-0.86	-1.93	±5
1852.4	Tissue Liquid Head	39.528	1.374	40.0	1.40	-1.18	-1.86	±5
1860	Tissue Liquid Head	40.109	1.383	40.0	1.40	0.27	-1.21	±5
1880	Tissue Liquid Head	39.942	1.392	40.0	1.40	-0.15	-0.57	±5
1882.5	Tissue Liquid Head	40.014	1.397	40.0	1.40	0.04	-0.21	±5
1900	Tissue Liquid Head	39.955	1.415	40.0	1.40	-0.11	1.07	±5
1905	Tissue Liquid Head	39.873	1.418	40.0	1.40	-0.32	1.29	±5
1907.6	Tissue Liquid Head	40.087	1.428	40.0	1.40	0.22	2	±5
1909.8	Tissue Liquid Head	40.067	1.429	40.0	1.40	0.17	2.07	±5

**Liquid Verification above was performed on 2020/12/22.*

Frequency (MHz)	Liquid Type	Liquid Parameter		Target Value		Delta (%)		Tolerance (%)
		ε_r	σ (S/m)	ε_r	σ (S/m)	$\Delta\varepsilon_r$	Δσ	
2300	Tissue Liquid Head	39.716	1.637	39.50	1.67	0.55	-1.98	±5
2310	Tissue Liquid Head	39.573	1.639	39.48	1.68	0.24	-2.44	±5

**Liquid Verification above was performed on 2020/12/20.*

Frequency (MHz)	Liquid Type	Liquid Parameter		Target Value		Delta (%)		Tolerance (%)
		ε_r	σ (S/m)	ε_r	σ (S/m)	$\Delta\varepsilon_r$	Δσ	
2300	Tissue Liquid Head	39.582	1.642	39.50	1.67	0.21	-1.68	±5
2355	Tissue Liquid Head	39.421	1.665	39.40	1.71	0.05	-2.63	±5

**Liquid Verification above was performed on 2020/12/22.*

Frequency (MHz)	Liquid Type	Liquid Parameter		Target Value		Delta (%)		Tolerance (%)
		ε_r	σ (S/m)	ε_r	σ (S/m)	$\Delta\varepsilon_r$	Δσ	
2412	Tissue Liquid Head	38.562	1.817	39.28	1.77	-1.83	2.66	±5
2437	Tissue Liquid Head	38.646	1.847	39.23	1.79	-1.49	3.18	±5
2450	Tissue Liquid Head	38.128	1.849	39.20	1.80	-2.73	2.72	±5
2462	Tissue Liquid Head	38.641	1.874	39.18	1.81	-1.38	3.54	±5
2510	Tissue Liquid Head	38.696	1.904	39.12	1.86	-1.08	2.37	±5
2535	Tissue Liquid Head	38.353	1.927	39.09	1.89	-1.89	1.96	±5

**Liquid Verification above was performed on 2020/12/21.*

Frequency (MHz)	Liquid Type	Liquid Parameter		Target Value		Delta (%)		Tolerance (%)
		ε_r	σ (S/m)	ε_r	σ (S/m)	$\Delta\varepsilon_r$	Δσ	
2545	Tissue Liquid Head	38.743	1.962	39.05	1.92	-0.79	2.19	±5
2560	Tissue Liquid Head	38.787	1.966	39.06	1.92	-0.7	2.4	±5
2595	Tissue Liquid Head	38.304	1.976	39.01	1.95	-1.81	1.33	±5
2600	Tissue Liquid Head	38.174	1.985	39.0	1.96	-2.12	1.28	±5
2645	Tissue Liquid Head	38.092	1.998	38.94	2.01	-2.18	-0.6	±5

**Liquid Verification above was performed on 2020/12/21.*

System Accuracy Verification

Prior to the assessment, the system validation kit was used to test whether the system was operating within its specifications of ±10%. The validation results are tabulated below. And also the corresponding SAR plot is attached as well in the SAR plots files.

The spacing distances in the **System Verification Setup Block Diagram** is given by the following:

a) s = 15 mm ± 0,2 mm for 300 MHz ≤ f ≤ 1 000 MHz;

b) s = 10 mm ± 0,2 mm for 1 000 MHz < f ≤ 3 000 MHz;

c) s = 10 mm ± 0,2 mm for 3 000 MHz < f ≤ 6 000 MHz.

System Verification Setup Block Diagram

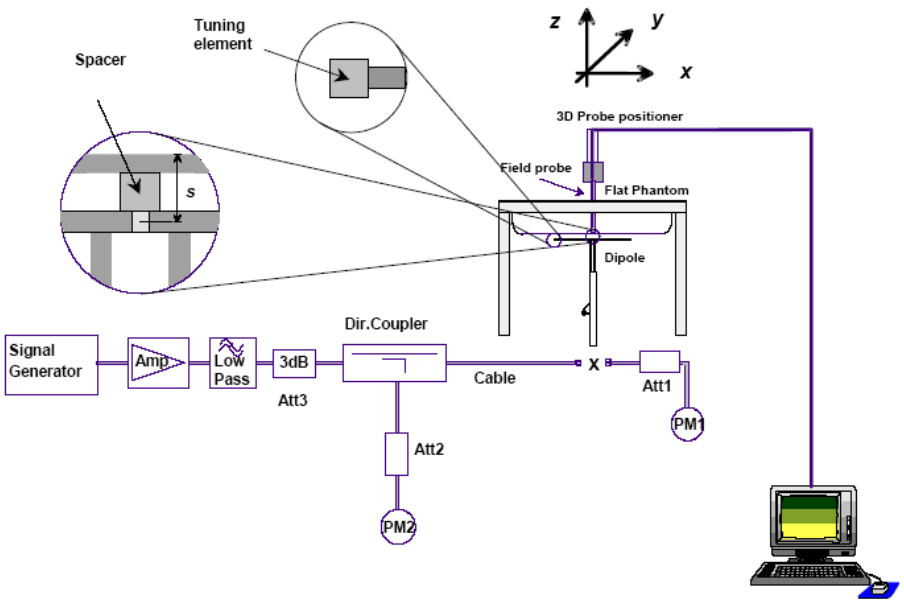

System Accuracy Check Results

Date	Frequency Band (MHz)	Liquid Type	Input Power (mW)	Measured SAR (W/kg)		Normalized to 1W (W/kg)	Target Value (W/Kg)	Delta (%)	Tolerance (%)
2020/12/19	750	Head	100	1g	0.860	8.60	8.55	0.585	±10
2020/12/20	750	Head	100	1g	0.858	8.58	8.55	0.351	±10
2020/12/23	1800	Head	100	1g	3.75	37.5	38.5	-2.597	±10
2020/12/22	1900	Head	100	1g	3.96	39.6	40.3	-1.737	±10
2020/12/20	2300	Head	100	1g	4.82	48.2	47.1	2.335	±10
2020/12/22	2300	Head	100	1g	4.85	48.5	47.1	2.972	±10
2020/12/21	2450	Head	100	1g	5.32	53.2	52.5	1.333	±10
2020/12/21	2600	Head	100	1g	5.61	56.1	55.4	1.264	±10

*The SAR values above are normalized to 1 Watt forward power.

SAR SYSTEM VALIDATION DATA

System Performance 750 MHz Head (Date: 2020/12/19)

DUT: Dipole 750MHz; Type: D750V3; Serial: 1194

Communication System: UID 0, CW (0); Frequency: 750 MHz;Duty Cycle: 1:1
Medium parameters used: f = 750 MHz; σ = 0.864 S/m; ε_r = 42.792; ρ = 1000 kg/m^3
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.92, 9.92, 9.92) @ 750 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 3/3/2020
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Head 750MHz Pin=100mW/Area Scan (101x161x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 1.07 W/kg

Head 750MHz Pin=100mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 33.63 V/m; Power Drift = -0.02 dB
Peak SAR (extrapolated) = 1.35 W/kg
SAR(1 g) = 0.86 W/kg; SAR(10 g) = 0.574 W/kg
Maximum value of SAR (measured) = 0.982 W/kg

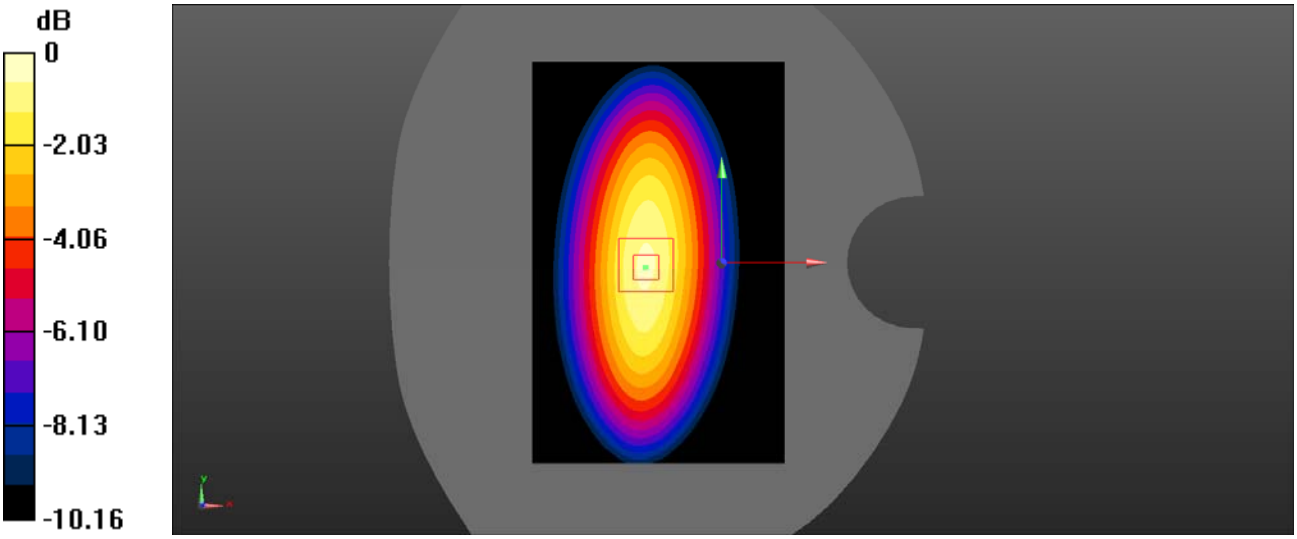

0 dB = 0.982 W/kg = -0.08 dBW/kg

System Performance 750 MHz Head

DUT: Dipole 750MHz; Type: D750V3; Serial: 1194 (Date: 2020/12/20)

Communication System: UID 0, CW (0); Frequency: 750 MHz;Duty Cycle: 1:1
Medium parameters used: f = 750 MHz; σ = 0.872 S/m; ε_r = 42.756; ρ = 1000 kg/m^3
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.92, 9.92, 9.92) @ 750 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 3/3/2020
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Head 750MHz Pin=100mW/Area Scan (101x161x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 1.06 W/kg

Head 750MHz Pin=100mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 33.41 V/m; Power Drift = -0.01 dB
Peak SAR (extrapolated) = 1.32 W/kg
SAR(1 g) = 0.858 W/kg; SAR(10 g) = 0.566 W/kg
Maximum value of SAR (measured) = 0.976 W/kg

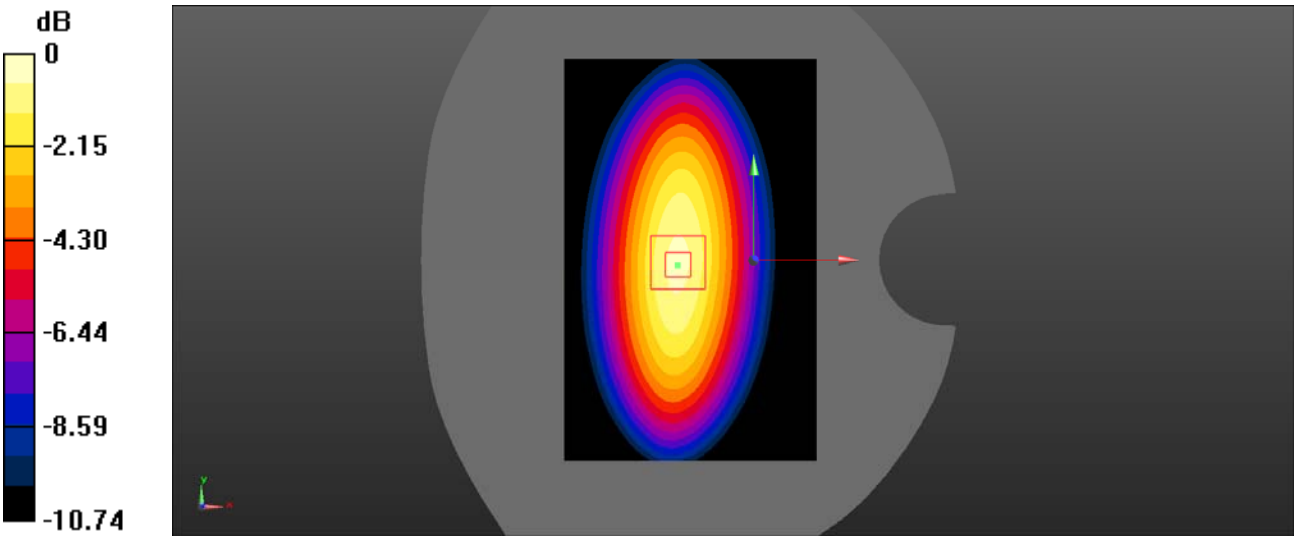

0 dB = 0.976 W/kg = -0.11 dBW/kg

System Performance 1800 MHz Head

DUT: Dipole 1800 MHz; Type: D1800V2; Serial: 2d018

Communication System: UID 0, CW (0); Frequency: 1800 MHz;Duty Cycle: 1:1
Medium parameters used: f = 1800 MHz; σ = 1.414 S/m; ε_r = 40.266; ρ = 1000 kg/m^3
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(8.21, 8.21, 8.21) @ 1800 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 3/3/2020
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Head 1800MHz Pin=100mW/Area Scan (81x101x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 4.32 W/kg

Head 1800MHz Pin=100mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 51.77 V/m; Power Drift = -0.02 dB
Peak SAR (extrapolated) = 6.82 W/kg
SAR(1 g) = 3.75 W/kg; SAR(10 g) = 1.96 W/kg
Maximum value of SAR (measured) = 4.18 W/kg

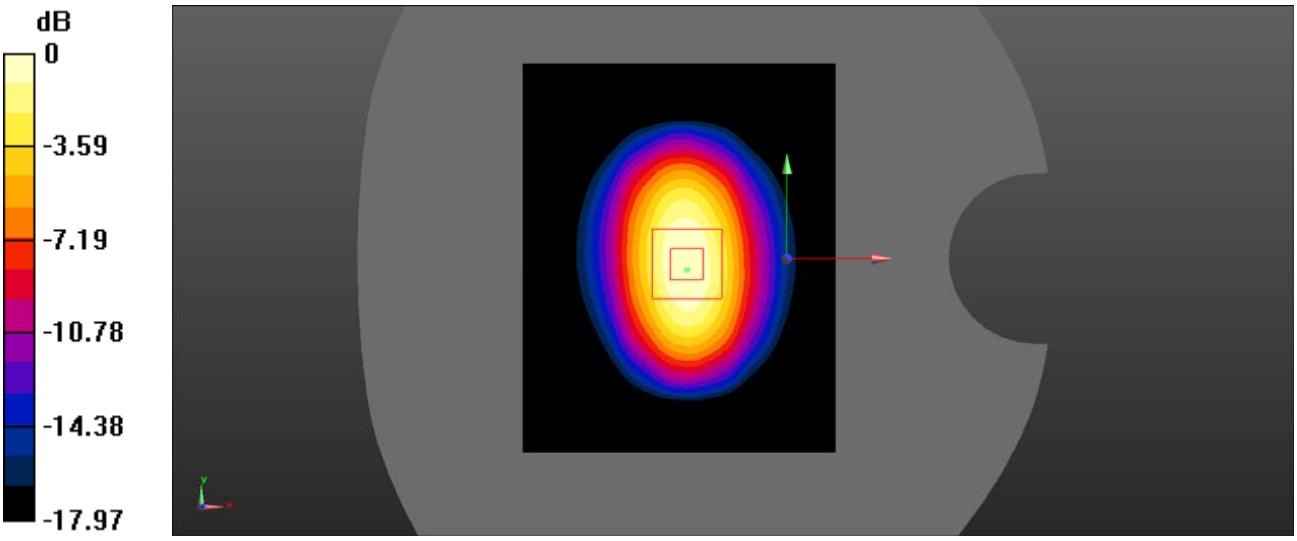

0 dB = 4.18 W/kg = 6.21 dBW/kg

System Performance 1900 MHz Head

DUT: Dipole 1900MHz; Type: D1900V2; Serial: 5d231

Communication System: UID 0, CW (0); Frequency: 1900 MHz;Duty Cycle: 1:1
Medium parameters used: f = 1900 MHz; σ = 1.415 S/m; ε_r = 39.955; ρ = 1000 kg/m^3
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.95, 7.95, 7.95) @ 1900 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 3/3/2020
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Head 1900MHz Pin=100mW/Area Scan (81x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 4.27 W/kg

Head 1900MHz Pin=100mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 54.58 V/m; Power Drift = -0.02 dB
Peak SAR (extrapolated) = 6.95 W/kg
SAR(1 g) = 3.96 W/kg; SAR(10 g) = 2.05 W/kg
Maximum value of SAR (measured) = 4.27 W/kg

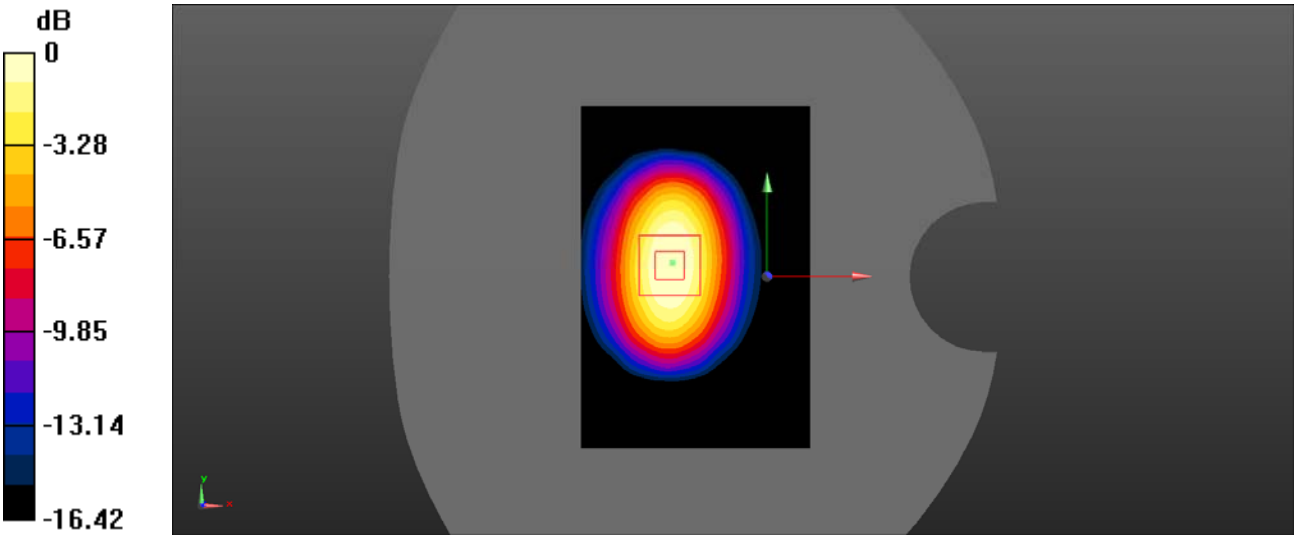

0 dB = 4.27 W/kg = 6.30 dBW/kg

System Performance 2300 Head

DUT: Dipole 2300 Type: D2300V2; Serial: 1103 (Date:2020/12/20)

Communication System: UID 0, CW (0); Frequency: 2300 MHz;Duty Cycle: 1:1
Medium parameters used: f = 2300 MHz; σ = 1.637 S/m; ε_r = 39.716; ρ = 1000 kg/m^3
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.53, 7.53, 7.53) @ 2300 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 3/3/2020
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Head 2300MHz Pin=100mW/Area Scan (81x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 6.88 W/kg

Head 2300MHz Pin=100mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 47.85V/m; Power Drift = -0.01 dB
Peak SAR (extrapolated) = 9.72 W/kg
SAR(1 g) = 4.82 W/kg; SAR(10 g) = 2.32 W/kg
Maximum value of SAR (measured) = 5.64 W/kg

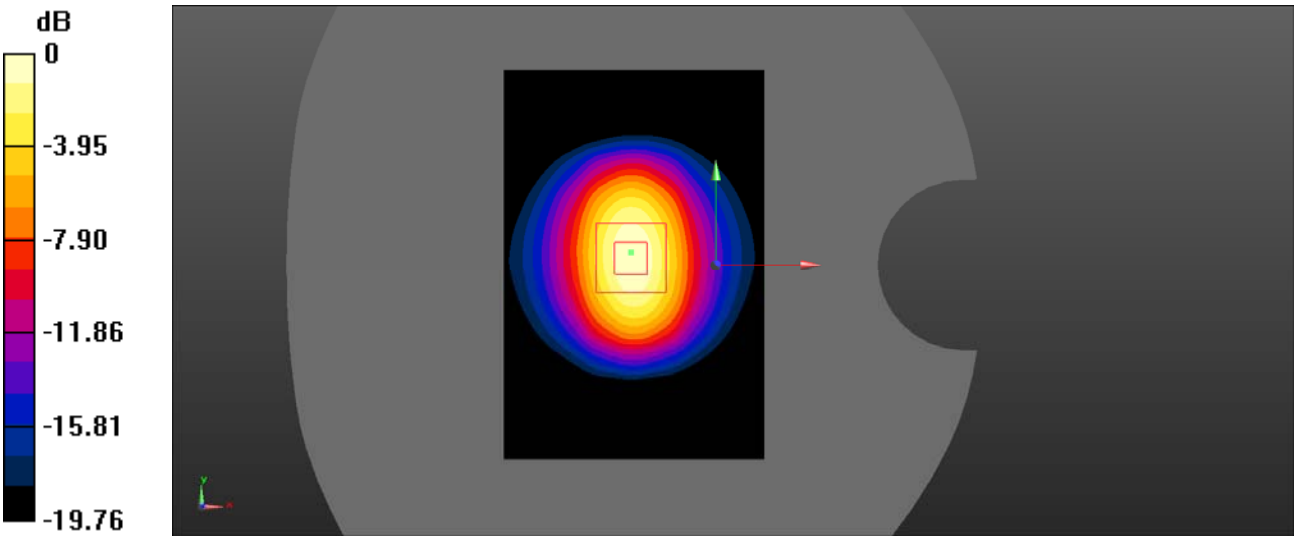

0 dB = 5.64 W/kg = 7.51 dBW/kg

System Performance 2300 Head

DUT: Dipole 2300 Type: D2300V2; Serial: 1103 (Date:2020/12/22)

Communication System: UID 0, CW (0); Frequency: 2300 MHz;Duty Cycle: 1:1
Medium parameters used: f = 2300 MHz; σ = 1.642 S/m; ε_r = 39.582; ρ = 1000 kg/m^3
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.53, 7.53, 7.53) @ 2300 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 3/3/2020
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Head 2300MHz Pin=100mW/Area Scan (81x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 6.88 W/kg

Head 2300MHz Pin=100mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 48.16V/m; Power Drift = -0.02 dB
Peak SAR (extrapolated) = 9.72 W/kg
SAR(1 g) = 4.85 W/kg; SAR(10 g) = 2.36 W/kg
Maximum value of SAR (measured) = 5.68 W/kg

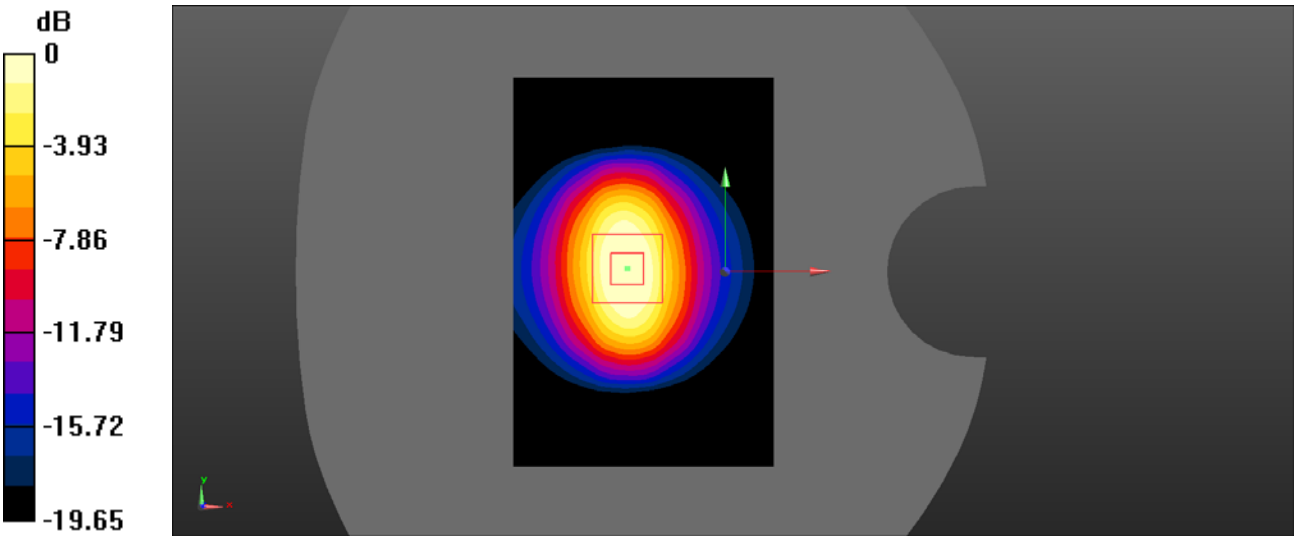

0 dB = 5.68 W/kg = 7.54 dBW/kg

System Performance 2450 MHz Head

DUT: Dipole 2450MHz; Type: D2450V2; Serial: 751

Communication System: UID 0, CW (0); Frequency: 2450 MHz;Duty Cycle: 1:1
Medium parameters used: f = 2450 MHz; σ = 1.849 S/m; ε_r = 38.128; ρ = 1000 kg/m^3
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.15, 7.15, 7.15) @ 2450 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 3/3/2020
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Head 2450MHz Pin=100mW/Area Scan (81x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 6.05 W/kg

Head 2450MHz Pin=100mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 49.84 V/m; Power Drift = -0.02 dB
Peak SAR (extrapolated) = 10.6 W/kg
SAR(1 g) = 5.32 W/kg; SAR(10 g) = 2.46 W/kg
Maximum value of SAR (measured) = 6.18 W/kg

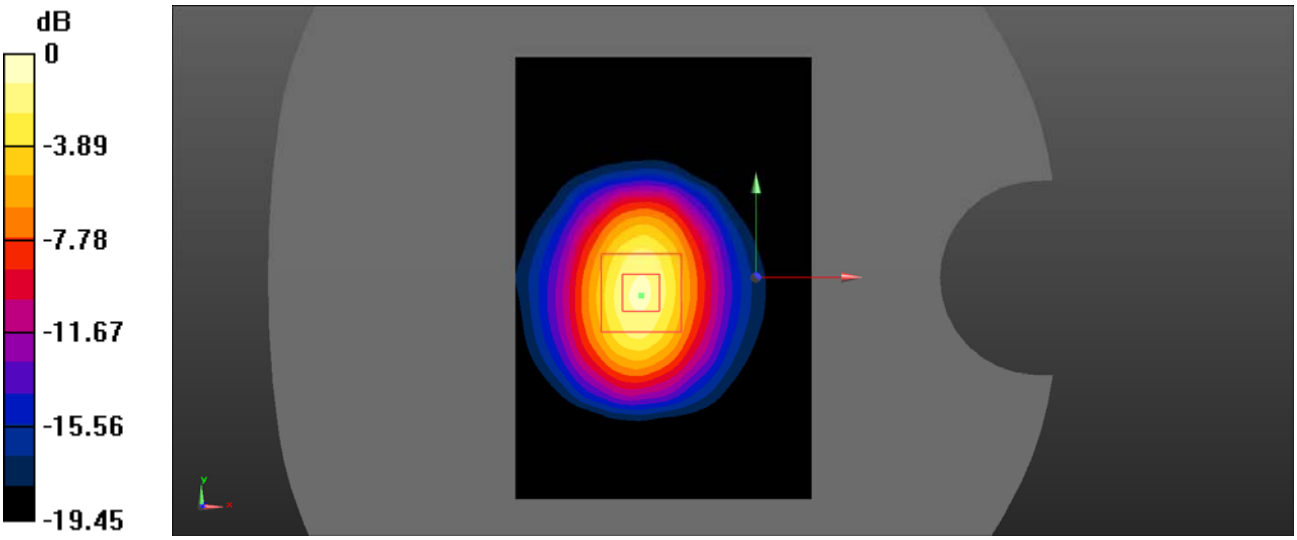

0 dB = 6.18 W/kg = 7.91 dBW/kg

System Performance 2600 MHz Head

DUT: Dipole 2600 MHz; Type: D2600V2; Serial: 1073

Communication System: UID 0, CW (0); Frequency: 2600 MHz;Duty Cycle: 1:1
Medium parameters used: f = 2600 MHz; σ = 1.985 S/m; ε_r = 38.174; ρ = 1000 kg/m^3
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.04, 7.04, 7.04) @ 2600 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 3/3/2020
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Head 2600MHz Pin=100mW/Area Scan (81x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 6.39 W/kg

Head 2600MHz Pin=100mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 52.67 V/m; Power Drift = -0.01 dB
Peak SAR (extrapolated) = 12.5 W/kg
SAR(1 g) = 5.61 W/kg; SAR(10 g) = 2.53 W/kg
Maximum value of SAR (measured) =6.29 W/kg

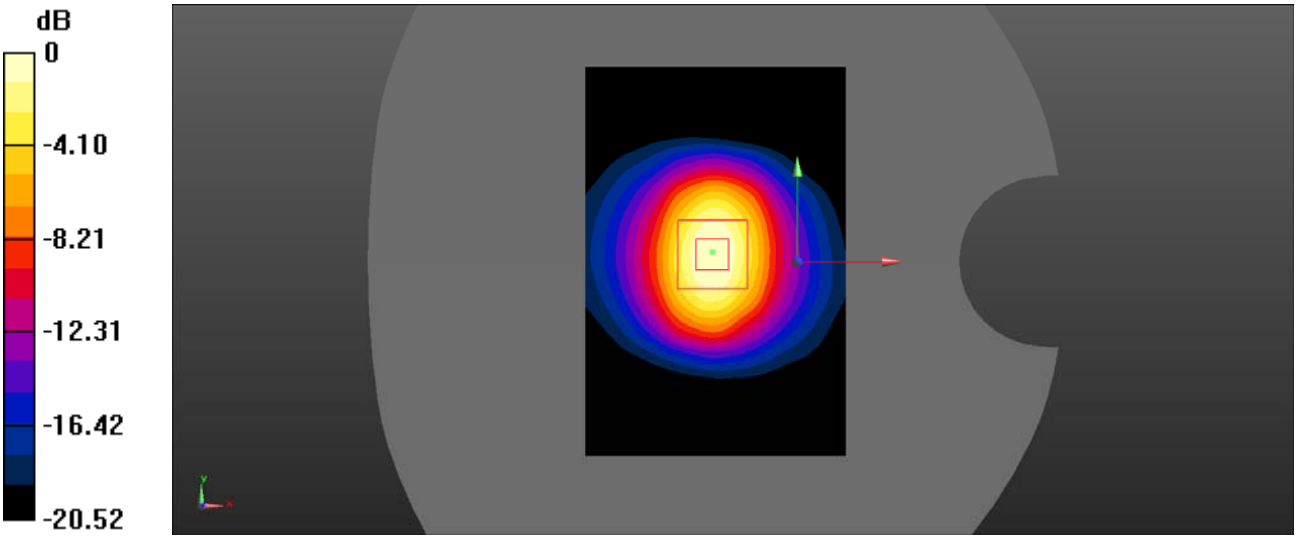

0 dB = 6.29 W/kg = 7.99 dBW/kg

EUT TEST STRATEGY AND METHODOLOGY

Test positions for body-worn and other configurations

Body-worn operating configurations should be tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in normal use configurations. Devices with a headset output should be tested with a headset connected to the device. When multiple accessories that do not contain metallic components are supplied with the device, the device may be tested with only the accessory that dictates the closest spacing to the body. When multiple accessories that contain metallic components are supplied with the device, the device must be tested with each accessory that contains a unique metallic component. If multiple accessories share an identical metallic component (e.g., the same metallic belt-clip used with different holsters with no other metallic components), only the accessory that dictates the closest spacing to the body must be tested.

Body-worn accessories may not always be supplied or available as options for some devices that are intended to be authorized for body-worn use. A separation distance of 1.5 cm between the back of the device and a flat phantom is recommended for testing body-worn SAR compliance under such circumstances. Other separation distances may be used, but they should not exceed 2.5 cm. In these cases, the device may use body-worn accessories that provide a separation distance greater than that tested for the device provided however that the accessory contains no metallic components.

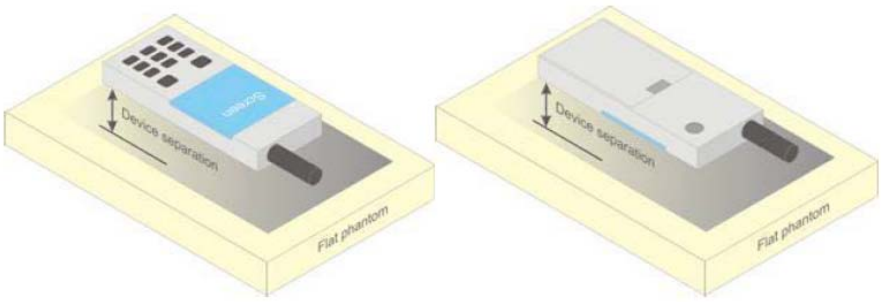

Figure 5 – Test positions for body-worn devices

Test Distance for SAR Evaluation

For this case the EUT(Equipment Under Test) is set 10mm away from the phantom, the test distance is 10mm.

SAR Evaluation Procedure

The evaluation was performed with the following procedure:

Step 1: Measurement of the SAR value at a fixed location above the ear point or central position was used as a reference value for assessing the power drop. The SAR at this point is measured at the start of the test and then again at the end of the testing.

Step 2: The SAR distribution at the exposed side of the head was measured at a distance of 4 mm from the inner surface of the shell. The area covered the entire dimension of the head or radiating structures of the EUT, the horizontal grid spacing was 15 mm x 15 mm, and the SAR distribution was determined by integrated grid of 1.5mm x 1.5mm. Based on these data, the area of the maximum absorption was determined by spline interpolation. The first Area Scan covers the entire dimension of the EUT to ensure that the hotspot was correctly identified.

Step 3: Around this point, a volume of 30 mm x 30 mm x 30 mm was assessed by measuring 7x 7 x 7 points. On the basis of this data set, the spatial peak SAR value was evaluated under the following procedure:

1) The data at the surface were extrapolated, since the center of the dipoles is 1.2 mm away from the tip of the probe and the distance between the surface and the lowest measuring point is 1.3 mm. The extrapolation was based on a least square algorithm. A polynomial of the fourth order was calculated through the points in z-axes. This polynomial was then used to evaluate the points between the surface and the probe tip.

2) The maximum interpolated value was searched with a straightforward algorithm. Around this maximum the SAR values averaged over the spatial volumes (1 g or 10 g) were computed by the 3D-Spline interpolation algorithm. The 3D-Spline is composed of three one dimensional splines with the “Not a knot"-condition (in x, y and z-directions). The volume was integrated with the trapezoidal-algorithm. One thousand points (10 x 10 x 10) were interpolated to calculate the averages.

All neighboring volumes were evaluated until no neighboring volume with a higher average value was found.

Step 4: Re-measurement of the SAR value at the same location as in Step 1. If the value changed by more than 5%, the evaluation was repeated.

CONDUCTED OUTPUT POWER MEASUREMENT

Provision Applicable

The measured peak output power should be greater and within 5% than EMI measurement.

Test Procedure

The RF output of the transmitter was connected to the input of the EMI Test Receiver through Connector.

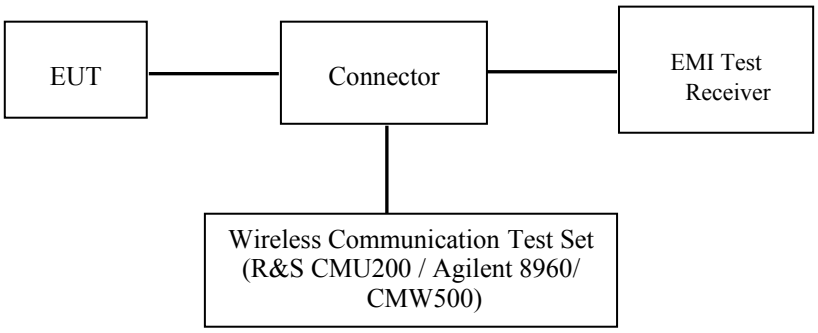

GSM/WCDMA/LTE

Radio Configuration

The power measurement was configured by the Wireless Communication Test Set.

GSM/GPRS

Function: Menu select > GSM Mobile Station > GSM 850/1900
Press Connection control to choose the different menus
Press RESET > choose all the reset all settings
Connection Press Signal Off to turn off the signal and change settings
Network Support > GSM + GPRS or GSM + EGSM
Main Service > Packet Data
Service selection > Test Mode A – Auto Slot Config. off
MS Signal Press Slot Config Bottom on the right twice to select and change the number of time slots and power setting
> Slot configuration > Uplink/Gamma
> 33 dBm for GPRS 850
> 30 dBm for GPRS 1900
BS Signal Enter the same channel number for TCH channel (test channel) and BCCH channel
Frequency Offset > + 0 Hz
Mode > BCCH and TCH
BCCH Level > -85 dBm (May need to adjust if link is not stabe)
BCCH Channel > choose desire test channel [Enter the same channel number for TCH channel (test channel) and BCCH channel]

Channel Type > Off
P0 > 4 dB
Slot Config >Unchanged (if already set under MS signal)
TCH > choose desired test channel
Hopping > Off

Main Timeslot > 3
Network Coding Scheme > CS4 (GPRS)
Bit Stream >2E9-1 PSR Bit Stream
AF/RF Enter appropriate offsets for Ext. Att. Output and Ext. Att. Input
Connection Press Signal on to turn on the signal and change settings

WCDMA Release 99

The following tests were conducted according to the test requirements outlines in section 5.2 of the 3GPP TS34.121-1 specification. The EUT has a nominal maximum output power of 24dBm (+1.7/-3.7).

WCDMA General Settings	Loopback Mode	Test Mode 1
	Rel99 RMC	12.2kbps RMC
	Power Control Algorithm	Algorithm2
	β_c/β_d	8/15

HSDPA

The following tests were conducted according to the test requirements outlines in section 5.2 of the 3GPP TS34.121-1 specification.

	Mode	HSDPA	HSDPA	HSDPA	HSDPA
	Subset	1	2	3	4
WCDMA General Settings	Loopback Mode	Test Mode 1			
	Rel99 RMC	12.2kbps RMC			
	HSDPA FRC	H-Set1			
	Power Control Algorithm	Algorithm2			
	β_c	2/15	12/15	15/15	15/15
	β_d	15/15	15/15	8/15	4/15
	β_d(SF)	64			
	β_c/β_d	2/15	12/15	15/8	15/4
	β_{hs}	4/15	24/15	30/15	30/15
	MPR(dB)	0	0	0.5	0.5
HSDPA Specific Settings	DACK	8			
	DNAK	8			
	DCQI	8			
	Ack-Nack repetition factor	3			
	CQI Feedback	4ms			
	CQI Repetition Factor	2			
	Ahs=βhs/ βc	30/15			

HSUPA

The following tests were conducted according to the test requirements outlines in section 5.2 of the 3GPP TS34.121-1 specification.

	Mode	**HSUPA**	**HSUPA**	**HSUPA**	**HSUPA**	**HSUPA**
	Subset	**1**	**2**	**3**	**4**	**5**
WCDMA General Settings	Loopback Mode	Test Mode 1				
	Rel99 RMC	12.2kbps RMC				
	HSDPA FRC	H-Set1				
	HSUPA Test	HSUPA Loopback				
	Power Control Algorithm	Algorithm2				
	β_c	11/15	6/15	15/15	2/15	15/15
	β_d	15/15	15/15	9/15	15/15	0
	β_{ec}	209/225	12/15	30/15	2/15	5/15
	β_c/ β_d	11/15	6/15	15/9	2/15	-
	β_{hs}	22/15	12/15	30/15	4/15	5/15
	CM(dB)	1.0	3.0	2.0	3.0	1.0
	MPR(dB)	0	2	1	2	0
HSDPA Specific Settings	DACK	8				
	DNAK	8				
	DCQI	8				
	Ack-Nack repetition factor	3				
	CQI Feedback	4ms				
	CQI Repetition Factor	2				
	Ahs=β_{hs}/ β_c	30/15				
HSUPA Specific Settings	DE-DPCCH	6	8	8	5	7
	DHARQ	0	0	0	0	0
	AG Index	20	12	15	17	21
	ETFCI	75	67	92	71	81
	Associated Max UL Data Rate kbps	242.1	174.9	482.8	205.8	308.9
	Reference E_FCls	E-TFCI 11 E E-TFCI PO 4 E-TFCI 67 E-TFCI PO 18 E-TFCI 71 E-TFCI PO23 E-TFCI 75 E-TFCI PO26 E-TFCI 81 E-TFCI PO 27		E-TFCI 11 E-TFCI PO4 E-TFCI 92 E-TFCI PO 18	E-TFCI 11 E E-TFCI PO 4 E-TFCI 67 E-TFCI PO 18 E-TFCI 71 E-TFCI PO23 E-TFCI 75 E-TFCI PO26 E-TFCI 81 E-TFCI PO 27	

FDD-LTE

For UE Power Class 1 and 3, the allowed Maximum Power Reduction (MPR) for the maximum output power in Table 6.2.2-1due to higher order modulation and transmit bandwidth configuration (resource blocks) is specified in Table 6.2.3-1.

Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1 and 3

Modulation	Channel bandwidth / Transmission bandwidth (N_{RB})						MPR (dB)
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2

For UE Power Class 1 and 3 the specific requirements and identified sub clauses are specified in Table 6.2.4-1 along with the allowed A-MPR values that may be used to meet these requirements. The allowed A-MPR values specified below in Table 6.2.4.-1 to 6.2.4-15 are in addition to the allowed MPR requirements specified in sub clause 6.2.3.

Table 6.2.4-1: Additional Maximum Power Reduction (A-MPR)

Network Signalling value	Requirements (subclause)	E-UTRA Band	Channel bandwidth (MHz)	Resources Blocks (N_{RB})	A-MPR (dB)
NS_01	6.6.2.1.1	Table 5.5-1	1.4, 3, 5, 10, 15, 20	Table 5.6-1	N/A
NS_03	6.6.2.2.1	2, 4,10, 23, 25, 35, 36	3	>5	≤ 1
			5	>6	≤ 1
			10	>6	≤ 1
			15	>8	≤ 1
			20	>10	≤ 1
NS_04	6.6.2.2.2	41	5	>6	≤ 1
			10, 15, 20	Table 6.2.4-4	
NS_05	6.6.3.3.1	1	10,15,20	≥ 50	≤ 1
NS_06	6.6.2.2.3	12, 13, 14, 17	1.4, 3, 5, 10	Table 5.6-1	N/A
NS_07	6.6.2.2.3 6.6.3.3.2	13	10	Table 6.2.4-2	
NS_08	6.6.3.3.3	19	10, 15	> 44	≤ 3
NS_09	6.6.3.3.4	21	10, 15	> 40	≤ 1
				> 55	≤ 2
NS_10		20	15, 20	Table 6.2.4-3	
NS_11	6.6.2.2.1	23	1.4, 3, 5, 10, 15, 20	Table 6.2.4-5	
NS_12	6.6.3.3.5	26	1.4, 3, 5	Table 6.2.4-6	
NS_13	6.6.3.3.6	26	5	Table 6.2.4-7	
NS_14	6.6.3.3.7	26	10, 15	Table 6.2.4-8	
NS_15	6.6.3.3.8	26	1.4, 3, 5, 10, 15	Table 6.2.4-9 Table 6.2.4-10	
NS_16	6.6.3.3.9	27	3, 5, 10	Table 6.2.4-11, Table 6.2.4-12, Table 6.2.4-13	
NS_17	6.6.3.3.10	28	5, 10	Table 5.6-1	N/A
NS_18	6.6.3.3.11	28	5	≥ 2	≤ 1
			10, 15, 20	≥ 1	≤ 4
NS_19	6.6.3.3.12	44	10, 15, 20	Table 6.2.4-14	
NS_20	6.2.2 6.6.2.2.1 6.6.3.2	23	5, 10, 15, 20	Table 6.2.4-15	
...					
NS_32	-	-	-	-	-

Maximum Target Output Power

Max Target Power(dBm)				
Mode/Band		Channel		
		Low	Middle	High
GPRS/ EGPRS 850	GPRS 1 TX Slot	32.9	32.9	32.9
	GPRS 2 TX Slot	30.8	30.8	30.8
	GPRS 3 TX Slot	28.3	28.3	28.3
	GPRS 4 TX Slot	25.9	25.9	25.9
	EGPRS 1 TX Slot	25.4	25.4	25.4
	EGPRS 2 TX Slot	24.9	24.9	24.9
	EGPRS 3 TX Slot	23.1	23.1	23.1
	EGPRS 4 TX Slot	20.3	20.3	20.3
GPRS/ EGPRS 1900	GPRS 1 TX Slot	32.3	32.3	32.3
	GPRS 2 TX Slot	30.4	30.4	30.4
	GPRS 3 TX Slot	28.1	28.1	28.1
	GPRS 4 TX Slot	26.3	26.3	26.3
	EGPRS 1 TX Slot	26.5	26.5	26.5
	EGPRS 2 TX Slot	24.6	24.6	24.6
	EGPRS 3 TX Slot	22.2	22.2	22.2
	EGPRS 4 TX Slot	19.5	19.5	19.5
WCDMA Band 2		23.5	23.5	23.5
WCDMA Band 5		22.7	22.7	22.7
LTE Band 2		25.0	25.0	25.0
LTE Band 4		24.6	24.6	24.6
LTE Band 5		24.7	24.7	24.7
LTE Band 7		25.0	25.0	25.0
LTE Band 12		24.5	24.5	24.5
LTE Band 13		24.1	24.1	24.1
LTE Band 26		24.7	24.7	24.7
LTE Band 38		24.5	24.5	24.5
LTE Band 40 Lower		22.8	22.8	22.8
LTE Band 40 Upper		22.8	22.8	22.8
LTE Band 41		24.7	24.7	24.7
LTE Band 66		24.6	24.6	24.6
WLAN 2.4G		16.1	16.1	16.1

Test Results:

GPRS:

Band	Channel No.	Frequency (MHz)	RF Output Power (dBm)			
			1 slot	2 slots	3 slots	4 slots
GPRS 850	128	824.2	32.01	30.39	27.75	25.32
	190	836.6	32.21	30.21	27.98	25.58
	251	848.8	32.61	30.50	27.94	25.61
GPRS 1900	512	1850.2	31.41	29.41	27.48	25.16
	661	1880	31.50	29.96	27.55	25.72
	810	1909.8	31.99	30.10	27.79	26.02

EGPRS:

Band	Channel No.	Frequency (MHz)	RF Output Power (dBm)			
			1 slot	2 slots	3 slots	4 slots
EGPRS 850	128	824.2	24.89	24.39	22.81	19.86
	190	836.6	24.96	24.51	22.59	19.86
	251	848.8	25.12	24.64	22.54	19.98
EGPRS 1900	512	1850.2	25.91	23.89	21.49	18.92
	661	1880	26.16	24.23	21.91	19.22
	810	1909.8	26.15	24.30	21.85	19.18

For SAR, the time based average power is relevant, the difference in between depends on the duty cycle of the TDMA signal.

Number of Time slot	1	2	3	4
Duty Cycle	1:8	1:4	1:2.66	1:2
Time based Ave. power compared to slotted Ave. power	-9 dB	-6 dB	-4.25 dB	-3 dB
Crest Factor	8	4	2.66	2

The time based average power for GPRS

Band	Channel No.	Frequency (MHz)	Time based average Power (dBm)			
			1 slot	2 slot	3 slots	4 slots
GPRS 850	128	824.2	23.01	24.39	23.50	22.32
	190	836.6	23.21	24.21	23.73	22.58
	251	848.8	23.61	**24.50**	23.69	22.61
GPRS 1900	512	1850.2	22.41	23.41	23.23	22.16
	661	1880	22.50	23.96	23.30	22.72
	810	1909.8	22.99	**24.10**	23.54	23.02

The time based average power for EGPRS

Band	Channel No.	Frequency (MHz)	Time based average Power (dBm)			
			1 slot	2 slot	3 slots	4 slots
EGPRS 850	128	824.2	15.89	18.39	18.56	16.86
	190	836.6	15.96	18.51	18.34	16.86
	251	848.8	16.12	18.64	18.29	16.98
EGPRS 1900	512	1850.2	16.91	17.89	17.24	15.92
	661	1880	17.16	18.23	17.66	16.22
	810	1909.8	17.15	18.30	17.60	16.18

Note:

1. Rohde & Schwarz Radio Communication Tester (CMU200) was used for the measurement of GPRS/EGPRS peak and average output power for active timeslots.
3. For GPRS/EGPRS, 1, 2, 3 and 4 timeslots has been activated separately with power level 3(850 MHz band) and 3(1900 MHz band).

WCDMA Band 2:

Test Condition	Test Mode	3GPP Sub Test	Averaged Mean Power (dBm)		
			Low Frequency	Mid Frequency	High Frequency
Normal	RMC12.2k		22.88	23.09	23.15
	HSDPA	1	21.92	21.93	22.14
		2	20.50	21.49	21.09
		3	19.91	20.77	20.52
		4	18.34	18.95	18.13
	HSUPA	1	22.15	22.22	22.21
		2	20.97	21.55	21.09
		3	20.58	20.57	20.38
		4	19.61	19.04	18.85
		5	18.67	18.62	18.16
	DC-HSDPA	1	21.26	21.03	20.97
		2	18.52	19.50	19.18
		3	17.61	17.23	17.02
		4	16.54	16.29	16.09
	HSPA+ (16QAM)	1	20.91	20.79	20.46

WCDMA Band 5:

Test Condition	Test Mode	3GPP Sub Test	Averaged Mean Power (dBm)		
			Low Frequency	Mid Frequency	High Frequency
Normal	RMC12.2k		22.35	22.17	22.23
	HSDPA	1	21.17	21.13	21.20
		2	20.42	20.35	20.28
		3	19.81	19.80	19.47
		4	18.85	18.71	18.41
	HSUPA	1	21.41	21.66	21.38
		2	20.84	20.79	20.48
		3	19.71	19.68	19.65
		4	18.58	18.51	18.26
		5	17.53	17.50	17.05
	DC-HSDPA	1	20.94	20.73	20.51
		2	19.63	19.55	19.17
		3	18.77	18.59	18.43
		4	17.59	17.56	17.23
	HSPA+ (16QAM)	1	20.79	20.49	20.04

Note:

1. The default test configuration is to measure SAR with an established radio link between the EUT and a communication test set using a 12.2 kbps RMC (reference measurement Channel) Configured in Test Loop Model 1.
2. KDB 941225 D01-Body SAR is not required for HSDPA/HSUPA/ DC-HSDPA/ HSPA+ (16QAM) when the maximum average output of each RF channel is less than ¼ dB higher than measured 12.2kbps RMC or the maximum SAR for 12.2kbps RMC is < 75% of SAR limit.

LTE Band 2:

BW (MHz)	Modulation	Resource Block Size& Resource Block Offset	Target MPR	Meas MPR	Ave Tx Power (dBm)		
					Low Channel	Mid Channel	High Channel
					1850.7MHz	1880MHz	1909.3MHz
1.4	QPSK	RB Size=1, RB Offset=0	0	0	23.80	24.01	23.95
		RB Size=1, RB Offset=3	0	0	23.91	23.79	23.95
		RB Size=1, RB Offset=5	0	0	23.86	24.04	23.89
		RB Size=3, RB Offset=0	1	1	23.79	24.10	24.08
		RB Size=3, RB Offset=3	1	1	23.88	24.05	24.13
		RB Size=6, RB Offset=0	1	1	22.77	23.11	23.32
	16QAM	RB Size=1, RB Offset=0	1	1	23.09	23.33	23.10
		RB Size=1, RB Offset=3	1	1	23.22	23.67	23.25
		RB Size=1, RB Offset=5	1	1	22.96	23.29	23.10
		RB Size=3, RB Offset=0	2	2	23.72	23.97	24.15
		RB Size=3, RB Offset=3	2	2	23.74	24.10	24.19
		RB Size=6, RB Offset=0	2	2	21.89	22.16	21.97
BW (MHz)	Modulation	Resource Block Size& Resource Block Offset	Target MPR	Meas MPR	Ave Tx Power (dBm)		
					Low Channel	Mid Channel	High Channel
					1851.5MHz	1880MHz	1908.5MHz
3	QPSK	RB Size=1, RB Offset=0	0	0	23.74	24.05	24.00
		RB Size=1, RB Offset=8	0	0	23.89	23.92	23.80
		RB Size=1, RB Offset=14	0	0	23.93	23.95	24.07
		RB Size=6, RB Offset=0	1	1	22.70	23.08	23.22
		RB Size=6, RB Offset=9	1	1	22.68	23.14	23.15
		RB Size=15, RB Offset=0	1	1	22.87	23.07	23.22
	16QAM	RB Size=1, RB Offset=0	1	1	23.09	23.66	23.19
		RB Size=1, RB Offset=8	1	1	22.98	23.37	22.95
		RB Size=1, RB Offset=14	1	1	23.12	23.20	22.70
		RB Size=6, RB Offset=0	2	2	22.01	22.23	22.29
		RB Size=8, RB Offset=9	2	2	21.82	22.19	21.81
		RB Size=15, RB Offset=0	2	2	21.67	22.03	22.23

BW (MHz)	Modulation	Resource Block Size& Resource Block Offset	Target MPR	Meas MPR	Ave Tx Power (dBm)		
					Low Channel	Mid Channel	High Channel
					1852.5MHz	1880MHz	1907.5MHz
5	QPSK	RB Size=1, RB Offset=0	0	0	23.75	24.14	24.11
		RB Size=1, RB Offset=13	0	0	23.67	24.06	23.97
		RB Size=1, RB Offset=24	0	0	23.76	24.02	24.03
		RB Size=15, RB Offset=0	1	1	22.90	23.10	23.14
		RB Size=15, RB Offset=10	1	1	22.90	23.07	23.14
		RB Size=25, RB Offset=0	1	1	22.83	23.10	23.15
	16QAM	RB Size=1, RB Offset=0	1	1	22.18	23.40	22.95
		RB Size=1, RB Offset=13	1	1	22.42	23.50	22.99
		RB Size=1, RB Offset=24	1	1	22.06	23.26	22.93
		RB Size=15, RB Offset=0	2	2	22.82	23.10	23.10
		RB Size=15, RB Offset=10	2	2	22.78	23.04	23.12
		RB Size=25, RB Offset=0	2	2	22.06	21.95	22.08
BW (MHz)	Modulation	Resource Block Size& Resource Block Offset	Target MPR	Meas MPR	Ave Tx Power (dBm)		
					Low Channel	Mid Channel	High Channel
					1855MHz	1880MHz	1905MHz
10	QPSK	RB Size=1, RB Offset=0	0	0	23.76	24.02	24.27
		RB Size=1, RB Offset=25	0	0	23.81	24.07	24.34
		RB Size=1, RB Offset=49	0	0	23.79	24.11	24.18
		RB Size=25, RB Offset=0	1	1	22.86	23.09	23.21
		RB Size=25, RB Offset=25	1	1	22.85	23.20	23.11
		RB Size=50, RB Offset=0	1	1	22.89	23.17	23.22
	16QAM	RB Size=1, RB Offset=0	1	1	23.10	23.77	23.07
		RB Size=1, RB Offset=25	1	1	23.29	23.40	23.13
		RB Size=1, RB Offset=49	1	1	23.06	23.64	22.86
		RB Size=25, RB Offset=0	2	2	23.06	23.10	23.26
		RB Size=25, RB Offset=25	2	2	22.85	23.25	23.15
		RB Size=50, RB Offset=0	2	2	21.71	22.18	22.15

BW (MHz)	Modulation	Resource Block Size& Resource Block Offset	Target MPR	Meas MPR	Ave Tx Power (dBm)		
					Low Channel	Mid Channel	High Channel
					1857.5MHz	1880MHz	1902.5MHz
15	QPSK	RB Size=1, RB Offset=0	0	0	23.67	24.13	24.05
		RB Size=1, RB Offset=38	0	0	24.04	23.88	23.99
		RB Size=1, RB Offset=74	0	0	23.90	23.80	23.81
		RB Size=36, RB Offset=0	1	1	22.85	23.15	23.29
		RB Size=36, RB Offset=39	1	1	23.02	23.07	23.12
		RB Size=75, RB Offset=0	1	1	22.90	23.07	23.12
	16QAM	RB Size=1, RB Offset=0	1	1	23.11	23.19	23.24
		RB Size=1, RB Offset=38	1	1	23.36	23.88	23.38
		RB Size=1, RB Offset=74	1	1	23.32	23.49	23.03
		RB Size=36, RB Offset=0	2	2	23.02	23.14	23.26
		RB Size=36, RB Offset=39	2	2	22.85	23.11	23.10
		RB Size=75, RB Offset=0	2	2	21.88	22.14	22.16
BW (MHz)	Modulation	Resource Block Size& Resource Block Offset	Target MPR	Meas MPR	Ave Tx Power (dBm)		
					Low Channel	Mid Channel	High Channel
					1860MHz	1880MHz	1900MHz
20	QPSK	RB Size=1, RB Offset=0	0	0	23.56	24.16	23.95
		RB Size=1, RB Offset=50	0	0	23.91	24.66	24.15
		RB Size=1, RB Offset=99	0	0	23.65	24.22	23.94
		RB Size=50, RB Offset=0	1	1	22.90	23.30	23.31
		RB Size=50, RB Offset=50	1	1	22.99	23.16	23.10
		RB Size=100, RB Offset=0	1	1	22.92	23.09	23.31
	16QAM	RB Size=1, RB Offset=0	1	1	23.24	23.16	23.98
		RB Size=1, RB Offset=50	1	1	23.82	23.08	24.33
		RB Size=1, RB Offset=99	1	1	23.42	22.89	23.32
		RB Size=50, RB Offset=0	2	2	22.96	23.20	23.22
		RB Size=50, RB Offset=50	2	2	22.99	23.31	23.23
		RB Size=100, RB Offset=0	2	2	21.97	22.20	22.26

LTE Band 4:

BW (MHz)	Modulation	Resource Block Size& Resource Block Offset	Target MPR	Meas MPR	Ave Tx Power (dBm)		
					Low Channel	Mid Channel	High Channel
					1710.7MHz	1732.5MHz	1754.3MHz
1.4	QPSK	RB Size=1, RB Offset=0	0	0	22.71	24.17	23.83
		RB Size=1, RB Offset=3	0	0	22.64	24.17	23.72
		RB Size=1, RB Offset=5	0	0	23.71	24.09	23.79
		RB Size=3, RB Offset=0	1	1	23.44	23.84	23.93
		RB Size=3, RB Offset=3	1	1	23.73	23.88	23.91
		RB Size=6, RB Offset=0	1	1	22.65	23.01	22.99
	16QAM	RB Size=1, RB Offset=0	1	1	22.68	23.26	23.23
		RB Size=1, RB Offset=3	1	1	22.95	23.26	23.43
		RB Size=1, RB Offset=5	1	1	22.64	23.18	23.20
		RB Size=3, RB Offset=0	2	2	23.79	23.86	24.08
		RB Size=3, RB Offset=3	2	2	23.51	23.83	24.05
		RB Size=6, RB Offset=0	2	2	21.56	21.99	22.02
BW (MHz)	Modulation	Resource Block Size& Resource Block Offset	Target MPR	Meas MPR	Ave Tx Power (dBm)		
					Low Channel	Mid Channel	High Channel
					1711.5MHz	1732.5MHz	1753.5MHz
3	QPSK	RB Size=1, RB Offset=0	0	0	23.43	23.80	23.77
		RB Size=1, RB Offset=8	0	0	24.00	23.94	23.86
		RB Size=1, RB Offset=14	0	0	23.59	23.68	23.80
		RB Size=6, RB Offset=0	1	1	22.82	22.92	22.91
		RB Size=6, RB Offset=9	1	1	22.92	22.96	23.05
		RB Size=15, RB Offset=0	1	1	22.87	22.92	23.00
	16QAM	RB Size=1, RB Offset=0	1	1	22.83	23.24	23.18
		RB Size=1, RB Offset=8	1	1	22.36	23.31	23.16
		RB Size=1, RB Offset=14	1	1	22.35	23.14	23.14
		RB Size=6, RB Offset=0	2	2	21.57	22.00	21.86
		RB Size=6, RB Offset=9	2	2	21.67	22.05	22.12
		RB Size=15, RB Offset=0	2	2	21.76	22.07	21.81

BW (MHz)	Modulation	Resource Block Size& Resource Block Offset	Target MPR	Meas MPR	Ave Tx Power (dBm)		
					Low Channel	Mid Channel	High Channel
					1712.5MHz	1732.5MHz	1752.5MHz
5	QPSK	RB Size=1, RB Offset=0	0	0	23.82	23.80	23.83
		RB Size=1, RB Offset=13	0	0	23.67	24.14	23.73
		RB Size=1, RB Offset=24	0	0	23.68	23.85	23.90
		RB Size=15, RB Offset=0	1	1	22.96	23.03	23.11
		RB Size=15, RB Offset=10	1	1	22.89	22.90	23.08
		RB Size=25, RB Offset=0	1	1	22.80	22.85	22.98
	16QAM	RB Size=1, RB Offset=0	1	1	22.86	22.46	23.17
		RB Size=1, RB Offset=13	1	1	23.00	22.46	23.41
		RB Size=1, RB Offset=24	1	1	22.78	22.48	23.33
		RB Size=15, RB Offset=0	2	2	22.83	22.98	22.99
		RB Size=15, RB Offset=10	2	2	22.81	22.98	23.07
		RB Size=25, RB Offset=0	2	2	21.75	22.05	21.77
BW (MHz)	Modulation	Resource Block Size& Resource Block Offset	Target MPR	Meas MPR	Ave Tx Power (dBm)		
					Low Channel	Mid Channel	High Channel
					1715MHz	1732.5MHz	1750MHz
10	QPSK	RB Size=1, RB Offset=0	0	0	23.57	23.86	23.90
		RB Size=1, RB Offset=25	0	0	23.68	24.01	24.06
		RB Size=1, RB Offset=49	0	0	23.73	23.76	24.01
		RB Size=25, RB Offset=0	1	1	22.89	23.00	22.90
		RB Size=25, RB Offset=25	1	1	22.89	23.02	22.95
		RB Size=50, RB Offset=0	1	1	22.78	22.90	23.06
	16QAM	RB Size=1, RB Offset=0	1	1	22.72	23.14	23.36
		RB Size=1, RB Offset=25	1	1	22.84	23.26	23.24
		RB Size=1, RB Offset=49	1	1	22.52	23.09	23.72
		RB Size=25, RB Offset=0	2	2	22.77	22.96	22.88
		RB Size=25, RB Offset=25	2	2	22.90	23.00	22.95
		RB Size=50, RB Offset=0	2	2	21.77	21.99	21.94

BW (MHz)	Modulation	Resource Block Size& Resource Block Offset	Target MPR	Meas MPR	Ave Tx Power (dBm)		
					Low Channel	Mid Channel	High Channel
					1717.5MHz	1732.5MHz	1747.5MHz
15	QPSK	RB Size=1, RB Offset=0	0	0	23.52	23.67	23.74
		RB Size=1, RB Offset=38	0	0	23.81	24.12	23.94
		RB Size=1, RB Offset=74	0	0	23.85	23.92	23.91
		RB Size=36, RB Offset=0	1	1	22.76	23.02	23.10
		RB Size=36, RB Offset=39	1	1	22.89	22.91	23.18
		RB Size=75, RB Offset=0	1	1	22.79	23.03	23.14
	16QAM	RB Size=1, RB Offset=0	1	1	22.87	23.40	23.29
		RB Size=1, RB Offset=38	1	1	22.88	23.32	23.55
		RB Size=1, RB Offset=74	1	1	22.45	23.23	23.85
		RB Size=36, RB Offset=0	2	2	22.87	23.02	23.17
		RB Size=36, RB Offset=39	2	2	23.01	23.01	23.11
		RB Size=75, RB Offset=0	2	2	21.87	22.12	22.18
BW (MHz)	Modulation	Resource Block Size& Resource Block Offset	Target MPR	Meas MPR	Ave Tx Power (dBm)		
					Low Channel	Mid Channel	High Channel
					1720MHz	1732.5MHz	1745MHz
20	QPSK	RB Size=1, RB Offset=0	0	0	23.42	23.72	24.21
		RB Size=1, RB Offset=50	0	0	23.88	24.19	24.23
		RB Size=1, RB Offset=99	0	0	23.63	23.71	24.23
		RB Size=50, RB Offset=0	1	1	22.90	22.92	23.03
		RB Size=50, RB Offset=50	1	1	23.07	23.03	23.27
		RB Size=100, RB Offset=0	1	1	22.94	22.94	23.13
	16QAM	RB Size=1, RB Offset=0	1	1	23.32	23.54	23.08
		RB Size=1, RB Offset=50	1	1	24.03	23.75	23.11
		RB Size=1, RB Offset=99	1	1	23.86	23.05	23.07
		RB Size=50, RB Offset=0	2	2	22.84	23.13	22.95
		RB Size=50, RB Offset=50	2	2	23.06	23.03	23.10
		RB Size=100, RB Offset=0	2	2	22.02	21.91	22.03

LTE Band 5:

BW (MHz)	Modulation	Resource Block Size& Resource Block Offset	Target MPR	Meas MPR	Ave Tx Power (dBm)		
					Low Channel	Mid Channel	High Channel
					824.7MHz	836.5MHz	844MHz
1.4	QPSK	RB Size=1, RB Offset=0	0	0	23.56	24.14	23.66
		RB Size=1, RB Offset=3	0	0	23.61	24.15	23.81
		RB Size=1, RB Offset=5	0	0	23.66	24.09	23.69
		RB Size=3, RB Offset=0	1	1	23.78	23.96	23.89
		RB Size=3, RB Offset=3	1	1	23.73	24.00	23.84
		RB Size=6, RB Offset=0	1	1	22.90	22.91	22.93
	16QAM	RB Size=1, RB Offset=0	1	1	22.84	23.25	23.45
		RB Size=1, RB Offset=3	1	1	22.92	23.21	23.49
		RB Size=1, RB Offset=5	1	1	22.86	22.97	23.58
		RB Size=3, RB Offset=0	2	2	23.63	23.94	24.16
		RB Size=3, RB Offset=3	2	2	23.83	23.93	23.92
		RB Size=6, RB Offset=0	2	2	21.62	21.83	21.88
BW (MHz)	Modulation	Resource Block Size& Resource Block Offset	Target MPR	Meas MPR	Ave Tx Power (dBm)		
					Low Channel	Mid Channel	High Channel
					825.5MHz	836.5MHz	847.5MHz
3	QPSK	RB Size=1, RB Offset=0	0	0	23.62	23.94	23.74
		RB Size=1, RB Offset=8	0	0	23.92	23.96	24.02
		RB Size=1, RB Offset=14	0	0	23.92	23.87	23.81
		RB Size=6, RB Offset=0	1	1	22.96	23.00	22.86
		RB Size=6, RB Offset=8	1	1	22.90	22.94	22.92
		RB Size=15, RB Offset=0	1	1	22.86	22.99	22.99
	16QAM	RB Size=1, RB Offset=0	1	1	23.04	23.03	22.77
		RB Size=1, RB Offset=8	1	1	23.10	23.23	22.78
		RB Size=1, RB Offset=14	1	1	23.08	22.99	22.45
		RB Size=6, RB Offset=0	2	2	22.03	21.92	21.56
		RB Size=6, RB Offset=8	2	2	22.03	21.73	21.77
		RB Size=15, RB Offset=0	2	2	21.74	21.75	21.79

BW (MHz)	Modulation	Resource Block Size& Resource Block Offset	Target MPR	Meas MPR	Ave Tx Power (dBm)		
					Low Channel	Mid Channel	High Channel
					826.5MHz	836.5MHz	846.5MHz
5	QPSK	RB Size=1, RB Offset=0	0	0	23.92	23.66	23.68
		RB Size=1, RB Offset=13	0	0	23.86	24.06	23.83
		RB Size=1, RB Offset=24	0	0	23.61	23.71	23.84
		RB Size=15, RB Offset=0	1	1	22.93	23.05	22.90
		RB Size=15, RB Offset=10	1	1	22.88	22.94	22.87
		RB Size=25, RB Offset=0	1	1	22.86	22.80	22.83
	16QAM	RB Size=1, RB Offset=0	1	1	22.42	23.04	22.61
		RB Size=1, RB Offset=13	1	1	22.26	23.16	22.62
		RB Size=1, RB Offset=24	1	1	22.39	23.06	22.64
		RB Size=15, RB Offset=0	2	2	22.84	22.91	22.97
		RB Size=15, RB Offset=10	2	2	22.79	22.90	22.91
		RB Size=25, RB Offset=0	2	2	22.06	21.77	21.80
BW (MHz)	Modulation	Resource Block Size& Resource Block Offset	Target MPR	Meas MPR	Ave Tx Power (dBm)		
					Low Channel	Mid Channel	High Channel
					829MHz	836.5MHz	844MHz
10	QPSK	RB Size=1, RB Offset=0	0	0	23.62	23.90	23.99
		RB Size=1, RB Offset=25	0	0	23.88	23.93	23.93
		RB Size=1, RB Offset=49	0	0	23.55	23.88	23.87
		RB Size=25, RB Offset=0	1	1	22.79	23.06	22.91
		RB Size=25, RB Offset=25	1	1	22.80	22.95	22.86
		RB Size=50, RB Offset=0	1	1	22.86	22.93	22.86
	16QAM	RB Size=1, RB Offset=0	1	1	22.71	23.03	23.16
		RB Size=1, RB Offset=25	1	1	22.91	23.16	23.75
		RB Size=1, RB Offset=49	1	1	22.46	22.98	23.17
		RB Size=25, RB Offset=0	2	2	22.80	22.87	22.96
		RB Size=25, RB Offset=25	2	2	22.93	22.92	22.95
		RB Size=50, RB Offset=0	2	2	21.65	22.00	21.83

LTE Band 7:

BW	Modulation	Resource Block Size& Resource Block Offset	Target MPR	Meas MPR	Ave Tx Power (dBm)		
					Low Channel	Mid Channel	High Channel
					2502.5MHz	2535MHz	2567.5MHz
5M	QPSK	RB Size=1, RB Offset=0	0	0	24.01	24.00	23.44
		RB Size=1, RB Offset=13	0	0	24.39	24.23	22.78
		RB Size=1, RB Offset=24	0	0	24.22	23.95	21.89
		RB Size=15, RB Offset=0	1	1	23.35	23.29	22.94
		RB Size=15, RB Offset=10	1	1	23.34	23.16	22.35
		RB Size=25, RB Offset=0	1	1	23.19	23.17	22.67
	16QAM	RB Size=1, RB Offset=0	1	1	22.77	23.52	22.40
		RB Size=1, RB Offset=13	1	1	22.89	23.58	21.91
		RB Size=1, RB Offset=24	1	1	22.83	23.43	21.12
		RB Size=15, RB Offset=0	2	2	23.29	23.23	22.86
		RB Size=15, RB Offset=10	2	2	23.34	23.32	23.38
		RB Size=25, RB Offset=0	2	2	22.49	22.19	22.38
BW	Modulation	Resource Block Size& Resource Block Offset	Target MPR	Meas MPR	Ave Tx Power (dBm)		
					Low Channel	Mid Channel	High Channel
					2505MHz	2535MHz	2565MHz
10M	QPSK	RB Size=1, RB Offset=0	0	0	23.61	23.96	23.46
		RB Size=1, RB Offset=25	0	0	24.71	24.38	23.75
		RB Size=1, RB Offset=49	0	0	24.23	23.39	21.76
		RB Size=25, RB Offset=0	1	1	23.22	23.25	23.78
		RB Size=25, RB Offset=25	1	1	23.13	23.33	22.91
		RB Size=50, RB Offset=0	1	1	23.22	23.37	23.31
	16QAM	RB Size=1, RB Offset=0	1	1	23.17	23.13	22.53
		RB Size=1, RB Offset=25	1	1	24.12	23.84	22.93
		RB Size=1, RB Offset=49	1	1	23.43	22.72	21.17
		RB Size=25, RB Offset=0	2	2	23.20	23.31	23.80
		RB Size=25, RB Offset=25	2	2	23.16	23.24	22.97
		RB Size=50, RB Offset=0	2	2	22.32	22.35	22.55

BW	Modulation	Resource Block Size& Resource Block Offset	Target MPR	Meas MPR	Ave Tx Power (dBm)		
					Low Channel	Mid Channel	High Channel
					2507.5MHz	2535MHz	2562.5MHz
15M	QPSK	RB Size=1, RB Offset=0	0	0	23.40	23.79	23.21
		RB Size=1, RB Offset=38	0	0	24.44	24.00	23.71
		RB Size=1, RB Offset=74	0	0	24.12	23.09	21.46
		RB Size=36, RB Offset=0	1	1	23.34	23.38	23.74
		RB Size=36, RB Offset=39	1	1	23.36	23.35	22.92
		RB Size=75, RB Offset=0	1	1	23.33	23.36	23.34
	16QAM	RB Size=1, RB Offset=0	1	1	23.07	22.99	22.85
		RB Size=1, RB Offset=38	1	1	23.63	23.44	23.35
		RB Size=1, RB Offset=74	1	1	23.49	22.33	21.20
		RB Size=36, RB Offset=0	2	2	23.32	23.49	23.71
		RB Size=36, RB Offset=39	2	2	23.39	23.42	22.83
		RB Size=75, RB Offset=0	2	2	22.24	22.37	22.59
BW	Modulation	Resource Block Size& Resource Block Offset	Target MPR	Meas MPR	Ave Tx Power (dBm)		
					Low Channel	Mid Channel	High Channel
					2510MHz	2535MHz	2560MHz
20M	QPSK	RB Size=1, RB Offset=0	0	0	23.97	24.51	23.74
		RB Size=1, RB Offset=50	0	0	24.47	23.99	23.90
		RB Size=1, RB Offset=99	0	0	23.65	22.65	21.42
		RB Size=50, RB Offset=0	1	1	23.56	23.78	23.49
		RB Size=50, RB Offset=50	1	1	23.51	23.49	23.01
		RB Size=100, RB Offset=0	1	1	23.36	23.37	23.30
	16QAM	RB Size=1, RB Offset=0	1	1	22.35	22.81	22.57
		RB Size=1, RB Offset=50	1	1	23.78	23.43	23.62
		RB Size=1, RB Offset=99	1	1	23.11	22.03	21.17
		RB Size=50, RB Offset=0	2	2	23.56	23.37	23.54
		RB Size=50, RB Offset=50	2	2	23.44	23.47	23.04
		RB Size=100, RB Offset=0	2	2	22.35	22.42	22.58

LTE Band 12:

BW (MHz)	Modulation	Resource Block Size& Resource Block Offset	Target MPR	Meas MPR	Ave Tx Power (dBm)		
					Low Channel	Mid Channel	High Channel
					699.7MHz	707.5MHz	715.3MHz
1.4	QPSK	RB Size=1, RB Offset=0	0	0	23.75	24.03	23.55
		RB Size=1, RB Offset=3	0	0	23.86	23.89	24.08
		RB Size=1, RB Offset=5	0	0	23.97	23.91	23.93
		RB Size=3, RB Offset=0	1	1	24.03	23.94	23.60
		RB Size=3, RB Offset=3	1	1	23.92	23.93	23.72
		RB Size=6, RB Offset=0	1	1	23.10	22.97	22.87
	16QAM	RB Size=1, RB Offset=0	1	1	23.10	21.59	23.18
		RB Size=1, RB Offset=3	1	1	23.32	22.64	23.17
		RB Size=1, RB Offset=5	1	1	23.26	22.57	23.07
		RB Size=3, RB Offset=0	2	2	23.87	23.81	23.75
		RB Size=3, RB Offset=3	2	2	23.92	23.94	23.80
		RB Size=6, RB Offset=0	2	2	22.17	21.70	21.85
BW (MHz)	Modulation	Resource Block Size& Resource Block Offset	Target MPR	Meas MPR	Ave Tx Power (dBm)		
					Low Channel	Mid Channel	High Channel
					700.5MHz	707.5MHz	714.5MHz
3	QPSK	RB Size=1, RB Offset=0	0	0	23.87	23.68	23.50
		RB Size=1, RB Offset=8	0	0	23.62	23.71	23.74
		RB Size=1, RB Offset=14	0	0	23.60	23.82	23.82
		RB Size=6, RB Offset=0	1	1	22.97	22.81	22.73
		RB Size=6, RB Offset=9	1	1	22.76	22.95	22.97
		RB Size=15, RB Offset=0	1	1	22.87	22.86	22.73
	16QAM	RB Size=1, RB Offset=0	1	1	23.00	23.43	22.58
		RB Size=1, RB Offset=8	1	1	23.21	23.41	22.72
		RB Size=1, RB Offset=14	1	1	23.07	23.10	22.89
		RB Size=6, RB Offset=0	2	2	21.88	21.92	21.79
		RB Size=6, RB Offset=9	2	2	21.88	21.75	21.94
		RB Size=15, RB Offset=0	2	2	21.77	21.69	21.84

BW (MHz)	Modulation	Resource Block Size& Resource Block Offset	Target MPR	Meas MPR	Ave Tx Power (dBm)		
					Low Channel	Mid Channel	High Channel
					701.5MHz	707.5MHz	713.5MHz
5	QPSK	RB Size=1, RB Offset=0	0	0	23.81	23.53	23.64
		RB Size=1, RB Offset=13	0	0	23.77	23.81	23.66
		RB Size=1, RB Offset=24	0	0	23.73	23.96	23.63
		RB Size=15, RB Offset=0	1	1	22.91	22.82	22.85
		RB Size=15, RB Offset=10	1	1	22.79	22.90	22.82
		RB Size=25, RB Offset=0	1	1	22.85	22.91	22.78
	16QAM	RB Size=1, RB Offset=0	1	1	22.50	23.14	22.64
		RB Size=1, RB Offset=13	1	1	22.28	23.37	22.42
		RB Size=1, RB Offset=24	1	1	22.23	23.01	22.62
		RB Size=15, RB Offset=0	2	2	22.80	22.97	22.86
		RB Size=15, RB Offset=10	2	2	22.71	22.94	22.70
		RB Size=25, RB Offset=0	2	2	21.79	21.86	21.84
BW (MHz)	Modulation	Resource Block Size& Resource Block Offset	Target MPR	Meas MPR	Ave Tx Power (dBm)		
					Low Channel	Mid Channel	High Channel
					704MHz	707.5MHz	711MHz
10	QPSK	RB Size=1, RB Offset=0	0	0	24.01	23.72	24.05
		RB Size=1, RB Offset=25	0	0	24.13	23.92	24.17
		RB Size=1, RB Offset=49	0	0	24.14	23.71	23.75
		RB Size=25, RB Offset=0	1	1	22.76	22.90	23.03
		RB Size=25, RB Offset=25	1	1	23.00	22.75	22.74
		RB Size=50, RB Offset=0	1	1	22.85	22.88	22.91
	16QAM	RB Size=1, RB Offset=0	1	1	23.11	23.32	22.57
		RB Size=1, RB Offset=25	1	1	23.33	23.29	22.87
		RB Size=1, RB Offset=49	1	1	23.04	23.15	22.31
		RB Size=25, RB Offset=0	2	2	22.85	22.81	22.99
		RB Size=25, RB Offset=25	2	2	22.85	22.78	22.80
		RB Size=50, RB Offset=0	2	2	21.86	21.89	21.80

LTE Band 13:

BW (MHz)	Modulation	Resource Block Size& Resource Block Offset	Target MPR	Meas MPR	Ave Tx Power (dBm)		
					Low Channel	Mid Channel	High Channel
					779.5MHz	782MHz	784.5MHz
5	QPSK	RB Size=1, RB Offset=0	0	0	23.66	23.44	23.63
		RB Size=1, RB Offset=13	0	0	23.74	23.43	23.79
		RB Size=1, RB Offset=24	0	0	23.67	23.59	23.68
		RB Size=15, RB Offset=0	1	1	22.59	22.85	22.86
		RB Size=15, RB Offset=10	1	1	22.65	22.73	22.77
		RB Size=25, RB Offset=0	1	1	22.84	22.90	22.71
	16QAM	RB Size=1, RB Offset=0	1	1	23.09	22.42	22.23
		RB Size=1, RB Offset=13	1	1	22.93	22.37	22.07
		RB Size=1, RB Offset=24	1	1	23.30	22.65	22.41
		RB Size=15, RB Offset=0	2	2	22.70	22.76	22.69
		RB Size=15, RB Offset=10	2	2	22.72	22.68	22.74
		RB Size=25, RB Offset=0	2	2	21.97	21.67	21.62
BW (MHz)	Modulation	Resource Block Size& Resource Block Offset	Target MPR	Meas MPR	Ave Tx Power (dBm)		
					Low Channel	Mid Channel	High Channel
					/	782MHz	/
10	QPSK	RB Size=1, RB Offset=0	0	0	/	21.43	/
		RB Size=1, RB Offset=25	0	0	/	22.21	/
		RB Size=1, RB Offset=49	0	0	/	22.11	/
		RB Size=25, RB Offset=0	1	1	/	21.17	/
		RB Size=25, RB Offset=25	1	1	/	21.15	/
		RB Size=50, RB Offset=0	1	1	/	21.27	/
	16QAM	RB Size=1, RB Offset=0	1	1	/	20.73	/
		RB Size=1, RB Offset=25	1	1	/	22.19	/
		RB Size=1, RB Offset=49	1	1	/	21.45	/
		RB Size=25, RB Offset=0	2	2	/	20.33	/
		RB Size=25, RB Offset=25	2	2	/	21.43	/
		RB Size=50, RB Offset=0	2	2	/	22.21	/

LTE Band 26:

BW (MHz)	Modulation	Resource Block Size& Resource Block Offset	Target MPR	Meas MPR	Ave Tx Power (dBm)		
					Low Channel	Mid Channel	High Channel
					814.7MHz	831.5MHz	848.3MHz
1.4	QPSK	RB Size=1, RB Offset=0	0	0	23.94	23.72	24.06
		RB Size=1, RB Offset=3	0	0	24.06	23.92	23.89
		RB Size=1, RB Offset=5	0	0	24.24	23.88	23.75
		RB Size=3, RB Offset=0	1	1	24.01	24.04	24.03
		RB Size=3, RB Offset=3	1	1	23.90	24.08	23.93
		RB Size=6, RB Offset=0	1	1	22.97	22.99	23.04
	16QAM	RB Size=1, RB Offset=0	1	1	23.08	23.22	23.01
		RB Size=1, RB Offset=3	1	1	23.35	23.42	23.14
		RB Size=1, RB Offset=5	1	1	23.39	23.42	23.02
		RB Size=3, RB Offset=0	2	2	24.07	24.11	24.01
		RB Size=3, RB Offset=3	2	2	24.07	24.15	23.87
		RB Size=6, RB Offset=0	2	2	22.12	22.17	21.81
BW (MHz)	Modulation	Resource Block Size& Resource Block Offset	Target MPR	Meas MPR	Ave Tx Power (dBm)		
					Low Channel	Mid Channel	High Channel
					815.5MHz	831.5MHz	847.5MHz
3	QPSK	RB Size=1, RB Offset=0	0	0	23.80	23.97	23.94
		RB Size=1, RB Offset=8	0	0	23.89	23.81	24.02
		RB Size=1, RB Offset=14	0	0	24.09	23.82	23.75
		RB Size=6, RB Offset=0	1	1	23.05	23.02	23.05
		RB Size=6, RB Offset=9	1	1	23.32	23.03	22.94
		RB Size=15, RB Offset=0	1	1	23.17	22.93	22.92
	16QAM	RB Size=1, RB Offset=0	1	1	23.39	23.36	23.05
		RB Size=1, RB Offset=8	1	1	23.18	23.61	23.04
		RB Size=1, RB Offset=14	1	1	23.30	23.41	22.85
		RB Size=6, RB Offset=0	2	2	21.79	21.82	21.80
		RB Size=6, RB Offset=9	2	2	22.12	21.89	21.75
		RB Size=15, RB Offset=0	2	2	22.15	22.02	21.94

BW	Modulation	Resource Block Size& Resource Block Offset	Target MPR	Meas MPR	Ave Tx Power (dBm)		
					Low Channel	Mid Channel	High Channel
					816.5MHz	831.5MHz	846.5MHz
5M	QPSK	RB Size=1, RB Offset=0	0	0	23.71	23.60	23.66
		RB Size=1, RB Offset=13	0	0	23.94	23.99	24.08
		RB Size=1, RB Offset=24	0	0	23.69	23.75	23.89
		RB Size=15, RB Offset=0	1	1	22.96	22.87	22.95
		RB Size=15, RB Offset=10	1	1	23.06	22.80	22.96
		RB Size=25, RB Offset=0	1	1	22.94	22.89	22.94
	16QAM	RB Size=1, RB Offset=0	1	1	22.24	23.16	22.65
		RB Size=1, RB Offset=13	1	1	22.34	23.23	22.67
		RB Size=1, RB Offset=24	1	1	22.23	23.19	22.66
		RB Size=15, RB Offset=0	2	2	22.96	22.86	23.02
		RB Size=15, RB Offset=10	2	2	23.06	22.86	22.90
		RB Size=25, RB Offset=0	2	2	22.12	21.79	21.88
BW	Modulation	Resource Block Size& Resource Block Offset	Target MPR	Meas MPR	Ave Tx Power (dBm)		
					Low Channel	Mid Channel	High Channel
					819MHz	831.5MHz	841.5MHz
10M	QPSK	RB Size=1, RB Offset=0	0	0	23.78	23.83	23.74
		RB Size=1, RB Offset=25	0	0	23.96	23.79	24.10
		RB Size=1, RB Offset=49	0	0	24.02	23.77	23.54
		RB Size=25, RB Offset=0	1	1	22.99	22.90	22.81
		RB Size=25, RB Offset=25	1	1	22.93	22.91	22.93
		RB Size=50, RB Offset=0	1	1	23.05	22.89	22.81
	16QAM	RB Size=1, RB Offset=0	1	1	23.30	22.99	22.49
		RB Size=1, RB Offset=25	1	1	23.25	23.59	23.00
		RB Size=1, RB Offset=49	1	1	23.27	23.33	22.63
		RB Size=25, RB Offset=0	2	2	23.02	22.94	22.89
		RB Size=25, RB Offset=25	2	2	23.00	23.07	22.89
		RB Size=50, RB Offset=0	2	2	22.03	21.92	21.85

BW	Modulation	Resource Block Size& Resource Block Offset	Target MPR	Meas MPR	Ave Tx Power (dBm)		
					Low Channel	Mid Channel	High Channel
					821.5MHz	831.5MHz	841.5MHz
15M	QPSK	RB Size=1, RB Offset=0	0	0	23.76	23.72	23.56
		RB Size=1, RB Offset=38	0	0	24.42	23.85	23.82
		RB Size=1, RB Offset=74	0	0	23.70	23.86	23.44
		RB Size=36, RB Offset=0	1	1	23.08	22.90	22.88
		RB Size=36, RB Offset=39	1	1	22.92	22.95	22.89
		RB Size=75, RB Offset=0	1	1	23.00	22.89	23.06
	16QAM	RB Size=1, RB Offset=0	1	1	23.12	23.35	22.71
		RB Size=1, RB Offset=38	1	1	23.14	23.69	22.99
		RB Size=1, RB Offset=74	1	1	23.18	23.62	22.37
		RB Size=36, RB Offset=0	2	2	23.03	22.86	22.90
		RB Size=36, RB Offset=39	2	2	22.84	23.00	22.91
		RB Size=75, RB Offset=0	2	2	21.89	21.91	21.97

LTE Band 38:

BW	Modulation	Resource Block Size& Resource Block Offset	Target MPR	Meas MPR	Ave Tx Power (dBm)		
					Low Channel	Mid Channel	High Channel
					2572.5MHz	2595MHz	2617.5MHz
5M	QPSK	RB Size=1, RB Offset=0	0	0	23.82	23.59	23.72
		RB Size=1, RB Offset=13	0	0	23.88	23.77	23.65
		RB Size=1, RB Offset=24	0	0	23.88	23.69	23.56
		RB Size=15, RB Offset=0	1	1	23.08	22.92	22.92
		RB Size=15, RB Offset=10	1	1	22.99	22.92	22.83
		RB Size=25, RB Offset=0	1	1	22.99	22.81	22.97
	16QAM	RB Size=1, RB Offset=0	1	1	23.07	22.18	23.11
		RB Size=1, RB Offset=13	1	1	22.98	22.51	23.36
		RB Size=1, RB Offset=24	1	1	22.70	22.17	23.04
		RB Size=15, RB Offset=0	2	2	21.88	21.69	21.90
		RB Size=15, RB Offset=10	2	2	21.61	21.70	21.78
		RB Size=25, RB Offset=0	2	2	21.78	21.83	21.83
BW	Modulation	Resource Block Size& Resource Block Offset	Target MPR	Meas MPR	Ave Tx Power (dBm)		
					Low Channel	Mid Channel	High Channel
					2575MHz	2595MHz	2615MHz
10M	QPSK	RB Size=1, RB Offset=0	0	0	23.91	23.85	23.86
		RB Size=1, RB Offset=25	0	0	23.83	23.91	24.11
		RB Size=1, RB Offset=49	0	0	23.61	23.89	23.75
		RB Size=25, RB Offset=0	1	1	22.97	23.02	22.89
		RB Size=25, RB Offset=25	1	1	22.82	22.90	22.96
		RB Size=50, RB Offset=0	1	1	22.97	22.92	22.88
	16QAM	RB Size=1, RB Offset=0	1	1	23.07	23.04	23.37
		RB Size=1, RB Offset=25	1	1	23.42	23.20	23.49
		RB Size=1, RB Offset=49	1	1	22.94	22.87	23.33
		RB Size=25, RB Offset=0	2	2	22.09	21.82	21.96
		RB Size=25, RB Offset=25	2	2	22.00	21.76	21.97
		RB Size=50, RB Offset=0	2	2	21.83	21.75	21.81

BW	Modulation	Resource Block Size& Resource Block Offset	Target MPR	Meas MPR	Ave Tx Power (dBm)		
					Low Channel	Mid Channel	High Channel
					2577.5MHz	2595MHz	2612.5MHz
15M	QPSK	RB Size=1, RB Offset=0	0	0	23.79	23.65	23.93
		RB Size=1, RB Offset=38	0	0	23.86	23.76	23.74
		RB Size=1, RB Offset=74	0	0	23.47	23.76	23.69
		RB Size=36, RB Offset=0	1	1	22.75	23.08	22.92
		RB Size=36, RB Offset=39	1	1	22.94	22.90	22.97
		RB Size=75, RB Offset=0	1	1	22.70	22.83	22.95
	16QAM	RB Size=1, RB Offset=0	1	1	22.97	22.87	23.14
		RB Size=1, RB Offset=38	1	1	22.76	22.78	23.79
		RB Size=1, RB Offset=74	1	1	22.63	22.76	23.40
		RB Size=36, RB Offset=0	2	2	21.94	21.87	21.86
		RB Size=36, RB Offset=39	2	2	21.93	21.80	21.88
		RB Size=75, RB Offset=0	2	2	21.85	21.78	21.89
BW	Modulation	Resource Block Size& Resource Block Offset	Target MPR	Meas MPR	Ave Tx Power (dBm)		
					Low Channel	Mid Channel	High Channel
					2580MHz	2595MHz	2610MHz
20M	QPSK	RB Size=1, RB Offset=0	0	0	23.92	23.34	23.76
		RB Size=1, RB Offset=50	0	0	23.90	23.92	24.21
		RB Size=1, RB Offset=99	0	0	23.94	23.41	23.66
		RB Size=50, RB Offset=0	1	1	22.99	22.94	22.97
		RB Size=50, RB Offset=50	1	1	22.95	23.13	22.99
		RB Size=100, RB Offset=0	1	1	22.74	22.85	23.01
	16QAM	RB Size=1, RB Offset=0	1	1	23.54	23.00	22.49
		RB Size=1, RB Offset=50	1	1	23.66	23.24	22.65
		RB Size=1, RB Offset=99	1	1	23.34	22.92	22.21
		RB Size=50, RB Offset=0	2	2	21.85	22.01	22.09
		RB Size=50, RB Offset=50	2	2	21.84	21.86	21.87
		RB Size=100, RB Offset=0	2	2	22.02	21.84	21.76

LTE Band 40 Lower:

BW	Modulation	Resource Block Size& Resource Block Offset	Target MPR	Meas MPR	Ave Tx Power (dBm)		
					Low Channel	Mid Channel	High Channel
					2307.5MHz	2310MHz	2312.5MHz
5M	QPSK	RB Size=1, RB Offset=0	0	0	22.17	22.20	22.37
		RB Size=1, RB Offset=13	0	0	22.18	22.44	22.43
		RB Size=1, RB Offset=24	0	0	22.41	22.34	22.46
		RB Size=15, RB Offset=0	1	1	21.37	21.33	21.62
		RB Size=15, RB Offset=10	1	1	21.47	21.51	21.37
		RB Size=25, RB Offset=0	1	1	21.48	21.43	21.38
	16QAM	RB Size=1, RB Offset=0	1	1	21.54	21.62	21.07
		RB Size=1, RB Offset=13	1	1	21.80	21.63	20.99
		RB Size=1, RB Offset=24	1	1	21.74	21.93	21.09
		RB Size=15, RB Offset=0	2	2	20.17	20.32	20.33
		RB Size=15, RB Offset=10	2	2	20.31	20.23	20.15
		RB Size=25, RB Offset=0	2	2	20.38	20.36	20.43
BW	Modulation	Resource Block Size& Resource Block Offset	Target MPR	Meas MPR	Ave Tx Power (dBm)		
					Low Channel	Mid Channel	High Channel
					/	2310MHz	/
10M	QPSK	RB Size=1, RB Offset=0	0	0	/	22.06	/
		RB Size=1, RB Offset=25	0	0	/	22.49	/
		RB Size=1, RB Offset=49	0	0	/	22.34	/
		RB Size=25, RB Offset=0	1	1	/	21.41	/
		RB Size=25, RB Offset=25	1	1	/	21.48	/
		RB Size=50, RB Offset=0	1	1	/	21.54	/
	16QAM	RB Size=1, RB Offset=0	1	1	/	21.29	/
		RB Size=1, RB Offset=25	1	1	/	21.67	/
		RB Size=1, RB Offset=49	1	1	/	21.05	/
		RB Size=25, RB Offset=0	2	2	/	20.26	/
		RB Size=25, RB Offset=25	2	2	/	20.38	/
		RB Size=50, RB Offset=0	2	2	/	20.47	/

LTE Band 40 Upper:

BW	Modulation	Resource Block Size& Resource Block Offset	Target MPR	Meas MPR	Ave Tx Power (dBm)		
					Low Channel	Mid Channel	High Channel
					2352.5MHz	2355MHz	2357.5MHz
5M	QPSK	RB Size=1, RB Offset=0	0	0	22.13	22.09	22.08
		RB Size=1, RB Offset=13	0	0	22.20	22.10	22.15
		RB Size=1, RB Offset=24	0	0	21.84	22.01	21.99
		RB Size=15, RB Offset=0	1	1	21.20	21.19	21.14
		RB Size=15, RB Offset=10	1	1	21.18	21.17	21.11
		RB Size=25, RB Offset=0	1	1	21.28	21.28	21.05
	16QAM	RB Size=1, RB Offset=0	1	1	21.50	21.20	20.68
		RB Size=1, RB Offset=13	1	1	21.59	21.40	20.75
		RB Size=1, RB Offset=24	1	1	21.28	21.34	20.70
		RB Size=15, RB Offset=0	2	2	20.32	20.01	19.88
		RB Size=15, RB Offset=10	2	2	20.00	20.01	19.99
		RB Size=25, RB Offset=0	2	2	20.25	20.08	20.09
BW	Modulation	Resource Block Size& Resource Block Offset	Target MPR	Meas MPR	Ave Tx Power (dBm)		
					Low Channel	Mid Channel	High Channel
					/	2355MHz	/
10M	QPSK	RB Size=1, RB Offset=0	0	0	/	22.20	/
		RB Size=1, RB Offset=25	0	0	/	22.35	/
		RB Size=1, RB Offset=49	0	0	/	22.08	/
		RB Size=25, RB Offset=0	1	1	/	21.10	/
		RB Size=25, RB Offset=25	1	1	/	21.25	/
		RB Size=50, RB Offset=0	1	1	/	21.26	/
	16QAM	RB Size=1, RB Offset=0	1	1	/	20.69	/
		RB Size=1, RB Offset=25	1	1	/	21.63	/
		RB Size=1, RB Offset=49	1	1	/	21.00	/
		RB Size=25, RB Offset=0	2	2	/	20.10	/
		RB Size=25, RB Offset=25	2	2	/	19.89	/
		RB Size=50, RB Offset=0	2	2	/	20.17	/

LTE Band 41:

BW	Modulation	Resource Block Size& Resource Block Offset	Target MPR	Meas MPR	Ave Tx Power (dBm)		
					Low Channel	Mid Channel	High Channel
					2498.5MHz	2593MHz	2687.5 MHz
5M	QPSK	RB Size=1, RB Offset=0	0	0	23.62	23.54	23.68
		RB Size=1, RB Offset=13	0	0	23.73	23.70	23.98
		RB Size=1, RB Offset=24	0	0	23.70	23.78	23.74
		RB Size=15, RB Offset=0	1	1	22.61	22.86	23.05
		RB Size=15, RB Offset=10	1	1	22.62	22.95	23.09
		RB Size=25, RB Offset=0	1	1	22.65	22.86	23.02
	16QAM	RB Size=1, RB Offset=0	1	1	22.77	22.42	23.11
		RB Size=1, RB Offset=13	1	1	23.05	22.22	23.35
		RB Size=1, RB Offset=24	1	1	22.91	22.13	23.33
		RB Size=15, RB Offset=0	2	2	21.62	21.48	21.87
		RB Size=15, RB Offset=10	2	2	21.61	21.55	21.94
		RB Size=25, RB Offset=0	2	2	21.50	21.65	21.85
BW	Modulation	Resource Block Size& Resource Block Offset	Target MPR	Meas MPR	Ave Tx Power (dBm)		
					Low Channel	Mid Channel	High Channel
					2501MHz	2593MHz	2685MHz
10M	QPSK	RB Size=1, RB Offset=0	0	0	23.72	23.91	23.95
		RB Size=1, RB Offset=25	0	0	23.84	24.26	23.85
		RB Size=1, RB Offset=49	0	0	23.76	23.96	23.83
		RB Size=25, RB Offset=0	1	1	22.78	22.91	23.10
		RB Size=25, RB Offset=25	1	1	22.78	22.96	23.02
		RB Size=50, RB Offset=0	1	1	22.91	22.88	23.12
	16QAM	RB Size=1, RB Offset=0	1	1	22.71	23.28	23.32
		RB Size=1, RB Offset=25	1	1	23.15	23.70	23.42
		RB Size=1, RB Offset=49	1	1	22.45	23.22	22.87
		RB Size=25, RB Offset=0	2	2	21.43	21.87	22.16
		RB Size=25, RB Offset=25	2	2	21.61	21.76	22.18
		RB Size=50, RB Offset=0	2	2	21.69	21.83	21.79

BW	Modulation	Resource Block Size& Resource Block Offset	Target MPR	Meas MPR	Ave Tx Power (dBm)		
					Low Channel	Mid Channel	High Channel
					2503.5MHz	2593MHz	2682.5MHz
15M	QPSK	RB Size=1, RB Offset=0	0	0	22.29	23.34	23.21
		RB Size=1, RB Offset=38	0	0	23.07	22.91	23.78
		RB Size=1, RB Offset=74	0	0	23.33	22.42	23.69
		RB Size=36, RB Offset=0	1	1	21.85	22.10	22.71
		RB Size=36, RB Offset=39	1	1	22.34	21.54	22.84
		RB Size=75, RB Offset=0	1	1	22.28	21.85	22.53
	16QAM	RB Size=1, RB Offset=0	1	1	21.33	22.30	22.74
		RB Size=1, RB Offset=38	1	1	21.91	21.73	23.20
		RB Size=1, RB Offset=74	1	1	22.49	21.27	22.77
		RB Size=36, RB Offset=0	2	2	20.62	20.87	21.57
		RB Size=36, RB Offset=39	2	2	21.21	20.48	21.70
		RB Size=75, RB Offset=0	2	2	21.09	20.99	21.68
BW	Modulation	Resource Block Size& Resource Block Offset	Target MPR	Meas MPR	Ave Tx Power (dBm)		
					Low Channel	Mid Channel	High Channel
					2506MHz	2593MHz	2680MHz
20M	QPSK	RB Size=1, RB Offset=0	0	0	23.10	23.54	23.99
		RB Size=1, RB Offset=50	0	0	23.83	23.80	24.41
		RB Size=1, RB Offset=99	0	0	23.41	23.53	23.88
		RB Size=50, RB Offset=0	1	1	22.70	22.81	23.06
		RB Size=50, RB Offset=50	1	1	22.78	22.83	23.14
		RB Size=100, RB Offset=0	1	1	22.75	22.88	22.91
	16QAM	RB Size=1, RB Offset=0	1	1	22.85	22.92	22.56
		RB Size=1, RB Offset=50	1	1	23.34	23.56	22.88
		RB Size=1, RB Offset=99	1	1	23.33	22.86	22.44
		RB Size=50, RB Offset=0	2	2	21.63	21.81	21.93
		RB Size=50, RB Offset=50	2	2	21.63	21.97	21.93
		RB Size=100, RB Offset=0	2	2	21.57	21.80	21.73

LTE Band 66:

BW (MHz)	Modulation	Resource Block Size& Resource Block Offset	Target MPR	Meas MPR	Ave Tx Power (dBm)		
					Low Channel	Mid Channel	High Channel
					1710.7MHz	1745MHz	1779.3MHz
1.4	QPSK	RB Size=1, RB Offset=0	0	0	23.19	23.60	23.41
		RB Size=1, RB Offset=3	0	0	23.20	23.70	23.53
		RB Size=1, RB Offset=5	0	0	23.40	23.69	23.44
		RB Size=3, RB Offset=0	1	1	23.38	23.50	23.54
		RB Size=3, RB Offset=3	1	1	23.42	23.72	23.63
		RB Size=6, RB Offset=0	1	1	22.45	22.62	22.65
	16QAM	RB Size=1, RB Offset=0	1	1	22.51	22.96	23.04
		RB Size=1, RB Offset=3	1	1	22.53	23.05	22.89
		RB Size=1, RB Offset=5	1	1	22.42	22.97	23.25
		RB Size=3, RB Offset=0	2	2	22.46	22.79	22.90
		RB Size=3, RB Offset=3	2	2	22.80	22.56	22.74
		RB Size=6, RB Offset=0	2	2	21.40	21.65	21.57
BW (MHz)	Modulation	Resource Block Size& Resource Block Offset	Target MPR	Meas MPR	Ave Tx Power (dBm)		
					Low Channel	Mid Channel	High Channel
					1711.5MHz	1745MHz	1778.5MHz
3	QPSK	RB Size=1, RB Offset=0	0	0	23.53	23.71	23.63
		RB Size=1, RB Offset=8	0	0	23.46	23.48	23.44
		RB Size=1, RB Offset=14	0	0	23.55	23.57	23.52
		RB Size=6, RB Offset=0	1	1	22.64	22.70	22.59
		RB Size=6, RB Offset=9	1	1	22.57	22.69	22.56
		RB Size=15, RB Offset=0	1	1	22.51	22.67	22.52
	16QAM	RB Size=1, RB Offset=0	1	1	22.81	23.02	22.54
		RB Size=1, RB Offset=8	1	1	22.71	23.23	22.60
		RB Size=1, RB Offset=14	1	1	22.77	22.89	22.53
		RB Size=6, RB Offset=0	2	2	21.46	21.72	21.58
		RB Size=6, RB Offset=9	2	2	21.62	21.55	21.44
		RB Size=15, RB Offset=0	2	2	21.54	21.47	21.48

BW (MHz)	Modulation	Resource Block Size& Resource Block Offset	Target MPR	Meas MPR	Ave Tx Power (dBm)		
					Low Channel	Mid Channel	High Channel
					1712.5MHz	1745MHz	1777.5MHz
5	QPSK	RB Size=1, RB Offset=0	0	0	23.60	23.56	23.61
		RB Size=1, RB Offset=13	0	0	23.49	23.57	23.63
		RB Size=1, RB Offset=24	0	0	23.11	23.51	23.76
		RB Size=15, RB Offset=0	1	1	22.67	22.58	22.63
		RB Size=15, RB Offset=10	1	1	22.52	22.64	22.55
		RB Size=25, RB Offset=0	1	1	22.51	22.73	22.54
	16QAM	RB Size=1, RB Offset=0	1	1	22.14	22.98	22.40
		RB Size=1, RB Offset=13	1	1	22.10	23.14	22.39
		RB Size=1, RB Offset=24	1	1	21.98	22.88	22.43
		RB Size=15, RB Offset=0	2	2	21.29	21.61	21.50
		RB Size=15, RB Offset=10	2	2	21.39	21.48	21.39
		RB Size=25, RB Offset=0	2	2	21.46	21.59	21.53
BW (MHz)	Modulation	Resource Block Size& Resource Block Offset	Target MPR	Meas MPR	Ave Tx Power (dBm)		
					Low Channel	Mid Channel	High Channel
					1715MHz	1745MHz	1775MHz
10	QPSK	RB Size=1, RB Offset=0	0	0	23.41	23.80	23.71
		RB Size=1, RB Offset=25	0	0	23.49	23.80	23.84
		RB Size=1, RB Offset=49	0	0	23.49	23.50	23.98
		RB Size=25, RB Offset=0	1	1	22.56	22.68	22.73
		RB Size=25, RB Offset=25	1	1	22.48	22.79	22.65
		RB Size=50, RB Offset=0	1	1	22.49	22.70	22.63
	16QAM	RB Size=1, RB Offset=0	1	1	22.88	23.27	22.57
		RB Size=1, RB Offset=25	1	1	22.88	23.13	22.65
		RB Size=1, RB Offset=49	1	1	22.59	23.00	22.52
		RB Size=25, RB Offset=0	2	2	21.59	21.76	21.58
		RB Size=25, RB Offset=25	2	2	21.44	21.87	21.83
		RB Size=50, RB Offset=0	2	2	21.52	21.72	21.51

BW (MHz)	Modulation	Resource Block Size& Resource Block Offset	Target MPR	Meas MPR	Ave Tx Power (dBm)		
					Low Channel	Mid Channel	High Channel
					1717.5MHz	1745MHz	1772.5MHz
15	QPSK	RB Size=1, RB Offset=0	0	0	23.56	23.60	23.41
		RB Size=1, RB Offset=38	0	0	23.35	23.62	23.39
		RB Size=1, RB Offset=74	0	0	23.50	23.60	23.39
		RB Size=36, RB Offset=0	1	1	22.50	22.84	22.67
		RB Size=36, RB Offset=39	1	1	22.57	22.70	22.78
		RB Size=75, RB Offset=0	1	1	22.54	22.59	22.56
	16QAM	RB Size=1, RB Offset=0	1	1	22.88	23.55	22.51
		RB Size=1, RB Offset=38	1	1	22.80	23.19	22.79
		RB Size=1, RB Offset=74	1	1	22.70	23.52	22.39
		RB Size=36, RB Offset=0	2	2	21.42	21.74	21.58
		RB Size=36, RB Offset=39	2	2	21.46	21.74	21.57
		RB Size=75, RB Offset=0	2	2	21.37	21.69	21.52
BW (MHz)	Modulation	Resource Block Size& Resource Block Offset	Target MPR	Meas MPR	Ave Tx Power (dBm)		
					Low Channel	Mid Channel	High Channel
					1720MHz	1745MHz	1770MHz
20	QPSK	RB Size=1, RB Offset=0	0	0	23.49	23.89	23.55
		RB Size=1, RB Offset=50	0	0	23.63	24.33	23.81
		RB Size=1, RB Offset=99	0	0	23.72	23.68	23.54
		RB Size=50, RB Offset=0	1	1	22.51	22.85	22.59
		RB Size=50, RB Offset=50	1	1	22.74	22.88	22.70
		RB Size=100, RB Offset=0	1	1	22.70	22.84	22.70
	16QAM	RB Size=1, RB Offset=0	1	1	22.97	22.92	23.29
		RB Size=1, RB Offset=50	1	1	23.24	23.00	23.28
		RB Size=1, RB Offset=99	1	1	23.07	22.92	22.90
		RB Size=50, RB Offset=0	2	2	21.57	21.68	21.44
		RB Size=50, RB Offset=50	2	2	21.72	21.79	21.48
		RB Size=100, RB Offset=0	2	2	21.67	21.76	21.58

Note:

1. SAR for LTE band exposure configurations is measured according to the procedures of KDB 941225 D05 SAR for LTE Devices v02.
2. The CMW500 Wideband Radio Communication tester is used for LTE output power measurements and SAR testing. Closed loop power control is used to keep the radio transmitters the max output power during the test.

WLAN 2.4G:

Mode	Channel frequency	Data Rate	RF Output Power(dBm)
802.11b	2412	1Mbps	**15.84**
	2437		15.63
	2462		15.82
802.11g	2412	6Mbps	13.26
	2437		12.71
	2462		12.72
802.11n HT20	2412	MCS0	12.20
	2437		11.76
	2462		11.55
802.11n HT40	2422	MCS0	12.05
	2437		11.51
	2452		12.08

Standalone SAR test exclusion considerations

Antennas Location:

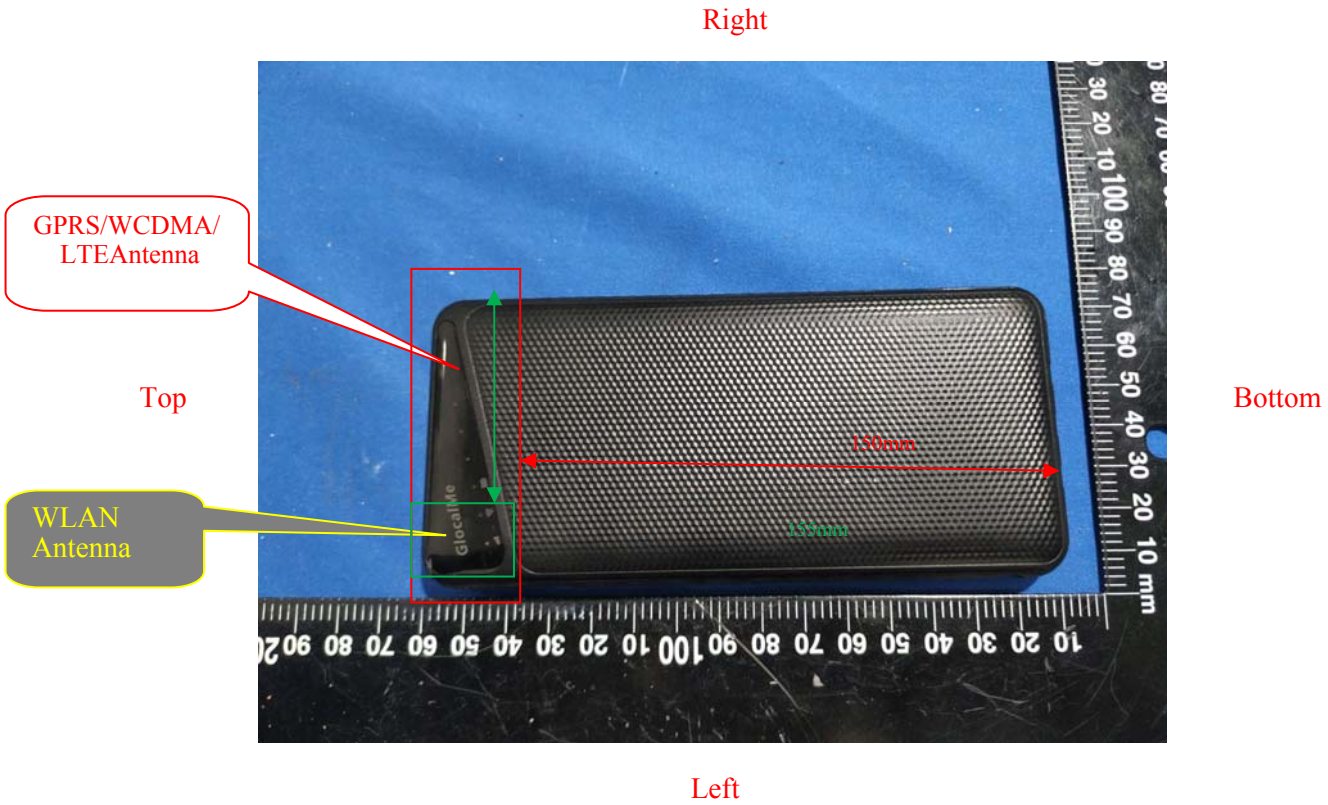

Antenna Distance To Edge

Antenna Distance To Edge(mm)						
Antenna	**Front**	**Back**	**Left**	**Right**	**Top**	**Bottom**
WLAN Antenna	< 5	< 5	< 5	35	< 5	150
WWAN(GPRS /WCDMA/LTE)	< 5	< 5	< 5	< 5	< 5	150

Standalone SAR test exclusion considerations

Mode	Frequency (MHz)	P_{avg} (dBm)	P_{avg} (mW)	Distance (mm)	Calculated value	Threshold (1-g)	SAR Test Exclusion
WLAN 2.4G	2462	16.1	40.74	0	12.8	3	No

NOTE:

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

[(max. power of channel, including tune-up tolerance, mW)/(min. test separation distance, mm)] ·
[√f(GHz)] ≤ 3.0 for 1-g SAR and ≤7.5 for 10-g extremity SAR, where

1. f(GHz) is the RF channel transmit frequency in GHz.
2. Power and distance are rounded to the nearest mW and mm before calculation.
3. The result is rounded to one decimal place for comparison.
4. When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test Exclusion.

SAR test exclusion for the EUT edge considerations Result

Exclusion Result						
Mode	**Front**	**Back**	**Left**	**Right**	**Top**	**Bottom**
WLAN 2.4G	**Required**	**Required**	**Required**	Exclusion	**Required**	Exclusion
WWAN	**Required**	**Required**	**Required**	**Required**	**Required**	Exclusion

Note:

Required: The distance to Edge is less than 25mm, testing is required.
Exclusion*: SAR test exclusion evaluation has been done above**.**
Exclusion: The distance to Edge is more than 25 mm, testing is not required.

SAR MEASUREMENT RESULTS

This page summarizes the results of the performed dosimetric evaluation.

SAR Test Data

Environmental Conditions

Temperature:	22.1-23.2 ℃	22.1-23.2 ℃	22.2-23.3 ℃	22.2-23.5 ℃	22.2-23.3 ℃
Relative Humidity:	45-50%	45-51%	43-52 %	43-49 %	42-49 %
ATM Pressure:	101.3 kPa	101.3 kPa	101.3 kPa	101.3 kPa	101.3 kPa
Test Date:	2020/12/19	2020/12/20	2020/12/21	2020/12/22	2020/12/23

Testing was performed by Seven Liang, Ricardo Lan,Thomas Deng.

GPRS 850：

EUT Position	Frequency (MHz)	Test Mode	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/kg)			
					Scaled Factor	Meas. SAR	Scaled SAR	Plot
Body Front (10mm)	824.2	GPRS	/	/	/	/	/	/
	836.6	GPRS	30.21	30.8	1.146	0.201	**0.23**	1#
	848.8	GPRS	/	/	/	/	/	/
Body Back (10mm)	824.2	GPRS	/	/	/	/	/	/
	836.6	GPRS	30.21	30.8	1.146	0.147	0.17	2#
	848.8	GPRS	/	/	/	/	/	/
Body Left (10mm)	824.2	GPRS	/	/	/	/	/	/
	836.6	GPRS	30.21	30.8	1.146	0.148	0.17	3#
	848.8	GPRS	/	/	/	/	/	/
Body Right (10mm)	824.2	GPRS	/	/	/	/	/	/
	836.6	GPRS	30.21	30.8	1.146	0.090	0.10	5#
	848.8	GPRS	/	/	/	/	/	/
Body Top (10mm)	824.2	GPRS	/	/	/	/	/	/
	836.6	GPRS	30.21	30.8	1.146	0.047	0.05	5#
	848.8	GPRS	/	/	/	/	/	/

Note:

1. When the 1-g SAR is ≤ 0.8W/Kg, testing for other channels are optional.
2. The EUT transmit and receive through the same GPRS antenna while testing SAR.
3. When SAR or MPE is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance.
4. When the maximum output power variation across the required test channels is > 0.5 dB, instead of the middle channel, the highest output power channel must be used.
5. The Multi-slot Classes of EUT is Class 12 which has maximum 4 Downlink slots and 4 Uplink slots, the maximum active slots is 5, when perform the multiple slots scan, 3DL+2UL is the worst case.

GPRS 1900:

EUT Position	Frequency (MHz)	Test Mode	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/kg)			
					Scaled Factor	Meas. SAR	Scaled SAR	Plot
Body Front (10mm)	1850.2	GPRS	/	/	/	/	/	/
	1880	GPRS	29.96	30.4	1.107	0.274	0.30	6#
	1909.8	GPRS	/	/	/	/	/	/
Body Back (10mm)	1850.2	GPRS	/	/	/	/	/	/
	1880	GPRS	29.96	30.4	1.107	0.306	**0.34**	7#
	1909.8	GPRS	/	/	/	/	/	/
Body Left (10mm)	1850.2	GPRS	/	/	/	/	/	/
	1880	GPRS	29.96	30.4	1.107	0.123	0.14	8#
	1909.8	GPRS	/	/	/	/	/	/
Body Right (10mm)	1850.2	GPRS	/	/	/	/	/	/
	1880	GPRS	29.96	30.4	1.107	0.248	0.27	9#
	1909.8	GPRS	/	/	/	/	/	/
Body Top (10mm)	1850.2	GPRS	/	/	/	/	/	/
	1880	GPRS	29.96	30.4	1.107	0.420	0.46	10#
	1909.8	GPRS	/	/	/	/	/	/

Note:
1. When the 1-g SAR is ≤ 0.8W/Kg, testing for other channels are optional.
2. The EUT transmit and receive through the same GPRS antenna while testing SAR.
3. When SAR or MPE is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance.
4. When the maximum output power variation across the required test channels is > 0.5 dB, instead of the middle channel, the highest output power channel must be used.
5. The Multi-slot Classes of EUT is Class 12 which has maximum 4 Downlink slots and 4 Uplink slots, the maximum active slots is 5, when perform the multiple slots scan, 3DL+2UL is the worst case.

WCDMA Band 2:

EUT Position	Frequency (MHz)	Test Mode	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/kg)			
					Scaled Factor	Meas. SAR	Scaled SAR	Plot
Body Front (10mm)	1852.4	RMC	/	/	/	/	/	/
	1880	RMC	23.09	23.5	1.099	0.531	0.58	11#
	1907.6	RMC	/	/	/	/	/	/
Body Back (10mm)	1852.4	RMC	/	/	/	/	/	/
	1880	RMC	23.09	23.5	1.099	0.684	**0.75**	12#
	1907.6	RMC	/	/	/	/	/	/
Body Left (10mm)	1852.4	RMC	/	/	/	/	/	/
	1880	RMC	23.09	23.5	1.099	0.182	0.20	13#
	1907.6	RMC	/	/	/	/	/	/
Body Right (10mm)	1852.4	RMC	/	/	/	/	/	/
	1880	RMC	23.09	23.5	1.099	0.473	0.52	14#
	1907.6	RMC	/	/	/	/	/	/
Body Top (10mm)	1852.4	RMC	/	/	/	/	/	/
	1880	RMC	23.09	23.5	1.099	0.717	0.79	15#
	1907.6	RMC	/	/	/	/	/	/

WCDMA Band 5:

EUT Position	Frequency (MHz)	Test Mode	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/kg)			
					Scaled Factor	Meas. SAR	Scaled SAR	Plot
Body Front (10mm)	826.4	RMC	/	/	/	/	/	/
	836.6	RMC	22.17	22.7	1.130	0.275	**0.31**	16#
	846.6	RMC	/	/	/	/	/	/
Body Back (10mm)	826.4	RMC	/	/	/	/	/	/
	836.6	RMC	22.17	22.7	1.130	0.216	0.24	17#
	846.6	RMC	/	/	/	/	/	/
Body Left (10mm)	826.4	RMC	/	/	/	/	/	/
	836.6	RMC	22.17	22.7	1.130	0.227	0.26	18#
	846.6	RMC	/	/	/	/	/	/
Body Right (10mm)	826.4	RMC	/	/	/	/	/	/
	836.6	RMC	22.17	22.7	1.130	0.161	0.18	19#
	846.6	RMC	/	/	/	/	/	/
Body Top (10mm)	826.4	RMC	/	/	/	/	/	/
	836.6	RMC	22.17	22.7	1.130	0.072	0.08	20#
	846.6	RMC	/	/	/	/	/	/

Note:
1. When the 1-g SAR is≤ 0.8W/Kg, testing for other channels are optional.
2. The EUT transmit and receive through the same antenna while testing SAR.
3. The default test configuration is to measure SAR with an established radio link between the EUT and a communication test set using a 12.2 kbps RMC (reference measurement Channel) Configured in Test Loop Model.
4. KDB 941225 D01-Body SAR is not required for HSDPA/HSUPA when the maximum average output of each RF channel is less than ¼ dB higher than measured 12.2kbps RMC or the maximum SAR for 12.2kbps RMC is < 75% of SAR limit.
5. When SAR or MPE is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance.

LTE Band 2:

EUT Position	Frequency (MHz)	Bandwidth (MHz)	Test Mode	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/kg)			
						Scaled Factor	Meas. SAR	Scaled SAR	Plot
Body Front (10mm)	1860	20	1RB	/	/	/	/	/	/
	1880	20	1RB	23.72	24.5	1.197	0.609	0.73	21#
	1900	20	1RB	/	/	/		/	/
	1880	20	50%RB	23.3	24.5	1.318	0.532	0.70	22#
Body Back (10mm)	1860	20	1RB	/	/	/	/	/	/
	1880	20	1RB	23.72	24.5	1.197	0.651	0.78	23#
	1900	20	1RB	/	/	/	/	/	/
	1880	20	50%RB	23.3	24.5	1.318	0.552	0.73	24#
Body Left (10mm)	1860	20	1RB	/	/	/	/	/	/
	1880	20	1RB	23.72	24.5	1.197	0.179	0.21	25#
	1900	20	1RB	/	/	/	/	/	/
	1880	20	50%RB	23.3	24.5	1.318	0.149	0.20	26#
Body Right (10mm)	1860	20	1RB	/	/	/	/	/	/
	1880	20	1RB	23.72	24.5	1.197	0.642	0.77	27#
	1900	20	1RB	/	/	/	/	/	/
	1880	20	50%RB	23.3	24.5	1.318	0.535	0.71	28#
Body Top (10mm)	1860	20	1RB	24.01	24.5	1.119	0.794	0.89	29#
	1880	20	1RB	23.72	24.5	1.197	0.858	1.03	30#
	1900	20	1RB	24.05	24.5	1.109	0.945	**1.05**	31#
	1880	20	50%RB	23.3	24.5	1.318	0.683	0.90	32#
	1880	20	100%RB	23.3	24.5	1.318	0.671	0.88	33#

LTE Band 7:

EUT Position	Frequency (MHz)	Bandwidth (MHz)	Test Mode	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/kg)			
						Scaled Factor	Meas. SAR	Scaled SAR	Plot
Body Front (10mm)	2510	20	1RB	/	/	/	/	/	/
	2535	20	1RB	24.51	24.9	1.094	0.69	0.75	34#
	2560	20	1RB	/	/	/	/	/	/
	2535	20	50%RB	23.78	24.9	1.294	0.52	0.67	35#
Body Back (10mm)	2510	20	1RB	23.97	25.0	1.268	0.720	0.91	36#
	2535	20	1RB	24.51	25.0	1.119	0.900	1.01	37#
	2560	20	1RB	23.74	25.0	1.337	0.758	1.01	38#
	2535	20	50%RB	23.78	25.0	1.324	0.831	1.10	39#
	2535	20	100%RB	23.78	25.0	1.324	0.690	0.91	40#
Body Left (10mm)	2510	20	1RB	/	/	/	/	/	/
	2535	20	1RB	24.51	25.0	1.119	0.225	0.25	41#
	2560	20	1RB	/	/	/	/	/	/
	2535	20	50%RB	23.78	25.0	1.324	0.190	0.25	42#
Body Right (10mm)	2510	20	1RB	23.97	25.0	1.268	0.758	0.96	43#
	2535	20	1RB	24.51	25.0	1.119	0.971	1.09	44#
	2560	20	1RB	23.74	25.0	1.337	0.767	1.03	45#
	2535	20	50%RB	23.78	25.0	1.324	0.869	1.15	46#
	2535	20	100%RB	23.78	25.0	1.324	0.767	1.02	47#
Body Top (10mm)	2510	20	1RB	23.97	25.0	1.268	0.701	0.89	48#
	2535	20	1RB	24.51	25.0	1.119	0.867	0.97	49#
	2560	20	1RB	23.74	25.0	1.337	0.734	0.98	50#
	2535	20	50%RB	23.78	25.0	1.324	0.715	0.95	51#
	2535	20	100%RB	23.78	25.0	1.324	0.712	0.94	52#

LTE Band 12:

EUT Position	Frequency (MHz)	Bandwidth (MHz)	Test Mode	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/kg)			
						Scaled Factor	Meas. SAR	Scaled SAR	Plot
Body Front (10mm)	704	10	1RB	/	/	/	/	/	/
	707.5	10	1RB	23.72	24.5	1.197	0.496	0.59	53#
	711	10	1RB	/	/	/		/	/
	707.5	10	50%RB	22.9	24.5	1.445	0.394	0.57	54#
Body Back (10mm)	704	10	1RB	/	/	/	/	/	/
	707.5	10	1RB	23.72	24.5	1.197	0.513	0.61	55#
	711	10	1RB	/	/	/	/	/	/
	707.5	10	50%RB	22.9	24.5	1.445	0.394	0.57	56#
Body Left (10mm)	704	10	1RB	/	/	/	/	/	/
	707.5	10	1RB	23.72	24.5	1.197	0.289	0.35	57#
	711	10	1RB	/	/	/	/	/	/
	707.5	10	50%RB	22.9	24.5	1.445	0.242	0.35	58#
Body Right (10mm)	704	10	1RB	/	/	/	/	/	/
	707.5	10	1RB	23.72	24.5	1.197	0.296	0.35	59#
	711	10	1RB	/	/	/	/	/	/
	707.5	10	50%RB	22.9	24.5	1.445	0.246	0.36	60#
Body Top (10mm)	704	10	1RB	/	/	/	/	/	/
	707.5	10	1RB	23.72	24.5	1.197	0.044	0.05	61#
	711	10	1RB	/	/	/	/	/	/
	707.5	10	50%RB	22.9	24.5	1.445	0.039	0.06	62#

LTE Band 13:

EUT Position	Frequency (MHz)	Bandwidth (MHz)	Test Mode	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/kg)			
						Scaled Factor	Meas. SAR	Scaled SAR	Plot
Body Front (10mm)	/	/	/	/	/	/	/	/	/
	782	10	1RB	23.72	24.5	1.197	0.170	0.20	63#
	/	/	/	/	/	/	/	/	/
	782	10	50%RB	22.9	24.5	1.445	0.209	0.30	64#
Body Back (10mm)	/	/	/	/	/	/	/	/	/
	782	10	1RB	23.72	24.5	1.197	0.162	0.19	65#
	/	/	/	/	/	/	/	/	/
	782	10	50%RB	22.9	24.5	1.445	0.203	0.29	66#
Body Left (10mm)	/	/	/	/	/	/	/	/	/
	782	10	1RB	23.72	24.5	1.197	0.096	0.11	67#
	/	/	/	/	/	/	/	/	/
	782	10	50%RB	22.9	24.5	1.445	0.116	0.17	68#
Body Right (10mm)	/	/	/	/	/	/	/	/	/
	782	10	1RB	23.72	24.5	1.197	0.065	0.08	69#
	/	/	/	/	/	/	/	/	/
	782	10	50%RB	22.9	24.5	1.445	0.081	0.12	70#
Body Top (10mm)	/	/	/	/	/	/	/	/	/
	782	10	1RB	23.72	24.5	1.197	0.045	0.05	71#
	/	/	/	/	/	/	/	/	/
	782	10	50%RB	22.9	24.5	1.445	0.052	0.08	72#

LTE Band 26(Contains LTE Band 5):

EUT Position	Frequency (MHz)	Bandwidth (MHz)	Test Mode	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/kg)			
						Scaled Factor	Meas. SAR	Scaled SAR	Plot
Body Front (10mm)	821.5	15	1RB	/	/	/	/	/	/
	831.5	15	1RB	23.72	24.5	1.197	0.662	0.79	73#
	841.5	15	1RB	/	/	/	/	/	/
	831.5	15	50%RB	22.9	24.5	1.445	0.517	0.75	74#
Body Back (10mm)	821.5	15	1RB	/	/	/	/	/	/
	831.5	15	1RB	23.72	24.5	1.197	0.656	0.79	75#
	841.5	15	1RB	/	/	/	/	/	/
	831.5	15	50%RB	22.9	24.5	1.445	0.506	0.73	76#
Body Left (10mm)	821.5	15	1RB	/	/	/	/	/	/
	831.5	15	1RB	23.72	24.5	1.197	0.584	0.70	77#
	841.5	15	1RB	/	/	/	/	/	/
	831.5	15	50%RB	22.9	24.5	1.445	0.458	0.66	78#
Body Right (10mm)	821.5	15	1RB	/	/	/	/	/	/
	831.5	15	1RB	23.72	24.5	1.197	0.517	0.62	79#
	841.5	15	1RB	/	/	/	/	/	/
	831.5	15	50%RB	22.9	24.5	1.445	0.407	0.59	80#
Body Top (10mm)	821.5	15	1RB	/	/	/	/	/	/
	831.5	15	1RB	23.72	24.5	1.197	0.069	0.08	81#
	841.5	15	1RB	/	/	/	/	/	/
	831.5	15	50%RB	22.9	24.5	1.445	0.055	0.08	82#

LTE Band 40 Lower:

EUT Position	Frequency (MHz)	Bandwidth (MHz)	Test Mode	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/kg)			
						Scaled Factor	Meas. SAR	Scaled SAR	Plot
Body Front (10mm)	/	/	/	/	/	/	/	/	/
	2310	10	1RB	22.06	22.8	1.186	0.493	**0.58**	83#
	/	/	/	/	/	/	/	/	/
	2310	10	50%	21.41	22.8	1.377	0.372	0.51	84#
Body Back (10mm)	/	/	/	/	/	/	/	/	/
	2310	10	1RB	22.06	22.8	1.186	0.333	0.39	85#
	/	/	/	/	/	/	/	/	/
	2310	10	50%	21.41	22.8	1.377	0.27	0.37	86#
Body Left (10mm)	/	/	/	/	/	/	/	/	/
	2310	10	1RB	22.06	22.8	1.186	0.448	0.53	87#
	/	/	/	/	/	/	/	/	/
	2310	10	50%	21.41	22.8	1.377	0.365	0.50	88#
Body Right (10mm)	/	/	/	/	/	/	/	/	/
	2310	10	1RB	22.06	22.8	1.186	0.049	0.06	89#
	/	/	/	/	/	/	/	/	/
	2310	10	50%	21.41	22.8	1.377	0.041	0.06	90#
Body Top (10mm)	/	/	/	/	/	/	/	/	/
	2310	10	1RB	22.06	22.8	1.186	0.467	0.55	91#
	/	/	/	/	/	/	/	/	/
	2310	10	50%	21.41	22.8	1.377	0.38	0.52	92#

LTE Band 40 Upper:

EUT Position	Frequency (MHz)	Bandwidth (MHz)	Test Mode	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/kg)			
						Scaled Factor	Meas. SAR	Scaled SAR	Plot
Body Front (10mm)	/	/	/	/	/	/	/	/	/
	2355	10	1RB	22.2	22.8	1.148	0.352	0.40	93#
	/	/	/	/	/	/	/	/	/
	2355	10	50%RB	21.1	22.8	1.479	0.324	0.48	94#
Body Back (10mm)	/	/	/	/	/	/	/	/	/
	2355	10	1RB	22.2	22.8	1.148	0.321	0.37	95#
	/	/	/	/	/	/	/	/	/
	2355	10	50%RB	21.1	22.8	1.479	0.396	0.59	96#
Body Left (10mm)	/	/	/	/	/	/	/	/	/
	2355	10	1RB	22.2	22.8	1.148	0.081	0.09	97#
	/	/	/	/	/	/	/	/	/
	2355	10	50%RB	21.1	22.8	1.479	0.072	0.11	98#
Body Right (10mm)	/	/	/	/	/	/	/	/	/
	2355	10	1RB	22.2	22.8	1.148	0.418	0.48	99#
	/	/	/	/	/	/	/	/	/
	2355	10	50%RB	21.1	22.8	1.479	0.351	0.52	100#
Body Top (10mm)	/	/	/	/	/	/	/	/	/
	2355	10	1RB	22.2	22.8	1.148	0.397	0.46	101#
	/	/	/	/	/	/	/	/	/
	2355	10	50%RB	21.1	22.8	1.479	0.334	0.49	102#

LTE Band 41(Contains LTE Band 38):

EUT Position	Frequency (MHz)	Bandwidth (MHz)	Test Mode	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/kg)			
						Scaled Factor	Meas. SAR	Scaled SAR	Plot
Body Front (10mm)	2506	20	1RB	/	/	/	/	/	/
	2593	20	1RB	23.72	24.5	1.197	0.277	0.33	103#
	2680	20	1RB	/	/	/	/	/	/
	2593	20	50%RB	22.9	24.5	1.445	0.228	0.33	104#
Body Back (10mm)	2506	20	1RB	/	/	/	/	/	/
	2593	20	1RB	23.72	24.5	1.197	0.353	0.42	105#
	2680	20	1RB	/	/	/	/	/	/
	2593	20	50%RB	22.9	24.5	1.445	0.287	0.41	106#
Body Left (10mm)	2506	20	1RB	/	/	/	/	/	/
	2593	20	1RB	23.72	24.5	1.197	0.089	0.11	107#
	2680	20	1RB	/	/	/	/	/	/
	2593	20	50%RB	22.9	24.5	1.445	0.083	0.12	108#
Body Right (10mm)	2506	20	1RB	/	/	/	/	/	/
	2593	20	1RB	23.72	24.5	1.197	0.354	0.42	109#
	2680	20	1RB	/	/	/	/	/	/
	2593	20	50%RB	22.9	24.5	1.445	0.236	0.34	110#
Body Top (10mm)	2506	20	1RB	/	/	/	/	/	/
	2593	20	1RB	23.72	24.5	1.197	0.457	0.55	111#
	2680	20	1RB	/	/	/	/	/	/
	2593	20	50%RB	22.9	24.5	1.445	0.378	0.55	112#

LTE Band 66(Contains LTE Band 4):

EUT Position	Frequency (MHz)	Bandwidth (MHz)	Test Mode	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/kg)			
						Scaled Factor	Meas. SAR	Scaled SAR	Plot
Body Front (10mm)	1720	20	1RB	23.49	24.6	1.291	0.871	1.12	113#
	1745	20	1RB	23.89	24.6	1.178	0.794	0.94	114#
	1770	20	1RB	23.55	24.6	1.274	0.759	0.97	115#
	1745	20	50%RB	22.85	24.6	1.496	0.642	0.96	116#
	1745	20	100%RB	22.85	24.6	1.496	0.636	0.95	117#
Body Back (10mm)	1720	20	1RB	23.49	24.6	1.291	0.937	1.21	118#
	1745	20	1RB	23.89	24.6	1.178	0.789	0.93	119#
	1770	20	1RB	23.55	24.6	1.274	0.998	1.27	120#
	1745	20	50%RB	22.85	24.6	1.496	0.772	1.16	121#
	1745	20	100%RB	22.85	24.6	1.496	0.766	1.15	122#
Body Left (10mm)	1720	20	1RB	/	/	/	/	/	/
	1745	20	1RB	23.89	24.6	1.178	0.208	0.24	123#
	1770	20	1RB	/	/	/	/	/	/
	1745	20	50%RB	22.85	24.6	1.496	0.174	0.26	124#
Body Right (10mm)	1720	20	1RB	/	/	/	/	/	/
	1745	20	1RB	23.89	24.6	1.178	0.435	0.51	125#
	1770	20	1RB	/	/	/	/	/	/
	1745	20	50%RB	22.85	24.6	1.496	0.384	0.57	126#
Body Top (10mm)	1720	20	1RB	23.49	24.6	1.291	0.982	1.27	127#
	1745	20	1RB	23.89	24.6	1.178	1.18	1.39	128#
	1770	20	1RB	23.55	24.6	1.274	1.03	1.31	129#
	1745	20	50%RB	22.85	24.6	1.496	0.915	1.37	130#
	1745	20	100%RB	22.85	24.6	1.496	0.889	1.33	131#

Note:

1. When the 1-g SAR is ≤ 0.8W/Kg, testing for other channels are optional.
2. SAR for LTE band exposure configurations is measured according to the procedures of KDB 941225 D05 SAR for LTE Devices v02.
3. KDB941225D05-SAR for higher order modulation is required only when the highest maximum output power for the configuration in the higher order modulation is > 0.5 dB higher than the same configuration in QPSK or when the reported SAR for the QPSK configuration is > 1.45 W/kg
4. KDB941225D05-For QPSK with 100% RB allocation, when the reported SAR measured for the Highest output power channel is <1.45 W/kg, tests for the remaining required test channels are optional.
5. KDB941225D05- For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg.
6. KDB941225D05- Start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power among RB offset the upper edge, middle and lower edge of each required test channel.
7. KDB941225D05- other channel bandwidths SAR test is required when the highest maximum output power of a configuration requiring testing in the smaller channel bandwidth is > 0.5 dB higher than the equivalent channel configurations in the largest channel bandwidth configuration or the reported SAR of a configuration for the largest channel bandwidth is > 1.45 W/kg.
8. Worst case SAR for 50% RB allocation is selected to be tested.
9. KDB 648474 D04-When the peak SAR located in regions that probe is unable to access, a flat phantom is used for SAR measurement.

WLAN 2.4G:

EUT Position	Frequency (MHz)	Test Mode	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/kg)			
					Scaled Factor	Meas. SAR	Scaled SAR	Plot
Body Front (10mm)	2412	802.11b	/	/	/	/	/	/
	2437	802.11b	15.63	16.1	1.114	0.106	0.12	132#
	2462	802.11b	/	/	/	/	/	/
Body Back (10mm)	2412	802.11b	/	/	/	/	/	/
	2437	802.11b	15.63	16.1	1.114	0.053	0.06	133#
	2462	802.11b	/	/	/	/	/	/
Body Left (10mm)	2412	802.11b	/	/	/	/	/	/
	2437	802.11b	15.63	16.1	1.114	0.17	0.19	134#
	2462	802.11b	/	/	/	/	/	/
Body Right (10mm)	2412	802.11b	/	/	/	/	/	/
	2437	802.11b	15.63	16.1	1.114	0.061	0.07	135#
	2462	802.11b	/	/	/	/	/	/
Body Top (10mm)	2412	802.11b	/	/	/	/	/	/
	2437	802.11b	15.63	16.1	1.114	0.031	0.03	136#
	2462	802.11b	/	/	/	/	/	/

Note:
1. When the 1-g SAR is≤ 0.8W/Kg, testing for other channels are optional.
2. When the highest *reported* SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg, OFDM SAR is not required.
3. When SAR or MPE is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance.

SAR Measurement Variability

In accordance with published RF Exposure KDB procedure 865664 D01 SAR measurement 100 MHz to 6 GHz v01. These additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results

1) Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg; steps 2) through 4) do not apply.
2) When the original highest measured SAR is ≥ 0.80 W/kg, repeat that measurement once.
3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 W/kg (~ 10% from the 1-g SAR limit).
4) Perform a third repeated measurement only if the original, first or second repeated measurement is ≥1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20.

Note: The same procedures should be adapted for measurements according to extremity and occupational exposure limits by applying a factor of 2.5 for extremity exposure and a factor of 5 for occupational exposure to the corresponding SAR thresholds.

The Highest Measured SAR Configuration in Each Frequency Band

Body

SAR probe calibration point	Frequency Band	Freq.(MHz)	EUT Position	Meas. SAR (W/kg)		Largest to Smallest SAR Ratio
				Original	Repeated	
1900MHz (1850-2000MHz)	LTE Band 2	1900	Body Top	0.945	0.95	1.0
2600MHz (2550-2700MHz)	LTE Band 7	2535	Body Back	0.9	0.907	0.99
2600MHz (2550-2700MHz)	LTE Band 7	2535	Body Right	0.971	0.963	1.0
2600MHz (2550-2700MHz)	LTE Band 7	2535	Body Top	0.867	0.863	1.0
1800MHz (1650-1850MHz)	LTE Band 66	1745	Body Front	0.794	0.801	0.99
1800MHz (1650-1850MHz)	LTE Band 66	1770	Body Back	0.998	0.996	1.0
1800MHz (1650-1850MHz)	LTE Band 66	1745	Body Top	1.18	1.12	1.05

Note:

1. Second Repeated Measurement is not required since the ratio of the largest to smallest SAR for the original and first repeated measurement is not > 1.20.
2. The measured SAR results **do not** have to be scaled to the maximum tune-up tolerance to determine if repeated measurements are required.
3. SAR measurement variability must be assessed for each frequency band, which is determined by the **SAR probe calibration point and tissue-equivalent medium** used for the device measurements..

SAR SIMULTANEOUS TRANSMISSION DESCRIPTION

Simultaneous Transmission:

Description of Simultaneous Transmit Capabilities		
Transmitter Combination	**Simultaneous?**	**Hotspot?**
WWAN(GPRS/WCDMA/LTE) + WLAN	√	√

Simultaneous and Hotspot SAR test exclusion considerations:

Mode(SAR1+SAR2)	Position	Reported SAR(W/kg)		ΣSAR < 1.6W/kg
		SAR1	SAR2	
GPRS 850 + WLAN(2.4G) (Hotspot)	Body Front	0.23	0.12	0.35
	Body Back	0.17	0.06	0.23
	Body Left	0.17	0.19	0.36
	Body Right	0.1	0.07	0.17
	Body Top	0.05	0.03	0.08
GPRS 1900 + WLAN(2.4G) (Hotspot)	Body Front	0.3	0.12	0.42
	Body Back	0.34	0.06	0.40
	Body Left	0.14	0.19	0.33
	Body Right	0.27	0.07	0.34
	Body Top	0.46	0.03	0.49
WCDMA Band 2+ WLAN(2.4G) (Hotspot)	Body Front	0.58	0.12	0.70
	Body Back	0.75	0.06	0.81
	Body Left	0.2	0.19	0.39
	Body Right	0.52	0.07	0.59
	Body Top	0.79	0.03	0.82
WCDMA Band 5+ WLAN(2.4G) (Hotspot)	Body Front	0.31	0.12	0.43
	Body Back	0.24	0.06	0.30
	Body Left	0.26	0.19	0.45
	Body Right	0.18	0.07	0.25
	Body Top	0.08	0.03	0.11

Mode(SAR1+SAR2)	Position	Reported SAR(W/kg)		ΣSAR < 1.6W/kg
		SAR1	SAR2	
LTE Band 2+ WLAN(2.4G) (Hotspot)	Body Front	0.73	0.12	0.85
	Body Back	0.78	0.06	0.84
	Body Left	0.21	0.19	0.40
	Body Right	0.77	0.07	0.84
	Body Top	1.05	0.03	1.08
LTE Band 7+ WLAN(2.4G) (Hotspot)	Body Front	0.75	0.12	0.87
	Body Back	1.1	0.06	1.16
	Body Left	0.25	0.19	0.44
	Body Right	1.15	0.07	1.22
	Body Top	0.98	0.03	1.01
LTE Band 12+ WLAN(2.4G) (Hotspot)	Body Front	0.59	0.12	0.71
	Body Back	0.61	0.06	0.67
	Body Left	0.35	0.19	0.54
	Body Right	0.36	0.07	0.43
	Body Top	0.06	0.03	0.09
LTE Band 13+ WLAN(2.4G) (Hotspot)	Body Front	0.3	0.12	0.42
	Body Back	0.29	0.06	0.35
	Body Left	0.17	0.19	0.36
	Body Right	0.12	0.07	0.19
	Body Top	0.08	0.03	0.11
LTE Band 26+ WLAN(2.4G) (Hotspot)	Body Front	0.79	0.12	0.91
	Body Back	0.79	0.06	0.85
	Body Left	0.70	0.19	0.89
	Body Right	0.66	0.07	0.73
	Body Top	0.08	0.03	0.11
LTE Band 40 Lower + WLAN(2.4G) (Hotspot)	Body Front	0.58	0.12	0.70
	Body Back	0.39	0.06	0.45
	Body Left	0.53	0.19	0.72
	Body Right	0.06	0.07	0.13
	Body Top	0.55	0.03	0.58
LTE Band 40 Upper + WLAN(2.4G) (Hotspot)	Body Front	0.48	0.12	0.60
	Body Back	0.59	0.06	0.65
	Body Left	0.11	0.19	0.30
	Body Right	0.52	0.07	0.59
	Body Top	0.49	0.03	0.52
LTE Band 41 + WLAN(2.4G) (Hotspot)	Body Front	0.33	0.12	0.45
	Body Back	0.42	0.06	0.48
	Body Left	0.12	0.19	0.31
	Body Right	0.42	0.07	0.49
	Body Top	0.55	0.03	0.58

Mode(SAR1+SAR2)	Position	Reported SAR(W/kg)		ΣSAR < 1.6W/kg
		SAR1	SAR2	
LTE Band 66 + WLAN(2.4G) (Hotspot)	Body Front	1.12	0.12	1.24
	Body Back	1.27	0.06	1.33
	Body Left	0.26	0.19	0.45
	Body Right	0.57	0.07	0.64
	Body Top	1.39	0.03	**1.42**

Note:

1. Hotspot mode SAR is measured for all edges and surfaces of the device with a transmitting antenna located within 25 mm from that surface or edge; for the data modes, wireless technologies and frequency bands supporting hotspot mode.

Conclusion:

Sum of SAR: **Σ SAR ≤ 1.6 W/kg** therefore simultaneous transmission SAR with Volume Scans is **not required**.

SAR Plots

Please Refer to the Attachment.

APPENDIX A MEASUREMENT UNCERTAINTY

The uncertainty budget has been determined for the measurement system and is given in the following Table.

Measurement uncertainty evaluation for IEEE1528-2013 SAR test

Source of uncertainty	Tolerance/ uncertainty ± %	Probability distribution	Divisor	ci (1 g)	ci (10 g)	Standard uncertainty ± %, (1 g)	Standard uncertainty ± %, (10 g)
Measurement system							
Probe calibration	6.55	N	1	1	1	6.6	6.6
Axial Isotropy	4.7	R	√3	1	1	2.7	2.7
Hemispherical Isotropy	9.6	R	√3	0	0	0.0	0.0
Boundary effect	1.0	R	√3	1	1	0.6	0.6
Linearity	4.7	R	√3	1	1	2.7	2.7
Detection limits	1.0	R	√3	1	1	0.6	0.6
Readout electronics	0.3	N	1	1	1	0.3	0.3
Response time	0.0	R	√3	1	1	0.0	0.0
Integration time	0.0	R	√3	1	1	0.0	0.0
RF ambient conditions – noise	1.0	R	√3	1	1	0.6	0.6
RF ambient conditions–reflections	1.0	R	√3	1	1	0.6	0.6
Probe positioner mech. Restrictions	0.8	R	√3	1	1	0.5	0.5
Probe positioning with respect to phantom shell	6.7	R	√3	1	1	3.9	3.9
Post-processing	2.0	R	√3	1	1	1.2	1.2
Test sample related							
Test sample positioning	2.8	N	1	1	1	2.8	2.8
Device holder uncertainty	6.3	N	1	1	1	6.3	6.3
Drift of output power	5.0	R	√3	1	1	2.9	2.9
Phantom and set-up							
Phantom uncertainty (shape and thickness tolerances)	4.0	R	√3	1	1	2.3	2.3
Liquid conductivity target)	5.0	R	√3	0.64	0.43	1.8	1.2
Liquid conductivity meas.)	2.5	N	1	0.64	0.43	1.6	1.1
Liquid permittivity target)	5.0	R	√3	0.6	0.49	1.7	1.4
Liquid permittivity meas.)	2.5	N	1	0.6	0.49	1.5	1.2
Combined standard uncertainty		RSS				12.2	12.0
Expanded uncertainty 95 % confidence interval)						24.3	23.9

Measurement uncertainty evaluation for IEC62209-2 SAR test

Source of uncertainty	Tolerance/ uncertainty ± %	Probability distribution	Divisor	ci (1 g)	ci (10 g)	Standard uncertainty ± %, (1 g)	Standard uncertainty ± %, (10 g)
Measurement system							
Probe calibration	6.55	N	1	1	1	6.6	6.6
Axial Isotropy	4.7	R	√3	1	1	2.7	2.7
Hemispherical Isotropy	9.6	R	√3	0	0	0.0	0.0
Linearity	4.7	R	√3	1	1	2.7	2.7
Modulation Response	0.0	R	√3	1	1	0.0	0.0
Detection limits	1.0	R	√3	1	1	0.6	0.6
Boundary effect	1.0	R	√3	1	1	0.6	0.6
Readout electronics	0.3	N	1	1	1	0.3	0.3
Response time	0.0	R	√3	1	1	0.0	0.0
Integration time	0.0	R	√3	1	1	0.0	0.0
RF ambient conditions – noise	1.0	R	√3	1	1	0.6	0.6
RF ambient conditions–reflections	1.0	R	√3	1	1	0.6	0.6
Probe positioner mech. Restrictions	0.8	R	√3	1	1	0.5	0.5
Probe positioning with respect to phantom shell	6.7	R	√3	1	1	3.9	3.9
Post-processing	2.0	R	√3	1	1	1.2	1.2
Test sample related							
Device holder Uncertainty	6.3	N	1	1	1	6.3	6.3
Test sample positioning	2.8	N	1	1	1	2.8	2.8
Power scaling	4.5	R	√3	1	1	2.6	2.6
Drift of output power	5.0	R	√3	1	1	2.9	2.9
Phantom and set-up							
Phantom uncertainty (shape and thickness tolerances)	4.0	R	√3	1	1	2.3	2.3
Algorithm for correcting SAR for deviations in permittivity and conductivity	1.9	N	1	1	0.84	1.1	0.9
Liquid conductivity (meas.)	2.5	N	1	0.64	0.43	1.6	1.1
Liquid permittivity (meas.)	2.5	N	1	0.6	0.49	1.5	1.2
Temp. unc. - Conductivity	1.7	R	√3	0.78	0.71	0.8	0.7
Temp. unc. - Permittivity	0.3	R	√3	0.23	0.26	0.0	0.0
Combined standard uncertainty		RSS				12.2	12.1
Expanded uncertainty 95 % confidence interval)						24.5	24.2

APPENDIX B EUT TEST POSITION PHOTOS

Please Refer to the Attachment.

APPENDIX C PROBE CALIBRATION CERTIFICATES

Please Refer to the Attachment.

APPENDIX D DIPOLE CALIBRATION CERTIFICATES

Please Refer to the Attachment.

******* END OF REPORT *******