

Product Name: Smiirl Counter	Report No: FCC022022-05615RF1
Product Model: LI7D	Security Classification: Open
Version: V1.0	Total Page: 90

TIRT Testing Report



Prepared By:	Checked By:	Approved By:	The logo for TIRT Shenzhen is a circular emblem with the text "TIRT Shenzhen" in the center and "Beijing TIRT Technology Service Co., Ltd." around the perimeter.
Stone Tang	Randy Lv	Daniel Chen	
Stone Tang	Randy Lv	Daniel chen	

RF TEST REPORT

FCC ID: 2AC8OCOUNTV2

According to

47 CFR FCC Part 15, Subpart C(Section 15.247)

ANSI C63.10:2013

Equipment : Smiirl Counter
Model No. : LI7D
Series Model : LI5D, FF5D, FF7D, FO5D, FO7D, CU5D, CU7D, CUSH5D, CUSH7D (They have the same circuit principle, appearance and performance, but they are different for different customer configurations .Since only the measurement configuration (software function) of LI7D is different from other models, and it does not affect the wireless test, so, we choose the LI7D as the DUT (device under test) to cover all the models.)
Trademark : SMIIRL
Product No. : 20221026018929
Applicant : SMIIRL SAS
10 RUE DE PENTHIEVRE, 75008 PARIS, FRANCE

- The test result referred exclusively to the presented test model /sample.
- Without written approval of TIRT Inc. the test report shall not be reproduced except in full.
- Test Date: 2022.10.14-2022.10.28
- Receipt date: 2022.11.02

Lab: Beijing TIRT Technology Service Co.,Ltd Shenzhen

Add: 101, 3 # Factory Building, Gongjin Electronics Shatin Community, Kengzi Street,
Pingshan District, Shenzhen, China

TEL: +86-0755-27087573

Table of Contents

History of this test report.....	5
1. General Information	6
1.1 Applicant.....	6
1.2 Manufacturer.....	6
1.3 Factory.....	6
1.4 Basic Description of Equipment Under Test.....	6
1.5 Antenna Information	7
1.6 Transmit Operating Mode	7
2. Summary of Test Results	8
2.1 Summary of Test Items	8
2.2 Application of Standard.....	8
2.3 Test Instruments	9
2.4 Test Mode	10
2.5 Test Condition	10
2.6 Duty Cycle of Test Signal	11
2.7 Measurement Uncertainty.....	14
2.8 Test Location.....	14
2.9 Deviation from Standards	14
2.10 Abnormalities from Standard Conditions.....	14
3. Test Procedure And Results	15
3.1 AC Power Line Conducted Emission	15
3.1.1 Limit.....	15
3.1.2 Test Peripherals.....	15
3.1.3 Test Procedure	15
3.1.4 Test Setup	16
3.1.5 Test Result.....	17
3.2 Radiated Emission and Band Edge	19
3.2.1 Limit.....	19
3.2.2 Test Peripherals.....	19

3.2.3	Test Procedure	19
3.2.4	Test Setup	21
3.2.5	Test Result.....	22
3.3	Spurious Emission at Antenna Port	45
3.3.1	Limit.....	45
3.3.2	Test Peripherals.....	45
3.3.3	Test Procedure	45
3.3.4	Test Setup	46
3.3.5	The Result	47
3.4	6dB Bandwidth.....	67
3.4.1	Limit.....	67
3.4.2	Test Peripherals.....	67
3.4.3	Test Procedure	67
3.4.4	Test Setup	68
3.4.5	Test Result.....	68
3.5	Conducted Output Power.....	80
3.5.1	Limit.....	80
3.5.2	Test Peripherals.....	80
3.5.3	Test Procedure	80
3.5.4	Test Setup	80
3.5.5	Table of Parameters of Text Software Setting.....	81
3.5.6	The Result	82
3.6	Power Spectral Density.....	83
3.6.1	Limit.....	83
3.6.2	Test Peripherals.....	83
3.6.3	Test Procedure	83
3.6.4	Test Setup	84
3.6.5	The Result	85

History of this test report

Original Report Issue Date: 2022.11.02

- ☒ No additional attachment
- ☐ Additional attachments were issued following record

Attachment No.	Issue Date	Description

1. General Information

1.1 Applicant

SMIIRL SAS

10 RUE DE PENTHIEVRE, 75008 PARIS, FRANCE

1.2 Manufacturer

SMIIRL SAS

10 RUE DE PENTHIEVRE, 75008 PARIS, FRANCE

1.3 Factory

AZTECH COMMUNICATION DEVICE(DG) LTD

Jiu Jiang Shui Village, Chang Ping Town, Dong Guan City, Guang Dong

Province, China

1.4 Basic Description of Equipment Under Test

Items	Description	
Equipment Name	Smiirl Counter	
Model Number	LI7D	
Trademark	SMIIRL	
Power Supply	Adapter Model: AMS159A-0501500F Input: 100-240V~50/60Hz 0.5A/30VA Output: 5V  1.5A	
EUT Stage	☐ Product Unit	☒ Final-Sample
Operating Band	2400~2483.5MHz	☒ IEEE 802.11b
		☒ IEEE 802.11g
		☒ IEEE 802.11n(20MHz)
		☒ IEEE 802.11n(40MHz)
Product Type	IEEE 802.11b: WLAN (1TX, 1RX) IEEE 802.11g: WLAN (1TX, 1RX) IEEE 802.11n: WLAN (1TX, 1RX)	
Nominal Bandwidth	20MHz / 40MHz	
Modulation	IEEE 802.11b: DSSS (DBPSK, DQPSK, CCK) IEEE 802.11g: OFDM (BPSK / QPSK / 16QAM / 64QAM) IEEE 802.11n: OFDM (BPSK / QPSK / 16QAM / 64QAM)	
Data Rate (Mbps)	IEEE 802.11b mode : DSSS (1/2/5.5/11) IEEE 802.11g mode : OFDM (6/9/12/18/24/36/48/54) IEEE 802.11n (20MHz) mode(MCS0~MCS7) IEEE 802.11n (40MHz) mode(MCS0~MCS7)	

Eleven channels are provided for 802.11b, 802.11g, 802.11n (20MHz):

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
2400MHz ~ 2483.5 MHz	01	2412MHz	07	2442MHz
	02	2417MHz	08	2447MHz
	03	2422MHz	09	2452MHz
	04	2427MHz	10	2457MHz
	05	2432MHz	11	2462MHz
	06	2437MHz	/	/

Seven channels are provided for 802.11n (40MHz):

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
2400MHz ~ 2483.5 MHz	03	2422 MHz	07	2442MHz
	04	2427MHz	08	2447MHz
	05	2432MHz	09	2452MHz
	06	2437MHz	/	/

1.5 Antenna Information

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)
1	N/A	N/A	PCB	N/A	4.33

1.6 Transmit Operating Mode

Transmit Operating Mode					Transmit Multiple Antennas					
☒	Operating mode 1 (single antenna)				☒	1TX				
☐	Operating mode 2 (multiple antenna, no beam forming)				☐	2TX	☐	3TX	☐	4TX
☐	Operating mode 3 (multiple antenna, with beam forming)				☐	2TX	☐	3TX	☐	4TX
☒	802.11b	Operating mode	☒	1TX	☐	2TX	☐	3TX		
☒	802.11g	Operating mode	☒	1TX	☐	2TX	☐	3TX		
☒	802.11n(20MHz)	Operating mode	☒	1TX	☐	2TX	☐	3TX		
☒	802.11n(40MHz)	Operating mode	☒	1TX	☐	2TX	☐	3TX		

Note:

802.11b, 1Mbps~11Mbps: 1TX1RX.

802.11g, 6Mbps~54Mbps: 1TX1RX.

802.11n20MHz/40MHz, MCS0~ MCS7: 1TX1RX.

2. Summary of Test Results

2.1 Summary of Test Items

47 CFR FCC Part 15, Subpart C (Section 15.247)			
Test item	FCC Clause	Results	Remarks
AC Power Conducted Emission	15.207	Pass	Meet the requirement of the limit
Radiated Emission and Band Edge Measurement	15.205/15.209 /15.247(d)	Pass	Meet the requirement of the limit
Spurious Emission at Antenna Port	15.247(d)	Pass	Meet the requirement of the limit
6dB Bandwidth	15.247(a)(2)	Pass	Meet the requirement of the limit
Conducted Power	15.247(b)	Pass	Meet the requirement of the limit
Power Spectral Density	15.247(e)	Pass	Meet the requirement of the limit
Antenna Requirements	15.203	Compliance	The EUT has one PCB antenna arrangement for WiFi which was permanently attached and the antenna gain is 4.33 dBi, Impedance is 50Ω fulfill the requirement of this section. Please refer to the product photos.
Note: NA denotes Not Applicable in this part			

2.2 Application of Standard

47 CFR FCC Part 15, Subpart C (Section 15.247)

KDB 558074 D01 DTS Meas Guidance v04

ANSI C63.10:2013

2.3 Test Instruments

No.	Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	EMI Receiver	Rohde&Schwarz	ESCI	1166.5950.03	2022/11/16
2	AMN	Rohde&Schwarz	ENV216	3560.6550.05	2022/11/09
3	AMN	Schwarzbeck	NSLK8127	#829	2022/11/09
4	ECSI RF IN RF Cable	Rohde&Schwarz	RP-X1	\	2022/11/18
5	ECSI RF IN RF Cable	Rohde&Schwarz	Sapre sm	\	2022/11/09
6	EMI Receiver	Rohde&Schwarz	ESR7	102013	2022/11/09
7	Spectrum analyzer	Rohde&Schwarz	FSV30	103741	2022/11/09
8	EMI receiver	Rohde&Schwarz	ESU	100184	2023/07/20
9	Spectrum analyzer	KEYSIGHT	N9010A-44	MY51440158	2022/11/09
10	Loop Antenna*	Schwarzbeck	FMZB1519 B	00029	2025/07/03
11	Integral Antenna	Schwarzbeck	VULB 9163	VULB 9163-361	2022/11/09
12	Integral Antenna	Schwarzbeck	BBHA 9120D	BBHA 9120D 1201	2022/11/09
13	Integral Antenna	Schwarzbeck	BBHA 9170	9170#685	2022/11/09
14	Preamplifier	CD Systems Inc	PAP-03036-30	85060000	2022/11/09
15	Preamplifier	Schwarzbeck	BBV9721	9721-019	2022/11/09
16	Preamplifier	emci	EMC012645 SE	980417	2022/11/09
17	ECSI RF IN RF Cable	Rohde&Schwarz	AP-X1	\	2022/11/09
18	Spectrum Analyzer	Agilent	N9010A	MY52221119	2022/11/09
19	Power Collection Unit	Tonscend	JS0806-2	188060134	2022/11/09
20	Tonscend Test System	Tonscend	2.6.77.0518	NA	NA
21	10dB Attenuator	Tonscend	10dB	NA	NA
22	Temp&Humidity Recorder	Anymetre	JR900	NA	2022/11/03
23	Temp&Humidity Chamber	ETOMA	NTH1100-3 0A	16080628	2022/11/03
24	Filter	STI	STI15-9845	N/A	N/A
25	Filter	STI	5.1G	N/A	N/A
26	Filter	STI	STI15-9845	N/A	N/A
27	Testing Software	EZ-EMC	TW-03A2	N/A	N/A

2.4 Test Mode

Frequency Range : 2400~2483.5 MHz				
Test Items	Mode	Data Rate	Channel	Antenna
AC Power Conducted Emission	802.11b	1 Mbps	01	1
Radiated Emission and Band Edge Measurement	802.11b	1 Mbps	01/06/11	1
	802.11g	6Mbps	01/06/11	1
	802.11n(20MHz)	MCS0	01/06/11	1
	802.11n(40MHz)	MCS0	03/06/09	1
Spurious Emission at Antenna Port	802.11b	1 Mbps	01/06/11	1
	802.11g	6Mbps	01/06/11	1
	802.11n(20MHz)	MCS0	01/06/11	1
	802.11n(40MHz)	MCS0	03/06/09	1
6dB Bandwidth	802.11b	1 Mbps	01/06/11	1
	802.11g	6Mbps	01/06/11	1
	802.11n(20MHz)	MCS0	01/06/11	1
	802.11n(40MHz)	MCS0	03/06/09	1
Conducted Power	802.11b	1 Mbps	01/06/11	1
	802.11g	6Mbps	01/06/11	1
	802.11n(20MHz)	MCS0	01/06/11	1
	802.11n(40MHz)	MCS0	03/06/09	1
Power Spectral Density	802.11b	1 Mbps	01/06/11	1
	802.11g	6Mbps	01/06/11	1
	802.11n(20MHz)	MCS0	01/06/11	1
	802.11n(40MHz)	MCS0	03/06/09	1

2.5 Test Condition

Applicable to	Environmental conditions	Input Power	Tested by
AC Power Conducted Emission	25°C, 54 % RH	120Vac, 60Hz	Stone Tang
Radiated Emission and Band Edge Measurement	24°C, 53 % RH	120Vac, 60Hz	Stone Tang
Spurious Emission at Antenna Port	24°C, 53 % RH	120Vac, 60Hz	Stone Tang
6dB Bandwidth	24.5°C, 56 % RH	5Vdc	Stone Tang
Conducted Power	24.5°C, 56 % RH	5Vdc	Stone Tang
Power Spectral Density	24.5°C, 56 % RH	5Vdc	Stone Tang

2.6 Duty Cycle of Test Signal


If duty cycle is $\geq 98\%$, duty factor is not required.

If duty cycle is $< 98\%$, duty factor shall be considered.


So all the duty factor of other test mode shall be considered.

TestMode	Antenna	Channel	Transmission Duration [ms]	Transmission Period [ms]	Duty Cycle [%]	Duty Factor
11B	Ant1	2437	27.00	27.00	100.00	0
11G	Ant1	2437	27.00	27.00	100.00	0
11N20SISO	Ant1	2437	27.00	27.00	100.00	0
11N40SISO	Ant1	2437	27.00	27.00	100.00	0


11B_Ant1_2437

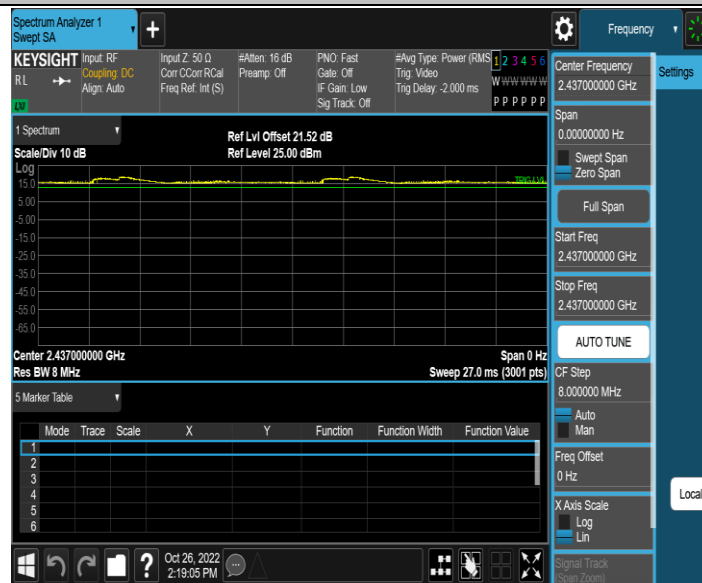


11G_Ant1_2437

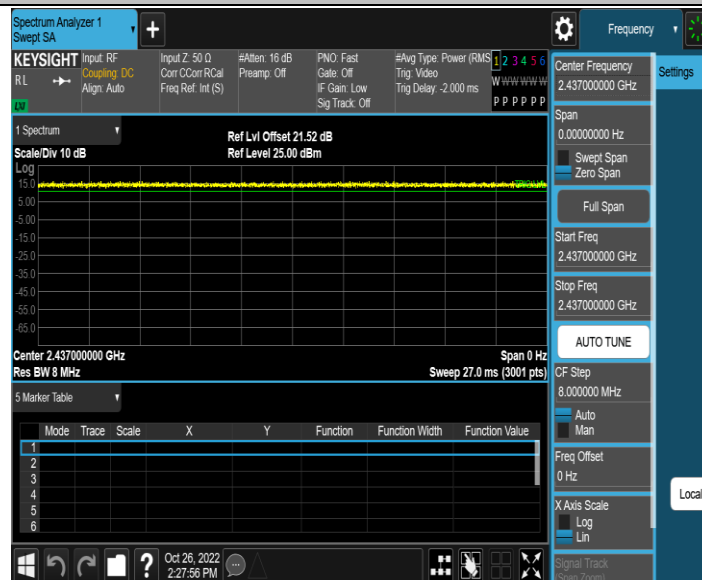

11N20SISO_Ant1_2437

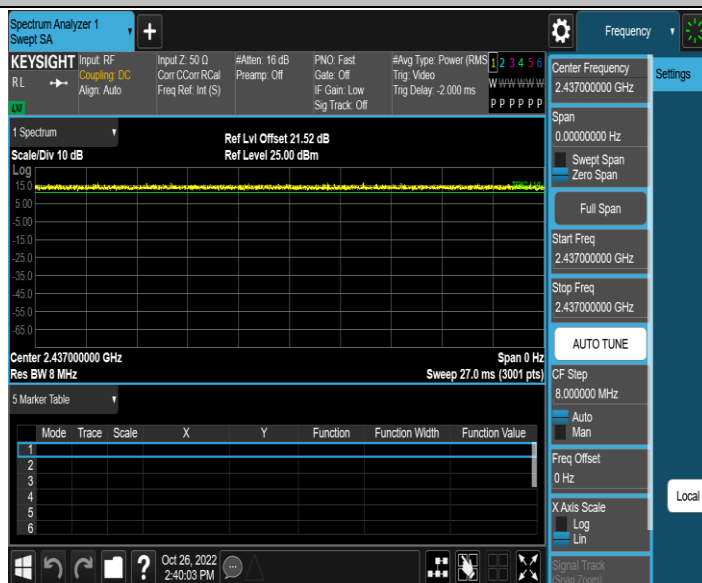

11N40SISO_Ant1_2437

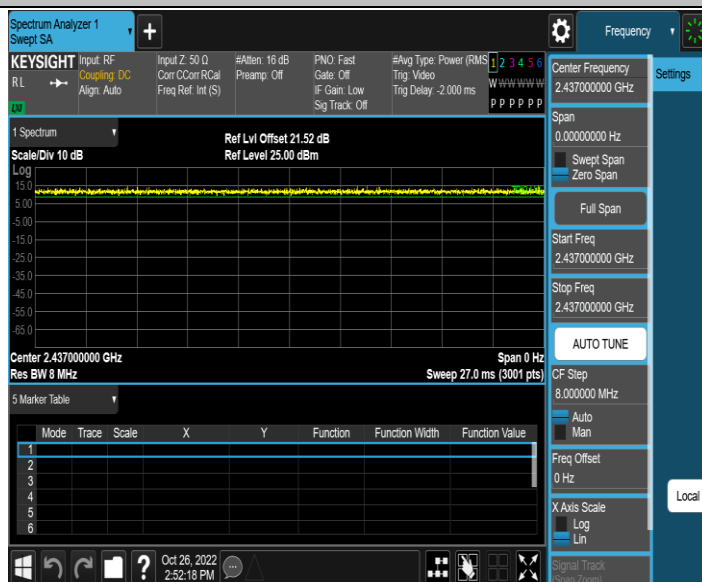

2.7 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT.

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

Uncertainty	
Parameter	Uncertainty
Occupied Channel Bandwidth	± 142.12 KHz
RF power conducted	± 0.74 dB
RF power radiated	± 3.25 dB
Spurious emissions, conducted	± 1.78 dB
Spurious emissions, radiated (30MHz~1GHz)	± 4.6 dB
Spurious emissions, radiated (1GHz ~ 18GHz)	± 4.9 dB
Conduction Emissions(150kHz~30MHz)	± 3.1 dB
Humidity	$\pm 4.6\%$
Temperature	$\pm 0.7^{\circ}\text{C}$
Time	$\pm 1.25\%$

2.8 Test Location

Company:	Beijing TIRT Technology Service Co.,Ltd Shenzhen
Address:	101, 3 # Factory Building, Gongjin Electronics Shatin Community, Kengzi Street, Pingshan District, Shenzhen, China
CNAS Registration Number:	CNAS L14158
A2LA Registration Number:	6049.01
FCC Accredited Lab. Designation Number:	CN1309
FCC Test Firm Registration Number:	825524
Telephone:	+86-0755-27087573

2.9 Deviation from Standards

None

2.10 Abnormalities from Standard Conditions

None

3. Test Procedure And Results

3.1 AC Power Line Conducted Emission

3.1.1 Limit

Frequency	Maximum RF Line Voltage	
	Quasi-Peak Level dB(μV)	Average Level dB(μV)
150kHz ~ 500kHz	66 ~ 56*	56 ~ 46*
500kHz ~ 5MHz	56	46
5MHz ~ 30MHz	60	50

Notes: 1. * Decreasing linearly with logarithm of frequency.
2. The lower limit shall apply at the transition frequencies.

3.1.2 Test Peripherals


Support Equipment				
No.	Equipment	Brand Name	Model Name	Remarks
1	Type-C Cable	AWM	E101344	0.9m, No Shielding
2	Adaptor	FUSHIGANG	AS1201A-0502000 USU	NA
3	Record PC	Lenovo	M4500T	NA
4	Control PC	Lenovo	M4500T	NA

3.1.3 Test Procedure

Test Method	
☒ Conducted Measurement	☐ Radiated Measurement
Test Channels	
☐ Lowest, Middle and Highest Channel	☐ Lowest and Highest Channel
Environmental conditions	
☒ Normal	☐ Normal and Extreme
Note: ● : Test ○ : No Test	

- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

3.1.4 Test Setup

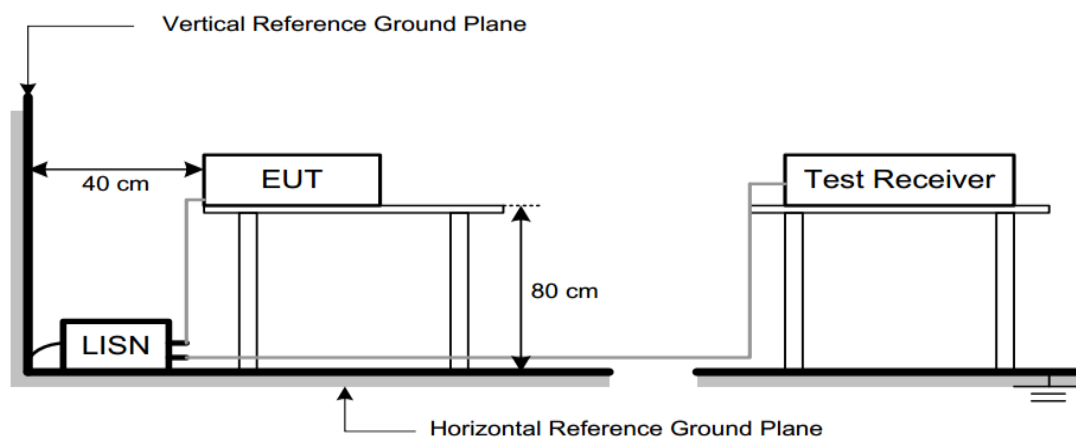


3.1.5 Test Result

Note:


1. Correct Factor = LISN Factor + Cable Loss + Pulse Limiter Factor, the value was added to Original Receiver Reading by the software automatically.
2. Measurement = Reading + Correct Factor.
3. Over = Measurement - Limit

150kHz~30MHz	Worst Case Operating Mode: 11B_CH01
--------------	-------------------------------------

Line

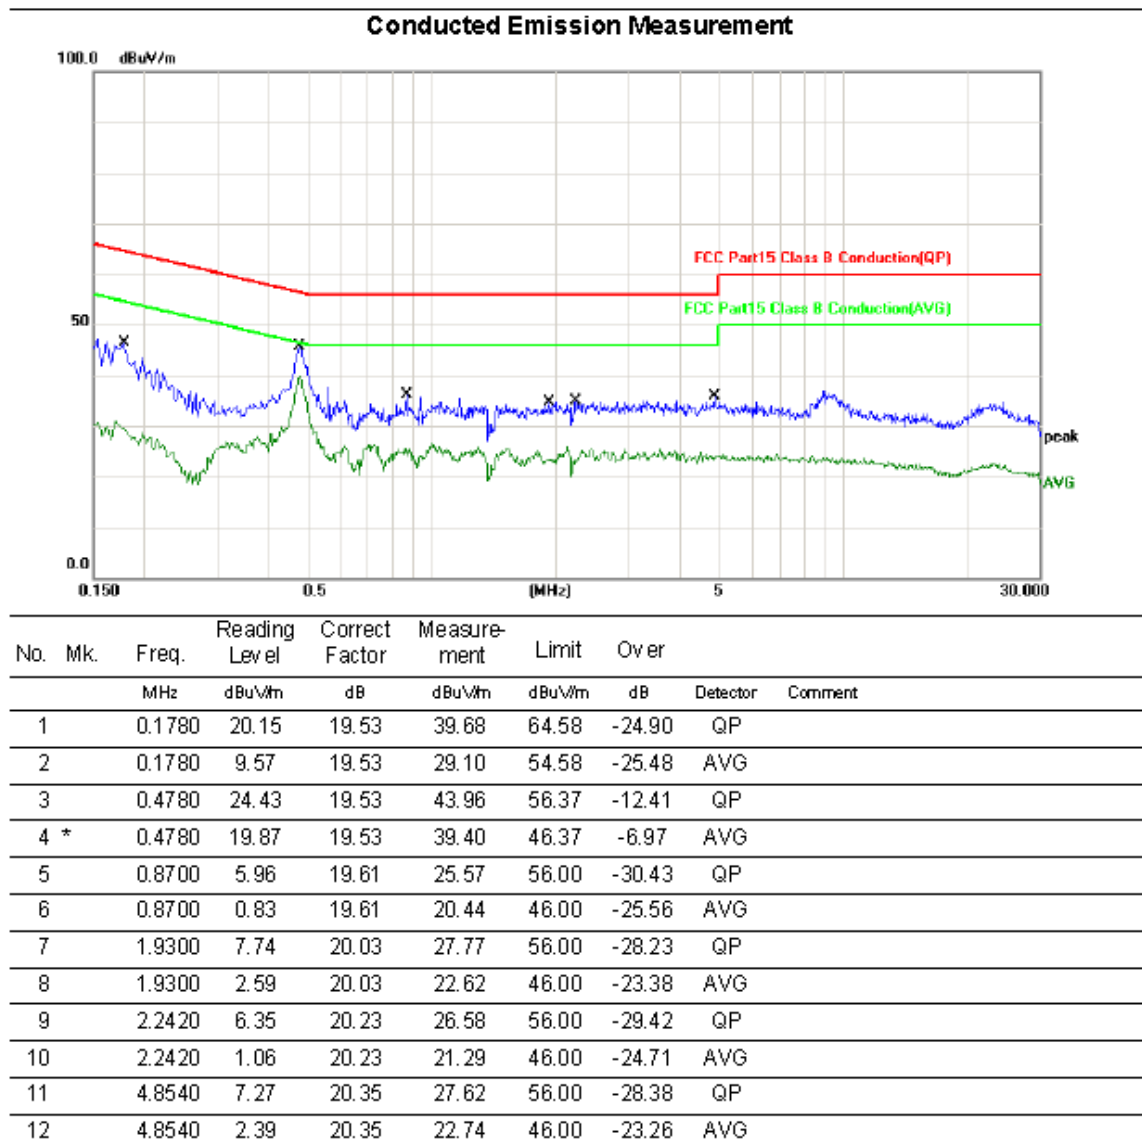

Conducted Emission Measurement

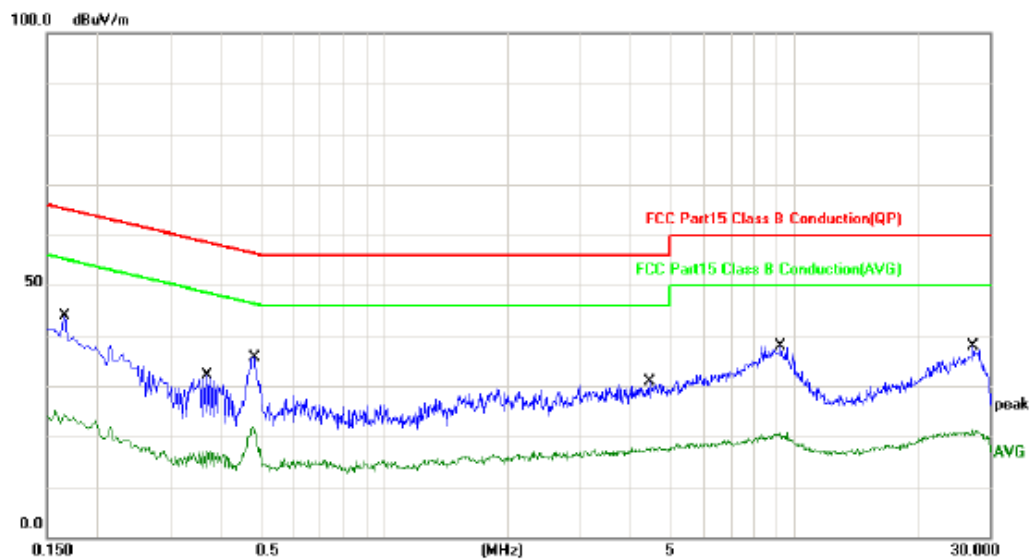

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		0.1660	17.00	19.70	36.70	65.16	-28.46	QP	
2		0.1660	3.89	19.70	23.59	55.16	-31.57	AVG	
3		0.3700	6.37	19.70	26.07	58.50	-32.43	QP	
4		0.3700	-4.00	19.70	15.70	48.50	-32.80	AVG	
5	*	0.4820	12.05	19.74	31.79	56.30	-24.51	QP	
6		0.4820	1.44	19.74	21.18	46.30	-25.12	AVG	
7		4.4420	1.25	20.34	21.59	56.00	-34.41	QP	
8		4.4420	-3.71	20.34	16.63	46.00	-29.37	AVG	
9		9.2540	9.87	20.47	30.34	60.00	-29.66	QP	
10		9.2540	-1.63	20.47	18.84	50.00	-31.16	AVG	
11		27.3500	9.15	20.46	29.61	60.00	-30.39	QP	
12		27.3500	-0.23	20.46	20.23	50.00	-29.77	AVG	

3.2 Radiated Emission and Band Edge

3.2.1 Limit

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20dB below the highest level of the desired power:

Frequency (MHz)	Distance Meters(m)	Field Strength Limit	
		$\mu\text{V/m}$	$\text{dB}(\mu\text{V})/\text{m}$
0.009 – 0.49	300	2400/F(kHz)	-
0.490 – 1.705	30	24000/F(kHz)	-
1.705 – 30	30	30	-
30~88	3	100	40.0
88~216	3	150	43.5
216~960	3	200	46.0
960~1000	3	500	54.0
Above 1000	3	74.0 $\text{dB}(\mu\text{V})/\text{m}$ (Peak) 54.0 $\text{dB}(\mu\text{V})/\text{m}$ (Average)	

Note: (1) Emission level $\text{dB}\mu\text{V} = 20 \log$ Emission level $\mu\text{V/m}$

(2) The smaller limit shall apply at the cross point between two frequency bands.

(3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.

3.2.2 Test Peripherals

Support Equipment				
No.	Equipment	Brand Name	Model Name	Remarks
1	Type-C Cable	AWM	E101344	0.9m, No Shielding
2	Adaptor	FUSHIGANG	AS1201A-0502000 USU	NA
3	Record PC	Lenovo	M4500T	NA
4	Control PC	Lenovo	M4500T	NA

3.2.3 Test Procedure


Test Method	
☐ Conducted Measurement	☒ Radiated Measurement
Test Channels	
☒ Lowest, Middle and Highest Channel	☐ Lowest and Highest Channel
Environmental conditions	
☒ Normal	☐ Normal and Extreme
Note: ☒ : Test ☐ : No Test	

a) The measuring distance of 3 m shall be used for measurements. The EUT was placed on the


- top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1 GHz)
- b) The measuring distance of 3 m or 1.5m shall be used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
 - c) The height of the equipment or of the substitution antenna shall be 0.8m or 1.5m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
 - d) For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
 - e) The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz.
 - f) The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
 - g) All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform. (below 1 GHz)
 - h) All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1 GHz)
 - i) For the actual test configuration, please refer to the related Item -EUT Test Photos.

3.2.4 Test Setup

(A) Radiated Emission Test Set-Up Frequency 30 MHz-1000 MHz

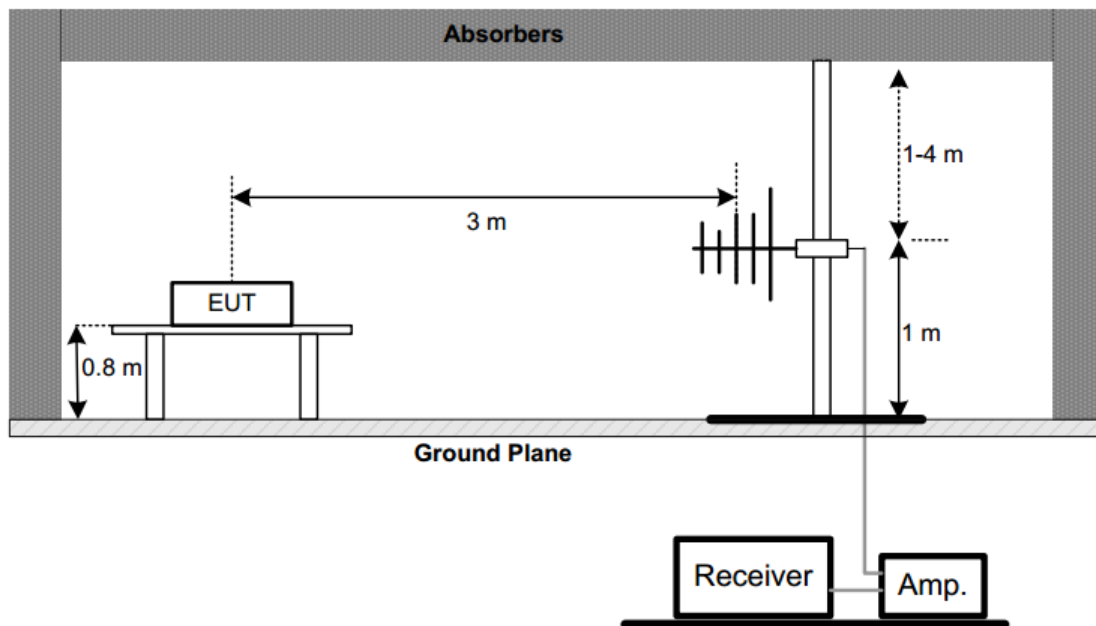

(B) Radiated Emission Test Set-Up Frequency Above 1 GHz

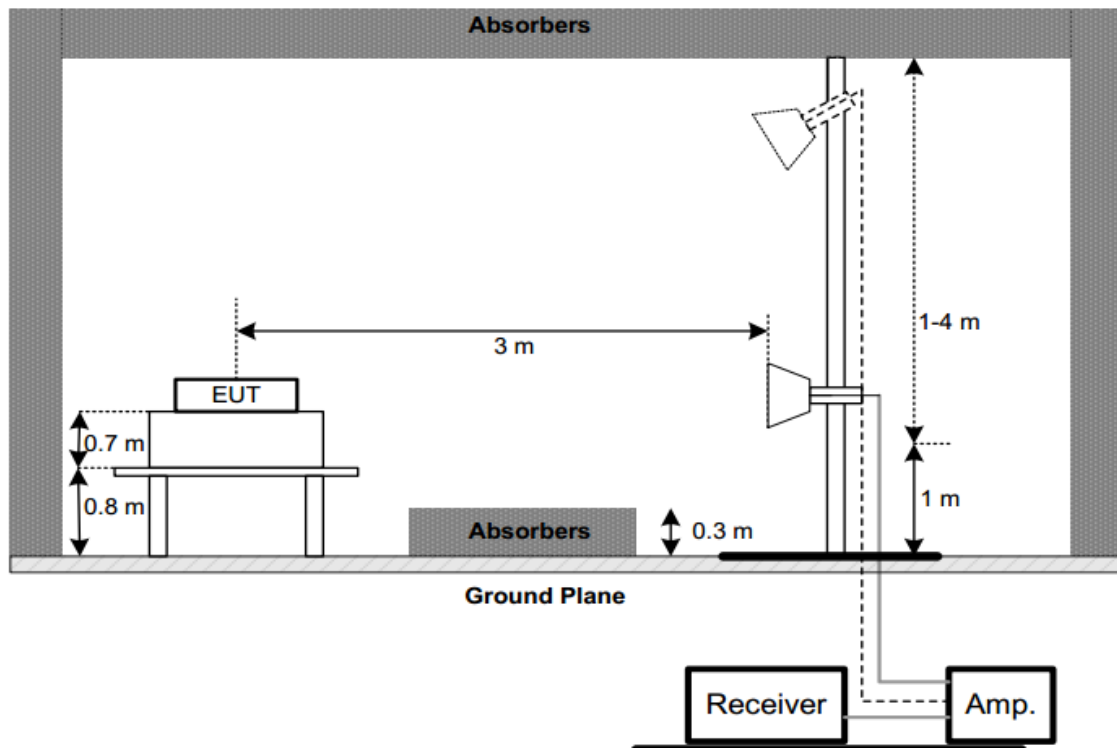

3.2.5 Test Result

1) Radiated emission: 9KHz-30MHz

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.


There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

2) Radiated emission: 30MHz-1G

Note:


1. Measurement = Reading + Correct Factor.
2. Over = Measurement - Limit

Below 1G (30MHz~1GHz)	Test mode: 11B	Test Channel:6
-----------------------	----------------	----------------

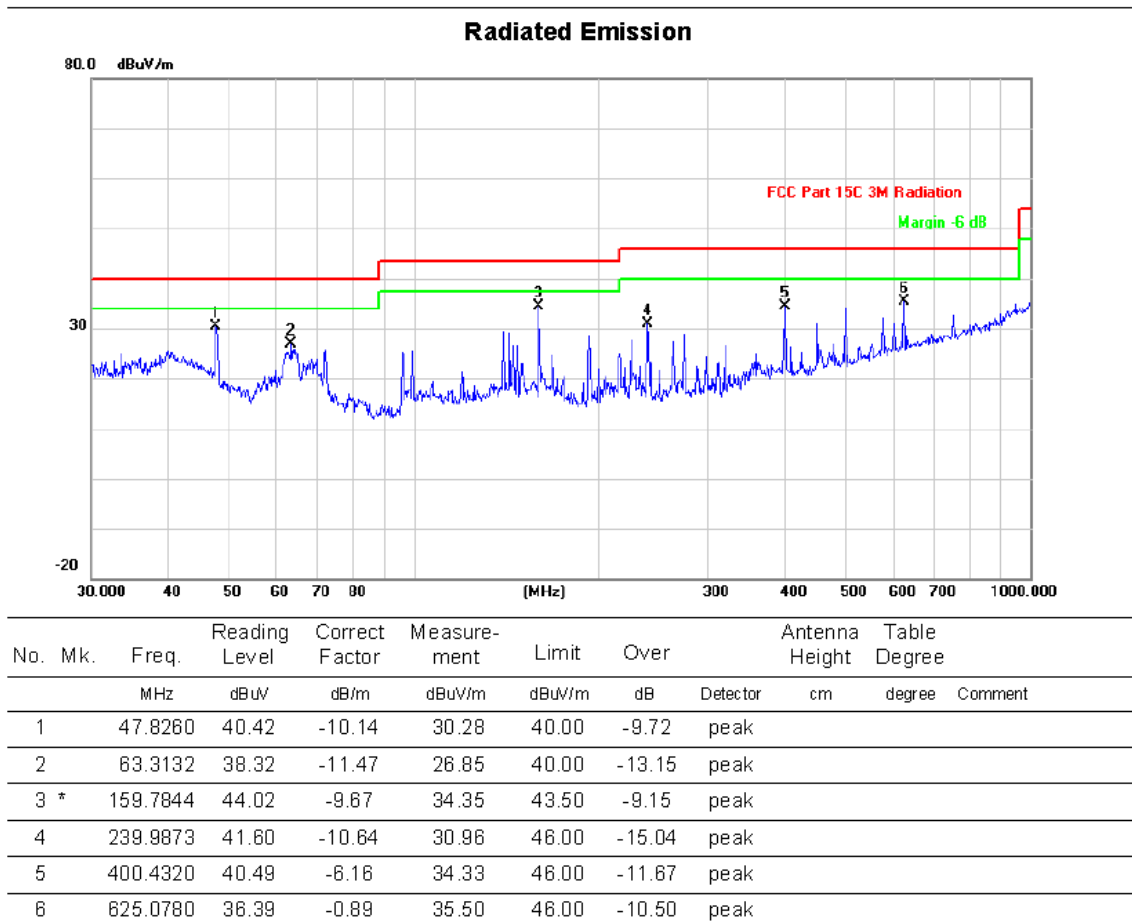VERTICAL


HORIZONTAL

Radiated Emission

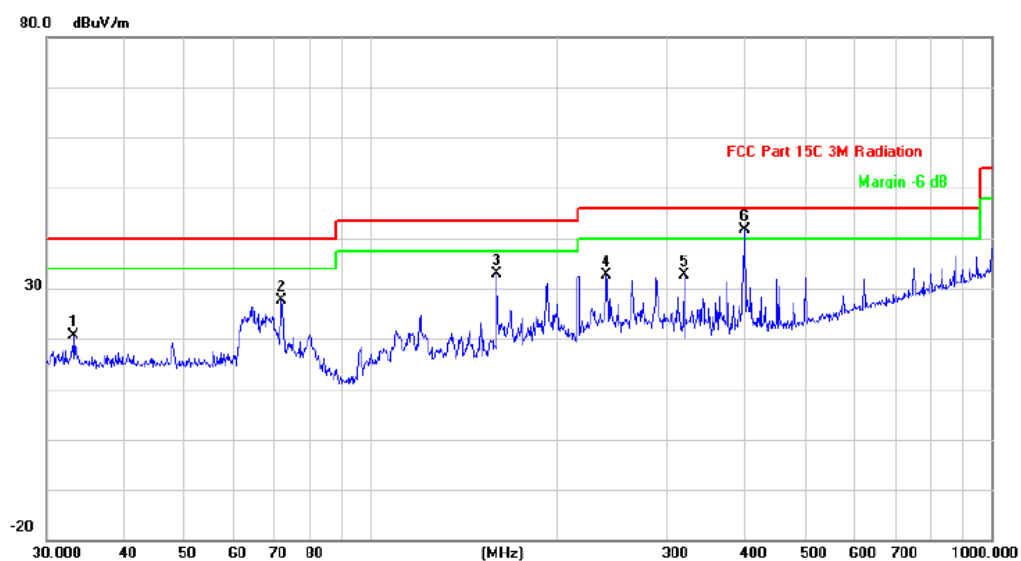



No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		33.2112	31.55	-11.00	20.55	40.00	-19.45	peak		
2		71.8320	40.40	-12.66	27.74	40.00	-12.26	peak		
3		159.7844	42.56	-9.67	32.89	43.50	-10.61	peak		
4		239.9873	43.27	-10.64	32.63	46.00	-13.37	peak		
5		319.9370	41.07	-8.37	32.70	46.00	-13.30	peak		
6	*	400.4320	47.79	-6.16	41.63	46.00	-4.37	peak		

3) Radiated emission: Above 1G

Note:


1. Measurement = Reading + Correct Factor.
2. Over = Measurement - Limit

Above 1G (1GHz~26.5GHz)	Test mode:11B	Test Channel:1
VERTICAL		

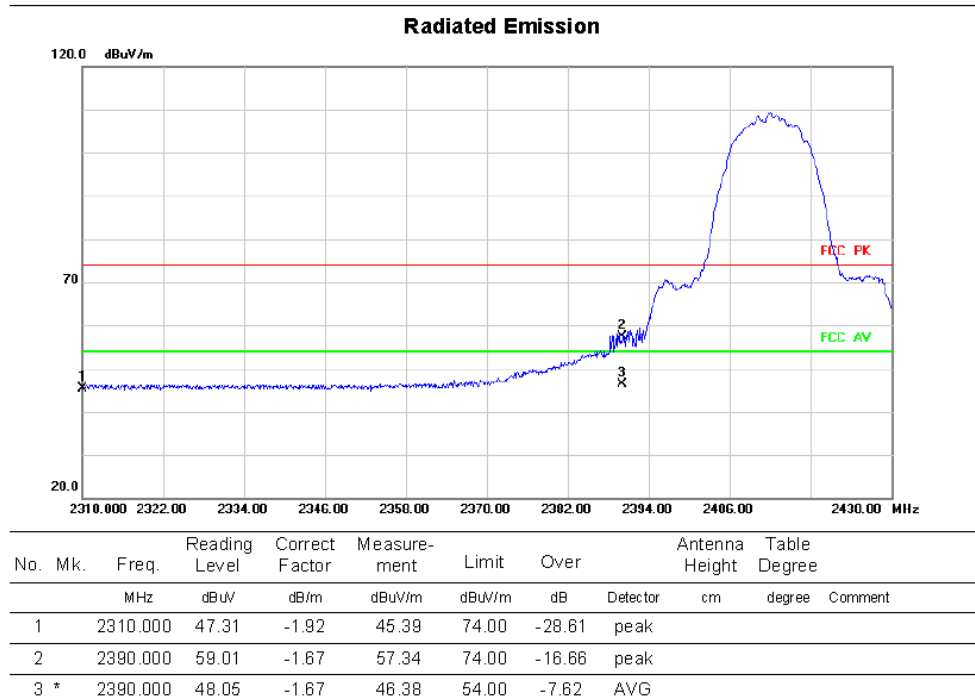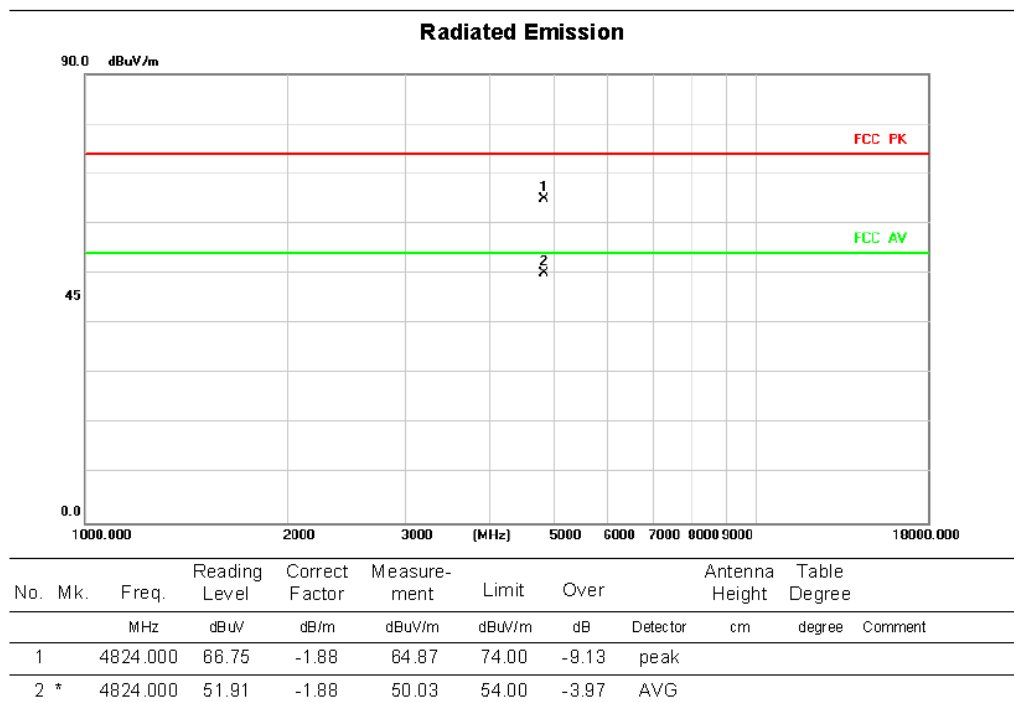


HORIZONTALA

Radiated Emission

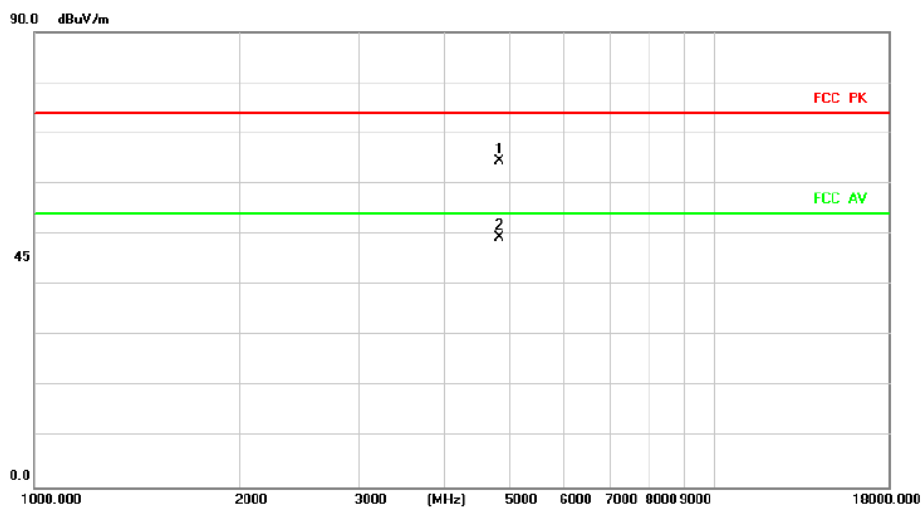

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		4824.000	66.27	-1.88	64.39	74.00	-9.61	peak		
2 *		4824.000	51.20	-1.88	49.32	54.00	-4.68	AVG		

Radiated Emission

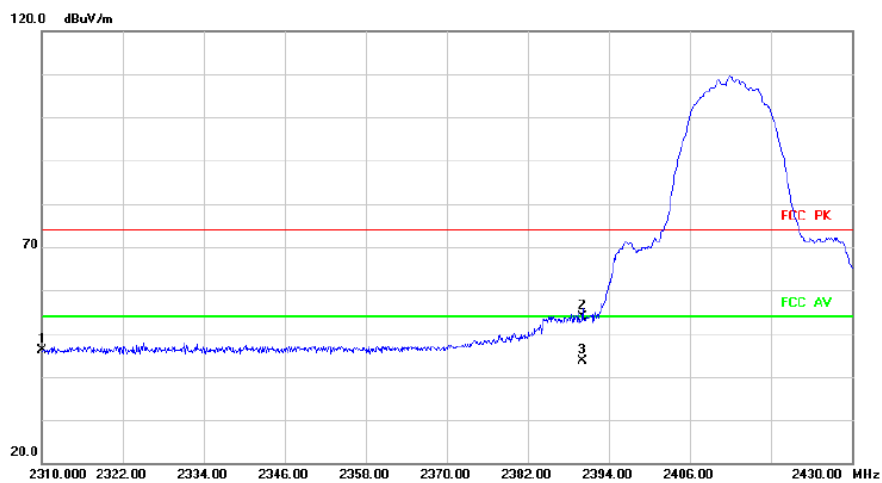

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		2310.000	48.03	-1.92	46.11	74.00	-27.89	peak		
2		2390.000	55.55	-1.67	53.88	74.00	-20.12	peak		
3 *		2390.000	45.21	-1.67	43.54	54.00	-10.46	AVG		


Above 1G (1GHz~26.5GHz)

Test mode: 11B

Test Channel:6

VERTICAL


Radiated Emission

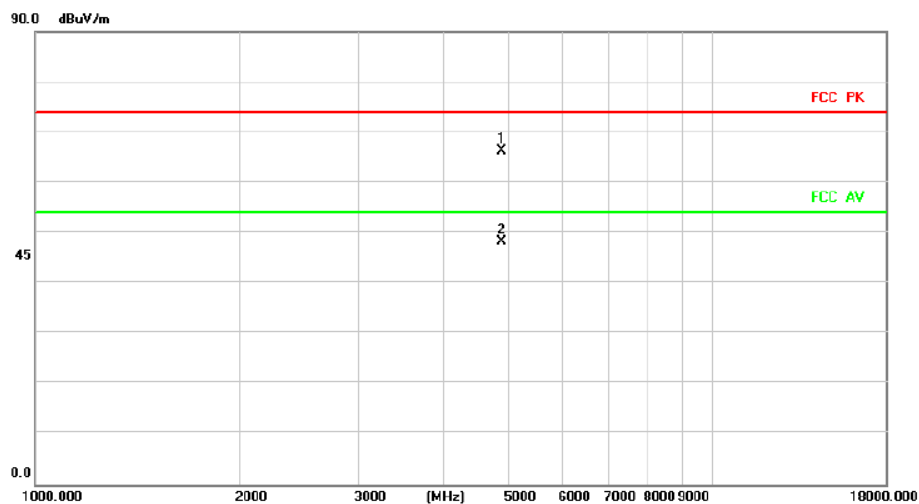

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		4874.000	67.84	-1.59	66.25	74.00	-7.75	peak		
2 *		4874.000	48.81	-1.59	48.22	54.00	-5.78	AVG		

HORIZONTAL

Radiated Emission

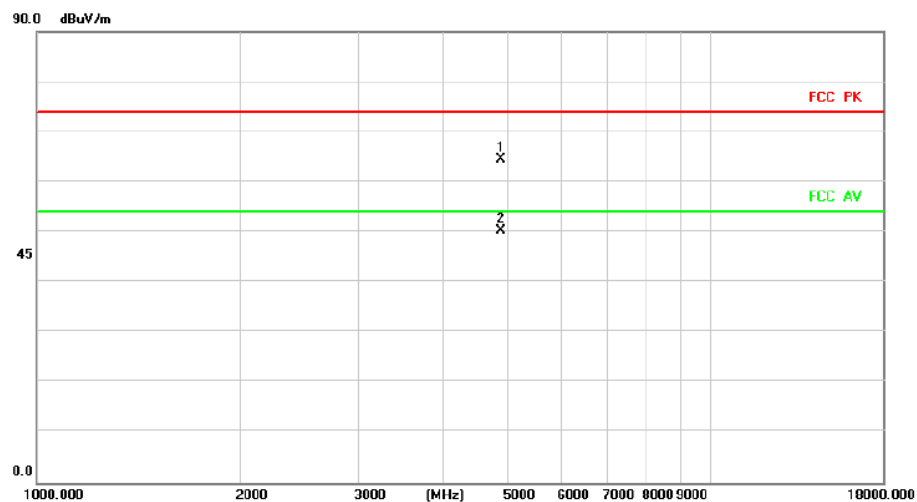

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		4874.000	65.99	-1.59	64.40	74.00	-9.60	peak		
2 *		4874.000	51.92	-1.59	50.33	54.00	-3.67	AVG		


Above 1G (1GHz~26.5GHz)

Test mode: 11B

Test Channel:11


VERTICAL

Radiated Emission

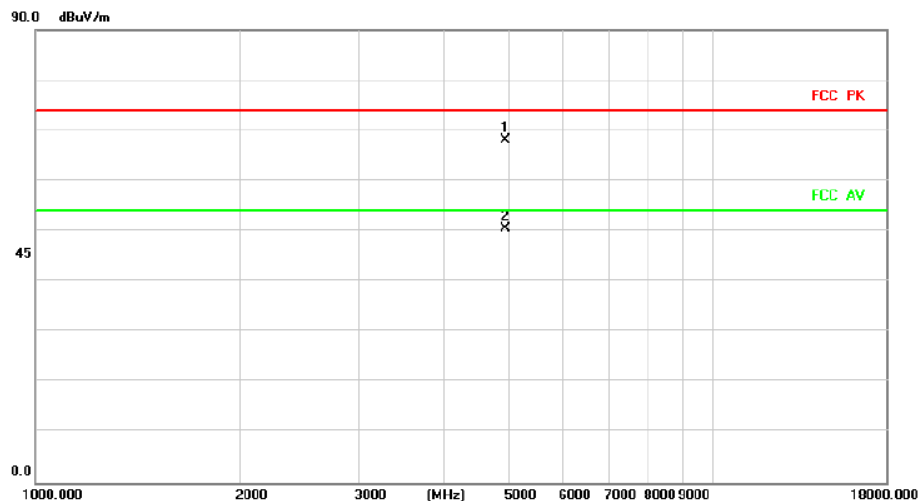

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		4924.000	68.36	-1.30	68.06	74.00	-5.94	peak		
2 *		4924.000	51.79	-1.30	50.49	54.00	-3.51	AVG		

Radiated Emission

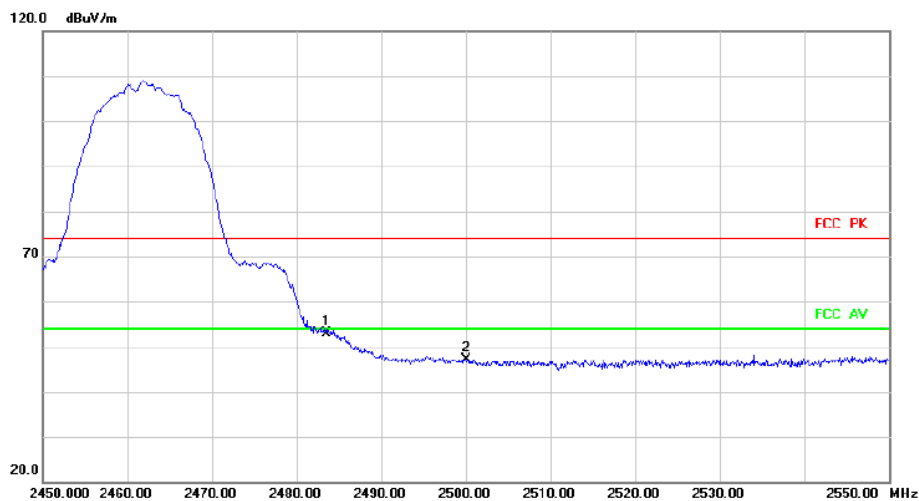

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	Comment
1 *		2483.500	54.10	-1.28	52.82	74.00	-21.18	peak		
2		2500.000	48.39	-1.21	47.18	74.00	-26.82	peak		


HORIZONTALA

Radiated Emission



No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		4924.000	67.52	-1.30	66.22	74.00	-7.78	peak		
2 *		4924.000	50.38	-1.30	49.08	54.00	-4.92	AVG		

Radiated Emission

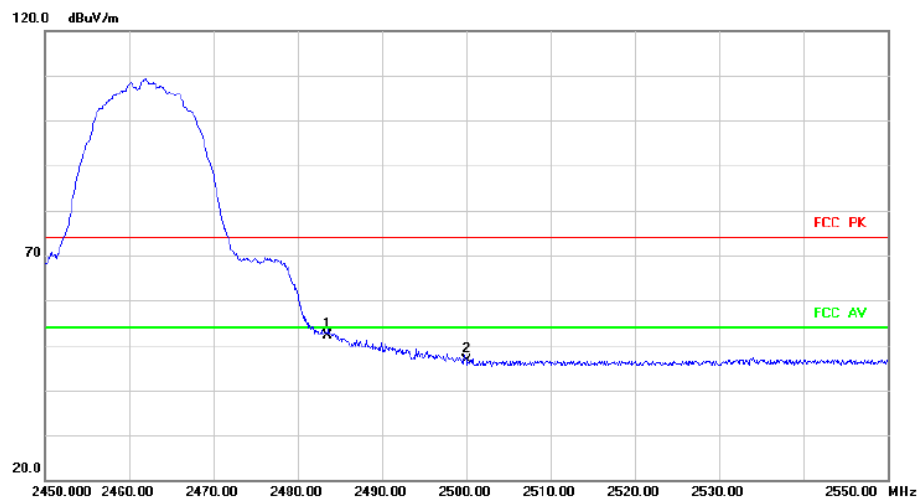

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1 *		2483.500	53.47	-1.28	52.19	74.00	-21.81	peak		
2		2500.000	47.80	-1.21	46.59	74.00	-27.41	peak		


Above 1G (1GHz~26.5GHz)

Test mode: 11G

Test Channel:1


VERTICAL

Radiated Emission

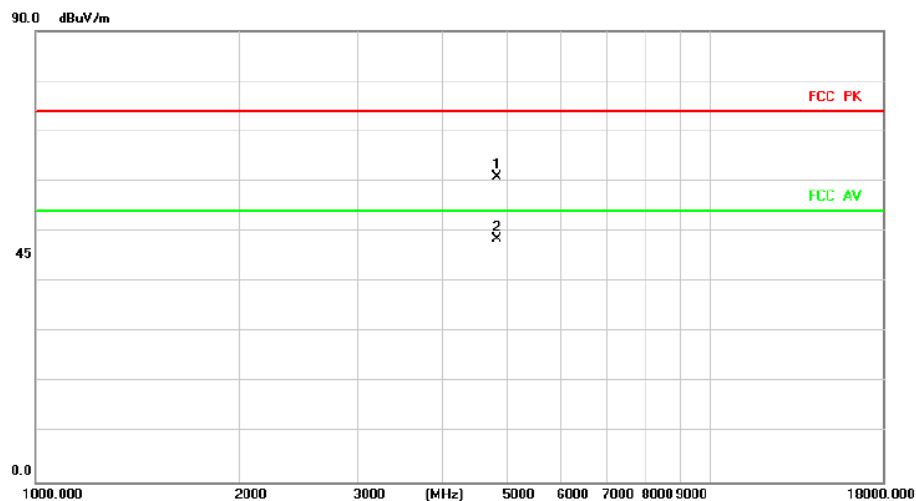

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		4824.000	62.82	-1.88	60.94	74.00	-13.06	peak		
2 *		4824.000	50.47	-1.88	48.59	54.00	-5.41	AVG		


Radiated Emission

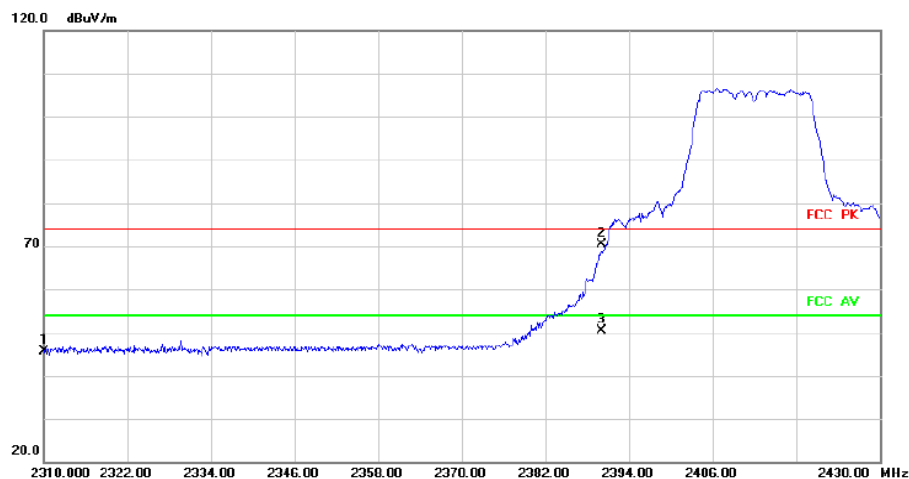

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		2310.000	47.64	-1.92	45.72	74.00	-28.28	peak		
2		2390.000	71.98	-1.67	70.31	74.00	-3.69	peak		
3 *		2390.000	52.08	-1.67	50.41	54.00	-3.59	AVG		


HORIZONTALA

Radiated Emission

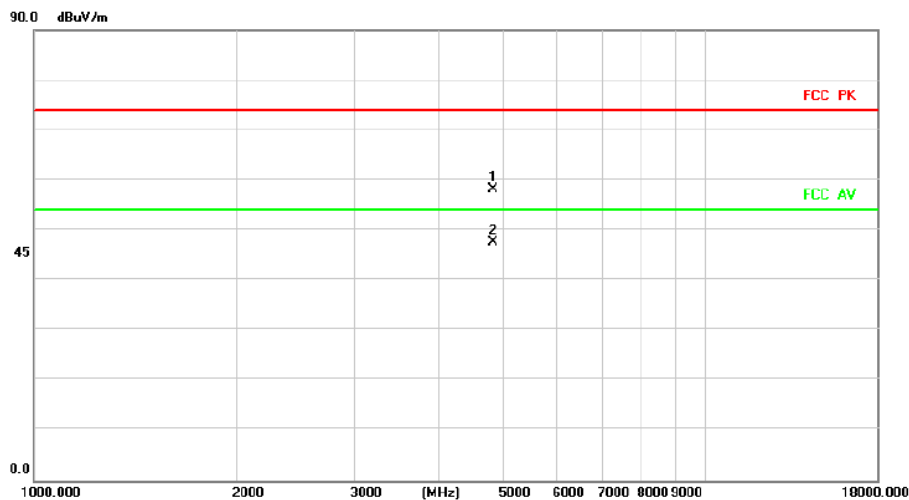

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		4824.000	59.99	-1.88	58.11	74.00	-15.89	peak		
2 *		4824.000	49.50	-1.88	47.62	54.00	-6.38	AVG		

Radiated Emission

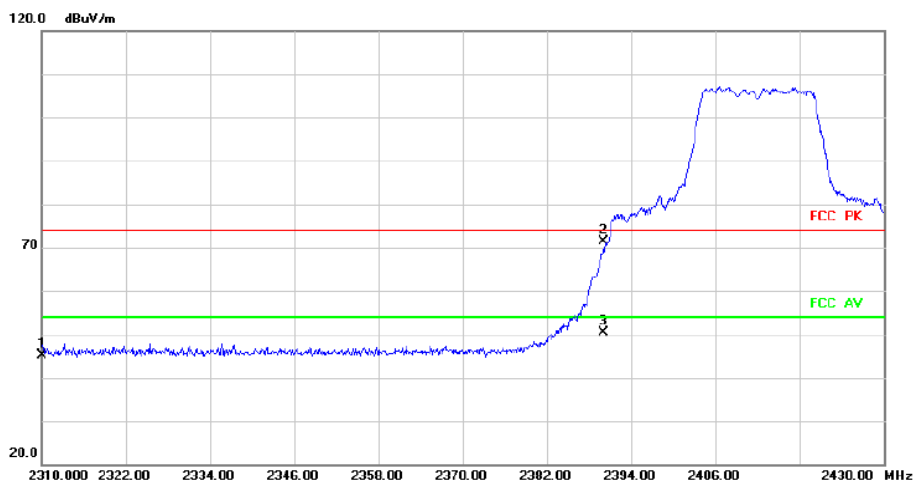

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		2310.000	47.16	-1.92	45.24	74.00	-28.76	peak		
2 *		2390.000	73.01	-1.67	71.34	74.00	-2.66	peak		
3		2390.000	51.95	-1.67	50.28	54.00	-3.72	AVG		


Above 1G (1GHz~26.5GHz)

Test mode: 11G

Test Channel:6

VERTICAL


Radiated Emission

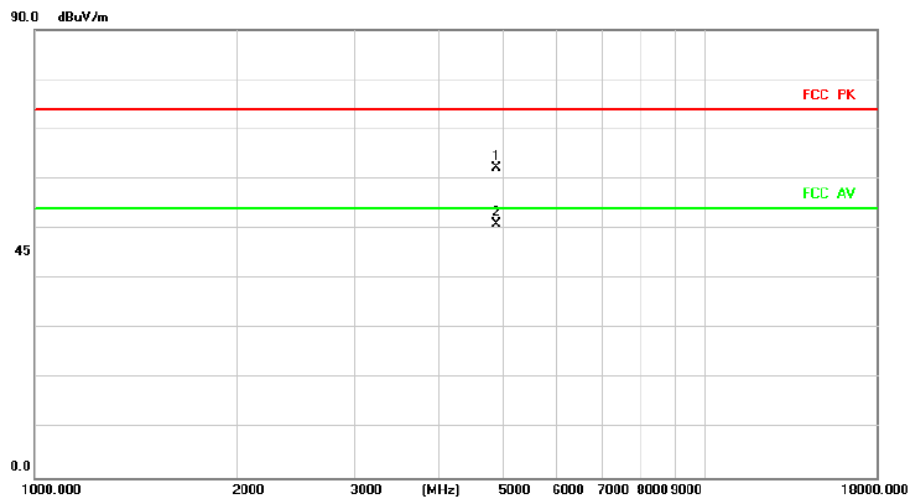

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		4874.000	63.72	-1.59	62.13	74.00	-11.87	peak		
2 *		4874.000	52.45	-1.59	50.86	54.00	-3.14	AVG		

HORIZONTAL

Radiated Emission

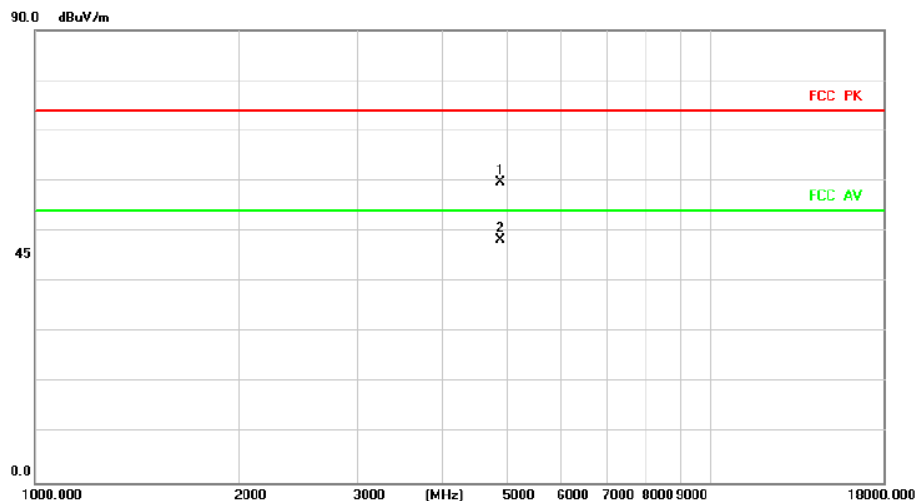

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		4874.000	61.42	-1.59	59.83	74.00	-14.17	peak		
2 *		4874.000	49.89	-1.59	48.30	54.00	-5.70	AVG		


Above 1G (1GHz~26.5GHz)

Test mode: 11G

Test Channel:11


VERTICAL

Radiated Emission

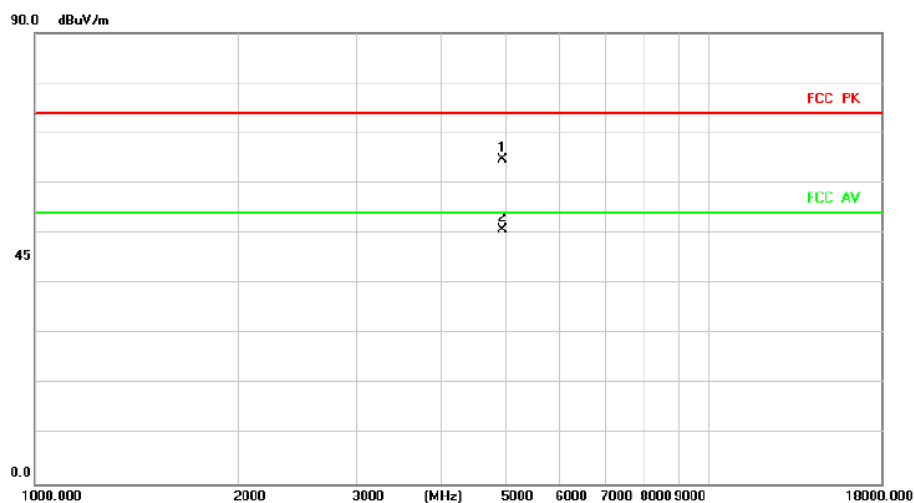

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		4924.000	66.03	-1.30	64.73	74.00	-9.27			peak
2	*	4924.000	52.08	-1.30	50.78	54.00	-3.22			AVG

Radiated Emission

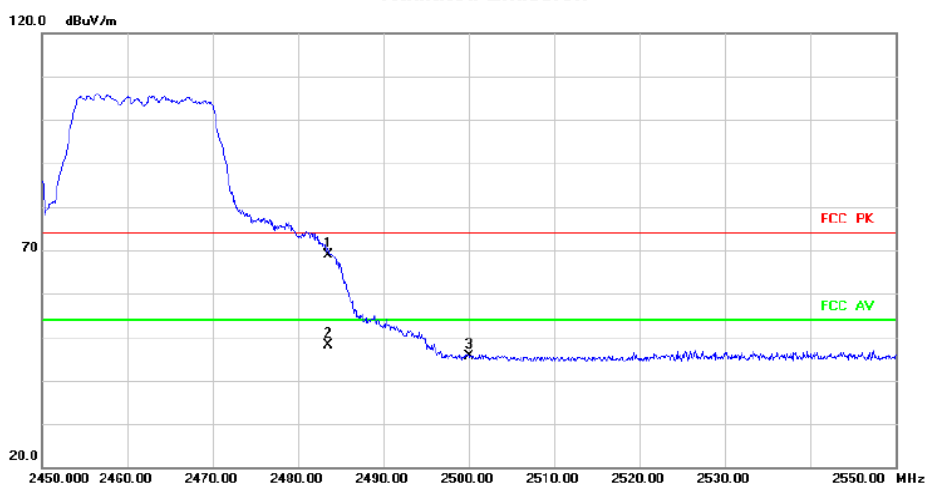

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	2483.500	70.14	-1.28	68.86	74.00	-5.14			peak
2		2483.500	49.37	-1.28	48.09	54.00	-5.91			AVG
3		2500.000	46.89	-1.21	45.68	74.00	-28.32			peak


HORIZONTALA

Radiated Emission



No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		4924.000	64.07	-1.30	62.77	74.00	-11.23	peak		
2 *		4924.000	50.93	-1.30	49.63	54.00	-4.37	AVG		

Radiated Emission

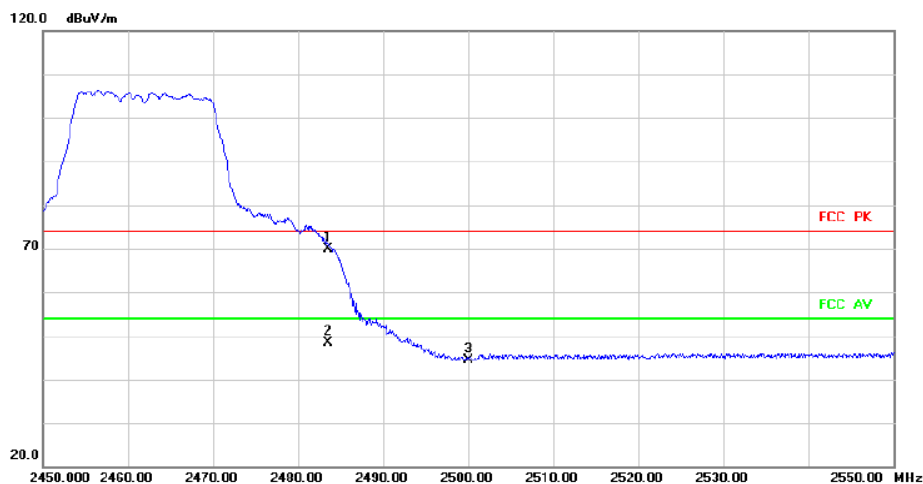

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1 *		2483.500	71.24	-1.28	69.96	74.00	-4.04	peak		
2		2483.500	49.59	-1.28	48.31	54.00	-5.69	AVG		
3		2500.000	45.56	-1.21	44.35	74.00	-29.65	peak		


Above 1G (1GHz~26.5GHz)

Test mode: 11N20SISO

Test Channel:1


VERTICAL

Radiated Emission

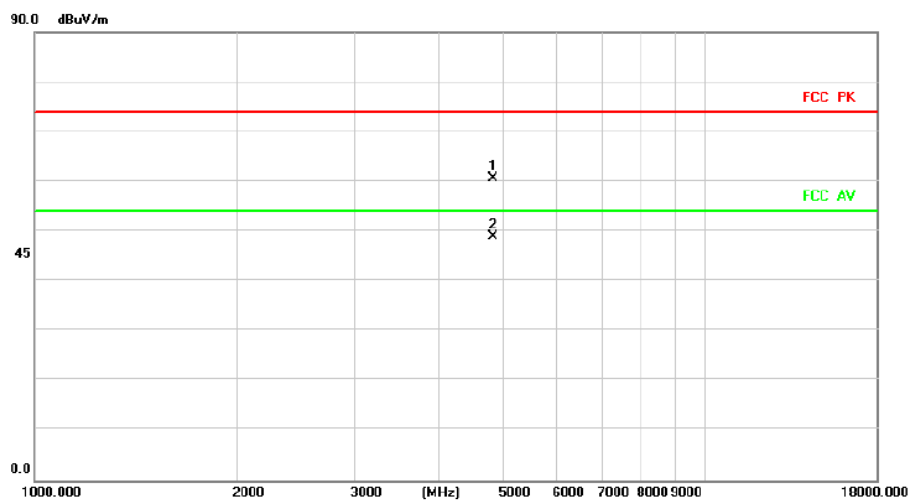

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		4824.000	62.48	-1.88	60.60	74.00	-13.40	peak		
2 *		4824.000	50.83	-1.88	48.95	54.00	-5.05	AVG		


Radiated Emission

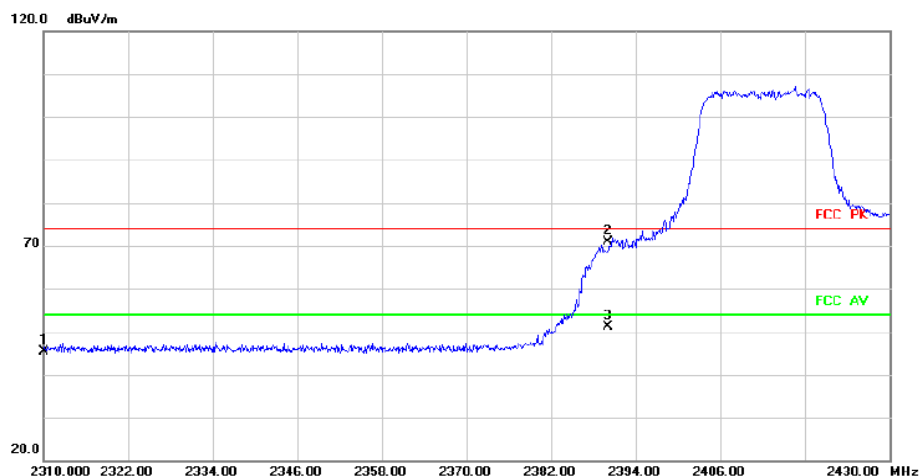

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		2310.000	47.24	-1.92	45.32	74.00	-28.68	peak		
2		2390.000	72.44	-1.67	70.77	74.00	-3.23	peak		
3 *		2390.000	52.71	-1.67	51.04	54.00	-2.96	AVG		


HORIZONTALA

Radiated Emission

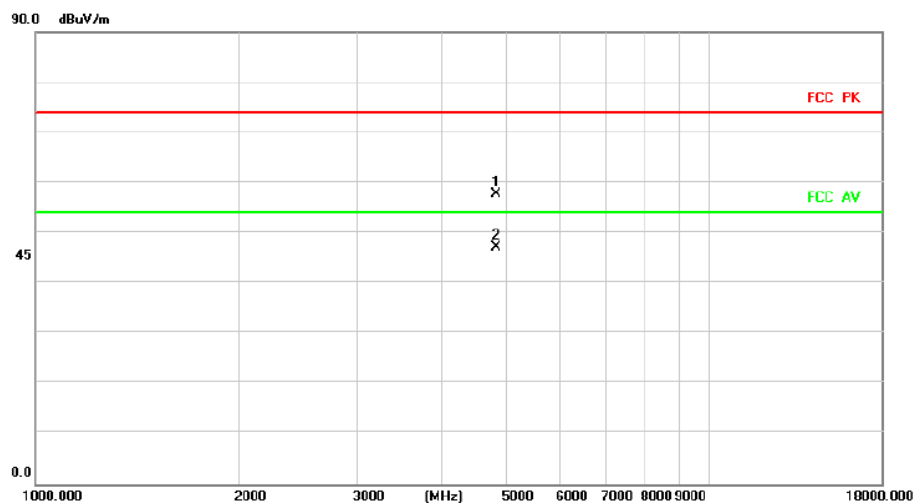

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		4824.000	59.65	-1.88	57.77	74.00	-16.23	peak		
2 *		4824.000	49.08	-1.88	47.20	54.00	-6.80	AVG		

Radiated Emission

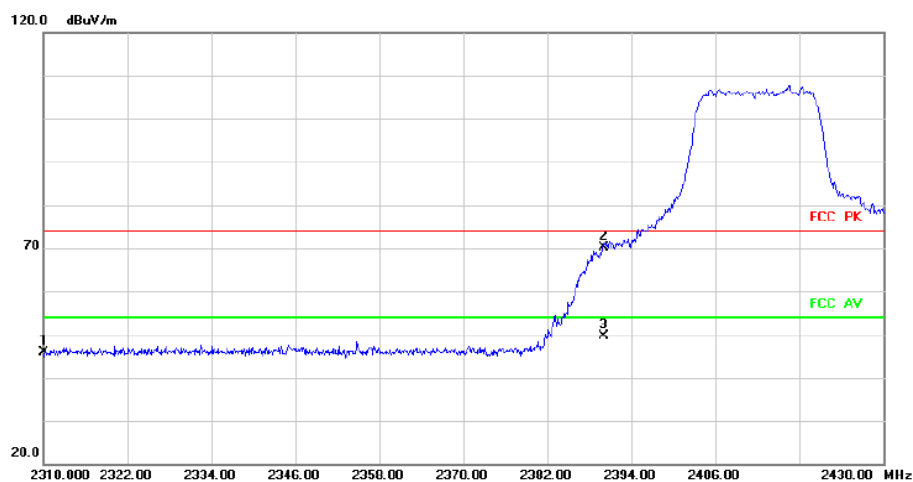

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		2310.000	47.69	-1.92	45.77	74.00	-28.23	peak		
2 *		2390.000	71.84	-1.67	70.17	74.00	-3.83	peak		
3		2390.000	51.40	-1.67	49.73	54.00	-4.27	AVG		


Above 1G (1GHz~26.5GHz)

Test mode: 11N20SISO

Test Channel:6

VERTICAL


Radiated Emission

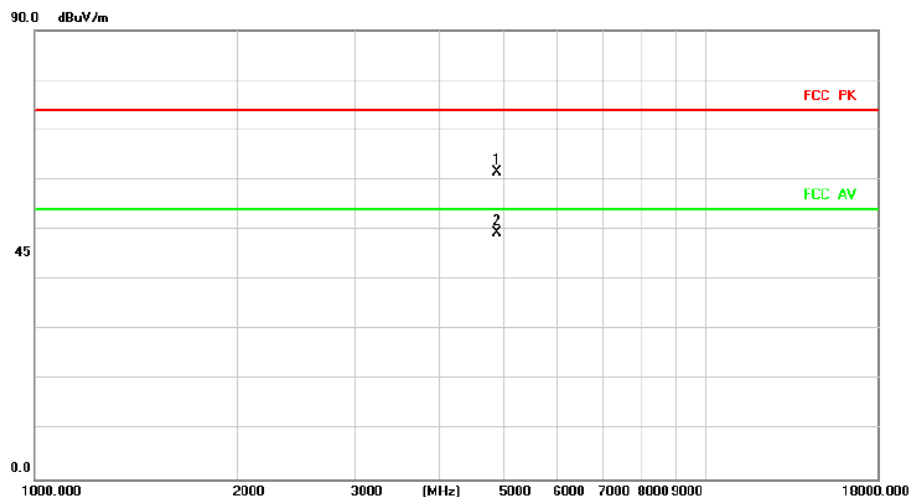

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		4874.000	63.12	-1.59	61.53	74.00	-12.47	peak		
2	*	4874.000	51.03	-1.59	49.44	54.00	-4.56	AVG		

HORIZONTAL

Radiated Emission

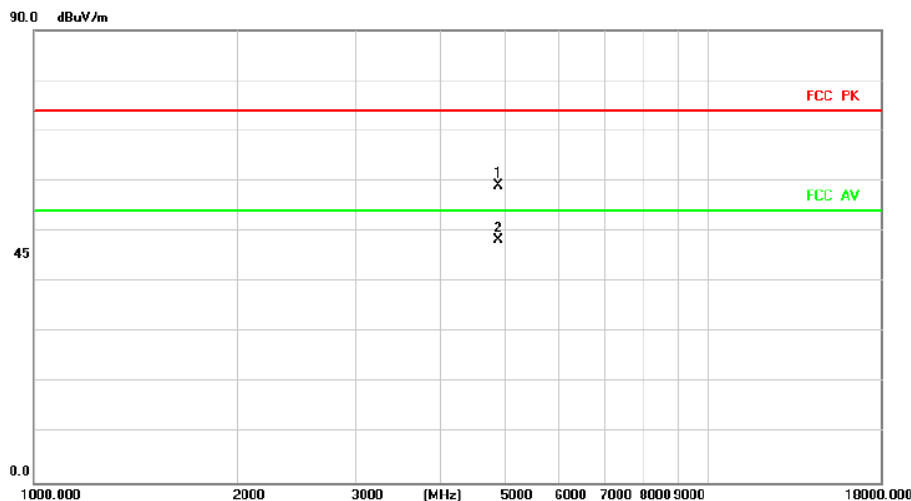

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		4874.000	60.69	-1.59	59.10	74.00	-14.90	peak		
2	*	4874.000	49.79	-1.59	48.20	54.00	-5.80	AVG		


Above 1G (1GHz~26.5GHz)

Test mode: 11N20SISO

Test Channel:11


VERTICAL

Radiated Emission

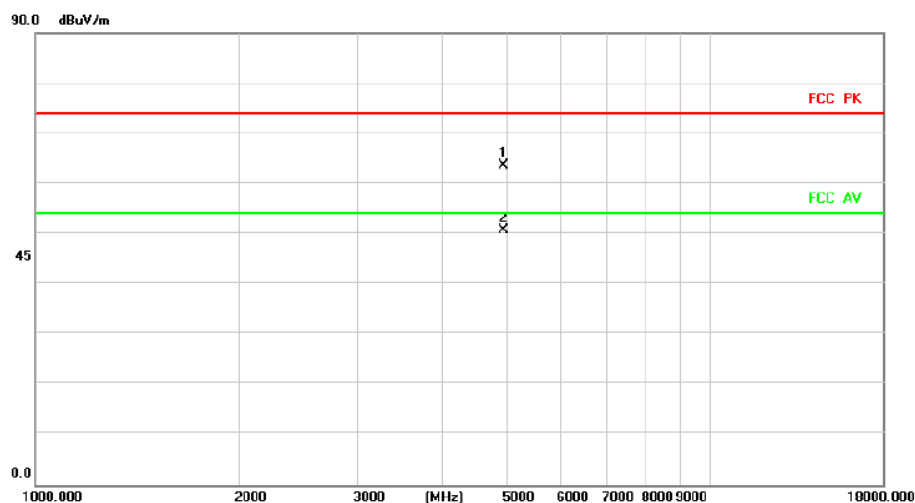

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		4924.000	64.95	-1.30	63.65	74.00	-10.35	peak		
2 *		4924.000	52.02	-1.30	50.72	54.00	-3.28	AVG		


Radiated Emission

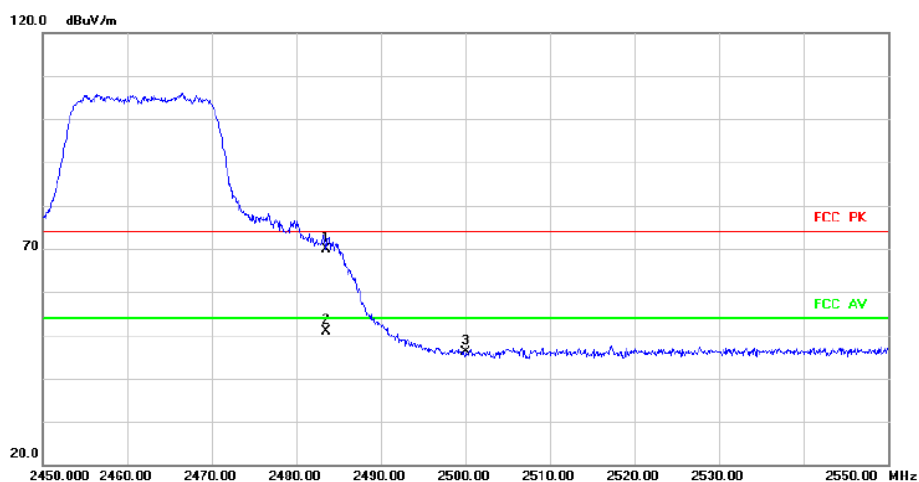

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		2483.500	71.22	-1.28	69.94	74.00	-4.06	peak		
2 *		2483.500	52.05	-1.28	50.77	54.00	-3.23	AVG		
3		2500.000	47.41	-1.21	46.20	74.00	-27.80	peak		


HORIZONTALA

Radiated Emission

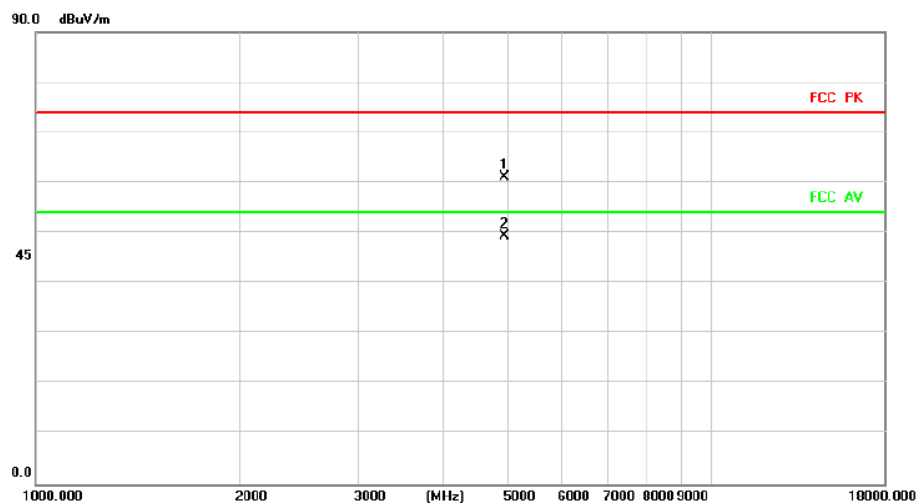

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		4924.000	62.38	-1.30	61.08	74.00	-12.92	peak		
2 *		4924.000	50.69	-1.30	49.39	54.00	-4.61	AVG		

Radiated Emission

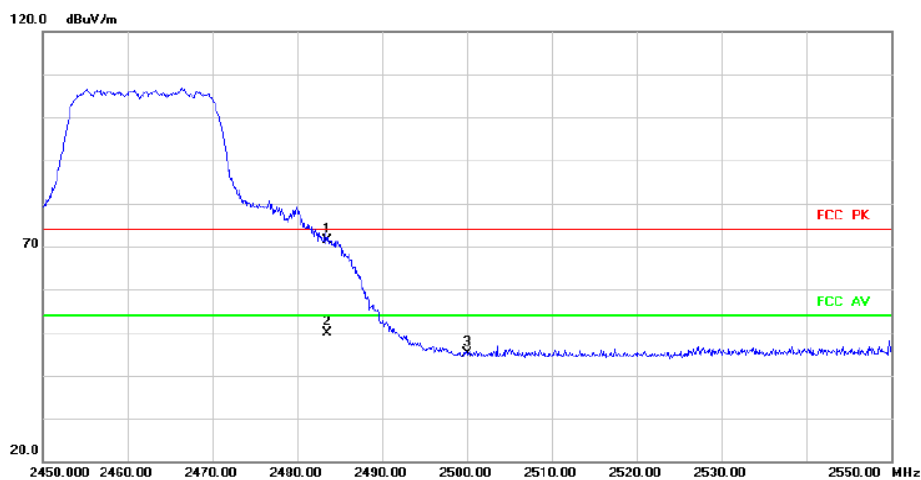

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1 *		2483.500	72.76	-1.28	71.48	74.00	-2.52	peak		
2		2483.500	51.08	-1.28	49.80	54.00	-4.20	AVG		
3		2500.000	46.33	-1.21	45.12	74.00	-28.88	peak		


Above 1G (1GHz~26.5GHz)

Test mode: 11N40SISO

Test Channel:3


VERTICAL

Radiated Emission

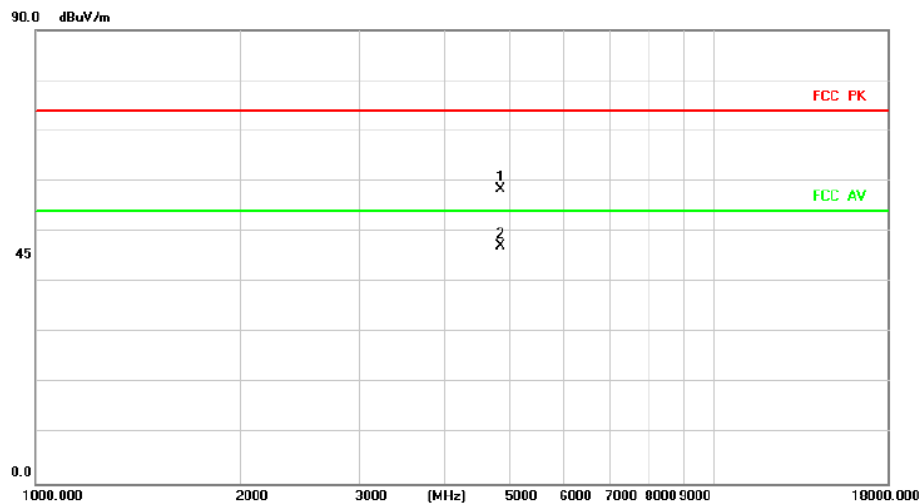

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		4844.000	60.25	-1.77	58.48	74.00	-15.52	peak		
2 *		4844.000	48.95	-1.77	47.18	54.00	-6.82	AVG		


Radiated Emission

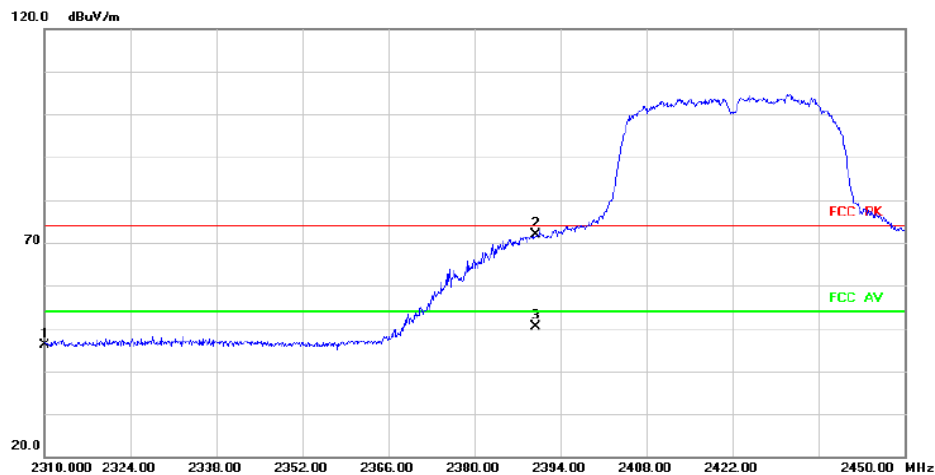

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		2310.000	48.10	-1.92	46.18	74.00	-27.82	peak		
2 *		2390.000	73.65	-1.67	71.98	74.00	-2.02	peak		
3		2390.000	52.07	-1.67	50.40	54.00	-3.60	AVG		


HORIZONTALA

Radiated Emission

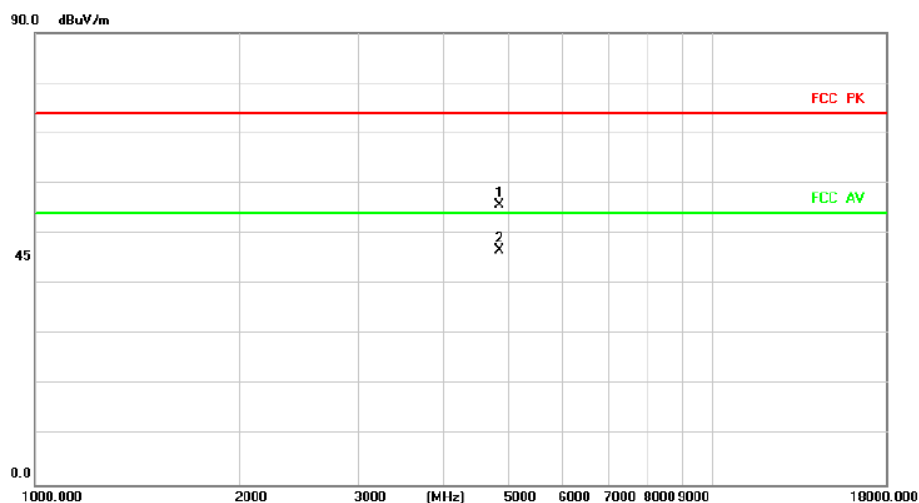

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		4844.000	57.44	-1.77	55.67	74.00	-18.33	peak		
2 *		4844.000	48.54	-1.77	46.77	54.00	-7.23	AVG		

Radiated Emission

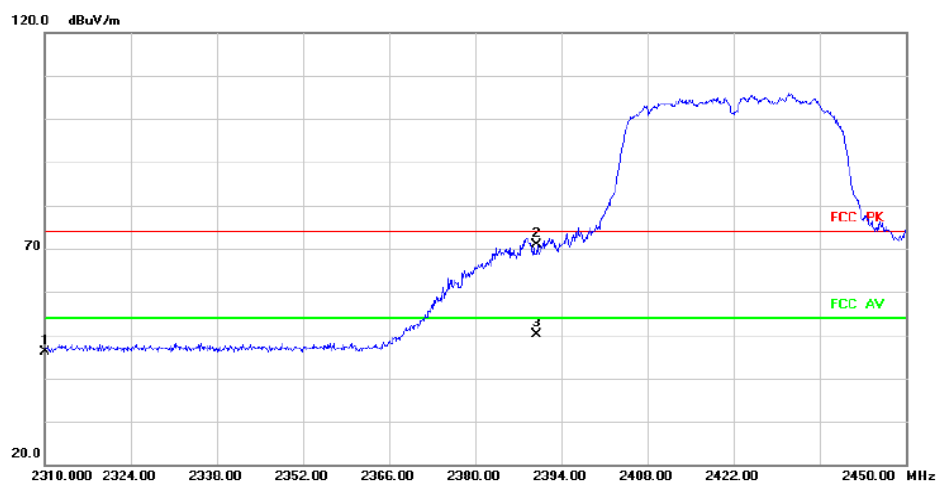

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		2310.000	48.11	-1.92	46.19	74.00	-27.81	peak		
2 *		2390.000	72.53	-1.67	70.86	74.00	-3.14	peak		
3		2390.000	51.81	-1.67	50.14	54.00	-3.86	AVG		


Above 1G (1GHz~26.5GHz)

Test mode: 11N40SISO

Test Channel:6

VERTICAL


Radiated Emission

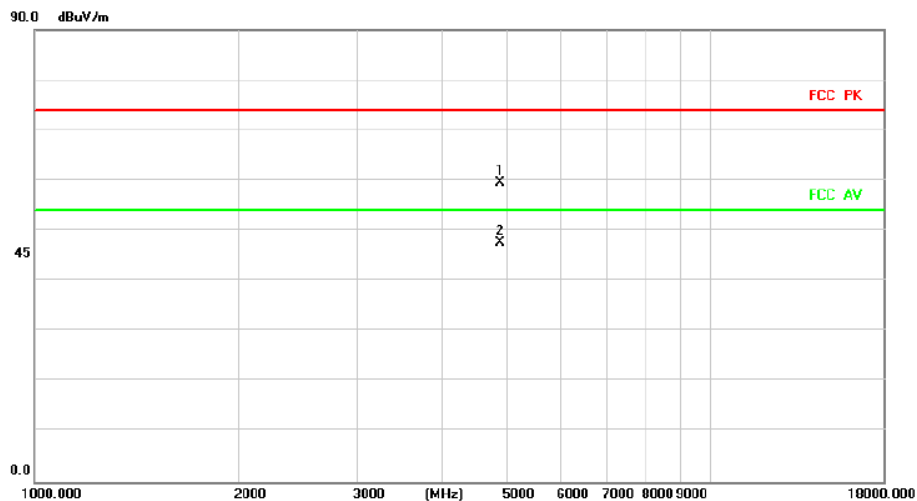

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		4874.000	61.04	-1.59	59.45	74.00	-14.55	peak		
2	*	4874.000	49.25	-1.59	47.66	54.00	-6.34	AVG		

HORIZONTAL

Radiated Emission

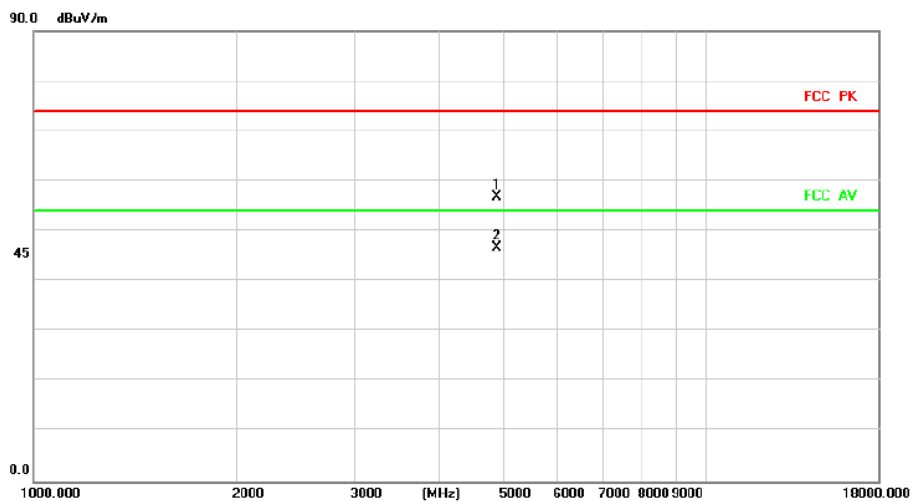

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		4874.000	58.40	-1.59	56.81	74.00	-17.19	peak		
2	*	4874.000	48.31	-1.59	46.72	54.00	-7.28	AVG		


Above 1G (1GHz~26.5GHz)

Test mode: 11N40SISO

Test Channel:9


VERTICAL

Radiated Emission

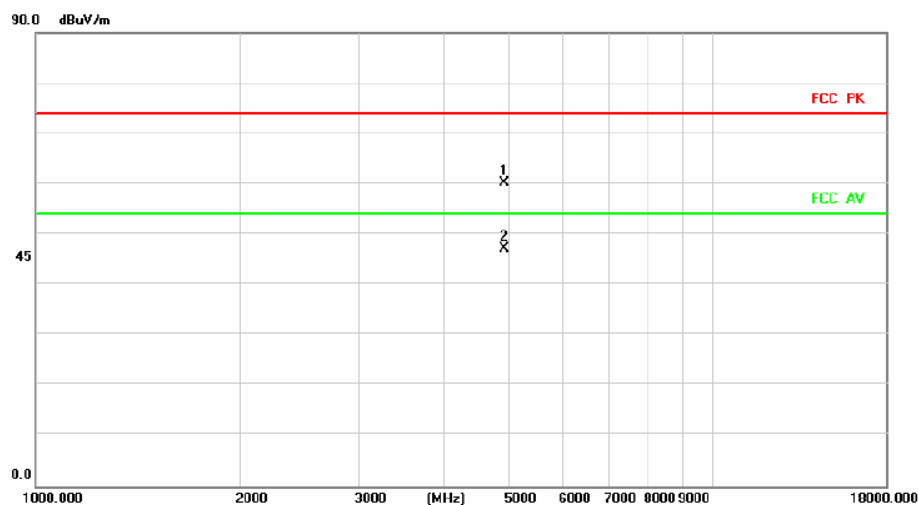

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		4904.000	61.59	-1.42	60.17	74.00	-13.83	peak		
2 *		4904.000	48.63	-1.42	47.21	54.00	-6.79	AVG		


Radiated Emission

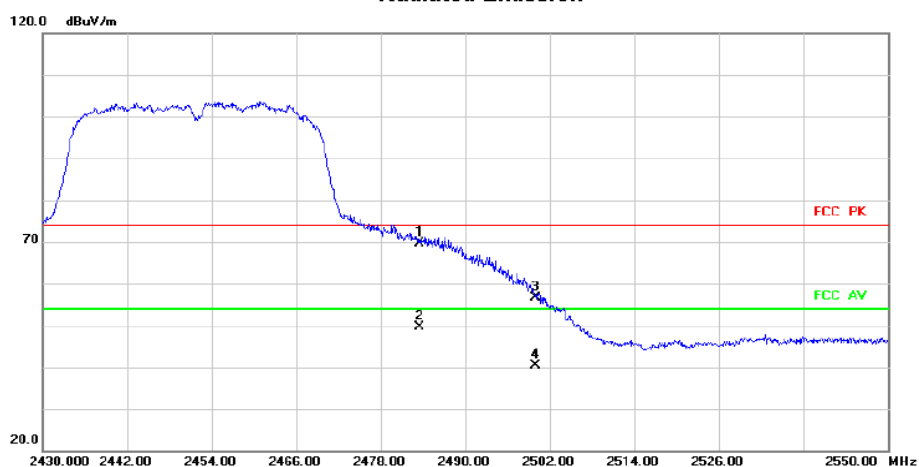

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		2483.500	70.82	-1.28	69.54	74.00	-4.46	peak		
2 *		2483.500	50.95	-1.28	49.67	54.00	-4.33	AVG		
3		2500.000	57.83	-1.21	56.62	74.00	-17.38	peak		
4		2500.000	41.57	-1.21	40.36	54.00	-13.64	AVG		


HORIZONTALA

Radiated Emission

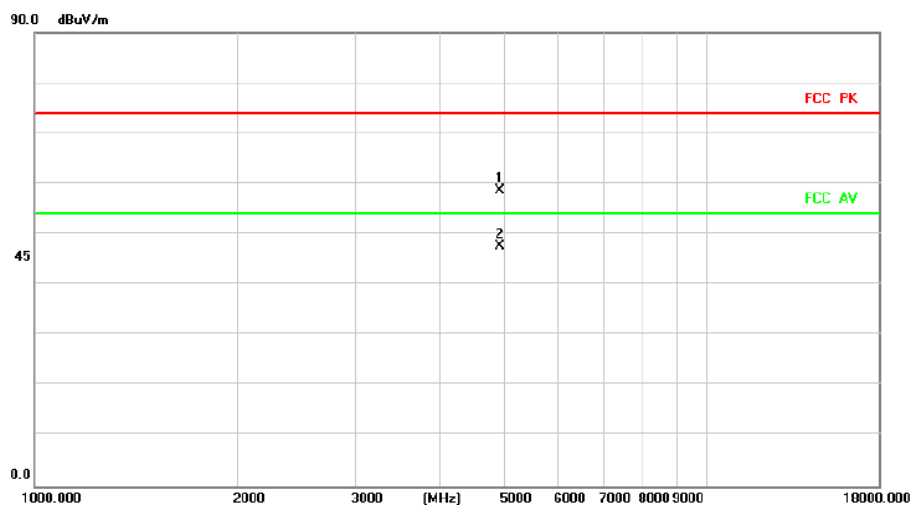

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		4904.000	59.96	-1.42	58.54	74.00	-15.46	peak		
2 *		4904.000	49.04	-1.42	47.62	54.00	-6.38	AVG		

Radiated Emission

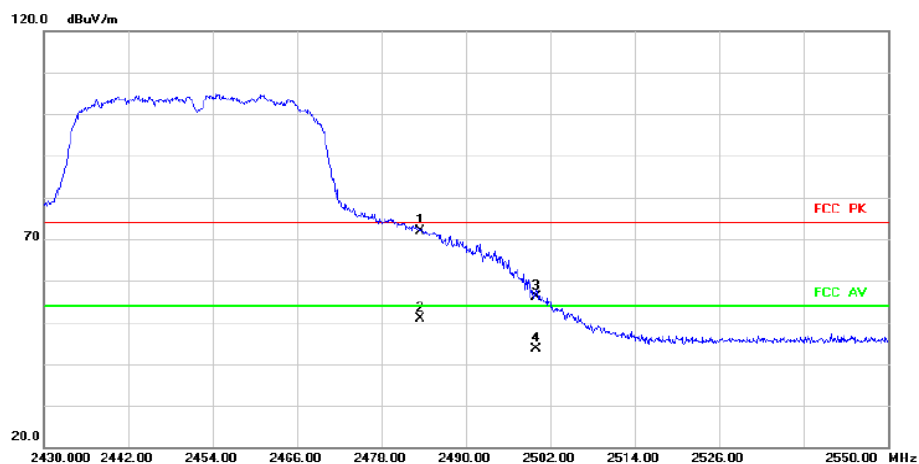

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1 *		2483.500	73.12	-1.28	71.84	74.00	-2.16	peak		
2		2483.500	52.08	-1.28	50.80	54.00	-3.20	AVG		
3		2500.000	57.23	-1.21	56.02	74.00	-17.98	peak		
4		2500.000	44.92	-1.21	43.71	54.00	-10.29	AVG		

3.3 Spurious Emission at Antenna Port

3.3.1 Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak Output Power limits. If the transmitter complies with the Output Power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

3.3.2 Test Peripherals

Support Equipment				
No.	Equipment	Brand Name	Model Name	Remarks
1	Type-C Cable	AWM	E101344	0.9m, No Shielding
2	Adaptor	FUSHIGANG	AS1201A-0502000 USU	NA
3	Record PC	Lenovo	M4500T	NA
4	Control PC	Lenovo	M4500T	NA

3.3.3 Test Procedure

Test Method	
☒ Conducted Measurement	☐ Radiated Measurement
Test Channels	
☒ Lowest, Middle and Highest Channel	☐ Lowest and Highest Channel
Environmental conditions	
☒ Normal	☐ Normal and Extreme
Note: ● : Test ○ : No Test	

a) The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.


b) Spectrum Setting as below:

Centre Frequency	The centre frequency of the channel under test
RBW	100 kHz
VBW	300 kHz
Frequency span	2 x Nominal Channel Bandwidth
Detector Mode	Peak
Trace Mode	Max Hold

Sweep Time	Auto Couple
------------	-------------

- c) Allow trace to full stabilize.
- d) Use the peak marker function to determine the maximum power level in any 100kHz band segment within the fundamental EBW.

3.3.4 Test Setup

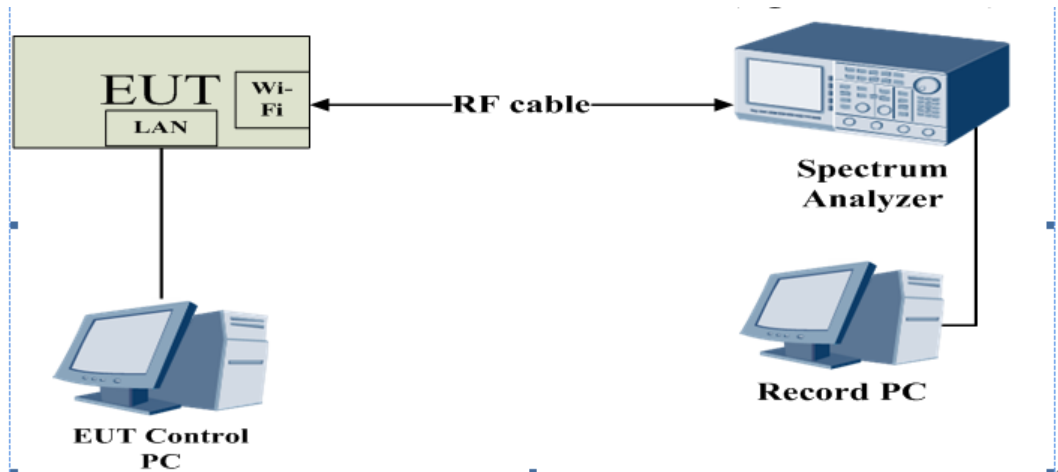


3.3.5 The Result


3.3.5.1. Conducted Spurious Emission

TestMode	Antenna	Channel	FreqRange [Mhz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
11B	Ant1	2412	Reference	2.02	2.02	---	PASS
			30~1000	2.02	-51.17	≤-17.98	PASS
			1000~26500	2.02	-18.6	≤-17.98	PASS
		2437	Reference	2.35	2.35	---	PASS
			30~1000	2.35	-50.69	≤-17.65	PASS
			1000~26500	2.35	-19.48	≤-17.65	PASS
		2462	Reference	3.44	3.44	---	PASS
			30~1000	3.44	-50.36	≤-16.56	PASS
			1000~26500	3.44	-21.39	≤-16.56	PASS
11G	Ant1	2412	Reference	-3.55	-3.55	---	PASS
			30~1000	-3.55	-50.25	≤-23.55	PASS
			1000~26500	-3.55	-28.19	≤-23.55	PASS
		2437	Reference	-2.90	-2.90	---	PASS
			30~1000	-2.90	-51.37	≤-22.9	PASS
			1000~26500	-2.90	-30.38	≤-22.9	PASS
		2462	Reference	-2.78	-2.78	---	PASS
			30~1000	-2.78	-51.65	≤-22.78	PASS
			1000~26500	-2.78	-31.59	≤-22.78	PASS
11N20SISO	Ant1	2412	Reference	-3.45	-3.45	---	PASS
			30~1000	-3.45	-51.56	≤-23.45	PASS
			1000~26500	-3.45	-27.71	≤-23.45	PASS
		2437	Reference	-3.31	-3.31	---	PASS
			30~1000	-3.31	-50.62	≤-23.31	PASS
			1000~26500	-3.31	-30.13	≤-23.31	PASS
		2462	Reference	-2.63	-2.63	---	PASS
			30~1000	-2.63	-51.9	≤-22.63	PASS
			1000~26500	-2.63	-32.27	≤-22.63	PASS
11N40SISO	Ant1	2422	Reference	-6.19	-6.19	---	PASS
			30~1000	-6.19	-51.87	≤-26.19	PASS
			1000~26500	-6.19	-31.67	≤-26.19	PASS
		2437	Reference	-5.62	-5.62	---	PASS
			30~1000	-5.62	-51.7	≤-25.62	PASS
			1000~26500	-5.62	-32.79	≤-25.62	PASS
		2452	Reference	-5.87	-5.87	---	PASS
			30~1000	-5.87	-50.74	≤-25.87	PASS
			1000~26500	-5.87	-33.36	≤-25.87	PASS


11B_Ant1_2412_0-Reference

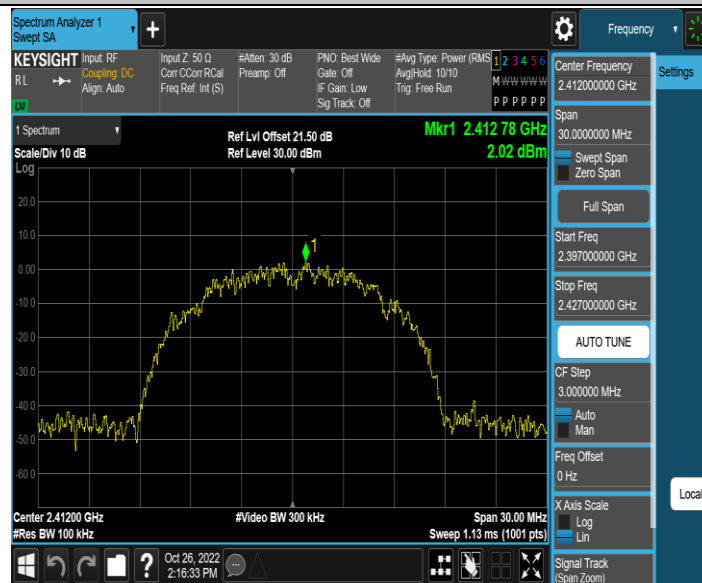

11B_Ant1_2412_30-1000

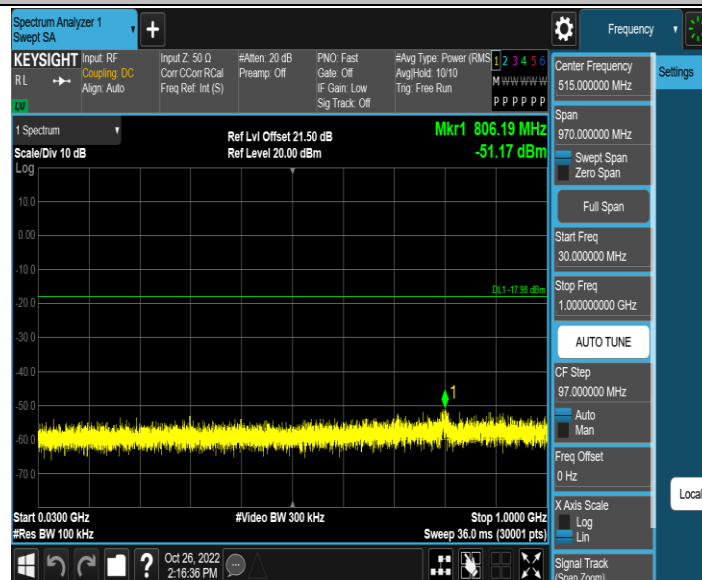


11B_Ant1_2412_1000-26500

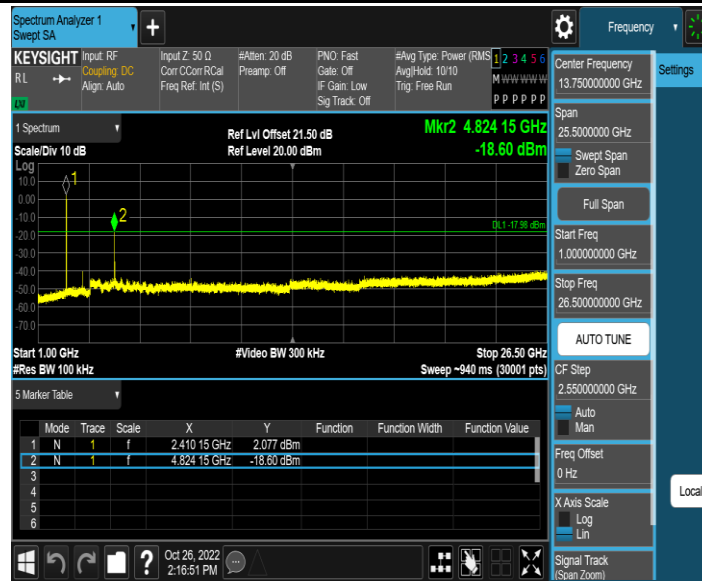

11B_Ant1_2437_0~Reference



11B_Ant1_2437_30~1000

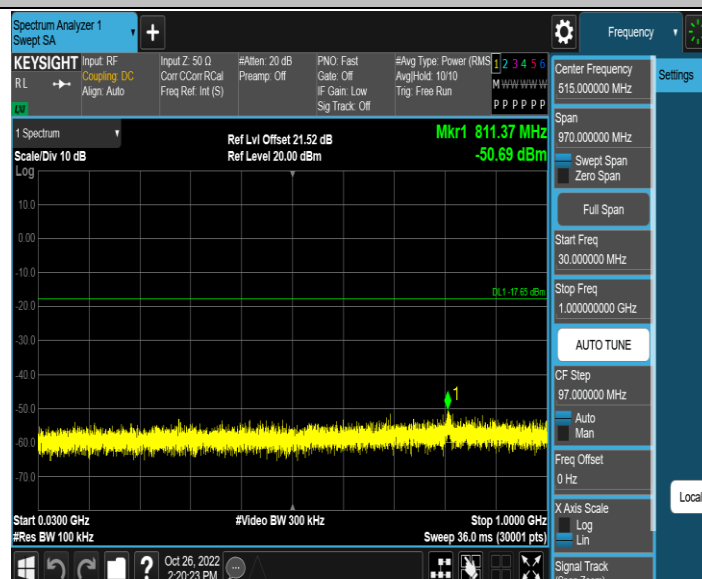


11B_Ant1_2437_1000~26500



11B_Ant1_2462_0~Reference




11B_Ant1_2462_30~1000

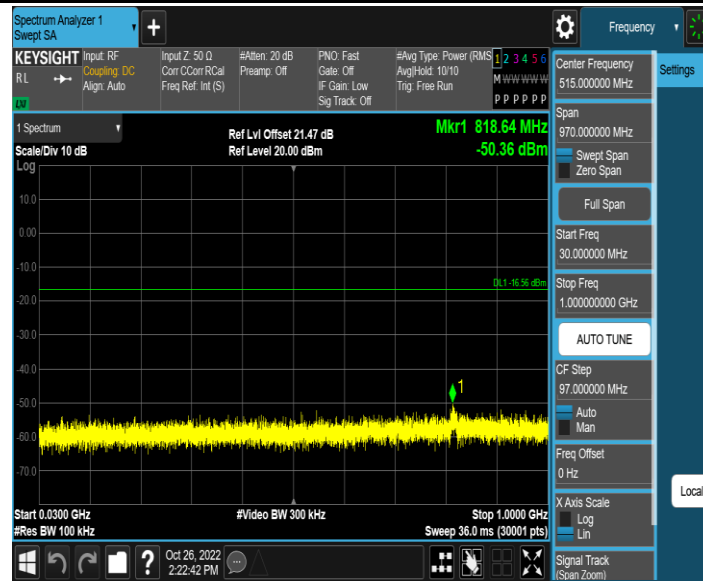


11B_Ant1_2462_1000~26500



11G_Ant1_2412_0~Reference

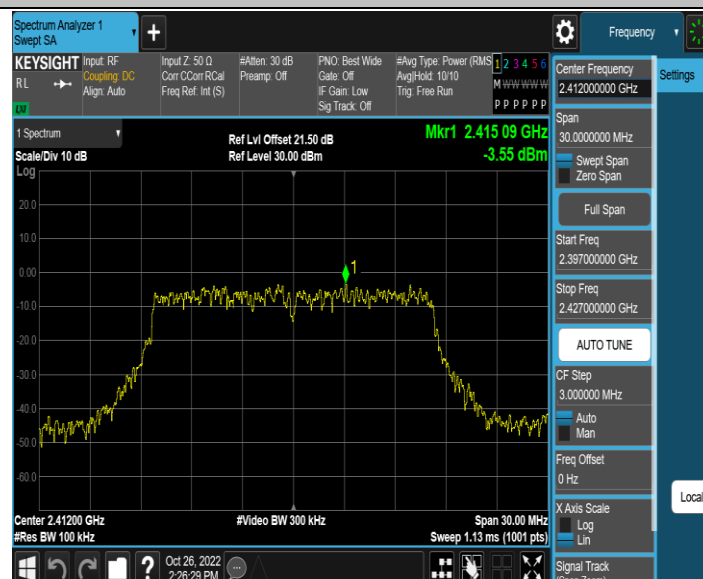

11G_Ant1_2412_30~1000

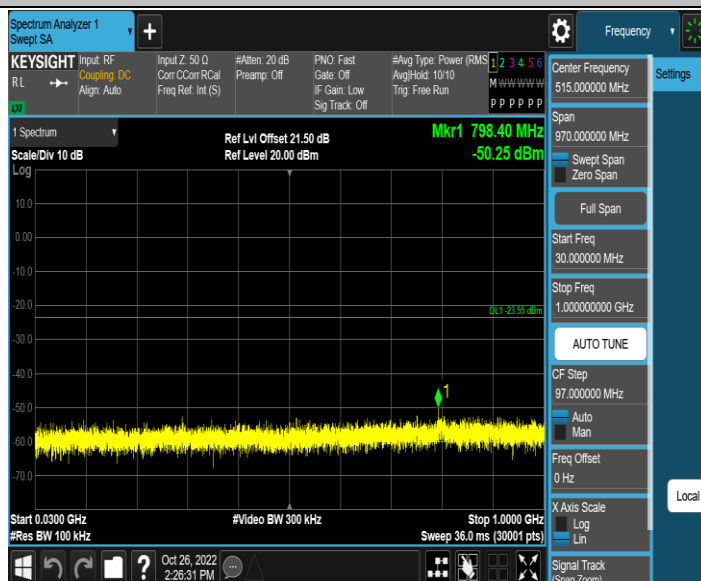


11G_Ant1_2412_1000~26500



11G_Ant1_2437_0~Reference




11G_Ant1_2437_30~1000

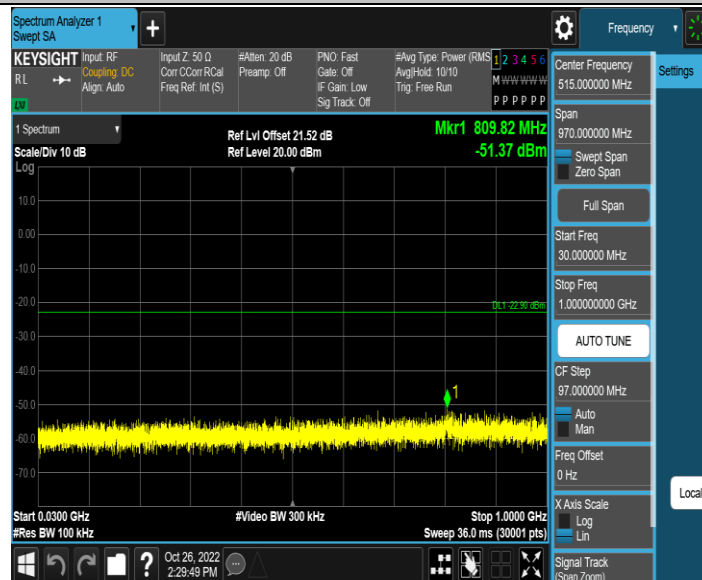


11G_Ant1_2437_1000~26500



11G_Ant1_2462_0-Reference

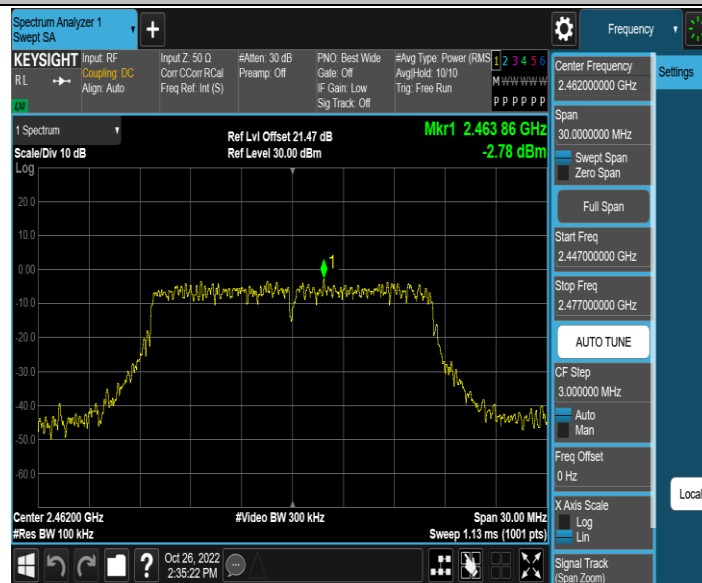


11G_Ant1_2462_30~1000

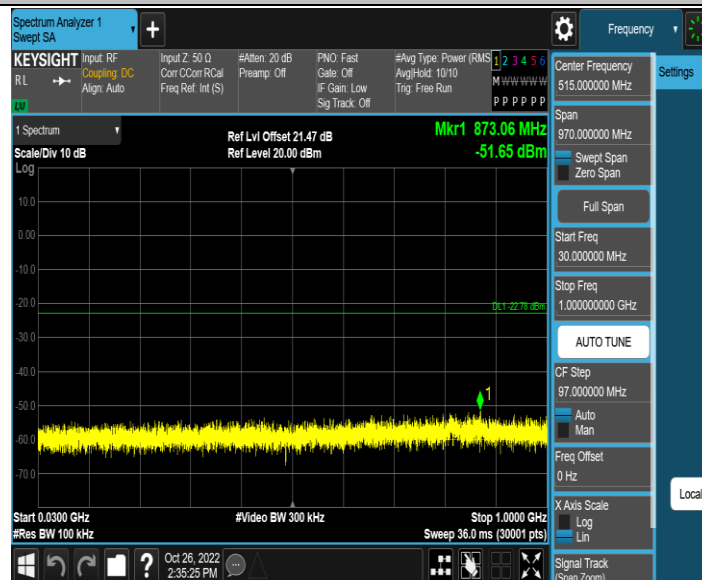


11G_Ant1_2462_1000~26500



11N20SISO_Ant1_2412_0~Reference

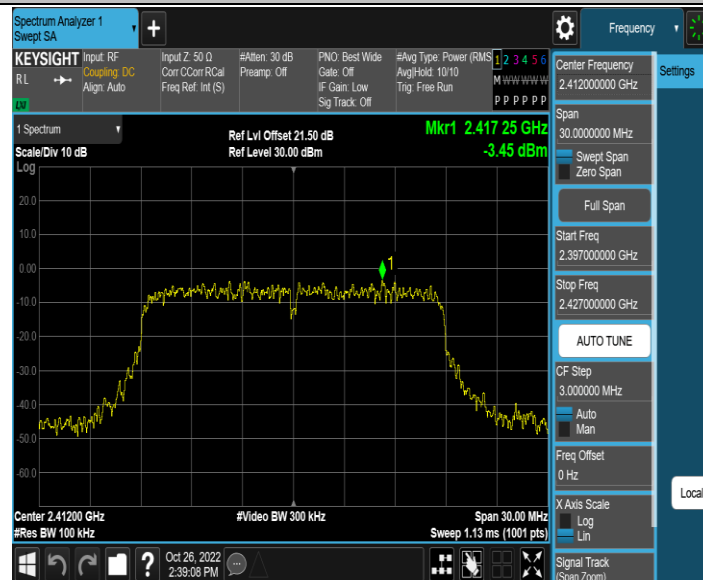


11N20SISO_Ant1_2412_30~1000

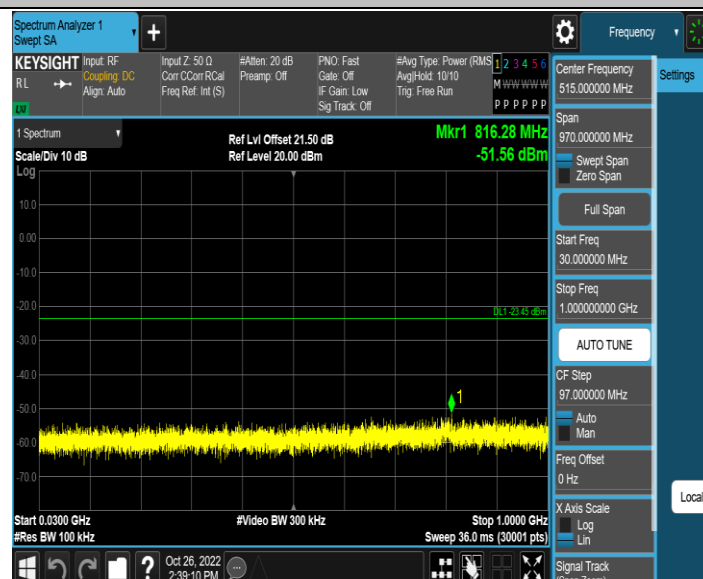


11N20SISO_Ant1_2412_1000~26500



11N20SISO_Ant1_2437_0~Reference

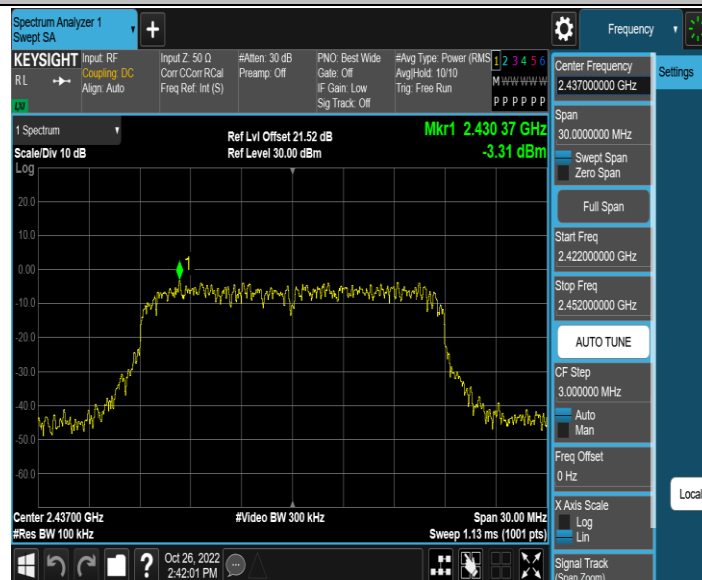


11N20SISO_Ant1_2437_30~1000

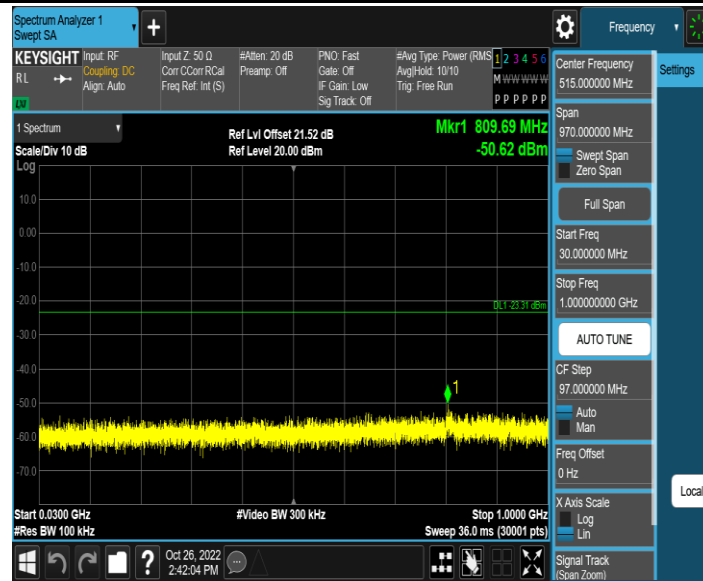


11N20SISO_Ant1_2437_1000-26500



11N20SISO_Ant1_2462_0-Reference

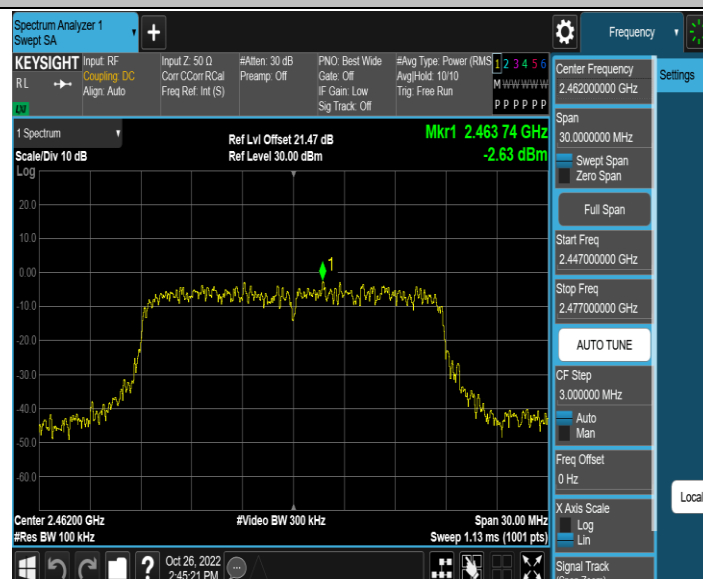


11N20SISO_Ant1_2462_30~1000

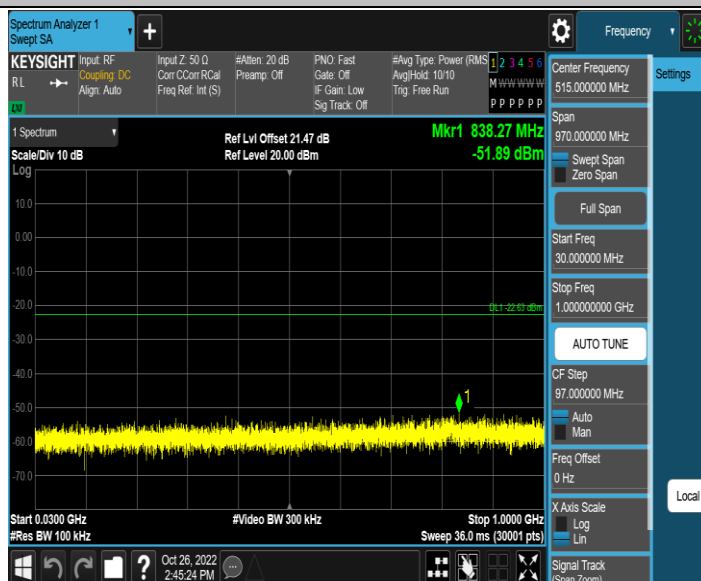


11N20SISO_Ant1_2462_1000~26500



11N40SISO_Ant1_2422_0~Reference

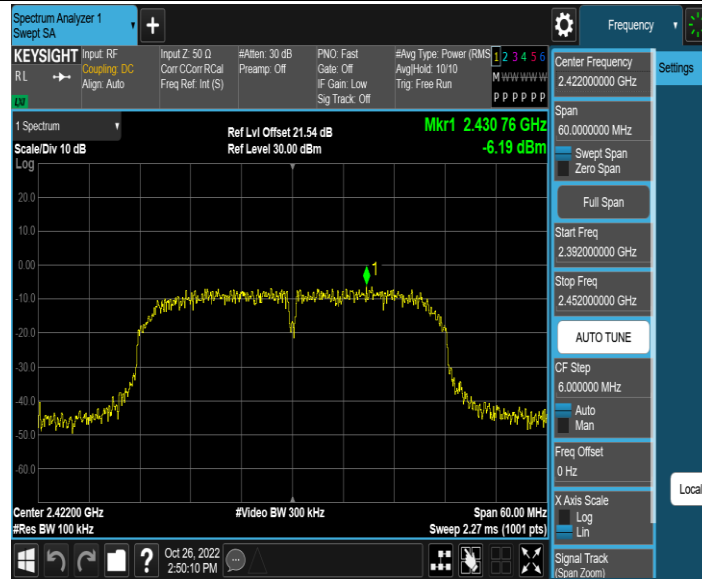

11N40SISO_Ant1_2422_30~1000

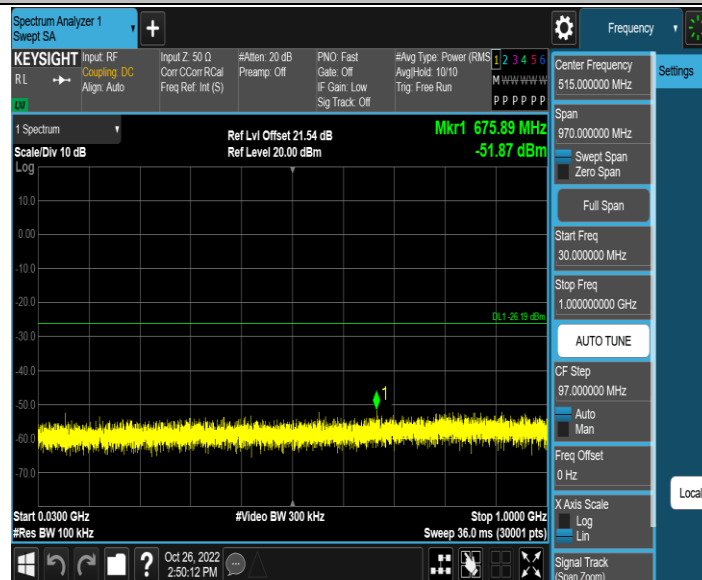


11N40SISO_Ant1_2422_1000~26500




11N40SISO_Ant1_2437_0~Reference




11N40SISO_Ant1_2437_30~1000

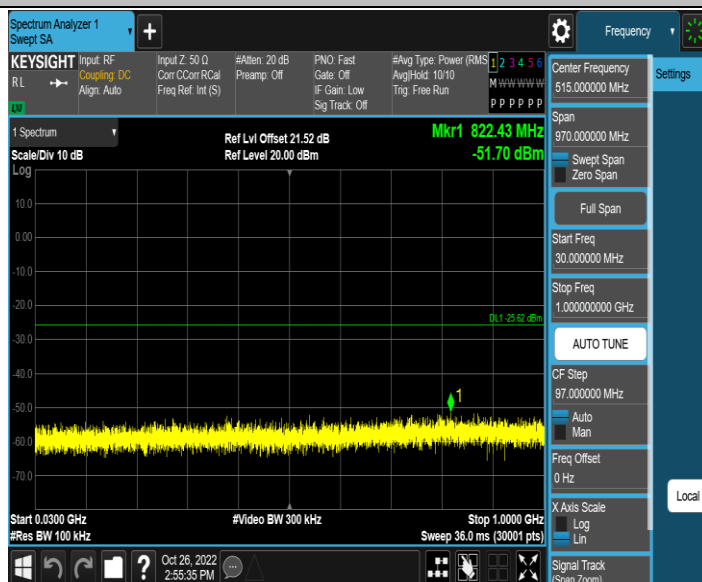


11N40SISO_Ant1_2437_1000~26500

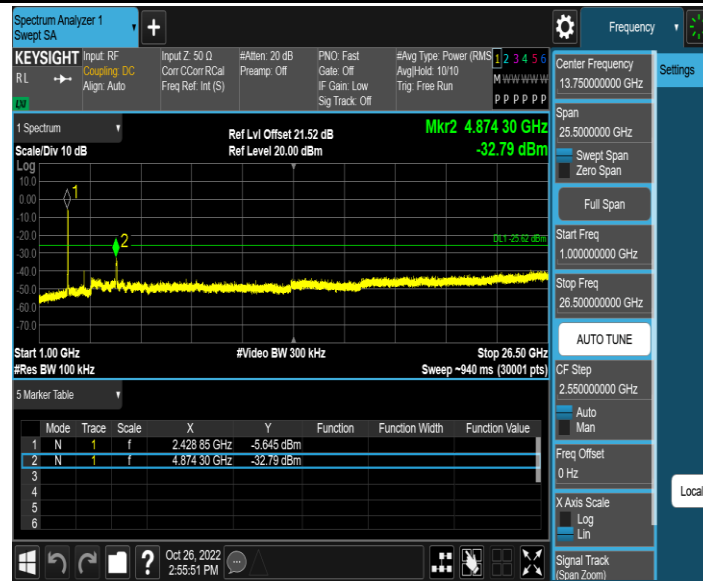

11N40SISO_Ant1_2452_0~Reference

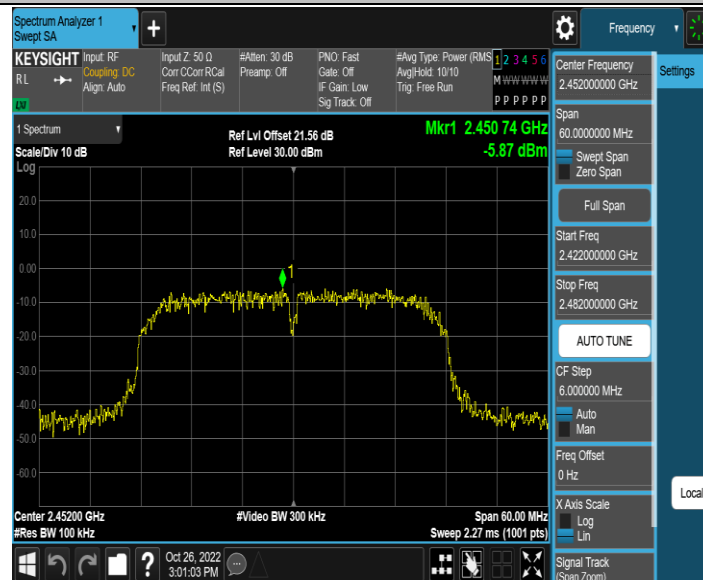

11N40SISO_Ant1_2452_30~1000

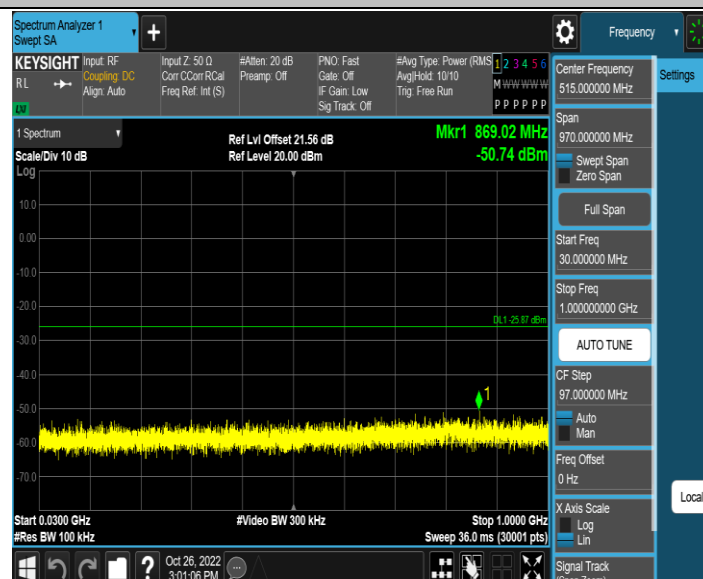


11N40SISO_Ant1_2452_1000~26500



3.3.5.2. Band edge measurements

TestMode	Antenna	ChName	Channel	RefLevel[dBm]	Result[dBm]	Limit[dBm]	Verdict
11B	Ant1	Low	2412	3.22	-51.11	≤-16.78	PASS
		High	2462	4.18	-55.18	≤-15.82	PASS
11G	Ant1	Low	2412	-2.34	-46.42	≤-22.34	PASS
		High	2462	-2.88	-51.29	≤-22.88	PASS
11N20SISO	Ant1	Low	2412	-2.52	-44.41	≤-22.52	PASS
		High	2462	-2.21	-50.05	≤-22.21	PASS
11N40SISO	Ant1	Low	2422	-5.70	-44.5	≤-25.7	PASS
		High	2452	-5.16	-47.1	≤-25.16	PASS

11B_Ant1_Low_2412

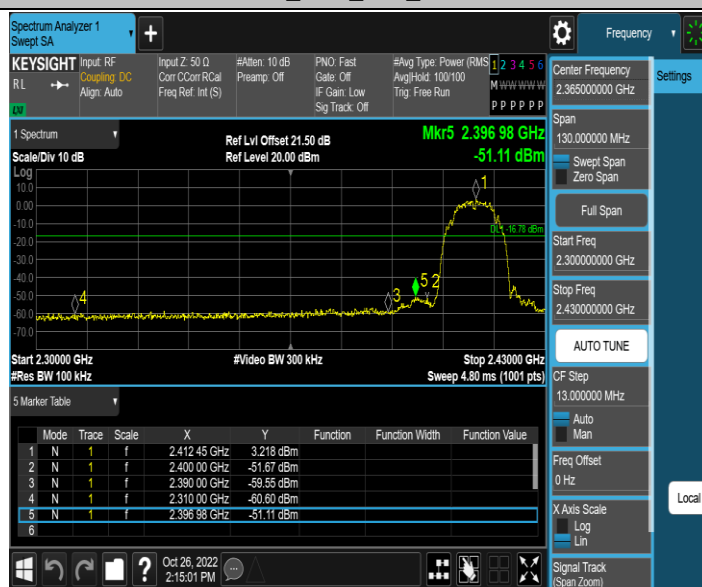

11B_Ant1_High_2462



11G_Ant1_Low_2412