

*FCC PART 15, SUBPART B and C
TEST REPORT*

for

INDUSTRIAL REMOTE TRANSMITTER

Model: 9557

Prepared for

PRECISION GOVERNORS, LLC
2322 SEVENTH AVENUE
ROCKFORD, IL 61104

Prepared by: _____

KENNETH LEE

Approved by: _____

JAMES ROSS

COMPATIBLE ELECTRONICS INC.
114 OLINDA DRIVE
BREA, CALIFORNIA 92823
(714) 579-0500

DATE: OCTOBER 1, 2014

	REPORT BODY	APPENDICES					TOTAL
		A	B	C	D	E	
PAGES	16	2	2	2	11	13	46

This report shall not be reproduced except in full, without the written approval of Compatible Electronics.

TABLE OF CONTENTS

Section / Title	PAGE
GENERAL REPORT SUMMARY	4
SUMMARY OF TEST RESULTS	5
1. PURPOSE	6
2. ADMINISTRATIVE DATA	7
2.1 Location of Testing	7
2.2 Traceability Statement	7
2.3 Cognizant Personnel	7
2.4 Date Test Sample was Received	7
2.5 Disposition of the Test Sample	7
2.6 Abbreviations and Acronyms	7
3. APPLICABLE DOCUMENTS	8
4. Description of Test Configuration	9
4.1 Description of Test Configuration - Emissions	9
5. LISTS OF EUT, ACCESSORIES AND TEST EQUIPMENT	10
5.1 EUT and Accessory List	10
5.2 Emissions Test Equipment	10
6. TEST SITE DESCRIPTION	11
6.1 Test Facility Description	11
6.2 EUT Mounting, Bonding and Grounding	11
7. Test Procedures	12
7.1 RF Emissions	12
7.1.1 Radiated Emissions (Spurious and Harmonics) Test – Lab B	12
7.1.2 Radiated Emissions (Spurious and Harmonics) Test – Lab D	14
The EUT was tested at a 3 meter test distance. The six highest emissions are listed in Table 1.0.	14
7.1.3 RF Emissions Test Results	15
7.1.4 Bandwidth of the Fundamental	15
8. CONCLUSIONS	16

LIST OF APPENDICES

APPENDIX	TITLE
A	Laboratory Accreditations and Recognitions
B	Modifications to the EUT
C	Additional Models Covered Under This Report
D	Diagrams and Charts • Test Setup Diagrams • Antenna and Effective Gain Factors
E	Data Sheets

LIST OF FIGURES

FIGURE	TITLE
1	Plot Map And Layout of Radiated Site
2	Layout of the Semi-Anechoic Test Chamber

GENERAL REPORT SUMMARY

This electromagnetic emission test report is generated by Compatible Electronics Inc., which is an independent testing and consulting firm. The test report is based on testing performed by Compatible Electronics personnel according to the measurement procedures described in the test specifications given below and in the "Test Procedures" section of this report.

The measurement data and conclusions appearing herein relate only to the sample tested and this report may not be reproduced without the written permission of Compatible Electronics, unless done so in full.

This report must not be used to claim product certification, approval or endorsement by NVLAP, NIST or any agency of the federal government.

Device Tested: Industrial Remote Transmitter
Model: 9557
S/N: N/A

Product Description: See Expository Statement.

Modifications: The EUT was modified in order to comply with specifications. Please see the list of modifications in Appendix B.

Customer: Precision Governors, LLC.
2322 Seventh Avenue
Rockford, IL 61104

Test Dates: September 5, 12 and 15, 2014

Test Specifications: Emissions requirements
CFR Title 47, Part 15, Subpart B; and Subpart C, sections 15.205, 15.209, and 15.231

Test Procedure: ANSI C63.4


Test Deviations: The test procedure was not deviated from during the testing.

SUMMARY OF TEST RESULTS

TEST	DESCRIPTION	RESULTS
1	Spurious Radiated RF Emissions, 10 kHz – 4.3392 GHz (Transmitter and Digital portion)	The EUT complies with the Class B limits of CFR Title 47, Part 15 Subpart B; and the limits of CFR Title 47, Part 15, Subpart C, section 15.205, 15.209 and 15.231
2	Conducted RF Emissions, 150 kHz to 30 MHz	This test was not performed because the EUT operates on battery power and does not connect to the AC mains.
3	-20 dB Bandwidth of the Fundamental	The EUT complies with the limits of CFR Title 47, Part 15, Subpart C, section 15.231 [c].

1. PURPOSE

This document is a qualification test report based on the emissions tests performed on the Industrial Remote Transmitter, Model: 9557. The emissions measurements were performed according to the measurement procedure described in ANSI C63.4. The tests were performed in order to determine whether the electromagnetic emissions from the equipment under test, referred to as EUT hereafter, are within the **Class B** specification limits defined by CFR Title 47, Part 15, Subpart B; and Subpart C, sections 15.205, 15.209, and 15.231.

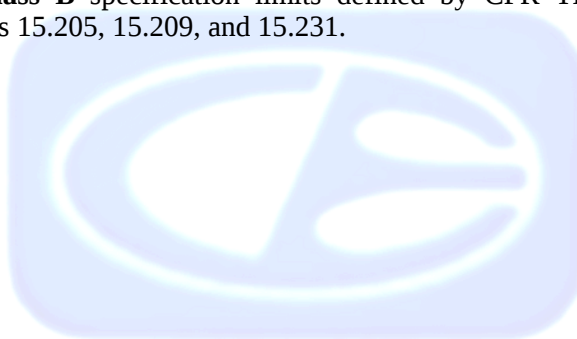

2. ADMINISTRATIVE DATA

2.1 Location of Testing

The emissions tests described herein were performed at the test facility of Compatible Electronics, 114 Olinda Drive, Brea, California 92823.

2.2 Traceability Statement

The calibration certificates of all test equipment used during the test are on file at the location of the test. The calibration is traceable to the National Institute of Standards and Technology (NIST).

2.3 Cognizant Personnel

Precision Governors, LLC

George Kuczenski Executive Vice President and General Manager

Compatible Electronics Inc.

Kyle Fujimoto	Test Engineer
James Ross	Test Engineer
Kenneth Lee	Test Technician

2.4 Date Test Sample was Received

The test sample was received on September 3, 2014.

2.5 Disposition of the Test Sample

The test sample has not been returned to Precision Governors as of the date of this test report.

2.6 Abbreviations and Acronyms

The following abbreviations and acronyms may be used in this document.

RF	Radio Frequency
EMI	Electromagnetic Interference
EUT	Equipment Under Test
P/N	Part Number
S/N	Serial Number
HP	Hewlett Packard
ITE	Information Technology Equipment
CML	Corrected Meter Limit
LISN	Line Impedance Stabilization Network
N/A	Not Applicable

3. APPLICABLE DOCUMENTS

The following documents are referenced or used in the preparation of this emissions Test Report.

SPEC	TITLE
FCC Title 47, Part 15 Subpart C	FCC Rules - Radio frequency devices (including digital devices) – Intentional Radiators
FCC Title 47, Part 15 Subpart B	FCC Rules - Radio frequency devices (including digital devices) – Unintentional Radiators
ANSI C63.4 2009	Methods of measurement of radio-noise emissions from low-voltage electrical and electronic equipment in the range of 9 kHz to 40 GHz


4. DESCRIPTION OF TEST CONFIGURATION

4.1 Description of Test Configuration - Emissions

The Industrial Remote Transmitter, Model: 9557 (EUT) is a remote control that is powered by two AA 1.5 VDC batteries.

The EUT was tested for emissions while in the X, Y and Z axis. The EUT was continuously transmitting.

The final radiated data for the EUT as was taken in the mode described above. Please see Appendix E for the data sheets.

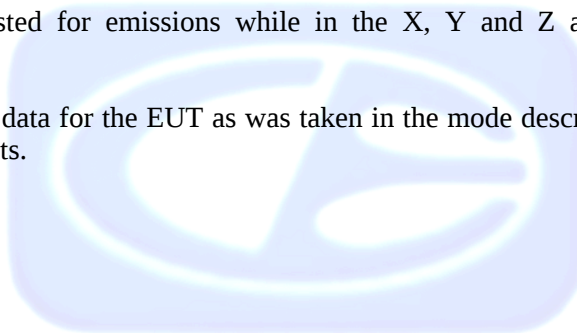

5. LISTS OF EUT, ACCESSORIES AND TEST EQUIPMENT**5.1 EUT and Accessory List**

EQUIPMENT	MANUFACTURER	MODEL NUMBER	SERIAL NUMBER	FCC ID
INDUSTRIAL REMOTE TRANSMITTER	PRECISION GOVERNORS, LLC	9557	N/A	2AC8S-9557

5.2 Emissions Test Equipment

EQUIPMENT TYPE	MANU-FACTURER	MODEL NUMBER	SERIAL NUMBER	CALIBRATION DATE	CAL. CYCLE
GENERAL TEST EQUIPMENT USED IN LAB B					
Computer	Compaq	CQ5210F	CNX9360CF9	N/A	N/A
Monitor	Hewlett Packard	HPs2031a	3CQ046N3MD	N/A	N/A
EMI Receiver	Rohde & Schwarz	ESIB40	100194	November 19, 2012	2 Year
GENERAL TEST EQUIPMENT USED IN LAB D					
Computer	Hewlett Packard	p6716f	MXX1030PX0	N/A	N/A
LCD Monitor	Hewlett Packard	52031a	3CQ046N3MG	N/A	N/A
EMI Receiver, 20 Hz – 26.5 GHz	Agilent Technologies	N9038A	MY51100115	March 6, 2014	2 Year
RF RADIATED EMISSIONS TEST EQUIPMENT					
CombiLog Antenna	Com-Power	AC-220	61060	May 20, 2014	1 Year
Preamplifier	Com-Power	PA-118	181656	January 13, 2014	1 Year
Loop Antenna	Com-Power	AL-130	17089	January 29, 2013	2 Year
Horn Antenna	Com-Power	AH-118	071175	February 26, 2014	2 Year
Antenna Mast	Com Power	AM-100	N/A	N/A	N/A
System Controller	Sunol Sciences Corporation	SC110V	112213-1	N/A	N/A
Turntable	Sunol Sciences Corporation	2011VS	N/A	N/A	N/A
Antenna-Mast	Sunol Sciences Corporation	TWR95-4	112213-3	N/A	N/A


6. TEST SITE DESCRIPTION**6.1 Test Facility Description**

Please refer to section 2.1 and 7.1 of this report for emissions test location.

6.2 EUT Mounting, Bonding and Grounding

The EUT was mounted on a 1.0 by 1.5 meter non-conductive table 0.8 meters above the ground plane.

The EUT was not grounded.

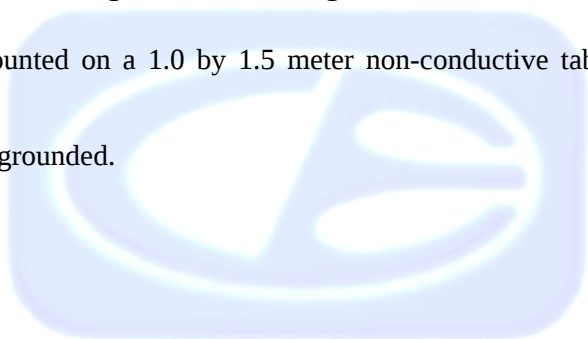

7. TEST PROCEDURES

The following sections describe the test methods and the specifications for the tests. Test results are also included in this section.

7.1 RF Emissions

7.1.1 Radiated Emissions (Spurious and Harmonics) Test – Lab B

The EMI Receiver was used as a measuring meter. A preamplifier was used to increase the sensitivity of the instrument. The Com Power Microwave Preamplifier Model: PA-118 was used for frequencies above 1 GHz. The EMI Receiver was used in the peak detect mode with the "Max Hold" feature activated. In this mode, the EMI Receiver records the highest measured reading over all the sweeps.

For frequencies above 1 GHz, the readings were averaged by a "duty cycle correction factor", derived from $20 \log$ (dwell time / one pulse train with blanking interval). This duty cycle correction factor was then subtracted from the peak reading.

The measurement bandwidth and transducers used for the radiated emissions test were:

FREQUENCY RANGE	EFFECTIVE MEASUREMENT BANDWIDTH	TRANSDUCER
1 GHz to 4.3392 GHz	1 MHz	Horn Antenna


The open field test site of Compatible Electronics, Inc. was used for radiated emission testing. This test site is set up according to ANSI C63.4: 2009. Please see section 6.2 of this report for mounting, bonding and grounding of the EUT. The turntable supporting the EUT is remote controlled using a motor. The turntable permits EUT rotation of 360 degrees in order to maximize emissions. Also, the antenna mast allows height variation of the antenna from 1 meter to 4 meters. Data was collected in the worst case (highest emission) configuration of the EUT by the Radiated Emission Manual Test software. At each reading, the EUT was rotated 360 degrees and the antenna height was varied from 1 to 4 meters (for E field radiated field strength). The gunsight method was used when measuring with the horn antenna in order to ensure accurate results.

Radiated Emissions (Spurious and Harmonics) Test -- Lab B (con't)

The presence of ambient signals was verified by turning the EUT off. In case an ambient signal was detected, the measurement bandwidth was reduced temporarily and verification was made that an additional adjacent peak did not exist. This ensures that the ambient signal does not hide any emissions from the EUT. The EUT was tested at a 3 meter test distance from 1 GHz to 4.3392 GHz to obtain the final test data.

Test Results:

The EUT complies with the **Class B** limits of CFR Title 47, Part 15, Subpart B; and the limits of CFR Title 47, Part 15, Subpart C, Sections 15.205, 15.209 and 15.231 for radiated emissions. Please see Appendix E for the data sheets.

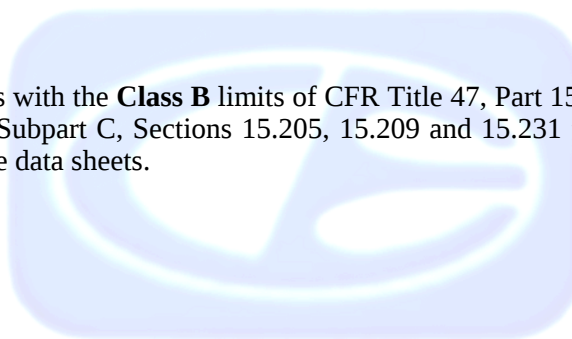

7.1.2 Radiated Emissions (Spurious and Harmonics) Test – Lab D

The EMI Receiver was used as the measuring meter. A built-in, internal preamplifier was used to increase the sensitivity of the instrument. The EMI Receiver was initially used with the Analyzer mode feature activated. In this mode, the EMI receiver can then record the actual frequency to be measured. This final reading is then taken accurately in the EMI Receiver mode, which takes into account the cable loss, amplifier gain and antenna factors, so that a true reading is compared to the true limit. A quasi-peak reading was taken only for those readings, which are marked accordingly on the data sheets.

For frequencies above 1 GHz, the readings were averaged by a “duty cycle correction factor”, derived from 20 log (dwell time / one pulse train with blanking interval). This duty cycle correction factor was then subtracted from the peak reading.

The EMI test chamber of Compatible Electronics, Inc. was used for radiated emissions testing. This test site is set up according to ANSI C63.4. Please see section 6.2 of this report for mounting, bonding and grounding of the EUT.

The turntable supporting the EUT is remote controlled using a motor. The turntable permits EUT rotation of 360 degrees in order to maximize emissions. Also, the antenna mast allows height variation of the antenna from 1 meter to 4 meters. Data was collected in the worst case (highest emission) configuration of the EUT. At each reading, the EUT was rotated 360 degrees and the antenna height was varied from 1 to 4 meters (for E field radiated field strength).

The measurement bandwidths and transducers used for the radiated emissions test were:

FREQUENCY RANGE	EFFECTIVE MEASUREMENT BANDWIDTH	TRANSDUCER
10 kHz to 150 kHz	200 Hz	Active Loop Antenna
150 kHz to 30 MHz	9 kHz	Active Loop Antenna
30 MHz to 1 GHz	120 kHz	CombiLog Antenna

The EUT was tested at a 3 meter test distance. The six highest emissions are listed in Table 1.0.

7.1.3 RF Emissions Test Results

Table 1.0 RADIATED EMISSION RESULTS
Industrial Remote Transmitter, Model: 9557

Frequency MHz	Average Corrected Reading* dBuV	Specification Limit dBuV	Delta (Cor. Reading – Spec. Limit) dB
433.92 (V) (Y-Axis)	80.02	80.82	-0.80
433.92 (H) (X-Axis)	78.45	80.82	-2.37
433.92 (H) (Z-Axis)	76.96	80.82	-3.86
1301.76 (V) (X-Axis)	49.98	54	-4.02
867.80 (H) (Z-Axis)	37.46	46	-8.36
870.20 (H) (Z-Axis)	37.55	46	-8.45

Notes:

(H) Horizontal

(V) Vertical

* The complete emissions data is given in Appendix E of this report.

7.1.4 Bandwidth of the Fundamental

The -20 dB bandwidth was checked to see that it was within 0.25% of the fundamental frequency for the EUT. Plots of the -20 dB bandwidth are located in Appendix E.

Test Results:

The EUT complies with the limits CFR Title 47, Part 15, Subpart C, section 15.231[c].

8. CONCLUSIONS

The Industrial Remote Transmitter, Model: 9557, as tested, meets all of the specification limits defined in FCC Title 47, Part 15, Subpart C, sections 15.205, 15.209, and 15.231.



APPENDIX A

LABORATORY ACCREDITATIONS AND RECOGNITIONS

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

LABORATORY ACCREDITATIONS AND RECOGNITIONS

NVLAP LAB CODES 200063-0,
200528-0, 200527-0

For US, Canada, Australia/New Zealand, Japan, Taiwan, Korea, and the European Union, Compatible Electronics is currently accredited by NVLAP to ISO/IEC 17025. Please follow the link to the NIST/NVLAP site for each of our facilities' NVLAP certificate and scope of accreditation

NVLAP listing links

[Agoura Division](#) / [Brea Division](#) / [Silverado/Lake Forest Division](#)

.Quote from ISO-ILAC-IAF Communiqué on 17025:

"A laboratory's fulfilment of the requirements of ISO/IEC 17025:2005 means the laboratory meets both the technical competence requirements and management system requirements that are necessary for it to consistently deliver technically valid test results and calibrations. The management system requirements in ISO/IEC 17025:2005 (Section 4) are written in language relevant to laboratory operations and meet the principles of ISO 9001:2008 Quality Management Systems — Requirements."

ANSI listing [CETCB](#)

Compatible Electronics has been nominated as a Conformity Assessment Body (CAB) for EMC under the US/EU Mutual Recognition Agreement (MRA).

US/EU MRA list [NIST MRA site](#)

Compatible Electronics has been nominated as a Conformity Assessment Body (CAB) for Taiwan/BSMI under the US/APEC (Asia-Pacific Economic Cooperation) Mutual Recognition Agreement (MRA).

APEC MRA list [NIST MRA site](#)

We are also listed for IT products by the following country/agency:

VCCI Support member: Please visit http://www.vcci.jp/vcci_e/

FCC Listing, from FCC OET site

[FCC test lab search](#) <https://fjallfoss.fcc.gov/oetcf/eas/reports/TestFirmSearch.cfm>

Compatible Electronics IC listing can be found at:

<http://www.ic.gc.ca/eic/site/ic1.nsf/eng/home>

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

APPENDIX B

MODIFICATIONS TO THE EUT

MODIFICATIONS TO THE EUT

The modifications listed below were made to the EUT to pass FCC Subpart B and FCC 15.231 specifications.

All the rework described below was implemented during the test in a method that could be reproduced in all the units by the manufacturer.

The resistor marked as R1 on the schematic was changed to an 820 ohm value.



APPENDIX C

***ADDITIONAL MODELS COVERED
UNDER THIS REPORT***



ADDITIONAL MODELS COVERED UNDER THIS REPORT

USED FOR THE PRIMARY TEST

Industrial Remote Transmitter
Model: 9557
S/N: N/A

There were no additional models covered under this report.




APPENDIX D

DIAGRAMS AND CHARTS

FIGURE 1: PLOT MAP AND LAYOUT OF RADIATED SITE

OPEN LAND > 15 METERS

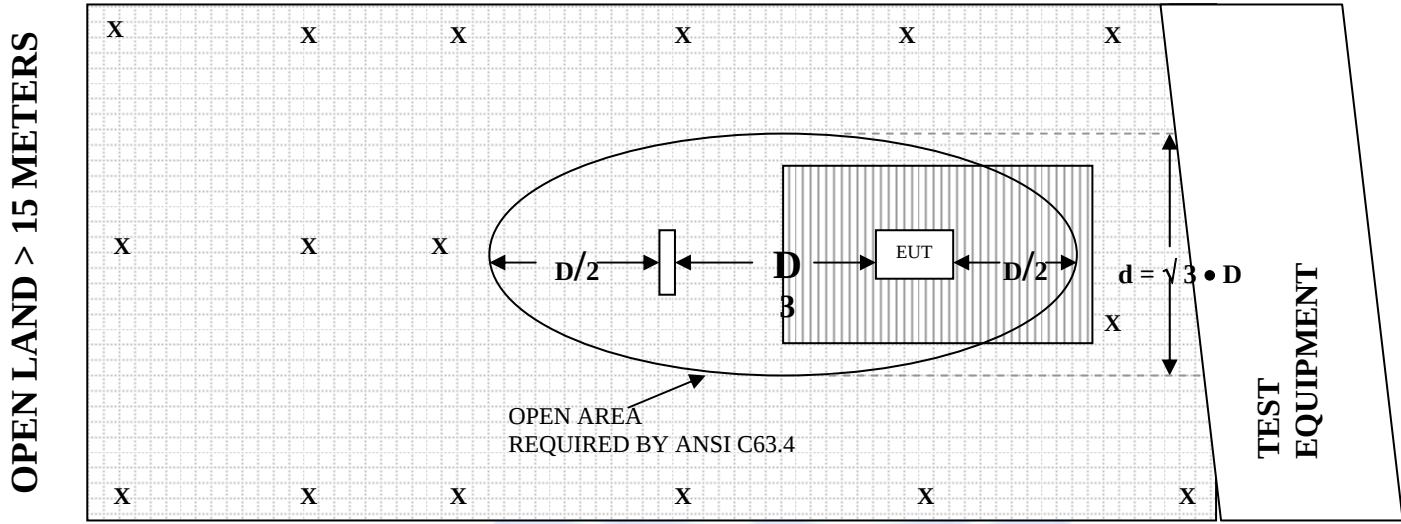

OPEN LAND > 15 METERS


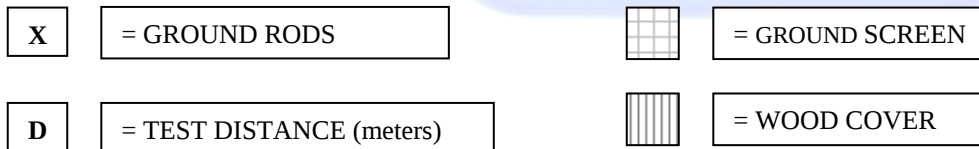


FIGURE 2: LAYOUT OF THE SEMI-ANECHOIC TEST CHAMBER

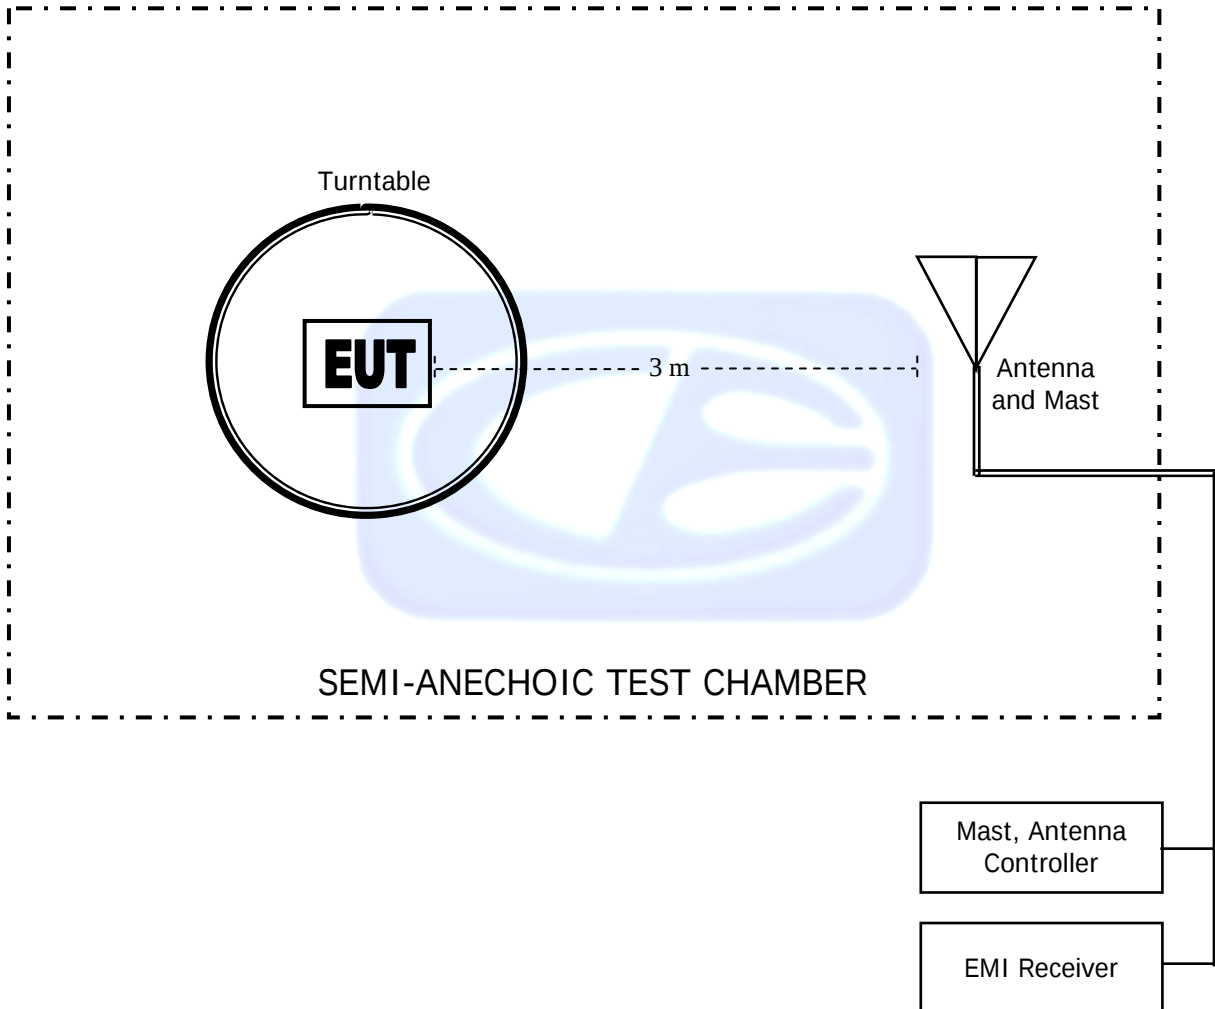

COM-POWER AL-130**LOOP ANTENNA**

S/N: 17089

CALIBRATION DATE: JANUARY 29, 2013

FREQUENCY (MHz)	MAGNETIC (dB/m)	ELECTRIC (dB/m)
0.009	-42.5	9
0.01	-42.3	9.2
0.02	-42.1	9.4
0.03	-41.4	10.1
0.04	-41.8	9.7
0.05	-42.4	9.1
0.06	-42.3	9.2
0.07	-42.5	9
0.08	-42.4	9.1
0.09	-42.5	9
0.1	-42.5	9
0.2	-42.7	8.8
0.3	-42.6	8.9
0.4	-42.5	9
0.5	-42.7	8.8
0.6	-42.7	8.8
0.7	-42.5	9
0.8	-42.3	9.2
0.9	-42.2	9.3
1	-42.2	9.3
2	-41.8	9.7
3	-41.7	9.8
4	-41.7	9.8
5	-41.5	10
6	-41.6	9.9
7	-41.4	10.1
8	-41	10.5
9	-40.8	10.7
10	-41.3	10.2
15	-41.4	10.1
20	-41.2	10.3
25	-42.6	8.9
30	-41.7	9.8

COM-POWER AC-220**COMBILOG ANTENNA****S/N: 61060****CALIBRATION DATE: MAY 20, 2014**

FREQUENCY (MHz)	FACTOR (dB)	FREQUENCY (MHz)	FACTOR (dB)
30	23.40	200	14.40
35	23.70	250	16.40
40	24.20	300	17.90
45	22.60	350	15.60
50	22.10	400	19.90
60	17.90	450	20.40
70	12.70	500	21.60
80	11.60	550	21.50
90	12.20	600	22.30
100	13.20	650	23.50
120	15.70	700	23.70
125	15.80	750	25.90
140	13.60	800	25.90
150	16.90	850	26.40
160	14.20	900	27.00
175	14.90	950	27.70
180	15.00	1000	27.50

COM POWER AH-118**HORN ANTENNA****S/N: 071175****CALIBRATION DATE: FEBRUARY 26, 2014**

FREQUENCY (GHz)	FACTOR (dB)	FREQUENCY (GHz)	FACTOR (dB)
1.0	24.23	10.0	38.43
1.5	25.84	10.5	40.19
2.0	28.14	11.0	40.49
2.5	29.51	11.5	41.39
3.0	31.20	12.0	42.02
3.5	32.17	12.5	43.30
4.0	31.40	13.0	42.77
4.5	31.86	13.5	40.18
5.0	34.82	14.0	42.59
5.5	34.38	14.5	41.74
6.0	36.31	15.0	41.84
6.5	34.81	15.5	38.48
7.0	37.48	16.0	39.52
7.5	36.98	16.5	37.85
8.0	36.66	17.0	41.33
8.5	38.47	17.5	44.96
9.0	37.22	18.0	48.50
9.5	37.86		

COM-POWER PA-118**PREAMPLIFIER**

S/N: 181656

CALIBRATION DATE: JANUARY 13, 2014

FREQUENCY (GHz)	FACTOR (dB)	FREQUENCY (GHz)	FACTOR (dB)
1.0	24.90	6.0	25.40
1.1	25.30	6.5	25.20
1.2	26.00	7.0	24.40
1.3	26.20	7.5	24.00
1.4	26.30	8.0	23.90
1.5	26.40	8.5	24.50
1.6	26.50	9.0	25.20
1.7	26.60	9.5	24.80
1.8	26.50	10.0	24.90
1.9	26.60	11.0	25.40
2.0	26.70	12.0	24.50
2.5	26.90	13.0	24.30
3.0	27.00	14.0	25.20
3.5	27.10	15.0	25.90
4.0	26.60	16.0	25.60
4.5	26.10	17.0	23.70
5.0	26.40	18.0	25.80
5.5	25.80		



FRONT VIEW

PRECISION GOVERNORS, LLC
INDUSTRIAL REMOTE TRANSMITTER
Model: 9557

FCC SUBPART B AND C – RADIATED EMISSIONS – BELOW 1 GHz

**PHOTOGRAPH SHOWING THE EUT CONFIGURATION
FOR MAXIMUM EMISSIONS**



REAR VIEW

PRECISION GOVERNORS, LLC
INDUSTRIAL REMOTE TRANSMITTER
Model: 9557

FCC SUBPART B AND C – RADIATED EMISSIONS – BELOW 1 GHz

**PHOTOGRAPH SHOWING THE EUT CONFIGURATION
FOR MAXIMUM EMISSIONS**



FRONT VIEW

PRECISION GOVERNORS, LLC
INDUSTRIAL REMOTE TRANSMITTER

Model: 9557

FCC SUBPART B AND C – RADIATED EMISSIONS – ABOVE 1 GHz

**PHOTOGRAPH SHOWING THE EUT CONFIGURATION
FOR MAXIMUM EMISSIONS**



REAR VIEW

PRECISION GOVERNORS, LLC
INDUSTRIAL REMOTE TRANSMITTER
Model: 9557

FCC SUBPART B AND C – RADIATED EMISSIONS – ABOVE 1 GHz

**PHOTOGRAPH SHOWING THE EUT CONFIGURATION
FOR MAXIMUM EMISSIONS**

APPENDIX E

DATA SHEETS

RADIATED EMISSIONS


DATA SHEETS

Title: Pre-Scan - FCC Class B - Z-Axis
File: Agilent - Pre-Scan - FCC Class B - Transmitter - Z-Axis - 09-12-2014.set
Operator: Kyle Fujimoto
EUT Type: Industrial Remote Transmitter
EUT Condition: Continuously Transmitting - Z-Axis
Comments: Customer: Precision Governors, LLC
Model: 9557

9/12/2014 3:16:28 PM
Sequence: Preliminary Scan

FCC Class B - Pre-Scan - Z-Axis

Electric Field Strength (dBμV/m)

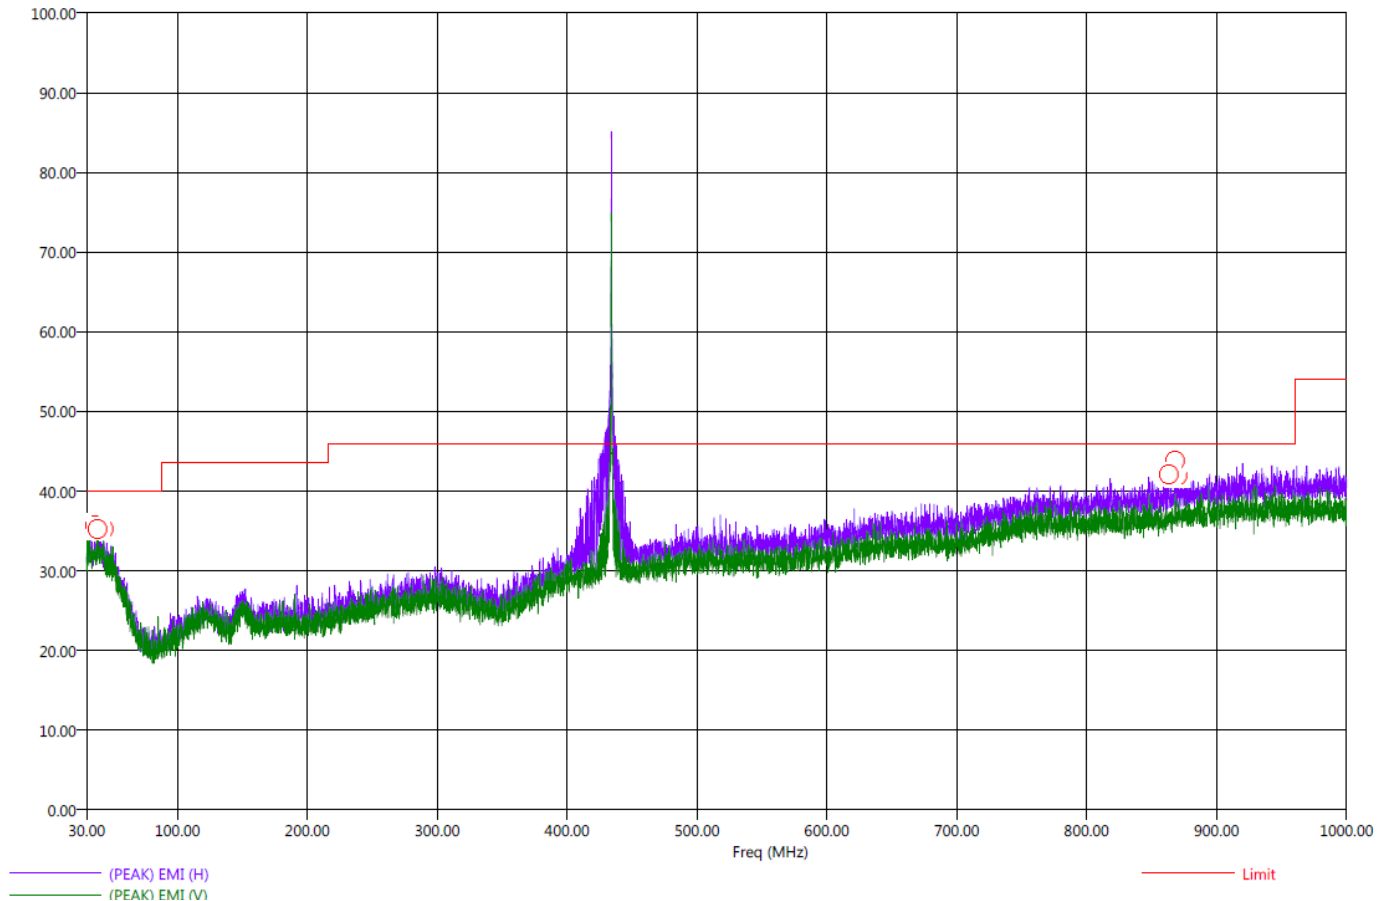

Title: Radiated Final - 30-1000 MHz - FCC Class B
File: Agilent - Final Scan - FCC Class B - Transmitter - Z-Axis - Worst Case - 09-12-2014.set
Operator: Kyle Fujimoto
EUT Type: Industrial Remote Transmitter
EUT Condition: Continuously Transmitting - Z-Axis
Comments: Customer: Precision Governors, LLC
Model: 9557

9/12/2014 3:32:59 PM
Sequence: Final Measurements

FCC Class B - Final Scan - Z-Axis Worst Case

Freq (MHz)	Pol	(PEAK) EMI (dBμV/m)	(QP) EMI (dBμV/m)	Limit (dBμV/m)	(PEAK) Margin (dB)	(QP) Margin (dB)	Cable (dB)	Transducer (dB)	Twr Ht (cm)	Ttbi Aql (deg)
36.10	H	35.14	30.75	40.00	-4.86	-9.25	0.40	23.74	366.35	221.25
38.80	V	35.38	31.17	40.00	-4.62	-8.83	0.42	24.09	398.71	111.75
43.20	H	34.77	30.29	40.00	-5.23	-9.71	0.45	23.17	350.53	189.25
863.30	H	41.31	37.43	46.00	-4.69	-8.57	2.55	26.56	334.35	1.75
867.80	H	41.62	37.64	46.00	-4.38	-8.36	2.56	26.62	174.65	245.75
870.20	H	41.80	37.55	46.00	-4.20	-8.45	2.57	26.64	270.35	120.25



FCC 15.231

Precision Governors, LLC
Industrial Remote Transmitter
Model: 9557

Date: 09/05/2014
Lab: B
Tested By: Kyle Fujimoto

X-Axis - Vertical

Freq. (MHz)	Level (dBuV)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Ant. Height (cm)	Table Angle (deg)	Comments
433.92	72.80	V	100.82	-28.02	Peak	207.10	51.00	
433.92	66.48	V	80.82	-14.34	Avg	207.10	51.00	
867.84	41.69	V	80.82	-39.13	Peak	335.22	42.50	
867.84	35.37	V	60.82	-25.45	Avg	335.22	42.50	
1301.76	56.30	V	74.00	-17.70	Peak	200.00	135.00	
1301.76	49.98	V	54.00	-4.02	Avg	200.00	135.00	
1735.68	44.40	V	80.82	-36.42	Peak	150.00	135.00	
1735.68	38.08	V	60.82	-22.74	Avg	150.00	135.00	
2169.6	48.70	V	80.82	-32.12	Peak	175.00	200.00	
2169.6	42.38	V	60.82	-18.44	Avg	175.00	200.00	
2603.52	46.90	V	80.82	-33.92	Peak	125.00	85.00	
2603.52	40.58	V	60.82	-20.24	Avg	125.00	85.00	
3037.44	47.70	V	80.82	-33.12	Peak	125.00	135.00	
3037.44	41.38	V	60.82	-19.44	Avg	125.00	135.00	
3471.36	47.10	V	80.82	-33.72	Peak	125.00	135.00	
3471.36	40.78	V	60.82	-20.04	Avg	125.00	135.00	
3905.28	46.30	V	74.00	-27.70	Peak	135.00	125.00	
3905.28	39.98	V	54.00	-14.02	Avg	135.00	125.00	
4339.2	47.30	V	74.00	-26.70	Peak	135.00	135.00	
4339.2	40.98	V	54.00	-13.02	Avg	135.00	135.00	

FCC 15.231

Precision Governors, LLC
Industrial Remote Transmitter
Model: 9557

Date: 09/05/2014
Lab: B
Tested By: Kyle Fujimoto

X-Axis - Horizontal

Freq. (MHz)	Level (dBuV)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Ant. Height (cm)	Table Angle (deg)	Comments
433.92	84.77	H	100.82	-16.05	Peak	207.10	90.25	
433.92	78.45	H	80.82	-2.37	Avg	207.10	90.25	
867.84	45.67	H	80.82	-35.15	Peak	175.16	239.00	
867.84	39.35	H	60.82	-21.47	Avg	175.16	239.00	
1301.76	40.80	H	74.00	-33.20	Peak	100.00	265.00	
1301.76	34.48	H	54.00	-19.52	Avg	100.00	265.00	
1735.68	42.50	H	80.82	-38.32	Peak	200.00	90.00	
1735.68	36.18	H	60.82	-24.64	Avg	200.00	90.00	
2169.6	43.20	H	80.82	-37.62	Peak	100.00	135.00	
2169.6	36.88	H	60.82	-23.94	Avg	100.00	135.00	
2603.52	50.20	H	80.82	-30.62	Peak	175.00	355.00	
2603.52	43.88	H	60.82	-16.94	Avg	175.00	355.00	
3037.44	46.60	H	80.82	-34.22	Peak	100.00	325.00	
3037.44	40.28	H	60.82	-20.54	Avg	100.00	325.00	
3471.36	45.60	H	80.82	-35.22	Peak	115.00	135.00	
3471.36	39.28	H	60.82	-21.54	Avg	115.00	135.00	
3905.28	44.50	H	74.00	-29.50	Peak	100.00	80.00	
3905.28	38.18	H	54.00	-15.82	Avg	100.00	80.00	
4339.2	46.60	H	74.00	-27.40	Peak	105.00	80.00	
4339.2	40.28	H	54.00	-13.72	Avg	105.00	80.00	

FCC 15.231Precision Governors, LLC
Industrial Remote Transmitter
Model: 9557Date: 09/05/2014
Lab: B
Tested By: Kyle Fujimoto**Y-Axis - Vertical**

Freq. (MHz)	Level (dBuV)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Ant. Height (cm)	Table Angle (deg)	Comments
433.92	86.34	V	100.82	-14.48	Peak	111.28	232.75	
433.92	80.02	V	80.82	-0.80	Avg	111.28	232.75	
867.84	42.81	V	80.82	-38.01	Peak	111.10	296.25	
867.84	36.49	V	60.82	-24.33	Avg	111.10	296.25	
1301.76	39.60	V	74.00	-34.40	Peak	300.00	110.00	
1301.76	33.28	V	54.00	-20.72	Avg	300.00	110.00	
1735.68	43.50	V	80.82	-37.32	Peak	100.00	350.00	
1735.68	37.18	V	60.82	-23.64	Avg	100.00	350.00	
2169.6	43.70	V	80.82	-37.12	Peak	150.00	190.00	
2169.6	37.38	V	60.82	-23.44	Avg	150.00	190.00	
2603.52	46.10	V	80.82	-34.72	Peak	125.00	290.00	
2603.52	39.78	V	60.82	-21.04	Avg	125.00	290.00	
3037.44	46.10	V	80.82	-34.72	Peak	175.00	45.00	
3037.44	39.78	V	60.82	-21.04	Avg	175.00	45.00	
3471.36	46.30	V	80.82	-34.52	Peak	100.00	180.00	
3471.36	39.98	V	60.82	-20.84	Avg	100.00	180.00	
3905.28	46.98	V	74.00	-27.02	Peak	115.00	82.00	
3905.28	40.66	V	54.00	-13.34	Avg	115.00	82.00	
4339.2	49.83	V	74.00	-24.17	Peak	125.00	75.00	
4339.2	43.51	V	54.00	-10.49	Avg	125.00	75.00	

FCC 15.231

Precision Governors, LLC
Industrial Remote Transmitter
Model: 9557

Date: 09/05/2014
Lab: B
Tested By: Kyle Fujimoto

Y-Axis - Horizontal

Freq. (MHz)	Level (dBuV)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Ant. Height (cm)	Table Angle (deg)	Comments
433.92	68.48	H	100.82	-32.34	Peak	223.46	318.50	
433.92	62.16	H	80.82	-18.66	Avg	223.46	318.50	
867.84	41.74	H	80.82	-39.08	Peak	127.34	338.25	
867.84	35.42	H	60.82	-25.40	Avg	127.34	338.25	
1301.76	36.90	H	74.00	-37.10	Peak	100.00	0.00	
1301.76	30.58	H	54.00	-23.42	Avg	100.00	0.00	
1735.68	40.60	H	80.82	-40.22	Peak	100.00	200.00	
1735.68	34.28	H	60.82	-26.54	Avg	100.00	200.00	
2169.6	43.00	H	80.82	-37.82	Peak	200.00	225.00	
2169.6	36.68	H	60.82	-24.14	Avg	200.00	225.00	
2603.52	45.20	H	80.82	-35.62	Peak	225.00	115.00	
2603.52	38.88	H	60.82	-21.94	Avg	225.00	115.00	
3037.44	47.00	H	80.82	-33.82	Peak	100.00	190.00	
3037.44	40.68	H	60.82	-20.14	Avg	100.00	190.00	
3471.36	45.50	H	80.82	-35.32	Peak	125.00	170.00	
3471.36	39.18	H	60.82	-21.64	Avg	125.00	170.00	
3905.28	44.10	H	74.00	-29.90	Peak	100.00	200.00	
3905.28	37.78	H	54.00	-16.22	Avg	100.00	200.00	
4339.2	46.90	H	74.00	-27.10	Peak	110.00	270.00	
4339.2	40.58	H	54.00	-13.42	Avg	110.00	270.00	

FCC 15.231

Precision Governors, LLC
Industrial Remote Transmitter
Model: 9557

Date: 09/05/2014
Lab: B
Tested By: Kyle Fujimoto

Z-Axis - Vertical

Freq. (MHz)	Level (dBuV)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Ant. Height (cm)	Table Angle (deg)	Comments
433.92	77.25	V	100.82	-23.57	Peak	159.34	0.00	
433.92	70.93	V	80.82	-9.89	Avg	159.34	0.00	
867.84	42.18	V	80.82	-38.64	Peak	207.10	175.25	
867.84	35.86	V	60.82	-24.96	Avg	207.10	175.25	
1301.76	38.00	V	74.00	-36.00	Peak	180.00	200.00	
1301.76	31.68	V	54.00	-22.32	Avg	180.00	200.00	
1735.68	46.90	V	80.82	-33.92	Peak	125.00	120.00	
1735.68	40.58	V	60.82	-20.24	Avg	125.00	120.00	
2169.6	48.60	V	80.82	-32.22	Peak	100.00	90.00	
2169.6	42.28	V	60.82	-18.54	Avg	100.00	90.00	
2603.52	52.50	V	80.82	-28.32	Peak	125.00	45.00	
2603.52	46.18	V	60.82	-14.64	Avg	125.00	45.00	
3037.44	51.10	V	80.82	-29.72	Peak	100.00	90.00	
3037.44	44.78	V	60.82	-16.04	Avg	100.00	90.00	
3471.36	50.20	V	80.82	-30.62	Peak	115.00	95.00	
3471.36	43.88	V	60.82	-16.94	Avg	115.00	95.00	
3905.28	45.60	V	74.00	-28.40	Peak	100.00	180.00	
3905.28	39.28	V	54.00	-14.72	Avg	100.00	180.00	
4339.2	45.00	V	74.00	-29.00	Peak	200.00	180.00	
4339.2	38.68	V	54.00	-15.32	Avg	200.00	180.00	

FCC 15.231

Precision Governors, LLC
Industrial Remote Transmitter
Model: 9557

Date: 09/05/2014
Lab: B
Tested By: Kyle Fujimoto

Z-Axis - Horizontal

Freq. (MHz)	Level (dBuV)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Ant. Height (cm)	Table Angle (deg)	Comments
433.92	83.28	H	100.82	-17.54	Peak	207.40	91.00	
433.92	76.96	H	80.82	-3.86	Avg	207.40	91.00	
867.84	42.16	H	80.82	-38.66	Peak	143.04	114.50	
867.84	35.84	H	60.82	-24.98	Avg	143.04	114.50	
1301.76	41.30	H	74.00	-32.70	Peak	100.00	135.00	
1301.76	34.98	H	54.00	-19.02	Avg	100.00	135.00	
1735.68	46.60	H	80.82	-34.22	Peak	115.00	90.00	
1735.68	40.28	H	60.82	-20.54	Avg	115.00	90.00	
2169.6	46.70	H	80.82	-34.12	Peak	150.00	170.00	
2169.6	40.38	H	60.82	-20.44	Avg	150.00	170.00	
2603.52	42.90	H	80.82	-37.92	Peak	105.00	135.00	
2603.52	36.58	H	60.82	-24.24	Avg	105.00	135.00	
3037.44	45.00	H	80.82	-35.82	Peak	200.00	45.00	
3037.44	38.68	H	60.82	-22.14	Avg	200.00	45.00	
3471.36	46.90	H	80.82	-33.92	Peak	125.00	90.00	
3471.36	40.58	H	60.82	-20.24	Avg	125.00	90.00	
3905.28								No Emission
3905.28								Detected
4339.2	48.90	H	74.00	-25.10	Peak	105.00	15.00	
4339.2	42.58	H	54.00	-11.42	Avg	105.00	15.00	

FCC 15.231 and FCC Class BPrecision Governors, LLC
Industrial Remote Transmitter
Model: 9557

Dates: 09/05/2014 and 09/12/2014

Labs: B and D

Tested By: Kyle Fujimoto


Digital Portion and Non-Harmonic Emissions of the Transmitter
Vertical and Horizontal Polarizations

Freq. (MHz)	Level (dBuV)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Ant. Height (m)	Table Angle (deg)	Comments
								No Emissions Detected from 10 kHz to 30 MHz for the Digital Portion for both the Vertical and Horizontal Polarizations.
								No Emissions Detected from 10 kHz to 30 MHz for the Non-Harmonic Emissions from the Tx for the EUT for both the Vertical and Horizontal Polarizations.
								No Emissions Detected from 1 GHz to 5 GHz for the Digital Portion for both the Vertical and Horizontal Polarizations.
								No Emissions Detected from 1 GHz to 5 GHz for the Non-Harmonic Emissions from the Tx for the EUT for both the Vertical and Horizontal Polarizations.
								Investigated in the X, Y, and Z-Axis



-20 dB BANDWIDTH

DATA SHEET

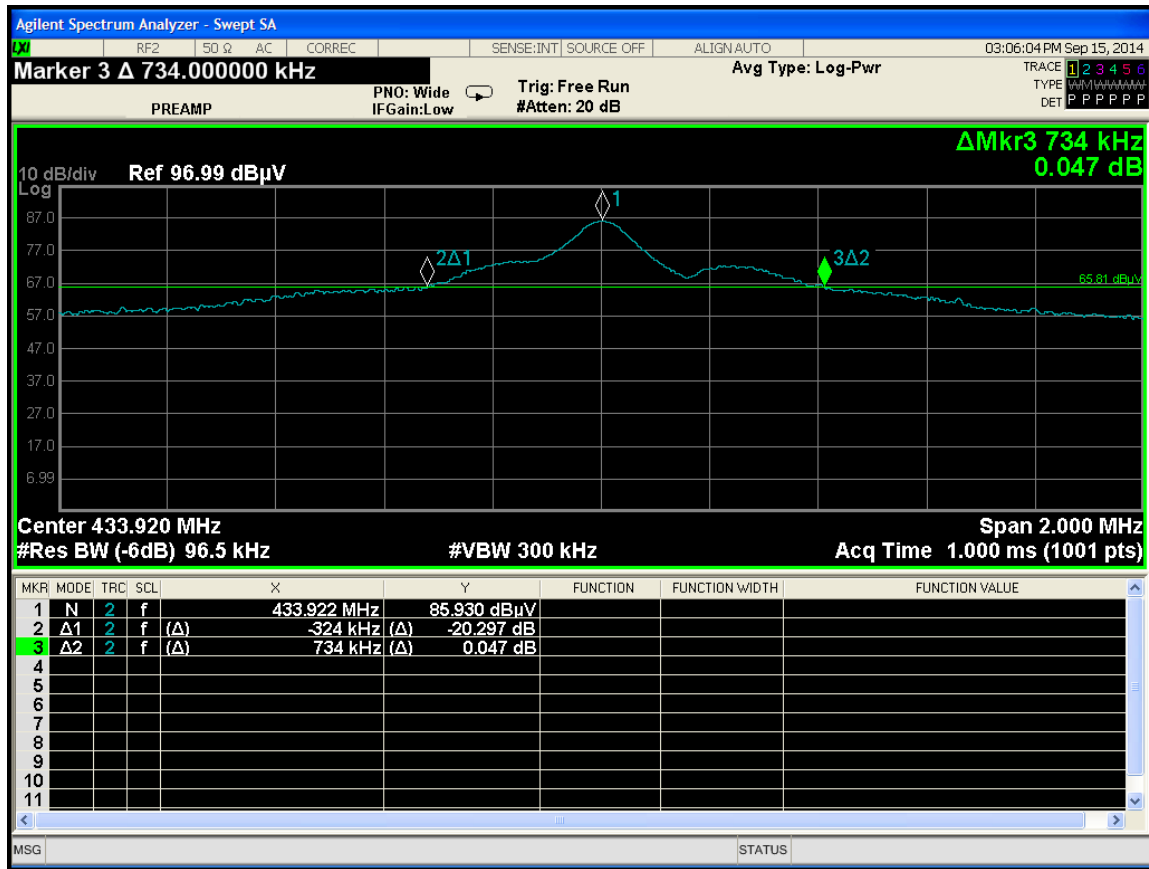

-20 dB of the Fundamental – 433.92 MHz