

Test Plot 1#:**DUT: A2211; Type: Smart watch; Serial: 26CG-1;**

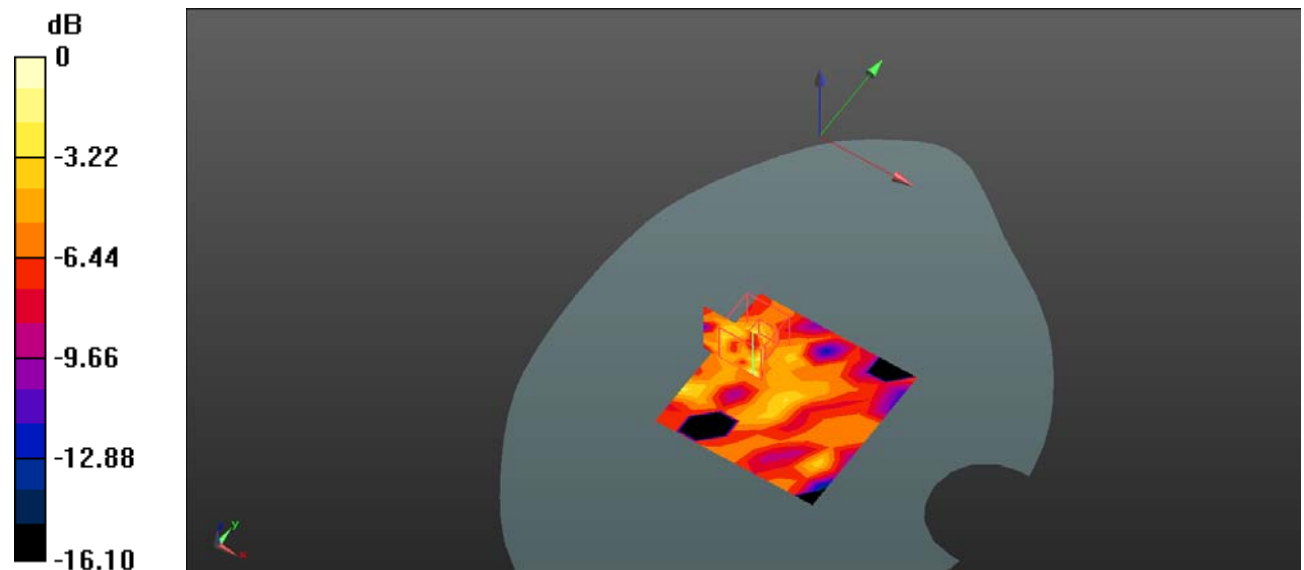
Communication System: UID 0, Bluetooth(GFSK) (0); Frequency: 2441 MHz; Duty Cycle: 1:1.3031

Medium parameters used: $f = 2441 \text{ MHz}$; $\sigma = 1.862 \text{ S/m}$; $\epsilon_r = 38.154$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3701; ConvF(7.25, 7.25, 7.25) @ 2441 MHz; Calibrated: 2023/03/15
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Face up/Bluetooth BDR(GFSK) Mid/Area Scan (9x9x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$ Maximum value of SAR (measured) = 0.00233 W/kg **Face up/Bluetooth BDR(GFSK) Mid/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$ Reference Value = 1.295 V/m ; Power Drift = -0.10 dB Peak SAR (extrapolated) = 0.00480 W/kg **SAR(1 g) = 0.00153 W/kg ; SAR(10 g) = 0.00121 W/kg** Maximum value of SAR (measured) = 0.00389 W/kg  $0 \text{ dB} = 0.00389 \text{ W/kg} = -24.10 \text{ dBW/kg}$

Test Plot 2#:**DUT: A2211; Type: Smart watch; Serial: 26CG-1;**

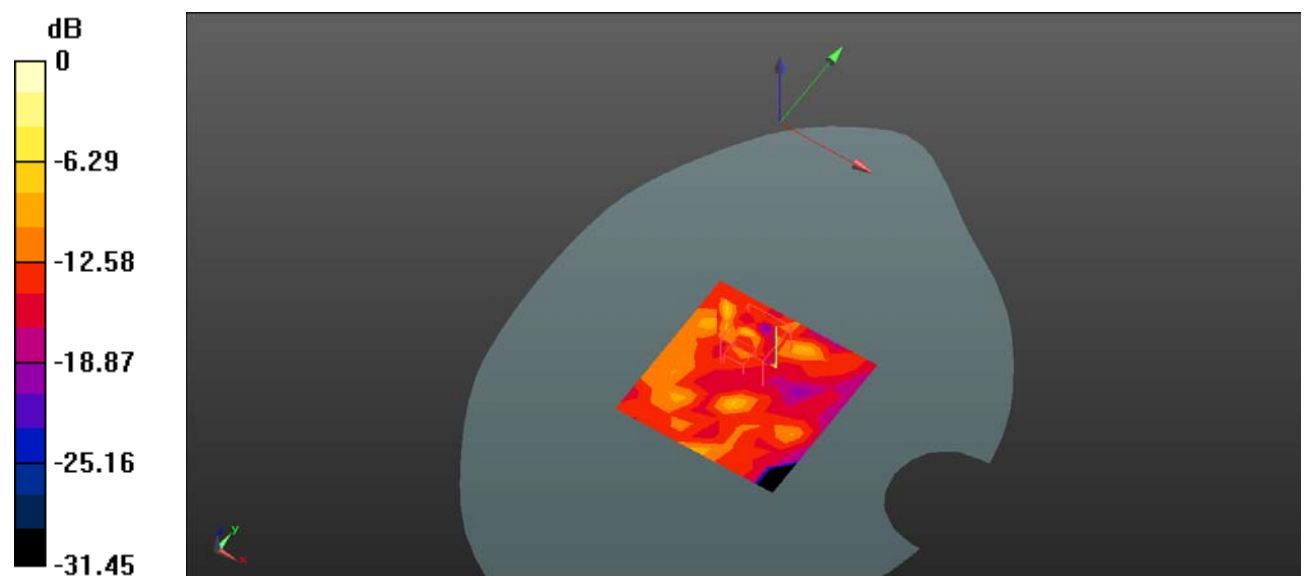
Communication System: UID 0, Bluetooth(GFSK) (0); Frequency: 2441 MHz; Duty Cycle: 1:1.3031

Medium parameters used: $f = 2441 \text{ MHz}$; $\sigma = 1.862 \text{ S/m}$; $\epsilon_r = 38.154$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3701; ConvF(7.25, 7.25, 7.25) @ 2441 MHz; Calibrated: 2023/03/15
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Limbs-Worn/Bluetooth BDR(GFSK) Mid/Area Scan (9x9x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$ Maximum value of SAR (measured) = 0.00848 W/kg **Limbs-Worn/Bluetooth BDR(GFSK) Mid/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$ Reference Value = 0 V/m ; Power Drift = 0.11 dB Peak SAR (extrapolated) = 0.0670 W/kg **SAR(1 g) = 0.00632 W/kg ; SAR(10 g) = 0.00285 W/kg** Maximum value of SAR (measured) = 0.0408 W/kg  $0 \text{ dB} = 0.0408 \text{ W/kg} = -13.89 \text{ dBW/kg}$