

TEST REPORT

Application No.: KSCR2509002164AT
FCC ID: 2AC8UA2550
Applicant: Anhui Huami Information Technology Co., Ltd.
Address of Applicant: Room 401-1, Building H8, Hefei Innovation Industrial Park Phase II, No.2800, Chuangxin Road, High-tech Zone, Hefei City, China (Anhui) Pilot Free Trade Zone
Manufacturer: Anhui Huami Information Technology Co., Ltd.
Address of Manufacturer: Room 401-1, Building H8, Hefei Innovation Industrial Park Phase II, No.2800, Chuangxin Road, High-tech Zone, Hefei City, China (Anhui) Pilot Free Trade Zone
Equipment Under Test (EUT):
EUT Name: Smart Watch
Model No.: A2550
Trade Mark: AMAZFIT
Standard(s) : 47 CFR Part 15, Subpart C 15.247
Date of Receipt: 2025-09-26
Date of Test: 2025-12-10 to 2025-12-17
Date of Issue: 2025-12-19

Test Result:	Pass*
---------------------	--------------

* In the configuration tested, the EUT complied with the standards specified above.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein.

Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.



Revision Record			
Version	Description	Date	Remark
00	Original	2025-12-19	/

Authorized for issue by:			
Tested By		Damon Zhou	
		Damon_Zhou/Project Engineer	
Approved By		Terry Hou	
		Terry Hou /Reviewer	

2 Test Summary

Radio Spectrum Technical Requirement					
Item	Standard	Method	Requirement	Result	Test Lab*
Antenna Requirement	47 CFR Part 15, Subpart C 15.247	N/A	47 CFR Part 15, Subpart C 15.203 & 15.247(b)(4)	Pass	N/A

Radio Spectrum Matter Part					
Item	Standard	Method	Requirement	Result	Test Lab*
Radiated Emissions which fall in the restricted bands		ANSI C63.10 (2020) Section 6.10.5	47 CFR Part 15, Subpart C 15.205 & 15.209	Pass	B
Radiated Spurious Emissions Below 1GHz		ANSI C63.10 (2020) Section 6.4,6.5	47 CFR Part 15, Subpart C 15.205 & 15.209	Pass	B
Radiated Spurious Emissions Above 1GHz		ANSI C63.10 (2020) Section 6.6	47 CFR Part 15, Subpart C 15.205 & 15.209	Pass	A
Conducted Average Output Power		ANSI C63.10 (2020) Section 11.9.2	47 CFR Part 15, Subpart C 15.247(b)(3)	Pass	A
Minimum 6dB Bandwidth		ANSI C63.10 (2020) Section 11.8.1	47 CFR Part 15, Subpart C 15.247a(2)	Pass	A
Power Spectrum Density		ANSI C63.10 (2020) Section 11.10.3	47 CFR Part 15, Subpart C 15.247(e)	Pass	A
Conducted Band Edges Measurement		ANSI C63.10 (2020) Section 6.10.4	47 CFR Part 15, Subpart C 15.247(d)	Pass	A
Conducted Spurious Emissions		ANSI C63.10 (2020) Section 11.11	47 CFR Part 15, Subpart C 15.247(d)	Pass	A

3 Contents

	Page
1 COVER PAGE	1
2 Test Summary	3
3 Contents.....	4
4 General Information.....	5
4.1 Details of E.U.T.	5
4.2 Power level setting using in test:.....	5
4.3 Description of Support Units	5
4.4 Measurement Uncertainty	6
4.5 Test Location.....	7
4.6 Test Facility	8
4.7 Deviation from Standards.....	8
4.8 Abnormalities from Standard Conditions.....	8
5 Equipment List	9
6 Radio Spectrum Technical Requirement.....	11
6.1 Antenna Requirement	11
7 Radio Spectrum Matter Test Results	12
7.1 Radiated Emissions which fall in the restricted bands	12
7.2 Radiated Spurious Emissions Below 1GHz	31
7.3 Radiated Spurious Emissions Above 1GHz.....	35
7.4 Conducted Average Output Power	49
7.5 Minimum 6dB Bandwidth	51
7.6 Power Spectrum Density.....	52
7.7 Conducted Band Edges Measurement	53
7.8 Conducted Spurious Emissions	54
8 Test Setup Photo	55
9 EUT Constructional Details (EUT Photos).....	55
10 Appendix.....	56

4 General Information

4.1 Details of E.U.T.

Power supply:	DC 5V Rechargeable Li-ion Battery Model: PL682734 Rated Capacity: 870mAh Nominal Energy: 3.367Wh Limit Charge: DC4.45V Nominal Voltage: DC 3.87V
Operation Frequency:	2402MHz to 2480MHz
Modulation Type:	GFSK
Number of Channels:	40
Channel Spacing:	2MHz
Antenna Type:	Slot Antenna
Antenna Gain:	-4.49dBi (Provided by the manufacturer)

4.2 Power level setting using in test:

Channel	BLE	BLE
	1M	2M
0	46	46
19	46	46
39	46	46

4.3 Description of Support Units

Description	Manufacturer	Model No.	Serial No.
Notebook	Lenovo	K27	/
AC Adapter	JIUZHOU	DYS05100CS-E	/

4.4 Measurement Uncertainty

Lab A:

No.	Item	Measurement Uncertainty
1	Radio Frequency	8.4×10^{-8}
2	Timeout	2s
3	Duty Cycle	0.37%
4	Occupied Bandwidth	3%
5	RF Conducted Power	0.6dB
6	RF Power Density	2.9dB
7	Conducted Spurious Emissions	0.75dB
8	RF Radiated Power	5.2dB (Below 1GHz)
		5.9dB (Above 1GHz)
9	Radiated Spurious Emission Test	4.2dB (Below 30MHz)
		4.5dB (30MHz-1GHz)
		5.1dB (1GHz-18GHz)
		5.4dB (Above 18GHz)
10	Temperature Test	1°C
11	Humidity Test	3%
12	Supply Voltages	1.5%
13	Time	3%

Note: The measurement uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

Lab B:

No.	Item	Measurement Uncertainty
1	Radio Frequency	$\pm 7.25 \times 10^{-8}$
2	Duty cycle	$\pm 0.37\%$
3	Occupied Bandwidth	$\pm 3\%$
4	Conduction emission	$\pm 3.0\text{dB}$ (150kHz to 30MHz)
5	RF conducted power	$\pm 0.75\text{dB}$
6	RF power density	$\pm 2.84\text{dB}$
7	Conducted Spurious emissions	$\pm 0.75\text{dB}$
8	RF Radiated power	$\pm 2.6\text{dB}$ (30MHz-1GHz)
		$\pm 2.7\text{dB}$ (1GHz-18GHz)
9	Temperature test	$\pm 1^\circ\text{C}$
10	Humidity test	$\pm 3\%$
11	Supply voltages	$\pm 1\%$
12	Time	$\pm 3\%$

Remark:

The U_{lab} (lab Uncertainty) is less than $U_{\text{CISPR/ETSI}}$ (CISPR/ETSI Uncertainty), so the test results
– compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;
– non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.

4.5 Test Location

Lab A:

Compliance Certification Services (Kunshan) Inc.

No.10 Weiye Rd, Innovation park, Eco&Tec, Development Zone, Kunshan City, Jiangsu, China.

Tel: +86 512 5735 5888 Fax: +86 512 5737 0818

Lab B:

Conducted Emissions at AC Power Line (150kHz-30MHz); Radiated Emissions; Radiated Emissions which fall in the restricted bands test at:

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone

Note:

1. SGS is not responsible for wrong test results due to incorrect information (e.g., max. internal working frequency, antenna gain, cable loss, etc) is provided by the applicant. (If applicable).
2. SGS is not responsible for the authenticity, integrity and the validity of the conclusion based on results of the data provided by applicant. (If applicable).
3. Sample source: sent by customer.

4.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

Lab A:

• **A2LA (Certificate No. 2541.01)**

Compliance Certification Services (Kunshan) Inc. is accredited by the American Association for Laboratory Accreditation (A2LA).

• **FCC (Designation Number: CN1172)**

Compliance Certification Services (Kunshan) Inc. has been recognized as an accredited testing laboratory.

• **ISED (CAB Identifier: CN0072)**

Compliance Certification Services (Kunshan) Inc. has been recognized by Innovation, Science and Economic Development Canada (ISED) as an accredited testing laboratory.

Company Number: 2324E

• **VCCI (Member No: 1938)**

The 3m and 10m Semi-anechoic chamber and Shielded Room of Compliance Certification Services (Kunshan) Inc. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-20134, R-11600, C-11707, T-11499, G-10216 respectively.

Lab B:

• **A2LA (Certificate No. 6336.01)**

SGS-CSTC STANDARDS TECHNICAL SERVICES (SUZHOU) CO., LTD. is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 6336.01.

• **Innovation, Science and Economic Development Canada**

SGS-CSTC STANDARDS TECHNICAL SERVICES (SUZHOU) CO., LTD. has been recognized by ISED as an accredited testing laboratory.

CAB identifier: CN0120.

IC#: 27594.

• **FCC –Designation Number: CN1312**

SGS-CSTC STANDARDS TECHNICAL SERVICES (SUZHOU) CO., LTD. has been recognized as an accredited testing laboratory.

Designation Number: CN1312.

Test Firm Registration Number: 717327

4.7 Deviation from Standards

None

4.8 Abnormalities from Standard Conditions

None

5 Equipment List

Lab A:

Item	Equipment	Manufacturer	Model	Inventory No	Cal Date	Cal. Due Date
RF Conducted Test						
1	Spectrum Analyzer	Keysight	N9020A	KUS1911E004-2	07/09/2025	07/08/2026
2	Spectrum Analyzer	Keysight	N9020A	KUS2001M001-2	07/09/2025	07/08/2026
3	Spectrum Analyzer	Keysight	N9030B	KSEM021-1	01/15/2025	01/14/2026
4	Signal Generator	R&S	SMBV100B	KSEM032	02/19/2025	02/18/2026
5	Signal Generator	R&S	SMW200A	KSEM020-1	07/09/2025	07/08/2026
6	Signal Generator	Agilent	N5182A	KUS2001M001-1	07/08/2025	07/07/2026
7	Signal Generator	Agilent	E8257C	KS301066	07/22/2025	07/21/2026
8	Radio Communication Test Station	Anritsu	MT8000A	KSEM001-1	07/09/2025	07/08/2026
9	Radio Communication Analyzer	Anritsu	MT8821C	KSEM002-1	02/19/2025	02/18/2026
10	Universal Radio Communication Tester	R&S	CMW500	KUS1911E004-1	07/08/2025	07/07/2026
11	Switcher	TST	FY562	KUS2001M001-4	01/15/2025	01/14/2026
12	Conducted Test Cable	Thermax	RF01-RF04	CZ301111- CZ301120	01/14/2025	01/13/2026
13	Temp. / Humidity Chamber	TERCHY	MHK-120AK	KS301190	07/15/2025	07/14/2026
14	Temperature & Humidity Recorder	Renke Control	RS-WS-N01-6J	KSEM024-5	02/26/2025	02/25/2026
15	Software	BST	TST-PASS	/	NCR	NCR

Lab B:

Item	Equipment	Manufacturer	Model	Inventory No	Cal Date	Cal. Due Date
RF Radiated Test						
1	Semi-Anechoic Chamber	Brilliant-emc	N/A	SUWI-04-02-01	6/3/2023	6/2/2026
2	Signal Analyzer	ROHDE&SCHWARZ	FSW43	SUWI-01-02-04	1/20/2025	1/19/2026
3	Signal Analyzer	KEYSIGHT	N9020A	SUWI-01-02-09	11/21/2025	11/20/2026
4	Test receiver	ROHDE&SCHWARZ	ESR7	SUWI-01-10-01	1/15/2025	1/14/2026
5	Signal Generator	ROHDE&SCHWARZ	SMW100A	SUWI-01-18-01	1/16/2025	1/15/2026
6	Receiving antenna	SCHWRZBECK MESS- ELEKTRONIK	VULB 9168	SUWI-01-11-04	9/10/2025	9/9/2027
7	Receiving antenna	SCHWRZBECK MESS- ELEKTRONIK	BBHA 9120D	SUWI-01-11-02	5/7/2025	5/6/2027
8	Receiving antenna	SCHWRZBECK MESS- ELEKTRONIK	BBHA 9170	SUWI-01-11-03	5/7/2025	5/6/2027
9	Active Loop Antenna	SCHWRZBECK MESS- ELEKTRONIK	FMZB 1519B	SUWI-01-21-01	5/7/2025	5/6/2027
10	Amplifier	Tonscend	TAP9K3G40	SUWI-01-14-01	1/16/2025	1/15/2026
11	Amplifier	Tonscend	TAP01018050	SUWI-01-14-02	1/16/2025	1/15/2026
12	Amplifier	Tonscend	TAP18040048	SUWI-01-14-03	1/20/2025	1/19/2026
13	Wideband Radio Communication Tester	Anritsu	MT8820C	SUWI-01-26-01	11/21/2025	11/20/2026
14	Wideband Radio Communication Tester	Anritsu	MT8821C	SUWI-01-26-03	8/25/2025	8/24/2026
15	Wideband Radio Communication Tester	ROHDE&SCHWARZ	CMW500	SUWI-01-16-09	8/26/2025	8/25/2026
16	Radio Communication Analyzer	StarPoint	SP9500E	SUWI-01-28-02	2025/11/21	2026/11/20
17	Signal Generator	ROHDE&SCHWARZ	SMB100A	SUWI-01-08-01	1/16/2025	1/15/2026
18	DC Power Supply	HYELEC	HY3005B	SUWI-01-18-01	1/15/2025	1/14/2026
19	Temperature and humidity meter	MingGao	TH101B	SUWI-01-01-05	2/13/2025	2/12/2026
20	Measurement Software	Tonscend	JS32-RE 4.0.0.0	SUWI-02-09-06	NCR	NCR
21	RF Control unit	Tonscend	JS0806-1	SUWI-02-20-01	NCR	NCR
22	RFCables	Tonscend	NA	SUWI-01-03-02	1/16/2025	1/15/2026

6 Radio Spectrum Technical Requirement

6.1 Antenna Requirement

6.1.1 Test Requirement:

47 CFR Part 15, Subpart C 15.203 & 15.247(b)(4)

6.1.2 Conclusion

Standard Requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:

The antenna is Slot Antenna on the main PCB and no consideration of replacement. The best case gain of the antenna is -4.49 dBi.

Antenna location: Refer to internal photo.

7 Radio Spectrum Matter Test Results

7.1 Radiated Emissions which fall in the restricted bands

Test Requirement 47 CFR Part 15, Subpart C 15.205 & 15.209

Test Method: ANSI C63.10 (2020) Section 6.10.5

Measurement Distance: 3M

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

7.1.1 E.U.T. Operation

Operating Environment:

Temperature: 24.0 °C


Humidity: 45.8 % RH

Atmospheric Pressure: 1010 mbar

7.1.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	02	TX mode(1Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.
Final test	03	TX mode(2Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.

7.1.3 Test Setup Diagram

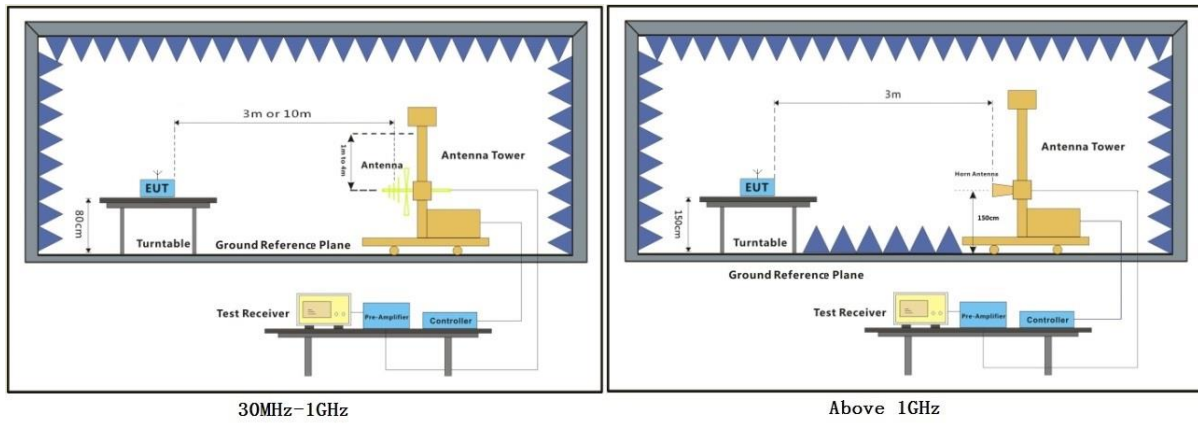

7.1.4 Measurement Procedure and Data

- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.

Remark 1: $\text{Level} = \text{Read Level} + \text{Cable Loss} + \text{Antenna Factor} - \text{Preamp Factor}$


Remark 2: For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.

Remark 3: The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 3MHz for Peak detection (PK) and Average detection (AV) at frequency above 1GHz.

Remark 4: For fundamental and harmonic signal measurement, the resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is $\geq 1/T$ (Duty cycle $< 98\%$) or 10Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz.




BLE_1M_TX_CH_00_Horizontal_Peak

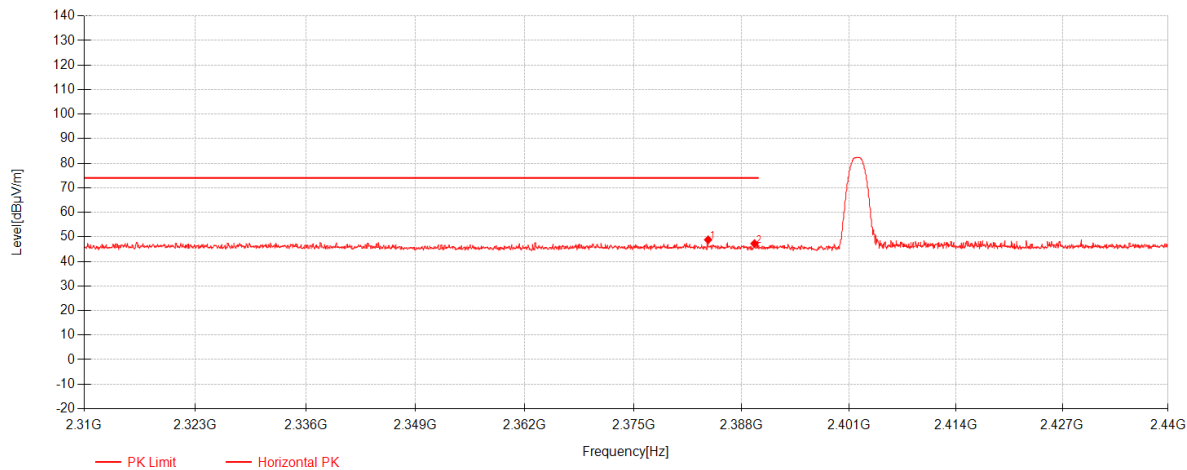

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2383.97	45.35	26.99	-23.51	48.83	74.00	25.17	Horizontal
2	2389.56	43.79	27.00	-23.52	47.27	74.00	26.73	Horizontal




BLE_2M_TX_CH_00_Horizontal_Peak

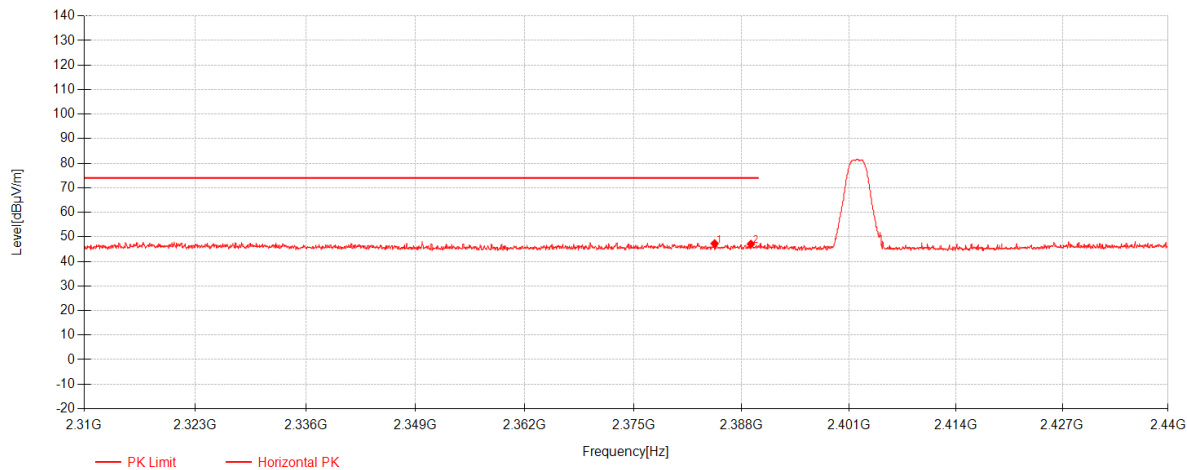

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2384.75	43.82	26.99	-23.51	47.30	74.00	26.70	Horizontal
2	2389.1267	43.63	27.00	-23.52	47.11	74.00	26.89	Horizontal




BLE_1M_TX_CH_00_Horizontal_Average

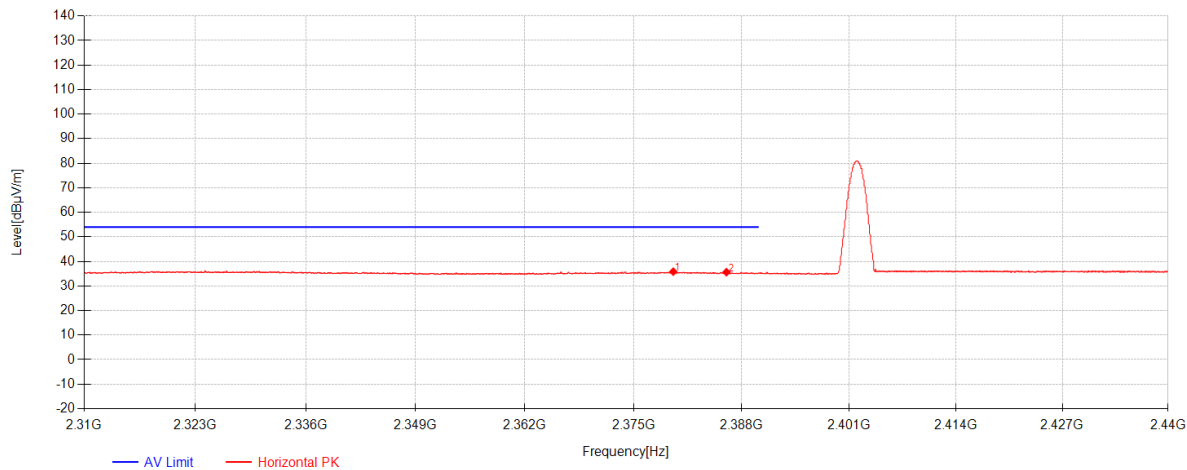

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2379.7775	32.35	26.98	-23.50	35.83	54.00	18.17	Horizontal
2	2386.18	32.14	27.00	-23.51	35.62	54.00	18.38	Horizontal


BLE_2M_TX_CH_00_Horizontal_Average

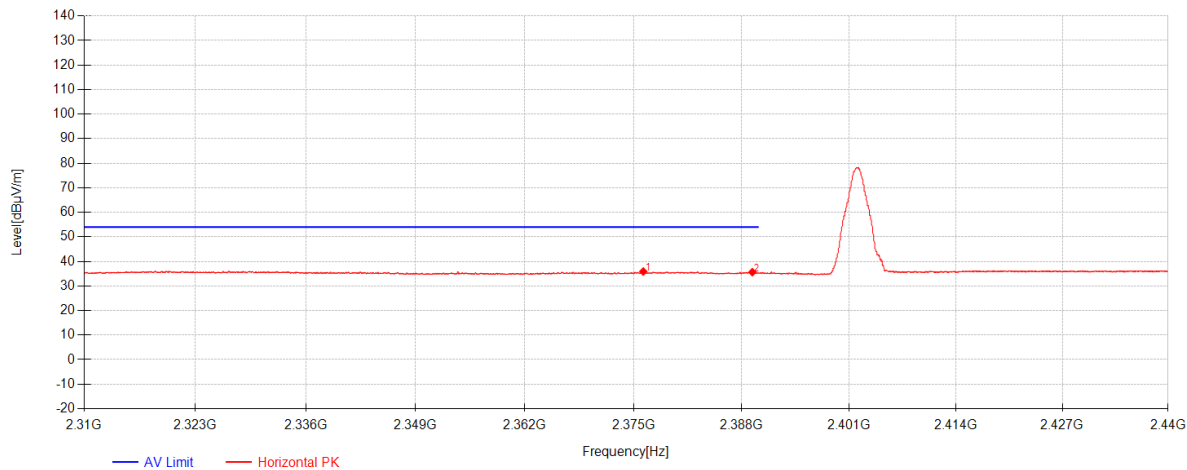

Data List								
NO.	Frequency [MHz]	Reading [dBµV]	AF [dB/m]	Factor [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Polarity
1	2376.17	32.41	26.98	-23.50	35.89	54.00	18.11	Horizontal
2	2389.3	32.14	27.00	-23.52	35.62	54.00	18.38	Horizontal




BLE_1M_TX_CH_00_Vertical_Peak

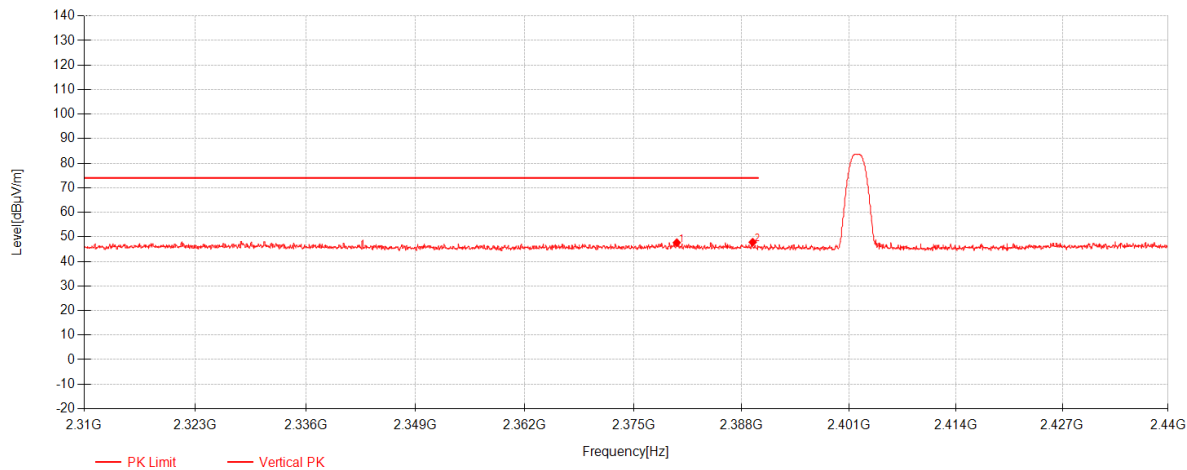

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2380.2	44.18	26.98	-23.50	47.66	74.00	26.34	Vertical
2	2389.3433	44.35	27.00	-23.52	47.83	74.00	26.17	Vertical




BLE_2M_TX_CH_00_Vertical_Peak

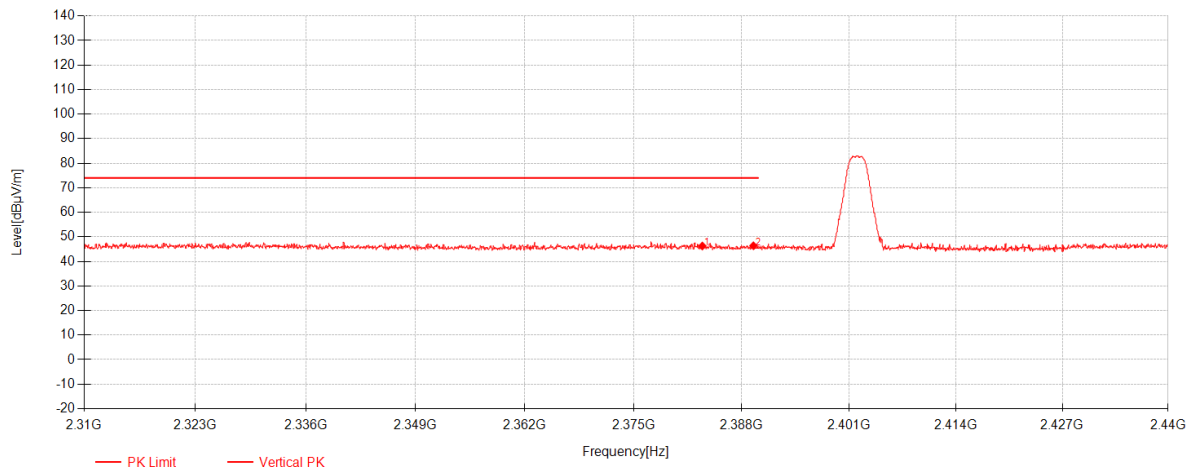

Data List								
NO.	Frequency [MHz]	Reading [dBµV]	AF [dB/m]	Factor [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Polarity
1	2383.2767	42.81	26.99	-23.51	46.29	74.00	27.71	Vertical
2	2389.43	42.90	27.00	-23.52	46.38	74.00	27.62	Vertical




BLE_1M_TX_CH_00_Vertical_Average

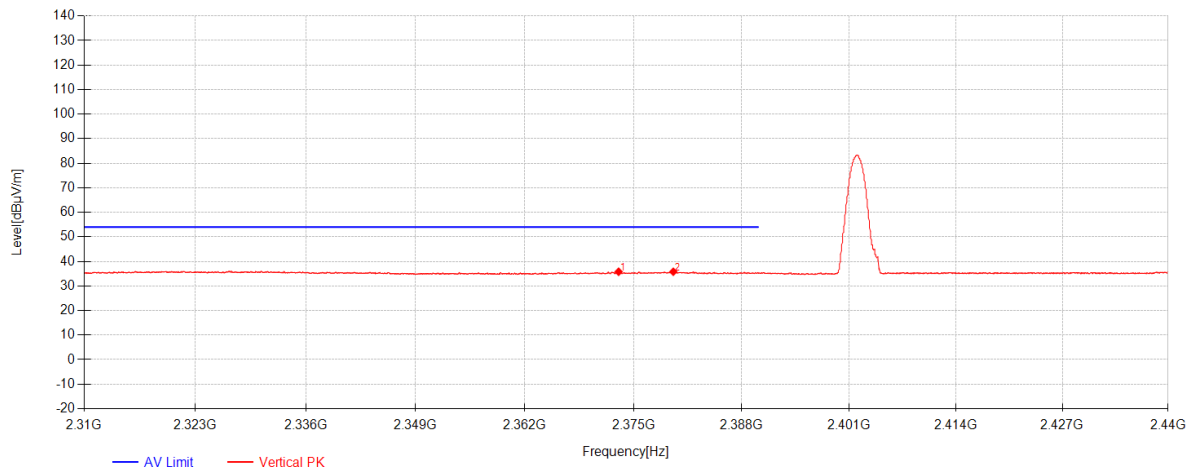


Data List								
NO.	Frequency [MHz]	Reading [dBµV]	AF [dB/m]	Factor [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Polarity
1	2373.2125	32.31	26.97	-23.50	35.79	54.00	18.21	Vertical
2	2379.7775	32.32	26.98	-23.50	35.80	54.00	18.20	Vertical

BLE_2M_TX_CH_00_Vertical_Average

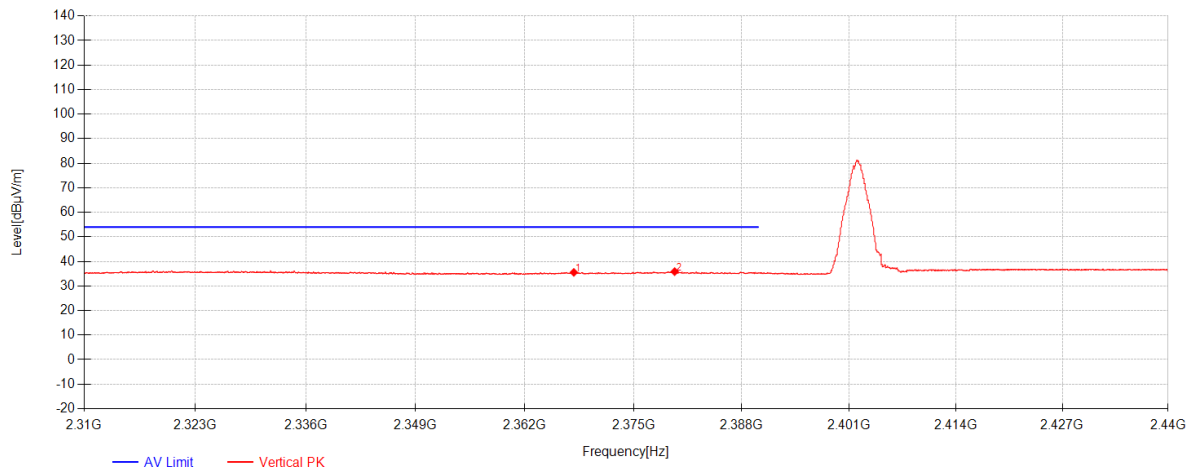

Data List								
NO.	Frequency [MHz]	Reading [dBµV]	AF [dB/m]	Factor [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Polarity
1	2367.85	32.06	26.96	-23.49	35.53	54.00	18.47	Vertical
2	2379.94	32.36	26.98	-23.50	35.84	54.00	18.16	Vertical


BLE_1M_TX_CH_39_Horizontal_Peak

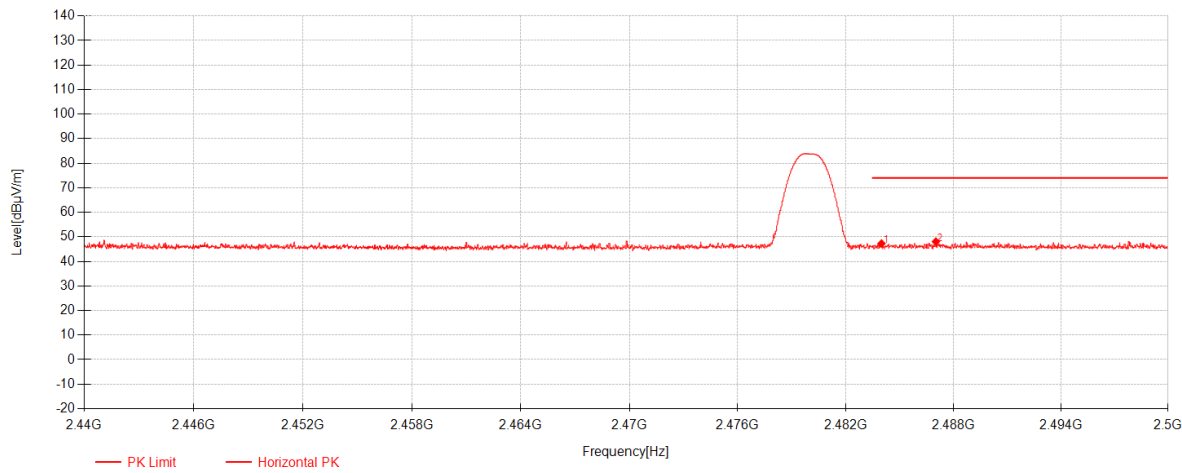

Data List								
NO.	Frequency [MHz]	Reading [dBµV]	AF [dB/m]	Factor [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Polarity
1	2483.995	43.29	27.17	-23.18	47.28	74.00	26.72	Horizontal
2	2487.025	44.04	27.18	-23.16	48.05	74.00	25.95	Horizontal




BLE_2M_TX_CH_39_Horizontal_Peak

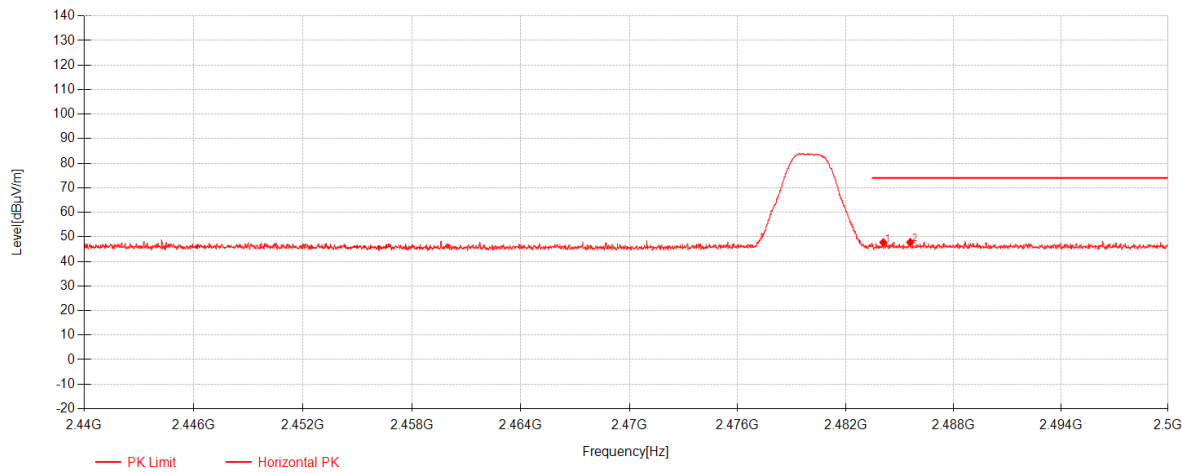

Data List								
NO.	Frequency [MHz]	Reading [dBµV]	AF [dB/m]	Factor [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Polarity
1	2484.1	43.76	27.17	-23.18	47.75	74.00	26.25	Horizontal
2	2485.6	43.82	27.17	-23.17	47.82	74.00	26.18	Horizontal




BLE_1M_TX_CH_39_Horizontal_Average

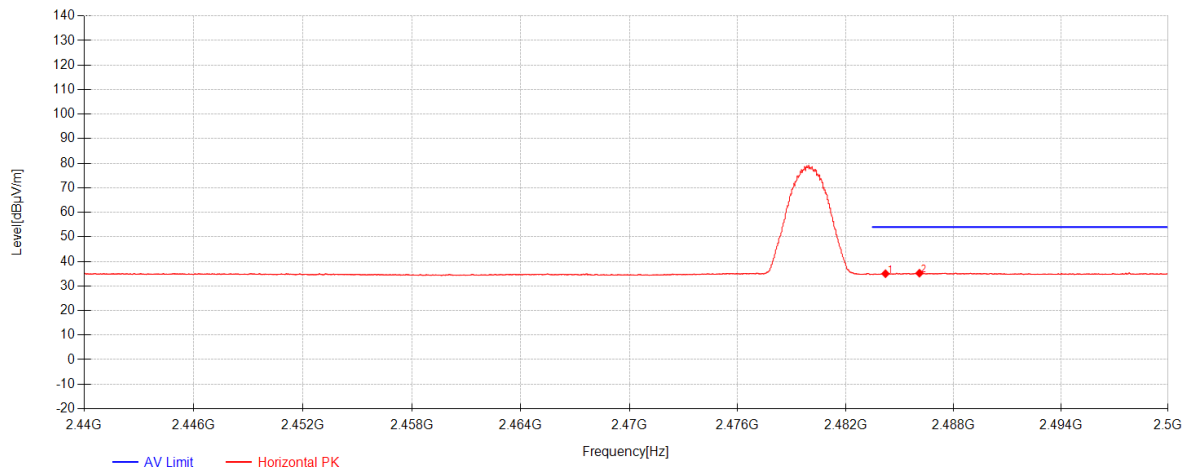

Data List								
NO.	Frequency [MHz]	Reading [dBµV]	AF [dB/m]	Factor [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Polarity
1	2484.22	31.00	27.17	-23.18	35.00	54.00	19.00	Horizontal
2	2486.11	31.19	27.17	-23.17	35.20	54.00	18.80	Horizontal




BLE_2M_TX_CH_39_Horizontal_Average

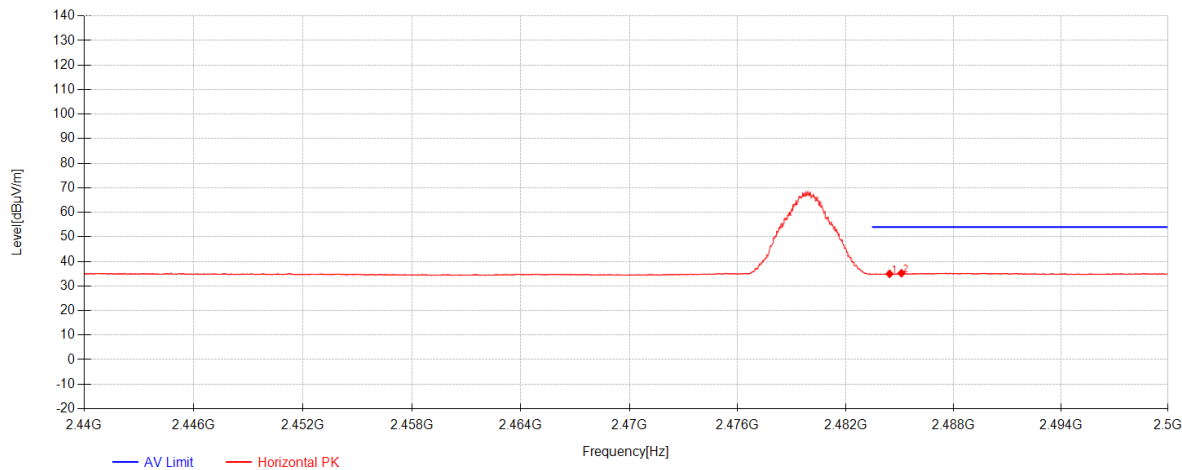

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2484.445	30.94	27.17	-23.18	34.94	54.00	19.06	Horizontal
2	2485.105	31.19	27.17	-23.17	35.19	54.00	18.81	Horizontal




BLE_1M_TX_CH_39_Vertical_Peak

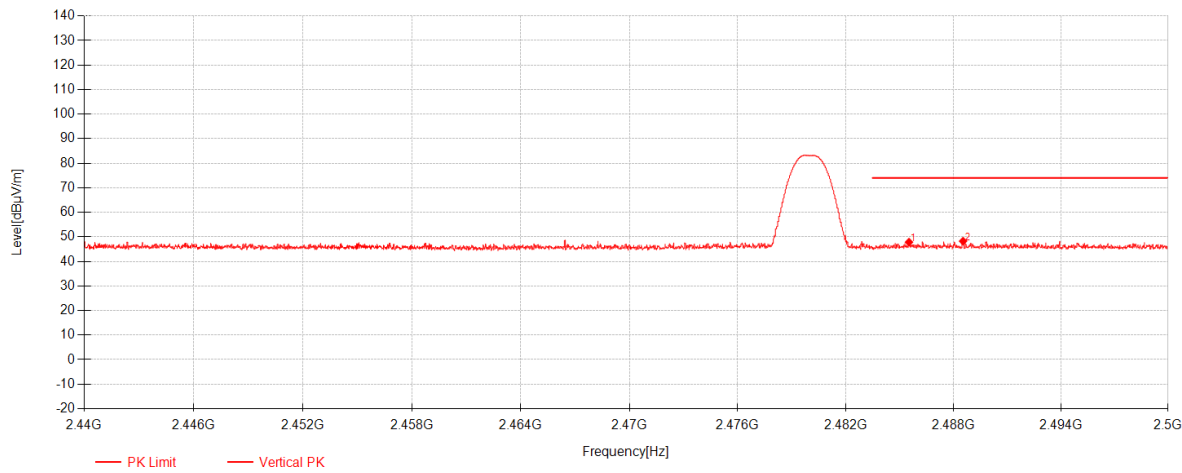

Data List								
NO.	Frequency [MHz]	Reading [dBµV]	AF [dB/m]	Factor [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Polarity
1	2485.525	43.85	27.17	-23.17	47.85	74.00	26.15	Vertical
2	2488.54	44.23	27.18	-23.16	48.25	74.00	25.75	Vertical




BLE_2M_TX_CH_39_Vertical_Peak

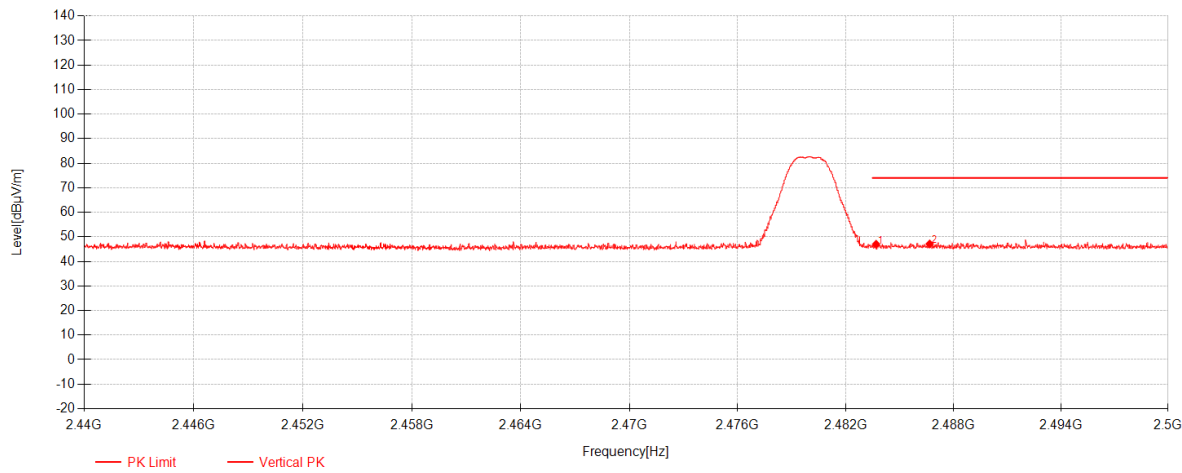

Data List								
NO.	Frequency [MHz]	Reading [dBµV]	AF [dB/m]	Factor [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Polarity
1	2483.695	43.04	27.17	-23.18	47.03	74.00	26.97	Vertical
2	2486.68	43.12	27.18	-23.17	47.13	74.00	26.87	Vertical




BLE_1M_TX_CH_39_Veritical_Average

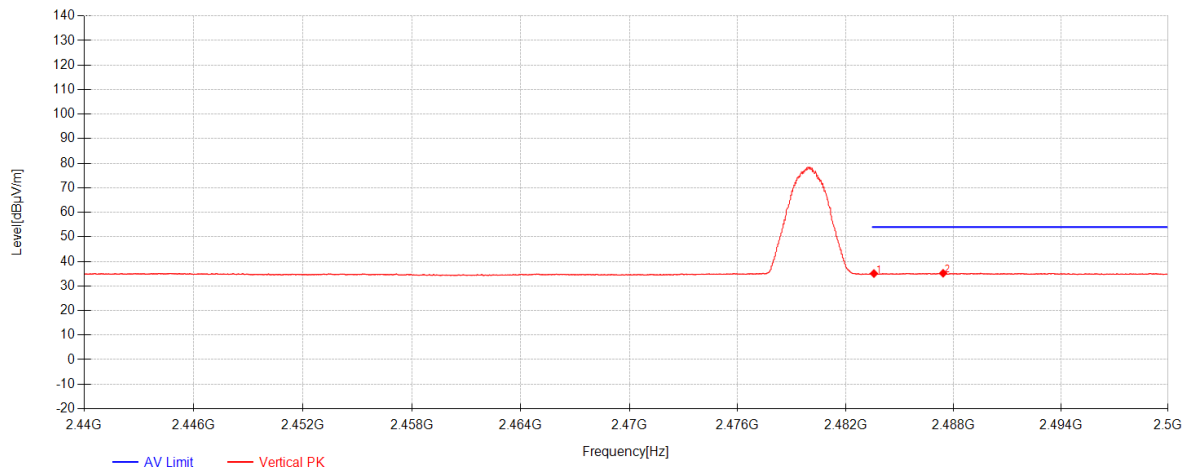

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2483.575	31.08	27.17	-23.18	35.07	54.00	18.93	Vertical
2	2487.43	31.17	27.18	-23.16	35.18	54.00	18.82	Vertical



BLE_2M_TX_CH_39_Veritical_Average

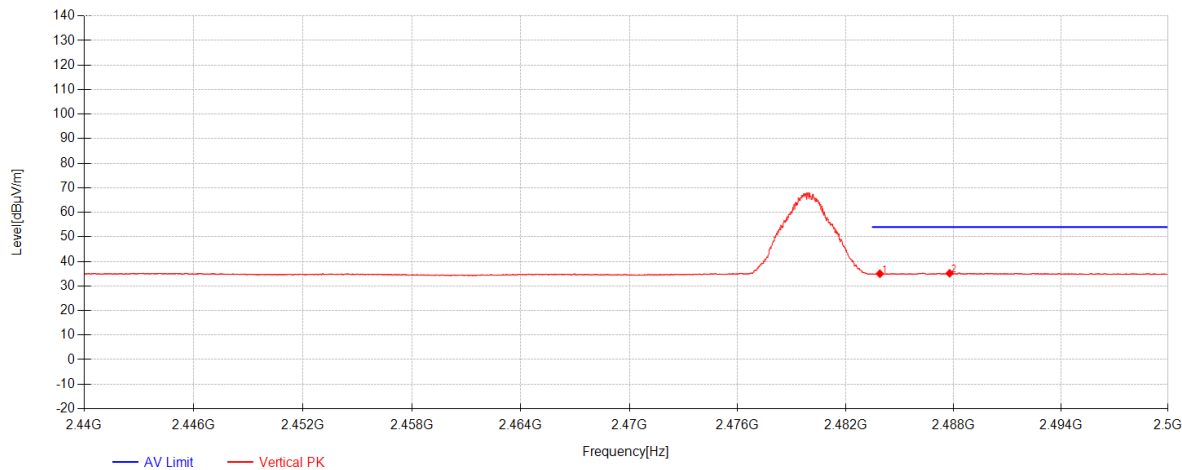

Data List								
NO.	Frequency [MHz]	Reading [dBµV]	AF [dB/m]	Factor [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Polarity
1	2483.905	31.00	27.17	-23.18	34.99	54.00	19.01	Vertical
2	2487.79	31.14	27.18	-23.16	35.16	54.00	18.84	Vertical

7.2 Radiated Spurious Emissions Below 1GHz

Test Requirement 47 CFR Part 15, Subpart C 15.205 & 15.209

Test Method: ANSI C63.10 (2020) Section 6.4,6.5

Measurement Distance: 3M

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
960-1000	500	3

7.2.1 E.U.T. Operation

Operating Environment:

Temperature: 24.0 °C


Humidity: 34.7 % RH

Atmospheric Pressure: 1010 mbar

7.2.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	02	TX mode(1Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.

7.2.3 Test Setup Diagram

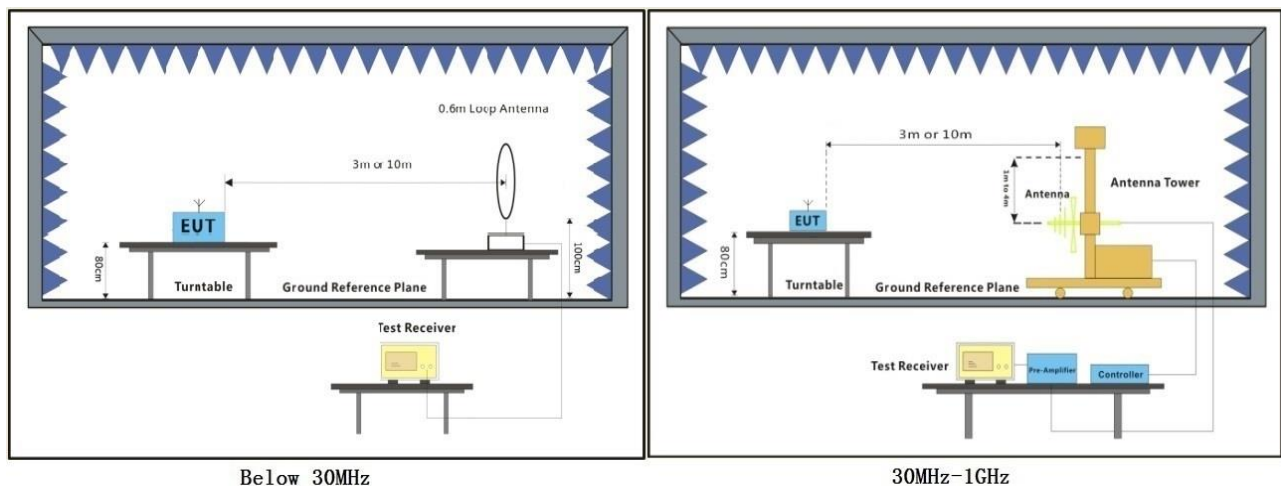


7.2.4 Measurement Procedure and Data

- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using quasi-peak method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- i. Repeat above procedures until all frequencies measured was complete.

Remark:

1. $\text{Level} = \text{Read Level} + \text{Cable Loss} + \text{Antenna Factor} - \text{Preamp Factor}$
2. Scan from 9kHz to 30MHz, the disturbance below 30MHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.


BLE_1M_TX_CH_19_Horizontal

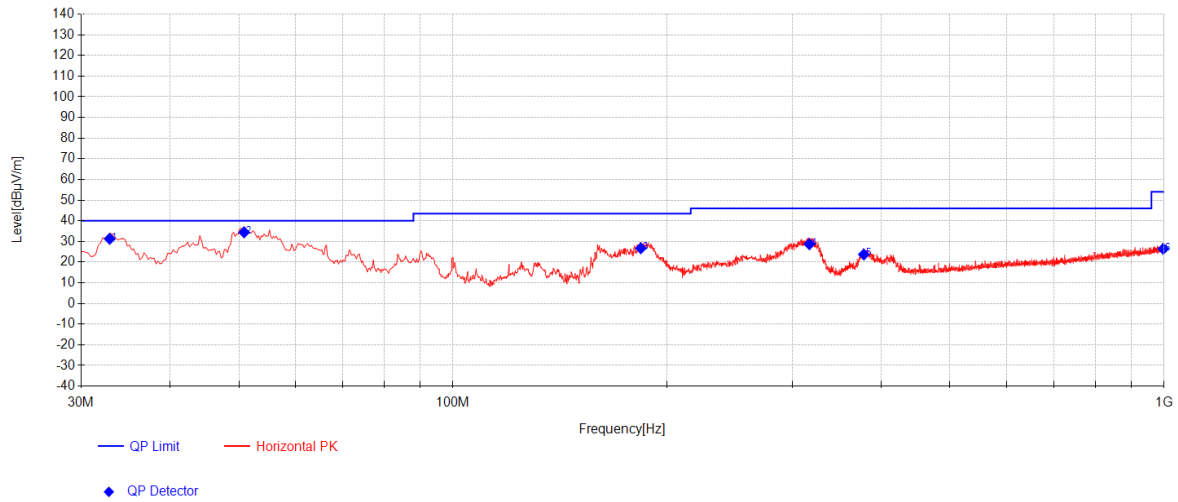

Final Data List

NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]	Height [cm]	Angle [°]	Polarity
1	32.91	52.6	12.67	-33.98	31.29	40.00	8.71	174	197	Horizontal
2	50.855	54.71	13.40	-33.68	34.43	40.00	5.57	155	22	Horizontal
3	183.745	48.55	10.53	-32.36	26.72	43.50	16.78	169	185	Horizontal
4	317.12	46.91	13.31	-31.54	28.68	46.00	17.32	125	197	Horizontal
5	378.23	39.66	15.15	-31.13	23.68	46.00	22.32	142	156	Horizontal
6	997.3325	29.77	24.48	-27.83	26.42	54.00	27.58	163	197	Horizontal

BLE_1M_TX_CH_19_Vertical

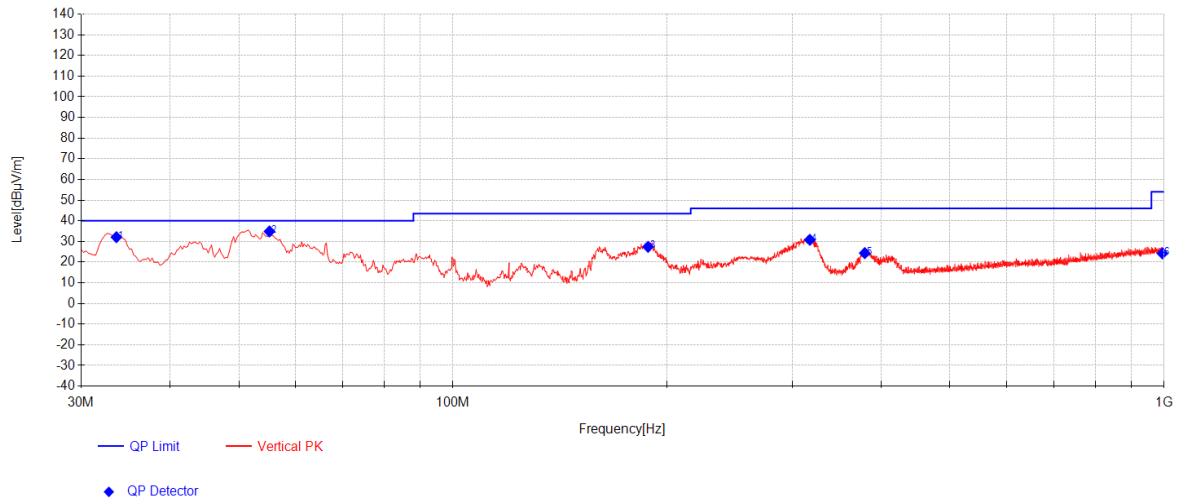

Final Data List

NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]	Height [cm]	Angle [°]	Polarity
1	33.6375	53.33	12.72	-33.97	32.08	40.00	7.92	155	339	Vertical
2	55.22	55.6	12.87	-33.62	34.85	40.00	5.15	124	94	Vertical
3	188.11	49.4	10.34	-32.34	27.40	43.50	16.10	171	209	Vertical
4	317.605	49.01	13.33	-31.54	30.80	46.00	15.20	193	197	Vertical
5	379.4425	40.3	15.18	-31.12	24.36	46.00	21.64	152	147	Vertical
6	994.665	27.62	24.46	-27.86	24.22	54.00	29.78	150	125	Vertical

7.3 Radiated Spurious Emissions Above 1GHz

Test Requirement 47 CFR Part 15, Subpart C 15.205 & 15.209

Test Method: ANSI C63.10 (2020) Section 6.6

Measurement Distance: 3M

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
Above 1000	500	3

7.3.1 E.U.T. Operation

Operating Environment:

Temperature: 24.0 °C


Humidity: 34.7 % RH

Atmospheric Pressure: 1010 mbar

7.3.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	02	TX mode(1Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.
Final test	03	TX mode(2Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.

7.3.3 Test Setup Diagram

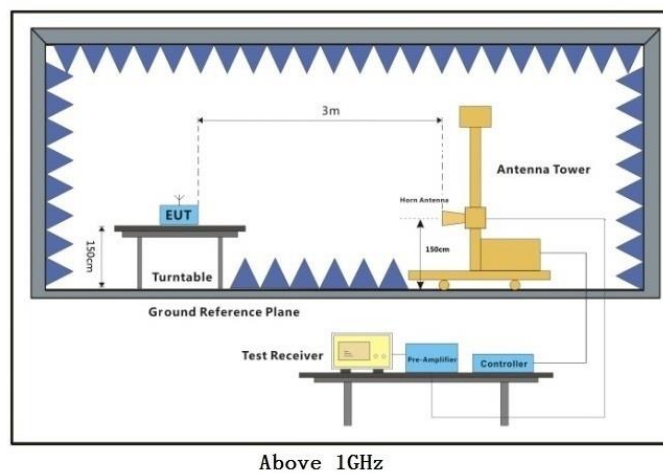


7.3.4 Measurement Procedure and Data

- a. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak or average method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- i. Repeat above procedures until all frequencies measured was complete.

Remark:


1. $\text{Level} = \text{Read Level} + \text{Cable Loss} + \text{Antenna Factor} - \text{Preamp Factor}$
2. Scan from 1GHz to 25GHz, the disturbance above 18GHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.
3. As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 3MHz for Peak detection (PK) and Average detection (AV) at frequency above 1GHz.
- 5: For fundamental and harmonic signal measurement, the resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is $\geq 1/T$ (Duty cycle $< 98\%$) or 10Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz.

BLE_1M_TX_CH_00_Horizontal

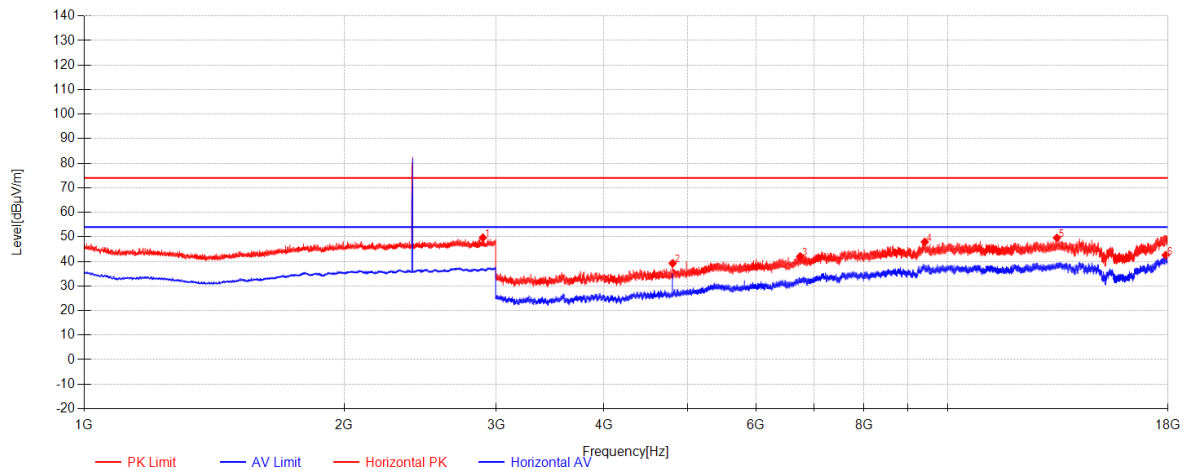


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2895.6667	44.75	27.91	-23.00	49.66	74.00	24.34	Horizontal
2	4803.75	56.45	30.77	-48.01	39.21	74.00	34.79	Horizontal
3	6748.875	53.64	35.10	-46.72	42.02	74.00	31.98	Horizontal
4	9409.5	52.95	37.97	-42.99	47.94	74.00	26.06	Horizontal
5	13382.25	49.37	39.37	-39.16	49.59	74.00	24.41	Horizontal
6	17889.375	36.57	44.14	-38.15	42.55	54.00	11.45	Horizontal

BLE_2M_TX_CH_00_Horizontal

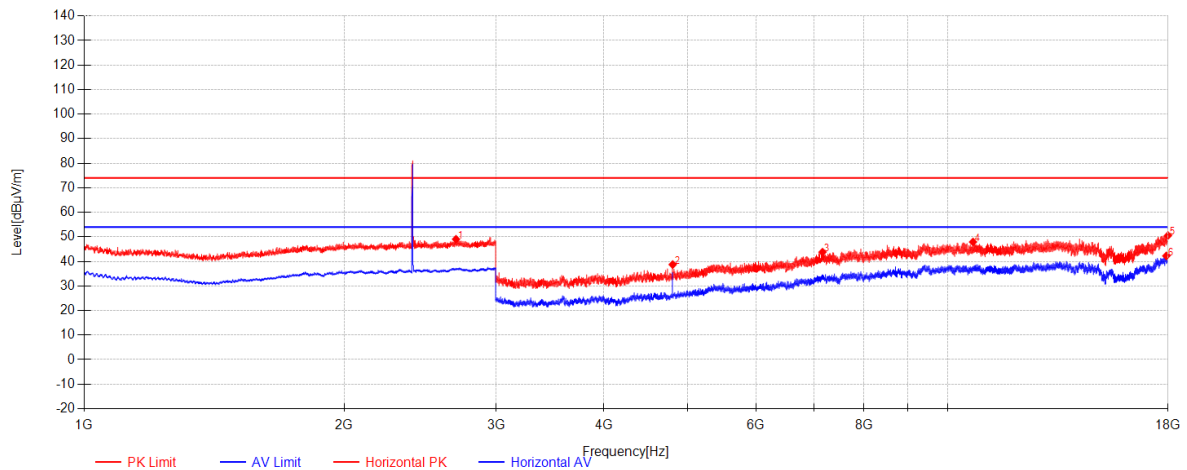


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2695.6667	44.47	27.55	-22.99	49.03	74.00	24.97	Horizontal
2	4803.75	55.96	30.77	-48.01	38.72	74.00	35.28	Horizontal
3	7163.25	54.06	35.79	-46.06	43.79	74.00	30.21	Horizontal
4	10700.625	49.64	39.29	-41.01	47.92	74.00	26.08	Horizontal
5	17997.375	44.63	44.78	-38.88	50.53	74.00	23.47	Horizontal
6	17918.25	36.22	44.31	-38.29	42.24	54.00	11.76	Horizontal

BLE_1M_TX_CH_00_Vertical

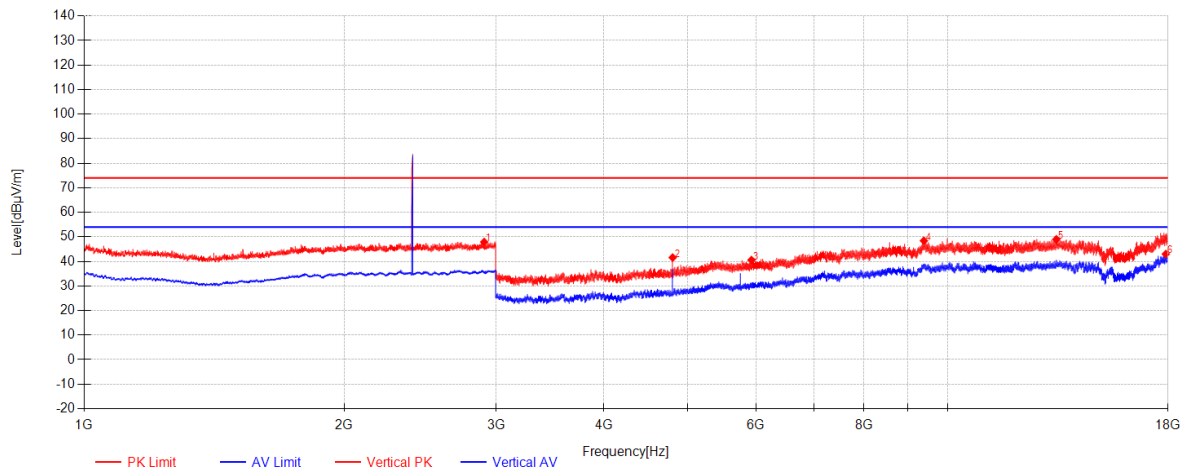


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2906	42.95	27.93	-22.96	47.92	74.00	26.08	Vertical
2	4803.375	58.82	30.77	-48.01	41.58	74.00	32.42	Vertical
3	5926.5	55.02	32.77	-47.24	40.55	74.00	33.45	Vertical
4	9386.625	53.51	37.94	-43.03	48.42	74.00	25.58	Vertical
5	13362.75	48.82	39.34	-39.14	49.02	74.00	24.98	Vertical
6	17892	36.98	44.15	-38.15	42.98	54.00	11.02	Vertical

BLE_2M_TX_CH_00_Vertical

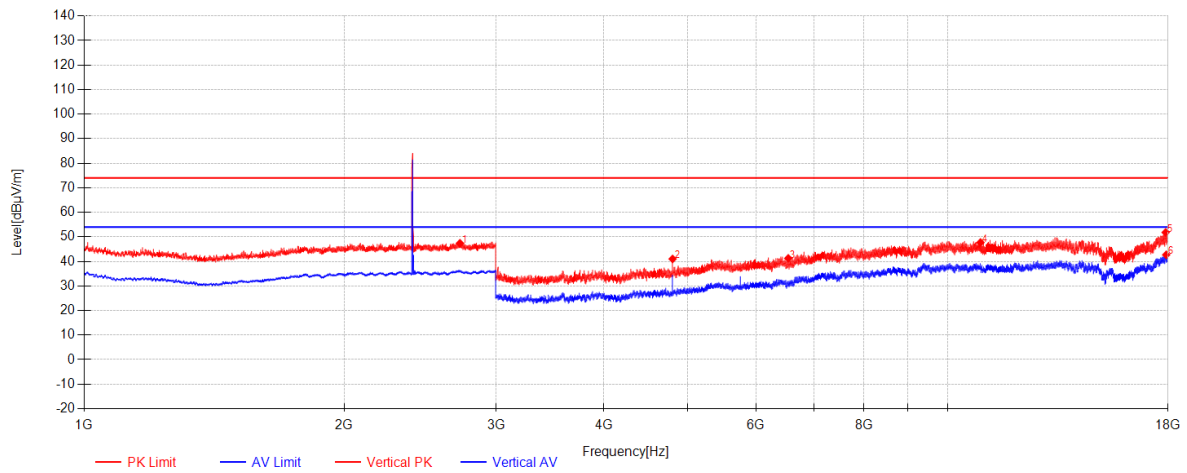


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2724	42.82	27.60	-23.04	47.39	74.00	26.61	Vertical
2	4802.625	58.25	30.77	-48.01	41.01	74.00	32.99	Vertical
3	6537.375	53.50	34.76	-47.01	41.25	74.00	32.75	Vertical
4	10915.875	48.37	39.44	-40.12	47.69	74.00	26.31	Vertical
5	17885.25	45.86	44.11	-38.16	51.82	74.00	22.18	Vertical
6	17912.625	36.66	44.28	-38.24	42.69	54.00	11.31	Vertical

BLE_1M_TX_CH_19_Horizontal

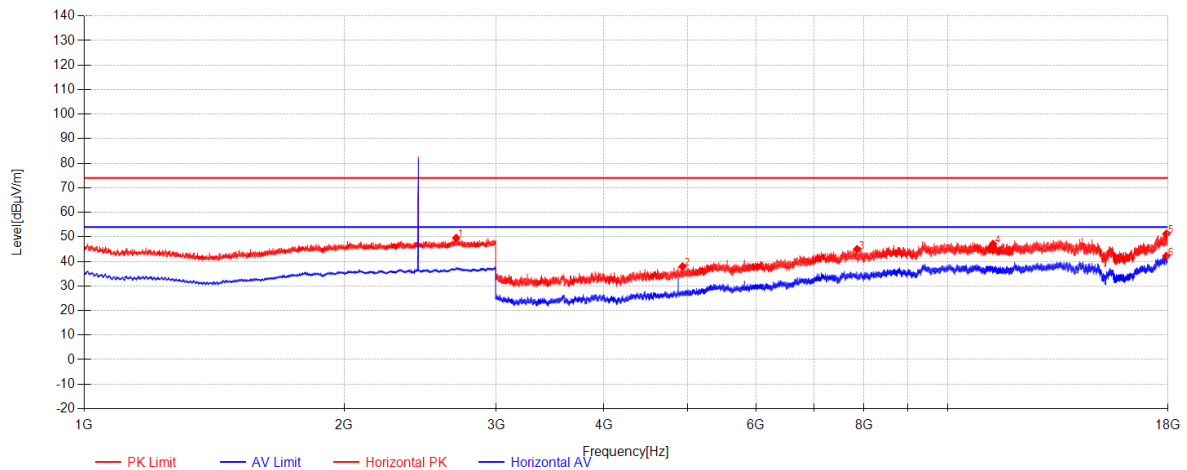


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2697	44.96	27.55	-22.98	49.53	74.00	24.47	Horizontal
2	4932	54.87	31.05	-48.02	37.90	74.00	36.10	Horizontal
3	7855.5	53.85	36.33	-45.21	44.97	74.00	29.03	Horizontal
4	11287.875	48.08	39.47	-40.45	47.11	74.00	26.89	Horizontal
5	17919.375	45.21	44.32	-38.30	51.23	74.00	22.77	Horizontal
6	17916	36.18	44.30	-38.27	42.21	54.00	11.79	Horizontal

BLE_2M_TX_CH_19_Horizontal

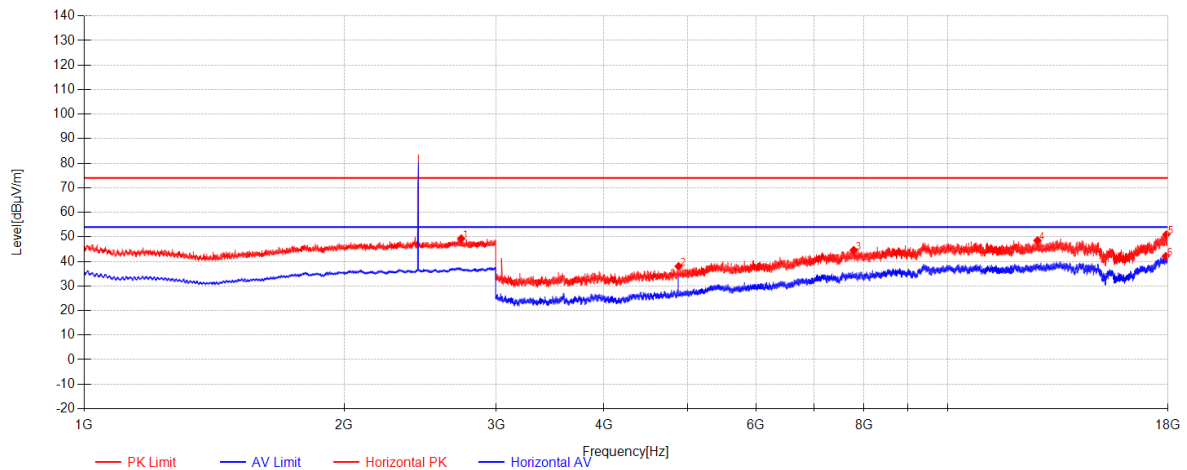


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2733.3333	44.73	27.62	-23.07	49.28	74.00	24.72	Horizontal
2	4880.25	55.06	30.94	-48.03	37.97	74.00	36.03	Horizontal
3	7784.625	53.17	36.34	-44.96	44.56	74.00	29.44	Horizontal
4	12707.625	48.79	38.98	-39.27	48.49	74.00	25.51	Horizontal
5	17916.375	44.87	44.30	-38.27	50.90	74.00	23.10	Horizontal
6	17887.125	36.12	44.12	-38.16	42.09	54.00	11.91	Horizontal

BLE_1M_TX_CH_19_Vetical

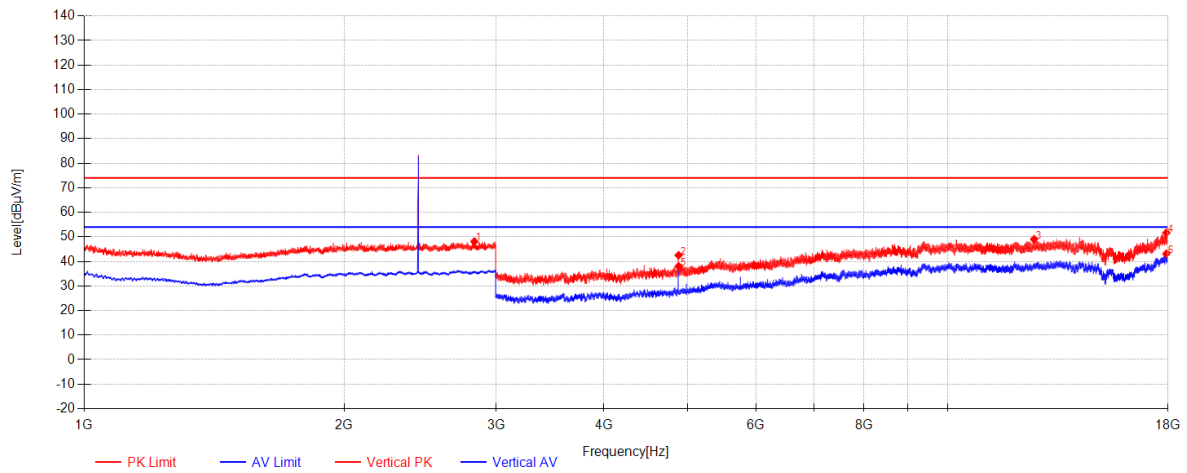


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2831	43.50	27.80	-23.19	48.11	74.00	25.89	Vertical
2	4880.25	59.59	30.94	-48.03	42.50	74.00	31.50	Vertical
3	12591.75	49.09	39.04	-39.06	49.07	74.00	24.93	Vertical
4	17919.75	45.65	44.32	-38.30	51.67	74.00	22.33	Vertical
5	4880.25	55.08	30.94	-48.03	37.99	54.00	16.01	Vertical
6	17920.125	37.12	44.32	-38.30	43.14	54.00	10.86	Vertical

BLE_2M_TX_CH_19_Vertical

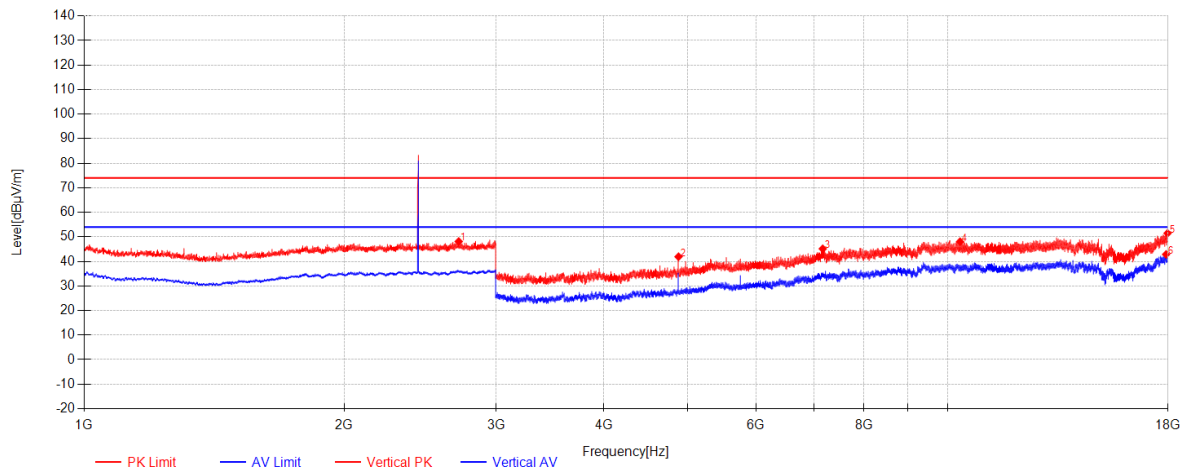


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2715	43.53	27.59	-23.01	48.11	74.00	25.89	Vertical
2	4879.125	59.01	30.93	-48.03	41.92	74.00	32.08	Vertical
3	7167.375	55.42	35.80	-46.08	45.14	74.00	28.86	Vertical
4	10336.5	50.17	39.04	-41.18	48.02	74.00	25.98	Vertical
5	17976.375	45.53	44.66	-38.72	51.47	74.00	22.53	Vertical
6	17905.875	36.81	44.24	-38.19	42.85	54.00	11.15	Vertical

BLE_1M_TX_CH_39_Horizontal

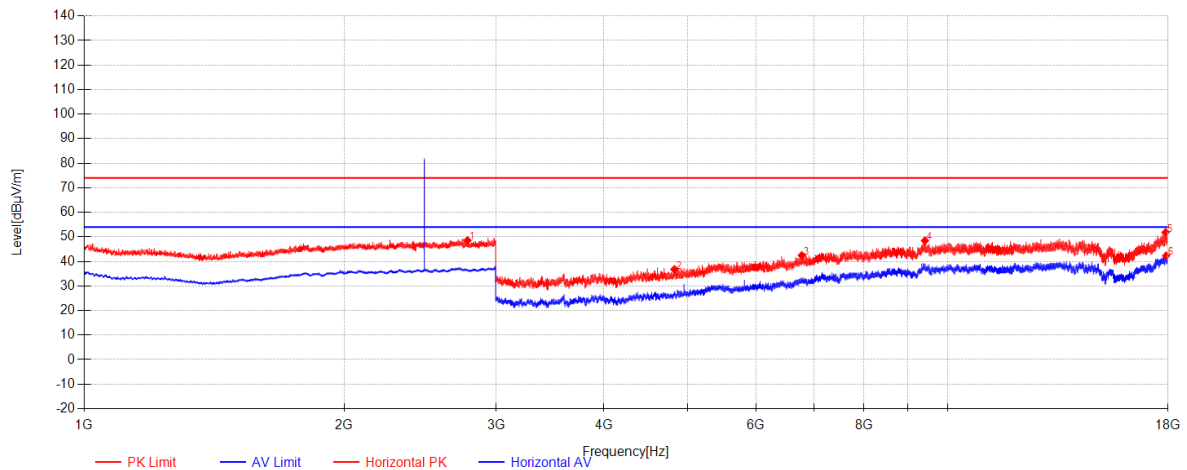


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2779.3333	44.05	27.70	-23.21	48.54	74.00	25.46	Horizontal
2	4826.25	53.96	30.82	-48.02	36.76	74.00	37.24	Horizontal
3	6778.875	54.11	35.15	-46.82	42.44	74.00	31.56	Horizontal
4	9414	53.44	37.98	-42.95	48.46	74.00	25.54	Horizontal
5	17882.625	45.89	44.10	-38.16	51.83	74.00	22.17	Horizontal
6	17911.125	36.31	44.27	-38.23	42.34	54.00	11.66	Horizontal

BLE_2M_TX_CH_39_Horizontal

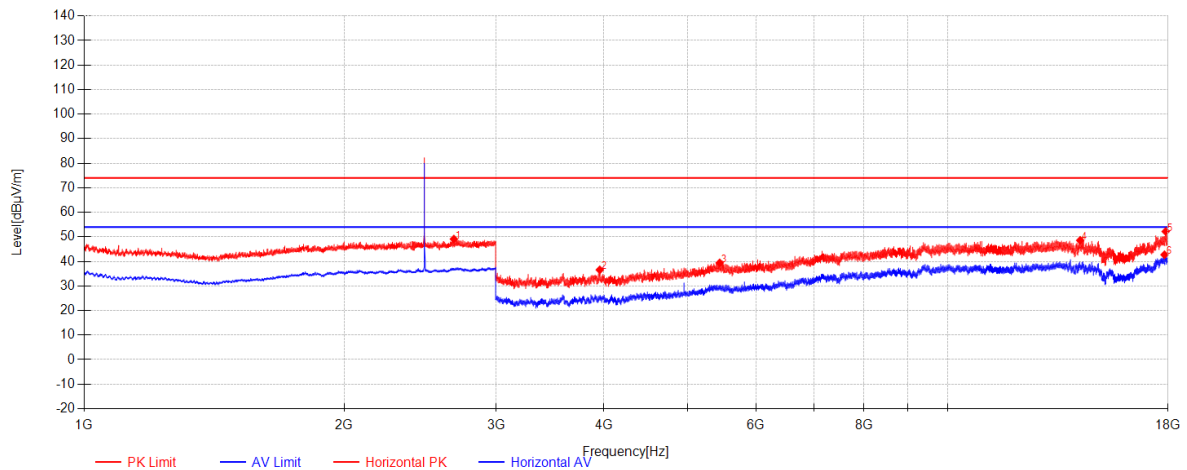


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2680	44.69	27.52	-23.10	49.11	74.00	24.89	Horizontal
2	3955.125	55.56	29.23	-48.23	36.56	74.00	37.44	Horizontal
3	5445	54.63	32.45	-47.67	39.41	74.00	34.59	Horizontal
4	14239.875	46.87	40.28	-38.56	48.58	74.00	25.42	Horizontal
5	17887.5	46.22	44.13	-38.16	52.19	74.00	21.81	Horizontal
6	17829.375	37.12	43.78	-38.18	42.72	54.00	11.28	Horizontal

BLE_1M_TX_CH_39_Vetical

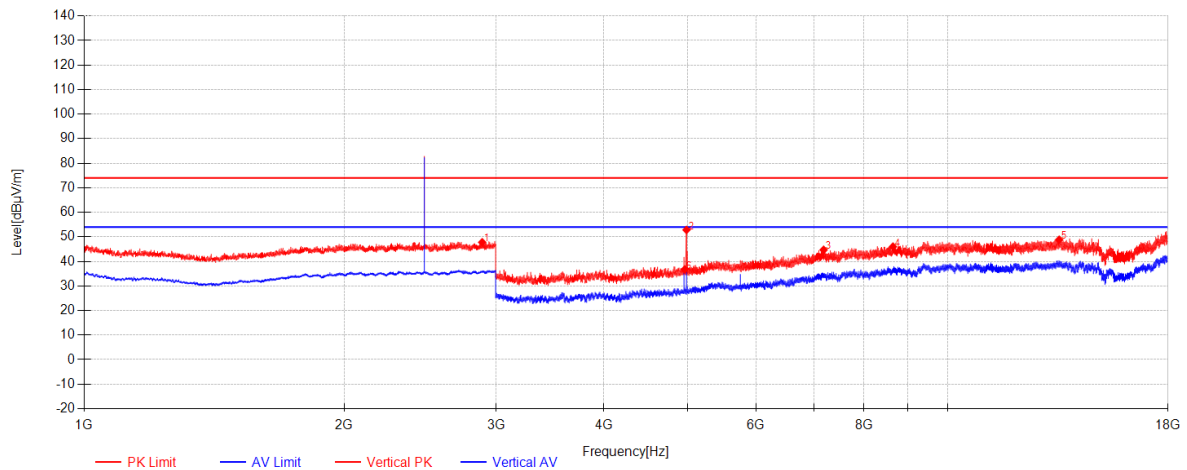

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2890.3333	42.92	27.90	-23.02	47.80	74.00	26.20	Vertical
2	4984.125	69.68	31.17	-48.01	52.83	74.00	21.17	Vertical
3	7184.25	55.01	35.83	-46.14	44.70	74.00	29.30	Vertical
4	8644.5	53.05	37.01	-44.04	46.02	74.00	27.98	Vertical
5	13463.625	48.51	39.50	-39.18	48.82	74.00	25.18	Vertical
6	4960.5	53.60	31.11	-48.02	36.70	54.00	17.30	Vertical

BLE_2M_TX_CH_39_Vertical

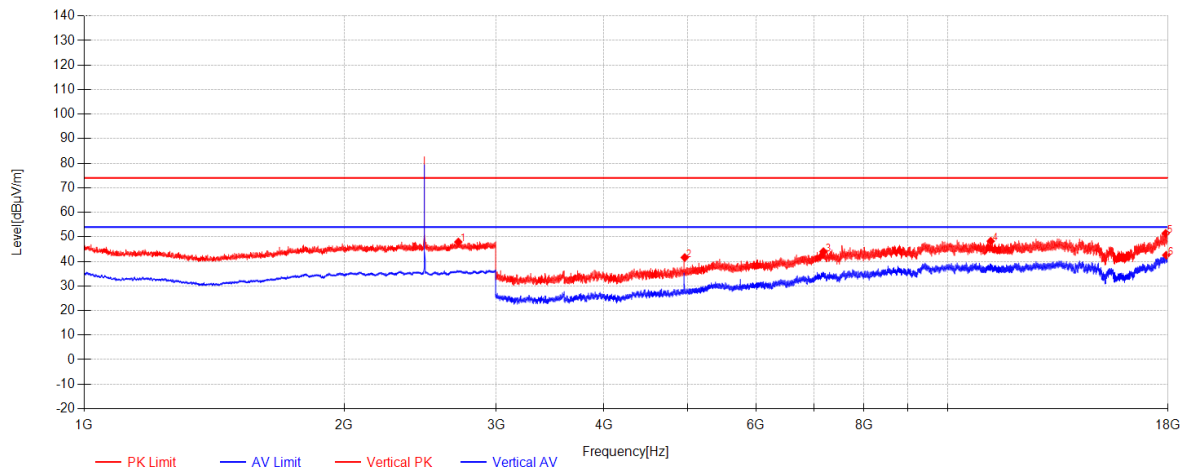

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2712.3333	43.34	27.58	-23.00	47.92	74.00	26.08	Vertical
2	4960.875	58.49	31.11	-48.02	41.59	74.00	32.41	Vertical
3	7180.5	54.29	35.82	-46.13	43.99	74.00	30.01	Vertical
4	11218.875	49.13	39.48	-40.36	48.25	74.00	25.75	Vertical
5	17886.375	45.47	44.12	-38.16	51.43	74.00	22.57	Vertical
6	17911.875	36.51	44.27	-38.24	42.54	54.00	11.46	Vertical

7.4 Conducted Average Output Power

Test Requirement 47 CFR Part 15, Subpart C 15.247(b)(3)

Test Method: ANSI C63.10 (2020) Section 11.9.2

Limit:

Frequency range(MHz)	Output power of the intentional radiator(watt)
902-928	1 for ≥ 50 hopping channels
	0.25 for $25 \leq$ hopping channels < 50
	1 for digital modulation
2400-2483.5	1 for ≥ 75 non-overlapping hopping channels
	0.125 for all other frequency hopping systems
	1 for digital modulation
5725-5850	1 for frequency hopping systems and digital modulation

7.4.1 E.U.T. Operation

Operating Environment:

Temperature: 23.1 °C


Humidity: 47.8 % RH

Atmospheric Pressure: 1010 mbar

7.4.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	02	TX mode(1Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.
Final test	03	TX mode(2Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.

7.4.3 Test Setup Diagram

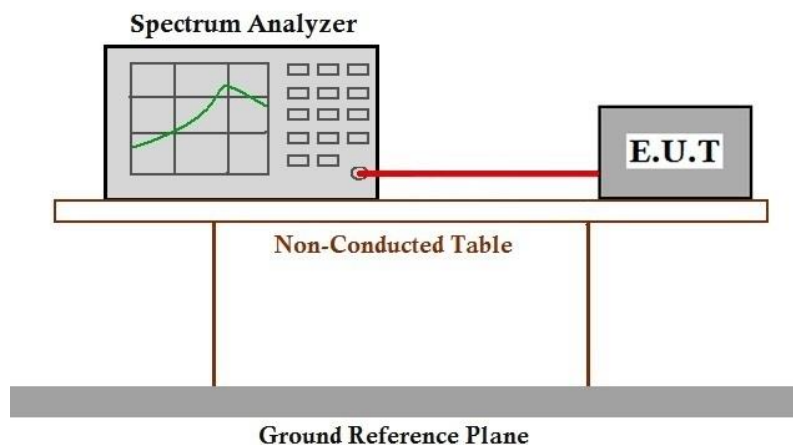



Report No.: KSCR250900216403

Page: 50 of 83

7.4.4 Measurement Procedure and Data

Note: Since the verify power the same operating range bandwidth and smaller power can be covered by the higher power.

Please Refer to Appendix for Details

7.5 Minimum 6dB Bandwidth

Test Requirement 47 CFR Part 15, Subpart C 15.247a(2)

Test Method: ANSI C63.10 (2020) Section 11.8.1

Limit:

≥500 kHz

7.5.1 E.U.T. Operation

Operating Environment:

Temperature: 23.1 °C


Humidity: 47.8 % RH

Atmospheric Pressure: 1010 mbar

7.5.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	02	TX mode(1Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.
Final test	03	TX mode(2Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.

7.5.3 Test Setup Diagram

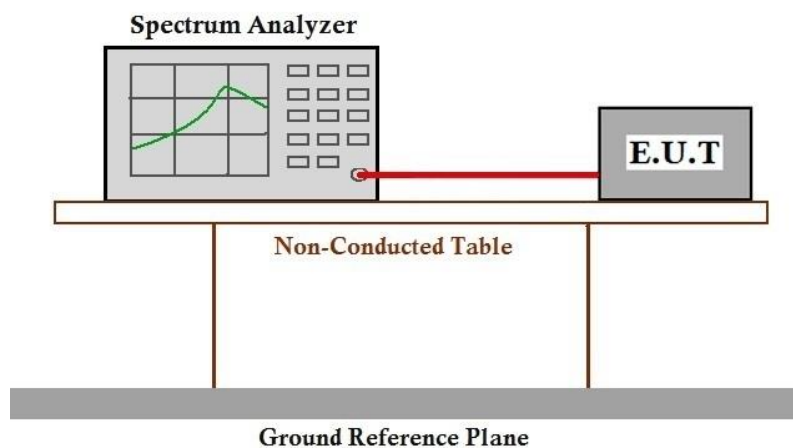

7.5.4 Measurement Procedure and Data

Please Refer to Appendix for Details

7.6 Power Spectrum Density

Test Requirement 47 CFR Part 15, Subpart C 15.247(e)

Test Method: ANSI C63.10 (2020) Section 11.10.3

Limit:

≤8dBm in any 3 kHz band during any time interval of continuous transmission

7.6.1 E.U.T. Operation

Operating Environment:

Temperature: 23.1 °C


Humidity: 47.8 % RH

Atmospheric Pressure: 1010 mbar

7.6.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	02	TX mode(1Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.
Final test	03	TX mode(2Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.

7.6.3 Test Setup Diagram

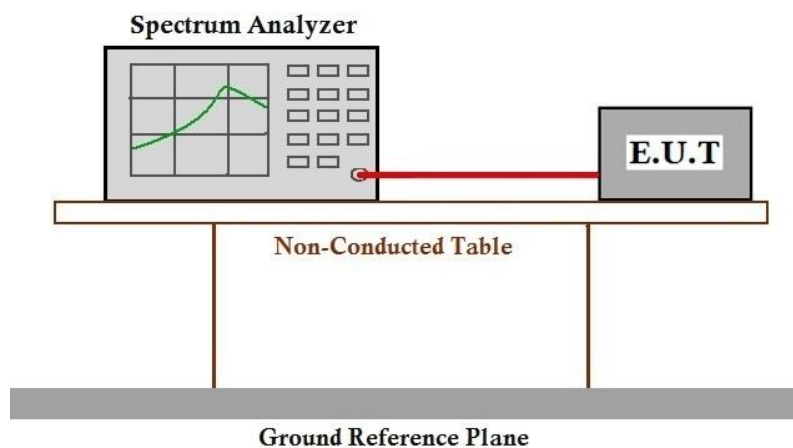

7.6.4 Measurement Procedure and Data

Please Refer to Appendix for Details

7.7 Conducted Band Edges Measurement

Test Requirement 47 CFR Part 15, Subpart C 15.247(d)

Test Method: ANSI C63.10 (2020) Section 6.10.4

Limit:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

7.7.1 E.U.T. Operation

Operating Environment:

Temperature: 23.1 °C


Humidity: 47.8 % RH

Atmospheric Pressure: 1010 mbar

7.7.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	02	TX mode(1Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.
Final test	03	TX mode(2Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.

7.7.3 Test Setup Diagram

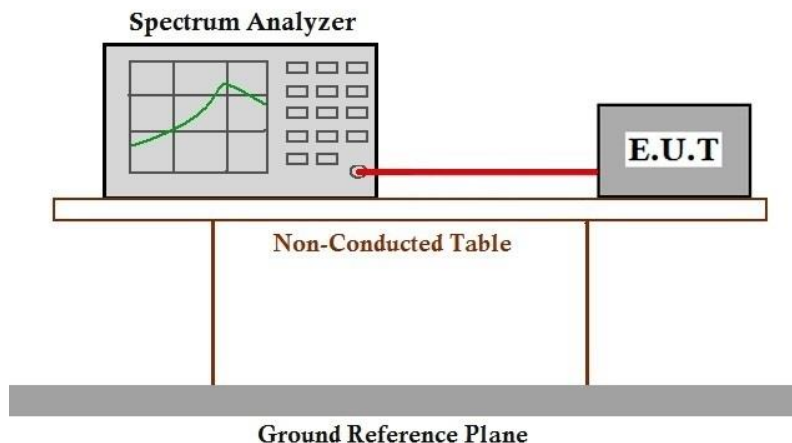

7.7.4 Measurement Procedure and Data

Please Refer to Appendix for Details

7.8 Conducted Spurious Emissions

Test Requirement 47 CFR Part 15, Subpart C 15.247(d)

Test Method: ANSI C63.10 (2020) Section 11.11

Limit:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

7.8.1 E.U.T. Operation

Operating Environment:

Temperature: 23.1 °C


Humidity: 47.8 % RH

Atmospheric Pressure: 1010 mbar

7.8.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	02	TX mode(1Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.
Final test	03	TX mode(2Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.

7.8.3 Test Setup Diagram

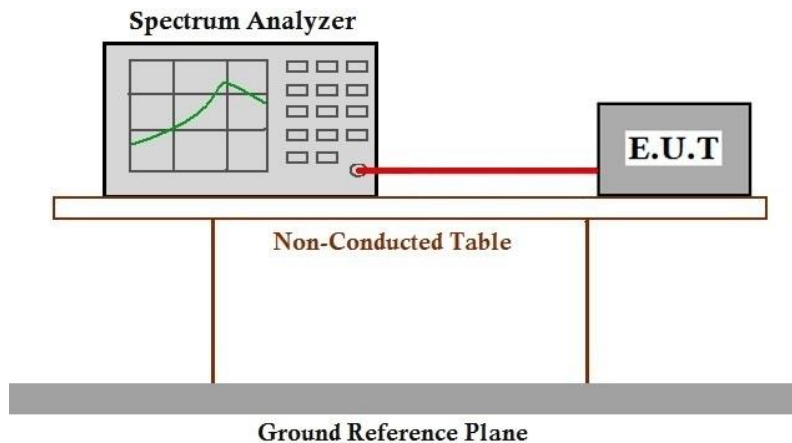

7.8.4 Measurement Procedure and Data

Please Refer to Appendix for Details

8 Test Setup Photo

Refer to Appendix - Test Setup Photo for KSCR2509002164AT

9 EUT Constructional Details (EUT Photos)

Refer to Appendix_Photographs of EUT Constructional Details for KSCR2509002164AT



10 Appendix

1. Duty Cycle


1.1 Test Result

1.1.1 Ant1


Ant1							
Mode	TX Type	Frequency (MHz)	T_on (ms)	Period (ms)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	Max. DC Variation (%)
1M	SISO	2402	0.403	0.625	64.48	1.91	0.03
		2440	0.403	0.625	64.48	1.91	0.00
		2480	0.403	0.625	64.48	1.91	0.00
2M	SISO	2402	0.218	0.625	34.88	4.57	0.02
		2440	0.218	0.625	34.88	4.57	0.00
		2480	0.218	0.625	34.88	4.57	0.03

1.2 Test Graph


1.2.1 Ant1

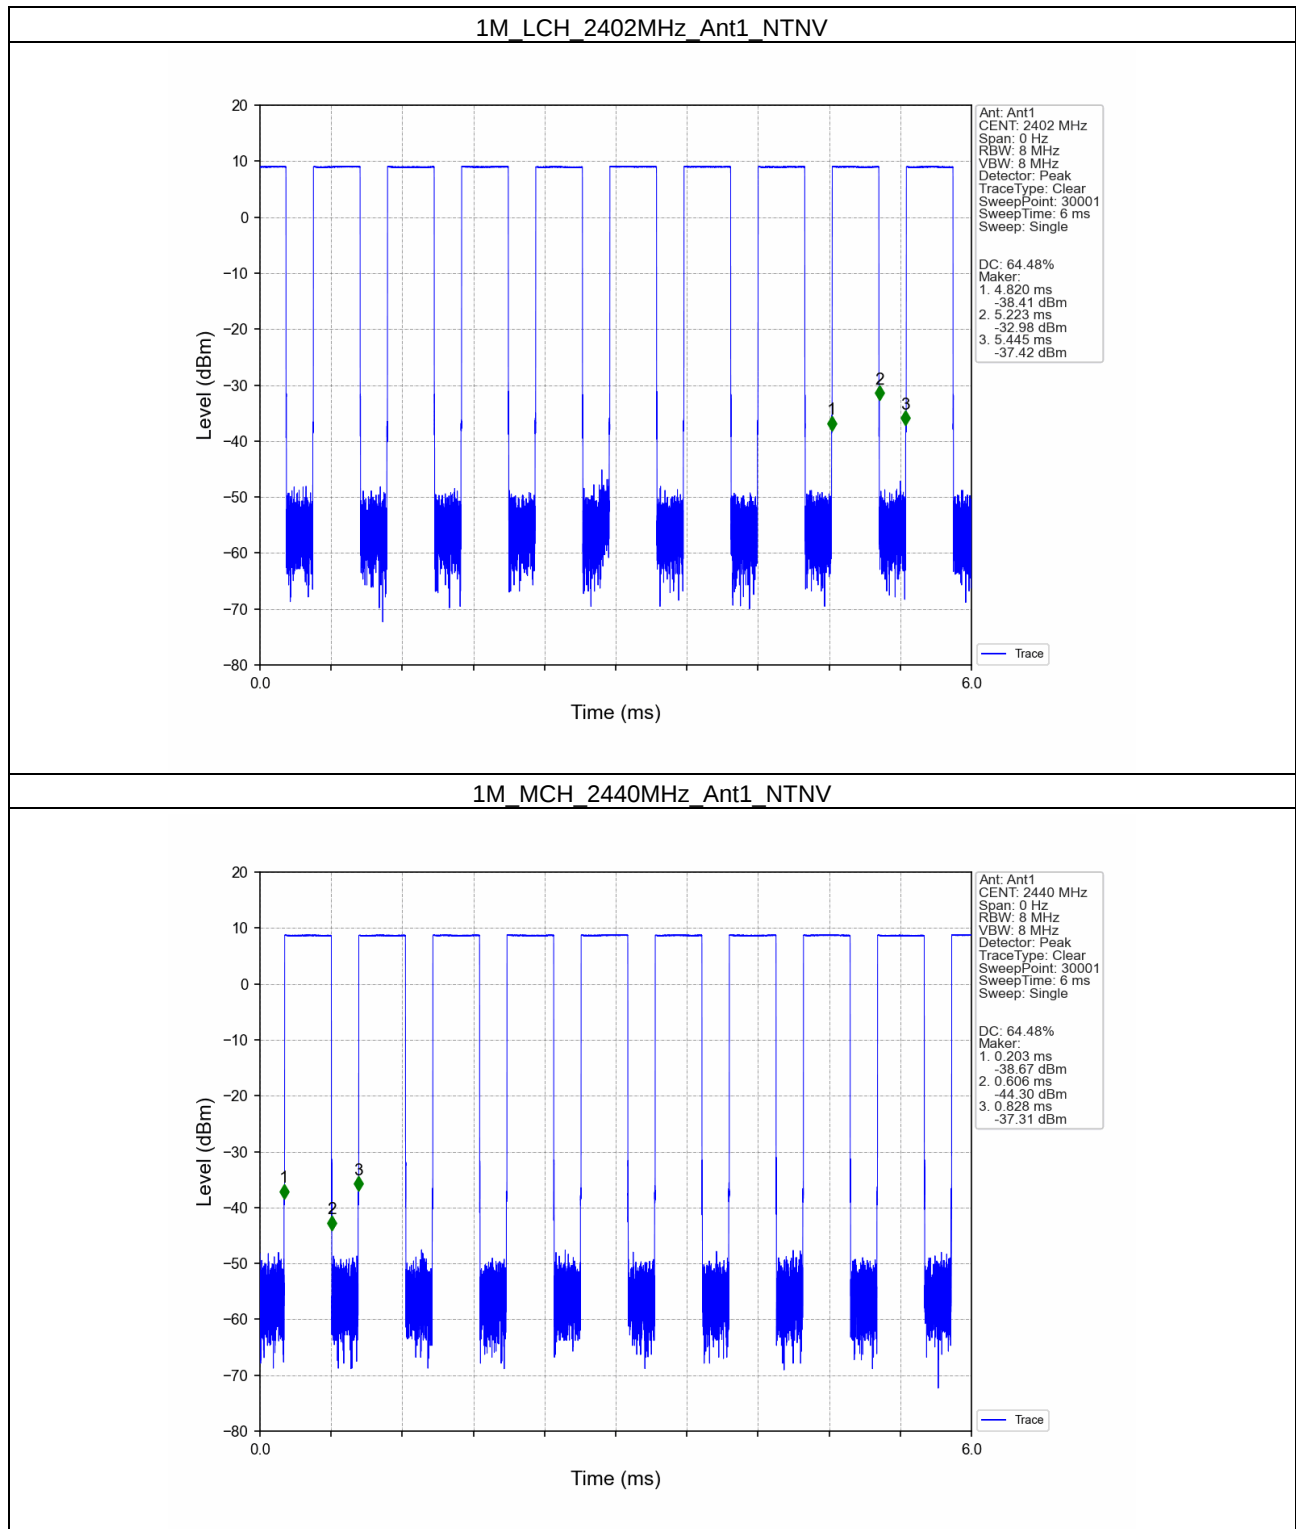


1M_HCH_2480MHz_Ant1_NTNV

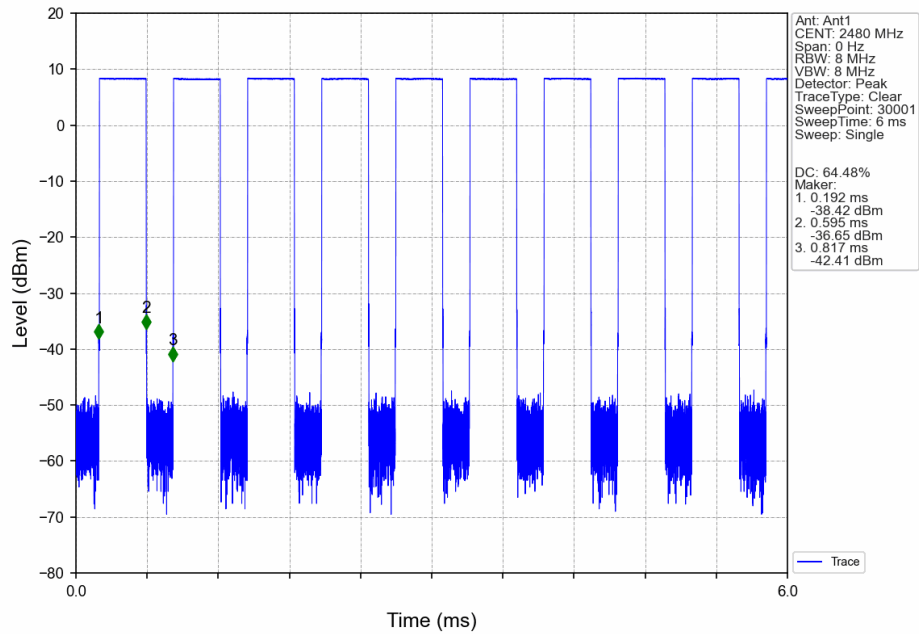


2M_LCH_2402MHz_Ant1_NTNV

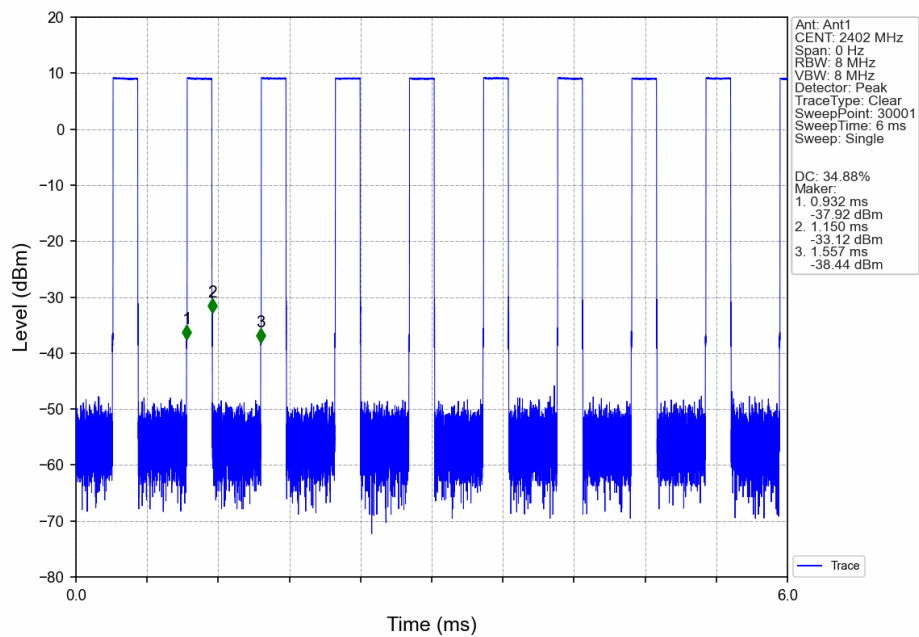

2M_MCH_2440MHz_Ant1_NTNV

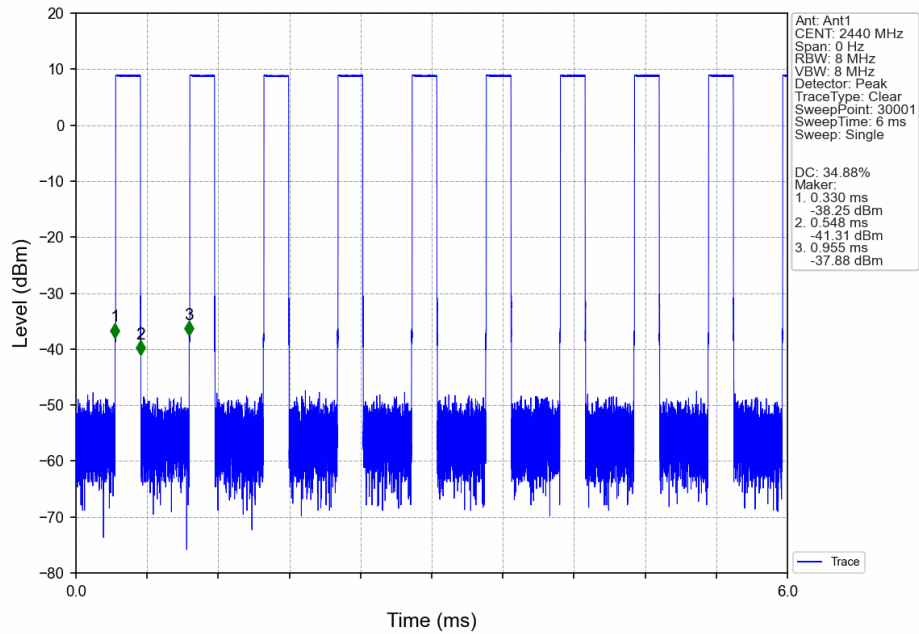

2M_HCH_2480MHz_Ant1_NTNV

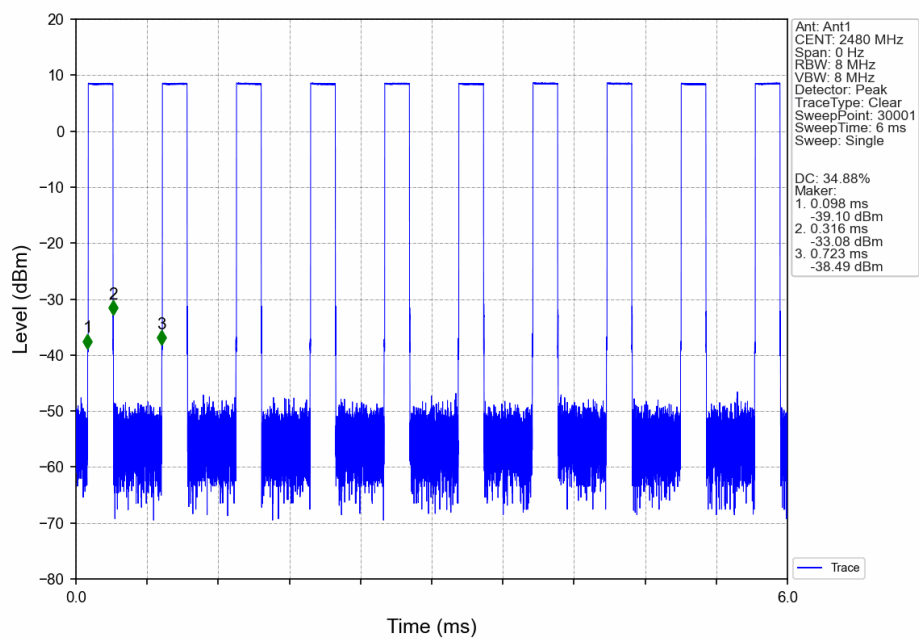

2. Bandwidth

2.1 Test Result

2.1.1 OBW


Mode	TX Type	Frequency (MHz)	ANT	99% Occupied Bandwidth (MHz)		Verdict
				Result	Limit	
1M	SISO	2402	1	1.038	/	Pass
		2440	1	1.041	/	Pass
		2480	1	1.043	/	Pass
2M	SISO	2402	1	2.071	/	Pass
		2440	1	2.063	/	Pass
		2480	1	2.058	/	Pass

2.1.2 6dB BW


Mode	TX Type	Frequency (MHz)	ANT	6dB Bandwidth (MHz)		Verdict
				Result	Limit	
1M	SISO	2402	1	0.655	≥ 0.5	Pass
		2440	1	0.658	≥ 0.5	Pass
		2480	1	0.663	≥ 0.5	Pass
2M	SISO	2402	1	0.948	≥ 0.5	Pass
		2440	1	1.146	≥ 0.5	Pass
		2480	1	1.170	≥ 0.5	Pass

2.2 Test Graph


2.2.1 OBW

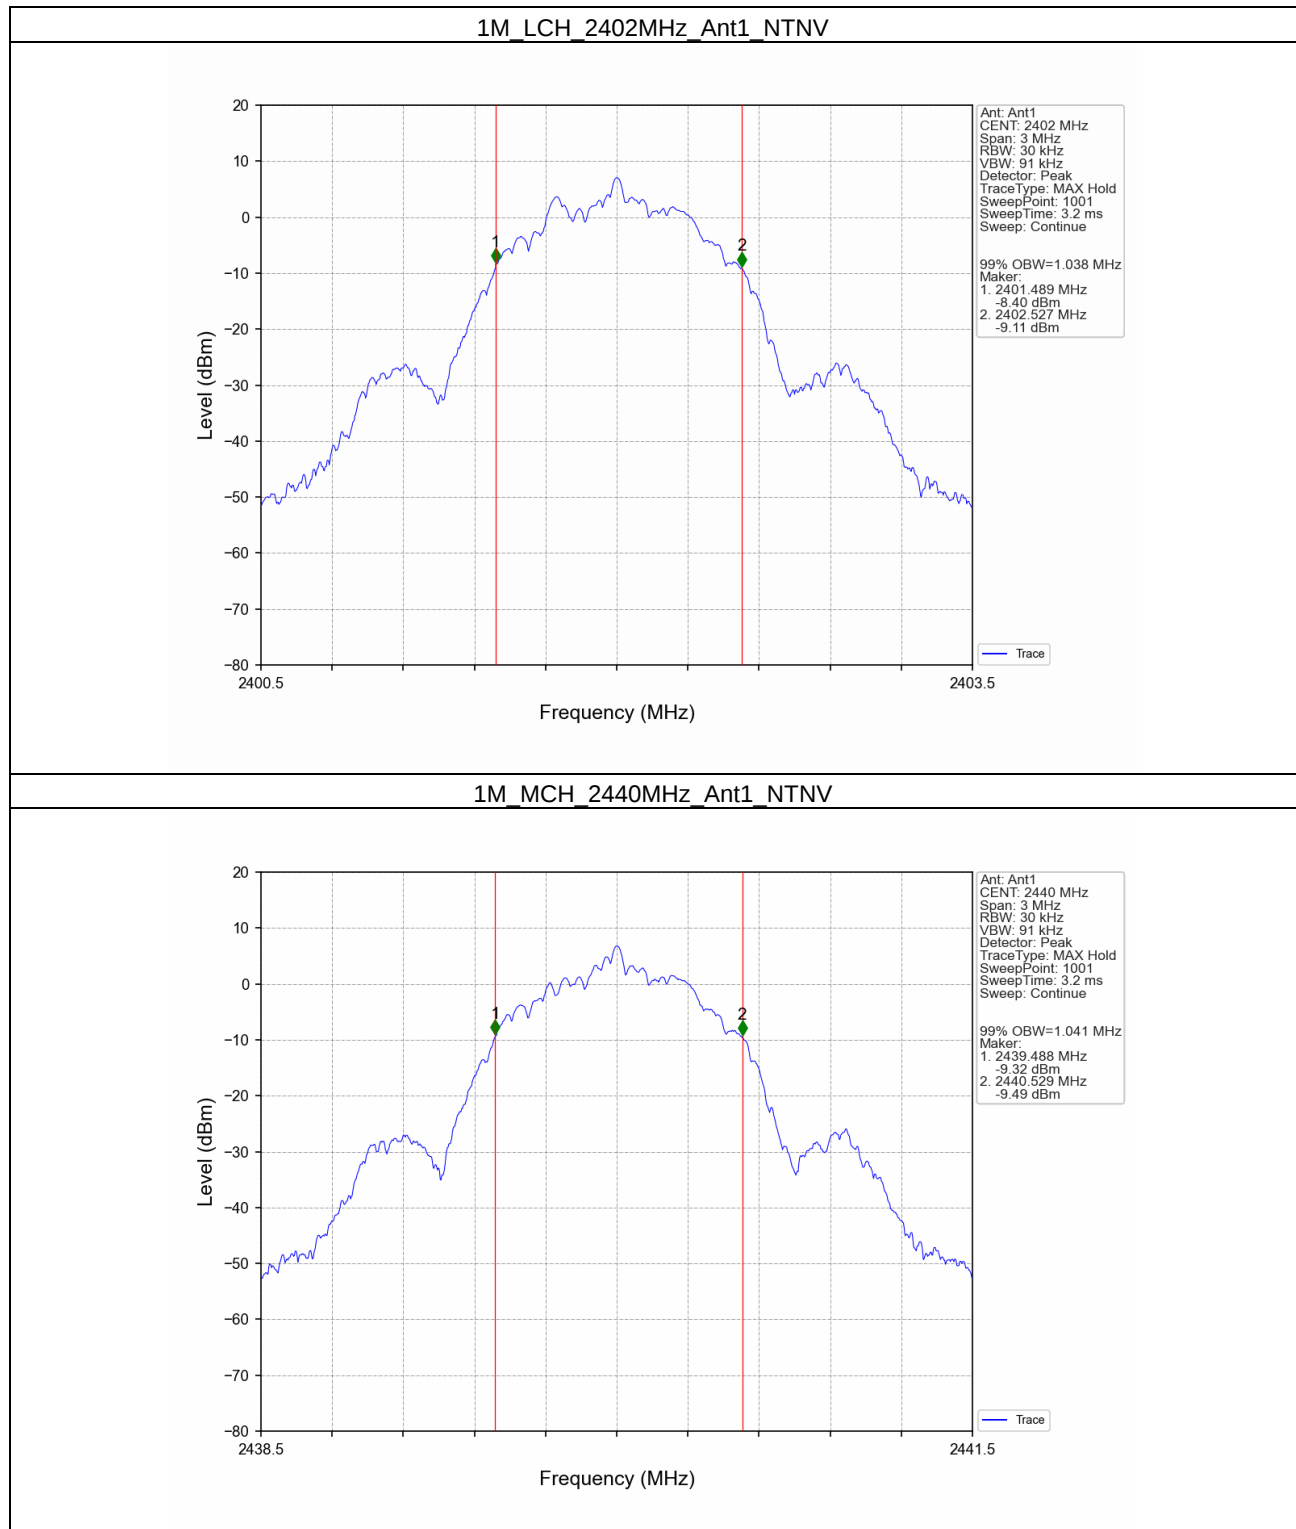


1M_HCH_2480MHz_Ant1_NTNV

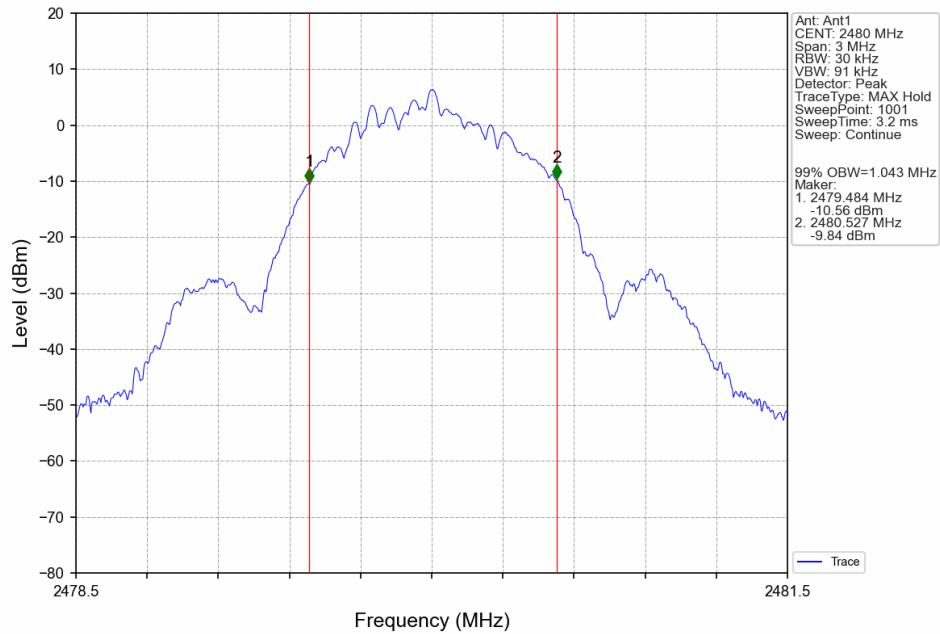


2M_LCH_2402MHz_Ant1_NTNV

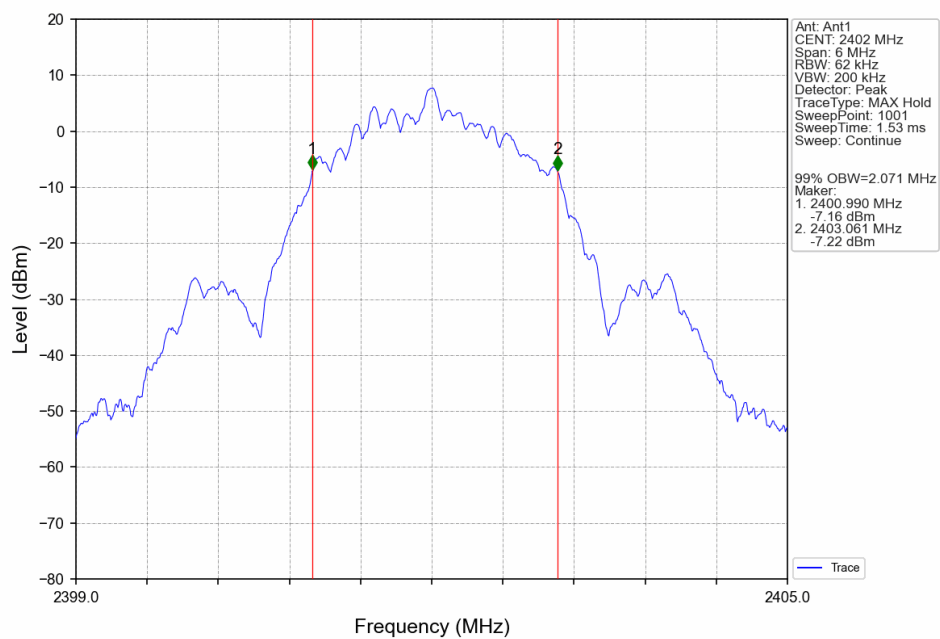


2M MCH 2440MHz Ant1 NTN

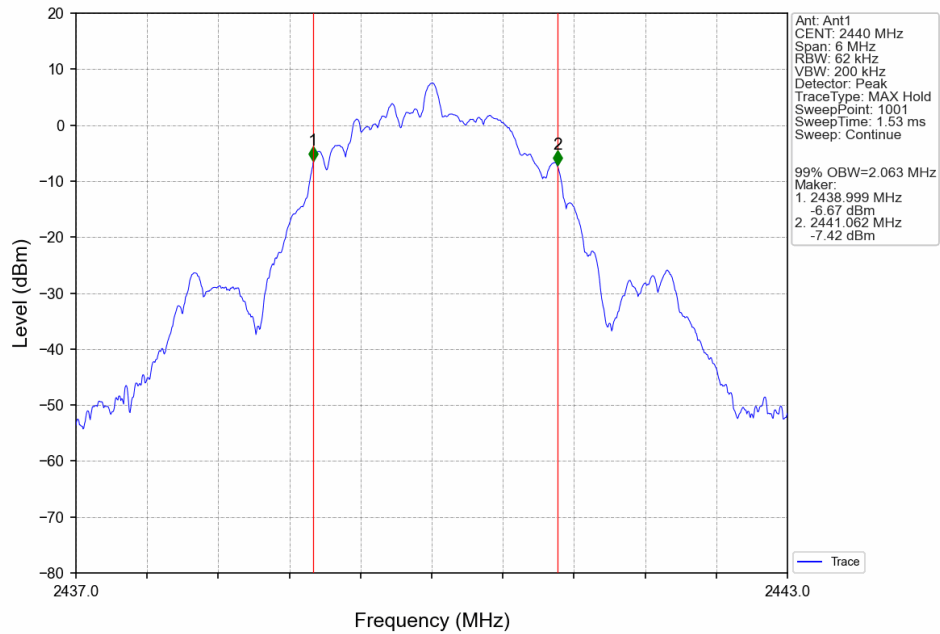


2M HCH 2480MHz Ant1 NTN

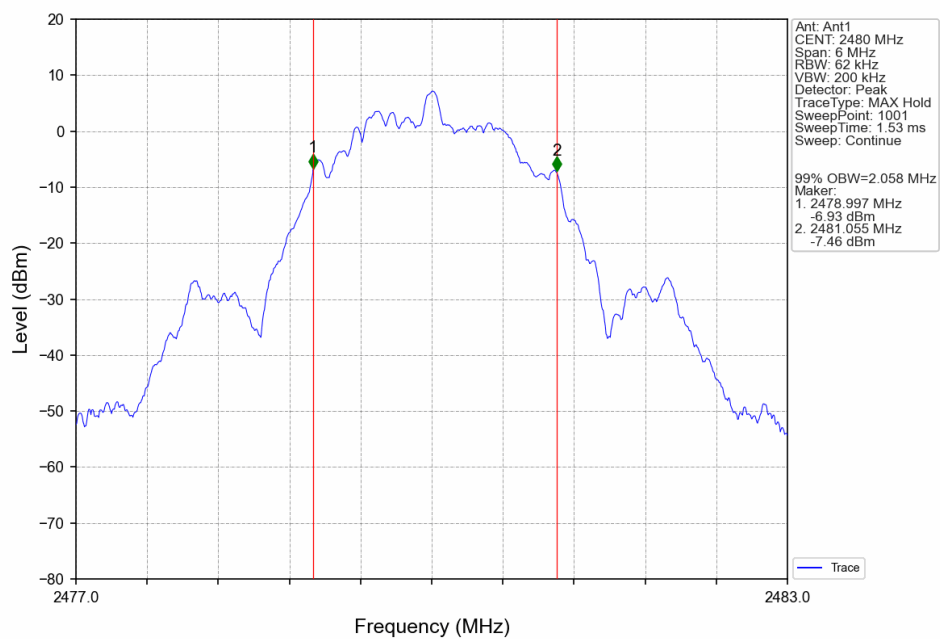


2.2.2 6dB BW

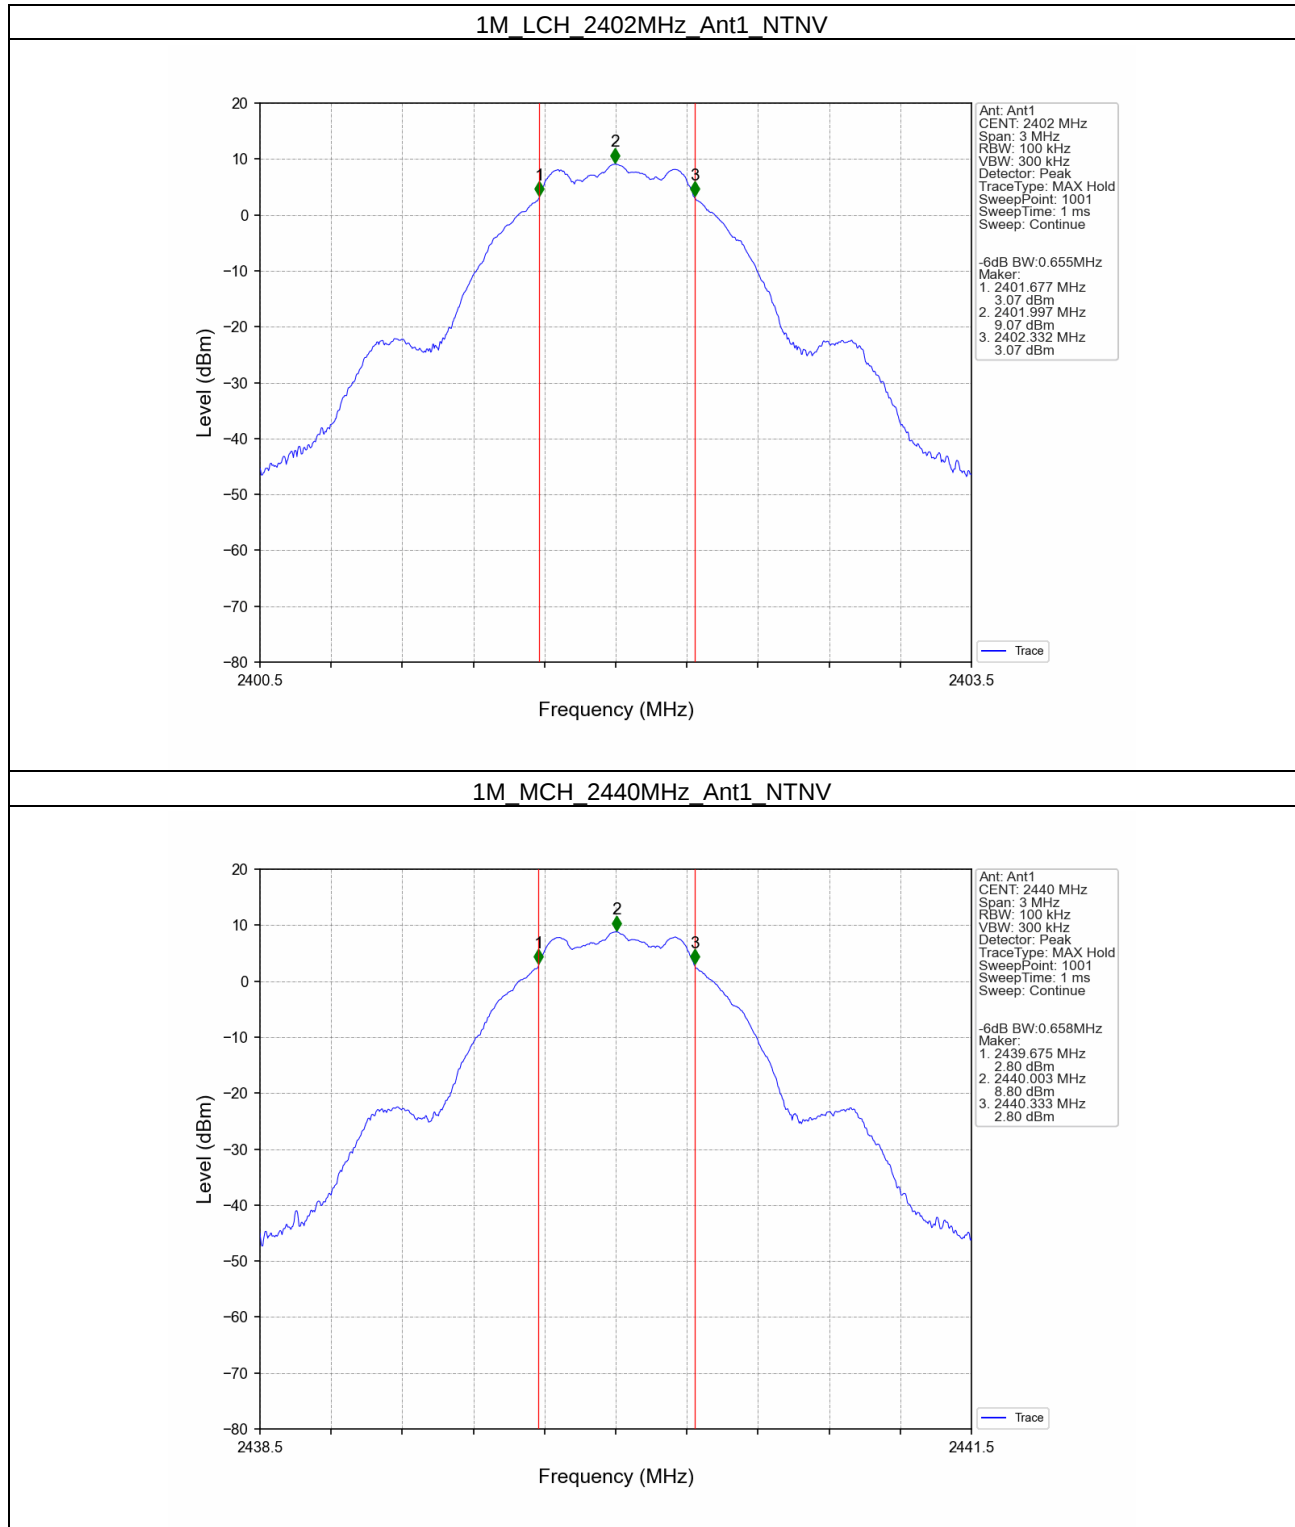


1M_HCH_2480MHz_Ant1_NTNV

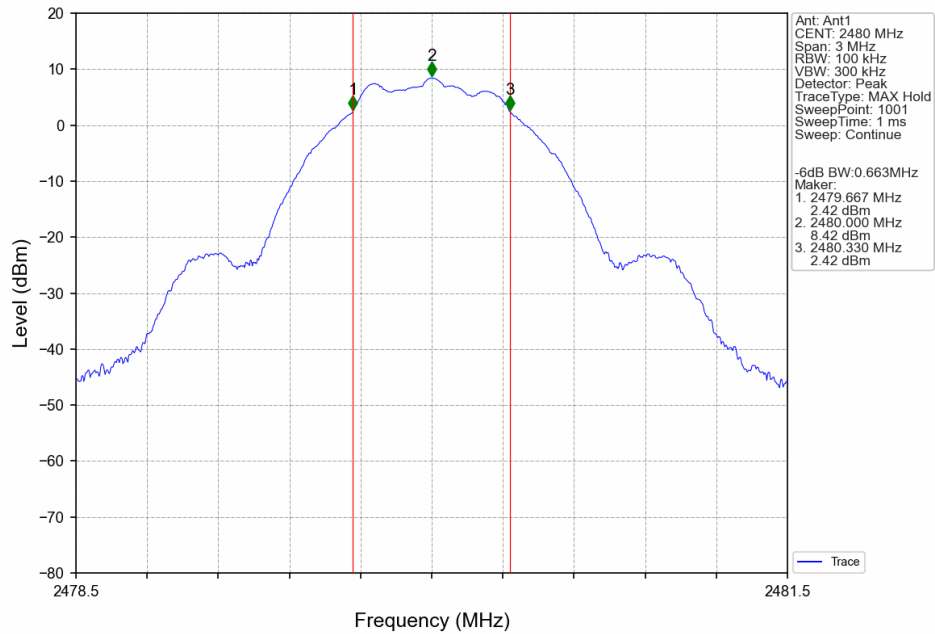


2M_LCH_2402MHz_Ant1_NTNV

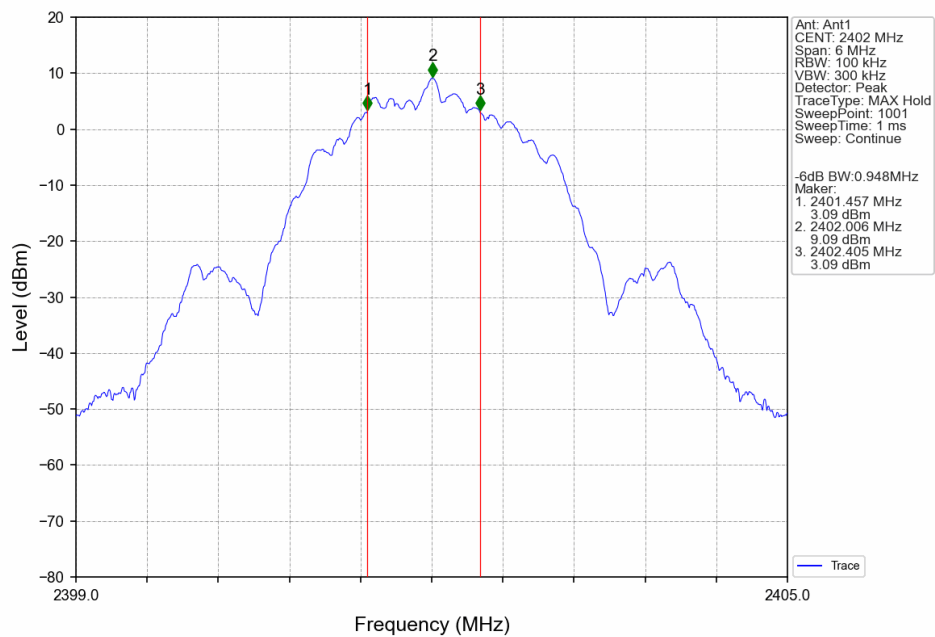

2M MCH 2440MHz Ant1 NTN

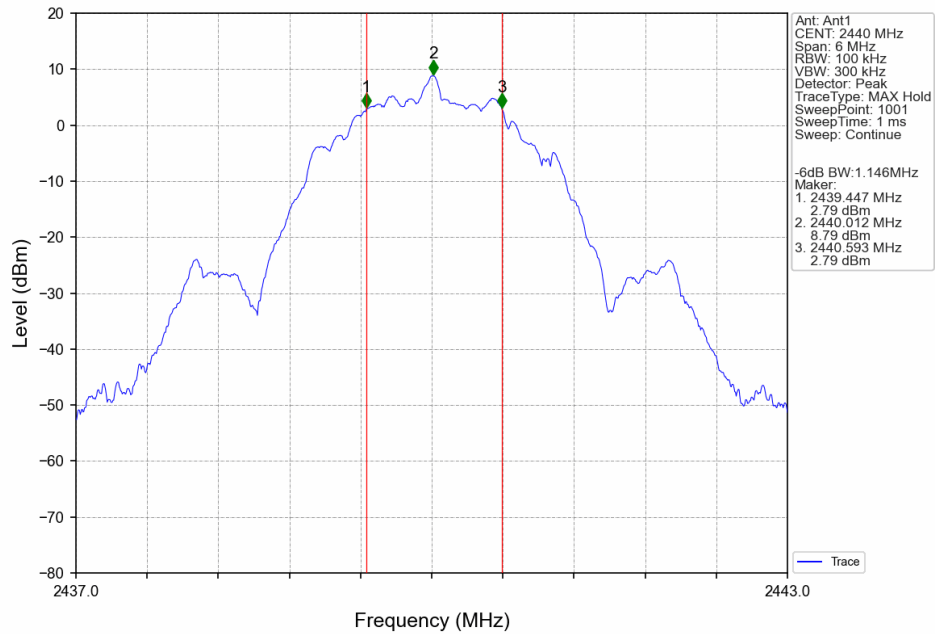

2M HCH 2480MHz Ant1 NTN

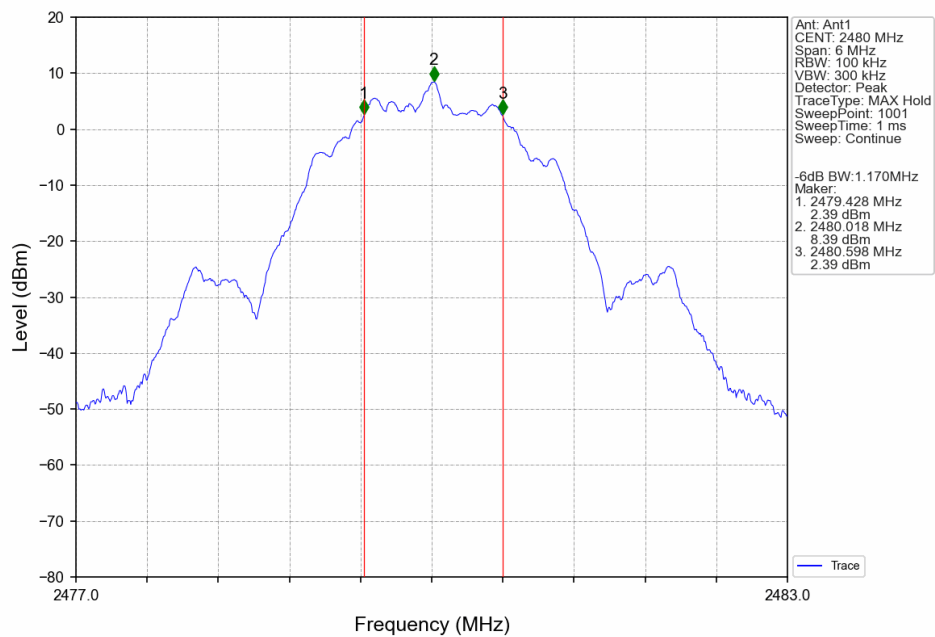

3. Maximum Conducted Output Power

3.1 Test Result


3.1.1 Power

Mode	TX Type	Frequency (MHz)	Maximum Average Conducted Output Power (dBm)		Verdict
			ANT1	Limit	
1M	SISO	2402	8.65	<=30	Pass
		2440	8.46	<=30	Pass
		2480	8.06	<=30	Pass
2M	SISO	2402	8.79	<=30	Pass
		2440	8.52	<=30	Pass
		2480	8.12	<=30	Pass


Note1: Antenna Gain: Ant1: -4.49dBi;

3.2 Test Graph


3.2.1 Power

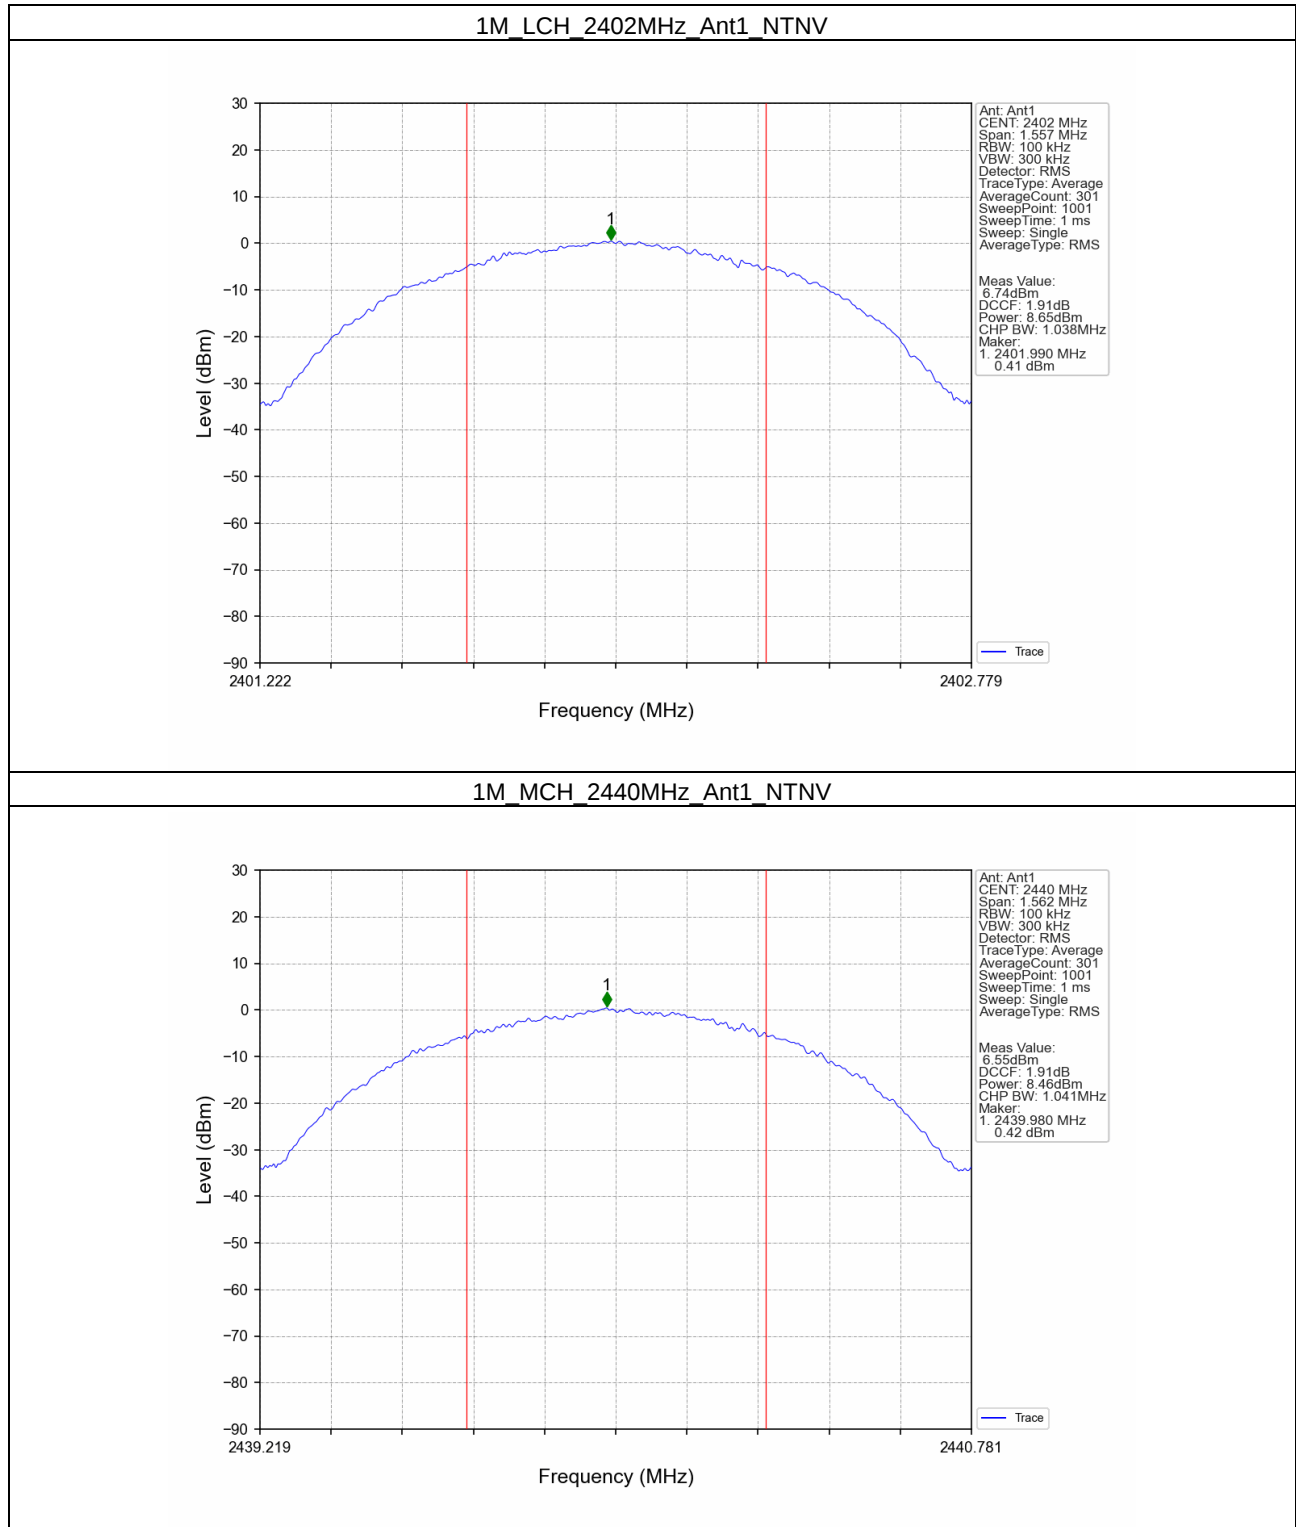


1M_HCH_2480MHz_Ant1_NTNV

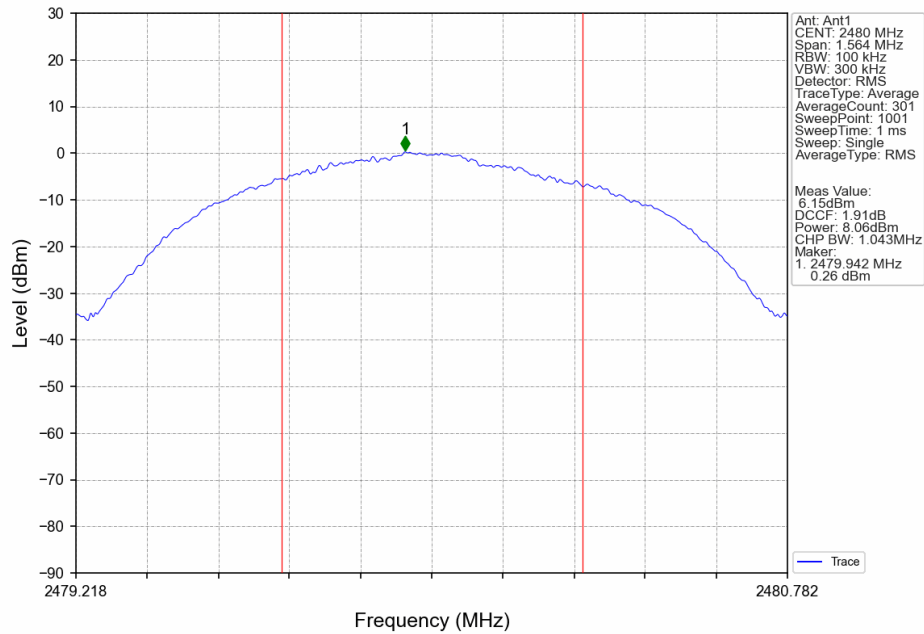


2M_LCH_2402MHz_Ant1_NTNV

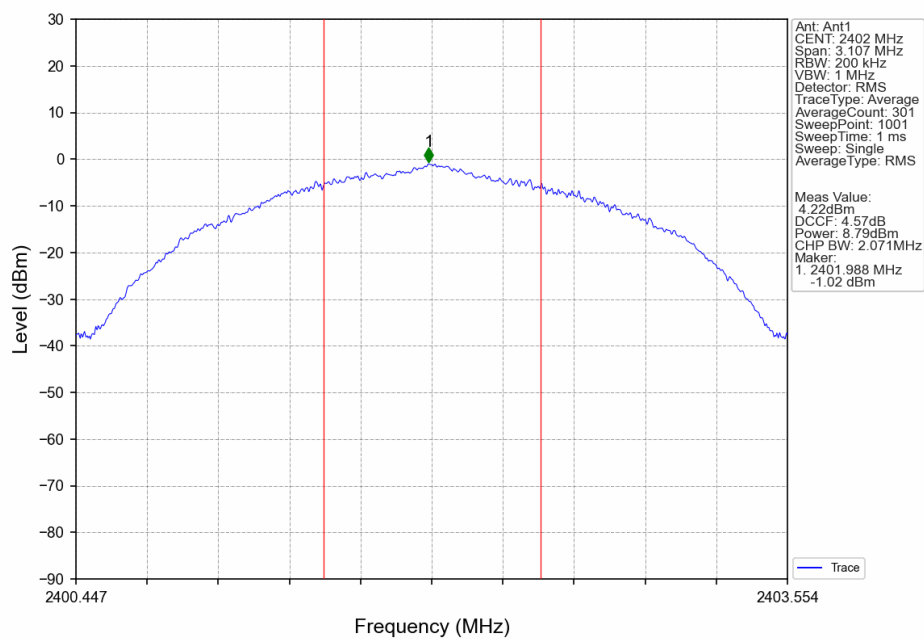

2M_MCH_2440MHz_Ant1_NTNV

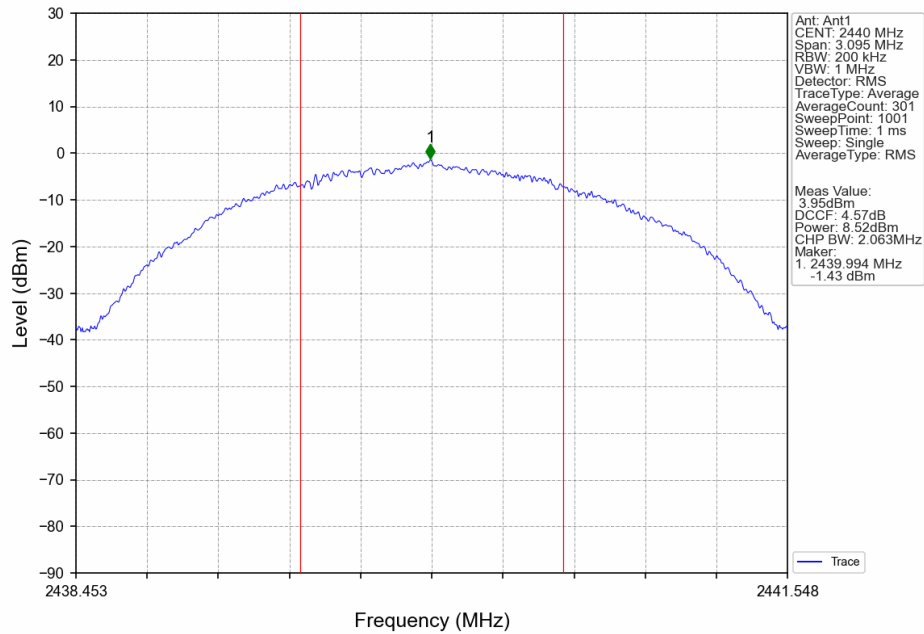

2M_HCH_2480MHz_Ant1_NTNV

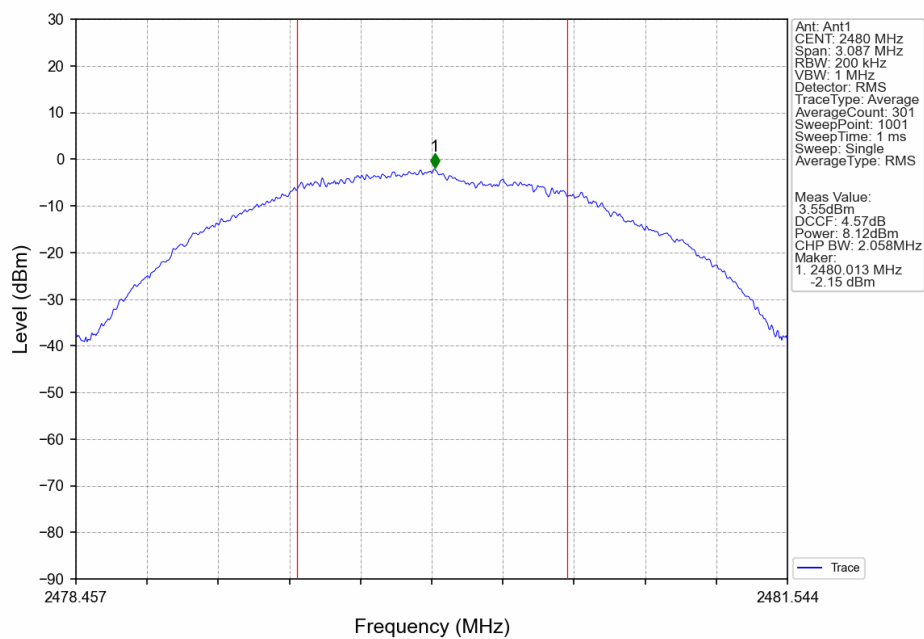



4. Maximum Power Spectral Density


4.1 Test Result

4.1.1 PSD


Mode	TX Type	Frequency (MHz)	Maximum PSD (dBm)		Verdict
			ANT1	Limit	
1M	SISO	2402	2.32	<=8	Pass
		2440	2.26	<=8	Pass
		2480	2.57	<=8	Pass
2M	SISO	2402	1.46	<=8	Pass
		2440	0.39	<=8	Pass
		2480	0.93	<=8	Pass
Note1: Antenna Gain: Ant1: -4.49dBi;					

4.2 Test Graph


4.2.1 PSD

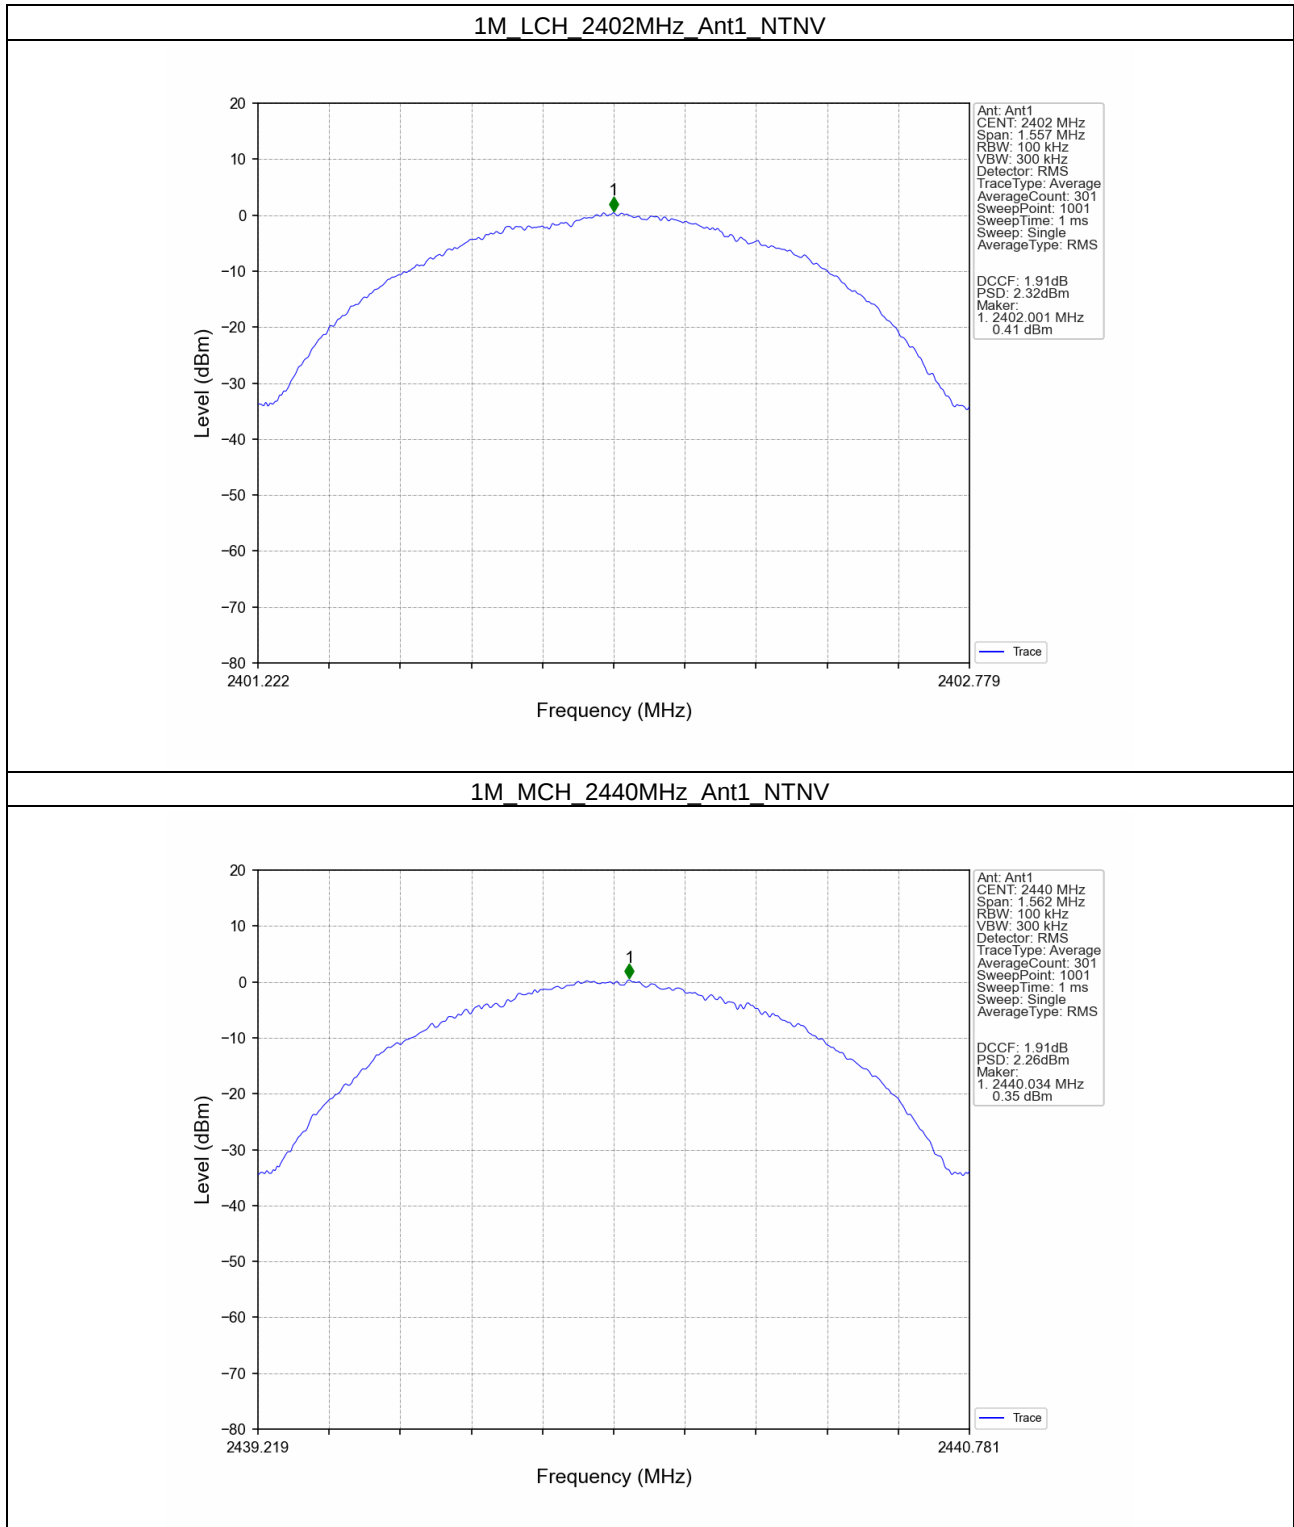


1M_HCH_2480MHz_Ant1_NTNV

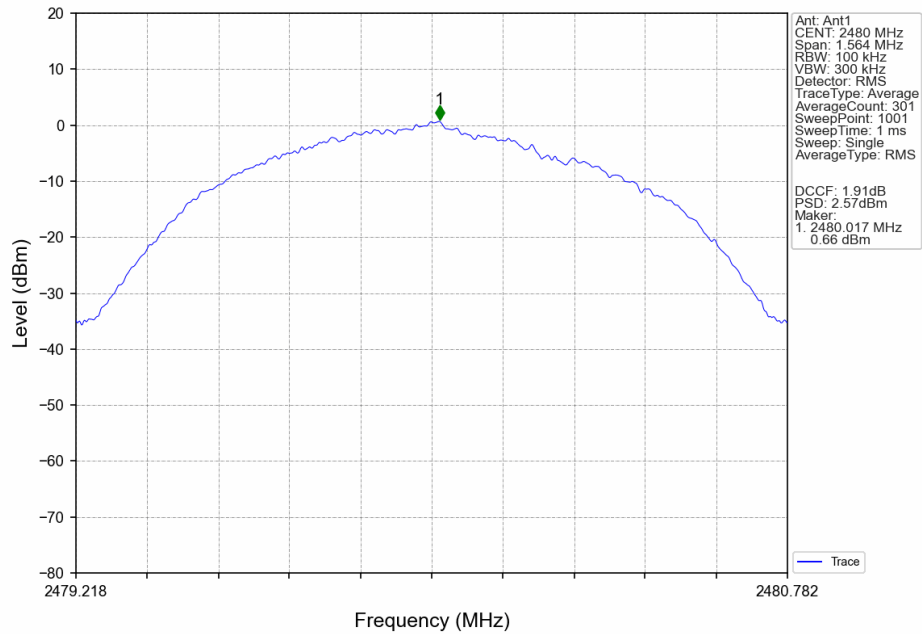


2M_LCH_2402MHz_Ant1_NTNV

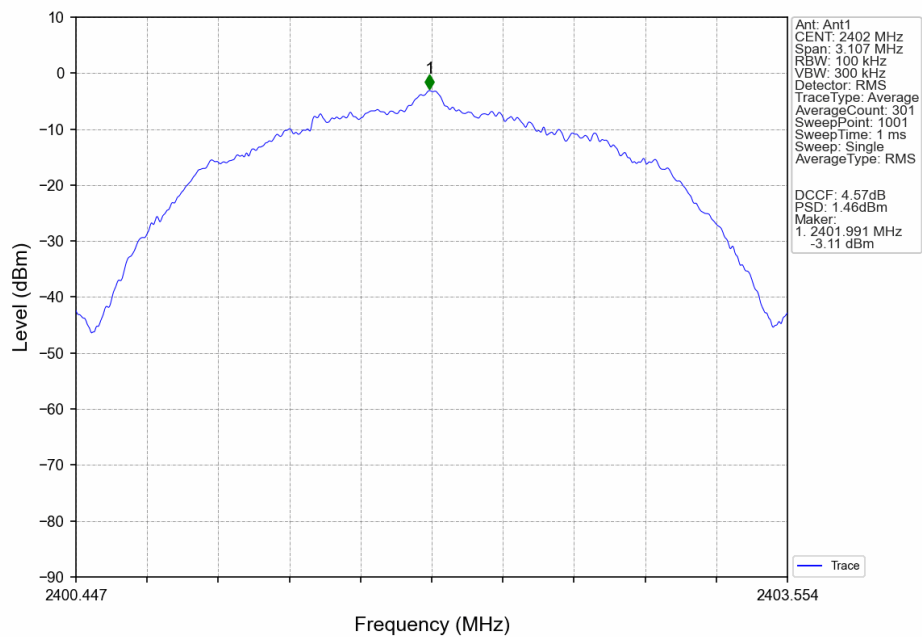

2M_MCH_2440MHz_Ant1_NTNV

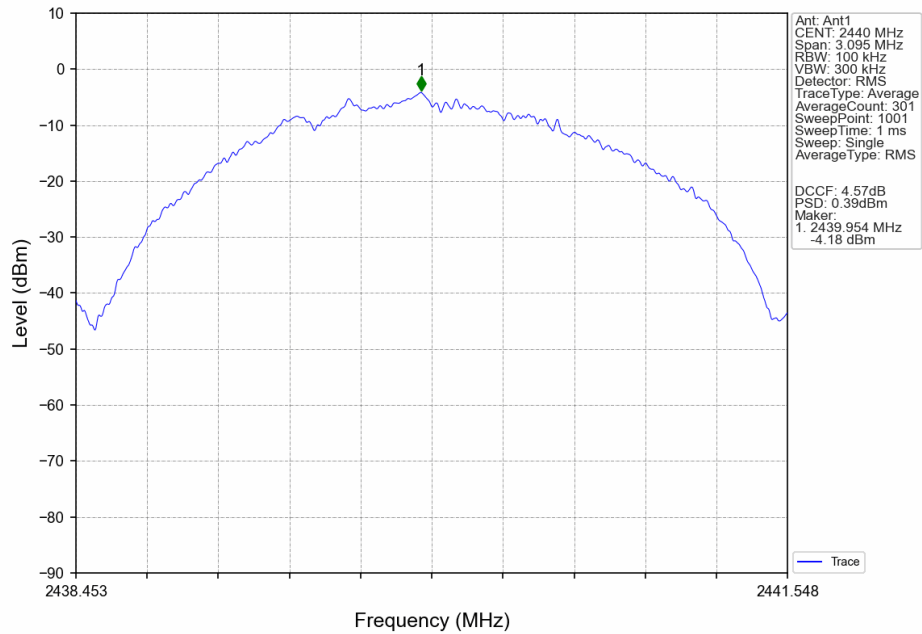

2M_HCH_2480MHz_Ant1_NTNV

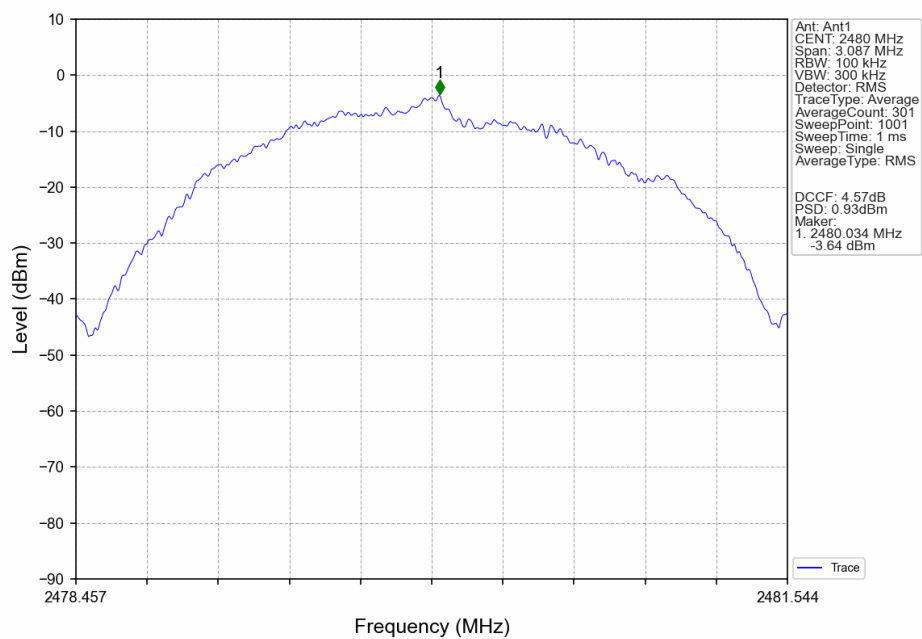

5. Unwanted Emissions In Non-restricted Frequency Bands

5.1 Test Result

5.1.1 Ref

Mode	TX Type	Frequency (MHz)	ANT	Level of Reference (dBm)
1M	SISO	2402	1	9.01
		2440	1	8.77
		2480	1	8.46
2M	SISO	2402	1	9.04
		2440	1	8.86
		2480	1	8.41

Note1: Refer to FCC Part 15.247 (d) and ANSI C63.10-2020, the channel contains the maximum PSD level was used to establish the reference level.


5.1.2 CSE

Mode	TX Type	Frequency (MHz)	ANT	Level of Reference (dBm)	Limit (dBm)	Verdict
1M	SISO	2402	1	9.01	-20.99	Pass
		2440	1	9.01	-20.99	Pass
		2480	1	9.01	-20.99	Pass
2M	SISO	2402	1	9.04	-20.96	Pass
		2440	1	9.04	-20.96	Pass
		2480	1	9.04	-20.96	Pass


Note1: Refer to FCC Part 15.247 (d) and ANSI C63.10-2020, the channel contains the maximum PSD level was used to establish the reference level.

5.2 Test Graph


5.2.1 Ref

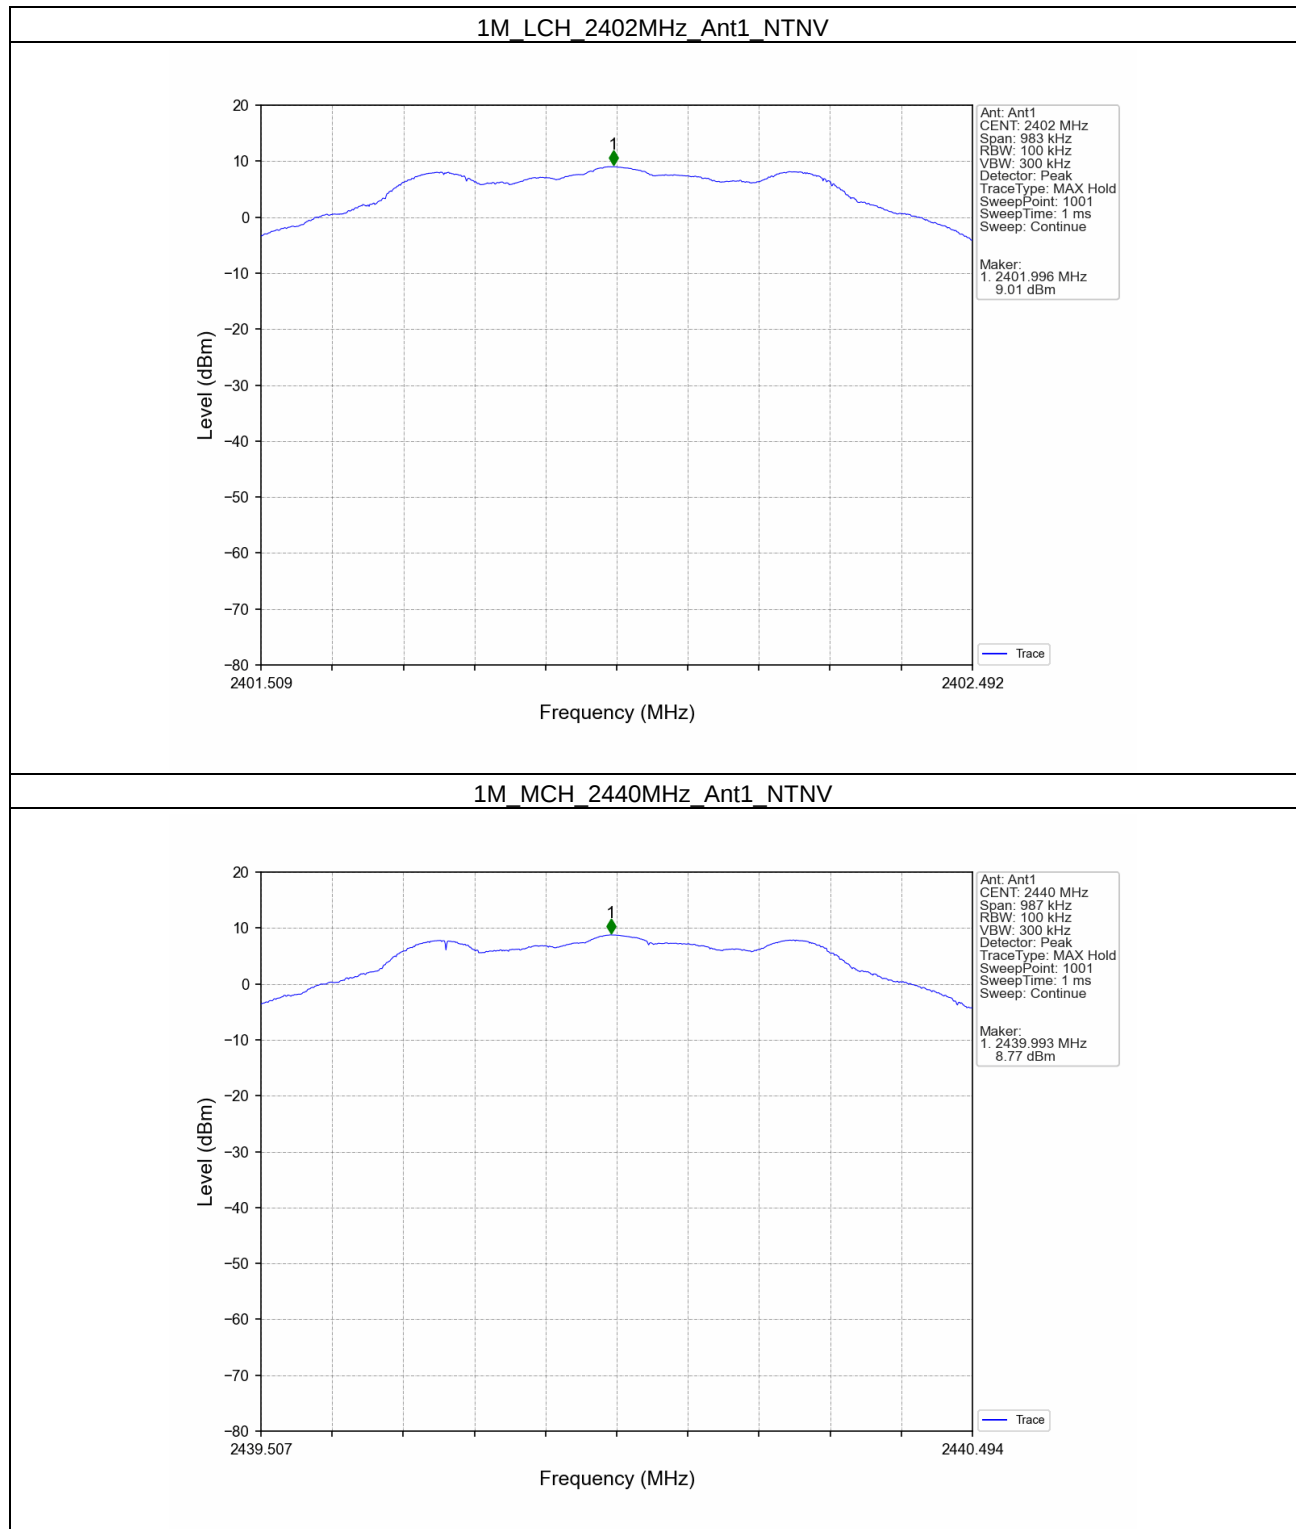


1M_HCH_2480MHz_Ant1_NTNV

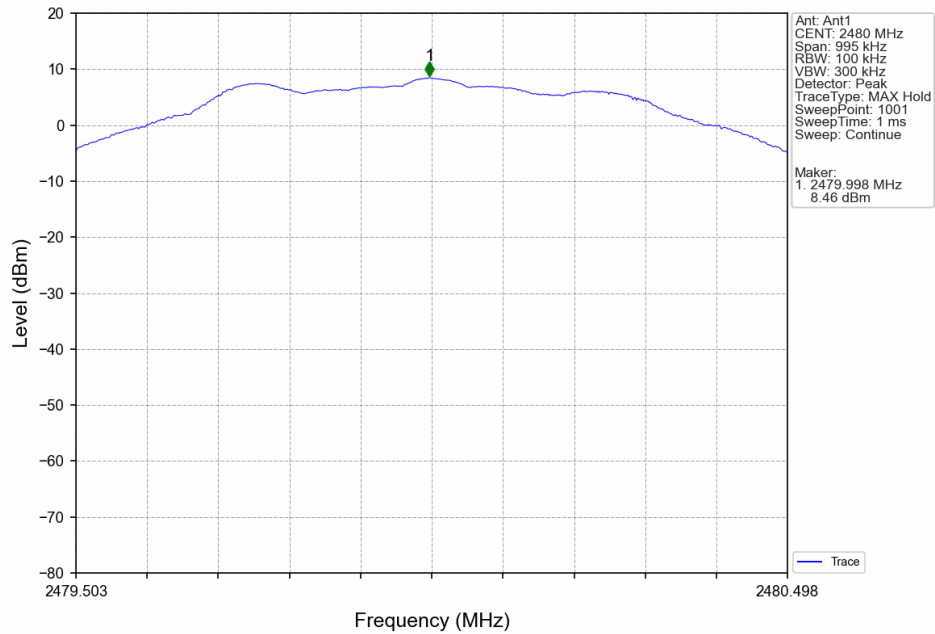


2M_LCH_2402MHz_Ant1_NTNV

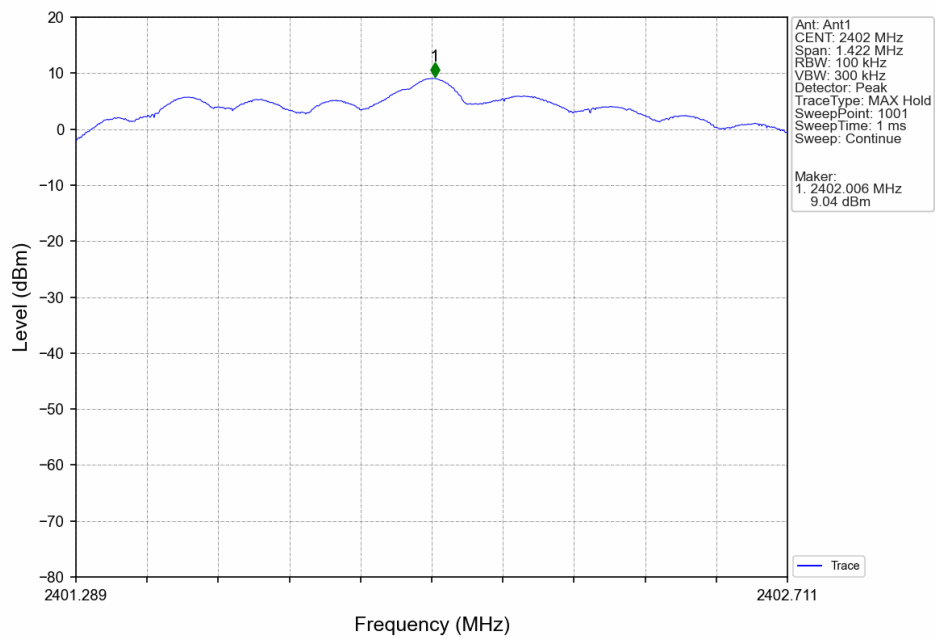


2M MCH 2440MHz Ant1 NTN

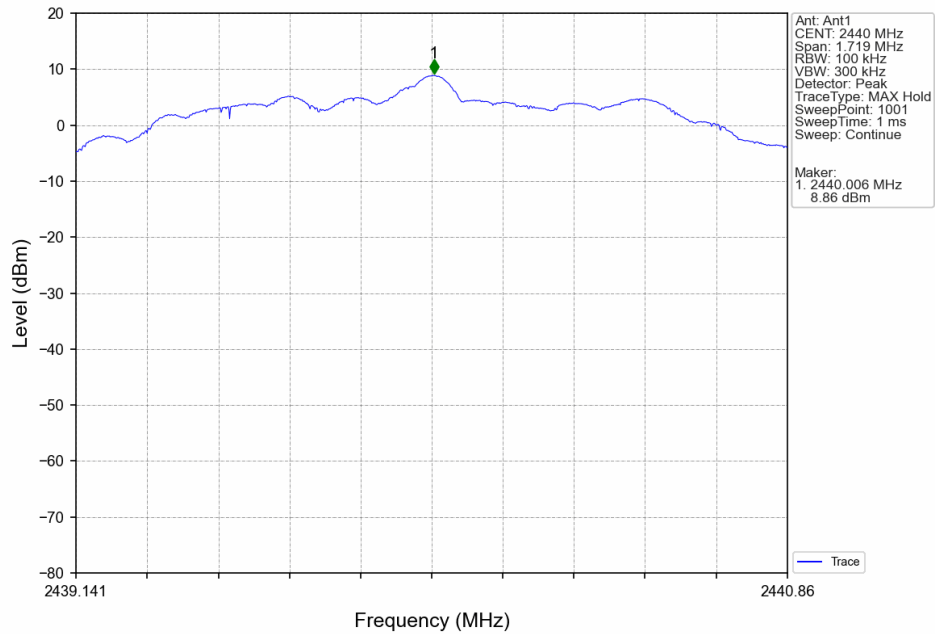


2M HCH 2480MHz Ant1 NTN

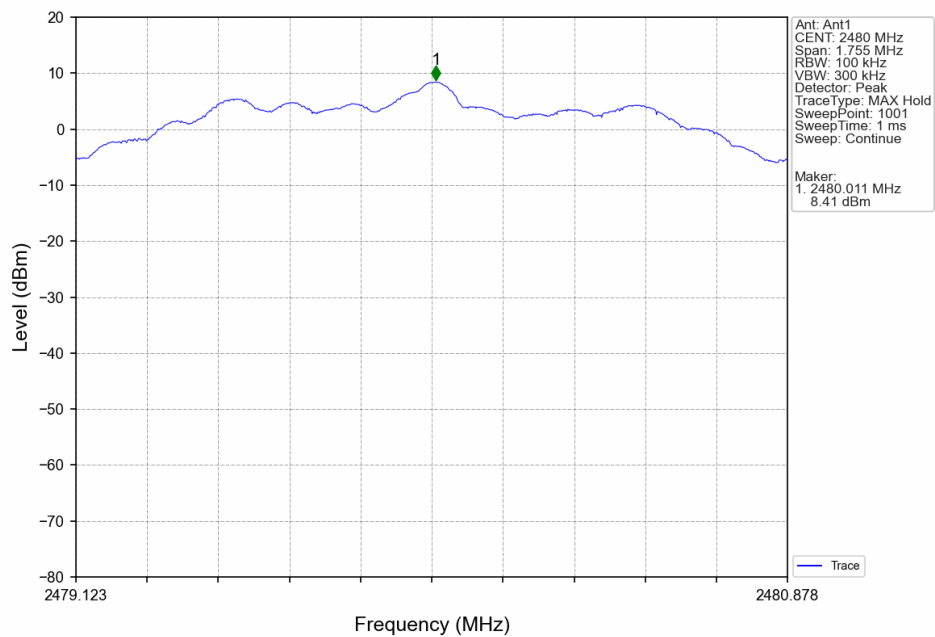


5.2.2 CSE

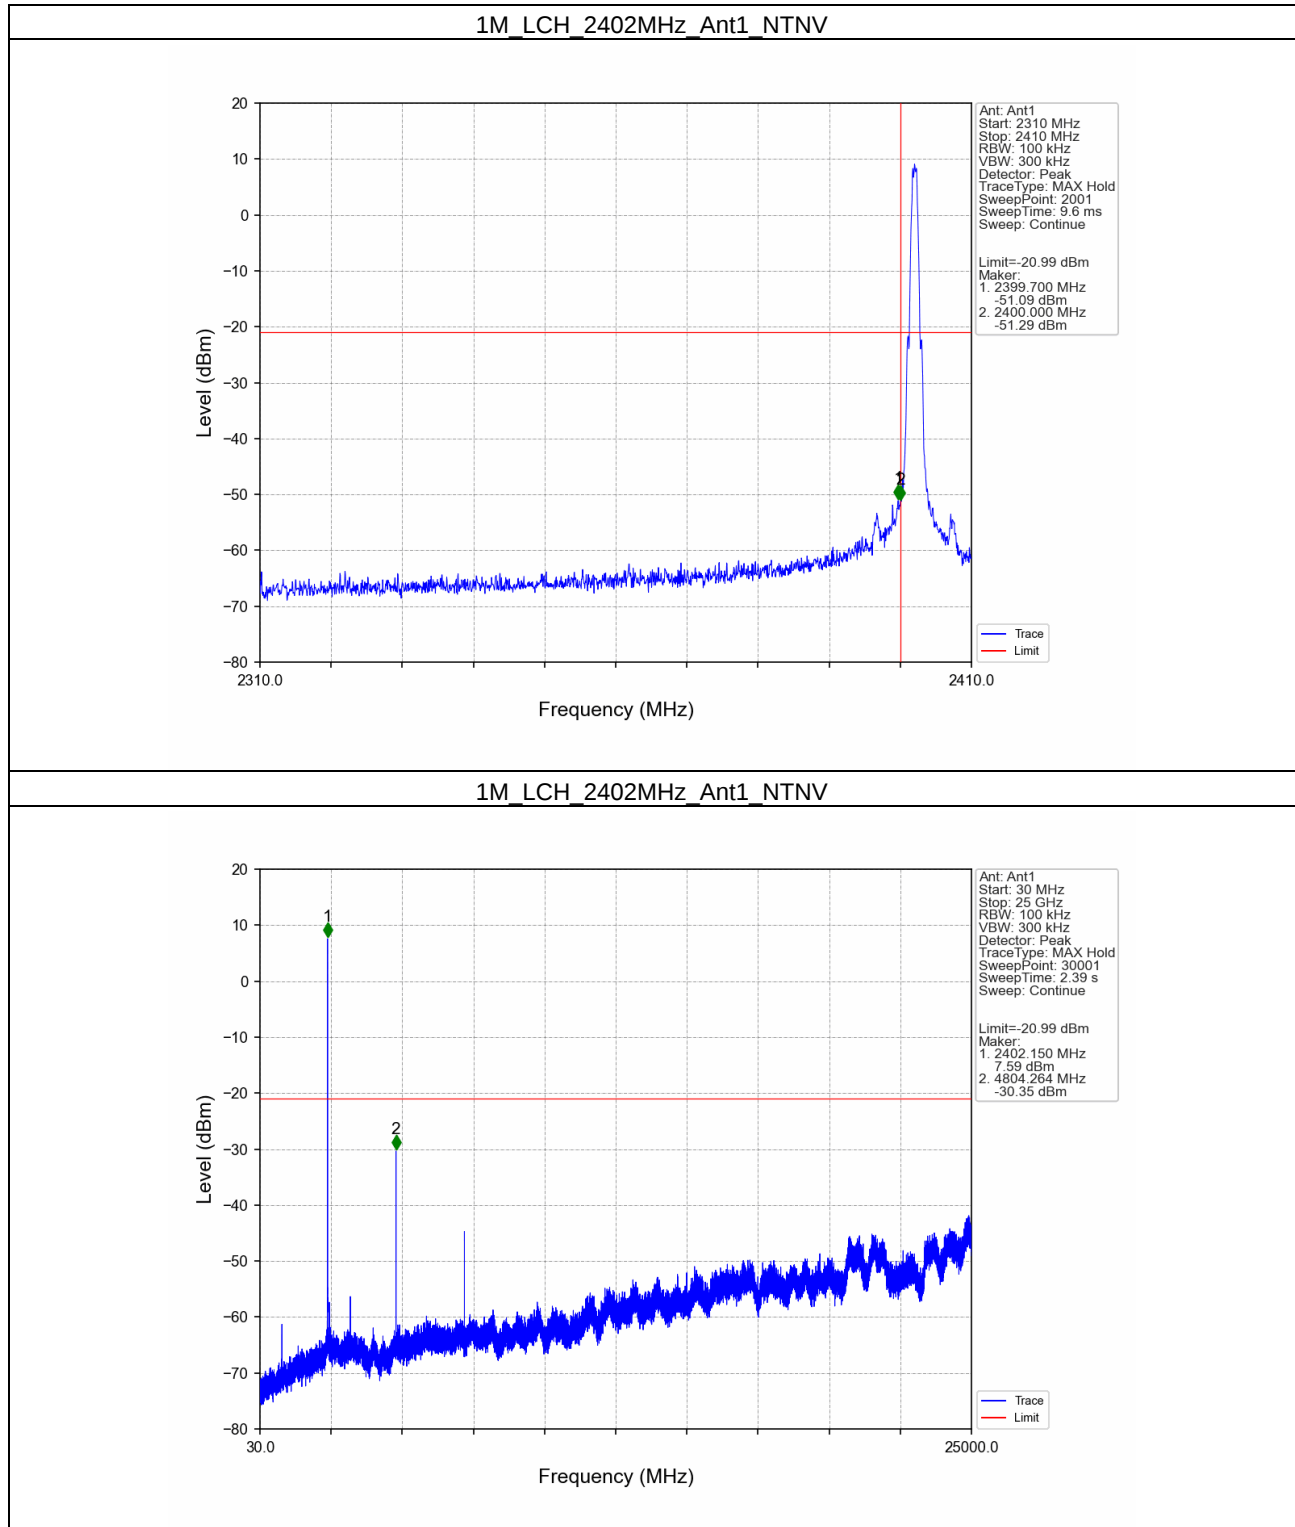


1M MCH 2440MHz_Ant1_NTNV

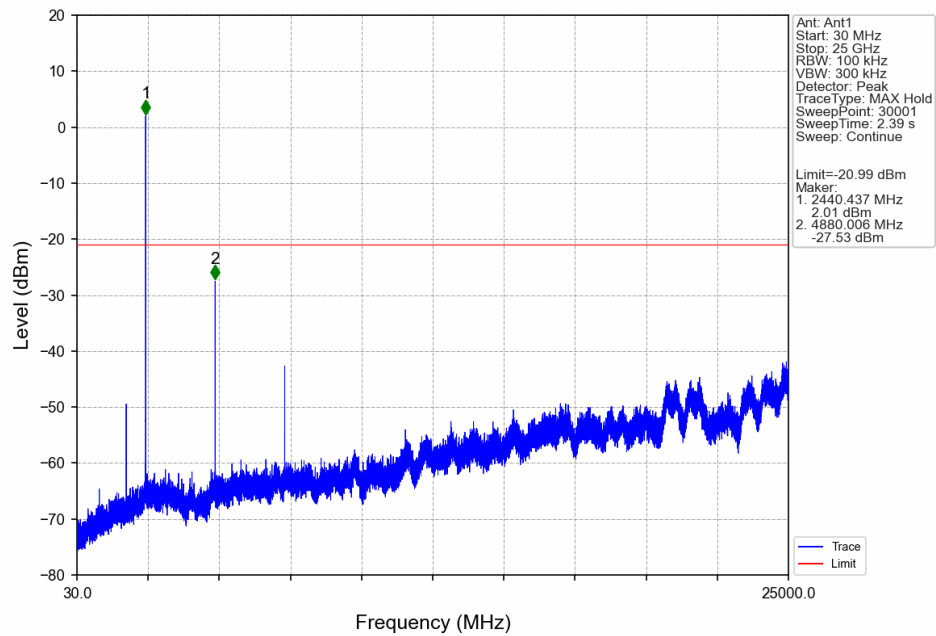


1M HCH 2480MHz_Ant1_NTNV

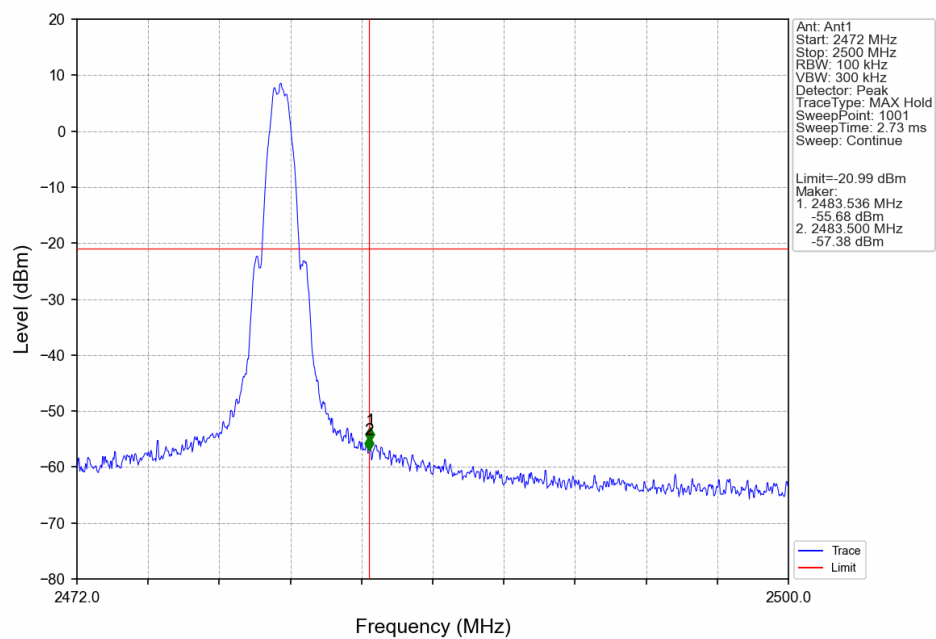


1M_HCH_2480MHz_Ant1_NTNV

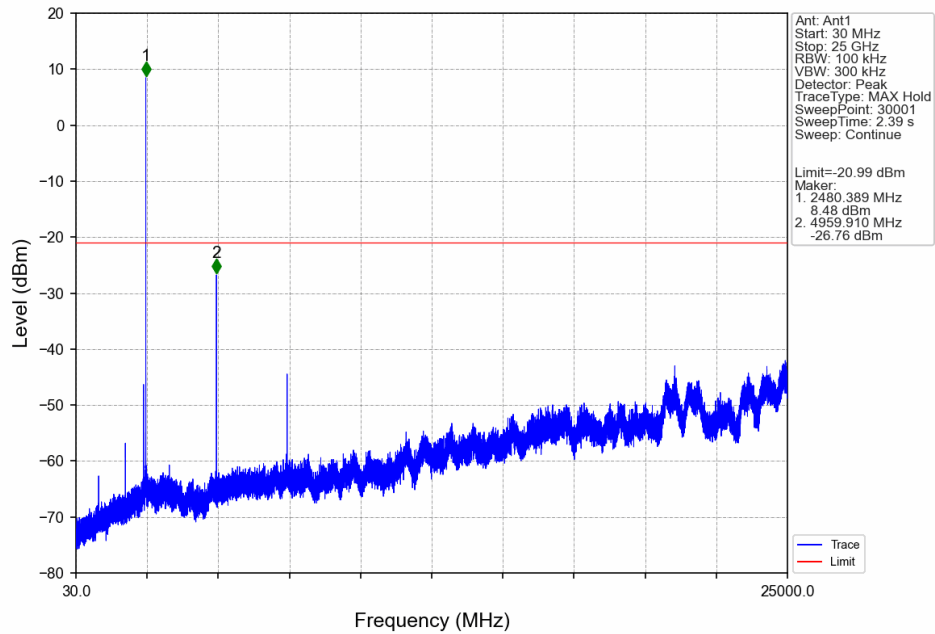


2M_LCH_2402MHz_Ant1_NTNV

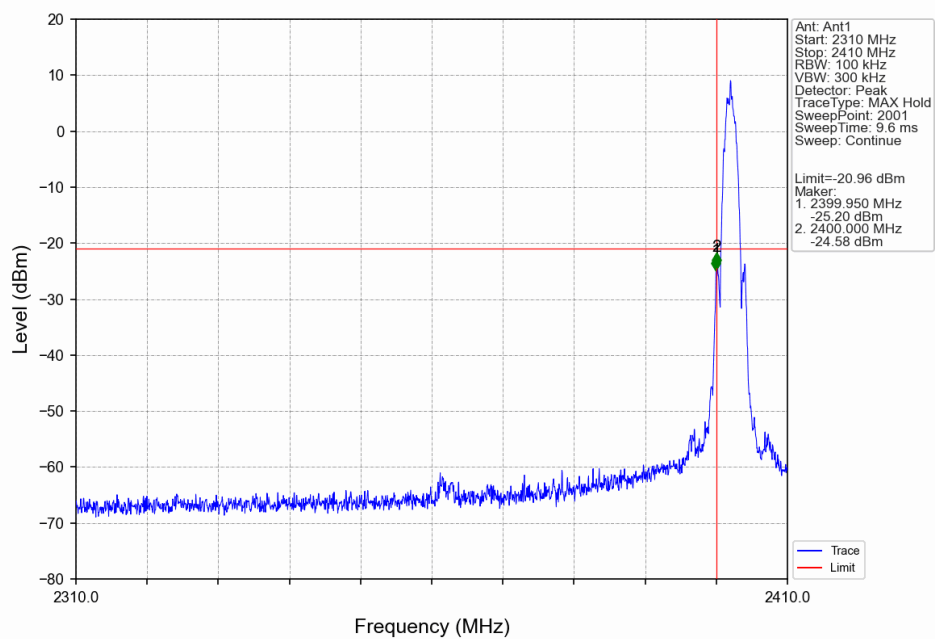


2M_LCH_2402MHz_Ant1_NTNV

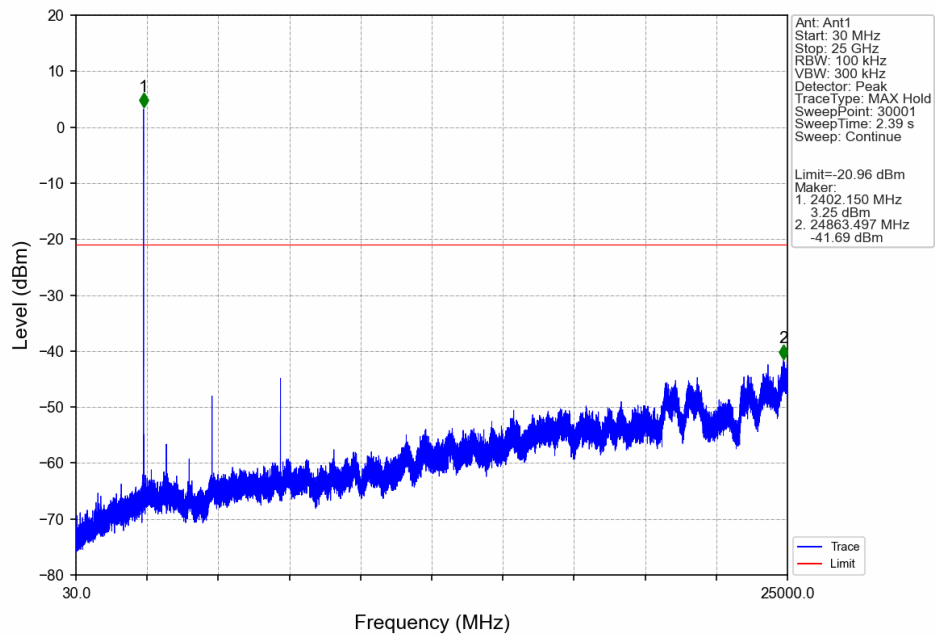


2M_MCH_2440MHz_Ant1_NTNV

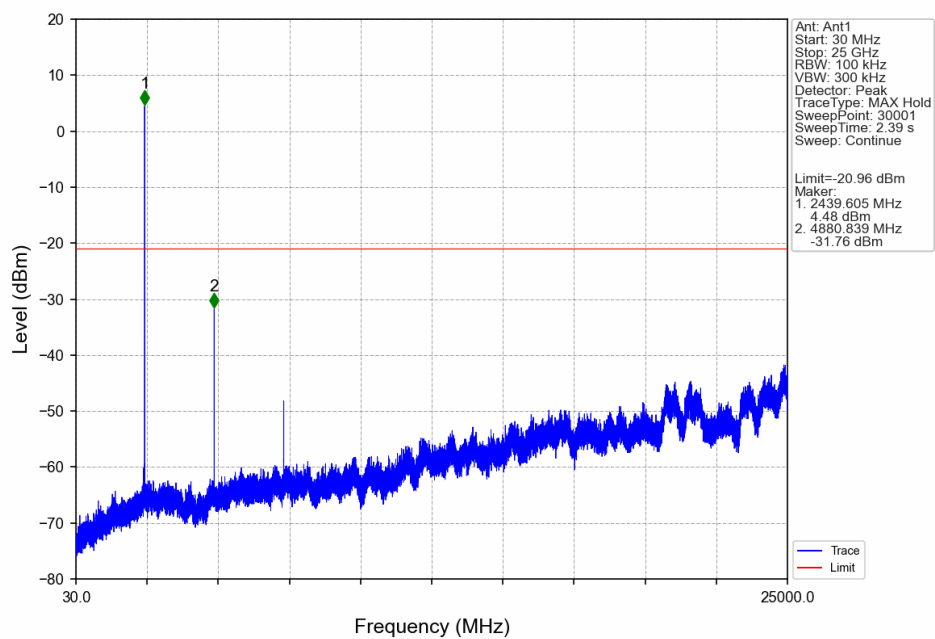

2M_HCH_2480MHz_Ant1_NTNV

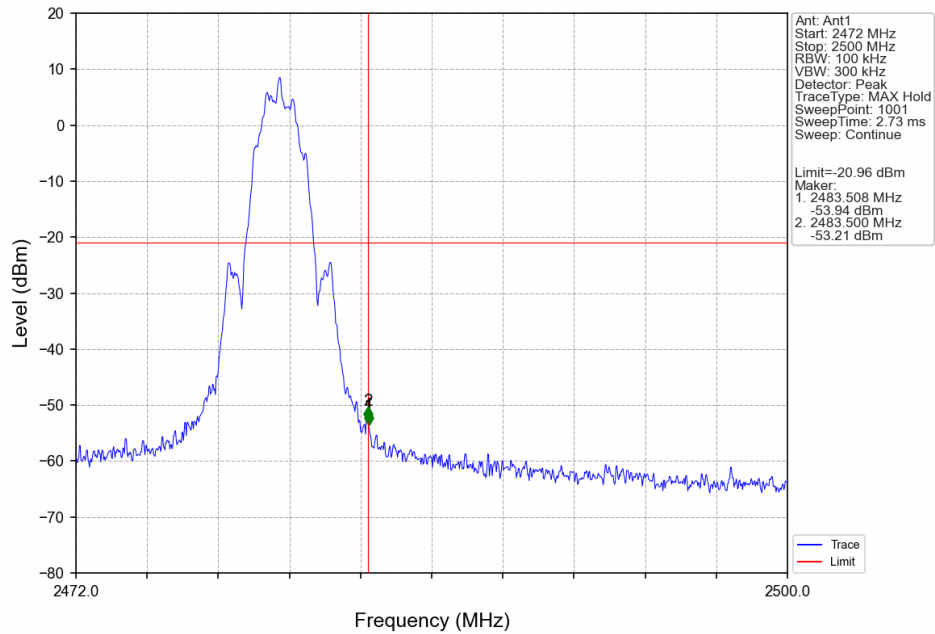

2M_HCH_2480MHz_Ant1_NTNV

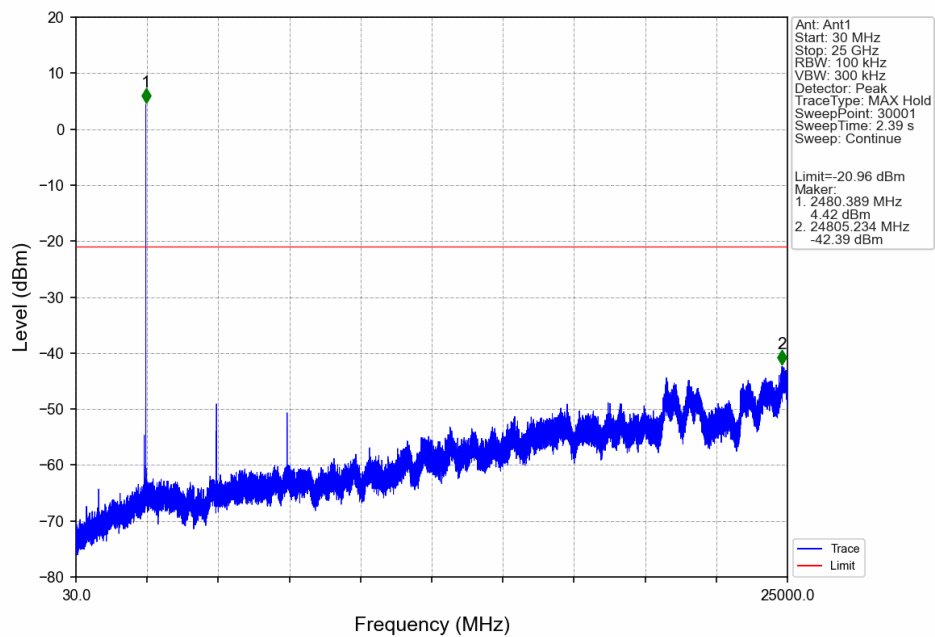

- End of the Report -