

TEST REPORT

Application No.: SUCR2601000075AT
FCC ID: 2AC8UA2564
Applicant: Anhui Huami Information Technology Co., Ltd.
Address of Applicant: Room 401-1, Building H8, Hefei Innovation Industrial Park Phase II, No.2800, Chuangxin Road, High-tech Zone, Hefei City, China (Anhui) Pilot Free Trade Zone
Manufacturer: Anhui Huami Information Technology Co., Ltd.
Address of Manufacturer: Room 401-1, Building H8, Hefei Innovation Industrial Park Phase II, No.2800, Chuangxin Road, High-tech Zone, Hefei City, China (Anhui) Pilot Free Trade Zone
Equipment Under Test (EUT):
EUT Name: Smart Watch
Model No.: A2564
Trade Mark: AMAZFIT
Standard(s) : 47 CFR Part 15, Subpart C 15.247
Date of Receipt: 2026-01-29
Date of Test: 2026-02-05 to 2026-02-09
Date of Issue: 2026-03-04

Test Result:
Pass*

* In the configuration tested, the EUT complied with the standards specified above.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone:(86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Revision Record			
Version	Description	Date	Remark
00	Original	2026-03-04	/

Authorized for issue by:				
Tested By		Nature Shen		
		Nature Shen/Project Engineer		
Approved By		Cedar cheng		
		Cedar Cheng/Reviewer		

2 Test Summary

Radio Spectrum Technical Requirement					
Item	Standard	Method	Requirement	Result	Test Lab*
Antenna Requirement	47 CFR Part 15, Subpart C 15.247	N/A	47 CFR Part 15, Subpart C 15.203 & 15.247(b)(4)	Pass	N/A

Radio Spectrum Matter Part					
Item	Standard	Method	Requirement	Result	Test Lab*
Conducted Emissions at AC Power Line (150kHz-30MHz)	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2020) Section 6.2	47 CFR Part 15, Subpart C 15.207	Pass	B
Radiated Emissions which fall in the restricted bands		ANSI C63.10 (2020) Section 6.10.5 & 11.12	47 CFR Part 15, Subpart C 15.205 & 15.209	Pass	B
Radiated Spurious Emissions Below 1GHz		ANSI C63.10 (2020) Section 6.4,6.5	47 CFR Part 15, Subpart C 15.205 & 15.209	Pass	B
Radiated Spurious Emissions Above 1GHz		ANSI C63.10 (2020) Section 6.6 & 11.12	47 CFR Part 15, Subpart C 15.205 & 15.209	Pass	B
Maximum Conducted Output Power		ANSI C63.10 (2020) Section 11.9.2	47 CFR Part 15, Subpart C 15.247(b)(3)	Pass	A
Minimum 6dB Bandwidth		ANSI C63.10 (2020) Section 11.8.1	47 CFR Part 15, Subpart C 15.247a(2)	Pass	A
Power Spectral Density		ANSI C63.10 (2020) Section 11.10.3	47 CFR Part 15, Subpart C 15.247(e)	Pass	A
Conducted Band Edges Measurement		ANSI C63.10 (2020) Section 6.10.4	47 CFR Part 15, Subpart C 15.247(d)	Pass	A
Conducted Spurious Emissions		ANSI C63.10 (2020) Section 11.11	47 CFR Part 15, Subpart C 15.247(d)	Pass	A

3 Contents

	Page
1 COVER PAGE	1
2 Test Summary	3
3 Contents.....	4
4 General Information.....	5
4.1 Details of E.U.T.	5
4.2 Description of Support Units	5
4.3 Measurement Uncertainty & Decision Rule	6
4.4 Test Location	8
4.5 Test Facility	9
4.6 Deviation from Standards.....	9
4.7 Abnormalities from Standard Conditions.....	9
5 Equipment List	10
6 Radio Spectrum Technical Requirement.....	12
6.1 Antenna Requirement	12
7 Radio Spectrum Matter Test Results	13
7.1 Conducted Emissions at AC Power Line (150kHz-30MHz).....	13
7.2 Radiated Emissions which fall in the restricted bands	17
7.3 Radiated Spurious Emissions Below 1GHz	35
7.4 Radiated Spurious Emissions Above 1GHz.....	39
7.5 Maximum Conducted Output Power	57
7.6 Minimum 6dB Bandwidth.....	59
7.7 Power Spectral Density	60
7.8 Conducted Band Edges Measurement	61
7.9 Conducted Spurious Emissions	63
8 Test Setup Photo	65
9 EUT Constructional Details (EUT Photos).....	65
10 Appendix.....	66

4 General Information

4.1 Details of E.U.T.

Power supply:	Rechargeable Li-ion Battery Battery model: PL592428 Rated Capacity: 540mAh Nominal Energy: 2.12Wh Nominal Voltage: 3.91V Limited Charge Voltage: 4.5V
Operation Frequency:	2402MHz to 2480MHz
Modulation Type:	GFSK
Number of Channels:	40
Channel Spacing:	2MHz
Antenna Type:	Metal Antenna
Antenna Gain:	-4.37dBi (Provided by the manufacturer)

4.2 Description of Support Units

Description	Manufacturer	Model No.	Serial No.
Notebook	Lenovo	/	/
AC Adapter	AOHAI	SR-02A	/

4.3 Measurement Uncertainty & Decision Rule

Lab A:

No.	Item	Measurement Uncertainty
1	Radio Frequency	$\pm 7.25 \times 10^{-8}$
2	Duty cycle	$\pm 0.37\%$
3	Occupied Bandwidth	$\pm 3\%$
4	Conduction emission	$\pm 3.0\text{dB}$ (150kHz to 30MHz)
5	RF conducted power	$\pm 0.75\text{dB}$
6	RF power density	$\pm 2.84\text{dB}$
7	Conducted Spurious emissions	$\pm 0.75\text{dB}$
8	RF Radiated power	$\pm 1.56\text{dB}$ (9KHz-30MHz)
		$\pm 4.80\text{dB}$ (30MHz-1GHz)
		$\pm 4.80\text{dB}$ (1GHz-18GHz)
		$\pm 4.80\text{dB}$ (18GHz-40GHz)
9	Temperature test	$\pm 1^\circ\text{C}$
10	Humidity test	$\pm 3\%$
11	Supply voltages	$\pm 1\%$
12	Time	$\pm 3\%$
Remark: The U_{lab} (lab Uncertainty) is less than $U_{\text{CISPR/ETSI}}$ (CISPR/ETSI Uncertainty), so the test results – compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit; – non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.		

Lab B:

No.	Item	Measurement Uncertainty
1	Radio Frequency	8.4×10^{-8}
2	Timeout	2s
3	Duty Cycle	0.37%
4	Occupied Bandwidth	3%
5	RF Conducted Power	0.6dB
6	RF Power Density	2.9dB
7	Conducted Spurious Emissions	0.75dB
8	RF Radiated Power	5.2dB (Below 1GHz)
		5.9dB (Above 1GHz)
9	Radiated Spurious Emission Test	4.2dB (Below 30MHz)
		4.5dB (30MHz-1GHz)
		5.1dB (1GHz-18GHz)
		5.4dB (Above 18GHz)
10	Temperature Test	1°C
11	Humidity Test	3%
12	Supply Voltages	1.5%
13	Time	3%

Note: The measurement uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

4.4 Test Location

Lab A:

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu)
Pilot Free Trade Zone

Lab B:

Conducted Emissions at AC Power Line (150kHz-30MHz); Radiated Emissions; Radiated Emissions
which fall in the restricted bands test at:

Compliance Certification Services (Kunshan) Inc.

No.10 Weiye Rd, Innovation park, Eco&Tec, Development Zone, Kunshan City, Jiangsu, China.

Tel: +86 512 5735 5888 Fax: +86 512 5737 0818

Note:

- 1.SGS is not responsible for wrong test results due to incorrect information (e.g., max. internal working frequency, antenna gain, cable loss, etc) is provided by the applicant. (If applicable).
- 2.SGS is not responsible for the authenticity, integrity and the validity of the conclusion based on results of the data provided by applicant. (If applicable).
3. Sample source: sent by customer.

4.5 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

Lab A:

• A2LA (Certificate No. 6336.01)

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd. is accredited by the American Association for Laboratory Accreditation (A2LA).

• FCC (Designation Number: CN1312)

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd. has been recognized as an accredited testing laboratory. Test Firm Registration Number: 717327

• ISED (CAB Identifier: CN0120)

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd. has been recognized by Innovation, Science and Economic Development Canada (ISED) as an accredited testing laboratory.

Company Number: 27594

Lab B:

• A2LA (Certificate No. 2541.01)

Compliance Certification Services (Kunshan) Inc. is accredited by the American Association for Laboratory Accreditation (A2LA).

• FCC (Designation Number: CN1172)

Compliance Certification Services (Kunshan) Inc. has been recognized as an accredited testing laboratory.

• ISED (CAB Identifier: CN0072)

Compliance Certification Services (Kunshan) Inc. has been recognized by Innovation, Science and Economic Development Canada (ISED) as an accredited testing laboratory.

Company Number: 2324E

• VCCI (Member No: 1938)

The 3m and 10m Semi-anechoic chamber and Shielded Room of Compliance Certification Services (Kunshan) Inc. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-20134, R-11600, C-11707, T-11499, G-10216 respectively.

4.6 Deviation from Standards

None

4.7 Abnormalities from Standard Conditions

None

5 Equipment List

Lab A:

Item	Equipment	Manufacturer	Model	Inventory No	Cal Date	Cal. Due Date
RF Conducted Test						
1	Signal Analyzer	ROHDE&SCHWARZ	FSW43	SUWI-01-02-04	1/14/2026	1/13/2027
2	Signal Analyzer	KEYSIGHT	N9020A	SUWI-01-02-15	11/21/2025	11/20/2026
3	MXG Vector signal genitor	KEYSIGHT	N5182B	SUWI-01-38-01	1/14/2026	1/13/2027
4	Signal Generator	ROHDE&SCHWARZ	SMW200A	SUWI-01-07-08	1/14/2026	1/13/2027
5	Signal Generator	ROHDE&SCHWARZ	SMW100A	SUWI-01-08-01	1/14/2026	1/13/2027
6	MXG Vector Signal Generator	ROHDE&SCHWARZ	SMR20	SUWI-01-33-01	11/21/2025	11/20/2026
7	Wideband Radio Communication Tester	ROHDE&SCHWARZ	CMW500	SUWI-01-16-13	5/8/2025	5/7/2026
8	Wideband Radio Communication Test Station	Anritsu	MT8000A	SUWI-01-34-02	11/21/2025	11/20/2026
9	Wideband Radio Communication Tester	Anritsu	MT8821C	SUWI-01-26-03	11/21/2025	11/20/2026
10	Power meter	Anritsu	ML2495A	SUWI-01-31-01	11/21/2025	11/20/2026
11	Pulse power sensor	Anritsu	MA2411B	SUWI-01-32-01	11/21/2025	11/20/2026
12	DC Power Supply	HYELEC	HY3005B	SUWI-01-18-01	1/14/2026	1/13/2027
13	Temperature and humidity meter	MingGao	TH101B	SUWI-01-01-07	2/11/2026	2/10/2027
14	Temperature Chamber	GIANT FORCE	ICT-017-40-SP-SD	SUWI-01-13-02	5/7/2025	5/6/2026
15	Measurement Software	TST	TST 272 V2.02	SUWI-03-55-03	NCR	NCR
16	RF Control unit	TST	TSCB3023R2	SUWI-02-20-01	NCR	NCR
17	RFCables	Tonscend	NA	SUWI-01-03-01	NCR	NCR

Lab B:

Item	Equipment	Manufacturer	Model	Inventory No	Cal Date	Cal. Due Date
Conducted Emission at Mains Terminals						
1	EMI Test Receive	R&S	ESCI	KS301196	07/09/2025	07/08/2026
2	LISN	R&S	ENV216	KS301197	01/08/2026	01/07/2027
3	LISN	Schwarzbeck	NNLK 8129	KS301091	01/08/2026	01/07/2027
4	Pulse Limiter	R&S	ESH3-Z2	KUS1902E001	12/18/2025	12/17/2026
5	CE test Cable	Thermax	/	CZ301102	12/18/2025	12/17/2026
6	Software	Faratronic	E3	/	N.C.R	N.C.R
RF Radiated Test						
1	Spectrum Analyzer	R&S	FSV40	KUS1806E003	07/09/2025	07/08/2026
2	Universal Radio Communication Tester	R&S	CMW500	KSEM009-1	12/17/2025	12/16/2026
3	Signal Generator	Agilent	E8257C	KS301066	07/22/2025	07/21/2026
4	Loop Antenna (9KHz-30MHz)	COM-POWER	AL-130R	KUS1806E001	07/11/2025	07/10/2026
5	Bilog Antenna (30MHz-1GHz)	TESEQ	CBL 6112D	KUS1806E005	07/12/2025	07/11/2026
6	Horn-antenna(1-18GHz)	Schwarzbeck	BBHA9120D	KS301079	01/11/2026	01/10/2028
7	Horn Antenna(18-40GHz)	Schwarzbeck	BBHA9170	CZ301058	01/11/2026	01/10/2028
8	Amplifier(30MHz~1GHz)	TST	LNA009100G30	KSEM061	12/18/2025	12/17/2026
9	Amplifier(400MHz~8GHz)	TST	LNA004080G30	KSEM062	12/18/2025	12/17/2026
10	Amplifier(1GHz~18GHz)	TST	LNA010180G45	KSEM039	07/09/2025	07/08/2026
11	Amplifier(18~40GHz)	TST	LNA180400G40	KSEM038	07/09/2025	07/08/2026
12	Temperature & Humidity Recorder	Renke Control	RS-WS-N01-6J	KSEM024-4	02/26/2025	02/25/2026
13	Software	ESE	E3_V 6.111221a	/	NCR	NCR
14	Measurement Software	Tonscend	JS32-RE V5.0.0.1	/	NCR	NCR
15	Measurement Software	Tonscend	JS32-RSE V5.0.0.0	/	NCR	NCR

6 Radio Spectrum Technical Requirement

6.1 Antenna Requirement

6.1.1 Test Requirement:

47 CFR Part 15, Subpart C 15.203 & 15.247(b)(4)

6.1.2 Conclusion

Standard Requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:

The antenna is metal Antenna and no consideration of replacement. The best case gain of the antenna is -4.37dBi.

Antenna location: Refer to internal photo.

7 Radio Spectrum Matter Test Results

7.1 Conducted Emissions at AC Power Line (150kHz-30MHz)

Test Requirement 47 CFR Part 15, Subpart C 15.207

Test Method: ANSI C63.10 (2020) Section 6.2

Limit:

Frequency of emission(MHz)	Conducted limit(dBμV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50
*Decreases with the logarithm of the frequency.		
Detector: Peak for pre-scan (9kHz resolution bandwidth) 0.15M to 30MHz		

7.1.1 E.U.T. Operation

Operating Environment:

Temperature: 25.6 °C


Humidity: 47.7 % RH

Atmospheric Pressure: 1001 mbar

7.1.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	02	TX mode(1Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.

7.1.3 Test Setup Diagram

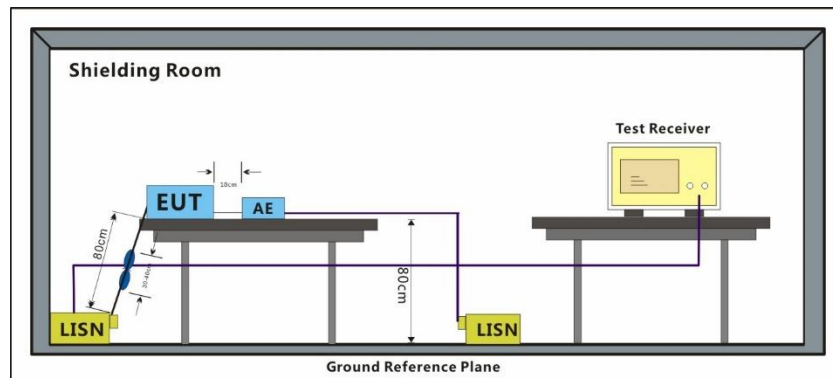


7.1.4 Measurement Procedure and Data

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50ohm/50μH + 5ohm linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane.
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.
- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.


Remark : Level=Read Level+ Cable Loss+ LISN Factor

Test Mode: 02; Line: Live line

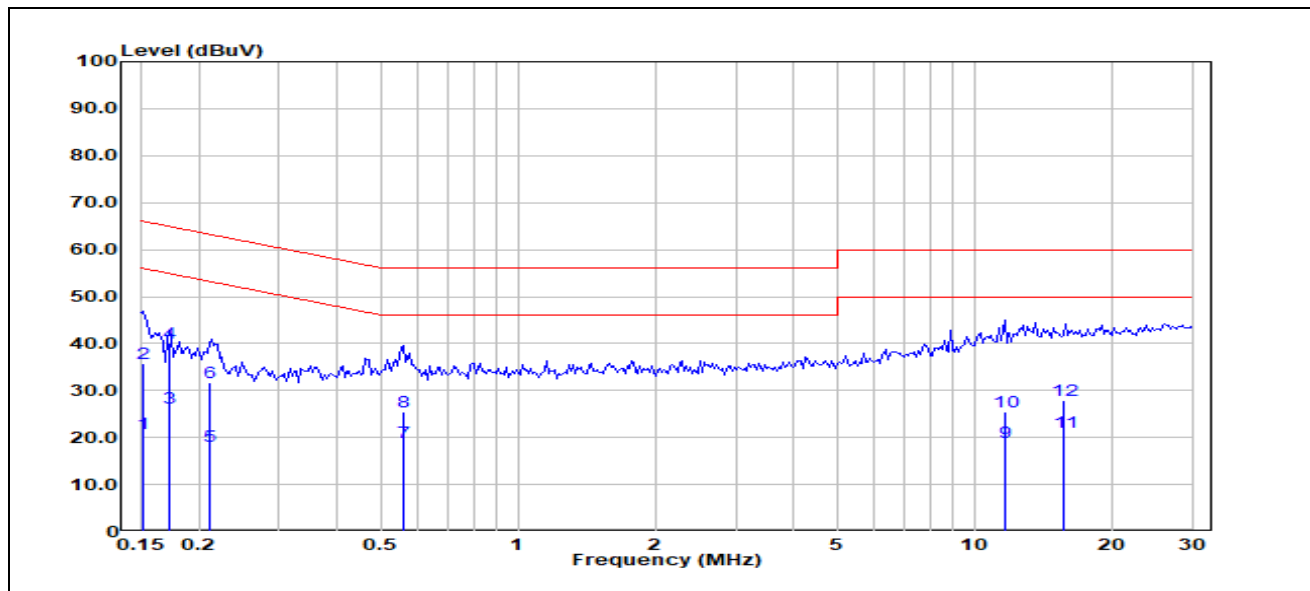

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1503	0.27	20.58	20.85	55.99	-35.14	Average
2	0.1503	15.12	20.58	35.70	65.99	-30.29	QP
3	0.1722	5.76	20.45	26.20	54.85	-28.65	Average
4	0.1722	19.74	20.45	40.19	64.85	-24.67	QP
5	0.2109	-2.23	20.28	18.05	53.17	-35.12	Average
6	0.2109	11.54	20.28	31.82	63.17	-31.35	QP
7	0.5603	-1.24	20.22	18.98	46.00	-27.02	Average
8	0.5603	5.14	20.22	25.35	56.00	-30.65	QP
9	11.6559	-5.49	24.50	19.01	50.00	-30.99	Average
10	11.6559	0.91	24.50	25.41	60.00	-34.59	QP
11	15.7640	-4.94	26.16	21.22	50.00	-28.78	Average
12	15.7640	1.66	26.16	27.83	60.00	-32.17	QP

Test Mode: 02; Line: Neutral Line

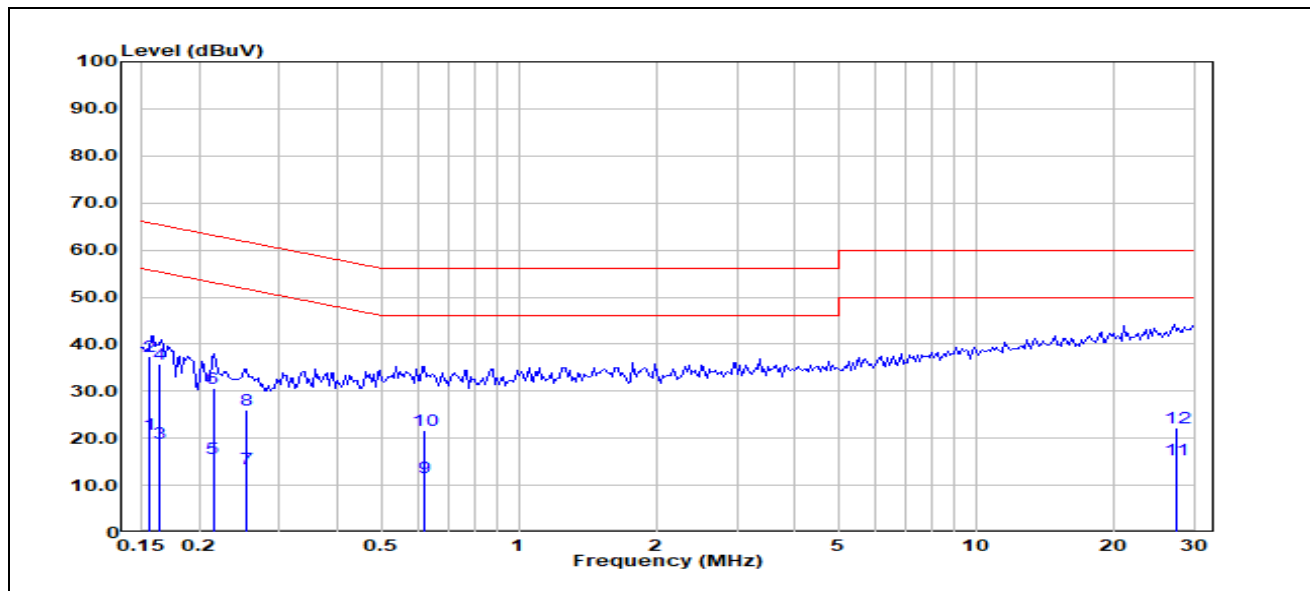

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1555	0.28	20.51	20.79	55.70	-34.91	Average
2	0.1555	16.96	20.51	37.47	65.70	-28.24	QP
3	0.1642	-1.39	20.48	19.09	55.25	-36.16	Average
4	0.1642	15.39	20.48	35.87	65.25	-29.38	QP
5	0.2145	-4.47	20.32	15.85	53.03	-37.18	Average
6	0.2145	10.20	20.32	30.52	63.03	-32.51	QP
7	0.2527	-6.69	20.22	13.52	51.67	-38.15	Average
8	0.2527	5.78	20.22	26.00	61.67	-35.67	QP
9	0.6227	-8.66	20.20	11.54	46.00	-34.46	Average
10	0.6227	1.49	20.20	21.68	56.00	-34.32	QP
11	27.5035	-13.11	28.47	15.36	50.00	-34.64	Average
12	27.5035	-6.22	28.47	22.25	60.00	-37.75	QP

7.2 Radiated Emissions which fall in the restricted bands

Test Requirement 47 CFR Part 15, Subpart C 15.205 & 15.209

Test Method: ANSI C63.10 (2020) Section 6.10.5 & 11.12

Measurement Distance: 3m

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

7.2.1 E.U.T. Operation

Operating Environment:

Temperature: 25.1 °C


Humidity: 47.6 % RH

Atmospheric Pressure: 1001 mbar

7.2.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	02	TX mode(1Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.
Final test	03	TX mode(2Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.

7.2.3 Test Setup Diagram

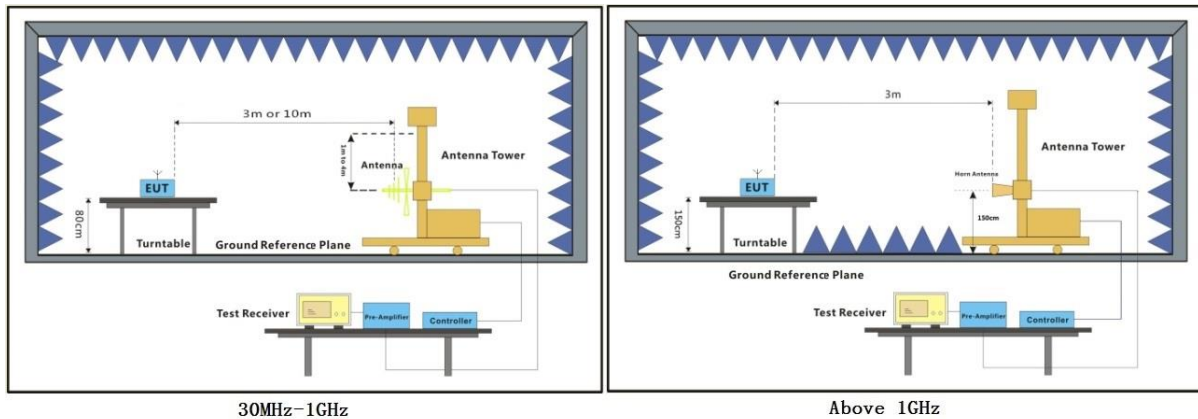


7.2.4 Measurement Procedure and Data

- For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- Test the EUT in the lowest channel, the middle channel, the Highest channel.
- The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- Repeat above procedures until all frequencies measured was complete.

Remark 1: Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor


Remark 2: For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.

BLE_1M_TX_CH_00_Horizontal_Peak

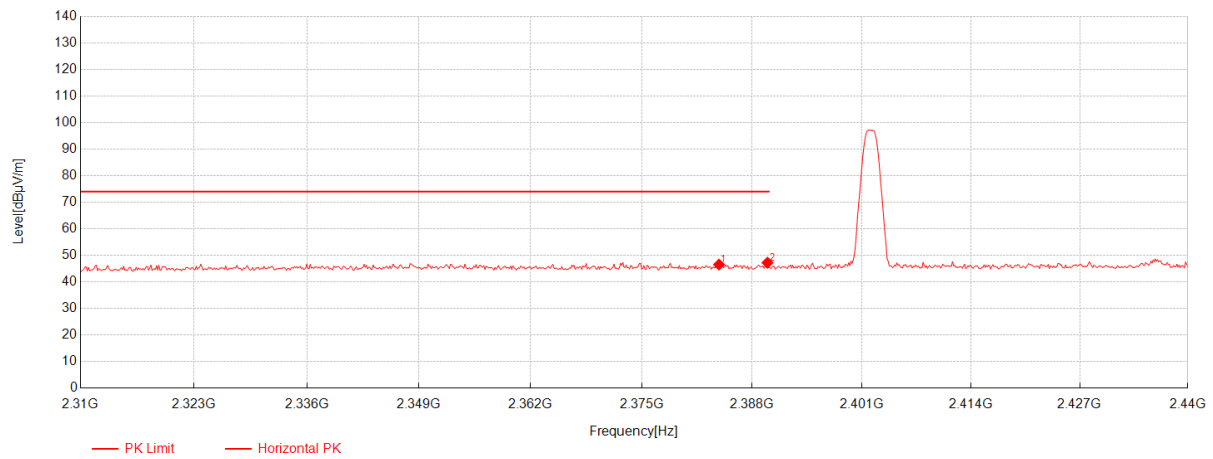


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2384.1	46.01	26.64	-26.15	46.50	74.00	27.50	Horizontal
2	2389.82	46.64	26.70	-26.13	47.21	74.00	26.79	Horizontal

BLE_1M_TX_CH_00_Horizontal_Average

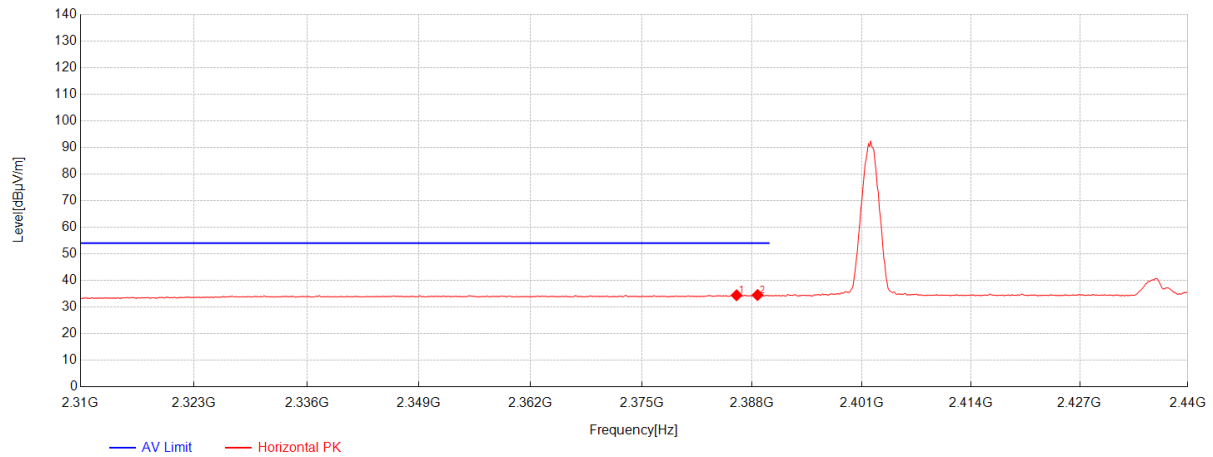


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2386.18	33.90	26.66	-26.14	34.42	54.00	19.58	Horizontal
2	2388.65	33.94	26.69	-26.13	34.50	54.00	19.50	Horizontal

BLE_1M_TX_CH_00_Vertical_Peak

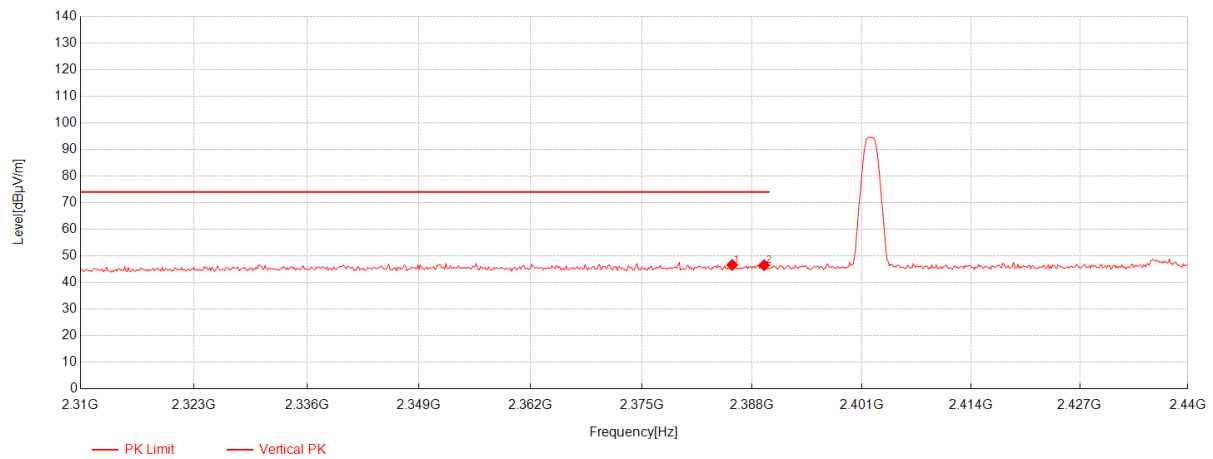


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2385.66	46.04	26.66	-26.15	46.55	74.00	27.45	Vertical
2	2389.43	45.92	26.69	-26.13	46.48	74.00	27.52	Vertical

BLE_1M_TX_CH_00_Vertical_Average

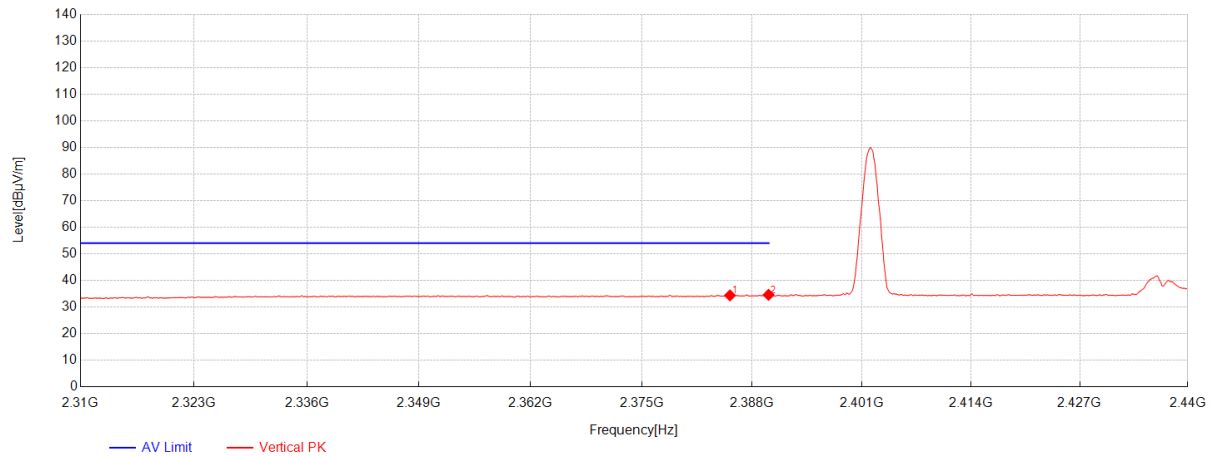


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2385.4	33.87	26.65	-26.15	34.37	54.00	19.63	Vertical
2	2389.95	34.02	26.70	-26.13	34.59	54.00	19.41	Vertical

BLE_1M_TX_CH_39_Horizontal

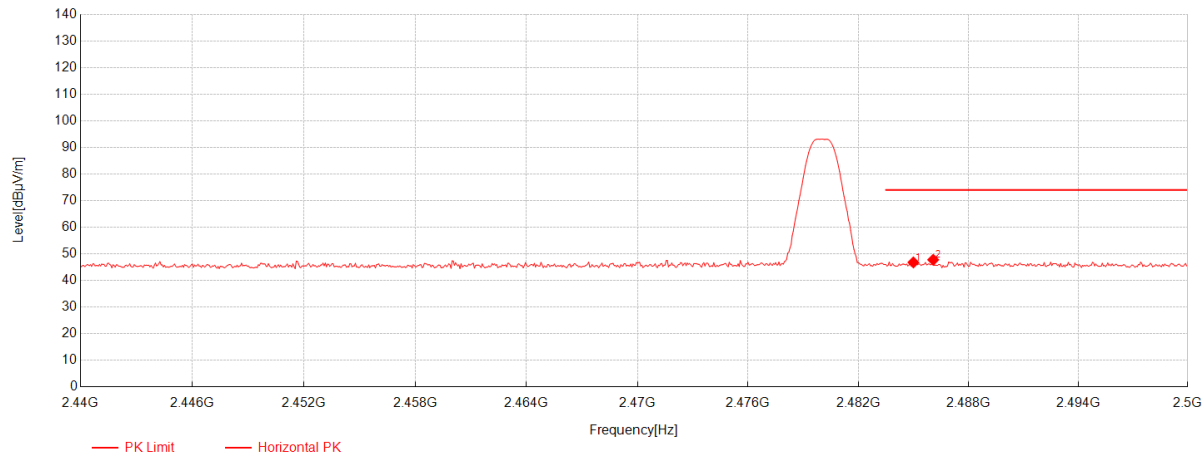


Data List								
NO.	Frequency [MHz]	Reading [dBµV]	AF [dB/m]	Factor [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Polarity
1	2485	45.85	27.15	-26.24	46.76	74.00	27.24	Horizontal
2	2486.08	46.85	27.14	-26.24	47.75	74.00	26.25	Horizontal

BLE_1M_TX_CH_39_Horizontal_Average

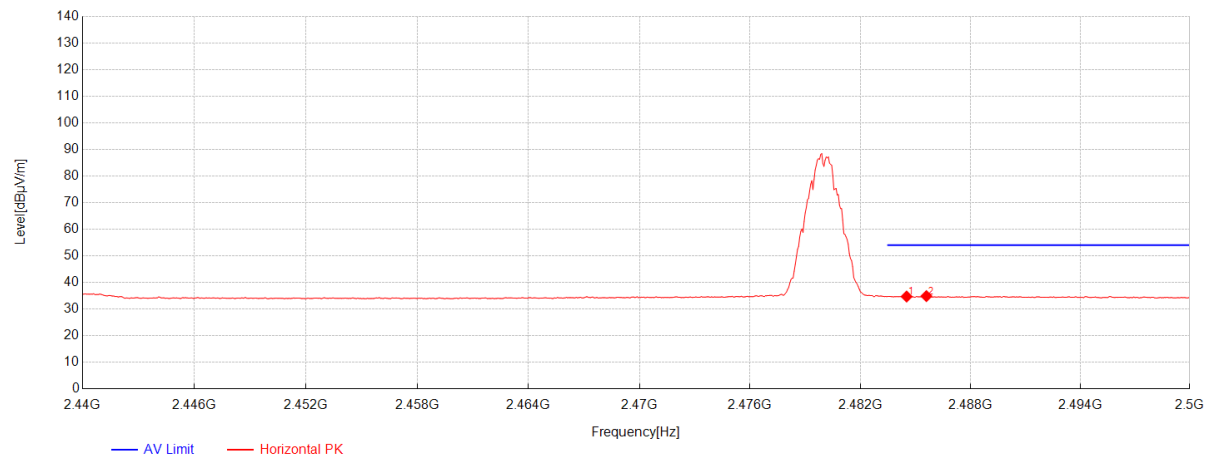


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2484.52	33.79	27.15	-26.24	34.70	54.00	19.30	Horizontal
2	2485.6	33.96	27.14	-26.24	34.86	54.00	19.14	Horizontal

BLE_1M_TX_CH_39_Verical

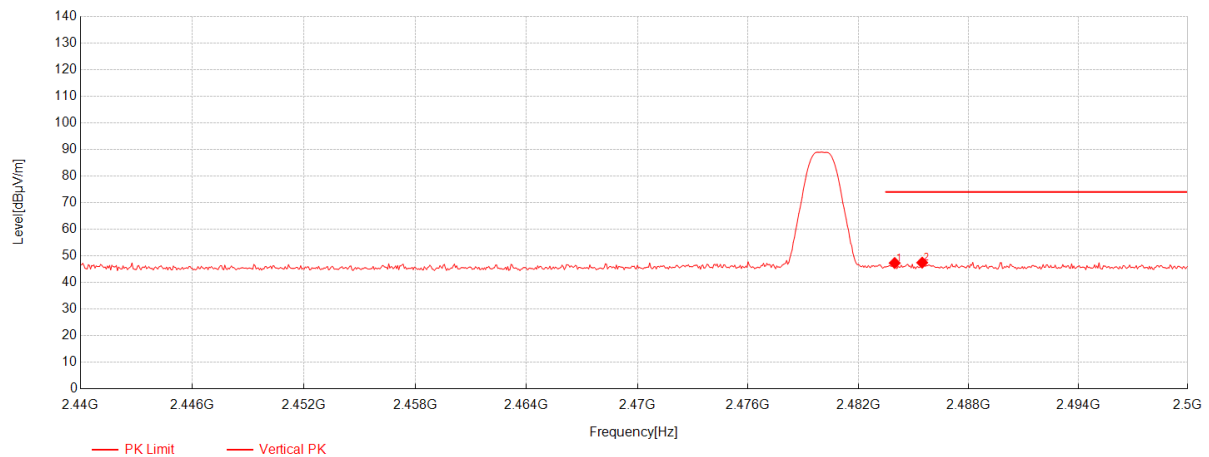


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2483.98	46.35	27.16	-26.24	47.27	74.00	26.73	Vertical
2	2485.48	46.51	27.15	-26.24	47.42	74.00	26.58	Vertical

BLE_1M_TX_CH_39_Verical_Average

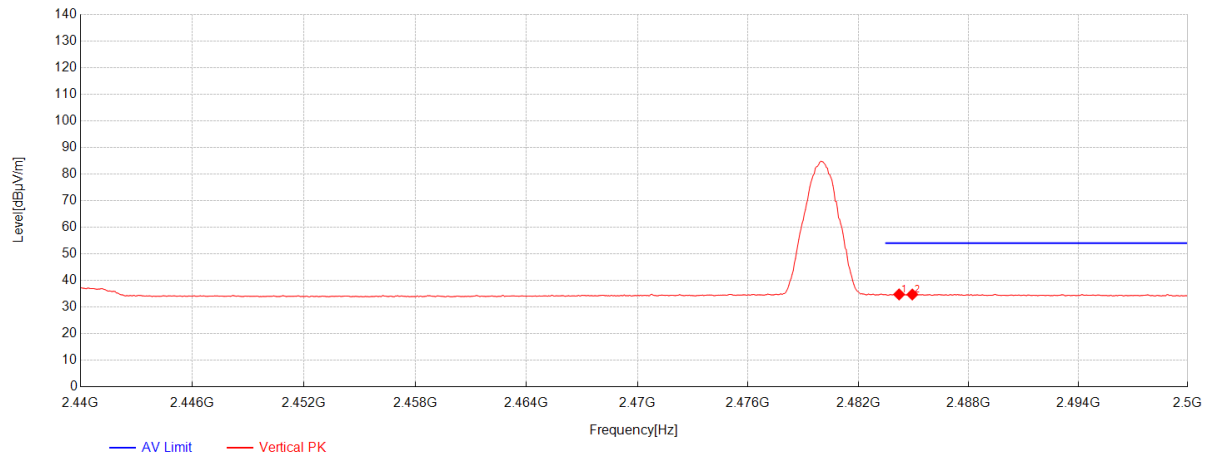


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2484.22	33.82	27.16	-26.24	34.74	54.00	19.26	Vertical
2	2484.94	33.80	27.15	-26.24	34.71	54.00	19.29	Vertical

BLE_2M_TX_CH_00_Horizontal_Peak

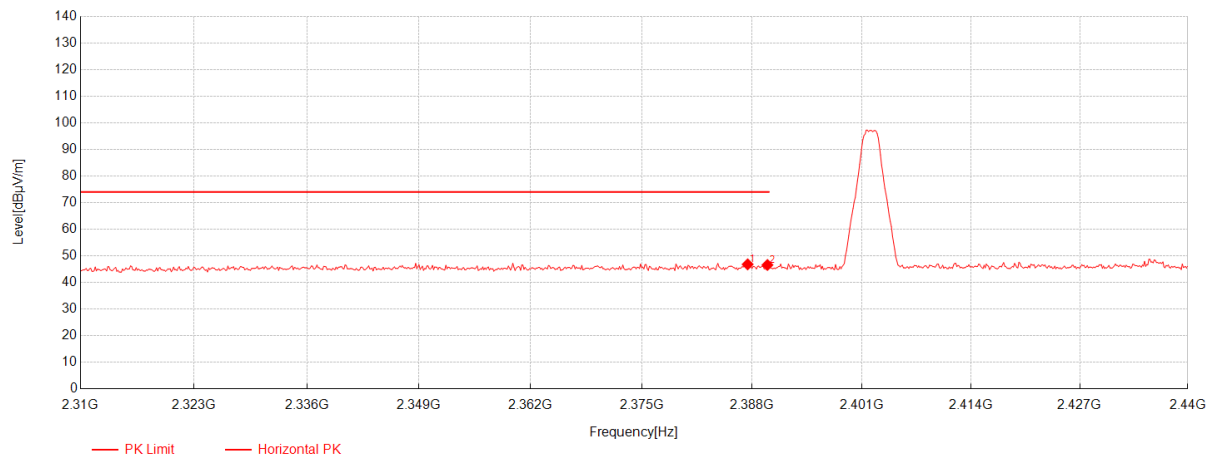


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2387.48	46.25	26.67	-26.14	46.78	74.00	27.22	Horizontal
2	2389.82	45.99	26.70	-26.13	46.56	74.00	27.44	Horizontal

BLE_2M_TX_CH_00_Horizontal_Average

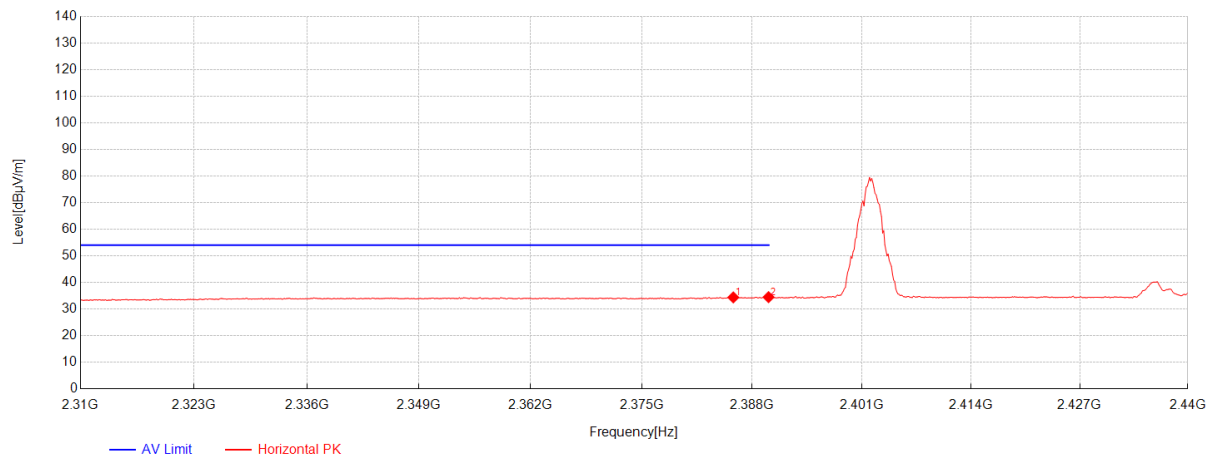


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2385.79	33.86	26.66	-26.15	34.37	54.00	19.63	Horizontal
2	2389.95	33.90	26.70	-26.13	34.47	54.00	19.53	Horizontal

BLE_2M_TX_CH_00_Verical

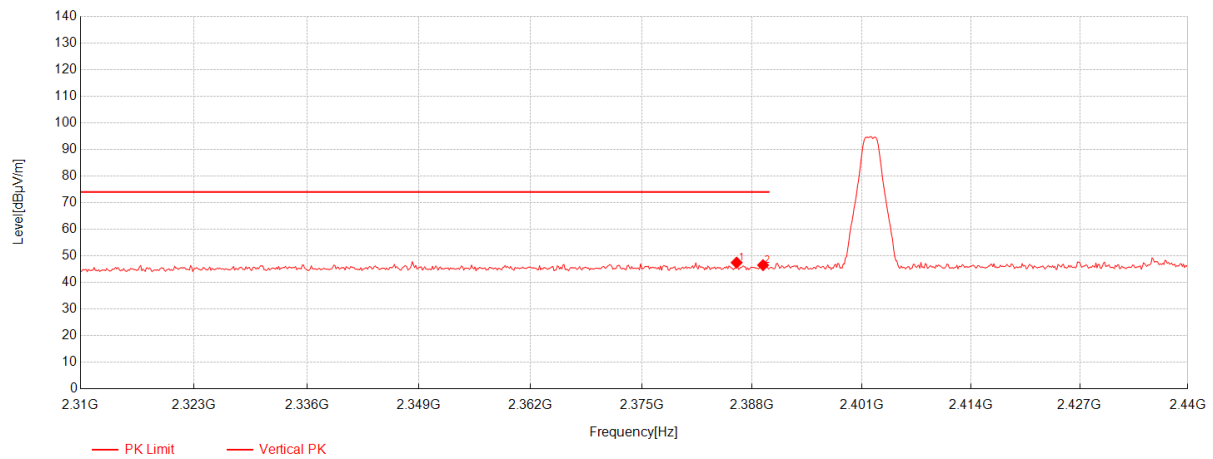


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2386.18	46.91	26.66	-26.14	47.43	74.00	26.57	Vertical
2	2389.3	45.93	26.69	-26.13	46.49	74.00	27.51	Vertical

BLE_2M_TX_CH_00_Vertical_Average

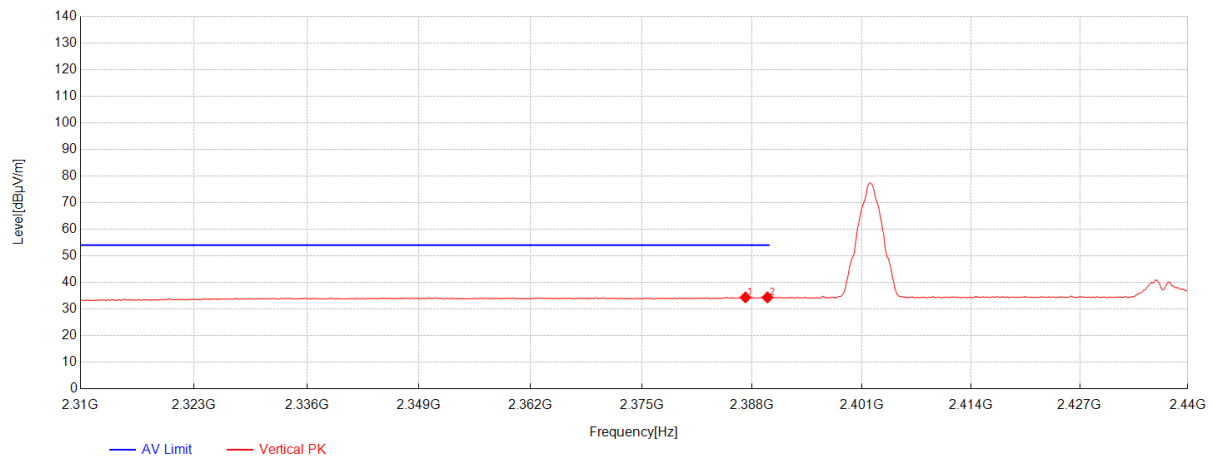


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2387.22	33.84	26.67	-26.14	34.37	54.00	19.63	Vertical
2	2389.82	33.80	26.70	-26.13	34.37	54.00	19.63	Vertical

BLE_2M_TX_CH_39_Horizontal_Peak

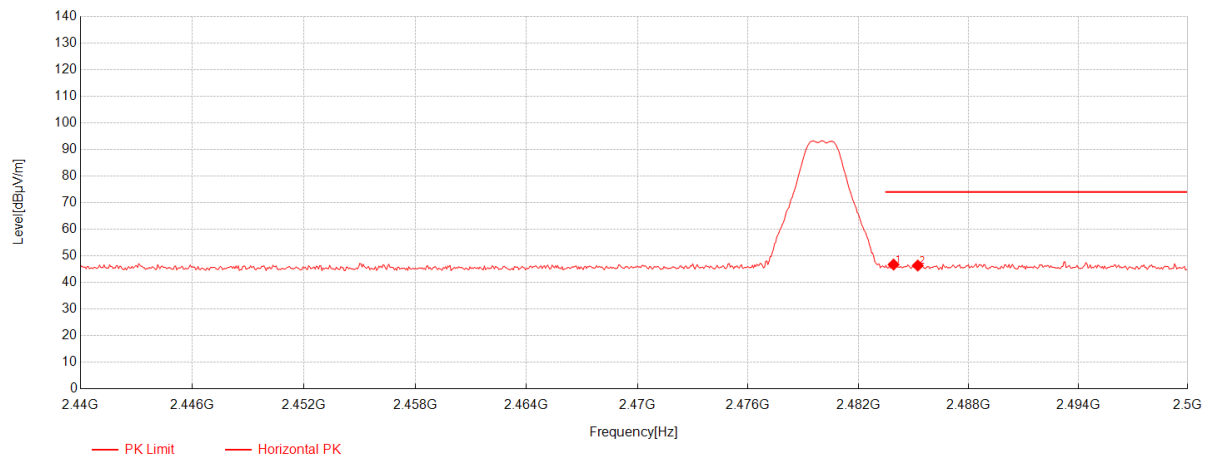


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2483.92	45.80	27.16	-26.24	46.72	74.00	27.28	Horizontal
2	2485.24	45.44	27.15	-26.24	46.35	74.00	27.65	Horizontal

BLE_2M_TX_CH_39_Horizontal_Average

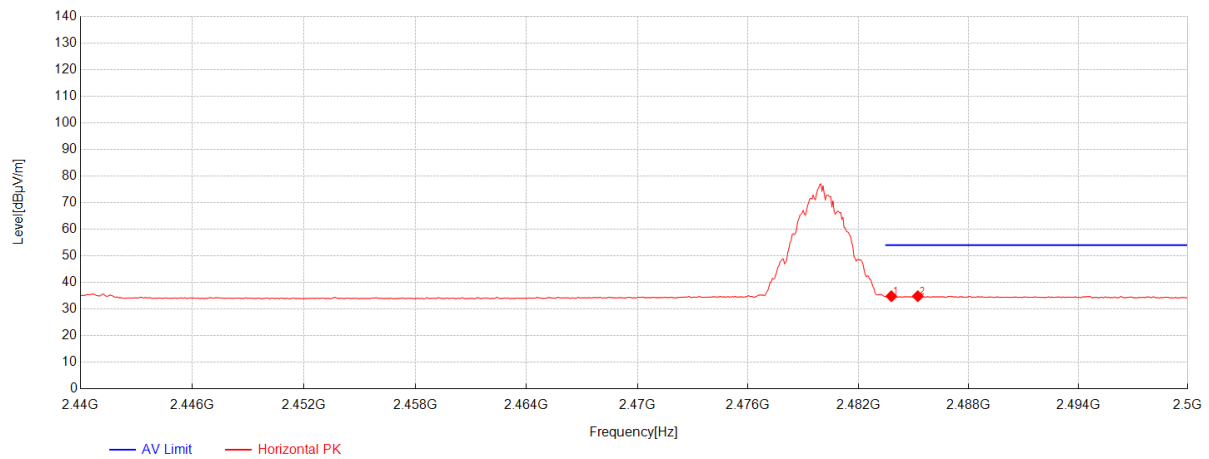


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2483.8	33.89	27.16	-26.24	34.81	54.00	19.19	Horizontal
2	2485.24	33.90	27.15	-26.24	34.81	54.00	19.19	Horizontal

BLE_2M_TX_CH_39_Verical

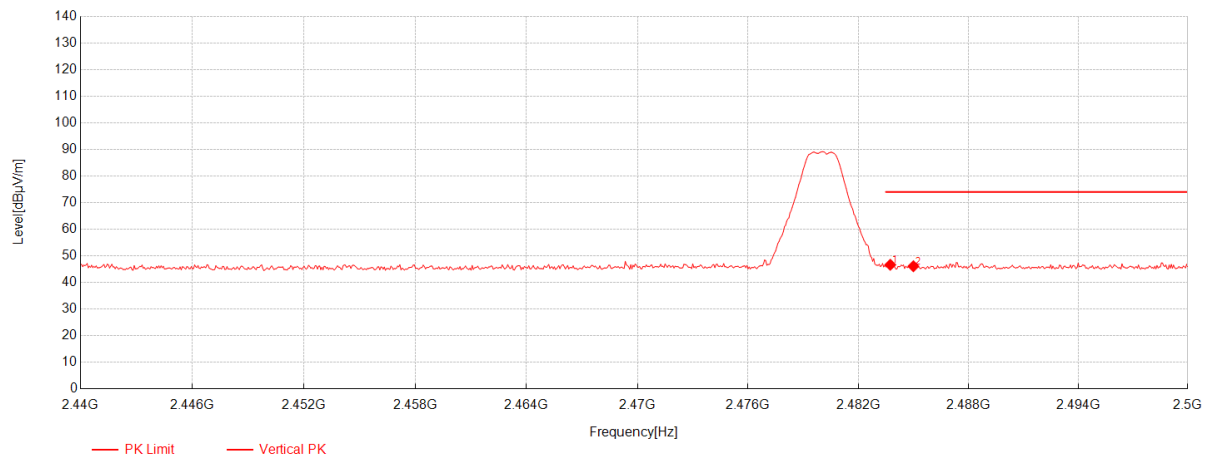

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2483.74	45.70	27.16	-26.24	46.62	74.00	27.38	Vertical
2	2485	45.17	27.15	-26.24	46.08	74.00	27.92	Vertical

BLE_2M_TX_CH_39_Veritical_Average

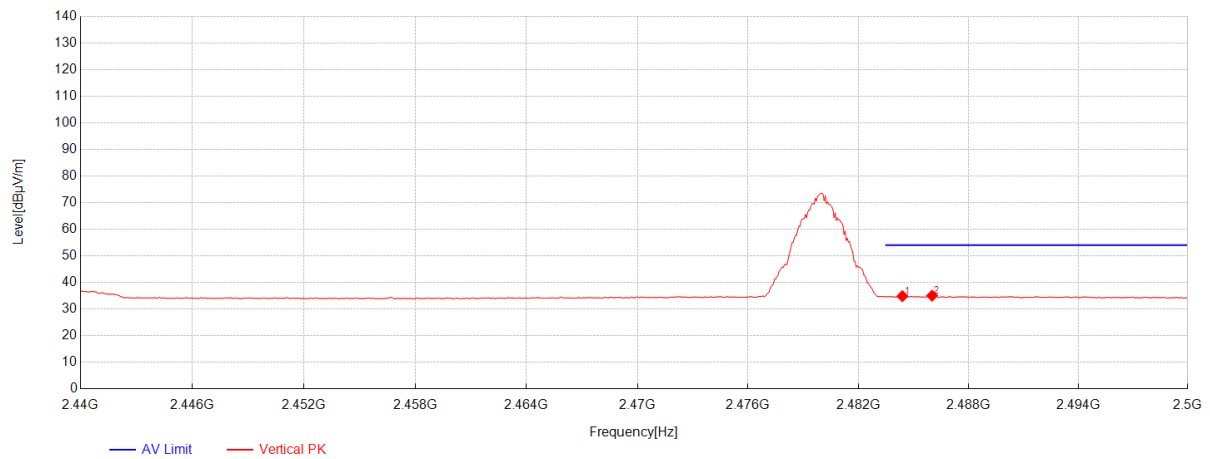

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2484.4	33.91	27.16	-26.24	34.83	54.00	19.17	Vertical
2	2486.02	34.12	27.14	-26.24	35.02	54.00	18.98	Vertical

7.3 Radiated Spurious Emissions Below 1GHz

Test Requirement 47 CFR Part 15, Subpart C 15.205 & 15.209

Test Method: ANSI C63.10 (2020) Section 6.4,6.5

Measurement Distance: 3m

Limit:

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)	Field strength (dBμV/m@3m)
0.009-0.490	2400/F(kHz)	300	128.5 to 93.8
0.490-1.705	24000/F(kHz)	30	73.8 to 62.9
1.705-30.0	30	30	69.60
30-88	100	3	40.0
88-216	150	3	43.5
216-960	200	3	46.0
960-1000	500	3	54.0

Note :The emission limits for the range 9-90 kHz and 110-490 kHz are based on measurements employing a linear average detector.

7.3.1 E.U.T. Operation

Operating Environment:

Temperature: 24.3 °C


Humidity: 45.2 % RH

Atmospheric Pressure: 1001 mbar

7.3.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	02	TX mode(1Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.

7.3.3 Test Setup Diagram

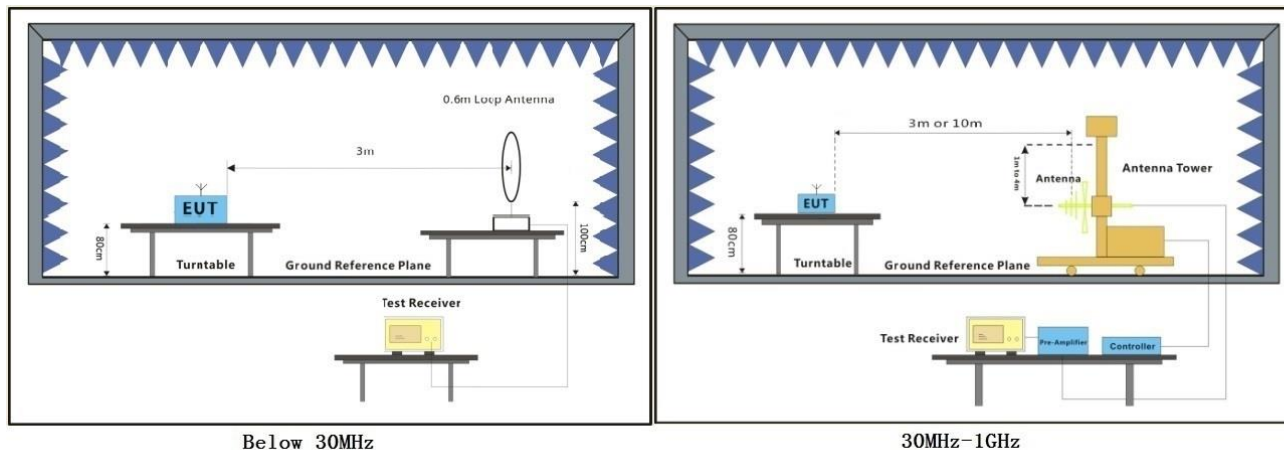


7.3.4 Measurement Procedure and Data

- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8m above the ground at a semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3m or 10m away from the interference-receiving antenna, which was mounted on the variable-height antenna tower.
- c. The antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1m to 4m (for the test frequency of below 30MHz, the antenna was tuned to heights 1m) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using quasi-peak method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- i. Repeat above procedures until all frequencies measured was complete.

Remark:

1. Scan from 9kHz to 30MHz, the disturbance below 30MHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only below points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.
2. The disturbance below 1GHz was very low and the harmonics were the highest point could be found when testing, so only the worst-case test curve is displayed.


Test Mode: 02; Polarity: Horizontal

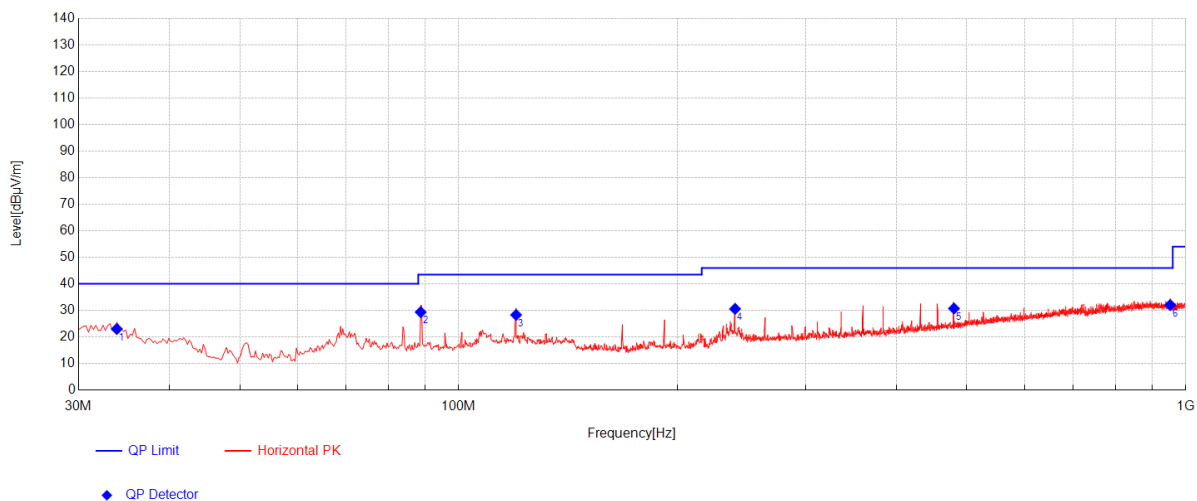

Final Data List

NO.	Frequency [MHz]	AF [dB/m]	Factor [dB]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]	Height [cm]	Angle [°]	Polarity
1	33.88	16.67	-32.49	23.02	40.00	16.98	255	354	Horizontal
2	88.685	10.71	-31.92	29.37	43.50	14.13	255	360	Horizontal
3	119.9675	13.69	-31.77	28.31	43.50	15.19	255	360	Horizontal
4	240.005	12.80	-31.13	30.58	46.00	15.42	255	131	Horizontal
5	480.08	18.30	-30.48	30.73	46.00	15.27	255	316	Horizontal
6	952.2275	22.89	-29.03	32.04	46.00	13.96	255	360	Horizontal

Test Mode: 02; Polarity: Vertical

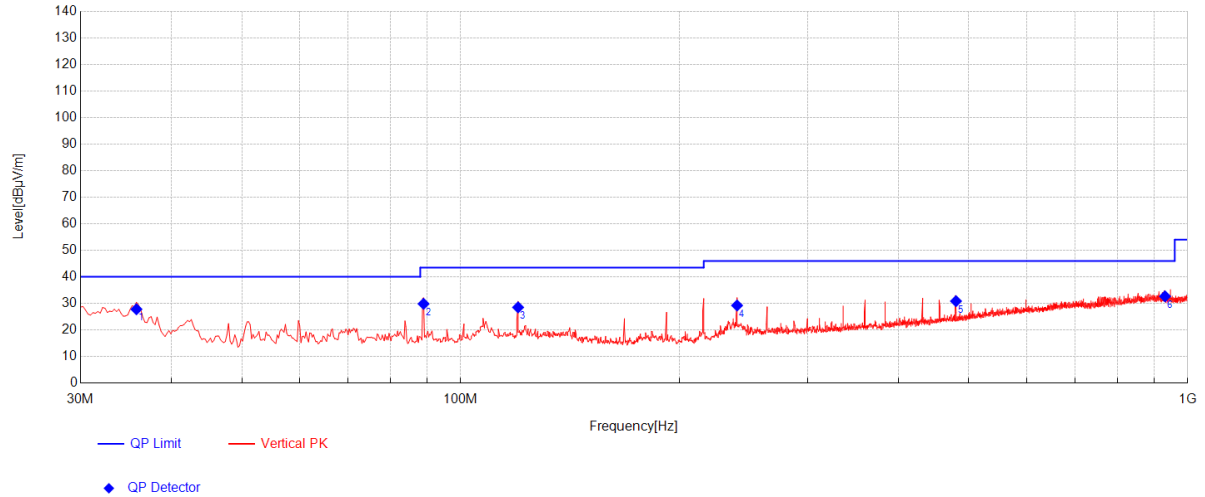

Final Data List

NO.	Frequency [MHz]	AF [dB/m]	Factor [dB]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]	Height [cm]	Angle [°]	Polarity
1	35.82	15.19	-32.46	27.80	40.00	12.20	255	0	Vertical
2	88.9275	10.78	-31.92	29.84	43.50	13.66	255	257	Vertical
3	119.9675	13.69	-31.77	28.52	43.50	14.98	255	355	Vertical
4	240.005	12.80	-31.13	29.23	46.00	16.77	255	130	Vertical
5	480.08	18.30	-30.48	30.85	46.00	15.15	255	313	Vertical
6	930.645	23.11	-29.13	32.67	46.00	13.33	255	12	Vertical

7.4 Radiated Spurious Emissions Above 1GHz

Test Requirement 47 CFR Part 15, Subpart C 15.205 & 15.209

Test Method: ANSI C63.10 (2020) Section 6.6 & 11.12

Measurement Distance: 3m

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
Above 1000	500	3

Note:

At Above 18GHz, measurements may be performed at a distance shorter than that specified in the regulations

Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor+ Aux Factor (if applicable)

The aux factor needs to be added when measurements are performed at a distance other than the limit distance provided.

EX. Above 18GHz, Aux Factor = 20 dB/decade of distance, the aux factor is $20\log(1/3) = -9.54\text{dB}$ (for 1m test distance).

7.4.1 E.U.T. Operation

Operating Environment:

Temperature: 25.1 °C


Humidity: 47.6 % RH

Atmospheric Pressure: 1001 mbar

7.4.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	02	TX mode(1Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.
Final test	03	TX mode(2Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.

7.4.3 Test Setup Diagram

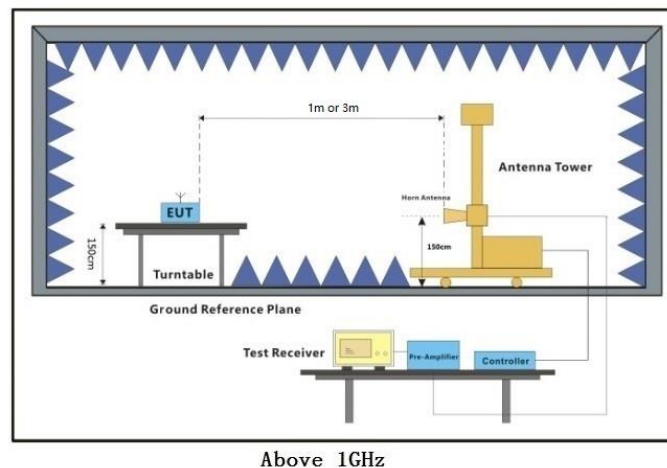


7.4.4 Measurement Procedure and Data

- a. For above 1GHz, the EUT was placed on the top of a rotating table 1.5m above the ground at a 3m fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. The EUT was set 3m away from the interference-receiving antenna from 1GHz to 18GHz, and 3m away from the interference-receiving antenna above 18GHz.
- b. The interference-receiving antenna was mounted on the variable-height antenna tower, with its boresight facing the EUT throughout the test.
- c. The antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1m to 4m and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- g. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- h. Repeat above procedures until all frequencies measured was complete.

Remark:


1. Scan from 1GHz to 10th harmonic of the highest frequency or 40 GHz, whichever is lower.
2. As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.
3. For the frequency above 18GHz, testing had been executed under all test modes, only the worst-case test curve is displayed in the report.
4. For devices with multiple operating modes, measurements on the middle channel is used to determine the worst-case mode(s). Only the worst-case mode with the highest output power and the mode with the highest output power spectral density for each modulation family (e.g., OFDM and direct sequence spread spectrum) is recorded in the test report.

BLE_1M_TX_CH_00_Horizontal

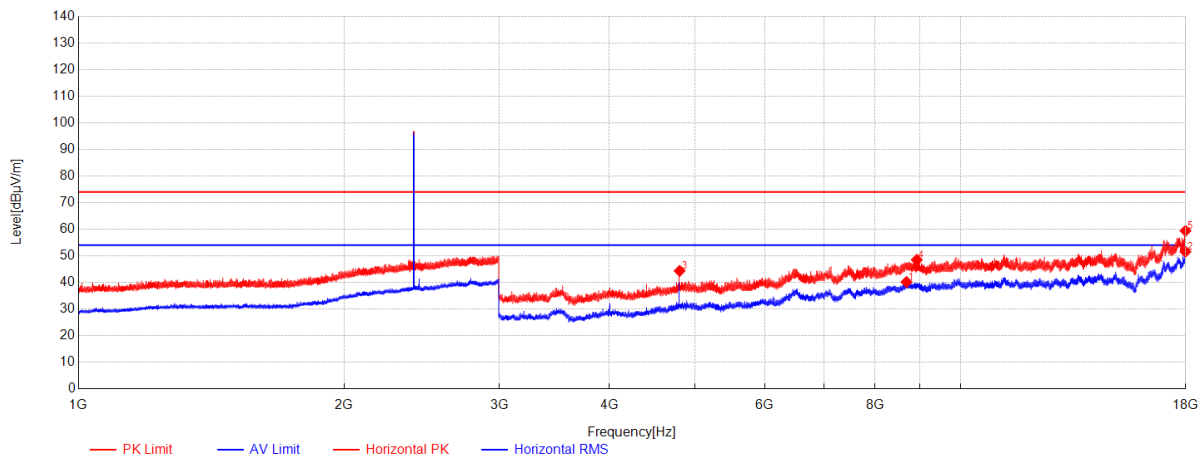

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	8684	48.55	37.47	-45.85	40.17	54.00	13.83	Horizontal
2	17987	49.71	43.20	-41.38	51.53	54.00	2.47	Horizontal
3	4803.5	62.87	31.49	-50.04	44.32	74.00	29.68	Horizontal
4	8921.5	56.92	37.74	-46.19	48.47	74.00	25.53	Horizontal
5	17990	57.51	43.20	-41.33	59.38	74.00	14.62	Horizontal


BLE_1M_TX_CH_00_Verical

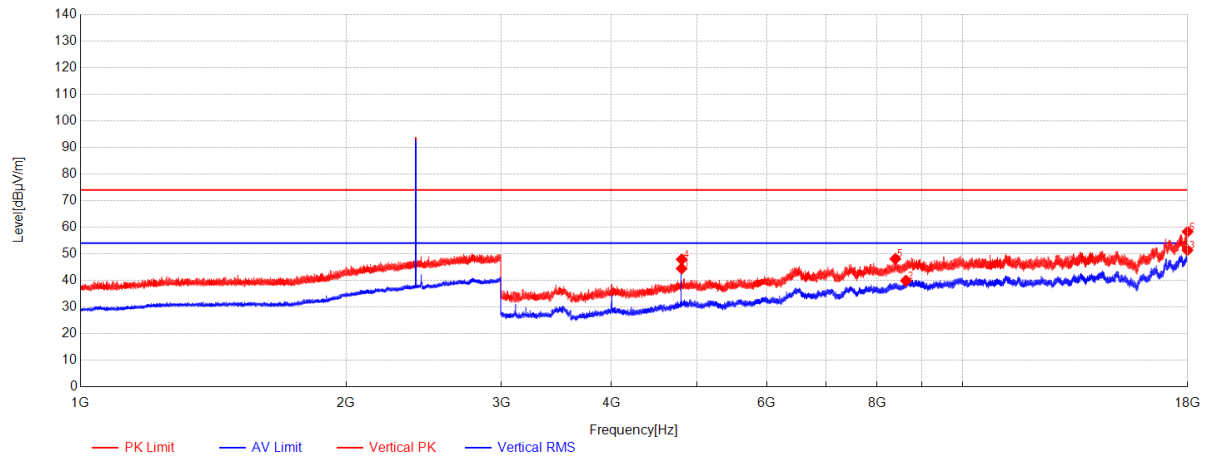

Data List


NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	4804	63.00	31.49	-50.04	44.45	54.00	9.55	Vertical
2	8626.5	48.67	37.40	-46.17	39.90	54.00	14.10	Vertical
3	17990	49.48	43.20	-41.33	51.35	54.00	2.65	Vertical
4	4804.5	66.43	31.49	-50.04	47.88	74.00	26.12	Vertical
5	8391	58.13	37.01	-47.05	48.09	74.00	25.91	Vertical
6	17997	56.30	43.20	-41.21	58.29	74.00	15.71	Vertical

BLE_1M_TX_CH_19_Horizontal

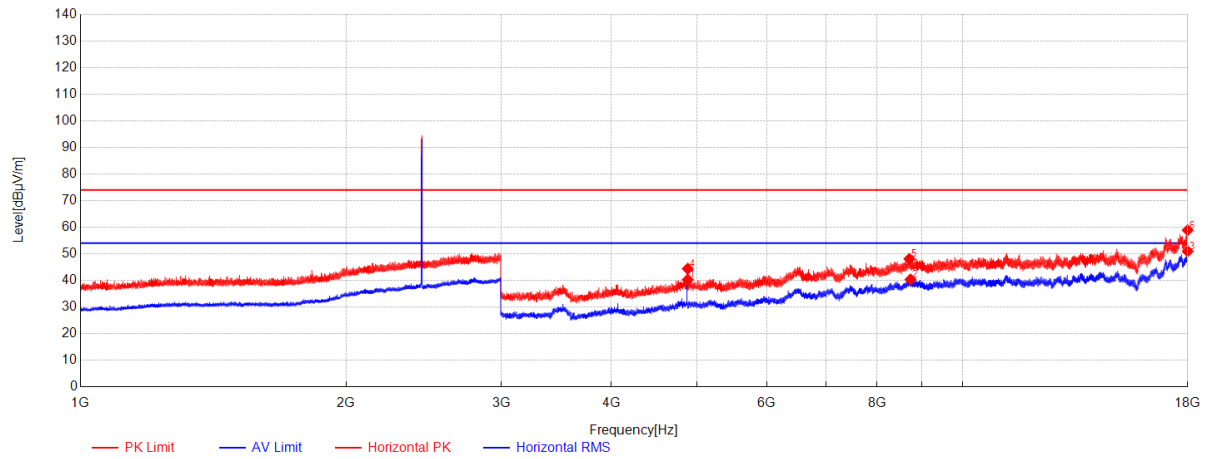


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	4880.5	59.43	31.46	-50.61	40.28	54.00	13.72	Horizontal
2	8728.5	48.73	37.56	-45.92	40.37	54.00	13.63	Horizontal
3	17998.5	48.90	43.20	-41.19	50.91	54.00	3.09	Horizontal
4	4880	63.54	31.46	-50.60	44.40	74.00	29.60	Horizontal
5	8703.5	56.36	37.51	-45.78	48.09	74.00	25.91	Horizontal
6	17996.5	56.89	43.20	-41.22	58.87	74.00	15.13	Horizontal

BLE_1M_TX_CH_19_Verical

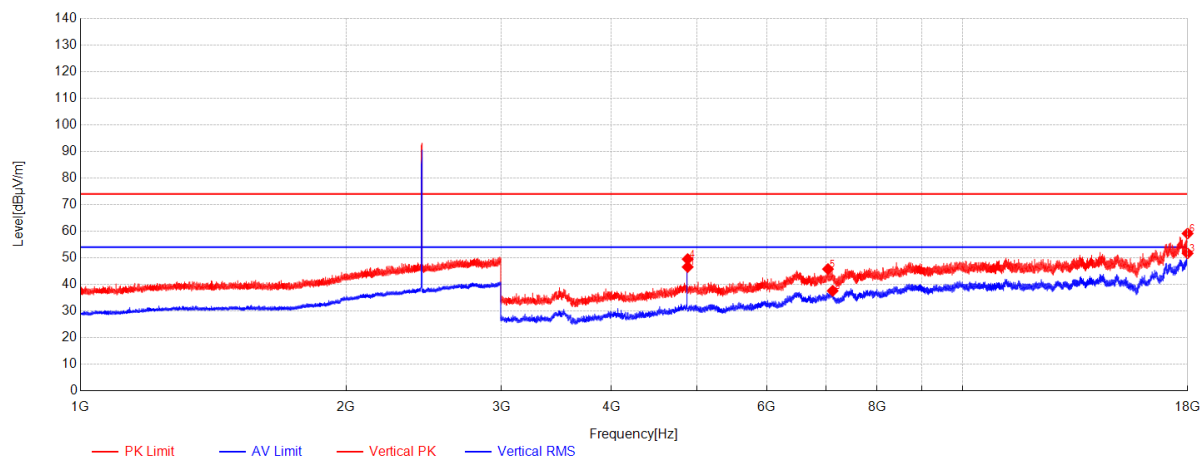


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	4880	65.69	31.46	-50.60	46.55	54.00	7.45	Vertical
2	7125	48.71	35.90	-47.01	37.60	54.00	16.40	Vertical
3	17998	49.65	43.20	-41.19	51.66	54.00	2.34	Vertical
4	4879.5	68.64	31.46	-50.60	49.50	74.00	24.50	Vertical
5	7038.5	57.82	35.42	-47.48	45.76	74.00	28.24	Vertical
6	17996.5	57.14	43.20	-41.22	59.12	74.00	14.88	Vertical

BLE_1M_TX_CH_39_Horizontal

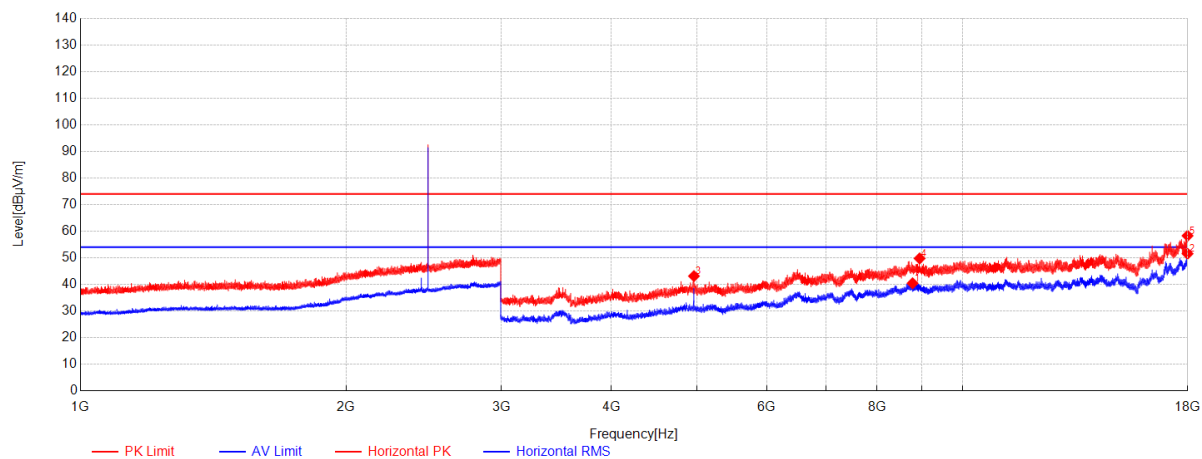

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	8778	49.10	37.54	-46.20	40.44	54.00	13.56	Horizontal
2	17995.5	49.57	43.20	-41.24	51.53	54.00	2.47	Horizontal
3	4960.5	62.28	31.56	-50.71	43.13	74.00	30.87	Horizontal
4	8940.5	58.16	37.78	-46.18	49.76	74.00	24.24	Horizontal
5	17992	56.38	43.20	-41.30	58.28	74.00	15.72	Horizontal


BLE_1M_TX_CH_39_Verical

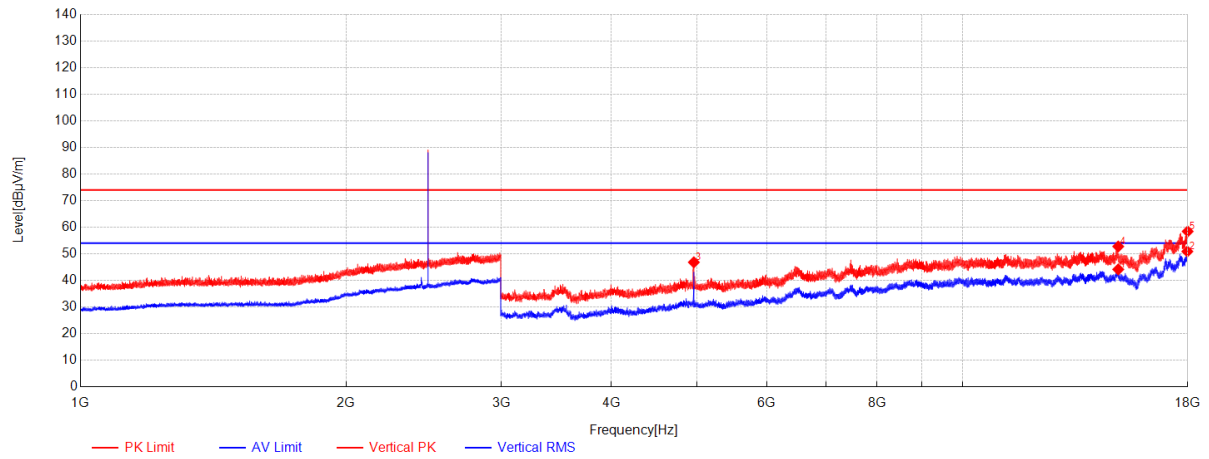

Data List

NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	15015.5	45.30	39.66	-40.82	44.14	54.00	9.86	Vertical
2	17984.5	49.10	43.20	-41.43	50.87	54.00	3.13	Vertical
3	4959.5	65.96	31.56	-50.71	46.81	74.00	27.19	Vertical
4	15015	53.90	39.66	-40.81	52.75	74.00	21.25	Vertical
5	18000	56.36	43.20	-41.16	58.40	74.00	15.60	Vertical


BLE_2M_TX_CH_00_Horizontal

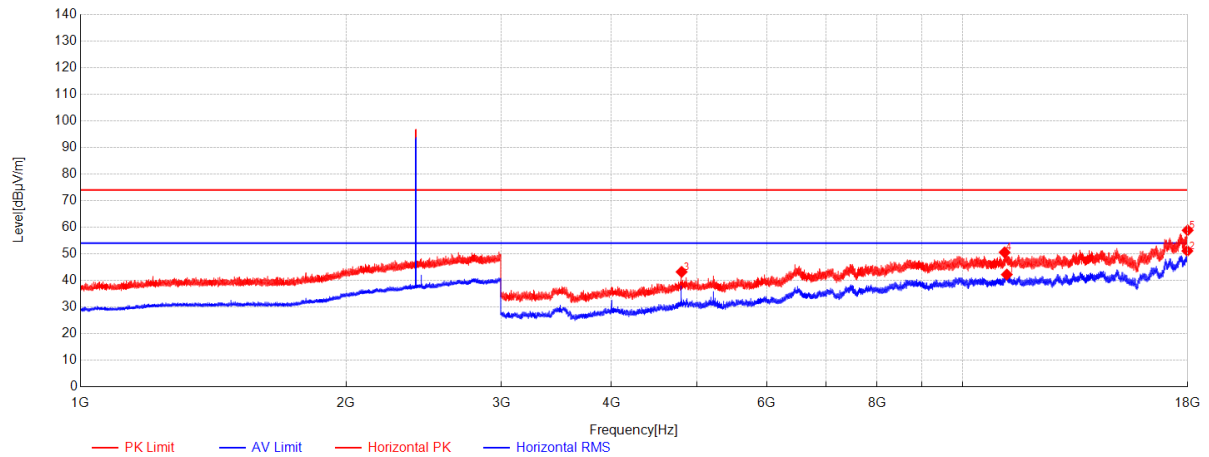

Data List


NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	11226.5	46.91	39.55	-44.26	42.20	54.00	11.80	Horizontal
2	17984.5	49.30	43.20	-41.43	51.07	54.00	2.93	Horizontal
3	4803	61.75	31.49	-50.03	43.21	74.00	30.79	Horizontal
4	11162.5	55.72	39.35	-44.54	50.53	74.00	23.47	Horizontal
5	18000	56.78	43.20	-41.16	58.82	74.00	15.18	Horizontal

BLE_2M_TX_CH_00_Verical

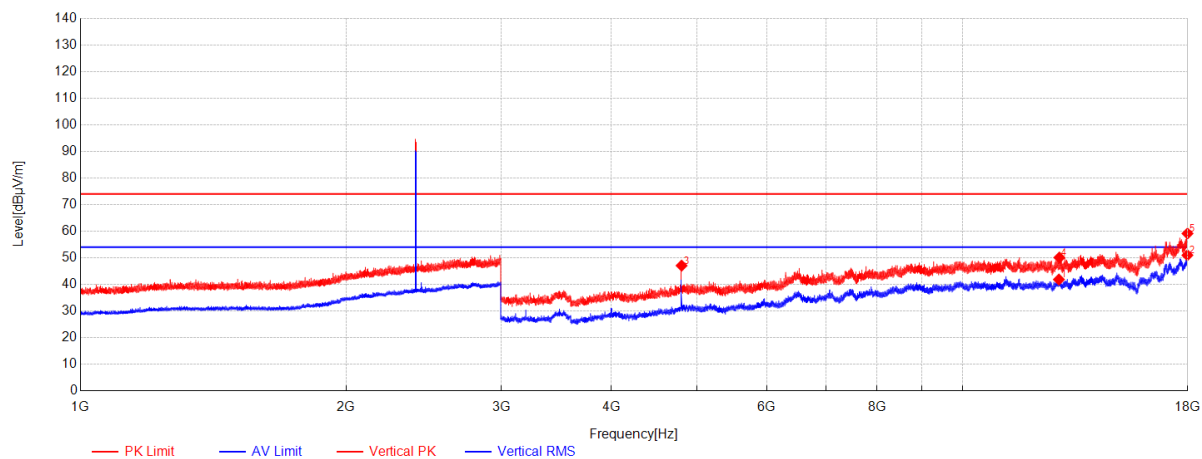


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	12862	45.23	39.92	-43.31	41.84	54.00	12.16	Vertical
2	17987.5	49.14	43.20	-41.38	50.96	54.00	3.04	Vertical
3	4803	65.59	31.49	-50.03	47.05	74.00	26.95	Vertical
4	12877	53.51	39.95	-43.38	50.08	74.00	23.92	Vertical
5	17990.5	57.23	43.20	-41.32	59.11	74.00	14.89	Vertical

BLE_2M_TX_CH_19_Horizontal

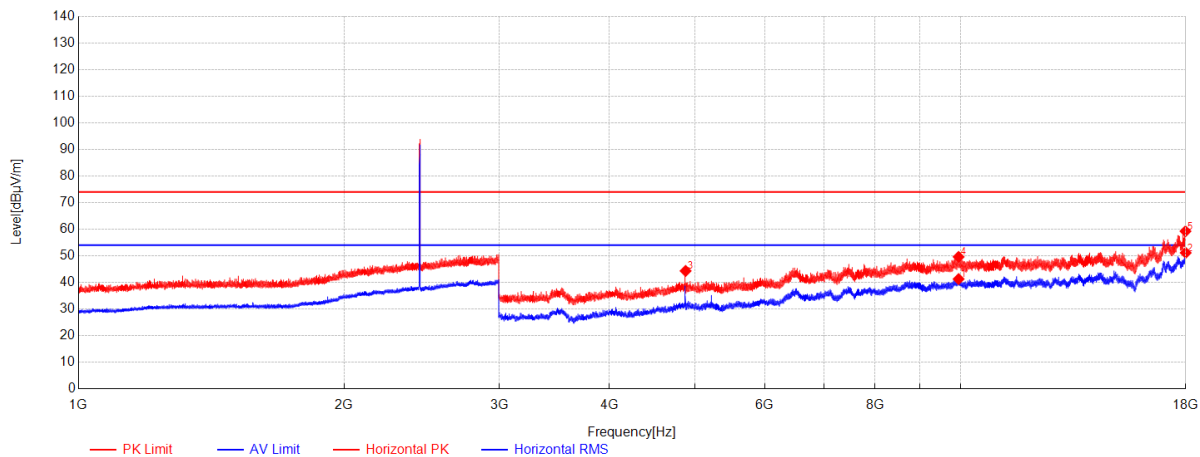


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	9950.5	47.14	39.10	-44.97	41.27	54.00	12.73	Horizontal
2	18000	49.07	43.20	-41.16	51.11	54.00	2.89	Horizontal
3	4879	63.45	31.46	-50.59	44.32	74.00	29.68	Horizontal
4	9950	55.47	39.10	-44.98	49.59	74.00	24.41	Horizontal
5	17989.5	57.36	43.20	-41.34	59.22	74.00	14.78	Horizontal

BLE_2M_TX_CH_19_Verical

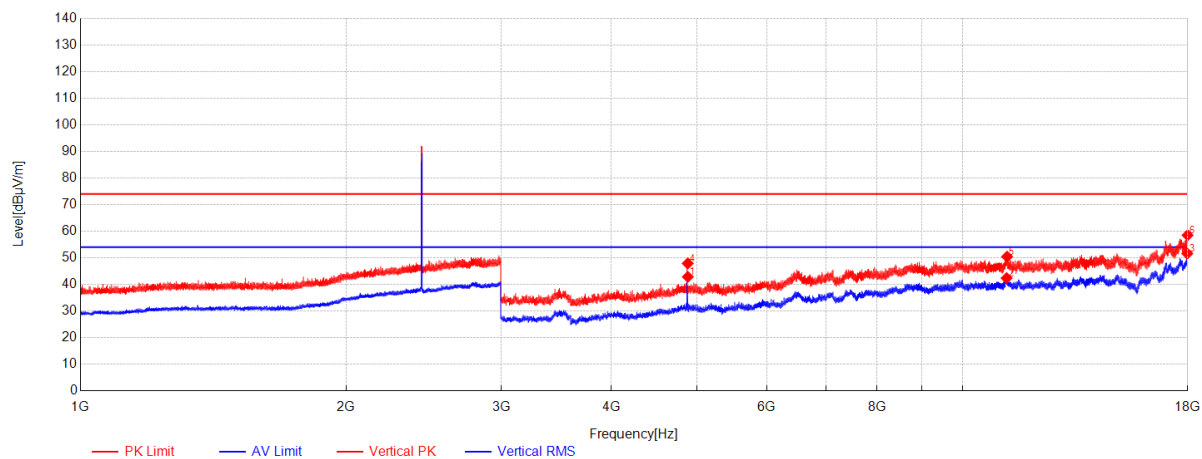


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	4881.5	62.00	31.46	-50.61	42.85	54.00	11.15	Vertical
2	11218.5	47.08	39.54	-44.24	42.38	54.00	11.62	Vertical
3	17981.5	49.87	43.20	-41.48	51.59	54.00	2.41	Vertical
4	4881	67.04	31.46	-50.61	47.89	74.00	26.11	Vertical
5	11232.5	55.12	39.57	-44.27	50.42	74.00	23.58	Vertical
6	17994	56.53	43.20	-41.26	58.47	74.00	15.53	Vertical

BLE_2M_TX_CH_39_Horizontal

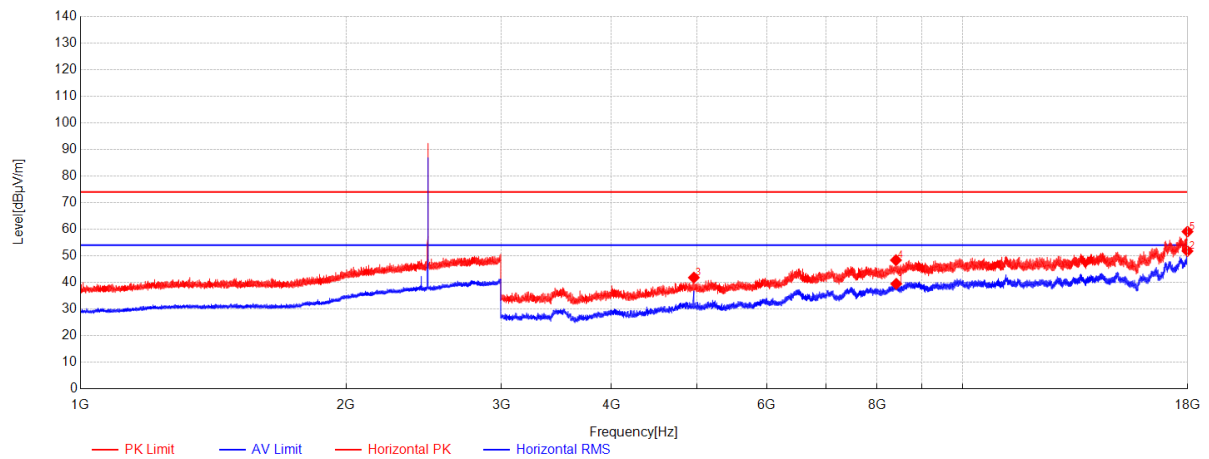


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	8412	49.46	37.03	-47.02	39.47	54.00	14.53	Horizontal
2	17990	49.90	43.20	-41.33	51.77	54.00	2.23	Horizontal
3	4959.5	60.96	31.56	-50.71	41.81	74.00	32.19	Horizontal
4	8406	58.30	37.06	-47.01	48.35	74.00	25.65	Horizontal
5	17989.5	57.22	43.20	-41.34	59.08	74.00	14.92	Horizontal

BLE_2M_TX_CH_39_Verical

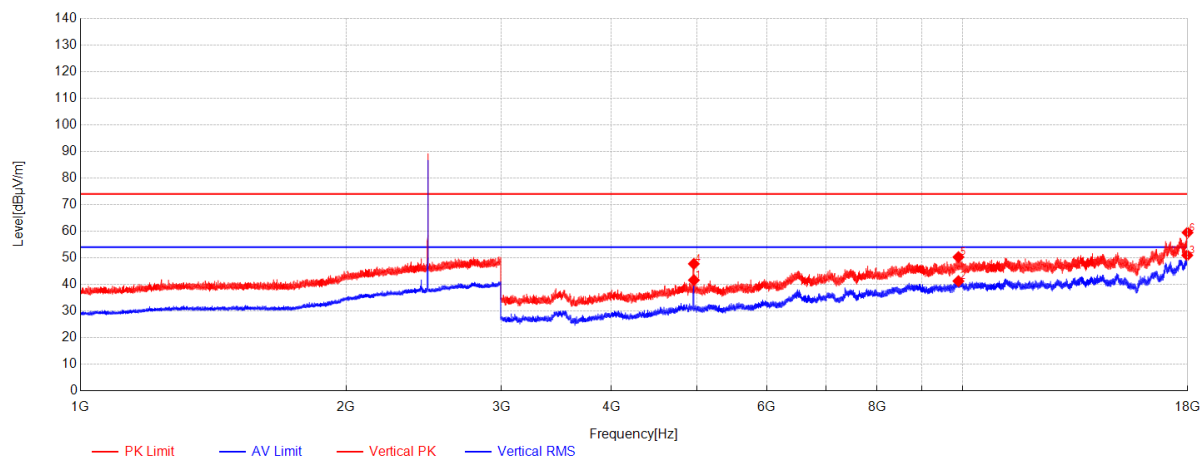

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	4959.5	60.76	31.56	-50.71	41.61	54.00	12.39	Vertical
2	9894	47.56	38.86	-45.18	41.24	54.00	12.76	Vertical
3	17981.5	49.20	43.20	-41.48	50.92	54.00	3.08	Vertical
4	4959	66.89	31.55	-50.71	47.73	74.00	26.27	Vertical
5	9893.5	56.60	38.86	-45.18	50.28	74.00	23.72	Vertical
6	17993	57.56	43.20	-41.28	59.48	74.00	14.52	Vertical

BLE_1M_TX_CH_00_Horizontal

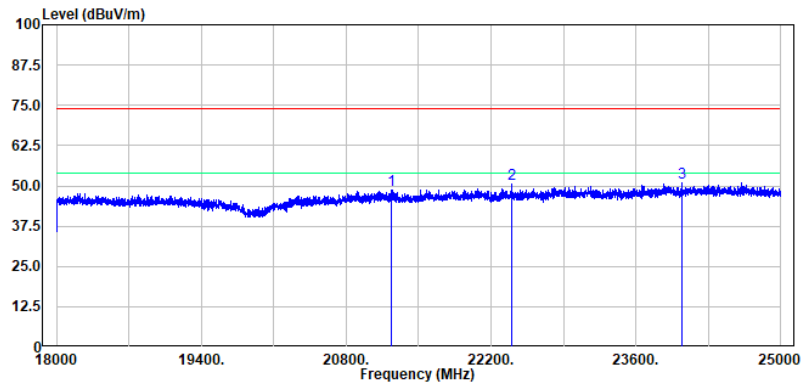


Antenna Polarity :Horizontal

No.	Freq	Read level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
1	21238.85	56.70	38.16	9.80	55.87	48.79	74.00	-25.21	Peak
2	22395.48	58.00	38.58	9.32	55.34	50.56	74.00	-23.44	Peak
3	24052.01	55.26	39.25	10.56	54.12	50.95	74.00	-23.05	Peak

Notes: Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

BLE_1M_TX_CH_00_Horizontal

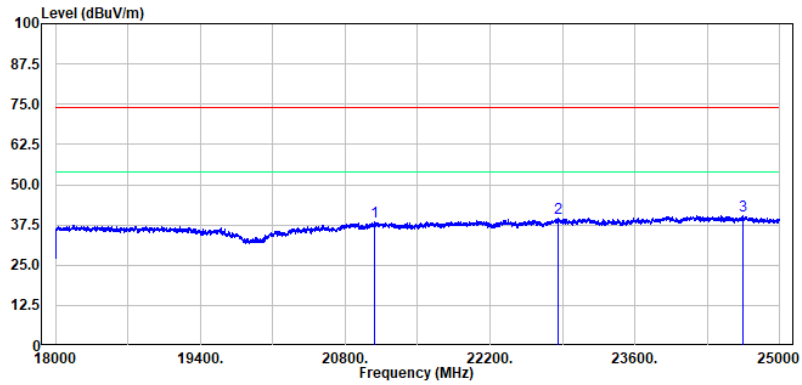


Antenna Polarity :Horizontal

No.	Freq	Read level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
1	21083.42	46.81	38.11	9.53	56.08	38.37	54.00	-15.63	Average
2	22858.97	45.95	38.83	9.87	55.16	39.49	54.00	-14.51	Average
3	24641.53	45.03	39.48	10.50	54.53	40.48	54.00	-13.52	Average

Notes: Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

BLE_1M_TX_CH_00_Verical

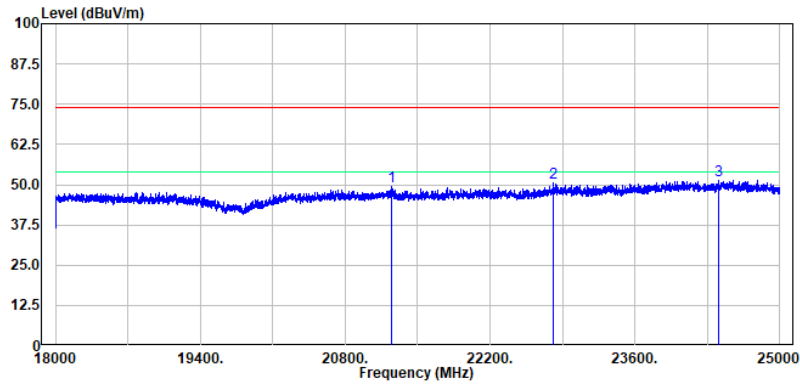


Antenna Polarity :Vertical

No.	Freq	Read level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
1	21251.45	57.24	38.16	9.82	55.85	49.37	74.00	-24.63	Peak
2	22816.96	56.92	38.80	9.83	55.17	50.38	74.00	-23.62	Peak
3	24411.88	55.61	39.39	10.61	54.26	51.35	74.00	-22.65	Peak

Notes: Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

BLE_1M_TX_CH_00_Verical

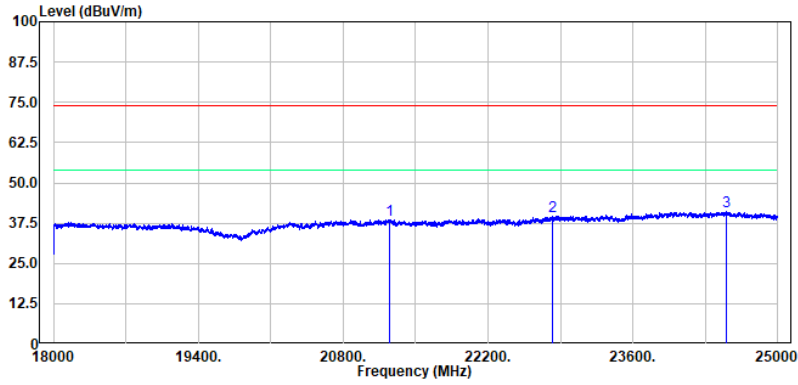

Antenna Polarity :Vertical

No.	Freq	Read level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
1	21247.25	46.45	38.16	9.81	55.85	38.57	54.00	-15.43	Average
2	22819.76	46.13	38.80	9.84	55.17	39.60	54.00	-14.40	Average
3	24505.70	45.21	39.43	10.69	54.31	41.02	54.00	-12.98	Average

Notes: Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

7.5 Maximum Conducted Output Power

Test Requirement 47 CFR Part 15, Subpart C 15.247(b)(3)

Test Method: ANSI C63.10 (2020) Section 11.9.2

Limit:

Frequency range(MHz)	Output power of the intentional radiator(watt)
902-928	1 for ≥ 50 hopping channels
	0.25 for $25 \leq$ hopping channels < 50
	1 for digital modulation
2400-2483.5	1 for ≥ 75 non-overlapping hopping channels
	0.125 for all other frequency hopping systems
	1 for digital modulation
5725-5850	1 for frequency hopping systems and digital modulation

7.5.1 E.U.T. Operation

Operating Environment:

Temperature: 24.8 °C


Humidity: 48.5 % RH

Atmospheric Pressure: 1001 mbar

7.5.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	02	TX mode(1Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.
Final test	03	TX mode(2Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.

7.5.3 Test Setup Diagram

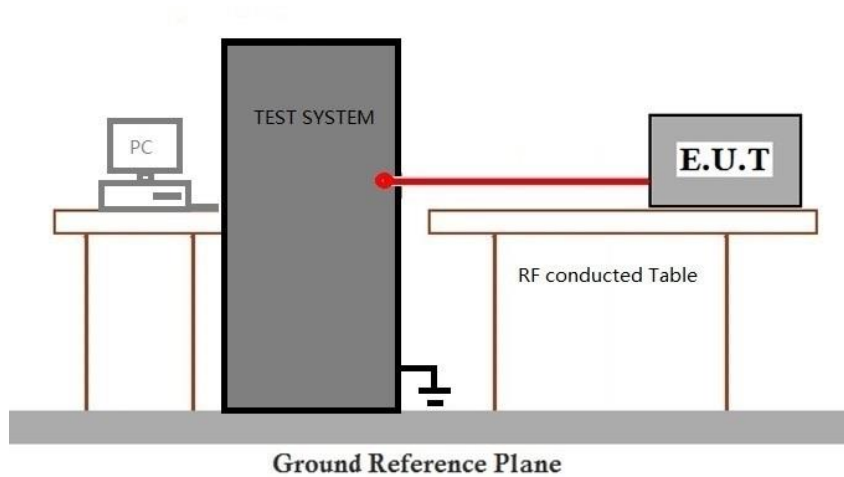

7.5.4 Measurement Procedure and Data

Note: Since the verify power the same operating range bandwidth and smaller power can be covered by the higher power.

Please Refer to Appendix for Details

7.6 Minimum 6dB Bandwidth

Test Requirement 47 CFR Part 15, Subpart C 15.247a(2)

Test Method: ANSI C63.10 (2020) Section 11.8.1

Limit:

≥500 kHz

7.6.1 E.U.T. Operation

Operating Environment:

Temperature: 24.8 °C


Humidity: 48.5 % RH

Atmospheric Pressure: 1001 mbar

7.6.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	02	TX mode(1Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.
Final test	03	TX mode(2Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.

7.6.3 Test Setup Diagram

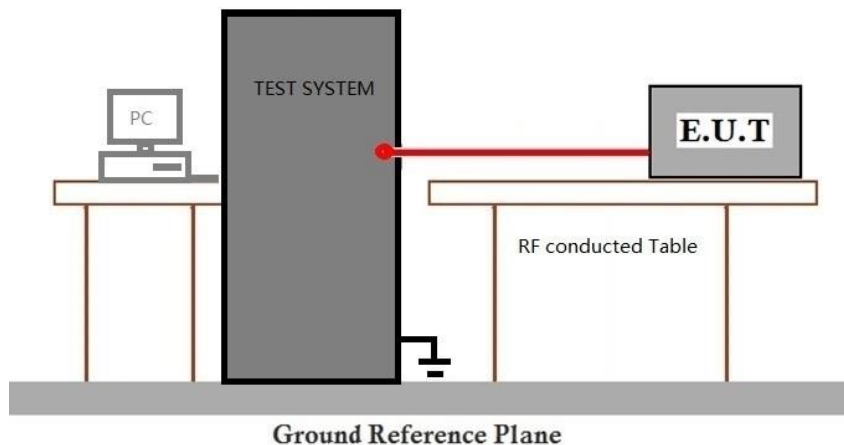

7.6.4 Measurement Procedure and Data

Please Refer to Appendix for Details

7.7 Power Spectral Density

Test Requirement 47 CFR Part 15, Subpart C 15.247(e)

Test Method: ANSI C63.10 (2020) Section 11.10.3

Limit:

≤8dBm in any 3 kHz band during any time interval of continuous transmission

7.7.1 E.U.T. Operation

Operating Environment:

Temperature: 24.8 °C


Humidity: 48.5 % RH

Atmospheric Pressure: 1001 mbar

7.7.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	02	TX mode(1Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.
Final test	03	TX mode(2Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.

7.7.3 Test Setup Diagram

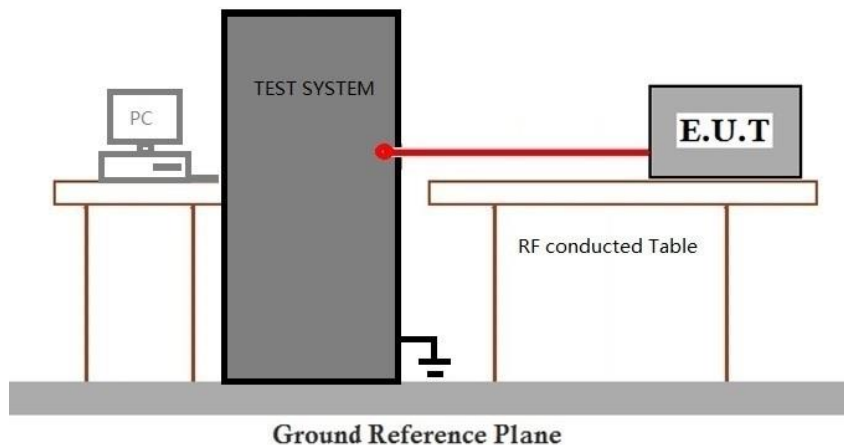

7.7.4 Measurement Procedure and Data

Please Refer to Appendix for Details

7.8 Conducted Band Edges Measurement

Test Requirement 47 CFR Part 15, Subpart C 15.247(d)

Test Method: ANSI C63.10 (2020) Section 6.10.4

Limit:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

7.8.1 E.U.T. Operation

Operating Environment:

Temperature: 24.8 °C


Humidity: 48.5 % RH

Atmospheric Pressure: 1001 mbar

7.8.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	02	TX mode(1Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.
Final test	03	TX mode(2Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.

7.8.3 Test Setup Diagram

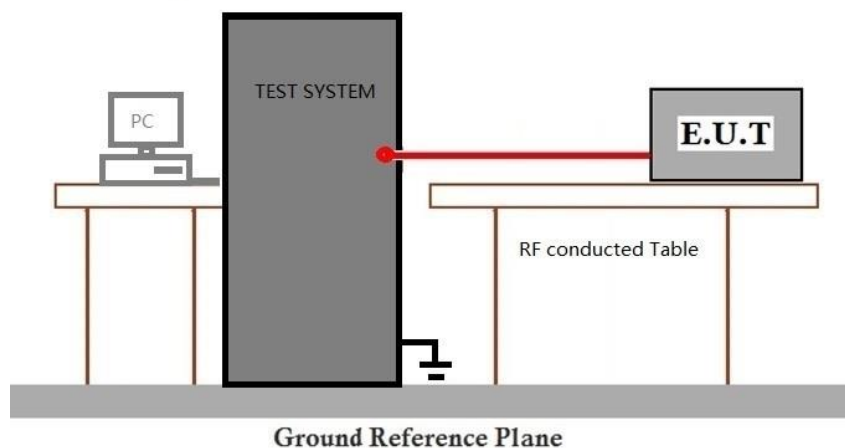



Report No.: SUCR260100007501

Page: 62 of 93

7.8.4 Measurement Procedure and Data

Please Refer to Appendix for Details

7.9 Conducted Spurious Emissions

Test Requirement 47 CFR Part 15, Subpart C 15.247(d)

Test Method: ANSI C63.10 (2020) Section 11.11

Limit:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

7.9.1 E.U.T. Operation

Operating Environment:

Temperature: 24.8 °C


Humidity: 48.5 % RH

Atmospheric Pressure: 1001 mbar

7.9.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	02	TX mode(1Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.
Final test	03	TX mode(2Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.

7.9.3 Test Setup Diagram

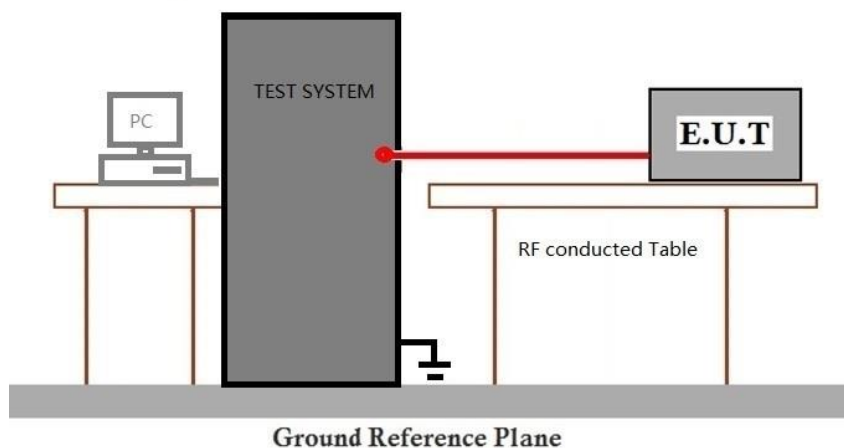

7.9.4 Measurement Procedure and Data

Please Refer to Appendix for Details

8 Test Setup Photo

Refer to Appendix - Test Setup Photo for SUCR2601000075AT

9 EUT Constructional Details (EUT Photos)

Refer to External and Internal Photos for SUCR2601000075AT

10 Appendix

1. Duty Cycle


1.1 Test Result

1.1.1 Ant1


Ant1							
Mode	TX Type	Frequency (MHz)	T_on (ms)	Period (ms)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	Max. DC Variation (%)
1M	SISO	2402	0.402	0.625	64.32	1.92	0.03
		2440	0.401	0.625	64.16	1.93	0.03
		2480	0.401	0.625	64.16	1.93	0.03
2M	SISO	2402	0.217	0.625	34.72	4.59	0.00
		2440	0.218	0.625	34.88	4.57	0.03
		2480	0.218	0.625	34.88	4.57	0.00

1.2 Test Graph


1.2.1 Ant1

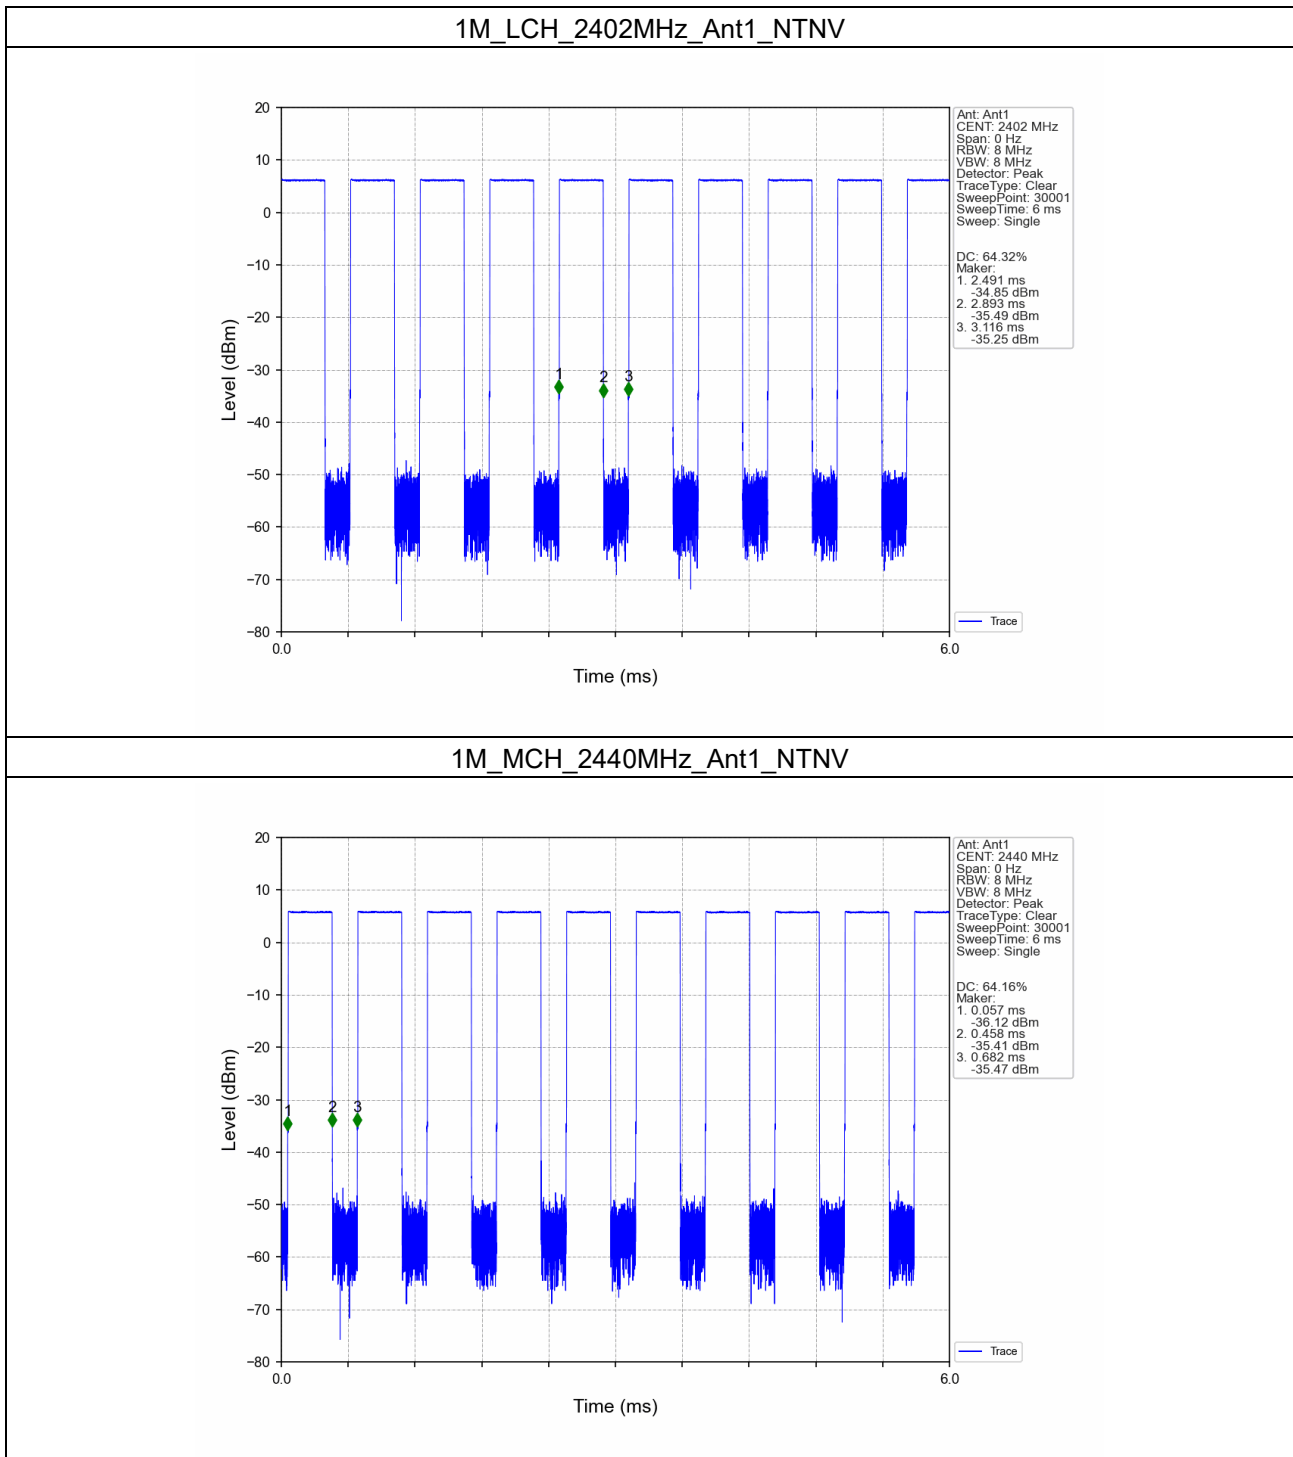


1M_HCH_2480MHz_Ant1_NTNV

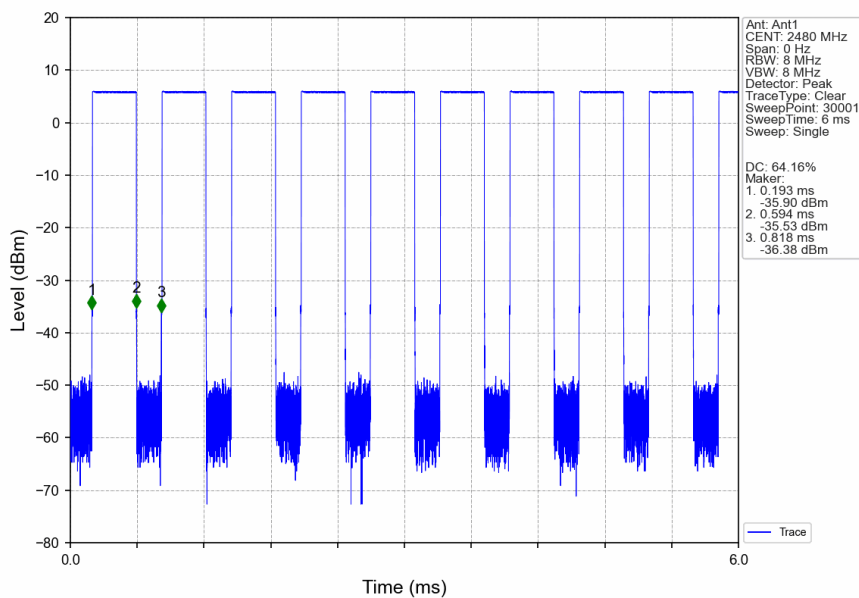


2M_LCH_2402MHz_Ant1_NTNV

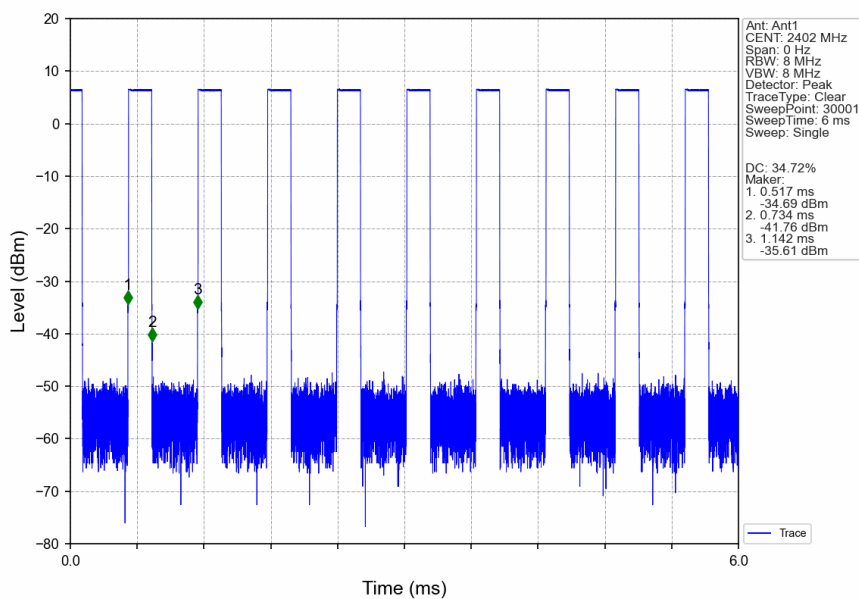

2M_MCH_2440MHz_Ant1_NTNV

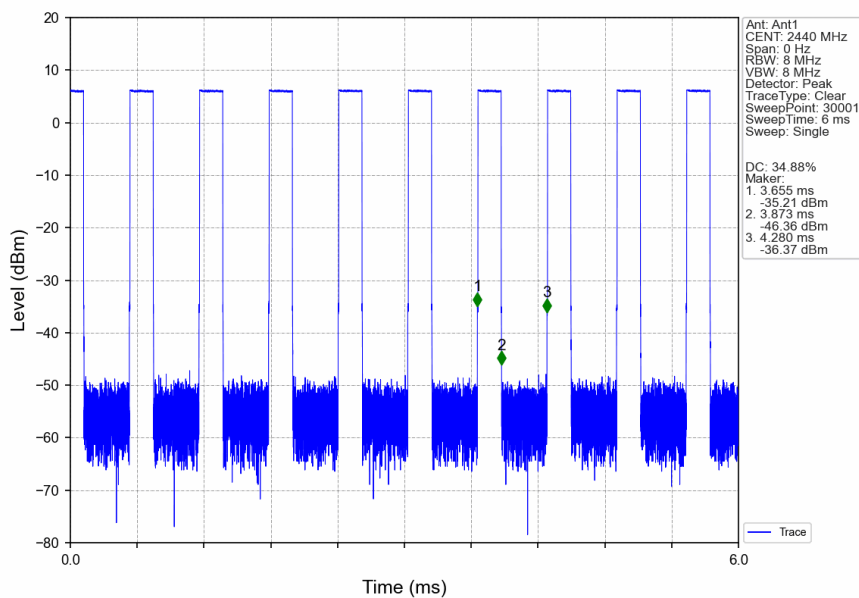

2M_HCH_2480MHz_Ant1_NTNV

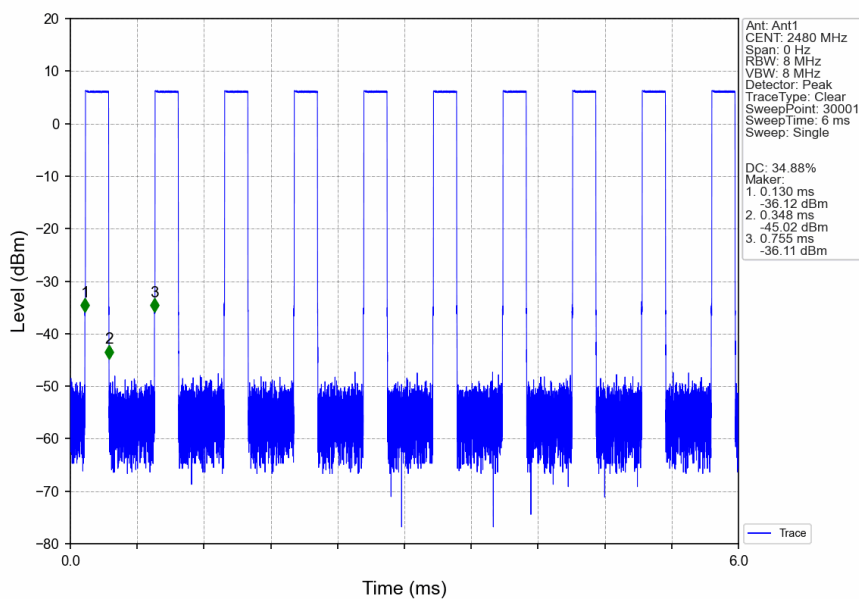

2. Bandwidth

2.1 Test Result

2.1.1 OBW


Mode	TX Type	Frequency (MHz)	ANT	99% Occupied Bandwidth (MHz)		Verdict
				Result	Limit	
1M	SISO	2402	1	1.029	/	Pass
		2440	1	1.039	/	Pass
		2480	1	1.039	/	Pass
2M	SISO	2402	1	2.072	/	Pass
		2440	1	2.067	/	Pass
		2480	1	2.067	/	Pass

2.1.2 6dB BW


Mode	TX Type	Frequency (MHz)	ANT	6dB Bandwidth (MHz)		Verdict
				Result	Limit	
1M	SISO	2402	1	0.663	≥ 0.5	Pass
		2440	1	0.656	≥ 0.5	Pass
		2480	1	0.652	≥ 0.5	Pass
2M	SISO	2402	1	1.135	≥ 0.5	Pass
		2440	1	1.135	≥ 0.5	Pass
		2480	1	1.107	≥ 0.5	Pass

2.2 Test Graph


2.2.1 OBW

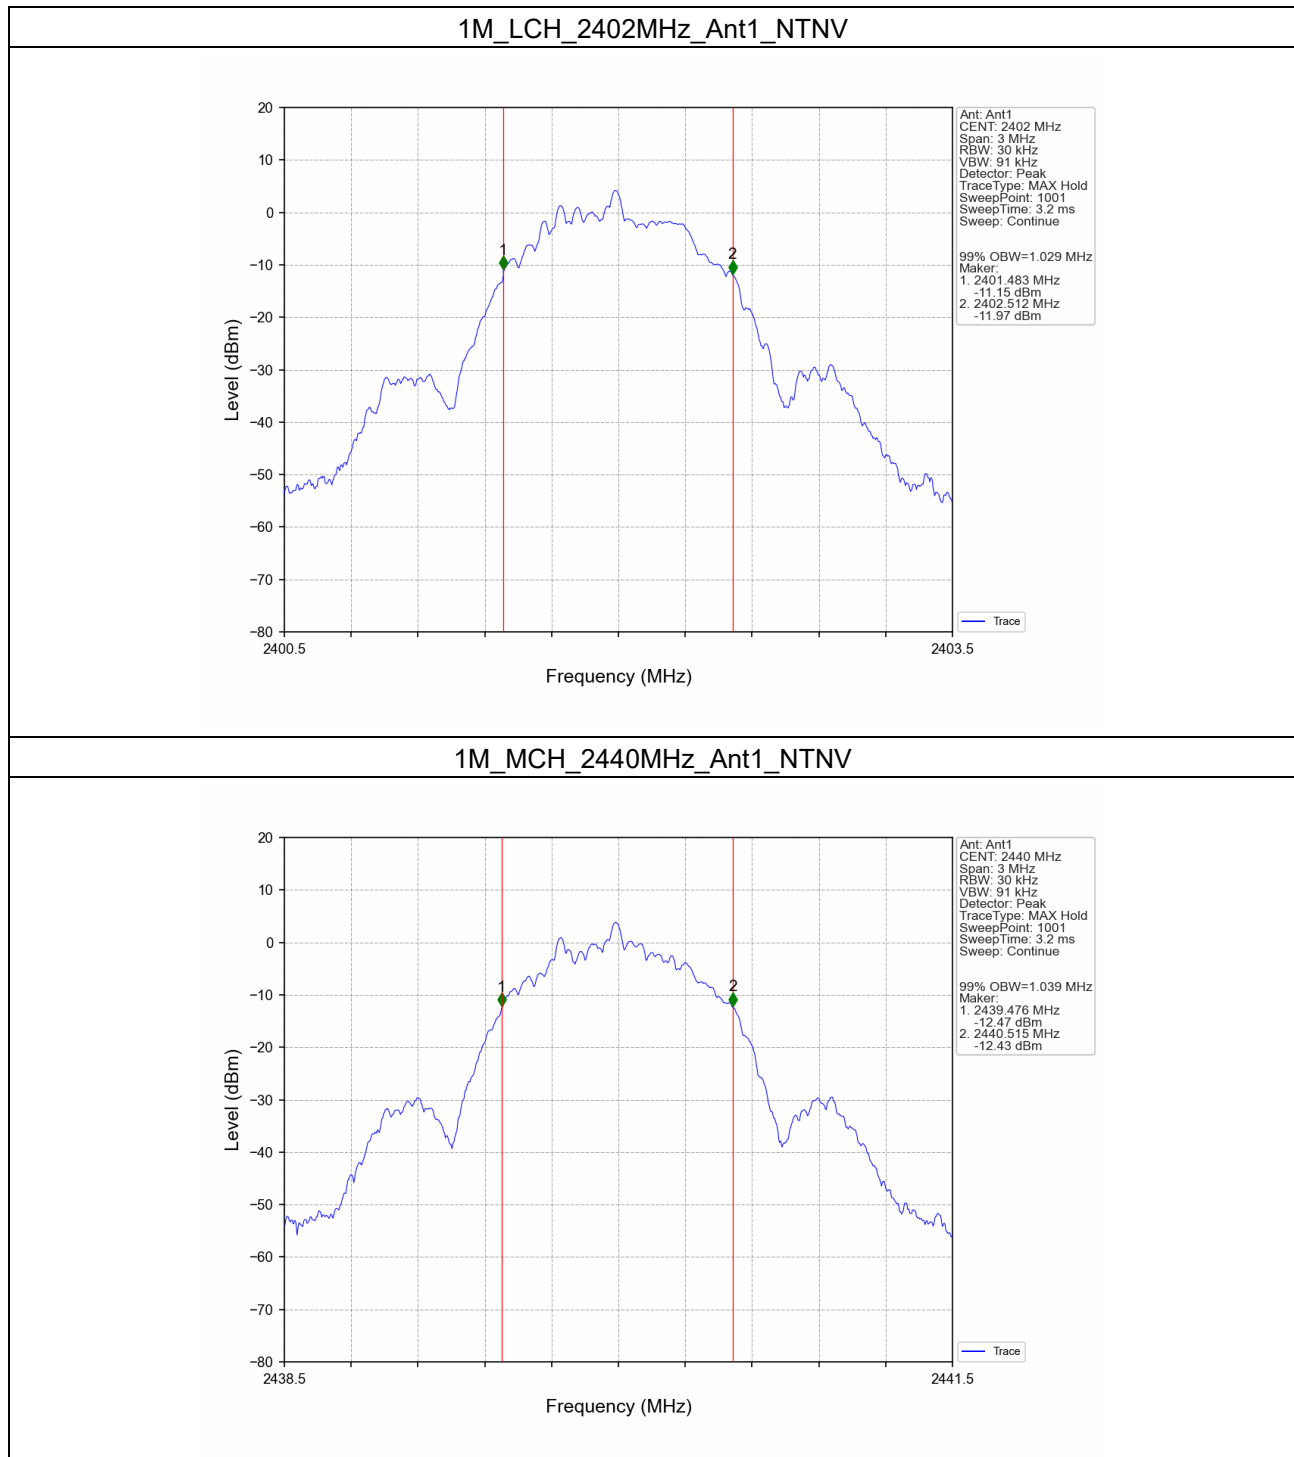


1M_HCH_2480MHz_Ant1_NTNV

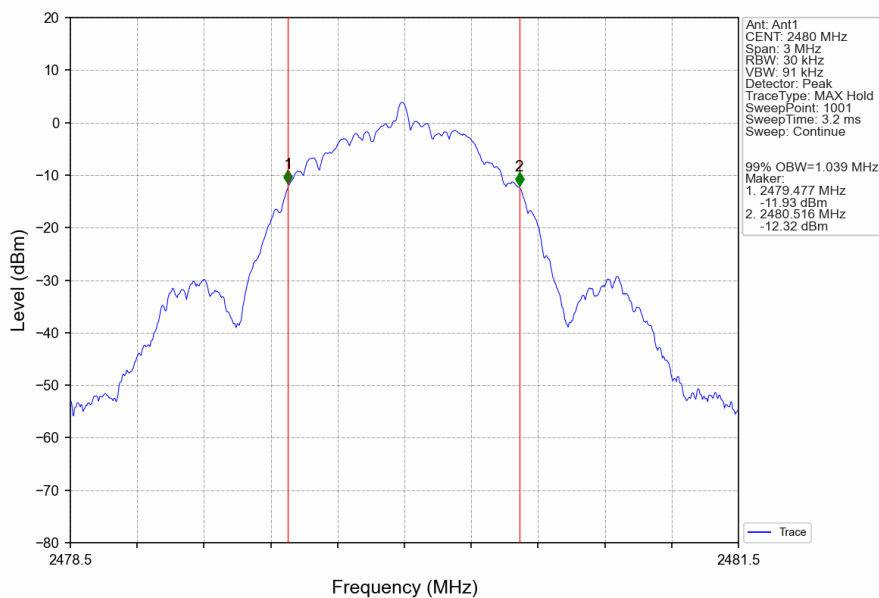


2M_LCH_2402MHz_Ant1_NTNV

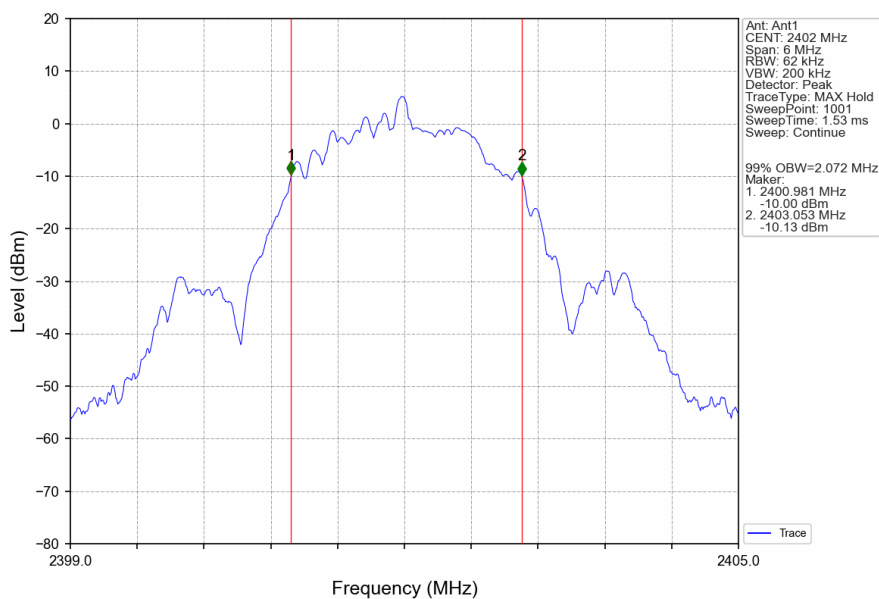

2M_MCH_2440MHz_Ant1_NTNV

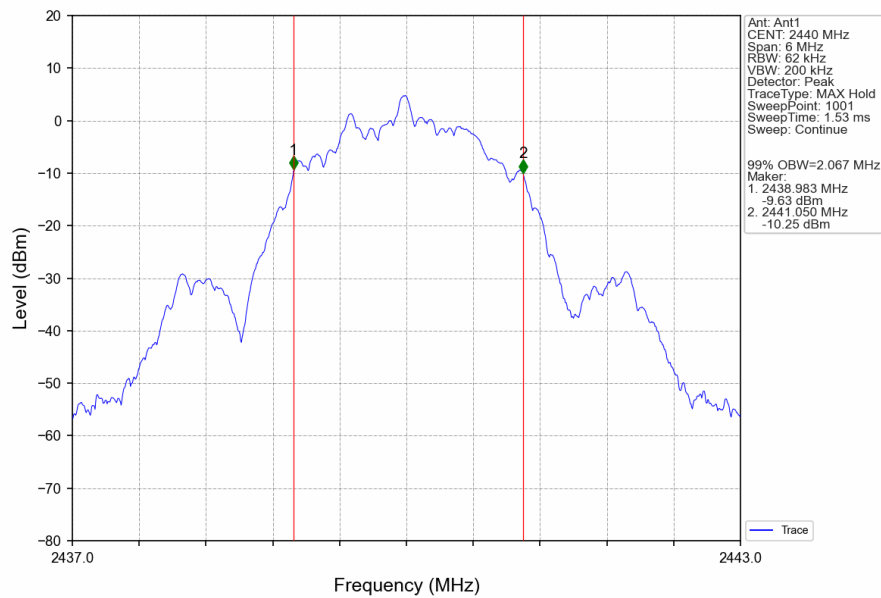


2M_HCH_2480MHz_Ant1_NTNV

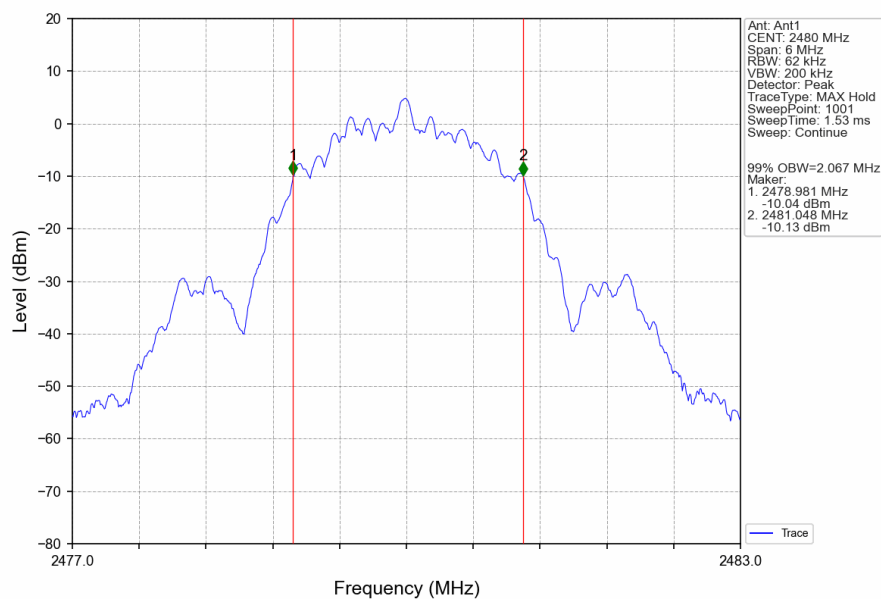


2.2.2 6dB BW


1M_LCH_2402MHz_Ant1_NTNV

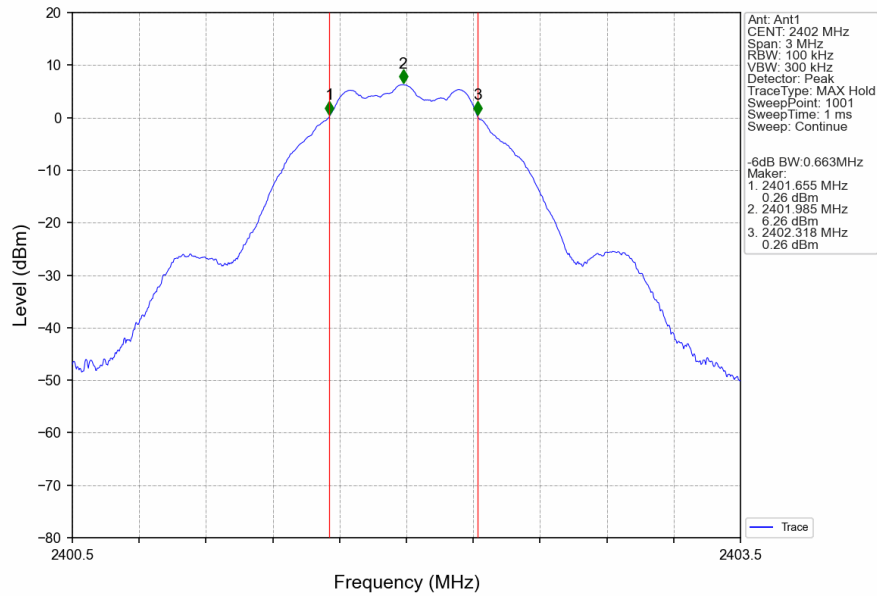


1M_MCH_2440MHz_Ant1_NTNV

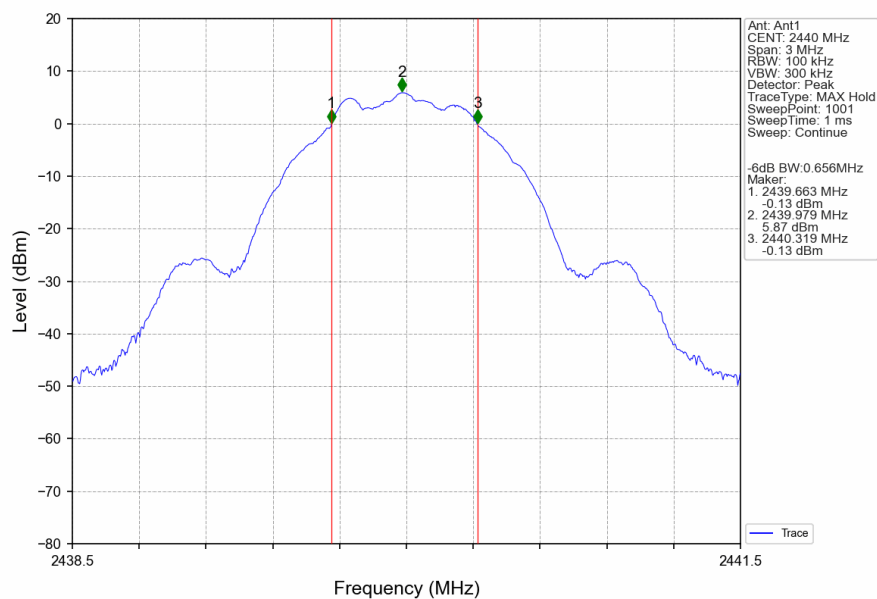


1M_HCH_2480MHz_Ant1_NTNV

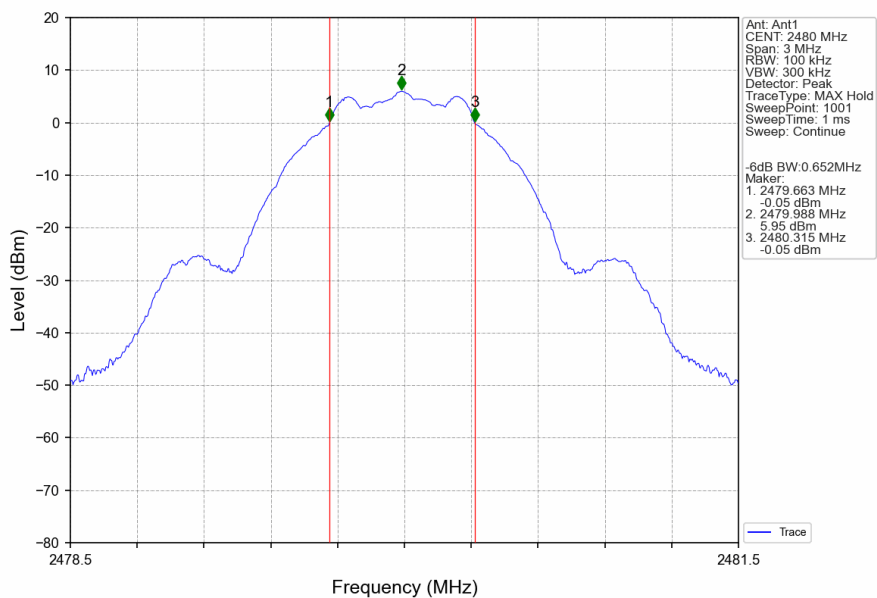


2M_LCH_2402MHz_Ant1_NTNV

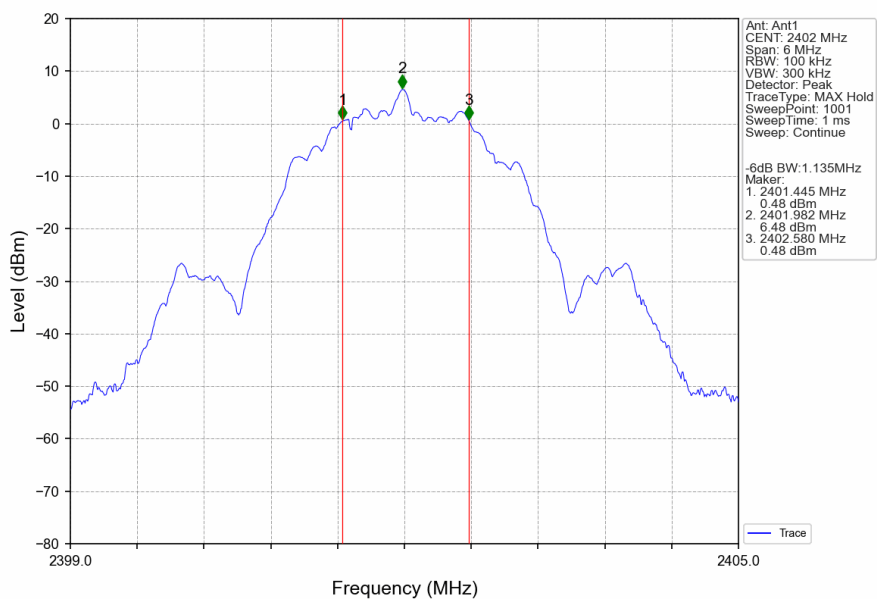

2M_MCH_2440MHz_Ant1_NTNV

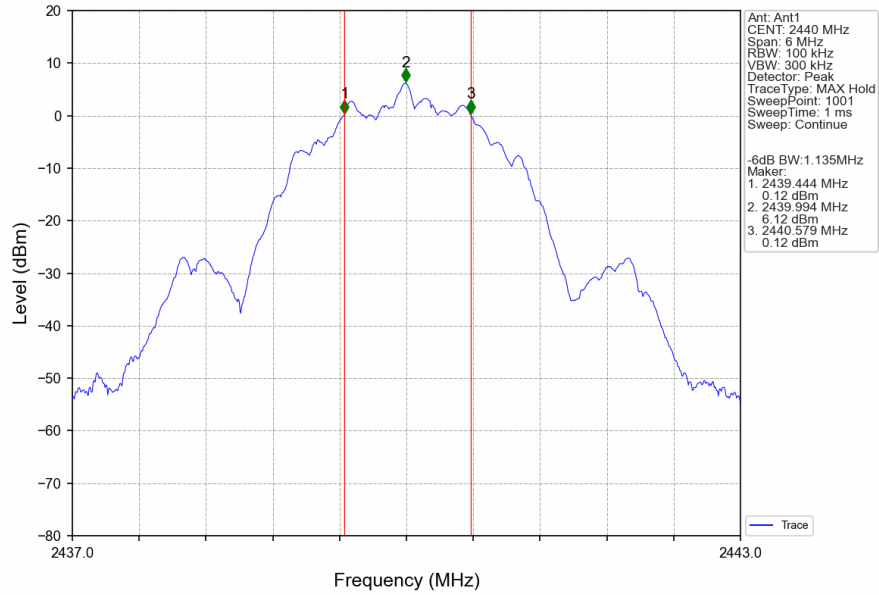

2M_HCH_2480MHz_Ant1_NTNV

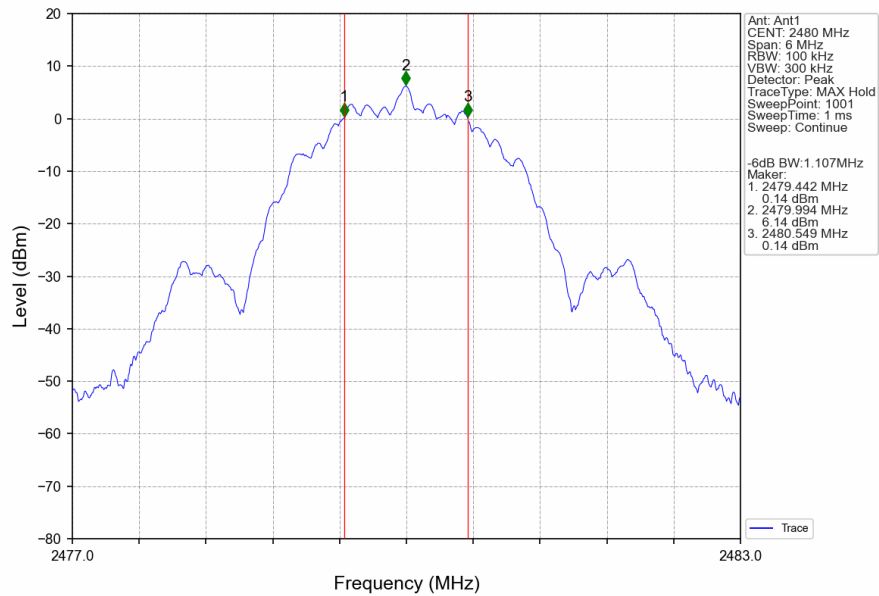

3. Maximum Conducted Output Power

3.1 Test Result


3.1.1 Power

Mode	TX Type	Frequency (MHz)	Maximum Average Conducted Output Power (dBm)		Verdict
			ANT1	Limit	
1M	SISO	2402	5.97	<=30	Pass
		2440	5.62	<=30	Pass
		2480	5.73	<=30	Pass
2M	SISO	2402	6.19	<=30	Pass
		2440	6.09	<=30	Pass
		2480	5.63	<=30	Pass


Note1: Antenna Gain: Ant1: -4.37dBi;

3.2 Test Graph


3.2.1 Power

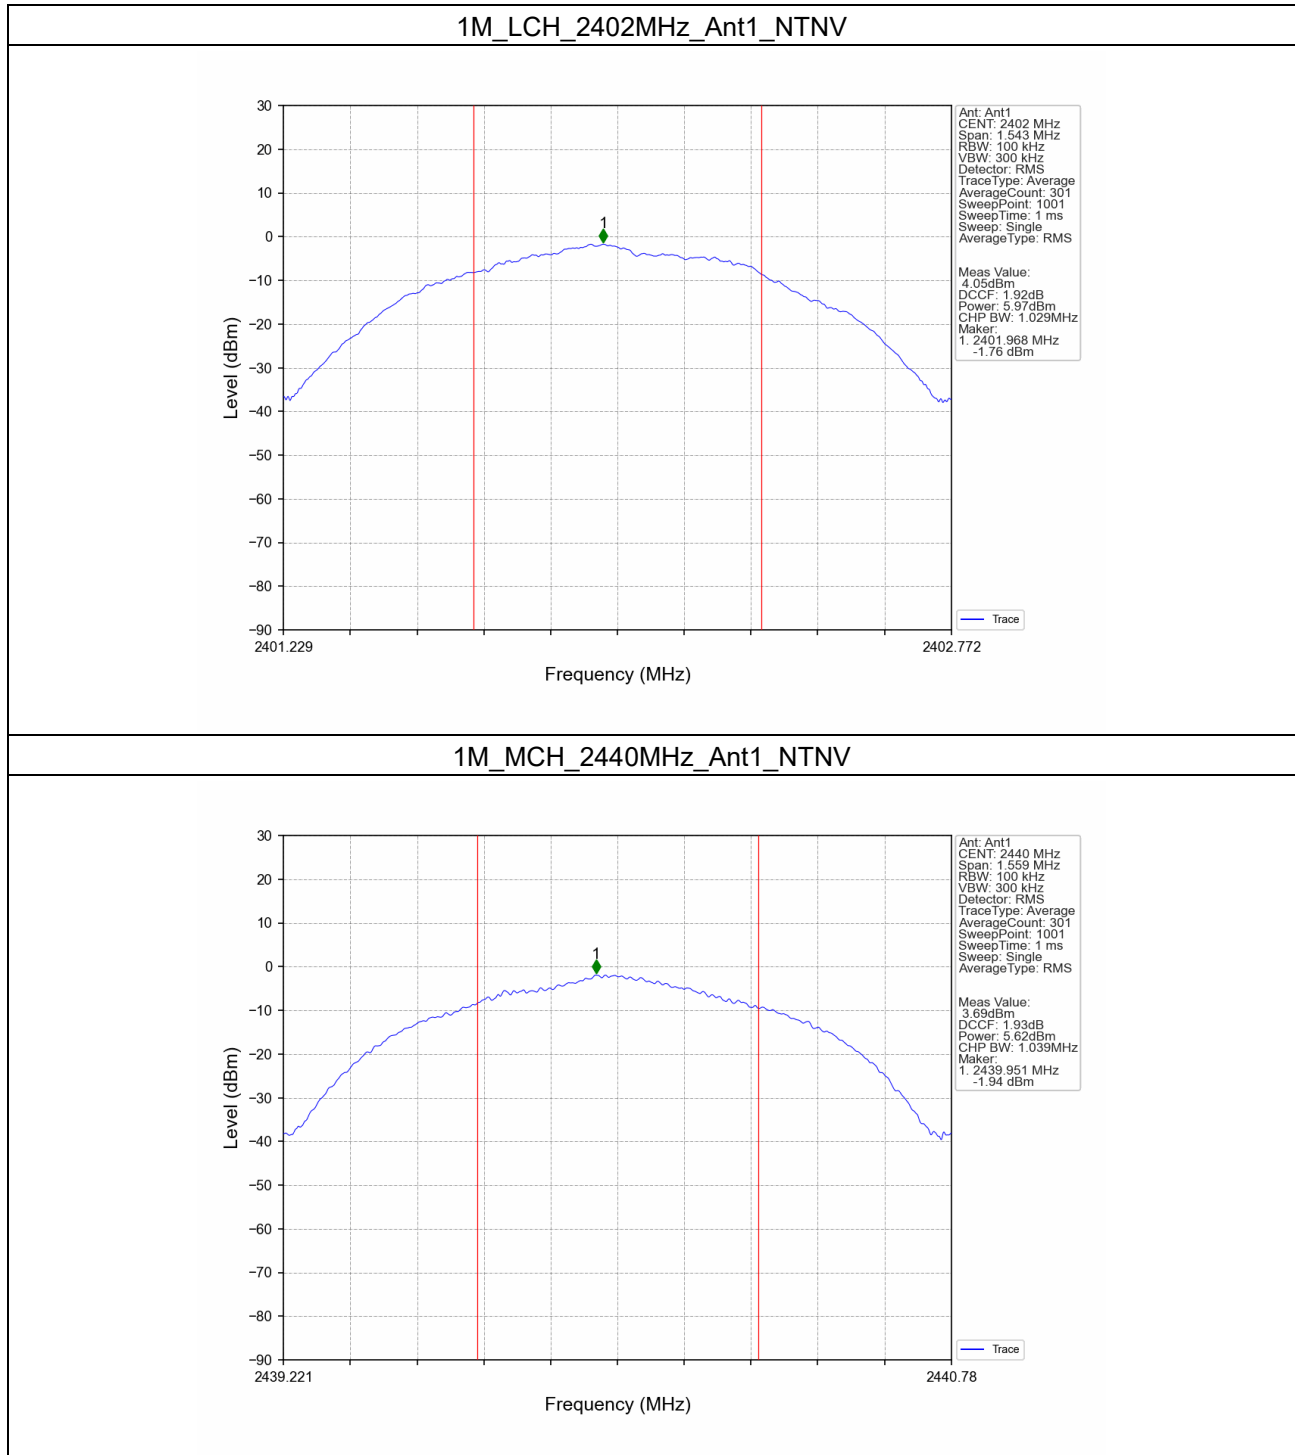


1M_HCH_2480MHz_Ant1_NTNV

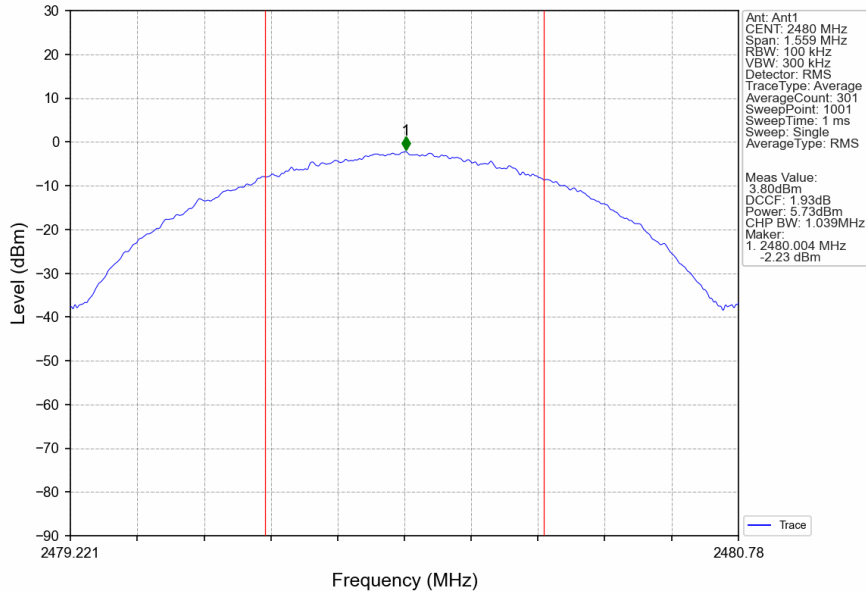


2M_LCH_2402MHz_Ant1_NTNV

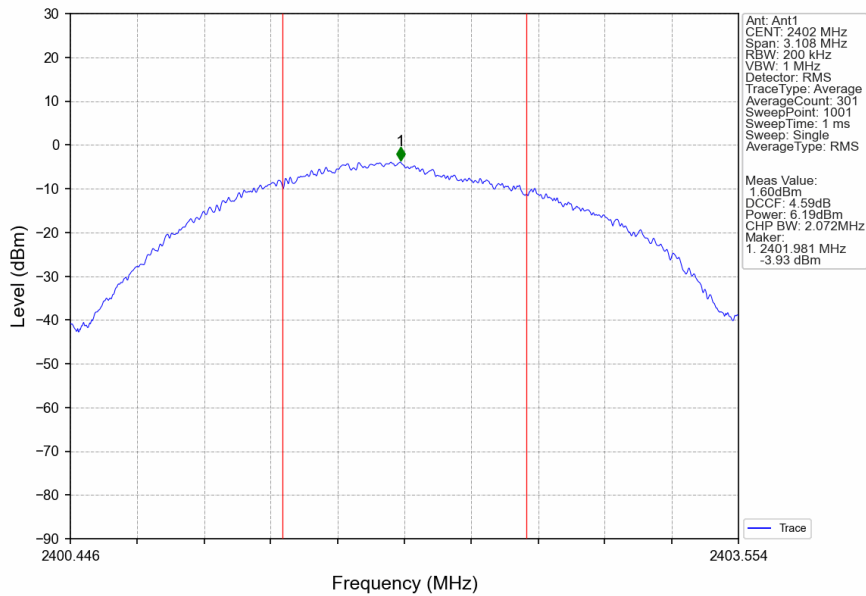

2M_MCH_2440MHz_Ant1_NTNV

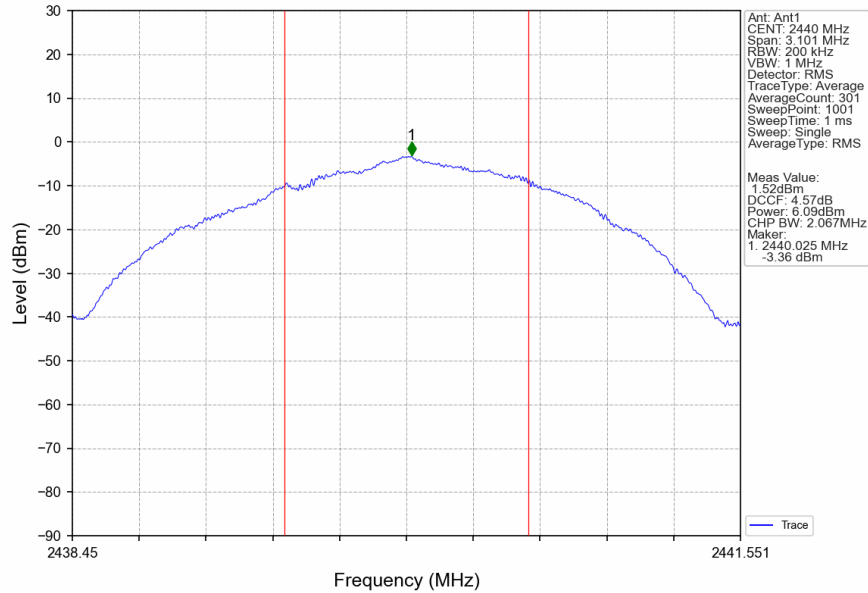

2M_HCH_2480MHz_Ant1_NTNV

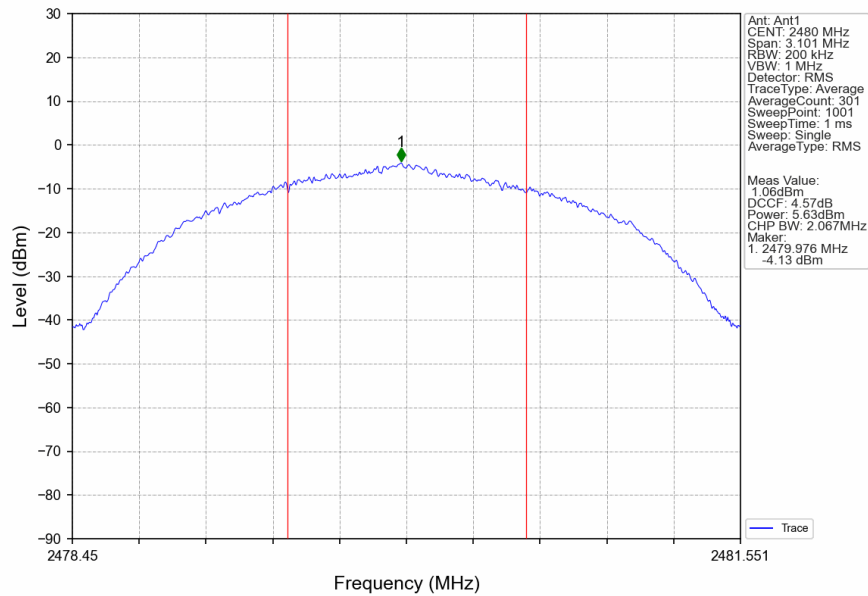

4. Maximum Power Spectral Density


4.1 Test Result

4.1.1 PSD


Mode	TX Type	Frequency (MHz)	Maximum PSD (dBm)		Verdict
			ANT1	Limit	
1M	SISO	2402	0.64	<=8	Pass
		2440	-0.12	<=8	Pass
		2480	-1.38	<=8	Pass
2M	SISO	2402	-1.62	<=8	Pass
		2440	-2.42	<=8	Pass
		2480	-1.13	<=8	Pass
Note1: Antenna Gain: Ant1: -4.37dBi;					

4.2 Test Graph


4.2.1 PSD

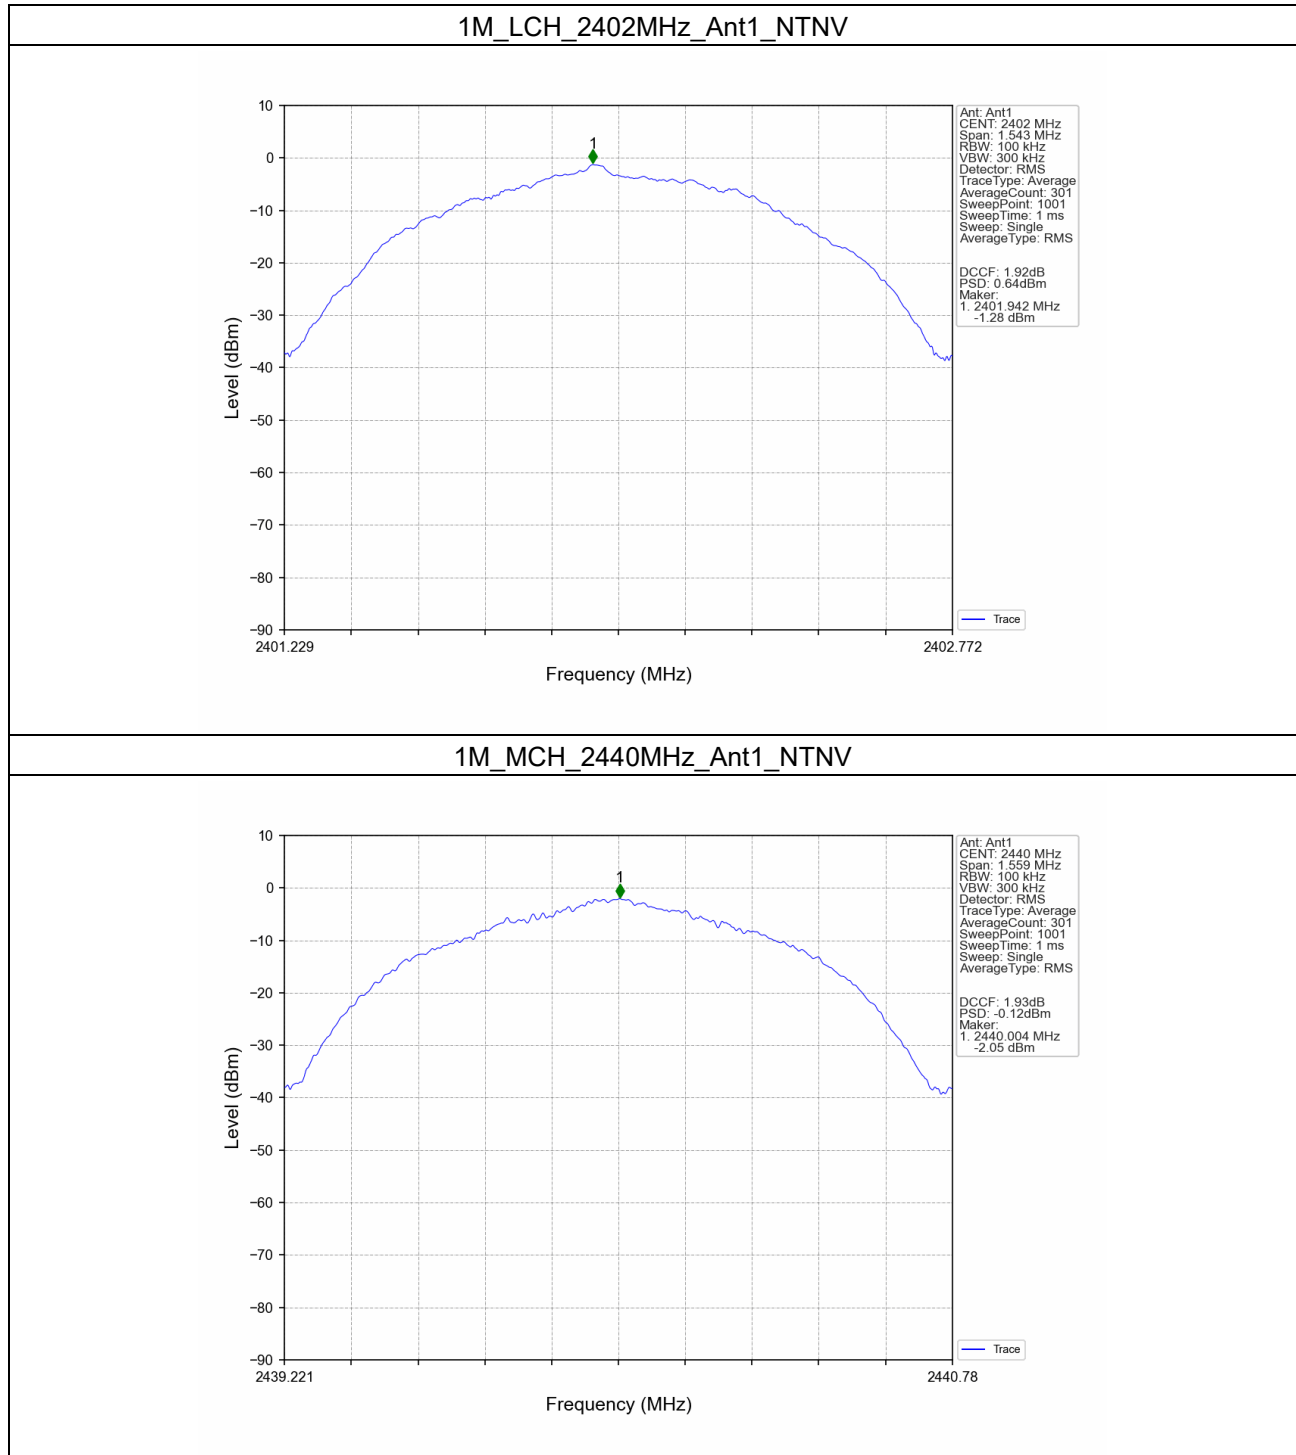


1M_HCH_2480MHz_Ant1_NTNV

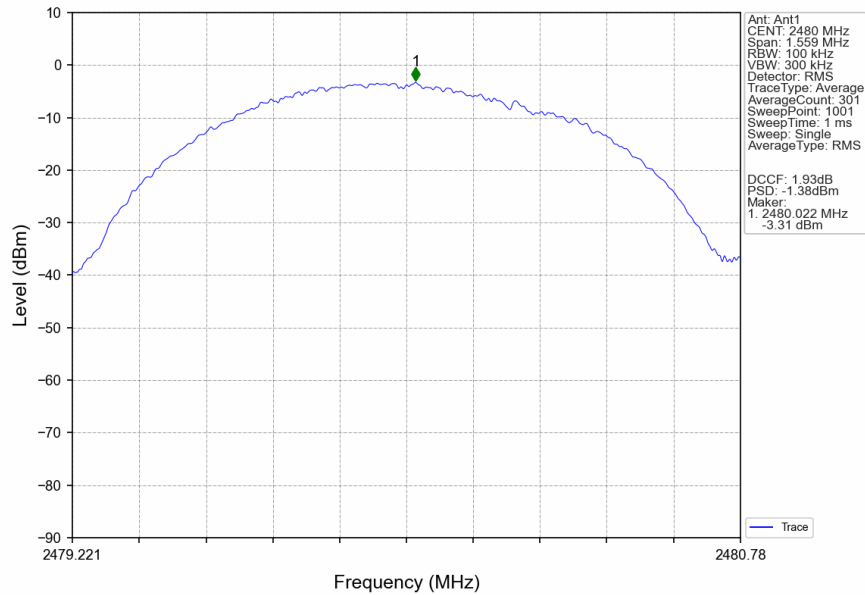


2M_LCH_2402MHz_Ant1_NTNV

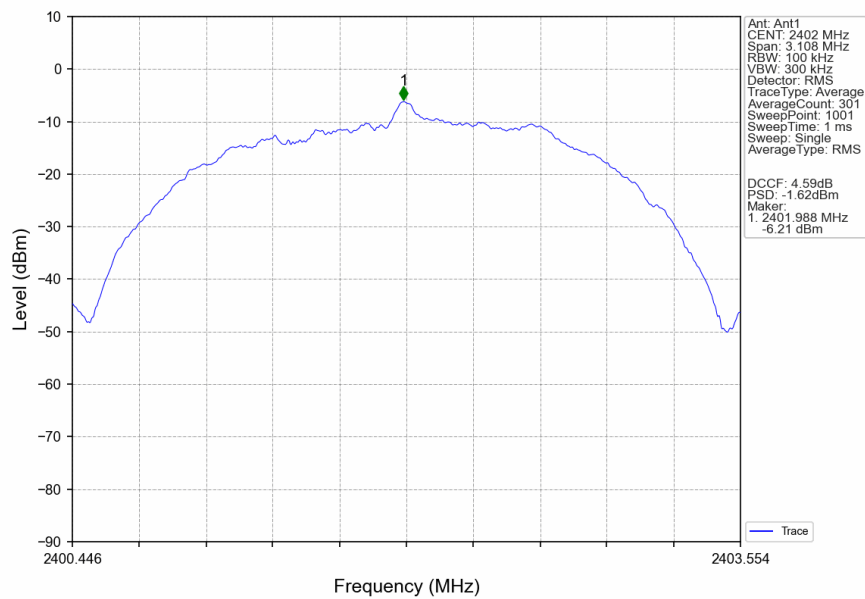

2M_MCH_2440MHz_Ant1_NTNV

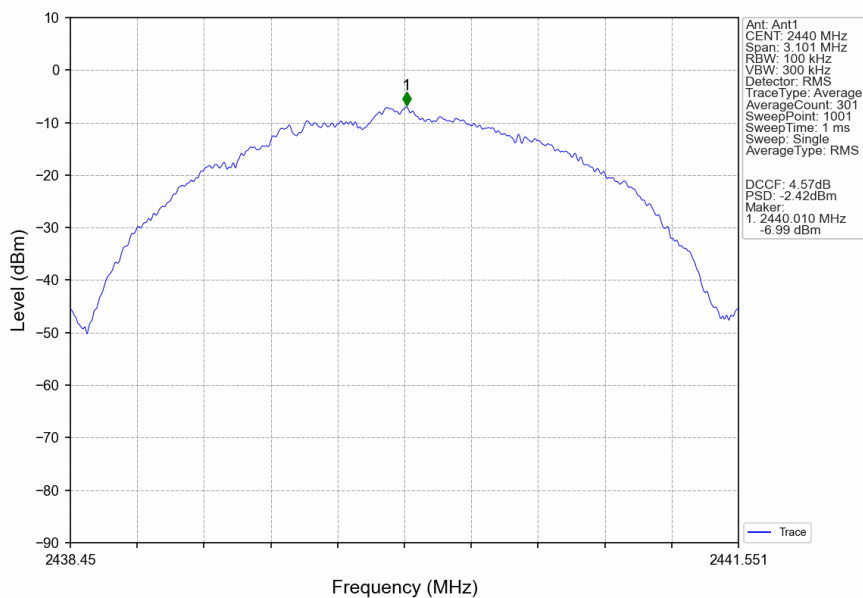

2M_HCH_2480MHz_Ant1_NTNV

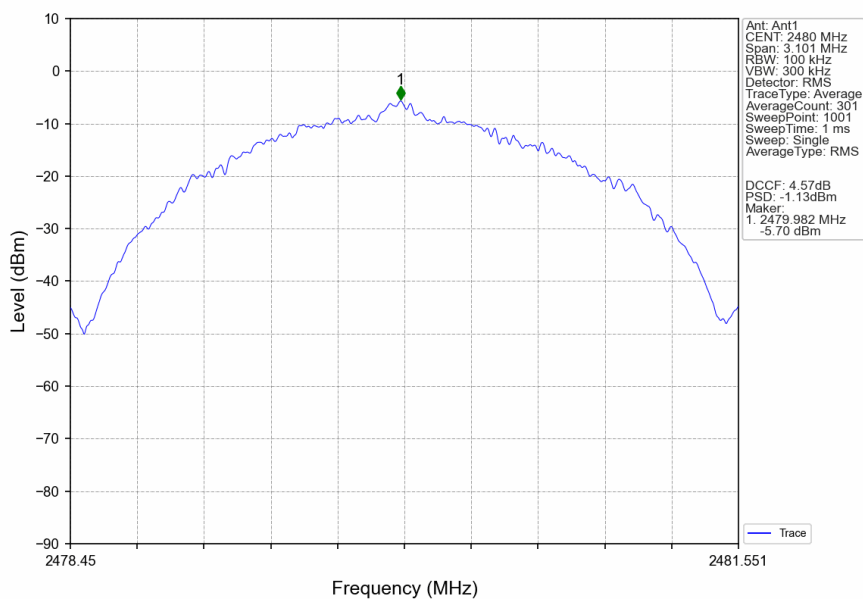

5. Unwanted Emissions In Non-restricted Frequency Bands

5.1 Test Result

5.1.1 Ref

Mode	TX Type	Frequency (MHz)	ANT	Level of Reference (dBm)
1M	SISO	2402	1	6.17
		2440	1	5.82
		2480	1	5.90
2M	SISO	2402	1	6.39
		2440	1	6.03
		2480	1	6.08

Note1: Refer to FCC Part 15.247 (d) and ANSI C63.10-2020, the channel contains the maximum PSD level was used to establish the reference level.


5.1.2 CSE

Mode	TX Type	Frequency (MHz)	ANT	Level of Reference (dBm)	Limit (dBm)	Verdict
1M	SISO	2402	1	6.17	-23.83	Pass
		2440	1	6.17	-23.83	Pass
		2480	1	6.17	-23.83	Pass
2M	SISO	2402	1	6.39	-23.61	Pass
		2440	1	6.39	-23.61	Pass
		2480	1	6.39	-23.61	Pass


Note1: Refer to FCC Part 15.247 (d) and ANSI C63.10-2020, the channel contains the maximum PSD level was used to establish the reference level.

5.2 Test Graph


5.2.1 Ref

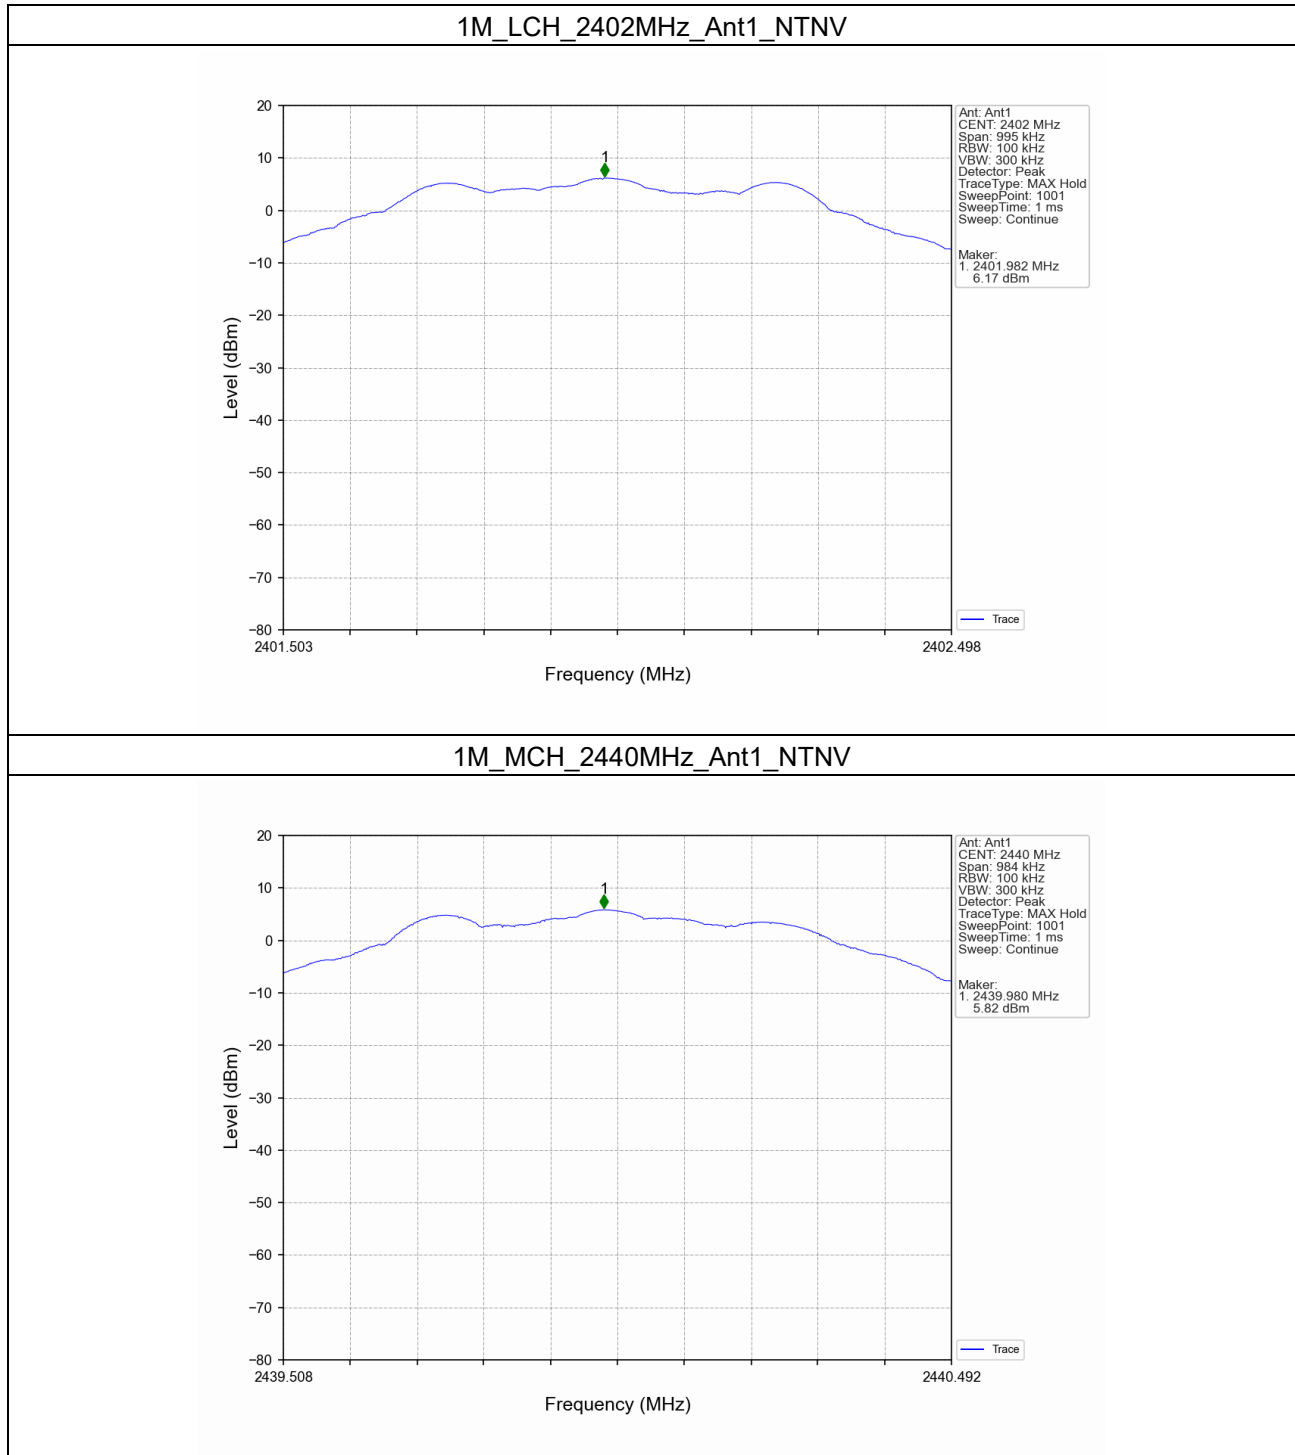


1M_HCH_2480MHz_Ant1_NTNV

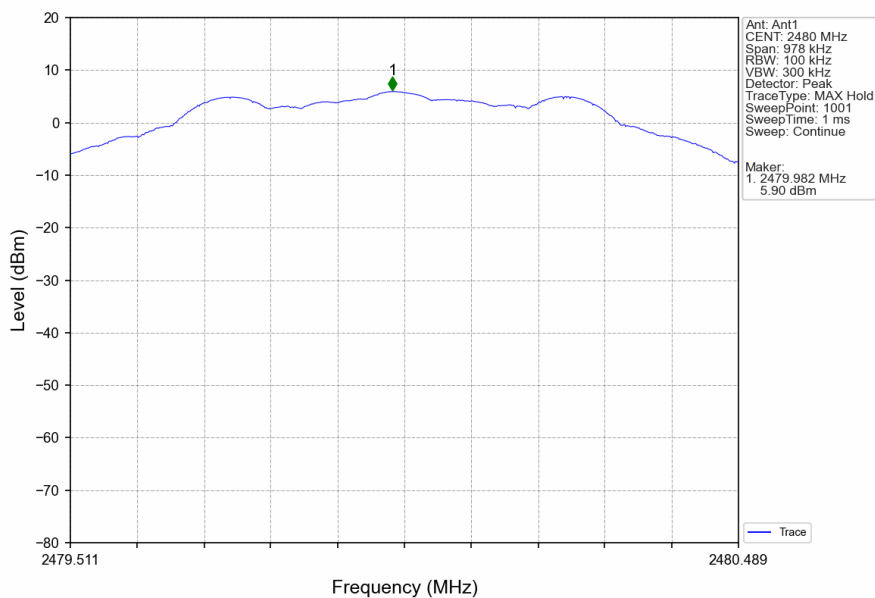


2M_LCH_2402MHz_Ant1_NTNV

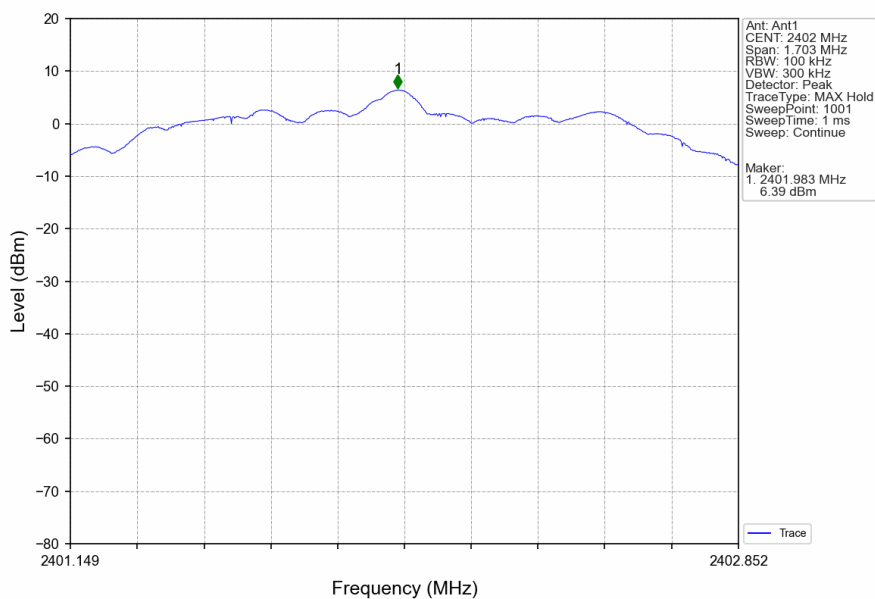

2M_MCH_2440MHz_Ant1_NTNV

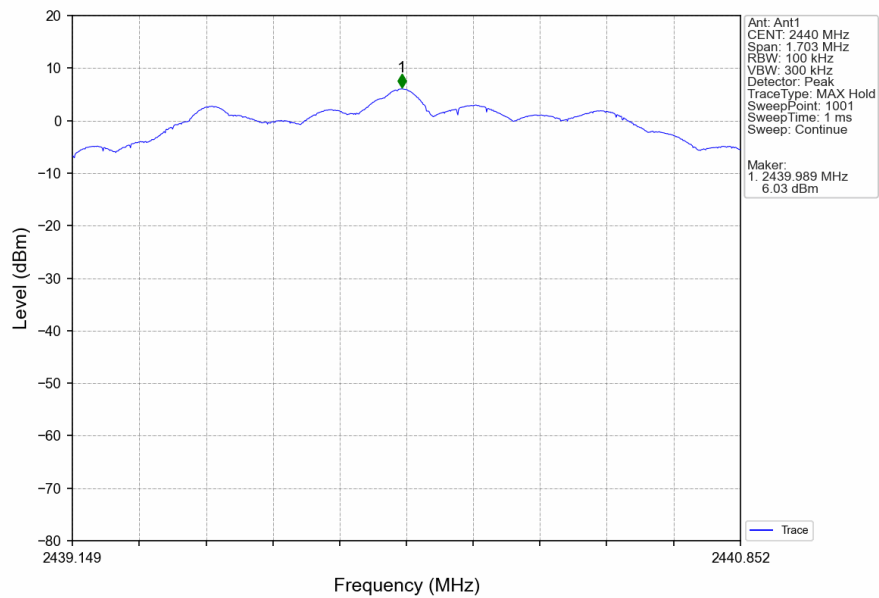


2M_HCH_2480MHz_Ant1_NTNV

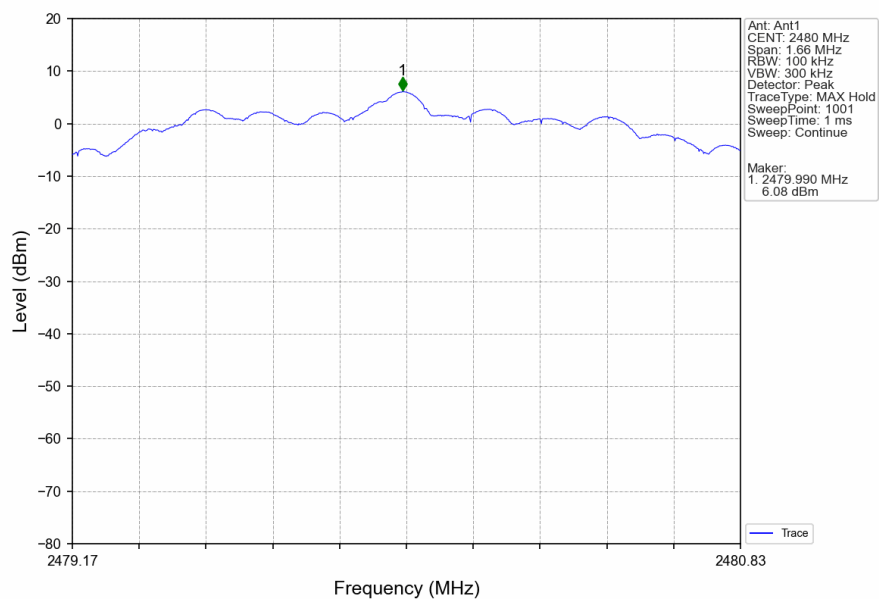


5.2.2 CSE


1M_LCH_2402MHz_Ant1_NTNV

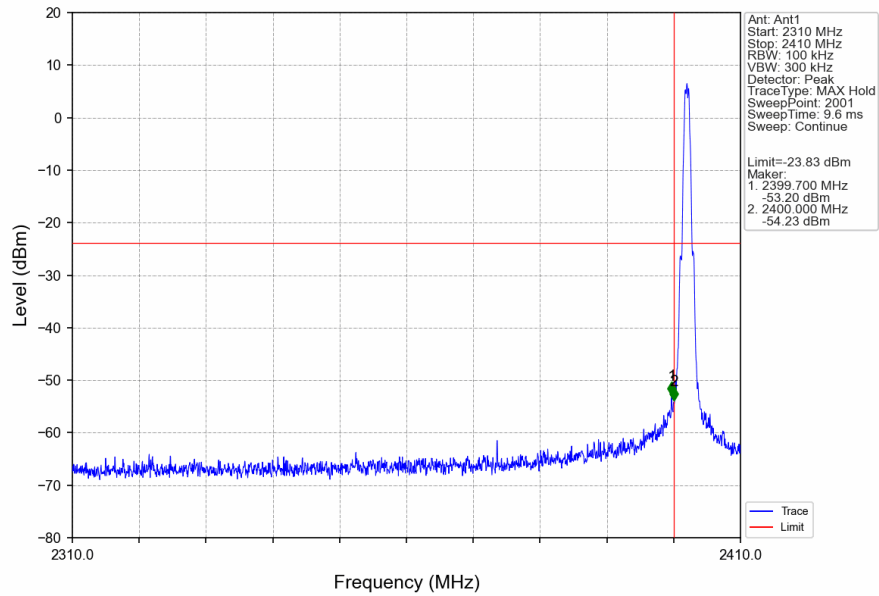


1M_LCH_2402MHz_Ant1_NTNV

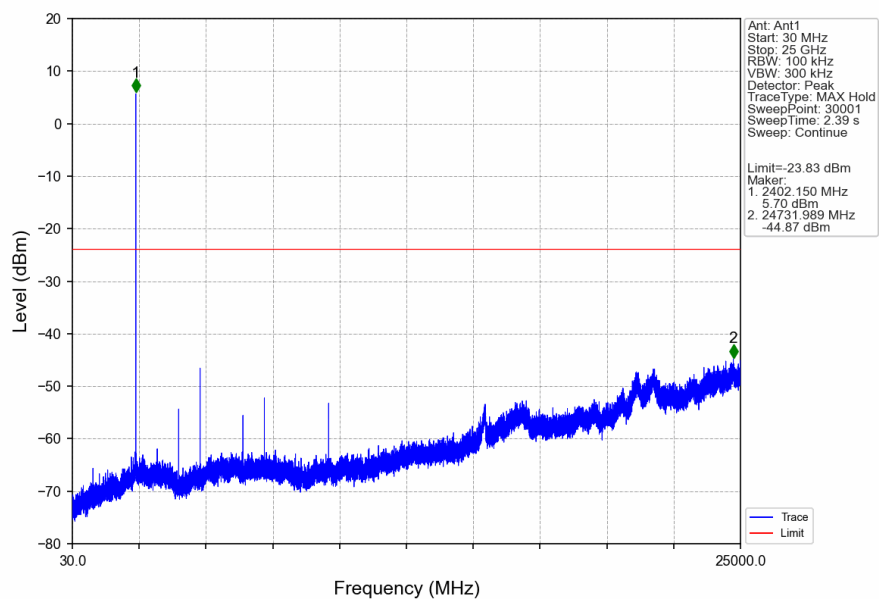


1M_MCH_2440MHz_Ant1_NTNV

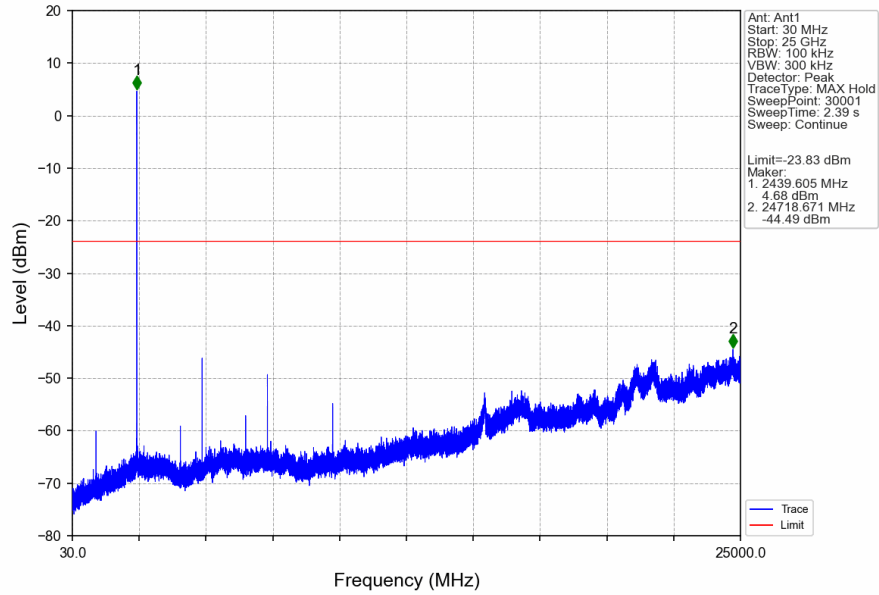


1M_HCH_2480MHz_Ant1_NTNV

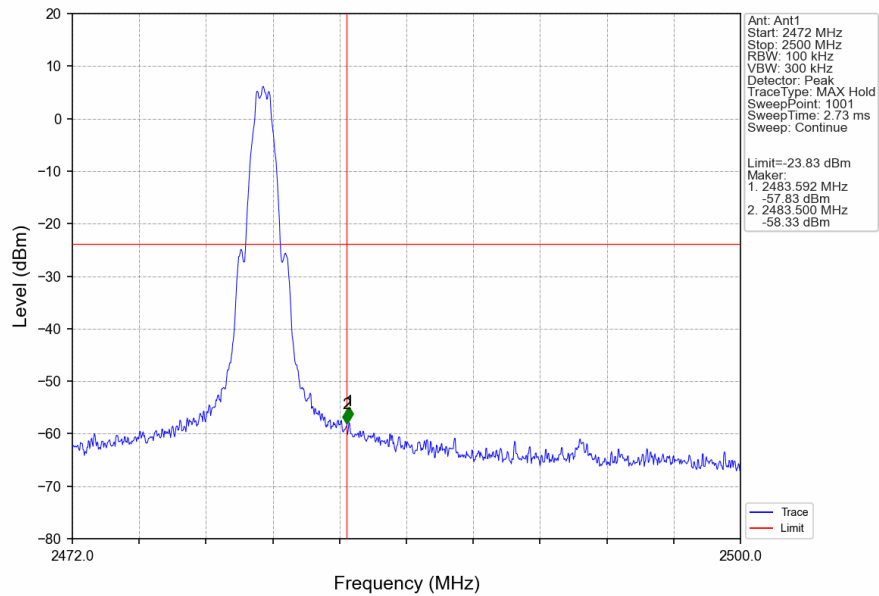


1M_HCH_2480MHz_Ant1_NTNV

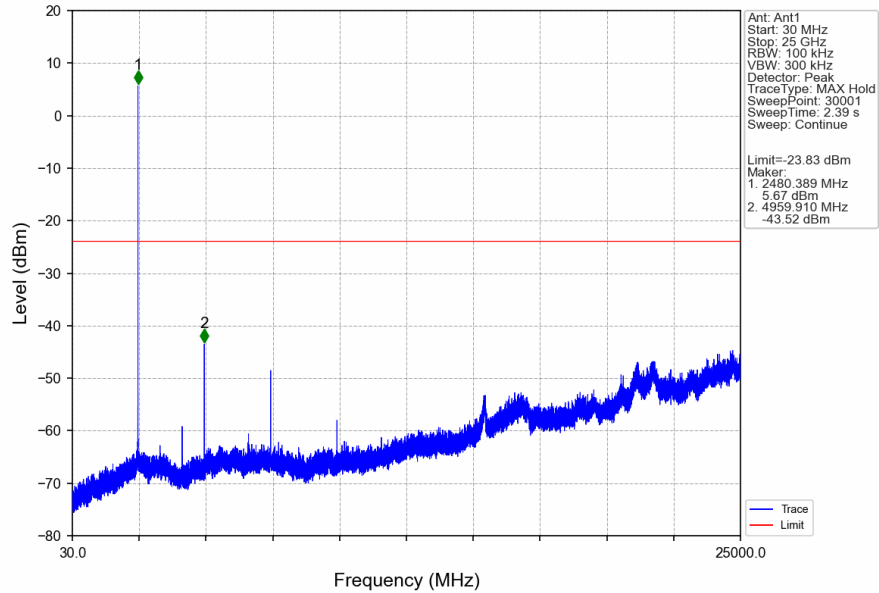


2M_LCH_2402MHz_Ant1_NTNV

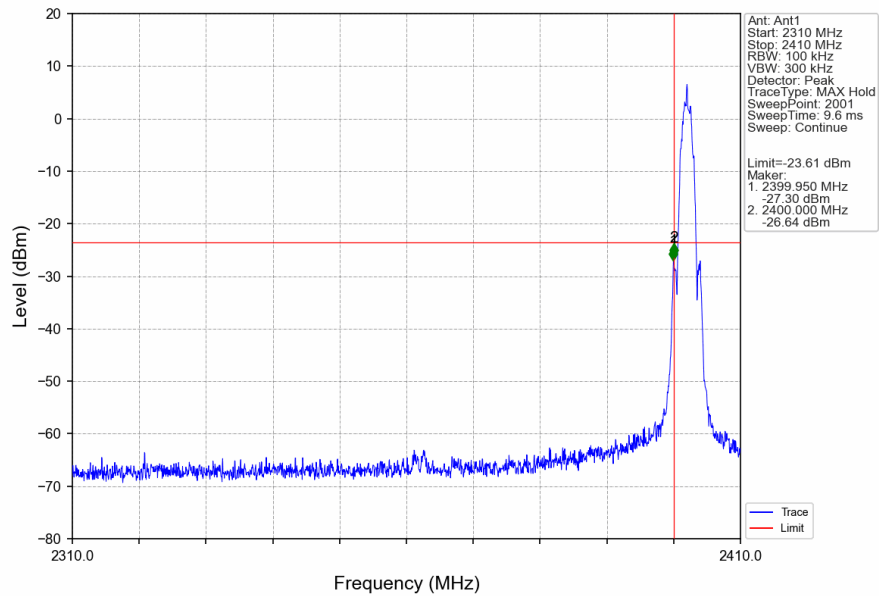


2M_LCH_2402MHz_Ant1_NTNV

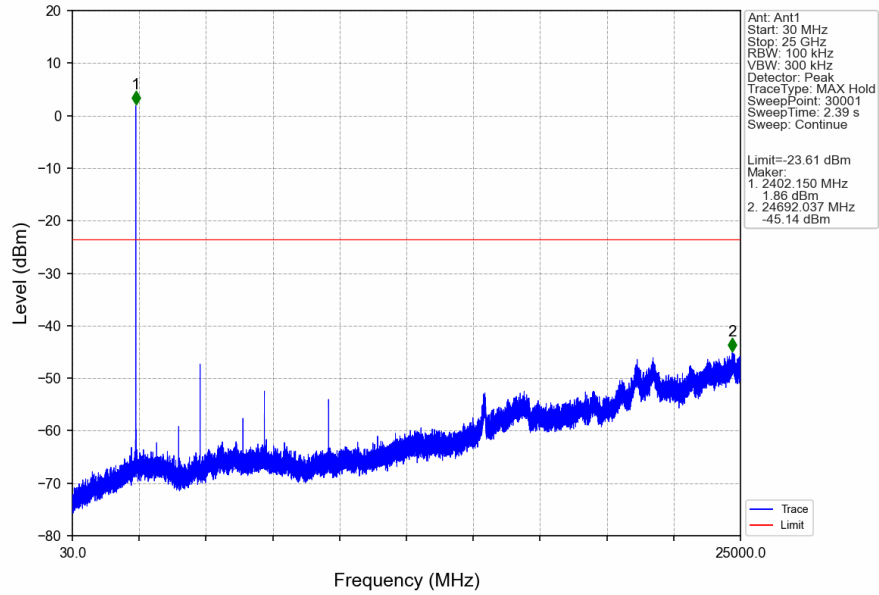


2M_MCH_2440MHz_Ant1_NTNV

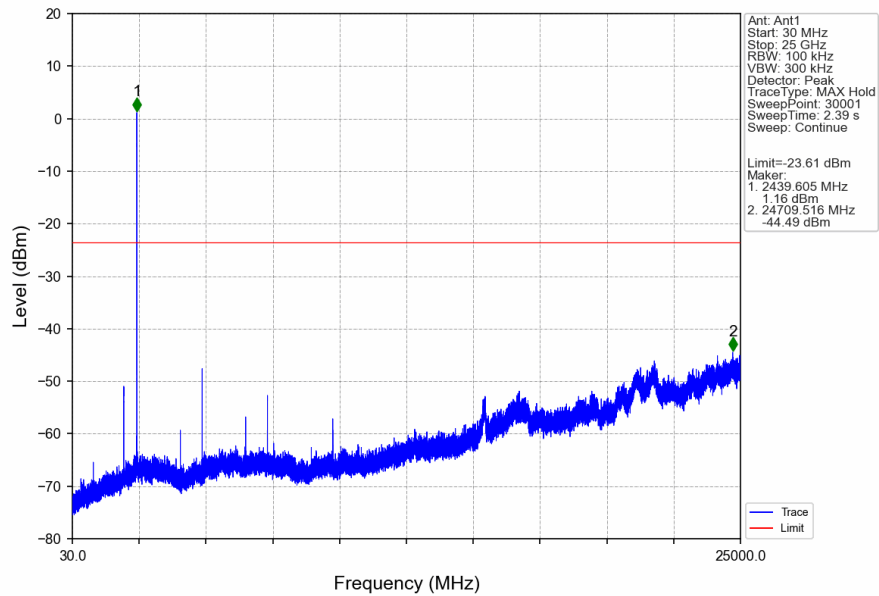

2M_HCH_2480MHz_Ant1_NTNV

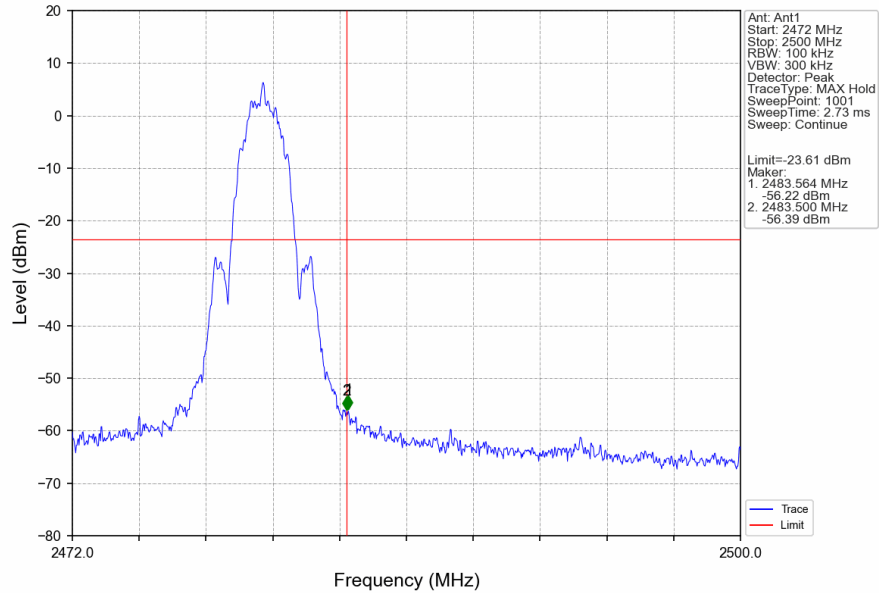

2M_HCH_2480MHz_Ant1_NTNV

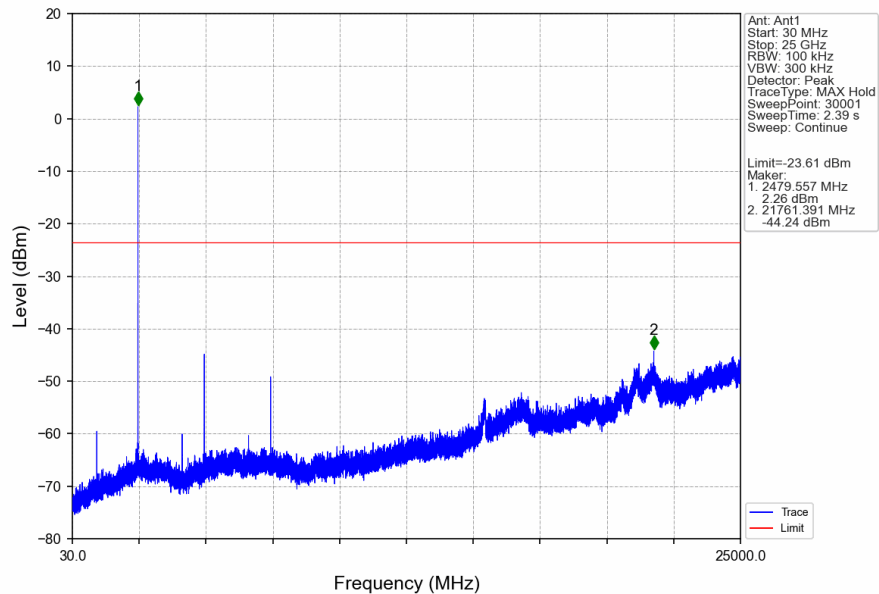

- End of the Report -