

Measurement Results

1-0213/20-02-03_log1_conducted

[Test logging](#)

This addendum is electronically signed and valid without handwritten signature.
For verification of the electronic signatures, the public keys can be requested at the testing laboratory.

Document authorized:



cn=Mihail Dorongovskij, o=CTC
advanced GmbH, ou=DOR-200803,
email=mihail.dorongovskij@ctcad
vanced.com, c=DE
2020.11.05 13:42:54 +01'00'

Mihail Dorongovskij
Lab Manager
Radio Communications

Table of Content

IUT Summary	3
1. FCC Part 15.247 Maximum Peak Conducted Output Power DTS ~ BT LE 1 Msps	4
2. FCC Part 15.247 Bandwidth 6dB DTS ~ BT LE 1 Msps	11
3. FCC Part 15.247 Peak Power Spectral Density DTS ~ BT LE 1 Msps	15
4. FCC Part 15.247 Bandwidth 99PCT-20dB ~ BT LE 1 Msps	19
5. FCC Part 15.247 TX Spurious Conducted ~ BT LE 1 Msps	26
6. FCC Part 15.247 Maximum Peak Conducted Output Power DTS ~ BT LE 2 Msps	30
7. FCC Part 15.247 TX Spurious Conducted ~ BT LE 2 Msps	37
8. FCC Part 15.247 Bandwidth 6dB DTS ~ BT LE 2 Msps	41
9. FCC Part 15.247 Peak Power Spectral Density DTS ~ BT LE 2 Msps	45
10. FCC Part 15.247 Bandwidth 99PCT-20dB ~ BT LE 2 Msps	49
11. FCC Part 15.247 Maximum Peak Conducted Output Power DTS ~ BT LE 2 Msps	56
12. FCC Part 15.247 Bandwidth 6dB DTS ~ BT LE 2 Msps	63
13. FCC Part 15.247 Peak Power Spectral Density DTS ~ BT LE 2 Msps	67
14. FCC Part 15.247 TX Spurious Conducted ~ BT LE 2 Msps	71
15. FCC Part 15.247 Bandwidth 99PCT-20dB ~ BT LE 2 Msps	75

IUT Summary

IUT DEFINITION & Common settings	
Manufacturer	SBO Hearing A/S
Type	DA_AU5_MNR_R
Serial No. Setup No.	64155776 / 64155751 1.0
SW Version HW Version	xble_qual_app 54.4 FL/rev05
Comment 1 2	
Tlow Tmid Thigh [°C]	0 20 40
Vlow Vmid Vhigh [V] @Imax [A]	3.4 4.2 4.2 @1
Auto Control enabled Power Supply Climatic Box	No No
Antenna Gain [dBi] (only considered if explicitly mentioned in testresult)	0
Additional Path Loss [dB]	0.8

IUT Common Settings BT Low Energy	
Intermodulation Value N	3
Image Freq. Low Mid High [MHz]	-2 -2 -2 for 1 Mbps / -4 -4 -4 for 2 Mbps
Power Class	2
1 Mbps supported	True TXpayload 255 RXpayload 255
2 Mbps supported	True TXpayload 255 RXpayload 255
Longrange S8 supported	False TXpayload 255 RXpayload 255
Longrange S2 supported	False TXpayload 255 RXpayload 255
Signaling Settings	USB_RS232 HCI 9 9600 None S1 None On
Signaling RF Settings	RF1com 0 0 On
User Interaction	No
Switch Matrix & Pathcompensation enabled	Yes

1. FCC Part 15.247 Maximum Peak Conducted Output Power DTS ~ BT LE 1 Msps

Test References	
TC Start	28.09.2020 09:37:52
Ambit Temp [°C] Humidity [rel%]	22.0 42
System Version	1.0.0.51
Test Specification	FCC Part 15.247
Test Method	DTS: KDB 558074 D01 V05 - Chapter 8.3.1.1 RBW ≥ DTS Bandwidth
Class / TC Version	TC_VM_FCC15247_Maximum_Peak_Conducted_Output_Power_DTS_V01 Version: 0.0.1
My Description	FCC 15.247 Maximum Peak Output Power Conducted DTS - BT LE 1 Msps
Add. Information	


Test Parameter	
Technology to test	BT LE 1 Msps
Antenna Port used	1
Temperature	mid
Voltage	mid
Frequency low to test	True Freq [MHz] 2402
Frequency mid to test	True Freq [MHz] 2440
Frequency high to test	True Freq [MHz] 2480
Switched Path	IUT - SignalingUnit - SpectrumAnalyzer
Devices in use	SigBT: Rohde&Schwarz,CMW,1201.0002k75/100683,3.7.170 SA: Rohde&Schwarz,FSV-30,1321.3008K30/103809,3.60

Test at TX 2402 MHz

DTM Connection check					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Connection result	---	---	---	---	PASS

READ SA SETTINGS:					
RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	3.67 10.89 10				
Start [MHz] Stop [MHz]	2401.000 2403.000				
RBW [MHz] VBW [MHz]	0.100000 0.300000				
Detector TraceMode	POS MAXH				
Sweep: Time [ms] Count Points per Section Type	50 200 10001 SWE				


DTS Bandwidth					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
DTS Bandwidth (6dB)	---	---	652	kHz	INFO

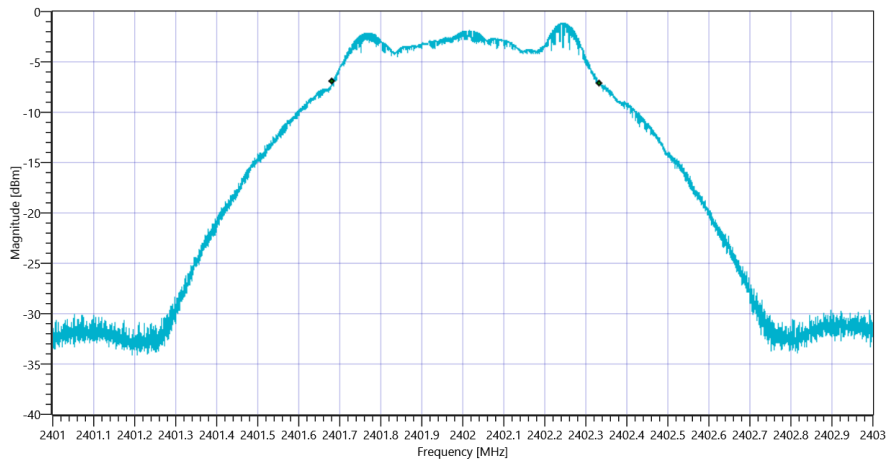

Plot_FCC Part 15.247 Maximum Peak Conducted Output Power DTS ~ BT LE 1 Msps DTS BW_28092020_093820.png

READ SA SETTINGS:					
RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	8.67 10.89 15				
Start [MHz] Stop [MHz]	2401.000 2403.000				
RBW [MHz] VBW [MHz]	1.000000 3.000000				
Detector TraceMode	POS MAXH				
Sweep: Time [ms] Count Points per Section Type	50 200 1001 SWE				

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Peak Power	---	30.00	-1.25	dBm	PASS
Peak Power	---	1000	0.749894	mW	PASS
Frequency at Peak	---	---	2402.272	MHz	INFO

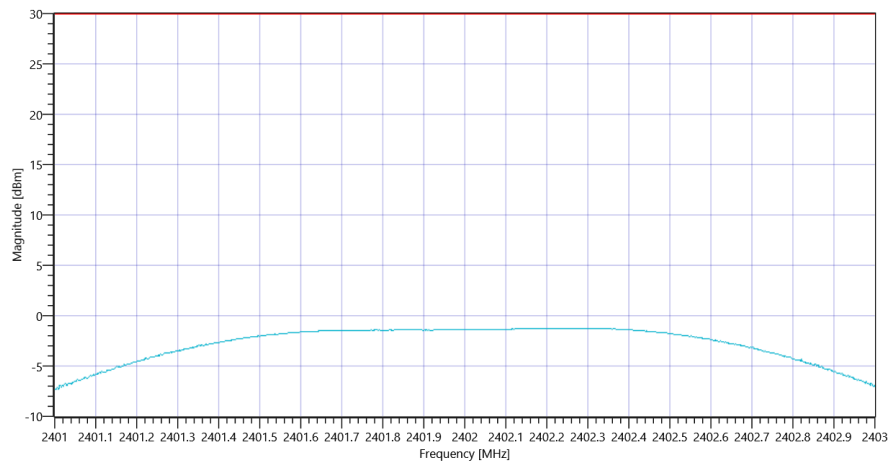


Plot_FCC Part 15.247 Maximum Peak Conducted Output Power DTS ~ BT LE 1 Msps_28092020_093835.png

Test at TX 2440 MHz

DTM Connection check					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Connection result	---	---	---	---	PASS


READ SA SETTINGS:					
RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	5.73 10.9 10				
Start [MHz] Stop [MHz]	2439.000 2441.000				
RBW [MHz] VBW [MHz]	0.100000 0.300000				
Detector TraceMode	POS MAXH				
Sweep: Time [ms] Count Points per Section Type	50 200 10001 SWE				

DTS Bandwidth					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
DTS Bandwidth (6dB)	---	---	653	kHz	INFO

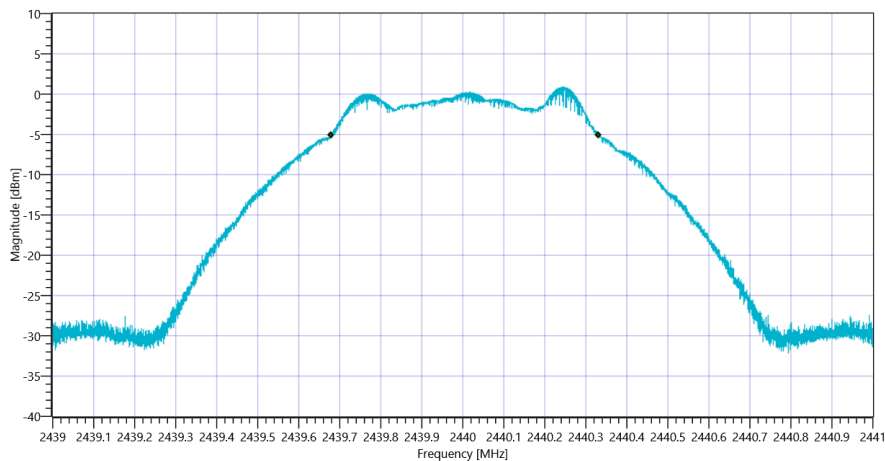

READ SA SETTINGS:					
RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	10.73 10.9 15				
Start [MHz] Stop [MHz]	2439.000 2441.000				
RBW [MHz] VBW [MHz]	1.000000 3.000000				
Detector TraceMode	POS MAXH				
Sweep: Time [ms] Count Points per Section Type	50 200 1001 SWE				

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Peak Power	---	30.00	0.75	dBm	PASS
Peak Power	---	1000	1.188502	mW	PASS
Frequency at Peak	---	---	2439.77	MHz	INFO

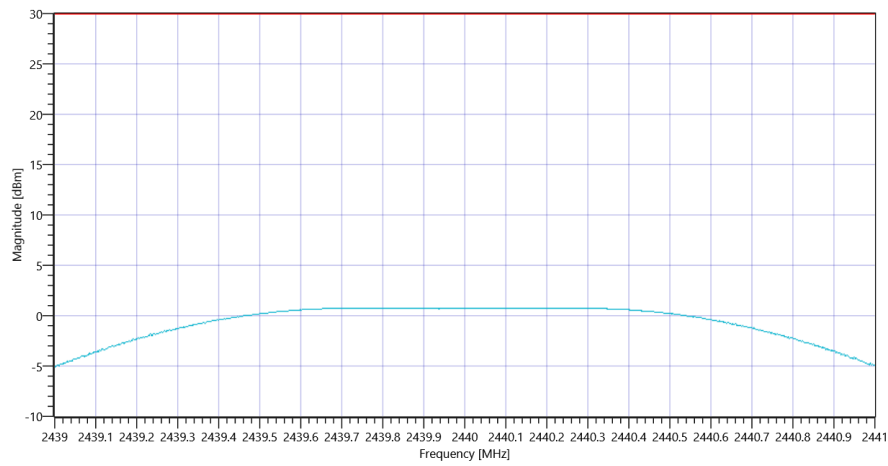


Plot_FCC Part 15.247 Maximum Peak Conducted Output Power DTS ~ BT LE 1 Msps_28092020_093918.png

Test at TX 2480 MHz

DTM Connection check					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Connection result	---	---	---	---	PASS


READ SA SETTINGS:					
RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	4.61 10.95 10				
Start [MHz] Stop [MHz]	2479.000 2481.000				
RBW [MHz] VBW [MHz]	0.100000 0.300000				
Detector TraceMode	POS MAXH				
Sweep: Time [ms] Count Points per Section Type	50 200 10001 SWE				

DTS Bandwidth					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
DTS Bandwidth (6dB)	---	---	653	kHz	INFO

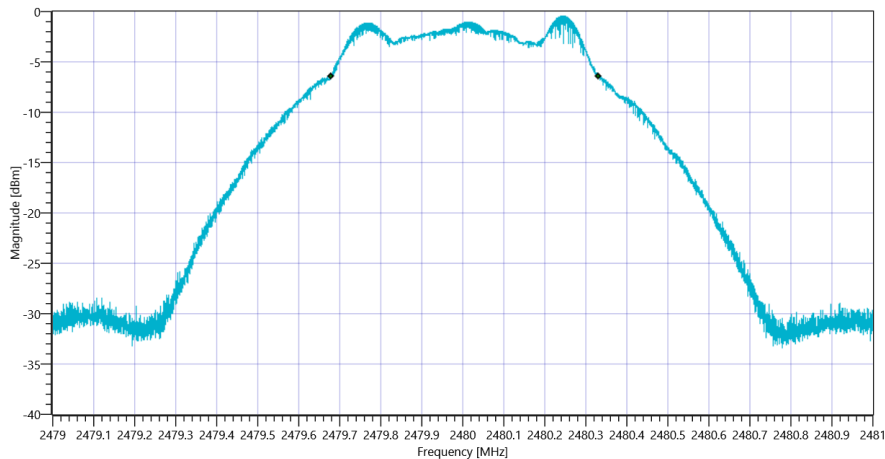

READ SA SETTINGS:					
RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	9.61 10.95 15				
Start [MHz] Stop [MHz]	2479.000 2481.000				
RBW [MHz] VBW [MHz]	1.000000 3.000000				
Detector TraceMode	POS MAXH				
Sweep: Time [ms] Count Points per Section Type	50 200 1001 SWE				

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Peak Power	---	30.00	-0.35	dBm	PASS
Peak Power	---	1000	0.922571	mW	PASS
Frequency at Peak	---	---	2479.75	MHz	INFO

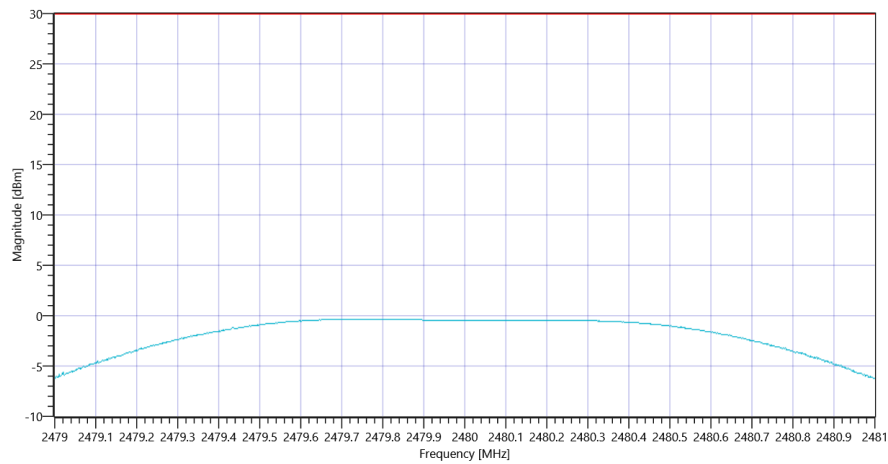

Plot_FCC Part 15.247 Maximum Peak Conducted Output Power DTS ~ BT LE 1 Msps_28092020_094000.png

TEST FINISHED

General Verdict

28.09.2020 09:40:01 / RT: 129 s

PASS

2. FCC Part 15.247 Bandwidth 6dB DTS ~ BT LE 1 Msps

Test References	
TC Start	28.09.2020 09:40:05
Ambit Temp [°C] Humidity [rel%]	22.0 42
System Version	1.0.0.51
Test Specification	FCC Part 15.247
Test Method	99
Class / TC Version	TC_VM_FCC15247_Bandwidth_6dB_DTS_V01 Version: 0.0.1
My Description	FCC 15.247 Bandwidth 6dB DTS - BT LE 1 Msps
Add. Information	


Test Parameter	
Technology to test	BT LE 1 Msps
Antenna Port used	1
Temperature	mid
Voltage	mid
Frequency low to test	True Freq [MHz] 2402
Frequency mid to test	True Freq [MHz] 2440
Frequency high to test	True Freq [MHz] 2480
Switched Path	IUT - SignalingUnit - SpectrumAnalyzer
Devices in use	SigBT: Rohde&Schwarz,CMW,1201.0002k75/100683,3.7.170 SA: Rohde&Schwarz,FSV-30,1321.3008K30/103809,3.60

Test at TX 2402 MHz

DTM Connection check					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Connection result	---	---	---	---	PASS

READ SA SETTINGS:		
RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	3.87 10.89 10	
Start [MHz] Stop [MHz]	2401.000 2403.000	
RBW [MHz] VBW [MHz]	0.100000 0.300000	
Detector TraceMode	POS MAXH	
Sweep: Time [ms] Count Points per Section Type	50 200 10001 SWE	

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
DTS Bandwidth (6dB)	500	---	652	kHz	PASS

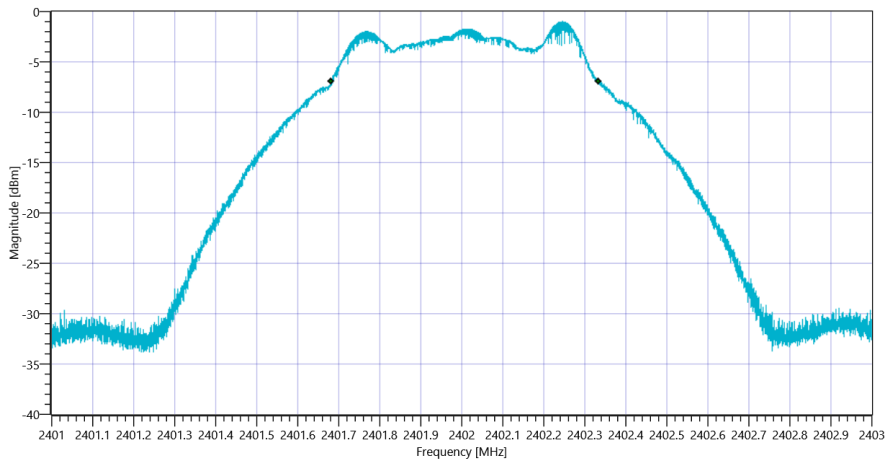


Plot_FCC Part 15.247 Bandwidth 6dB DTS ~ BT LE 1 Msps_28092020_094033.png

Test at TX 2440 MHz

DTM Connection check					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Connection result	---	---	---	---	PASS

READ SA SETTINGS:		
RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	5.82 10.9 10	
Start [MHz] Stop [MHz]	2439.000 2441.000	
RBW [MHz] VBW [MHz]	0.100000 0.300000	
Detector TraceMode	POS MAXH	
Sweep: Time [ms] Count Points per Section Type	50 200 10001 SWE	

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
DTS Bandwidth (6dB)	500	---	653	kHz	PASS

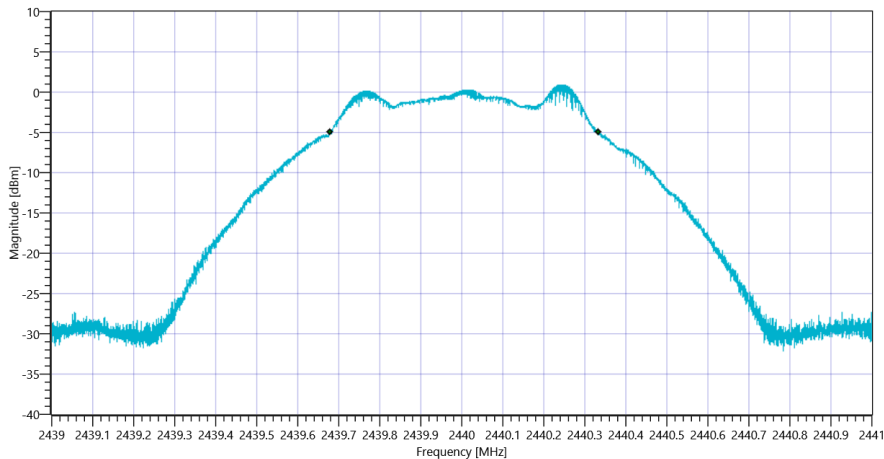


Test at TX 2480 MHz

DTM Connection check					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Connection result	---	---	---	---	PASS

READ SA SETTINGS:					
RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	4.69 10.95 10				
Start [MHz] Stop [MHz]	2479.000 2481.000				
RBW [MHz] VBW [MHz]	0.100000 0.300000				
Detector TraceMode	POS MAXH				
Sweep: Time [ms] Count Points per Section Type	50 200 10001 SWE				

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
DTS Bandwidth (6dB)	500	---	653	kHz	PASS

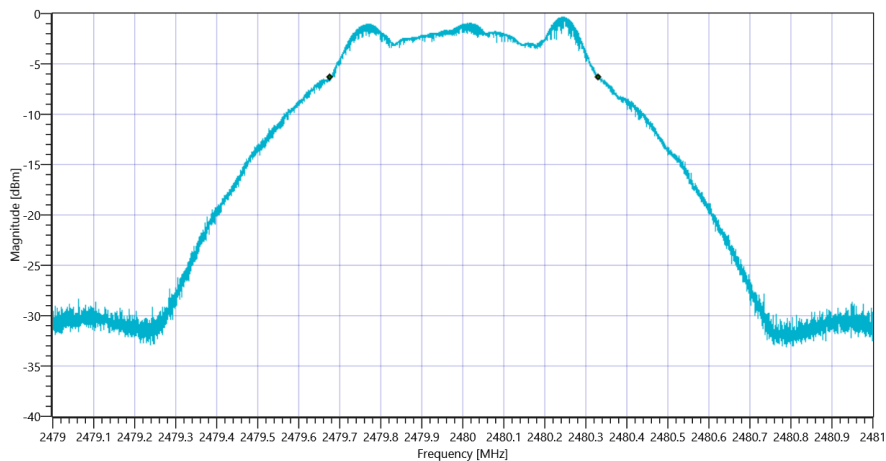

TEST FINISHED		
General Verdict	28.09.2020 09:41:26 / RT: 81 s	PASS

3. FCC Part 15.247 Peak Power Spectral Density DTS ~ BT LE 1 Msps

Test References	
TC Start	28.09.2020 09:41:31
Ambit Temp [°C] Humidity [rel%]	22.1 42
System Version	1.0.0.51
Test Specification	FCC Part 15.247
Test Method	DTS: KDB 558074 D01 V05 - Chapter 8.4 DTS maximum power spectral density level in the fundamental emission
Class / TC Version	TC_VM_FCC15247_Peak_Power_Spectral_Density_DTS_V01 Version: 0.0.1
My Description	FCC 15.247 Peak Power Spectral Density DTS - BT LE 1 Msps
Add. Information	


Test Parameter	
Technology to test	BT LE 1 Msps
Antenna Port used	1
Temperature	mid
Voltage	mid
Frequency low to test	True Freq [MHz] 2402
Frequency mid to test	True Freq [MHz] 2440
Frequency high to test	True Freq [MHz] 2480
Switched Path	IUT - SignalingUnit - SpectrumAnalyzer
Devices in use	SigBT: Rohde&Schwarz,CMW,1201.0002k75/100683,3.7.170 SA: Rohde&Schwarz,FSV-30,1321.3008K30/103809,3.60

Test at TX 2402 MHz

DTM Connection check					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Connection result	---	---	---	---	PASS

READ SA SETTINGS:		
RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	3.92 10.89 10	
Start [MHz] Stop [MHz]	2401.250 2402.750	
RBW [MHz] VBW [MHz]	0.003000 0.010000	
Detector TraceMode	POS MAXH	
Sweep: Time [ms] Count Points per Section Type	1000 20 1001 SWE	

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max Peak power Density	---	8	-17.11	dBm/3KHz	PASS

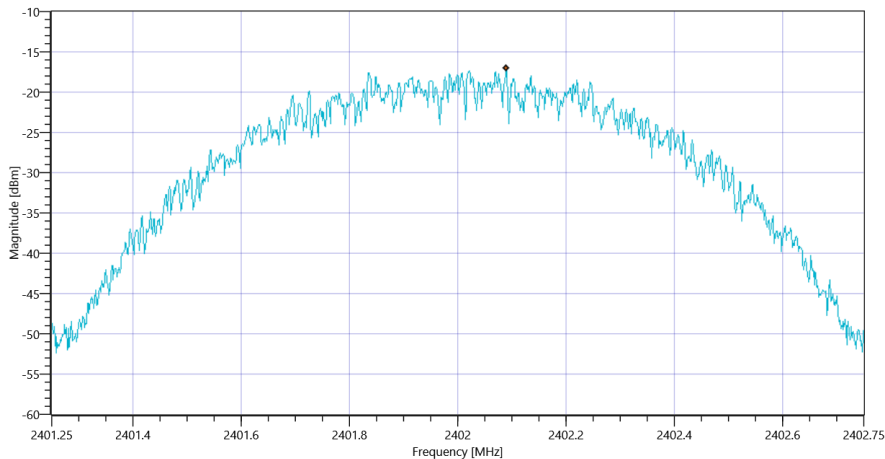


Plot_FCC Part 15.247 Peak Power Spectral Density DTS ~ BT LE 1 Msps_28092020_094208.png

Test at TX 2440 MHz

DTM Connection check					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Connection result	---	---	---	---	PASS

READ SA SETTINGS:		
RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	5.87 10.9 10	
Start [MHz] Stop [MHz]	2439.250 2440.750	
RBW [MHz] VBW [MHz]	0.003000 0.010000	
Detector TraceMode	POS MAXH	
Sweep: Time [ms] Count Points per Section Type	1000 20 1001 SWE	

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max Peak power Density	---	8	-15.29	dBm/3KHz	PASS

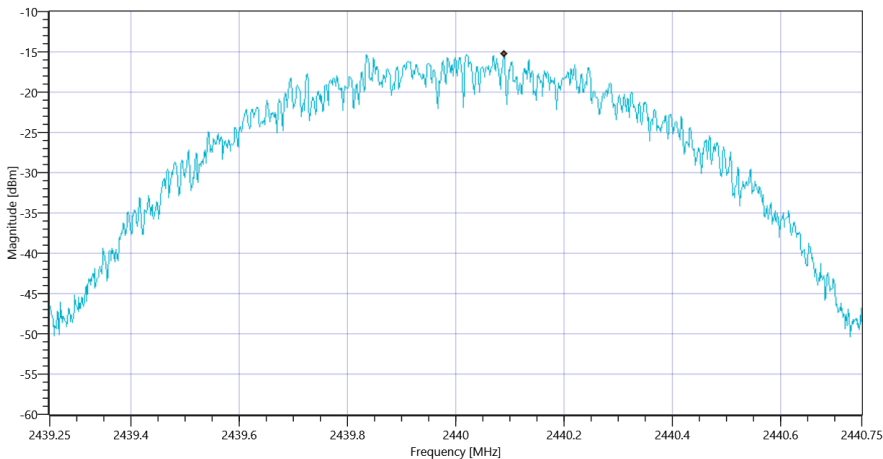


Plot_FCC Part 15.247 Peak Power Spectral Density DTS ~ BT LE 1 Msps_28092020_094244.png

Test at TX 2480 MHz

DTM Connection check					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Connection result	---	---	---	---	PASS

READ SA SETTINGS:					
RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	4.72 10.95 10				
Start [MHz] Stop [MHz]	2479.250 2480.750				
RBW [MHz] VBW [MHz]	0.003000 0.010000				
Detector TraceMode	POS MAXH				
Sweep: Time [ms] Count Points per Section Type	1000 20 1001 SWE				

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max Peak power Density	---	8	-16.27	dBm/3KHz	PASS

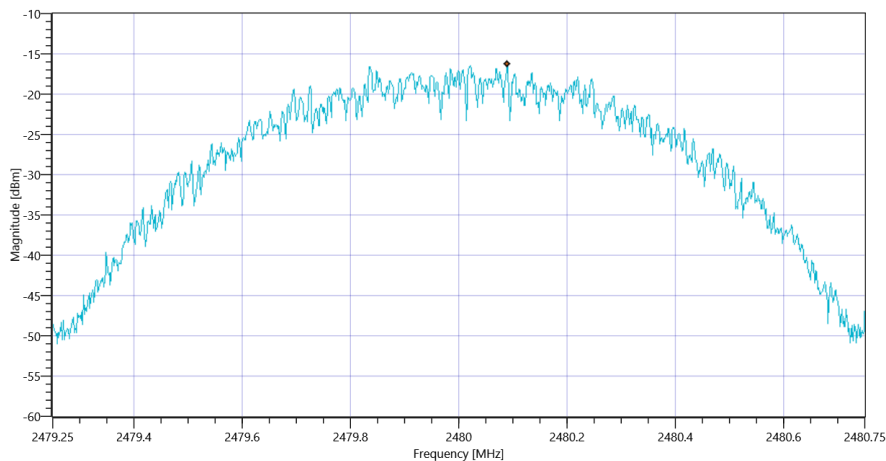

Plot_FCC Part 15.247 Peak Power Spectral Density DTS ~ BT LE 1 Msps_28092020_094320.png

TEST FINISHED		
General Verdict	28.09.2020 09:43:21 / RT: 109 s	PASS

4. FCC Part 15.247 Bandwidth 99PCT-20dB ~ BT LE 1 Msps

Test References	
TC Start	28.09.2020 09:43:25
Ambit Temp [°C] Humidity [rel%]	22.0 42
System Version	1.0.0.51
Test Specification	FCC Part 15.247
Test Method	
Class / TC Version	TC_VM_FCC15247_Bandwidth_99PCT_20dB_DTS_FHSS_V01 Version: 0.0.2
My Description	FCC 15.247 Bandwidth 99PCT-20dB DTS - BT LE 1 Msps
Add. Information	



Test Parameter	
Technology to test	BT LE 1 Msps
Antenna Port used	1
Temperature	mid
Voltage	mid
Frequency low to test	True Freq [MHz] 2402
Frequency mid to test	True Freq [MHz] 2440
Frequency high to test	True Freq [MHz] 2480
Switched Path	IUT - SignalingUnit - SpectrumAnalyzer
Devices in use	SigBT: Rohde&Schwarz,CMW,1201.0002k75/100683,3.7.170 SA: Rohde&Schwarz,FSV-30,1321.3008K30/103809,3.60

Test at TX 2402 MHz

DTM Connection check					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Connection result	---	---	---	---	PASS

READ SA SETTINGS:					
RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]			3.87 10.89 10		
Start [MHz] Stop [MHz]			2401.000 2403.000		
RBW [MHz] VBW [MHz]			0.020000 0.100000		
Detector TraceMode			POS MAXH		
Sweep: Time [ms] Count Points per Section Type			50 200 10001 SWE		

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	---	---	1044	kHz	INFO
T1 99%	2400.000000	---	2401.4923	MHz	PASS
T2 99%	---	2483.500000	2402.5363	MHz	PASS

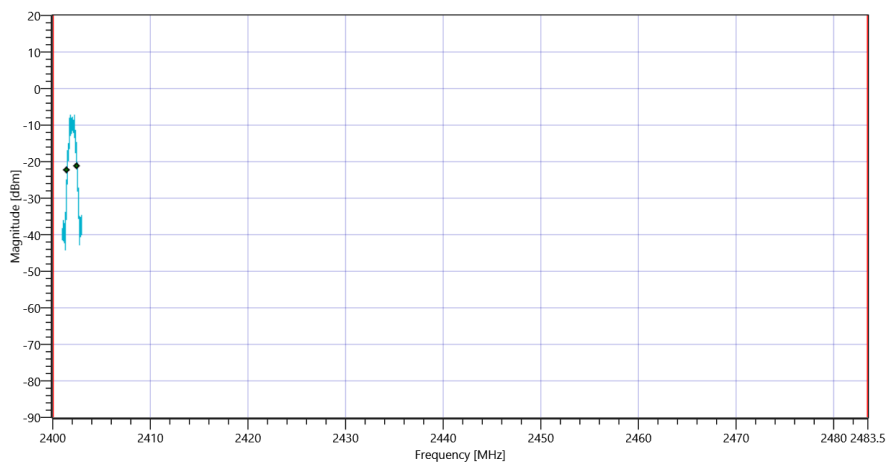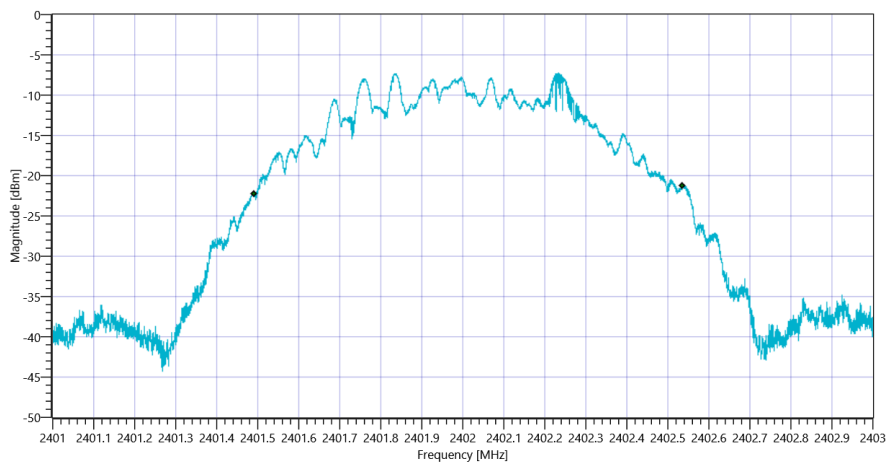

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 20dB	---	---	1186	kHz	INFO
T1 20DB	2400.000000	---	2401.4292	MHz	PASS


T2 20dB

2483.500000


2402.6152

MHz

PASS

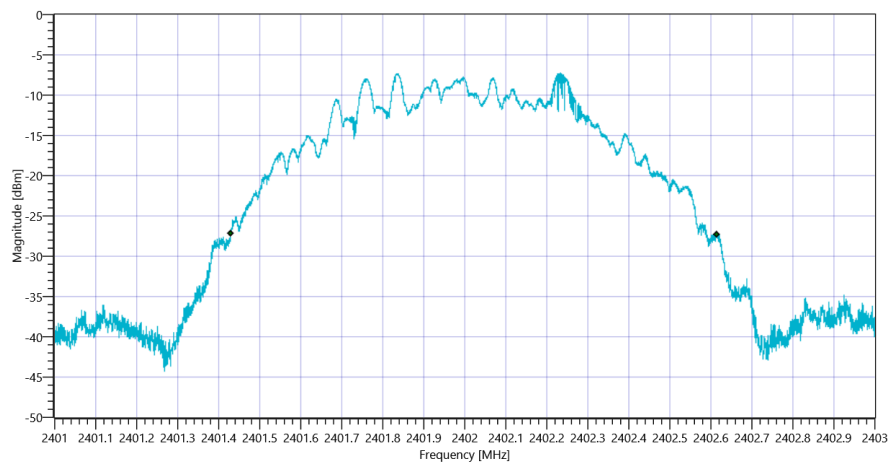

Plot_FCC Part 15.247 Bandwidth 99PCT-20dB ~ BT LE 1 Msps 20dB_28092020_094402.png

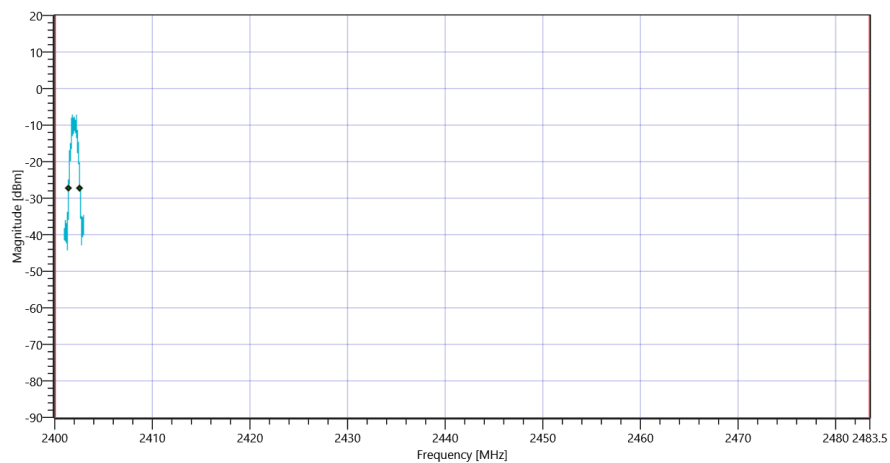


Plot_FCC Part 15.247 Bandwidth 99PCT-20dB ~ BT LE 1 Msps_28092020_094406.png

Test at TX 2440 MHz


DTM Connection check					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Connection result	---	---	---	---	PASS

READ SA SETTINGS:					
RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]			5.88 10.9 10		
Start [MHz] Stop [MHz]			2439.000 2441.000		
RBW [MHz] VBW [MHz]			0.020000 0.100000		
Detector TraceMode			POS MAXH		
Sweep: Time [ms] Count Points per Section Type			50 200 10001 SWE		

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	---	---	1044	kHz	INFO
T1 99%	2400.000000	---	2439.4895	MHz	PASS
T2 99%	---	2483.500000	2440.5339	MHz	PASS

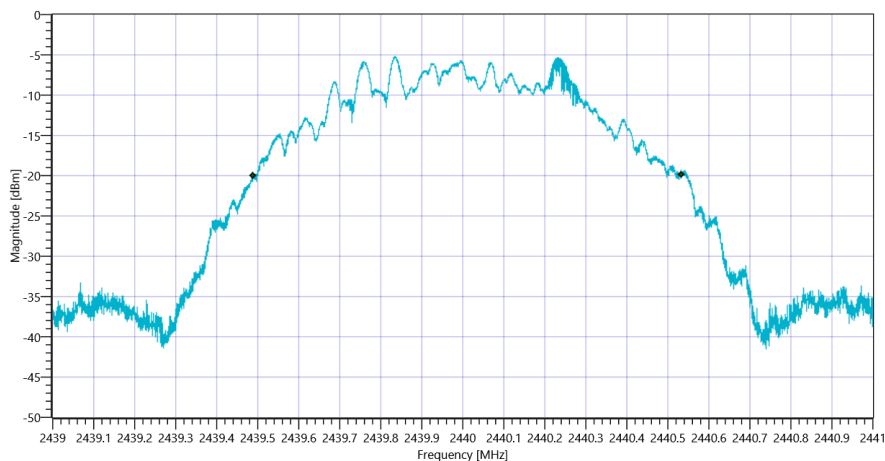

Plot_FCC Part 15.247 Bandwidth 99PCT-20dB ~ BT LE 1 Msps 99PCT_28092020_094433.png

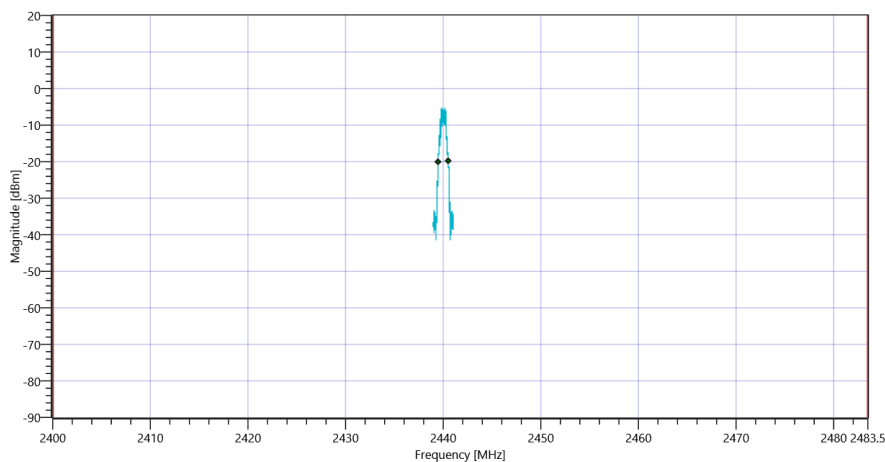

Plot_FCC Part 15.247 Bandwidth 99PCT-20dB ~ BT LE 1 Msps 28092020_094437.png

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 20dB	---	---	1210	kHz	INFO
T1 20DB	2400.000000	---	2439.4084	MHz	PASS


T2 20dB

2483.500000


2440.6188

MHz

PASS

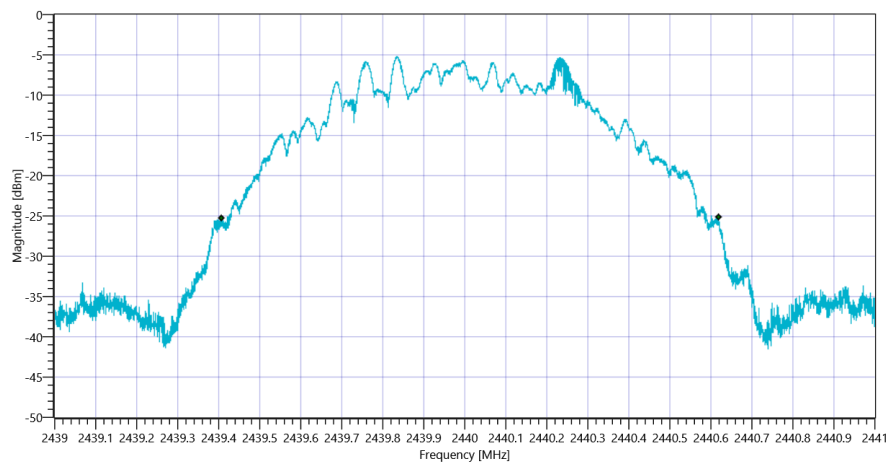

Plot_FCC Part 15.247 Bandwidth 99PCT-20dB ~ BT LE 1 Msps_28092020_094442.png

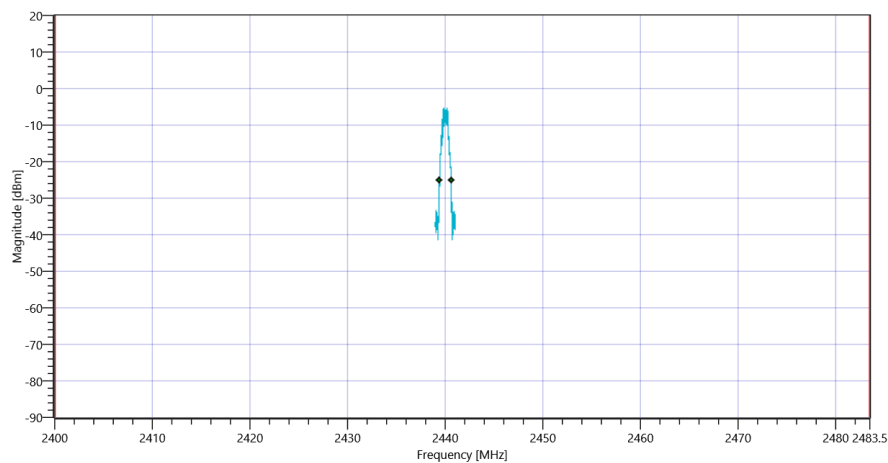



Plot_FCC Part 15.247 Bandwidth 99PCT-20dB ~ BT LE 1 Msps_28092020_094446.png

Test at TX 2480 MHz

DTM Connection check					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Connection result	---	---	---	---	PASS

READ SA SETTINGS:					
RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]			4.75 10.95 10		
Start [MHz] Stop [MHz]			2479.000 2481.000		
RBW [MHz] VBW [MHz]			0.020000 0.100000		
Detector TraceMode			POS MAXH		
Sweep: Time [ms] Count Points per Section Type			50 200 10001 SWE		

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	---	---	1046	kHz	INFO
T1 99%	2400.000000	---	2479.4869	MHz	PASS
T2 99%	---	2483.500000	2480.5325	MHz	PASS

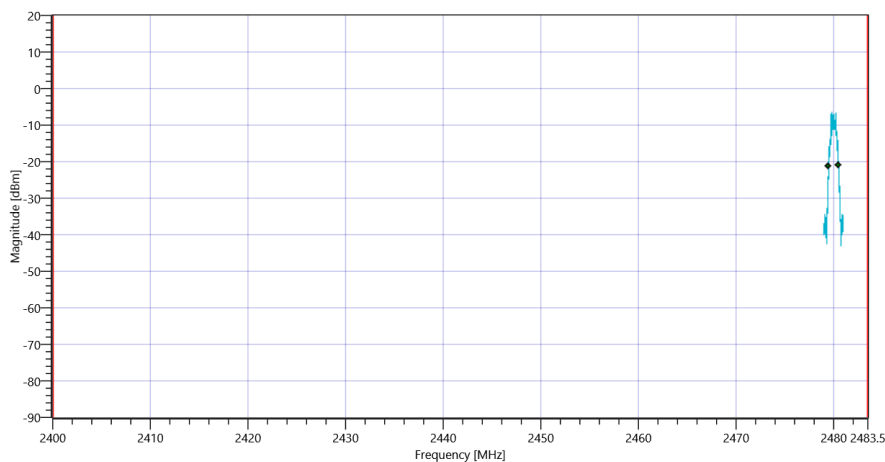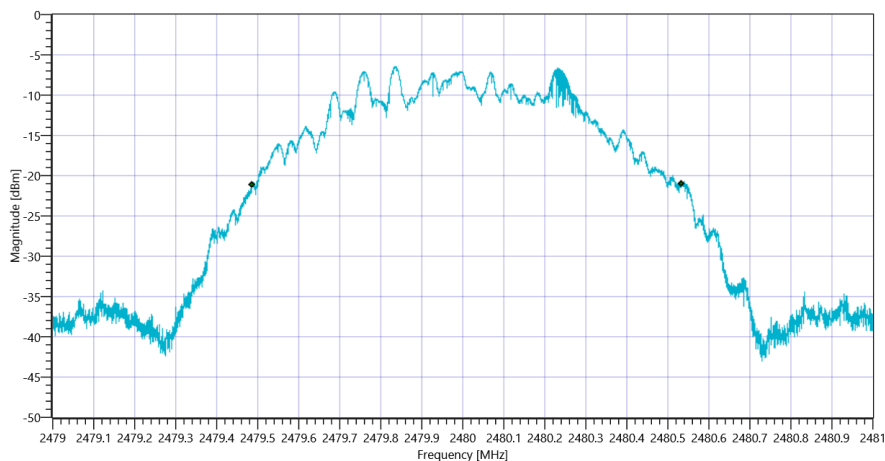

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 20dB	---	---	1184	kHz	INFO
T1 20DB	2400.000000	---	2479.4048	MHz	PASS


T2 20dB

2483.500000


2480.5886

MHz

PASS

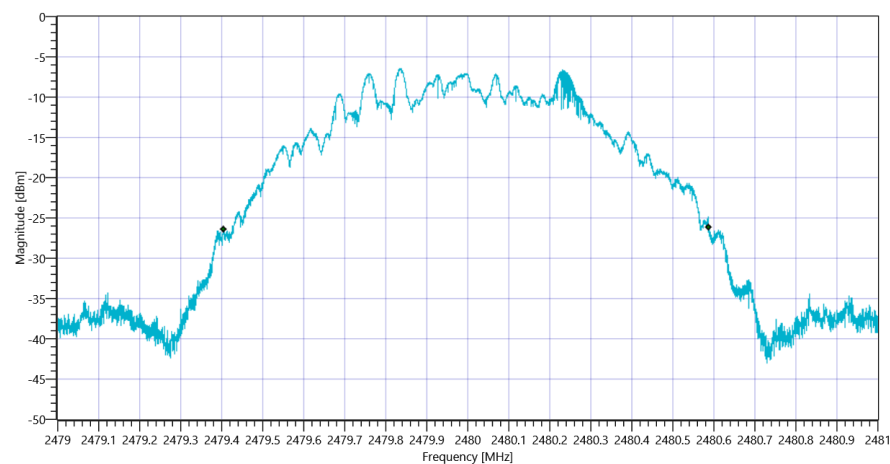

Plot_FCC Part 15.247 Bandwidth 99PCT-20dB ~ BT LE 1 Msps 20dB_28092020_094523.png

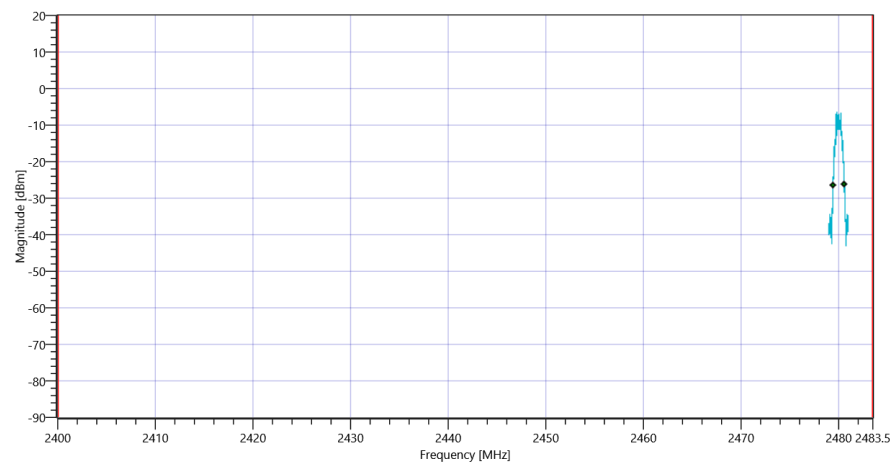

Plot_FCC Part 15.247 Bandwidth 99PCT-20dB ~ BT LE 1 Msps_28092020_094527.png

TEST FINISHED

General Verdict

28.09.2020 09:45:28 / RT: 122 s

PASS

5. FCC Part 15.247 TX Spurious Conducted ~ BT LE 1 Msp

Test References	
TC Start	28.09.2020 09:45:32
Ambit Temp [°C] Humidity [rel%]	22.1 42
System Version	1.0.0.51
Test Specification	FCC Part 15.247
Test Method	IF DTS then 8.5 DTS emissions in non-restricted frequency bands: Subclause 11.11 of ANSI C63.10 is applicable.
Class / TC Version	TC_VM_FCC15247_TX_Emissions_Conducted_V01 Version: 0.0.1
My Description	FCC 15.247 TX Emissions Conducted DTS - BT LE 1 Msp
Add. Information	


Test Parameter	
Technology to test	BT LE 1 Msp
Antenna Port used	1
Temperature	mid
Voltage	mid
Frequency low to test	True Freq [MHz] 2402
Frequency mid to test	True Freq [MHz] 2440
Frequency high to test	True Freq [MHz] 2480
Switched Path	IUT - SignalingUnit - SpectrumAnalyzer
Devices in use	SigBT: Rohde&Schwarz,CMW,1201.0002k75/100683,3.7.170 SA: Rohde&Schwarz,FSV-30,1321.3008K30/103809,3.60

Test at TX 2402 MHz


DTM Connection check					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Connection result	---	---	---	---	PASS

READ SA SETTINGS:					
RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]			-0.39 0 15		
Start [MHz] Stop [MHz]			24530.000 25030.000		
RBW [MHz] VBW [MHz]			0.100000 0.300000		
Detector TraceMode			POS MAXH		
Sweep: Time [ms] Count Points per Section Type			500 8 3001 SWE		

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Reference @ 2402.33 MHz	---	---	-1.86	dBm	INFO
No peaks detected	---	---			PASS
Lowest margin to limit 2399.833 MHz	0	---	24.71	dB	INFO

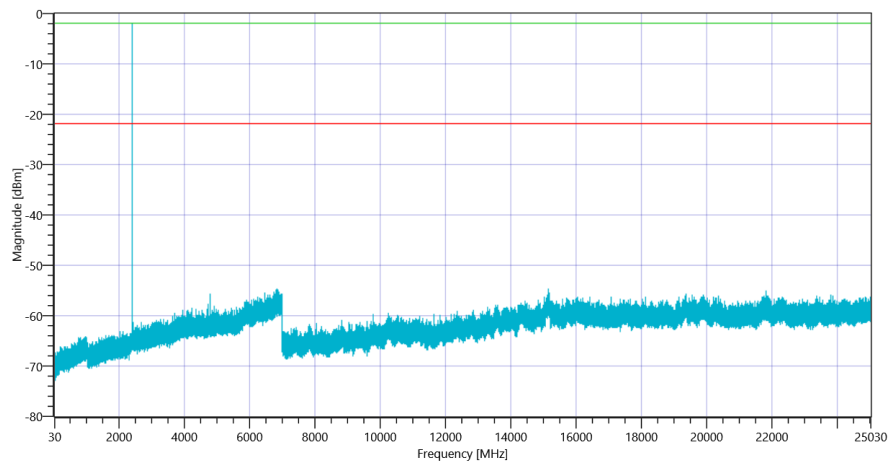

Plot_FCC Part 15.247 TX Spurious Conducted ~ BT LE 1 Msps 2402_28092020_095020.png

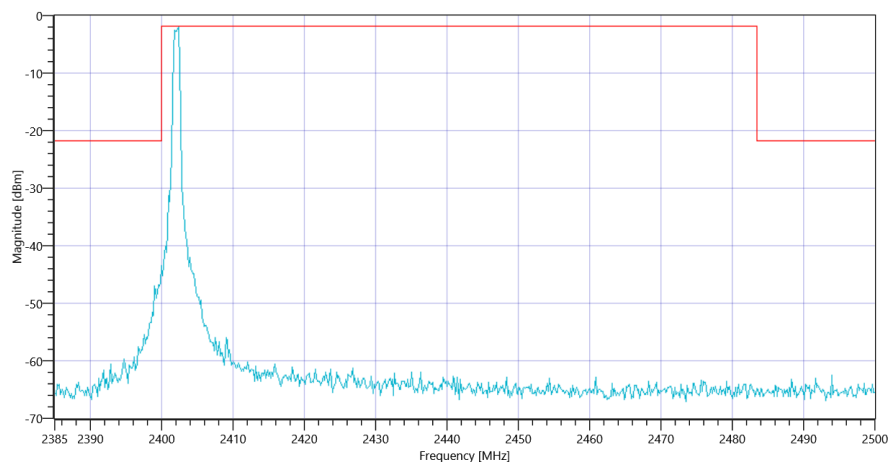


Plot_FCC Part 15.247 TX Spurious Conducted ~ BT LE 1 Msps 2402_28092020_095023.png

Test at TX 2440 MHz


DTM Connection check					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Connection result	---	---	---	---	PASS

READ SA SETTINGS:		
RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	1.28 0 20	
Start [MHz] Stop [MHz]	24530.000 25030.000	
RBW [MHz] VBW [MHz]	0.100000 0.300000	
Detector TraceMode	POS MAXH	
Sweep: Time [ms] Count Points per Section Type	500 8 3001 SWE	

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Reference @ 2440.00 MHz	---	---	-0.55	dBm	INFO
No peaks detected	---	---			PASS
Lowest margin to limit 15155.333 MHz	0	---	26.05	dB	INFO

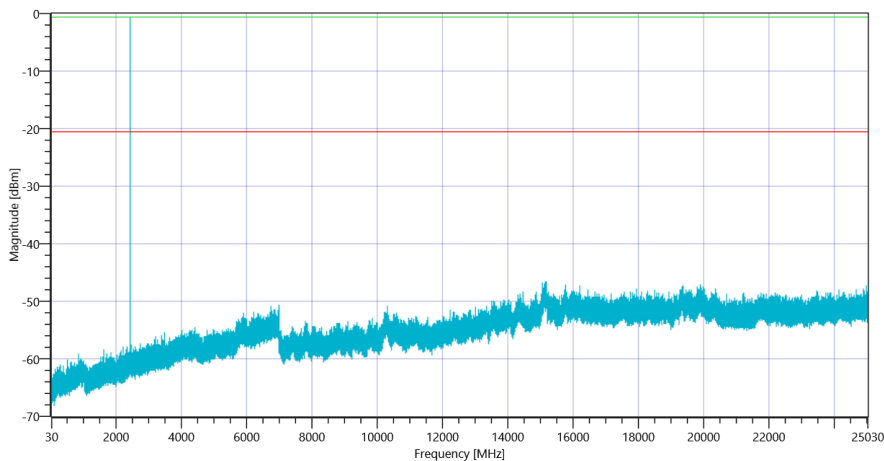

Plot_FCC Part 15.247 TX Spurious Conducted ~ BT LE 1 Msps 2440_28092020_095509.png

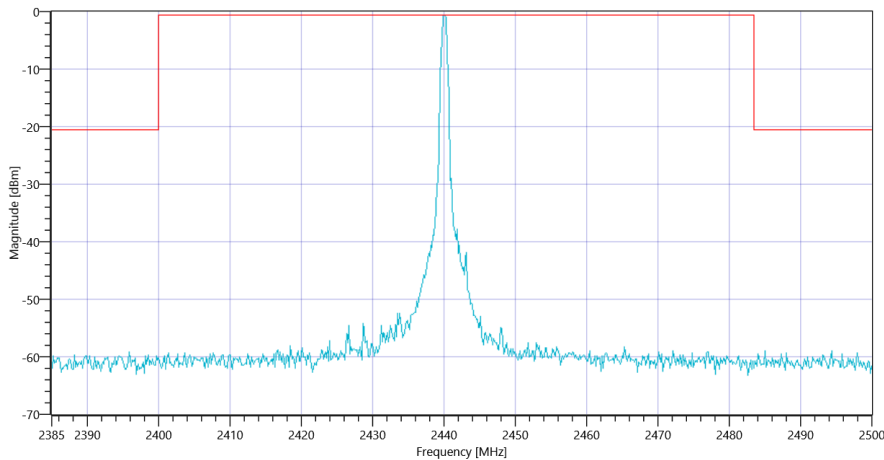


Plot_FCC Part 15.247 TX Spurious Conducted ~ BT LE 1 Msps 2440_28092020_095512.png

Test at TX 2480 MHz


DTM Connection check					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Connection result	---	---	---	---	PASS

READ SA SETTINGS:					
RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]			0.11 0 20		
Start [MHz] Stop [MHz]			24530.000 25030.000		
RBW [MHz] VBW [MHz]			0.100000 0.300000		
Detector TraceMode			POS MAXH		
Sweep: Time [ms] Count Points per Section Type			500 8 3001 SWE		

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Reference @ 2480.00 MHz	---	---	-1.76	dBm	INFO
No peaks detected	---	---			PASS
Lowest margin to limit 15161.333 MHz	0	---	24.82	dB	INFO

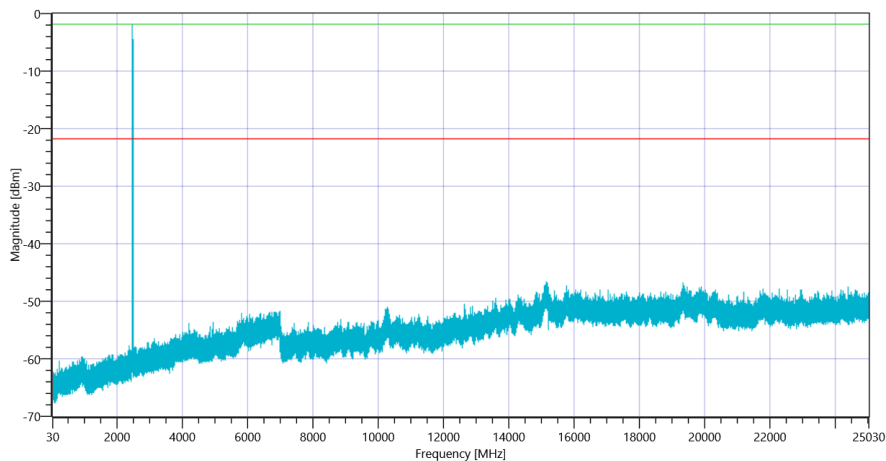

Plot_FCC Part 15.247 TX Spurious Conducted ~ BT LE 1 Msps 2480_28092020_095959.png

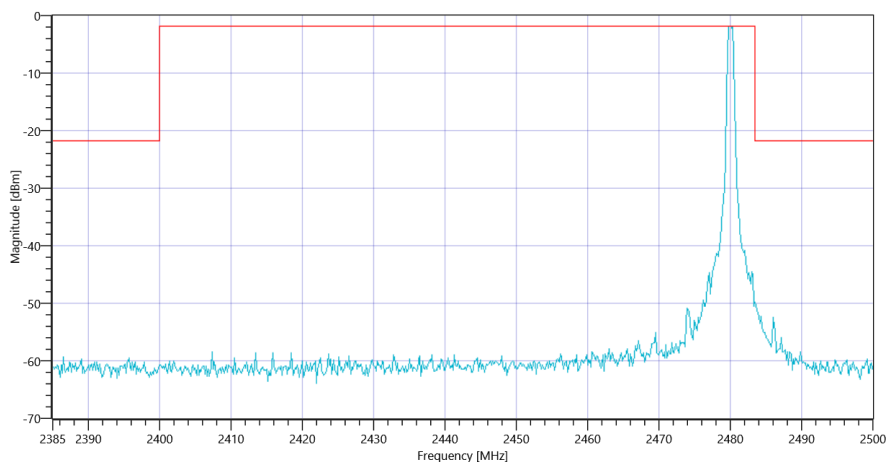

Plot_FCC Part 15.247 TX Spurious Conducted ~ BT LE 1 Msps 2480_28092020_100002.png

TEST FINISHED		
General Verdict	28.09.2020 10:00:04 / RT: 871 s	PASS

6. FCC Part 15.247 Maximum Peak Conducted Output Power DTS ~ BT LE 2 Msps

Test References	
TC Start	28.09.2020 14:45:11
Ambit Temp [°C] Humidity [rel%]	25.3 34
System Version	1.0.0.51
Test Specification	FCC Part 15.247
Test Method	DTS: KDB 558074 D01 V05 - Chapter 8.3.1.1 RBW ≥ DTS Bandwidth
Class / TC Version	TC_VM_FCC15247_Maximum_Peak_Conducted_Output_Power_DTS_V01 Version: 0.0.1
My Description	FCC 15.247 Maximum Peak Output Power Conducted DTS - BT LE 2 Msps
Add. Information	


Test Parameter	
Technology to test	BT LE 2 Msps
Antenna Port used	1
Temperature	mid
Voltage	mid
Frequency low to test	True Freq [MHz] 2404
Frequency mid to test	True Freq [MHz] 2440
Frequency high to test	True Freq [MHz] 2478
Switched Path	IUT - SignalingUnit - SpectrumAnalyzer
Devices in use	SigBT: Rohde&Schwarz,CMW,1201.0002k75/100683,3.7.170 SA: Rohde&Schwarz,FSV-30,1321.3008K30/103809,3.60

Test at TX 2404 MHz

DTM Connection check					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Connection result	---	---	---	---	PASS


READ SA SETTINGS:					
RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]			11.27 10.9 20		
Start [MHz] Stop [MHz]			2401.700 2406.300		
RBW [MHz] VBW [MHz]			0.100000 0.300000		
Detector TraceMode			POS MAXH		
Sweep: Time [ms] Count Points per Section Type			50 200 10001 SWE		

DTS Bandwidth					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
DTS Bandwidth (6dB)	---	---	1136	kHz	INFO

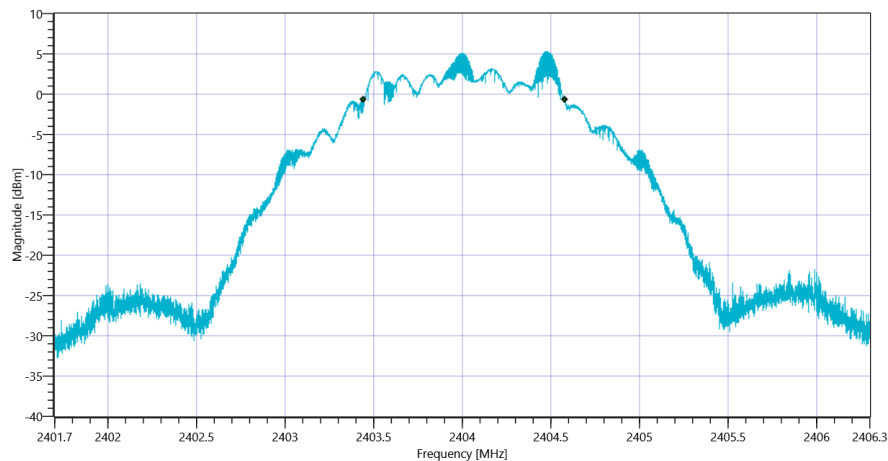

READ SA SETTINGS:					
RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]			16.27 10.9 25		
Start [MHz] Stop [MHz]			2401.700 2406.300		
RBW [MHz] VBW [MHz]			2.000000 5.000000		
Detector TraceMode			POS MAXH		
Sweep: Time [ms] Count Points per Section Type			50 200 1001 SWE		

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Peak Power	---	30.00	6.26	dBm	PASS
Peak Power	---	1000	4.226686	mW	PASS
Frequency at Peak	---	---	2404.561	MHz	INFO

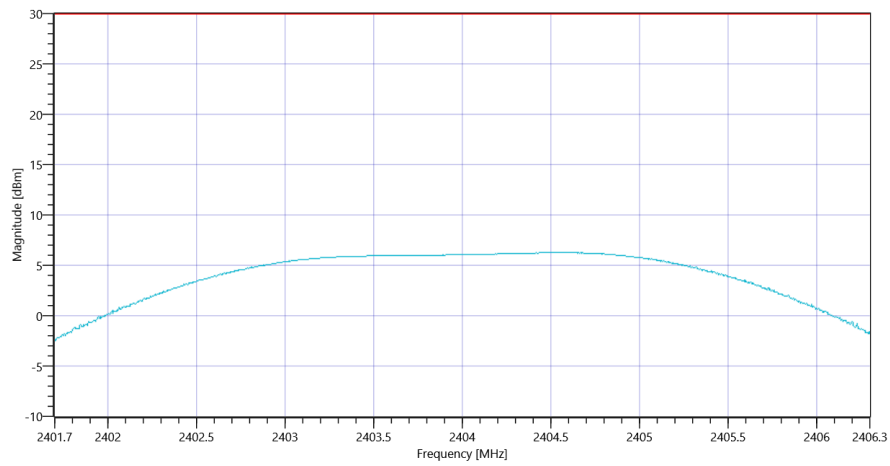


Plot_FCC Part 15.247 Maximum Peak Conducted Output Power DTS ~ BT LE 2 Msp.28092020_144555.png

Test at TX 2440 MHz

DTM Connection check					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Connection result	---	---	---	---	PASS


READ SA SETTINGS:					
RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]			12.45 10.9 20		
Start [MHz] Stop [MHz]			2437.700 2442.300		
RBW [MHz] VBW [MHz]			0.100000 0.300000		
Detector TraceMode			POS MAXH		
Sweep: Time [ms] Count Points per Section Type			50 200 10001 SWE		

DTS Bandwidth					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
DTS Bandwidth (6dB)	---	---	1205	kHz	INFO

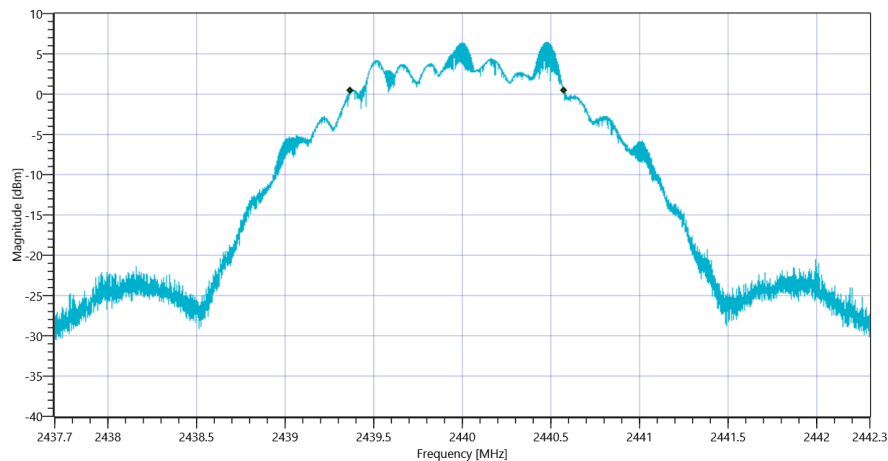

READ SA SETTINGS:					
RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]			17.45 10.9 25		
Start [MHz] Stop [MHz]			2437.700 2442.300		
RBW [MHz] VBW [MHz]			2.000000 5.000000		
Detector TraceMode			POS MAXH		
Sweep: Time [ms] Count Points per Section Type			50 200 1001 SWE		

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Peak Power	---	30.00	7.42	dBm	PASS
Peak Power	---	1000	5.520774	mW	PASS
Frequency at Peak	---	---	2440.473	MHz	INFO

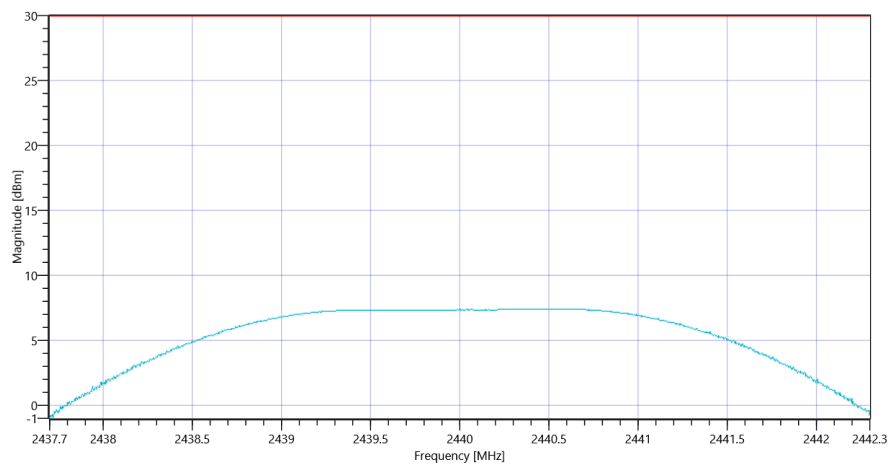


Plot_FCC Part 15.247 Maximum Peak Conducted Output Power DTS ~ BT LE 2 Msps_28092020_144637.png

Test at TX 2478 MHz

DTM Connection check					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Connection result	---	---	---	---	PASS


READ SA SETTINGS:					
RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	11.77 10.95 20				
Start [MHz] Stop [MHz]	2475.700 2480.300				
RBW [MHz] VBW [MHz]	0.100000 0.300000				
Detector TraceMode	POS MAXH				
Sweep: Time [ms] Count Points per Section Type	50 200 10001 SWE				

DTS Bandwidth					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
DTS Bandwidth (6dB)	---	---	1206	kHz	INFO

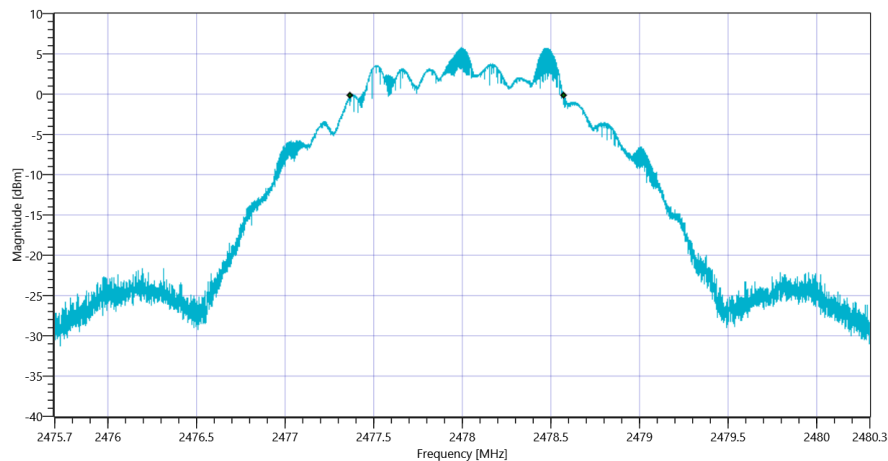

READ SA SETTINGS:					
RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	16.77 10.95 25				
Start [MHz] Stop [MHz]	2475.700 2480.300				
RBW [MHz] VBW [MHz]	2.000000 5.000000				
Detector TraceMode	POS MAXH				
Sweep: Time [ms] Count Points per Section Type	50 200 1001 SWE				

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Peak Power	---	30.00	6.81	dBm	PASS
Peak Power	---	1000	4.797334	mW	PASS
Frequency at Peak	---	---	2477.499	MHz	INFO

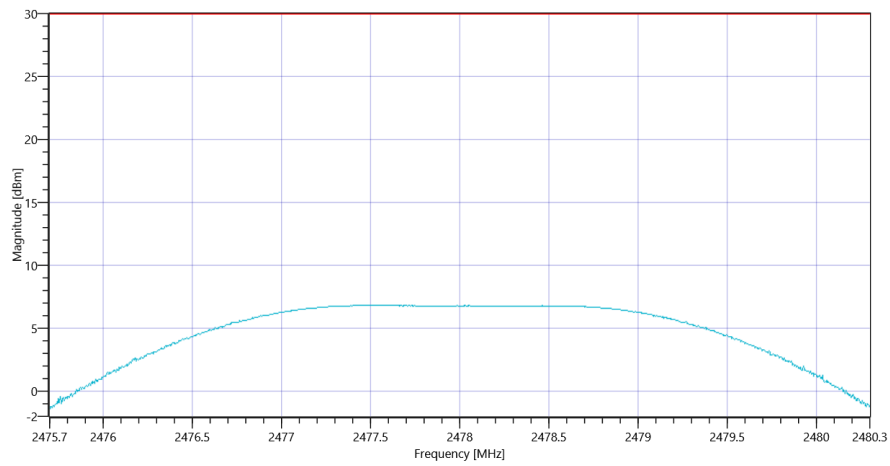

Plot_FCC Part 15.247 Maximum Peak Conducted Output Power DTS ~ BT LE 2 Msps_28092020_144720.png

TEST FINISHED

General Verdict

28.09.2020 14:47:21 / RT: 129 s

PASS

7. FCC Part 15.247 TX Spurious Conducted ~ BT LE 2 Msps

Test References	
TC Start	28.09.2020 14:47:25
Ambit Temp [°C] Humidity [rel%]	25.2 35
System Version	1.0.0.51
Test Specification	FCC Part 15.247
Test Method	IF DTS then 8.5 DTS emissions in non-restricted frequency bands: Subclause 11.11 of ANSI C63.10 is applicable.
Class / TC Version	TC_VM_FCC15247_TX_Emissions_Conducted_V01 Version: 0.0.1
My Description	FCC 15.247 TX Emissions Conducted DTS - BT LE 2 Msps
Add. Information	


Test Parameter	
Technology to test	BT LE 2 Msps
Antenna Port used	1
Temperature	mid
Voltage	mid
Frequency low to test	True Freq [MHz] 2404
Frequency mid to test	True Freq [MHz] 2440
Frequency high to test	True Freq [MHz] 2478
Switched Path	IUT - SignalingUnit - SpectrumAnalyzer
Devices in use	SigBT: Rohde&Schwarz,CMW,1201.0002k75/100683,3.7.170 SA: Rohde&Schwarz,FSV-30,1321.3008K30/103809,3.60

Test at TX 2404 MHz


DTM Connection check					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Connection result	---	---	---	---	PASS

READ SA SETTINGS:					
RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]			6.64 0 25		
Start [MHz] Stop [MHz]			24530.000 25030.000		
RBW [MHz] VBW [MHz]			0.100000 0.300000		
Detector TraceMode			POS MAXH		
Sweep: Time [ms] Count Points per Section Type			500 8 3001 SWE		

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Reference @ 2404.50 MHz	---	---	5.05	dBm	INFO
No peaks detected	---	---			PASS
Lowest margin to limit 2399.667 MHz	0	---	24.82	dB	INFO

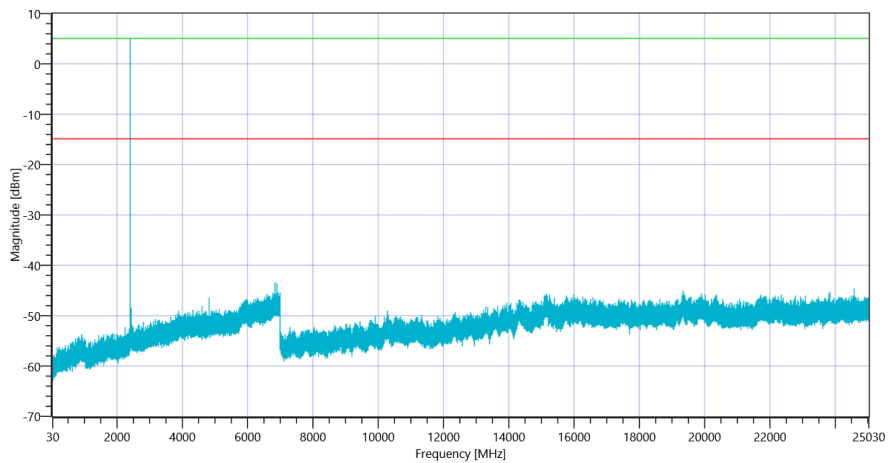

Plot_FCC Part 15.247 TX Spurious Conducted ~ BT LE 2 Msps 2404_28092020_145212.png

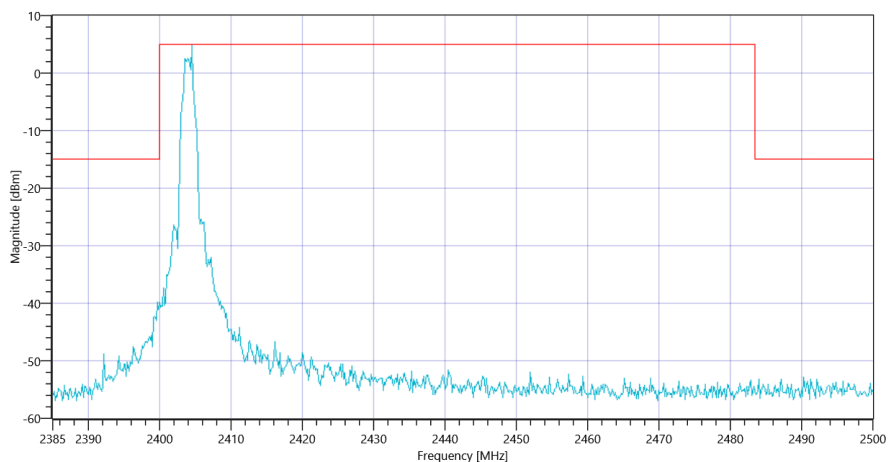


Plot_FCC Part 15.247 TX Spurious Conducted ~ BT LE 2 Msps 2404_28092020_145215.png

Test at TX 2440 MHz


DTM Connection check					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Connection result	---	---	---	---	PASS

READ SA SETTINGS:					
RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]			7.73 0 25		
Start [MHz] Stop [MHz]			24530.000 25030.000		
RBW [MHz] VBW [MHz]			0.100000 0.300000		
Detector TraceMode			POS MAXH		
Sweep: Time [ms] Count Points per Section Type			500 8 3001 SWE		

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Reference @ 2440.50 MHz	---	---	6.18	dBm	INFO
No peaks detected	---	---			PASS
Lowest margin to limit 6954.5 MHz	0	---	31.26	dB	INFO

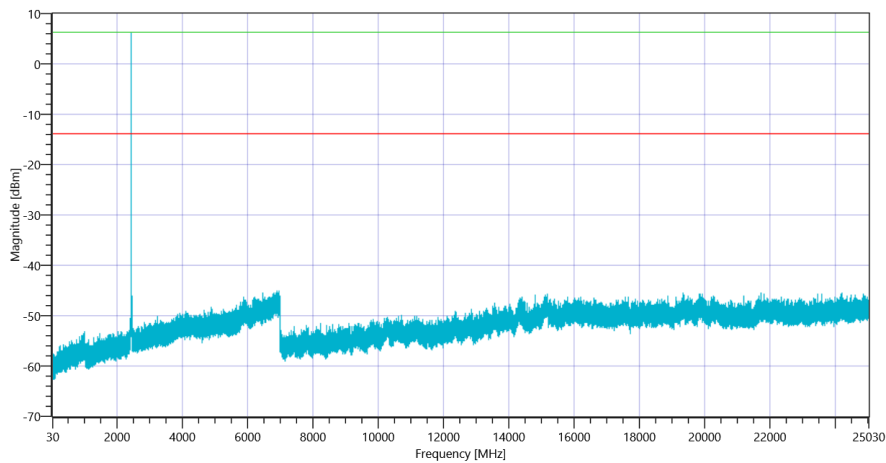

Plot_FCC Part 15.247 TX Spurious Conducted ~ BT LE 2 Msps 2440_28092020_145702.png

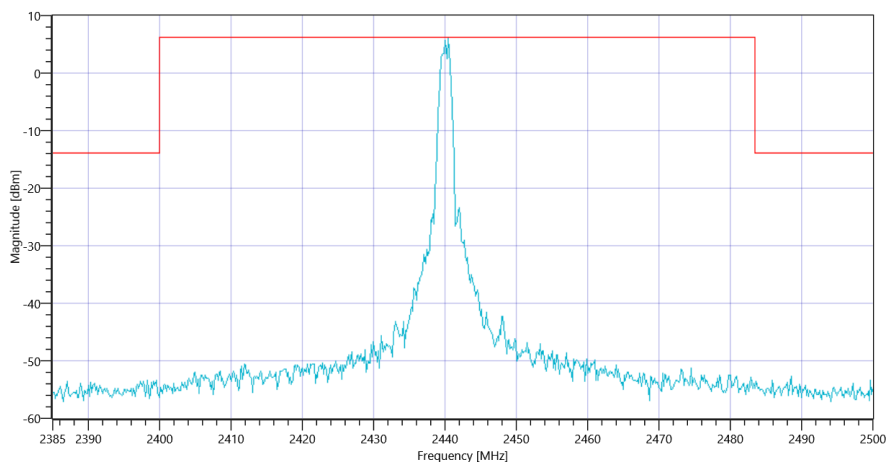


Plot_FCC Part 15.247 TX Spurious Conducted ~ BT LE 2 Msps 2440_28092020_145704.png

Test at TX 2478 MHz


DTM Connection check					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Connection result	---	---	---	---	PASS

READ SA SETTINGS:					
RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]			6.96 0 25		
Start [MHz] Stop [MHz]			24530.000 25030.000		
RBW [MHz] VBW [MHz]			0.100000 0.300000		
Detector TraceMode			POS MAXH		
Sweep: Time [ms] Count Points per Section Type			500 8 3001 SWE		

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Reference @ 2478.00 MHz	---	---	4.27	dBm	INFO
No peaks detected	---	---			PASS
Lowest margin to limit 2483.667 MHz	0	---	28.08	dB	INFO

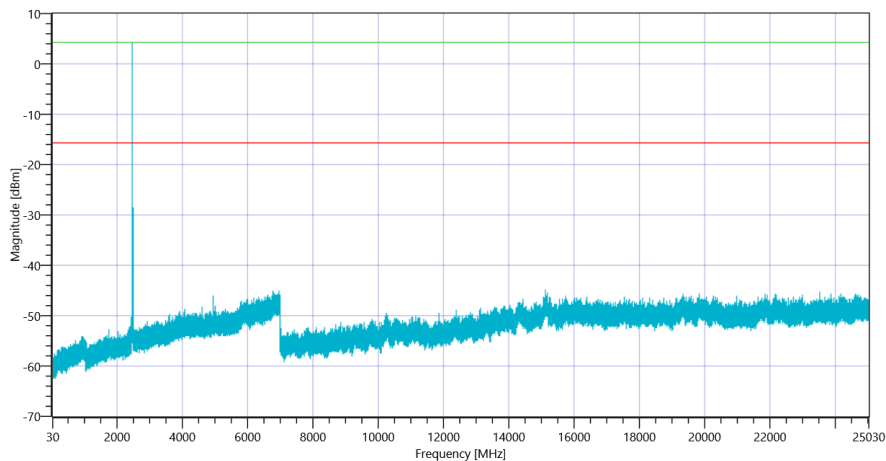

Plot_FCC Part 15.247 TX Spurious Conducted ~ BT LE 2 Msps 2478_28092020_150151.png

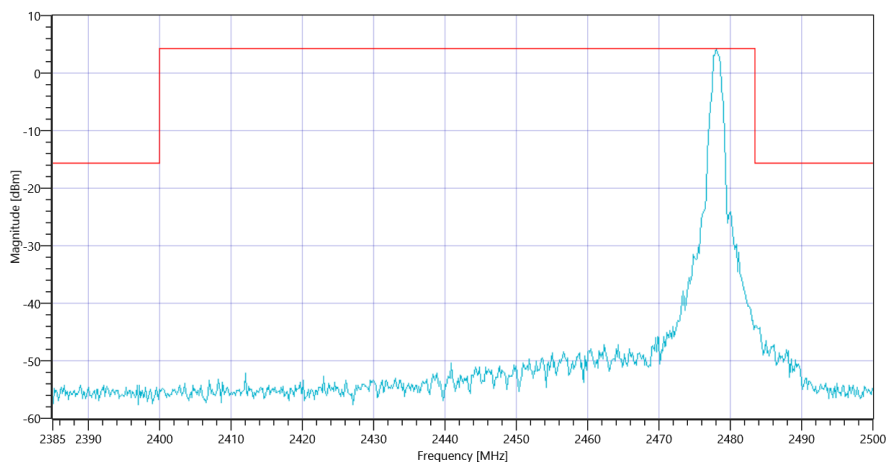

Plot_FCC Part 15.247 TX Spurious Conducted ~ BT LE 2 Msps 2478_28092020_150154.png

TEST FINISHED		
General Verdict	28.09.2020 15:01:56 / RT: 870 s	PASS

8. FCC Part 15.247 Bandwidth 6dB DTS ~ BT LE 2 Msps

Test References	
TC Start	28.09.2020 15:02:00
Ambit Temp [°C] Humidity [rel%]	26.2 33
System Version	1.0.0.51
Test Specification	FCC Part 15.247
Test Method	99
Class / TC Version	TC_VM_FCC15247_Bandwidth_6dB_DTS_V01 Version: 0.0.1
My Description	FCC 15.247 Bandwidth 6dB DTS - BT LE 2 Msps
Add. Information	


Test Parameter	
Technology to test	BT LE 2 Msps
Antenna Port used	1
Temperature	mid
Voltage	mid
Frequency low to test	True Freq [MHz] 2404
Frequency mid to test	True Freq [MHz] 2440
Frequency high to test	True Freq [MHz] 2478
Switched Path	IUT - SignalingUnit - SpectrumAnalyzer
Devices in use	SigBT: Rohde&Schwarz,CMW,1201.0002k75/100683,3.7.170 SA: Rohde&Schwarz,FSV-30,1321.3008K30/103809,3.60

Test at TX 2404 MHz

DTM Connection check					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Connection result	---	---	---	---	PASS

READ SA SETTINGS:		
RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	11.30 10.9 20	
Start [MHz] Stop [MHz]	2401.700 2406.300	
RBW [MHz] VBW [MHz]	0.100000 0.300000	
Detector TraceMode	POS MAXH	
Sweep: Time [ms] Count Points per Section Type	50 200 10001 SWE	

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
DTS Bandwidth (6dB)	500	---	1137	kHz	PASS

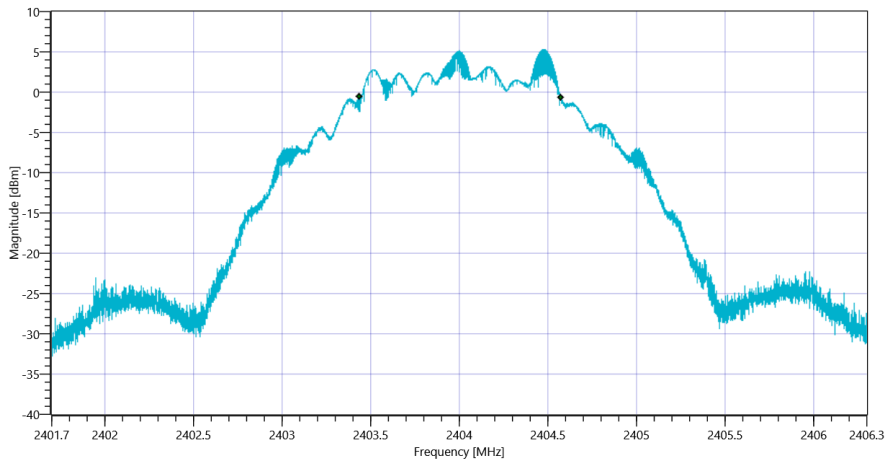


Plot_FCC Part 15.247 Bandwidth 6dB DTS ~ BT LE 2 Msps_28092020_150228.png

Test at TX 2440 MHz

DTM Connection check					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Connection result	---	---	---	---	PASS

READ SA SETTINGS:		
RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	12.42 10.9 20	
Start [MHz] Stop [MHz]	2437.700 2442.300	
RBW [MHz] VBW [MHz]	0.100000 0.300000	
Detector TraceMode	POS MAXH	
Sweep: Time [ms] Count Points per Section Type	50 200 10001 SWE	

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
DTS Bandwidth (6dB)	500	---	1206	kHz	PASS

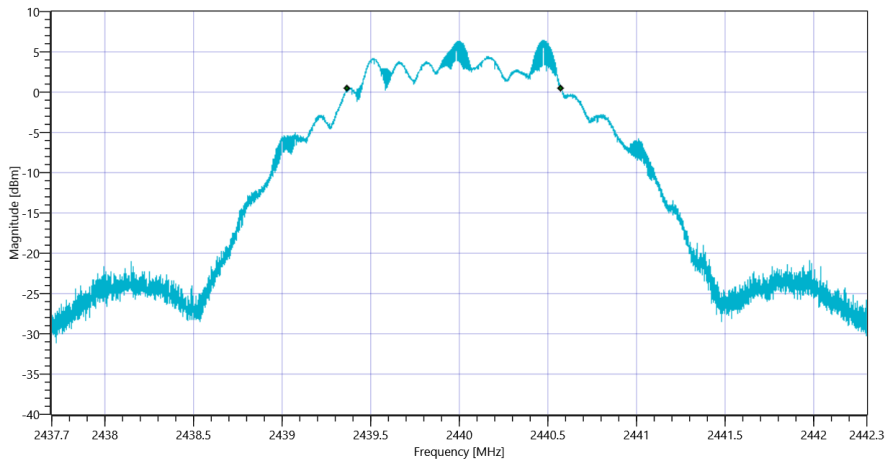


Plot_FCC Part 15.247 Bandwidth 6dB DTS ~ BT LE 2 Msps_28092020_150254.png

Test at TX 2478 MHz

DTM Connection check					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Connection result	---	---	---	---	PASS

READ SA SETTINGS:					
RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	11.74 10.95 20				
Start [MHz] Stop [MHz]	2475.700 2480.300				
RBW [MHz] VBW [MHz]	0.100000 0.300000				
Detector TraceMode	POS MAXH				
Sweep: Time [ms] Count Points per Section Type	50 200 10001 SWE				

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
DTS Bandwidth (6dB)	500	---	1205	kHz	PASS

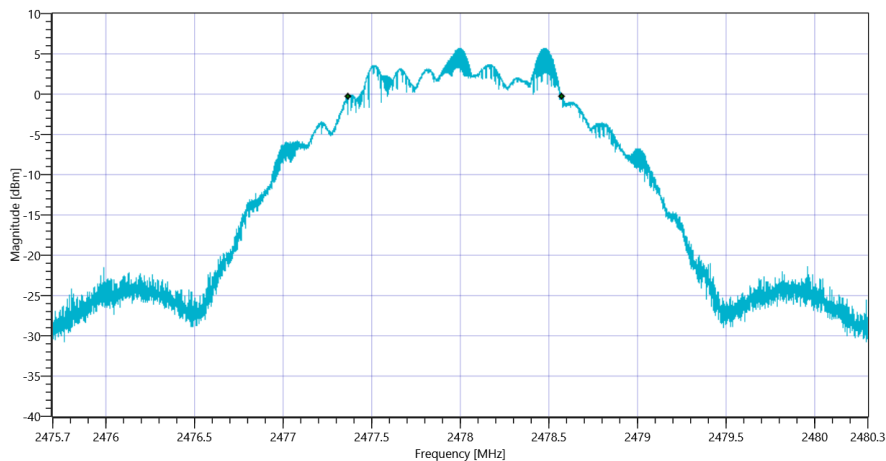

Plot_FCC Part 15.247 Bandwidth 6dB DTS ~ BT LE 2 Msps_28092020_150321.png

TEST FINISHED		
General Verdict	28.09.2020 15:03:21 / RT: 81 s	PASS

9. FCC Part 15.247 Peak Power Spectral Density DTS ~ BT LE 2 Msps

Test References	
TC Start	28.09.2020 15:03:26
Ambit Temp [°C] Humidity [rel%]	26.3 33
System Version	1.0.0.51
Test Specification	FCC Part 15.247
Test Method	DTS: KDB 558074 D01 V05 - Chapter 8.4 DTS maximum power spectral density level in the fundamental emission
Class / TC Version	TC_VM_FCC15247_Peak_Power_Spectral_Density_DTS_V01 Version: 0.0.1
My Description	FCC 15.247 Peak Power Spectral Density DTS - BT LE 2 Msps
Add. Information	


Test Parameter	
Technology to test	BT LE 2 Msps
Antenna Port used	1
Temperature	mid
Voltage	mid
Frequency low to test	True Freq [MHz] 2404
Frequency mid to test	True Freq [MHz] 2440
Frequency high to test	True Freq [MHz] 2478
Switched Path	IUT - SignalingUnit - SpectrumAnalyzer
Devices in use	SigBT: Rohde&Schwarz,CMW,1201.0002k75/100683,3.7.170 SA: Rohde&Schwarz,FSV-30,1321.3008K30/103809,3.60

Test at TX 2404 MHz

DTM Connection check					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Connection result	---	---	---	---	PASS

READ SA SETTINGS:	
RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	11.30 10.9 20
Start [MHz] Stop [MHz]	2402.275 2405.725
RBW [MHz] VBW [MHz]	0.003000 0.010000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	1000 20 1001 SWE

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max Peak power Density	---	8	-11.63	dBm/3KHz	PASS

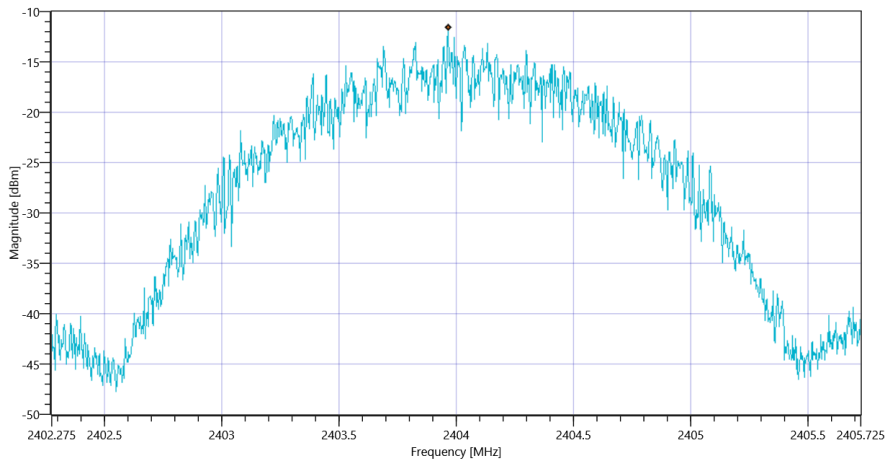


Plot_FCC Part 15.247 Peak Power Spectral Density DTS ~ BT LE 2 Msps_28092020_150404.png

Test at TX 2440 MHz

DTM Connection check					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Connection result	---	---	---	---	PASS

READ SA SETTINGS:		
RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	12.44 10.9 20	
Start [MHz] Stop [MHz]	2438.275 2441.725	
RBW [MHz] VBW [MHz]	0.003000 0.010000	
Detector TraceMode	POS MAXH	
Sweep: Time [ms] Count Points per Section Type	1000 20 1001 SWE	

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max Peak power Density	---	8	-10.51	dBm/3KHz	PASS

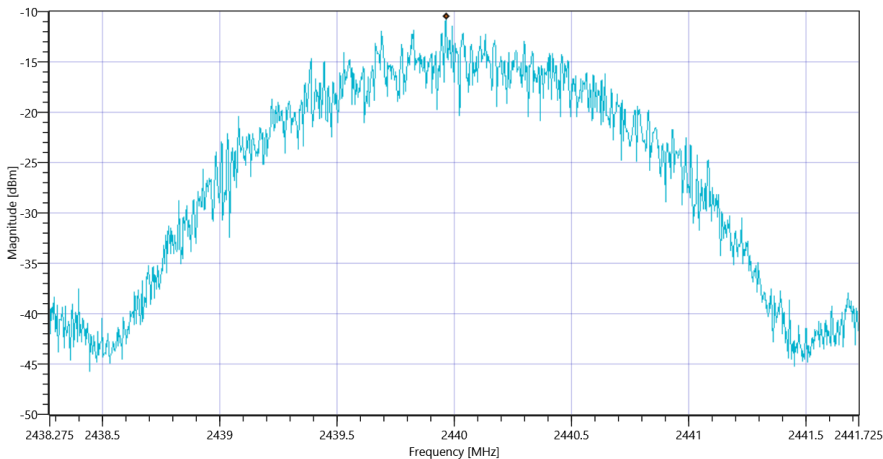


Plot_FCC Part 15.247 Peak Power Spectral Density DTS ~ BT LE 2 Msps_28092020_150440.png

Test at TX 2478 MHz

DTM Connection check					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Connection result	---	---	---	---	PASS

READ SA SETTINGS:					
RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]			11.75 10.95 20		
Start [MHz] Stop [MHz]			2476.275 2479.725		
RBW [MHz] VBW [MHz]			0.003000 0.010000		
Detector TraceMode			POS MAXH		
Sweep: Time [ms] Count Points per Section Type			1000 20 1001 SWE		

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max Peak power Density	---	8	-10.98	dBm/3KHz	PASS

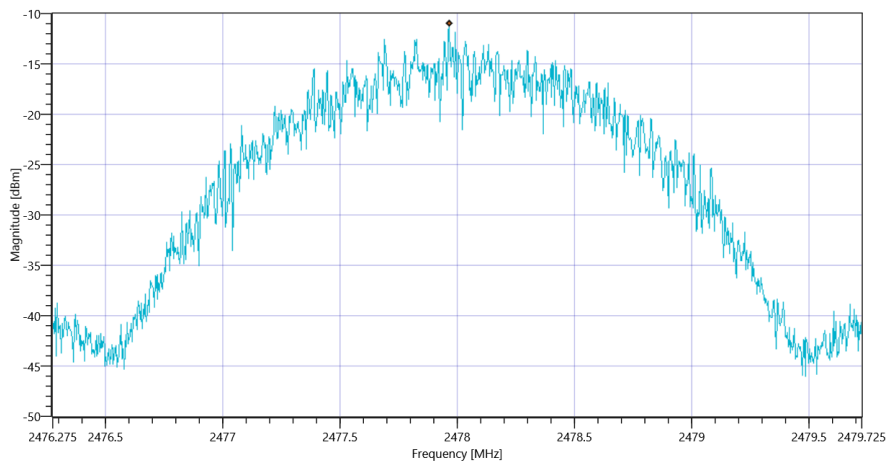

TEST FINISHED		
General Verdict	28.09.2020 15:05:17 / RT: 110 s	PASS

10. FCC Part 15.247 Bandwidth 99PCT-20dB ~ BT LE 2 Msps

Test References	
TC Start	28.09.2020 15:05:21
Ambit Temp [°C] Humidity [rel%]	26.4 33
System Version	1.0.0.51
Test Specification	FCC Part 15.247
Test Method	
Class / TC Version	TC_VM_FCC15247_Bandwidth_99PCT_20dB_DTS_FHSS_V01 Version: 0.0.2
My Description	FCC 15.247 Bandwidth 99PCT-20dB DTS - BT LE 2 Msps
Add. Information	


Test Parameter	
Technology to test	BT LE 2 Msps
Antenna Port used	1
Temperature	mid
Voltage	mid
Frequency low to test	True Freq [MHz] 2404
Frequency mid to test	True Freq [MHz] 2440
Frequency high to test	True Freq [MHz] 2478
Switched Path	IUT - SignalingUnit - SpectrumAnalyzer
Devices in use	SigBT: Rohde&Schwarz,CMW,1201.0002k75/100683,3.7.170 SA: Rohde&Schwarz,FSV-30,1321.3008K30/103809,3.60

Test at TX 2404 MHz


DTM Connection check					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Connection result	---	---	---	---	PASS

READ SA SETTINGS:					
RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]			11.27 10.9 20		
Start [MHz] Stop [MHz]			2401.700 2406.300		
RBW [MHz] VBW [MHz]			0.050000 0.200000		
Detector TraceMode			POS MAXH		
Sweep: Time [ms] Count Points per Section Type			50 200 10001 SWE		

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	---	---	2114	kHz	INFO
T1 99%	2400.000000	---	2402.9697	MHz	PASS
T2 99%	---	2483.500000	2405.0841	MHz	PASS

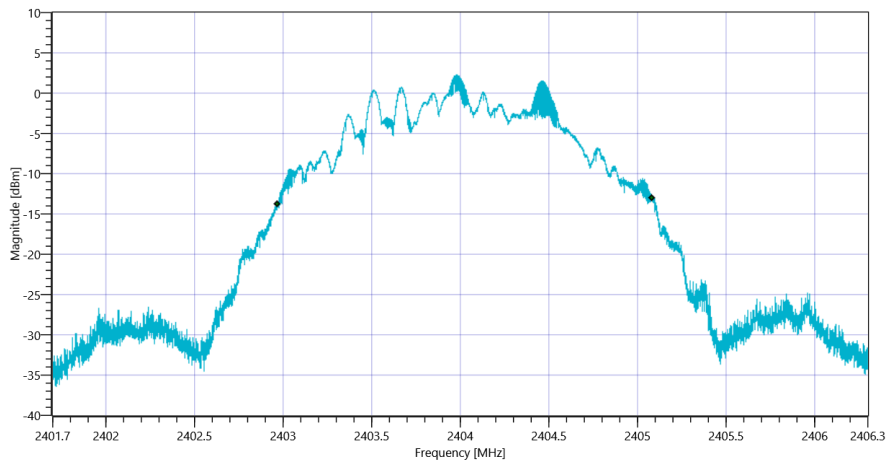

Plot_FCC Part 15.247 Bandwidth 99PCT-20dB ~ BT LE 2 Msps 99PCT_28092020_150549.png

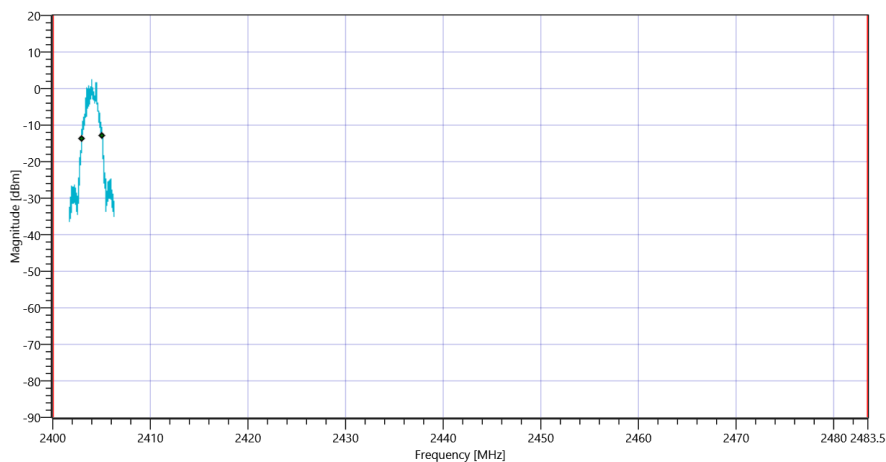

Plot_FCC Part 15.247 Bandwidth 99PCT-20dB ~ BT LE 2 Msps 99PCT_28092020_150553.png

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 20dB	---	---	2312	kHz	INFO
T1 20DB	2400.000000	---	2402.8583	MHz	PASS



T2 20dB

2483.500000

2405.1702

MHz

PASS

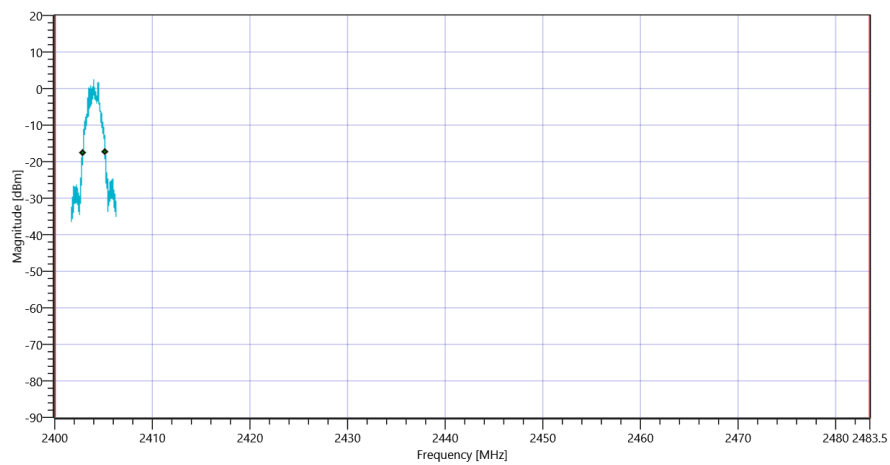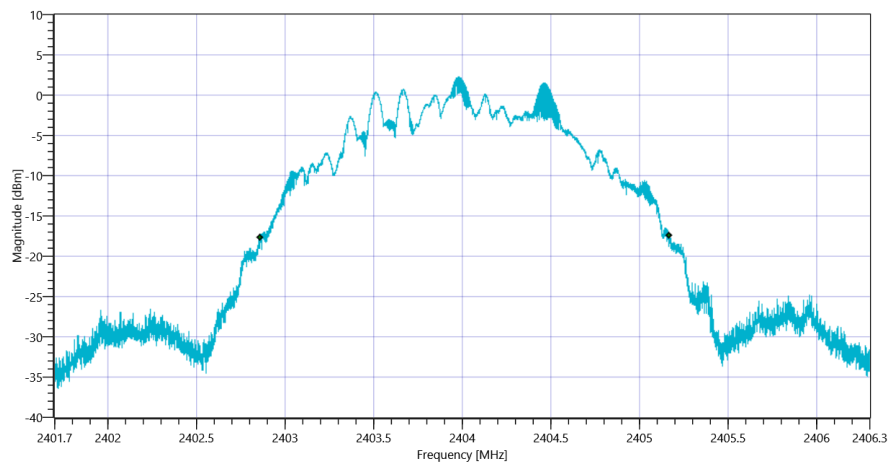


Test at TX 2440 MHz


DTM Connection check					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Connection result	---	---	---	---	PASS

READ SA SETTINGS:					
RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]			12.43 10.9 20		
Start [MHz] Stop [MHz]			2437.700 2442.300		
RBW [MHz] VBW [MHz]			0.050000 0.200000		
Detector TraceMode			POS MAXH		
Sweep: Time [ms] Count Points per Section Type			50 200 10001 SWE		

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	---	---	2122	kHz	INFO
T1 99%	2400.000000	---	2438.9559	MHz	PASS
T2 99%	---	2483.500000	2441.0777	MHz	PASS

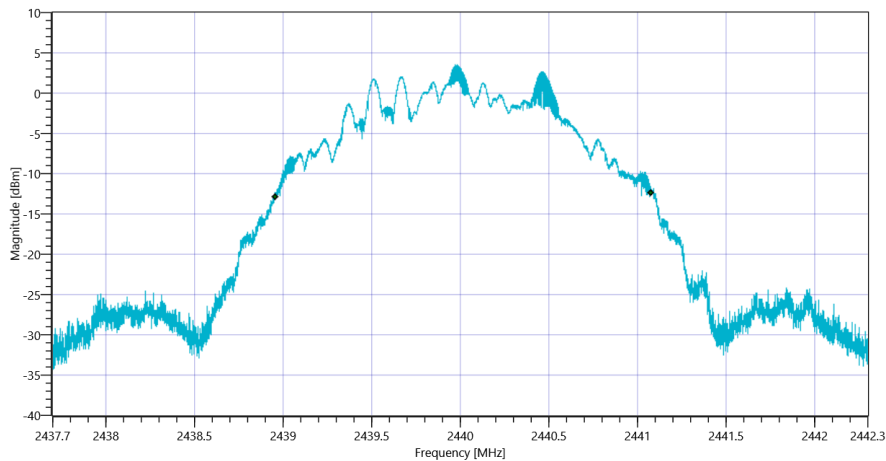

Plot_FCC Part 15.247 Bandwidth 99PCT-20dB ~ BT LE 2 Msps 99PCT_28092020_150629.png

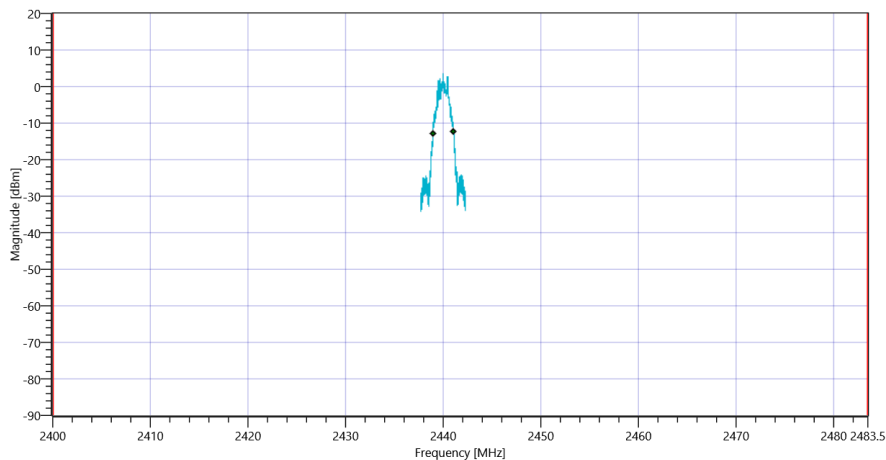

Plot_FCC Part 15.247 Bandwidth 99PCT-20dB ~ BT LE 2 Msps 28092020_150633.png

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 20dB	---	---	2315	kHz	INFO
T1 20DB	2400.000000	---	2438.8564	MHz	PASS



T2 20dB

2483.500000

2441.1716

MHz

PASS

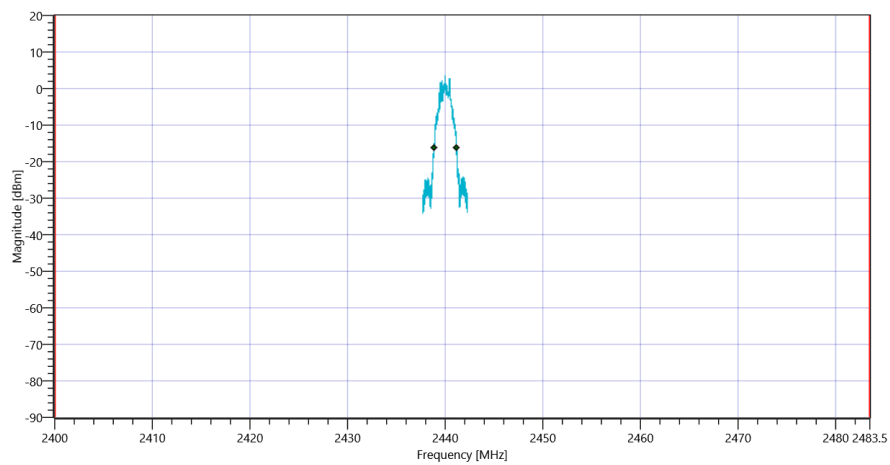
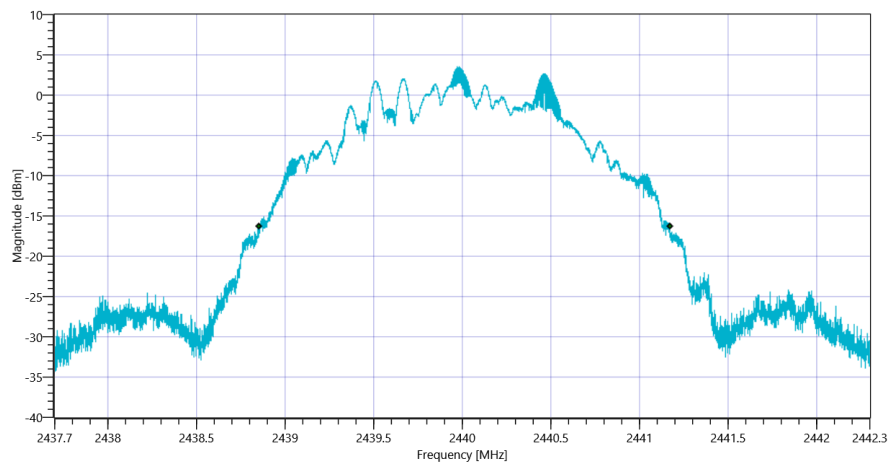


Test at TX 2478 MHz

DTM Connection check					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Connection result	---	---	---	---	PASS


READ SA SETTINGS:					
RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]			11.75 10.95 20		
Start [MHz] Stop [MHz]			2475.700 2480.300		
RBW [MHz] VBW [MHz]			0.050000 0.200000		
Detector TraceMode			POS MAXH		
Sweep: Time [ms] Count Points per Section Type			50 200 10001 SWE		

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	---	---	2124	kHz	INFO
T1 99%	2400.000000	---	2476.9522	MHz	PASS
T2 99%	---	2483.500000	2479.0758	MHz	PASS

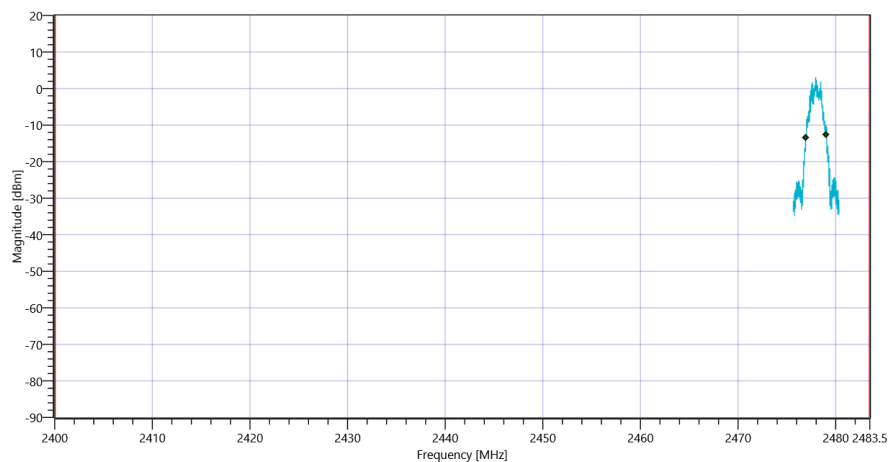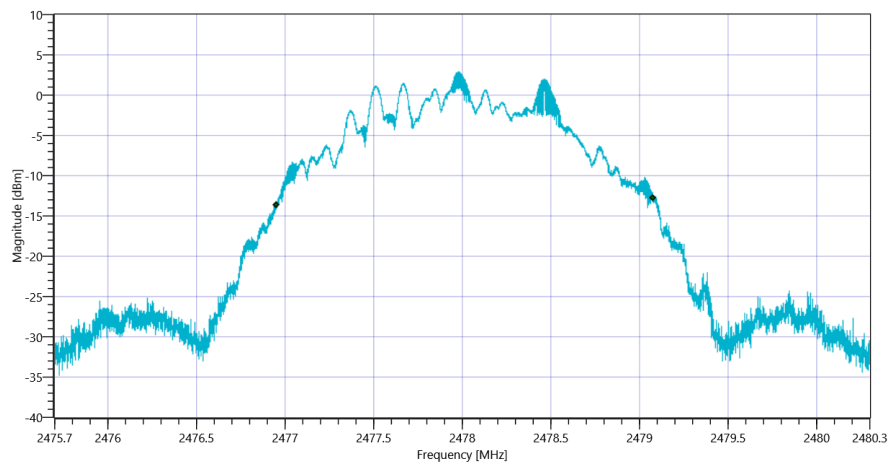


RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 20dB	---	---	2315	kHz	INFO
T1 20DB	2400.000000	---	2476.8541	MHz	PASS

T2 20dB	---	2483.500000	2479.1693	MHz	PASS
---------	-----	-------------	-----------	-----	------

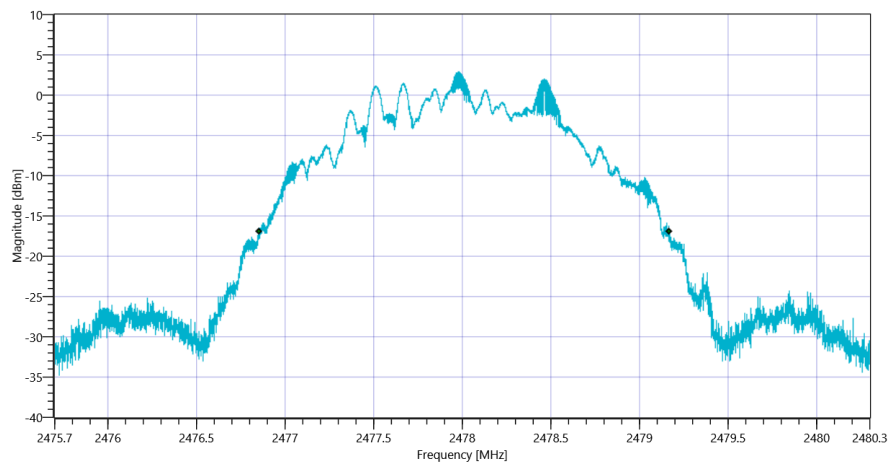

Plot_FCC Part 15.247 Bandwidth 99PCT-20dB ~ BT LE 2 Msps 20dB_28092020_150719.png

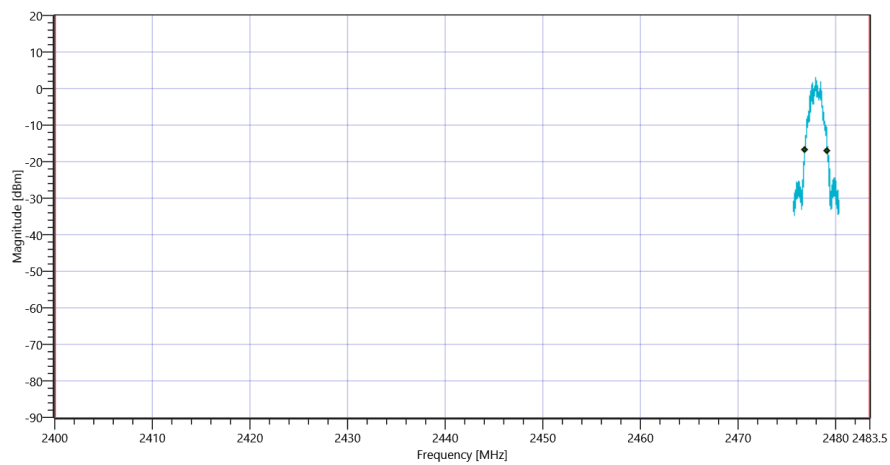

Plot_FCC Part 15.247 Bandwidth 99PCT-20dB ~ BT LE 2 Msps_28092020_150722.png

TEST FINISHED					
General Verdict	28.09.2020 15:07:23 / RT: 122 s			PASS	

11. FCC Part 15.247 Maximum Peak Conducted Output Power DTS ~ BT LE 2 Msps

Test References	
TC Start	29.09.2020 10:41:55
Ambit Temp [°C] Humidity [rel%]	22.7 46
System Version	1.0.0.51
Test Specification	FCC Part 15.247
Test Method	DTS: KDB 558074 D01 V05 - Chapter 8.3.1.1 RBW ≥ DTS Bandwidth
Class / TC Version	TC_VM_FCC15247_Maximum_Peak_Conducted_Output_Power_DTS_V01 Version: 0.0.1
My Description	FCC 15.247 Maximum Peak Output Power Conducted DTS - BT LE 2 Msps
Add. Information	


Test Parameter	
Technology to test	BT LE 2 Msps
Antenna Port used	1
Temperature	mid
Voltage	mid
Frequency low to test	True Freq [MHz] 2404
Frequency mid to test	True Freq [MHz] 2440
Frequency high to test	True Freq [MHz] 2478
Switched Path	IUT - SignalingUnit - SpectrumAnalyzer
Devices in use	SigBT: Rohde&Schwarz,CMW,1201.0002k75/100683,3.7.170 SA: Rohde&Schwarz,FSV-30,1321.3008K30/103809,3.60

Test at TX 2404 MHz

DTM Connection check					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Connection result	---	---	---	---	PASS


READ SA SETTINGS:					
RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]			5.14 13.9 10		
Start [MHz] Stop [MHz]			2401.700 2406.300		
RBW [MHz] VBW [MHz]			0.100000 0.300000		
Detector TraceMode			POS MAXH		
Sweep: Time [ms] Count Points per Section Type			50 200 10001 SWE		

DTS Bandwidth					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
DTS Bandwidth (6dB)	---	---	1198	kHz	INFO

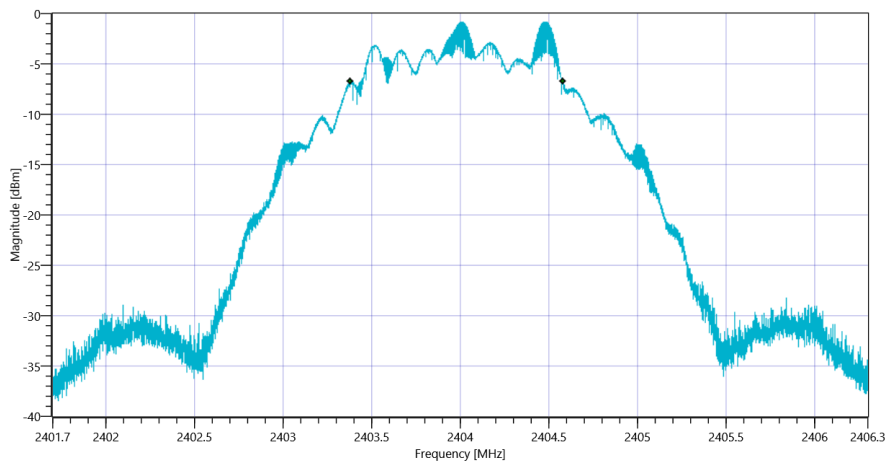

READ SA SETTINGS:					
RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]			10.14 13.9 15		
Start [MHz] Stop [MHz]			2401.700 2406.300		
RBW [MHz] VBW [MHz]			2.000000 5.000000		
Detector TraceMode			POS MAXH		
Sweep: Time [ms] Count Points per Section Type			50 200 1001 SWE		

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Peak Power	---	30.00	0.19	dBm	PASS
Peak Power	---	1000	1.04472	mW	PASS
Frequency at Peak	---	---	2404.551	MHz	INFO

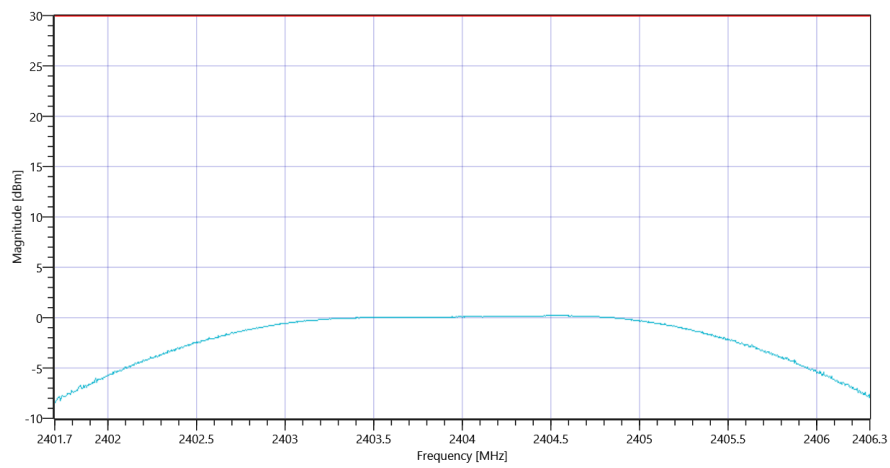


Plot_FCC Part 15.247 Maximum Peak Conducted Output Power DTS ~ BT LE 2 Msps_29092020_104239.png

Test at TX 2440 MHz

DTM Connection check					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Connection result	---	---	---	---	PASS


READ SA SETTINGS:					
RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]			6.82 13.9 10		
Start [MHz] Stop [MHz]			2437.700 2442.300		
RBW [MHz] VBW [MHz]			0.100000 0.300000		
Detector TraceMode			POS MAXH		
Sweep: Time [ms] Count Points per Section Type			50 200 10001 SWE		

DTS Bandwidth					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
DTS Bandwidth (6dB)	---	---	1201	kHz	INFO

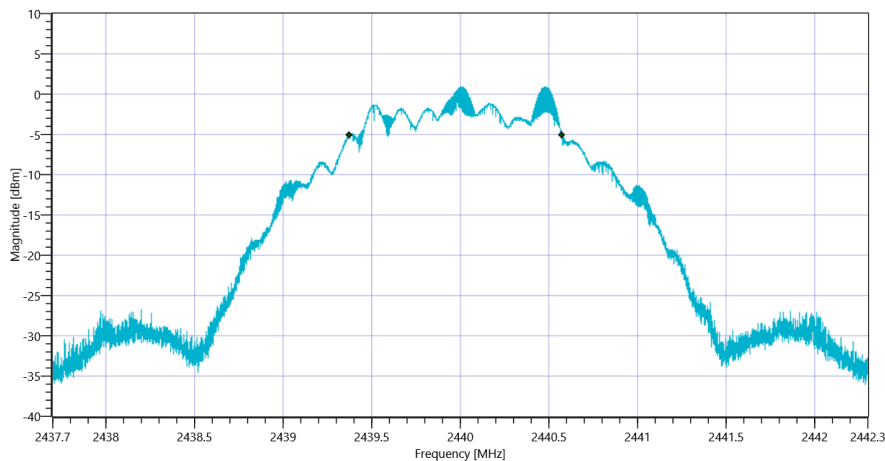

READ SA SETTINGS:					
RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]			11.82 13.9 15		
Start [MHz] Stop [MHz]			2437.700 2442.300		
RBW [MHz] VBW [MHz]			2.000000 5.000000		
Detector TraceMode			POS MAXH		
Sweep: Time [ms] Count Points per Section Type			50 200 1001 SWE		

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Peak Power	---	30.00	1.86	dBm	PASS
Peak Power	---	1000	1.534617	mW	PASS
Frequency at Peak	---	---	2440.524	MHz	INFO

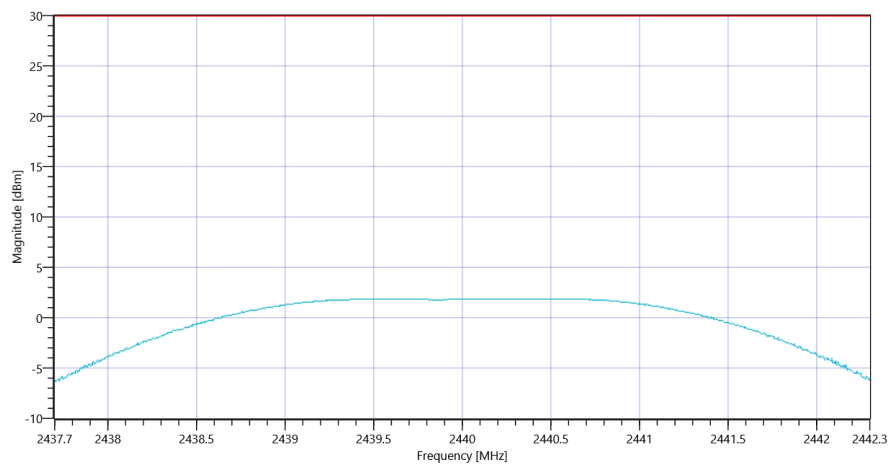


Plot_FCC Part 15.247 Maximum Peak Conducted Output Power DTS ~ BT LE 2 Msps_29092020_104321.png

Test at TX 2478 MHz

DTM Connection check					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Connection result	---	---	---	---	PASS


READ SA SETTINGS:					
RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	5.98 13.95 10				
Start [MHz] Stop [MHz]	2475.700 2480.300				
RBW [MHz] VBW [MHz]	0.100000 0.300000				
Detector TraceMode	POS MAXH				
Sweep: Time [ms] Count Points per Section Type	50 200 10001 SWE				

DTS Bandwidth					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
DTS Bandwidth (6dB)	---	---	1204	kHz	INFO

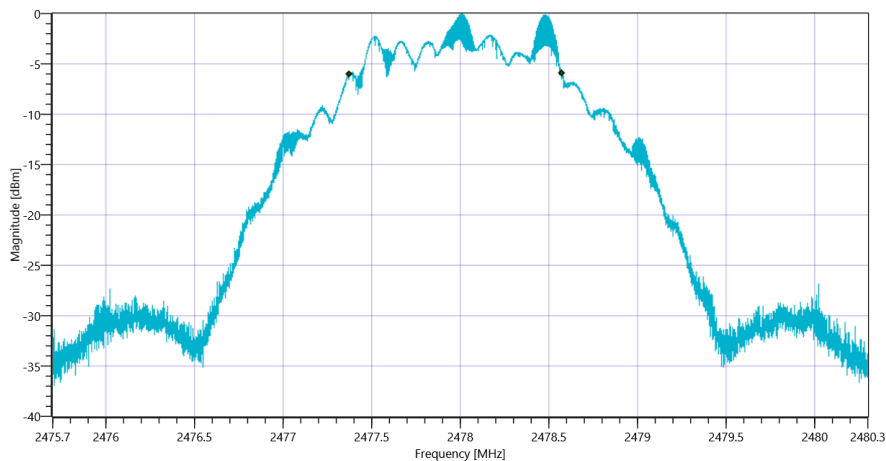

READ SA SETTINGS:					
RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	10.98 13.95 15				
Start [MHz] Stop [MHz]	2475.700 2480.300				
RBW [MHz] VBW [MHz]	2.000000 5.000000				
Detector TraceMode	POS MAXH				
Sweep: Time [ms] Count Points per Section Type	50 200 1001 SWE				

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Peak Power	---	30.00	0.96	dBm	PASS
Peak Power	---	1000	1.247384	mW	PASS
Frequency at Peak	---	---	2477.508	MHz	INFO

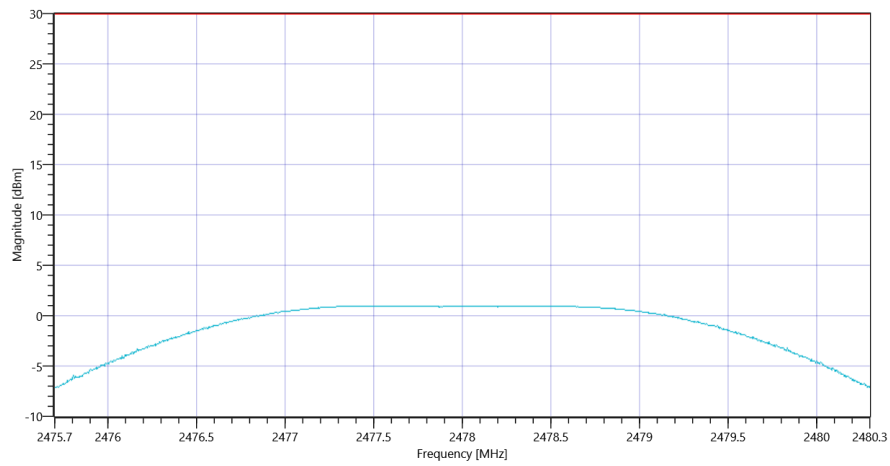

Plot_FCC Part 15.247 Maximum Peak Conducted Output Power DTS ~ BT LE 2 Msps_29092020_104404.png

TEST FINISHED

General Verdict

29.09.2020 10:44:05 / RT: 129 s

PASS

12. FCC Part 15.247 Bandwidth 6dB DTS ~ BT LE 2 Msps

Test References	
TC Start	29.09.2020 10:51:15
Ambit Temp [°C] Humidity [rel%]	22.8 46
System Version	1.0.0.51
Test Specification	FCC Part 15.247
Test Method	99
Class / TC Version	TC_VM_FCC15247_Bandwidth_6dB_DTS_V01 Version: 0.0.1
My Description	FCC 15.247 Bandwidth 6DB DTS - BT LE 2 Msps
Add. Information	


Test Parameter	
Technology to test	BT LE 2 Msps
Antenna Port used	1
Temperature	mid
Voltage	mid
Frequency low to test	True Freq [MHz] 2404
Frequency mid to test	True Freq [MHz] 2440
Frequency high to test	True Freq [MHz] 2478
Switched Path	IUT - SignalingUnit - SpectrumAnalyzer
Devices in use	SigBT: Rohde&Schwarz,CMW,1201.0002k75/100683,3.7.170 SA: Rohde&Schwarz,FSV-30,1321.3008K30/103809,3.60

Test at TX 2404 MHz

DTM Connection check					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Connection result	---	---	---	---	PASS

READ SA SETTINGS:		
RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	5.16 13.9 10	
Start [MHz] Stop [MHz]	2401.700 2406.300	
RBW [MHz] VBW [MHz]	0.100000 0.300000	
Detector TraceMode	POS MAXH	
Sweep: Time [ms] Count Points per Section Type	50 200 10001 SWE	

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
DTS Bandwidth (6dB)	500	---	1205	kHz	PASS

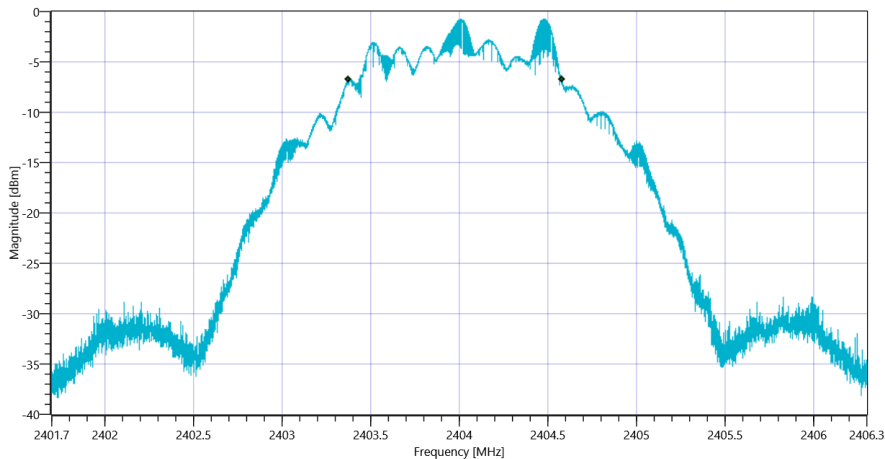


Plot_FCC Part 15.247 Bandwidth 6dB DTS ~ BT LE 2 Msps_29092020_105143.png

Test at TX 2440 MHz

DTM Connection check					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Connection result	---	---	---	---	PASS

READ SA SETTINGS:					
RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]			6.85 13.9 10		
Start [MHz] Stop [MHz]			2437.700 2442.300		
RBW [MHz] VBW [MHz]			0.100000 0.300000		
Detector TraceMode			POS MAXH		
Sweep: Time [ms] Count Points per Section Type			50 200 10001 SWE		

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
DTS Bandwidth (6dB)	500	---	1207	kHz	PASS

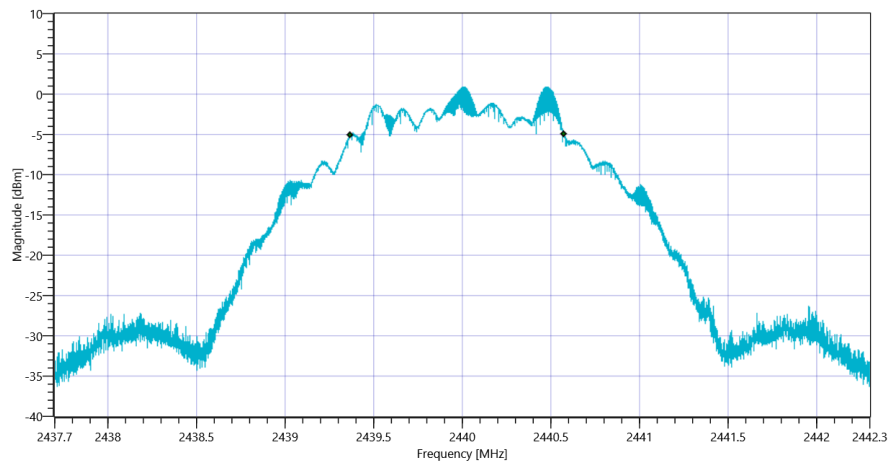


Plot_FCC Part 15.247 Bandwidth 6dB DTS ~ BT LE 2 Msps_29092020_105209.png

Test at TX 2478 MHz

DTM Connection check					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Connection result	---	---	---	---	PASS

READ SA SETTINGS:					
RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	5.97 13.95 10				
Start [MHz] Stop [MHz]	2475.700 2480.300				
RBW [MHz] VBW [MHz]	0.100000 0.300000				
Detector TraceMode	POS MAXH				
Sweep: Time [ms] Count Points per Section Type	50 200 10001 SWE				

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
DTS Bandwidth (6dB)	500	---	1204	kHz	PASS

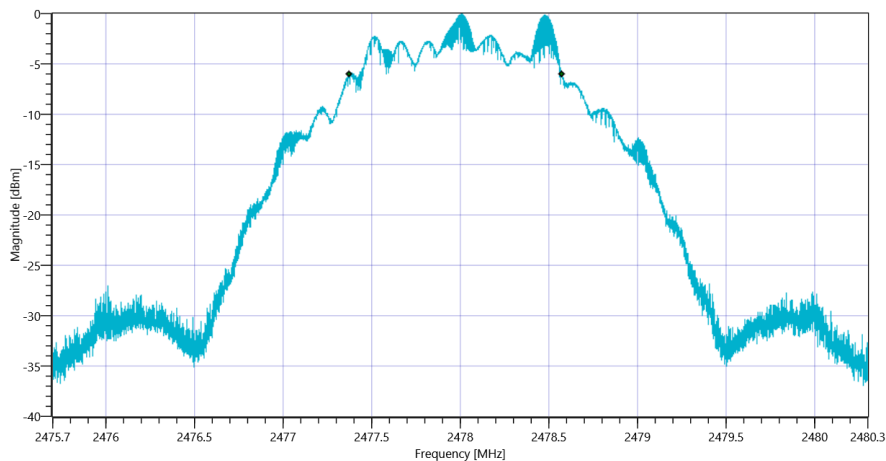

TEST FINISHED		
General Verdict	29.09.2020 10:52:36 / RT: 81 s	PASS

13. FCC Part 15.247 Peak Power Spectral Density DTS ~ BT LE 2 Msps

Test References	
TC Start	29.09.2020 10:52:40
Ambit Temp [°C] Humidity [rel%]	22.8 46
System Version	1.0.0.51
Test Specification	FCC Part 15.247
Test Method	DTS: KDB 558074 D01 V05 - Chapter 8.4 DTS maximum power spectral density level in the fundamental emission
Class / TC Version	TC_VM_FCC15247_Peak_Power_Spectral_Density_DTS_V01 Version: 0.0.1
My Description	FCC 15.247 Peak Power Spectral Density DTS - BT LE 2 Msps
Add. Information	


Test Parameter	
Technology to test	BT LE 2 Msps
Antenna Port used	1
Temperature	mid
Voltage	mid
Frequency low to test	True Freq [MHz] 2404
Frequency mid to test	True Freq [MHz] 2440
Frequency high to test	True Freq [MHz] 2478
Switched Path	IUT - SignalingUnit - SpectrumAnalyzer
Devices in use	SigBT: Rohde&Schwarz,CMW,1201.0002k75/100683,3.7.170 SA: Rohde&Schwarz,FSV-30,1321.3008K30/103809,3.60

Test at TX 2404 MHz

DTM Connection check					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Connection result	---	---	---	---	PASS

READ SA SETTINGS:		
RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	5.21 13.9 10	
Start [MHz] Stop [MHz]	2402.275 2405.725	
RBW [MHz] VBW [MHz]	0.003000 0.010000	
Detector TraceMode	POS MAXH	
Sweep: Time [ms] Count Points per Section Type	1000 20 1001 SWE	

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max Peak power Density	---	8	-17.76	dBm/3KHz	PASS

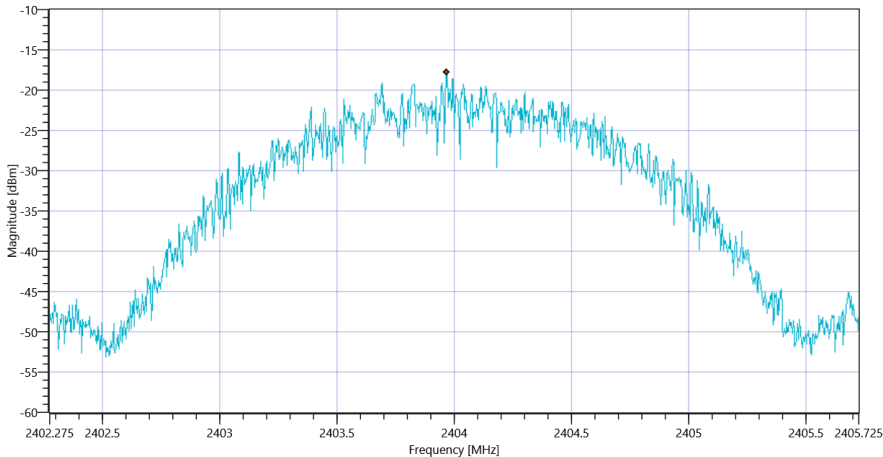


Plot_FCC Part 15.247 Peak Power Spectral Density DTS ~ BT LE 2 Msps_29092020_105319.png

Test at TX 2440 MHz

DTM Connection check					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Connection result	---	---	---	---	PASS

READ SA SETTINGS:	
RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	6.87 13.9 10
Start [MHz] Stop [MHz]	2438.275 2441.725
RBW [MHz] VBW [MHz]	0.003000 0.010000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	1000 20 1001 SWE

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max Peak power Density	---	8	-16.05	dBm/3KHz	PASS

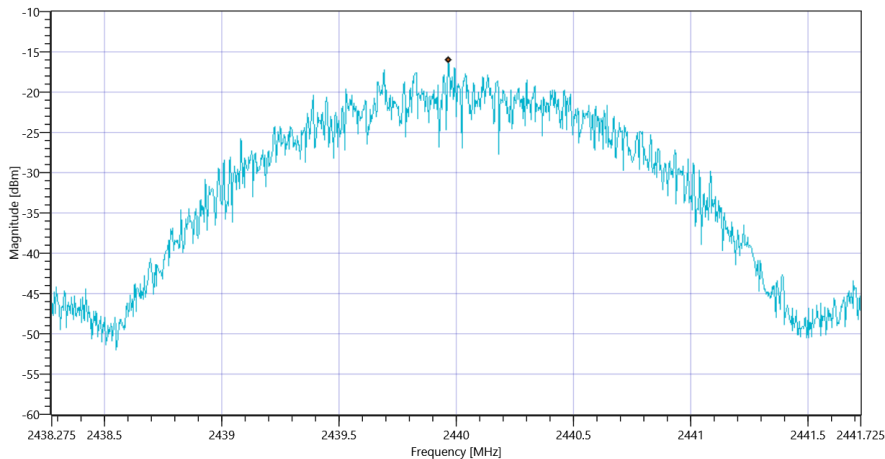


Plot_FCC Part 15.247 Peak Power Spectral Density DTS ~ BT LE 2 Msps_29092020_105355.png

Test at TX 2478 MHz

DTM Connection check					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Connection result	---	---	---	---	PASS

READ SA SETTINGS:					
RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	5.93 13.95 10				
Start [MHz] Stop [MHz]	2476.275 2479.725				
RBW [MHz] VBW [MHz]	0.003000 0.010000				
Detector TraceMode	POS MAXH				
Sweep: Time [ms] Count Points per Section Type	1000 20 1001 SWE				

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max Peak power Density	---	8	-17.03	dBm/3KHz	PASS

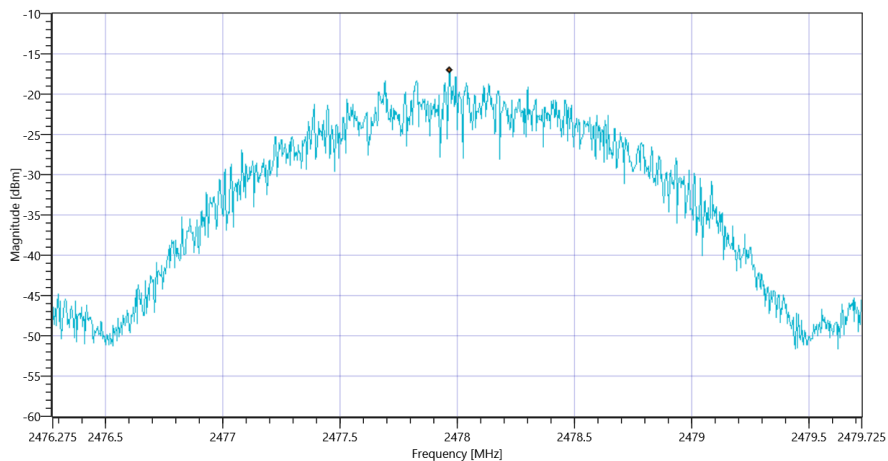

Plot_FCC Part 15.247 Peak Power Spectral Density DTS ~ BT LE 2 Msps_29092020_105431.png

TEST FINISHED		
General Verdict	29.09.2020 10:54:32 / RT: 111 s	PASS

14. FCC Part 15.247 TX Spurious Conducted ~ BT LE 2 Msps

Test References	
TC Start	29.09.2020 10:54:36
Ambit Temp [°C] Humidity [rel%]	22.9 46
System Version	1.0.0.51
Test Specification	FCC Part 15.247
Test Method	IF DTS then 8.5 DTS emissions in non-restricted frequency bands: Subclause 11.11 of ANSI C63.10 is applicable.
Class / TC Version	TC_VM_FCC15247_TX_Emissions_Conducted_V01 Version: 0.0.1
My Description	FCC 15.247 TX Emissions Conducted DTS - BT LE 2 Msps
Add. Information	


Test Parameter	
Technology to test	BT LE 2 Msps
Antenna Port used	1
Temperature	mid
Voltage	mid
Frequency low to test	True Freq [MHz] 2404
Frequency mid to test	True Freq [MHz] 2440
Frequency high to test	True Freq [MHz] 2478
Switched Path	IUT - SignalingUnit - SpectrumAnalyzer
Devices in use	SigBT: Rohde&Schwarz,CMW,1201.0002k75/100683,3.7.170 SA: Rohde&Schwarz,FSV-30,1321.3008K30/103809,3.60

Test at TX 2404 MHz


DTM Connection check					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Connection result	---	---	---	---	PASS

READ SA SETTINGS:	
RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	1.09 0 20
Start [MHz] Stop [MHz]	24530.000 25030.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	500 8 3001 SWE

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Reference @ 2404.17 MHz	---	---	-2.98	dBm	INFO
No peaks detected	---	---			PASS
Lowest margin to limit 19830.5 MHz	0	---	20.19	dB	INFO

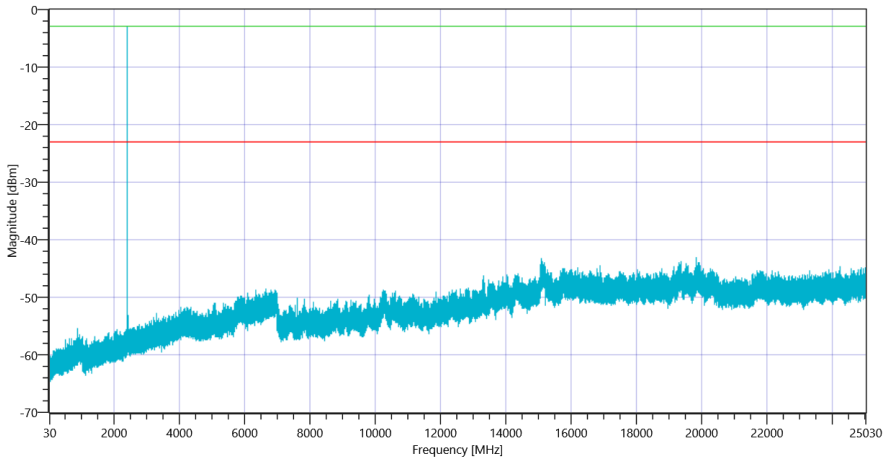

Plot_FCC Part 15.247 TX Spurious Conducted ~ BT LE 2 Msps 2404_29092020_105924.png

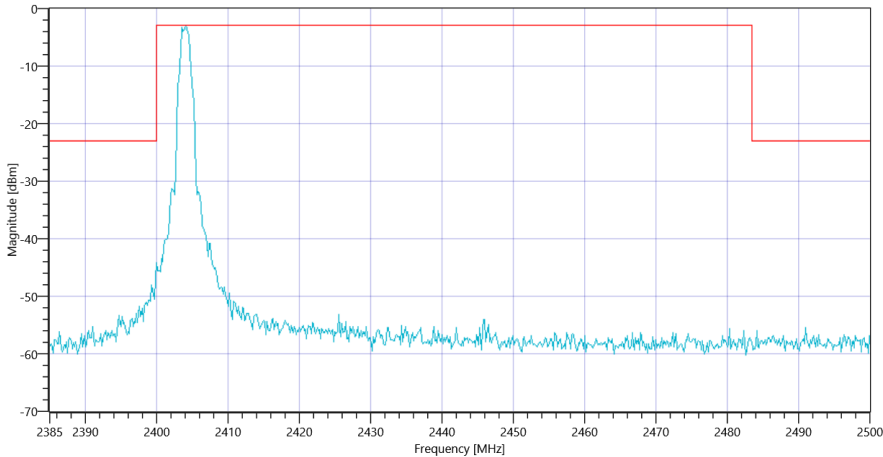


Plot_FCC Part 15.247 TX Spurious Conducted ~ BT LE 2 Msps 2404_29092020_105926.png

Test at TX 2440 MHz


DTM Connection check					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Connection result	---	---	---	---	PASS

READ SA SETTINGS:		
RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	2.40 0 20	
Start [MHz] Stop [MHz]	24530.000 25030.000	
RBW [MHz] VBW [MHz]	0.100000 0.300000	
Detector TraceMode	POS MAXH	
Sweep: Time [ms] Count Points per Section Type	500 8 3001 SWE	

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Reference @ 2440.50 MHz	---	---	-0.05	dBm	INFO
No peaks detected	---	---			PASS
Lowest margin to limit 15177.333 MHz	0	---	23.35	dB	INFO

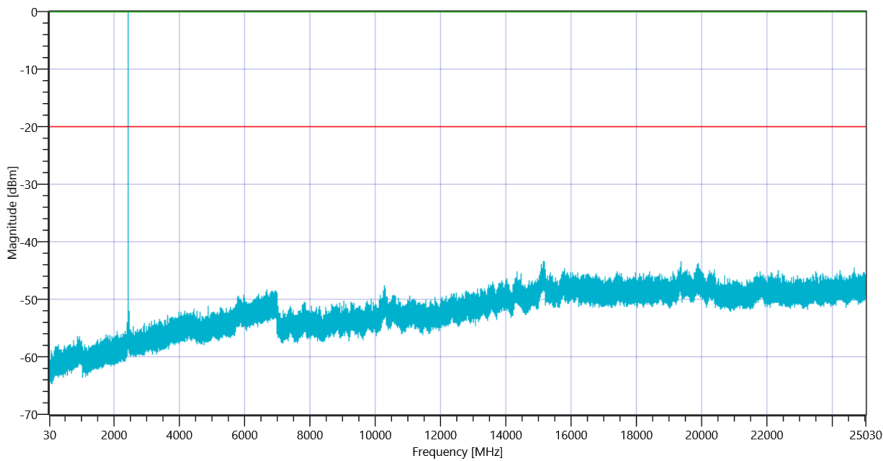

Plot_FCC Part 15.247 TX Spurious Conducted ~ BT LE 2 Msps 2440_29092020_110413.png

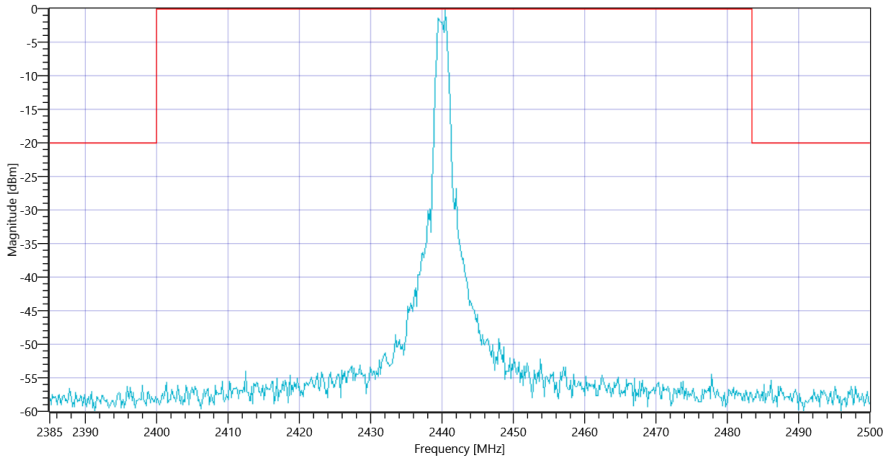



Plot_FCC Part 15.247 TX Spurious Conducted ~ BT LE 2 Msps 2440_29092020_110416.png

Test at TX 2478 MHz

DTM Connection check					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Connection result	---	---	---	---	PASS

READ SA SETTINGS:					
RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]			1.31 0 20		
Start [MHz] Stop [MHz]			24530.000 25030.000		
RBW [MHz] VBW [MHz]			0.100000 0.300000		
Detector TraceMode			POS MAXH		
Sweep: Time [ms] Count Points per Section Type			500 8 3001 SWE		

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Reference @ 2478.50 MHz	---	---	-0.32	dBm	INFO
No peaks detected	---	---			PASS
Lowest margin to limit 19979.833 MHz	0	---	23.39	dB	INFO

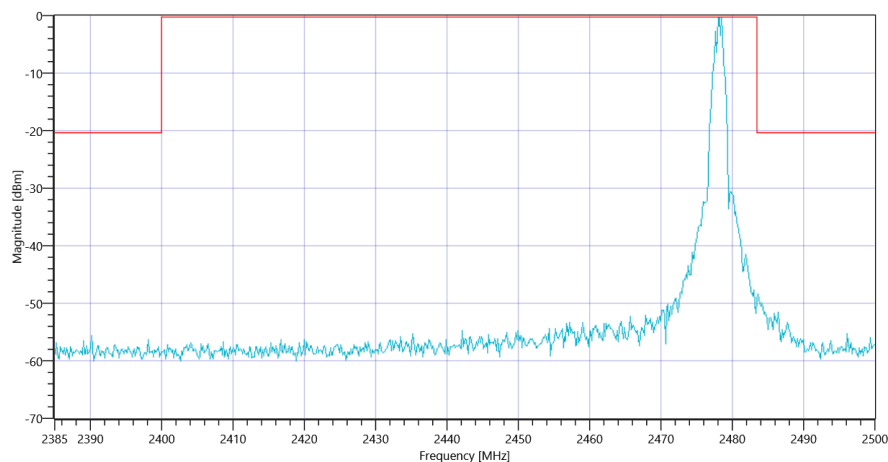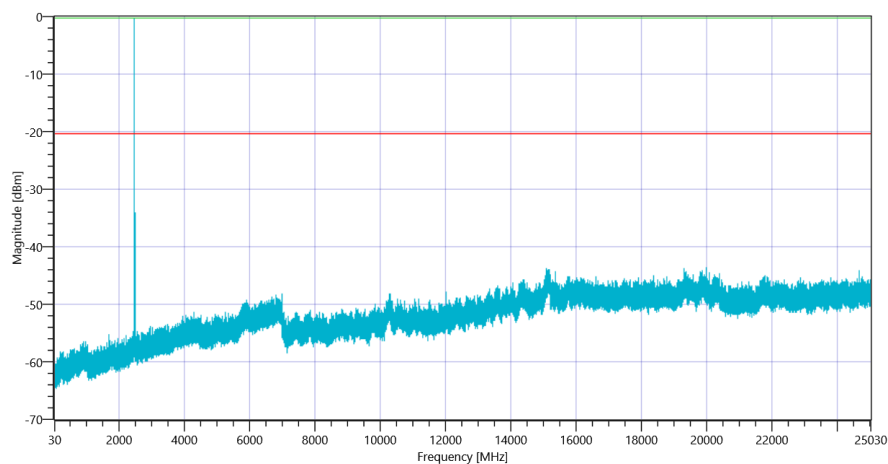

TEST FINISHED		
General Verdict	29.09.2020 11:09:08 / RT: 871 s	PASS

15. FCC Part 15.247 Bandwidth 99PCT-20dB ~ BT LE 2 Msps

Test References	
TC Start	29.09.2020 11:09:12
Ambit Temp [°C] Humidity [rel%]	23.0 45
System Version	1.0.0.51
Test Specification	FCC Part 15.247
Test Method	
Class / TC Version	TC_VM_FCC15247_Bandwidth_99PCT_20dB_DTS_FHSS_V01 Version: 0.0.2
My Description	FCC 15.247 Bandwidth 99PCT-20DB DTS - BT LE 2 Msps
Add. Information	


Test Parameter	
Technology to test	BT LE 2 Msps
Antenna Port used	1
Temperature	mid
Voltage	mid
Frequency low to test	True Freq [MHz] 2404
Frequency mid to test	True Freq [MHz] 2440
Frequency high to test	True Freq [MHz] 2478
Switched Path	IUT - SignalingUnit - SpectrumAnalyzer
Devices in use	SigBT: Rohde&Schwarz,CMW,1201.0002k75/100683,3.7.170 SA: Rohde&Schwarz,FSV-30,1321.3008K30/103809,3.60

Test at TX 2404 MHz


DTM Connection check					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Connection result	---	---	---	---	PASS

READ SA SETTINGS:					
RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]			5.28 13.9 10		
Start [MHz] Stop [MHz]			2401.700 2406.300		
RBW [MHz] VBW [MHz]			0.050000 0.200000		
Detector TraceMode			POS MAXH		
Sweep: Time [ms] Count Points per Section Type			50 200 10001 SWE		

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	---	---	2115	kHz	INFO
T1 99%	2400.000000	---	2402.9637	MHz	PASS
T2 99%	---	2483.500000	2405.0791	MHz	PASS

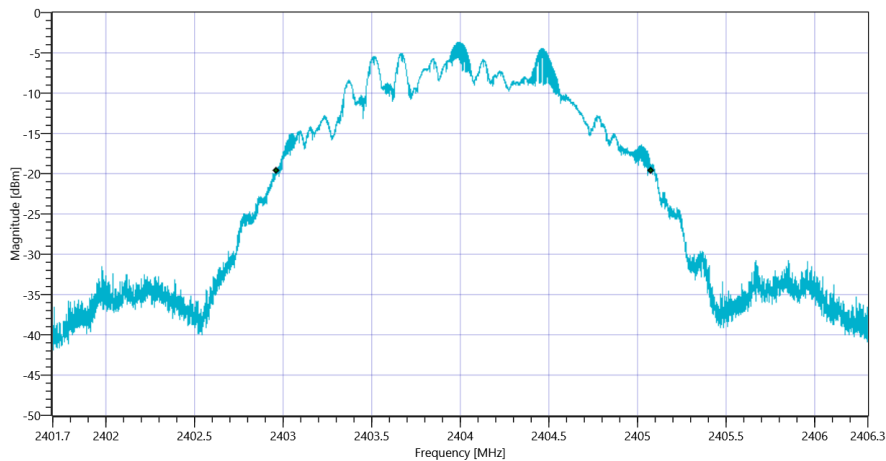


Plot_FCC Part 15.247 Bandwidth 99PCT-20dB ~ BT LE 2 Msps 99PCT_29092020_110941.png

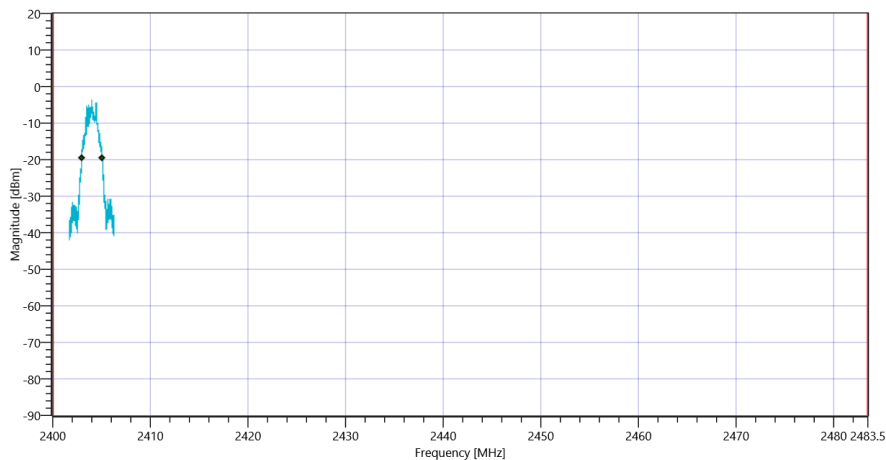


Plot_FCC Part 15.247 Bandwidth 99PCT-20dB ~ BT LE 2 Msps 29092020_110945.png

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 20dB	---	---	2312	kHz	INFO
T1 20DB	2400.000000	---	2402.8555	MHz	PASS

T2 20dB	---	2483.500000	2405.1675	MHz	PASS
---------	-----	-------------	-----------	-----	------

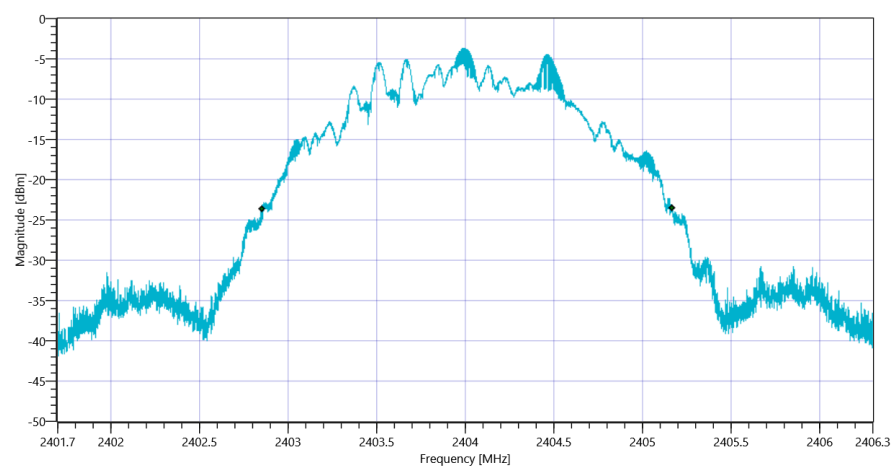

Plot_FCC Part 15.247 Bandwidth 99PCT-20dB ~ BT LE 2 Msps 20dB_29092020_110950.png

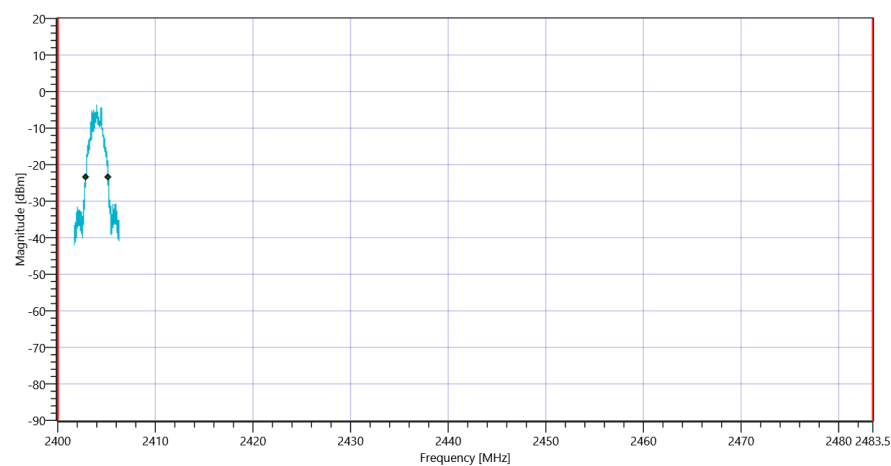



Plot_FCC Part 15.247 Bandwidth 99PCT-20dB ~ BT LE 2 Msps_29092020_110953.png

Test at TX 2440 MHz

DTM Connection check					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Connection result	---	---	---	---	PASS

READ SA SETTINGS:					
RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]			6.88 13.9 10		
Start [MHz] Stop [MHz]			2437.700 2442.300		
RBW [MHz] VBW [MHz]			0.050000 0.200000		
Detector TraceMode			POS MAXH		
Sweep: Time [ms] Count Points per Section Type			50 200 10001 SWE		

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	---	---	2118	kHz	INFO
T1 99%	2400.000000	---	2438.9582	MHz	PASS
T2 99%	---	2483.500000	2441.0763	MHz	PASS

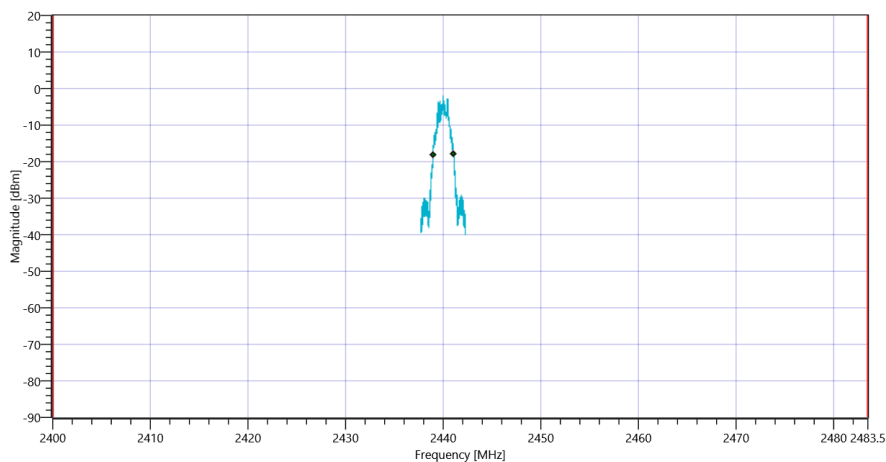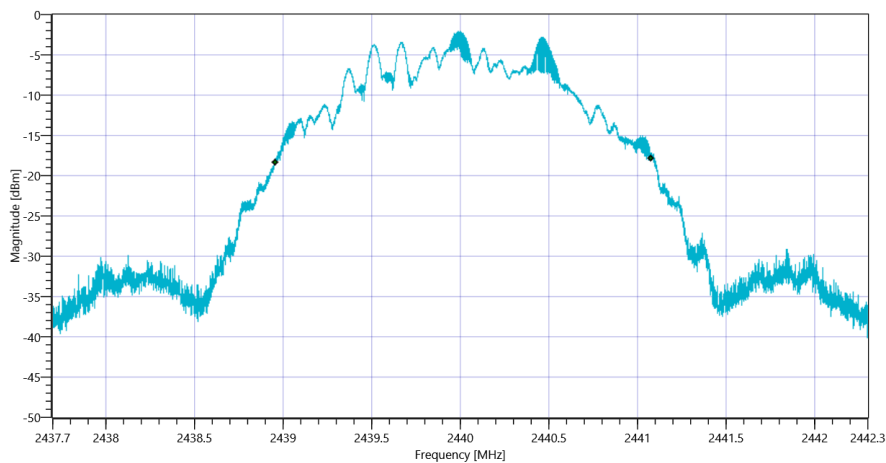

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 20dB	---	---	2326	kHz	INFO
T1 20DB	2400.000000	---	2438.8523	MHz	PASS


T2 20dB

2483.500000


2441.1781

MHz

PASS

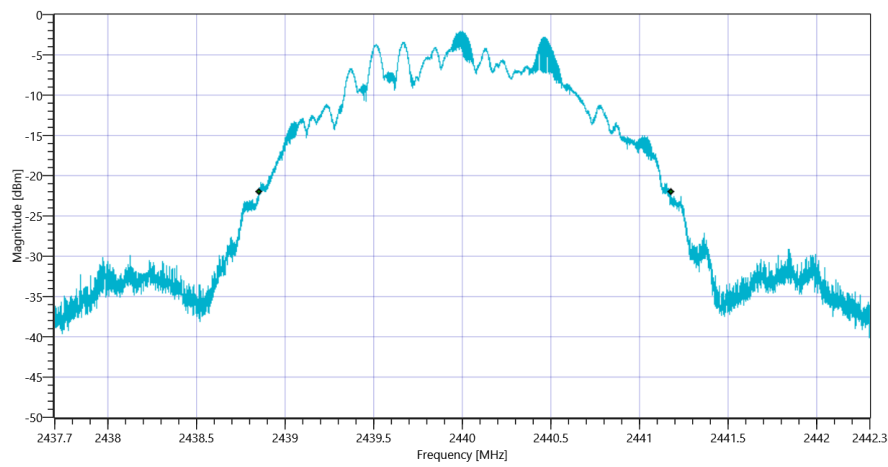

Plot_FCC Part 15.247 Bandwidth 99PCT-20dB ~ BT LE 2 Msps 29092020_111030.png

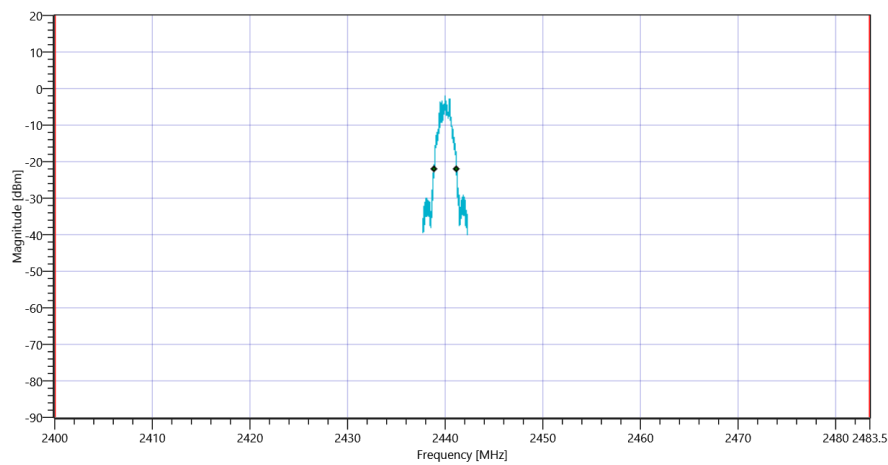



Plot_FCC Part 15.247 Bandwidth 99PCT-20dB ~ BT LE 2 Msps 29092020_111033.png

Test at TX 2478 MHz

DTM Connection check					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Connection result	---	---	---	---	PASS


READ SA SETTINGS:					
RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]			5.92 13.95 10		
Start [MHz] Stop [MHz]			2475.700 2480.300		
RBW [MHz] VBW [MHz]			0.050000 0.200000		
Detector TraceMode			POS MAXH		
Sweep: Time [ms] Count Points per Section Type			50 200 10001 SWE		

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	---	---	2123	kHz	INFO
T1 99%	2400.000000	---	2476.9527	MHz	PASS
T2 99%	---	2483.500000	2479.0754	MHz	PASS

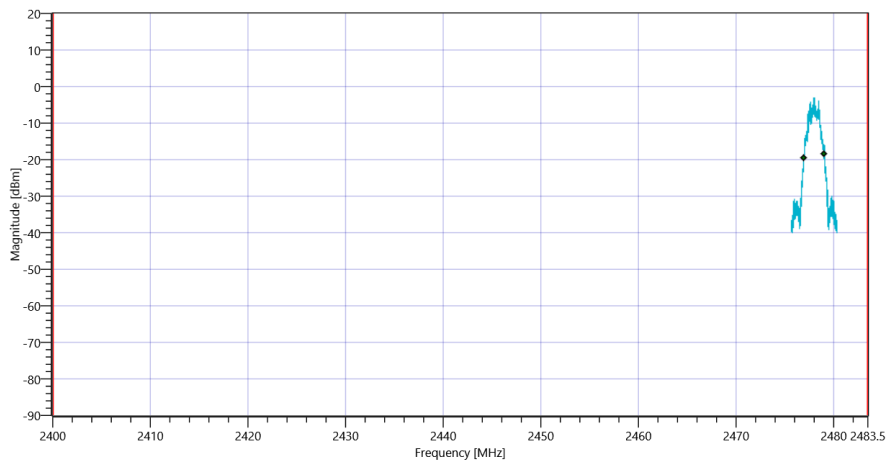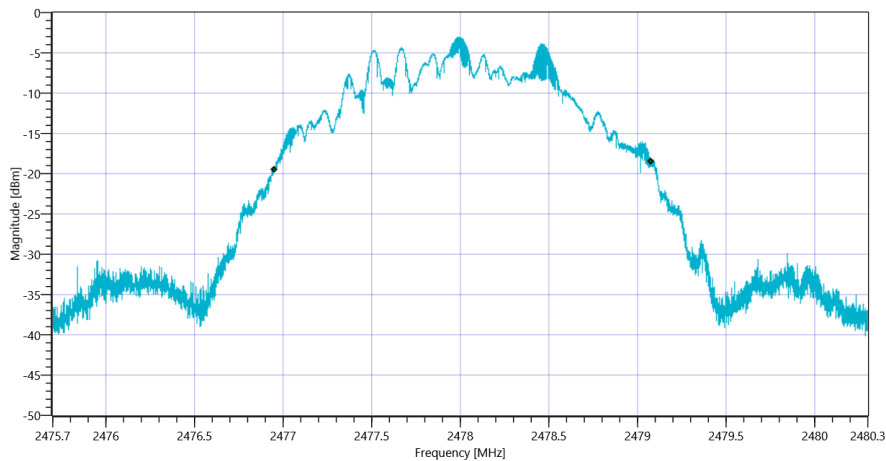


RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 20dB	---	---	2312	kHz	INFO
T1 20DB	2400.000000	---	2476.8541	MHz	PASS

T2 20dB	---	2483.500000	2479.1661	MHz	PASS
---------	-----	-------------	-----------	-----	------

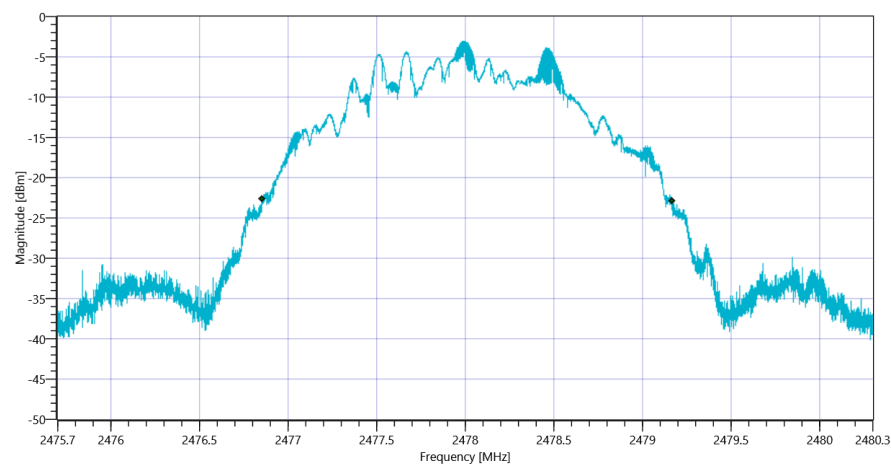

Plot_FCC Part 15.247 Bandwidth 99PCT-20dB ~ BT LE 2 Msps_29092020_111111.png

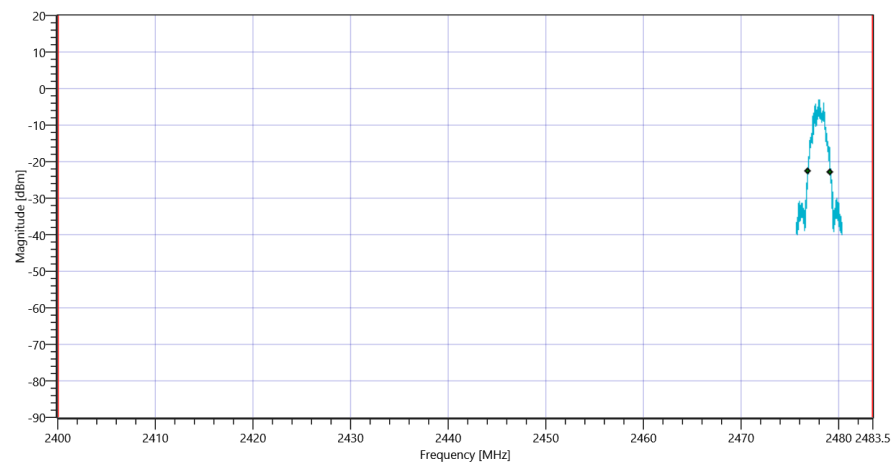

Plot_FCC Part 15.247 Bandwidth 99PCT-20dB ~ BT LE 2 Msps_29092020_111114.png

TEST FINISHED					
General Verdict	29.09.2020 11:11:15 / RT: 123 s			PASS	

- END OF DOCUMENT -