

## TEST REPORT

Test report no.: 1-7988/14-02-05-A



Deutsche  
Akkreditierungsstelle  
D-PL-12076-01-01

### Testing Laboratory

**CETECOM ICT Services GmbH**  
Untertuerkheimer Strasse 6 – 10  
66117 Saarbruecken / Germany  
Phone: + 49 681 5 98 - 0  
Fax: + 49 681 5 98 - 9075  
Internet: <http://www.cetecom.com>  
e-mail: [ict@cetecom.com](mailto:ict@cetecom.com)

#### Accredited Testing Laboratory:

The testing laboratory (area of testing) is accredited according to DIN EN ISO/IEC 17025 (2005) by the Deutsche Akkreditierungsstelle GmbH (DAkkS). The accreditation is valid for the scope of testing procedures as stated in the accreditation certificate with the registration number: D-PL-12076-01-01.  
Area of Testing:  
Radio Communications & EMC (RCE)

### Applicant

**SBO Hearing A/S**  
Kongebakken 9  
2765 Smørum/DENMARK  
Phone: +45 39 13 85 38  
Contact: Jørgen Peter Hanuscheck  
e-mail: [jnp@oticon.dk](mailto:jnp@oticon.dk)

### Manufacturer

**SBO Hearing A/S**  
Kongebakken 9  
2765 Smørum/DENMARK

### Test Standard/s

47 CFR Part 15 Title 47 of the Code of Federal Regulations; Chapter I; Part 15 - Radio frequency devices  
RSS - 210 Issue 8 Spectrum Management and Telecommunications Radio Standards Specification - Licence-exempt Radio Apparatus (All Frequency Bands): Category I Equipment

For further applied test standards please refer to section 3 of this test report.

### Test Item

**Kind of test item:** Programming device for hearing aids  
**Model name:** WLP Multi (e.g. FittingLINK WP-2)  
**FCC ID:** 2ACAHWLP020  
**IC:** 11936A-WLP020  
**Frequency [MHz]:** ISM band 2400 MHz to 2483.5 MHz  
(lowest channel 00 – 2402, highest channel 78 – 2480 MHz)  
**Technology tested:** Bluetooth®+EDR  
**Antenna:** Integrated PCB antenna  
**Power Supply:** 3.70V DC by Li - Po battery  
**Temperature Range:** 0°C to +40°C

### Test report authorised:

p.o.

Jörg Warken  
Professional

cn=Marco Bertolino, o=CETECOM ICT  
Services GmbH, ou=BTL-100826,  
email=marco.bertolino@cetecom.com,  
c=DE  
2014.07.21 07:39:31 +02'00'

### Test performed:

p.o.

Tobias Wittenmeier  
Experienced

cn=Andreas Luckenbill, o=CETECOM ICT  
Services GmbH, ou=LUC-111202,  
email=andreas.luckenbill@cetecom.co  
m, c=DE  
2014.07.21 07:52:08 +02'00'

## 1 Table of contents

|         |                                                            |    |
|---------|------------------------------------------------------------|----|
| 1       | Table of contents .....                                    | 2  |
| 2       | General Information .....                                  | 3  |
| 2.1     | Notes and disclaimer .....                                 | 3  |
| 2.2     | Application details.....                                   | 3  |
| 3       | Test standard/s .....                                      | 3  |
| 4       | Test Environment .....                                     | 4  |
| 5       | Test item .....                                            | 4  |
| 5.1     | Referenced documents.....                                  | 4  |
| 6       | Test laboratories sub-contracted .....                     | 4  |
| 7       | Summary of measurement results .....                       | 5  |
| 8       | Description of the test setup .....                        | 6  |
| 8.1     | Radiated measurements chamber F.....                       | 6  |
| 8.2     | Radiated measurements chamber C .....                      | 7  |
| 8.3     | Radiated measurements 12.75 GHz to 26 GHz .....            | 8  |
| 8.4     | AC conducted .....                                         | 9  |
| 8.5     | Conducted Bluetooth test system .....                      | 10 |
| 8.6     | Additional comments .....                                  | 11 |
| 9       | Measurement results.....                                   | 12 |
| 9.1     | Antenna gain .....                                         | 12 |
| 9.2     | Power spectral density .....                               | 14 |
| 9.3     | Carrier frequency separation .....                         | 15 |
| 9.4     | Number of hopping channels.....                            | 17 |
| 9.5     | Time of occupancy (dwell time) .....                       | 19 |
| 9.6     | Spectrum bandwidth of a FHSS system – 99 % bandwidth ..... | 20 |
| 9.7     | Maximum output power .....                                 | 24 |
| 9.8     | Near band spurious emissions conducted .....               | 26 |
| 9.9     | Band edge compliance radiated .....                        | 31 |
| 9.10    | TX spurious emissions conducted .....                      | 34 |
| 9.11    | TX spurious emissions radiated.....                        | 39 |
| 9.12    | RX spurious emissions radiated .....                       | 50 |
| 9.13    | TX and RX spurious emissions radiated < 30 MHz .....       | 54 |
| 9.14    | TX and RX spurious emissions conducted < 30 MHz .....      | 56 |
| 9.15    | Statistical measurements.....                              | 59 |
| 10      | Test equipment and ancillaries used for tests .....        | 61 |
| 11      | Observations .....                                         | 62 |
| Annex A | Document history .....                                     | 63 |
| Annex B | Further information.....                                   | 63 |
| Annex C | Accreditation Certificate .....                            | 64 |

## 2 General Information

### 2.1 Notes and disclaimer

The test results of this test report relate exclusively to the test item specified in this test report. CETECOM ICT Services GmbH does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item.

The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of CETECOM ICT Services GmbH.

The testing service provided by CETECOM ICT Services GmbH has been rendered under the current "General Terms and Conditions for CETECOM ICT Services GmbH".

CETECOM ICT Services GmbH will not be liable for any loss or damage resulting from false, inaccurate, inappropriate or incomplete product information provided by the customer.

Under no circumstances does the CETECOM ICT Services GmbH test report include any endorsement or warranty regarding the functionality, quality or performance of any other product or service provided.

Under no circumstances does the CETECOM ICT Services GmbH test report include or imply any product or service warranties from CETECOM ICT Services GmbH, including, without limitation, any implied warranties of merchantability, fitness for purpose, or non-infringement, all of which are expressly disclaimed by CETECOM ICT Services GmbH.

All rights and remedies regarding vendor's products and services for which CETECOM ICT Services GmbH has prepared this test report shall be provided by the party offering such products or services and not by CETECOM ICT Services GmbH.

In no case this test report can be considered as a Letter of Approval.

### 2.2 Application details

|                                    |            |
|------------------------------------|------------|
| Date of receipt of order:          | 2014-05-13 |
| Date of receipt of test item:      | 2014-06-16 |
| Start of test:                     | 2014-06-23 |
| End of test:                       | 2014-06-27 |
| Person(s) present during the test: | -/-        |

## 3 Test standard/s

| Test Standard     | Date    | Test Standard Description                                                                                                                             |
|-------------------|---------|-------------------------------------------------------------------------------------------------------------------------------------------------------|
| 47 CFR Part 15    | 12.2010 | Title 47 of the Code of Federal Regulations; Chapter I; Part 15 - Radio frequency devices                                                             |
| RSS - 210 Issue 8 | 12.2010 | Spectrum Management and Telecommunications Radio Standards Specification - Licence-exempt Radio Apparatus (All Frequency Bands): Category I Equipment |

#### 4 Test Environment

|                    |           |                                       |
|--------------------|-----------|---------------------------------------|
| Temperature:       | $T_{nom}$ | +22 °C during room temperature tests  |
|                    | $T_{max}$ | +40 °C during high temperature tests  |
|                    | $T_{min}$ | 0 °C during low temperature tests     |
| Relative humidity: |           | 55 %                                  |
| Air pressure:      |           | not relevant for this kind of testing |
| Power supply:      | $V_{nom}$ | 3.70 V DC by Li - Po battery          |
|                    | $V_{max}$ | 4.10 V                                |
|                    | $V_{min}$ | 3.45 V                                |

#### 5 Test item

|                      |   |                                                                                               |
|----------------------|---|-----------------------------------------------------------------------------------------------|
| Kind of test item    | : | Programming device for hearing aids                                                           |
| Type identification  | : | WLP Multi (e.g. FittingLINK WP-2)                                                             |
| S/N serial number    | : | Rad. 01901289 *)<br>Cond. 01901271 (BTADDR: 00198E3005F6) *)                                  |
| HW hardware status   | : | assembly rev 00 - PCB rev 03                                                                  |
| SW software status   | : | 1.4.2 + Power table fix (limited to 4dBm; 8dBm line removed in PSKEY_LC_ENHANCED_POWER_TABLE) |
| Frequency Band [MHz] | : | ISM band 2400 MHz to 2483.5 MHz<br>(lowest channel 00 – 2402, highest channel 78 – 2480 MHz)  |
| Type of Modulation   | : | GFSK, Pi/4 DQPSK                                                                              |
| Number of channels   | : | 79                                                                                            |
| Antenna              | : | Integrated PCB antenna                                                                        |
| Power Supply         | : | 3.70 V DC by Li - Po battery                                                                  |
| Temperature Range    | : | 0°C to +40 °C                                                                                 |

\*) for multiple measurements, the used S/N's are explicitly mentioned in the test case.

#### 5.1 Referenced documents

The content of the following annexes is defined in the QA. It may be that not all of the listed annexes are necessary for this report, thus some values in between may be missing.

Test setup- and EUT-photos are included in test report:

1-7988/14-02-01\_AnnexA  
1-7988/14-02-01\_AnnexB  
1-7988/14-02-01\_AnnexD

#### 6 Test laboratories sub-contracted

None

## 7 Summary of measurement results



No deviations from the technical specifications were ascertained



There were deviations from the technical specifications ascertained

| TC Identifier | Description                              | Verdict | Date       | Remark |
|---------------|------------------------------------------|---------|------------|--------|
| RF-Testing    | CFR Part 15<br>RSS 210, Issue 8, Annex 8 | Passed  | 2014-07-21 | -/-    |


| Test specification clause                   | Test case                                             | Temperature conditions | Power source voltages | Mode                         | Pass                                                                                                   | Fail                                                                             | NA                                                                                          | NP                                                                               | Remark                   |
|---------------------------------------------|-------------------------------------------------------|------------------------|-----------------------|------------------------------|--------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------|--------------------------|
| §15.247(b)(4)<br>RSS 210 / A8.4(2)          | Antenna gain                                          | Nominal                | Nominal               | GFSK                         | <input checked="" type="checkbox"/>                                                                    | <input type="checkbox"/>                                                         | <input type="checkbox"/>                                                                    | <input type="checkbox"/>                                                         | complies                 |
| §15.247(e)<br>RSS 210 / A8.2(b)             | Power spectral density                                | Nominal                | Nominal               | GFSK<br>Pi/4 DQPSK<br>8 DPSK | <input type="checkbox"/>                                                                               | <input type="checkbox"/>                                                         | <input checked="" type="checkbox"/>                                                         | <input type="checkbox"/>                                                         | Not applicable for FHSS! |
| §15.247(a)(1)<br>RSS 210 / A8.1(b)          | Carrier frequency separation                          | Nominal                | Nominal               | GFSK                         | <input checked="" type="checkbox"/>                                                                    | <input type="checkbox"/>                                                         | <input type="checkbox"/>                                                                    | <input type="checkbox"/>                                                         | complies                 |
| §15.247(a)(1)<br>RSS 210 / A8.1(d)          | Number of hopping channels                            | Nominal                | Nominal               | GFSK                         | <input checked="" type="checkbox"/>                                                                    | <input type="checkbox"/>                                                         | <input type="checkbox"/>                                                                    | <input type="checkbox"/>                                                         | complies                 |
| §15.247(a)(1)<br>(iii)<br>RSS 210 / A8.3(1) | Time of occupancy (dwell time)                        | Nominal                | Nominal               | GFSK<br>Pi/4 DQPSK<br>8 DPSK | <input checked="" type="checkbox"/>                                                                    | <input type="checkbox"/>                                                         | <input type="checkbox"/>                                                                    | <input type="checkbox"/>                                                         | complies                 |
| §15.247(a)(1)<br>RSS 210 / A8.2(a)          | Spectrum bandwidth of a FHSS system<br>20dB bandwidth | Nominal                | Nominal               | GFSK<br>Pi/4 DQPSK<br>8 DPSK | <input checked="" type="checkbox"/><br><input checked="" type="checkbox"/><br><input type="checkbox"/> | <input type="checkbox"/><br><input type="checkbox"/><br><input type="checkbox"/> | <input type="checkbox"/><br><input type="checkbox"/><br><input checked="" type="checkbox"/> | <input type="checkbox"/><br><input type="checkbox"/><br><input type="checkbox"/> | complies                 |
| §15.247(b)(1)<br>RSS-210 / A8.4(2)          | Maximum output power                                  | Nominal                | Nominal               | GFSK<br>Pi/4 DQPSK<br>8 DPSK | <input checked="" type="checkbox"/><br><input checked="" type="checkbox"/><br><input type="checkbox"/> | <input type="checkbox"/><br><input type="checkbox"/><br><input type="checkbox"/> | <input type="checkbox"/><br><input type="checkbox"/><br><input checked="" type="checkbox"/> | <input type="checkbox"/><br><input type="checkbox"/><br><input type="checkbox"/> | complies                 |
| §15.247(d)<br>RSS-210 / A8.5                | Near band spurious emissions                          | Nominal                | Nominal               | GFSK<br>Pi/4 DQPSK<br>8 DPSK | <input checked="" type="checkbox"/><br><input checked="" type="checkbox"/><br><input type="checkbox"/> | <input type="checkbox"/><br><input type="checkbox"/><br><input type="checkbox"/> | <input type="checkbox"/><br><input type="checkbox"/><br><input checked="" type="checkbox"/> | <input type="checkbox"/><br><input type="checkbox"/><br><input type="checkbox"/> | complies                 |
| §15.205<br>RSS-210 / A8.5                   | Band edge compliance radiated                         | Nominal                | Nominal               | GFSK<br>Pi/4 DQPSK<br>8 DPSK | <input checked="" type="checkbox"/><br><input checked="" type="checkbox"/><br><input type="checkbox"/> | <input type="checkbox"/><br><input type="checkbox"/><br><input type="checkbox"/> | <input type="checkbox"/><br><input type="checkbox"/><br><input checked="" type="checkbox"/> | <input type="checkbox"/><br><input type="checkbox"/><br><input type="checkbox"/> | complies                 |
| §15.247(d)<br>RSS-210 / A8.5                | TX spurious emissions conducted                       | Nominal                | Nominal               | GFSK<br>Pi/4 DQPSK<br>8 DPSK | <input checked="" type="checkbox"/><br><input checked="" type="checkbox"/><br><input type="checkbox"/> | <input type="checkbox"/><br><input type="checkbox"/><br><input type="checkbox"/> | <input type="checkbox"/><br><input type="checkbox"/><br><input checked="" type="checkbox"/> | <input type="checkbox"/><br><input type="checkbox"/><br><input type="checkbox"/> | complies                 |
| §15.247(d)<br>RSS-210 / A8.5                | TX spurious emissions radiated                        | Nominal                | Nominal               | GFSK                         | <input checked="" type="checkbox"/>                                                                    | <input type="checkbox"/>                                                         | <input type="checkbox"/>                                                                    | <input type="checkbox"/>                                                         | complies                 |
| §15.109<br>RSS-Gen                          | RX spurious emissions radiated                        | Nominal                | Nominal               | -/-                          | <input checked="" type="checkbox"/>                                                                    | <input type="checkbox"/>                                                         | <input type="checkbox"/>                                                                    | <input type="checkbox"/>                                                         | complies                 |
| §15.209(a)<br>RSS-Gen                       | TX spurious emissions radiated<br>< 30 MHz            | Nominal                | Nominal               | GFSK                         | <input checked="" type="checkbox"/>                                                                    | <input type="checkbox"/>                                                         | <input type="checkbox"/>                                                                    | <input type="checkbox"/>                                                         | complies                 |
| §15.107(a)<br>§15.207                       | Conducted emissions<br>< 30 MHz                       | Nominal                | Nominal               | GFSK                         | <input checked="" type="checkbox"/>                                                                    | <input type="checkbox"/>                                                         | <input type="checkbox"/>                                                                    | <input type="checkbox"/>                                                         | complies                 |

**Note:** NA = Not Applicable; NP = Not Performed

## 8 Description of the test setup

### 8.1 Radiated measurements chamber F


The radiated measurements are performed in vertical and horizontal plane in the frequency range from 9 kHz to 1 GHz in semi-anechoic chambers. The EUT is positioned on a non-conductive support with a height of 0.80 m above a conductive ground plane that covers the whole chamber. The receiving antennas are confirmed with specifications ANSI C63. These antennas can be moved over the height range between 1.0 m and 4.0 m in order to search for maximum field strength emitted from EUT. The measurement distances between EUT and receiving antennas are indicated in the test setups for the various frequency ranges. For each measurement, the EUT is rotated in all three axes until the maximum field strength is received. The wanted and unwanted emissions are received by spectrum analysers where the detector modes and resolution bandwidths over various frequency ranges are set according to requirement ANSI C63.

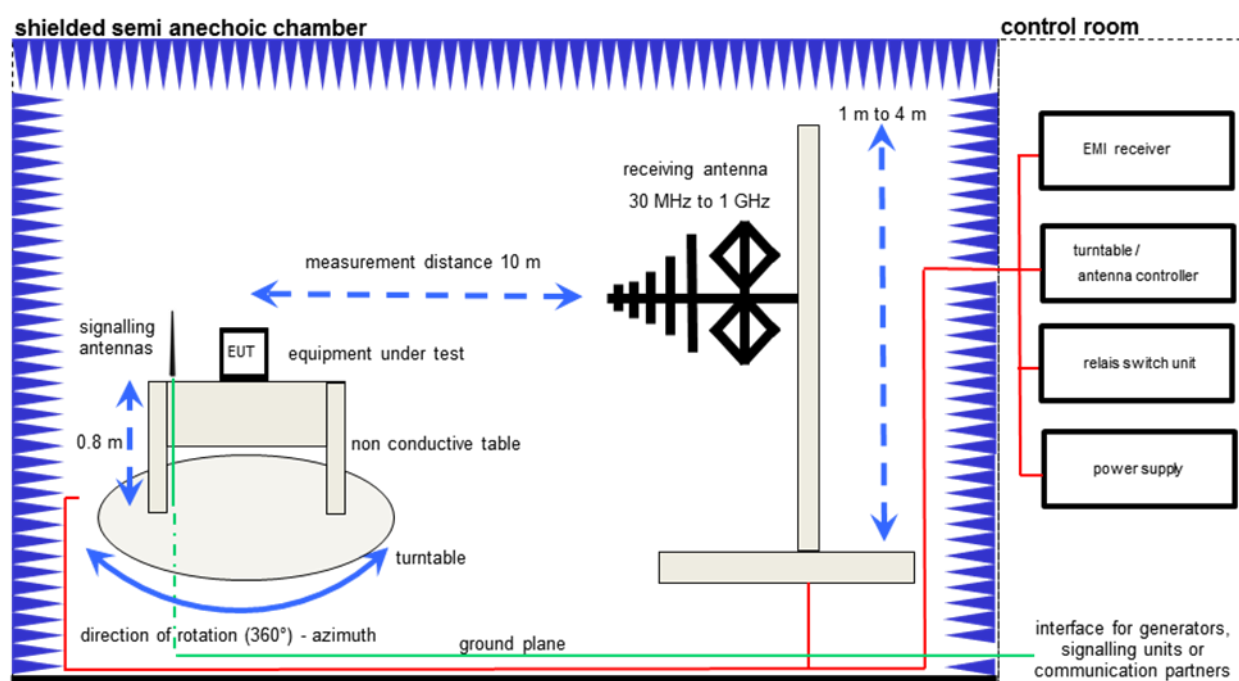

#### Equipment table:

| Equipment                                        | Type                                   | Manufacturer  | Serial No. | INV. No Cetecom |
|--------------------------------------------------|----------------------------------------|---------------|------------|-----------------|
| Software                                         | EMC32<br>V. 9.12.05                    | R&S           | -/-        | -/-             |
| Switch-Unit                                      | 3488A                                  | HP Meßtechnik | 2719A14505 | 300000368       |
| DC power supply, 60Vdc,<br>50A, 1200 W           | 6032A                                  | HP Meßtechnik | 2920A04466 | 300000580       |
| EMI Test Receiver                                | ESCI 3                                 | R&S           | 100083     | 300003312       |
| Amplifier                                        | JS42-00502650-28-5A                    | MITEQ         | 1084532    | 300003379       |
| Antenna Tower                                    | Model 2175                             | ETS-LINDGREN  | 64762      | 300003745       |
| Positioning Controller                           | Model 2090                             | ETS-LINDGREN  | 64672      | 300003746       |
| Turntable Interface-Box                          | Model 105637                           | ETS-LINDGREN  | 44583      | 300003747       |
| TRILOG Broadband Test-<br>Antenna 30 MHz - 3 GHz | VULB9163                               | Schwarzbeck   | 295        | 300003787       |
| CBT (Bluetooth Tester +<br>EDR Signalling)       | CBT 1153.9000K35, CBT-<br>B55, CBT-K55 | R&S           | 100313     | 300003516       |

## 8.2 Radiated measurements chamber C

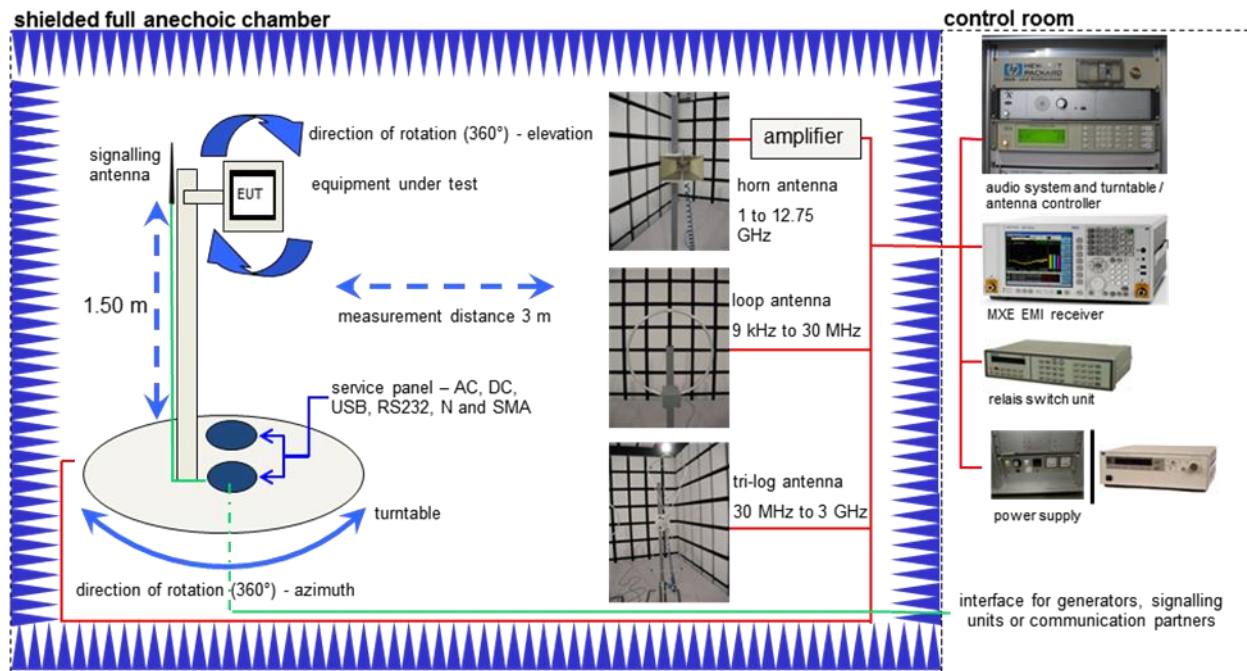

### Equipment table:

| Equipment                                      | Type                               | Manufacturer         | Serial No. | INV. No Cetecom |
|------------------------------------------------|------------------------------------|----------------------|------------|-----------------|
| MXE EMI Receiver 20 Hz bis 26,5 GHz            | N9038A                             | Agilent Technologies | MY51210197 | 300004405       |
| TRILOG Broadband Test-Antenna 30 MHz - 3 GHz   | VULB9163                           | Schwarzbeck          | 371        | 300003854       |
| Band Reject filter                             | WRCG2400/2483-2375/2505-50/10SS    | Wainwright           | 11         | 300003351       |
| Highpass Filter                                | WHKX7.0/18G-8SS                    | Wainwright           | 18         | 300003789       |
| Double-Ridged Waveguide Horn Antenna 1-18.0GHz | 3115                               | EMCO                 | 8812-3088  | 300001032       |
| Active Loop Antenna                            | 6502                               | EMCO                 | 8905-2342  | 300000256       |
| Anechoic chamber                               | FAC 3/5m                           | MWB / TDK            | 87400/02   | 300000996       |
| Switch / Control Unit                          | 3488A                              | HP Meßtechnik        | *          | 300000199       |
| Switch / Control Unit                          | 3488A                              | HP Meßtechnik        | 2719A15013 | 300001156       |
| Isolating Transformer                          | MPL IEC625 Bus Regeltrenntravo     | Erfi                 | 91350      | 300001155       |
| Three-Way Power Splitter, 50 Ohm               | 11850C                             | HP Meßtechnik        |            | 300000997       |
| Amplifier                                      | js42-00502650-28-5a                | Parzich GMBH         | 928979     | 300003143       |
| CBT (Bluetooth Tester + EDR Signalling)        | CBT 1153.9000K35, CBT-B55, CBT-K55 | R&S                  | 100313     | 300003516       |


### 8.3 Radiated measurements 12.75 GHz to 26 GHz



#### Equipment table:

| Equipment                                | Type                               | Manufacturer  | Serial No. | INV. No Cetecom |
|------------------------------------------|------------------------------------|---------------|------------|-----------------|
| Std. Gain Horn Antenna 12.4 to 18.0 GHz  | 639                                | Narda         | 8402       | 300000787       |
| Std. Gain Horn Antenna 18.0 to 26.5 GHz  | 638                                | Narda         | 8205       | 300002442       |
| Microwave System Amplifier, 0.5-26.5 GHz | 83017A                             | HP Meßtechnik | 00419      | 300002268       |
| Signal Analyzer 40 GHz                   | FSV40                              | R&S           | 101042     | 300004517       |
| CBT (Bluetooth Tester + EDR Signalling)  | CBT 1153.9000K35, CBT-B55, CBT-K55 | R&S           | 100313     | 300003516       |


## 8.4 AC conducted

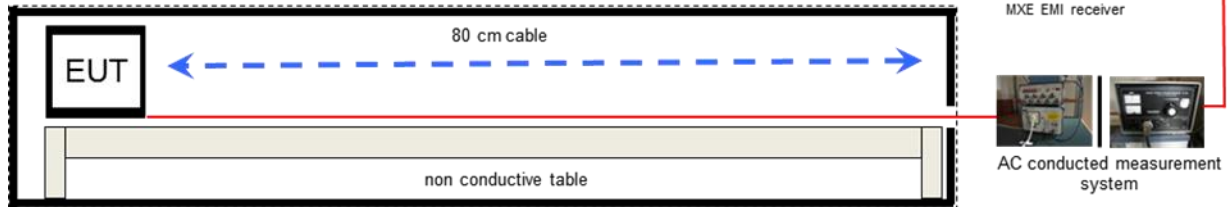

### Equipment table:

| Equipment                               | Type                               | Manufacturer         | Serial No. | INV. No Cetecom |
|-----------------------------------------|------------------------------------|----------------------|------------|-----------------|
| MXE EMI Receiver 20 Hz bis 26,5 GHz     | N9038A                             | Agilent Technologies | MY51210197 | 300004405       |
| Isolating Transformer                   | MPL IEC625 Bus Regeltrenntravo     | Erfi                 | 91350      | 300001155       |
| Switch / Control Unit                   | 3488A                              | HP Meßtechnik        | *          | 300000199       |
| Switch / Control Unit                   | 3488A                              | HP Meßtechnik        | 2719A15013 | 300001168       |
| Artificial Mains 9 kHz to 30 MHz        | ESH3-Z5                            | R&S                  | 828576/020 | 300001210       |
| CBT (Bluetooth Tester + EDR Signalling) | CBT 1153.9000K35, CBT-B55, CBT-K55 | R&S                  | 100313     | 300003516       |

## 8.5 Conducted Bluetooth test system

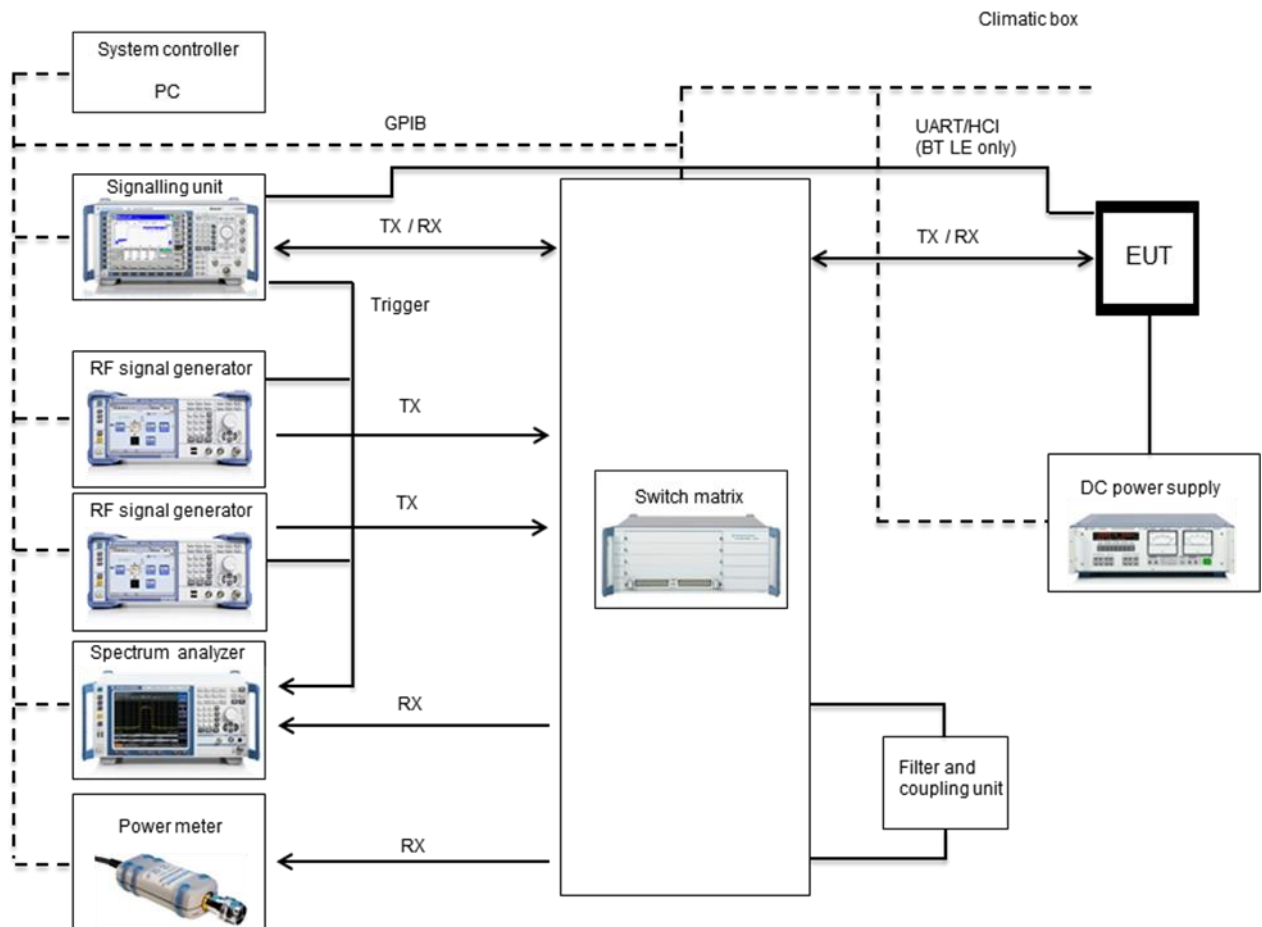

### Equipment table:

| Equipment                                              | Type             | Manufacturer    | Serial No.     | INV. No Cetecom |
|--------------------------------------------------------|------------------|-----------------|----------------|-----------------|
| Power Supply DC                                        | NGPE 40/40       | R&S             | 388            | 400000078       |
| Switch / Control Unit                                  | SSCU             | R&S             | 338864/003     | 300002681-0006  |
| Precision Step Attenuator<br>50 Ohms, 0 - 2700MHz      | RSP              | R&S             | 834500/010     | 300002681-0007  |
| Frequency Standard<br>(Rubidium Frequency<br>Standard) | MFS (Rubidium)   | R&S (Datum)     | 002            | 300002681-0009  |
| Directional Coupler                                    | 101020010        | Krytar          | 70215          | 300002840       |
| DC-Blocker                                             | 8143             | Inmet Corp.     | none           | 300002842       |
| Powersplitter                                          | 6005-3           | Inmet Corp.     |                | 300002841       |
| Temperature Test Chamber                               | VT 4002          | Heraeus Voetsch | 58566046820010 | 300003019       |
| CBT (Bluetooth Tester +<br>EDR Signalling)             | CBT 1153.9000K35 | R&S             | 100185         | 300003416       |
| Spectrum Analyzer 9kHz to<br>30GHz -140..+30dBm        | FSP30            | R&S             | 100886         | 300003575       |

## 8.6 Additional comments

The Bluetooth<sup>®</sup> word mark and logos are owned by the Bluetooth SIG Inc. and any use of such marks by Cetecom ICT Services GmbH is under license.

Reference documents: None

Special test descriptions: None

Configuration descriptions: TX tests: were performed with x-DH5 packets and static PRBS pattern payload.  
RX/Standby tests: BT test mode enabled, scan enabled, TX Idle

Test mode:

- ☒ Bluetooth Test mode loop back enabled  
(EUT is controlled over CBT/CMU)
- ☐ Special software is used.  
EUT is transmitting pseudo random data by itself

## 9 Measurement results

### 9.1 Antenna gain

#### Measurement:

The antenna gain of the complete system is calculated by the difference of radiated power in EIRP and the conducted power of the module. For normal Bluetooth<sup>®</sup> devices, the GFSK modulation is used.

#### Measurement parameters:

| Measurement parameter |          |
|-----------------------|----------|
| Detector:             | Peak     |
| Sweep time:           | Auto     |
| Video bandwidth:      | 3 MHz    |
| Resolution bandwidth: | 3 MHz    |
| Span:                 | 5 MHz    |
| Trace-Mode:           | Max hold |

#### Limits:

| FCC          | IC |
|--------------|----|
| Antenna Gain |    |
| 6 dBi        |    |

**Results:**

Note: For the purpose of additional information the average antenna gain was calculated based on the EIRP of three similar devices.

|                                                                       | <i>lowest channel<br/>2402 MHz</i> | <i>mid channel<br/>2441 MHz</i> | <i>highest channel<br/>2480 MHz</i> |
|-----------------------------------------------------------------------|------------------------------------|---------------------------------|-------------------------------------|
| <i>Conducted peak power [dBm]<br/>GFSK (measured)*</i>                | 2.9                                | 3.1                             | 3.1                                 |
| <i>Radiated peak power [dBm]<br/>GFSK EIRP (measured)<sup>1</sup></i> | 5.2                                | 4.5                             | 3.5                                 |
| <i>Radiated peak power [dBm]<br/>GFSK EIRP (measured)<sup>2</sup></i> | 3.3                                | 5.0                             | 4.9                                 |
| <i>Radiated peak power [dBm]<br/>GFSK EIRP (measured)<sup>3</sup></i> | 6.3                                | 5.4                             | 5.4                                 |
| <i>Max. Gain [dBi]<br/>calculated</i>                                 | 3.4                                | 2.3                             | 2.3                                 |
| <i>Average. Gain [dBi]<br/>calculated</i>                             | 2.0                                | 2.0                             | 1.5                                 |

<sup>1</sup>Test sample 1 (SN:01901263)

<sup>2</sup>Test sample 2 (SN:01901266)

<sup>3</sup>Test sample 3 (SN:01901289)

**Result: Passed**

## 9.2 Power spectral density

### Description:

Measurement of the power spectral density of a digital modulated system. This requirement is only valid for digitally modulated systems without hopping functionality.

### Measurement:

| Measurement parameter |          |
|-----------------------|----------|
| Detector:             | Peak     |
| Sweep time:           | 500 s    |
| Video bandwidth:      | 3 kHz    |
| Resolution bandwidth: | 3 kHz    |
| Span:                 | 150 kHz  |
| Trace-Mode:           | Max Hold |

### Limits:

| FCC                                                                                                                                                                                                                                                                                            | IC |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----|
| Power Spectral Density                                                                                                                                                                                                                                                                         |    |
| For digitally modulated systems the transmitter power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission or over 1.0 second if the transmission exceeds 1.0-second duration. |    |

### Results:

| Modulation              | Power spectral density [dBm/3kHz] |          |          |
|-------------------------|-----------------------------------|----------|----------|
| Frequency               | 2412 MHz                          | 2437 MHz | 2462 MHz |
| GFSK                    | Not required for hopping systems! |          |          |
| Pi/4 DQPSK              |                                   |          |          |
| 8DPSK                   |                                   |          |          |
| Measurement uncertainty | ± 1.5 dB                          |          |          |

### 9.3 Carrier frequency separation

#### Description:

Measurement of the carrier frequency separation of a hopping system. The carrier frequency separation is constant for all modulation-modes. We use GFSK-modulation to show compliance. EUT in hopping mode.

#### Measurement:

| Measurement parameter |          |
|-----------------------|----------|
| Detector:             | Peak     |
| Sweep time:           | Auto     |
| Video bandwidth:      | 100 kHz  |
| Resolution bandwidth: | 100 kHz  |
| Span:                 | 4 MHz    |
| Trace-Mode:           | Max Hold |

#### Limits:

| FCC                                                                                             | IC |
|-------------------------------------------------------------------------------------------------|----|
| Carrier Frequency Separation                                                                    |    |
| Minimum 25 kHz or two-thirds of the 20 dB bandwidth of the hopping system whichever is greater. |    |


#### Result:

|                              |         |
|------------------------------|---------|
| Carrier frequency separation | ~ 1 MHz |
|------------------------------|---------|

Result: **Passed**

**Plot:**

**Plot 1:** Carrier frequency separation (GFSK modulation)

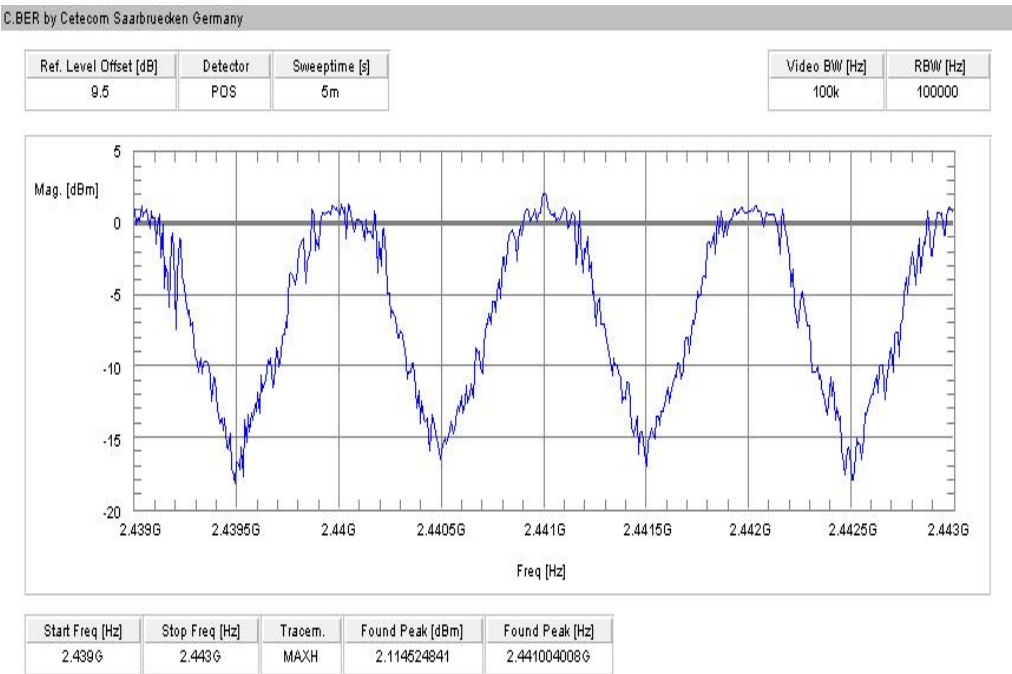

## 9.4 Number of hopping channels

### Description:

Measurement of the total number of used hopping channels. The number of hopping channels is constant for all modulation-modes. We use GFSK-modulation to show compliance. EUT in hopping mode.

### Measurement:

| Measurement parameter |                                                    |
|-----------------------|----------------------------------------------------|
| Detector:             | Peak                                               |
| Sweep time:           | Auto                                               |
| Video bandwidth:      | 500 kHz                                            |
| Resolution bandwidth: | 500 kHz                                            |
| Span:                 | Plot 1: 2400 – 2445 MHz<br>Plot 2: 2445 – 2485 MHz |
| Trace-Mode:           | Max Hold                                           |

### Limits:

| FCC                                          | IC |
|----------------------------------------------|----|
| Number of hopping channels                   |    |
| At least 15 non overlapping hopping channels |    |


### Result:

|                            |    |
|----------------------------|----|
| Number of hopping channels | 79 |
|----------------------------|----|


Result: **Passed**

**Plots:**

**Plot 1:** Number of hopping channels (GFSK modulation)

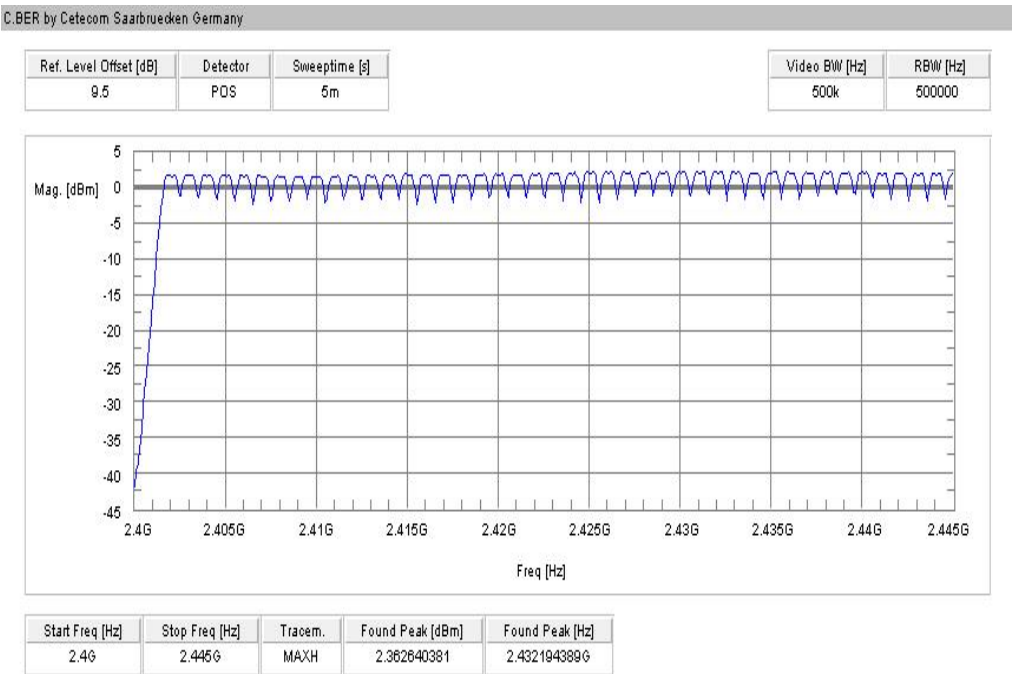

**Plot 2:** Number of hopping channels (GFSK modulation)

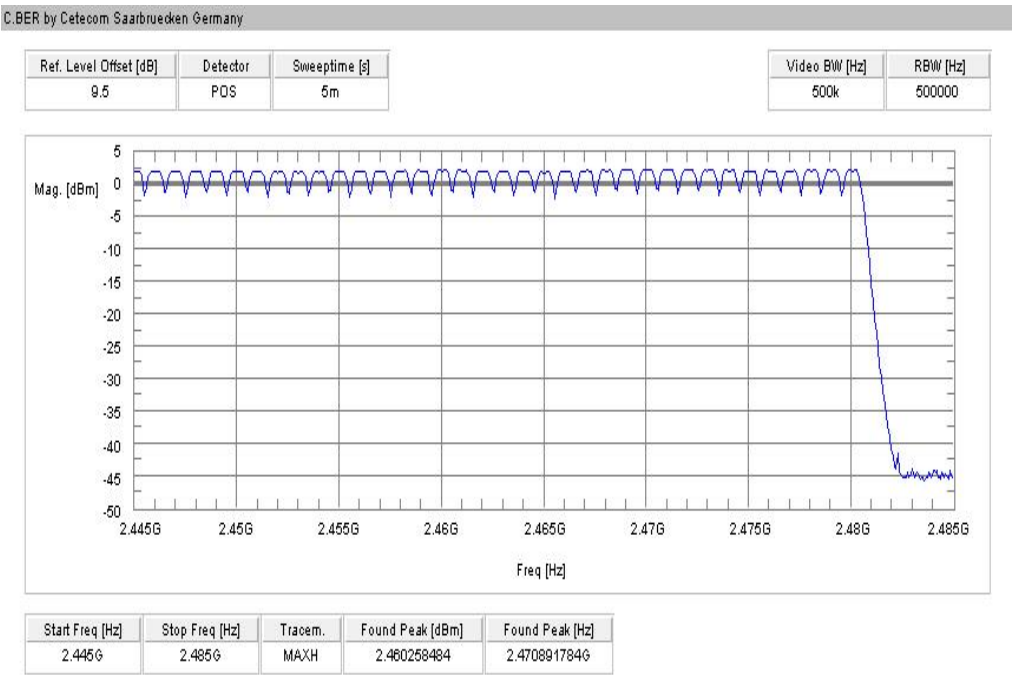

## 9.5 Time of occupancy (dwell time)

### Measurement:

For Bluetooth® devices no measurements mandatory depending on the fixed requirements according to the Bluetooth® Core Specifications!

### For Bluetooth® devices:

The channel staying time of 0.4 s within a 31.6 second period in data mode is constant for Bluetooth® devices and independent from the packet type (packet length). The calculation for a 31.6 second period is as follows:

Channel staying time = time slot length \* hop rate / number of hopping channels \* 31.6 s

Example for a DH1 packet (with a maximum length of one time slot)

Channel staying time =  $625 \mu\text{s} * 1600 * 1/\text{s} / 79 * 31.6 \text{ s} = 0.4 \text{ s}$  (in a 31.6 s period)

For multi-slot packets the hopping is reduced according to the length of the packet.

Example for a DH3 packet (with a maximum length of three time slots)

Channel staying time =  $3 * 625 \mu\text{s} * 1600/3 * 1/\text{s} / 79 * 31.6 \text{ s} = 0.4 \text{ s}$  (in a 31.6 s period)

Example for a DH5 packet (with a maximum length of five time slots)

Channel staying time =  $5 * 625 \mu\text{s} * 1600/5 * 1/\text{s} / 79 * 31.6 \text{ s} = 0.4 \text{ s}$  (in a 31.6 s period)

This is according to the Bluetooth® Core Specification V2.1 & V3.0 & V4.0 & V4.1 for all Bluetooth® devices and all modulations.

### The following table shows the relations:

| Packet Size | Pulse Width [ms] * | Max. number of transmissions per channel in 31.6 sec |
|-------------|--------------------|------------------------------------------------------|
| DH1         | 0.366              | 640                                                  |
| DH3         | 1.622              | 214                                                  |
| DH5         | 2.870              | 128                                                  |

\* according Bluetooth® specification

### Results:

| Packet Size | Pulse Width [ms]* | Max. number of transmissions in 31.6 sec | Dwell time [Pulse width * Number of transmissions] |
|-------------|-------------------|------------------------------------------|----------------------------------------------------|
| DH1         | 0.366             | 640                                      | 234.2 ms                                           |
| DH3         | 1.622             | 214                                      | 347.1 ms                                           |
| DH5         | 2.870             | 128                                      | 367.4 ms                                           |

### Limits:

| FCC                                                                                                                                                                                                           | IC |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----|
| Time of occupancy (dwell time)                                                                                                                                                                                |    |
| The frequency hopping operation shall have an average time of occupancy on any frequency not exceeding 0.4 seconds within a duration in seconds equal to the number of hopping frequencies multiplied by 0.4. |    |

**Result:** Passed

## 9.6 Spectrum bandwidth of a FHSS system – 99 % bandwidth

### Description:

Measurement of the 20dB bandwidth of the modulated signal. The measurement is performed according to the “Measurement Guidelines” (DA 00-705, March 30, 2000). EUT in single channel mode.

### Measurement:

| Measurement parameter |          |
|-----------------------|----------|
| Detector:             | Peak     |
| Sweep time:           | Auto     |
| Video bandwidth:      | 30 kHz   |
| Resolution bandwidth: | 10 kHz   |
| Span:                 | 6 MHz    |
| Trace-Mode:           | Max Hold |

### Limits:

| FCC                                                          | IC |
|--------------------------------------------------------------|----|
| Spectrum bandwidth of a FHSS system – 99% bandwidth          |    |
| GFSK < 1500 kHz<br>Pi/4 DQPSK < 1500 kHz<br>8DPSK < 1500 kHz |    |


### Results:

| Modulation<br>Frequency | 99 % bandwidth [kHz] |          |          |
|-------------------------|----------------------|----------|----------|
|                         | 2402 MHz             | 2441 MHz | 2480 MHz |
| GFSK                    | 938                  | 920      | 938      |
| Pi/4 DQPSK              | 1244                 | 1263     | 1263     |
| Measurement uncertainty | ± 10 kHz             |          |          |


Result: **Passed**

**Plots:**


**Plot 1:** lowest channel – 2402 MHz, GFSK modulation

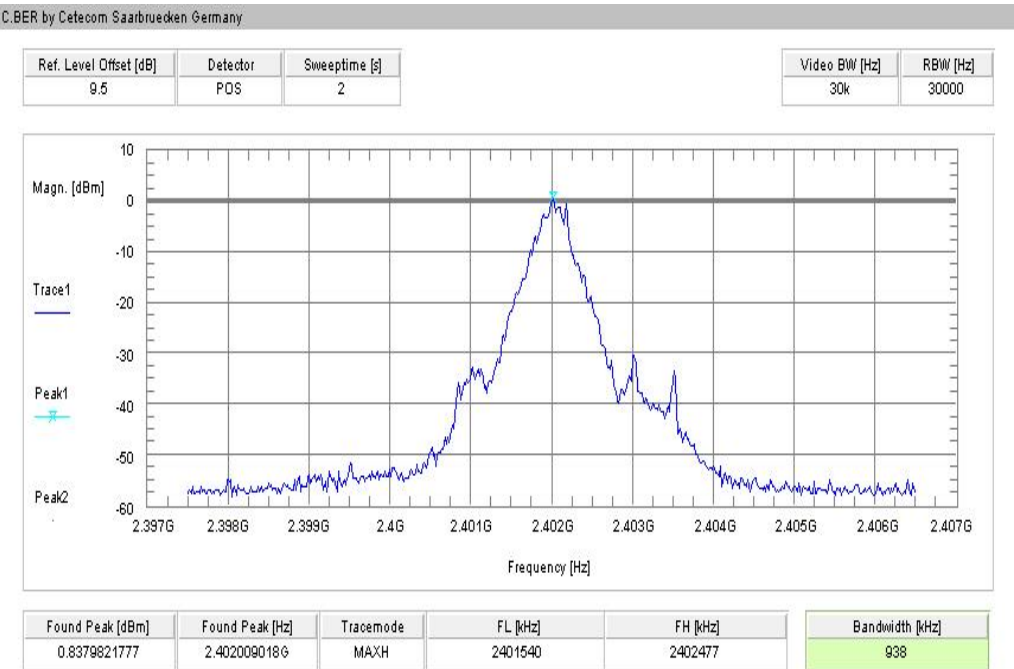


**Plot 2:** middle channel – 2441 MHz, GFSK modulation

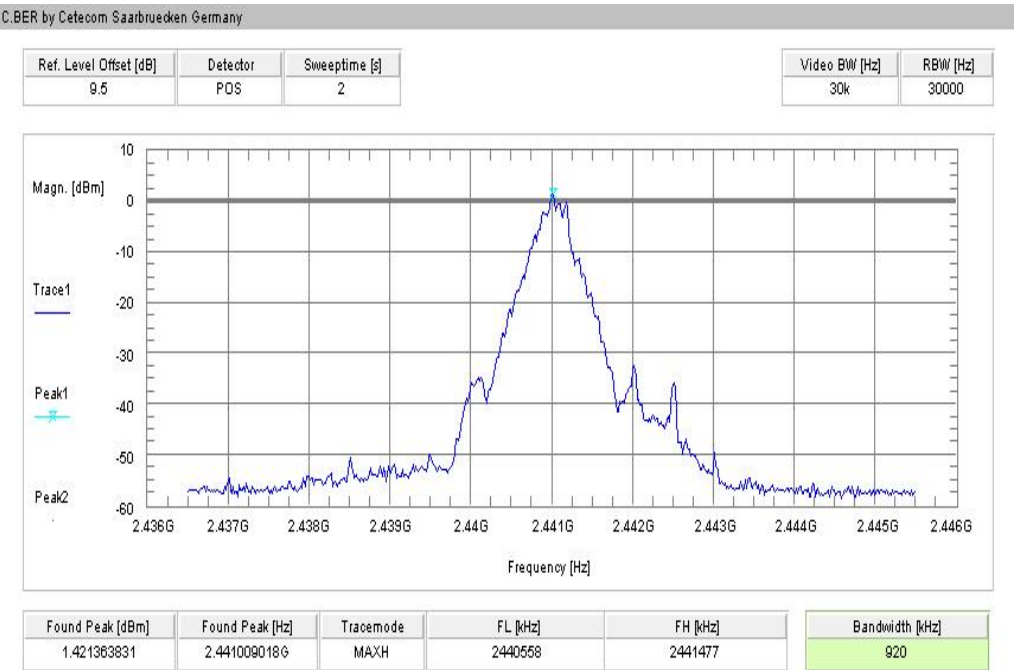


**Plot 3:** highest channel – 2480 MHz, GFSK modulation

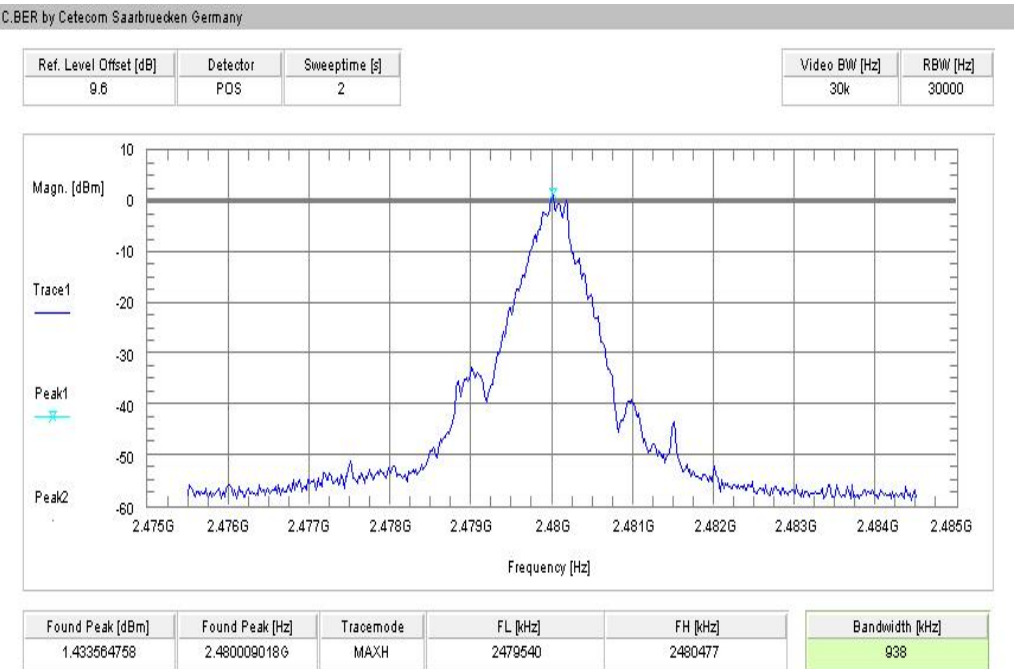


**Plot 4:** lowest channel – 2402 MHz, Pi / DQPSK modulation

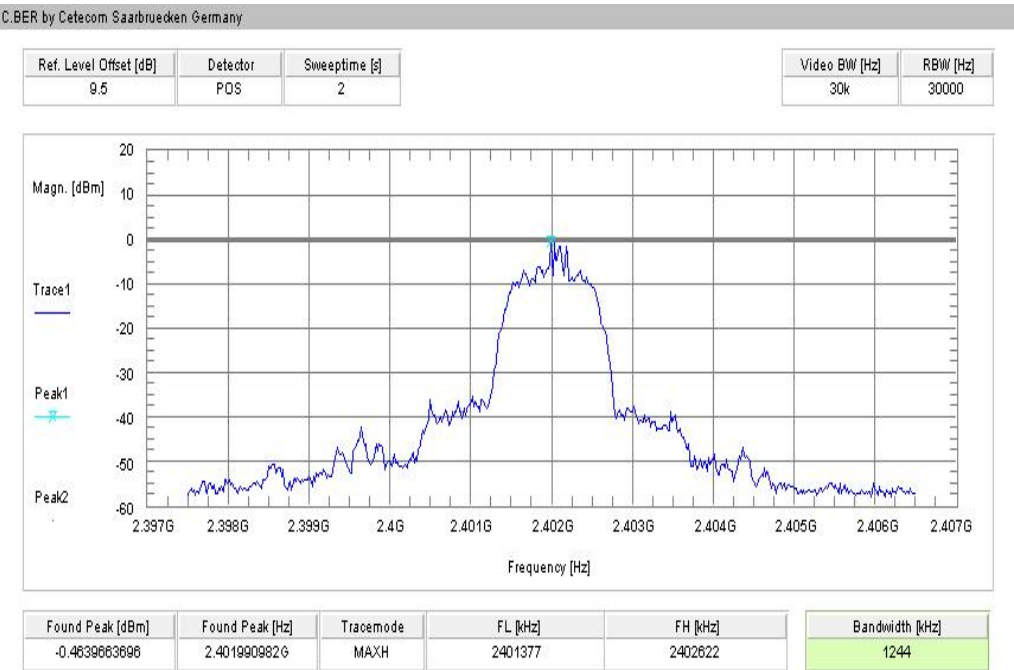

**Plot 5:** middle channel – 2441 MHz, Pi / DQPSK modulation

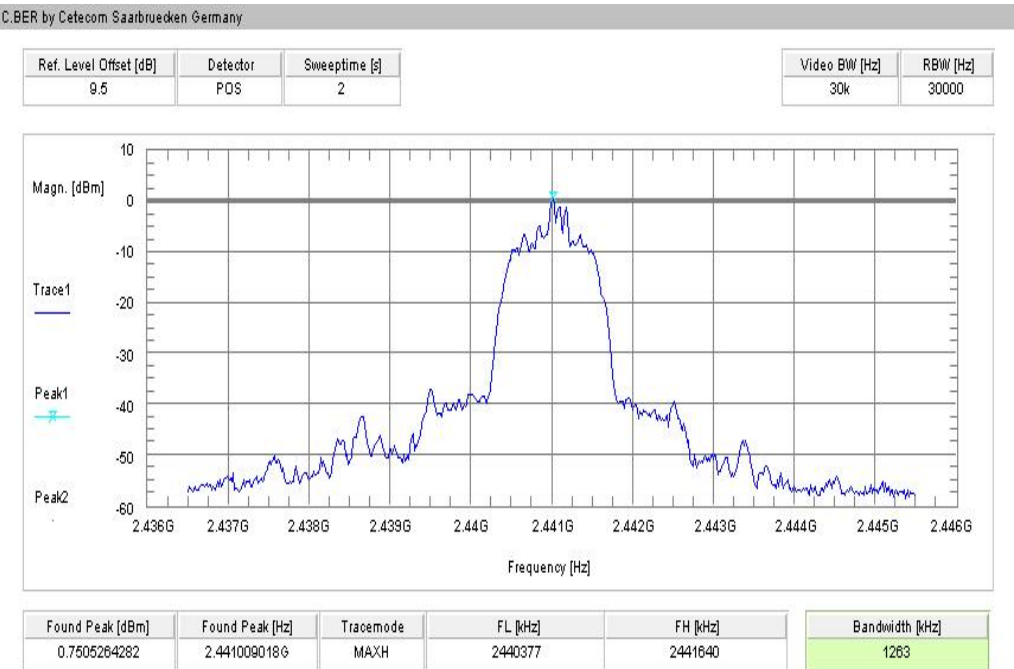

**Plot 6:** highest channel – 2480 MHz, Pi / DQPSK modulation

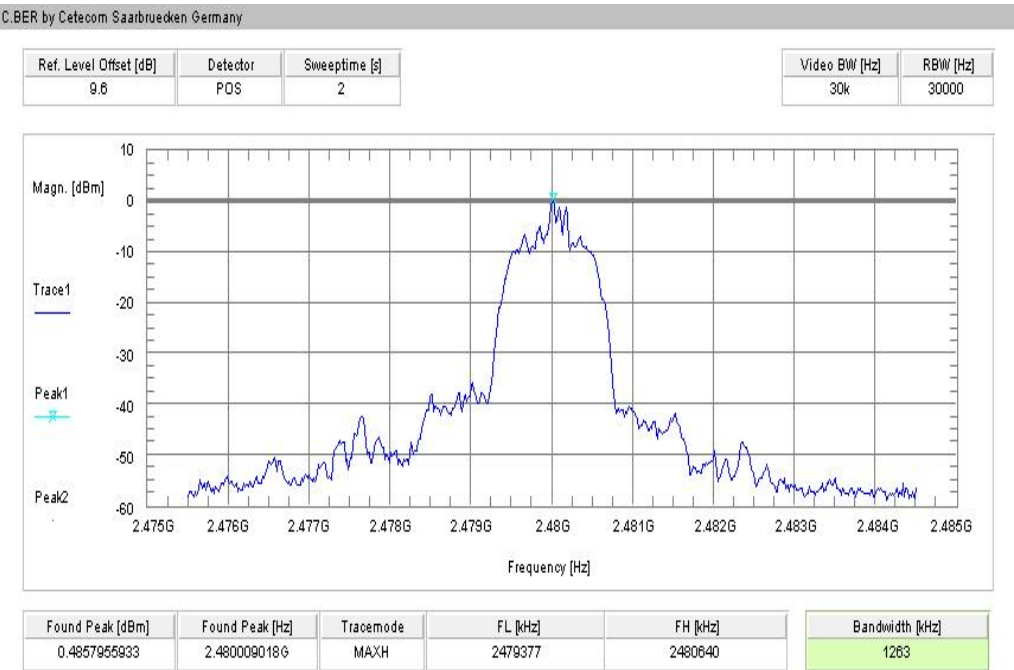

## 9.7 Maximum output power

### Description:

Measurement of the maximum output power conducted and radiated. EUT in single channel mode.

### Measurement:

| Measurement parameter |          |
|-----------------------|----------|
| Detector:             | Peak     |
| Sweep time:           | Auto     |
| Video bandwidth:      | 3 MHz    |
| Resolution bandwidth: | 3 MHz    |
| Span:                 | 5 MHz    |
| Trace-Mode:           | Max Hold |

### Limits:

| FCC                                                                                                                                          | IC |
|----------------------------------------------------------------------------------------------------------------------------------------------|----|
| Maximum output power                                                                                                                         |    |
| [Conducted: 0.125 W – antenna gain max. 6 dBi]<br>Systems using more than 75 hopping channels:<br>Conducted: 1.0 W – antenna gain max. 6 dBi |    |

**Results:**

| Modulation<br>Frequency | Maximum output power conducted [dBm] |          |          |
|-------------------------|--------------------------------------|----------|----------|
|                         | 2402 MHz                             | 2441 MHz | 2480 MHz |
| GFSK                    | 2.9                                  | 3.1      | 3.1      |
| Pi/4 DQPSK              | 2.1                                  | 2.4      | 2.2      |
| Measurement uncertainty | $\pm 1$ dB                           |          |          |

**Result:** Passed**Results:**

| Modulation<br>Frequency | Maximum output power radiated - EIRP [dBm] |          |          |
|-------------------------|--------------------------------------------|----------|----------|
|                         | 2402 MHz                                   | 2441 MHz | 2480 MHz |
| GFSK *)                 | 4.9                                        | 5.1      | 4.6      |
| Pi/4 DQPSK *)           | 4.1                                        | 4.4      | 3.7      |
| Measurement uncertainty | $\pm 3$ dB                                 |          |          |

\*) - Values calculated with antenna gain

**Result:** Passed

## 9.8 Near band spurious emissions conducted

### Description:

EUT is measured at the lower and upper band edge in single channel and hopping mode. The measurement is repeated for all modulations.

### Measurement:

| Measurement parameter |                                                                       |
|-----------------------|-----------------------------------------------------------------------|
| Detector:             | Peak                                                                  |
| Sweep time:           | Auto                                                                  |
| Video bandwidth:      | 100 kHz                                                               |
| Resolution bandwidth: | 100 kHz                                                               |
| Span:                 | Lower Band Edge: 2395 – 2405 MHz<br>higher Band Edge: 2478 – 2489 MHz |
| Trace-Mode:           | Max Hold                                                              |

### Limits:

| FCC                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | IC |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----|
| Near band spurious emissions conducted                                                                                                                                                                                                                                                                                                                                                                                                                                                              |    |
| In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. |    |


### Results:

| Scenario<br>Modulation        | Near band spurious emissions conducted [dB] |            |       |
|-------------------------------|---------------------------------------------|------------|-------|
|                               | GFSK                                        | Pi/4 DQPSK | 8DPSK |
| Lower band edge – hopping off | > 20 dB                                     | > 20 dB    | -/-   |
| Lower band edge – hopping on  | > 20 dB                                     | > 20 dB    | -/-   |
| Upper band edge – hopping off | > 20 dB                                     | > 20 dB    | -/-   |
| Upper band edge – hopping on  | > 20 dB                                     | > 20 dB    | -/-   |
| Measurement uncertainty       | ± 1.5 dB                                    |            |       |


**Result:** Passed

**Plots:**


**Plot 1:** Lower band edge – hopping on, GFSK modulation

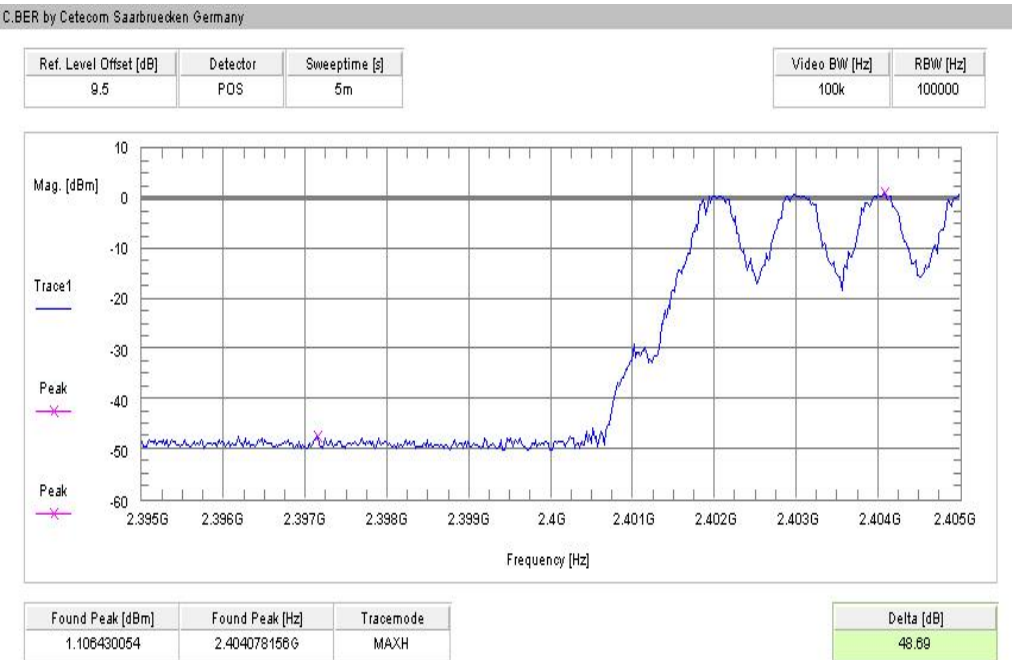


**Plot 2:** Upper band edge – hopping on, GFSK modulation

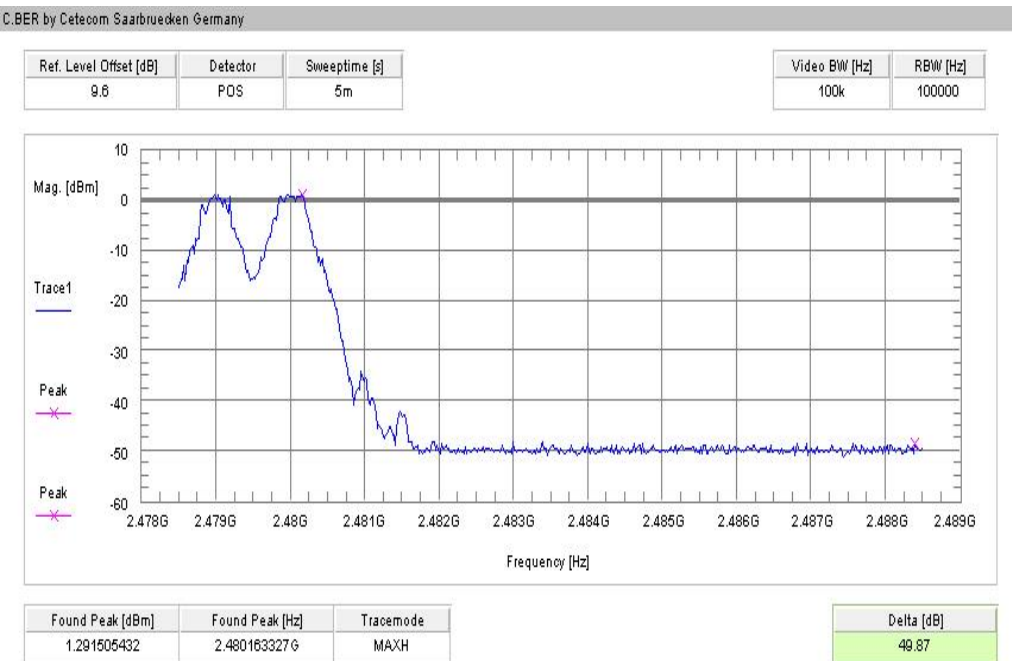


**Plot 3: Lower band edge – hopping off, GFSK modulation**

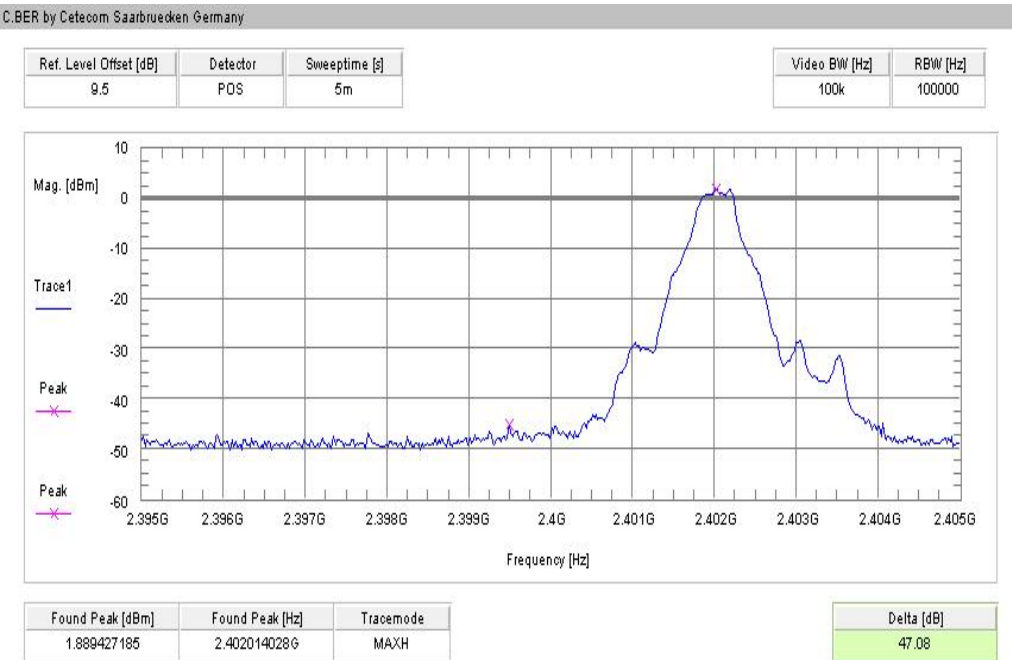


**Plot 4: Upper band edge – hopping off, GFSK modulation**

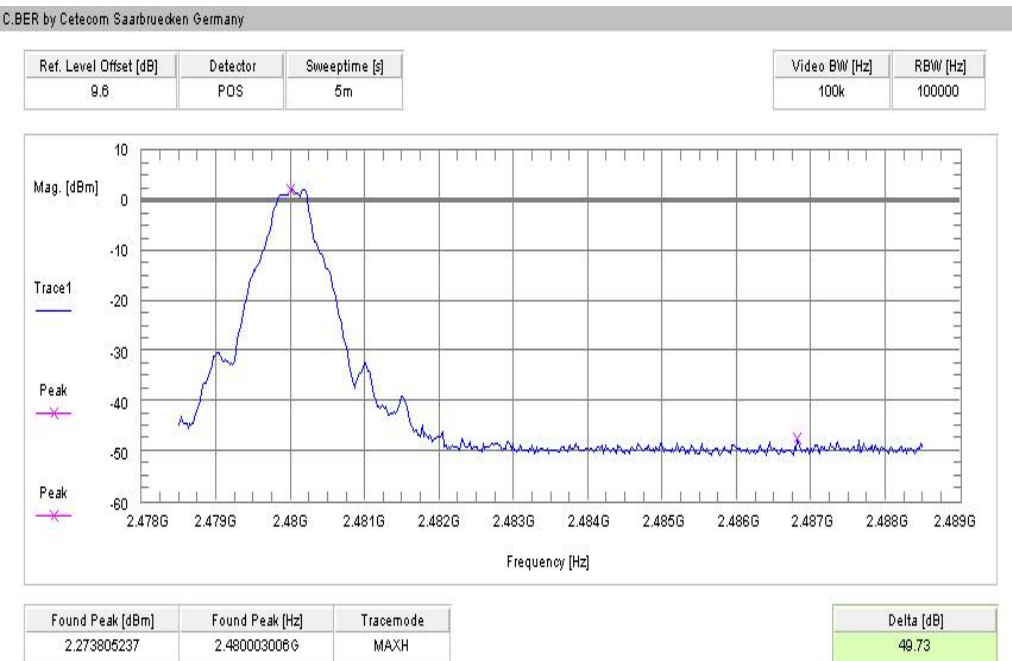


**Plot 5: Lower band edge – hopping on, Pi/4 DQPSK modulation**

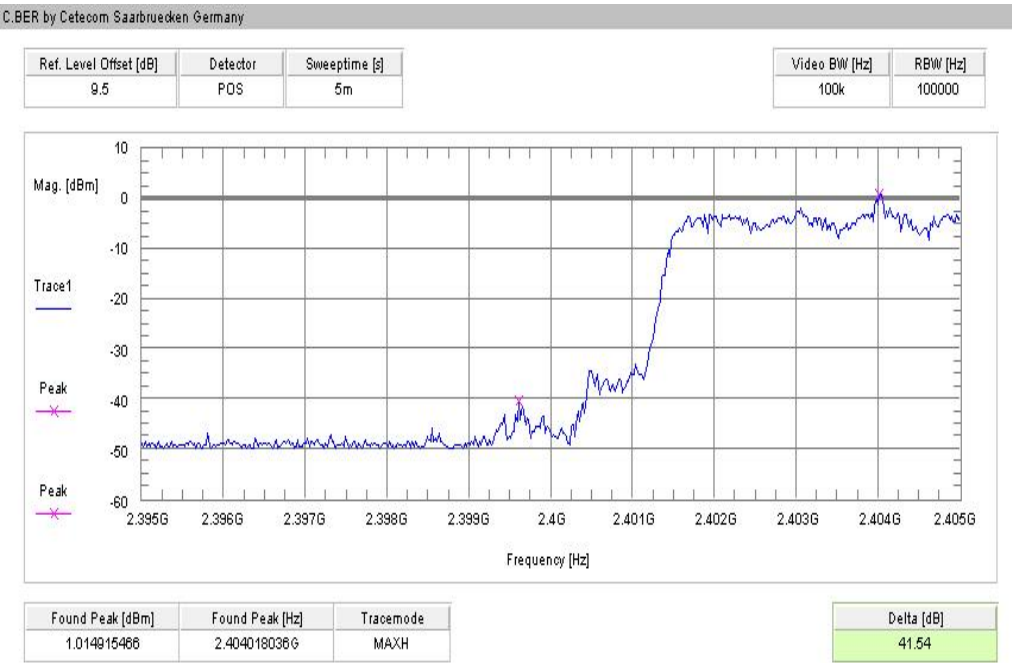


**Plot 6: Upper band edge – hopping on, Pi/4 DQPSK modulation**

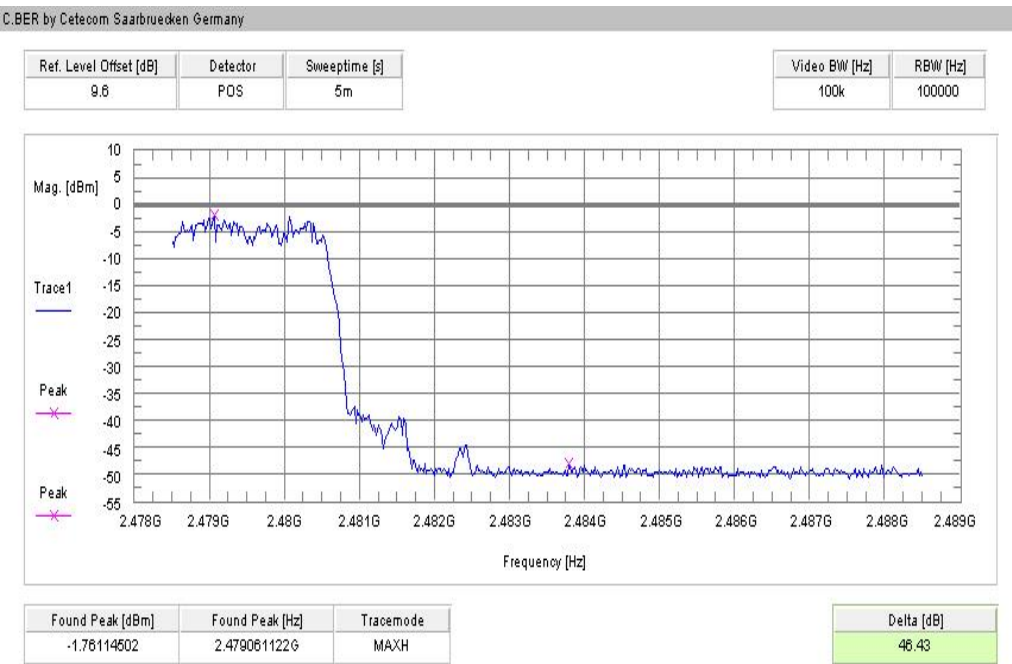

**Plot 7: Lower band edge – hopping off, Pi/4 DQPSK modulation**

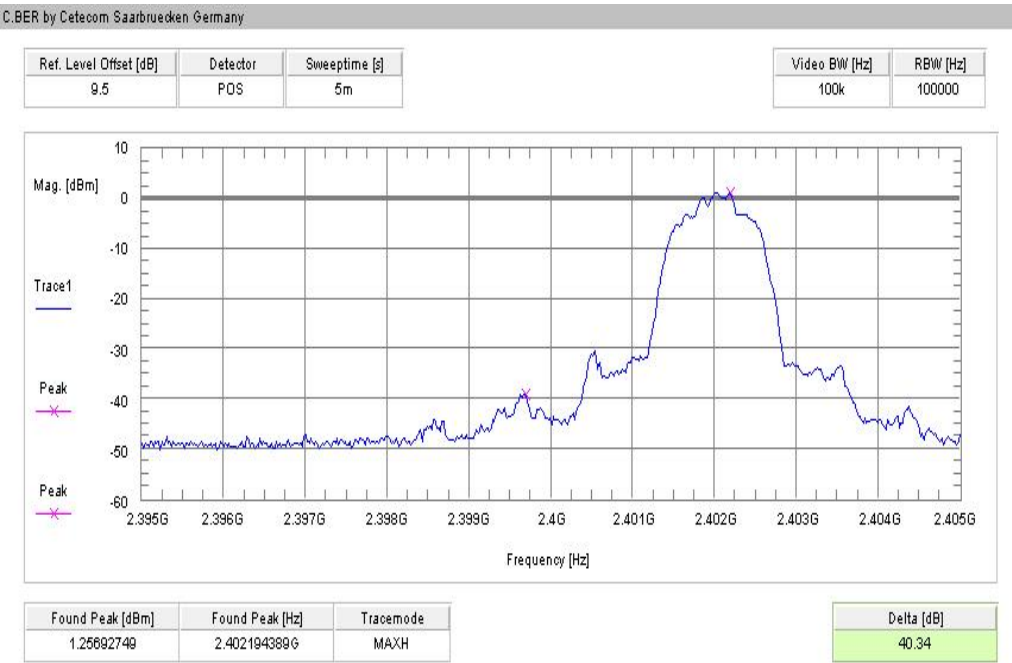

**Plot 8: Upper band edge – hopping off, Pi/4 DQPSK modulation**

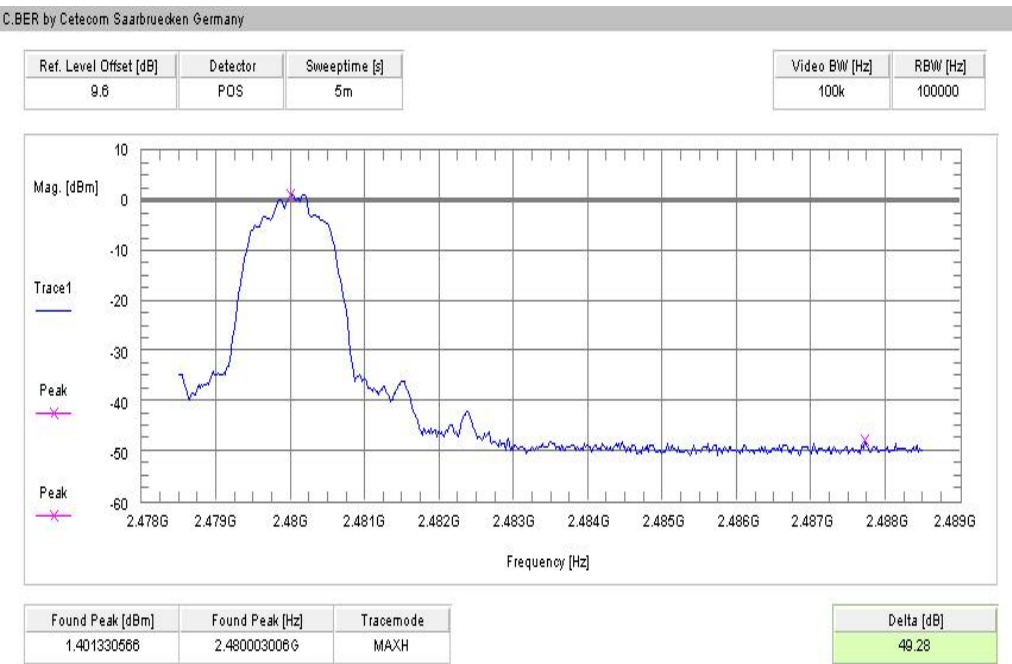

## 9.9 Band edge compliance radiated

### Description:

Measurement of the radiated band edge compliance. The EUT is turned in the position that results in the maximum level at the band edge. Then a sweep over the corresponding restricted band is performed. The EUT is set to single channel mode and the transmit channel is channel 00 for the lower restricted band and channel 78 for the upper restricted band. The measurement is repeated for all modulations. Measurement distance is 3m.

### Measurement:

| Measurement parameter |                                                             |
|-----------------------|-------------------------------------------------------------|
| Detector:             | Peak                                                        |
| Sweep time:           | Auto                                                        |
| Video bandwidth:      | 1 MHz Peak / 10 Hz AVG                                      |
| Resolution bandwidth: | 1 MHz                                                       |
| Span:                 | Lower Band: 2370 – 2400 MHz<br>higher Band: 2480 – 2500 MHz |
| Trace-Mode:           | Max Hold                                                    |



### Limits:

| FCC                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | IC |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----|
| Band edge compliance radiated                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |    |
| In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 5.205(c)). |    |
| 54 dBμV/m AVG<br>74 dBμV/m Peak                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |    |


### Results:

| Scenario<br>Modulation  | Band edge compliance radiated [dBμV/m] |                    |       |
|-------------------------|----------------------------------------|--------------------|-------|
|                         | GFSK                                   | Pi/4 DQPSK         | 8DPSK |
| Lower restricted band   | < 54 AVG / < 74 PP                     | < 54 AVG / < 74 PP | -/-   |
| Upper restricted band   | < 54 AVG / < 74 PP                     | < 54 AVG / < 74 PP | -/-   |
| Measurement uncertainty | ± 3 dB                                 |                    |       |


**Result:** Passed

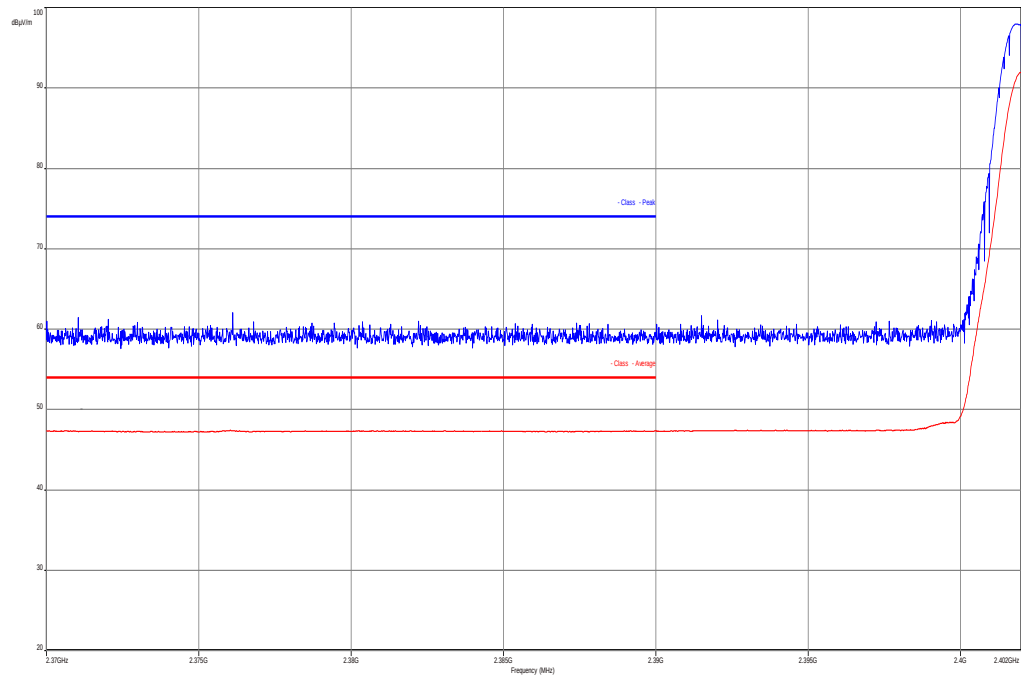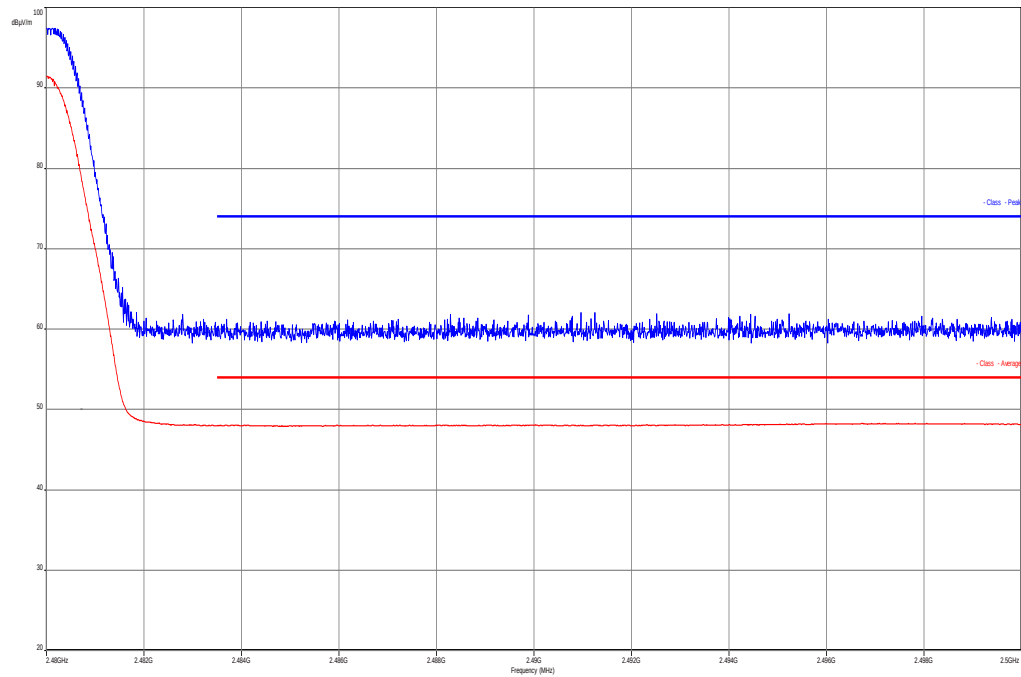**Plots:****Plot 1:** Lower band edge, GFSK modulation, vertical & horizontal polarization**Plot 2:** Upper band edge, GFSK modulation, vertical & horizontal polarization

**Plot 3:** Lower band edge, Pi/4 DQPSK modulation, vertical & horizontal polarization

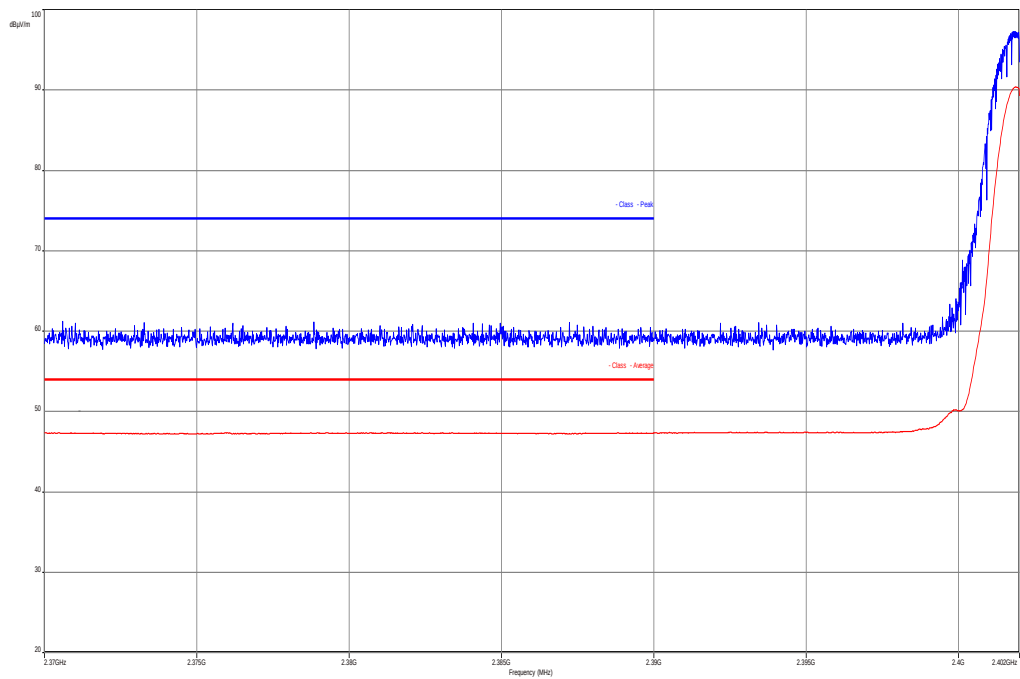

**Plot 4:** Upper band edge, Pi/4 DQPSK modulation, vertical & horizontal polarization

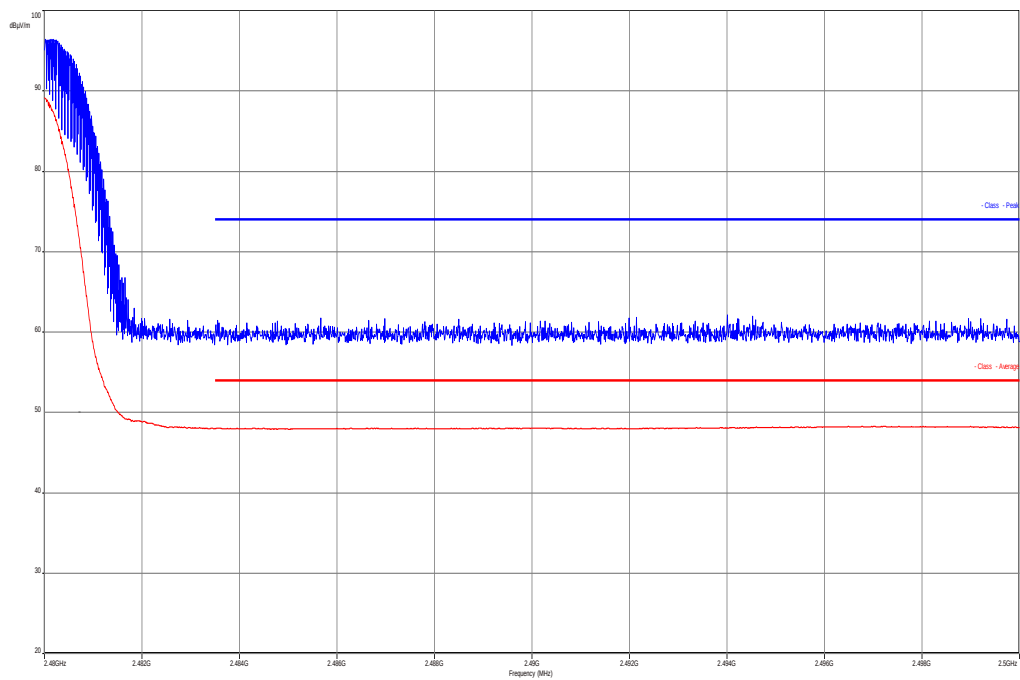

## 9.10 TX spurious emissions conducted

### Description:

Measurement of the conducted spurious emissions in transmit mode. The EUT is set to single channel mode and the transmit channel is channel 00, channel 39 and channel 78. The measurement is repeated for all modulations.

### Measurement:

| Measurement parameter |                 |         |
|-----------------------|-----------------|---------|
| Detector:             | Peak            |         |
| Sweep time:           | Auto            |         |
| Video bandwidth:      | F < 1 GHz:      | 500 kHz |
|                       | F > 1 GHz:      | 500 kHz |
| Resolution bandwidth: | F < 1 GHz:      | 100 kHz |
|                       | F > 1 GHz:      | 100 kHz |
| Span:                 | 9 kHz to 25 GHz |         |
| Trace-Mode:           | Max Hold        |         |

### Limits:

| FCC                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | IC |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----|
| TX spurious emissions conducted                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |    |
| In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required |    |

**Results:**

| TX spurious emissions conducted |  |                             |                                   |                                                      |                     |
|---------------------------------|--|-----------------------------|-----------------------------------|------------------------------------------------------|---------------------|
| GFSK - mode                     |  |                             |                                   |                                                      |                     |
| f [MHz]                         |  | amplitude of emission [dBm] | limit max. allowed emission power | actual attenuation below frequency of operation [dB] | results             |
| 2402                            |  | See plot                    | 30 dBm                            |                                                      | Operating frequency |
| No traceable peaks detected     |  |                             | -20 dBc                           |                                                      | complies            |
|                                 |  |                             |                                   |                                                      |                     |
|                                 |  |                             |                                   |                                                      |                     |
| 2441                            |  | See plot                    | 30 dBm                            |                                                      | Operating frequency |
| No traceable peaks detected     |  |                             | -20 dBc                           |                                                      | complies            |
|                                 |  |                             |                                   |                                                      |                     |
|                                 |  |                             |                                   |                                                      |                     |
| 2480                            |  | See plot                    | 30 dBm                            |                                                      | Operating frequency |
| No traceable peaks detected     |  |                             | -20 dBc                           |                                                      | complies            |
|                                 |  |                             |                                   |                                                      |                     |
|                                 |  |                             |                                   |                                                      |                     |
| Measurement uncertainty         |  | ± 3 dB                      |                                   |                                                      |                     |


**Result:** Passed**Results:**

| TX spurious emissions conducted |  |                             |                                   |                                                      |                     |
|---------------------------------|--|-----------------------------|-----------------------------------|------------------------------------------------------|---------------------|
| Pi/4-DQPSK - mode               |  |                             |                                   |                                                      |                     |
| f [MHz]                         |  | amplitude of emission [dBm] | limit max. allowed emission power | actual attenuation below frequency of operation [dB] | results             |
| 2402                            |  | See plot                    | 30 dBm                            |                                                      | Operating frequency |
| No traceable peaks detected     |  |                             | -20 dBc                           |                                                      | complies            |
|                                 |  |                             |                                   |                                                      |                     |
|                                 |  |                             |                                   |                                                      |                     |
| 2441                            |  | See plot                    | 30 dBm                            |                                                      | Operating frequency |
| No traceable peaks detected     |  |                             | -20 dBc                           |                                                      | complies            |
|                                 |  |                             |                                   |                                                      |                     |
|                                 |  |                             |                                   |                                                      |                     |
| 2480                            |  | See plot                    | 30 dBm                            |                                                      | Operating frequency |
| No traceable peaks detected     |  |                             | -20 dBc                           |                                                      | complies            |
|                                 |  |                             |                                   |                                                      |                     |
|                                 |  |                             |                                   |                                                      |                     |
| Measurement uncertainty         |  | ± 3dB                       |                                   |                                                      |                     |


**Result:** Passed

**Plots:**


**Plot 1:** lowest channel – 2402 MHz, GFSK modulation

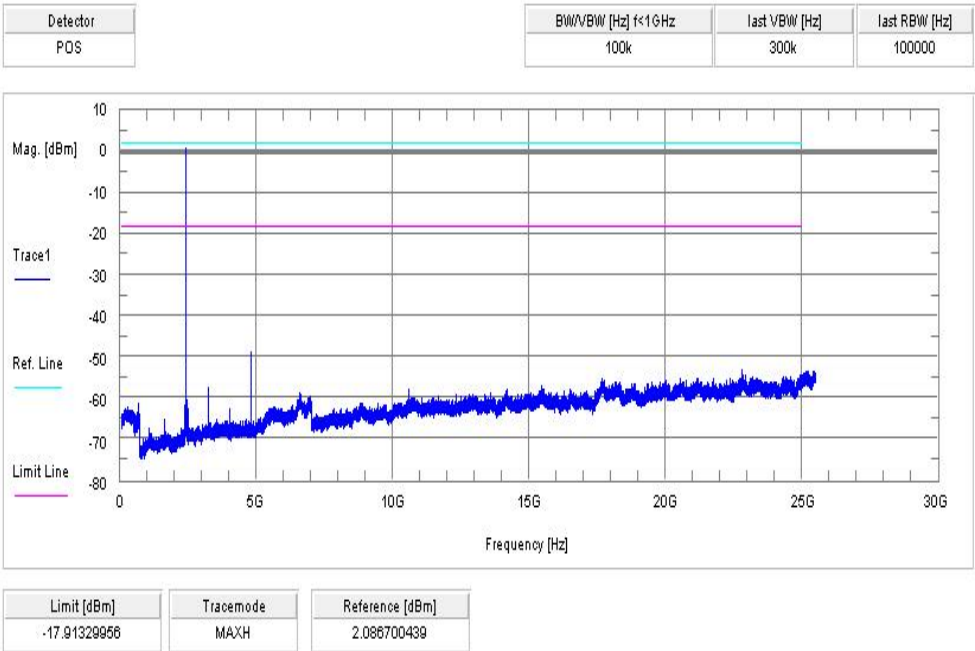


**Plot 2:** middle channel – 2441 MHz, GFSK modulation

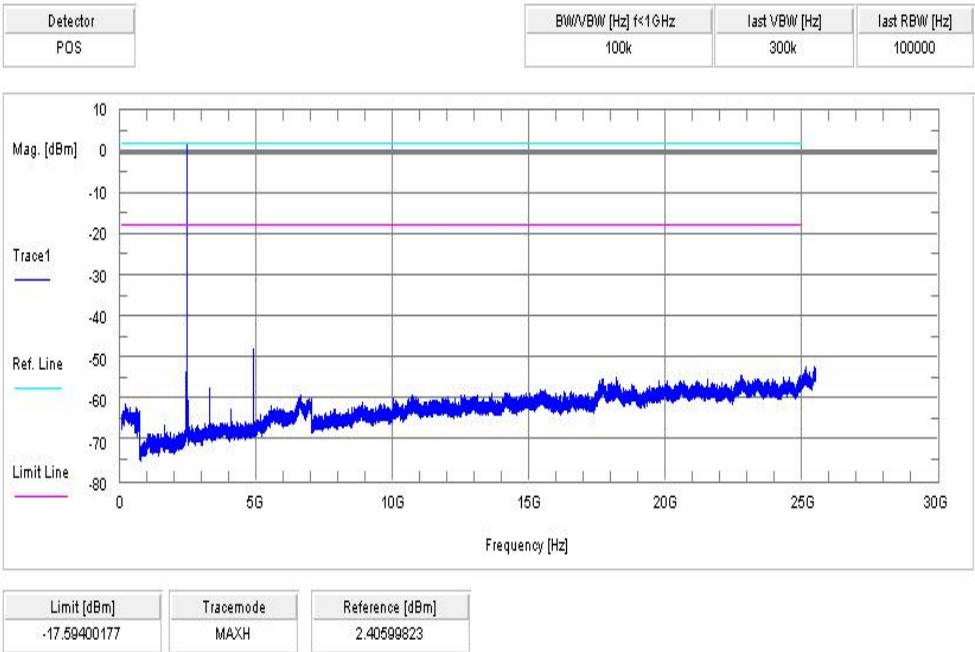


**Plot 3:** highest channel – 2480 MHz, GFSK modulation

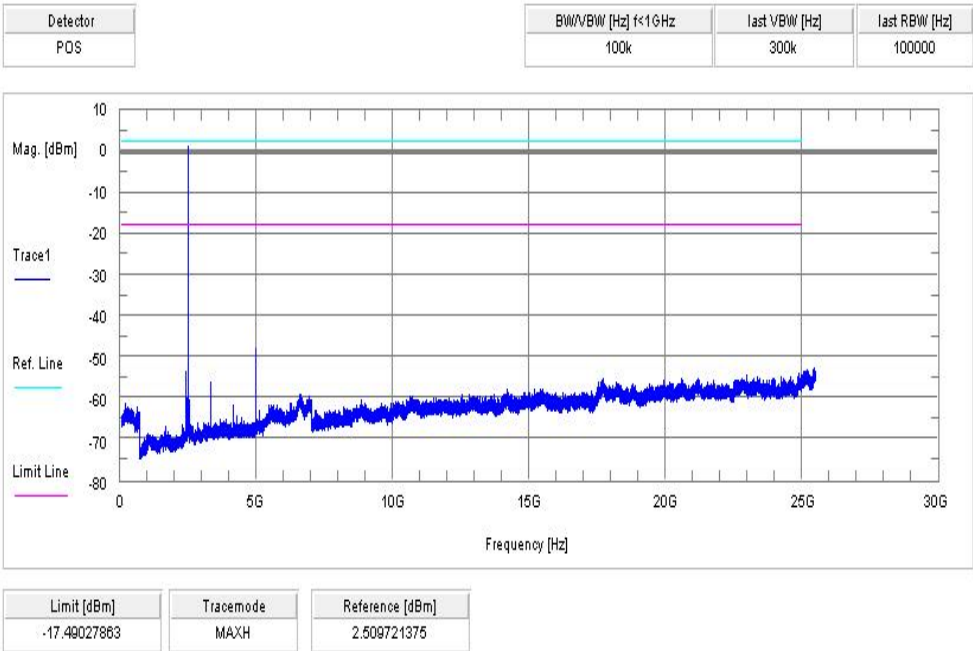


**Plot 4:** lowest channel – 2402 MHz, Pi / DQPSK modulation

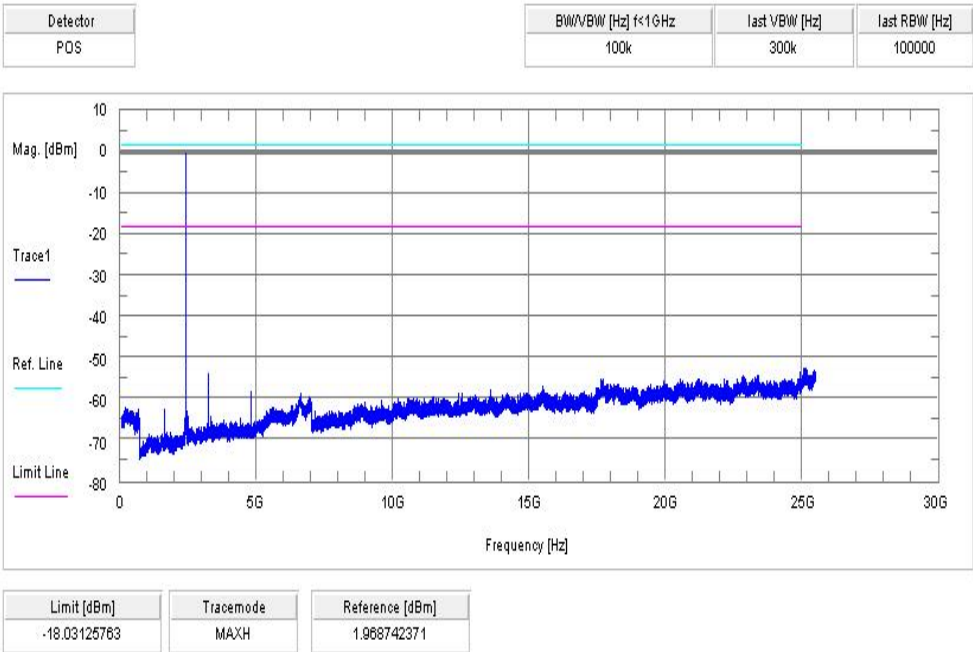

**Plot 5:** middle channel – 2441 MHz, Pi / DQPSK modulation

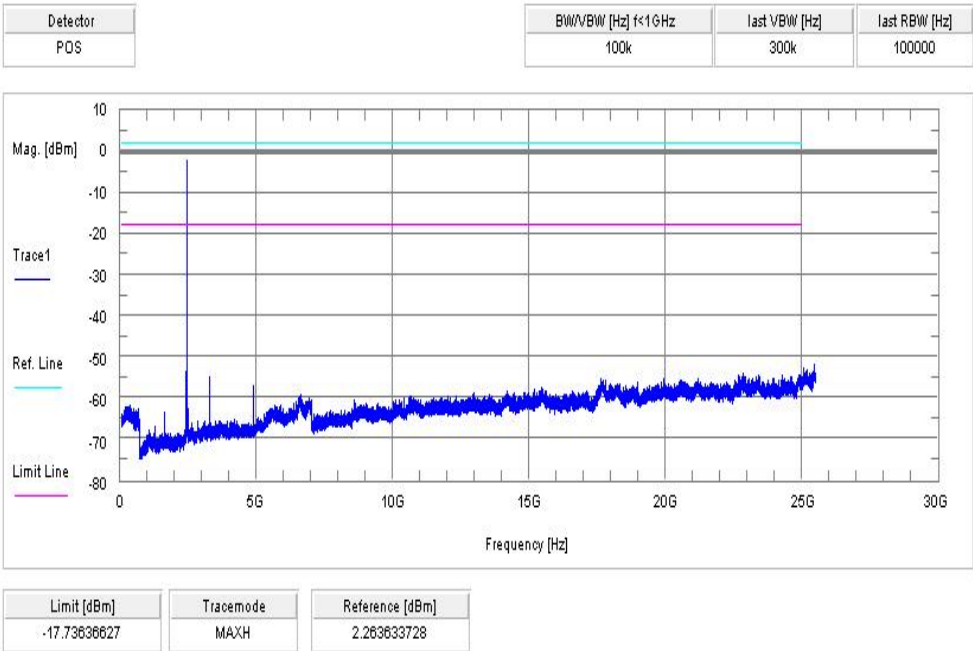

**Plot 6:** highest channel – 2480 MHz, Pi / DQPSK modulation

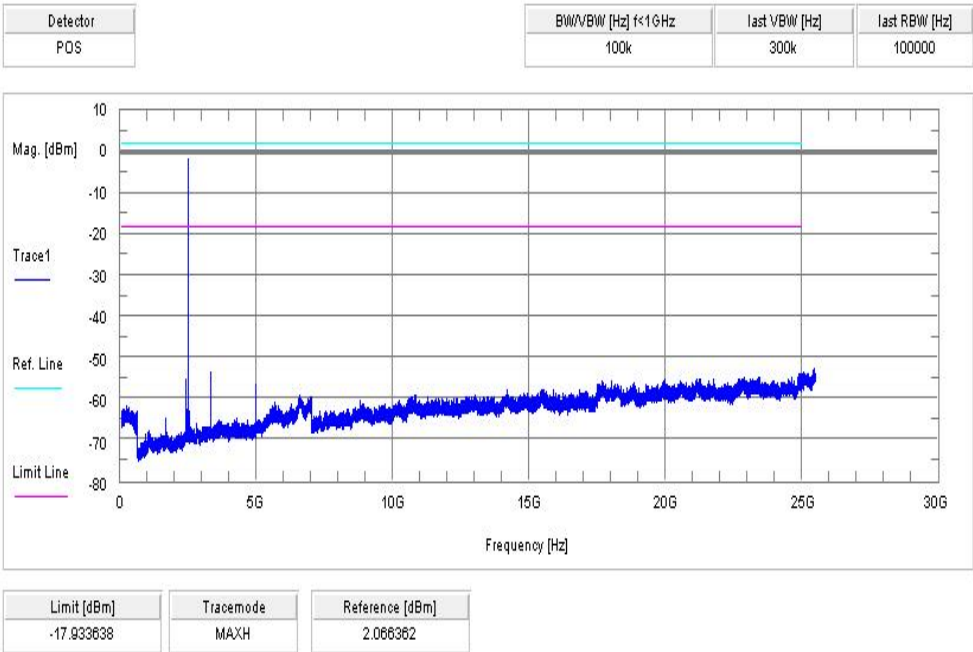

## 9.11 TX spurious emissions radiated

### Description:

Measurement of the radiated spurious emissions in transmit mode. The EUT is set to single channel mode and the transmit channel is channel 00, channel 39 and channel 78. The measurement is performed in the mode with the highest output power.

### Measurement:

| Measurement parameter |                                                                                                             |
|-----------------------|-------------------------------------------------------------------------------------------------------------|
| Detector:             | Peak / Quasi Peak                                                                                           |
| Sweep time:           | Auto                                                                                                        |
| Video bandwidth:      | 3 x RBW<br>Remeasurement: 10 Hz                                                                             |
| Resolution bandwidth: | F < 1 GHz: 100 kHz<br>F > 1 GHz: 1 MHz                                                                      |
| Span:                 | 30 MHz to 25 GHz                                                                                            |
| Trace-Mode:           | Max Hold                                                                                                    |
| Measured Modulation:  | <input checked="" type="checkbox"/> GFSK <input type="checkbox"/> Pi/4 DQPSK <input type="checkbox"/> 8DPSK |

The modulation with the highest output power was used to perform the transmitter spurious emissions. If spurious were detected a re-measurement was performed on the detected frequency with each modulation.

### Limits:


| FCC                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                         | IC                   |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------|----------------------|
| TX spurious emissions radiated                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |                         |                      |
| In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)). |                         |                      |
| §15.209                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                         |                      |
| Frequency (MHz)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | Field strength (dBμV/m) | Measurement distance |
| 30 - 88                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | 30.0                    | 10                   |
| 88 – 216                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | 33.5                    | 10                   |
| 216 – 960                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | 36.0                    | 10                   |
| Above 960                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | 54.0                    | 3                    |

**Results:**

| TX spurious emissions radiated [dBμV/m]                                          |          |                |                                                                                  |          |                |                                                                                  |          |                |
|----------------------------------------------------------------------------------|----------|----------------|----------------------------------------------------------------------------------|----------|----------------|----------------------------------------------------------------------------------|----------|----------------|
| 2402 MHz                                                                         |          |                | 2441 MHz                                                                         |          |                | 2480 MHz                                                                         |          |                |
| F [MHz]                                                                          | Detector | Level [dBμV/m] | F [MHz]                                                                          | Detector | Level [dBμV/m] | F [MHz]                                                                          | Detector | Level [dBμV/m] |
| For emissions below 1 GHz, please take a look at the table below the 1 GHz plot. |          |                | For emissions below 1 GHz, please take a look at the table below the 1 GHz plot. |          |                | For emissions below 1 GHz, please take a look at the table below the 1 GHz plot. |          |                |
| All detected peak emissions above 1 GHz are below the average limit!             |          |                | All detected peak emissions above 1 GHz are below the average limit!             |          |                | All detected peak emissions above 1 GHz are below the average limit!             |          |                |
|                                                                                  |          |                |                                                                                  |          |                |                                                                                  |          |                |
|                                                                                  |          |                |                                                                                  |          |                |                                                                                  |          |                |
| Measurement uncertainty                                                          |          |                | ± 3 dB                                                                           |          |                |                                                                                  |          |                |


**Result:** **Passed**

**Note:** The limit was recalculated with 20 dB / decade (Part 15.31) for all radiated spurious emissions 30 MHz to 1 GHz from 3 meter limit to a 10 meter distance. (40dB/decade for emissions < 30MHz)

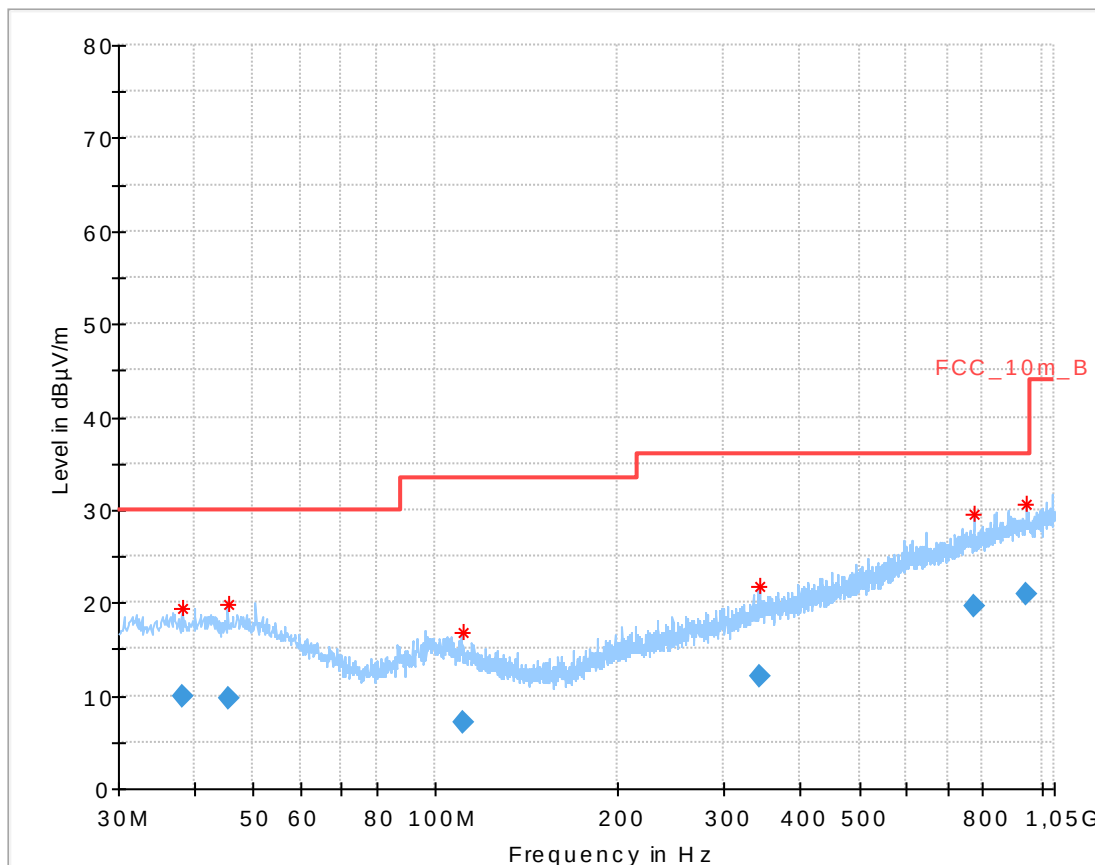**Plots:****Plot 1:** 30 MHz to 1 GHz, TX mode, channel 00, vertical & horizontal polarization**Final\_Result**


| Frequency (MHz) | QuasiPeak (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB) |
|-----------------|--------------------|----------------|-------------|-----------------|-----------------|-------------|-----|---------------|------------|
| 38.189400       | 9.90               | 30.00          | 20.10       | 1000.0          | 120.000         | 400.0       | V   | 222           | 14.0       |
| 45.433500       | 9.79               | 30.00          | 20.21       | 1000.0          | 120.000         | 400.0       | V   | -7            | 13.8       |
| 110.883600      | 7.02               | 33.50          | 26.48       | 1000.0          | 120.000         | 200.0       | V   | 110           | 11.0       |
| 342.025200      | 12.15              | 36.00          | 23.85       | 1000.0          | 120.000         | 193.0       | V   | 266           | 15.8       |
| 771.692100      | 19.54              | 36.00          | 16.46       | 1000.0          | 120.000         | 200.0       | H   | 262           | 22.7       |
| 944.293500      | 21.02              | 36.00          | 14.98       | 1000.0          | 120.000         | 400.0       | H   | 72            | 24.2       |

**Plot 2:** 1 GHz to 12.75 GHz, TX mode, channel 00, vertical & horizontal polarization

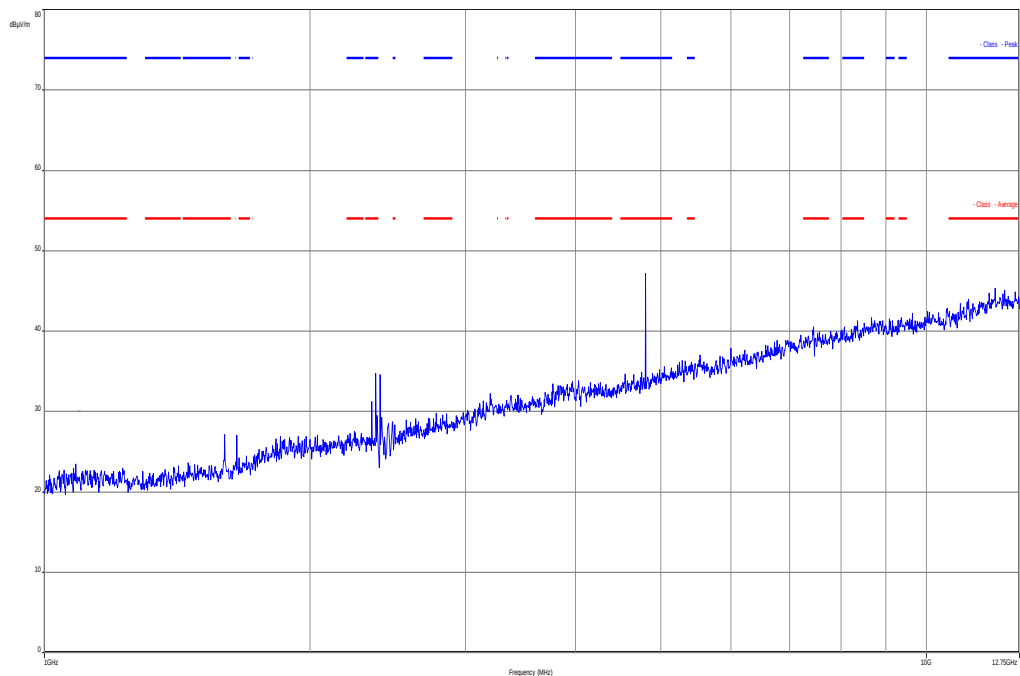


The carrier signal is notched with a 2.4 GHz band rejection filter.

**Plot 3:** 12.75 GHz to 18 GHz, TX mode, channel 00, vertical & horizontal polarization

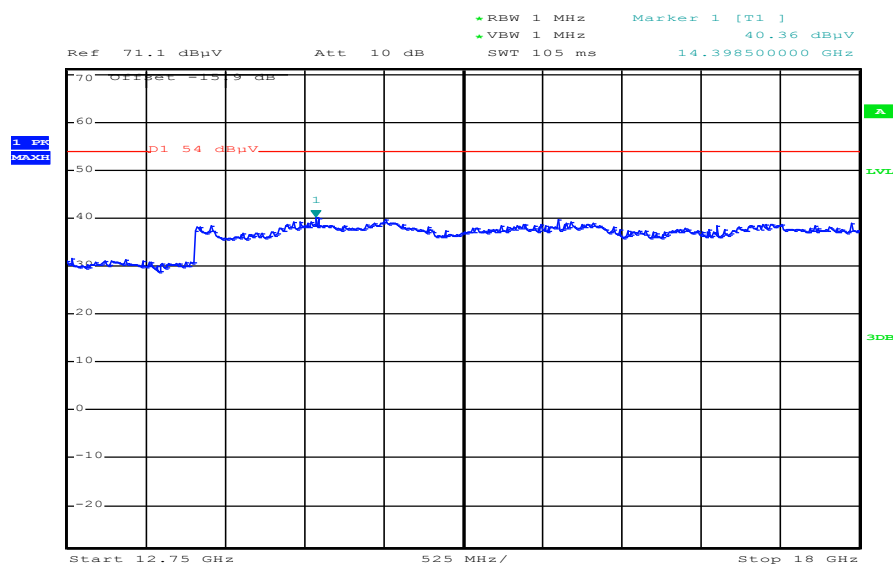


Date: 17.JUN.2014 13:51:20

Plot 4: 18 GHz to 26 GHz, TX mode, channel 00, vertical & horizontal polarization

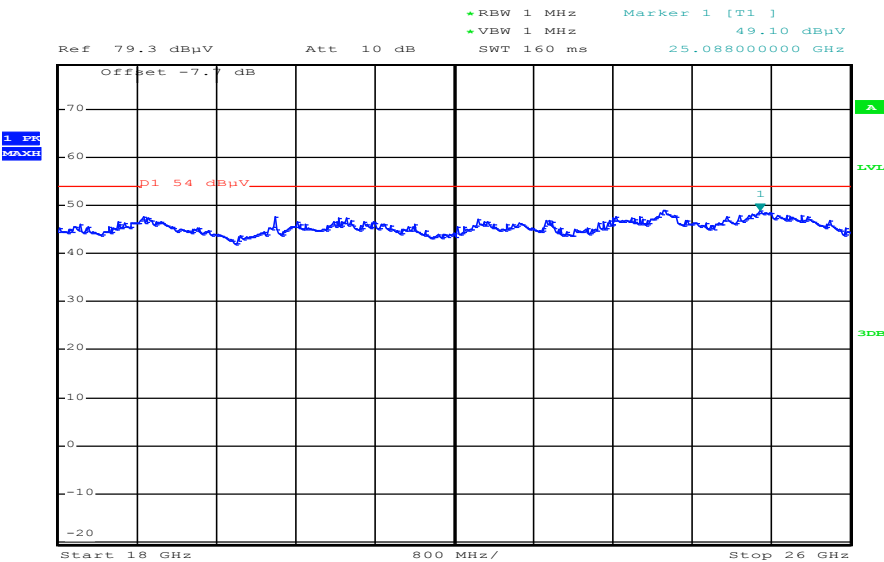


Date: 17.JUN.2014 13:58:40

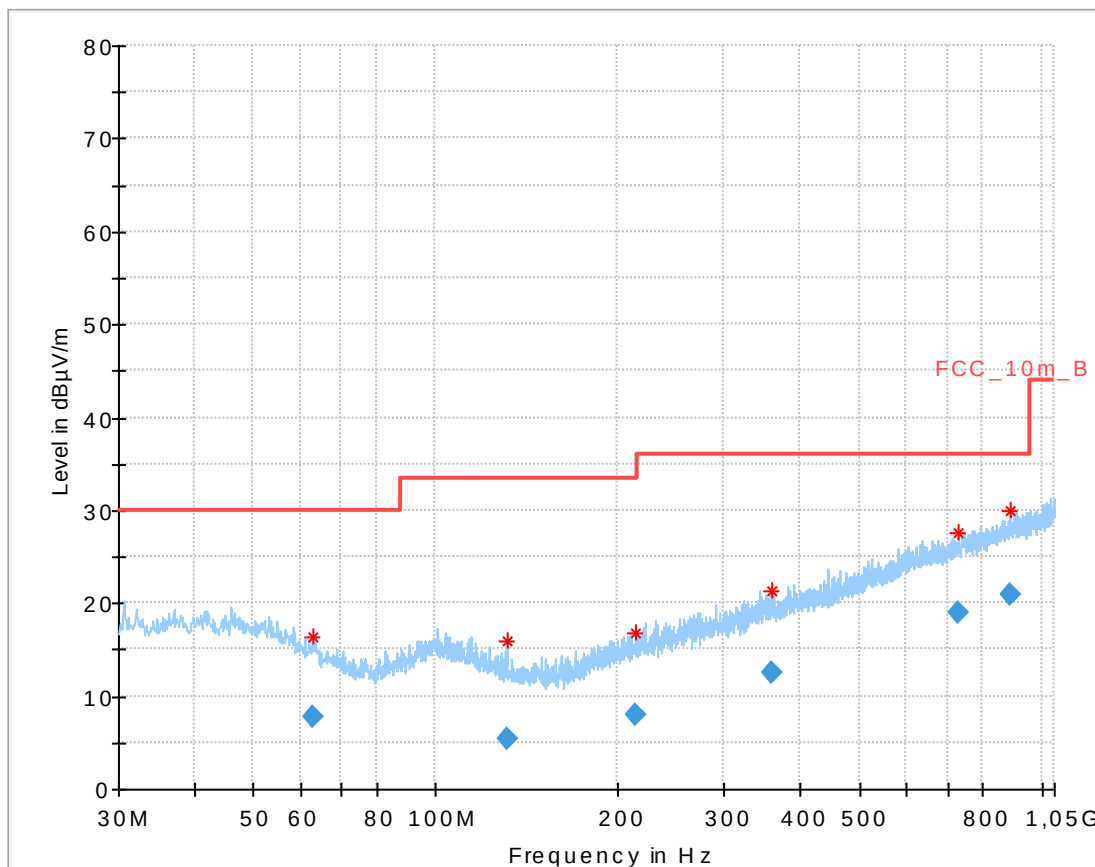**Plot 5:** 30 MHz to 1 GHz, TX mode, channel 39, vertical & horizontal polarization**Final Result:**


| Frequency (MHz) | QuasiPeak (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB) |
|-----------------|--------------------|----------------|-------------|-----------------|-----------------|-------------|-----|---------------|------------|
| 62.990400       | 7.77               | 30.00          | 22.23       | 1000.0          | 120.000         | 400.0       | V   | 174           | 10.9       |
| 131.238000      | 5.31               | 33.50          | 28.19       | 1000.0          | 120.000         | 200.0       | V   | 131           | 9.3        |
| 213.414450      | 7.89               | 33.50          | 25.61       | 1000.0          | 120.000         | 200.0       | V   | 145           | 12.2       |
| 357.754350      | 12.40              | 36.00          | 23.60       | 1000.0          | 120.000         | 200.0       | H   | -50           | 16.2       |
| 727.052850      | 19.05              | 36.00          | 16.95       | 1000.0          | 120.000         | 171.0       | H   | 304           | 22.2       |
| 887.345850      | 20.92              | 36.00          | 15.08       | 1000.0          | 120.000         | 200.0       | V   | 24            | 23.9       |

**Plot 6:** 1 GHz to 12.75 GHz, TX mode, channel 39, vertical & horizontal polarization

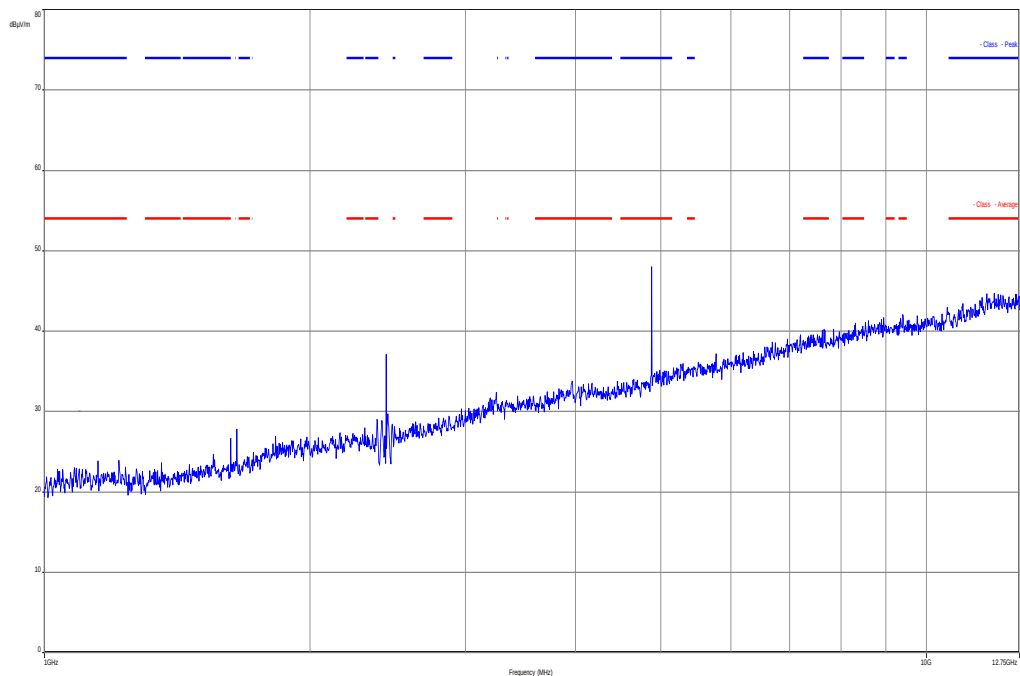


The carrier signal is notched with a 2.4 GHz band rejection filter.

**Plot 7:** 12.75 GHz to 18 GHz, TX mode, channel 39, vertical & horizontal polarization

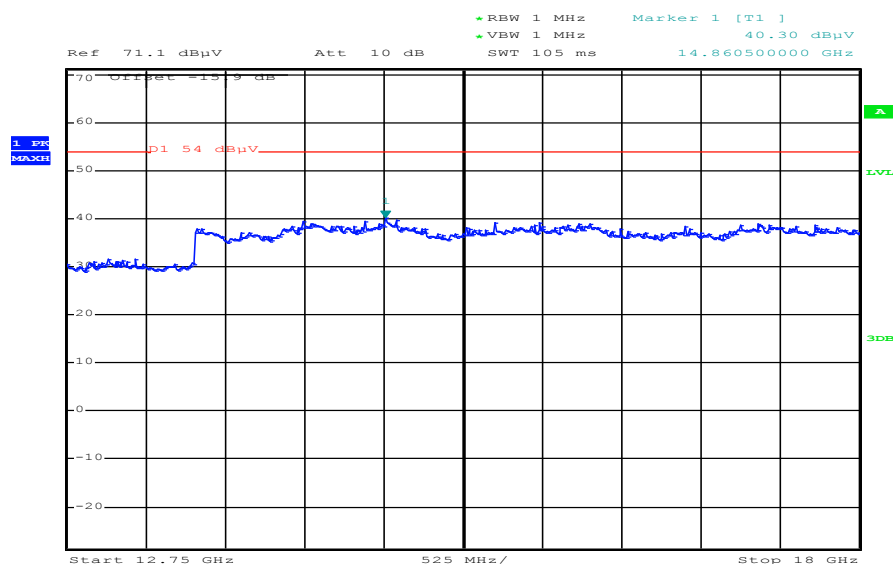


Date: 17.JUN.2014 13:52:20

Plot 8: 18 GHz to 26 GHz, TX mode, channel 39, vertical & horizontal polarization

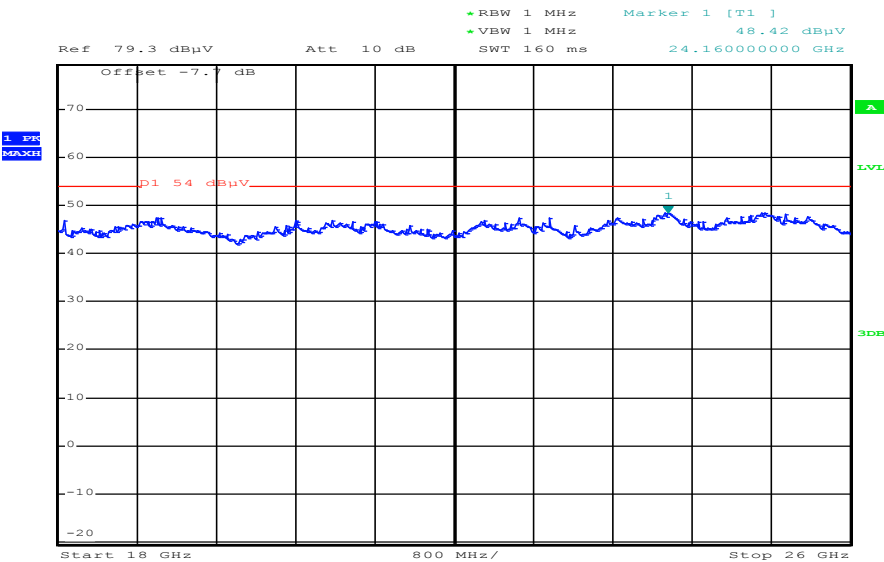


Date: 17.JUN.2014 13:59:25

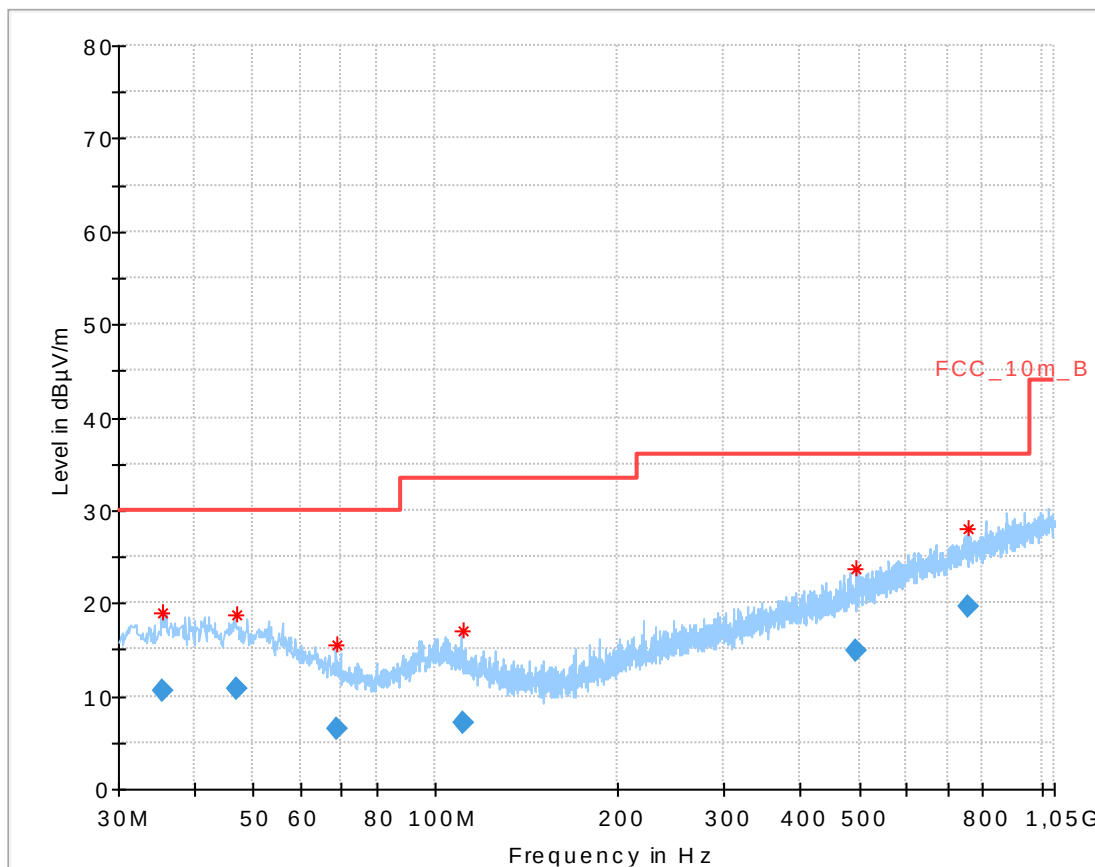**Plot 9:** 30 MHz to 1 GHz, TX mode, channel 78, vertical & horizontal polarization**Final Result:**


| Frequency (MHz) | QuasiPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB) |
|-----------------|--------------------|----------------|-------------|-----------------|-----------------|-------------|-----|---------------|------------|
| 35.490000       | 10.48              | 30.00          | 19.52       | 1000.0          | 120.000         | 220.0       | V   | 101           | 13.8       |
| 47.018400       | 10.84              | 30.00          | 19.16       | 1000.0          | 120.000         | 152.0       | V   | 195           | 13.8       |
| 68.854650       | 6.44               | 30.00          | 23.56       | 1000.0          | 120.000         | 141.0       | V   | 320           | 9.7        |
| 110.731650      | 7.12               | 33.50          | 26.38       | 1000.0          | 120.000         | 148.0       | H   | 121           | 11.0       |
| 495.159150      | 14.95              | 36.00          | 21.05       | 1000.0          | 120.000         | 136.0       | V   | 188           | 18.6       |
| 757.977750      | 19.52              | 36.00          | 16.48       | 1000.0          | 120.000         | 210.0       | H   | 105           | 22.7       |

**Plot 10:** 1 GHz to 12.75 GHz, TX mode, channel 78, vertical & horizontal polarization

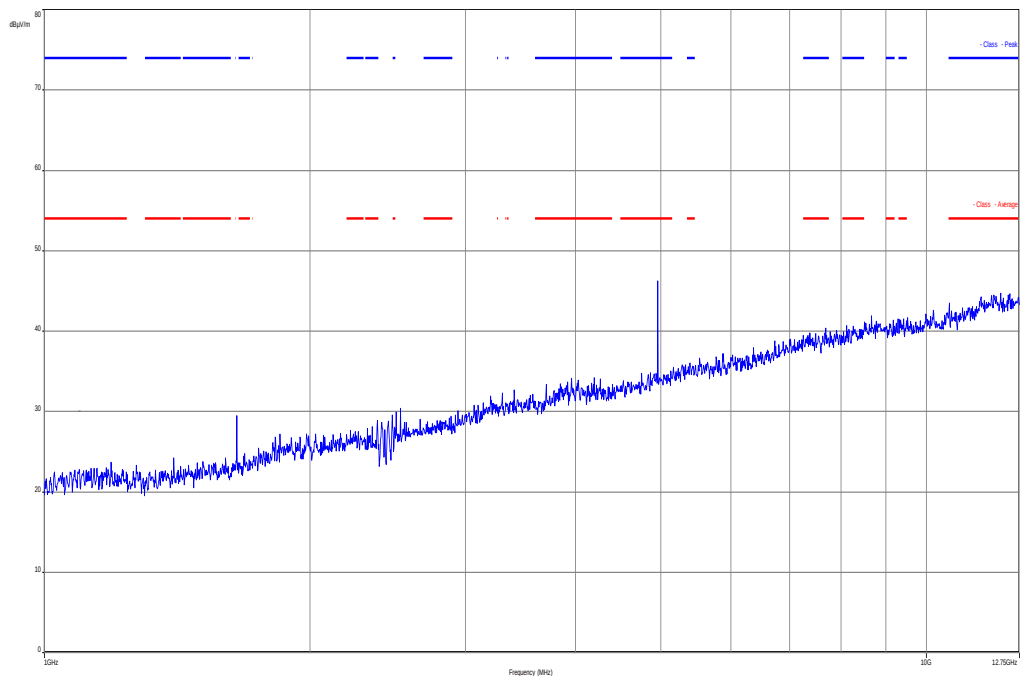


The carrier signal is notched with a 2.4 GHz band rejection filter.

**Plot 11:** 12.75 GHz to 18 GHz, TX mode, channel 78, vertical & horizontal polarization

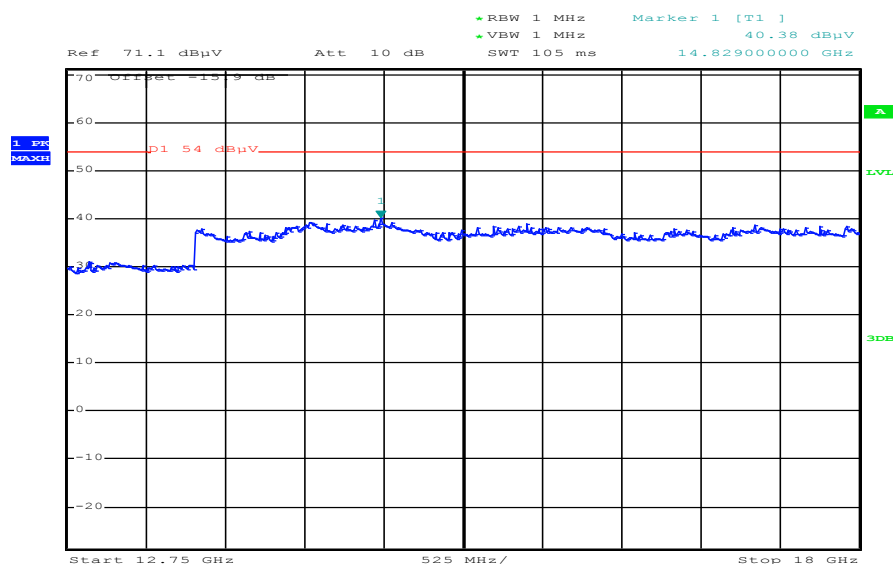

Date: 17.JUN.2014 13:53:21

**Plot 12:** 18 GHz to 26 GHz, TX mode, channel 78, vertical & horizontal polarization

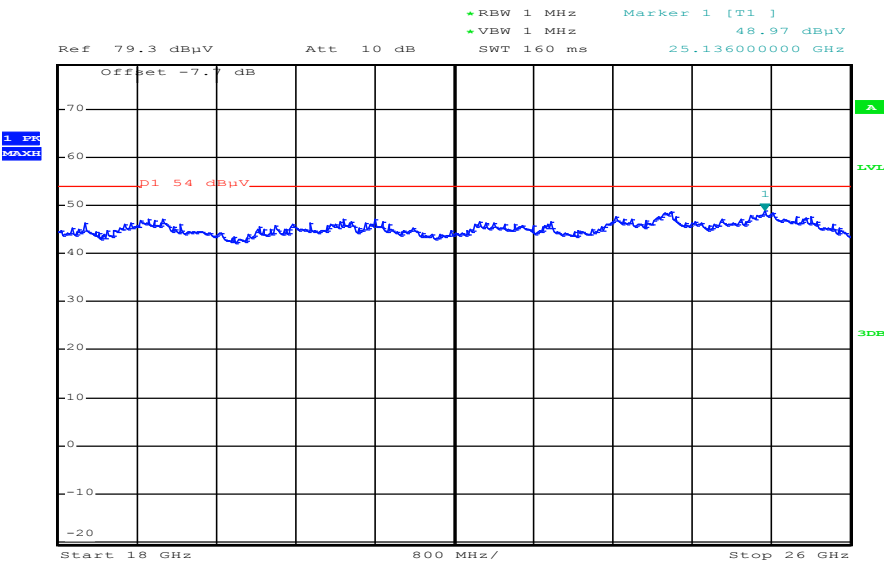

Date: 17.JUN.2014 14:00:42

## 9.12 RX spurious emissions radiated

### Description:

Measurement of the radiated spurious emissions in idle/receive mode. The EUT is detached so all oscillators are active.

### Measurement:

| Measurement parameter |                                        |
|-----------------------|----------------------------------------|
| Detector:             | Peak / Quasi peak                      |
| Sweep time:           | Auto                                   |
| Video bandwidth:      | 3 x RBW<br>Remeasurement: 10 Hz        |
| Resolution bandwidth: | F < 1 GHz: 100 kHz<br>F > 1 GHz: 1 MHz |
| Span:                 | 30 MHz to 25 GHz                       |
| Trace-Mode:           | Max Hold                               |

### Limits:


| FCC                            |                         | IC                   |
|--------------------------------|-------------------------|----------------------|
| RX Spurious Emissions Radiated |                         |                      |
| Frequency (MHz)                | Field strength (dBμV/m) | Measurement distance |
| 30 - 88                        | 30.0                    | 10                   |
| 88 – 216                       | 33.5                    | 10                   |
| 216 – 960                      | 36.0                    | 10                   |
| Above 960                      | 54.0                    | 3                    |

### Results:

| RX spurious emissions radiated [dBμV/m]                                          |          |                |
|----------------------------------------------------------------------------------|----------|----------------|
| F [MHz]                                                                          | Detector | Level [dBμV/m] |
| For emissions below 1 GHz, please take a look at the table below the 1 GHz plot. |          |                |
| All detected peak emissions above 1 GHz are below the average limit!             |          |                |
| Measurement uncertainty                                                          | ±3 dB    |                |


**Note:** The limit was recalculated with 20 dB / decade (Part 15.31) for all radiated spurious emissions 30 MHz to 1 GHz from 3 meter limit to a 10 meter distance. (40dB/decade for emissions < 30MHz)

**Result:** Passed

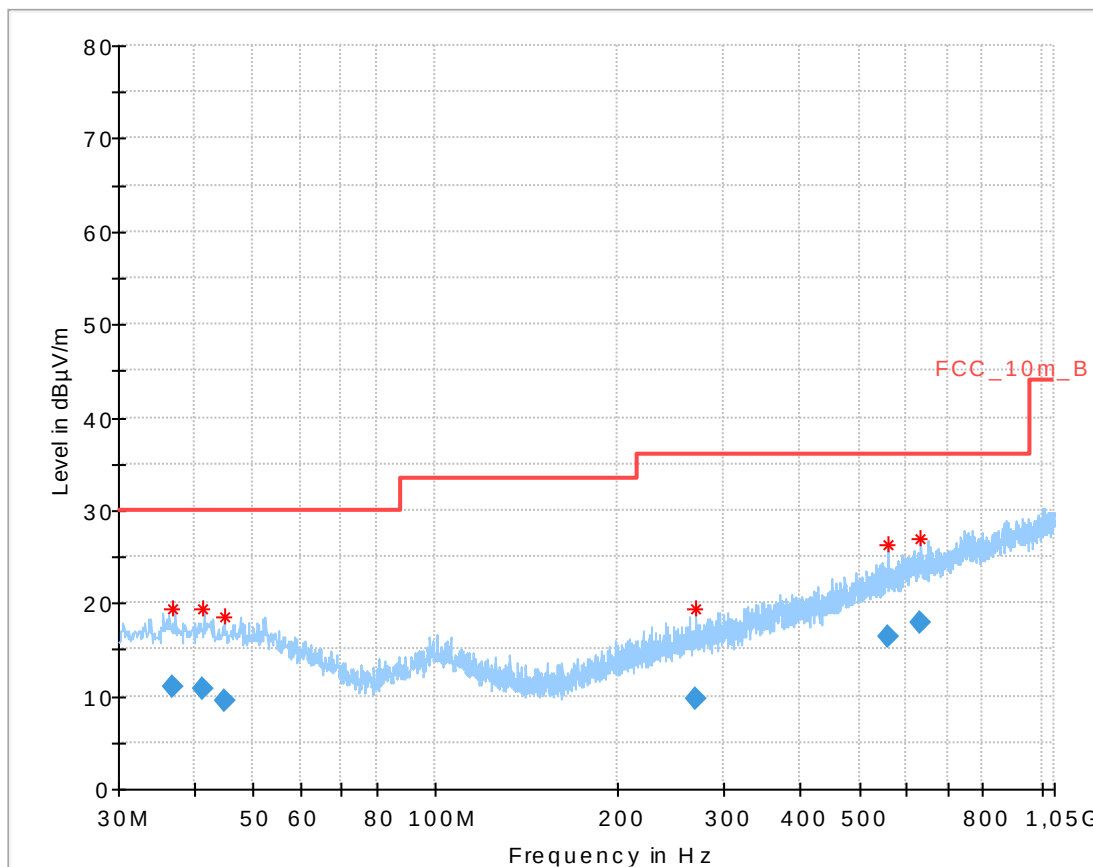
**Plots:****Plot 1:** 30 MHz to 1 GHz, RX mode, vertical & horizontal polarization**Final Result:**

| Frequency (MHz) | QuasiPeak (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB) |
|-----------------|--------------------|----------------|-------------|-----------------|-----------------|-------------|-----|---------------|------------|
| 36.780450       | 11.04              | 30.00          | 18.96       | 1000.0          | 120.000         | 140.0       | V   | 269           | 13.9       |
| 41.367150       | 10.74              | 30.00          | 19.26       | 1000.0          | 120.000         | 220.0       | H   | 10            | 14.0       |
| 44.835150       | 9.47               | 30.00          | 20.53       | 1000.0          | 120.000         | 158.0       | H   | 294           | 13.9       |
| 267.989700      | 9.62               | 36.00          | 26.38       | 1000.0          | 120.000         | 215.0       | H   | 320           | 13.8       |
| 557.942550      | 16.35              | 36.00          | 19.65       | 1000.0          | 120.000         | 220.0       | H   | 196           | 19.5       |
| 632.393700      | 17.87              | 36.00          | 18.13       | 1000.0          | 120.000         | 194.0       | V   | 213           | 21.0       |

Plot 2: 1 GHz to 12.75 GHz, RX mode, vertical & horizontal polarization

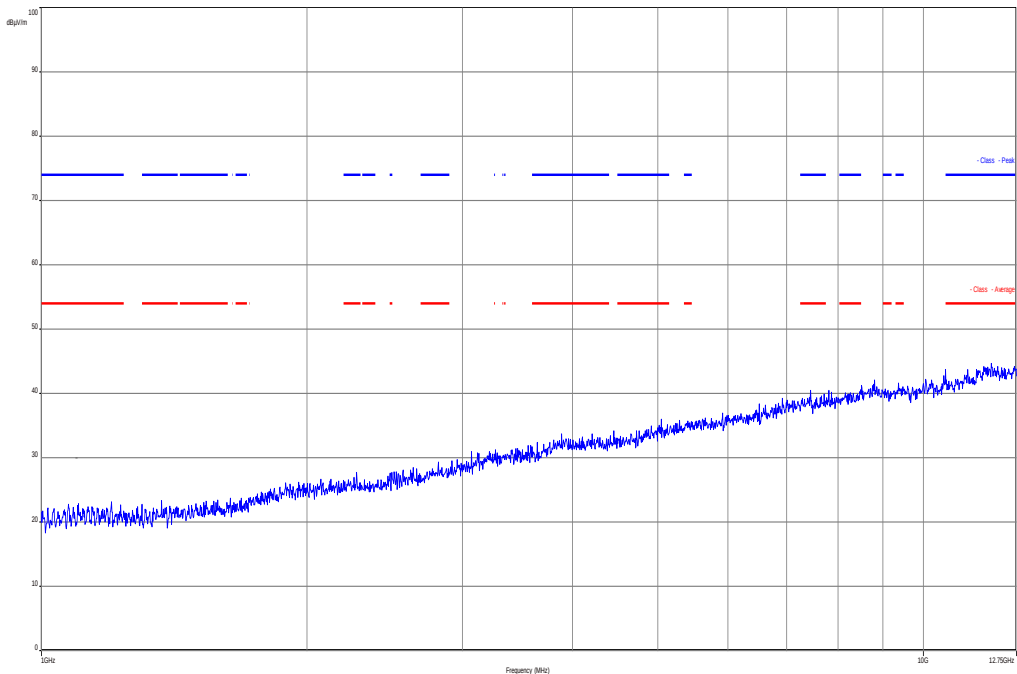


Plot 3: 12.75 GHz to 18 GHz, RX mode, vertical & horizontal polarization

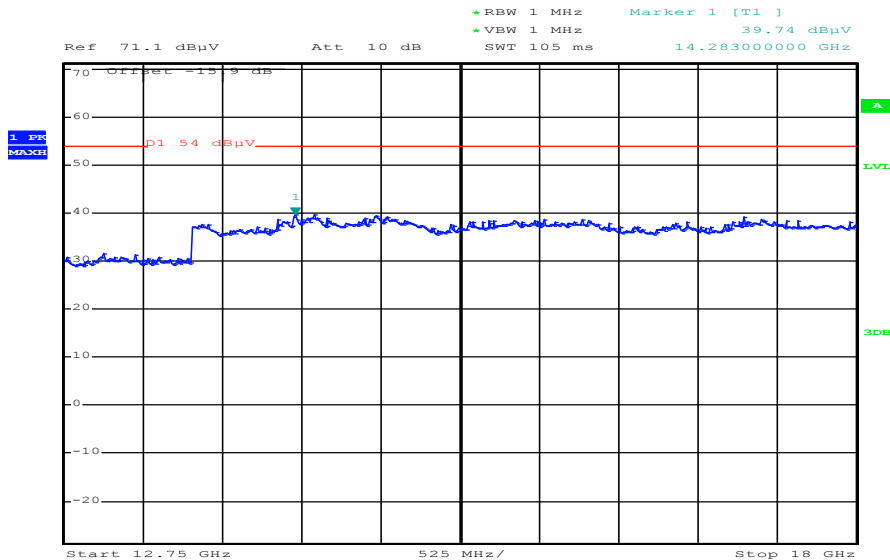

Date: 17.JUN.2014 13:54:40

Plot 4: 18 GHz to 26 GHz, RX mode, vertical & horizontal polarization

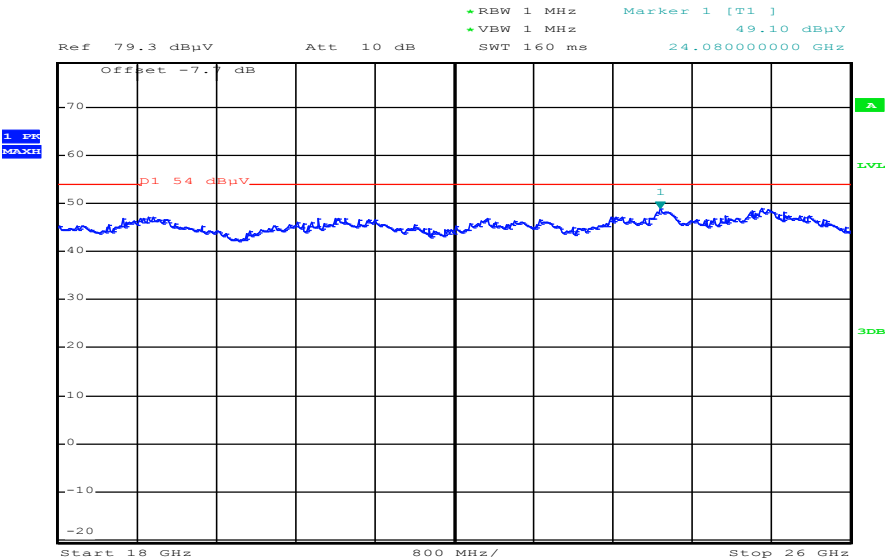

Date: 17.JUN.2014 13:57:38

### 9.13 TX and RX spurious emissions radiated < 30 MHz

#### Description:

Measurement of the radiated spurious emissions in transmit mode below 30 MHz. The EUT is set to single channel mode and the transmit channel is channel 39. This measurement is representative for all channels and modes. If critical peaks are found channel 00 and channel 78 will be measured too. The measurement is performed in the mode with the highest output power. The limits are recalculated to a measurement distance of 3 m with 40 dB/decade according CFR Part 2.

#### Measurement:

| Measurement parameter |                                            |
|-----------------------|--------------------------------------------|
| Detector:             | Peak / Quasi peak                          |
| Sweep time:           | Auto                                       |
| Video bandwidth:      | F < 150 kHz: 200 Hz<br>F > 150 kHz: 9 kHz  |
| Resolution bandwidth: | F < 150 kHz: 1 kHz<br>F > 150 kHz: 100 kHz |
| Span:                 | 9 kHz to 30 MHz                            |
| Trace-Mode:           | Max Hold                                   |

#### Limits:

| FCC                                     |                         | IC                   |
|-----------------------------------------|-------------------------|----------------------|
| TX spurious emissions radiated < 30 MHz |                         |                      |
| Frequency (MHz)                         | Field strength (dBμV/m) | Measurement distance |
| 0.009 – 0.490                           | 2400/F(kHz)             | 300                  |
| 0.490 – 1.705                           | 24000/F(kHz)            | 30                   |
| 1.705 – 30.0                            | 30                      | 30                   |


#### Results:

| TX spurious emissions radiated < 30 MHz [dBμV/m] |          |                |
|--------------------------------------------------|----------|----------------|
| F [MHz]                                          | Detector | Level [dBμV/m] |
| No peaks detected.                               |          |                |
|                                                  |          |                |
| Measurement uncertainty                          | ± 3 dB   |                |


**Result:** Passed

**Plots:**

**Plot 1: 9 kHz to 30 MHz, TX mode**

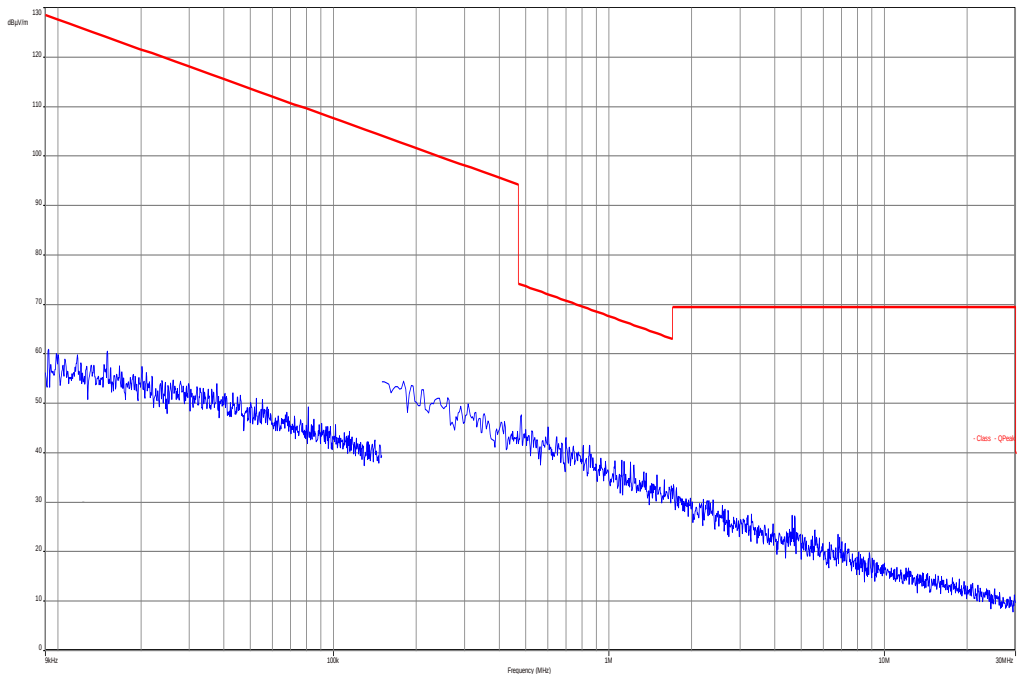

**Plot 4: 9 kHz to 30 MHz, RX mode**

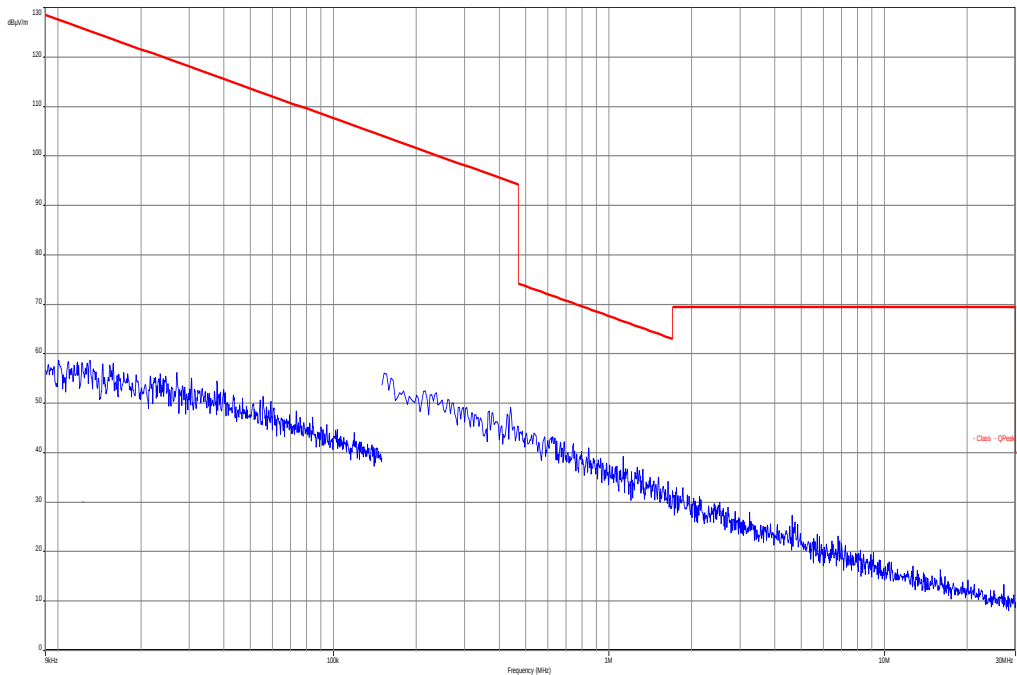

## 9.14 TX and RX spurious emissions conducted < 30 MHz

### Description:

Measurement of the conducted spurious emissions in transmit mode below 30 MHz. The EUT is set to single channel mode and the transmit channel is channel 39. This measurement is representative for all channels and modes. If critical peaks are found channel 00 and channel 78 will be measured too. The measurement is performed in the mode with the highest output power. Both power lines, phase and neutral line, are measured. Found peaks are remeasured with average and quasi peak detection to show compliance to the limits.

### Measurement:

| Measurement parameter |                                            |
|-----------------------|--------------------------------------------|
| Detector:             | Peak - Quasi peak / average                |
| Sweep time:           | Auto                                       |
| Video bandwidth:      | F < 150 kHz: 200 Hz<br>F > 150 kHz: 9 kHz  |
| Resolution bandwidth: | F < 150 kHz: 1 kHz<br>F > 150 kHz: 100 kHz |
| Span:                 | 9 kHz to 30 MHz                            |
| Trace-Mode:           | Max Hold                                   |

### Limits:



| FCC                                      |                     | IC               |
|------------------------------------------|---------------------|------------------|
| TX spurious emissions conducted < 30 MHz |                     |                  |
| Frequency (MHz)                          | Quasi-peak (dBμV/m) | Average (dBμV/m) |
| 0.15 – 0.5                               | 66 to 56*           | 56 to 46*        |
| 0.5 – 5                                  | 56                  | 46               |
| 5 – 30.0                                 | 60                  | 50               |

\*Decreases with the logarithm of the frequency


### Results:

| TX spurious emissions conducted < 30 MHz [dBμV/m] |          |                |
|---------------------------------------------------|----------|----------------|
| F [MHz]                                           | Detector | Level [dBμV/m] |
| No peaks detected.                                |          |                |
| Measurement uncertainty                           | ± 3 dB   |                |


**Result:** Passed

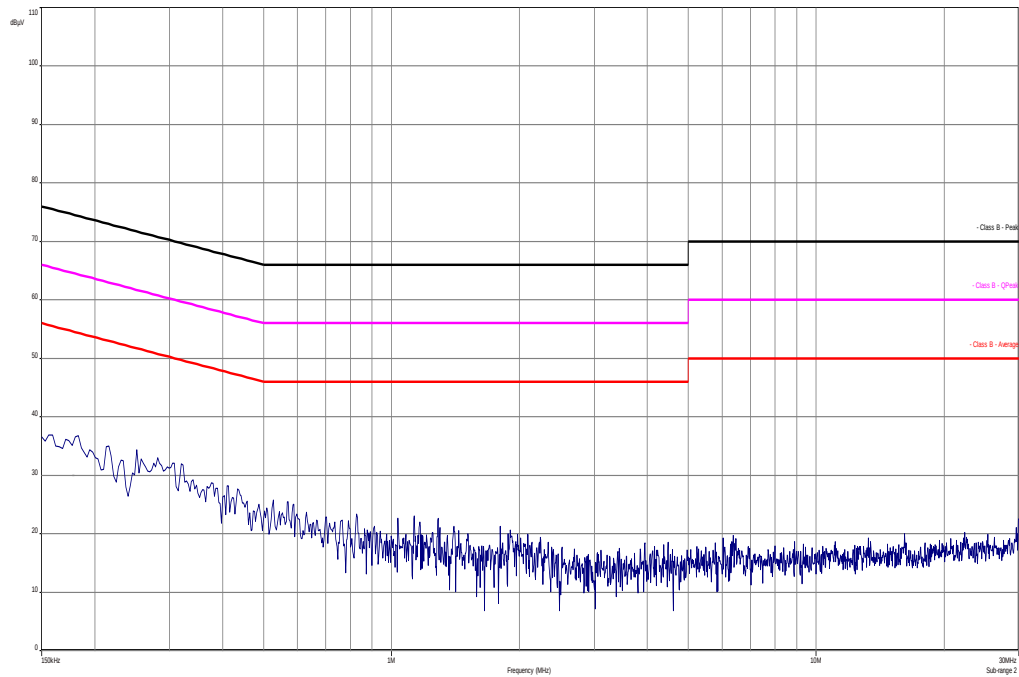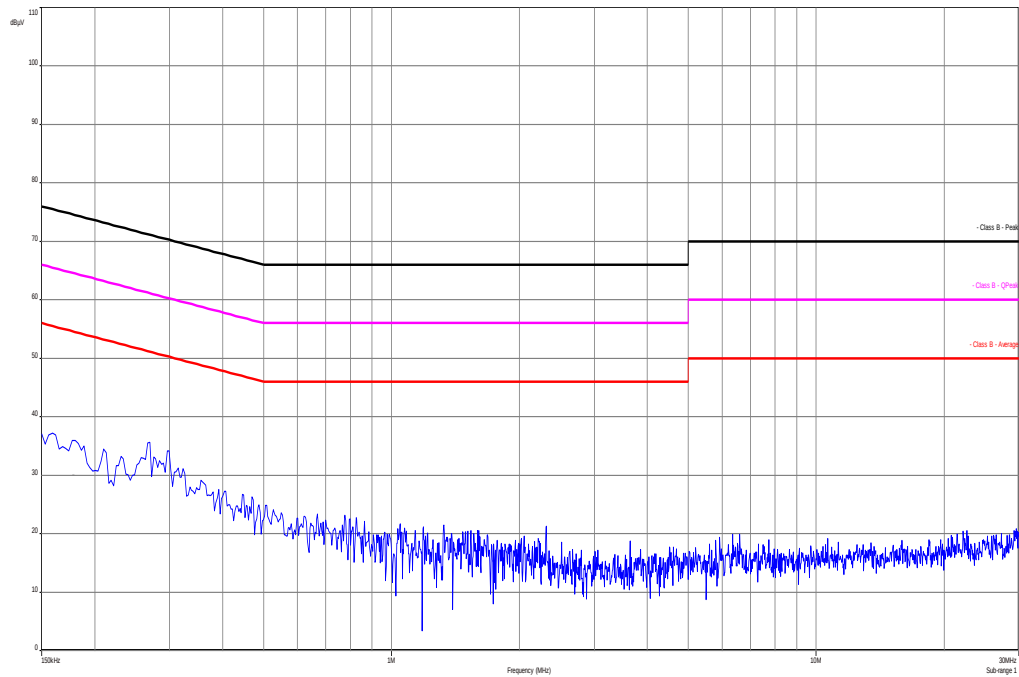**Plots:****Plot 1: 150 kHz to 30 MHz, TX mode, phase line****Plot 2: 150 kHz to 30 MHz, TX mode, neutral line**

**Plot 3:** 150 kHz to 30 MHz, RX mode, phase line

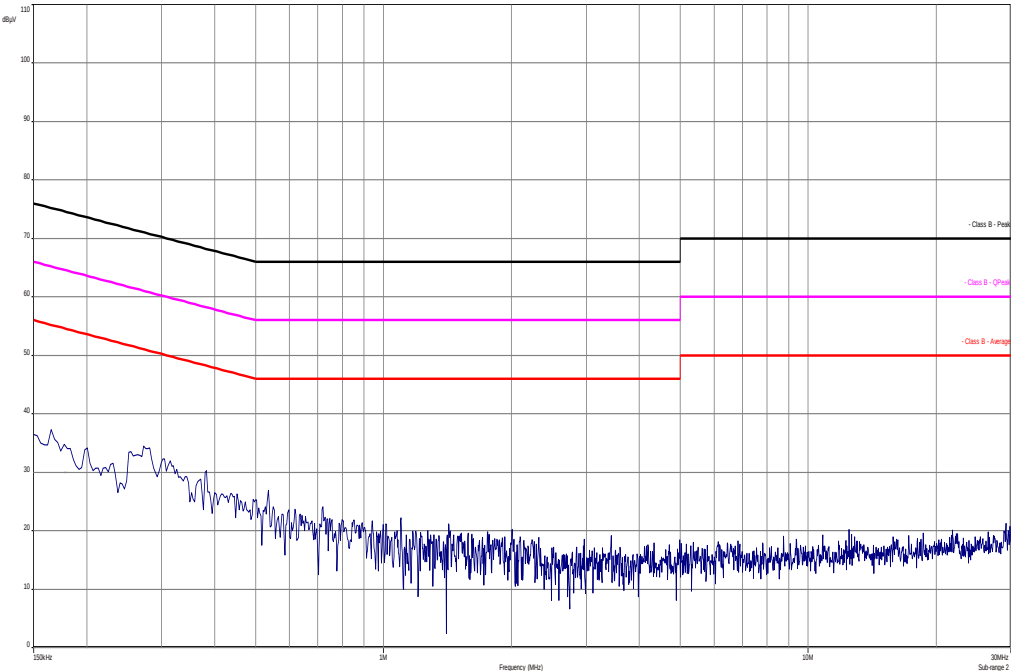

**Plot 4:** 150 kHz to 30 MHz, RX mode, neutral line

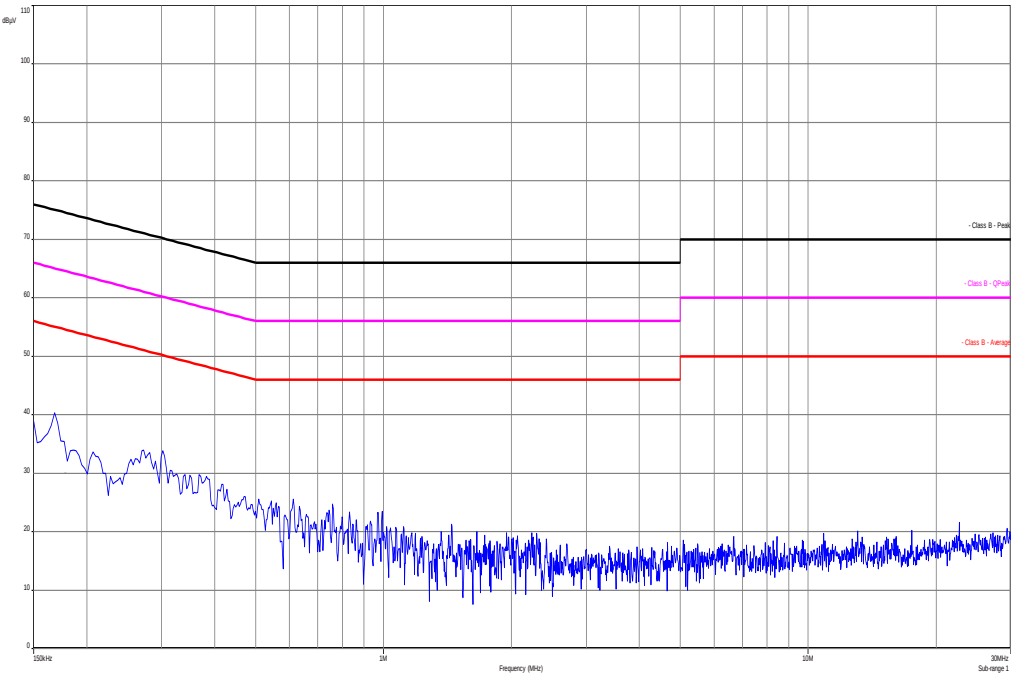

## 9.15 Statistical measurements

Radiated peak power: GFSK

|                                     | <i>lowest channel<br/>2402 MHz</i> | <i>mid channel<br/>2441 MHz</i> | <i>highest channel<br/>2480 MHz</i> |
|-------------------------------------|------------------------------------|---------------------------------|-------------------------------------|
| <i>Sample SN:01901263<br/>[dbm]</i> | 5.2                                | 4.5                             | 3.5                                 |
| <i>Sample SN:01901266<br/>[dbm]</i> | 3.3                                | 5.0                             | 4.9                                 |
| <i>Sample SN:01901289<br/>[dbm]</i> | 6.3                                | 5.4                             | 5.4                                 |

Conducted peak power: GFSK

|                                     | <i>lowest channel<br/>2402 MHz</i> | <i>mid channel<br/>2441 MHz</i> | <i>highest channel<br/>2480 MHz</i> |
|-------------------------------------|------------------------------------|---------------------------------|-------------------------------------|
| <i>Sample SN:01901271<br/>[dbm]</i> | 2.9                                | 3.1                             | 3.1                                 |
| <i>Sample SN:01901275<br/>[dbm]</i> | 2.4                                | 2.0                             | 1.6                                 |
| <i>Sample SN:01901279<br/>[dbm]</i> | 0.7                                | 1.5                             | 2.1                                 |

Conducted 20dB bandwidth: GFSK

|                                     | <i>lowest channel<br/>2402 MHz</i> | <i>mid channel<br/>2441 MHz</i> | <i>highest channel<br/>2480 MHz</i> |
|-------------------------------------|------------------------------------|---------------------------------|-------------------------------------|
| <i>Sample SN:01901271<br/>[kHz]</i> | 938                                | 920                             | 938                                 |
| <i>Sample SN:01901275<br/>[kHz]</i> | 938                                | 938                             | 938                                 |
| <i>Sample SN:01901279<br/>[kHz]</i> | 938                                | 938                             | 938                                 |

Conducted 20dB bandwidth: Pi/4 DQPSK

|                                     | <i>lowest channel<br/>2402 MHz</i> | <i>mid channel<br/>2441 MHz</i> | <i>highest channel<br/>2480 MHz</i> |
|-------------------------------------|------------------------------------|---------------------------------|-------------------------------------|
| <i>Sample SN:01901271<br/>[kHz]</i> | 1244                               | 1263                            | 1263                                |
| <i>Sample SN:01901275<br/>[kHz]</i> | 1263                               | 1244                            | 1244                                |
| <i>Sample SN:01901279<br/>[kHz]</i> | 1263                               | 1263                            | 1244                                |

## 10 Test equipment and ancillaries used for tests

Typically, the calibrations of the test apparatus are commissioned to and performed by an accredited calibration laboratory. The calibration intervals are determined in accordance with the DIN EN ISO/IEC 17025. In addition to the external calibrations, the laboratory executes comparison measurements with other calibrated test systems or effective verifications. Weekly chamber inspections and range calibrations are performed. Where possible, rf-generating and signalling equipment as well as measuring receivers and analyzers are connected to an external high-precision 10 MHz reference (GPS-based or rubidium frequency standard).

In order to simplify the identification of the equipment used at some special tests, some items of test equipment and ancillaries can be provided with an identifier or number in the equipment list below (Lab/Item).

| No. | Lab / Item | Equipment                                             | Type                   | Manufact.           | Serial No.                 | INV. No<br>Cetecom | Kind of<br>Calibration | Last<br>Calibration | Next<br>Calibration |
|-----|------------|-------------------------------------------------------|------------------------|---------------------|----------------------------|--------------------|------------------------|---------------------|---------------------|
| 1   | n. a.      | Switch / Control Unit                                 | 3488A                  | HP<br>Meßtechnik    |                            | 300001691          | ne                     |                     |                     |
| 2   | n. a.      | Power Supply DC                                       | NGPE 40/40             | R&S                 | 388                        | 400000078          | vIKI!                  | 21.08.2012          | 21.08.2014          |
| 3   | n. a.      | Power Sensor 50 Ohms, 10 MHz - 18 GHz, 1 nW - 20 mW   | NRV-Z1                 | R&S                 | 833894/011                 | 300002681-0010     | k                      | 22.08.2012          | 22.08.2014          |
| 4   | n. a.      | Hygro-Thermometer                                     | -/-, 5-45°C, 20-100%rF | Thies<br>Clima      | -/-                        | 400000080          | izw                    | 29.10.2013          | 29.10.2015          |
| 5   | n. a.      | Vector Signal Generator, 300 kHz to 2.2 GHz           | SMIQ03B                | R&S                 | 835541/055                 | 300002681-0001     | k                      | 18.08.2011          | 18.08.2014          |
| 7   | n. a.      | Signal Generator 0.01/2 - 20 GHz, Frequ. Resol. 0.1Hz | SMP02                  | R&S                 | 835133/011                 | 300002681-0003     | k                      | 12.08.2011          | 12.08.2014          |
| 8   | n. a.      | Dual Channel Power Meter                              | NRVD                   | R&S                 | 835430/044                 | 300002681-0004     | k                      | 22.08.2012          | 22.08.2014          |
| 9   | n. a.      | Switch / Control Unit                                 | SSCU                   | R&S                 | 338864/003                 | 300002681-0006     | ne                     |                     |                     |
| 10  | n. a.      | Precision Step Attenuator 50 Ohms, 0 - 2700MHz        | RSP                    | R&S                 | 834500/010                 | 300002681-0007     | NK!                    | 26.08.2008          |                     |
| 11  | n. a.      | Frequency Standard (Rubidium Frequency Standard)      | MFS (Rubidium)         | R&S (Datum)         | 002                        | 300002681-0009     | Ve                     | 21.08.2012          | 21.08.2014          |
| 12  | n. a.      | Power Sensor 50 Ohms, 10 MHz - 18 GHz, 1 nW - 20 mW   | NRV-Z1                 | R&S                 | 833894/012                 | 300002681-0013     | NK!                    | 26.08.2008          |                     |
| 13  | n. a.      | Directional Coupler                                   | 101020010              | Krytar              | 70215                      | 300002840          | ev                     |                     |                     |
| 14  | n. a.      | DC-Blocker                                            | 8143                   | Inmet Corp.         | none                       | 300002842          | ne                     |                     |                     |
| 15  | n. a.      | Powersplitter                                         | 6005-3                 | Inmet Corp.         |                            | 300002841          | ev                     |                     |                     |
| 16  | n. a.      | Temperature Test Chamber                              | VT 4002                | Heraeus<br>Voetsch  | 58566046820<br>010         | 300003019          | Ve                     | 26.09.2013          | 26.09.2015          |
| 17  | n. a.      | CBT (Bluetooth Tester + EDR Signalling)               | CBT 1153.9000 K35      | R&S                 | 100185                     | 300003416          | vIKI!                  | 21.08.2012          | 21.08.2014          |
| 18  | n. a.      | Spectrum Analyzer 9kHz to 30GHz - 140...+30dBm        | FSP30                  | R&S                 | 100886                     | 300003575          | k                      | 22.08.2012          | 22.08.2014          |
| 19  | n. a.      | CBT-K57 Software-Option for CBT/CBT32                 | CBT-K57                | R&S                 | 101051                     | 300003910          | ne                     |                     |                     |
| 20  | 45         | Switch-Unit                                           | 3488A                  | HP<br>Meßtechnik    | 2719A14505                 | 300000368          | g                      |                     |                     |
| 21  | n. a.      | software                                              | SPS_PHE 1.4f           | Spitzberger & Spieß | B5981;<br>5D1081;B597<br>9 | 300000210          | ne                     |                     |                     |
| 22  | n. a.      | EMI Test Receiver                                     | ESCI 3                 | R&S                 | 100083                     | 300003312          | k                      | 27.01.2014          | 27.01.2015          |
| 23  | n. a.      | Amplifier                                             | JS42-00502650-28-5A    | MITEQ               | 1084532                    | 300003379          | ev                     |                     |                     |
| 24  | n. a.      | Antenna Tower                                         | Model 2175             | ETS-<br>LINDGREN    | 64762                      | 300003745          | izw                    |                     |                     |

|    |       |                                                |                                  |                      |            |           |      |            |            |
|----|-------|------------------------------------------------|----------------------------------|----------------------|------------|-----------|------|------------|------------|
| 25 | n. a. | Positioning Controller                         | Model 2090                       | ETS-LINDGREN         | 64672      | 300003746 | izw  |            |            |
| 26 | n. a. | Turntable Interface-Box                        | Model 105637                     | ETS-LINDGREN         | 44583      | 300003747 | izw  |            |            |
| 27 | n. a. | TRILOG Broadband Test-Antenna 30 MHz - 3 GHz   | VULB9163                         | Schwarzbeck          | 295        | 300003787 | k    | 22.04.2014 | 22.04.2016 |
| 28 | n. a. | Spectrum-Analyzer                              | FSU26                            | R&S                  | 200809     | 300003874 | k    | 22.01.2014 | 22.01.2015 |
| 29 | n. a. | Double-Ridged Waveguide Horn Antenna 1-18.0GHz | 3115                             | EMCO                 | 8812-3088  | 300001032 | vKI! | 08.05.2013 | 08.05.2015 |
| 30 | n. a. | Anechoic chamber                               | FAC 3/5m                         | MWB / TDK            | 87400/02   | 300000996 | ev   |            |            |
| 31 | n. a. | Switch / Control Unit                          | 3488A                            | HP Meßtechnik        | *          | 300000199 | ne   |            |            |
| 32 | 90    | Active Loop Antenna 10 kHz to 30 MHz           | 6502                             | Kontron Psychotech   | 8905-2342  | 300000256 | k    | 13.06.2013 | 13.06.2015 |
| 33 | n. a. | Amplifier                                      | js42-00502650-28-5a              | Parzich GMBH         | 928979     | 300003143 | ne   |            |            |
| 34 | n. a. | Band Reject filter                             | WRCG185 5/1910-1835/1925-40/8SS  | Wainwright           | 7          | 300003350 | ev   |            |            |
| 35 | n. a. | Band Reject filter                             | WRCG240 0/2483-2375/2505-50/10SS | Wainwright           | 11         | 300003351 | ev   |            |            |
| 36 | n. a. | Highpass Filter                                | WHKX7.0/18G-8SS                  | Wainwright           | 18         | 300003789 | ne   |            |            |
| 37 | n. a. | TRILOG Broadband Test-Antenna 30 MHz - 3 GHz   | VULB9163                         | Schwarzbeck          | 371        | 300003854 | vKI! | 14.10.2011 | 14.10.2014 |
| 38 | n. a. | MXE EMI Receiver 20 Hz bis 26,5 GHz            | N9038A                           | Agilent Technologies | MY51210197 | 300004405 | k    | 13.03.2014 | 13.03.2015 |
| 39 | n. a. | 4U RF Switch Platform                          | L4491A                           | Agilent Technologies | MY50000037 | 300004509 | ne   |            |            |

**Agenda:** Kind of Calibration

k calibration / calibrated  
 ne not required (k, ev, izw, zw not required)  
 ev periodic self verification  
 Ve long-term stability recognized  
 vKI! Attention: extended calibration interval  
 NK! Attention: not calibrated

EK limited calibration  
 zw cyclical maintenance (external cyclical maintenance)  
 izw internal cyclical maintenance  
 g blocked for accredited testing  
 \*) next calibration ordered / currently in progress

## 11 Observations

No observations exceeding those reported with the single test cases have been made.

**Annex A Document history**

| Version | Applied changes                                                        | Date of release |
|---------|------------------------------------------------------------------------|-----------------|
|         | Initial release                                                        | 2014-07-17      |
| A       | Editorial changes (product name)<br>Corrected output power calculation | 2014-07-21      |

**Annex B Further information****Glossary**

|          |   |                                                |
|----------|---|------------------------------------------------|
| AVG      | - | Average                                        |
| DUT      | - | Device under test                              |
| EMC      | - | Electromagnetic Compatibility                  |
| EN       | - | European Standard                              |
| EUT      | - | Equipment under test                           |
| ETSI     | - | European Telecommunications Standard Institute |
| FCC      | - | Federal Communication Commission               |
| FCC ID   | - | Company Identifier at FCC                      |
| HW       | - | Hardware                                       |
| IC       | - | Industry Canada                                |
| Inv. No. | - | Inventory number                               |
| N/A      | - | Not applicable                                 |
| PP       | - | Positive peak                                  |
| QP       | - | Quasi peak                                     |
| S/N      | - | Serial number                                  |
| SW       | - | Software                                       |

## Annex C Accreditation Certificate

Front side of certificate

Back side of certificate



Deutsche Akkreditierungsstelle GmbH

Befehlens gemäß § 8 Absatz 1 AkkStelleG i.V.m. § 1 Absatz 1 AkkStelleG9V  
Unterzeichnerin der Multilateralen Abkommen  
von EA, ILAC und IAF zur gegenseitigen Anerkennung

### Akkreditierung



Die Deutsche Akkreditierungsstelle GmbH bestätigt hiermit, dass das Prüflaboratorium

**CETECOM ICT Services GmbH**  
Unterrichterstraße 6-10, 66117 Saarbrücken

die Kompetenz nach DIN EN ISO/IEC 17025:2005 besitzt, Prüfungen in folgenden Bereichen durchzuführen:

Drahtgebundene Kommunikation einschließlich xDSL

VoIP und DECT

Akustik

Funk einschließlich WLAN

Short Range Devices (SRD)

RFID

WiMax und Richtfunk

Mobilfunk (GSM / DCS, Over the Air (OTA) Performance)

Elektromagnetische Verträglichkeit (EMV) einschließlich Automotive

Produktsicherheit

SAR und Hearing Aid Compatibility (HAC)

Umweltsimulation

Smart Card Terminals

Bluetooth

Wi-Fi Services

Die Akkreditierungsurkunde gilt nur in Verbindung mit dem Bescheid vom 07.03.2014 mit der  
Akkreditationsnummer D-PL-12076-01 und ist gültig 17.01.2018. Sie besteht aus diesem Deckblatt, der  
Rückseite des Deckblatts und der folgenden Anlage mit insgesamt 77 Seiten.

Registrierungsnummer der Urkunde: D-PL-12076-01-00

Frankfurt am Main, 07.03.2014

Datei: 00000001-00000001

Im Auftrag D-PL-12076-01-00  
Hilfsgüter  
Hilfsgüter

Deutsche Akkreditierungsstelle GmbH

Standort Berlin  
Spittelmarkt 10  
10117 Berlin

Standort Frankfurt am Main  
Gartenstraße 6  
60504 Frankfurt am Main

Standort Braunschweig  
Bundesallee 100  
38116 Braunschweig

Die auszugsweise Veröffentlichung der Akkreditierungsurkunde bedarf der vorherigen schriftlichen  
Zustimmung der Deutsche Akkreditierungsstelle GmbH (DAkkS). Ausgenommen davon ist die separate  
Weiterverbreitung des Deckblattes durch die umseitig genannte Konformitätsbewertungsstelle in  
unveränderter Form.

Es darf nicht der Anschein erweckt werden, dass sich die Akkreditierung auch auf Bereiche erstreckt,  
die über den durch die DAkkS bestätigten Akkreditierungsbereich hinausgehen.

Die Akkreditierung erfolgte gemäß des Gesetzes über die Akkreditierungsstelle (AkkStelleG) vom  
31. Juli 2009 (BGBl. I S. 2675) sowie der Verordnung (EG) Nr. 765/2008 des Europäischen Parlaments  
und des Rates vom 9. Juli 2008 über die Vorschriften für die Akkreditierung und Marktüberwachung  
im Zusammenhang mit der Vermarktung von Produkten (AbL L 218 vom 9. Juli 2008, S. 30).  
Die DAkkS ist Unterzeichnerin der Multilateralen Abkommen zur gegenseitigen Anerkennung der  
European co-operation for Accreditation (EA), des International Accreditation Forum (IAF) und  
des International Laboratory Accreditation Cooperation (ILAC). Die Unterzeichner dieser Abkommen  
erkennen ihre Akkreditierungen gegenseitig an.

Der aktuelle Stand der Mitgliedschaft kann folgenden Webseiten entnommen werden:  
EA: [www.european-accreditation.org](http://www.european-accreditation.org)  
ILAC: [www.ilac.org](http://www.ilac.org)  
IAF: [www.iaf.org](http://www.iaf.org)

### Note:

The current certificate including annex is published on our website (see link below) or may be received from CETECOM ICT Services on request.

<http://www.cetecom.com/eu/de/cetecom-group/europa/deutschland-saarbruecken/akkreditierungen.html>