

FCC RF Test Report


APPLICANT : Senga Na Lenga Limited Liability Company
EQUIPMENT : Tablet
MODEL NAME : SR87CV
FCC ID : 2ACBF-6708
STANDARD : FCC Part 15 Subpart E §15.407
CLASSIFICATION : (NII) Unlicensed National Information Infrastructure

The testing was completed on Jun. 03, 2015. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.



Reviewed by: Joseph Lin / Supervisor



Approved by: Jones Tsai / Manager



SPORTON INTERNATIONAL INC.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C.

Report No. : FR520216-01D

Report Version : Rev. 02

Page Number : 1 of 34

Report Template No.: BU5-FR15EWL Version 1.0

TABLE OF CONTENTS

SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant	5
1.2 Feature of Equipment Under Test	5
1.3 Product Specification of Equipment Under Test.....	5
1.4 Modification of EUT	5
1.5 Testing Location	6
1.6 Applicable Standards.....	6
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	7
2.1 Carrier Frequency Channel	7
2.2 Pre-Scanned RF Power	8
2.3 Test Mode	9
2.4 Connection Diagram of Test System	10
2.5 Support Unit used in test configuration and system	11
2.6 EUT Operation Test Setup	11
2.7 Measurement Results Explanation Example.....	11
3 TEST RESULT	12
3.1 26dB & 99% Occupied Bandwidth Measurement	12
3.2 Maximum Conducted Output Power Measurement	14
3.3 Power Spectral Density Measurement	15
3.4 Unwanted Radiated Emission Measurement	17
3.5 AC Conducted Emission Measurement.....	24
3.6 Frequency Stability Measurement	29
3.7 Automatically Discontinue Transmission	30
3.8 Antenna Requirements	32
4 LIST OF MEASURING EQUIPMENTS.....	33
5 UNCERTAINTY OF EVALUATION	34
APPENDIX A. CONDUCTED TEST RESULTS	
APPENDIX B. RADIATED TEST RESULTS	

REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR520216-01D	Rev. 01	Initial issue of report	May 29, 2015
FR520216-01D	Rev. 02	Adding test data of duty cycle in section 3.4.7 and Automatically Discontinue Transmission in section 3.7.3.	Jun. 03, 2015

SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	2.1049 15.403(i)	26dB & 99% Bandwidth	-	Pass	-
3.2	15.407(a)	Maximum Conducted Output Power	FCC ≤ 24 dBm (depend on band)	Pass	-
3.3	15.407(a)	Power Spectral Density	FCC ≤ 11 dBm (depend on band)	Pass	-
3.4	15.407(b)	Unwanted Emissions	$\leq -17, -27$ dBm (depend on band)&15.209(a)	Pass	Under limit 0.50 dB at 5149.850 MHz
3.5	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 11.50 dB at 1.014 MHz and 1.278 MHz
3.6	15.407(g)	Frequency Stability	Within Operation Band	Pass	-
3.7	15.407(c)	Automatically Discontinue Transmission	Discontinue Transmission	Pass	-
0	15.203 & 15.407(a)	Antenna Requirement	N/A	Pass	-

1 General Description

1.1 Applicant

Senga Na Lenga Limited Liability Company
3900 N. Causeway Blvd.
Suite 1200
Metairie, Louisiana 70002

1.2 Feature of Equipment Under Test

Product Feature & Specification	
Equipment	Tablet
Model Name	SR87CV
FCC ID	2ACBF-6708
EUT supports Radios application	WLAN 11b/g/n HT20 WLAN 11a/n HT20/HT40 WLAN 11ac VHT20/VHT40/VHT80 Bluetooth v4.1 EDR/LE

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.3 Product Specification of Equipment Under Test

Product Specification subjective to this standard	
Tx/Rx Frequency Range	5180 MHz ~ 5240 MHz
Maximum Output Power to Antenna	802.11a : 15.38 dBm / 0.0345 W 802.11n HT20 : 15.28 dBm / 0.0337 W 802.11n HT40 : 15.49 dBm / 0.0354 W 802.11ac VHT20 : 13.97 dBm / 0.0249 W 802.11ac VHT40 : 13.84 dBm / 0.0242 W 802.11ac VHT80 : 13.24 dBm / 0.0211 W
Antenna Type / Gain	Fixed internal Antenna with gain 2.40 dBi
Type of Modulation	802.11a/n : OFDM (BPSK / QPSK / 16QAM / 64QAM) 802.11ac : OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM)

1.4 Modification of EUT

No modifications are made to the EUT during all test items.

1.5 Testing Location

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code : 1190) and the FCC designation No. TW1022 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC Test.

Test Site	SPORTON INTERNATIONAL INC.	
Test Site Location	No. 52, Hwa Ya 1 st Rd., Hwa Ya Technology Park, Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C. TEL: +886-3-327-3456 FAX: +886-3-328-4978	
Test Site No.	Sporton Site No.	
	TH05-HY	CO05-HY

Note: The test site complies with ANSI C63.4 2009 requirement.

Test Site	SPORTON INTERNATIONAL INC.	
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd Rd. Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C. TEL: +886-3-327-0855	
Test Site No.	Sporton Site No.	
	03CH11-HY	

Note: The test site complies with ANSI C63.4 2009 requirement.

1.6 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart E
- ♦ FCC KDB 789033 D02 General UNII Test Procedures New Rules v01
- ♦ FCC KDB 644545 D03 Guidance for IEEE 802.11ac New Rules v01
- ♦ ANSI C63.10-2009

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. FCC permits the use of the 1.5 meter table as an alternative in C63.10-2013 through inquiry tracking number 961829.
3. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

2 Test Configuration of Equipment Under Test

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conducted emission (150 kHz to 30 MHz) and radiated emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Z plane) were recorded in this report.

The final configuration from all the combinations and the worst-case data rates were investigated by measuring the maximum power across all the data rates and modulation modes under section 2.2.

Based on the worst configuration found above, the RF power setting is set individually to meet FCC compliance limit for the final conducted and radiated tests shown in section 2.3.

2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5150-5250 MHz Band 1 (U-NII-1)	36	5180	44	5220
	38	5190	46	5230
	40	5200	48	5240
	42	5210		

Note: The above Frequency and Channel in boldface were 802.11n HT40.

2.2 Pre-Scanned RF Power

Preliminary tests were performed in different data rate and data rate associated with the highest power were chosen for full test in the following tables. Final Output Power equals to Measured Output Power adds the duty factor.

5GHz 802.11a mode								
Data Rate (MHz)	6M bps	9M bps	12M bps	18M bps	24M bps	36M bps	48M bps	54M bps
Avg. Power (dBm)	15.38	15.20	15.17	15.21	15.14	15.08	14.87	15.18

5GHz 802.11n HT20 mode								
Data Rate (MHz)	MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
Avg. Power (dBm)	15.28	14.75	14.88	14.88	14.96	14.97	14.95	15.24

5GHz 802.11n HT40 mode								
Data Rate (MHz)	MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
Avg. Power (dBm)	15.49	14.89	15.19	15.28	15.38	15.48	15.37	15.34

5GHz 802.11ac VHT20 mode									
Data Rate (MHz)	MCS 0	MCS 1	MCS 2	MCS 3	MCS 4	MCS 5	MCS 6	MCS 7	MCS 8
Avg. Power (dBm)	13.97	13.59	13.55	13.47	13.31	13.74	13.50	13.67	13.82

5GHz 802.11ac VHT40 mode										
Data Rate (MHz)	MCS 0	MCS 1	MCS 2	MCS 3	MCS 4	MCS 5	MCS 6	MCS 7	MCS 8	MCS 9
Avg. Power (dBm)	13.84	13.14	13.10	13.22	13.47	13.64	13.69	13.75	13.83	13.81

5GHz 802.11ac VHT80 mode										
Data Rate (MHz)	MCS 0	MCS 1	MCS 2	MCS 3	MCS 4	MCS 5	MCS 6	MCS 7	MCS 8	MCS 9
Avg. Power (dBm)	13.24	12.76	13.00	13.09	12.94	12.86	12.85	13.17	12.94	13.17

2.3 Test Mode

Final test mode of conducted test items and radiated spurious emissions are considering the modulation and worse data rates from the power table described in section 2.2.

Modulation	Data Rate
802.11a	6 Mbps
802.11n HT20	MCS0
802.11n HT40	MCS0
802.11ac VHT20	MCS0
802.11ac VHT40	MCS0
802.11ac VHT80	MCS0


Test Cases	
AC Conducted Emission	Mode 1 : WLAN (5GHz) Link + Bluetooth Link + Earphone + MPEG4 + SD Card + USB Cable (Charging from Adapter)

Ch. #		Band I : 5150-5250 MHz		
		802.11a	802.11n HT20	802.11n HT40
L	Low	36	36	38
M	Middle	44	44	-
H	High	48	48	46


Ch. #		Band I : 5150-5250 MHz		
		802.11ac VHT20	802.11ac VHT40	802.11ac VHT80
L	Low	36	38	-
M	Middle	44	-	42
H	High	48	46	-

2.4 Connection Diagram of Test System

<WLAN Tx Mode>

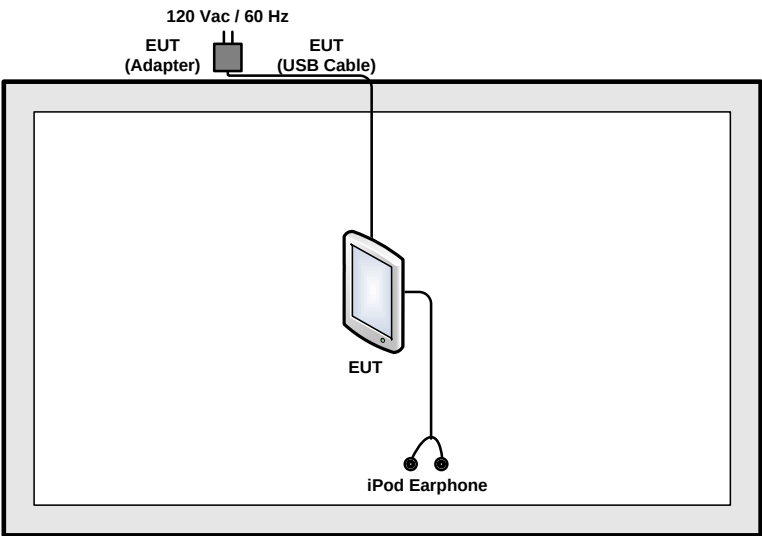

<AC Conducted Emission Mode>

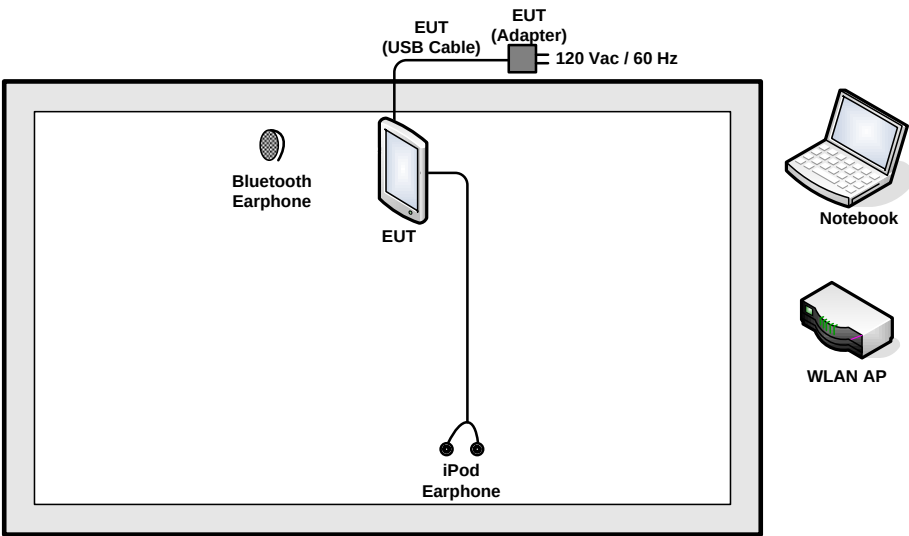

2.5 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Bluetooth Earphone	Sony Ericsson	MW600	PY7DDA-2029	N/A	N/A
2.	WLAN AP	ASUS	RT-AC66U	MSQ-RTAC66U	N/A	Unshielded, 1.8 m
3.	Notebook	DELL	Latitude E6320	FCC DoC/ Contains FCC ID: QDS-BRCM1054	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
4.	iPod Earphone	Apple	N/A	Verification	Unshielded, 1.0 m	N/A
5.	SD Card	SanDisk	MicroSD HC	FCC DoC	N/A	N/A

2.6 EUT Operation Test Setup

For WLAN function, programmed RF utility make the EUT provide functions like channel selection and power level for continuous transmitting and receiving signals.

2.7 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.2 dB and 10dB attenuator.

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 4.2 + 10 = 14.2 \text{ (dB)}\end{aligned}$$

3 Test Result

3.1 26dB & 99% Occupied Bandwidth Measurement

3.1.1 Description of 26dB & 99% Occupied Bandwidth

This section is for reporting purpose only.

There is no restriction limits for bandwidth.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures


1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v01.
Section C) Emission bandwidth
2. Set RBW = approximately 1% of the emission bandwidth.
3. Set the VBW > RBW.
4. Detector = Peak.
5. Trace mode = max hold
6. Measure the maximum width of the emission that is 26 dB down from the peak of the emission.
Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.
7. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1MHz and set the Video bandwidth (VBW) $\geq 3 * \text{RBW}$.
8. Measure and record the results in the test report.

3.1.4 Test Setup

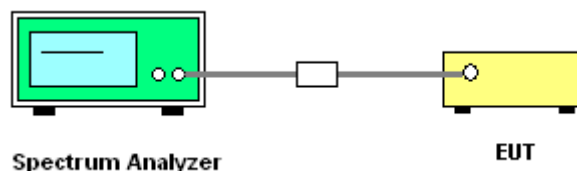

3.1.5 Test Result of 26dB & 99% Occupied Bandwidth Plots

Please refer to Appendix A.

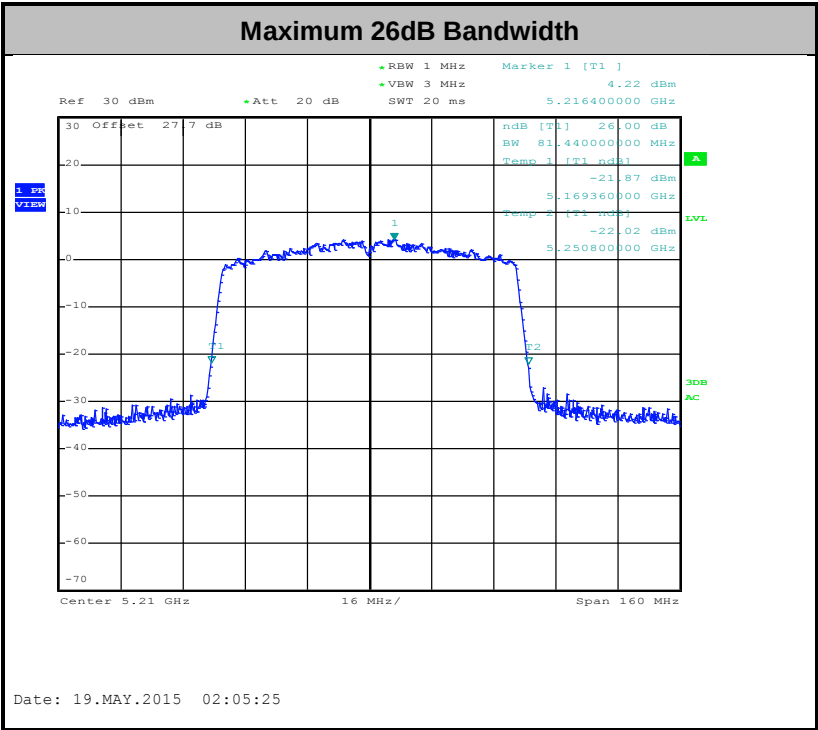

3.2 Maximum Conducted Output Power Measurement

3.2.1 Limit of Maximum Conducted Output Power

For mobile and portable client devices in the 5.15–5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.


3.2.3 Test Procedures

The testing follows Method PM of FCC KDB 789033 D02 General UNII Test Procedures New Rules v01.

Method PM (Measurement using an RF average power meter):

1. Measurement is performed using a wideband RF power meter.
2. The EUT is configured to transmit continuously with a consistent duty cycle at its maximum power control level.
3. Measure the average power of the transmitter, and the average power is corrected with duty factor, $10 \log(1/x)$, where x is the duty cycle.

3.2.4 Test Setup

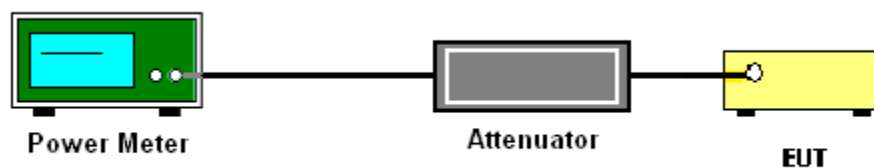

3.2.5 Test Result of Maximum Conducted Output Power

Please refer to Appendix A.

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

For mobile and portable client devices in the 5.15–5.25 GHz band, the maximum power spectral density shall not exceed 11dBm in any 1 megahertz band.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures

The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v01.


Section F) Maximum power spectral density.

Method SA-2

(trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).


1. The testing follows Method SA-2 of FCC KDB 789033 D02 General UNII Test Procedures New Rules v01.
 - Measure the duty cycle.
 - Set span to encompass the entire emission bandwidth (EBW) of the signal.
 - Set RBW = 1 MHz.
 - Set VBW $\geq$ 3 MHz.
 - Number of points in sweep $\geq$ 2 Span / RBW.
 - Sweep time = auto.
 - Detector = RMS
 - Trace average at least 100 traces in power averaging mode.
 - Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add $10 \log(1/0.25) = 6$ dB if the duty cycle is 25 percent.
2. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
3. Each plot has already offset with cable loss, and attenuator loss. Measure the PPSD and record it.

3.3.4 Test Setup

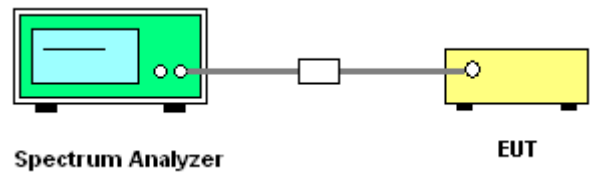

3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

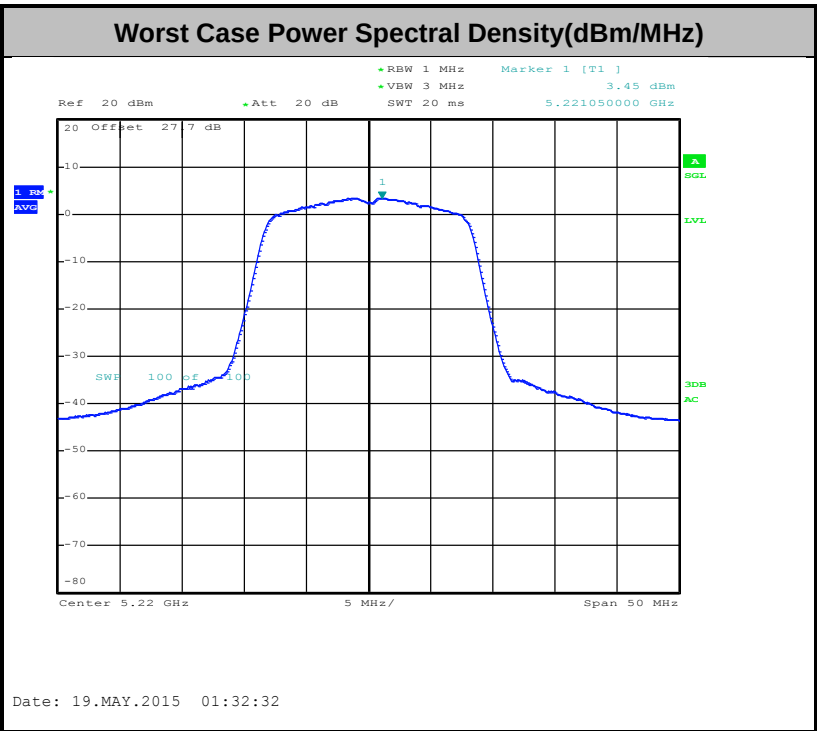

Note: Average Power Density (dB) = Measured value+ Duty Factor

3.4 Unwanted Radiated Emission Measurement

This section as specified in FCC Part 15.407(b) is to measure unwanted emissions through radiated measurement for band edge spurious emissions and out of band emissions measurement. The unwanted emissions shall comply with 15.407(b)(1) to (6), and restricted bands per FCC Part15.205.

3.4.1 Limit of Unwanted Emissions

- (1) For transmitters operating in the 5150-5250 MHz band: all emissions outside of the 5150-5350 MHz band shall not exceed an EIRP of -27dBm/MHz.
- (2) Unwanted spurious emissions fallen in restricted bands per FCC Part15.205 shall comply with the general field strength limits set forth in § 15.209 as below table,

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

Note: The following formula is used to convert the EIRP to field strength.

$$E = \frac{1000000\sqrt{30P}}{3} \text{ } \mu\text{V/m, where P is the eirp (Watts)}$$

EIRP (dBm)	Field Strength at 3m (dBμV/m)
-17	78.3
- 27	68.3

- (3) KDB789033 v01 G)2)c) As specified in 15.407(b), emissions above 1000 MHz that are outside of the restricted bands are subject to a peak emission limit of -27 dBm/MHz (or -17 dBm/MHz as specified in 15.407(b)(4)). However, an out-of-band emission that complies with both the average and peak limits of 15.209 is not required to satisfy the -27 dBm/MHz or -17 dBm/MHz peak emission limit.

3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.4.3 Test Procedures

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v01.

Section G) Unwanted emissions measurement.

(1) Procedure for Unwanted Emissions Measurements Below 1000MHz

- RBW = 120 kHz
- VBW = 300 kHz
- Detector = Peak
- Trace mode = max hold

(2) Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz

- RBW = 1 MHz
- VBW $\geq$ 3 MHz
- Detector = Peak
- Sweep time = auto
- Trace mode = max hold

(3) Procedures for Average Unwanted Emissions Measurements Above 1000MHz

- RBW = 1 MHz
- VBW = 10 Hz, when duty cycle is no less than 98 percent.
- VBW $\geq$ 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.


Band	Duty Cycle(%)	T(μ s)	1/T(kHz)	VBW Setting
802.11a	97.62	4100	0.24	300Hz
802.11n HT20	96.92	3780	0.26	300Hz
802.11n HT40	94.39	1850	0.54	1kHz
802.11n VHT20	97.45	3820	0.26	300Hz
802.11n VHT40	94.39	1850	0.54	1kHz
802.11n VHT80	88.89	880	1.14	3kHz

2. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
4. The antenna is a broadband antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.


5. For each suspected emission, the EUT was arranged to its worst case and then adjust the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

3.4.4 Test Setup


For radiated emissions below 30MHz

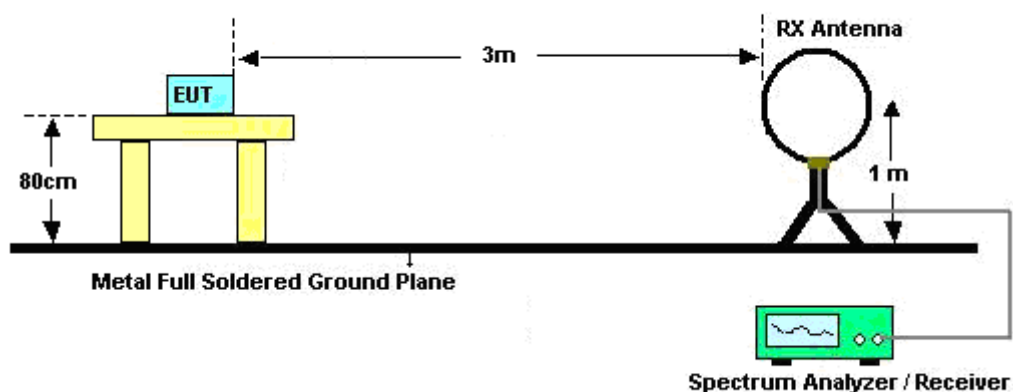

For radiated emissions from 30MHz to 1GHz

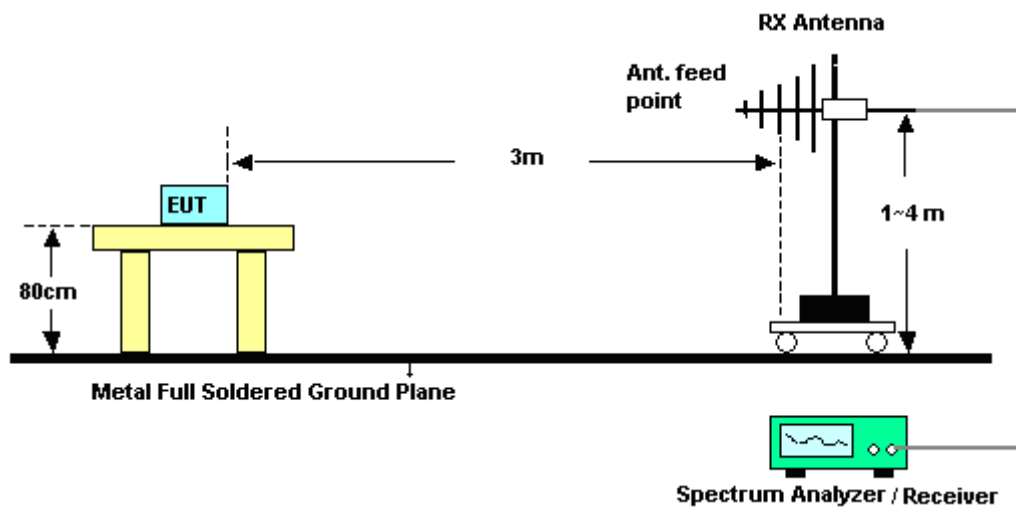

For radiated emissions above 1GHz

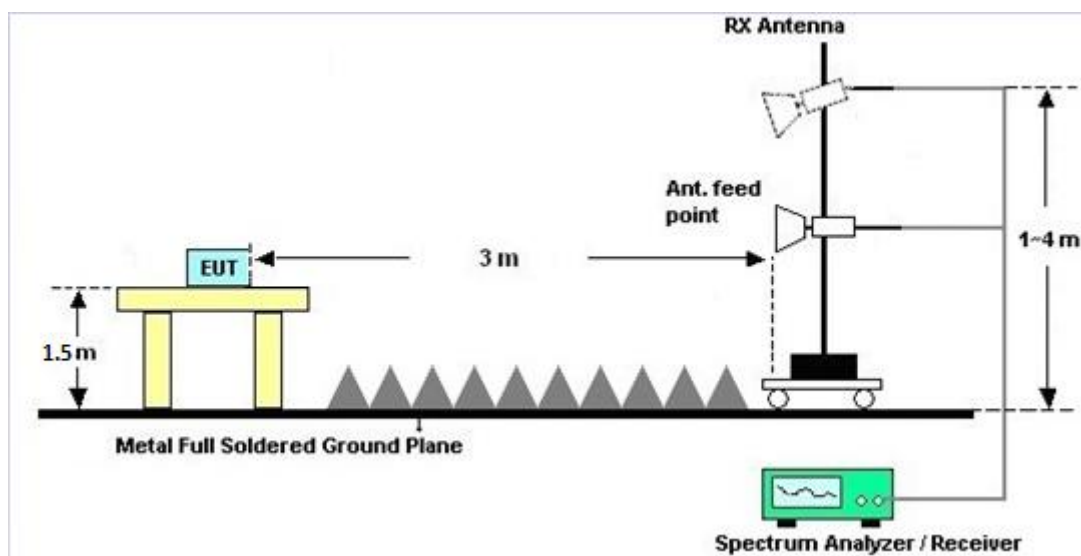



3.4.5 Test Results of Radiated Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.

3.4.6 Test Result of Radiated Band Edges

Please refer to Appendix A.

3.4.7 Duty Cycle

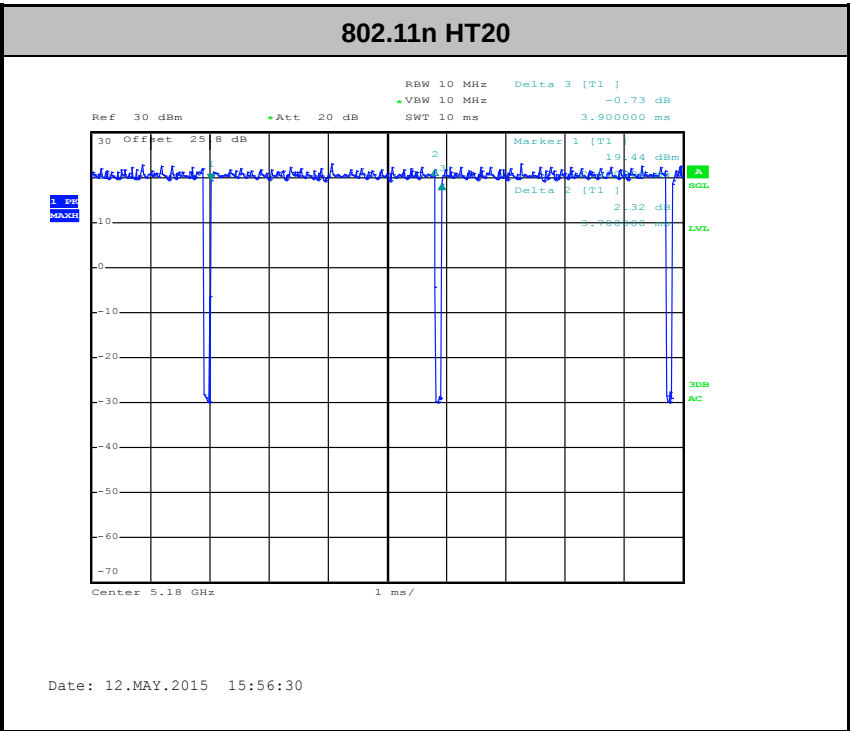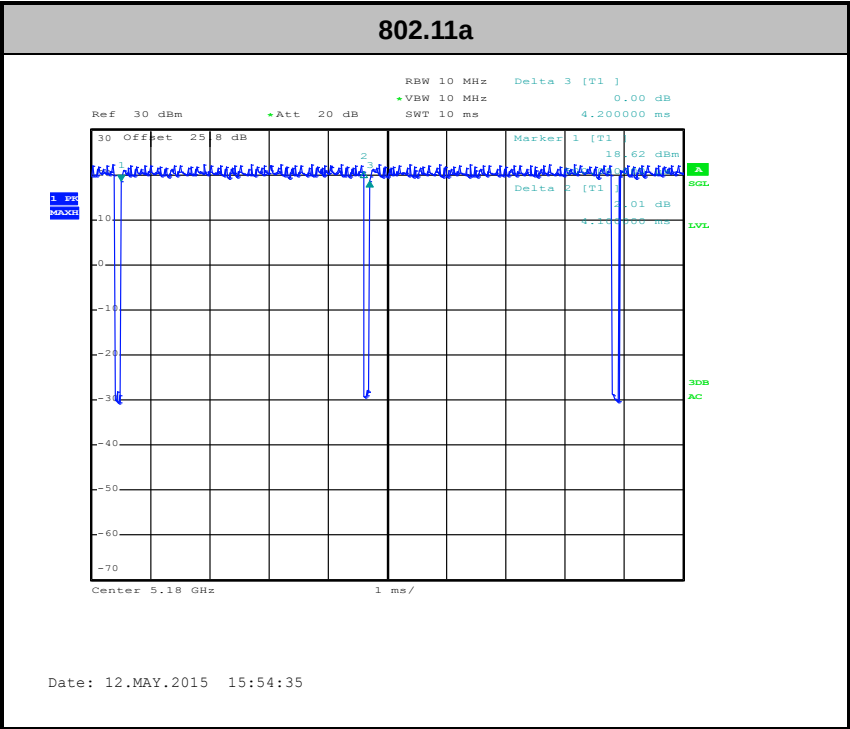

RBW 10 MHz Delta 3 [T1]
 VBW 10 MHz 0.06 dB
 Ref 30 dBm +Att 20 dB
 SWT 5 ms 1.960000 ms

Marker 1 [T1] 17.18 dBm
 Delta 2 [T1] 3.78 dB
 1.810000 ms

1.99 MAGN

Center 5.19 GHz 500 μs/

30dB AC

1.960000 ms

17.18 dBm

3.78 dB

1.810000 ms

1.99 MAGN

Center 5.19 GHz 500 μs/


30dB AC

1.960000 ms

17.18 dBm

3.78 dB

1.810000 ms

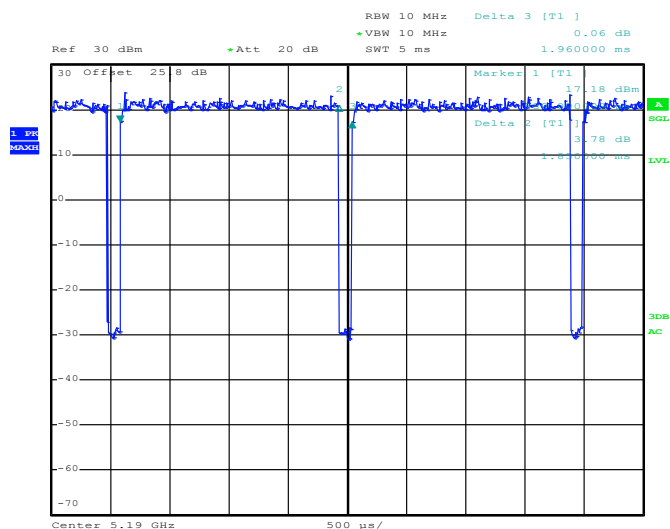

Date: 12.MAY.2015 15:59:10


802.11ac VHT20

RBW 10 MHz Delta 3 [T1]
 VBW 10 MHz 0.15 dB
 Ref 30 dBm Att 20 dB SWT 10 ms 3.920000 ms



1.000000 ms
 0.98 dB
 0.020000 ms

Center 5.18 GHz 1 ms/

Date: 12.MAY.2015 16:02:28

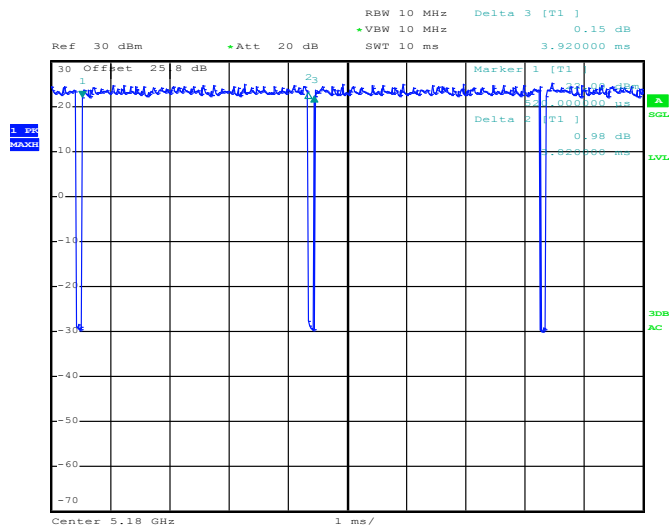

Date: 12.MAY.2015 16:02:28

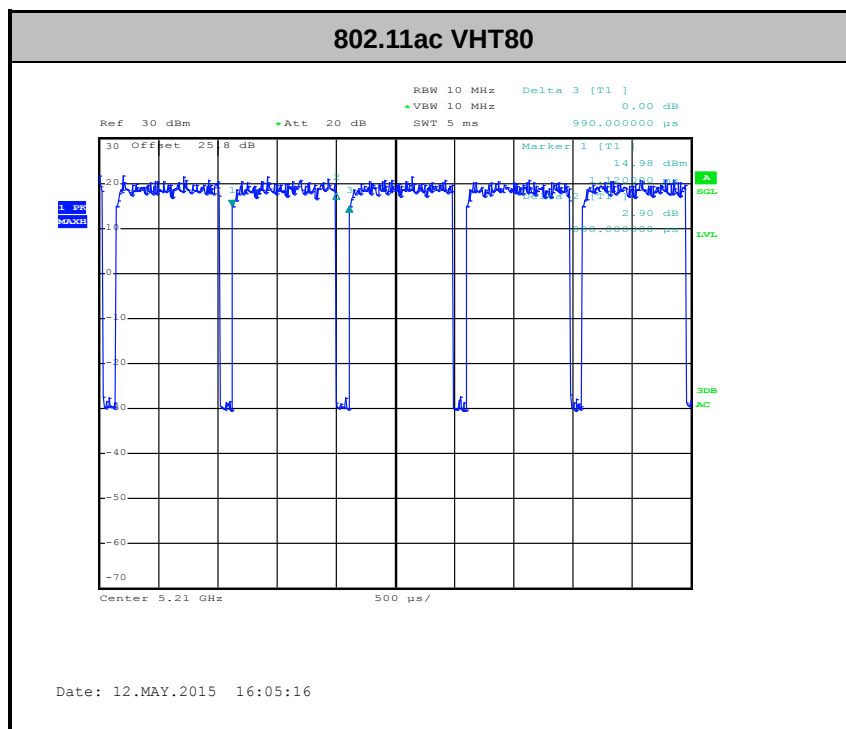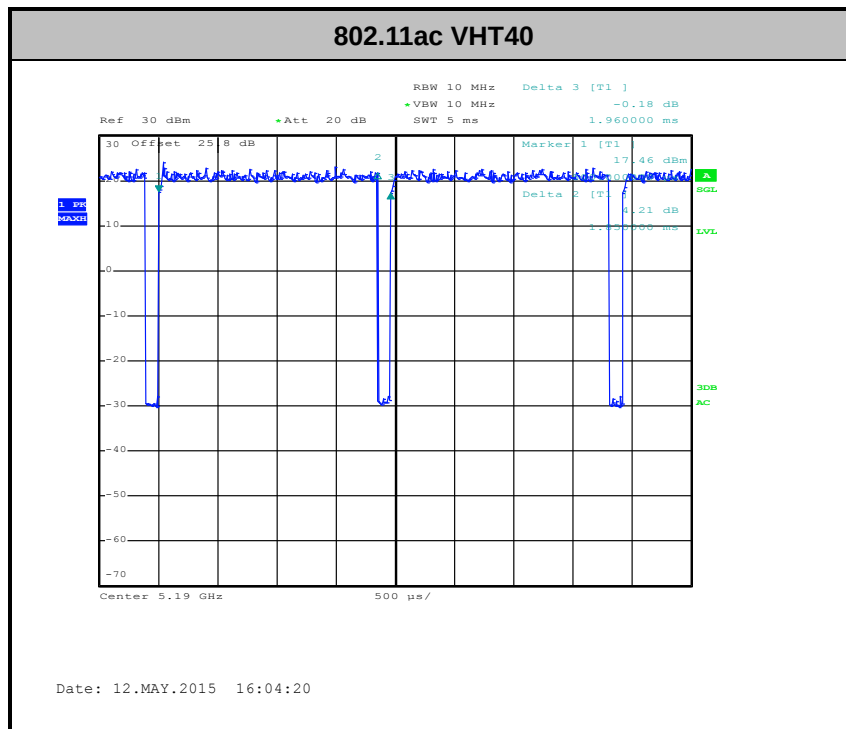

3.4.8 Test Result of Unwanted Radiated Emission (30MHz ~ 10th Harmonic)

Please refer to Appendix A.

3.5 AC Conducted Emission Measurement

3.5.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.5.3 Test Procedures


1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

3.5.4 Test Setup

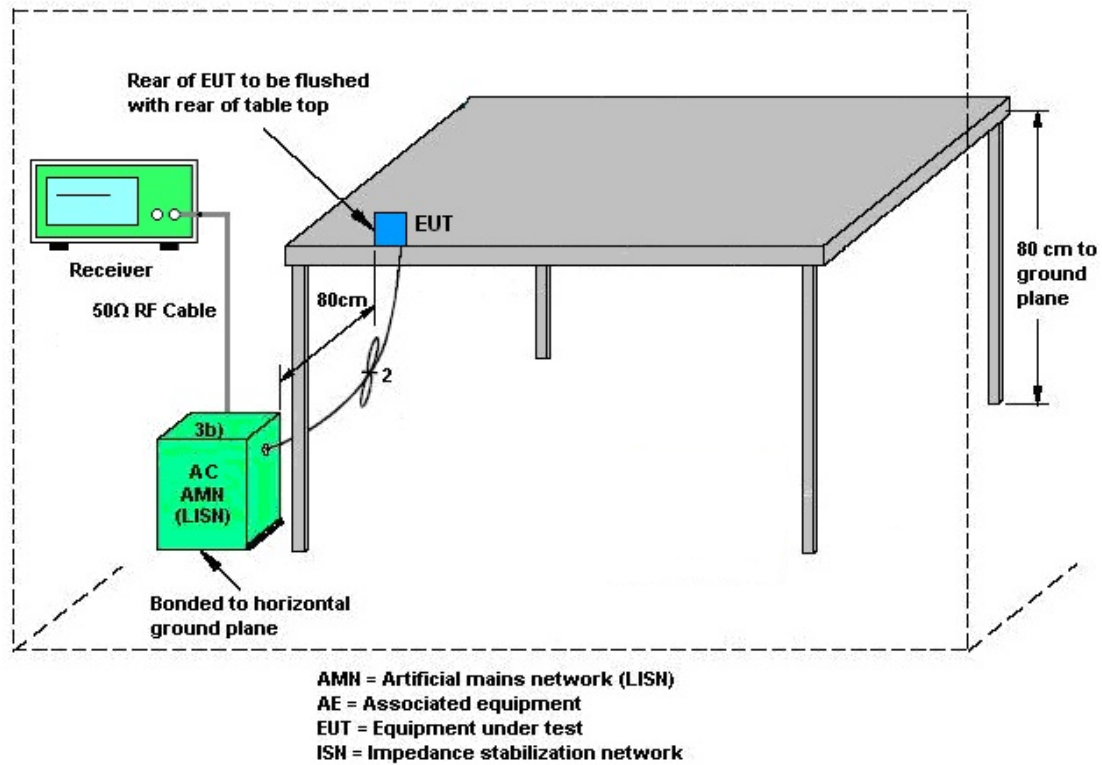

3.5.5 Test Result of AC Conducted Emission

Test Mode :	Mode 1	Temperature :	24~26°C
Test Engineer :	Eric Jeng	Relative Humidity :	48~50%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	WLAN (5GHz) Link + Bluetooth Link + Earphone + MPEG4 + SD Card + USB Cable (Charging from Adapter)		

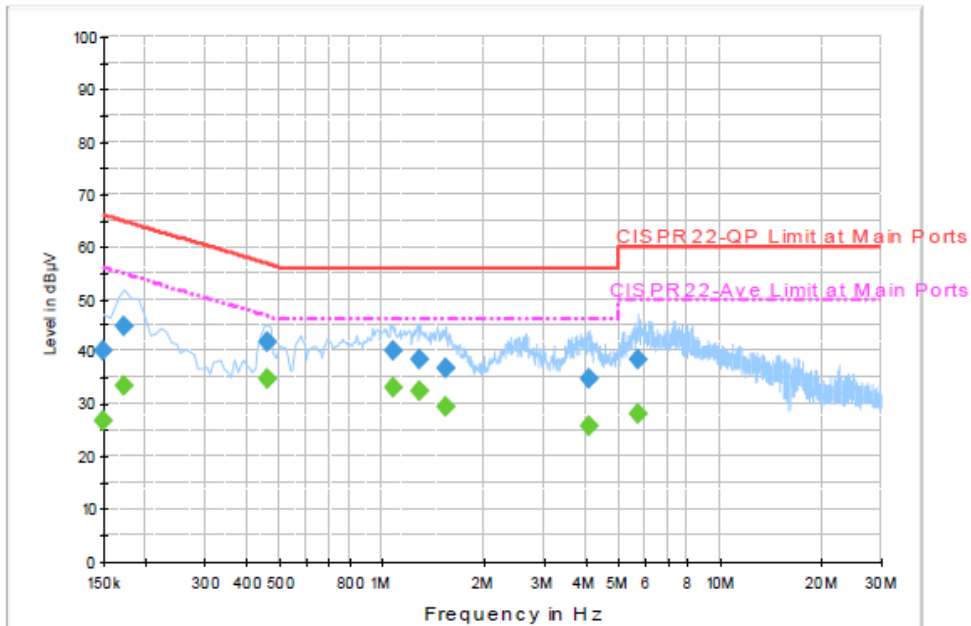


Final Result : QuasiPeak

Frequency (MHz)	QuasiPeak (dBμV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.150000	40.0	Off	L1	19.5	26.0	66.0
0.174000	44.8	Off	L1	19.4	20.0	64.8
0.462000	41.9	Off	L1	19.4	14.8	56.7
1.078000	40.3	Off	L1	19.5	15.7	56.0
1.294000	38.4	Off	L1	19.6	17.6	56.0
1.550000	36.7	Off	L1	19.5	19.3	56.0
4.094000	34.9	Off	L1	19.7	21.1	56.0
5.710000	38.5	Off	L1	19.8	21.5	60.0

Final Result : Average

Frequency (MHz)	Average (dBμV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.150000	26.7	Off	L1	19.5	29.3	56.0
0.174000	33.5	Off	L1	19.4	21.3	54.8
0.462000	34.9	Off	L1	19.4	11.8	46.7
1.078000	33.2	Off	L1	19.5	12.8	46.0
1.294000	32.6	Off	L1	19.6	13.4	46.0
1.550000	29.6	Off	L1	19.5	16.4	46.0
4.094000	25.7	Off	L1	19.7	20.3	46.0
5.710000	28.1	Off	L1	19.8	21.9	50.0


Test Mode :	Mode 1	Temperature :	24~26°C
Test Engineer :	Eric Jeng	Relative Humidity :	48~50%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	WLAN (5GHz) Link + Bluetooth Link + Earphone + MPEG4 + SD Card + USB Cable (Charging from Adapter)		

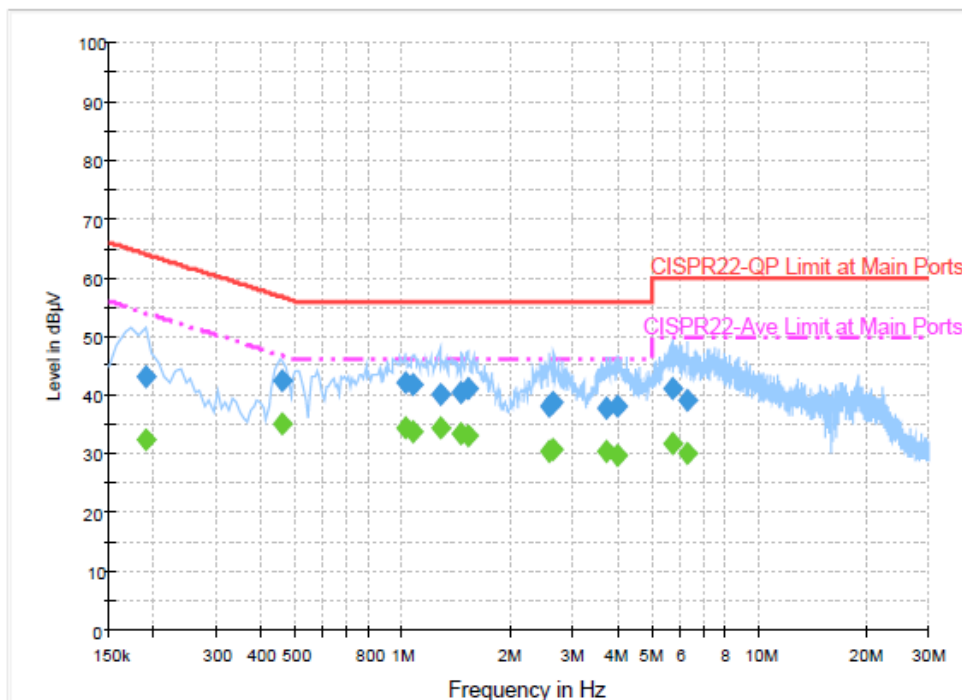

Final Result : QuasiPeak

Frequency (MHz)	QuasiPeak (dBμV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.190000	43.0	Off	N	19.5	21.0	64.0
0.462000	42.5	Off	N	19.4	14.2	56.7
1.014000	42.0	Off	N	19.5	14.0	56.0
1.070000	41.7	Off	N	19.5	14.3	56.0
1.278000	40.3	Off	N	19.6	15.7	56.0
1.462000	40.3	Off	N	19.5	15.7	56.0
1.526000	41.2	Off	N	19.5	14.8	56.0
2.582000	38.1	Off	N	19.6	17.9	56.0
2.654000	38.9	Off	N	19.6	17.1	56.0
3.750000	37.9	Off	N	19.7	18.1	56.0
4.022000	38.1	Off	N	19.7	17.9	56.0
5.710000	41.1	Off	N	19.7	18.9	60.0
6.310000	39.1	Off	N	19.7	20.9	60.0

Test Mode :	Mode 1	Temperature :	24~26°C
Test Engineer :	Eric Jeng	Relative Humidity :	48~50%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	WLAN (5GHz) Link + Bluetooth Link + Earphone + MPEG4 + SD Card + USB Cable (Charging from Adapter)		

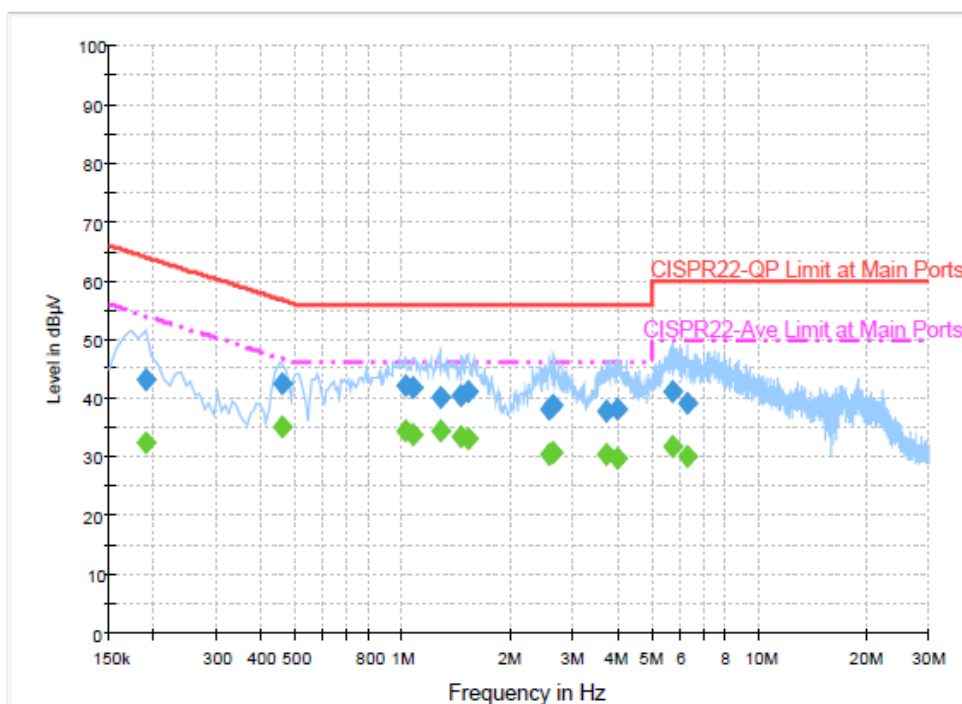

Final Result : Average

Frequency (MHz)	Average (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.190000	32.5	Off	N	19.5	21.5	54.0
0.462000	35.1	Off	N	19.4	11.6	46.7
1.014000	34.5	Off	N	19.5	11.5	46.0
1.070000	33.9	Off	N	19.5	12.1	46.0
1.278000	34.5	Off	N	19.6	11.5	46.0
1.462000	33.3	Off	N	19.5	12.7	46.0
1.526000	33.2	Off	N	19.5	12.8	46.0
2.582000	30.6	Off	N	19.6	15.4	46.0
2.654000	30.7	Off	N	19.6	15.3	46.0
3.750000	30.4	Off	N	19.7	15.6	46.0
4.022000	29.6	Off	N	19.7	16.4	46.0
5.710000	31.8	Off	N	19.7	18.2	50.0
6.310000	30.1	Off	N	19.7	19.9	50.0

3.6 Frequency Stability Measurement

3.6.1 Limit of Frequency Stability

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.


3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.6.3 Test Procedures

1. To ensure emission at the band edge is maintained within the authorized band, those values shall be measured by radiation emissions at upper and lower frequency points, and finally compensated by frequency deviation as procedures below.
2. The EUT was operated at the maximum output power, and connected to the spectrum analyzer, which is set to maximum hold function and peak detector. The peak value of the power envelope was measured and noted. The upper and lower frequency points were respectively measured relatively 10dB lower than the measured peak value.
3. The frequency deviation was calculated by adding the upper frequency point and the lower frequency point divided by two. Those detailed values of frequency deviation are provided in table below.

3.6.4 Test Setup

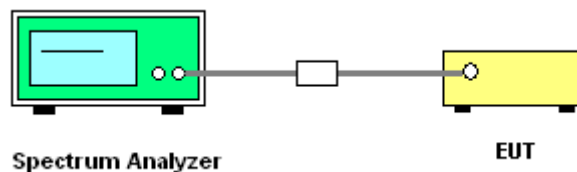

3.6.5 Test Result of Frequency Stability

Please refer to Appendix A.

The frequency band 5180-5240MHz which was verified by testing against other standard is less than 20 ppm which is sufficient to maintain the signal within the 5150-5250MHz band.

3.7 Automatically Discontinue Transmission

3.7.1 Limit of Automatically Discontinue Transmission

The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signaling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization to describe how this requirement is met.

3.7.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.7.3 Test Result of Automatically Discontinue Transmission


EUT is verified this characteristic during the function check of normal sample associated with an access point:

- A. Information start: make EUT supply information to the access point.
- B. Information stop: stop supplying information to the access point.

While the EUT is not transmitting any information, the EUT can automatically discontinue transmission and become standby mode for power saving.

- C. Information start: make EUT supply information to the access point again.

The EUT can detect the controlling signal of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission. While the EUT is not transmitting any information, the EUT can automatically discontinue transmission and become standby mode for power saving. The EUT can detect the controlling signal of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission.

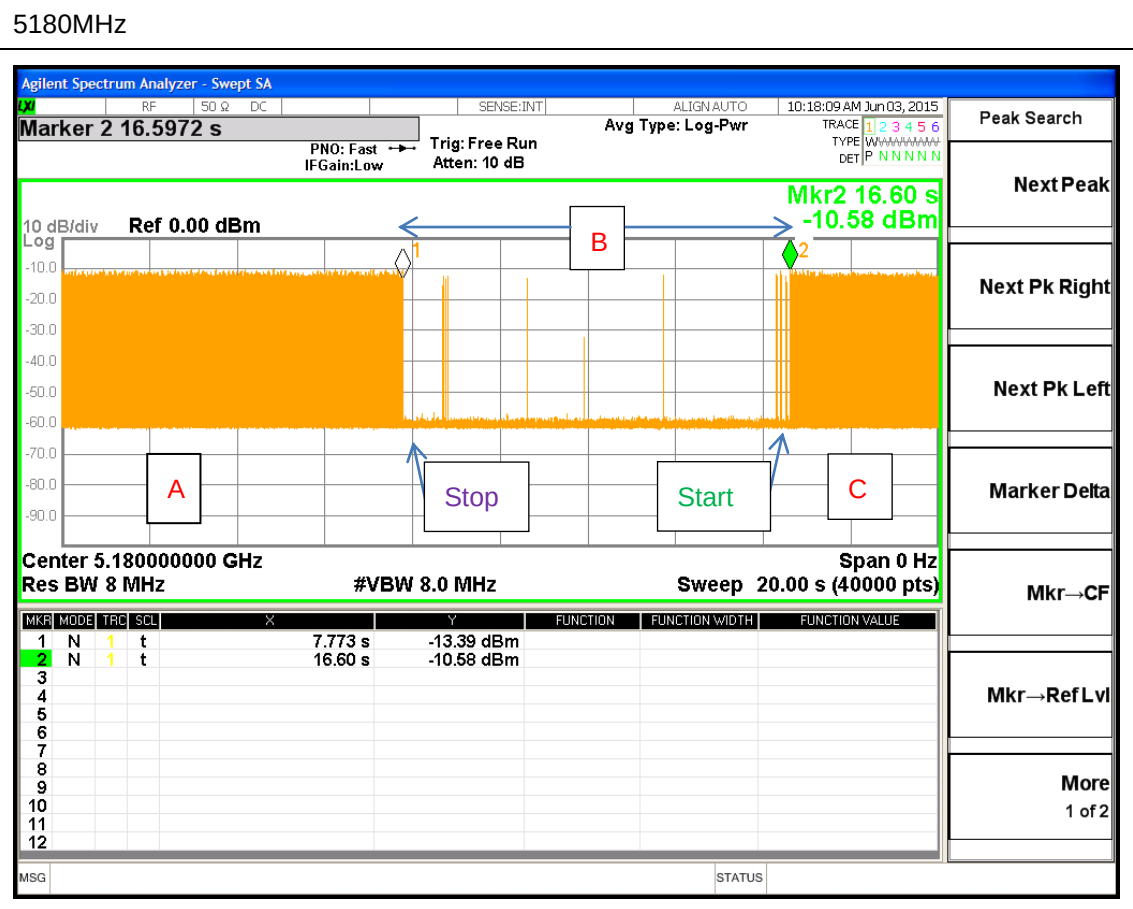

Note : The control / signalling information during the period B is precluded.

3.8 Antenna Requirements

3.8.1 Standard Applicable

According to FCC 47 CFR Section 15.407(a)(1)(2) ,if transmitting antenna directional gain is greater than 6 dBi, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.8.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.8.3 Antenna Gain

The antenna gain is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.

4 List of Measuring Equipments

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Power Meter	Anritsu	ML2495A	1218006	300MHz~40GHz	Oct. 18, 2014	May 12, 2015~ Jun. 03, 2015	Oct. 17, 2015	Conducted (TH05-HY)
Power Sensor	Anritsu	MA2411B	1027253	300MHz~40GHz	Aug. 09, 2014	May 12, 2015~ Jun. 03, 2015	Aug. 08, 2015	Conducted (TH05-HY)
Spectrum Analyzer	Rohde & Schwarz	FSP40	100057	9kHz-40GHz	Oct. 17, 2014	May 12, 2015~ Jun. 03, 2015	Oct. 16, 2015	Conducted (TH05-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100315	9 kHz~30 MHz	Jul. 28, 2014	May 10, 2015~ May 17, 2015	Jul. 27, 2015	Radiation (03CH11-HY)
Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170584	18GHz- 40GHz	Nov. 03, 2014	May 10, 2015~ May 17, 2015	Nov. 02, 2015	Radiation (03CH11-HY)
Amplifier	SONOMA	310N	187312	9kHz~1GHz	Nov. 24, 2014	May 10, 2015~ May 17, 2015	Nov. 23, 2015	Radiation (03CH11-HY)
Bilog Antenna	TESEQ	CBL 6111D	35414	30MHz~1GHz	Oct. 24, 2014	May 10, 2015~ May 17, 2015	Oct. 23, 2015	Radiation (03CH11-HY)
Horn Antenna	SCHWARZBECK	BBHA 9120 D	9120D-1326	1GHz ~ 18GHz	Oct. 03, 2014	May 10, 2015~ May 17, 2015	Oct. 02, 2015	Radiation (03CH11-HY)
Preamplifier	Keysight	83017A	MY53270080	1GHz~26.5GHz	Nov. 20, 2014	May 10, 2015~ May 17, 2015	Nov. 19, 2015	Radiation (03CH11-HY)
Spectrum Analyzer	Keysight	N9010A	MY54200486	10Hz ~ 44GHZ	Sep. 24, 2014	May 10, 2015~ May 17, 2015	Sep. 23, 2015	Radiation (03CH11-HY)
Antenna Mast	EMEC	AM-BS-4500-B	N/A	1~4m	N/A	May 10, 2015~ May 17, 2015	N/A	Radiation (03CH11-HY)
Turn Table	EMEC	TT 2000	N/A	0-360 degree	N/A	May 10, 2015~ May 17, 2015	N/A	Radiation (03CH11-HY)
Preamplifier	MITEQ	JS44-1800400 0-33-8P	1840917	18GHz ~ 40GHz	Jun. 09, 2014	May 10, 2015~ May 17, 2015	Jun. 08, 2015	Radiation (03CH11-HY)
EMI Test Receiver	Rohde & Schwarz	ESCS 30	100356	9kHz – 2.75GHz	Dec. 01, 2014	May 07, 2015	Nov. 30, 2015	Conduction (CO05-HY)
LISN	Rohde & Schwarz	ENV216	100080	9kHz~30MHz	Dec. 02, 2014	May 07, 2015	Dec. 01, 2015	Conduction (CO05-HY)
LISN (for auxiliary equipment)	Rohde & Schwarz	ENV216	100081	9kHz~30MHz	Dec. 08, 2014	May 07, 2015	Dec. 07, 2015	Conduction (CO05-HY)
AC Power Source	ChainTek	APC-1000W	N/A	N/A	N/A	May 07, 2015	N/A	Conduction (CO05-HY)

5 Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	2.26
---	------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	4.90
---	------

Appendix A. Conducted Test Results

Test Engineer:	Derek Hsu	Temperature:	21~25	°C
Test Date:	2015/5/7~2015/5/25	Relative Humidity:	51~54	%

TEST RESULTS DATA
26dB and 99% OBW

Band I										
Mod.	Data Rate	NTx	CH.	Freq. (MHz)	99% Bandwidth (MHz)	26 dB Bandwidth (MHz)	IC 99% Bandwidth Power Limit (dBm)	IC 99% Bandwidth EIRP Limit (dBm)		
11a	6Mbps	1	36	5180	17.25	21.55	-	22.37		
11a	6Mbps	1	44	5220	17.35	21.70	-	22.39		
11a	6Mbps	1	48	5240	17.40	21.50	-	22.41		
HT20	MCS0	1	36	5180	18.10	21.90	-	22.58		
HT20	MCS0	1	44	5220	18.15	22.10	-	22.59		
HT20	MCS0	1	48	5240	18.05	22.05	-	22.56		
HT40	MCS0	1	38	5190	36.20	41.49	-	23.01		
HT40	MCS0	1	46	5230	36.30	41.49	-	23.01		
VHT20	MCS0	1	36	5180	18.10	21.60	-	22.58		
VHT20	MCS0	1	44	5220	18.05	21.60	-	22.56		
VHT20	MCS0	1	48	5240	18.05	21.70	-	22.56		
VHT40	MCS0	1	38	5190	36.20	41.76	-	23.01		
VHT40	MCS0	1	46	5230	36.20	41.67	-	23.01		
VHT80	MCS0	1	42	5210	75.36	81.44	-	23.01		

TEST RESULTS DATA
Average Power Table

FCC Band I										
Mod.	Data Rate	NTx	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)	FCC Conducted Power Limit (dBm)	DG (dBi)		Pass/Fail
11a	6Mbps	1	36	5180	0.10	15.32	24.00	2.40		Pass
11a	6Mbps	1	44	5220	0.10	15.29	24.00	2.40		Pass
11a	6Mbps	1	48	5240	0.10	15.38	24.00	2.40		Pass
HT20	MCS0	1	36	5180	0.14	15.25	24.00	2.40		Pass
HT20	MCS0	1	44	5220	0.14	15.19	24.00	2.40		Pass
HT20	MCS0	1	48	5240	0.14	15.28	24.00	2.40		Pass
HT40	MCS0	1	38	5190	0.25	15.08	24.00	2.40		Pass
HT40	MCS0	1	46	5230	0.25	15.49	24.00	2.40		Pass
VHT20	MCS0	1	36	5180	0.11	13.88	24.00	2.40		Pass
VHT20	MCS0	1	44	5220	0.11	13.92	24.00	2.40		Pass
VHT20	MCS0	1	48	5240	0.11	13.97	24.00	2.40		Pass
VHT40	MCS0	1	38	5190	0.25	13.74	24.00	2.40		Pass
VHT40	MCS0	1	46	5230	0.25	13.84	24.00	2.40		Pass
VHT80	MCS0	1	42	5210	0.51	13.24	24.00	2.40		Pass

TEST RESULTS DATA
Power Spectral Density

FCC Band I										
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Duty Factor (dB)	Average Power Density (dBm/MHz)	Average PSD Limit (dBm/MHz)	DG (dBi)	-	Pass/Fail
11a	6Mbps	1	36	5180	0.10	3.31	11.00	2.40		Pass
11a	6Mbps	1	44	5220	0.10	3.55	11.00	2.40		Pass
11a	6Mbps	1	48	5240	0.10	3.50	11.00	2.40		Pass
HT20	MCS0	1	36	5180	0.14	3.07	11.00	2.40		Pass
HT20	MCS0	1	44	5220	0.14	3.38	11.00	2.40		Pass
HT20	MCS0	1	48	5240	0.14	3.18	11.00	2.40		Pass
HT40	MCS0	1	38	5190	0.25	0.43	11.00	2.40		Pass
HT40	MCS0	1	46	5230	0.25	0.25	11.00	2.40		Pass
VHT20	MCS0	1	36	5180	0.11	2.03	11.00	2.40		Pass
VHT20	MCS0	1	44	5220	0.11	2.37	11.00	2.40		Pass
VHT20	MCS0	1	48	5240	0.11	2.36	11.00	2.40		Pass
VHT40	MCS0	1	38	5190	0.25	-0.90	11.00	2.40		Pass
VHT40	MCS0	1	46	5230	0.25	-1.05	11.00	2.40		Pass
VHT80	MCS0	1	42	5210	0.51	-4.63	11.00	2.40		Pass

TEST RESULTS DATA
Frequency Stability

Band I										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Center Frequency (MHz)	Frequency Deviation (MHz)	Frequency Stability (ppm)	Temperature (°C)	Voltage (V)	Note
11a	6Mbps	1	36	5180	5180.000	0.000	0.00	25	3.4	
11a	6Mbps	1	36	5180	5180.000	0.000	0.00	25	4.2	
11a	6Mbps	1	36	5180	5180.000	0.000	0.00	25	3.7	
11a	6Mbps	1	36	5180	5180.050	0.050	9.65	0	3.7	
11a	6Mbps	1	36	5180	5180.000	0.000	0.00	35	3.7	

Appendix B. Radiated Spurious Emission

Test Engineer :	Jesse Wang and Derreck Chen	Temperature :	23~24°C
		Relative Humidity :	46~48%

Band 1 - 5150~5250MHz

WIFI 802.11a (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11a CH 36 5180MHz		5145.95	56.53	-17.47	74	49.4	31.72	8.95	33.54	105	152	P	H
		5149.7	47.54	-6.46	54	40.41	31.72	8.95	33.54	105	152	A	H
	*	5181	107.63	-	-	100.45	31.75	8.97	33.54	105	152	P	H
	*	5181	100.33	-	-	93.15	31.75	8.97	33.54	105	152	A	H
													H
													H
		5146.55	63.55	-10.45	74	56.42	31.72	8.95	33.54	192	134	P	V
		5149.85	53.04	-0.96	54	45.91	31.72	8.95	33.54	192	134	A	V
	*	5180	111.48	-	-	104.3	31.75	8.97	33.54	192	134	P	V
	*	5180	104.88	-	-	97.7	31.75	8.97	33.54	192	134	A	V
													V
													V
802.11a CH 44 5220MHz		5126.15	51.84	-22.16	74	44.72	31.71	8.95	33.54	100	152	P	H
		5125.85	43.53	-10.47	54	36.41	31.71	8.95	33.54	100	152	A	H
	*	5220	105.72	-	-	98.51	31.77	8.98	33.54	100	152	P	H
	*	5220	100.47	-	-	93.26	31.77	8.98	33.54	100	152	A	H
		5419.52	52.09	-21.91	74	44.54	31.93	9.17	33.55	100	152	P	H
		5451.31	43.74	-10.26	54	36.11	31.96	9.22	33.55	100	152	A	H
		5116.7	56.58	-17.42	74	49.5	31.69	8.92	33.53	345	121	P	V
		5029.55	48.17	-5.83	54	41.21	31.63	8.86	33.53	345	121	A	V
	*	5224	109.84	-	-	102.63	31.77	8.98	33.54	345	121	P	V
	*	5224	103.96	-	-	96.75	31.77	8.98	33.54	345	121	A	V
		5450.43	54.5	-19.5	74	46.87	31.96	9.22	33.55	345	121	P	V
		5446.69	45.68	-8.32	54	38.05	31.96	9.22	33.55	345	121	A	V

802.11a CH 48 5240MHz	*	5241	107.36	-	-	100.13	31.79	8.98	33.54	140	153	P	H
	*	5241	101.74	-	-	94.51	31.79	8.98	33.54	140	153	A	H
		5428.87	50.1	-23.9	74	42.53	31.95	9.17	33.55	140	153	P	H
		5457.25	42.49	-11.51	54	34.86	31.96	9.22	33.55	140	153	A	H
													H
													H
	*	5240	110.75	-	-	103.52	31.79	8.98	33.54	360	143	P	V
	*	5240	104.96	-	-	97.73	31.79	8.98	33.54	360	143	A	V
		5351.32	52.63	-21.37	74	45.21	31.88	9.08	33.54	360	143	P	V
		5350.55	45.17	-8.83	54	37.75	31.88	9.08	33.54	360	143	A	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

Band 1 5150~5250MHz

WIFI 802.11a (Harmonic @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant. 1		(MHz)	(dBμV/m)	Limit (dB)	Line (dBμV/m)	Level (dBμV)	Factor (dB/m)	Loss (dB)	Factor (dB)	Pos (cm)	Pos (deg)	Avg. (P/A)	(H/V)
802.11a CH 36 5180MHz		10360	46.87	-27.13	74	27.98	39.94	13.09	34.14	100	0	P	H
		15540	45.86	-28.14	74	26.76	38.33	16.55	35.78	100	0	P	H
													H
													H
		10360	45.74	-28.26	74	26.85	39.94	13.09	34.14	100	0	P	V
		15540	45.92	-28.08	74	26.82	38.33	16.55	35.78	100	0	P	V
													V
													V
802.11a CH 44 5220MHz		10440	46.18	-27.82	74	27.19	40.02	13.11	34.14	100	0	P	H
		15660	43.77	-30.23	74	24.92	38.09	16.56	35.8	100	0	P	H
													H
													H
		10440	46.71	-27.29	74	27.72	40.02	13.11	34.14	100	0	P	V
		15660	44.36	-29.64	74	25.51	38.09	16.56	35.8	100	0	P	V
													V
													V
802.11a CH 48 5240MHz		10480	46.27	-27.73	74	27.22	40.08	13.11	34.14	100	0	P	H
		15720	43.86	-30.14	74	25.14	37.95	16.57	35.8	100	0	P	H
													H
													H
		10480	46.08	-27.92	74	27.03	40.08	13.11	34.14	100	0	P	V
		15720	45.36	-28.64	74	26.64	37.95	16.57	35.8	100	0	P	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

Band 1 5150~5250MHz

WIFI 802.11n HT20 (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant. 1		(MHz)	(dBμV/m)	Limit (dB)	Line (dBμV/m)	Level (dBμV)	Factor (dB/m)	Loss (dB)	Factor (dB)	Pos (cm)	Pos (deg)	Avg. (P/A)	(H/V)
802.11n HT20 CH 36 5180MHz		5150	61.18	-12.82	74	54.05	31.72	8.95	33.54	104	154	P	H
		5150	47.41	-6.59	54	40.28	31.72	8.95	33.54	104	154	A	H
	*	5183	106.53	-	-	99.35	31.75	8.97	33.54	104	154	P	H
	*	5183	100.15	-	-	92.97	31.75	8.97	33.54	104	154	A	H
													H
													H
		5148.2	62.65	-11.35	74	55.52	31.72	8.95	33.54	324	145	P	V
		5149.7	53.02	-0.98	54	45.89	31.72	8.95	33.54	324	145	A	V
	*	5179	111.36	-	-	104.18	31.75	8.97	33.54	324	145	P	V
	*	5179	104.67	-	-	97.49	31.75	8.97	33.54	324	145	A	V
													V
													V
802.11n HT20 CH 44 5220MHz		5141.15	52.91	-21.09	74	45.78	31.72	8.95	33.54	228	112	P	H
		5141.15	44.27	-9.73	54	37.14	31.72	8.95	33.54	228	112	A	H
	*	5219	108.07	-	-	100.86	31.77	8.98	33.54	228	112	P	H
	*	5219	101.77	-	-	94.56	31.77	8.98	33.54	228	112	A	H
		5438.77	53.53	-20.47	74	45.96	31.95	9.17	33.55	228	112	P	H
		5433.93	46.19	-7.81	54	38.62	31.95	9.17	33.55	228	112	A	H
		5034.8	56.55	-17.45	74	49.59	31.63	8.86	33.53	335	146	P	V
		5002.85	48.3	-5.7	54	41.37	31.6	8.86	33.53	335	146	A	V
	*	5219	111.63	-	-	104.42	31.77	8.98	33.54	335	146	P	V
	*	5219	104.91	-	-	97.7	31.77	8.98	33.54	335	146	A	V
		5372	52.03	-21.97	74	44.55	31.89	9.13	33.54	335	146	P	V
		5353.08	44.73	-9.27	54	37.31	31.88	9.08	33.54	335	146	A	V

802.11n HT20 CH 48 5240MHz	*	5241	108.51	-	-	101.28	31.79	8.98	33.54	223	114	P	H
	*	5241	101.82	-	-	94.59	31.79	8.98	33.54	223	114	A	H
		5451.64	54.49	-19.51	74	46.86	31.96	9.22	33.55	223	114	P	H
		5446.91	46.15	-7.85	54	38.52	31.96	9.22	33.55	223	114	A	H
													H
													H
	*	5239	113.21	-	-	105.98	31.79	8.98	33.54	238	132	P	V
	*	5239	106.44	-	-	99.21	31.79	8.98	33.54	238	132	A	V
		5356.38	55.37	-18.63	74	47.95	31.88	9.08	33.54	238	132	P	V
		5447.68	47.41	-6.59	54	39.78	31.96	9.22	33.55	238	132	A	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

Band 1 5150~5250MHz

WIFI 802.11n HT20 (Harmonic @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant. 1		(MHz)	(dBμV/m)	Limit (dB)	Line (dBμV/m)	Level (dBμV)	Factor (dB/m)	Loss (dB)	Factor (dB)	Pos (cm)	Pos (deg)	Avg. (P/A)	(H/V)
802.11n HT20 CH 36 5180MHz		10360	45.57	-28.43	74	26.68	39.94	13.09	34.14	100	0	P	H
		15540	44.06	-29.94	74	24.96	38.33	16.55	35.78	100	0	P	H
													H
													H
		10360	46.05	-27.95	74	27.16	39.94	13.09	34.14	100	0	P	V
		15540	44.59	-29.41	74	25.49	38.33	16.55	35.78	100	0	P	V
													V
													V
802.11n HT20 CH 44 5220MHz		10440	45.92	-28.08	74	26.93	40.02	13.11	34.14	100	0	P	H
		15660	44.36	-29.64	74	25.51	38.09	16.56	35.8	100	0	P	H
													H
													H
		10440	46.1	-27.9	74	27.11	40.02	13.11	34.14	100	0	P	V
		15660	44.67	-29.33	74	25.82	38.09	16.56	35.8	100	0	P	V
													V
													V
802.11n HT20 CH 48 5240MHz		10480	46.11	-27.89	74	27.06	40.08	13.11	34.14	100	0	P	H
		15720	44.67	-29.33	74	25.95	37.95	16.57	35.8	100	0	P	H
													H
													H
		10480	46.71	-27.29	74	27.66	40.08	13.11	34.14	100	0	P	V
		15720	44.54	-29.46	74	25.82	37.95	16.57	35.8	100	0	P	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

Band 1 5150~5250MHz

WIFI 802.11n HT40 (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant. 1		(MHz)	(dBμV/m)	Limit (dB)	Line (dBμV/m)	Level (dBμV)	Factor (dB/m)	Loss (dB)	Factor (dB)	Pos (cm)	Pos (deg)	Avg. (P/A)	(H/V)
802.11n HT40 CH 38 5190MHz		5148.05	61.18	-12.82	74	54.05	31.72	8.95	33.54	100	131	P	H
		5149.7	50.16	-3.84	54	43.03	31.72	8.95	33.54	100	131	A	H
	*	5190	102.82	-	-	95.64	31.75	8.97	33.54	100	131	P	H
	*	5190	95.52	-	-	88.34	31.75	8.97	33.54	100	131	A	H
		5393.34	50.73	-23.27	74	43.24	31.91	9.13	33.55	100	131	P	H
		5368.04	42.84	-11.16	54	35.36	31.89	9.13	33.54	100	131	A	H
		5145.5	61.06	-12.94	74	53.93	31.72	8.95	33.54	219	119	P	V
		5149.7	53.01	-0.99	54	45.88	31.72	8.95	33.54	219	119	A	V
	*	5190	104.46	-	-	97.28	31.75	8.97	33.54	219	119	P	V
	*	5190	98.37	-	-	91.19	31.75	8.97	33.54	219	119	A	V
		5355.06	53.86	-20.14	74	46.44	31.88	9.08	33.54	219	119	P	V
		5411.27	44.72	-9.28	54	37.18	31.92	9.17	33.55	219	119	A	V
802.11n HT40 CH 46 5230MHz		5108.6	52.35	-21.65	74	45.27	31.69	8.92	33.53	223	111	P	H
		5144.15	44.17	-9.83	54	37.04	31.72	8.95	33.54	223	111	A	H
	*	5230	102.44	-	-	95.21	31.79	8.98	33.54	223	111	P	H
	*	5230	96.95	-	-	89.72	31.79	8.98	33.54	223	111	A	H
		5405.88	52.69	-21.31	74	45.15	31.92	9.17	33.55	223	111	P	H
		5442.84	45.25	-8.75	54	37.63	31.95	9.22	33.55	223	111	A	H
		5124.05	56.23	-17.77	74	49.11	31.71	8.95	33.54	211	133	P	V
		5147	48	-6	54	40.87	31.72	8.95	33.54	211	133	A	V
	*	5226	108.15	-	-	100.92	31.79	8.98	33.54	211	133	P	V
	*	5226	102.04	-	-	94.81	31.79	8.98	33.54	211	133	A	V
		5354.95	55.32	-18.68	74	47.9	31.88	9.08	33.54	211	133	P	V
		5417.32	47.15	-6.85	54	39.6	31.93	9.17	33.55	211	133	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

Band 1 5150~5250MHz

WIFI 802.11n HT40 (Harmonic @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant. 1		(MHz)	(dBμV/m)	Limit (dB)	Line (dBμV/m)	Level (dBμV)	Factor (dB/m)	Loss (dB)	Factor (dB)	Pos (cm)	Pos (deg)	Avg. (P/A)	(H/V)
802.11n HT40 CH 38 5190MHz		10380	47.1	-26.9	74	28.19	39.96	13.09	34.14	100	0	P	H
		15570	44.12	-29.88	74	25.1	38.26	16.55	35.79	100	0	P	H
													H
													H
		10380	48.8	-25.2	74	29.89	39.96	13.09	34.14	100	0	P	V
		15570	44.12	-29.88	74	25.1	38.26	16.55	35.79	100	0	P	V
													V
													V
802.11n HT40 CH 46 5230MHz		10460	48.08	-25.92	74	29.07	40.04	13.11	34.14	100	0	P	H
		15690	43.94	-30.06	74	25.16	38.02	16.56	35.8	100	0	P	H
													H
													H
		10460	47.52	-26.48	74	28.51	40.04	13.11	34.14	100	0	P	V
		15690	45.42	-28.58	74	26.64	38.02	16.56	35.8	100	0	P	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

Band 1 5150~5250MHz

WIFI 802.11ac VHT20 (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant. 1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	Avg. (P/A)	(H/V)
802.11ac VHT20 CH 36 5180MHz		5147.3	55.24	-18.76	74	48.11	31.72	8.95	33.54	110	89	P	H
		5149.7	45.54	-8.46	54	38.41	31.72	8.95	33.54	110	89	A	H
	*	5180	107.1	-	-	99.92	31.75	8.97	33.54	110	89	P	H
	*	5180	99.54	-	-	92.36	31.75	8.97	33.54	110	89	A	H
													H
													H
		5149.85	61.34	-12.66	74	54.21	31.72	8.95	33.54	234	130	P	V
		5149.7	50.97	-3.03	54	43.84	31.72	8.95	33.54	234	130	A	V
	*	5180	111.69	-	-	104.51	31.75	8.97	33.54	234	130	P	V
	*	5180	104.66	-	-	97.48	31.75	8.97	33.54	234	130	A	V
													V
													V
802.11ac VHT20 CH 44 5220MHz		5086.25	52.71	-21.29	74	45.65	31.67	8.92	33.53	100	295	P	H
		5025.8	44.81	-9.19	54	37.85	31.63	8.86	33.53	100	295	A	H
	*	5220	107.31	-	-	100.1	31.77	8.98	33.54	100	295	P	H
	*	5220	100.24	-	-	93.03	31.77	8.98	33.54	100	295	A	H
		5446.14	52.93	-21.07	74	45.3	31.96	9.22	33.55	100	295	P	H
		5447.9	44.34	-9.66	54	36.71	31.96	9.22	33.55	100	295	A	H
		5037.05	56.78	-17.22	74	49.82	31.63	8.86	33.53	244	132	P	V
		5012.45	48.77	-5.23	54	41.83	31.61	8.86	33.53	244	132	A	V
	*	5218	112.79	-	-	105.58	31.77	8.98	33.54	244	132	P	V
	*	5218	106.13	-	-	98.92	31.77	8.98	33.54	244	132	A	V
		5390.92	54.4	-19.6	74	46.91	31.91	9.13	33.55	244	132	P	V
		5422.82	46.62	-7.38	54	39.07	31.93	9.17	33.55	244	132	A	V

802.11ac VHT20 CH 48 5240MHz	*	5238	107.18	-	-	99.95	31.79	8.98	33.54	100	296	P	H
	*	5238	100.64	-	-	93.41	31.79	8.98	33.54	100	296	A	H
		5451.09	51.64	-22.36	74	44.01	31.96	9.22	33.55	100	296	P	H
		5447.9	44.18	-9.82	54	36.55	31.96	9.22	33.55	100	296	A	H
													H
													H
	*	5242	113.52	-	-	106.27	31.8	8.99	33.54	238	131	P	V
	*	5242	106.66	-	-	99.41	31.8	8.99	33.54	238	131	A	V
		5354.07	54.72	-19.28	74	47.3	31.88	9.08	33.54	238	131	P	V
		5409.84	47.12	-6.88	54	39.58	31.92	9.17	33.55	238	131	A	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

Band 1 5150~5250MHz

WIFI 802.11ac VHT20 (Harmonic @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant. 1		(MHz)	(dBμV/m)	Limit (dB)	Line (dBμV/m)	Level (dBμV)	Factor (dB/m)	Loss (dB)	Factor (dB)	Pos (cm)	Pos (deg)	Avg. (P/A)	(H/V)
802.11ac VHT20 CH 36 5180MHz		10360	46.68	-27.32	74	27.79	39.94	13.09	34.14	100	0	P	H
		15540	46	-28	74	26.9	38.33	16.55	35.78	100	0	P	H
													H
													H
		10360	47.86	-26.14	74	28.97	39.94	13.09	34.14	100	0	P	V
		15540	44.98	-29.02	74	25.88	38.33	16.55	35.78	100	0	P	V
													V
													V
802.11ac VHT20 CH 44 5220MHz		10440	47.23	-26.77	74	28.24	40.02	13.11	34.14	100	0	P	H
		15660	44.48	-29.52	74	25.63	38.09	16.56	35.8	100	0	P	H
													H
													H
		10440	47.08	-26.92	74	28.09	40.02	13.11	34.14	100	0	P	V
		15660	44.77	-29.23	74	25.92	38.09	16.56	35.8	100	0	P	V
													V
													V
802.11ac VHT20 CH 48 5240MHz		10480	47.57	-26.43	74	28.52	40.08	13.11	34.14	100	0	P	H
		15720	45.47	-28.53	74	26.75	37.95	16.57	35.8	100	0	P	H
													H
													H
		10480	46.64	-27.36	74	27.59	40.08	13.11	34.14	100	0	P	V
		15720	45.4	-28.6	74	26.68	37.95	16.57	35.8	100	0	P	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

Band 1 5150~5250MHz

WIFI 802.11ac VHT40 (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant. 1		(MHz)	(dBμV/m)	Limit (dB)	Line (dBμV/m)	Level (dBμV)	Factor (dB/m)	Loss (dB)	Factor (dB)	Pos (cm)	Pos (deg)	Avg. (P/A)	(H/V)
802.11ac VHT40 CH 38 5190MHz		5148.2	56.03	-17.97	74	48.9	31.72	8.95	33.54	100	296	P	H
		5149.1	47.85	-6.15	54	40.72	31.72	8.95	33.54	100	296	A	H
	*	5194	99.97	-	-	92.78	31.76	8.97	33.54	100	296	P	H
	*	5194	93.61	-	-	86.42	31.76	8.97	33.54	100	296	A	H
		5395.76	50.62	-23.38	74	43.12	31.92	9.13	33.55	100	296	P	H
		5391.36	43.01	-10.99	54	35.52	31.91	9.13	33.55	100	296	A	H
		5147.6	60.41	-13.59	74	53.28	31.72	8.95	33.54	271	131	P	V
		5149.85	53.5	-0.5	54	46.37	31.72	8.95	33.54	271	131	A	V
	*	5186	105.71	-	-	98.53	31.75	8.97	33.54	271	131	P	V
	*	5186	99.13	-	-	91.95	31.75	8.97	33.54	271	131	A	V
		5447.02	53.07	-20.93	74	45.44	31.96	9.22	33.55	271	131	P	V
		5394.88	45.07	-8.93	54	37.57	31.92	9.13	33.55	271	131	A	V
802.11ac VHT40 CH 46 5230MHz		5028.8	52.41	-21.59	74	45.45	31.63	8.86	33.53	100	295	P	H
		5029.55	44.61	-9.39	54	37.65	31.63	8.86	33.53	100	295	A	H
	*	5231	103.45	-	-	96.22	31.79	8.98	33.54	100	295	P	H
	*	5231	96.43	-	-	89.2	31.79	8.98	33.54	100	295	A	H
		5441.52	52.05	-21.95	74	44.48	31.95	9.17	33.55	100	295	P	H
		5448.45	44.39	-9.61	54	36.76	31.96	9.22	33.55	100	295	A	H
		5113.85	56.53	-17.47	74	49.45	31.69	8.92	33.53	225	133	P	V
		5149.85	48.31	-5.69	54	41.18	31.72	8.95	33.54	225	133	A	V
	*	5232	109.52	-	-	102.29	31.79	8.98	33.54	225	133	P	V
	*	5232	102.5	-	-	95.27	31.79	8.98	33.54	225	133	A	V
		5449.22	54.23	-19.77	74	46.6	31.96	9.22	33.55	225	133	P	V
		5430.3	46.71	-7.29	54	39.14	31.95	9.17	33.55	225	133	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

Band 1 5150~5250MHz

WIFI 802.11ac VHT40 (Harmonic @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant. 1		(MHz)	(dBμV/m)	Limit (dB)	Line (dBμV/m)	Level (dBμV)	Factor (dB/m)	Loss (dB)	Factor (dB)	Pos (cm)	Pos (deg)	Avg. (P/A)	(H/V)
802.11ac VHT40 CH 38 5190MHz		10380	46.23	-27.77	74	27.32	39.96	13.09	34.14	100	0	P	H
		15570	45.07	-28.93	74	26.05	38.26	16.55	35.79	100	0	P	H
													H
													H
		10380	46.43	-27.57	74	27.52	39.96	13.09	34.14	100	0	P	V
		15570	44.05	-29.95	74	25.03	38.26	16.55	35.79	100	0	P	V
													V
													V
802.11ac VHT40 CH 46 5230MHz		10460	46.27	-27.73	74	27.26	40.04	13.11	34.14	100	0	P	H
		15690	44.78	-29.22	74	26	38.02	16.56	35.8	100	0	P	H
													H
													H
		10460	47.91	-26.09	74	28.9	40.04	13.11	34.14	100	0	P	V
		15690	44.52	-29.48	74	25.74	38.02	16.56	35.8	100	0	P	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

Band 1 5150~5250MHz

WIFI 802.11ac VHT80 (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant. 1		(MHz)	(dBμV/m)	(dB)	Line (dBμV/m)	Level (dBμV)	Factor (dB/m)	Loss (dB)	Factor (dB)	Pos (cm)	Pos (deg)	Avg. (P/A)	(H/V)
802.11ac VHT80 CH 42 5210MHz		5147.75	56.21	-17.79	74	49.08	31.72	8.95	33.54	106	134	P	H
		5147.75	48.59	-5.41	54	41.46	31.72	8.95	33.54	106	134	A	H
	*	5213	94.83	-	-	87.62	31.77	8.98	33.54	106	134	P	H
	*	5213	88.03	-	-	80.82	31.77	8.98	33.54	106	134	A	H
		5431.18	50.01	-23.99	74	42.44	31.95	9.17	33.55	106	134	P	H
		5434.04	42.05	-11.95	54	34.48	31.95	9.17	33.55	106	134	A	H
		5142.05	58.53	-15.47	74	51.4	31.72	8.95	33.54	185	98	P	V
		5148.5	53.15	-0.85	54	46.02	31.72	8.95	33.54	185	98	A	V
	*	5210	101.03	-	-	93.82	31.77	8.98	33.54	185	98	P	V
	*	5210	93.91	-	-	86.7	31.77	8.98	33.54	185	98	A	V
		5356.27	52.16	-21.84	74	44.74	31.88	9.08	33.54	185	98	P	V
		5429.09	45.21	-8.79	54	37.64	31.95	9.17	33.55	185	98	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

Band 1 5150~5250MHz

WIFI 802.11ac VHT80 (Harmonic @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant. 1		(MHz)	(dBμV/m)	Limit (dB)	Line (dBμV/m)	Level (dBμV)	Factor (dB/m)	Loss (dB)	Factor (dB)	Pos (cm)	Pos (deg)	Avg. (P/A)	(H/V)
802.11ac VHT80 CH 42 5210MHz		11550	46.86	-27.14	74	27.73	39.92	13.97	34.76	100	0	P	H
		17328	48.64	-25.36	74	26.02	41.6	17	35.98	100	0	P	H
													H
													H
		11550	47.12	-26.88	74	27.99	39.92	13.97	34.76	100	0	P	V
		17328	49.55	-24.45	74	26.93	41.6	17	35.98	100	0	P	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

Emission below 1GHz

WIFI 802.11ac VHT40 (LF @ 3m

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT40 LF		67.53	14.79	-25.21	40	40.56	4.98	1.04	31.79			P	H
		154.74	26.69	-16.81	43.5	47.2	9.81	1.46	31.78	169	25	P	H
		265.17	17.19	-28.81	46	34.23	12.79	1.94	31.77			P	H
		463.1	17.6	-28.4	46	30.2	16.69	2.57	31.86			P	H
		760.6	22	-24	46	31.02	19.7	3.25	31.97			P	H
		936.3	25.14	-20.86	46	32.22	20.39	3.68	31.15			P	H
													H
													H
													H
													H
													H
													H
													H
		48.9	27.01	-12.99	40	49.68	8.09	1.04	31.8	218	66	P	V
		154.2	20.4	-23.1	43.5	40.89	9.83	1.46	31.78			P	V
		232.23	14.15	-31.85	46	34.36	9.77	1.79	31.77			P	V
		430.2	16.99	-29.01	46	29.91	16.5	2.41	31.83			P	V
		746.6	21.51	-24.49	46	30.44	19.8	3.25	31.98			P	V
		902.7	26.73	-19.27	46	34.49	20.1	3.55	31.41			P	V
													V
												V	
												V	
												V	
												V	
												V	
												V	
Remark	1. No other spurious found. 2. All results are PASS against limit line.												

Note symbol

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is over limit line.
P/A	P eak or A verage
H/V	H orizontal or V ertical

A calculation example for radiated spurious emission is shown as below:

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11b CH 01 2412MHz		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

- Level(dBμV/m) =
Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
- Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

- Level(dBμV/m)
= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)
= 55.45 (dBμV/m)
- Over Limit(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 55.45(dBμV/m) – 74(dBμV/m)
= -18.55(dB)

For Average Limit @ 2390MHz:

- Level(dBμV/m)
= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)
= 43.54 (dBμV/m)
- Over Limit(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 43.54(dBμV/m) – 54(dBμV/m)
= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.