

Notes:
Barcode of type 128 A & C containing "l4ffdddnnyaaaac",
where l is written with 128A the rest with 128C.
Unit Label: Label blank art. no. 59553

- Quiet zone
- min. 2.54 mm on each side.
- Bar height
- 4 mm.
- Barcode length
- Barcode width is up to 25.1 mm.
- Id. string height
- 1.5 mm.
- Info. line height
- 1.5 mm.
- Info. 2 line height
- 1.5 mm.
- CE mark height
- 5 mm.
- WEEE symbol height
- 7 mm.
- FCC mark height
- 3 mm.
- SGS mark height
- 5 mm.
- Tick mark height
- 3 mm.
- UKCA mark height
- 5 mm.
- Barcode placement
- The print should be centered lengthwise on the label and placed 0.5 mm from top edge

Variable fields:

Identifier string:

- l
- Revision level. One upper case letter (A-Z).
- '4'
- Format identifier. Always 4 for PL.
- ff
- Manufacturing unit. Two digits (00-64)
- ddd
- Production date. Three digits (000-953).
-
- Year followed by week (713= 1997 week 13, 650= 2006 week 50).
- nnnny
- Serial number. Five digits (00000-65535). Reset every new week.
- aaaa
- PL type. Four digits (0000-9999).
- c
- Checksum. One digit (0-9). The modulo-10 value of the sum of ASCII value for all 16 preceding characters.

The ff, ddd and nnnny fields together forms the physical addresses. Within one week, each manufacturing unit must use a continuous serial number, regardless of if a switch to a new PL is done. Otherwise the physical address will not be unique!


Under no circumstances can the serial number be set to zero, except when changing the week number!

Information line:


- ppppp-pp
- Product number. Printed by five plus two (optional) decimal digits in the range 00000-00 - 99999-99. Not derived from the bar code.
- yyww
- Manufacturing date. Is derived from ddd in the barcode and printed as four digits in the range yyww, indicating year and week.
- <A>
- Option field. Any printable characters.

Information line 2:

- Made in
- Manufacturing country. Printed as Made in followed by country.
Not derived from barcode.

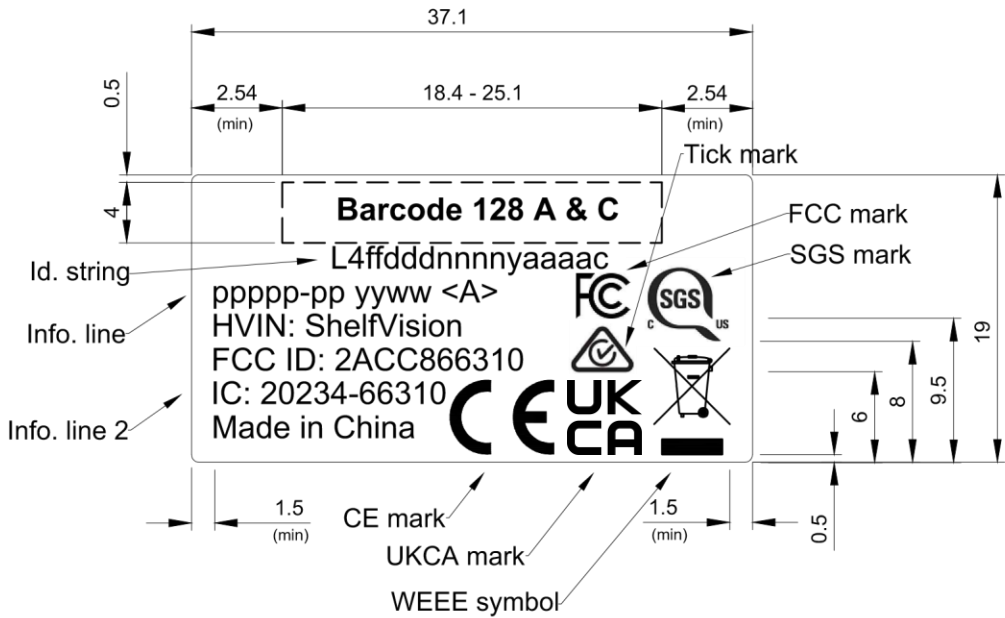

Produkt/Product							
Material/värmebeh./Heat Treatment				Ytbeläggning/Surface coating			
				Allmänna best./General requirements			
PRICER	Ytjämn./Surf.roughn	Grad.pol./Deburr.pol.	Konstr./Design.	Kontr./Chd.	Gransk./Std.	Godk./Appd.	Blad nr./Sheet
	102-51400e.dwg		EMC				1/1
Benämning/Name			Skala/Scale	Upprätt.datum/Original date	Rev.datum/Rev.date	Rev.	
Labelling instruction ShelfVision			2:1	201207	210510	E	
			Dok.typ/Doc.type	Artikelnr./Article no.			
			102	51400			

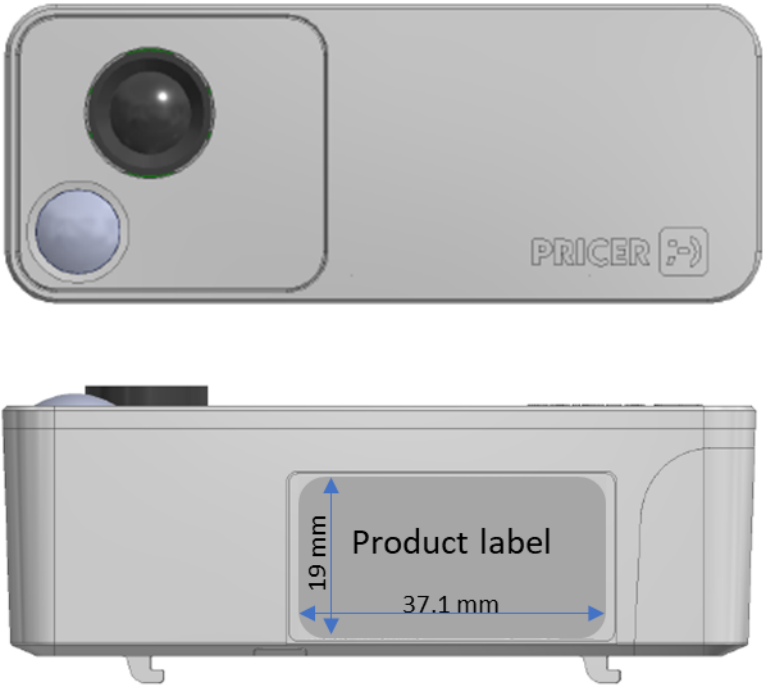

Comments -		Scale 1:1	Units mm	Format A4
Prepared Fredrik Tjerneld/210506		Product label position Pricer ShelfVision		
Reviewed -				Language EN/SV
Approved -				Page 1 of 1
 BRINGING TRUST TO RETAIL		Document id.		Revision
				A