



REPORT No.: SZ15080082W03

FCC RF TEST REPORT

APPLICANT : TCL Communication Ltd.

PRODUCT NAME : Car Wifi Hotspot

MODEL NAME : Y856UB

TRADE NAME : ALCATEL ONETOUCH

BRAND NAME : ALCATEL ONETOUCH

FCC ID : 2ACCJB028

STANDARD(S) : 47 CFR Part 15 Subpart C

ISSUE DATE : 2015-11-11



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd.

NOTE: This document is issued by MORLAB, the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.

MORLAB GROUP

FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road,
Block67, BaoAn District, ShenZhen , Guangdong Province, P. R. China

Tel: 86-755-36698555
Http://www.morlab.com

Fax: 86-755-36698525
E-mail: service@morlab.cn



DIRECTORY

TEST REPORT DECLARATION	4
1. TECHNICAL INFORMATION	5
1.1 APPLICANT INFORMATION	5
1.2 EQUIPMENT UNDER TEST (EUT) DESCRIPTION	5
1.2.1 IDENTIFICATION OF ALL USED EUTS	6
1.3 TEST STANDARDS AND RESULTS	6
1.3.1 TEST ENVIRONMENT CONDITIONS	7
2. 47 CFR PART 15C REQUIREMENTS	8
2.1 ANTENNA REQUIREMENT	8
2.1.1 APPLICABLE STANDARD	8
2.1.2 RESULT: COMPLIANT	8
2.2 PEAK OUTPUT POWER	8
2.2.1 REQUIREMENT	8
2.2.2 TEST DESCRIPTION	8
2.2.3 TEST RESULT	9
2.3 BANDWIDTH	11
2.3.1 REQUIREMENT	11
2.3.2 TEST DESCRIPTION	11
2.3.3 TEST RESULT	11
2.4 CONDUCTED SPURIOUS EMISSIONS AND BAND EDGE	28
2.4.1 REQUIREMENT	28
2.4.2 TEST DESCRIPTION	28
2.4.3 TEST RESULT	28
2.5 POWER SPECTRAL DENSITY (PSD)	53
2.5.1 REQUIREMENT	53
2.5.2 TEST DESCRIPTION	53
2.5.3 TEST RESULT	54
2.6 RESTRICTED FREQUENCY BANDS	71
2.6.1 REQUIREMENT	71
2.6.2 TEST DESCRIPTION	71
2.6.3 TEST RESULT	72



REPORT No.: SZ15080082W03

2.7	CONDUCTED EMISSION	91
2.7.1	REQUIREMENT	91
2.7.2	TEST DESCRIPTION	91
2.7.3	TEST RESULT	92
2.8	RADIATED EMISSION	93
2.8.1	REQUIREMENT	93
2.8.2	TEST DESCRIPTION	94
2.8.3	TEST RESULT	96
2.9	RF EXPOSURE EVALUATION	118
2.9.1	REQUIREMENT	118
2.9.2	RESULT	118
ANNEX A GENERAL INFORMATION		119

Change History		
Issue	Date	Reason for change
1.0	2015-11-11	First edition



REPORT No.: SZ15080082W03

TEST REPORT DECLARATION

Applicant	TCL Communication Ltd.
Applicant Address	5F, C-Tower, No.232, Liangjing Road, Zhangjiang High-tech Park, Pudong, Shanghai, China
Manufacturer	TCL Mobile Communication Co. Ltd. Huizhou
Manufacturer Address	70 Huifeng 4rd., ZhongKai High-Technology Development District, Huizhou, Guangdong, PRC. 516006
Product Name	Car Wifi Hotspot
Model Name	Y856UB
Brand Name	ALCATEL ONETOUCH
HW Version	03
SW Version	Y856_00_03.28_07
Test Standards	47 CFR Part 15 Subpart C
Test Date	2015-10-05 to 2015-10-25
Test Result	PASS

Tested by : Zou Jian
Zou Jian(Test Engineer)

Reviewed by : Qiu Xiaojun
Qiu Xiaojun(RF Manager)

Approved by : Zeng Dexin
Zeng Dexin(Chief Engineer)



1. TECHNICAL INFORMATION

Note: Provide by applicant.

1.1 Applicant Information

Company:	TCL Communication Ltd.
Address:	5F, C-Tower, No.232, Liangjing Road, Zhangjiang High-tech Park, Pudong, Shanghai, China

1.2 Equipment under Test (EUT) Description

Brand Name:	ALCATEL ONETOUCH
Trade Name:	ALCATEL ONETOUCH
Model Name:	Y856UB
Frequency Range:	802.11b/g/n-20MHz: 2.412GHz - 2.462GHz 802.11n-40MHz: 2.422GHz - 2.452GHz
Channel Number:	802.11b/g/n-20MHz: 11 802.11n-40MHz: 7
Modulation Type:	DSSS, OFDM
Antenna Type:	PIFA Antenna
Antenna Gain:	Ant1: 1dBi; Ant2: 1dBi

NOTE:

The EUT is a Car Wifi Hotspot, it contains WIFI Module operating at 2.4GHz ISM; it supports 802.11b, 802.11g, 802.11n and they are all tested in this report.

For 802.11b/g/n-20MHz (2.4GHz band), the frequencies allocated is $F \text{ (MHz)} = 2412 + 5 \times (n-1)$ ($1 \leq n \leq 11$). The lowest, middle, highest channel numbers of the EUT used and tested in this report are separately 1 (2412MHz), 6 (2437MHz) and 11 (2462MHz).

For 802.11n-40MHz, the frequencies allocated is $F \text{ (MHz)} = 2412 + 5 \times (n-1)$ ($3 \leq n \leq 9$). The lowest, middle, highest channel numbers of the EUT used and tested in this report are separately 3 (2422MHz), 6 (2437MHz) and 9 (2452MHz).

The EUT has 2 antennas, the EUT incorporates a MIMO function.

The EUT incorporates a MIMO function. Physically, the EUT provides two completed transmitters and two receivers (2T2R) for 2.4GHz band.

Operation mode TX mode	1TX	2TX
802.11b	ANT1 or ANT2	
802.11g	ANT1 or ANT2	
802.11n(20MHz)		ANT1 & ANT2
802.11n(40MHz)		ANT1 & ANT2



According to KDB 662911 D01, the directional gain = $G_{ANT} + 10\log(N_{ANT})$ dBi, where G_{ANT} is the antenna gain in dBi, N_{ANT} is the number of outputs.

For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.

The antenna connector of EUT is designed with permanent attachment and no consideration of replacement.

1.2.1 Identification of all used EUTs

The EUT identity consists of numerical and letter characters, the letter character indicates the test sample, and the following two numerical characters indicate the software version of the test sample.

EUT Identity	Hardware Version	Software Version
A01	03	Y856_00_03.28_07

1.3 Test Standards and Results

The objective of the report is to perform testing according to 47 CFR Part 15 Subpart C (Bluetooth, 2.4GHz ISM band radiators) for the EUT FCC ID Certification:

No.	Identity	Document Title
1	47 CFR Part 15 (10-1-13 Edition)	Radio Frequency Devices

Test detailed items/section required by FCC rules and results are as below:

No.	Section	Description	Test Date	Result
1	15.203	Antenna Requirement	N.A	<u>PASS</u>
2	15.247(b)	Peak Output Power	Oct 10, 2015	<u>PASS</u>
3	15.247(a)	Bandwidth	Oct 10, 2015	<u>PASS</u>
4	15.247(d)	Conducted Spurious Emission and Band Edge	Oct 10, 2015	<u>PASS</u>
5	15.247(d)	Restricted Frequency Bands	Oct 20, 2015	<u>PASS</u>
6	15.207	Conducted Emission	Oct 20, 2015	<u>PASS</u>
7	15.209 ,15.247(d)	Radiated Emission	Oct 20, 2015	<u>PASS</u>
8	15.247(e)	Power spectral density (PSD)	Oct 10, 2015	<u>PASS</u>
9	15.247(i), 1.1307&2.1093	RF exposure evaluation	N.A	<u>PASS</u>

The tests of Conducted Emission and Radiated Emission were performed according to the method of measurements prescribed in ANSI C63.4 2009.

These RF tests were performed according to the method of measurements prescribed in KDB558074 D01 v03r03 (09/06/2015).



REPORT No.: SZ15080082W03

1.3.1 Test Environment Conditions

During the measurement, the environmental conditions were within the listed ranges:

Temperature (°C):	15 - 35
Relative Humidity (%):	30 -60
Atmospheric Pressure (kPa):	86-106



2. 47 CFR PART 15C REQUIREMENTS

2.1 Antenna requirement

2.1.1 Applicable Standard

According to FCC 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

2.1.2 Result: Compliant

The EUT has a permanently and irreplaceable attached antenna. Please refer to the EUT internal photos.

2.2 Peak Output Power

2.2.1 Requirement

According to FCC section 15.247(b)(3), For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: The maximum peak conducted output power of the intentional radiator shall not exceed 1 Watt.

2.2.2 Test Description

KDB 558074 Section 9.1.3 was used in order to prove compliance.

The measured output power was calculated by the reading of the Power Meter and calibration.

A. Test Setup:



The EUT (Equipment under the test) which is coupled to the Power Meter; the RF load attached to the EUT antenna terminal is 50 Ohm; the path loss as the factor is calibrated to correct the reading, all test result in power meter.

**B. Equipments List:**

Please reference ANNEX A(1.4).

2.2.3 Test Result

The lowest, middle and highest channels are selected to perform testing to verify the conducted RF output peak power of the Module.

2.2.3.1 802.11b Test Mode

ANT 1:

Channel	Frequency (MHz)	Measured Output Peak Power		Limit		Verdict
		dBm	W	dBm	W	
1	2412	16.88	0.048753	30	1	PASS
6	2437	16.37	0.043351			PASS
11	2462	18.67	0.073621			PASS

ANT 2:

Channel	Frequency (MHz)	Measured Output Peak Power		Limit		Verdict
		dBm	W	dBm	W	
1	2412	16.86	0.048529	30	1	PASS
6	2437	16.25	0.04217			PASS
11	2462	17.27	0.053333			PASS

2.2.3.2 802.11g Test mode

ANT 1:

Channel	Frequency (MHz)	Measured Output Peak Power		Limit		Verdict
		dBm	W	dBm	W	
1	2412	20.33	0.107895	30	1	PASS
6	2437	19.75	0.094406			PASS
11	2462	20.25	0.105925			PASS

ANT 2:

Channel	Frequency (MHz)	Measured Output Peak Power		Limit		Verdict
		dBm	W	dBm	W	
1	2412	19.27	0.084528	30	1	PASS
6	2437	18.93	0.078163			PASS
11	2462	19.29	0.084918			PASS

**2.2.3.3 802.11n-20MHz Test mode**

ANT 1:

Channel	Frequency (MHz)	Measured Output Peak Power		Limit		Verdict
		dBm	W	dBm	W	
1	2412	18.76	0.075162	30	1	PASS
6	2437	18.28	0.067298			PASS
11	2462	19.72	0.093756			PASS

ANT 2:

Channel	Frequency (MHz)	Measured Output Peak Power		Limit		Verdict
		dBm	W	dBm	W	
1	2412	18.02	0.063387	30	1	PASS
6	2437	17.87	0.061235			PASS
11	2462	17.46	0.055719			PASS

ANT 1+ANT 2:

Channel	Frequency (MHz)	Measured Output Peak Power		Limit		Verdict
		dBm	W	dBm	W	
1	2412	21.42	0.138549	30	1	PASS
6	2437	21.09	0.128533			PASS
11	2462	21.75	0.149475			PASS

2.2.3.4 802.11n-40MHz Test mode

ANT 1:

Channel	Frequency (MHz)	Measured Output Peak Power		Limit		Verdict
		dBm	W	dBm	W	
3	2422	16.93	0.049317	30	1	PASS
6	2437	17.37	0.054576			PASS
9	2452	17.61	0.057677			PASS

ANT 2:

Channel	Frequency (MHz)	Measured Output Peak Power		Limit		Verdict
		dBm	W	dBm	W	
3	2422	15.62	0.036475	30	1	PASS
6	2437	15.87	0.038637			PASS
9	2452	15.89	0.038815			PASS



ANT 1+ANT 2:

Channel	Frequency (MHz)	Measured Output Peak Power		Limit		Verdict
		dBm	W	dBm	W	
3	2422	19.33	0.085792	30	1	PASS
6	2437	19.69	0.093213			PASS
9	2452	19.84	0.096492			PASS

2.3 Bandwidth

2.3.1 Requirement

According to FCC section 15.247(a) (2), Systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

2.3.2 Test Description

A. Test Set:



The EUT is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.

Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. In order to make an accurate measurement, set the span greater than RBW.

KDB 558074 Section 8.1 Option 1 was used in order to prove compliance.

B. Equipments List:

Please reference ANNEX A(1.4).

2.3.3 Test Result

The lowest, middle and highest channels are selected to perform testing to record the 6 dB bandwidth of the Module.



REPORT No.: SZ15080082W03


2.3.3.1 802.11b Test mode

ANT 1:

A. Test Verdict:

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Limits(kHz)	Result
1	2412	7.194	≥500	PASS
6	2437	7.577	≥500	PASS
11	2462	7.059	≥500	PASS


B. Test Plots

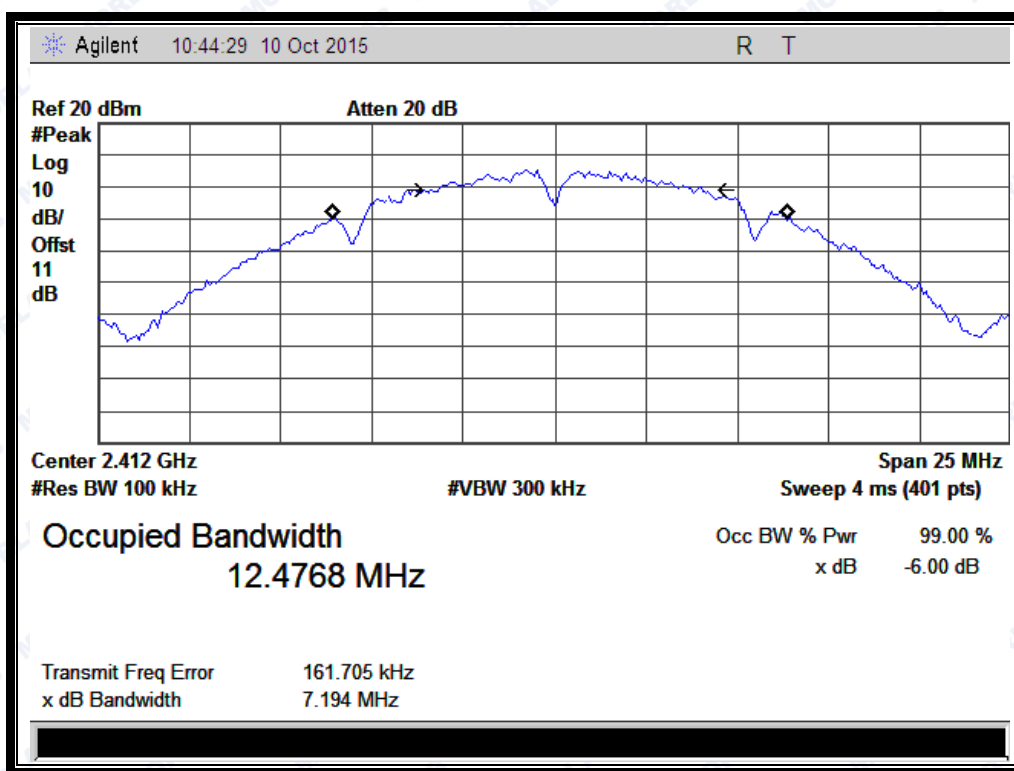


(Channel 1: 2412MHz @ 802.11b)



REPORT No.: SZ15080082W03

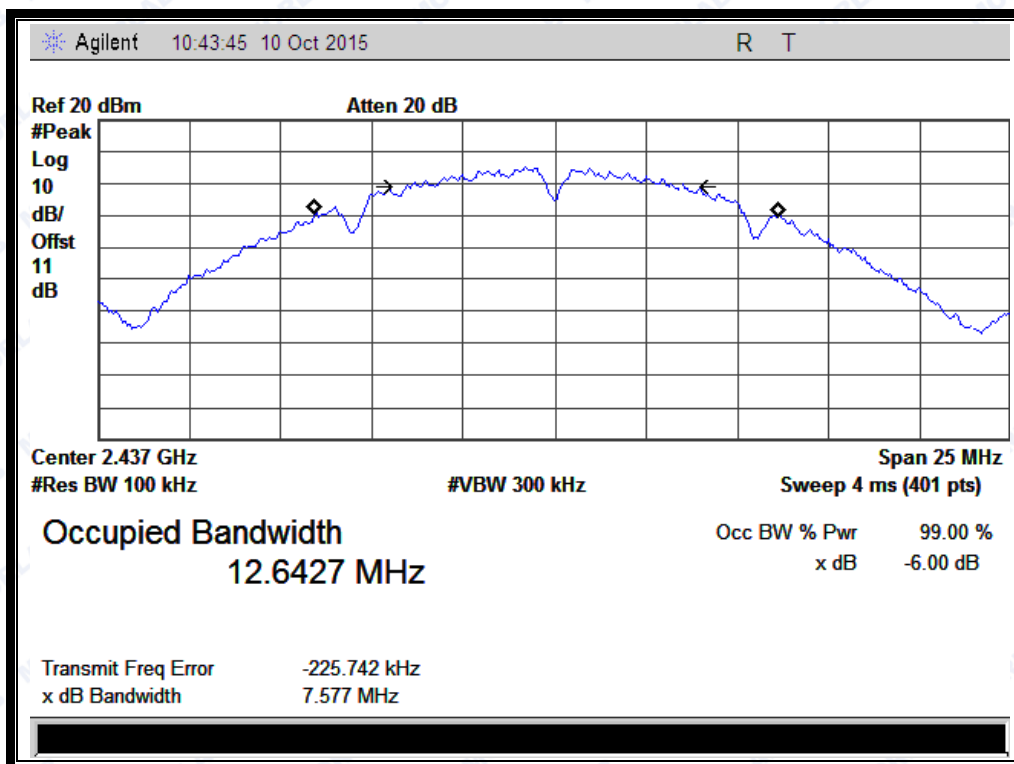

(Channel 6: 2437 MHz @ 802.11b)

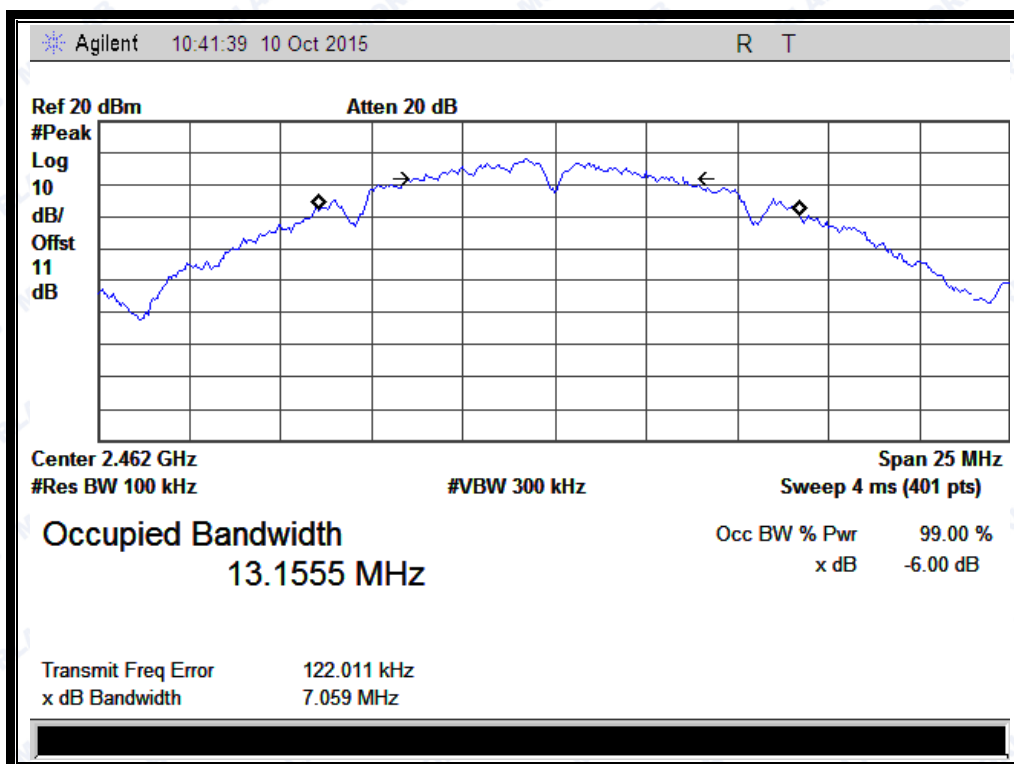

(Channel 11: 2462MHz @ 802.11b)




REPORT No.: SZ15080082W03

ANT 2:

A. Test Verdict:

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Limits(kHz)	Result
1	2412	7.157	≥500	PASS
6	2437	7.344	≥500	PASS
11	2462	6.967	≥500	PASS


B. Test Plots

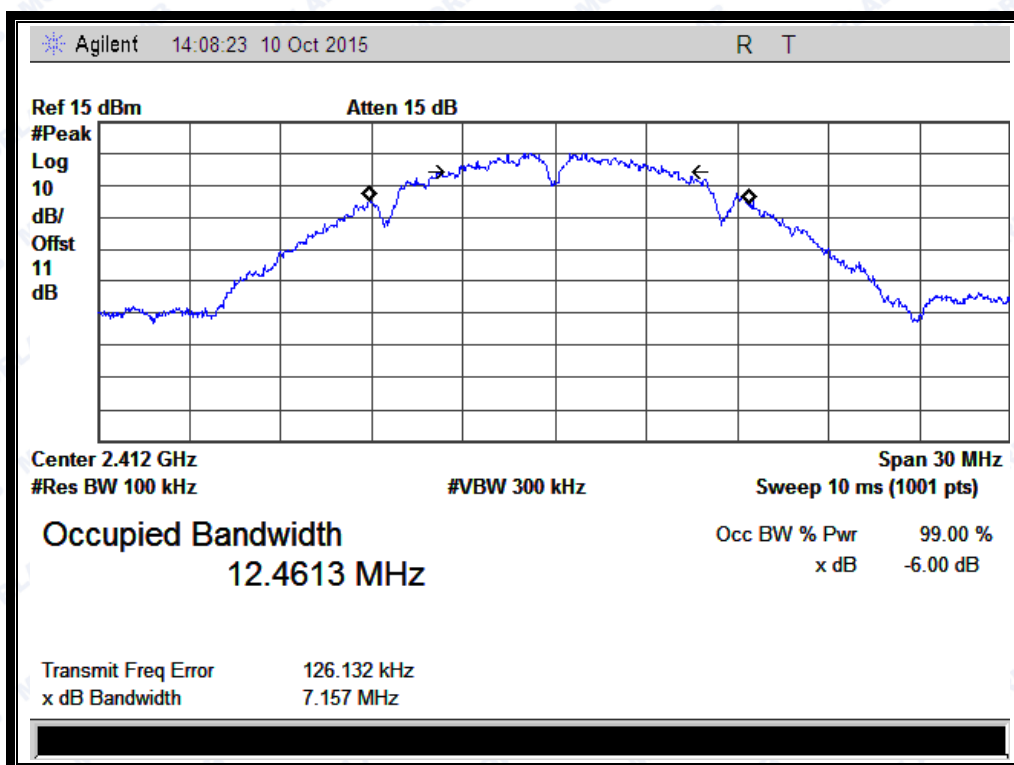


(Channel 1: 2412MHz @ 802.11b)



REPORT No.: SZ15080082W03

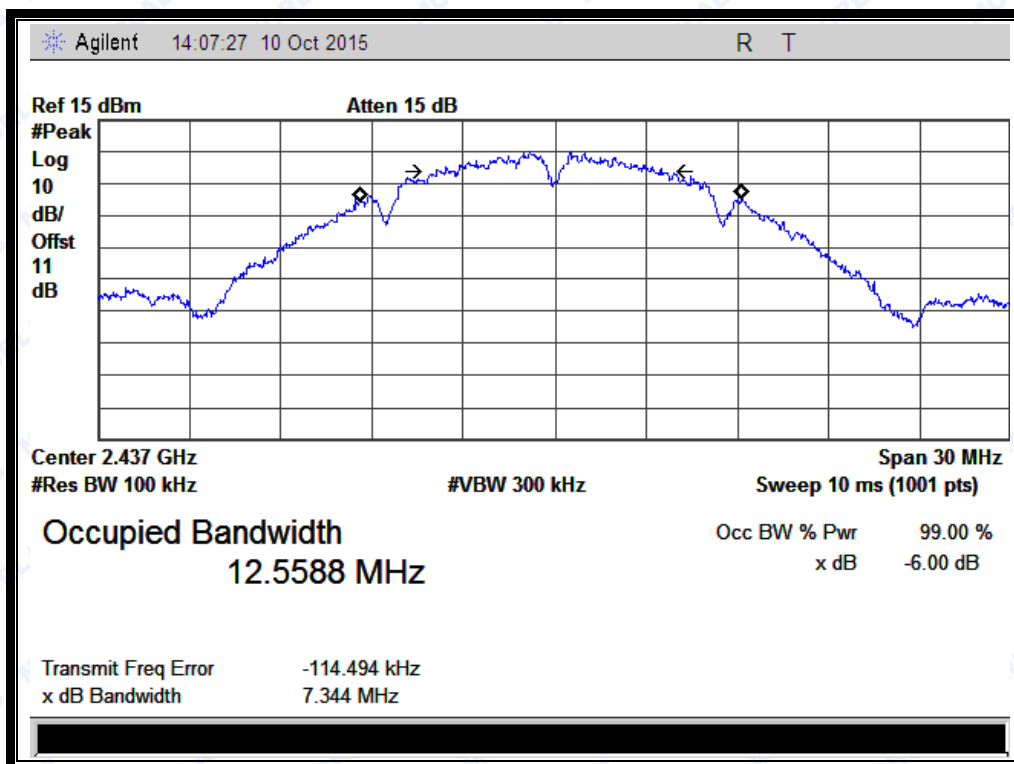

(Channel 6: 2437 MHz @ 802.11b)

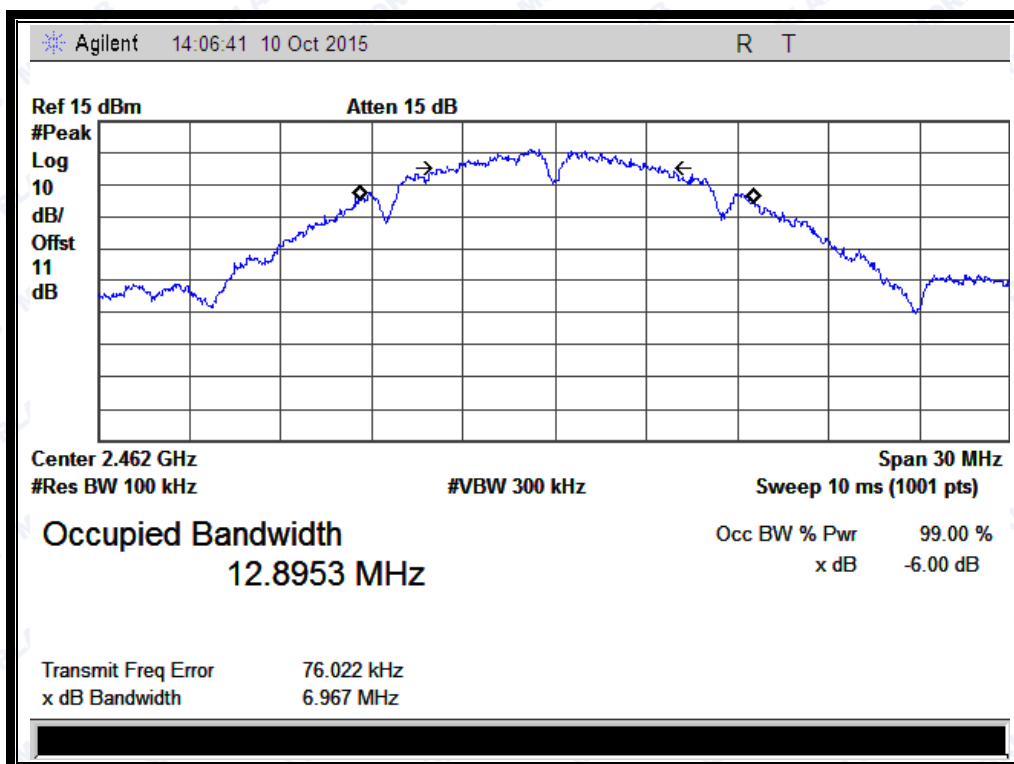

(Channel 11: 2462MHz @ 802.11b)



REPORT No.: SZ15080082W03


2.3.3.2 802.11g Test mode

ANT 1:

A. Test Verdict:

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Limits (kHz)	Result
1	2412	15.987	≥500	PASS
6	2437	15.833	≥500	PASS
11	2462	15.406	≥500	PASS


B. Test Plots:

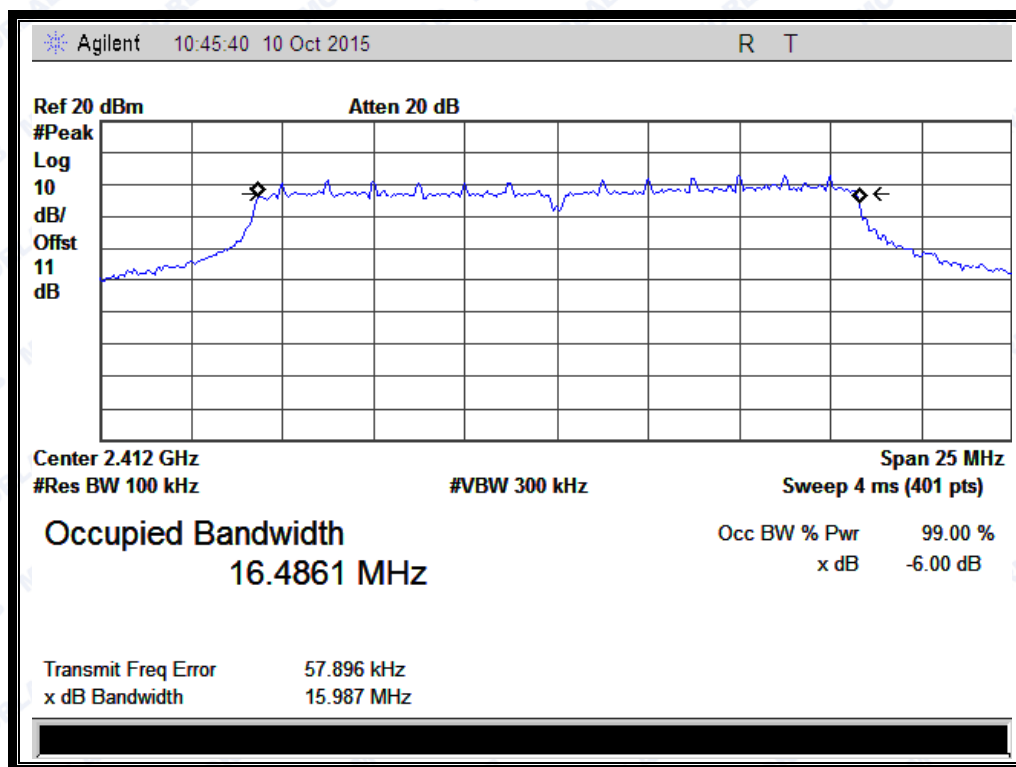


(Channel 1: 2412MHz @ 802.11g)



REPORT No.: SZ15080082W03

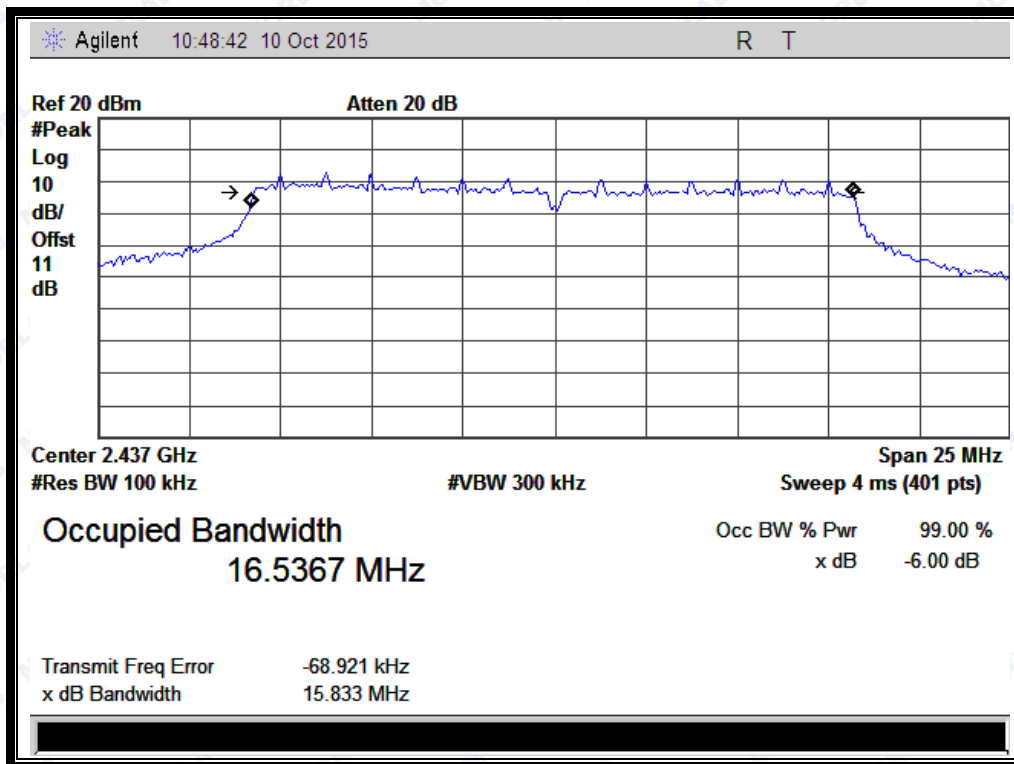

(Channel 6: 2437MHz @ 802.11g)

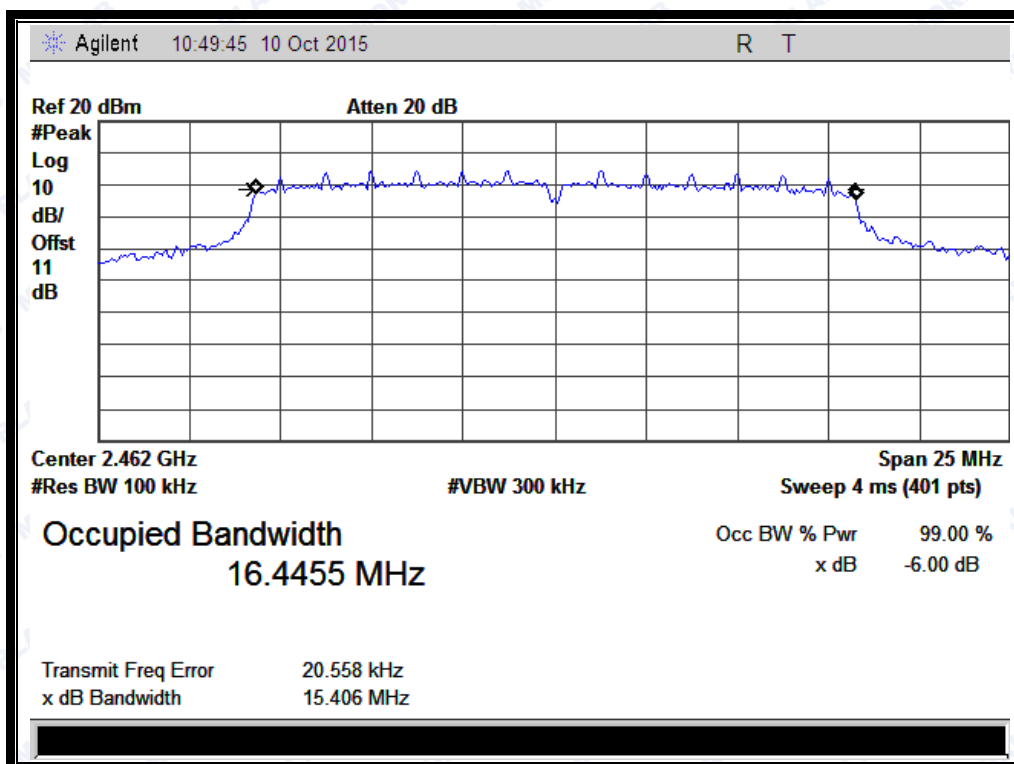

(Channel 11: 2462MHz @ 802.11g)




REPORT No.: SZ15080082W03

ANT 2:

A. Test Verdict:

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Limits(kHz)	Result
1	2412	16.049	≥500	PASS
6	2437	16.401	≥500	PASS
11	2462	15.677	≥500	PASS


B. Test Plots

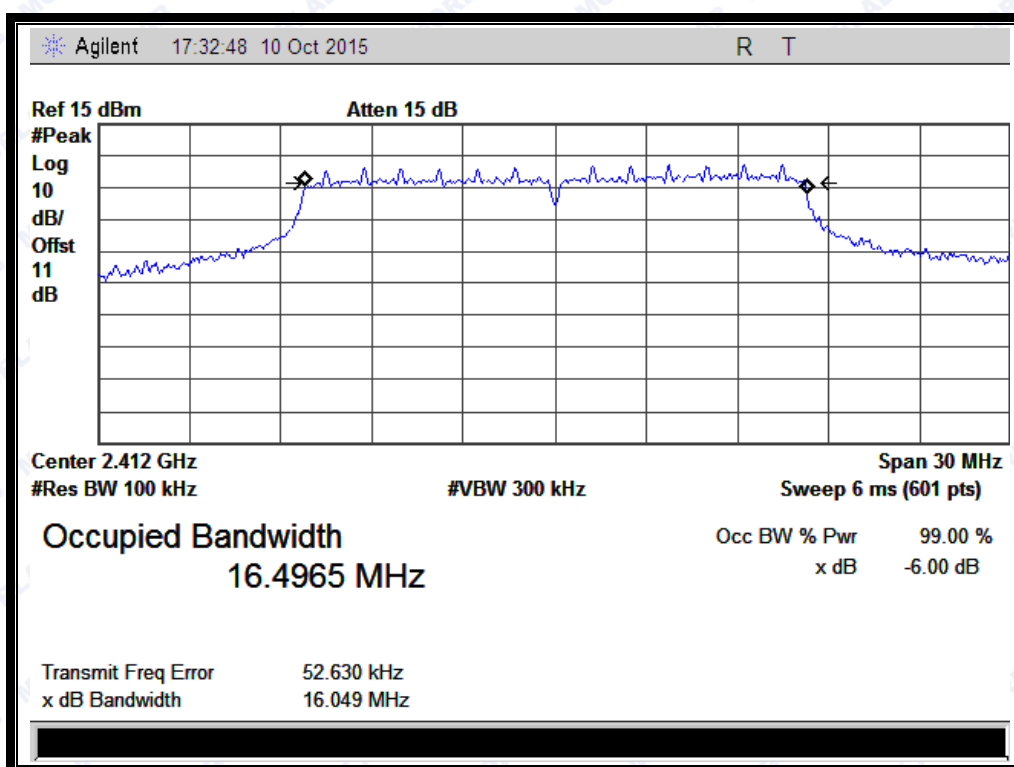


(Channel 1: 2412MHz @ 802.11g)



REPORT No.: SZ15080082W03

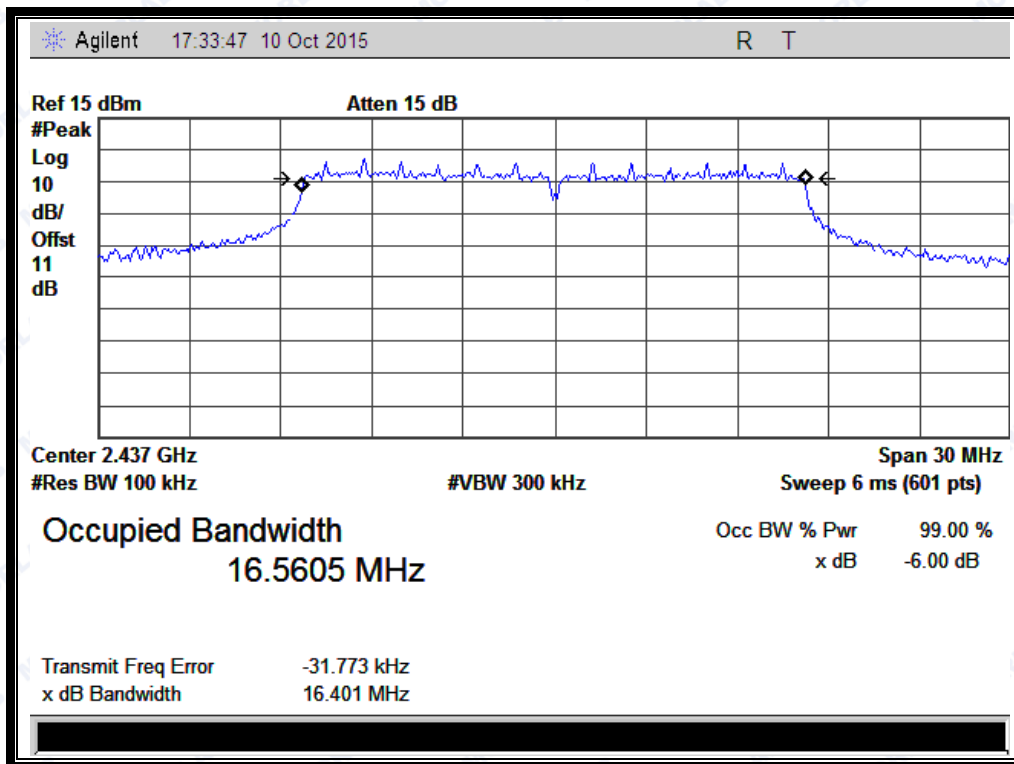

(Channel 6: 2437 MHz @ 802.11g)

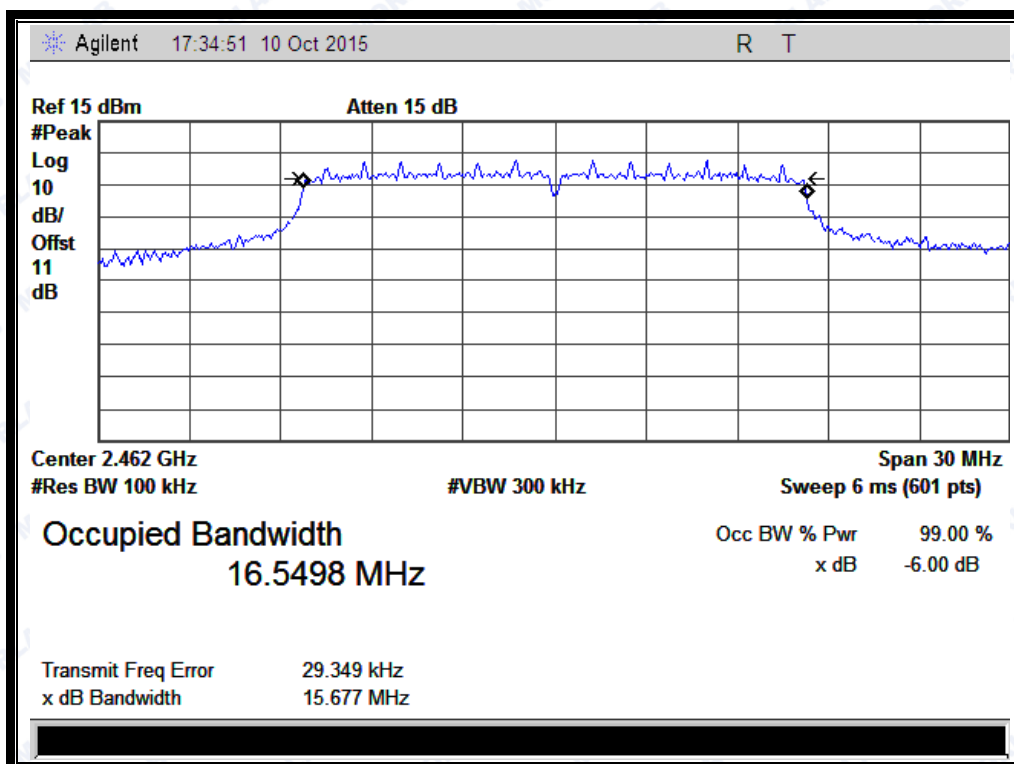

(Channel 11: 2462MHz @ 802.11g)



REPORT No.: SZ15080082W03


2.3.3.3 802.11n-20 Test mode

ANT 1:

B. Test Verdict:

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Limits (kHz)	Result
1	2412	16.955	≥ 500	PASS
6	2437	17.029	≥ 500	PASS
11	2462	16.311	≥ 500	PASS


B. Test Plots:

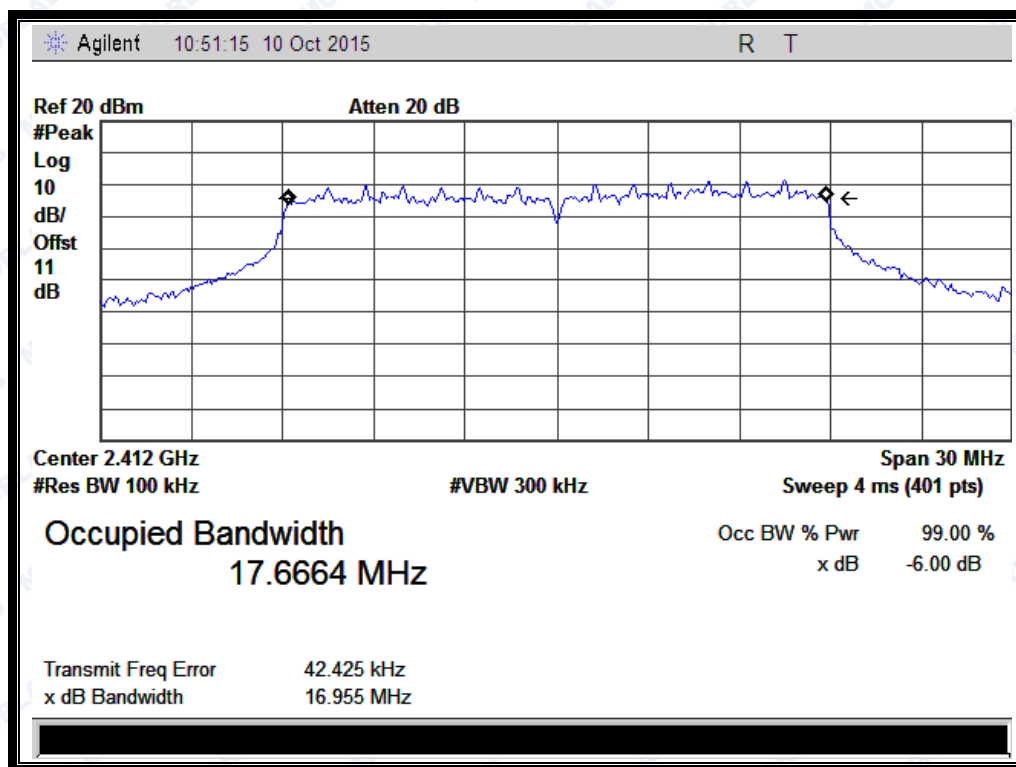


(Channel 1: 2412MHz @ 802.11n-20)



REPORT No.: SZ15080082W03

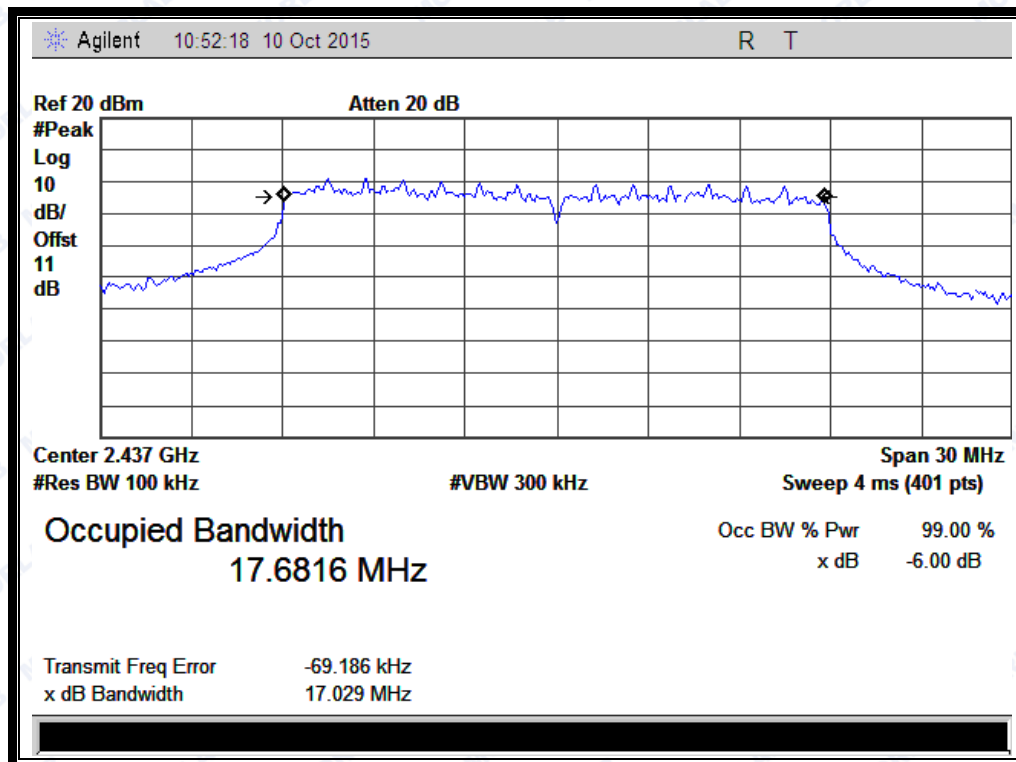

(Channel 6: 2437MHz @ 802.11n-20)

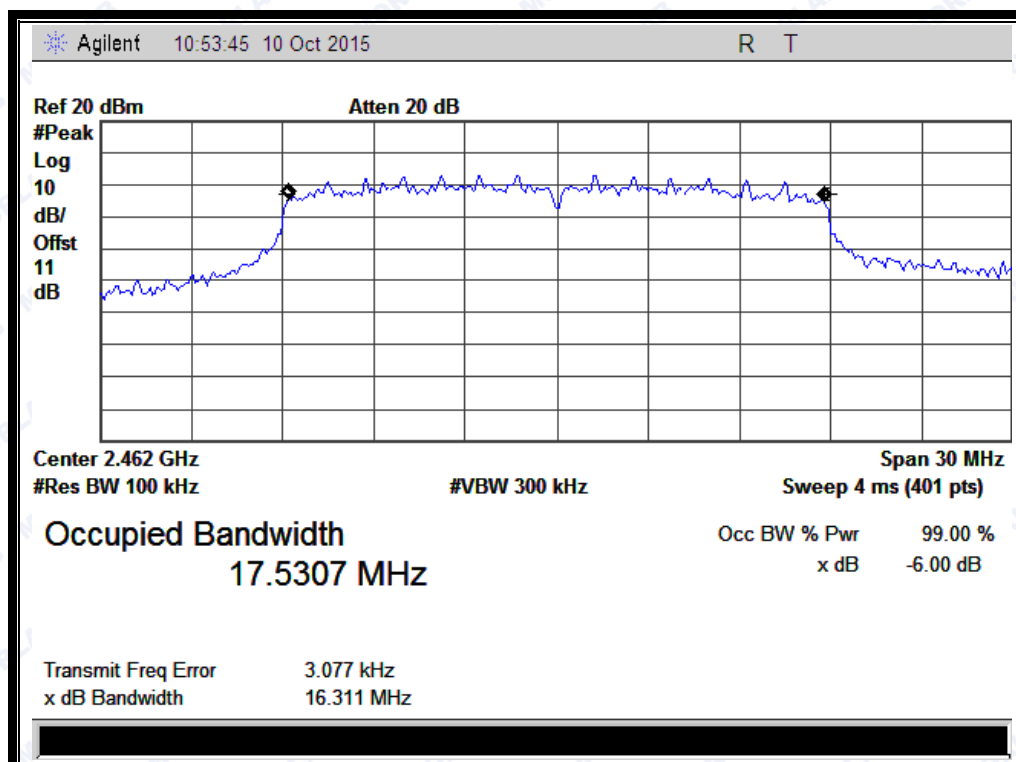

(Channel 11: 2462MHz @ 802.11n-20)




REPORT No.: SZ15080082W03

ANT 2:

A. Test Verdict:

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Limits(kHz)	Result
1	2412	16.998	≥500	PASS
6	2437	17.269	≥500	PASS
11	2462	16.430	≥500	PASS


B. Test Plots

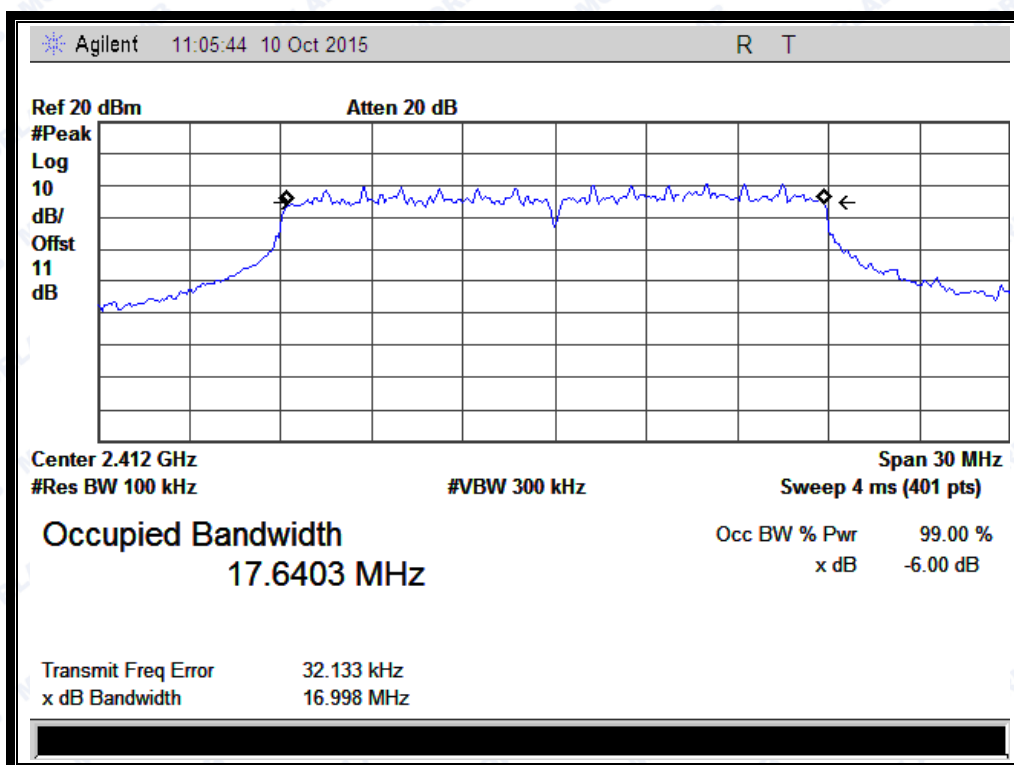


(Channel 1: 2412MHz @ 802.11 n-20)



REPORT No.: SZ15080082W03

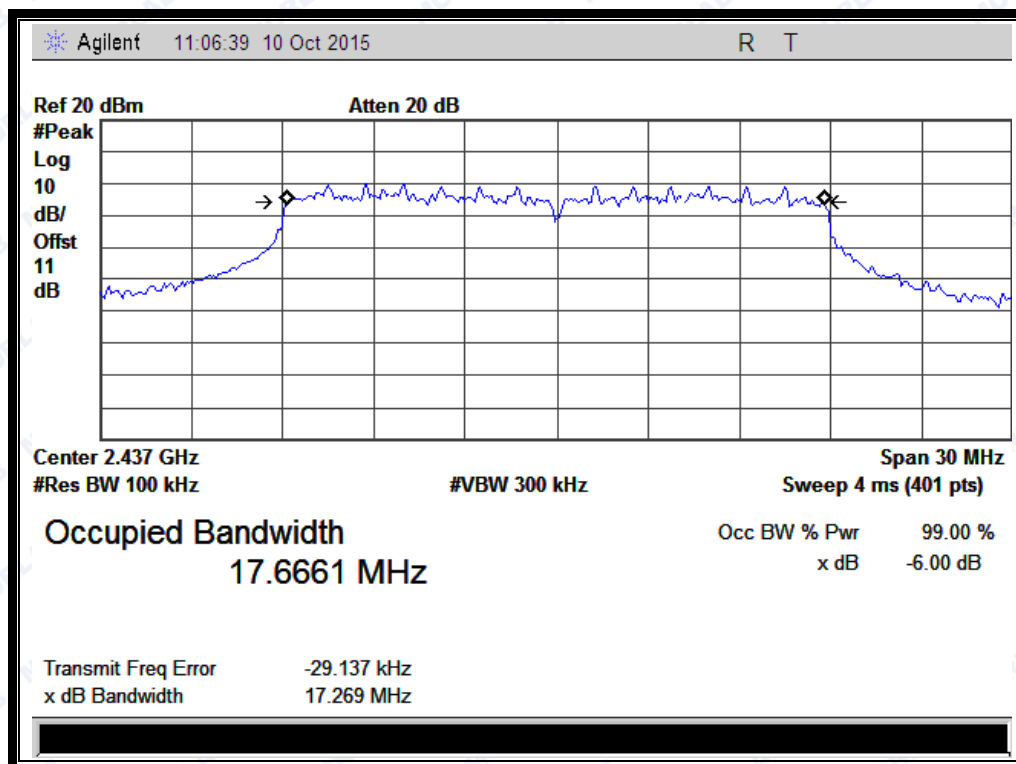

(Channel 6: 2437 MHz @ 802.11 n-20)

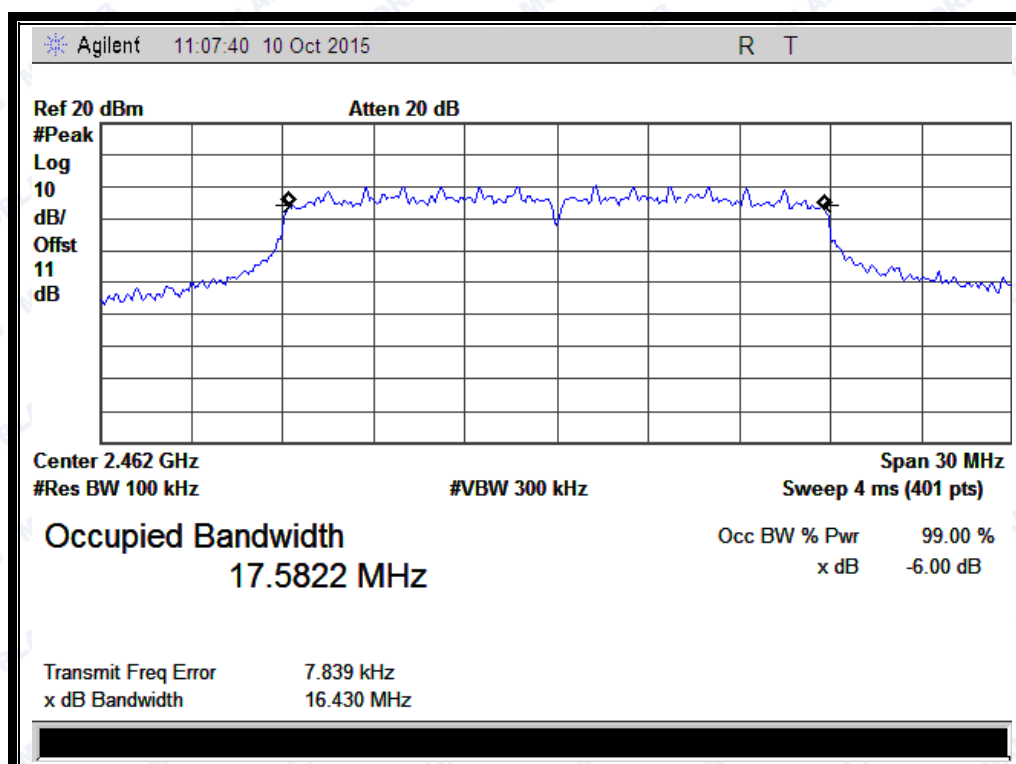

(Channel 11: 2462MHz @ 802.11 n-20)



REPORT No.: SZ15080082W03


2.3.3.4 802.11n-40 Test mode

ANT 1:

A. Test Verdict:

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Limits (kHz)	Result
3	2422	35.138	≥ 500	PASS
6	2437	36.176	≥ 500	PASS
9	2452	35.089	≥ 500	PASS


B. Test Plots:

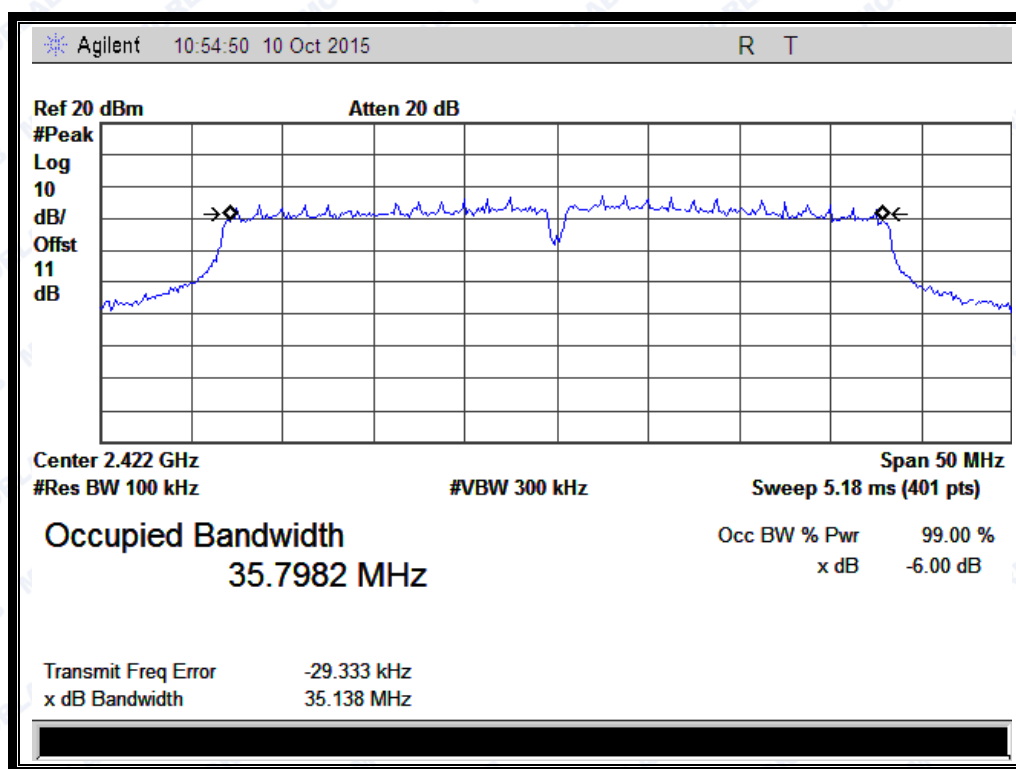


(Channel 3: 2422MHz @ 802.11n-40)



REPORT No.: SZ15080082W03

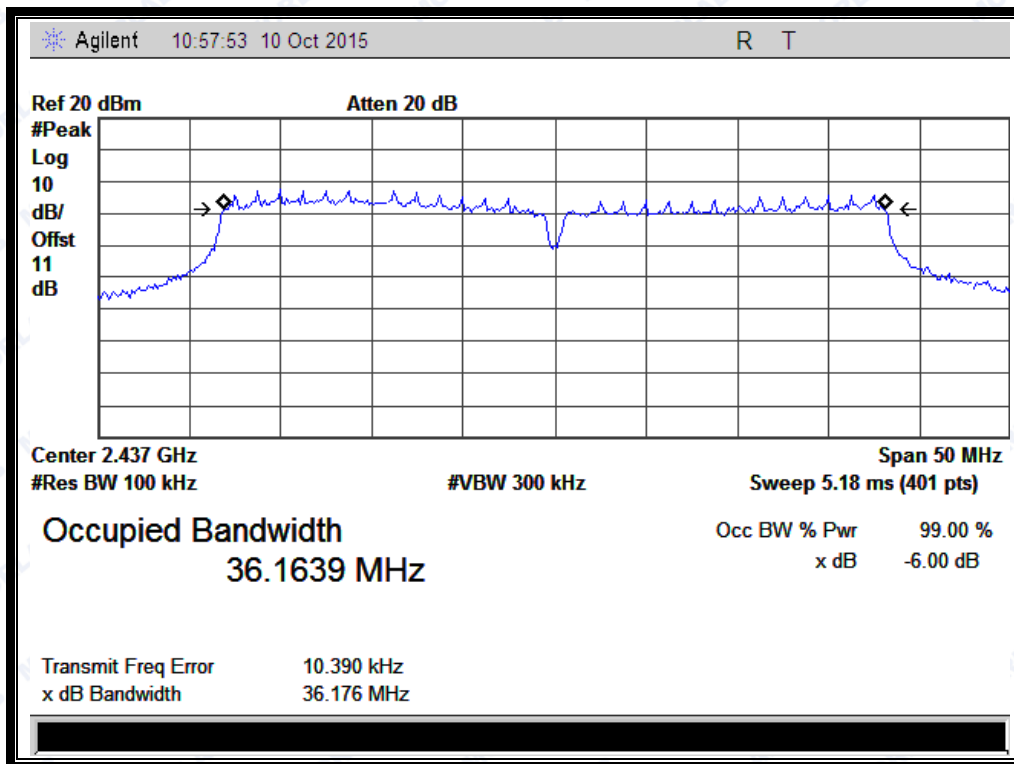

(Channel 6: 2437MHz @ 802.11n-40)

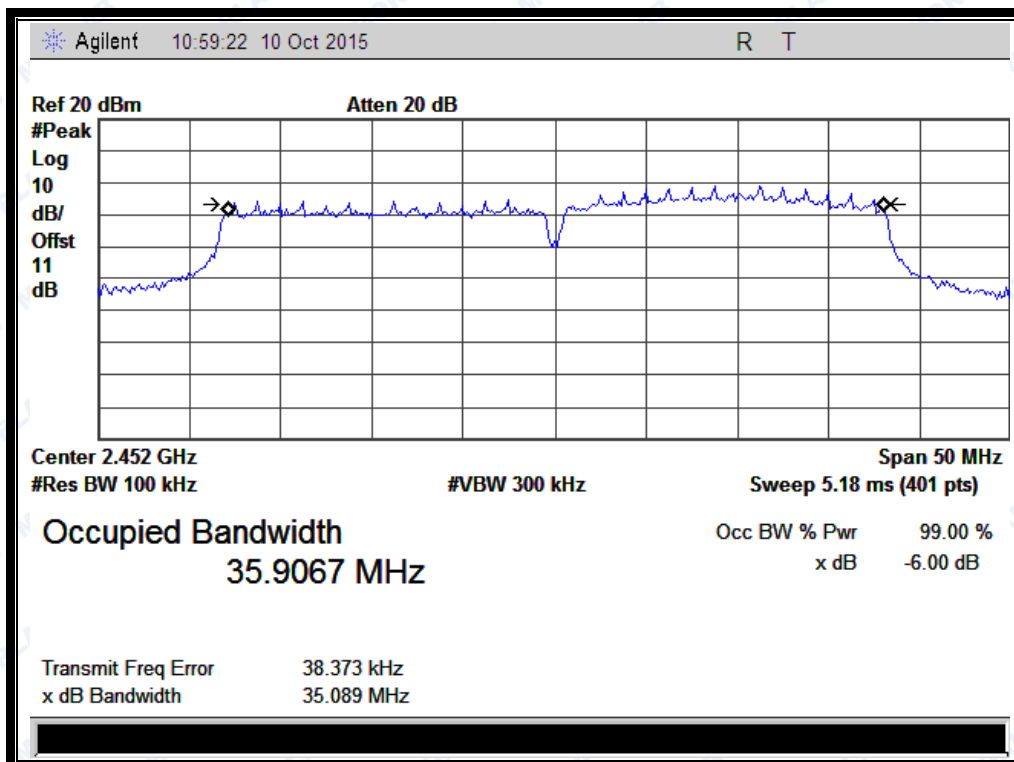

(Channel 9: 2452MHz @ 802.11n-40)




REPORT No.: SZ15080082W03

ANT 2:

A. Test Verdict:

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Limits(kHz)	Result
3	2422	35.752	≥500	PASS
6	2437	36.278	≥500	PASS
9	2452	35.191	≥500	PASS


B. Test Plots

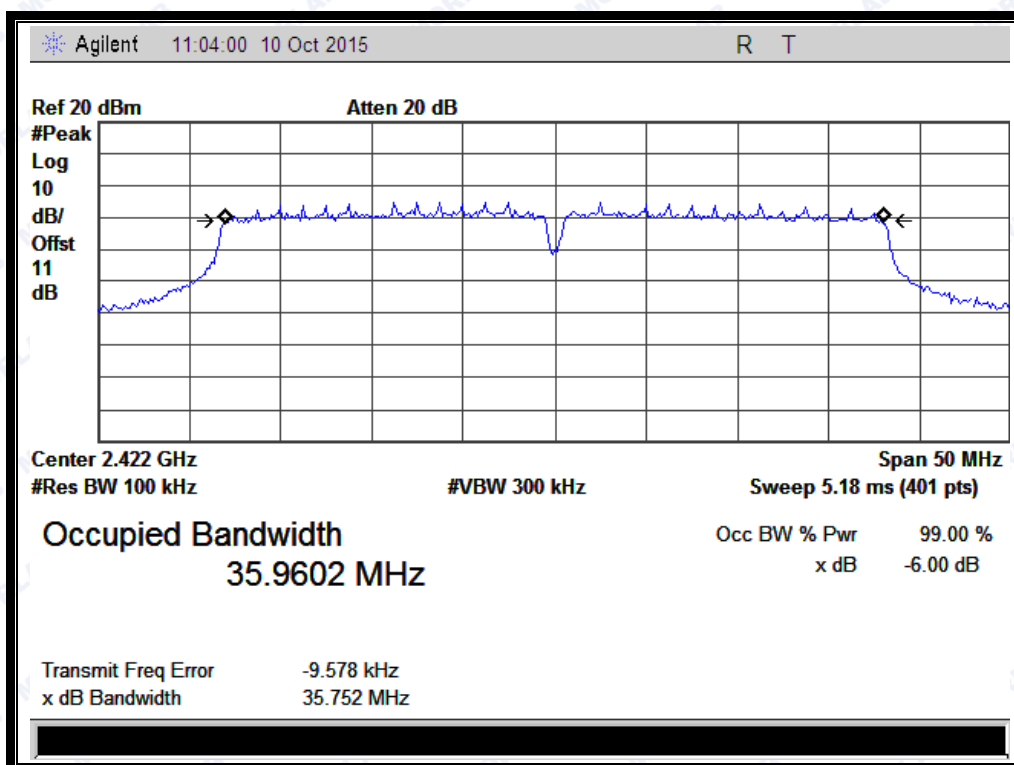


(Channel 1: 2412MHz @ 802.11 n-40)



REPORT No.: SZ15080082W03

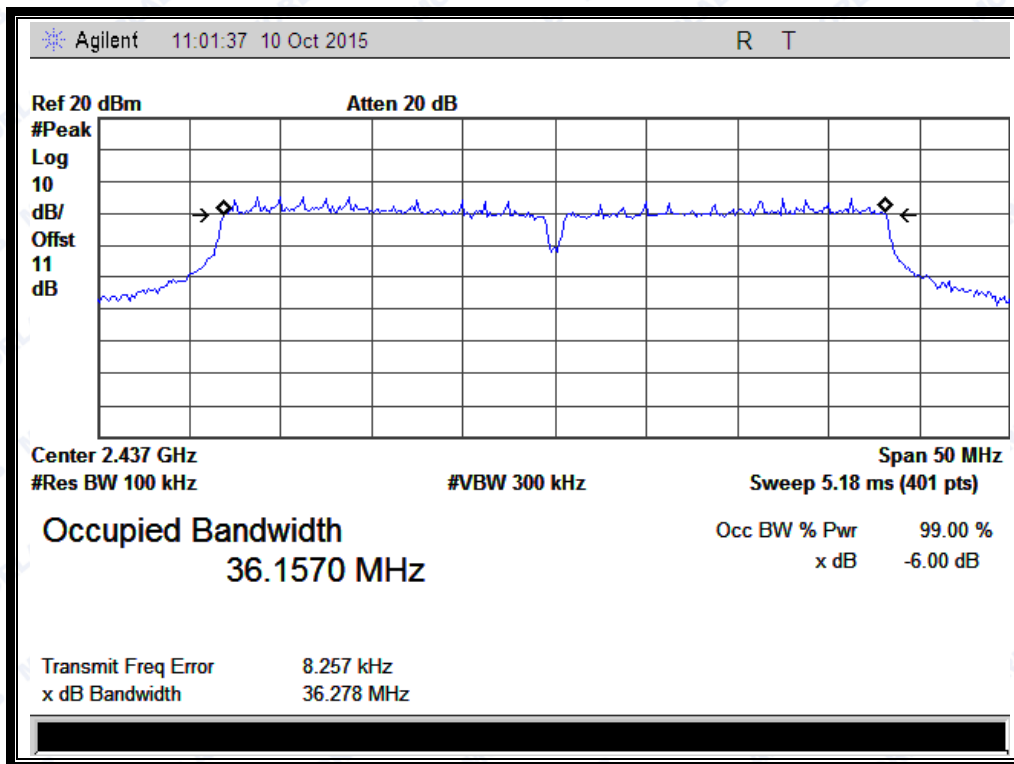

(Channel 6: 2437 MHz @ 802.11 n-40)

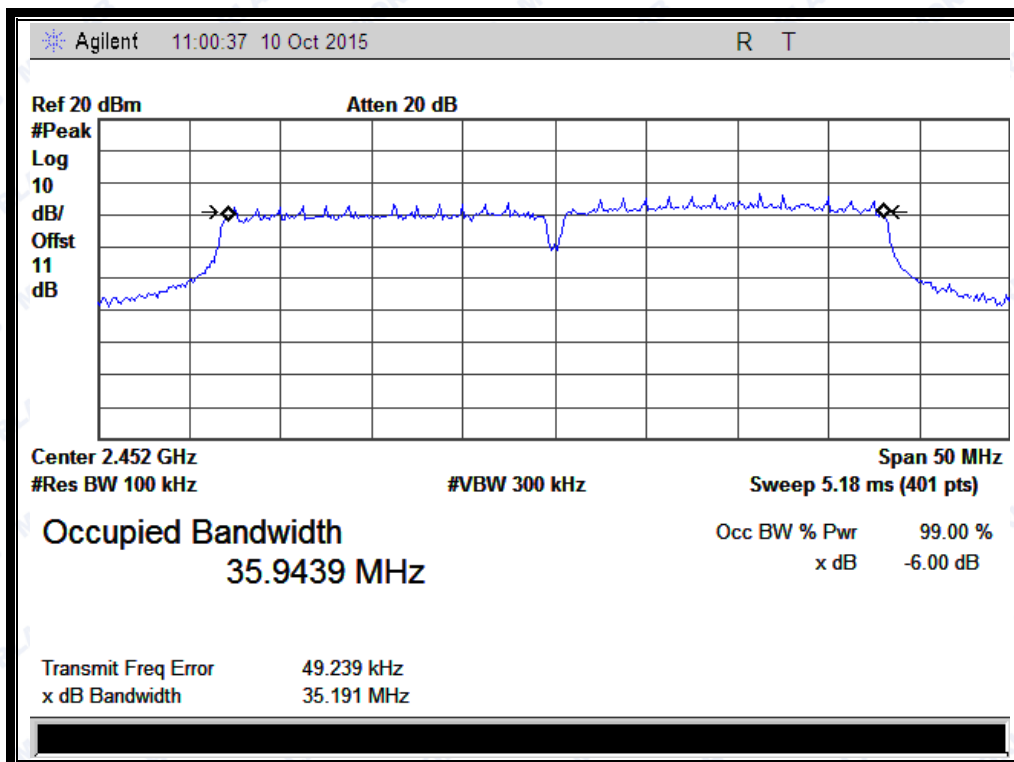

(Channel 11: 2462MHz @ 802.11 n-40)


2.4 Conducted Spurious Emissions and Band Edge

2.4.1 Requirement

According to FCC section 15.247(c), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

2.4.2 Test Description

A. Test Set:

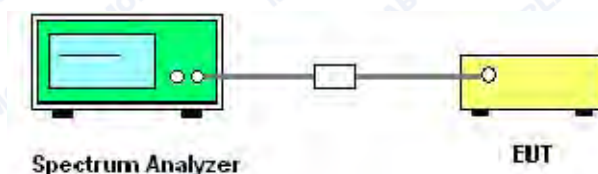

The EUT is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.

Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. In order to make an accurate measurement, set the span greater than RBW.

KDB 558074 Section 11.0 was used in order to prove compliance.

C. Equipments List:

Please reference ANNEX A(1.4).

2.4.3 Test Result

The measurement frequency range is from 30MHz to the 10th harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the spurious emissions.



REPORT No.: SZ15080082W03

2.4.3.1 802.11b Test mode


ANT 1:

A. Test Verdict:

Channel	Frequency (MHz)	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
			Carrier Level	Calculated -20dBc Limit	
1	2412	-45.57	4.851	-15.149	PASS
6	2437	-45.91	4.585	-15.415	PASS
11	2462	-46.51	8.136	-11.864	PASS

B. Test Plots:


Note: the power of the Module transmitting frequency should be ignored.

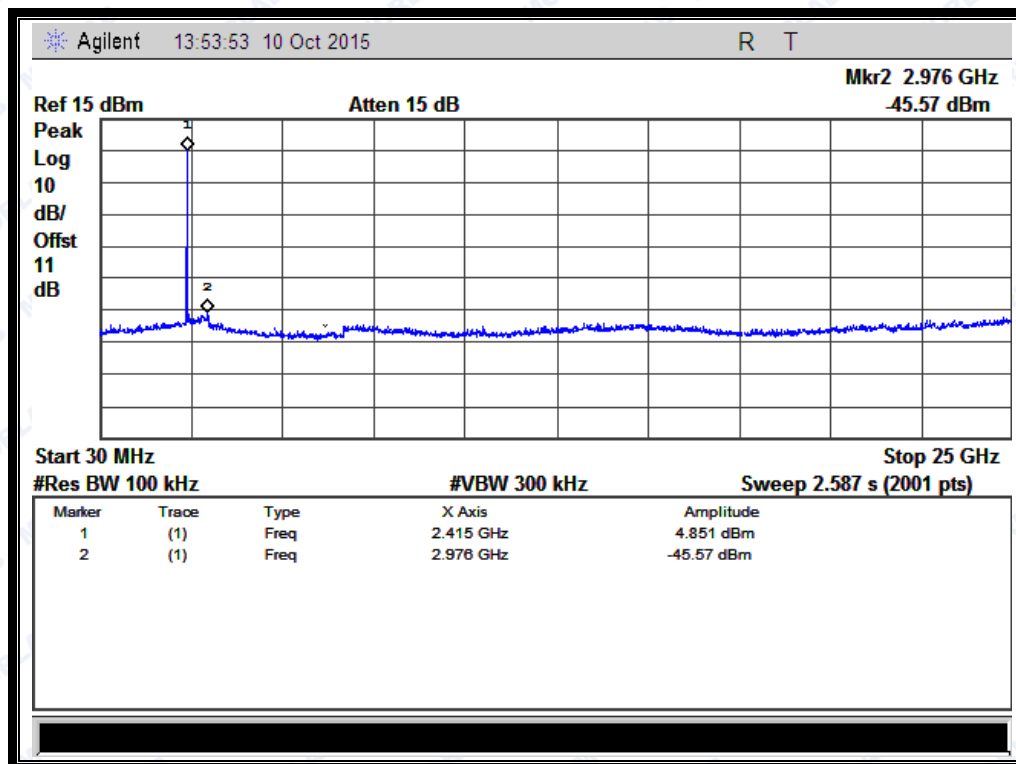


(Channel = 1, 30MHz to 25GHz)



REPORT No.: SZ15080082W03

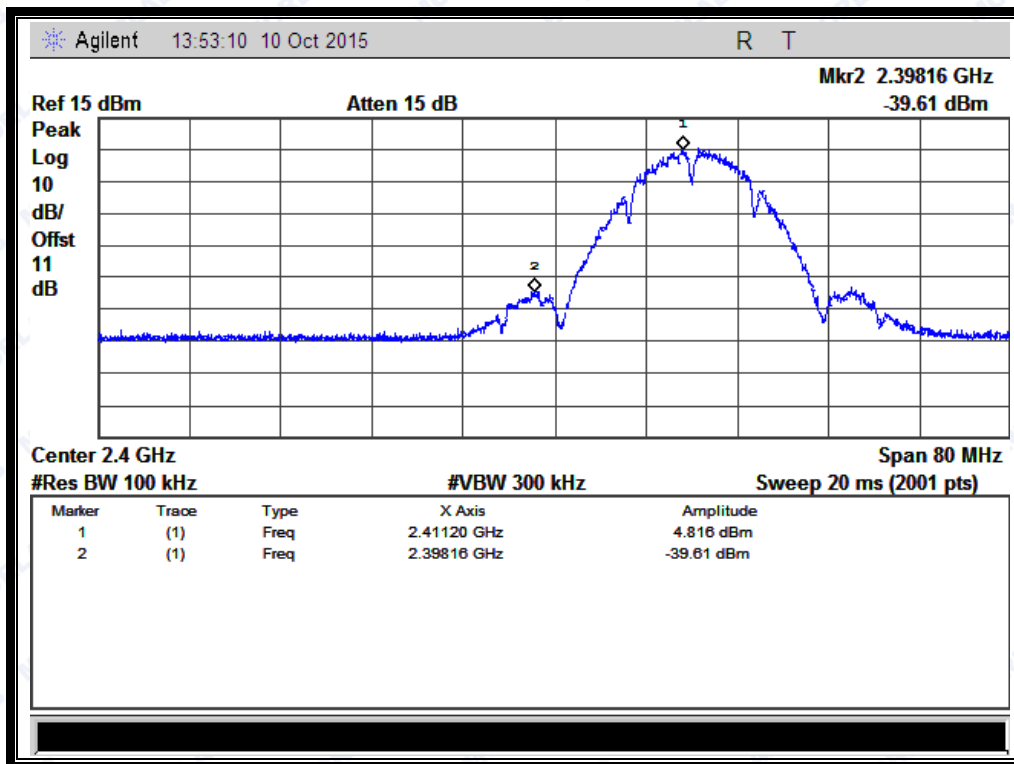


(Band Edge @ Channel = 1)

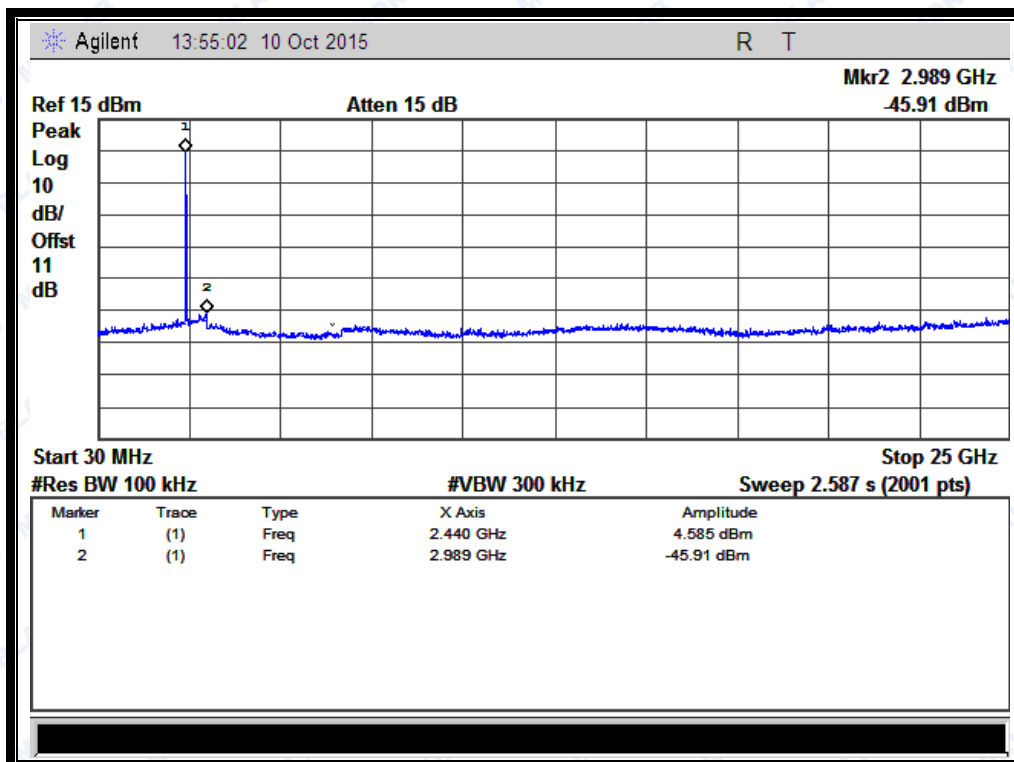


(Channel = 6, 30MHz to 25GHz)



REPORT No.: SZ15080082W03

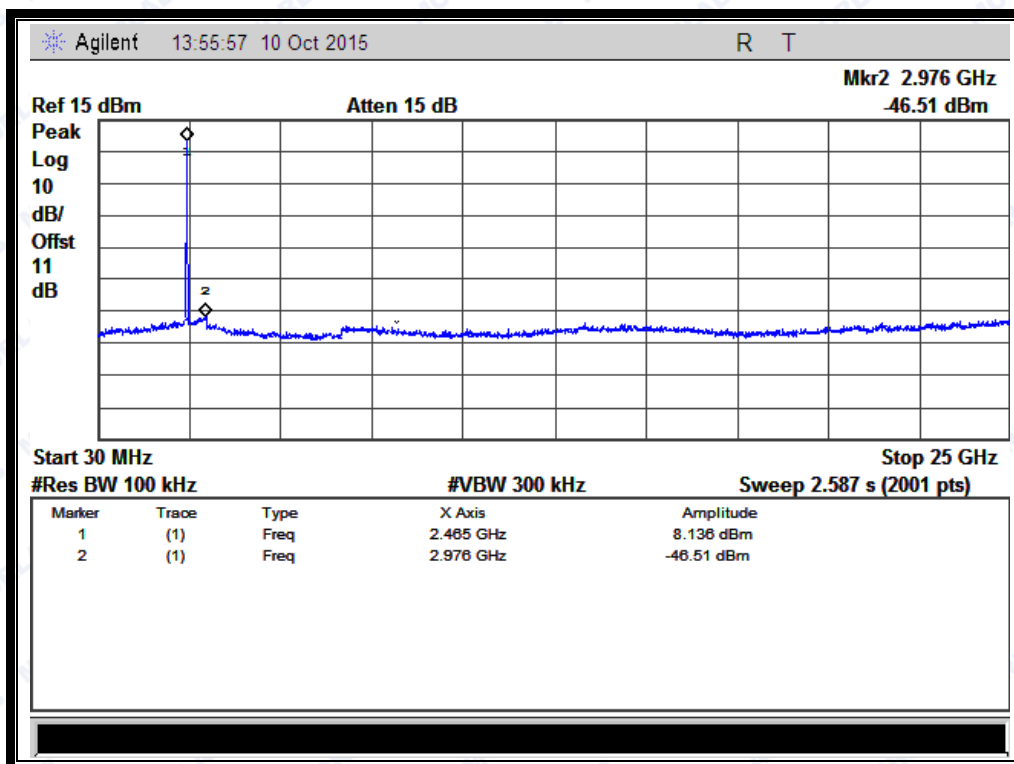

(Channel = 11, 30MHz to 25GHz)

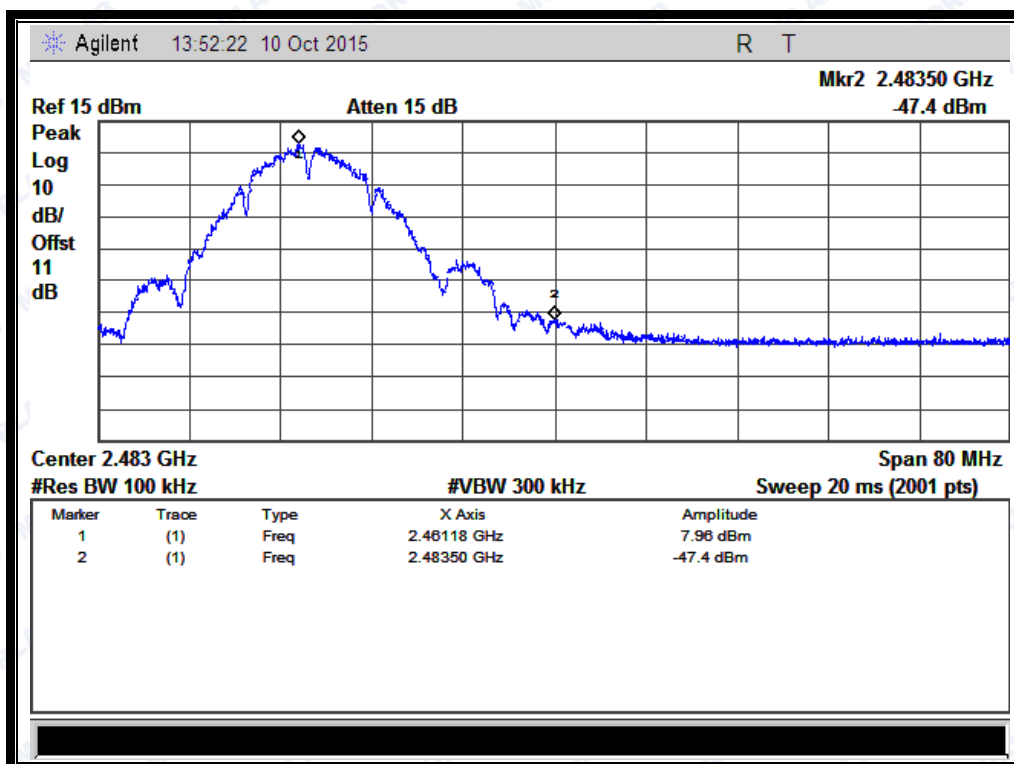

(Band Edge @ Channel = 11)



REPORT No.: SZ15080082W03


ANT 2:

A. Test Verdict:

Channel	Frequency (MHz)	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
			Carrier Level	Calculated -20dBc Limit	
1	2412	-46.49	4.423	-15.577	PASS
6	2437	-45.49	4.091	-15.909	PASS
11	2462	-46.49	5.857	-14.143	PASS

B. Test Plots:


Note: the power of the Module transmitting frequency should be ignored.

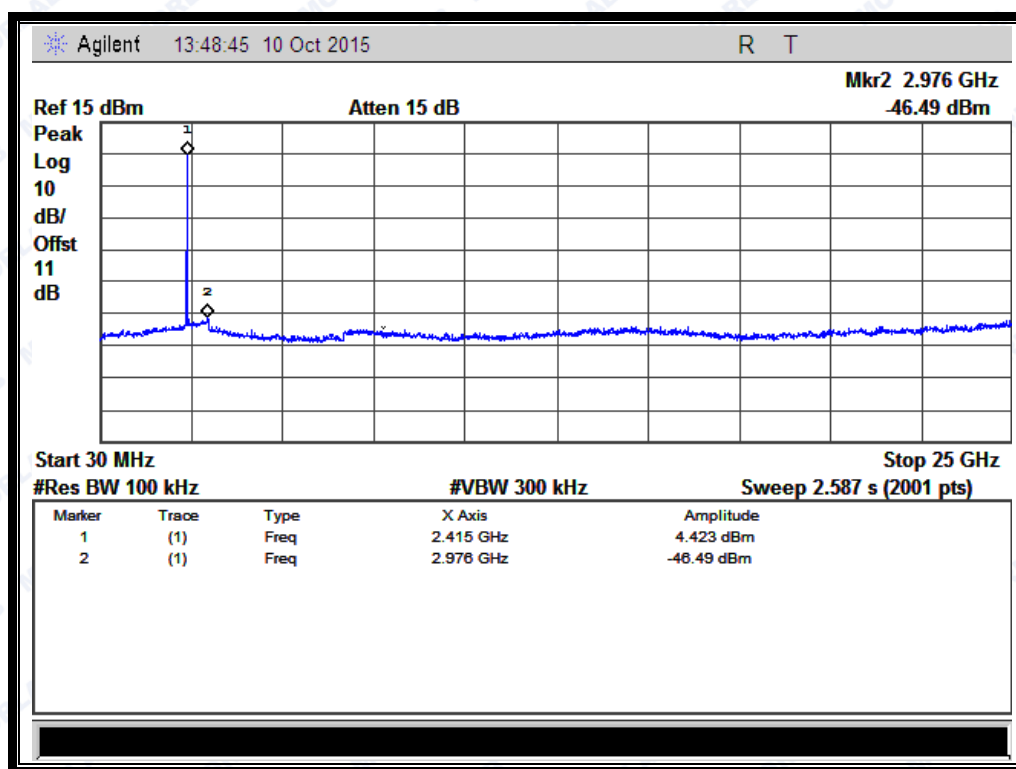


(Channel = 1, 30MHz to 25GHz)



REPORT No.: SZ15080082W03

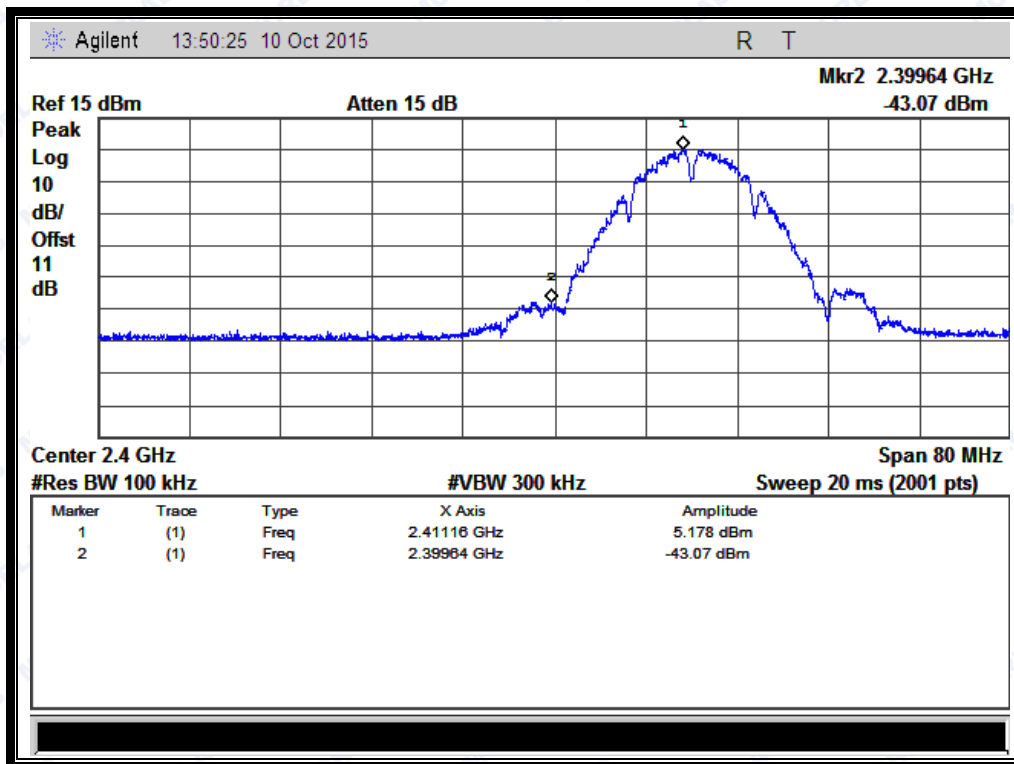


(Band Edge @ Channel = 1)

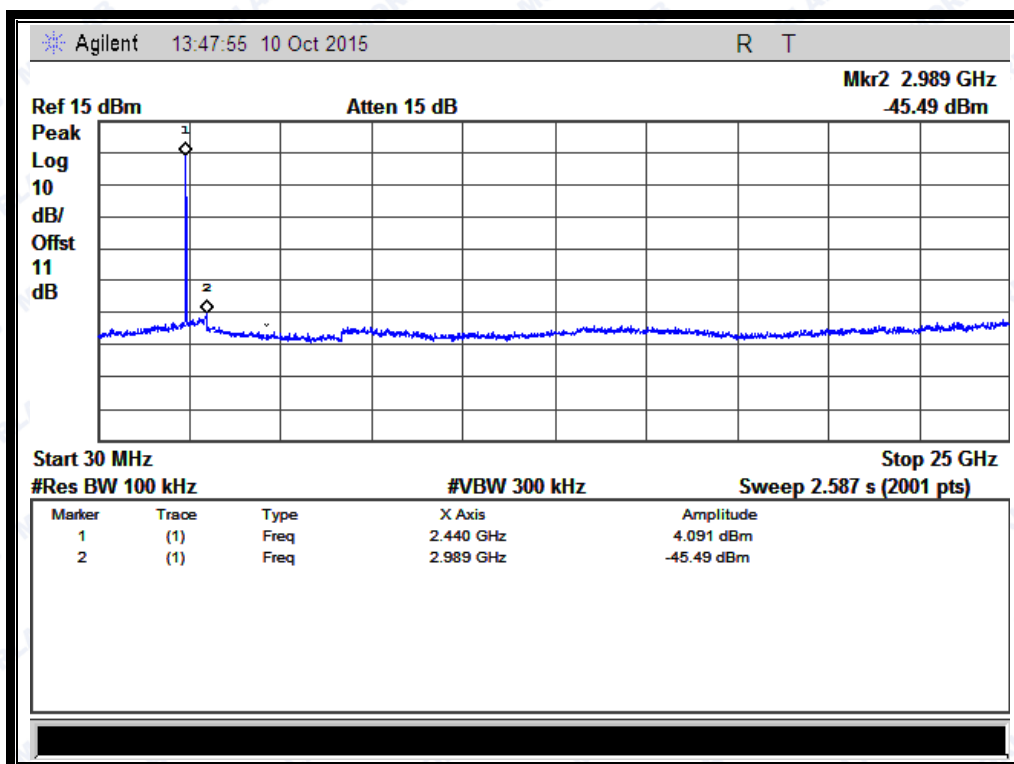


(Channel = 6, 30MHz to 25GHz)



REPORT No.: SZ15080082W03

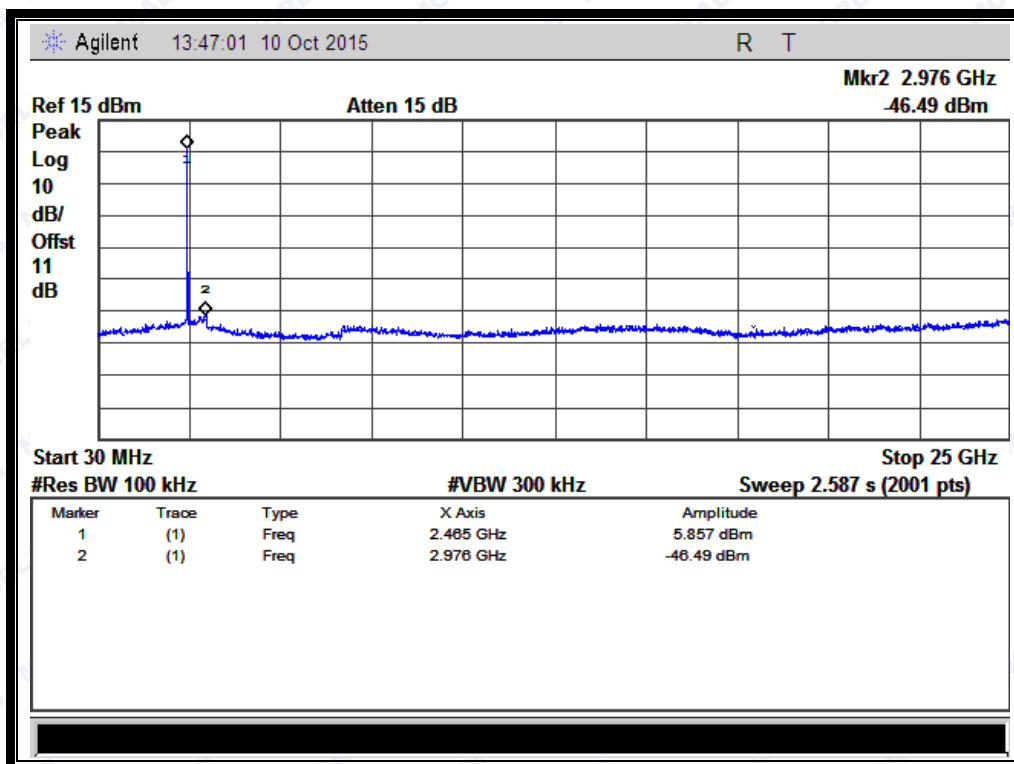

(Channel = 11, 30MHz to 25GHz)

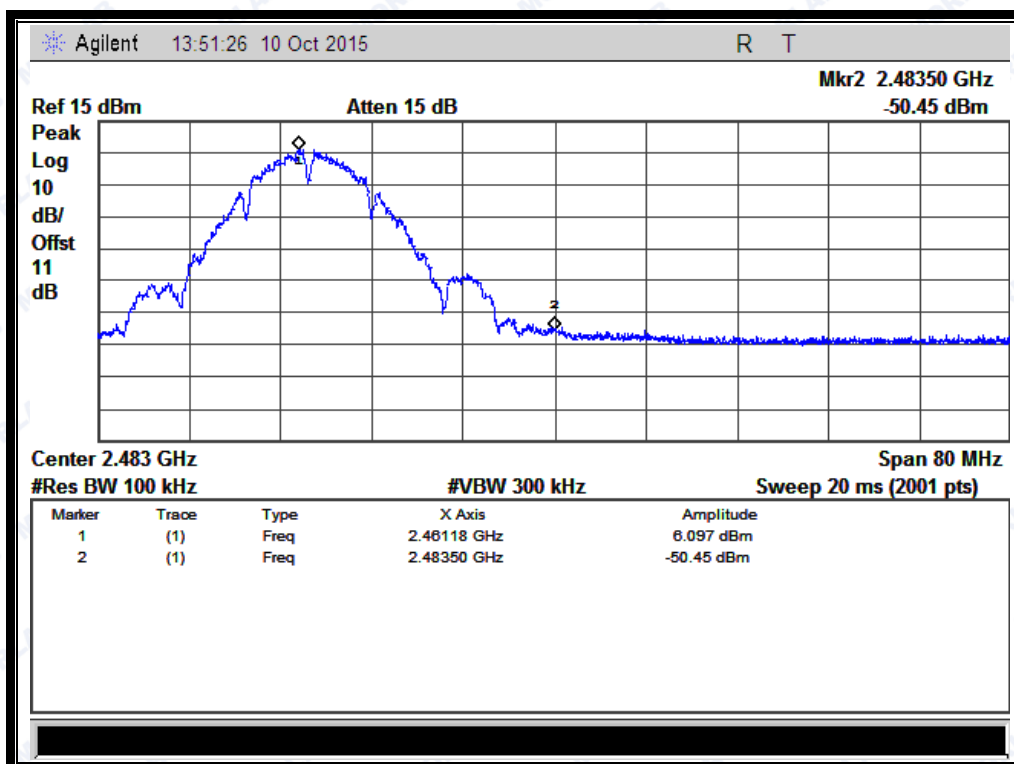

(Band Edge @ Channel = 11)




REPORT No.: SZ15080082W03

2.4.3.2 802.11g Test mode

ANT 1:

A. Test Verdict:


Channel	Frequency (MHz)	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
			Carrier Level	Calculated -20dBc Limit	
1	2412	-46.61	3.381	-16.619	PASS
6	2437	-44.76	0.699	-19.301	PASS
11	2462	-46.49	3.408	-16.592	PASS

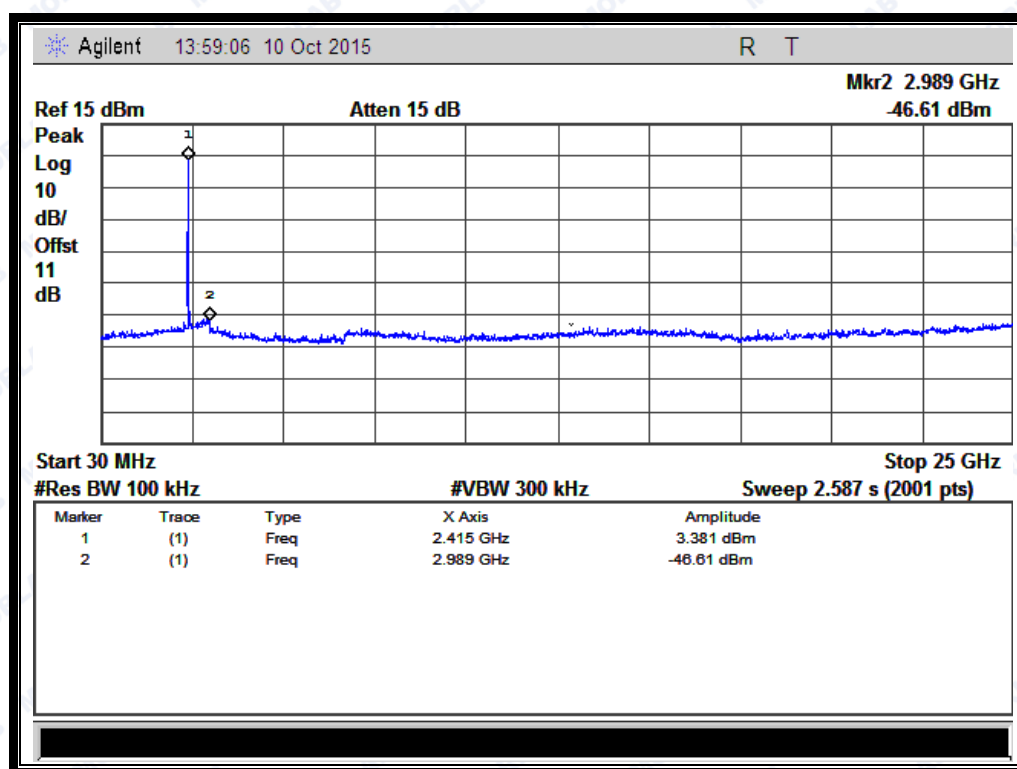B. Test Plots:**Note:** the power of the Module transmitting frequency should be ignored.


(Channel = 1, 30MHz to 25GHz)



REPORT No.: SZ15080082W03

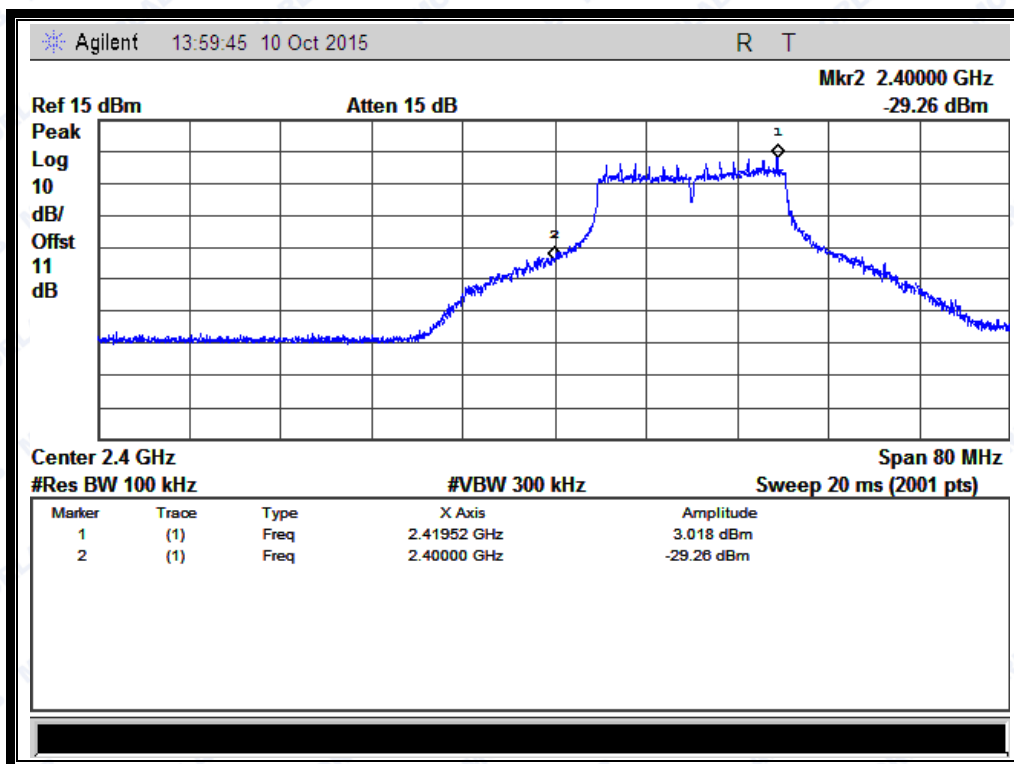


(Band Edge @ Channel = 1)

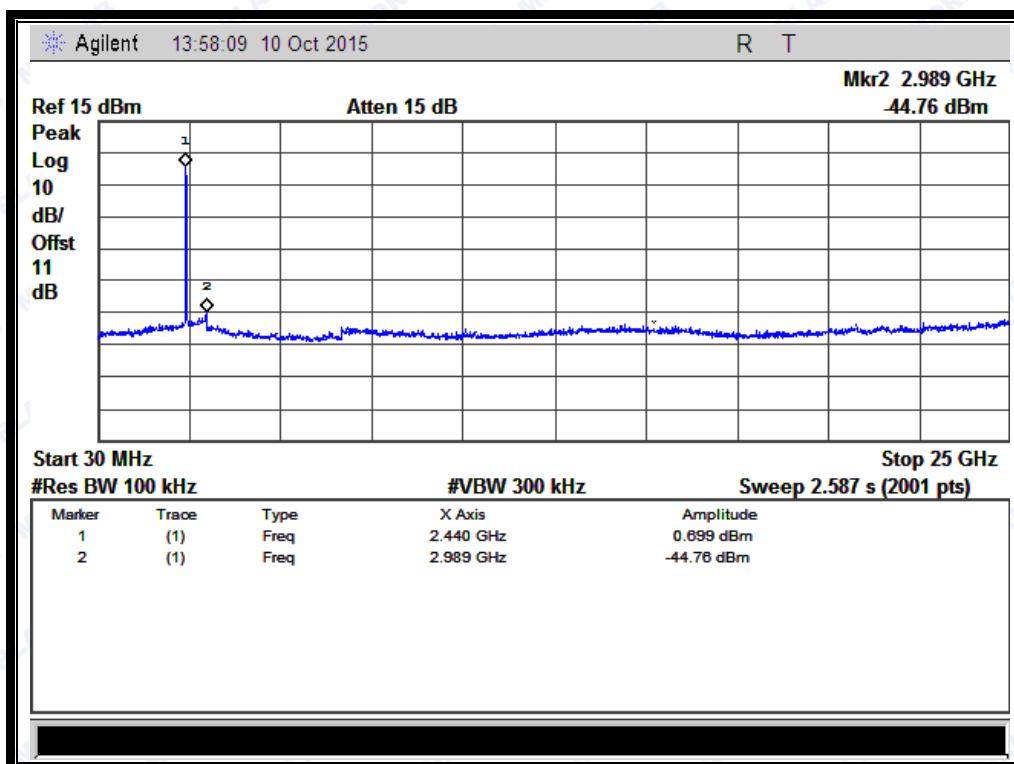


(Channel = 6, 30MHz to 25GHz)



REPORT No.: SZ15080082W03

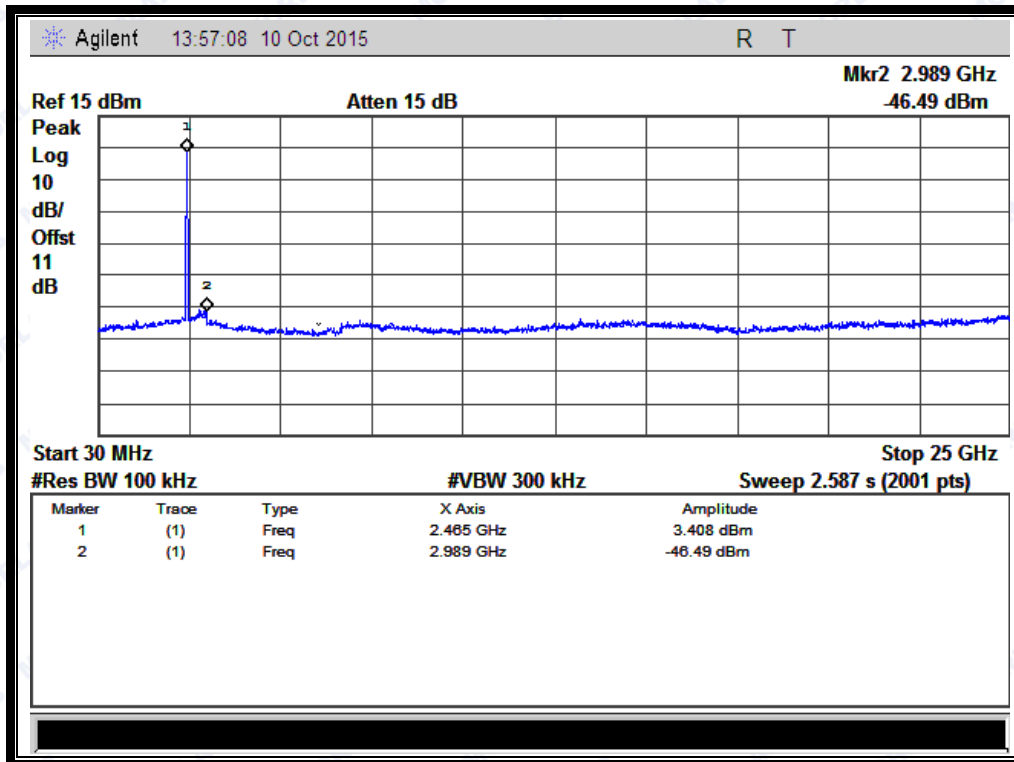

(Channel = 11, 30MHz to 25GHz)

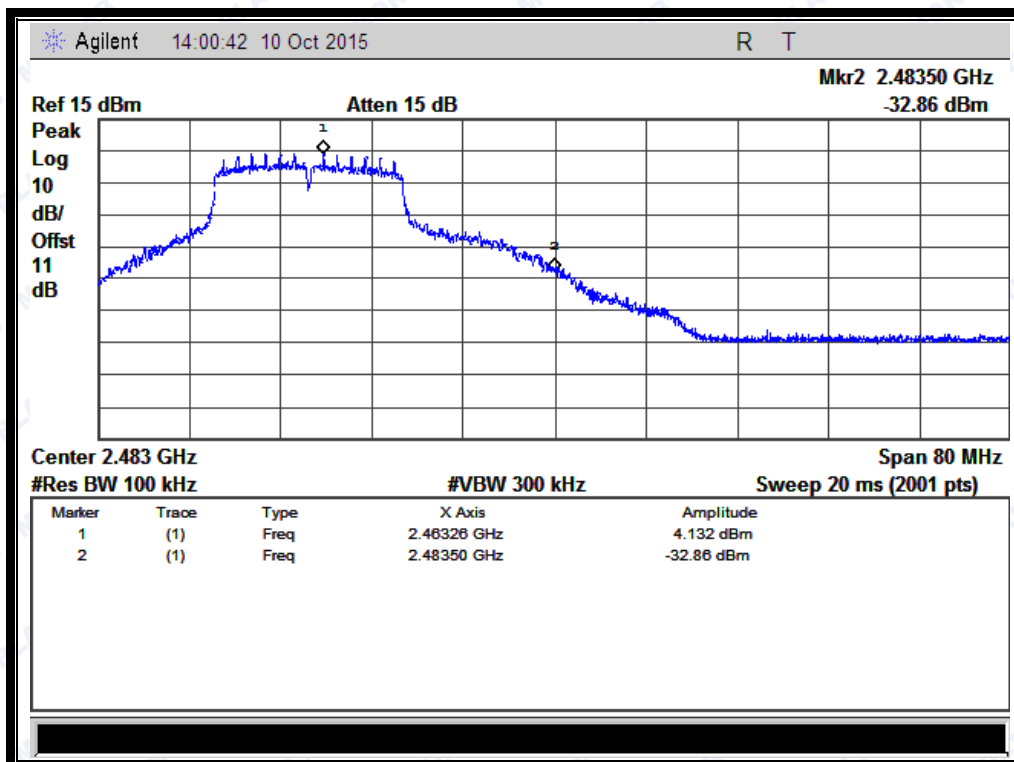

(Band Edge @ Channel = 11)




REPORT No.: SZ15080082W03

ANT 2:

A. Test Verdict:


Channel	Frequency (MHz)	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
			Carrier Level	Calculated -20dBc Limit	
1	2412	-50.91	1.799	-18.201	PASS
6	2437	-51.4	-2.117	-22.117	PASS
11	2462	-51.19	1.652	-18.348	PASS

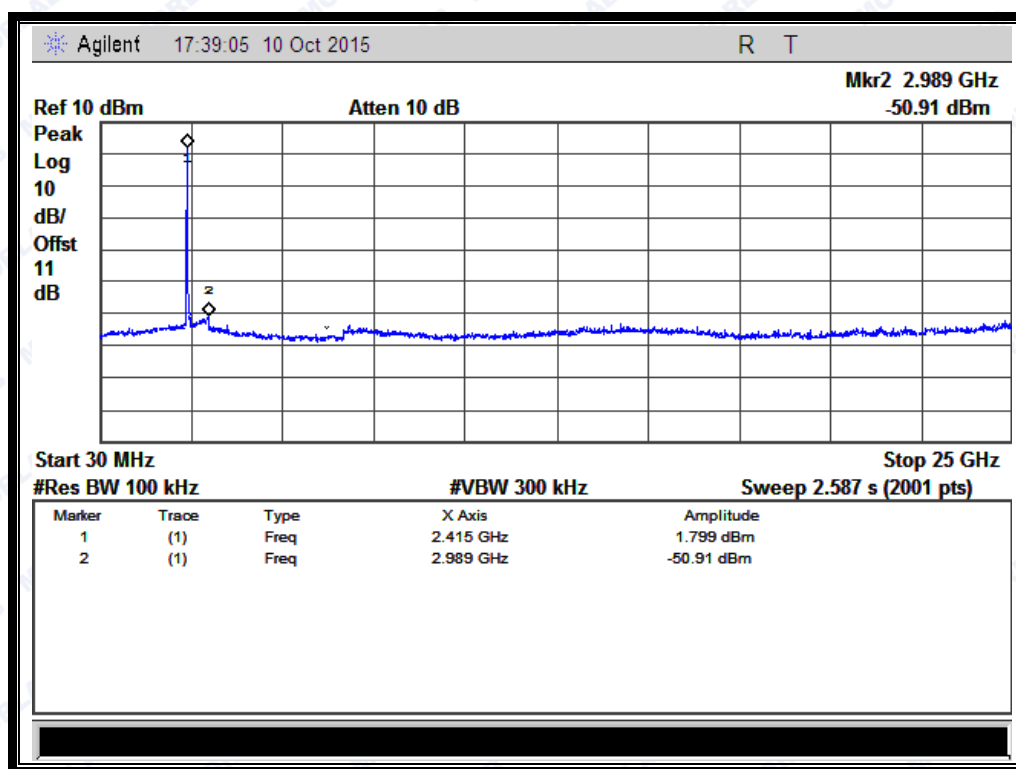B. Test Plots:**Note:** the power of the Module transmitting frequency should be ignored.


(Channel = 1, 30MHz to 25GHz)



REPORT No.: SZ15080082W03

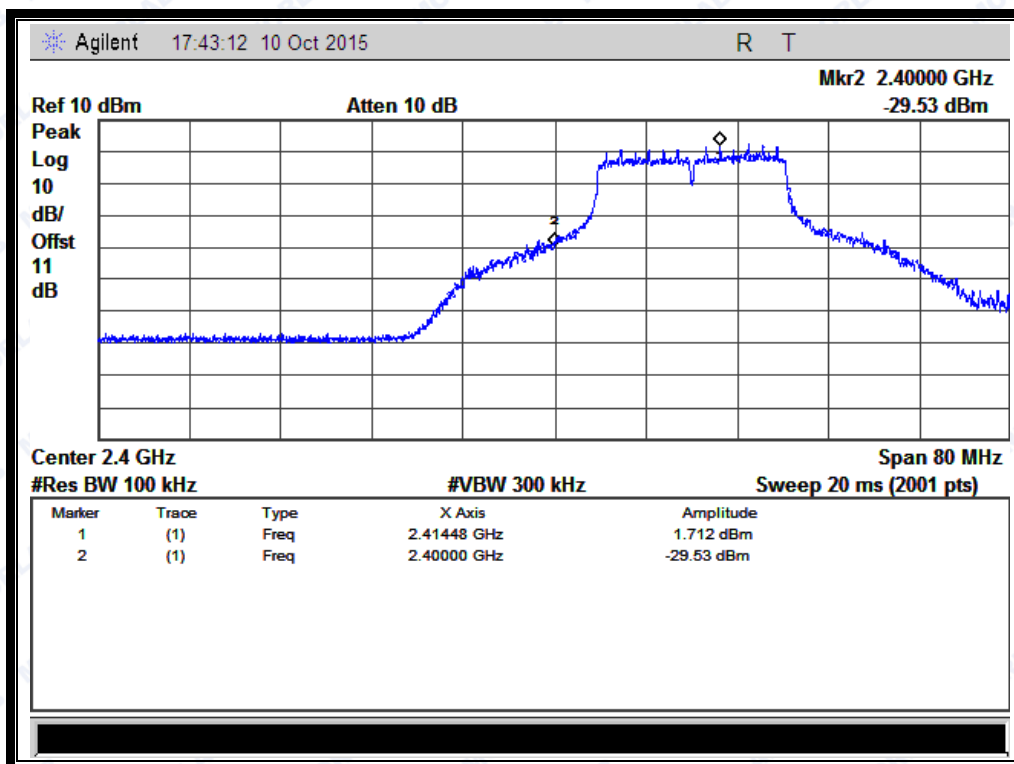


(Band Edge @ Channel = 1)

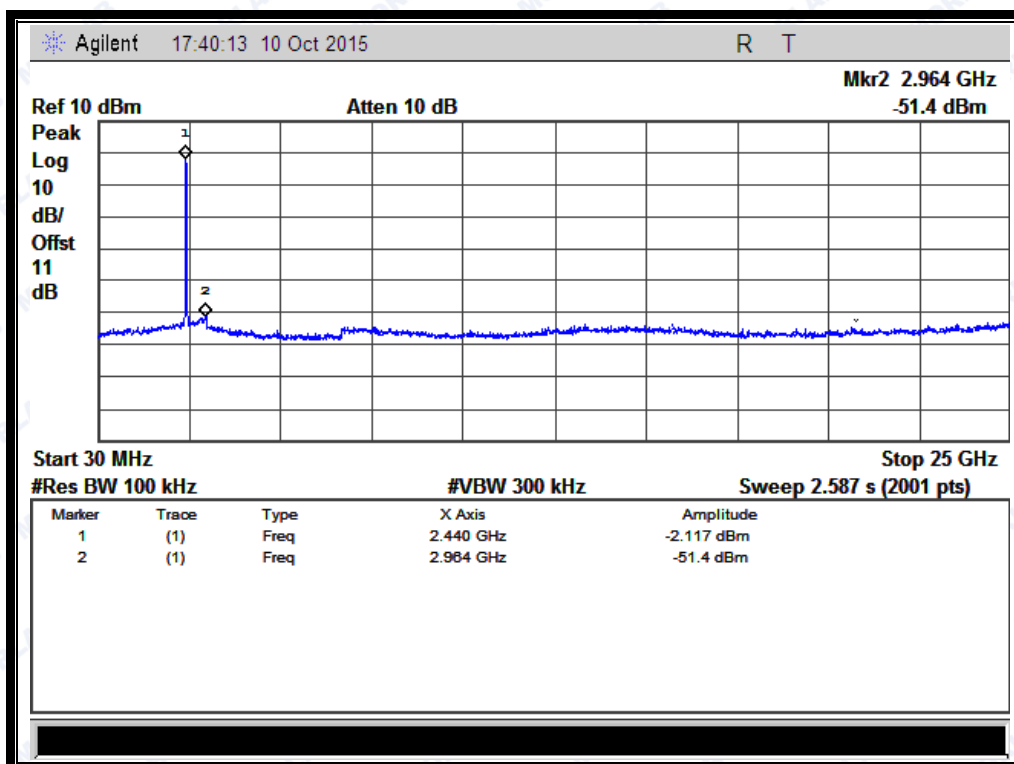


(Channel = 6, 30MHz to 25GHz)



REPORT No.: SZ15080082W03

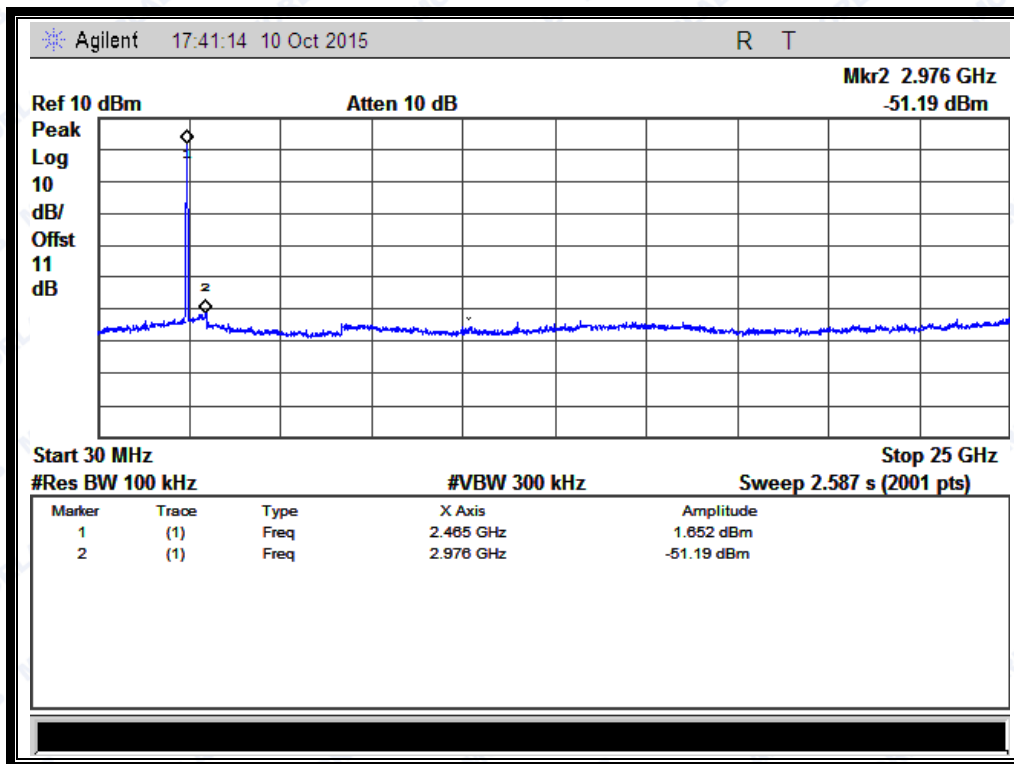

(Channel = 11, 30MHz to 25GHz)

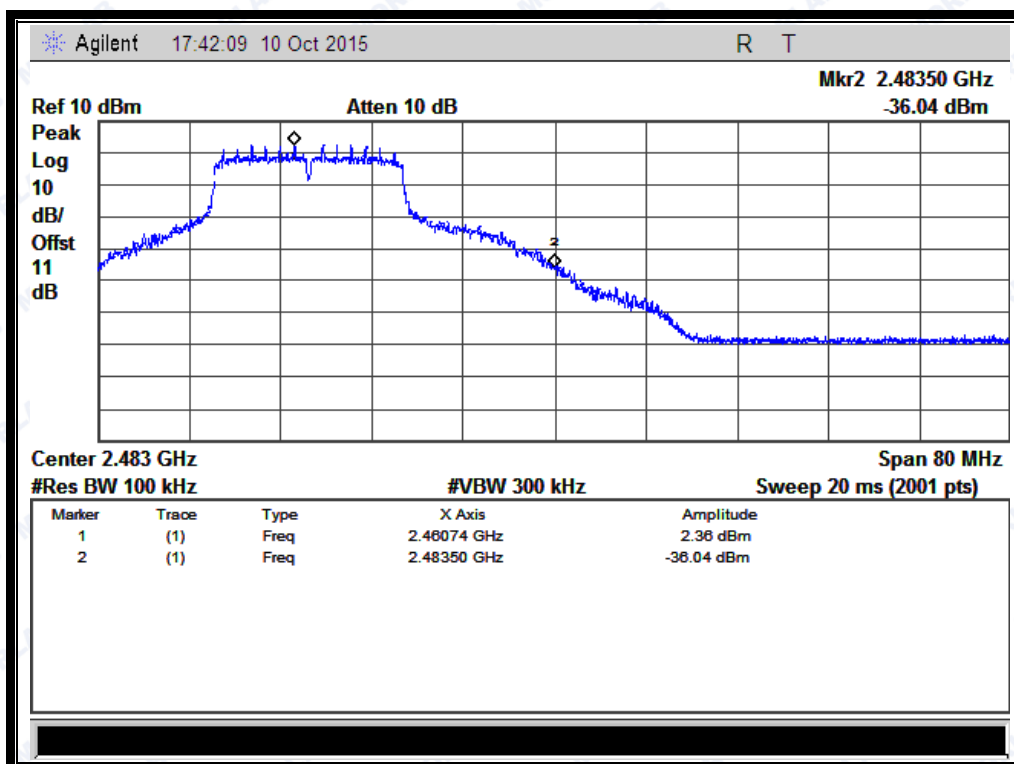

(Band Edge @ Channel = 11)




REPORT No.: SZ15080082W03

2.4.3.3 802.11n -20MHz Test mode

ANT 1:

A. Test Verdict:


Channel	Frequency (MHz)	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
			Carrier Level	Calculated -20dBc Limit	
1	2412	-52.26	0.36	-19.64	PASS
6	2437	-51.17	-1.558	-21.558	PASS
11	2462	-51.05	2.282	-17.718	PASS

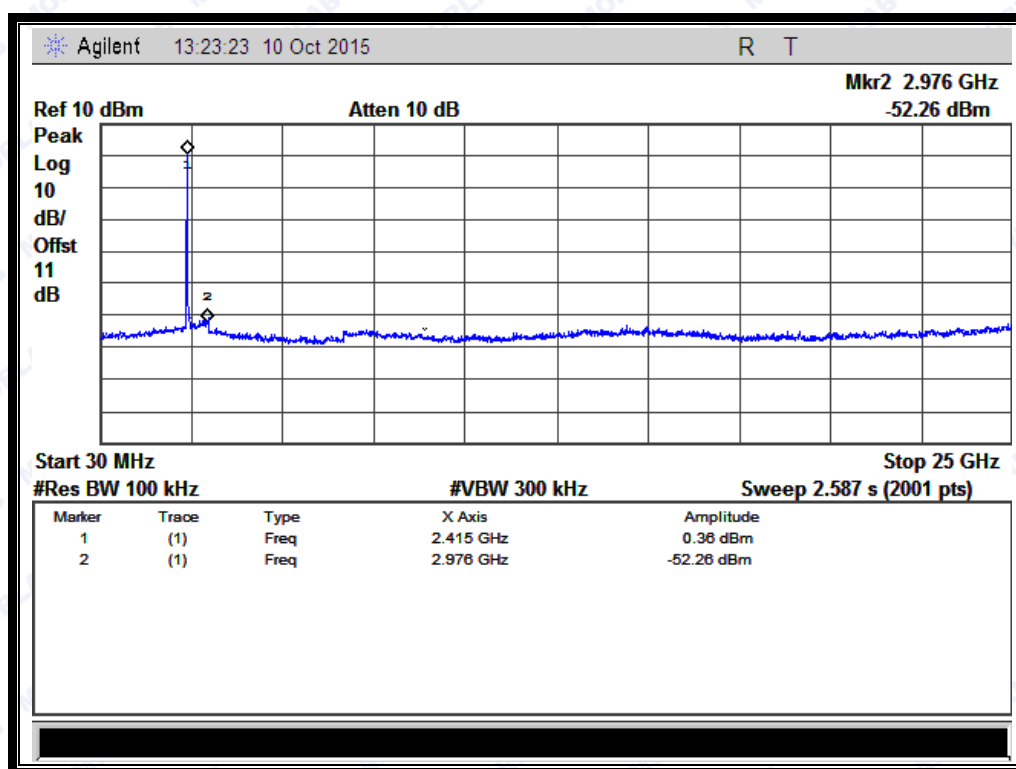B. Test Plots:**Note:** the power of the Module transmitting frequency should be ignored.


(Channel = 1, 30MHz to 25GHz)



REPORT No.: SZ15080082W03

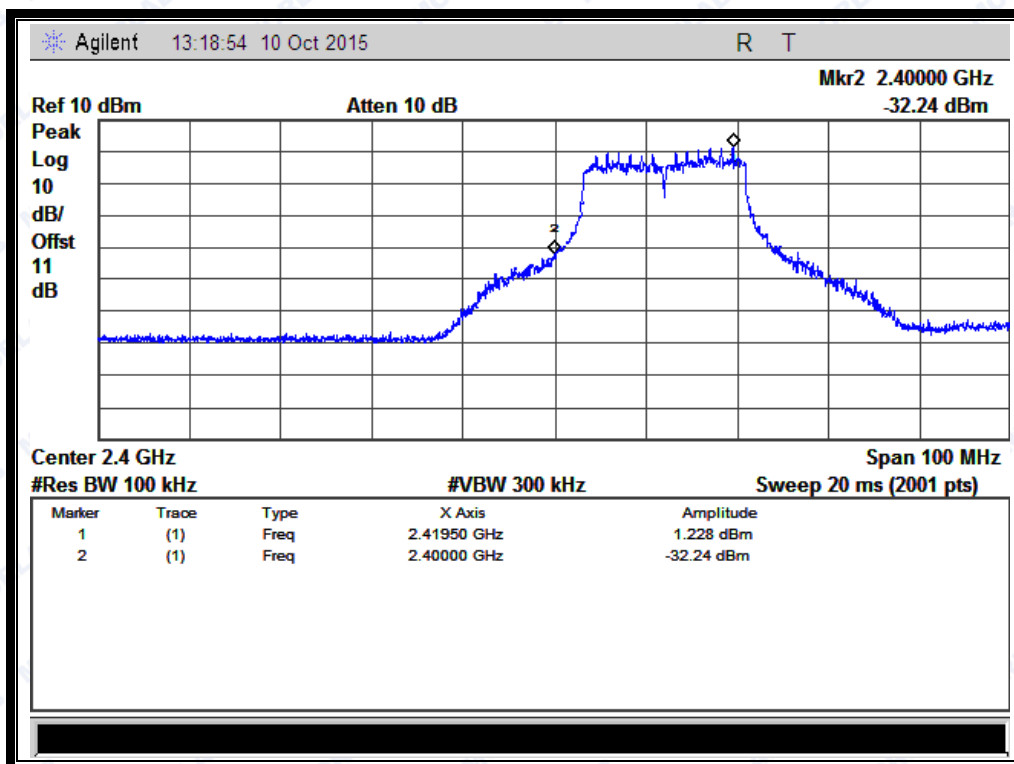


(Band Edge @ Channel = 1)

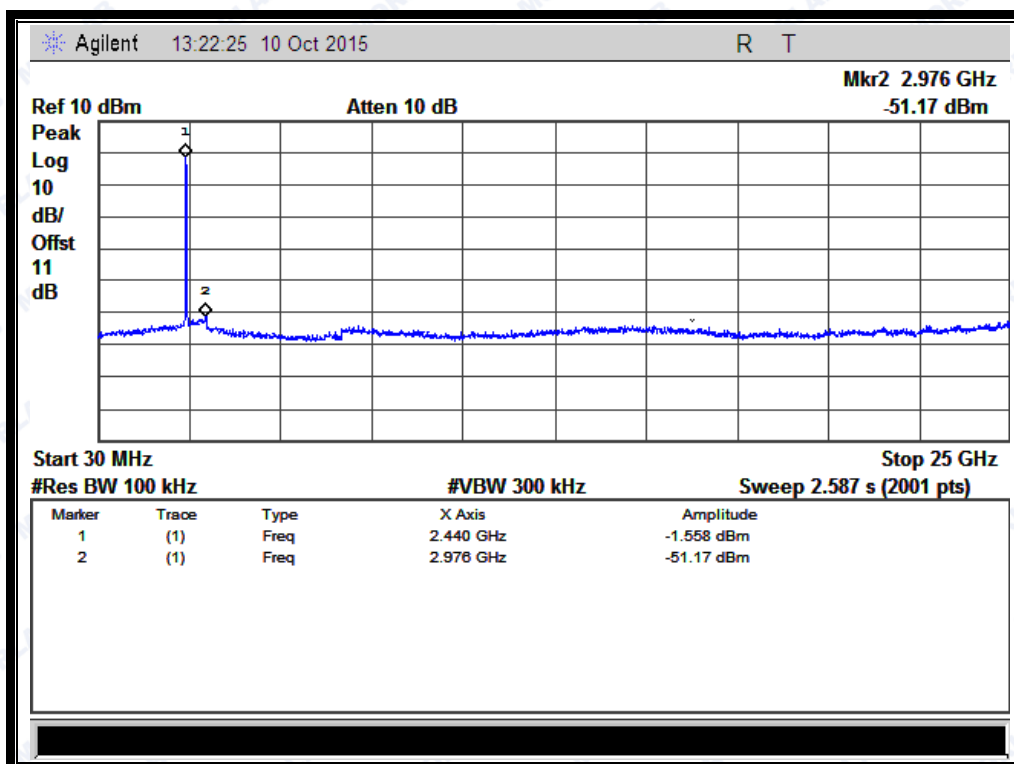


(Channel = 6, 30MHz to 25GHz)



REPORT No.: SZ15080082W03

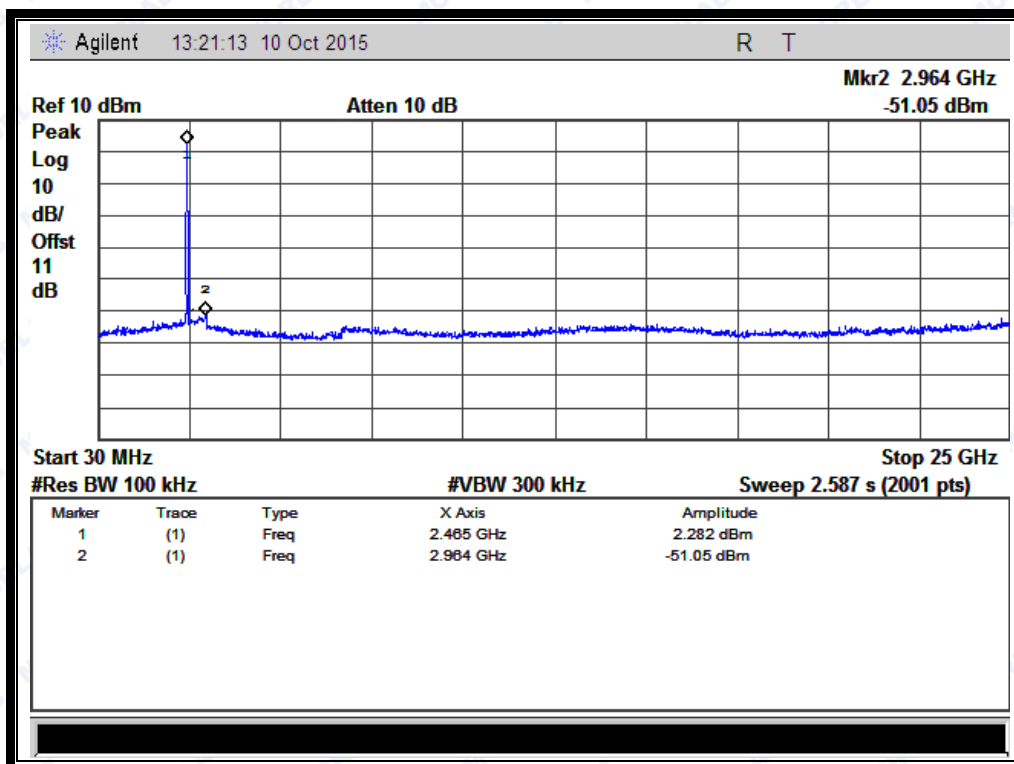

(Channel = 11, 30MHz to 25GHz)

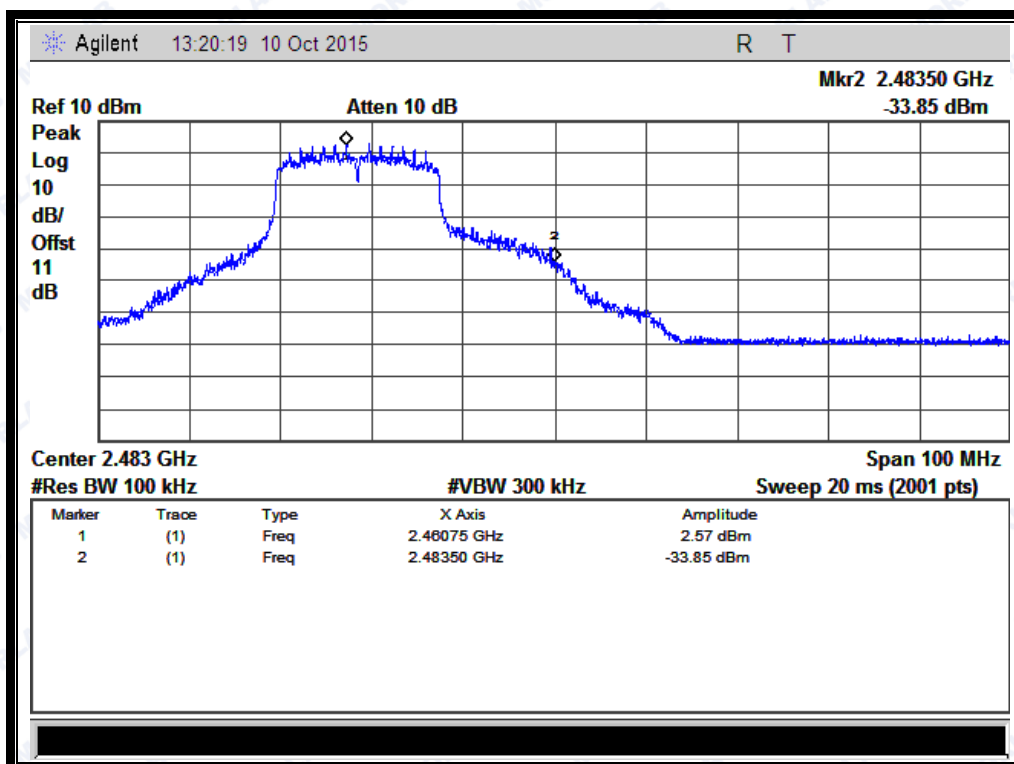

(Band Edge @ Channel = 11)




REPORT No.: SZ15080082W03

ANT 2:

A. Test Verdict:


Channel	Frequency (MHz)	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
			Carrier Level	Calculated -20dBc Limit	
1	2412	-51.35	0.45	-19.55	PASS
6	2437	-51.38	-0.39	-20.39	PASS
11	2462	-51.08	0.004	-19.996	PASS

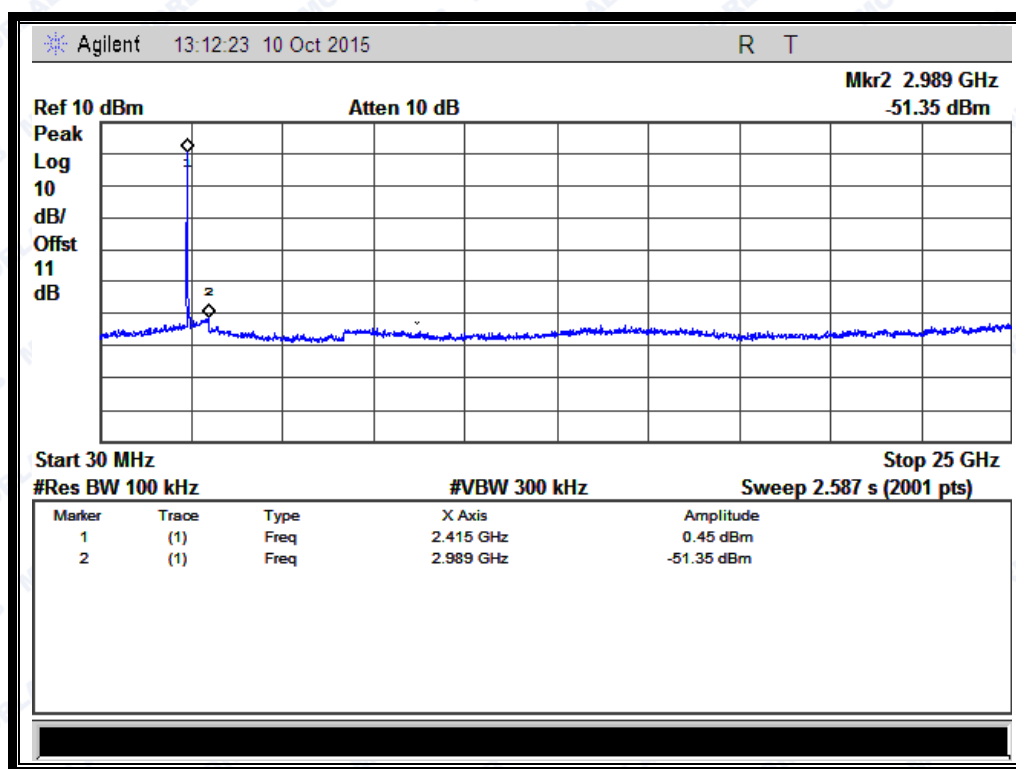B. Test Plots:**Note:** the power of the Module transmitting frequency should be ignored.


(Channel = 1, 30MHz to 25GHz)



REPORT No.: SZ15080082W03

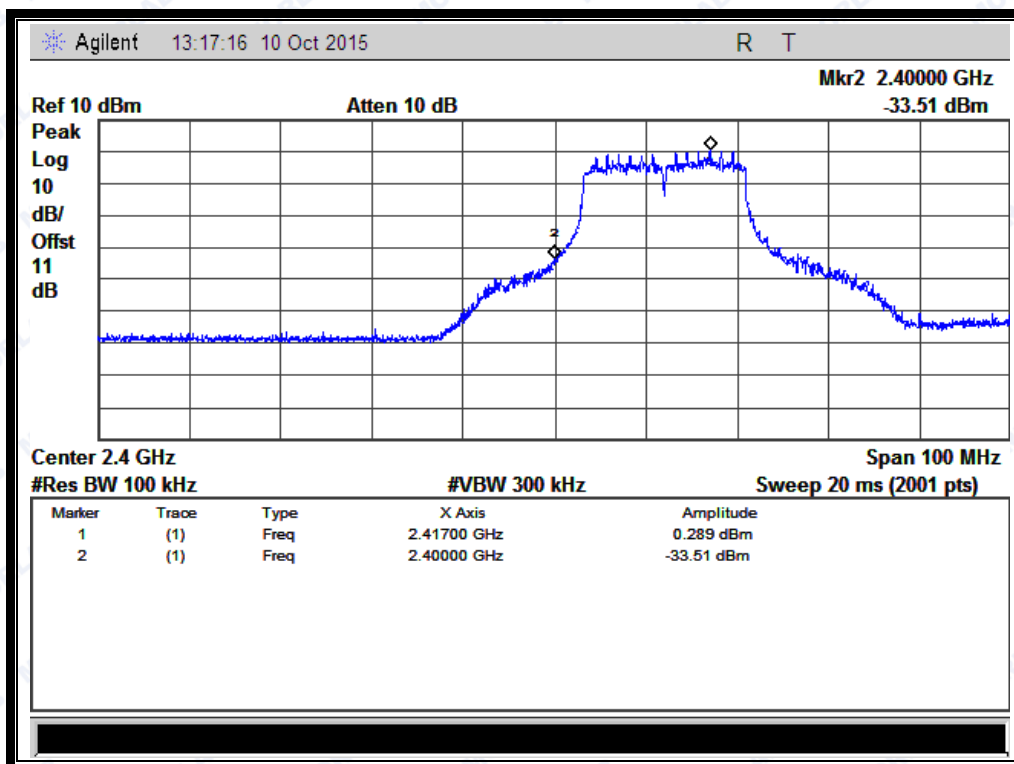


(Band Edge @ Channel = 1)

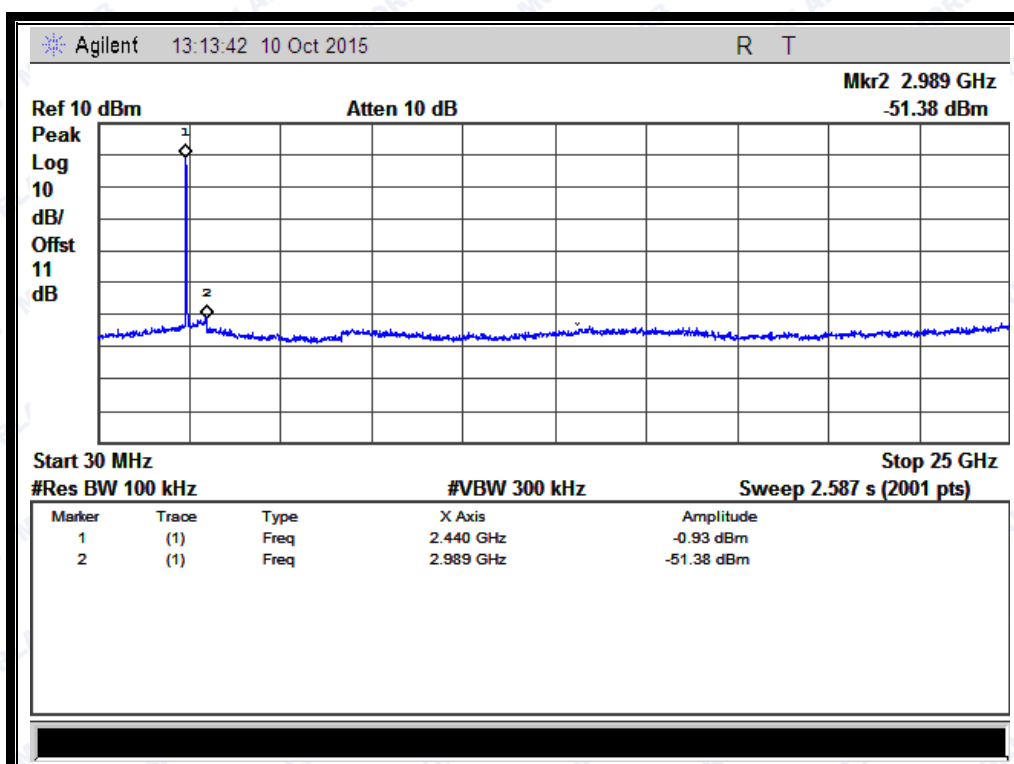


(Channel = 6, 30MHz to 25GHz)



REPORT No.: SZ15080082W03

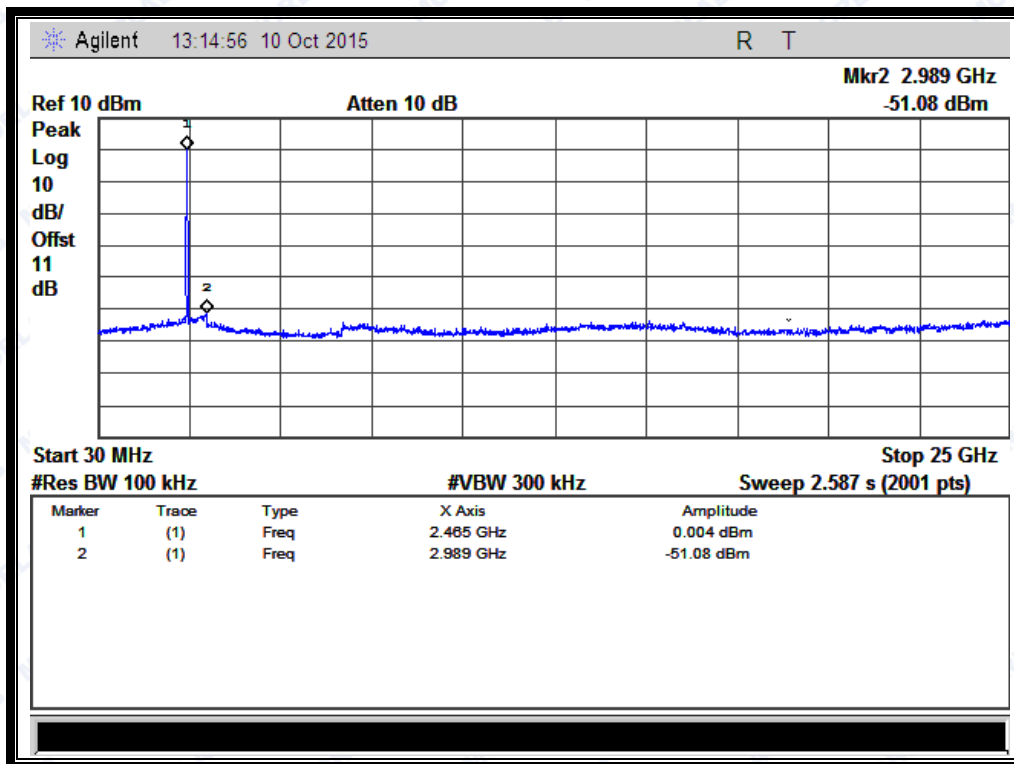

(Channel = 11, 30MHz to 25GHz)

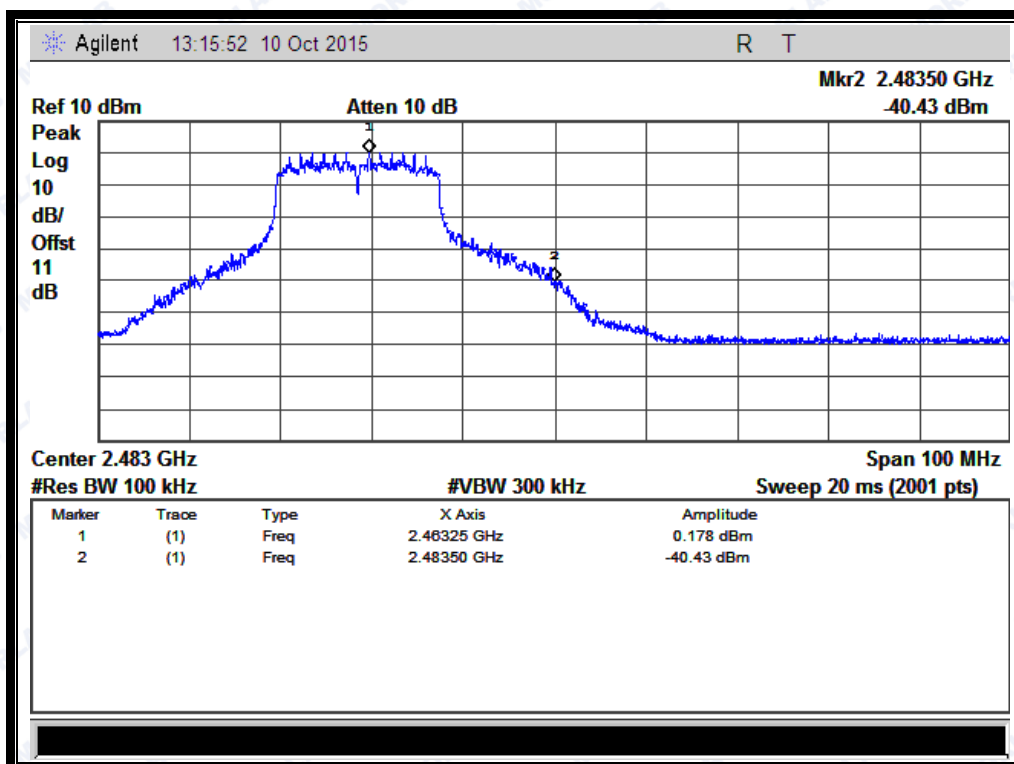

(Band Edge @ Channel = 11)



REPORT No.: SZ15080082W03

2.4.3.4 802.11n -40MHz Test mode


ANT 1:

A. Test Verdict:

Channel	Frequency (MHz)	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
			Carrier Level	Calculated -20dBc Limit	
3	2422	-50.58	-4.495	-24.495	PASS
6	2437	-51.17	-5.473	-24.473	PASS
9	2452	-51.15	-1.554	-21.554	PASS

B. Test Plots:


Note: the power of the Module transmitting frequency should be ignored.

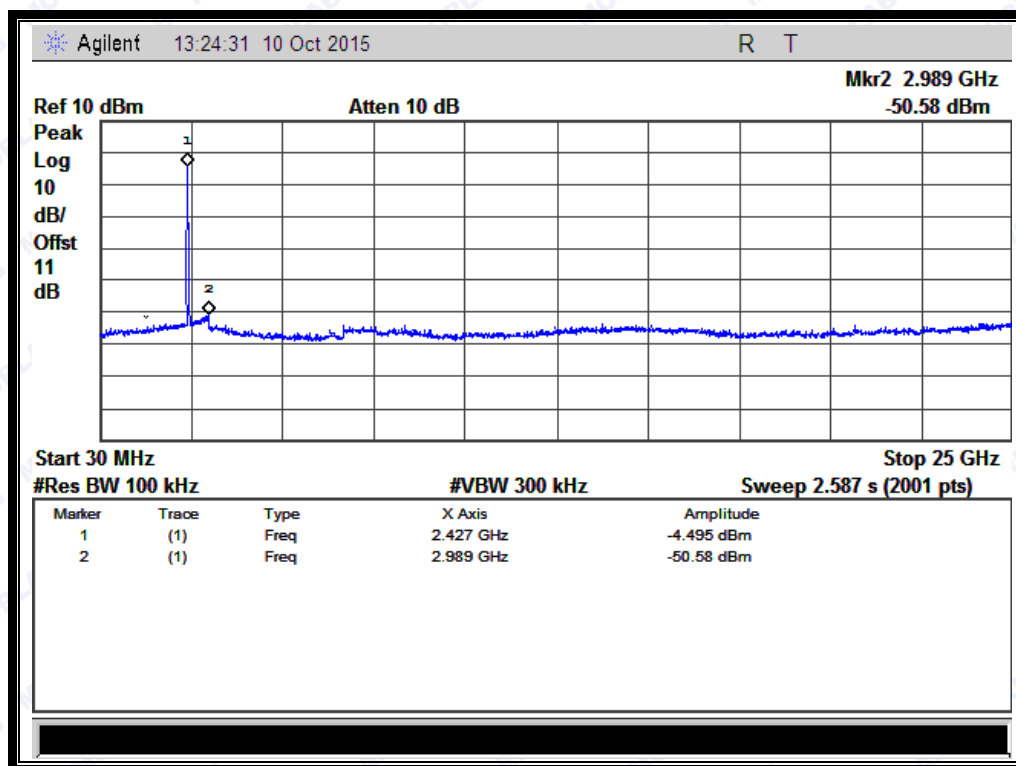


(Channel = 3, 30MHz to 25GHz)



REPORT No.: SZ15080082W03

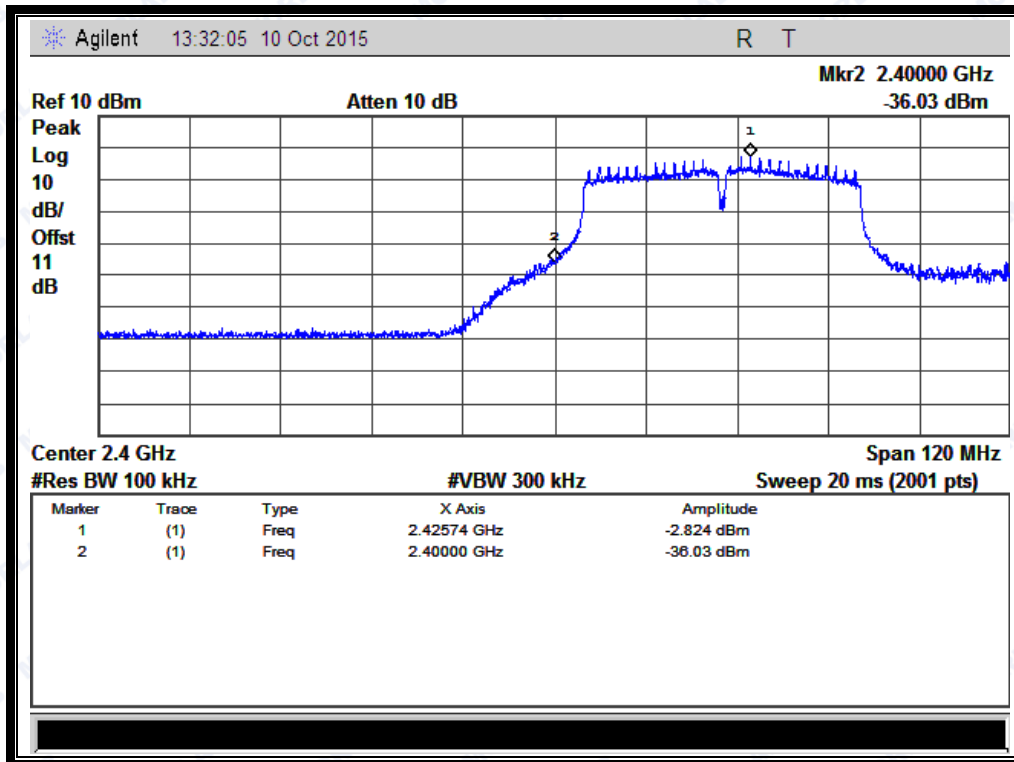


(Band Edge @ Channel = 3)

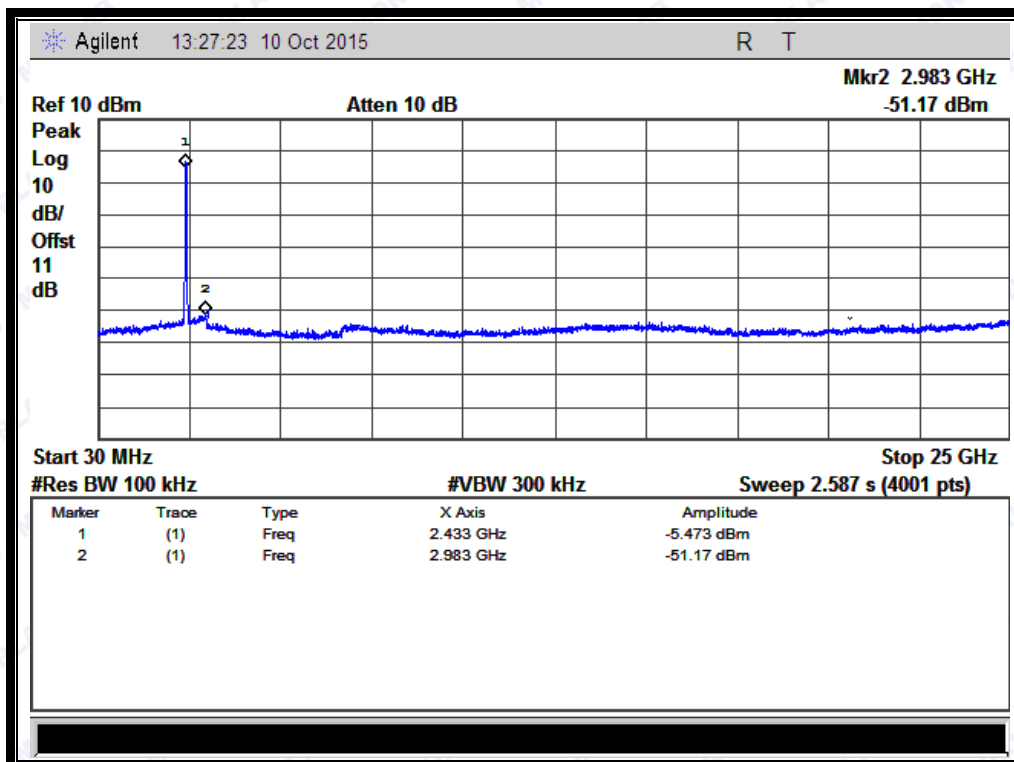


(Channel = 6, 30MHz to 25GHz)



REPORT No.: SZ15080082W03

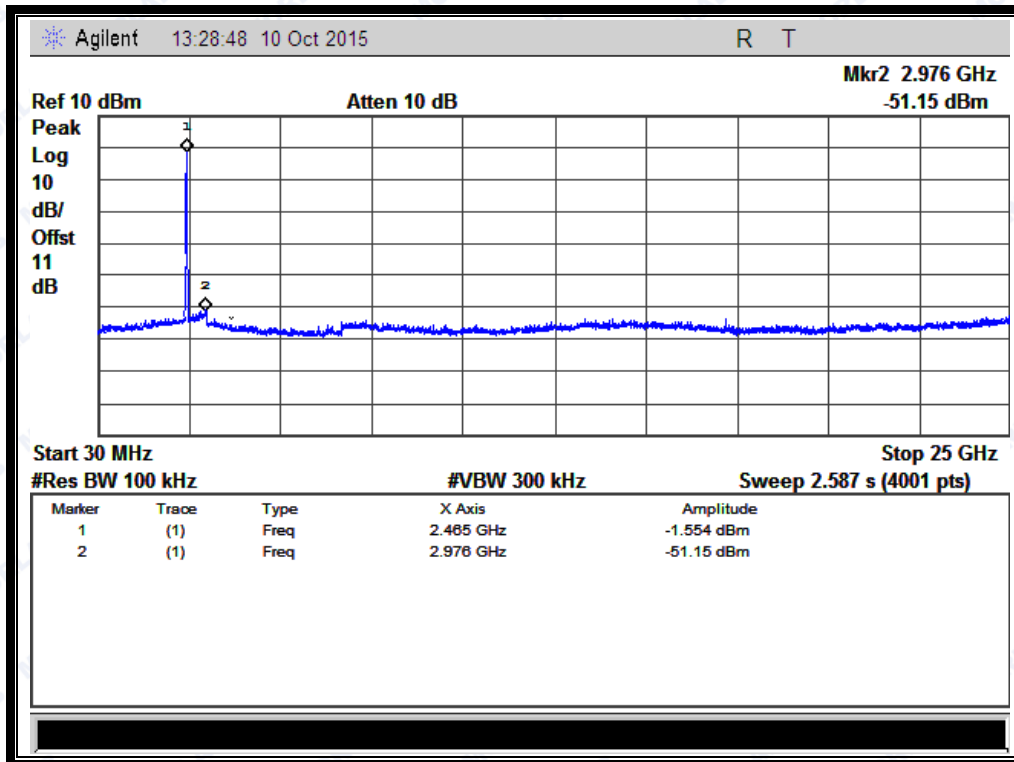

(Channel = 9, 30MHz to 25GHz)

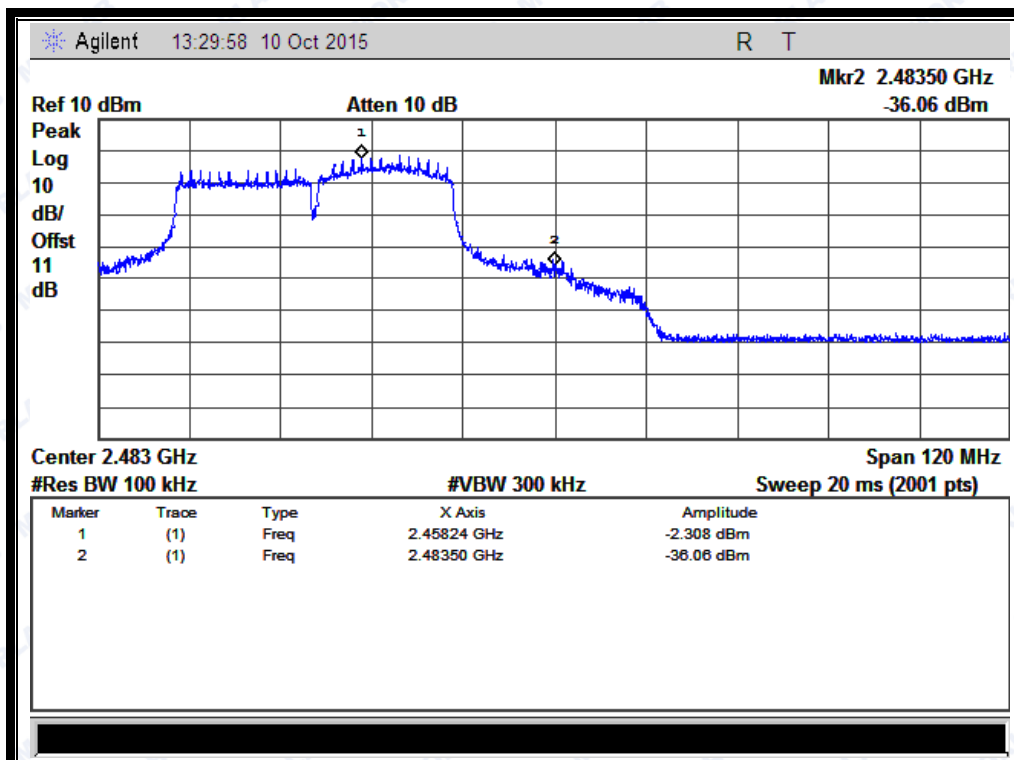

(Band Edge @ Channel = 9)



REPORT No.: SZ15080082W03


ANT 2:

A. Test Verdict:

Channel	Frequency (MHz)	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
			Carrier Level	Calculated -20dBc Limit	
3	2422	-51.39	-6.449	-26.449	PASS
6	2437	-51.11	-7.574	-27.574	PASS
9	2452	-49.67	-3.801	-23.801	PASS

B. Test Plots:


Note: the power of the Module transmitting frequency should be ignored.

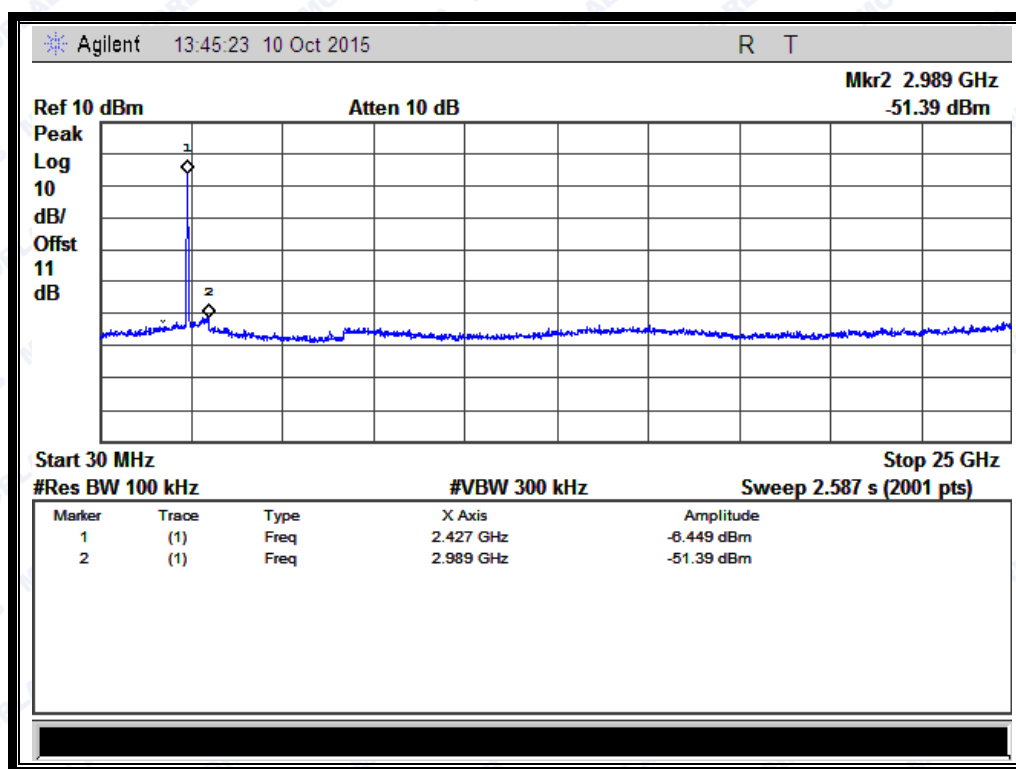


(Channel = 3, 30MHz to 25GHz)



REPORT No.: SZ15080082W03

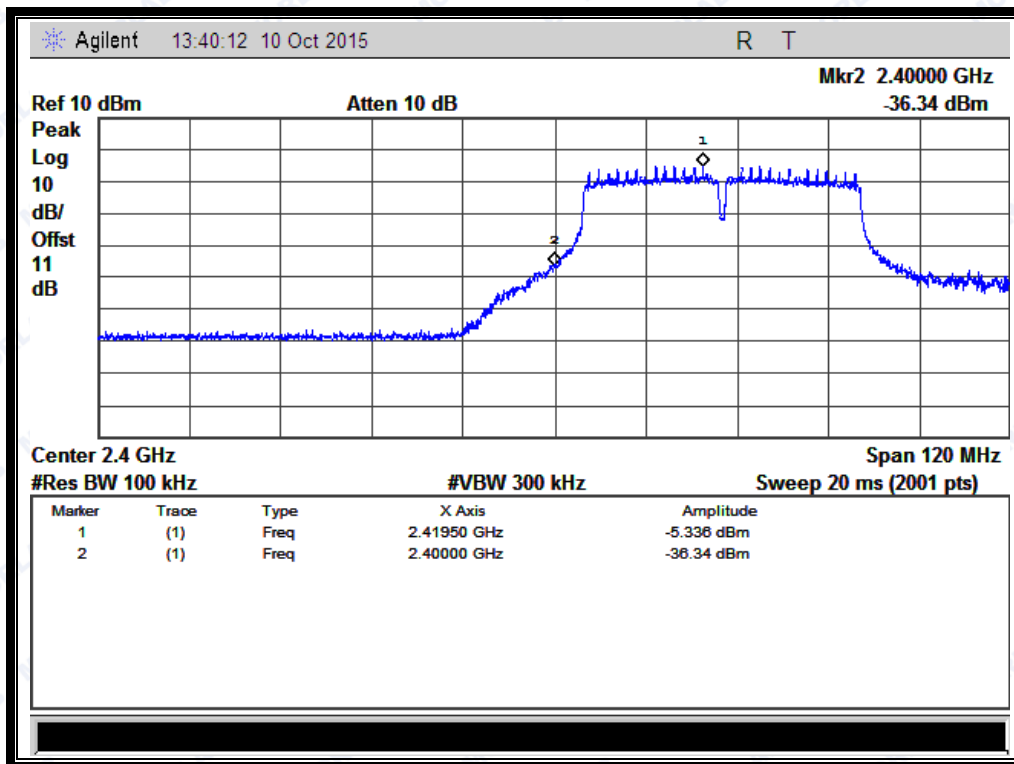


(Band Edge @ Channel = 3)

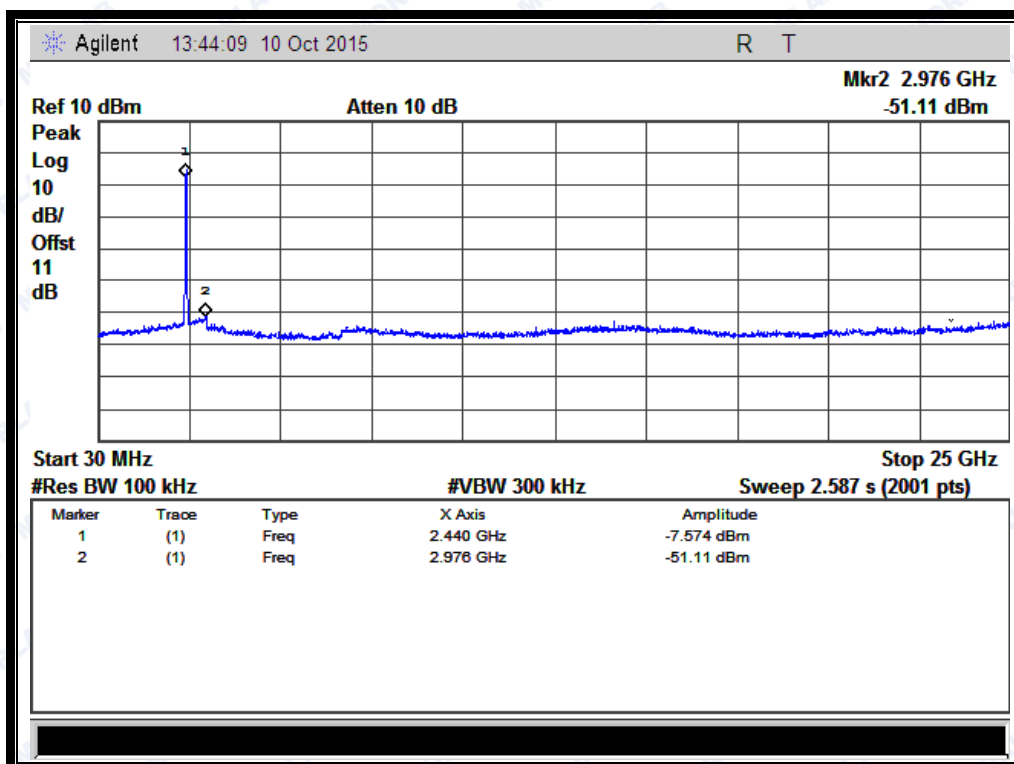


(Channel = 6, 30MHz to 25GHz)



REPORT No.: SZ15080082W03

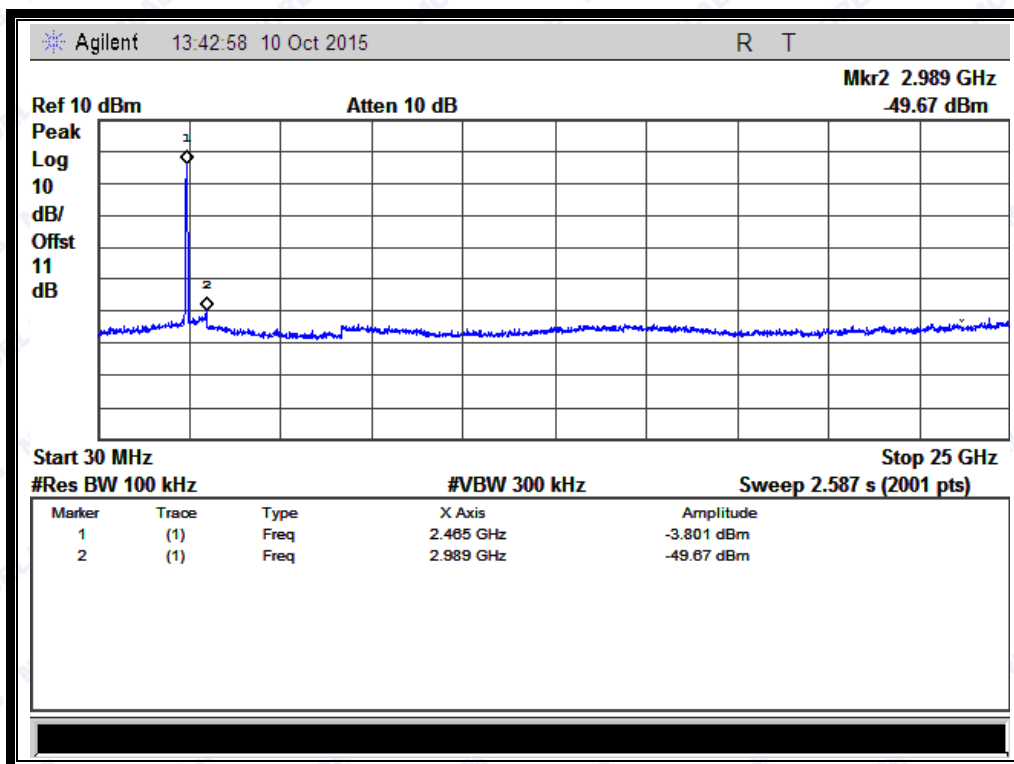

(Channel = 9, 30MHz to 25GHz)

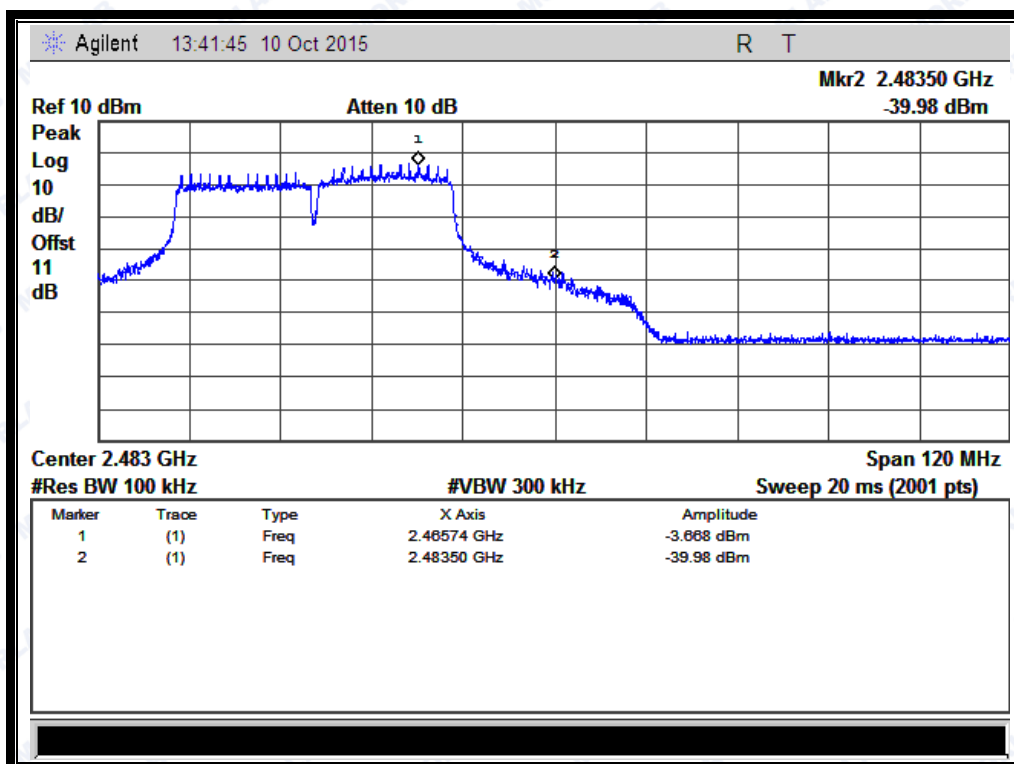

(Band Edge @ Channel = 9)


2.5 Power spectral density (PSD)

2.5.1 Requirement

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

2.5.2 Test Description

A. Test Set:

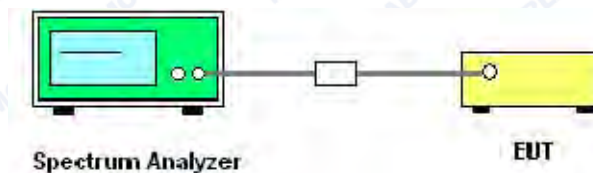

The EUT is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.

KDB 558074 Section 10.2 was used in order to prove compliance.

C. Equipments List:

Please reference ANNEX A(1.4).



REPORT No.: SZ15080082W03

2.5.3 Test Result


2.5.3.1 802.11b Test mode

ANT 1:

A. Test Verdict:

Spectral power density (dBm/3kHz)				
Channel	Frequency (MHz)	Measured PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
1	2412	-6.804	8	PASS
6	2437	-7.127	8	PASS
11	2462	-4.036	8	PASS
Measurement uncertainty: ± 1.3 dB				


B. Test Plots:

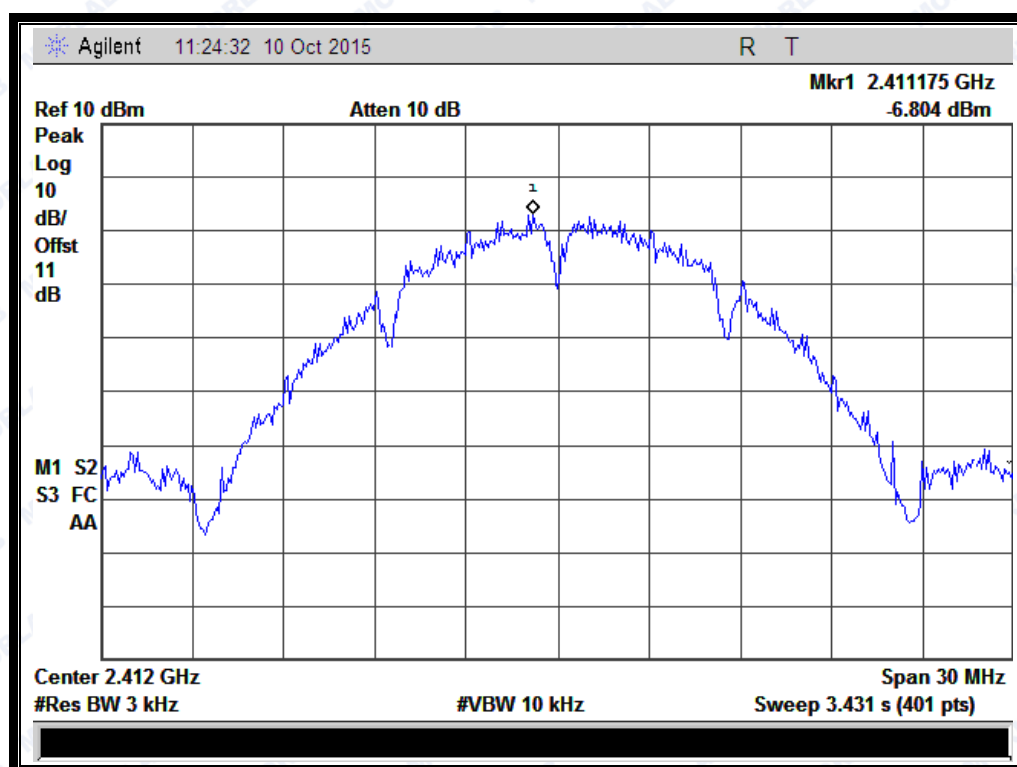


(Channel = 1 @ 802.11b)



REPORT No.: SZ15080082W03

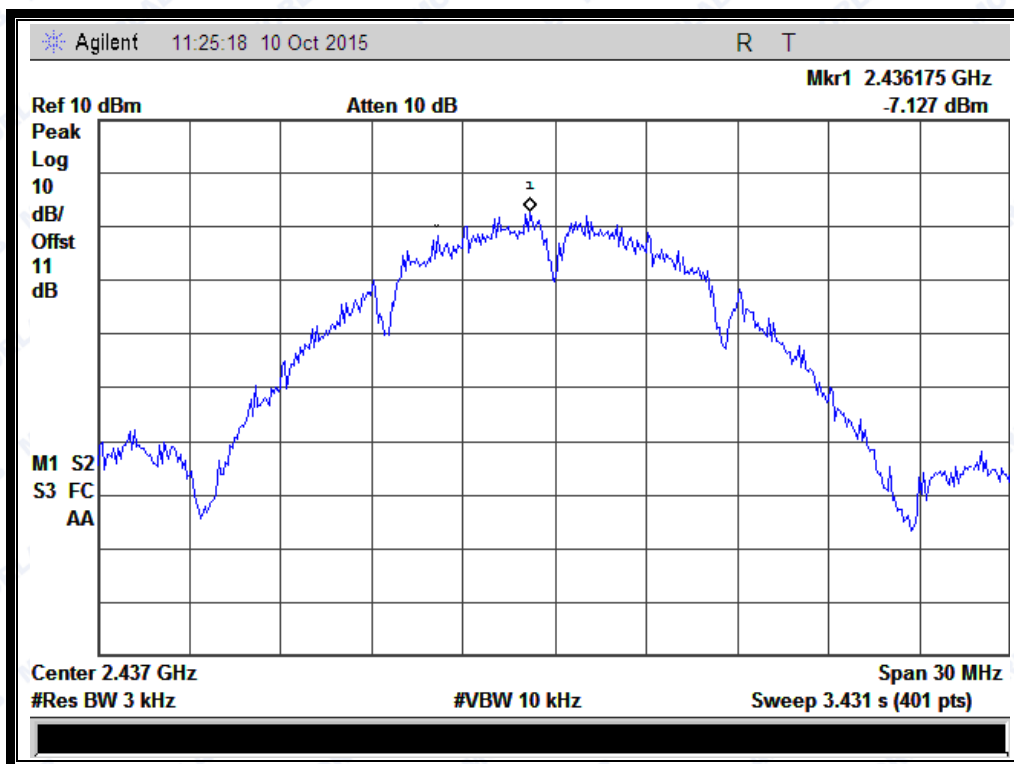

(Channel = 6 @ 802.11b)

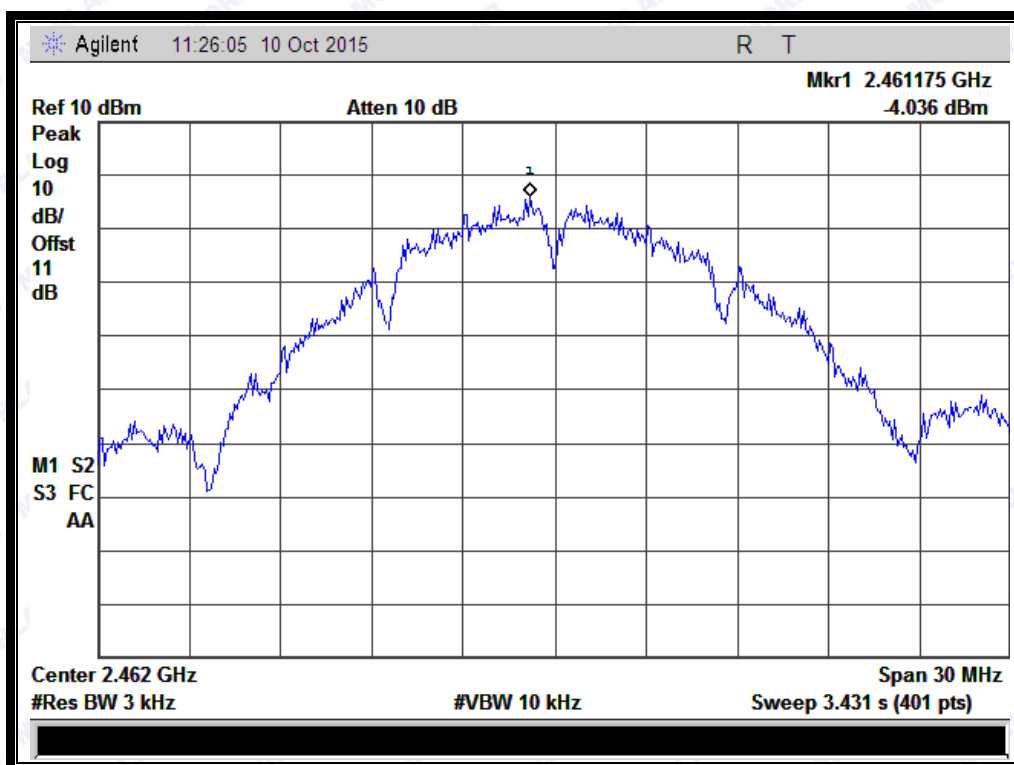

(Channel = 11 @ 802.11b)




REPORT No.: SZ15080082W03

ANT 2:

A. Test Verdict:

Spectral power density (dBm/3kHz)				
Channel	Frequency (MHz)	Measured PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
1	2412	-6.465	8	PASS
6	2437	-7.154	8	PASS
11	2462	-5.715	8	PASS
Measurement uncertainty: ± 1.3 dB				


B. Test Plots:

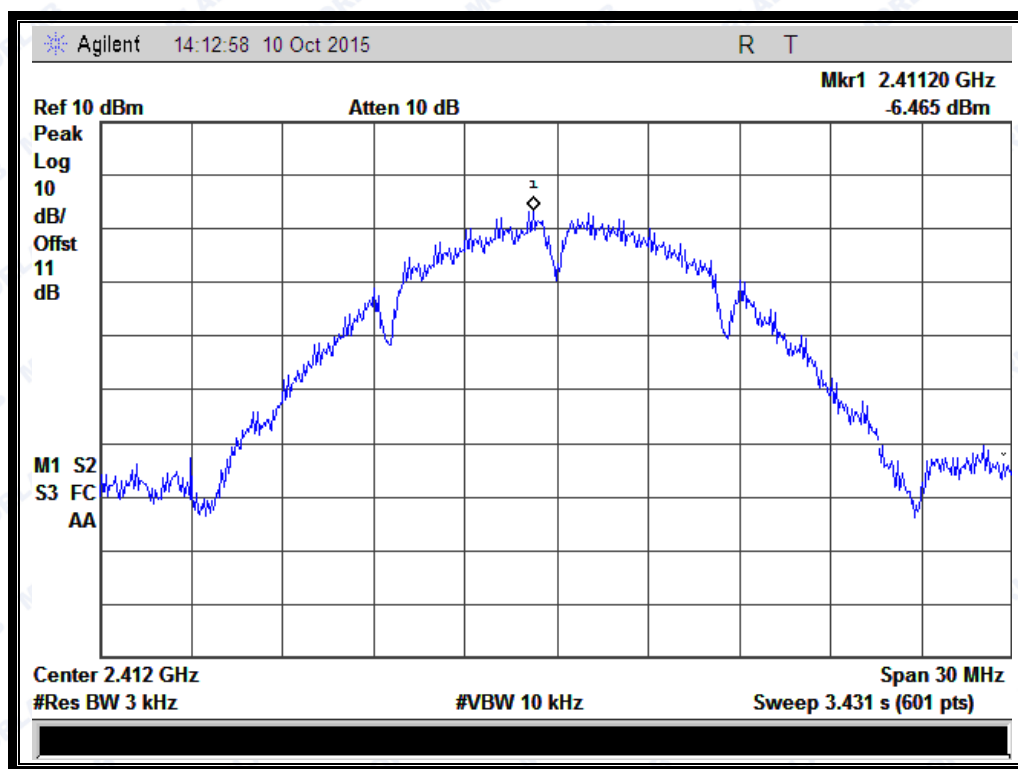


(Channel = 1 @ 802.11b)



REPORT No.: SZ15080082W03

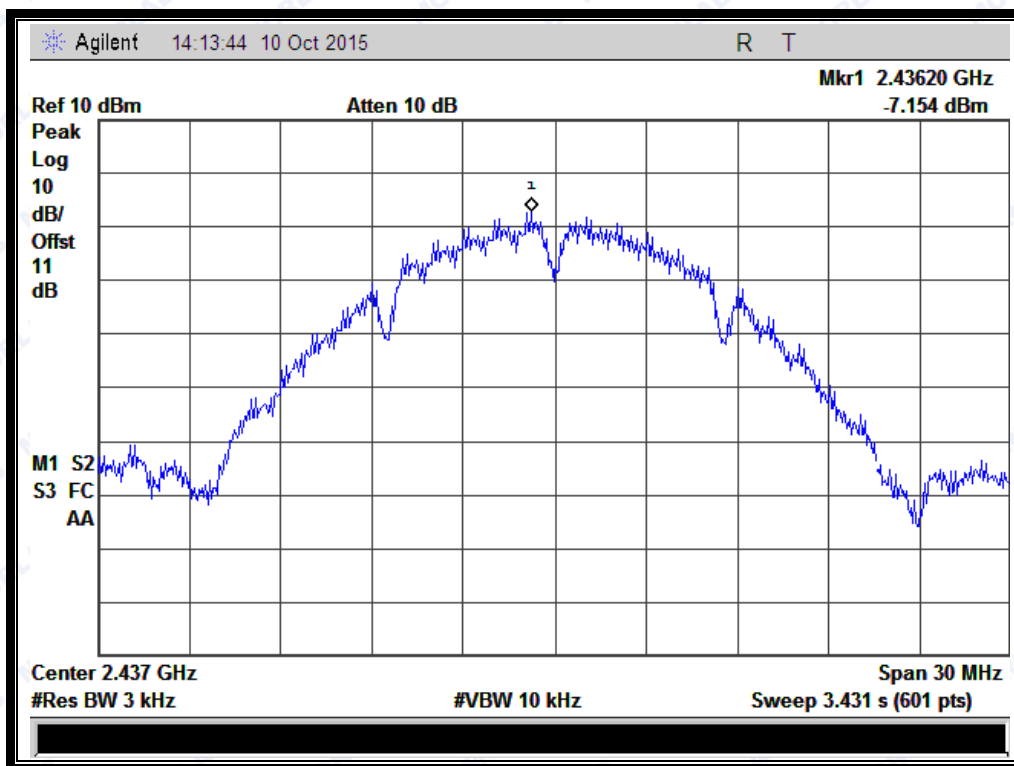

(Channel = 6 @ 802.11b)

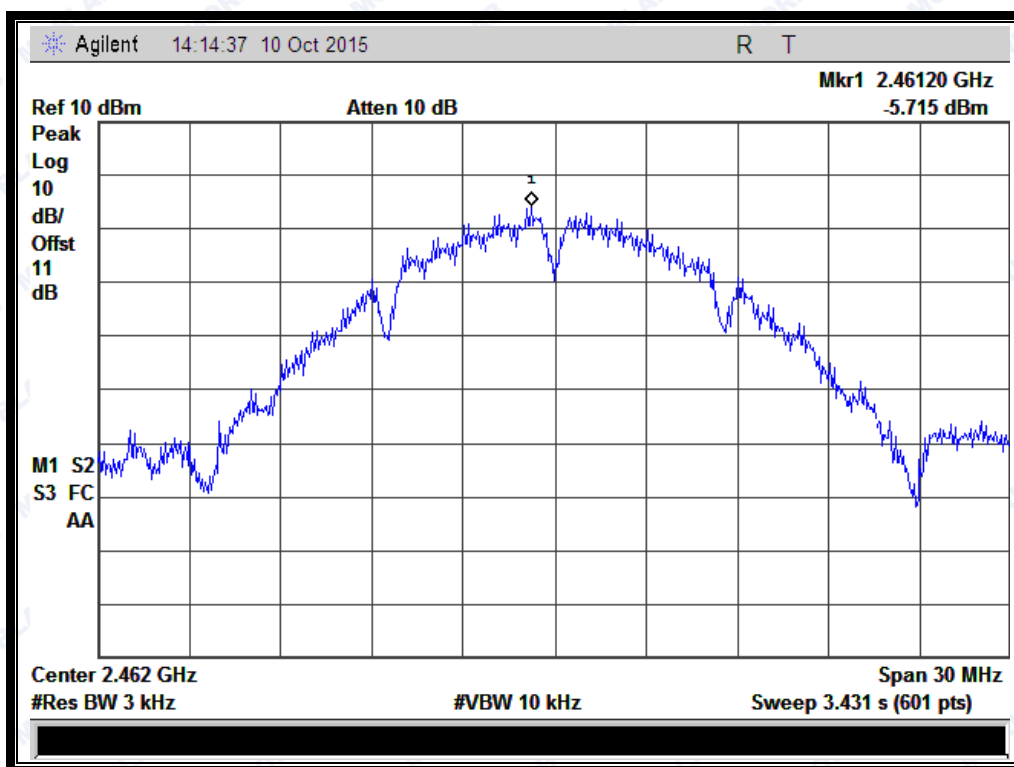

(Channel = 11 @ 802.11b)



REPORT No.: SZ15080082W03


2.5.3.2 802.11g Test mode

ANT 1:

A. Test Verdict:

Spectral power density (dBm/3kHz)				
Channel	Frequency (MHz)	Measured PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
1	2412	-13.03	8	PASS
6	2437	-13.95	8	PASS
11	2462	-10.63	8	PASS
Measurement uncertainty: ± 1.3 dB				


B. Test Plots:

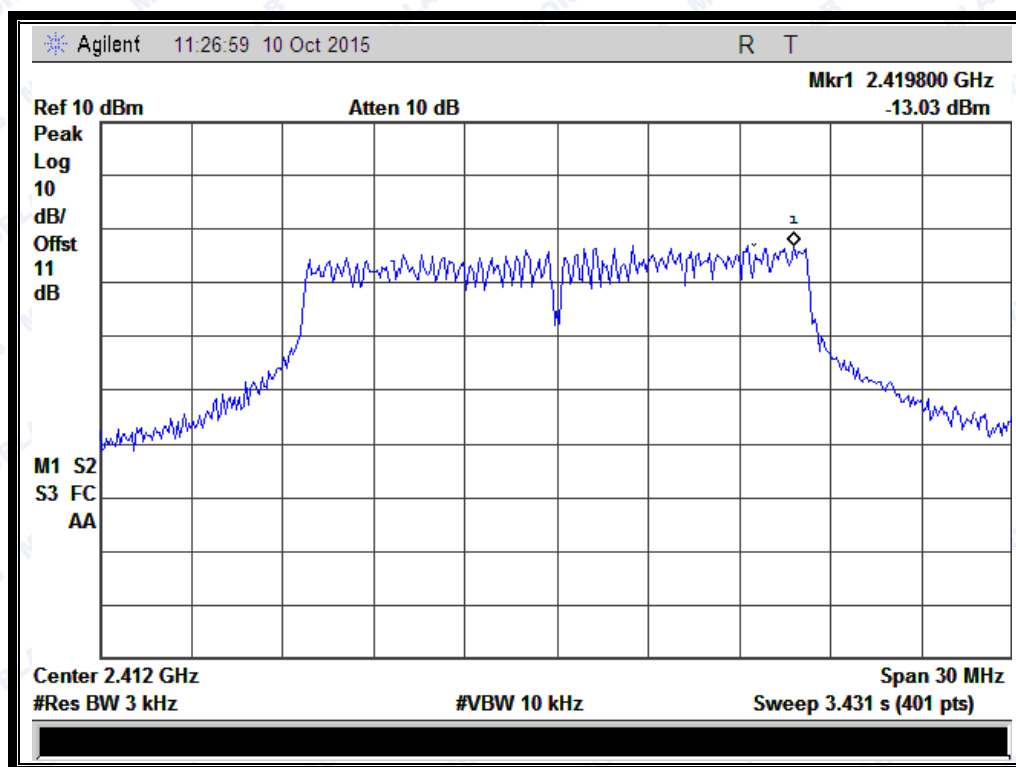


(Channel = 1 @ 802.11g)



REPORT No.: SZ15080082W03

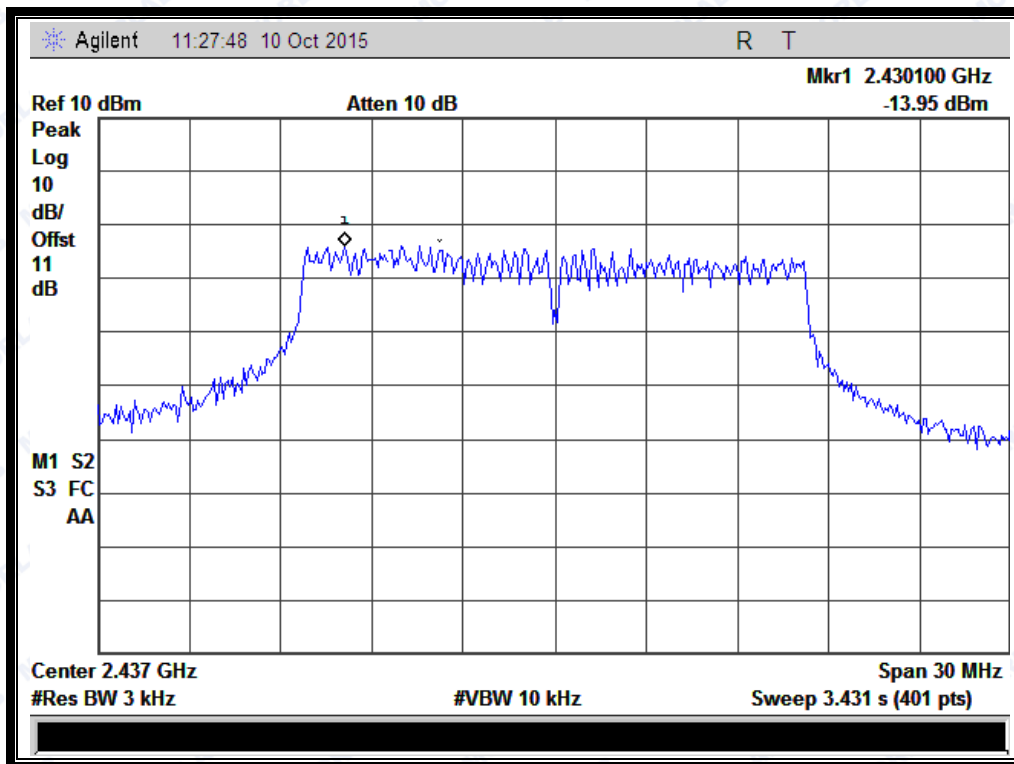

(Channel = 6 @ 802.11g)

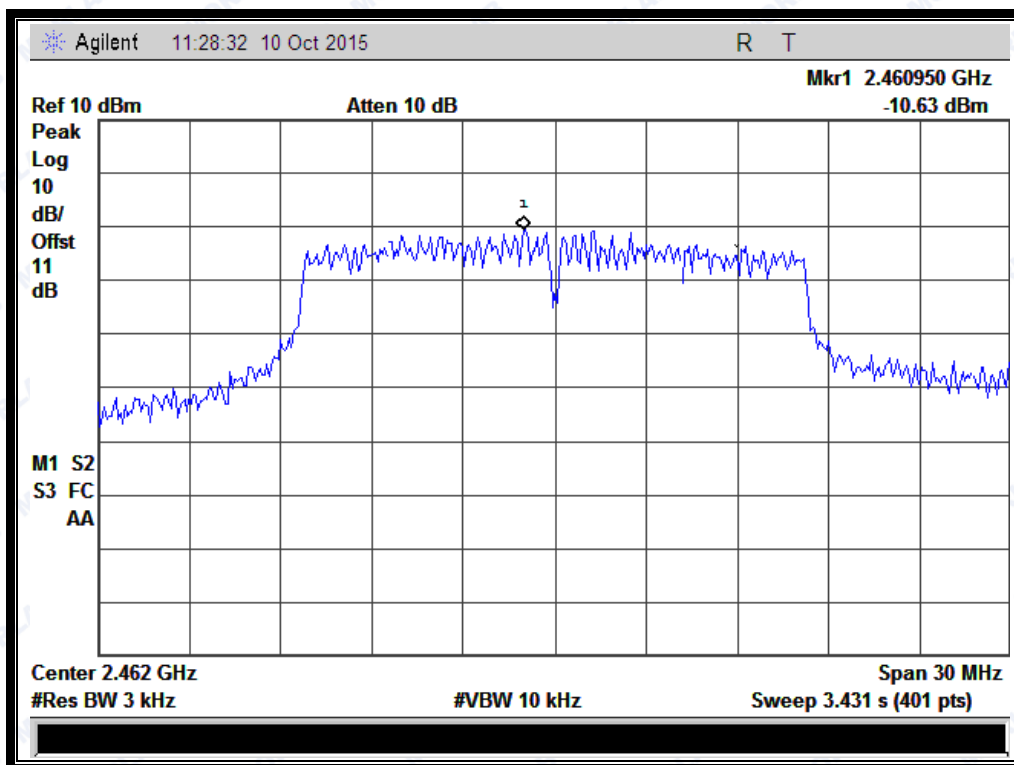

(Channel = 11 @ 802.11g)




REPORT No.: SZ15080082W03

ANT 2:

A. Test Verdict:

Spectral power density (dBm/3kHz)				
Channel	Frequency (MHz)	Measured PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
1	2412	-13.63	8	PASS
6	2437	-14.1	8	PASS
11	2462	-12.98	8	PASS
Measurement uncertainty: ± 1.3 dB				


B. Test Plots:

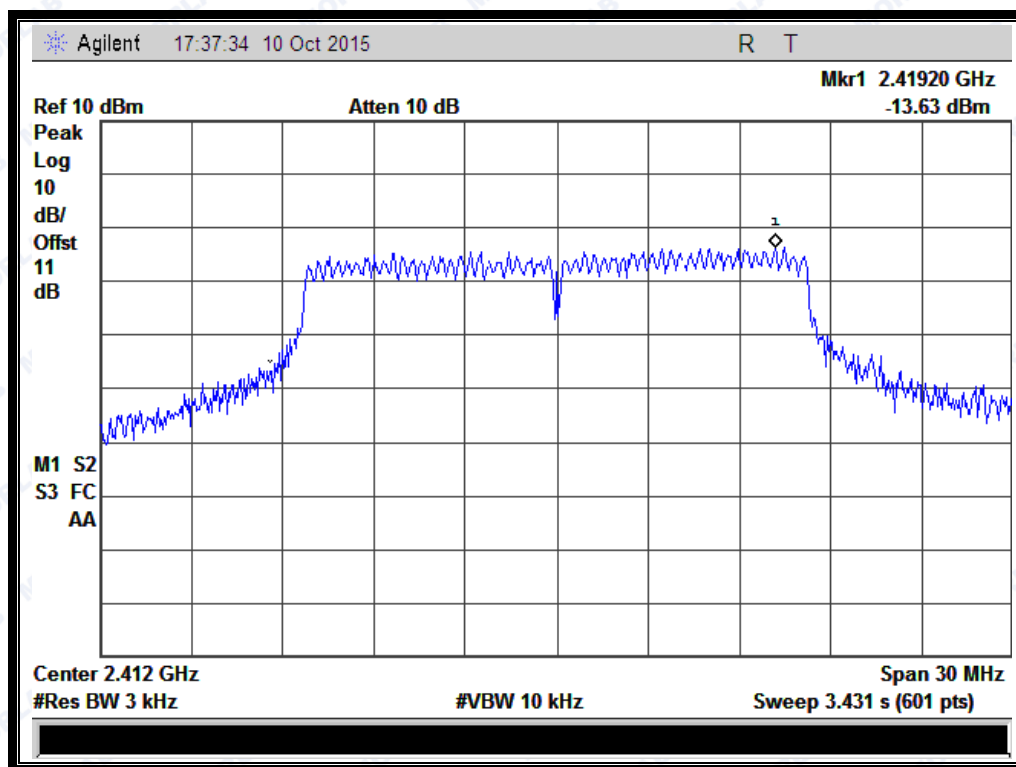


(Channel = 1 @ 802.11g)



REPORT No.: SZ15080082W03

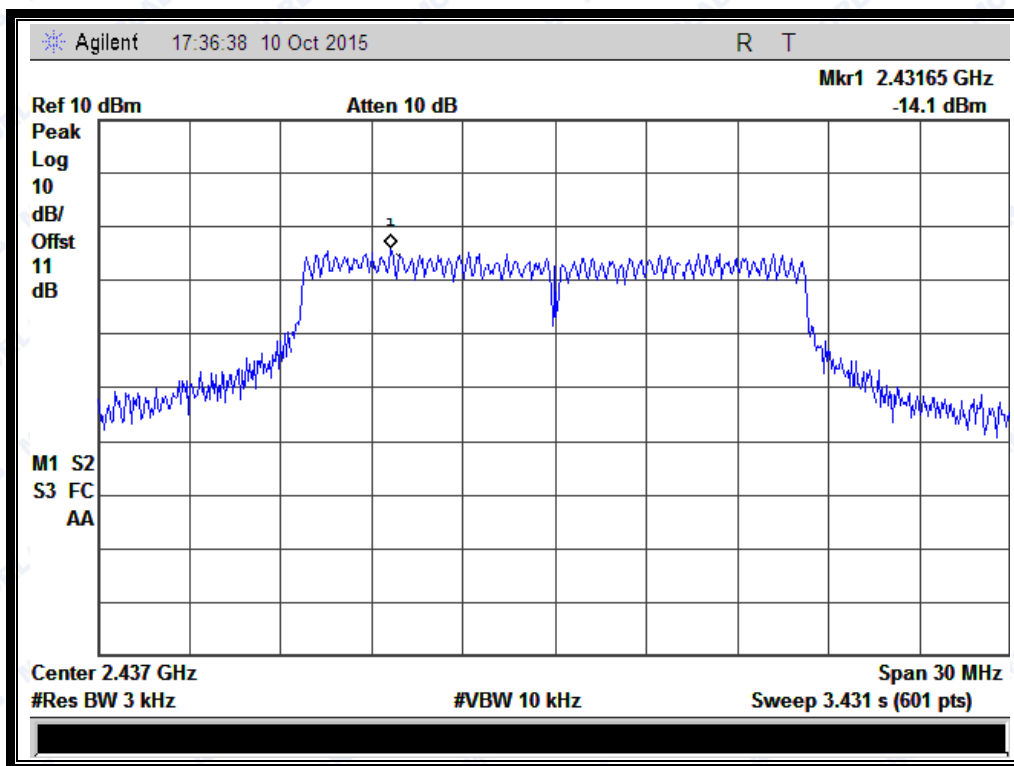

(Channel = 6 @ 802.11g)

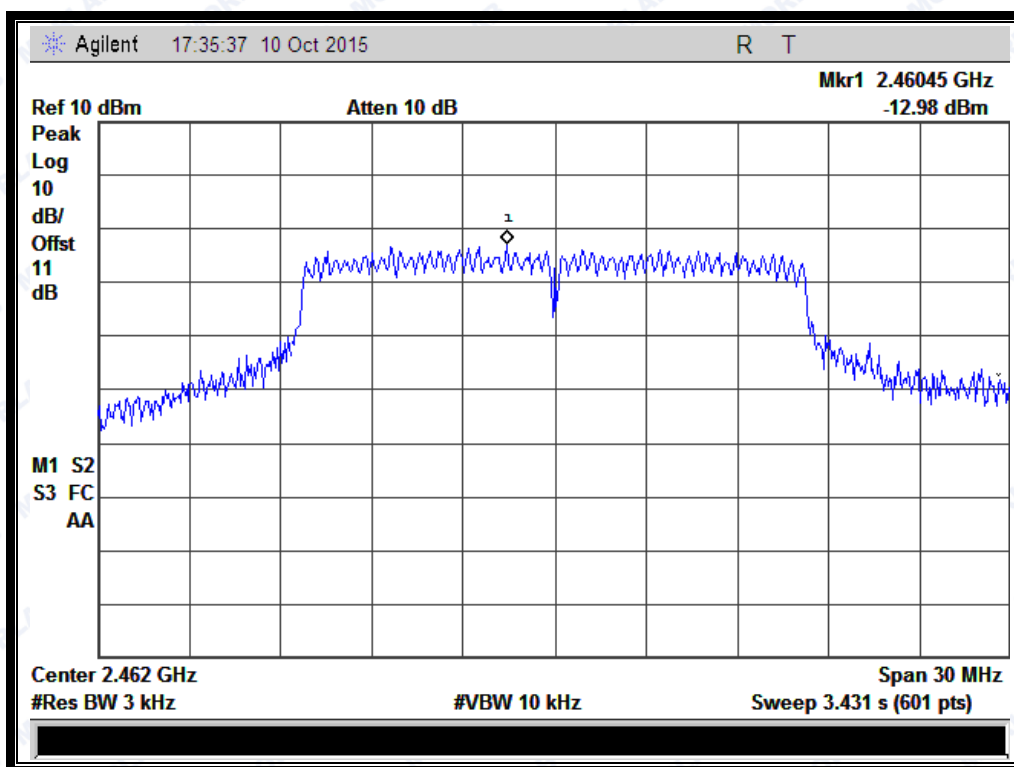

(Channel = 11 @ 802.11g)



REPORT No.: SZ15080082W03


2.5.3.3 802.11n-20MHz Test mode

ANT 1:

A. Test Verdict:

Spectral power density (dBm/3kHz)				
Channel	Frequency (MHz)	Measured PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
1	2412	-14.44	8	PASS
6	2437	-14.37	8	PASS
11	2462	-12.6	8	PASS
Measurement uncertainty: ± 1.3 dB				


B. Test Plots:

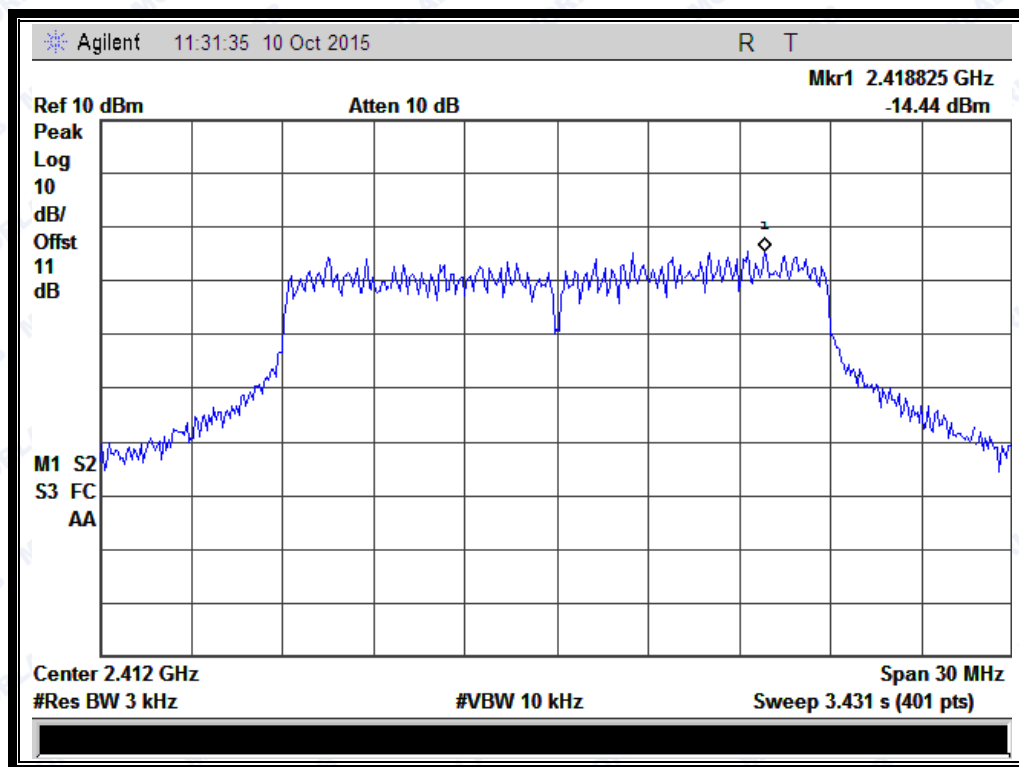


(Channel = 1 @ 802.11n-20MHz)



REPORT No.: SZ15080082W03

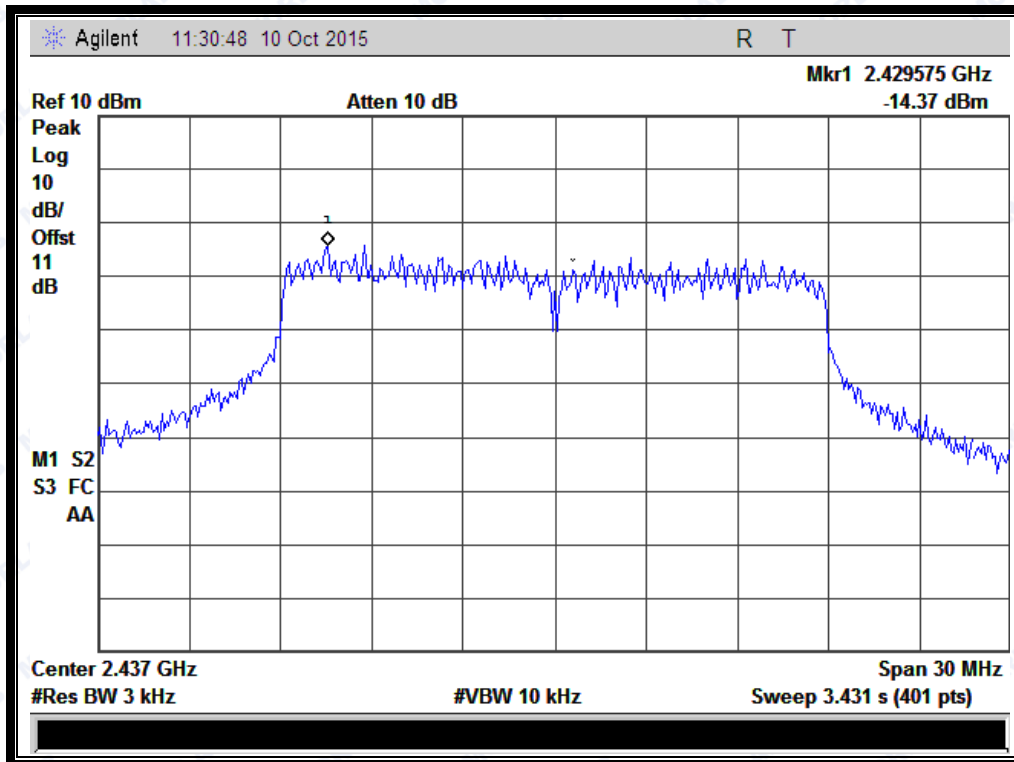

(Channel = 6 @ 802.11n-20MHz)

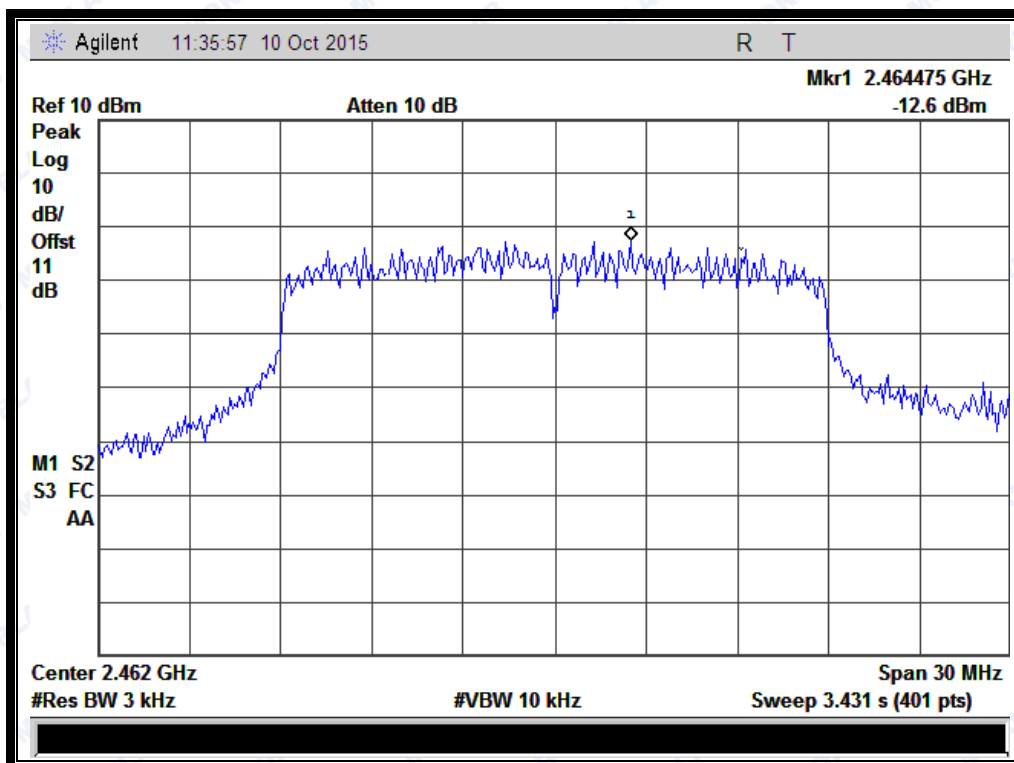

(Channel = 11 @ 802.11n-20MHz)




REPORT No.: SZ15080082W03

ANT 2:

A. Test Verdict:

Spectral power density (dBm/3kHz)				
Channel	Frequency (MHz)	Measured PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
1	2412	-15.26	8	PASS
6	2437	-15.47	8	PASS
11	2462	-15.18	8	PASS
Measurement uncertainty: ± 1.3 dB				


B. Test Plots:

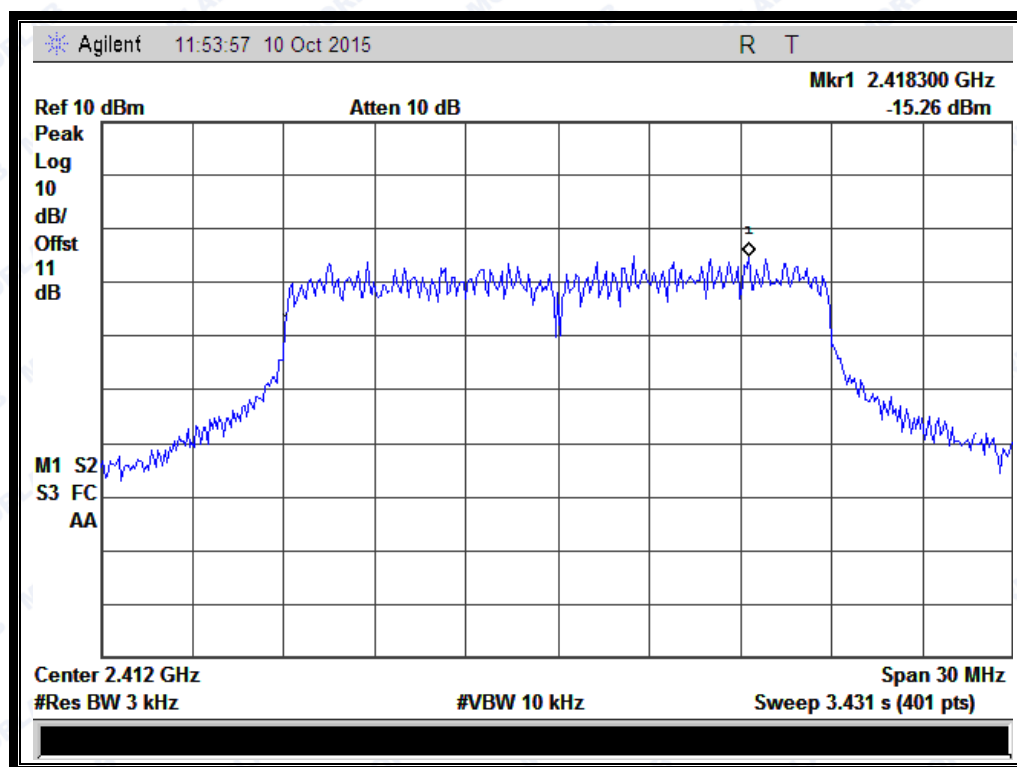


(Channel = 1 @ 802.11n-20MHz)



REPORT No.: SZ15080082W03

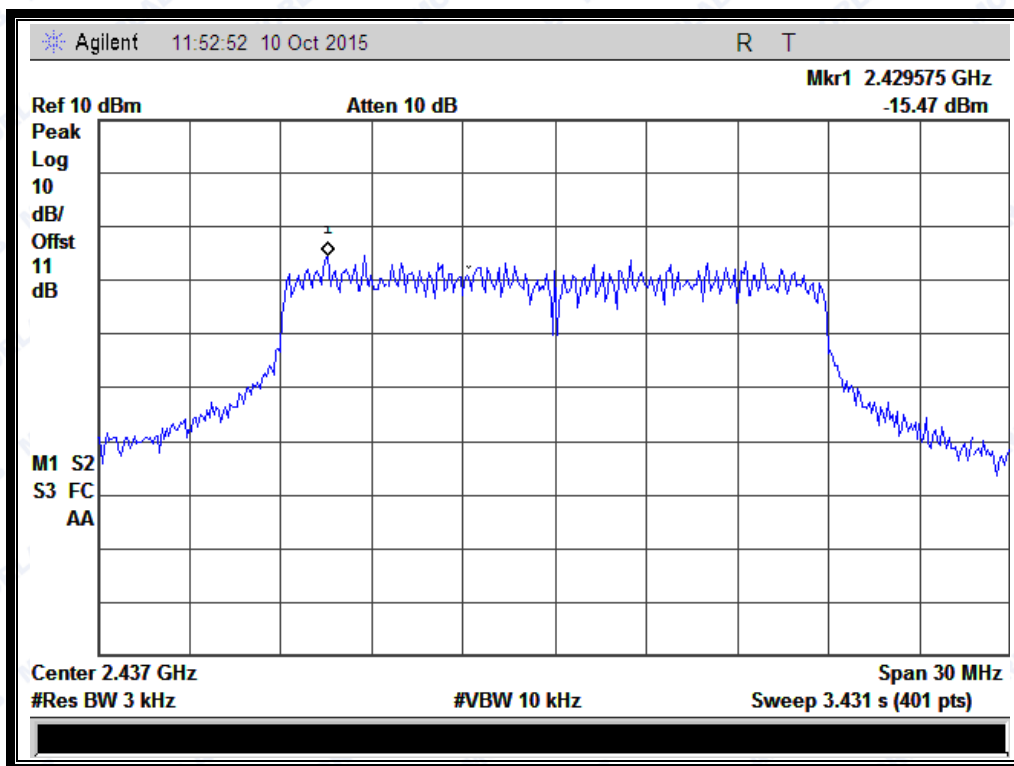

(Channel = 6 @ 802.11n-20MHz)

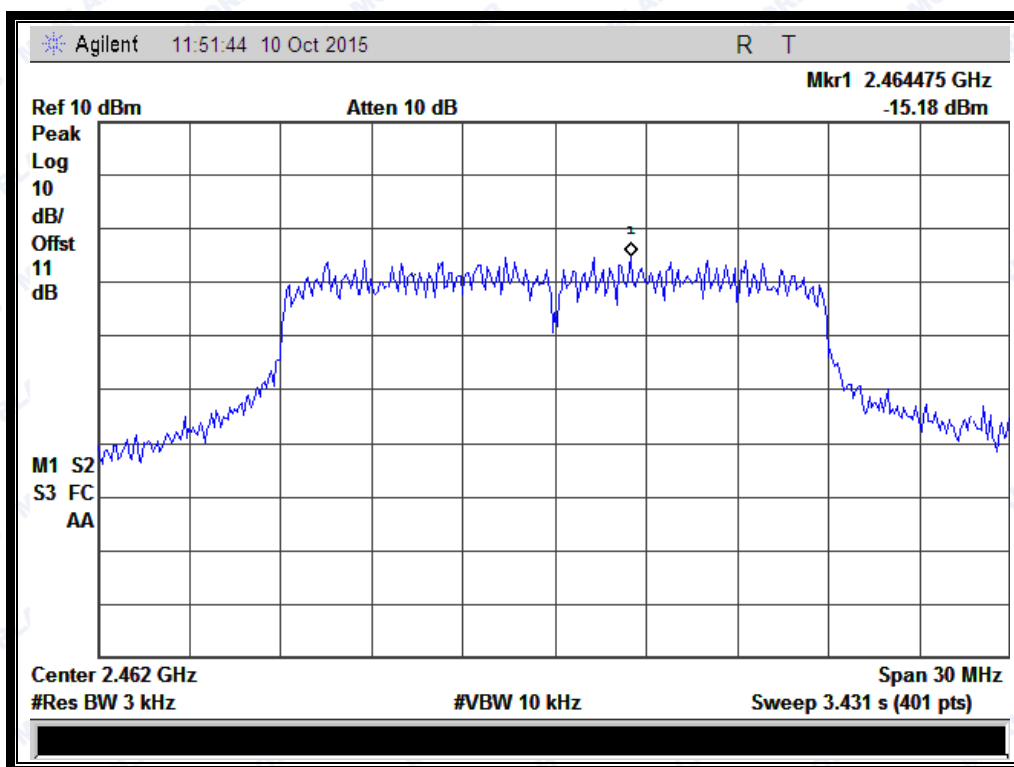

(Channel = 11 @ 802.11n-20MHz)



REPORT No.: SZ15080082W03

ANT 1+ ANT 2:

A. Test Verdict:

Spectral power density (dBm/3kHz)				
Channel	Frequency (MHz)	Measured PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
1	2412	-11.82	8	PASS
6	2437	-11.87	8	PASS
11	2462	-10.69	8	PASS
Measurement uncertainty: $\pm 1.3\text{dB}$				

2.5.3.4 802.11n-40MHz Test mode

ANT 1:


B. Test Verdict:

Spectral power density (dBm/3kHz)				
Channel	Frequency (MHz)	Measured PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
3	2422	-17.95	8	PASS
6	2437	-18.94	8	PASS
9	2452	-15.58	8	PASS
Measurement uncertainty: $\pm 1.3\text{dB}$				


B. Test Plots:



REPORT No.: SZ15080082W03

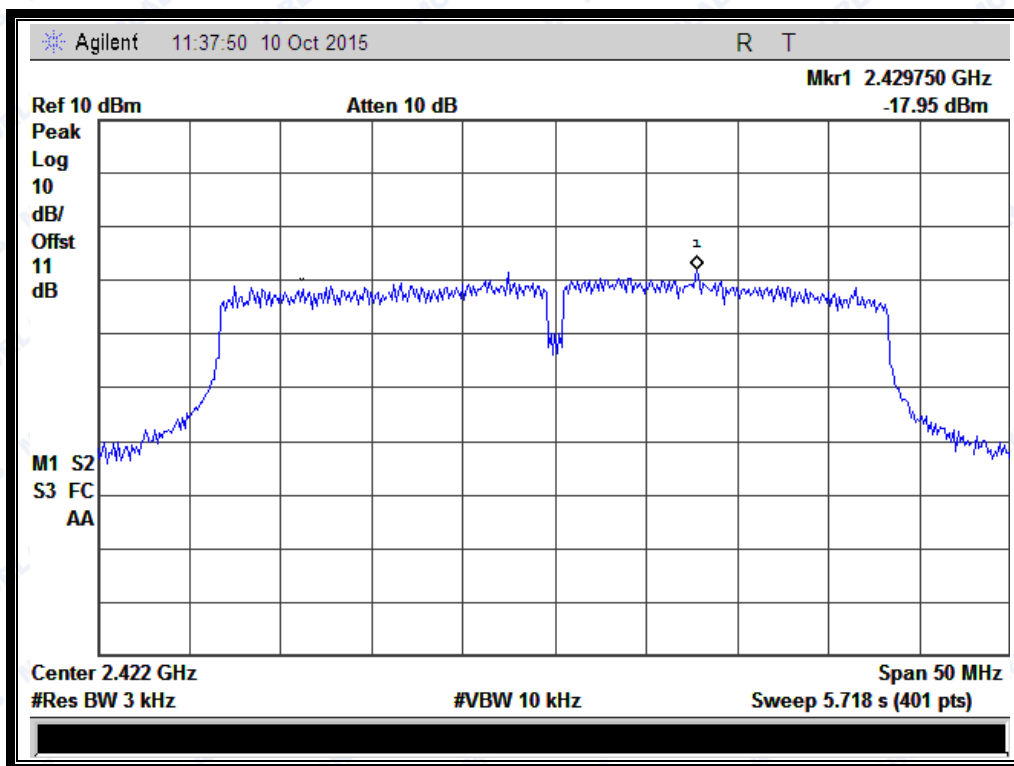


(Channel = 3 @ 802.11n-40MHz)

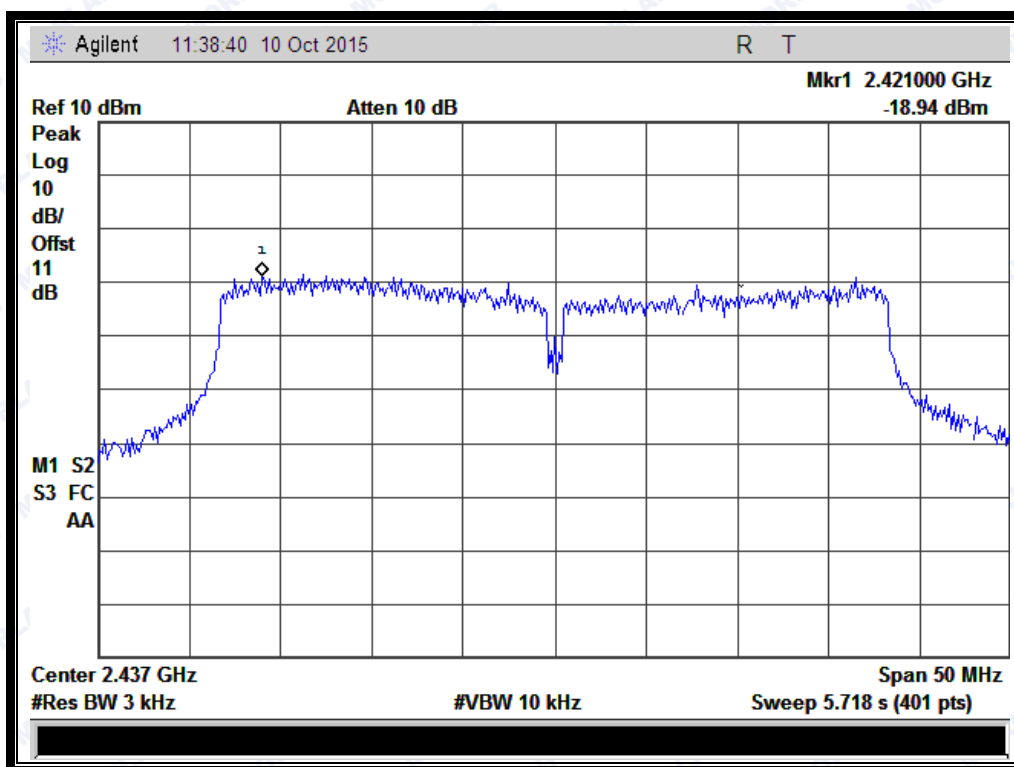

(Channel = 6 @ 802.11n-40MHz)



REPORT No.: SZ15080082W03

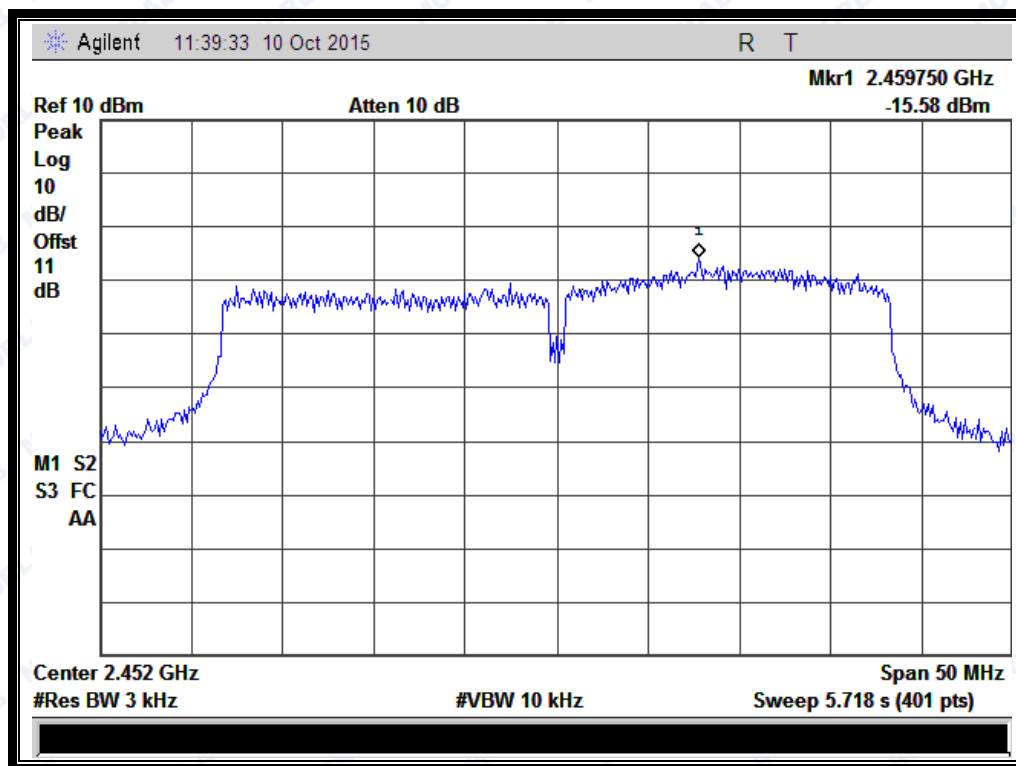

(Channel = 9 @ 802.11n-40MHz)

ANT 2:


A. Test Verdict:

Spectral power density (dBm/3kHz)				
Channel	Frequency (MHz)	Measured PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
3	2422	-20.71	8	PASS
6	2437	-20.64	8	PASS
9	2452	-18.44	8	PASS
Measurement uncertainty: ± 1.3 dB				


B. Test Plots:



REPORT No.: SZ15080082W03

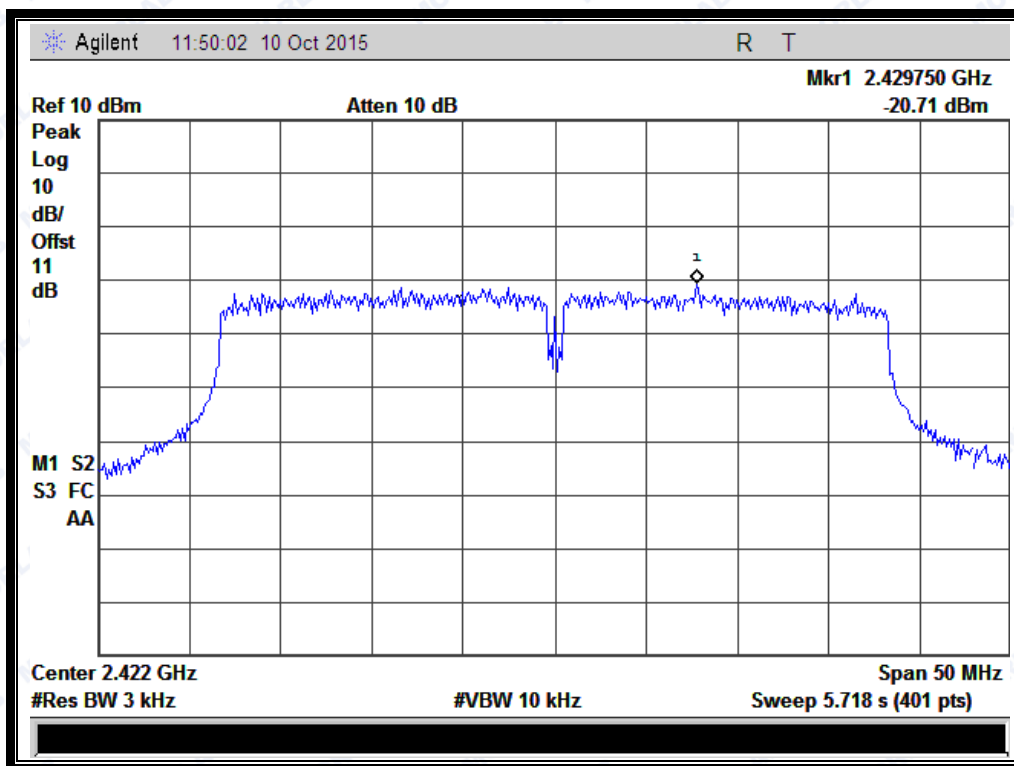


(Channel = 3 @ 802.11n-40MHz)

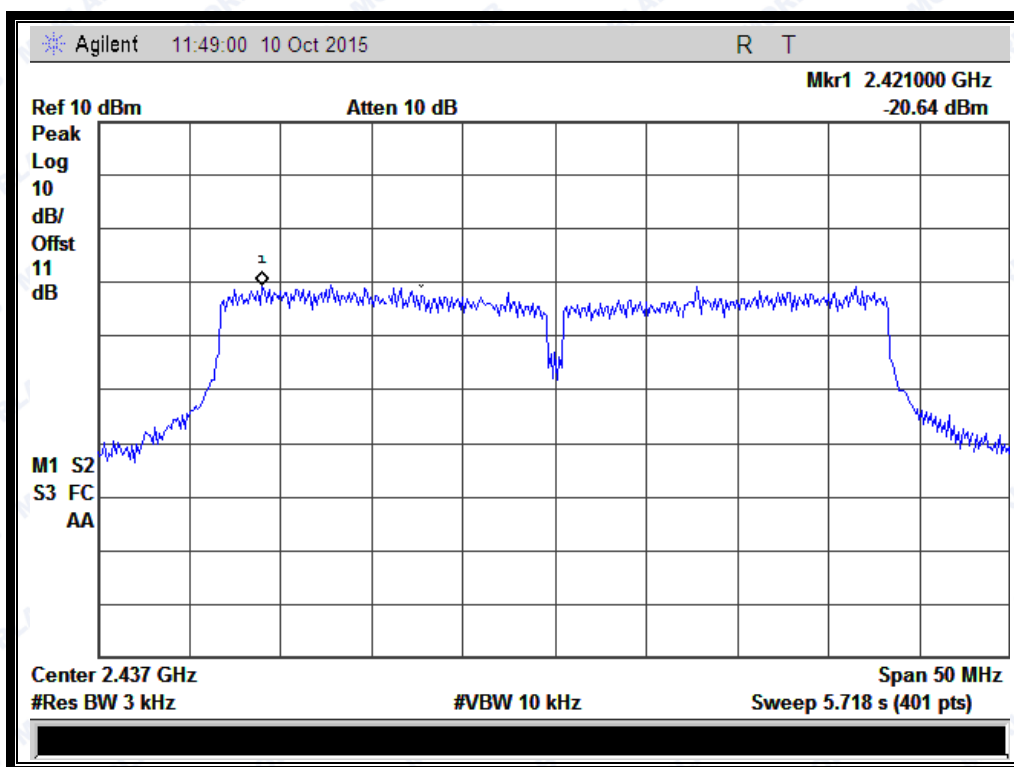

(Channel = 6 @ 802.11n-40MHz)



REPORT No.: SZ15080082W03

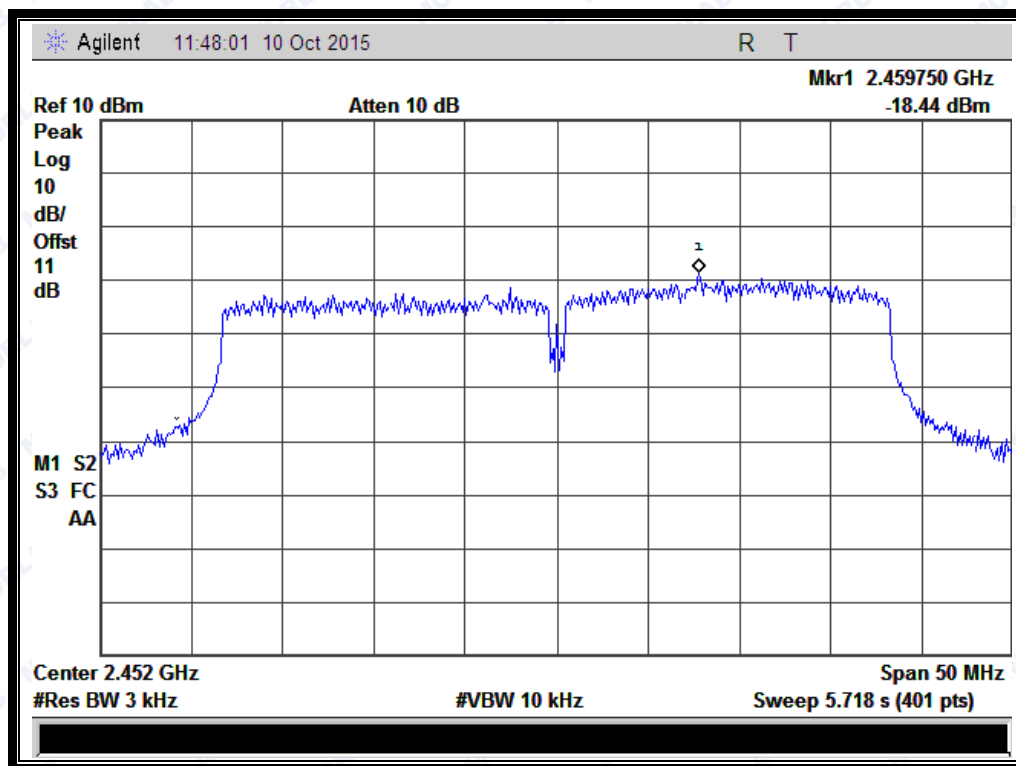

(Channel = 9 @ 802.11n-40MHz)

ANT 1+ANT 2:

A. Test Verdict:

Spectral power density (dBm/3kHz)				
Channel	Frequency (MHz)	Measured PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
3	2422	-16.10	8	PASS
6	2437	-16.70	8	PASS
9	2452	-13.77	8	PASS
Measurement uncertainty: ± 1.3 dB				


2.6 Restricted Frequency Bands

2.6.1 Requirement

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in 15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

2.6.2 Test Description

A. Test Setup

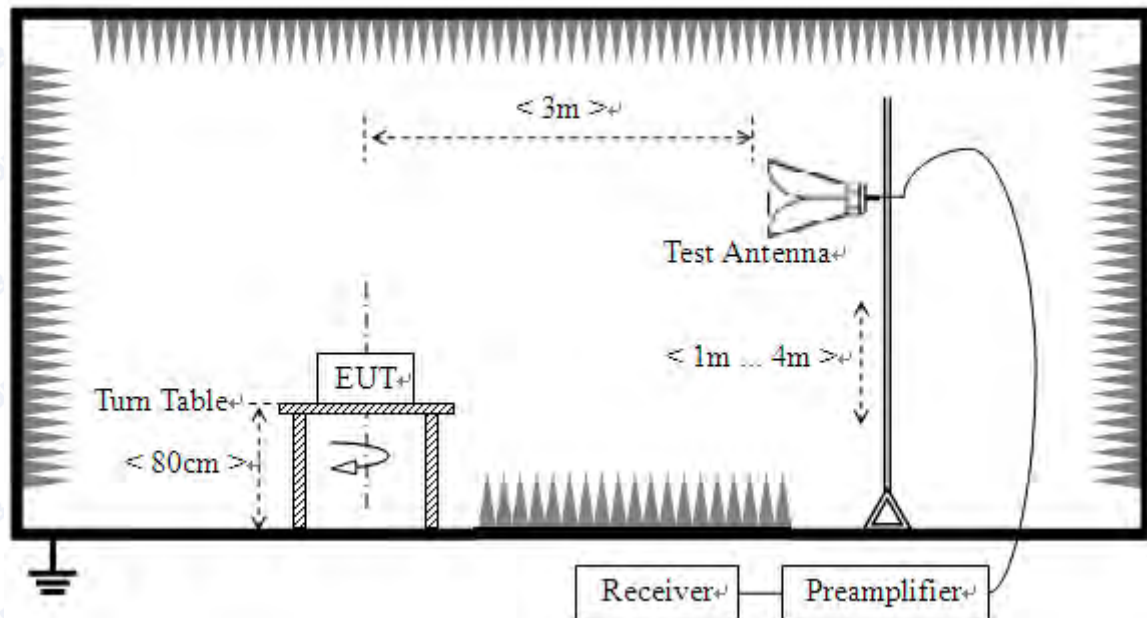

The Module is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading.

For the Test Antenna:

Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength.

KDB 558074 Section 12.1 was used in order to prove compliance.

B. Equipments List:

Please reference ANNEX A(1.4).



2.6.3 Test Result

The lowest and highest channels are tested to verify Restricted Frequency Bands.

The measurement results are obtained as below:

$$E \text{ [dB}\mu\text{V/m]} = U_R + A_T + A_{\text{Factor}} \text{ [dB]}; A_T = L_{\text{Cable loss}} \text{ [dB]} - G_{\text{preamp}} \text{ [dB]}$$

A_T : Total correction Factor except Antenna

U_R : Receiver Reading

G_{preamp} : Preamplifier Gain

A_{Factor} : Antenna Factor at 3m

Note: Restricted Frequency Bands were performed when antenna was at vertical and horizontal polarity, and only the worse test condition (vertical) was recorded in this test report.

2.6.3.1 802.11b Test mode

The lowest and highest channels are tested to verify the band edge emissions.

ANT 1:


A. Test Verdict:

Channel	Frequency (MHz)	Detector	Receiver Reading U_R (dBuV)	A_T (dB)	A_{Factor} (dB@3m)	Max. Emission E (dBμV/m)	Limit (dBμV/m)	Verdict
		PK/ AV						
1	2384.35	PK	43.84	-33.63	32.56	42.77	74	Pass
1	2384.94	AV	32.81	-33.63	32.56	31.74	54	Pass
11	2488.24	PK	43.07	-33.18	32.5	42.39	74	Pass
11	2487.13	AV	35.04	-33.18	32.5	34.36	54	Pass


B. Test Plots:



REPORT No.: SZ15080082W03

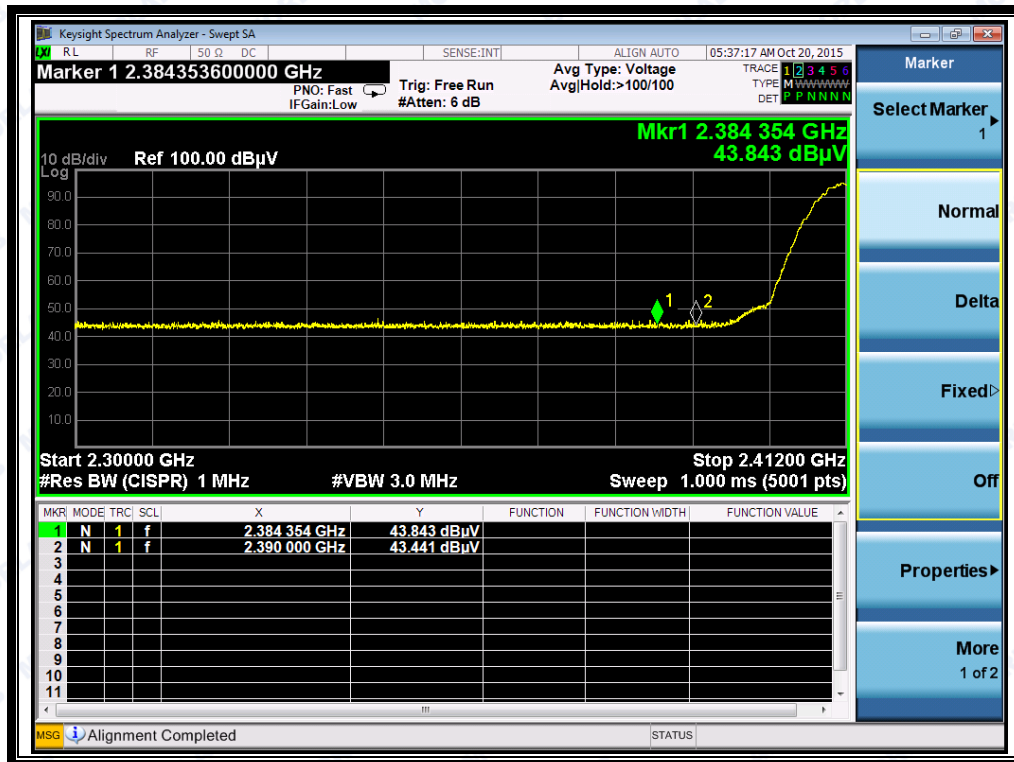

(Plot A1: Channel = 1 PEAK @ 802.11b)

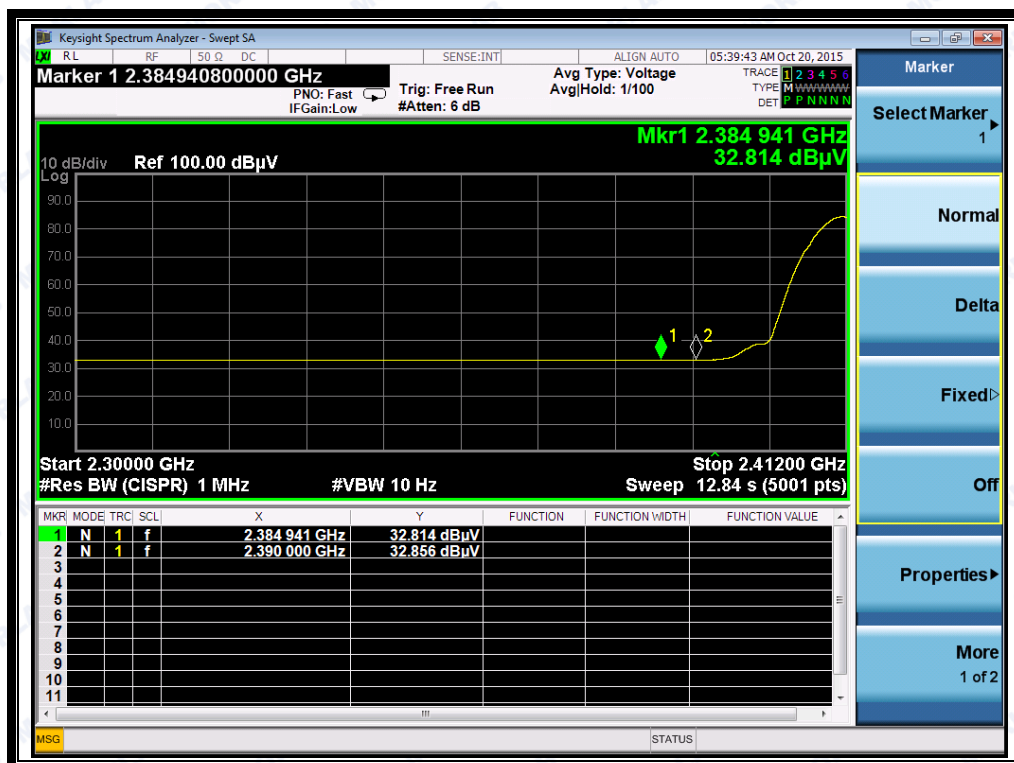


(Plot A2: Channel = 1 AVG @ 802.11b)



REPORT No.: SZ15080082W03



(Plot B1: Channel = 11 PEAK @ 802.11b)

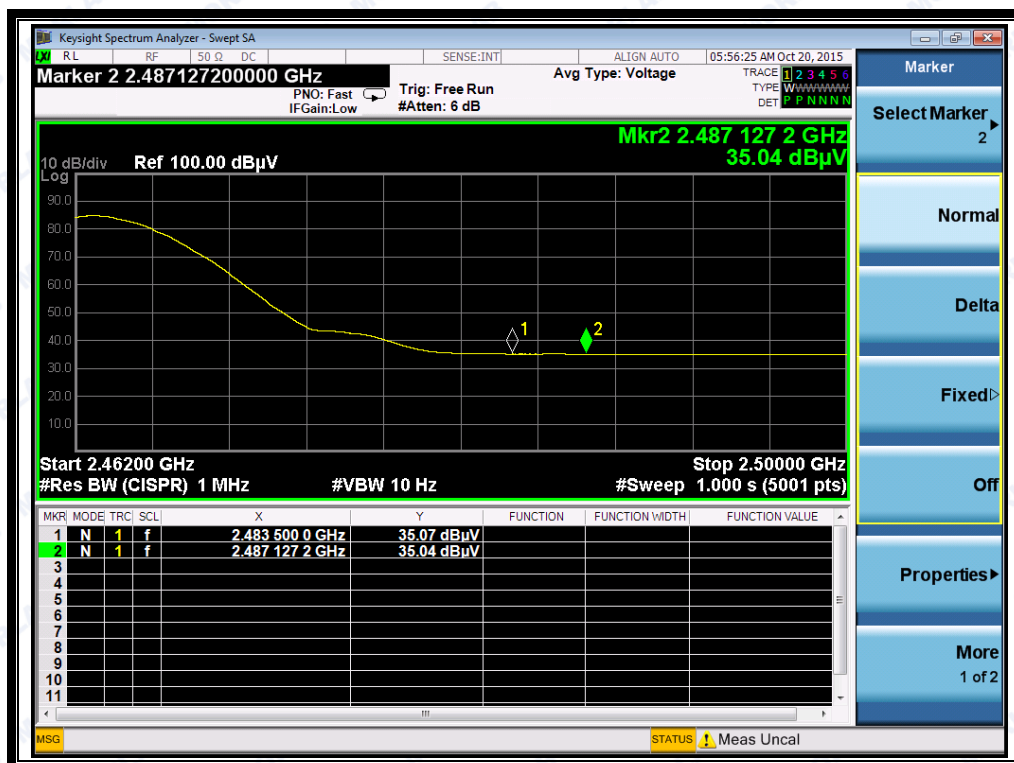

(Plot B2: Channel = 11 AVG @ 802.11b)




REPORT No.: SZ15080082W03

ANT 2:

A. Test Verdict:

Channel	Frequency (MHz)	Detector	Receiver Reading U_R (dBuV)	A_T (dB)	A_{Factor} (dB@3m)	Max. Emission E (dBuV/m)	Limit (dBuV/m)	Verdict
		PK/ AV						
1	2382.97	PK	43.06	-33.63	32.56	41.99	74	Pass
1	2385.95	AV	32.82	-33.63	32.56	31.75	54	Pass
11	2487.26	PK	44.88	-33.18	32.5	44.20	74	Pass
11	2487.62	AV	35.51	-33.18	32.5	34.83	54	Pass


B. Test Plots:

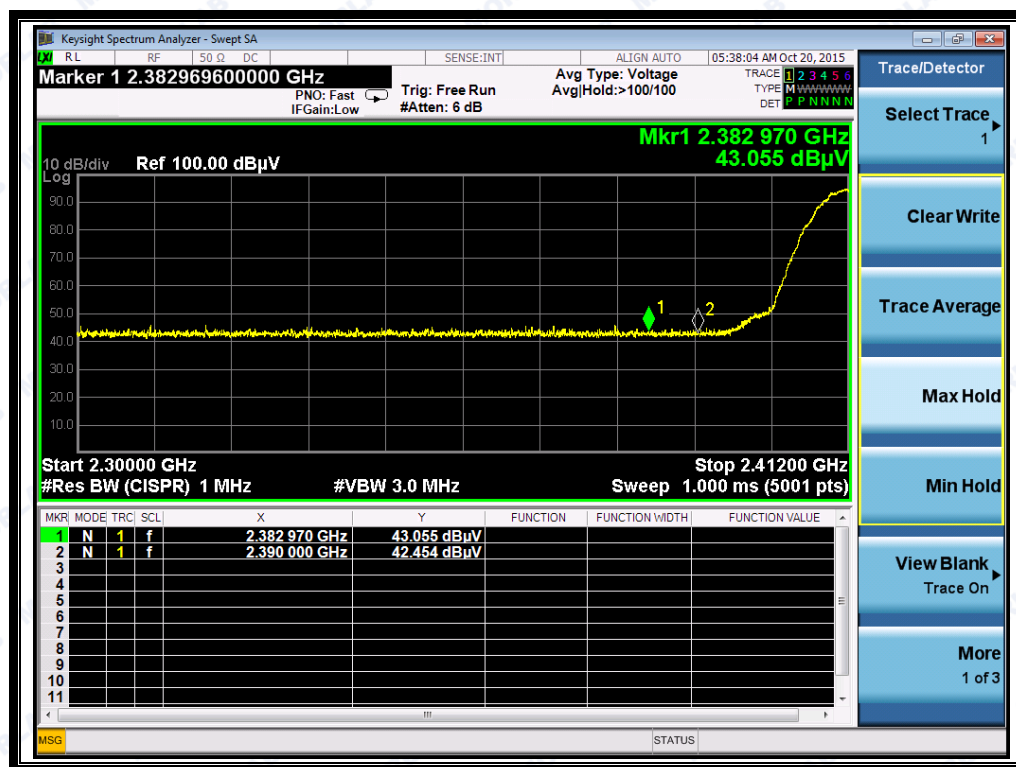

(Plot A1: Channel = 1 PEAK @ 802.11b)



REPORT No.: SZ15080082W03

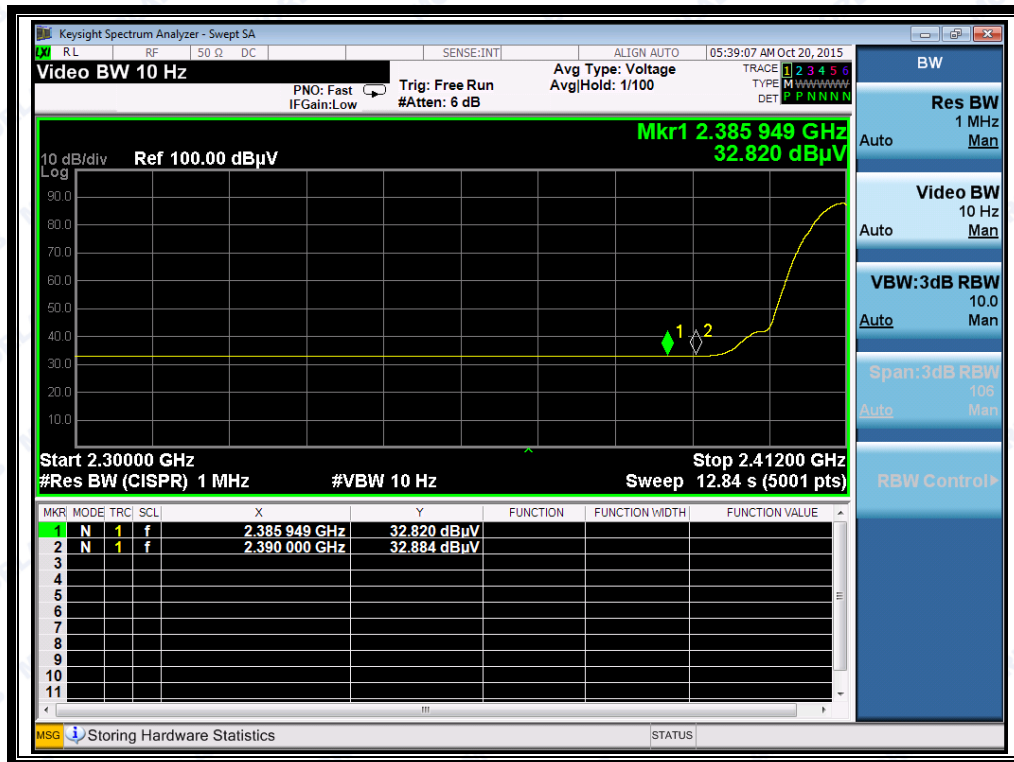


(Plot A2: Channel = 1 AVG @ 802.11b)



(Plot B1: Channel = 11 PEAK @ 802.11b)



REPORT No.: SZ15080082W03

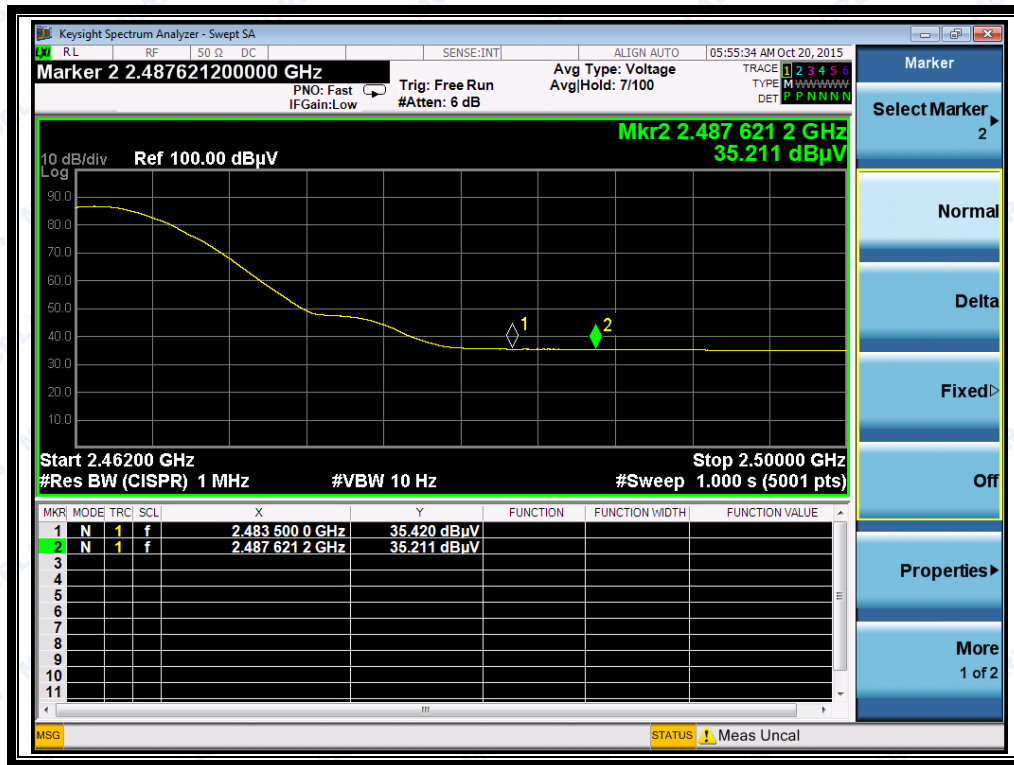

(Plot B2: Channel = 11 AVG @ 802.11b)



2.6.3.2 802.11g Test mode


The lowest and highest channels are tested to verify the band edge emissions.

ANT 1:

A. Test Verdict:

Channel	Frequency (MHz)	Detector	Receiver Reading U_R (dBuV)	A_T (dB)	A_{Factor} (dB@3m)	Max. Emission E (dBμV/m)	Limit (dBμV/m)	Verdict
		PK/ AV						
1	2386.73	PK	45.71	-33.63	32.56	44.64	74	Pass
1	2377.73	AV	32.85	-33.63	32.56	31.78	54	Pass
11	2484.69	PK	62.30	-33.18	32.5	61.62	74	Pass
11	2484.09	AV	50.06	-33.18	32.5	49.38	54	Pass


B. Test Plots:

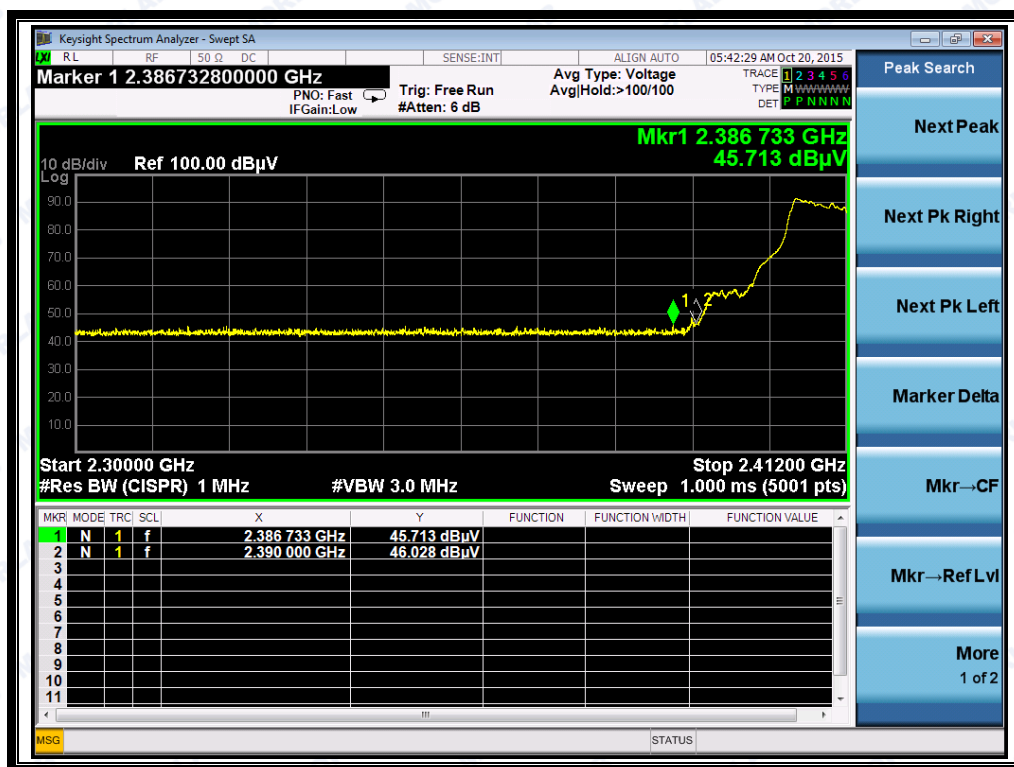



REPORT No.: SZ15080082W03

(Plot C1: Channel = 1 PEAK @ 802.11g)

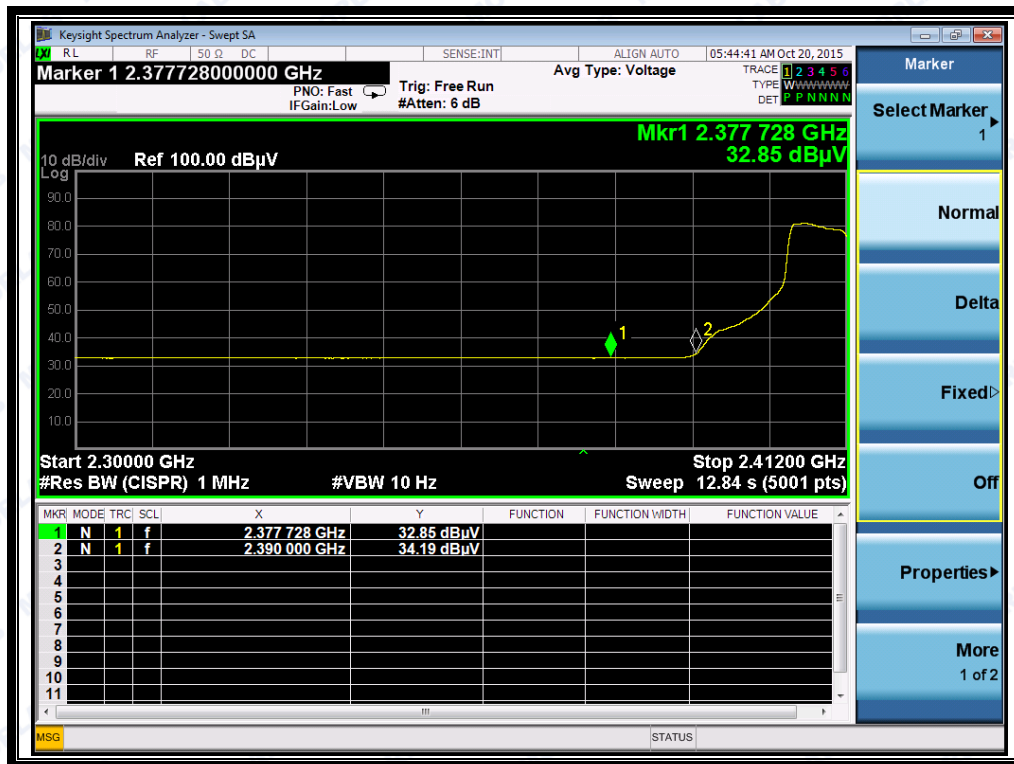


(Plot C2: Channel = 1 AVG @ 802.11g)





REPORT No.: SZ15080082W03

(Plot D1: Channel = 11 PEAK @ 802.11g)

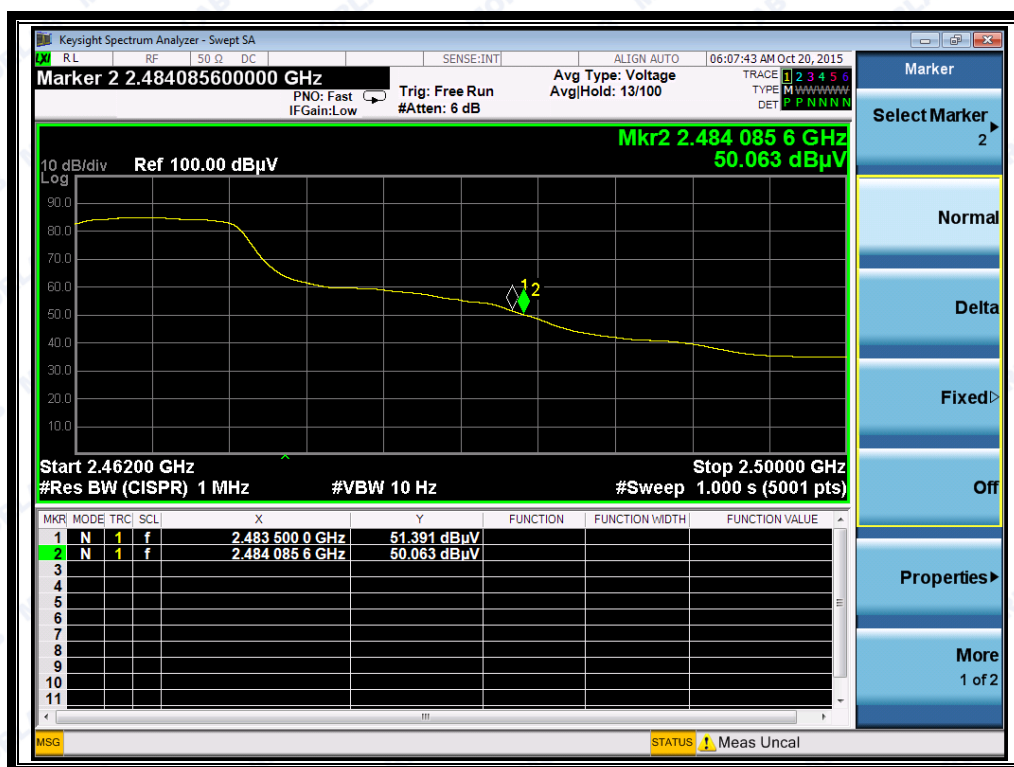

(Plot D2: Channel = 11 AVG @ 802.11g)

ANT 2:


A. Test Verdict:

Channel	Frequency (MHz)	Detector	Receiver Reading U_R (dBμV)	A_T (dB)	A_{Factor} (dB@3m)	Max. Emission E (dBμV/m)	Limit (dBμV/m)	Verdict
		PK/ AV						
1	2383.37	PK	42.62	-33.63	32.56	41.55	74	Pass
1	2380.53	AV	32.79	-33.63	32.56	31.72	54	Pass
11	2484.90	PK	61.79	-33.18	32.5	61.11	74	Pass
11	2484.16	AV	48.80	-33.18	32.5	48.12	54	Pass


B. Test Plots:



REPORT No.: SZ15080082W03

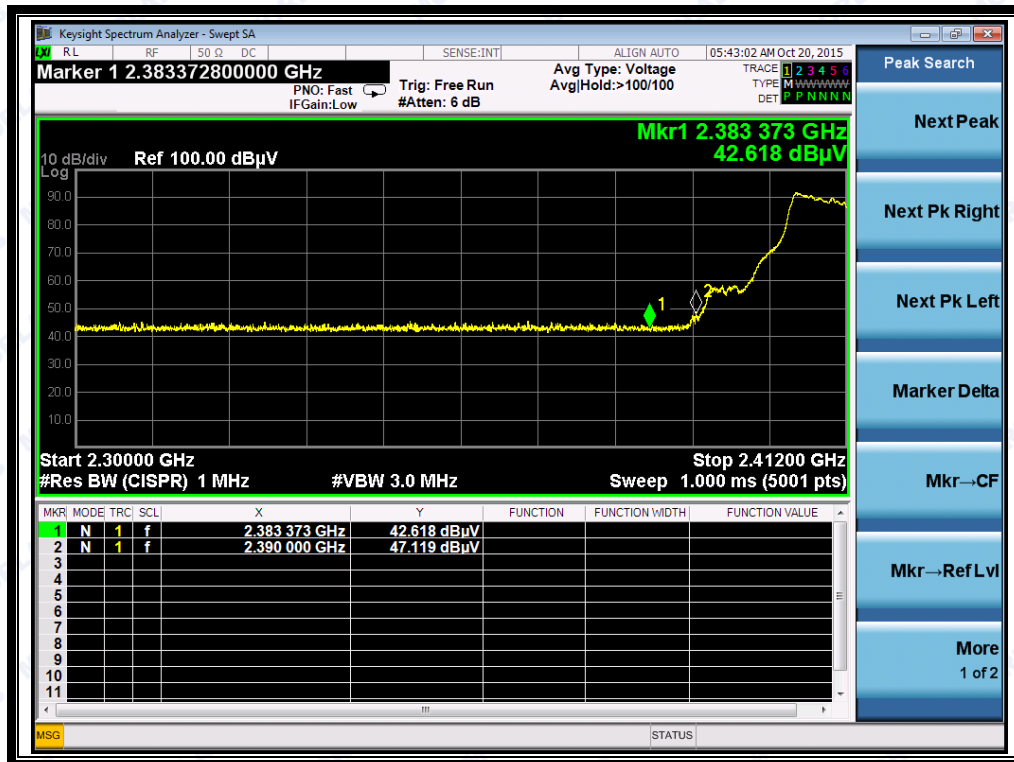


(Plot C1: Channel = 1 PEAK @ 802.11g)

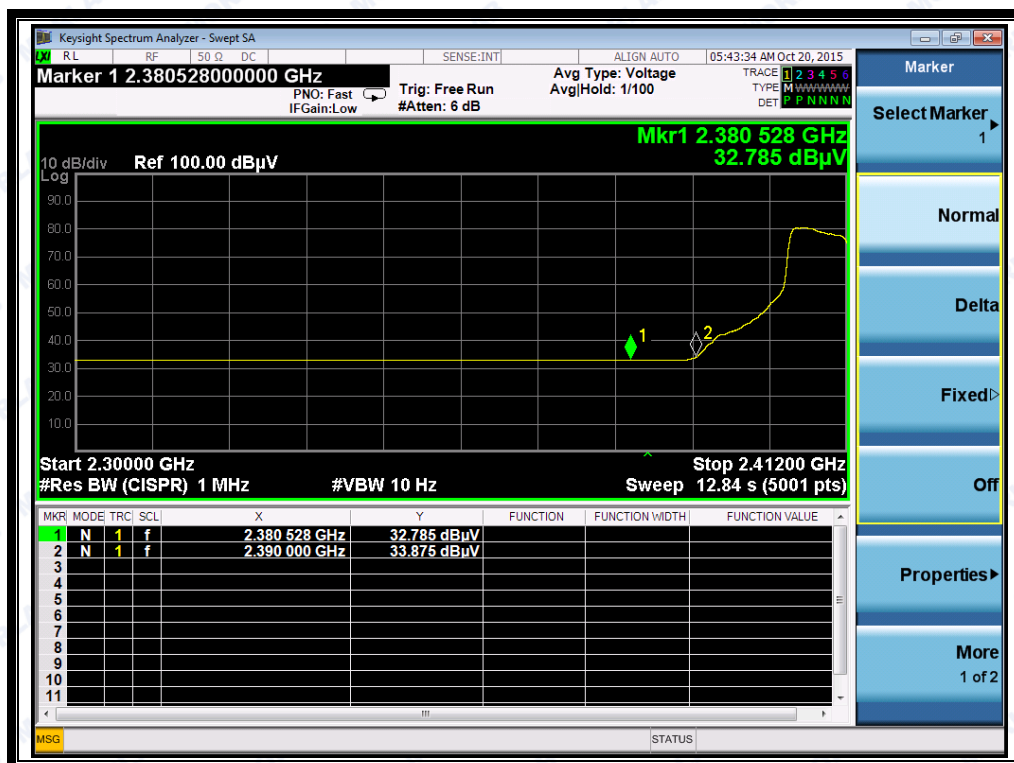


(Plot C2: Channel = 1 AVG @ 802.11g)



REPORT No.: SZ15080082W03

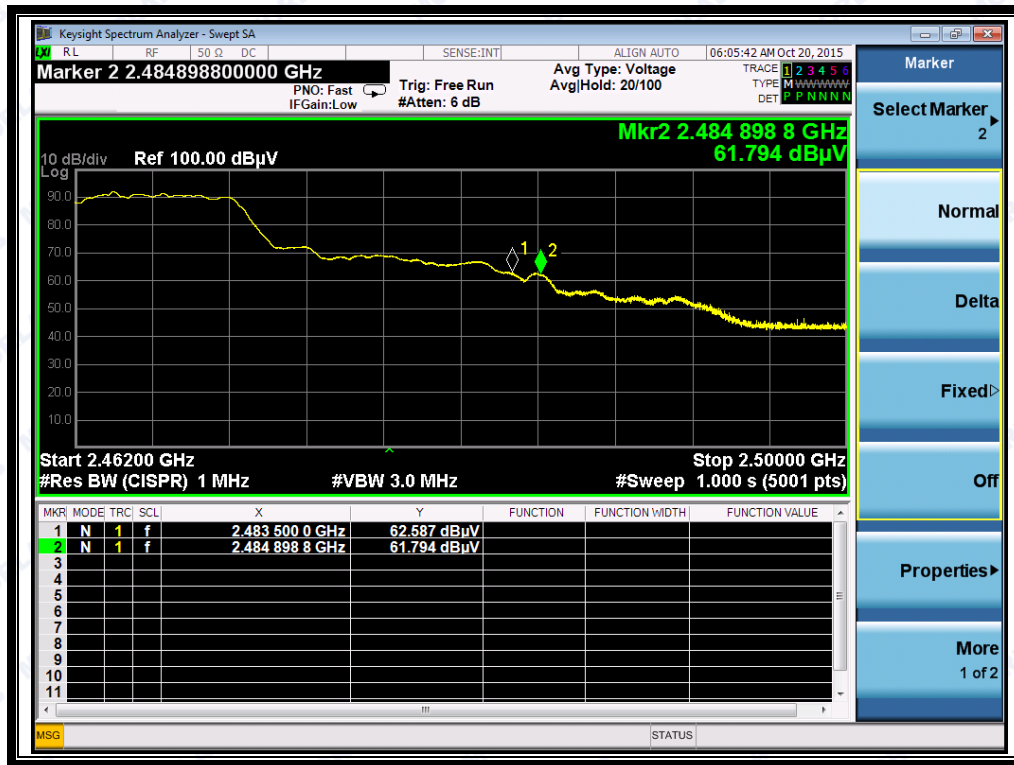

(Plot D1: Channel = 11 PEAK @ 802.11g)

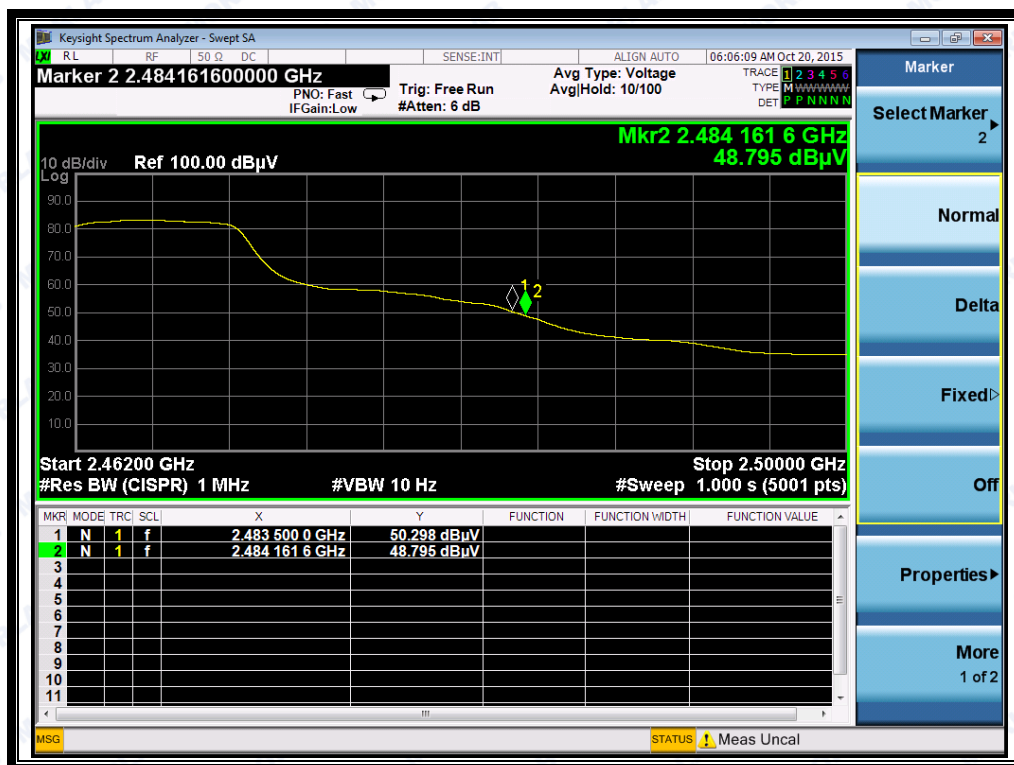

(Plot D2: Channel = 11 AVG @ 802.11g)

**2.6.3.3 802.11n-20MHz Test mode**

The lowest and highest channels are tested to verify the band edge emissions.

ANT 1:


A. Test Verdict:

Channel	Frequency (MHz)	Detector	Receiver Reading U_R (dBuV)	A_T (dB)	A_{Factor} (dB@3m)	Max. Emission E (dBuV/m)	Limit (dBuV/m)	Verdict
		PK/ AV						
1	2379.45	PK	44.54	-33.63	32.56	43.47	74	Pass
1	2371.64	AV	34.92	-33.63	32.56	33.85	54	Pass
11	2484.29	PK	56.27	-33.18	32.5	55.59	74	Pass
11	2484.18	AV	46.03	-33.18	32.5	45.35	54	Pass


B. Test Plots:



REPORT No.: SZ15080082W03

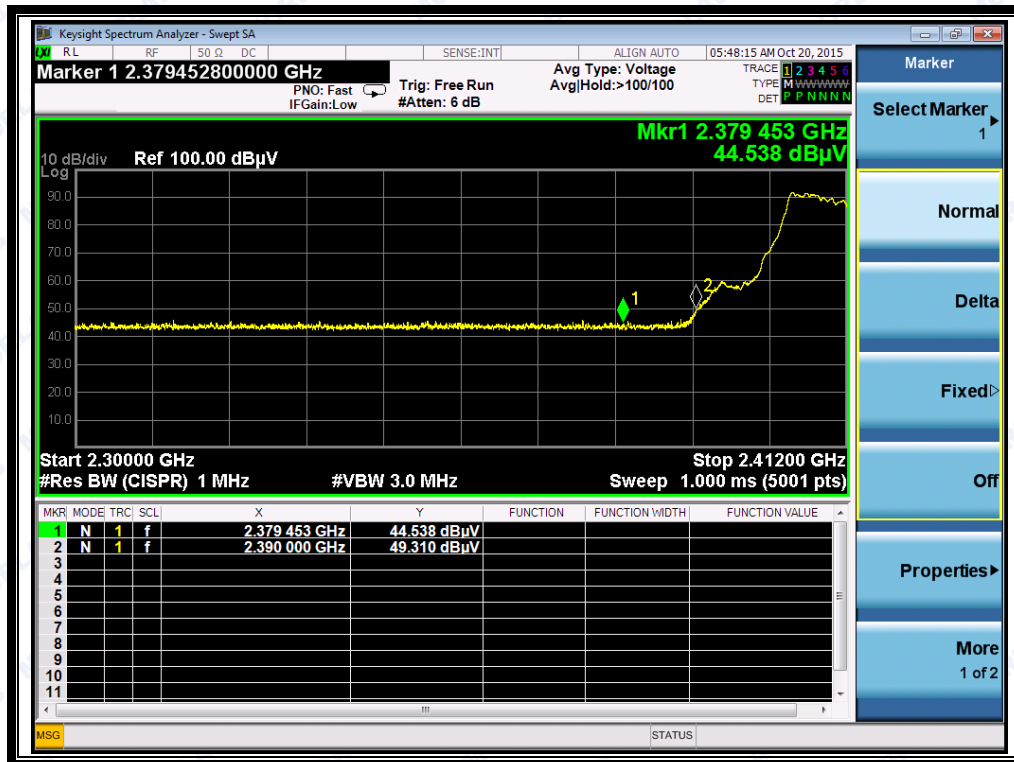


(Plot E1: Channel = 1 PEAK @ 802.11n-20)

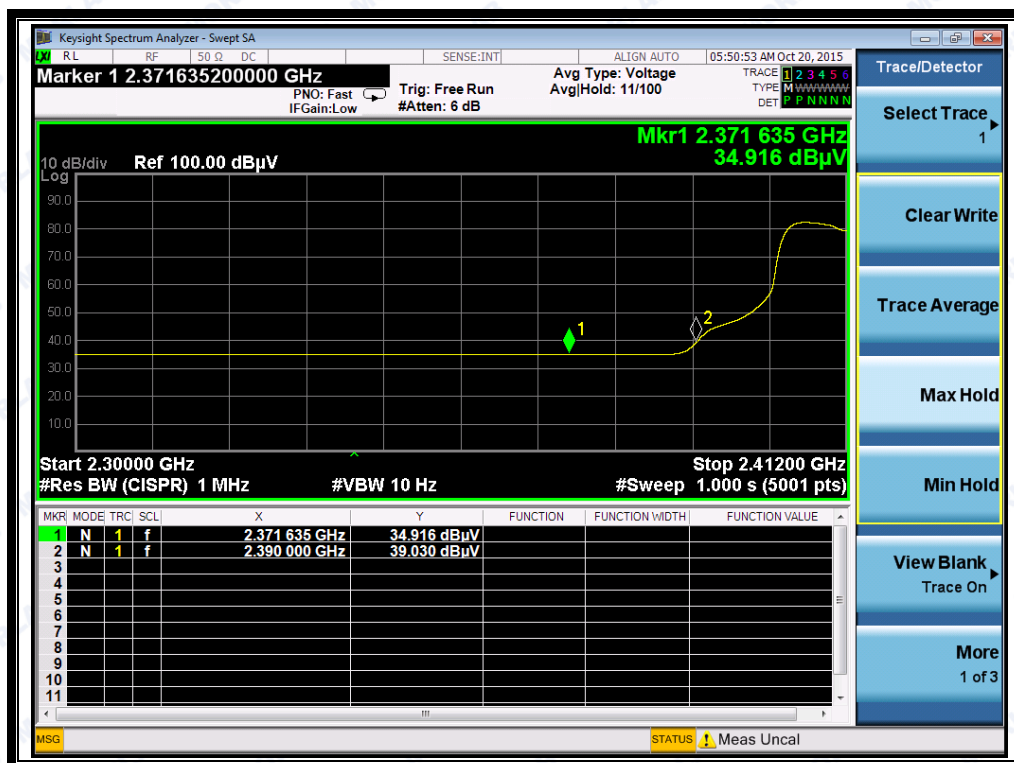


(Plot E2: Channel = 1 AVG @ 802.11n-20)



REPORT No.: SZ15080082W03

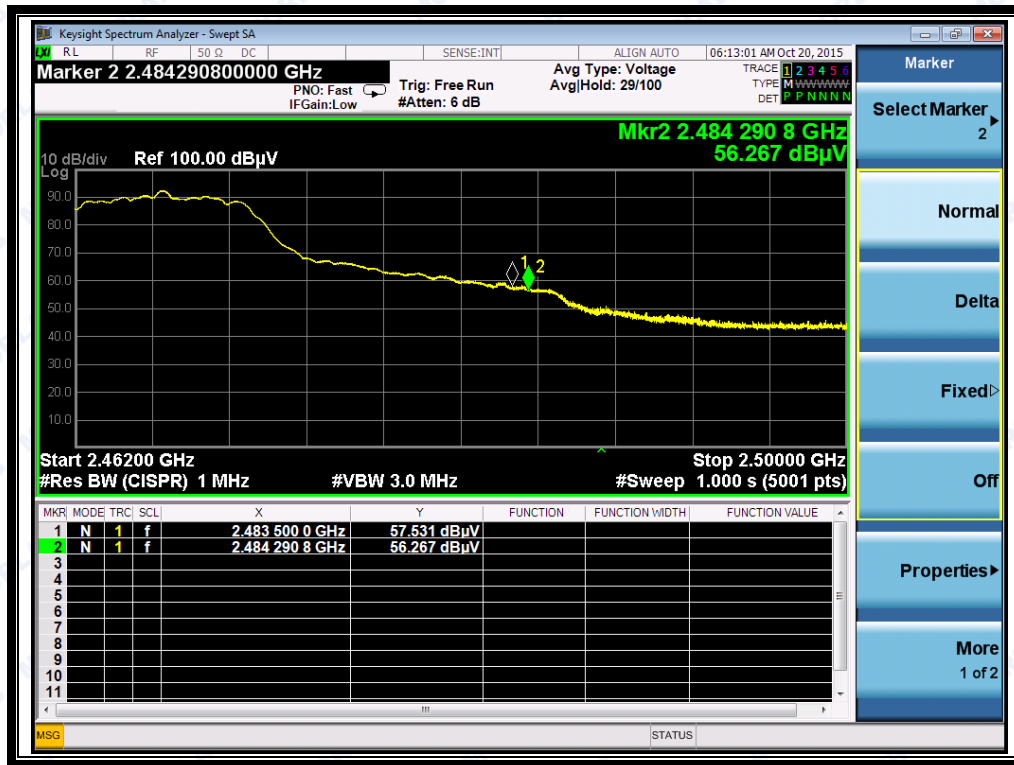

(Plot F1: Channel = 11 PEAK @ 802.11n-20)

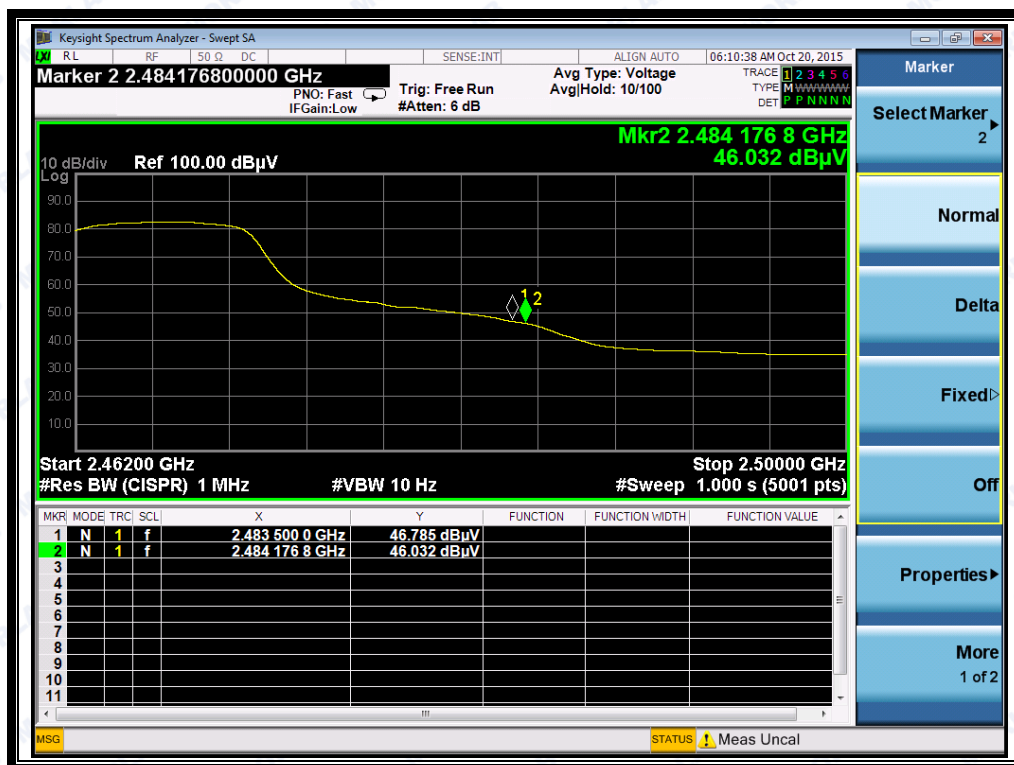

(Plot F2: Channel = 11 AVG @ 802.11n-20)




REPORT No.: SZ15080082W03

ANT 2:

A. Test Verdict:

Channel	Frequency (MHz)	Detector	Receiver Reading U_R (dBuV)	A_T (dB)	A_{Factor} (dB@3m)	Max. Emission E (dBuV/m)	Limit (dBuV/m)	Verdict
		PK/ AV						
1	2377.24	PK	43.85	-33.63	32.56	42.78	74	Pass
1	2373.79	AV	34.90	-33.63	32.56	33.83	54	Pass
11	2484.18	PK	59.66	-33.18	32.5	58.98	74	Pass
11	2484.31	AV	43.95	-33.18	32.5	43.27	54	Pass


B. Test Plots:

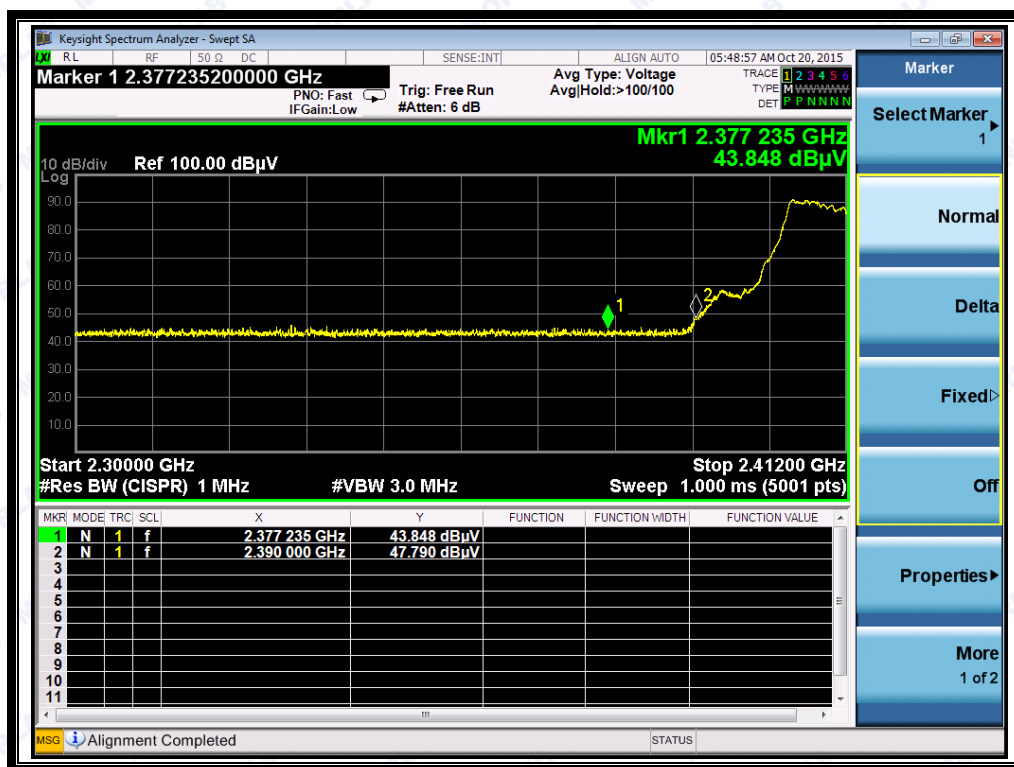


(Plot E1: Channel = 1 PEAK @ 802.11n-20)




REPORT No.: SZ15080082W03

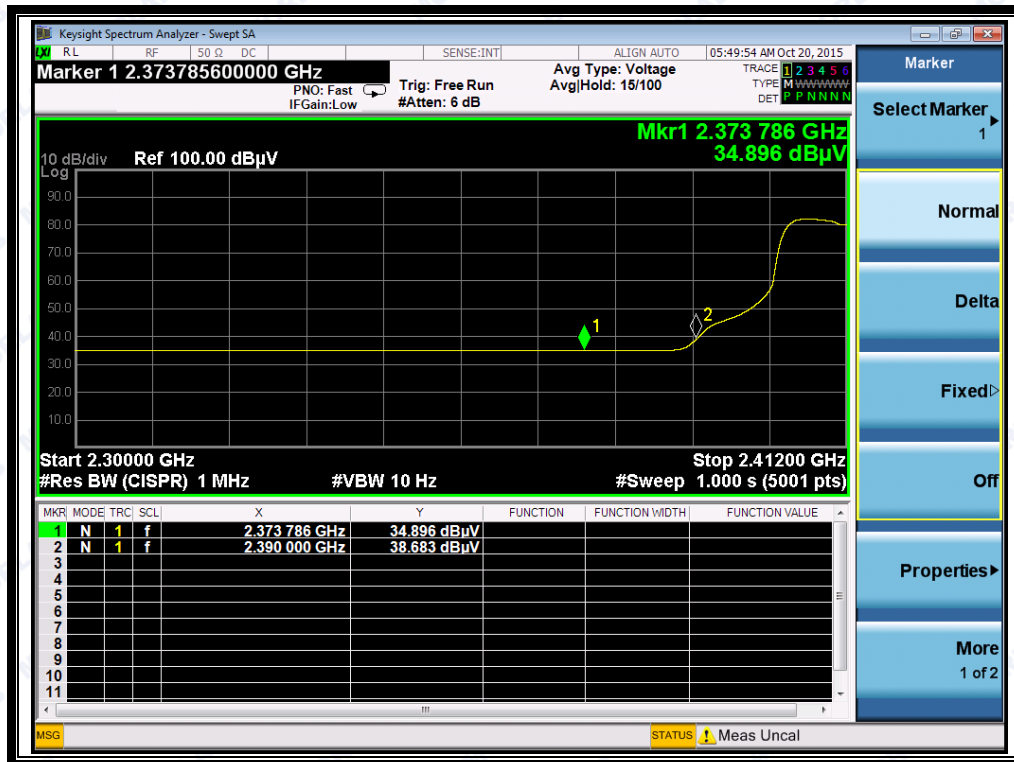

(Plot E2: Channel = 1 AVG @ 802.11n-20)

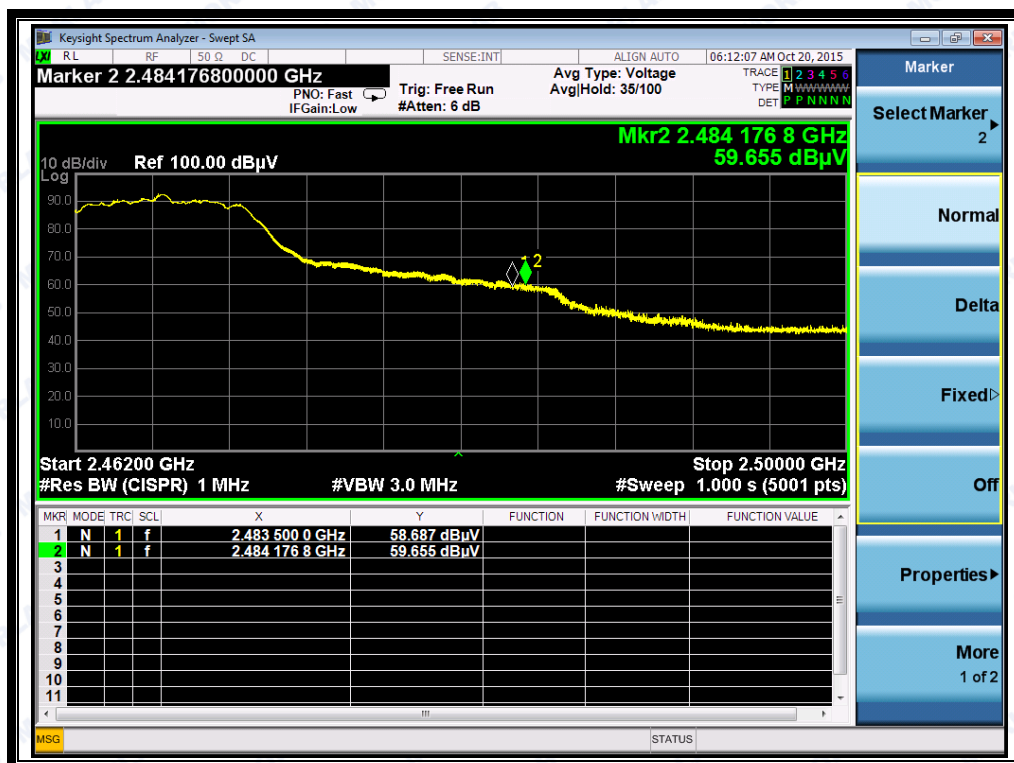

(Plot F1: Channel = 11 PEAK @ 802.11n-20)

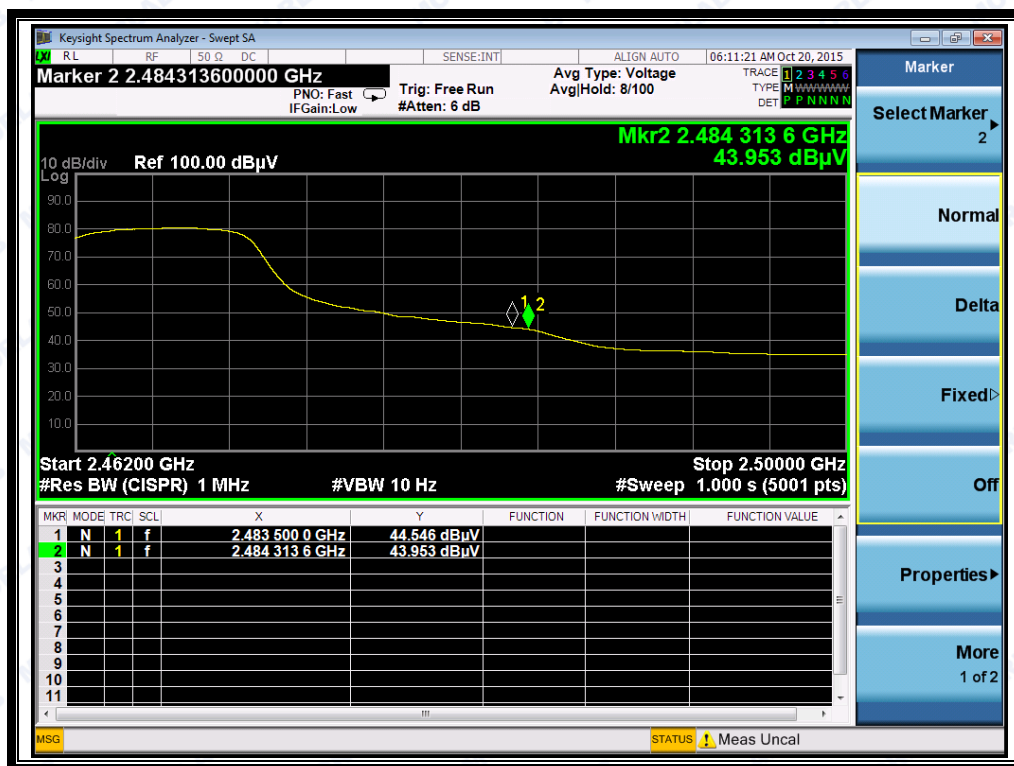

(Plot F2: Channel = 11 AVG @ 802.11n-20)

2.6.3.4 802.11n-40MHz Test mode


The lowest and highest channels are tested to verify the band edge emissions.

A. Test Verdict:


Channel	Frequency (MHz)	Detector	Receiver Reading U_R (dBμV)	A_T (dB)	A_{Factor} (dB@3m)	Max. Emission E (dBμV/m)	Limit (dBμV/m)	Verdict
		PK/ AV						
3	2370.44	PK	43.83	-33.63	32.56	42.76	74	Pass
3	2386.99	AV	34.08	-33.63	32.56	33.01	54	Pass
9	2484.77	PK	61.77	-33.18	32.5	61.09	74	Pass
9	2484.64	AV	50.09	-33.18	32.5	49.41	54	Pass



B. Test Plots:

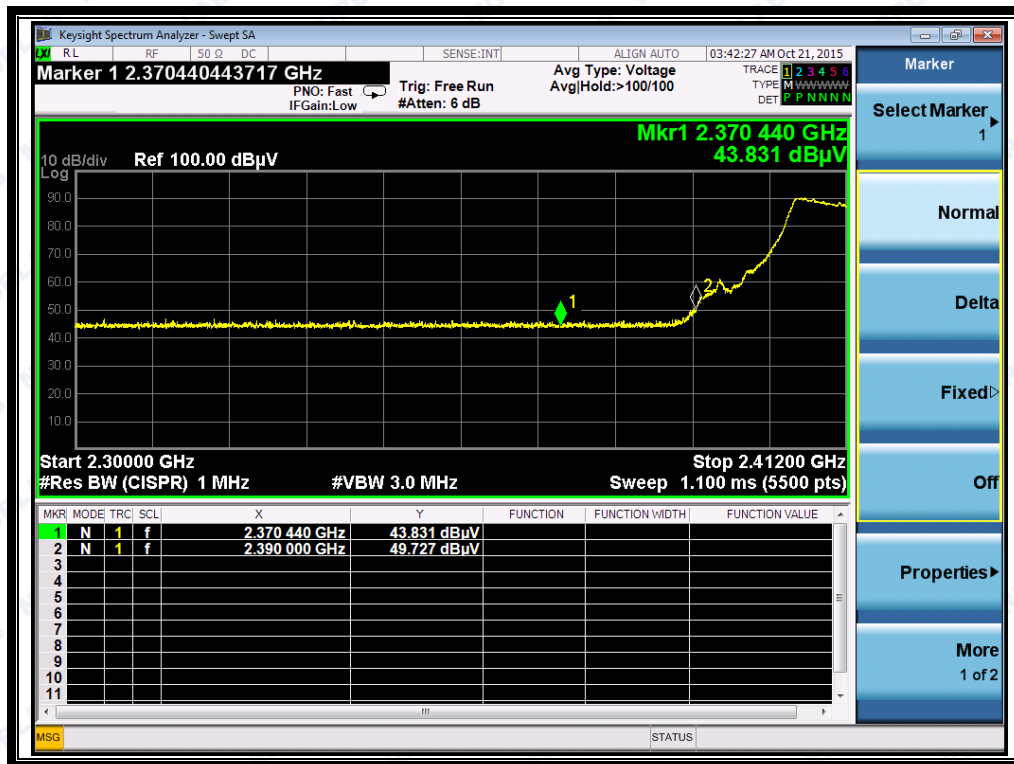

(Plot E1: Channel = 3 PEAK @ 802.11n-40)

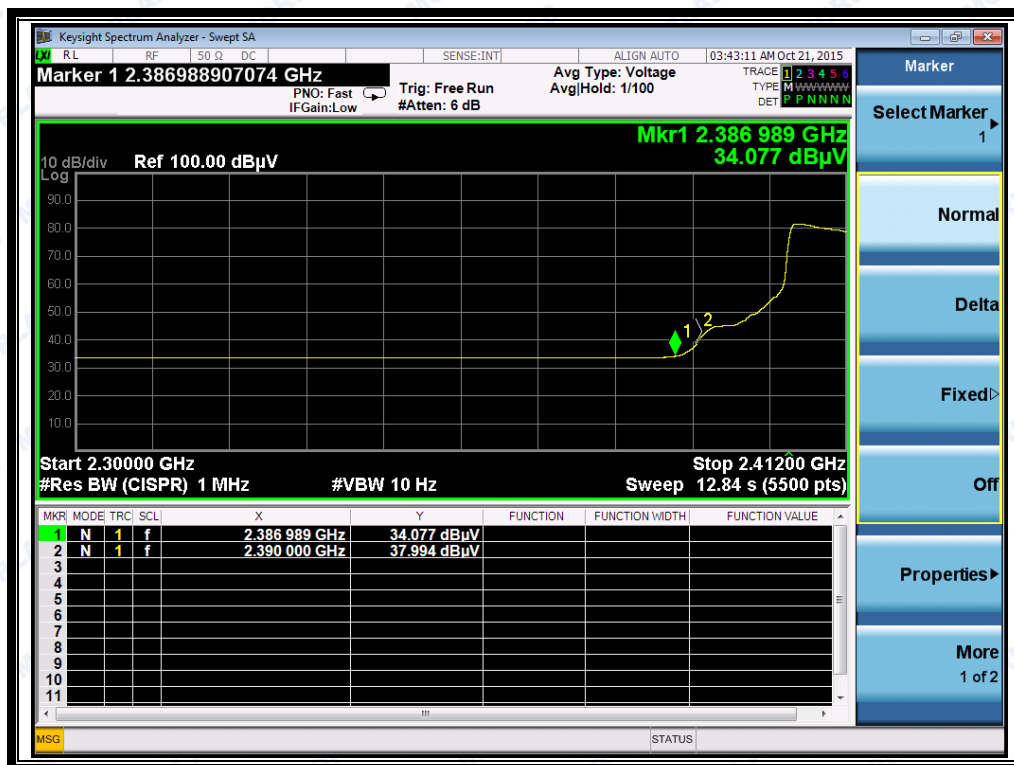




REPORT No.: SZ15080082W03

(Plot E2: Channel = 3 AVG @ 802.11n-40)



(Plot F1: Channel = 9 PEAK @ 802.11n-40)

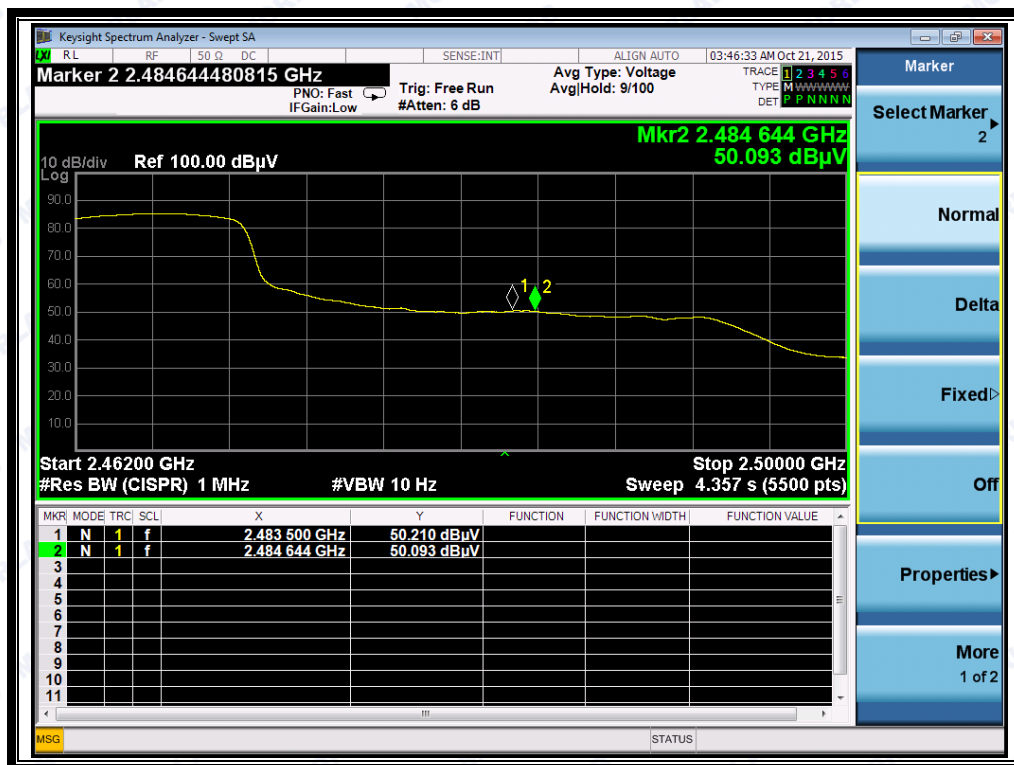

(Plot F2: Channel = 9 AVG @ 802.11n-40)

2.7 Conducted Emission

2.7.1 Requirement

According to FCC section 15.207, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN).


Frequency range (MHz)	Conducted Limit (dB μ V)	
	Quai-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
5 - 30	60	50

NOTE:

- The lower limit shall apply at the band edges.
- The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50MHz.

2.7.2 Test Description

A. Test Setup:

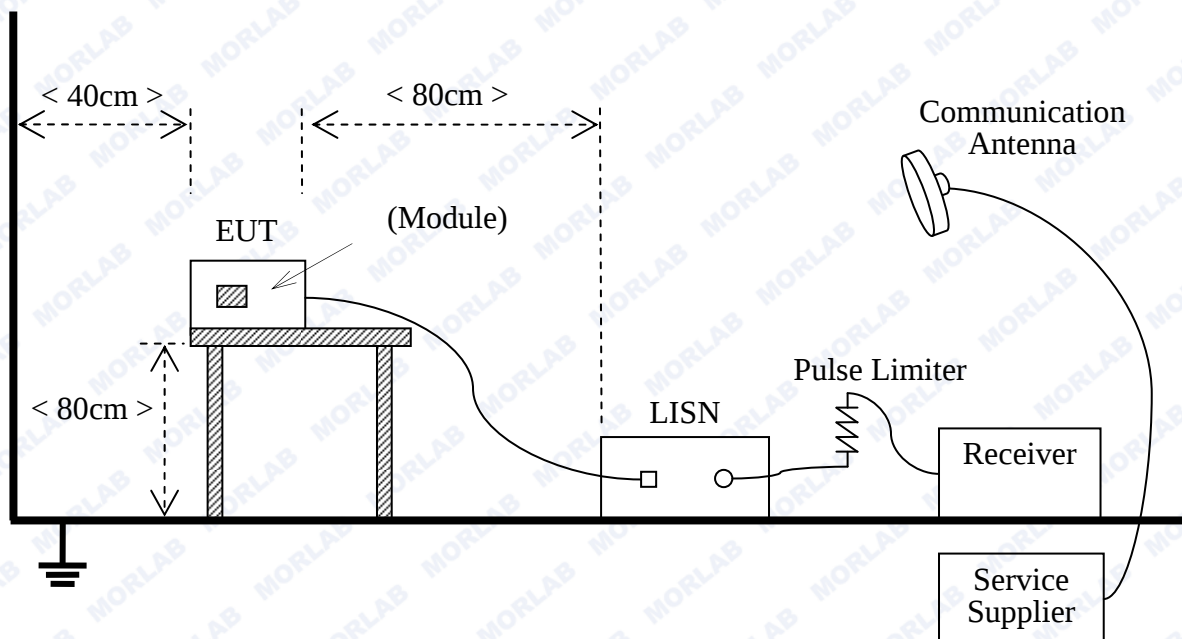

The Table-top EUT was placed upon a non-metallic table 0.8m above the horizontal metal



reference ground plane. EUT was connected to LISN and LISN was connected to reference Ground Plane. EUT was 80cm from LISN. The set-up and test methods were according to ANSI C63.4:2009

B. Equipments List:

Please reference ANNEX A(1.4).

2.7.3 Test Result


The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Refer to recorded points and plots below.

Note: All test modes are performed, only the worst case is recorded in this report.


A. Test setup:

The EUT configuration of the emission tests is EUT + Link.

B. Test Plots:

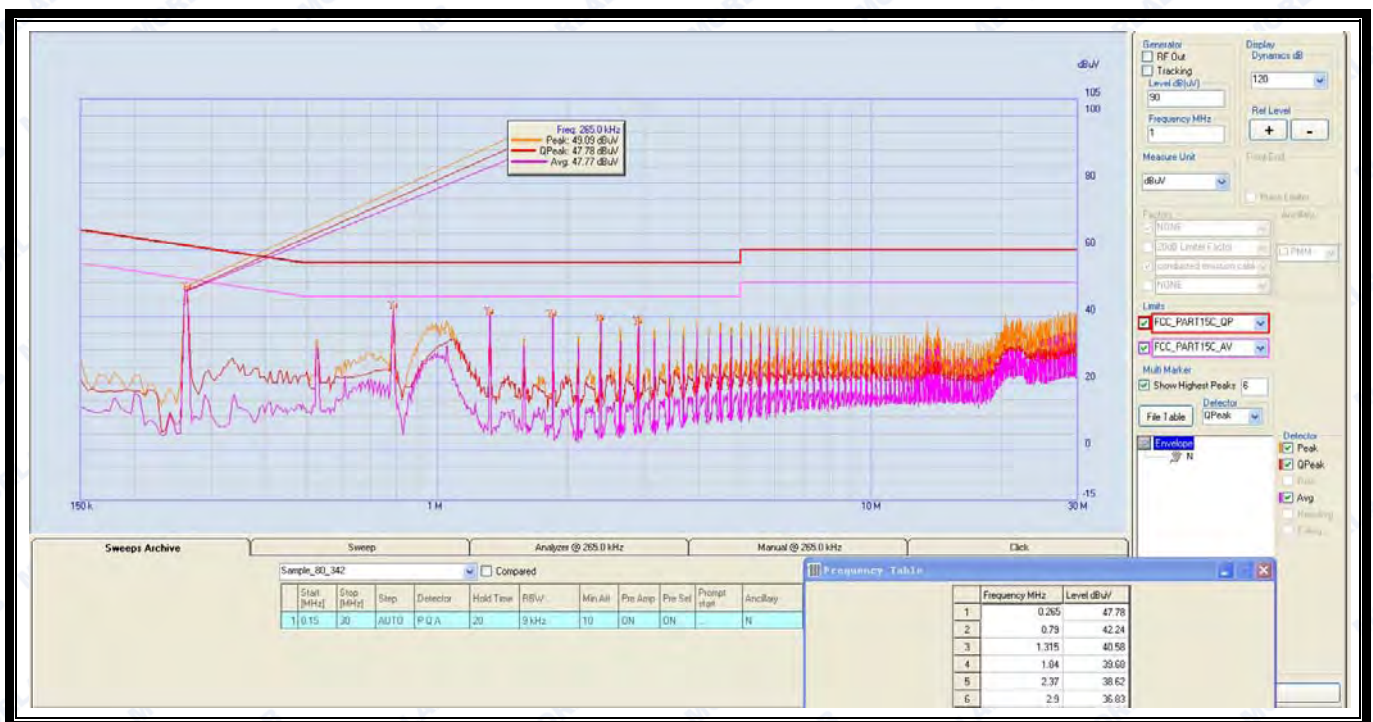

(Plot A: L Phase)

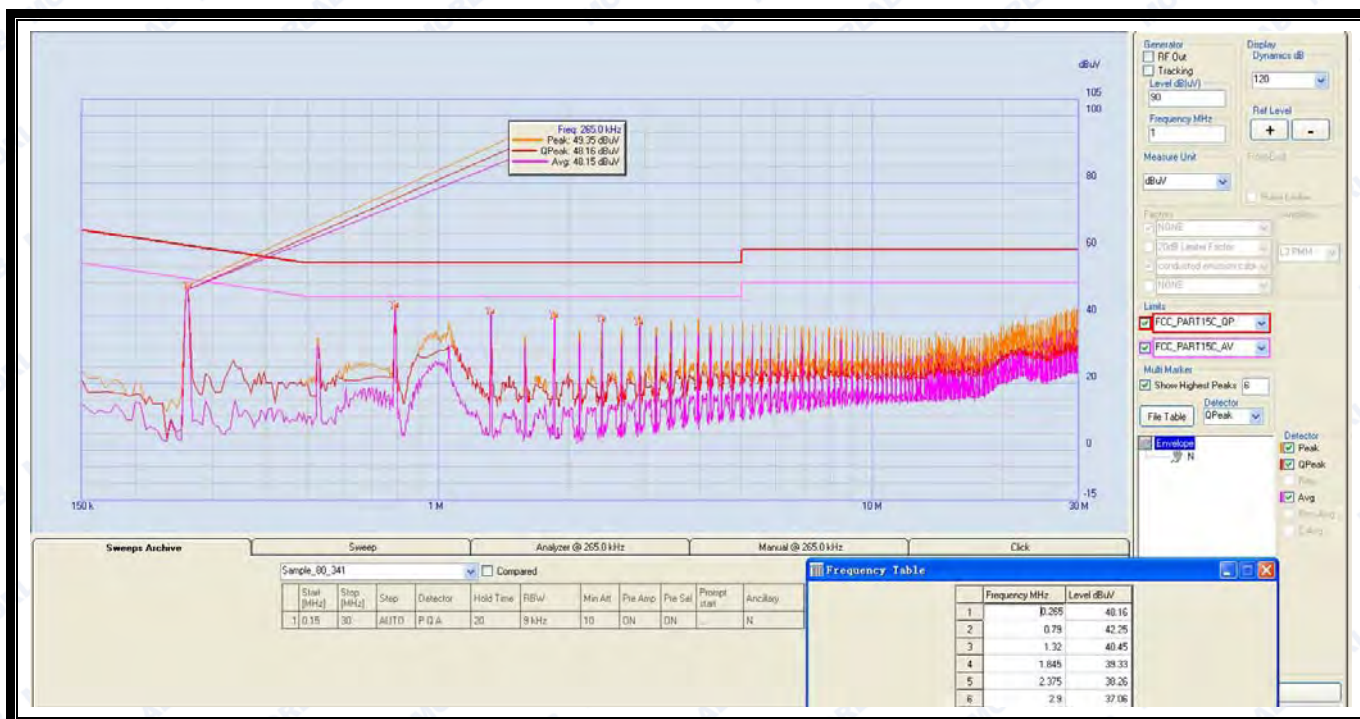

(Plot B: N Phase)

2.8 Radiated Emission

2.8.1 Requirement

According to FCC section 15.247(d), radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ($\mu\text{V}/\text{m}$)	Measurement Distance (m)
0.009 - 0.490	$2400/\text{F}(\text{kHz})$	300
0.490 - 1.705	$24000/\text{F}(\text{kHz})$	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

Note:

For Above 1000MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.


For above 1000MHz, limit field strength of harmonics: 54dBuV/m@3m (AV) and 74dBuV/m@3m (PK)

In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), also should comply with the radiated emission limits specified in Section 15.209(a)(above table)


2.8.2 Test Description

A. Test Setup:


- 1) For radiated emissions from 9kHz to 30MHz

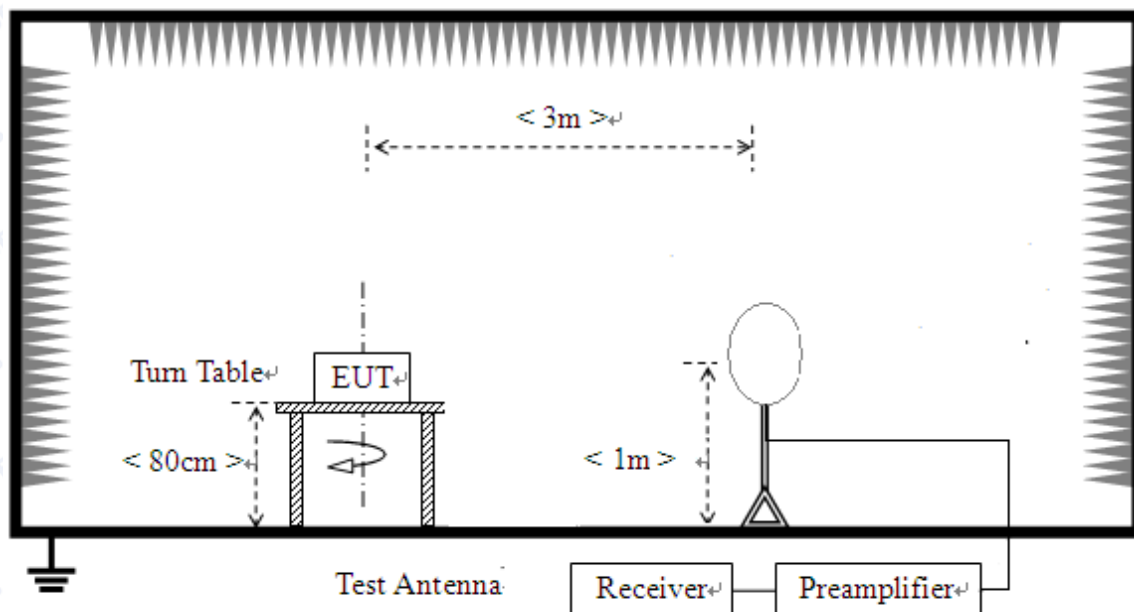

- 2) For radiated emissions from 30MHz to 1GHz

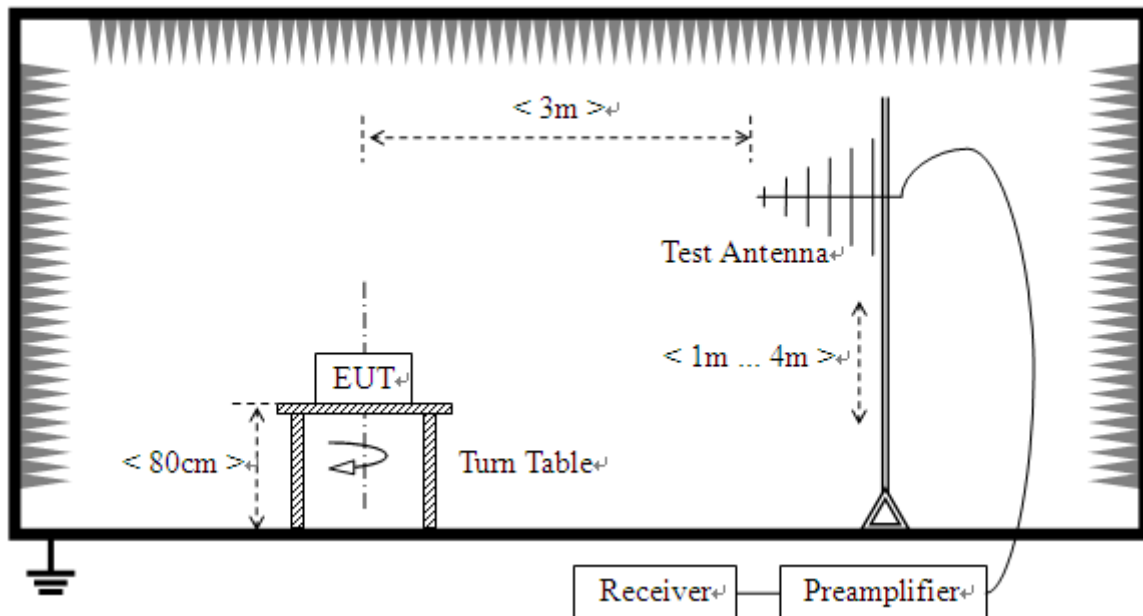

3) For radiated emissions above 1GHz

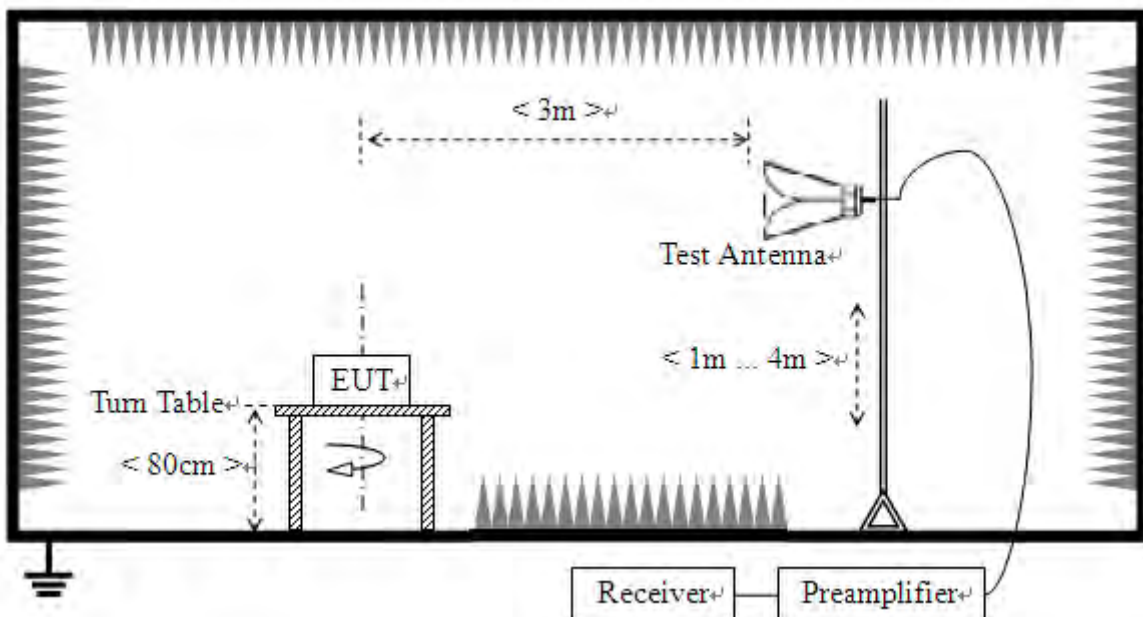

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4dB according to the standards: ANSI C63.4 (2009). The EUT was set-up on insulator 80cm above the Ground Plane. The set-up and test methods were according to ANSI C63.4.

The EUT is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of



the site as factors are calculated to correct the reading

For the Test Antenna:

(a) In the frequency range of 9kHz to 30MHz, magnetic field is measured with Loop Test Antenna. The Test Antenna is positioned with its plane vertical at 1m distance from the EUT. The center of the Loop Test Antenna is 1m above the ground. During the measurement the Loop Test Antenna rotates about its vertical axis for maximum response at each azimuth about the EUT.

(b) In the frequency range above 30MHz, Bi-Log Test Antenna (30MHz to 1GHz) and Horn Test Antenna (above 1GHz) are used. Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength. The emission levels at both horizontal and vertical polarizations should be tested.

B. Equipments List:

Please reference ANNEX A(1.4).

2.8.3 Test Result

According to ANSI C63.4 selection 4.2.2, because of peak detection will yield amplitudes equal to or greater than amplitudes measured with the quasi-peak (or average) detector, the measurement data from a spectrum analyzer peak detector will represent the worst-case results, if the peak measured value complies with the quasi-peak limit, it is unnecessary to perform an quasi-peak measurement.

The measurement results are obtained as below:

$$E \text{ [dB}\mu\text{V/m]} = U_R + A_T + A_{\text{Factor}} \text{ [dB]}; A_T = L_{\text{Cable loss}} \text{ [dB]} - G_{\text{preamp}} \text{ [dB]}$$

A_T : Total correction Factor except Antenna

U_R : Receiver Reading

G_{preamp} : Preamplifier Gain

A_{Factor} : Antenna Factor at 3m

During the test, the total correction Factor A_T and A_{Factor} were built in test software.

Note: All radiated emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

The low frequency, which started from 9KHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.

2.8.3.1 802.11b Test mode

A. Test Plots for the Whole Measurement Frequency Range:



ANT 1:

Plots for Channel = 1



Fre. (MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
49.400	17.93	N.A	N.A	N.A	40.00	N.A	Horizontal	PASS
125.060	16.53	N.A	N.A	N.A	43.50	N.A	Horizontal	PASS
231.760	20.98	N.A	N.A	N.A	46.00	N.A	Horizontal	PASS
662.440	21.86	N.A	N.A	N.A	46.00	N.A	Horizontal	PASS
2309.964	43.56	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS
8013.639	48.17	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS

(Antenna Horizontal, 30MHz to 25GHz)




Fre. (MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
31.940	35.13	N.A	N.A	N.A	40.00	N.A	Vertical	PASS
76.560	16.28	N.A	N.A	N.A	40.00	N.A	Vertical	PASS
163.860	18.14	N.A	N.A	N.A	43.50	N.A	Vertical	PASS
403.450	18.91	N.A	N.A	N.A	46.00	N.A	Vertical	PASS
2616.294	43.11	N.A	N.A	74.0	N.A	54.0	Vertical	PASS
14400.837	48.77	N.A	N.A	74.0	N.A	54.0	Vertical	PASS

(Antenna Vertical, 30MHz to 25GHz)



Plot for Channel = 6

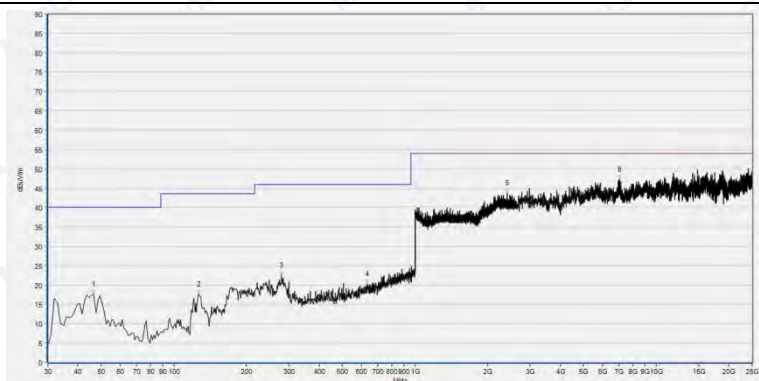

Fre.(MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
46.490	17.57	N.A	N.A	N.A	40.00	N.A	Horizontal	PASS
127.000	17.53	N.A	N.A	N.A	43.50	N.A	Horizontal	PASS
279.290	22.45	N.A	N.A	N.A	46.00	N.A	Horizontal	PASS
631.400	20.20	N.A	N.A	N.A	46.00	N.A	Horizontal	PASS
2411.124	43.72	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS
7036.007	47.32	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS

(Antenna Horizontal, 30MHz to 25GHz)




Fre.(MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
44.550	19.80	N.A	N.A	N.A	40.00	N.A	Vertical	PASS
151.250	18.54	N.A	N.A	N.A	43.50	N.A	Vertical	PASS
536.340	20.73	N.A	N.A	N.A	46.00	N.A	Vertical	PASS
3390.253	45.52	N.A	N.A	74.0	N.A	54.0	Vertical	PASS
10319.222	47.68	N.A	N.A	74.0	N.A	54.0	Vertical	PASS
16046.518	49.08	N.A	N.A	74.0	N.A	54.0	Vertical	PASS

(Antenna Vertical, 30MHz to 25GHz)



Plot for Channel = 11

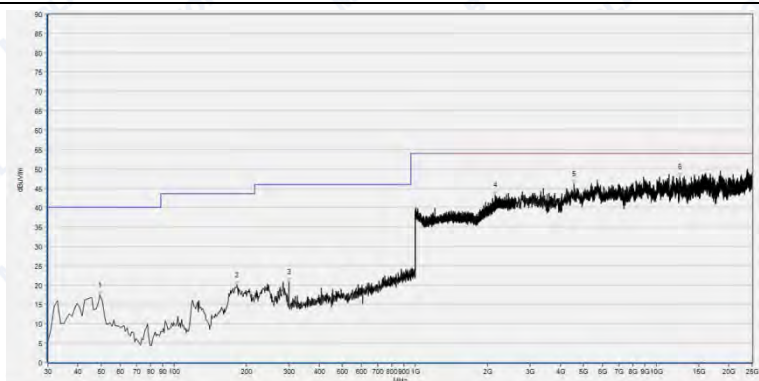

Fre.(MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
49.400	17.36	N.A	N.A	N.A	40.00	N.A	Horizontal	PASS
182.290	19.99	N.A	N.A	N.A	43.50	N.A	Horizontal	PASS
299.660	20.72	N.A	N.A	N.A	46.00	N.A	Horizontal	PASS
2149.260	43.19	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS
4567.485	46.15	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS
12535.188	47.97	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS

(Antenna Horizontal, 30MHz to 25GHz)




Fre.(MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
42.610	20.47	N.A	N.A	N.A	40.00	N.A	Vertical	PASS
168.710	19.29	N.A	N.A	N.A	43.50	N.A	Vertical	PASS
525.670	22.48	N.A	N.A	N.A	46.00	N.A	Vertical	PASS
2807.747	44.94	N.A	N.A	74.0	N.A	54.0	Vertical	PASS
6958.611	46.22	N.A	N.A	74.0	N.A	54.0	Vertical	PASS
14865.212	49.07	N.A	N.A	74.0	N.A	54.0	Vertical	PASS

(Antenna Vertical, 30MHz to 25GHz)




ANT 2:

Plots for Channel = 1

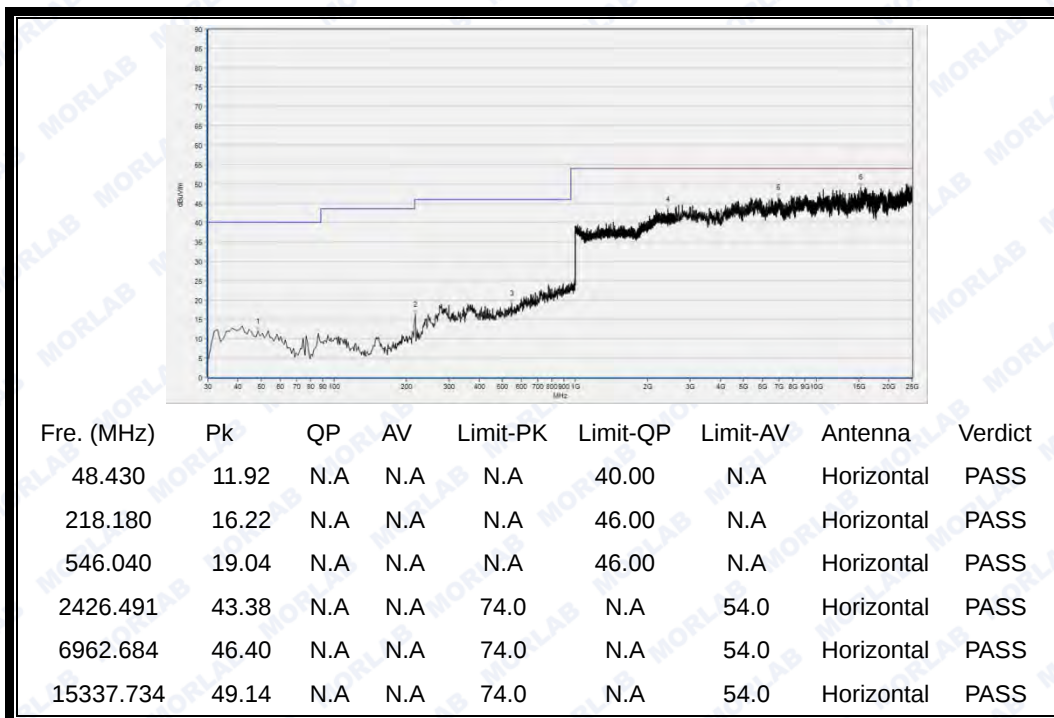

(Antenna Horizontal, 30MHz to 25GHz)

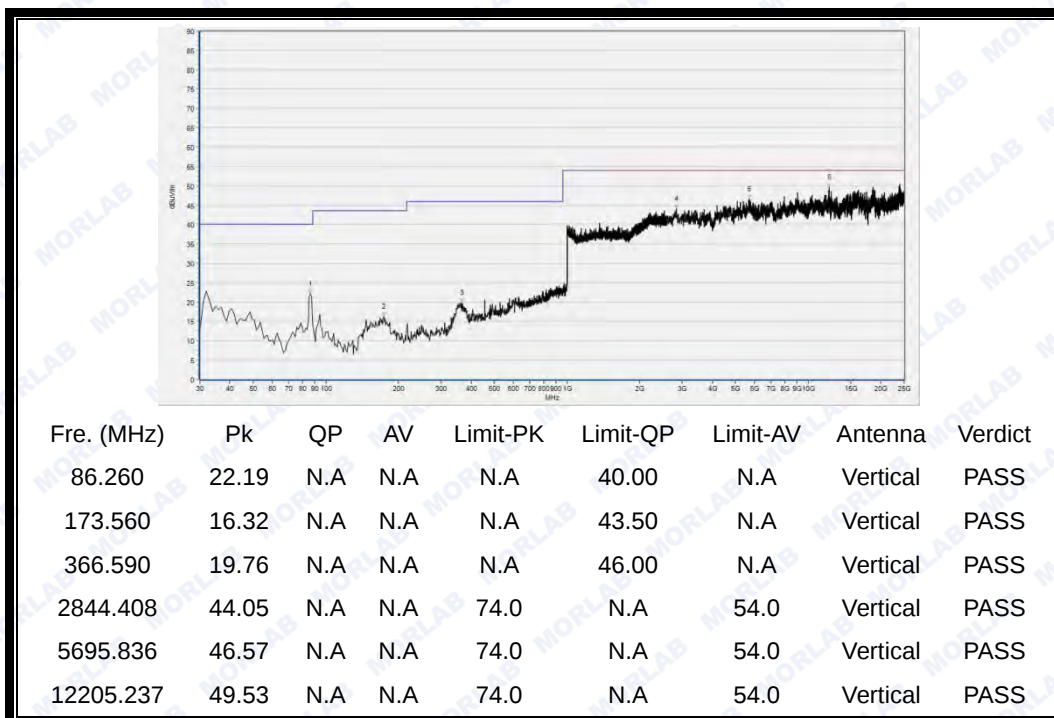

(Antenna Vertical, 30MHz to 25GHz)



REPORT No.: SZ15080082W03

Plot for Channel = 6



Fre.(MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
86.260	12.82	N.A	N.A	N.A	40.00	N.A	Horizontal	PASS
248.250	19.19	N.A	N.A	N.A	46.00	N.A	Horizontal	PASS
722.580	28.26	N.A	N.A	N.A	46.00	N.A	Horizontal	PASS
2836.261	43.68	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS
5675.468	46.48	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS
17162.648	49.39	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS

(Antenna Horizontal, 30MHz to 25GHz)



Fre.(MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
85.290	21.96	N.A	N.A	N.A	40.00	N.A	Vertical	PASS
154.160	16.17	N.A	N.A	N.A	43.50	N.A	Vertical	PASS
367.560	21.44	N.A	N.A	N.A	46.00	N.A	Vertical	PASS
2608.147	43.94	N.A	N.A	74.0	N.A	54.0	Vertical	PASS
5638.807	45.99	N.A	N.A	74.0	N.A	54.0	Vertical	PASS
9011.638	48.52	N.A	N.A	74.0	N.A	54.0	Vertical	PASS

(Antenna Vertical, 30MHz to 25GHz)



REPORT No.: SZ15080082W03

Plot for Channel = 11



Fre.(MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
86.260	12.42	N.A	N.A	N.A	40.00	N.A	Horizontal	PASS
239.520	18.70	N.A	N.A	N.A	46.00	N.A	Horizontal	PASS
719.670	30.93	N.A	N.A	N.A	46.00	N.A	Horizontal	PASS
3003.273	45.56	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS
8013.639	46.85	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS
12922.168	48.96	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS

(Antenna Horizontal, 30MHz to 25GHz)



Fre.(MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
86.260	22.08	N.A	N.A	N.A	40.00	N.A	Vertical	PASS
151.250	16.98	N.A	N.A	N.A	43.50	N.A	Vertical	PASS
480.080	25.49	N.A	N.A	N.A	46.00	N.A	Vertical	PASS
2815.894	43.77	N.A	N.A	74.0	N.A	54.0	Vertical	PASS
5602.146	47.67	N.A	N.A	74.0	N.A	54.0	Vertical	PASS
12152.282	49.03	N.A	N.A	74.0	N.A	54.0	Vertical	PASS

(Antenna Vertical, 30MHz to 25GHz)



REPORT No.: SZ15080082W03


2.8.3.2 802.11g Test mode

A. Test Plots for the Whole Measurement Frequency Range:

ANT 1: Plots for Channel = 1

Fre.(MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
43.580	18.52	N.A	N.A	N.A	40.00	N.A	Horizontal	PASS
178.410	19.96	N.A	N.A	N.A	43.50	N.A	Horizontal	PASS
299.660	19.28	N.A	N.A	N.A	46.00	N.A	Horizontal	PASS
2227.371	43.45	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS
5752.864	46.73	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS
12164.503	48.83	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS

(Antenna Horizontal, 30MHz to 25GHz)

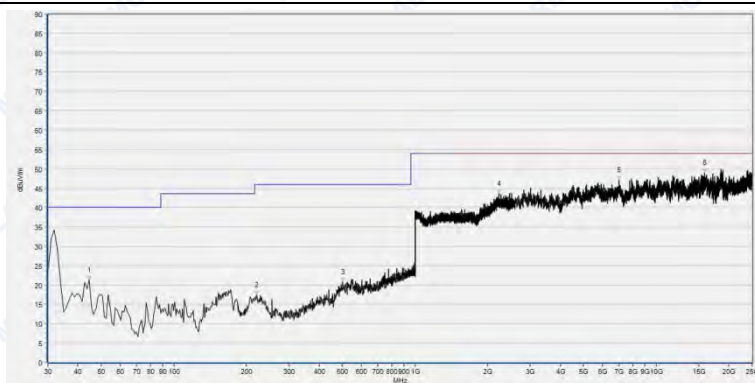

Fre.(MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
44.550	21.33	N.A	N.A	N.A	40.00	N.A	Vertical	PASS
220.120	17.51	N.A	N.A	N.A	46.00	N.A	Vertical	PASS
501.420	20.75	N.A	N.A	N.A	46.00	N.A	Vertical	PASS
2222.249	43.51	N.A	N.A	74.0	N.A	54.0	Vertical	PASS
7023.786	47.05	N.A	N.A	74.0	N.A	54.0	Vertical	PASS
15859.138	48.94	N.A	N.A	74.0	N.A	54.0	Vertical	PASS

(Antenna Vertical, 30MHz to 25GHz)



REPORT No.: SZ15080082W03

Plot for Channel = 6



Fre.(MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
43.580	17.51	N.A	N.A	N.A	40.00	N.A	Horizontal	PASS
120.210	15.98	N.A	N.A	N.A	43.50	N.A	Horizontal	PASS
242.430	21.10	N.A	N.A	N.A	46.00	N.A	Horizontal	PASS
455.830	19.95	N.A	N.A	N.A	46.00	N.A	Horizontal	PASS
2201.120	44.23	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS
10335.516	48.60	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS

(Antenna Horizontal, 30MHz to 25GHz)



Fre.(MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
43.580	19.76	N.A	N.A	N.A	40.00	N.A	Vertical	PASS
169.680	20.25	N.A	N.A	N.A	43.50	N.A	Vertical	PASS
495.600	23.71	N.A	N.A	N.A	46.00	N.A	Vertical	PASS
2153.741	43.12	N.A	N.A	74.0	N.A	54.0	Vertical	PASS
5691.762	47.10	N.A	N.A	74.0	N.A	54.0	Vertical	PASS
16327.587	48.79	N.A	N.A	74.0	N.A	54.0	Vertical	PASS

(Antenna Vertical, 30MHz to 25GHz)



REPORT No.: SZ15080082W03

Plot for Channel = 11



Fre.(MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
49.400	18.17	N.A	N.A	N.A	40.00	N.A	Horizontal	PASS
126.030	17.91	N.A	N.A	N.A	43.50	N.A	Horizontal	PASS
239.520	21.16	N.A	N.A	N.A	46.00	N.A	Horizontal	PASS
2406.002	44.65	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS
6498.309	47.13	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS
12152.282	49.09	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS

(Antenna Horizontal, 30MHz to 25GHz)



Fre.(MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
44.550	21.10	N.A	N.A	N.A	40.00	N.A	Vertical	PASS
168.710	20.92	N.A	N.A	N.A	43.50	N.A	Vertical	PASS
471.350	23.25	N.A	N.A	N.A	46.00	N.A	Vertical	PASS
2303.561	43.67	N.A	N.A	74.0	N.A	54.0	Vertical	PASS
5769.158	46.72	N.A	N.A	74.0	N.A	54.0	Vertical	PASS
11732.715	48.31	N.A	N.A	74.0	N.A	54.0	Vertical	PASS

(Antenna Vertical, 30MHz to 25GHz)



REPORT No.: SZ15080082W03

ANT 2:

Plots for Channel = 1



Fre.(MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
86.260	12.05	N.A	N.A	N.A	40.00	N.A	Horizontal	PASS
299.660	20.15	N.A	N.A	N.A	46.00	N.A	Horizontal	PASS
455.830	20.31	N.A	N.A	N.A	46.00	N.A	Horizontal	PASS
2583.994	43.73	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS
5879.142	46.17	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS
11749.009	47.85	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS

(Antenna Horizontal, 30MHz to 25GHz)




Fre.(MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
86.260	22.09	N.A	N.A	N.A	40.00	N.A	Vertical	PASS
161.920	16.68	N.A	N.A	N.A	43.50	N.A	Vertical	PASS
357.860	20.11	N.A	N.A	N.A	46.00	N.A	Vertical	PASS
2991.053	45.97	N.A	N.A	74.0	N.A	54.0	Vertical	PASS
5740.644	46.68	N.A	N.A	74.0	N.A	54.0	Vertical	PASS
11749.009	48.90	N.A	N.A	74.0	N.A	54.0	Vertical	PASS

(Antenna Vertical, 30MHz to 25GHz)




REPORT No.: SZ15080082W03

Plot for Channel = 6

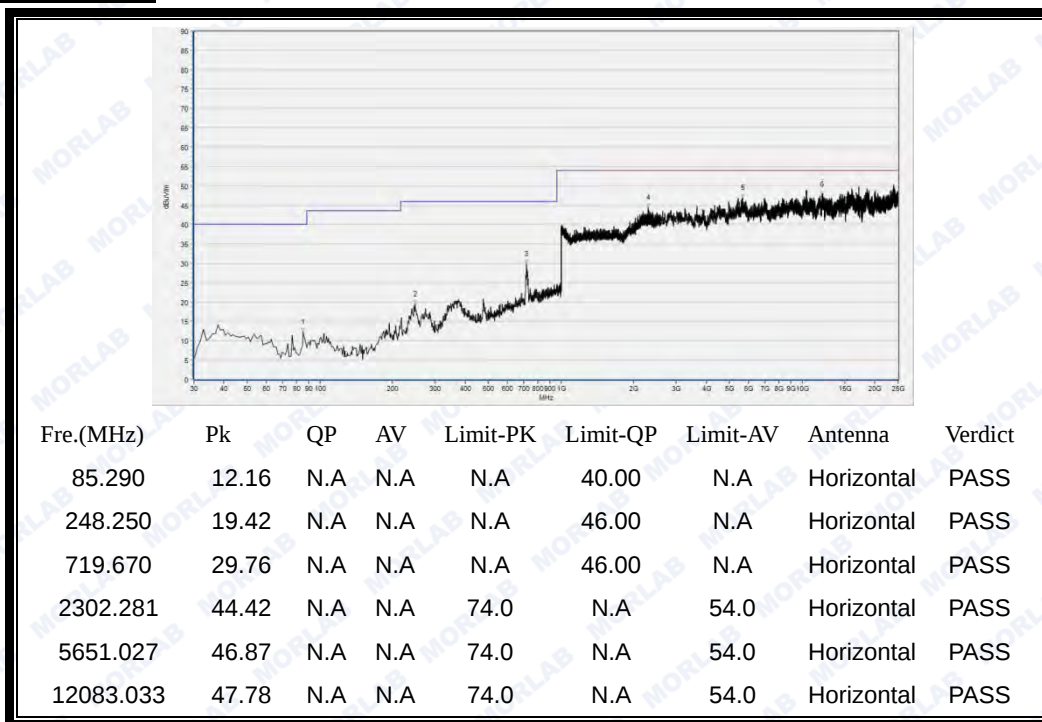

(Antenna Horizontal, 30MHz to 25GHz)

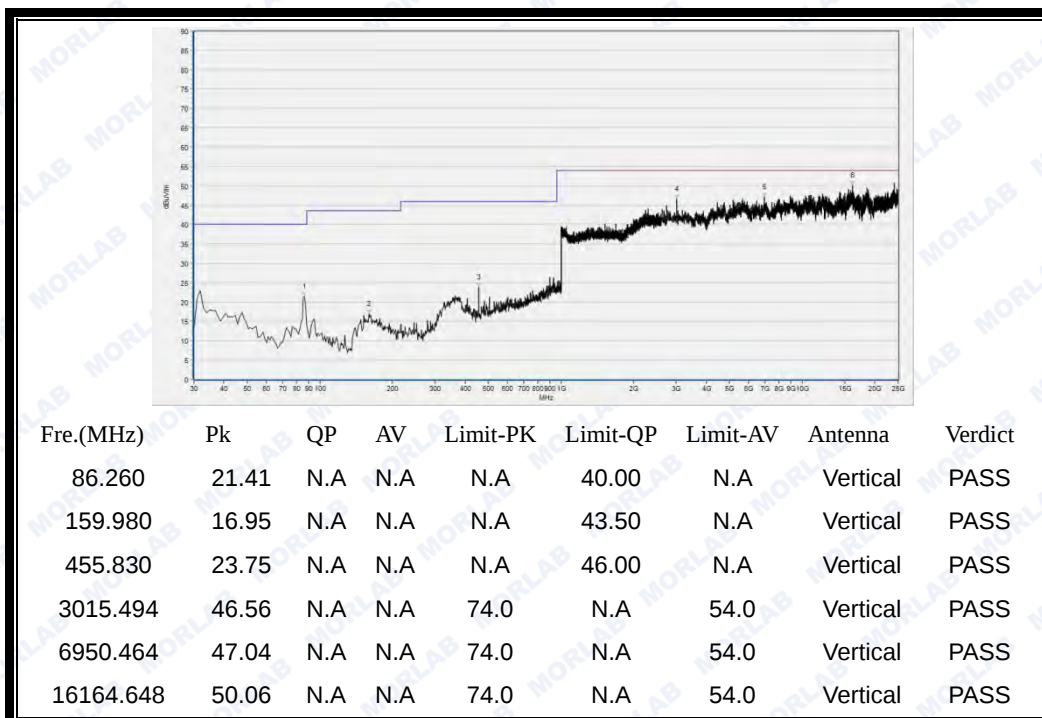


(Antenna Vertical, 30MHz to 25GHz)



REPORT No.: SZ15080082W03

Plot for Channel = 11

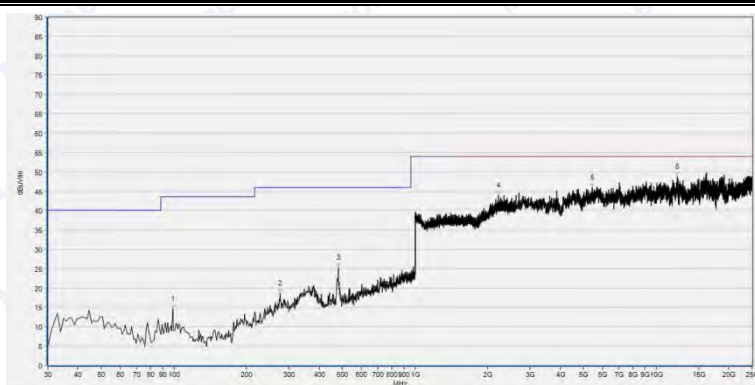


Fre.(MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
98.870	14.64	N.A	N.A	N.A	43.50	N.A	Horizontal	PASS
276.380	18.54	N.A	N.A	N.A	46.00	N.A	Horizontal	PASS
480.080	25.34	N.A	N.A	N.A	46.00	N.A	Horizontal	PASS
2219.688	43.83	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS
5418.840	45.87	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS
12209.311	48.75	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS

(Antenna Horizontal, 30MHz to 25GHz)



Fre.(MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
86.260	20.11	N.A	N.A	N.A	40.00	N.A	Vertical	PASS
177.440	18.05	N.A	N.A	N.A	43.50	N.A	Vertical	PASS
480.080	26.12	N.A	N.A	N.A	46.00	N.A	Vertical	PASS
2354.142	44.05	N.A	N.A	74.0	N.A	54.0	Vertical	PASS
7023.786	46.82	N.A	N.A	74.0	N.A	54.0	Vertical	PASS
14408.983	48.16	N.A	N.A	74.0	N.A	54.0	Vertical	PASS

(Antenna Vertical, 30MHz to 25GHz)

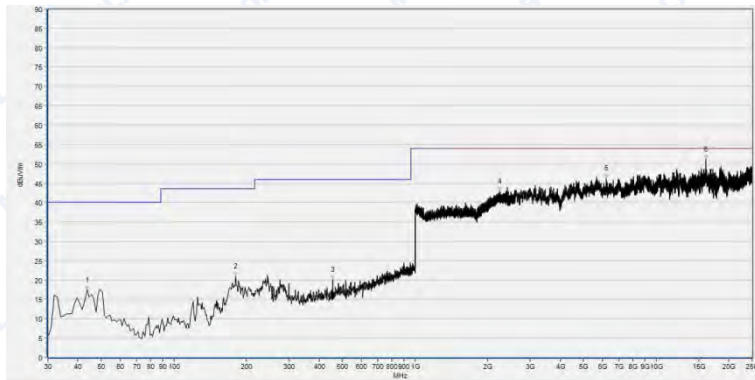**2.8.3.3 802.11n-20MHz Test mode****A. Test Plots for the Whole Measurement Frequency Range:**ANT 1: Plots for Channel = 1

Fre.(MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
43.580	17.42	N.A	N.A	N.A	40.00	N.A	Horizontal	PASS
180.350	20.96	N.A	N.A	N.A	43.50	N.A	Horizontal	PASS
455.830	20.04	N.A	N.A	N.A	46.00	N.A	Horizontal	PASS
2247.859	42.92	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS
6196.872	46.21	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS
16026.150	51.06	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS

(Antenna Horizontal, 30MHz to 25GHz)




Fre.(MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
44.550	20.97	N.A	N.A	N.A	40.00	N.A	Vertical	PASS
168.710	21.38	N.A	N.A	N.A	43.50	N.A	Vertical	PASS
233.700	18.12	N.A	N.A	N.A	46.00	N.A	Vertical	PASS
494.630	24.17	N.A	N.A	N.A	46.00	N.A	Vertical	PASS
2292.677	43.11	N.A	N.A	74.0	N.A	54.0	Vertical	PASS
8429.133	47.18	N.A	N.A	74.0	N.A	54.0	Vertical	PASS

(Antenna Vertical, 30MHz to 25GHz)




REPORT No.: SZ15080082W03

Plot for Channel = 6

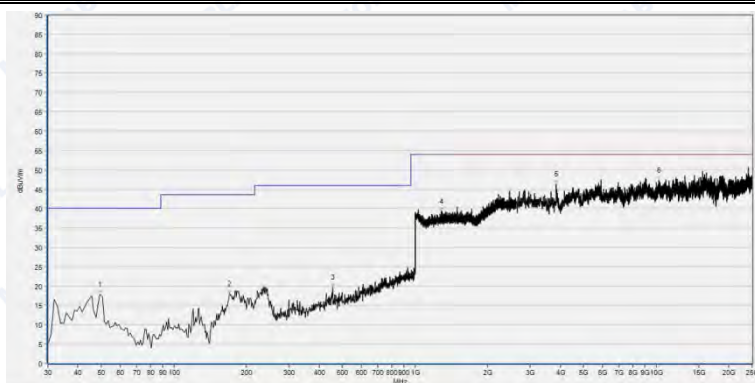

Fre.(MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
49.400	17.78	N.A	N.A	N.A	40.00	N.A	Horizontal	PASS
169.680	17.97	N.A	N.A	N.A	43.50	N.A	Horizontal	PASS
455.830	19.57	N.A	N.A	N.A	46.00	N.A	Horizontal	PASS
1284.914	39.29	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS
3850.555	46.19	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS
10233.679	47.20	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS

(Antenna Horizontal, 30MHz to 25GHz)

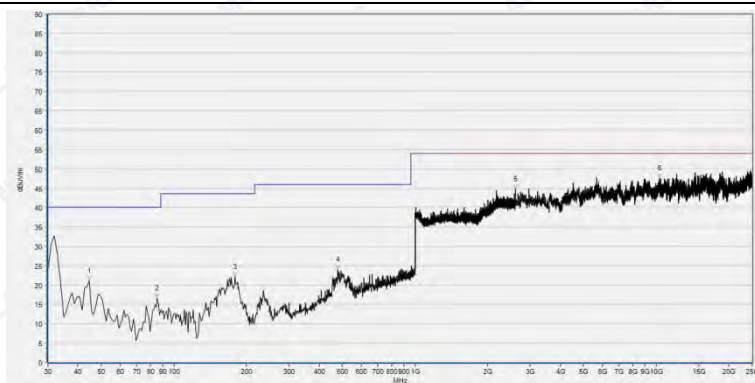

Fre.(MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
44.550	21.05	N.A	N.A	N.A	40.00	N.A	Vertical	PASS
85.290	16.55	N.A	N.A	N.A	40.00	N.A	Vertical	PASS
179.380	22.04	N.A	N.A	N.A	43.50	N.A	Vertical	PASS
477.170	23.98	N.A	N.A	N.A	46.00	N.A	Vertical	PASS
2612.220	44.70	N.A	N.A	74.0	N.A	54.0	Vertical	PASS
10294.781	47.59	N.A	N.A	74.0	N.A	54.0	Vertical	PASS

(Antenna Vertical, 30MHz to 25GHz)



REPORT No.: SZ15080082W03

Plot for Channel = 11



Fre.(MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
50.370	17.19	N.A	N.A	N.A	40.00	N.A	Horizontal	PASS
181.320	19.36	N.A	N.A	N.A	43.50	N.A	Horizontal	PASS
754.590	22.38	N.A	N.A	N.A	46.00	N.A	Horizontal	PASS
3031.788	43.94	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS
5687.689	47.62	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS
11744.935	49.72	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS

(Antenna Horizontal, 30MHz to 25GHz)



Fre.(MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
43.580	20.58	N.A	N.A	N.A	40.00	N.A	Vertical	PASS
168.710	22.11	N.A	N.A	N.A	43.50	N.A	Vertical	PASS
476.200	25.75	N.A	N.A	N.A	46.00	N.A	Vertical	PASS
2231.853	42.87	N.A	N.A	74.0	N.A	54.0	Vertical	PASS
5761.011	47.11	N.A	N.A	74.0	N.A	54.0	Vertical	PASS
15741.007	49.68	N.A	N.A	74.0	N.A	54.0	Vertical	PASS

(Antenna Vertical, 30MHz to 25GHz)



REPORT No.: SZ15080082W03

ANT 2:

Plots for Channel = 1



Fre.(MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
98.870	11.53	N.A	N.A	N.A	43.50	N.A	Horizontal	PASS
282.200	19.09	N.A	N.A	N.A	46.00	N.A	Horizontal	PASS
626.550	23.52	N.A	N.A	N.A	46.00	N.A	Horizontal	PASS
2612.220	43.33	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS
5748.791	48.02	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS
12201.164	48.97	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS

(Antenna Horizontal, 30MHz to 25GHz)



Fre.(MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
86.260	22.53	N.A	N.A	N.A	40.00	N.A	Vertical	PASS
164.830	16.51	N.A	N.A	N.A	43.50	N.A	Vertical	PASS
375.320	22.16	N.A	N.A	N.A	46.00	N.A	Vertical	PASS
2450.820	43.84	N.A	N.A	74.0	N.A	54.0	Vertical	PASS
6909.729	47.62	N.A	N.A	74.0	N.A	54.0	Vertical	PASS
14885.579	49.05	N.A	N.A	74.0	N.A	54.0	Vertical	PASS

(Antenna Vertical, 30MHz to 25GHz)



Plot for Channel = 6



Fre.(MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
86.260	12.20	N.A	N.A	N.A	40.00	N.A	Horizontal	PASS
247.280	20.10	N.A	N.A	N.A	46.00	N.A	Horizontal	PASS
722.580	29.48	N.A	N.A	N.A	46.00	N.A	Horizontal	PASS
2218.407	43.17	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS
4795.599	45.68	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS
8970.904	48.04	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS

(Antenna Horizontal, 30MHz to 25GHz)



Fre.(MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
85.290	22.03	N.A	N.A	N.A	40.00	N.A	Vertical	PASS
179.380	16.90	N.A	N.A	N.A	43.50	N.A	Vertical	PASS
367.560	23.91	N.A	N.A	N.A	46.00	N.A	Vertical	PASS
2604.073	45.69	N.A	N.A	74.0	N.A	54.0	Vertical	PASS
5756.938	46.69	N.A	N.A	74.0	N.A	54.0	Vertical	PASS
12160.429	49.21	N.A	N.A	74.0	N.A	54.0	Vertical	PASS

(Antenna Vertical, 30MHz to 25GHz)



REPORT No.: SZ15080082W03

Plot for Channel = 11




Fre.(MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
86.260	12.62	N.A	N.A	N.A	40.00	N.A	Horizontal	PASS
275.410	19.67	N.A	N.A	N.A	46.00	N.A	Horizontal	PASS
475.230	22.34	N.A	N.A	N.A	46.00	N.A	Horizontal	PASS
2408.563	43.97	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS
4241.608	45.42	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS
15447.718	48.47	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS

(Antenna Horizontal, 30MHz to 25GHz)



Fre.(MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
85.290	20.56	N.A	N.A	N.A	40.00	N.A	Vertical	PASS
178.410	18.40	N.A	N.A	N.A	43.50	N.A	Vertical	PASS
533.430	26.89	N.A	N.A	N.A	46.00	N.A	Vertical	PASS
3084.743	44.43	N.A	N.A	74.0	N.A	54.0	Vertical	PASS
5691.762	47.43	N.A	N.A	74.0	N.A	54.0	Vertical	PASS
12180.797	49.21	N.A	N.A	74.0	N.A	54.0	Vertical	PASS

(Antenna Vertical, 30MHz to 25GHz)

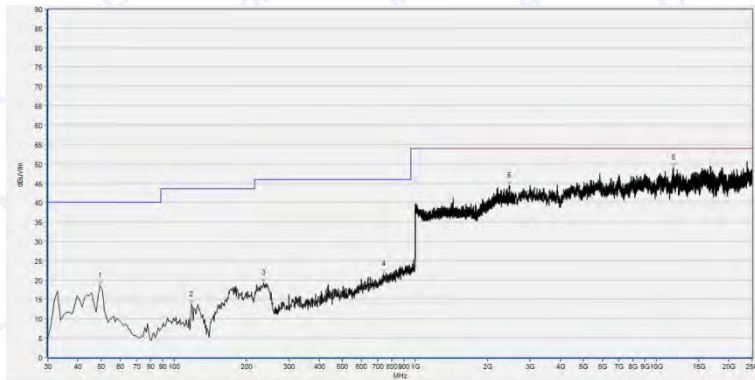**2.8.3.4 802.11n-40MHz Test mode****A. Test Plots for the Whole Measurement Frequency Range:**Plots for Channel = 3

Fre.(MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
49.400	18.58	N.A	N.A	N.A	40.00	N.A	Horizontal	PASS
118.270	13.82	N.A	N.A	N.A	43.50	N.A	Horizontal	PASS
235.640	19.23	N.A	N.A	N.A	46.00	N.A	Horizontal	PASS
740.040	21.60	N.A	N.A	N.A	46.00	N.A	Horizontal	PASS
2461.705	44.38	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS
11773.450	49.15	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS

(Plot A.2: Antenna Horizontal, 30MHz to 25GHz)




Fre.(MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
44.550	20.56	N.A	N.A	N.A	40.00	N.A	Vertical	PASS
178.410	21.59	N.A	N.A	N.A	43.50	N.A	Vertical	PASS
466.500	23.11	N.A	N.A	N.A	46.00	N.A	Vertical	PASS
2576.311	43.73	N.A	N.A	74.0	N.A	54.0	Vertical	PASS
6958.611	46.94	N.A	N.A	74.0	N.A	54.0	Vertical	PASS
14274.559	48.64	N.A	N.A	74.0	N.A	54.0	Vertical	PASS

(Plot A.3: Antenna Vertical, 30MHz to 25GHz)



Plots for Channel = 6

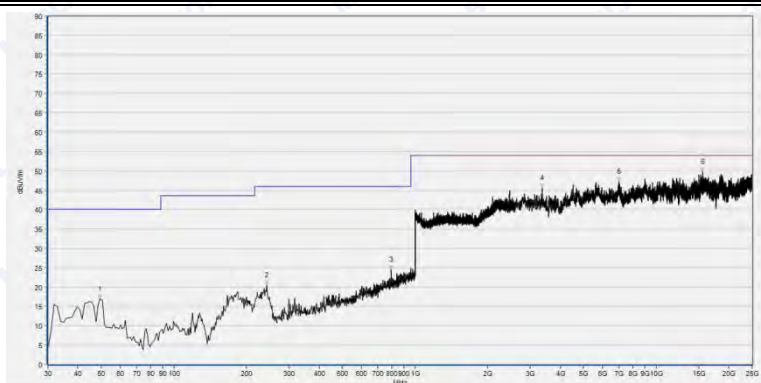

Fre.(MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
49.400	17.00	N.A	N.A	N.A	40.00	N.A	Horizontal	PASS
242.430	20.49	N.A	N.A	N.A	46.00	N.A	Horizontal	PASS
797.270	24.40	N.A	N.A	N.A	46.00	N.A	Horizontal	PASS
3373.959	45.54	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS
7007.492	47.33	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS
15598.436	49.76	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS

(Plot B.2: Antenna Horizontal, 30MHz to 25GHz)



Fre.(MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
44.550	20.44	N.A	N.A	N.A	40.00	N.A	Vertical	PASS
169.680	22.45	N.A	N.A	N.A	43.50	N.A	Vertical	PASS
500.450	23.74	N.A	N.A	N.A	46.00	N.A	Vertical	PASS
2202.401	43.21	N.A	N.A	74.0	N.A	54.0	Vertical	PASS
5712.129	46.58	N.A	N.A	74.0	N.A	54.0	Vertical	PASS
15313.293	48.98	N.A	N.A	74.0	N.A	54.0	Vertical	PASS

(Plot B.3: Antenna Vertical, 30MHz to 25GHz)




REPORT No.: SZ15080082W03

Plots for Channel = 9



Fre.(MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
49.400	17.39	N.A	N.A	N.A	40.00	N.A	Horizontal	PASS
183.260	19.52	N.A	N.A	N.A	43.50	N.A	Horizontal	PASS
435.460	18.02	N.A	N.A	N.A	46.00	N.A	Horizontal	PASS
2462.345	43.95	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS
6473.868	46.50	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS
15586.216	49.28	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS

(Plot C.2: Antenna Horizontal, 30MHz to 25GHz)

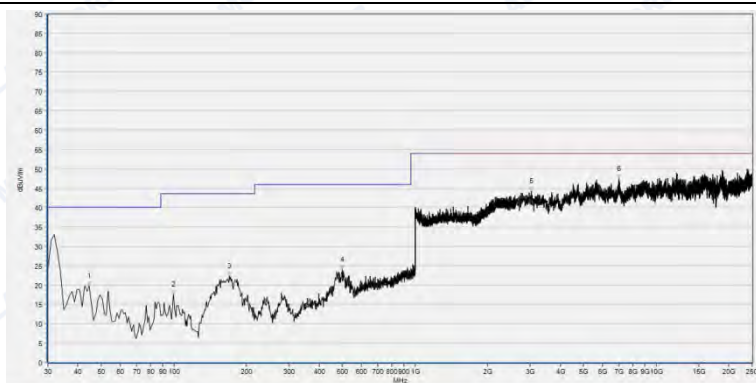

Fre.(MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
44.550	19.82	N.A	N.A	N.A	40.00	N.A	Vertical	PASS
99.840	17.52	N.A	N.A	N.A	43.50	N.A	Vertical	PASS
169.680	22.31	N.A	N.A	N.A	43.50	N.A	Vertical	PASS
499.480	23.88	N.A	N.A	N.A	46.00	N.A	Vertical	PASS
3039.935	44.24	N.A	N.A	74.0	N.A	54.0	Vertical	PASS
7019.713	47.44	N.A	N.A	74.0	N.A	54.0	Vertical	PASS

(Plot C.3: Antenna Vertical, 30MHz to 25GHz)



2.9 RF exposure evaluation

2.9.1 Requirement

According to § 1.1307(b)(1), systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of Commission's guideline.

2.9.2 Result

Please refer to SAR report.



ANNEX A GENERAL INFORMATION

1.1 Identification of the Responsible Testing Laboratory

Company Name:	Shenzhen Morlab Communications Technology Co., Ltd.
Department:	Morlab Laboratory
Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China
Responsible Test Lab Manager:	Mr. Su Feng
Telephone:	+86 755 36698555
Facsimile:	+86 755 36698525

1.2 Identification of the Responsible Testing Location

Name:	Shenzhen Morlab Communications Technology Co., Ltd. Morlab Laboratory
Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China

1.3 Facilities and Accreditations

Shenzhen Morlab Communications Technology Co., Ltd. Morlab Laboratory is a testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L3572.

All measurement facilities used to collect the measurement data are located at FL.1, Building A, FeiYang Science Park, Block 67, BaoAn District, Shenzhen, 518101 P. R. China. The test site is constructed in conformance with the requirements of ANSI C63.10 2013, ANSI C63.4 2009 and CISPR Publication 22; the FCC registration number is 695796.



REPORT No.: SZ15080082W03

1.4 Test Equipments Utilized

1.4.1 Conducted Test Equipments

Conducted Test Equipment						
No.	Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Cal. Due
1	Spectrum Analyzer	MY45101810	E4407B	Agilent	2015.02.26	2016.02.25
2	Power Splitter	NW521	1506A	Weinschel	2015.02.26	2016.02.25
3	Attenuator 1	(n.a.)	10dB	Resnet	2015.02.26	2016.02.25
4	Attenuator 2	(n.a.)	3dB	Resnet	2015.02.26	2016.02.25
5	USB Wideband Power Sensor	MY52280010	U2021XA	Agilent	2015.02.26	2016.02.25
6	EXA Signal Analyzer	MY51440152	N9010A	Agilent	2015.02.26	2016.02.25
7	RF cable	CB01	RF01	Morlab	N/A	N/A
8	Coaxial cable	CB02	RF02	Morlab	N/A	N/A
9	SMA connector	CN01	RF03	HUBER-SUHNER	N/A	N/A

1.4.2 Conducted Emission Test Equipments

Conducted Emission Test Equipments						
No.	Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Cal. Due
1	Receiver	US44210471	E7405A	Agilent	2015.02.26	2016.02.25
2	LISN	812744	NSLK 8127	Schwarzbeck	2015.02.26	2016.02.25
3	Service Supplier	100448	CMU200	R&S	2015.02.26	2016.02.25
4	Pulse Limiter (20dB)	9391	VTSD 9561-D	Schwarzbeck	2015.02.26	2016.02.25
5	Coaxial cable(BNC)	CB01	EMC01	Morlab	N/A	N/A



REPORT No.: SZ15080082W03

1.4.3 Radiated Test Equipments

Radiated Test Equipments						
No.	Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Cal.Due Date
1	System Simulator	100448	CMU200	R&S	2015.02.26	2016.02.25
2	Receiver	US44210471	E7405A	Agilent	2015.02.26	2016.02.25
3	Test Antenna - Bi-Log	9163-274	9m*6m*6m	Albatross	2015.02.26	2016.02.25
4	Test Antenna - Horn	9120D-963	VULB 9163	Schwarzbeck	2015.02.26	2016.02.25
5	Test Antenna - Horn	71688	BBHA 9120D	Schwarzbeck	2015.02.26	2016.02.25
6	Test Antenna - Loop	1519-022	HL050S7	R&S	2015.02.26	2016.02.25
7	Reject Filter	(n.a.)	BRM50702	Micro-Tronics	2015.02.26	2016.02.25
8	Coaxial cable (N male)	CB02	EMC02	Morlab	N/A	N/A
9	Coaxial cable (N male)	CB03	EMC03	Morlab	N/A	N/A

1.4.4 Climate Chamber

Climate Chamber						
No.	Equipment Name	Serial No.	Type	Manufacturer	Cal.Date	Cal.Due Date
1	Climate Chamber	2004012	HL4003T	Yinhe	2015.02.26	2016.02.25

1.4.5 Vibration Table

Vibration Table						
No.	Equipment Name	Serial No.	Type	Manufacturer	Cal.Date	Cal.Due Date
1	Vibration Table	N/A	ACT2000-S015L	CMI-COM	2015.02.26	2016.02.25

1.4.6 Anechoic Chamber

Anechoic Chamber						
No.	Equipment Name	Serial No.	Type	Manufacturer	Cal.Date	Cal.Due Date
1	Anechoic Chamber	N/A	9m*6m*6m	Albatross	2015.02.26	2016.02.25

***** END OF REPORT *****