Table 14.2-6: SAR Values (WCDMA 850 MHz Band - Body)

Ambient Temperature: 23.0 °C Liquid Temperature: 22.5°C										
Frequency		Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.									
836.4	4182	Rear	Fig.6	23.38	24	0.308	**0.36**	0.412	**0.48**	0.05

Note1: The distance between the EUT and the phantom bottom is 10mm.

Table 14.2-7: SAR Values (WCDMA 1700 MHz Band - Head)

Ambient Temperature: 23.0 °C Liquid Temperature: 22.5°C											
Frequency		Side	Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.										
1752.6	1513	Left	Touch	Fig.7	23.57	24	0.335	**0.37**	0.531	**0.59**	0.19

Table 14.2-8: SAR Values (WCDMA 1700 MHz Band - Body)

Ambient Temperature: 23.0 °C Liquid Temperature: 22.5°C										
Frequency		Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.									
1712.4	1312	Rear	Fig.8	23.39	24	0.654	**0.75**	0.993	**1.14**	-0.01

Note1: The distance between the EUT and the phantom bottom is 10mm.

Table 14.2-9: SAR Values (WCDMA 1900 MHz Band - Head)

Ambient Temperature: 23.0 °C Liquid Temperature: 22.5°C											
Frequency		Side	Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.										
1852.4	9262	Left	Touch	Fig.9	23.68	24	0.427	**0.46**	0.708	**0.76**	0.10

Table 14.2-10: SAR Values (WCDMA 1900 MHz Band - Body) – AP ON

Ambient Temperature: 23.0 °C Liquid Temperature: 22.5°C										
Frequency		Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.									
1907.6	9538	Bottom	Fig.10	22.47	22.5	0.521	**0.53**	1.03	**1.04**	0.03

Note1: The distance between the EUT and the phantom bottom is 10mm.

©Copyright. All rights reserved by CTTL.

Table 14.2-11: SAR Values (WCDMA 1900 MHz Band - Body) – AP OFF

Ambient Temperature: 23.0 °C Liquid Temperature: 22.5°C										
Frequency		Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.									
1907.6	9538	Rear	Fig.11	23.39	24	0.329	**0.38**	0.547	**0.63**	0.11

Note1: The distance between the EUT and the phantom bottom is 15mm.

Table 14.2-12: SAR Values (LTE Band2 - Head)

Ambient Temperature: 23.0 °C Liquid Temperature: 22.5°C												
Frequency		Mode	Side	Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.											
1900	19100	1RB_Mid	Left	Touch	Fig.12	23.61	24.8	0.37	**0.49**	0.602	**0.79**	0.08

Note1: The LTE mode is QPSK_20MHz.

Table 14.2-13: SAR Values (LTE Band2 - Body) – AP ON

Ambient Temperature: 23.0 °C Liquid Temperature: 22.5°C											
Frequency		Mode	Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.										
1900	19100	1RB_Low	Bottom	Fig.13	22.40	23	0.576	**0.66**	1.11	**1.27**	-0.19

Note1: The distance between the EUT and the phantom bottom is 10mm.

Note2: The LTE mode is QPSK_20MHz.

Table 14.2-14: SAR Values (LTE Band2 - Body) – AP OFF

Ambient Temperature: 23.0 °C Liquid Temperature: 22.5°C											
Frequency		Mode	Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.										
1900	19100	1RB_Mid	Rear	Fig.14	23.61	24.8	0.379	**0.50**	0.62	**0.82**	-0.11

Note1: The distance between the EUT and the phantom bottom is 15mm.

Note2: The LTE mode is QPSK_20MHz.

©Copyright. All rights reserved by CTTL.

Table 14.2-15: SAR Values (LTE Band4 - Head)

Ambient Temperature: 23.0 °C Liquid Temperature: 22.5°C												
Frequency		Mode	Side	Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.											
1745	20300	1RB_Mid	Left	Touch	Fig.15	24.18	24.5	0.423	**0.46**	0.686	**0.74**	0.03

Note1: The LTE mode is QPSK_20MHz.

Table 14.2-16: SAR Values (LTE Band4 - Body)

Ambient Temperature: 23.0 °C Liquid Temperature: 22.5°C											
Frequency		Mode	Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.										
1720	20050	1RB_Mid	Rear	Fig.16	23.3	24.5	0.657	**0.87**	0.988	**1.30**	-0.15

Note1: The distance between the EUT and the phantom bottom is 10mm.

Note2: The LTE mode is QPSK_20MHz.

Table 14.2-17: SAR Values (LTE Band5 - Head)

Ambient Temperature: 23.0 °C Liquid Temperature: 22.5°C												
Frequency		Mode	Side	Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.											
836.5	20525	1RB_Mid	Left	Touch	Fig.17	24.00	24.5	0.292	**0.33**	0.394	**0.44**	-0.12

Note1: The LTE mode is QPSK_10MHz.

Table 14.2-18: SAR Values (LTE Band5 - Body)

Ambient Temperature: 23.0 °C Liquid Temperature: 22.5°C											
Frequency		Mode	Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.										
836.5	20525	1RB_Mid	Rear	Fig.18	23.69	24.5	0.326	**0.39**	0.434	**0.52**	0.15

Note1: The distance between the EUT and the phantom bottom is 10mm.

Note2: The LTE mode is QPSK_10MHz.

©Copyright. All rights reserved by CTTL.

Table 14.2-19: SAR Values (LTE Band12 - Head)

Ambient Temperature: 23.0 °C Liquid Temperature: 22.5 °C												
Frequency		Mode	Side	Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.											
707.5	23095	1RB_Mid	Left	Touch	Fig.19	23.66	24	0.232	**0.25**	0.304	**0.33**	-0.02

Note1: The LTE mode is QPSK_10MHz.

Table 14.2-20: SAR Values (LTE Band12 - Body)

Ambient Temperature: 23.0 °C Liquid Temperature: 22.5 °C											
Frequency		Mode	Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.										
704	23060	1RB_Mid	Rear	Fig.20	23.56	24	0.352	**0.39**	0.471	**0.52**	0.17

Note1: The distance between the EUT and the phantom bottom is 10mm.

Note2: The LTE mode is QPSK_10MHz.

Table 14.2-21: SAR Values (LTE Band17 - Head)

Ambient Temperature: 23.0 °C Liquid Temperature: 22.5 °C												
Frequency		Mode	Side	Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.											
709	23780	1RB_Low	Left	Touch	/	23.88	24	0.183	**0.19**	0.233	**0.24**	0.12

Note1: The LTE mode is QPSK_10MHz.

Table 14.2-22: SAR Values (LTE Band17 - Body)

Ambient Temperature: 23.0 °C Liquid Temperature: 22.5 °C											
Frequency		Mode	Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.										
709	23780	1RB_Low	Rear	Fig.22	23.88	24	0.308	**0.32**	0.408	**0.42**	-0.12

Note1: The distance between the EUT and the phantom bottom is 10mm.

Note2: The LTE mode is QPSK_10MHz.

©Copyright. All rights reserved by CTTL.

14.3 WLAN Evaluation

According to the KDB248227 D01, SAR is measured for 2.4GHz 802.11b DSSS using the initial test position procedure.

Head Evaluation

Table 14.3-1: SAR Values (WLAN - Head) – 802.11b 1Mbps (Fast SAR)

Ambient Temperature: 23.0 °C Liquid Temperature: 22.5 °C											
Frequency		Side	Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.										
2462	11	Left	Touch	/	17.92	18	0.283	**0.29**	0.527	**0.54**	-0.19
2462	11	Left	Tilt	/	17.92	18	0.255	**0.26**	0.493	**0.50**	-0.08
2462	11	Right	Touch	/	17.92	18	0.512	**0.52**	1.08	**1.10**	0.01
2462	11	Right	Tilt	/	17.92	18	0.328	**0.33**	0.681	**0.69**	-0.03

As shown above table, the initial test position for head is “Right Touch”. So the head SAR of WLAN is presented as below:

Table 14.3-2: SAR Values (WLAN - Head) – 802.11b 1Mbps (Full SAR)

Ambient Temperature: 23.0 °C Liquid Temperature: 22.5 °C											
Frequency		Side	Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.										
2462	11	Right	Touch	/	17.92	18	0.473	**0.48**	1.04	**1.06**	0.01
2462	11	Right	Tilt	/	17.92	18	0.292	**0.30**	0.632	**0.64**	-0.03
2437	6	Right	Touch	Fig.19	17.65	18	0.524	**0.57**	1.13	**1.22**	-0.12
2412	1	Right	Touch	/	17.45	18	0.510	**0.58**	1.07	**1.21**	-0.15
2462	11	Left	Touch	/	17.92	18	0.292	**0.30**	0.556	**0.57**	-0.19

Note1: When the reported SAR of the initial test position is > 0.4 W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position using subsequent highest estimated 1-g SAR conditions determined by area scans, on the highest maximum output power channel, until the reported SAR is ≤ 0.8 W/kg.
Note2: For all positions/configurations tested using the initial test position and subsequent test positions, when the reported SAR is > 0.8 W/kg, SAR is measured for these test positions/configurations on the subsequent next highest measured output power channel until the reported SAR is ≤ 1.2 W/kg or all required channels are tested.

According to the KDB248227 D01, The reported SAR must be scaled to 100% transmission duty factor to determine compliance at the maximum tune-up tolerance limit. The scaled reported SAR is presented as below.

Table 14.3-3: SAR Values (WLAN - Head) – 802.11b 1Mbps (Scaled Reported SAR)

Ambient Temperature: 23.0 °C Liquid Temperature: 22.5 °C							
Frequency		Side	Test Position	Actual duty factor	maximum duty factor	Reported SAR (1g) (W/kg)	Scaled reported SAR (1g) (W/kg)
MHz	Ch.						
2437	6	Right	Touch	97.85%	100%	**1.22**	**1.25**
2462	11	Left	Touch	97.85%	100%	**0.57**	**0.58**

SAR is not required for OFDM because the 802.11b adjusted SAR ≤ 1.2 W/kg.

©Copyright. All rights reserved by CTTL.

Body Evaluation

Table 14.3-4: SAR Values (WLAN - Body) – 802.11b 1Mbps (Fast SAR)

Ambient Temperature: 23.0 °C Liquid Temperature: 22.5 °C										
Frequency		Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.									
2462	11	Front	/	17.99	18	0.109	**0.11**	0.208	**0.21**	-0.06
2462	11	Rear	/	17.99	18	0.128	**0.13**	0.272	**0.27**	0.04
2462	11	Right	/	17.99	18	0.0252	**0.03**	0.0459	**0.05**	0.17
2462	11	Top	/	17.99	18	0.0859	**0.09**	0.166	**0.17**	0.16

As shown above table, the initial test position for body is "Rear". So the body SAR of WLAN is presented as below:

Table 14.3-5: SAR Values (WLAN - Body) – 802.11b 1Mbps (Full SAR)

Ambient Temperature: 23.0 °C Liquid Temperature: 22.5 °C										
Frequency		Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.									
2462	11	Rear	Fig.20	17.99	18	0.133	**0.13**	0.28	**0.28**	0.04

Note1: When the reported SAR of the initial test position is > 0.4 W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position using subsequent highest estimated 1-g SAR conditions determined by area scans, on the highest maximum output power channel, until the reported SAR is ≤ 0.8 W/kg.

Note2: For all positions/configurations tested using the initial test position and subsequent test positions, when the reported SAR is > 0.8 W/kg, SAR is measured for these test positions/configurations on the subsequent next highest measured output power channel until the reported SAR is ≤ 1.2 W/kg or all required channels are tested.

According to the KDB248227 D01, The reported SAR must be scaled to 100% transmission duty factor to determine compliance at the maximum tune-up tolerance limit. The scaled reported SAR is presented as below.

Table 14.3-6: SAR Values (WLAN - Body) – 802.11b 1Mbps (Scaled Reported SAR)

Ambient Temperature: 23.0 °C Liquid Temperature: 22.5 °C						
Frequency		Test Position	Actual duty factor	maximum duty factor	Reported SAR (1g) (W/kg)	Scaled reported SAR (1g) (W/kg)
MHz	Ch.					
2462	11	Rear	97.61%	100%	**0.28**	**0.29**

SAR is not required for OFDM because the 802.11b adjusted SAR ≤ 1.2 W/kg.

©Copyright. All rights reserved by CTTL.

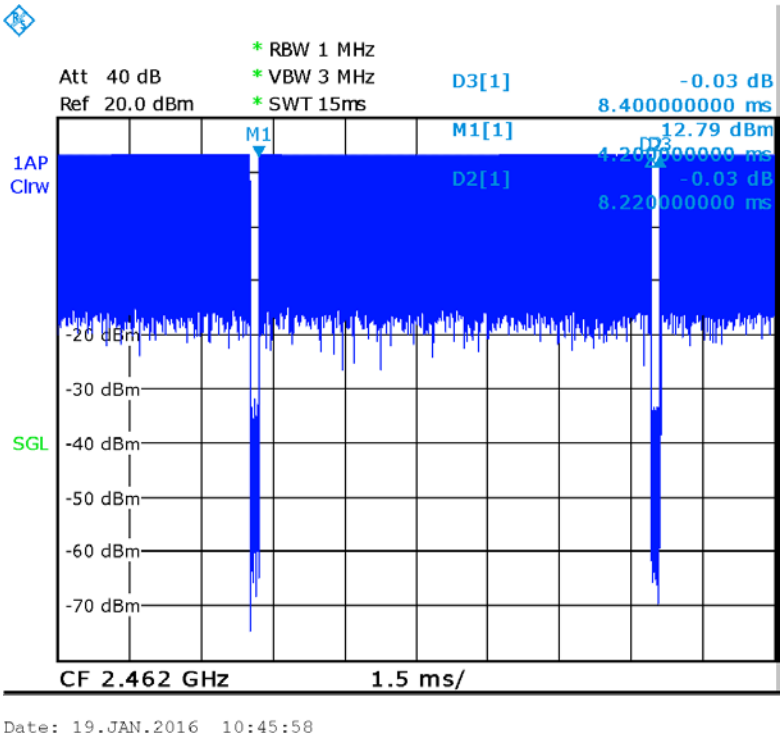

Picture 14.1 The plot of duty factor for head

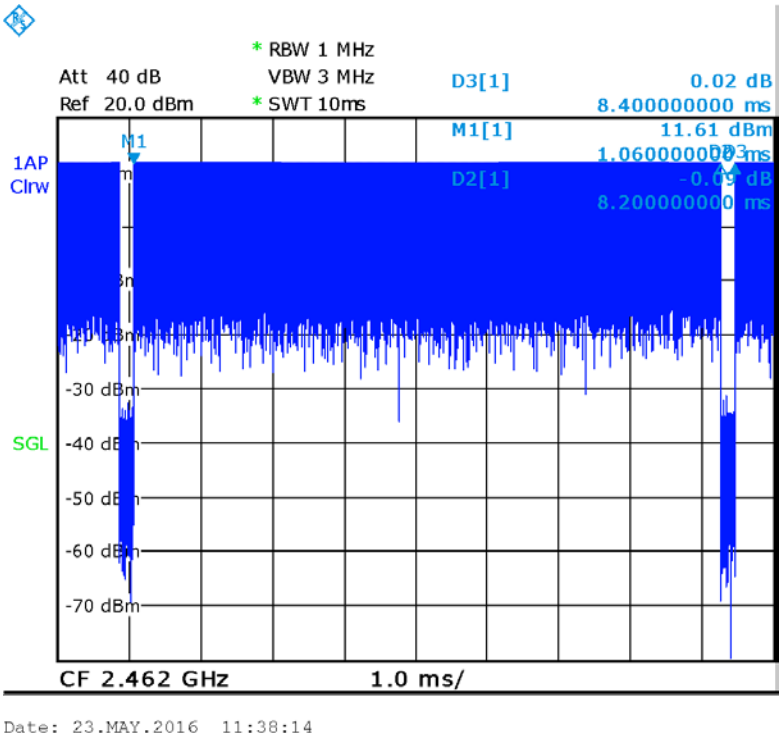

Picture 14.2 The plot of duty factor for body

©Copyright. All rights reserved by CTTL.

15 SAR Measurement Variability

SAR measurement variability must be assessed for each frequency band, which is determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. When both head and body tissue-equivalent media are required for SAR measurements in a frequency band, the variability measurement procedures should be applied to the tissue medium with the highest measured SAR, using the highest measured SAR configuration for that tissue-equivalent medium.

The following procedures are applied to determine if repeated measurements are required.

1) Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg; steps 2) through 4) do not apply.

2) When the original highest measured SAR is ≥ 0.80 W/kg, repeat that measurement once.

3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 W/kg (~ 10% from the 1-g SAR limit).

4) Perform a third repeated measurement only if the original, first or second repeated measurement is ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20.

Table 15.1: SAR Measurement Variability for Head WLAN (1g)

Frequency		Side	Test Position	Original SAR (W/kg)	First Repeated SAR (W/kg)	The Ratio	Second Repeated SAR (W/kg)
MHz	Ch.						
2437	6	Right	Touch	1.13	1.12	1.01	/

Table 15.2: SAR Measurement Variability for Body GSM1900 (1g)

Frequency		Test Position	Spacing (mm)	Original SAR (W/kg)	First Repeated SAR (W/kg)	The Ratio	Second Repeated SAR (W/kg)
MHz	Ch.						
1909.8	810	Bottom	10	0.926	0.923	1.00	/

Table 15.3: SAR Measurement Variability for Body WCDMA1700 (1g)

Frequency		Test Position	Spacing (mm)	Original SAR (W/kg)	First Repeated SAR (W/kg)	The Ratio	Second Repeated SAR (W/kg)
MHz	Ch.						
1712.4	1537	Rear	10	0.993	0.997	1.00	/

Table 15.4: SAR Measurement Variability for Body WCDMA1900 (1g)

Frequency		Test Position	Spacing (mm)	Original SAR (W/kg)	First Repeated SAR (W/kg)	The Ratio	Second Repeated SAR (W/kg)
MHz	Ch.						
1907.6	9938	Bottom	10	1.03	1.01	1.02	/

Table 15.5: SAR Measurement Variability for Body LTE Band2 (1g)

Frequency		Test Position	Spacing (mm)	Original SAR (W/kg)	First Repeated SAR (W/kg)	The Ratio	Second Repeated SAR (W/kg)
MHz	Ch.						
1900	19100	Bottom	10	1.11	1.09	1.02	/

Table 15.5: SAR Measurement Variability for Body LTE Band4 (1g)

Frequency		Test Position	Spacing (mm)	Original SAR (W/kg)	First Repeated SAR (W/kg)	The Ratio	Second Repeated SAR (W/kg)
MHz	Ch.						
1720	20050	Rear	10	0.988	0.976	1.01	/

©Copyright. All rights reserved by CTTL.

16 Measurement Uncertainty

16.1 Measurement Uncertainty for Normal SAR Tests (300MHz~3GHz)

No.	Error Description	Type	Uncertainty value	Probably Distribution	Div.	(Ci) 1g	(Ci) 10g	Std. Unc. (1g)	Std. Unc. (10g)	Degree of freedom
Measurement system										
1	Probe calibration	B	6.0	N	1	1	1	6.0	6.0	∞
2	Isotropy	B	4.7	R	$\sqrt{3}$	0.7	0.7	1.9	1.9	∞
3	Boundary effect	B	1.0	R	$\sqrt{3}$	1	1	0.6	0.6	∞
4	Linearity	B	4.7	R	$\sqrt{3}$	1	1	2.7	2.7	∞
5	Detection limit	B	1.0	N	1	1	1	0.6	0.6	∞
6	Readout electronics	B	0.3	R	$\sqrt{3}$	1	1	0.3	0.3	∞
7	Response time	B	0.8	R	$\sqrt{3}$	1	1	0.5	0.5	∞
8	Integration time	B	2.6	R	$\sqrt{3}$	1	1	1.5	1.5	∞
9	RF ambient conditions-noise	B	0	R	$\sqrt{3}$	1	1	0	0	∞
10	RFambient conditions-reflection	B	0	R	$\sqrt{3}$	1	1	0	0	∞
11	Probe positioned mech. restrictions	B	0.4	R	$\sqrt{3}$	1	1	0.2	0.2	∞
12	Probe positioning with respect to phantom shell	B	2.9	R	$\sqrt{3}$	1	1	1.7	1.7	∞
13	Post-processing	B	1.0	R	$\sqrt{3}$	1	1	0.6	0.6	∞
Test sample related										
14	Test sample positioning	A	3.3	N	1	1	1	3.3	3.3	71
15	Device holder uncertainty	A	3.4	N	1	1	1	3.4	3.4	5
16	Drift of output power	B	5.0	R	$\sqrt{3}$	1	1	2.9	2.9	∞
Phantom and set-up										
17	Phantom uncertainty	B	4.0	R	$\sqrt{3}$	1	1	2.3	2.3	∞
18	Liquid conductivity (target)	B	5.0	R	$\sqrt{3}$	0.64	0.43	1.8	1.2	∞
19	Liquid conductivity (meas.)	A	2.06	N	1	0.64	0.43	1.32	0.89	43
20	Liquid permittivity (target)	B	5.0	R	$\sqrt{3}$	0.6	0.49	1.7	1.4	∞
21	Liquid permittivity (meas.)	A	1.6	N	1	0.6	0.49	1.0	0.8	521

©Copyright. All rights reserved by CTTL.

Combined standard uncertainty	$u_c' = \sqrt{\sum_{i=1}^{21} c_i^2 u_i^2}$					9.55	9.43	257
Expanded uncertainty (confidence interval of 95 %)	$u_e = 2u_c$					19.1	18.9	

16.2 Measurement Uncertainty for Normal SAR Tests (3~6GHz)

No.	Error Description	Type	Uncertainty value	Probably Distribution	Div.	(Ci) 1g	(Ci) 10g	Std. Unc. (1g)	Std. Unc. (10g)	Degree of freedom
Measurement system										
1	Probe calibration	B	6.55	N	1	1	1	6.55	6.55	∞
2	Isotropy	B	4.7	R	$\sqrt{3}$	0.7	0.7	1.9	1.9	∞
3	Boundary effect	B	2.0	R	$\sqrt{3}$	1	1	1.2	1.2	∞
4	Linearity	B	4.7	R	$\sqrt{3}$	1	1	2.7	2.7	∞
5	Detection limit	B	1.0	R	$\sqrt{3}$	1	1	0.6	0.6	∞
6	Readout electronics	B	0.3	R	$\sqrt{3}$	1	1	0.3	0.3	∞
7	Response time	B	0.8	R	$\sqrt{3}$	1	1	0.5	0.5	∞
8	Integration time	B	2.6	R	$\sqrt{3}$	1	1	1.5	1.5	∞
9	RF ambient conditions-noise	B	0	R	$\sqrt{3}$	1	1	0	0	∞
10	RF ambient conditions-reflection	B	0	R	$\sqrt{3}$	1	1	0	0	∞
11	Probe positioned mech. restrictions	B	0.8	R	$\sqrt{3}$	1	1	0.5	0.5	∞
12	Probe positioning with respect to phantom shell	B	6.7	R	$\sqrt{3}$	1	1	3.9	3.9	∞
13	Post-processing	B	4.0	R	$\sqrt{3}$	1	1	2.3	2.3	∞
Test sample related										
14	Test sample positioning	A	3.3	N	1	1	1	3.3	3.3	71
15	Device holder uncertainty	A	3.4	N	1	1	1	3.4	3.4	5
16	Drift of output power	B	5.0	R	$\sqrt{3}$	1	1	2.9	2.9	∞
Phantom and set-up										
17	Phantom uncertainty	B	4.0	R	$\sqrt{3}$	1	1	2.3	2.3	∞
18	Liquid conductivity (target)	B	5.0	R	$\sqrt{3}$	0.64	0.43	1.8	1.2	∞
19	Liquid conductivity (meas.)	A	2.06	N	1	0.64	0.43	1.32	0.89	43

©Copyright. All rights reserved by CTTL.

20	Liquid permittivity (target)	B	5.0	R	$\sqrt{3}$	0.6	0.49	1.7	1.4	∞
21	Liquid permittivity (meas.)	A	1.6	N	1	0.6	0.49	1.0	0.8	521
Combined standard uncertainty		$u_c' = \sqrt{\sum_{i=1}^{21} c_i^2 u_i^2}$						10.7	10.6	257
Expanded uncertainty (confidence interval of 95 %)		$u_e = 2u_c$						21.4	21.1	

16.3 Measurement Uncertainty for Fast SAR Tests (300MHz~3GHz)

No.	Error Description	Type	Uncertainty value	Probably Distribution	Div.	(Ci) 1g	(Ci) 10g	Std. Unc. (1g)	Std. Unc. (10g)	Degree of freedom
Measurement system										
1	Probe calibration	B	6.0	N	1	1	1	6.0	6.0	∞
2	Isotropy	B	4.7	R	$\sqrt{3}$	0.7	0.7	1.9	1.9	∞
3	Boundary effect	B	1.0	R	$\sqrt{3}$	1	1	0.6	0.6	∞
4	Linearity	B	4.7	R	$\sqrt{3}$	1	1	2.7	2.7	∞
5	Detection limit	B	1.0	R	$\sqrt{3}$	1	1	0.6	0.6	∞
6	Readout electronics	B	0.3	R	$\sqrt{3}$	1	1	0.3	0.3	∞
7	Response time	B	0.8	R	$\sqrt{3}$	1	1	0.5	0.5	∞
8	Integration time	B	2.6	R	$\sqrt{3}$	1	1	1.5	1.5	∞
9	RF ambient conditions-noise	B	0	R	$\sqrt{3}$	1	1	0	0	∞
10	RF ambient conditions-reflection	B	0	R	$\sqrt{3}$	1	1	0	0	∞
11	Probe positioned mech. Restrictions	B	0.4	R	$\sqrt{3}$	1	1	0.2	0.2	∞
12	Probe positioning with respect to phantom shell	B	2.9	R	$\sqrt{3}$	1	1	1.7	1.7	∞
13	Post-processing	B	1.0	R	$\sqrt{3}$	1	1	0.6	0.6	∞
14	Fast SAR z-Approximation	B	7.0	R	$\sqrt{3}$	1	1	4.0	4.0	∞
Test sample related										
15	Test sample positioning	A	3.3	N	1	1	1	3.3	3.3	71
16	Device holder uncertainty	A	3.4	N	1	1	1	3.4	3.4	5
17	Drift of output power	B	5.0	R	$\sqrt{3}$	1	1	2.9	2.9	∞

©Copyright. All rights reserved by CTTL.

Phantom and set-up										
18	Phantom uncertainty	B	4.0	R	$\sqrt{3}$	1	1	2.3	2.3	∞
19	Liquid conductivity (target)	B	5.0	R	$\sqrt{3}$	0.64	0.43	1.8	1.2	∞
20	Liquid conductivity (meas.)	A	2.06	N	1	0.64	0.43	1.32	0.89	43
21	Liquid permittivity (target)	B	5.0	R	$\sqrt{3}$	0.6	0.49	1.7	1.4	∞
22	Liquid permittivity (meas.)	A	1.6	N	1	0.6	0.49	1.0	0.8	521
Combined standard uncertainty		$u_c^{'} = \sqrt{\sum_{i=1}^{22} c_i^2 u_i^2}$						10.4	10.3	257
Expanded uncertainty (confidence interval of 95 %)		$u_e = 2u_c$						20.8	20.6	

16.4 Measurement Uncertainty for Fast SAR Tests (3~6GHz)

No.	Error Description	Type	Uncertainty value	Probably Distribution	Div.	(Ci) 1g	(Ci) 10g	Std. Unc. (1g)	Std. Unc. (10g)	Degree of freedom
Measurement system										
1	Probe calibration	B	6.55	N	1	1	1	6.55	6.55	∞
2	Isotropy	B	4.7	R	$\sqrt{3}$	0.7	0.7	1.9	1.9	∞
3	Boundary effect	B	2.0	R	$\sqrt{3}$	1	1	1.2	1.2	∞
4	Linearity	B	4.7	R	$\sqrt{3}$	1	1	2.7	2.7	∞
5	Detection limit	B	1.0	R	$\sqrt{3}$	1	1	0.6	0.6	∞
6	Readout electronics	B	0.3	R	$\sqrt{3}$	1	1	0.3	0.3	∞
7	Response time	B	0.8	R	$\sqrt{3}$	1	1	0.5	0.5	∞
8	Integration time	B	2.6	R	$\sqrt{3}$	1	1	1.5	1.5	∞
9	RF ambient conditions-noise	B	0	R	$\sqrt{3}$	1	1	0	0	∞
10	RF ambient conditions-reflection	B	0	R	$\sqrt{3}$	1	1	0	0	∞
11	Probe positioned mech. Restrictions	B	0.8	R	$\sqrt{3}$	1	1	0.5	0.5	∞
12	Probe positioning with respect to phantom shell	B	6.7	R	$\sqrt{3}$	1	1	3.9	3.9	∞
13	Post-processing	B	1.0	R	$\sqrt{3}$	1	1	0.6	0.6	∞
14	Fast SAR z-Approximation	B	14.0	R	$\sqrt{3}$	1	1	8.1	8.1	∞
Test sample related										

©Copyright. All rights reserved by CTTL.

15	Test sample positioning	A	3.3	N	1	1	1	3.3	3.3	71
16	Device holder uncertainty	A	3.4	N	1	1	1	3.4	3.4	5
17	Drift of output power	B	5.0	R	$\sqrt{3}$	1	1	2.9	2.9	∞
Phantom and set-up										
18	Phantom uncertainty	B	4.0	R	$\sqrt{3}$	1	1	2.3	2.3	∞
19	Liquid conductivity (target)	B	5.0	R	$\sqrt{3}$	0.64	0.43	1.8	1.2	∞
20	Liquid conductivity (meas.)	A	2.06	N	1	0.64	0.43	1.32	0.89	43
21	Liquid permittivity (target)	B	5.0	R	$\sqrt{3}$	0.6	0.49	1.7	1.4	∞
22	Liquid permittivity (meas.)	A	1.6	N	1	0.6	0.49	1.0	0.8	521
Combined standard uncertainty		$u_c^{'} = \sqrt{\sum_{i=1}^{22} c_i^2 u_i^2}$						13.5	13.4	257
Expanded uncertainty (confidence interval of 95 %)		$u_e = 2u_c$						27.0	26.8	

17 MAIN TEST INSTRUMENTS

Table 17.1: List of Main Instruments

No.	Name	Type	Serial Number	Calibration Date	Valid Period
01	Network analyzer	E5071C	MY46110673	January 26, 2016	One year
02	Power meter	NRVD	102196	March 03, 2016	One year
03	Power sensor	NRV-Z5	100596		
04	Signal Generator	E4438C	MY49071430	February 01, 2016	One Year
05	Amplifier	60S1G4	0331848	No Calibration Requested	
06	BTS	E5515C	MY50263375	January 30, 2016	One year
07	BTS	CMW500	129942	March 03, 2016	One year
08	E-field Probe	SPEAG EX3DV4	3617	August 26, 2015	One year
09	DAE	SPEAG DAE4	777	August 26, 2015	One year
10	Dipole Validation Kit	SPEAG D750V3	1017	July 23, 2015	One year
11	Dipole Validation Kit	SPEAG D835V2	4d069	July 23, 2015	One year
12	Dipole Validation Kit	SPEAG D1750V2	1003	July 16, 2015	One year
13	Dipole Validation Kit	SPEAG D1900V2	5d101	July 23, 2015	One year
14	Dipole Validation Kit	SPEAG D2450V2	853	July 24, 2015	One year

END OF REPORT BODY

©Copyright. All rights reserved by CTTL.

ANNEX A Graph Results

850 Left Cheek Middle

Date: 2016-1-11
Electronics: DAE4 Sn777
Medium: Head 850 MHz
Medium parameters used (interpolated): f = 836.6 MHz; σ = 0.916 mho/m; εr = 41.849; ρ = 1000 kg/m^3
Ambient Temperature: 23.0^{o}C Liquid Temperature: 22.5^{o}C
Communication System: GSM 850 Frequency: 836.6 MHz Duty Cycle: 1:8.3
Probe: EX3DV4 - SN3617 ConvF(9.56, 9.56, 9.56)

Area Scan (71x111x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 0.345 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 8.052 V/m; Power Drift = 0.03 dB
Peak SAR (extrapolated) = 0.411 W/kg
SAR(1 g) = 0.309 W/kg; SAR(10 g) = 0.237 W/kg
Maximum value of SAR (measured) = 0.341 W/kg

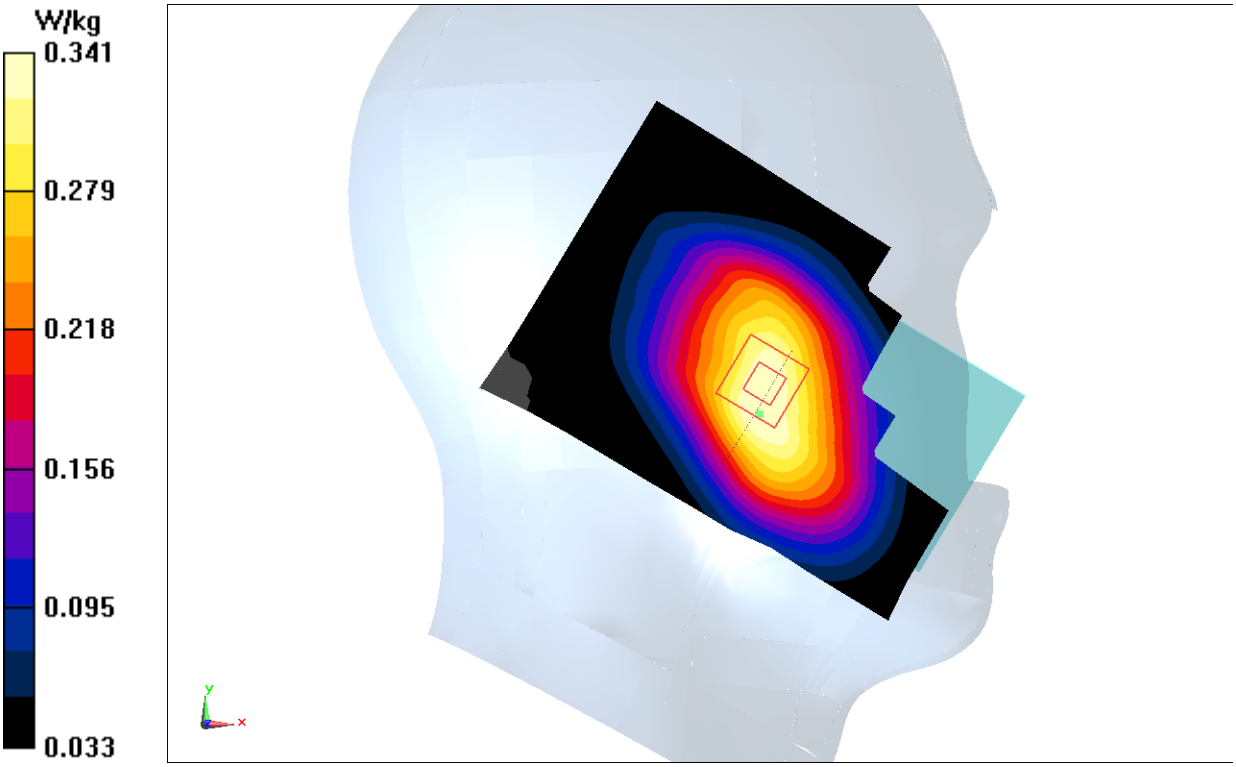

Fig.1 850MHz

©Copyright. All rights reserved by CTTL.

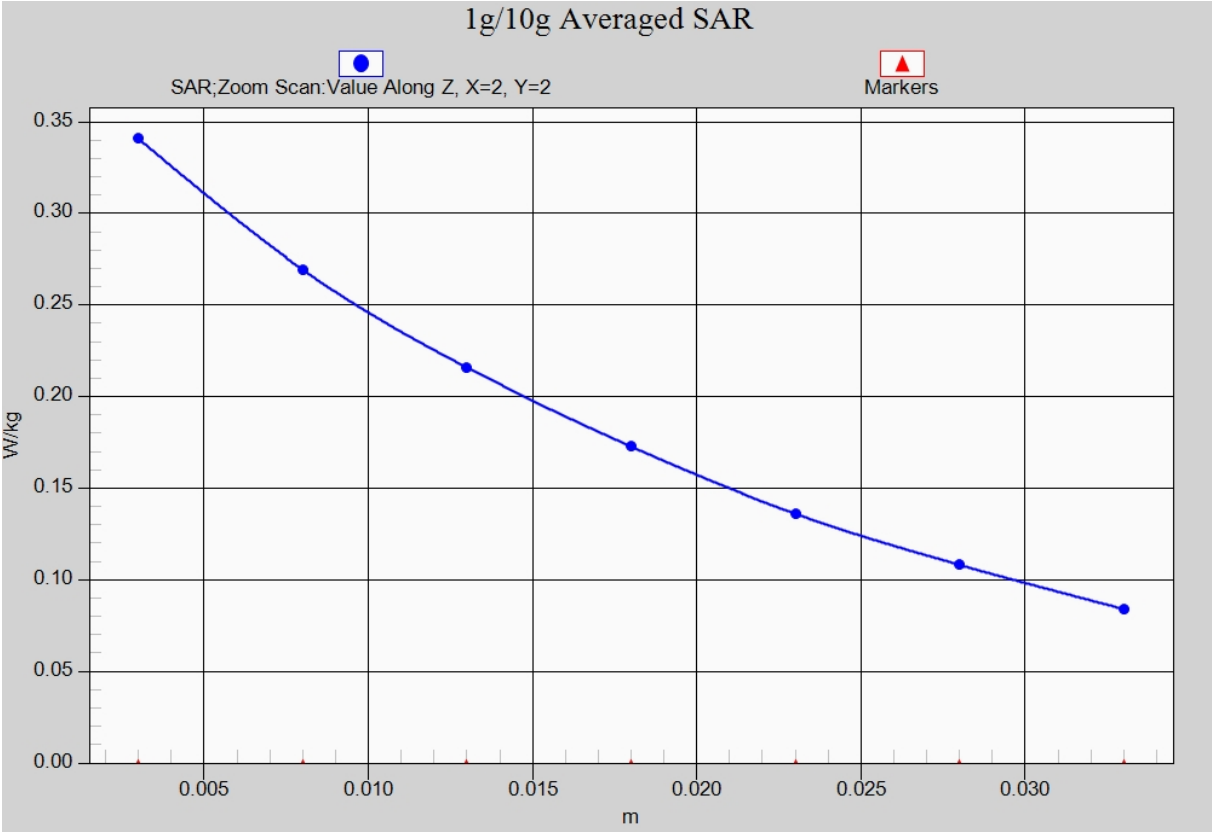

Fig. 1-1 Z-Scan at power reference point (850 MHz)

©Copyright. All rights reserved by CTTL.

850 Body Rear High

Date: 2016-05-11
Electronics: DAE4 Sn777
Medium: Body 850 MHz
Medium parameters used (interpolated): f = 848.8 MHz; σ = 0.994 mho/m; εr = 56.053; ρ = 1000 kg/m^3
Ambient Temperature: 23.0^{o}C Liquid Temperature: 22.5^{o}C
Communication System: GSM 850 GPRS Frequency: 848.8 MHz Duty Cycle: 1:4
Probe: EX3DV4 - SN3617 ConvF(9.71, 9.71, 9.71)

Area Scan (111x71x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 0.522 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 21.03 V/m; Power Drift = -0.07dB
Peak SAR (extrapolated) = 1.65 W/kg
SAR(1 g) = 0.760 W/kg; SAR(10 g) = 0.440 W/kg
Maximum value of SAR (measured) = 0.489 W/kg

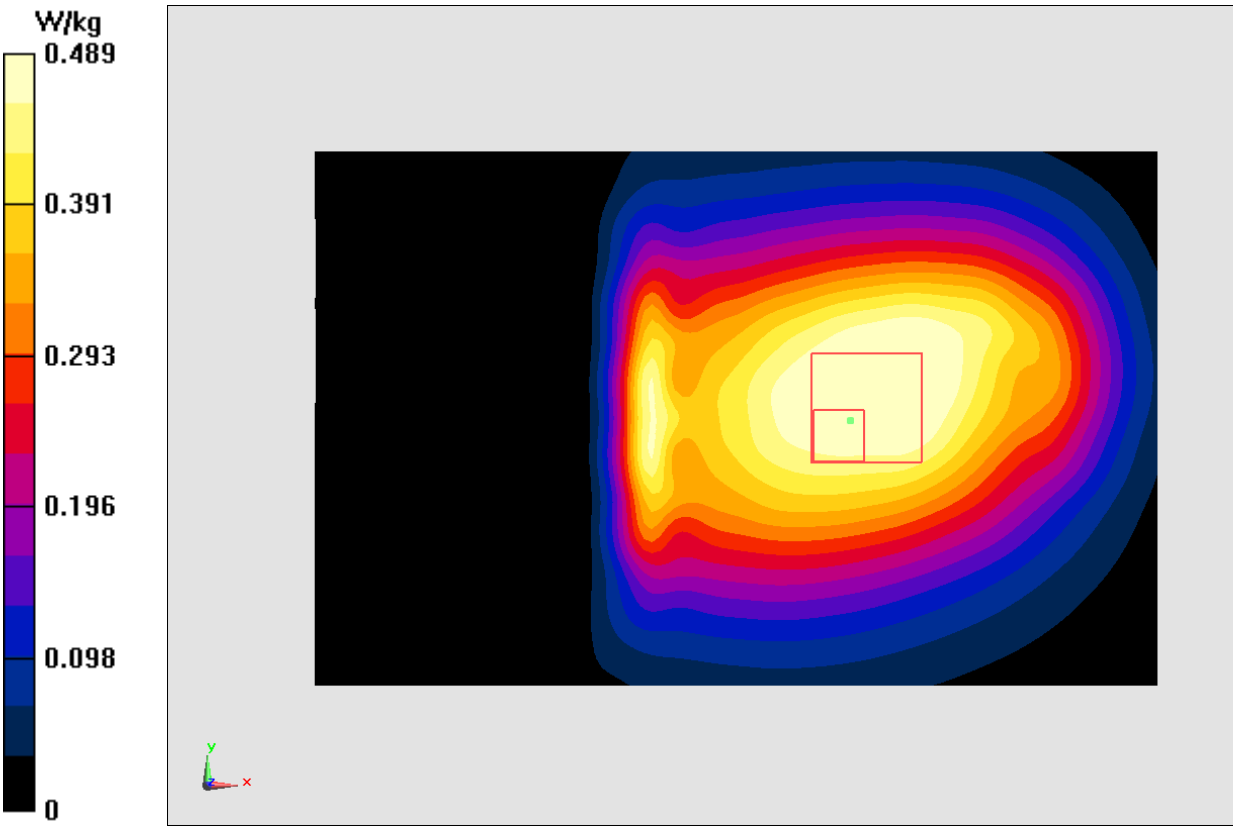

Fig.2 850 MHz

©Copyright. All rights reserved by CTTL.

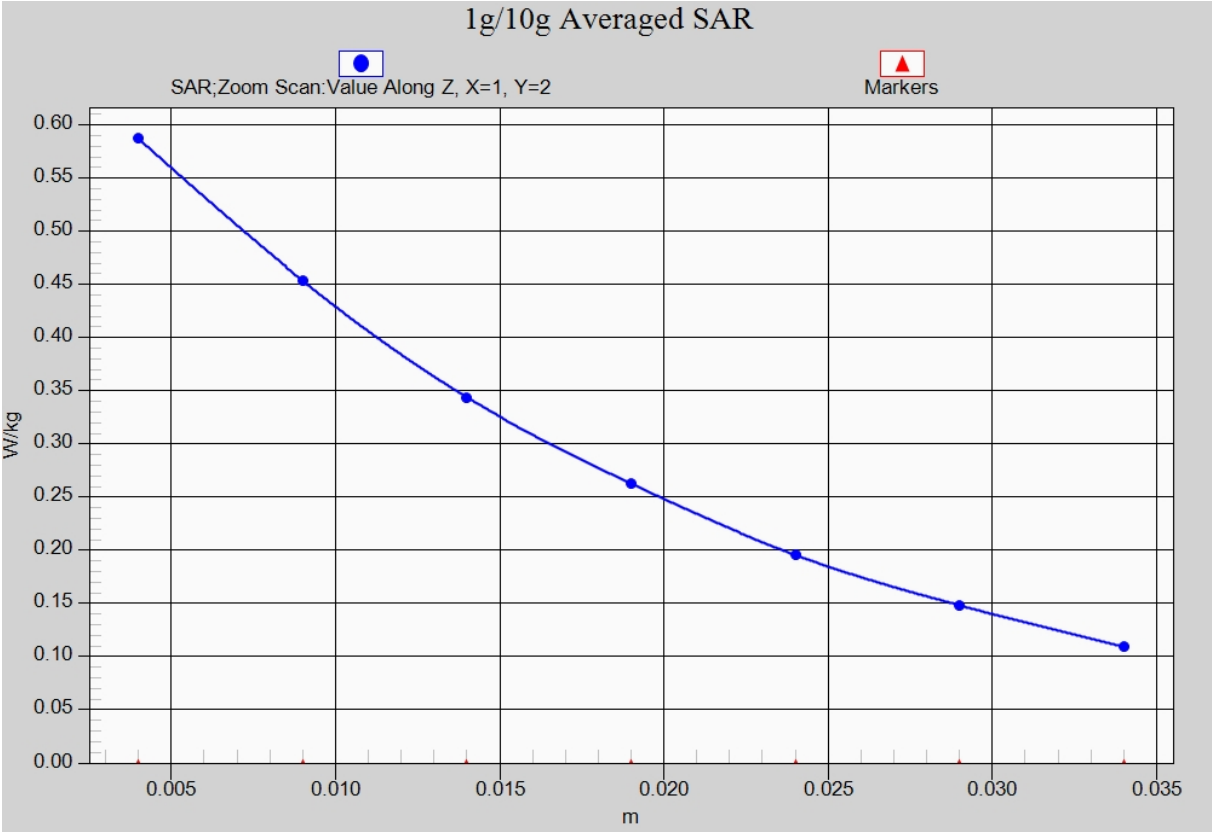

Fig. 2-1 Z-Scan at power reference point (850 MHz)

©Copyright. All rights reserved by CTTL.

1900 Left Cheek High

Date: 2016-1-13
Electronics: DAE4 Sn777
Medium: Head 1900 MHz
Medium parameters use: f = 1910 MHz; σ = 1.403 mho/m; εr = 41.9; ρ = 1000 kg/m^3
Ambient Temperature: 23.0^{o}C Liquid Temperature: 22.5^{o}C
Communication System: GSM 1900MHz Frequency: 1909.8 MHz Duty Cycle: 1:8.3
Probe: EX3DV4 - SN3617 ConvF(8.07, 8.07, 8.07)

Area Scan (71x111x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 0.387 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 4.041 V/m; Power Drift = 0.14 dB
Peak SAR (extrapolated) = 0.488 W/kg
SAR(1 g) = 0.322 W/kg; SAR(10 g) = 0.197 W/kg
Maximum value of SAR (measured) = 0.377 W/kg

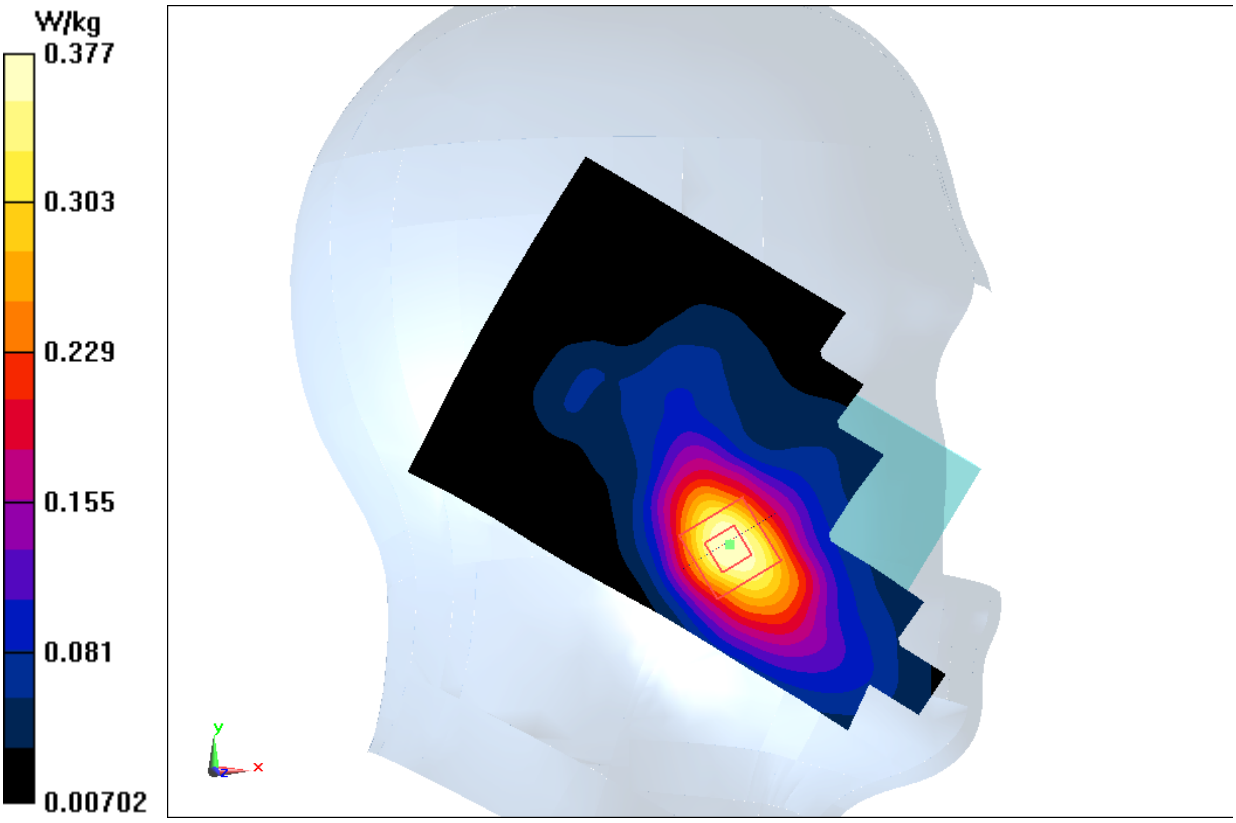

Fig.3 1900 MHz

©Copyright. All rights reserved by CTTL.

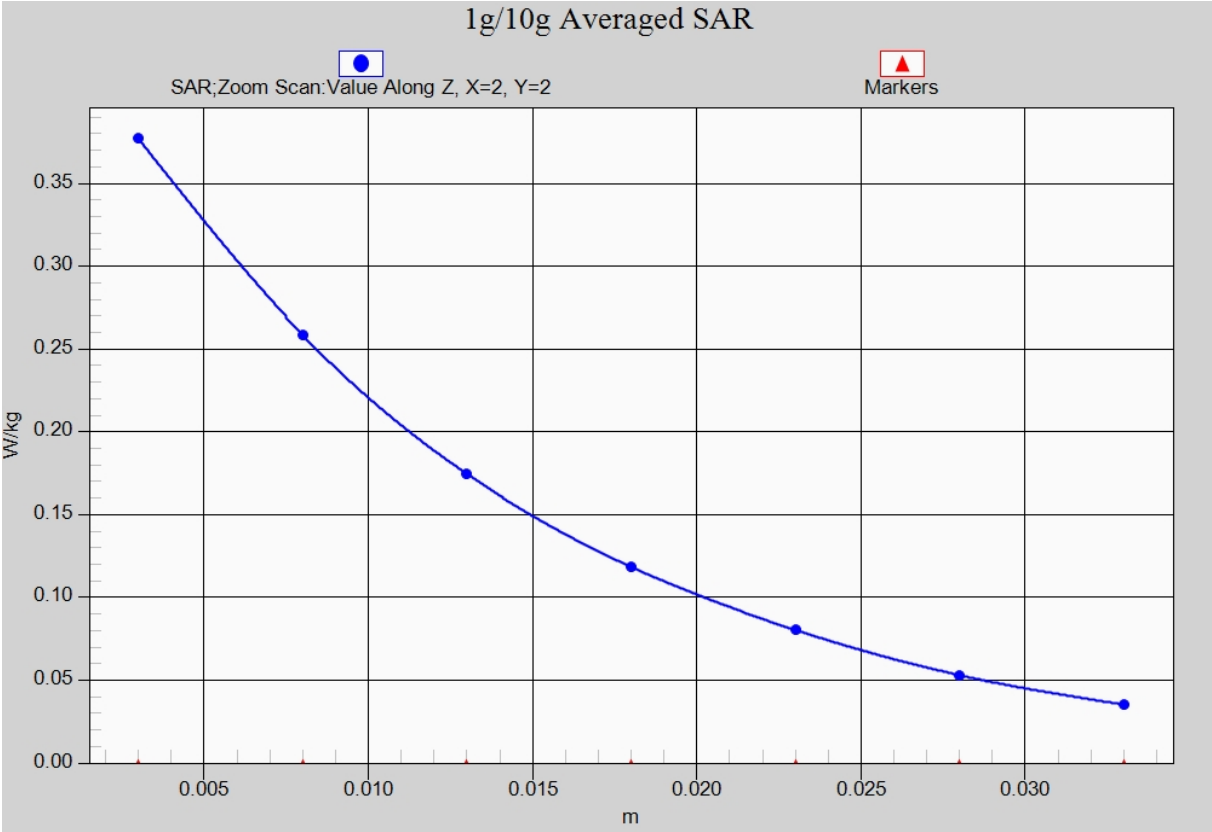

Fig. 3-1 Z-Scan at power reference point (1900 MHz)

©Copyright. All rights reserved by CTTL.

1900 Body Bottom High

Date: 2016-05-13
Electronics: DAE4 Sn777
Medium: Body 1900 MHz
Medium parameters used: f = 1910 MHz; σ = 1.532 mho/m; εr = 54.086; ρ = 1000 kg/m^3
Ambient Temperature: 23.0^{o}C Liquid Temperature: 22.5^{o}C
Communication System: GSM 1900MHz GPRS Frequency: 1910 MHz Duty Cycle: 1:2.67
Probe: EX3DV4 - SN3617 ConvF(7.74, 7.74, 7.74)

Area Scan (111x71x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 1.14 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 18.75 V/m; Power Drift = -0.09 dB
Peak SAR (extrapolated) = 1.62 W/kg
SAR(1 g) = 0.926 W/kg; SAR(10 g) = 0.473 W/kg
Maximum value of SAR (measured) = 1.17 W/kg

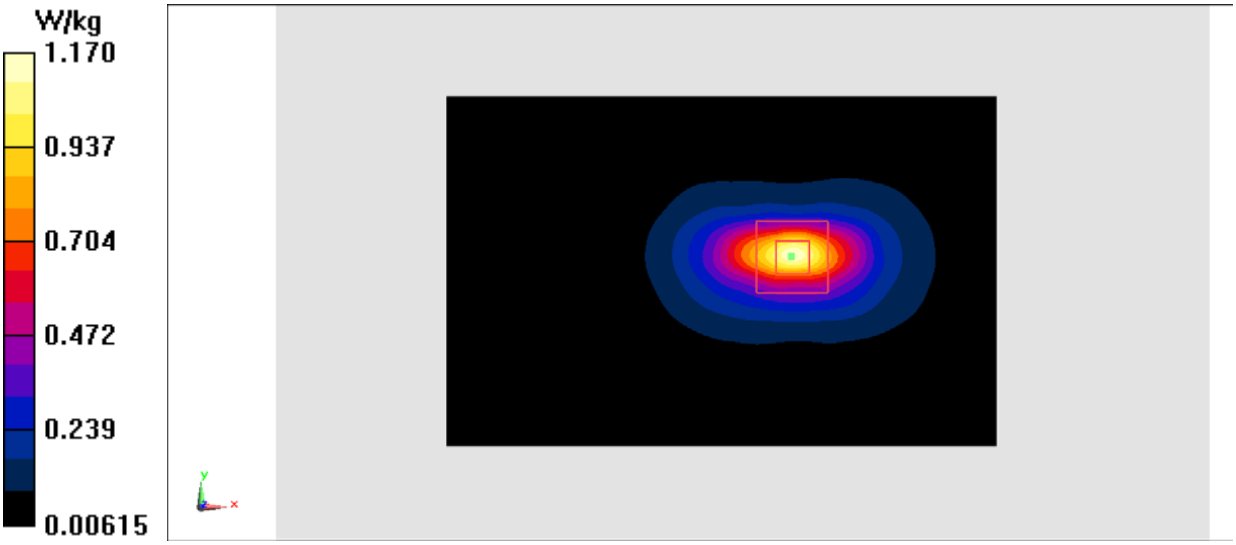

Fig.4 1900 MHz

©Copyright. All rights reserved by CTTL.

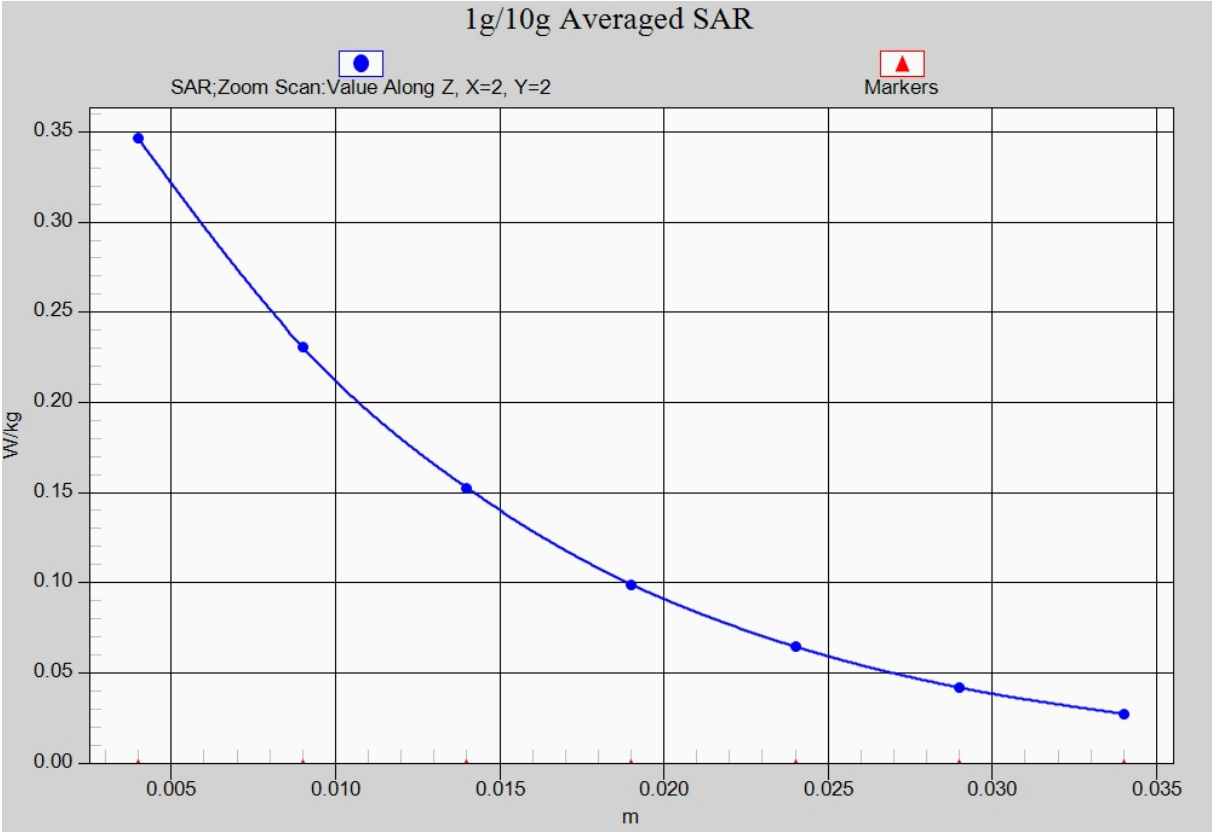

Fig.4-1 Z-Scan at power reference point (1900 MHz)

©Copyright. All rights reserved by CTTL.

WCDMA 850 Left Cheek Low

Date: 2016-1-11
Electronics: DAE4 Sn777
Medium: Head 850 MHz
Medium parameters used (interpolated): f = 826.4 MHz; σ = 0.909 mho/m; εr = 41.928; ρ = 1000 kg/m^3
Ambient Temperature: 23.0^{o}C Liquid Temperature: 22.5^{o}C
Communication System: WCDMA; Frequency: 826.4 MHz; Duty Cycle: 1:1
Probe: EX3DV4 - SN3617 ConvF(9.56, 9.56, 9.56)

Area Scan (71x111x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 0.408 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 10.43 V/m; Power Drift = 0.17 dB
Peak SAR (extrapolated) = 0.485 W/kg
SAR(1 g) = 0.370 W/kg; SAR(10 g) = 0.279 W/kg
Maximum value of SAR (measured) = 0.410 W/kg

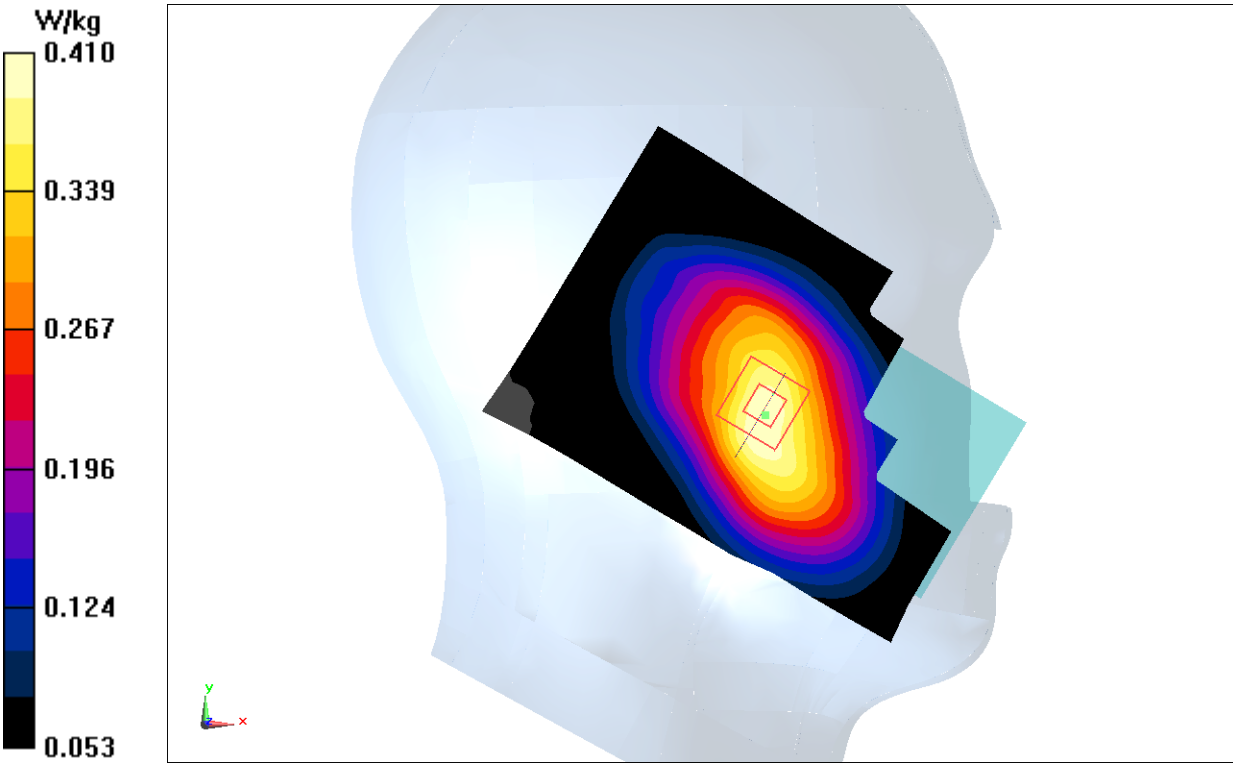

Fig.5 WCDMA 850

©Copyright. All rights reserved by CTTL.

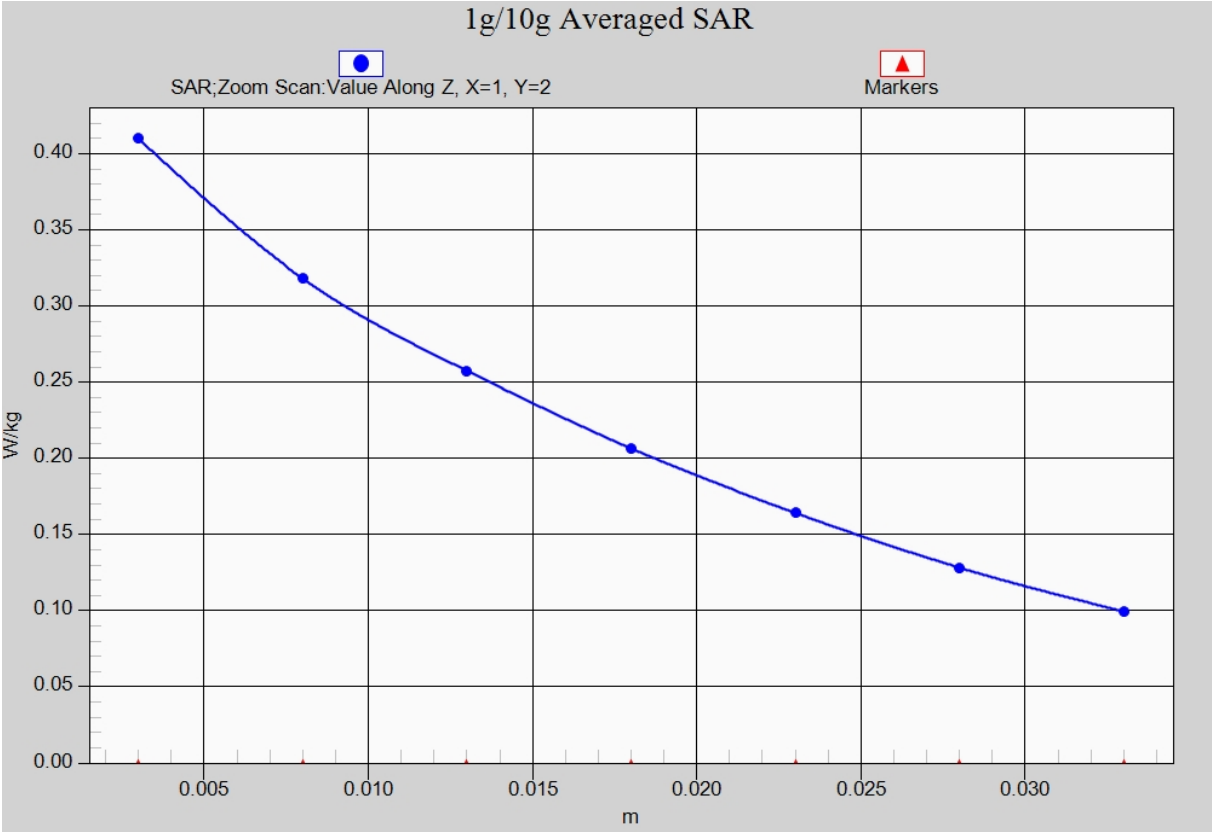

Fig. 5-1 Z-Scan at power reference point (WCDMA 850)

©Copyright. All rights reserved by CTTL.

WCDMA 850 Body Rear Middle

Date: 2016-05-11
Electronics: DAE4 Sn777
Medium: Body 850 MHz
Medium parameters used (interpolated): f = 836.4 MHz; σ = 0.984 mho/m; εr = 56.214; ρ = 1000 kg/m^3
Ambient Temperature: 23.0^{o}C Liquid Temperature: 22.5^{o}C
Communication System: WCDMA; Frequency: 836.4 MHz; Duty Cycle: 1:1
Probe: EX3DV4 - SN3617 ConvF(9.71, 9.71, 9.71)

Area Scan (111x71x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 0.470 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 19.55 V/m; Power Drift = 0.05 dB
Peak SAR (extrapolated) = 0.537 W/kg
SAR(1 g) = 0.412 W/kg; SAR(10 g) = 0.308 W/kg
Maximum value of SAR (measured) = 0.431 W/kg

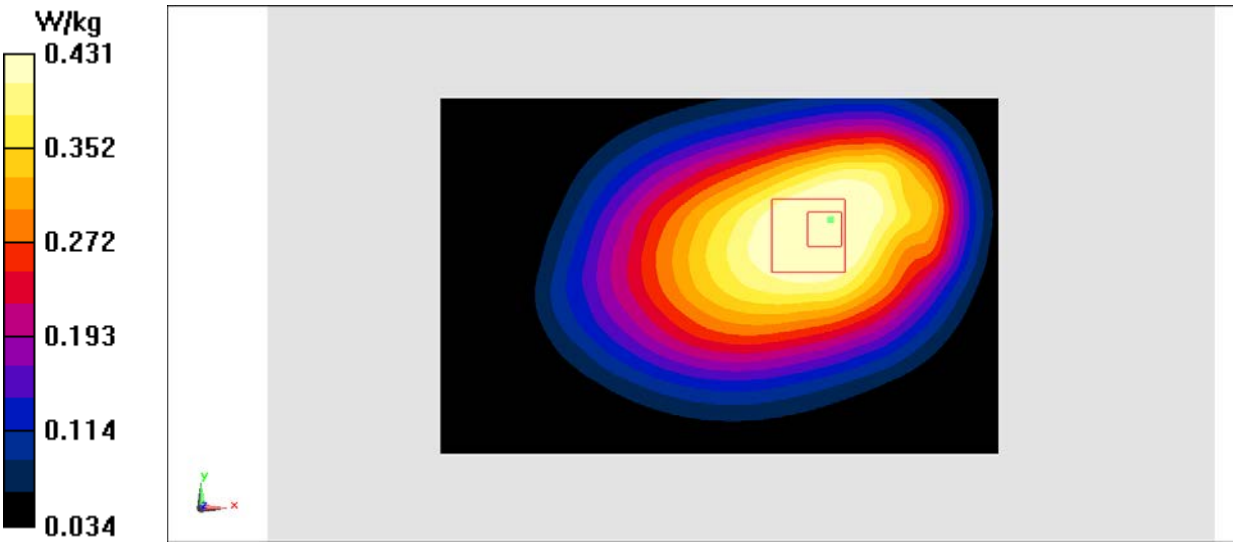

Fig.6 WCDMA 850

©Copyright. All rights reserved by CTTL.

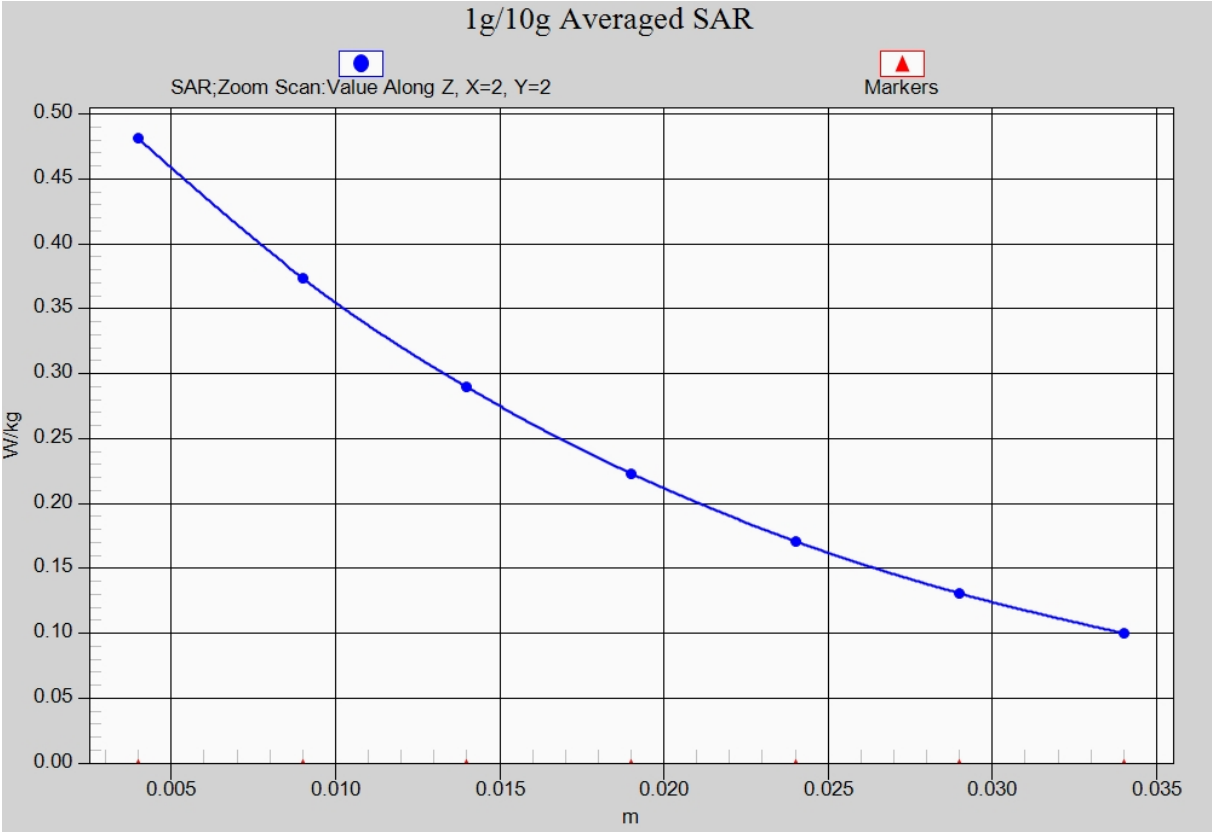

Fig. 6-1 Z-Scan at power reference point (WCDMA850)

©Copyright. All rights reserved by CTTL.

WCDMA 1700 Left Cheek High

Date: 2016-1-12
Electronics: DAE4 Sn777
Medium: Head 1750 MHz
Medium parameters used (interpolated): f = 1752.6 MHz; σ = 1.354 mho/m; εr = 41.395; ρ = 1000 kg/m^3
Ambient Temperature: 23.0^{o}C Liquid Temperature: 22.5^{o}C
Communication System: WCDMA 1700 Frequency: 1752.6 MHz Duty Cycle: 1:1
Probe: EX3DV4 - SN3617 ConvF(8.34, 8.34, 8.34)

Area Scan (71x111x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 0.676 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 4.605 V/m; Power Drift = 0.19 dB
Peak SAR (extrapolated) = 0.807 W/kg
SAR(1 g) = 0.531 W/kg; SAR(10 g) = 0.335 W/kg
Maximum value of SAR (measured) = 0.678 W/kg

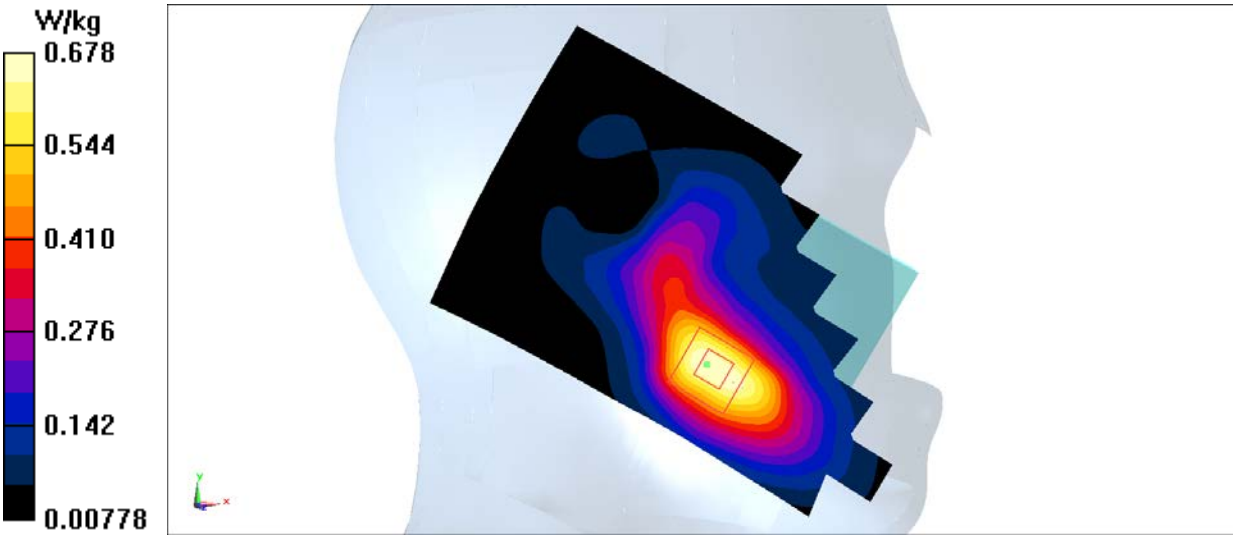

Fig.7 1700MHz

©Copyright. All rights reserved by CTTL.

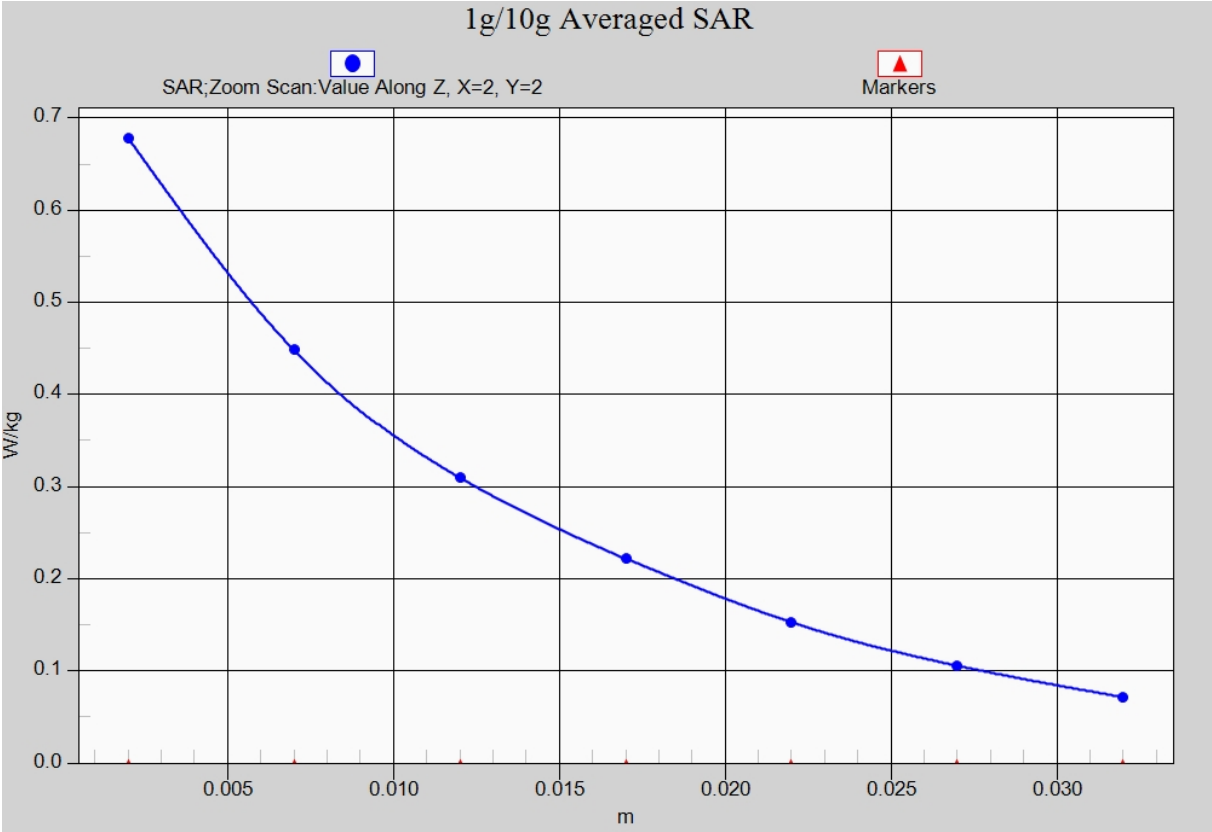

Fig. 7-1 Z-Scan at power reference point (1700 MHz)

©Copyright. All rights reserved by CTTL.

WCDMA 1700 Body Rear Low

Date: 2016-05-12
Electronics: DAE4 Sn777
Medium: Body 1750 MHz
Medium parameters used (interpolated): f = 1712.4 MHz; σ = 1.386 mho/m; εr = 54.526; ρ = 1000 kg/m^3
Ambient Temperature: 23.0^{o}C Liquid Temperature: 22.5^{o}C
Communication System: WCDMA 1700 Frequency: 1712.4 MHz Duty Cycle: 1:1
Probe: EX3DV4 - SN3617 ConvF(7.96, 7.96, 7.96)

Area Scan (111x71x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 1.13 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 15.47 V/m; Power Drift = -0.01 dB
Peak SAR (extrapolated) = 1.45 W/kg
SAR(1 g) = 0.993 W/kg; SAR(10 g) = 0.654 W/kg
Maximum value of SAR (measured) = 1.04 W/kg

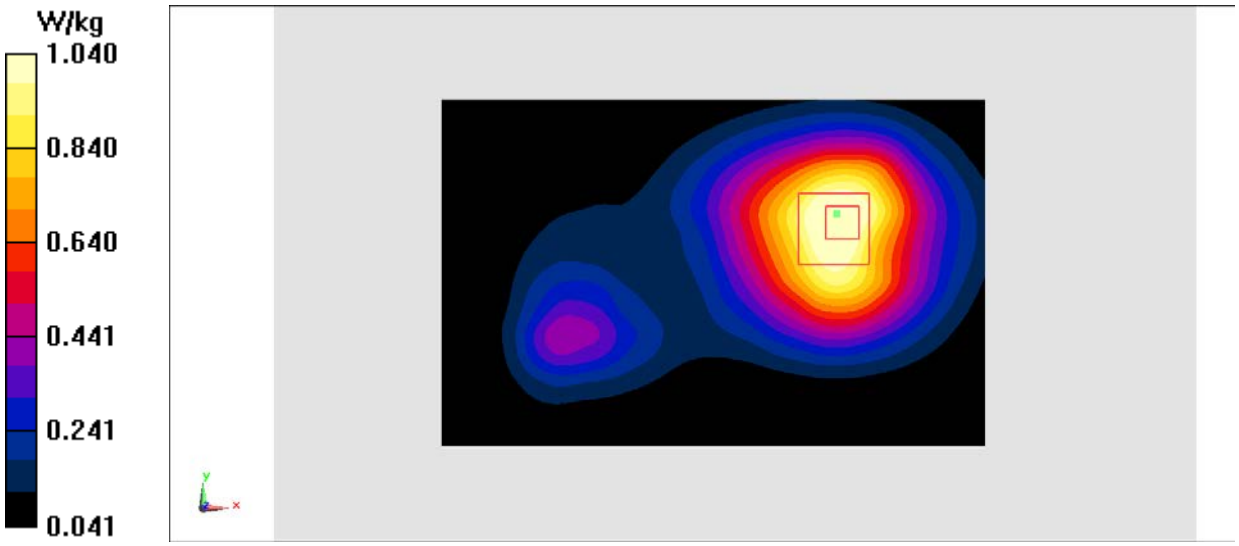

Fig.8 1700 MHz

©Copyright. All rights reserved by CTTL.

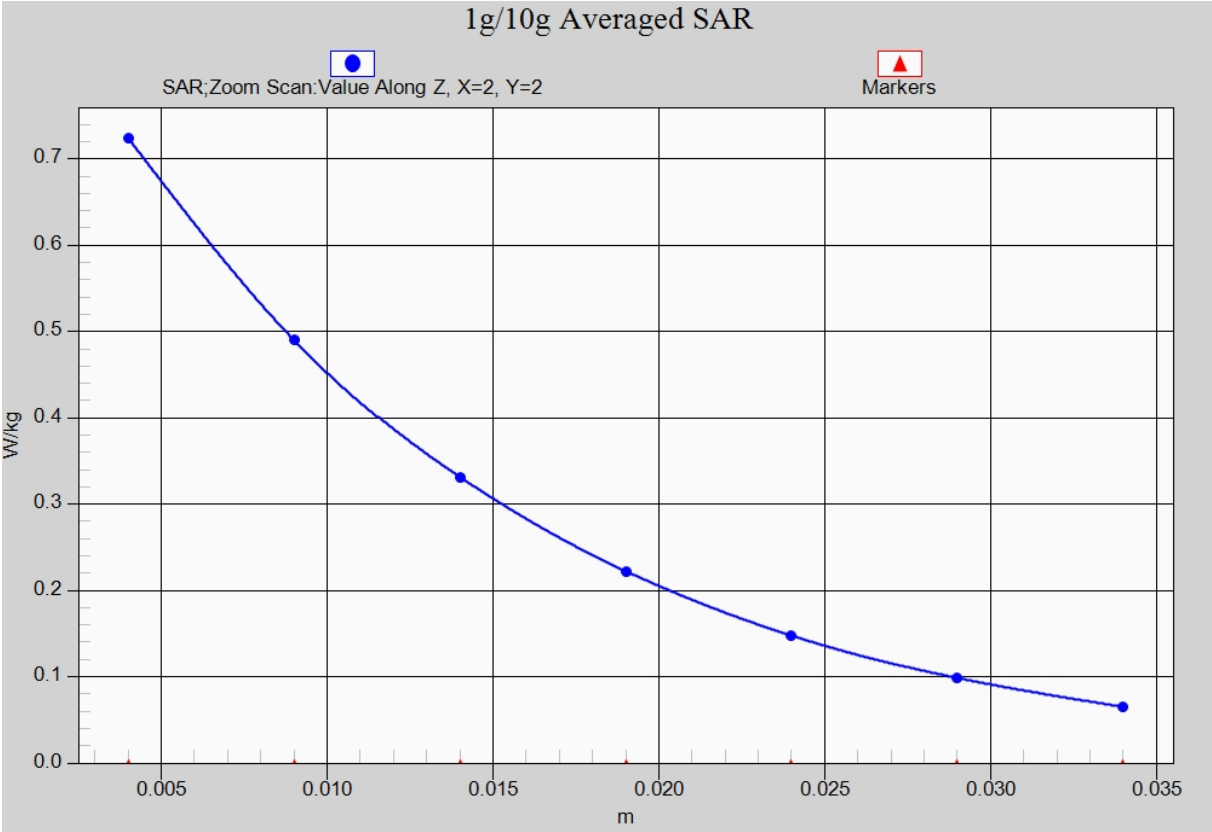

Fig. 8-1 Z-Scan at power reference point (1700 MHz)

©Copyright. All rights reserved by CTTL.

WCDMA 1900 Left Cheek Low

Date: 2016-1-13
Electronics: DAE4 Sn777
Medium: Head 1900 MHz
Medium parameters used (interpolated): f = 1852.4 MHz; σ = 1.33 mho/m; εr = 41.987; ρ = 1000 kg/m^3
Ambient Temperature: 23.0^{o}C Liquid Temperature: 22.5^{o}C
Communication System: WCDMA 1900 Frequency: 1852.4 MHz Duty Cycle: 1:1
Probe: EX3DV4 - SN3617 ConvF(8.07, 8.07, 8.07)

Area Scan (71x111x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 0.857 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 7.272 V/m; Power Drift = 0.10 dB
Peak SAR (extrapolated) = 1.08 W/kg
SAR(1 g) = 0.708 W/kg; SAR(10 g) = 0.427 W/kg
Maximum value of SAR (measured) = 0.844 W/kg

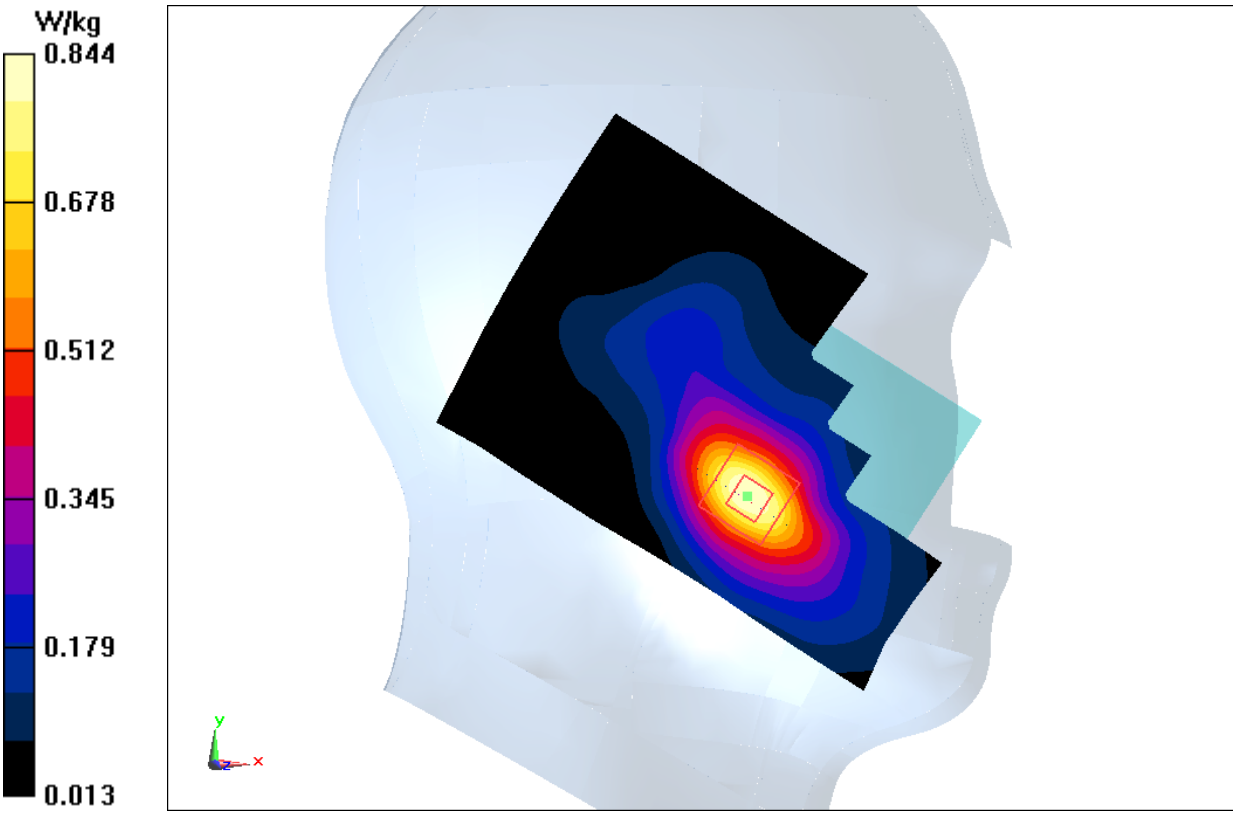

Fig.9 WCDMA1900

©Copyright. All rights reserved by CTTL.

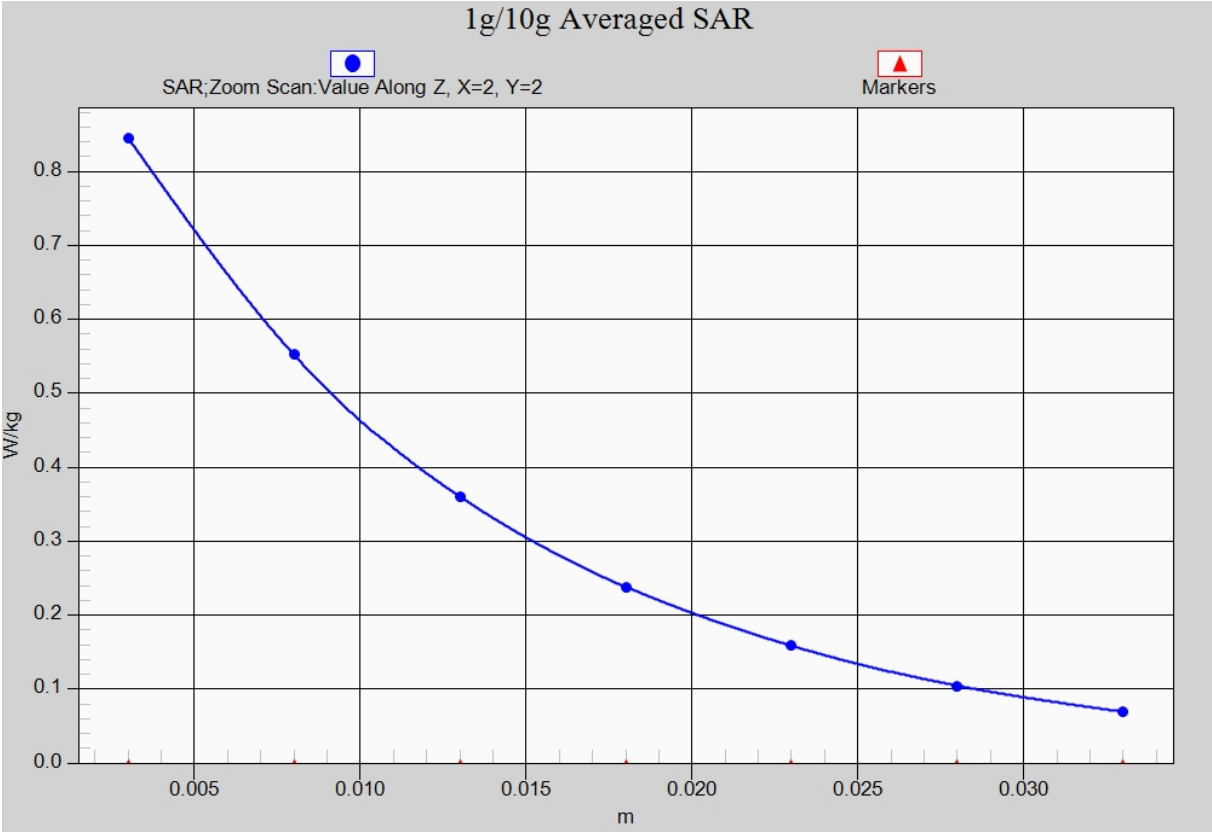

Fig. 9-1 Z-Scan at power reference point (WCDMA1900)

©Copyright. All rights reserved by CTTL.

WCDMA 1900 Body Bottom High – AP ON

Date: 2016-05-13
Electronics: DAE4 Sn777
Medium: Body 1900 MHz
Medium parameters used: f = 1907.6 MHz; σ = 1.663 mho/m; εr = 54.253; ρ = 1000 kg/m^3
Ambient Temperature: 23.0^{o}C Liquid Temperature: 22.5^{o}C
Communication System: WCDMA 1900 Frequency: 1907.6 MHz Duty Cycle: 1:1
Probe: EX3DV4 - SN3617 ConvF(7.74, 7.74, 7.74)

Area Scan (111x71x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 1.24 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 23.77 V/m; Power Drift = 0.03 dB
Peak SAR (extrapolated) = 1.76 W/kg
SAR(1 g) = 1.03 W/kg; SAR(10 g) = 0.521 W/kg
Maximum value of SAR (measured) = 1.31 W/kg

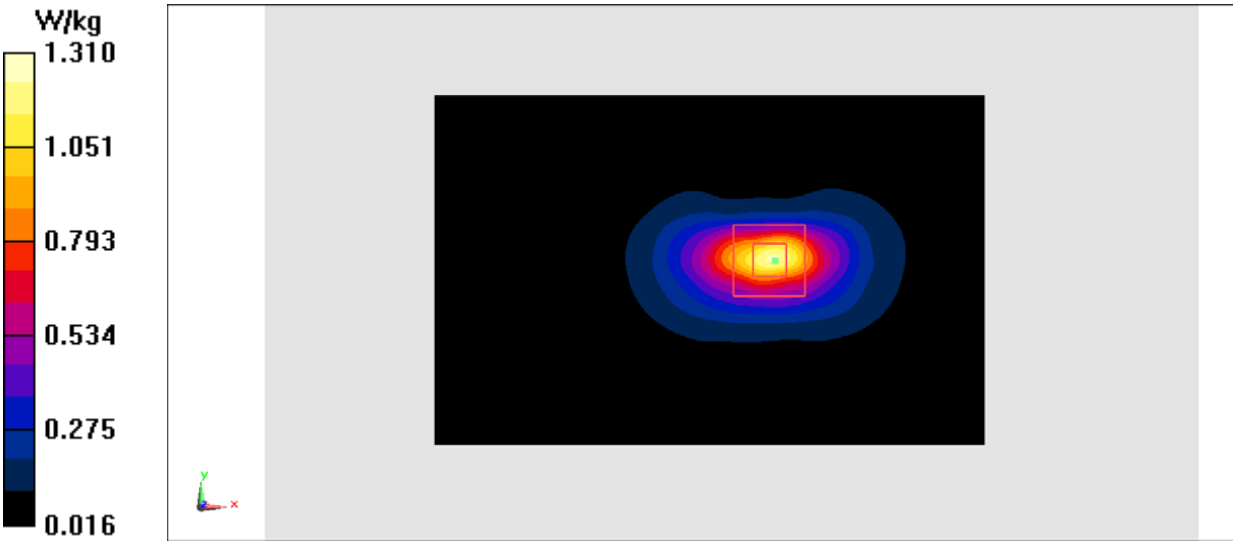

Fig.10 WCDMA1900

©Copyright. All rights reserved by CTTL.

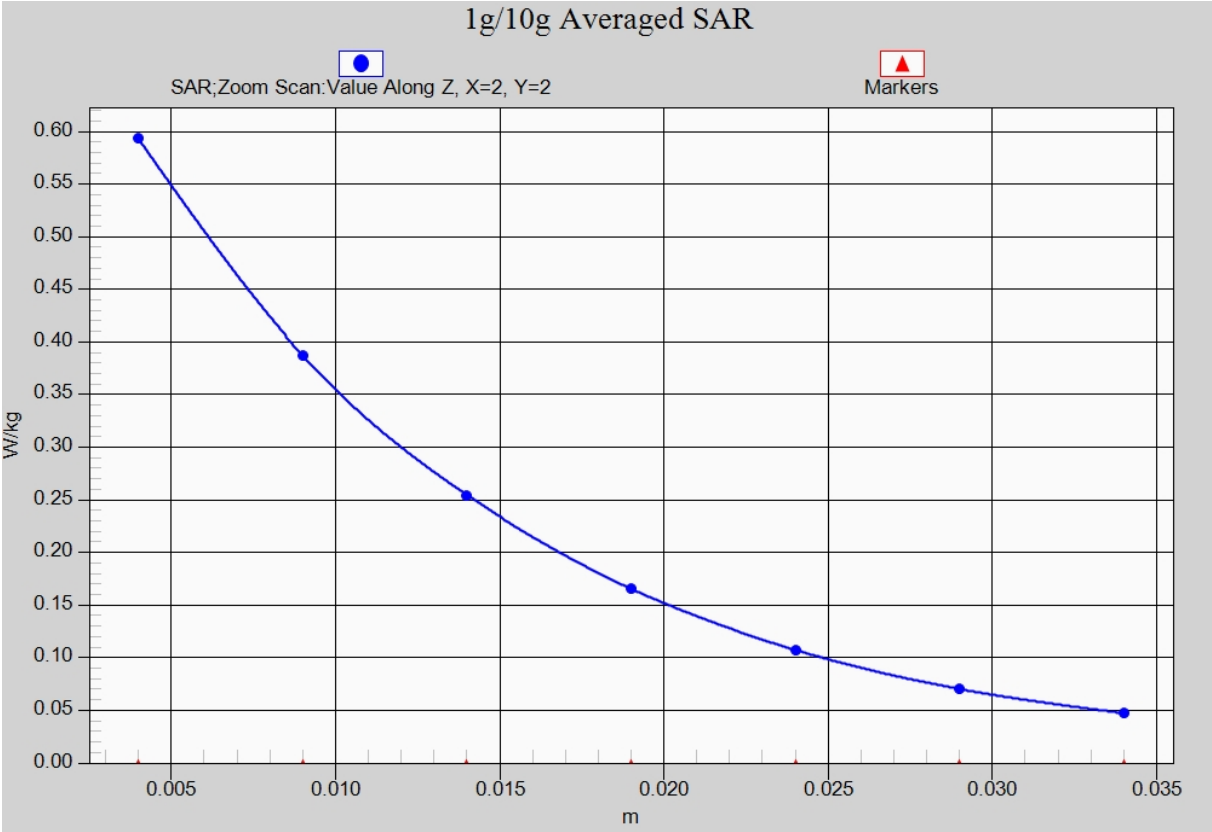

Fig. 10-1 Z-Scan at power reference point (WCDMA1900)

©Copyright. All rights reserved by CTTL.

WCDMA 1900 Body Rear High – AP OFF

Date: 2016-05-13
Electronics: DAE4 Sn777
Medium: Body 1900 MHz
Medium parameters used: f = 1907.6 MHz; σ = 1.663 mho/m; εr = 54.253; ρ = 1000 kg/m^3
Ambient Temperature: 23.0^{o}C Liquid Temperature: 22.5^{o}C
Communication System: WCDMA 1900 Frequency: 1907.6 MHz Duty Cycle: 1:1
Probe: EX3DV4 - SN3617 ConvF(7.74, 7.74, 7.74)

Area Scan (111x71x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 0.640 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 14.18 V/m; Power Drift = 0.11 dB
Peak SAR (extrapolated) = 0.845 W/kg
SAR(1 g) = 0.547 W/kg; SAR(10 g) = 0.329 W/kg
Maximum value of SAR (measured) = 0.655 W/kg

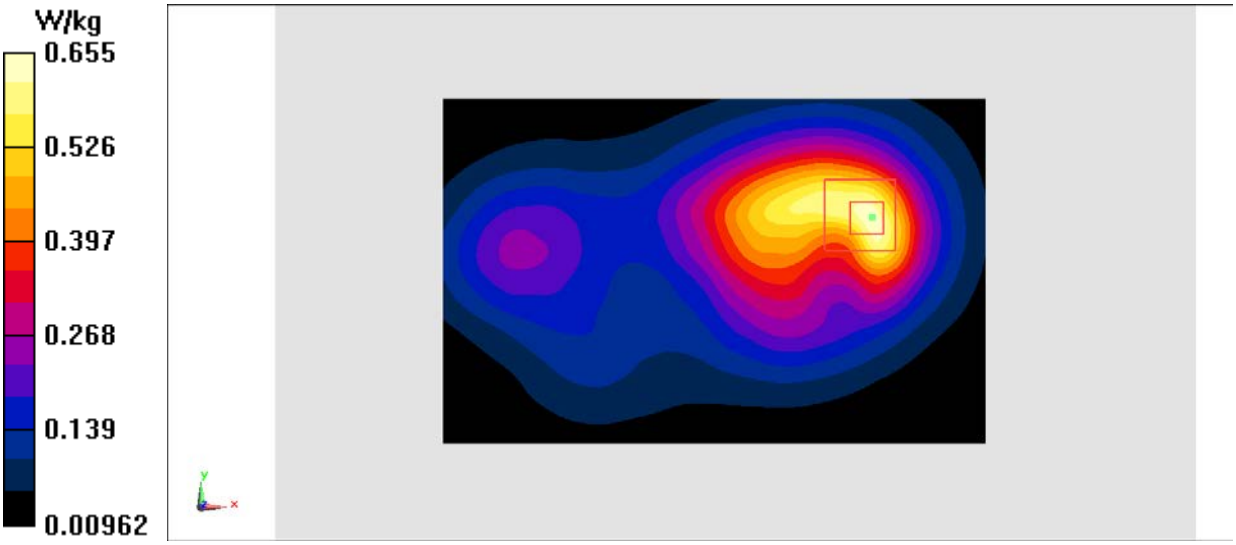

Fig.11 WCDMA1900

©Copyright. All rights reserved by CTTL.

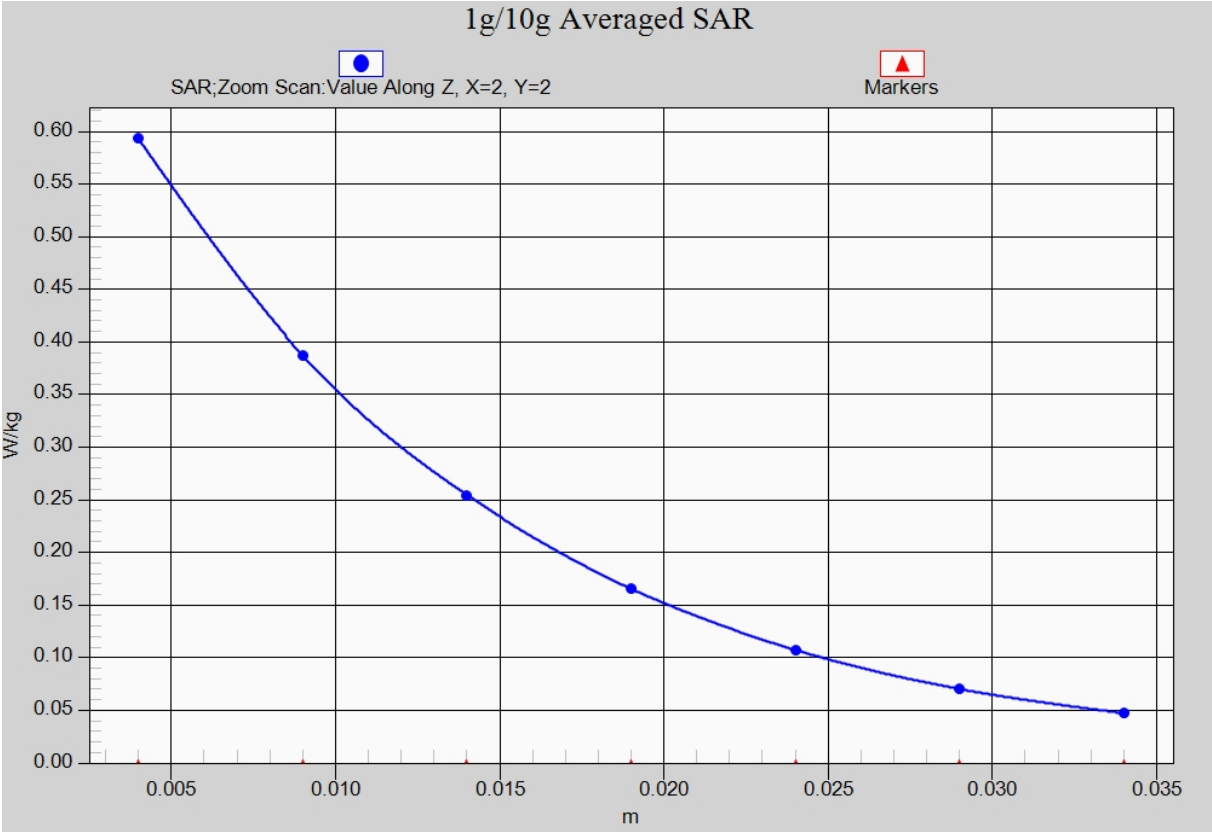

Fig. 11-1 Z-Scan at power reference point (WCDMA1900)

©Copyright. All rights reserved by CTTL.

LTE Band2 Left Cheek High with QPSK_20M_1RB_Middle

Date: 2016-05-13
Electronics: DAE4 Sn777
Medium: Head 1900 MHz
Medium parameters used: f = 1900 MHz; σ = 1.436 mho/m; εr = 39.88; ρ = 1000 kg/m^3
Ambient Temperature: 23.0^{o}C Liquid Temperature: 22.5^{o}C
Communication System: LTE Band2 Frequency: 1900 MHz Duty Cycle: 1:1
Probe: EX3DV4 - SN3617 ConvF(8.07, 8.07, 8.07)

Area Scan (71x111x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 0.745 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 6.469 V/m; Power Drift = 0.08 dB
Peak SAR (extrapolated) = 0.916 W/kg
SAR(1 g) = 0.602 W/kg; SAR(10 g) = 0.370 W/kg
Maximum value of SAR (measured) = 0.701 W/kg

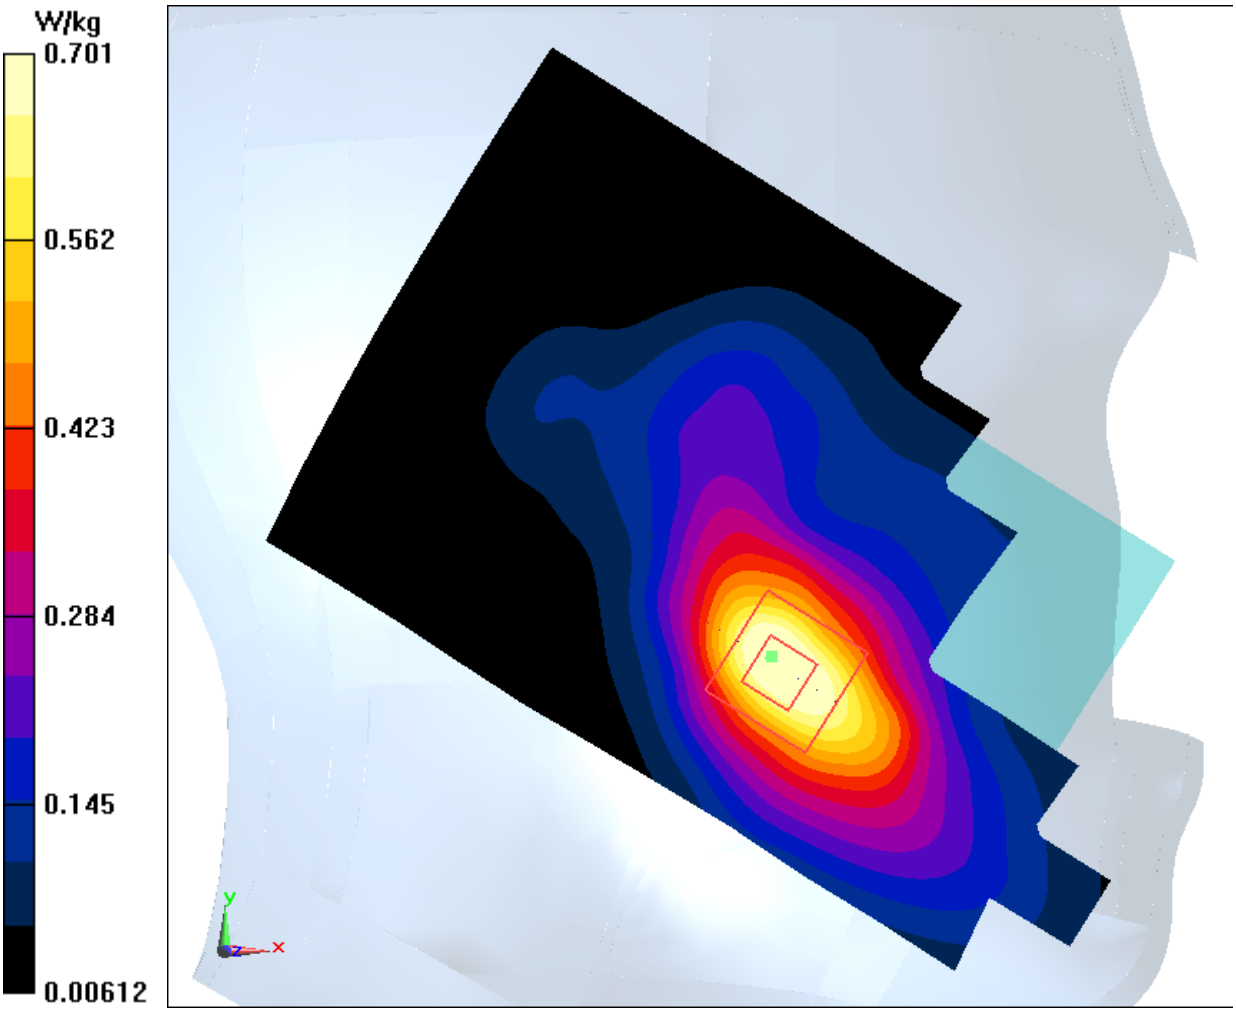

Fig.12 LTE Band2

©Copyright. All rights reserved by CTTL.

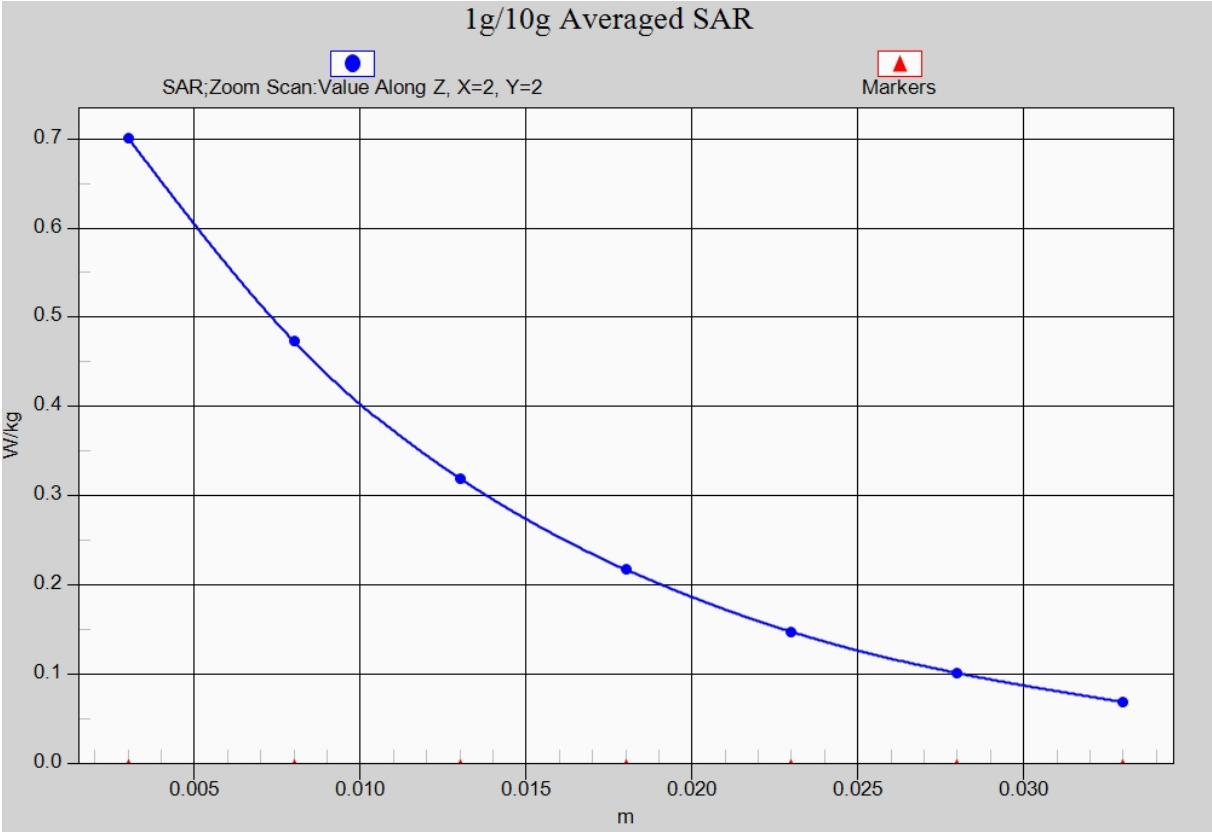

Fig. 12-1 Z-Scan at power reference point (LTE Band2)

©Copyright. All rights reserved by CTTL.

LTE Band2 Body Bottom High with QPSK_20M_1RB_Low – AP ON

Date: 2016-05-13
Electronics: DAE4 Sn777
Medium: Body 1900 MHz
Medium parameters used: f = 1900 MHz; σ = 1.573 mho/m; εr = 54.15; ρ = 1000 kg/m^3
Ambient Temperature: 23.0^{o}C Liquid Temperature: 22.5^{o}C
Communication System: LTE Band2 Frequency: 1900 MHz Duty Cycle: 1:1
Probe: EX3DV4 - SN3617 ConvF(7.74, 7.74, 7.74)

Area Scan (111x71x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 1.37 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 25.07 V/m; Power Drift = -0.19 dB
Peak SAR (extrapolated) = 1.93 W/kg
SAR(1 g) = 1.11 W/kg; SAR(10 g) = 0.576 W/kg
Maximum value of SAR (measured) = 1.37 W/kg

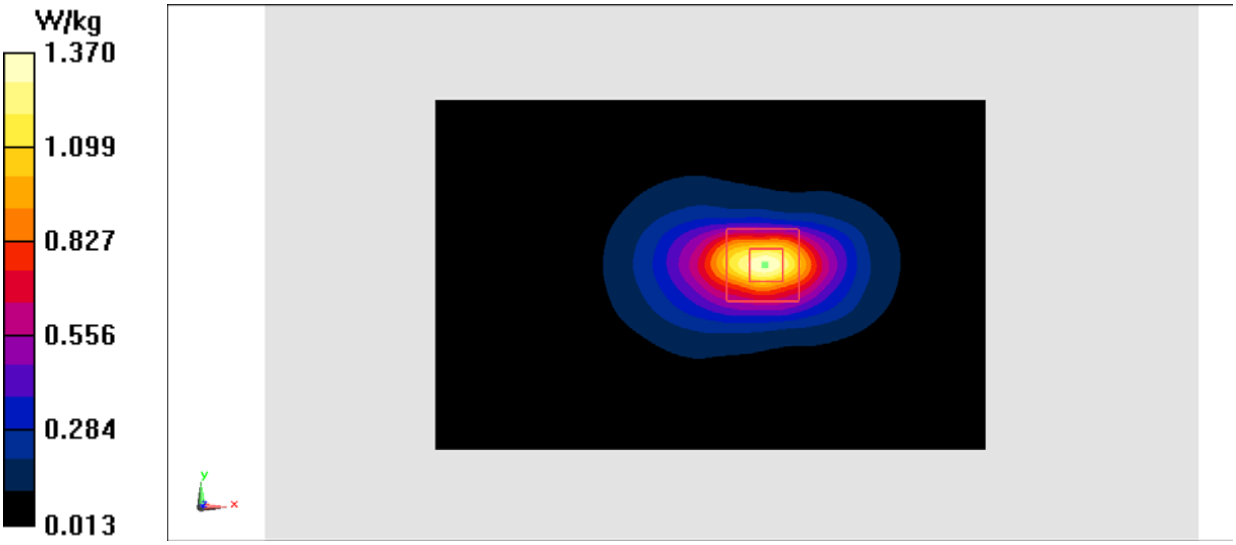

Fig.13 LTE Band2

©Copyright. All rights reserved by CTTL.

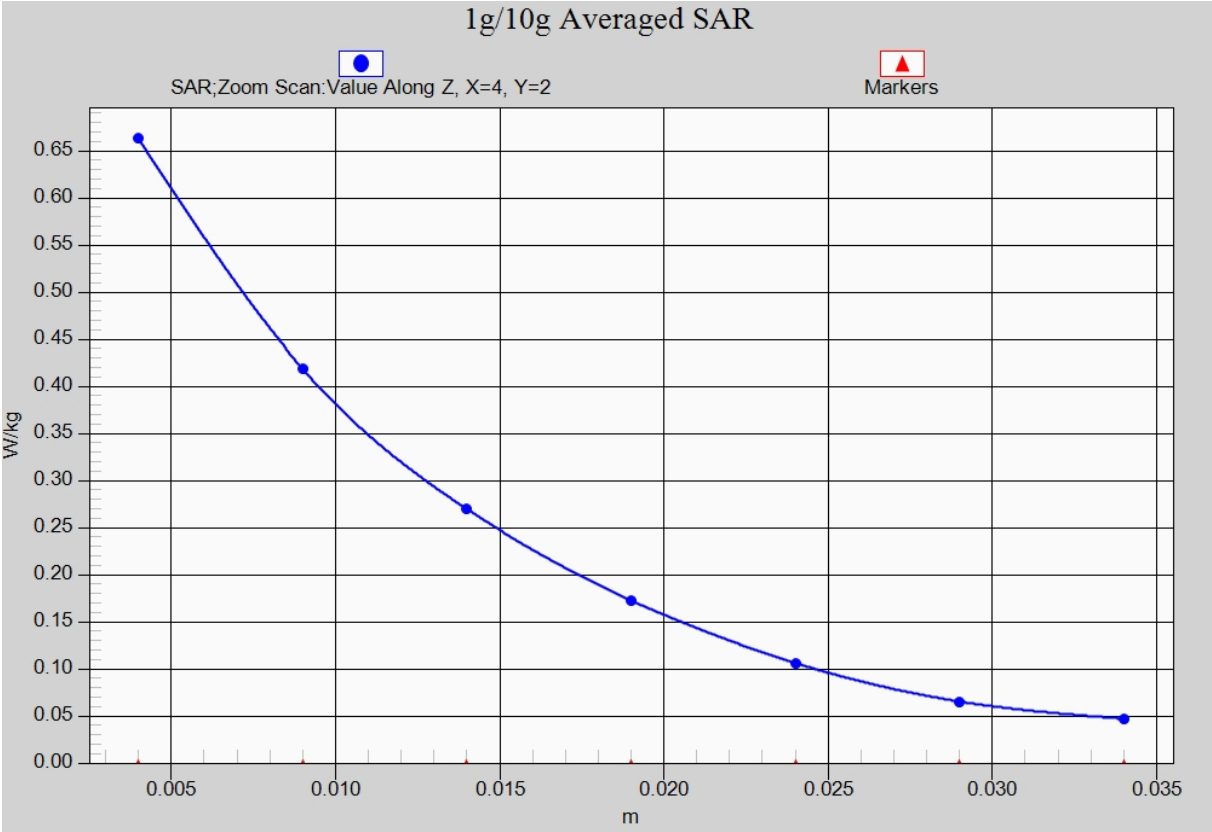

Fig. 13-1 Z-Scan at power reference point (LTE Band2)

©Copyright. All rights reserved by CTTL.

LTE Band2 Body Rear High with QPSK_20M_1RB_Middle – AP OFF

Date: 2016-05-13
Electronics: DAE4 Sn777
Medium: Body 1900 MHz
Medium parameters used: f = 1900 MHz; σ = 1.573 mho/m; εr = 54.15; ρ = 1000 kg/m^3
Ambient Temperature: 23.0^{o}C Liquid Temperature: 22.5^{o}C
Communication System: LTE Band2 Frequency: 1900 MHz Duty Cycle: 1:1
Probe: EX3DV4 - SN3617 ConvF(7.74, 7.74, 7.74)

Area Scan (111x71x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 0.733 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 10.96 V/m; Power Drift = -0.11 dB
Peak SAR (extrapolated) = 0.964 W/kg
SAR(1 g) = 0.620 W/kg; SAR(10 g) = 0.379 W/kg
Maximum value of SAR (measured) = 0.733 W/kg

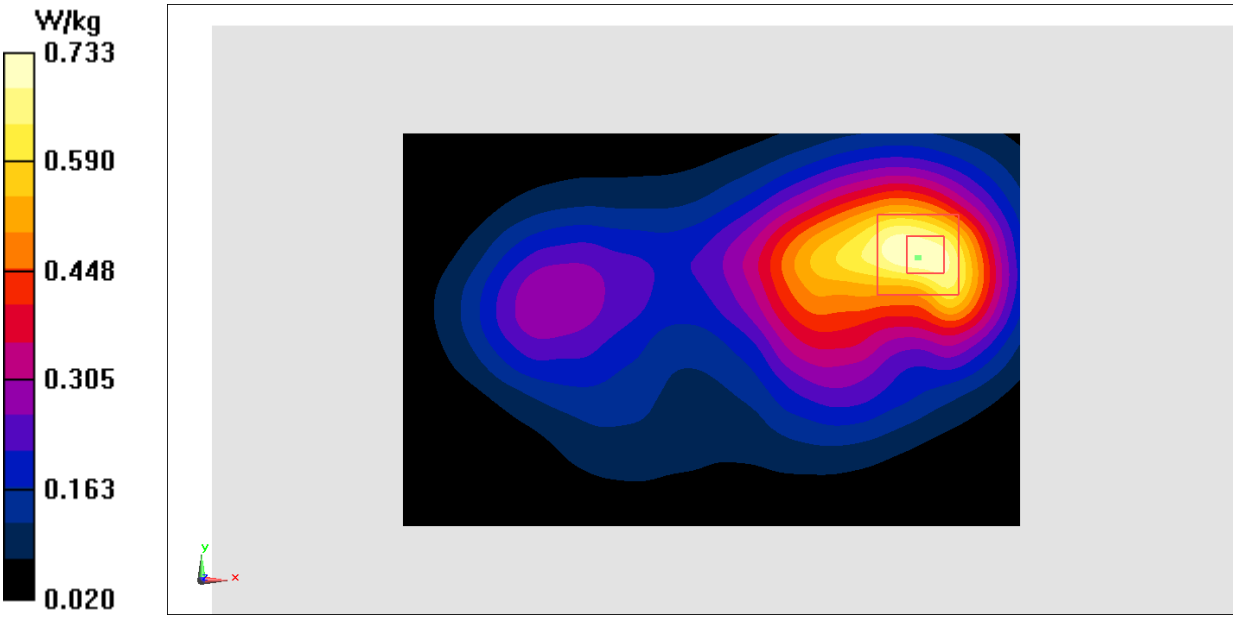

Fig.14 LTE Band2

©Copyright. All rights reserved by CTTL.

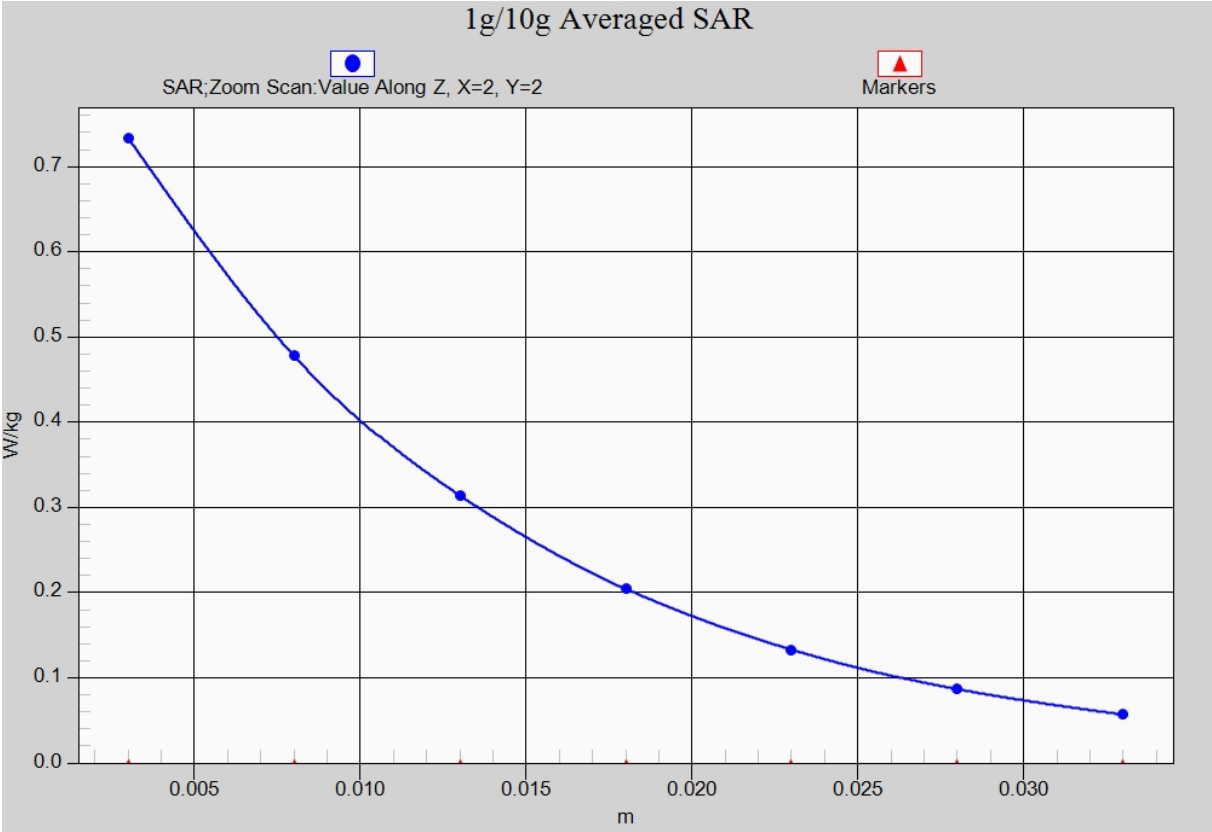

Fig. 14-1 Z-Scan at power reference point (LTE Band2)

©Copyright. All rights reserved by CTTL.

LTE Band4 Left Cheek High with QPSK_20M_1RB_Middle

Date: 2016-1-12
Electronics: DAE4 Sn777
Medium: Head 1750 MHz
Medium parameters used: f = 1745 MHz; σ = 1.344 mho/m; εr = 41.456; ρ = 1000 kg/m^3
Ambient Temperature: 23.0^{o}C Liquid Temperature: 22.5^{o}C
Communication System: LTE Band4 Frequency: 1745 MHz Duty Cycle: 1:1
Probe: EX3DV4 - SN3617 ConvF(8.34, 8.34, 8.34)

Area Scan (71x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 0.906 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 4.753 V/m; Power Drift = 0.03 dB
Peak SAR (extrapolated) = 1.06 W/kg
SAR(1 g) = 0.686 W/kg; SAR(10 g) = 0.423 W/kg
Maximum value of SAR (measured) = 0.888 W/kg

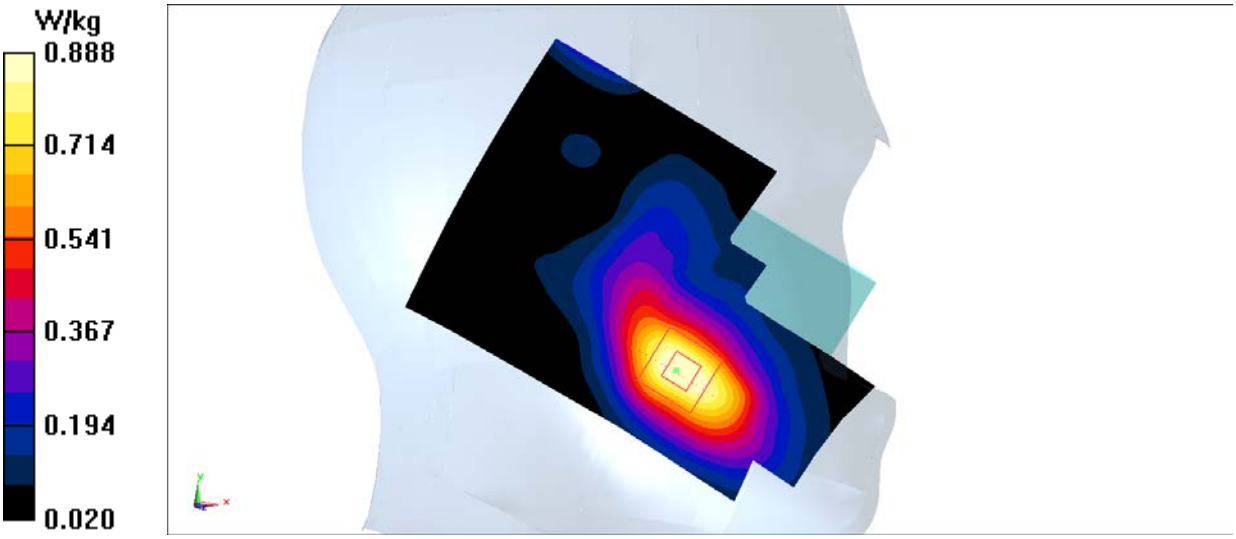

Fig.15 LTE Band4

©Copyright. All rights reserved by CTTL.

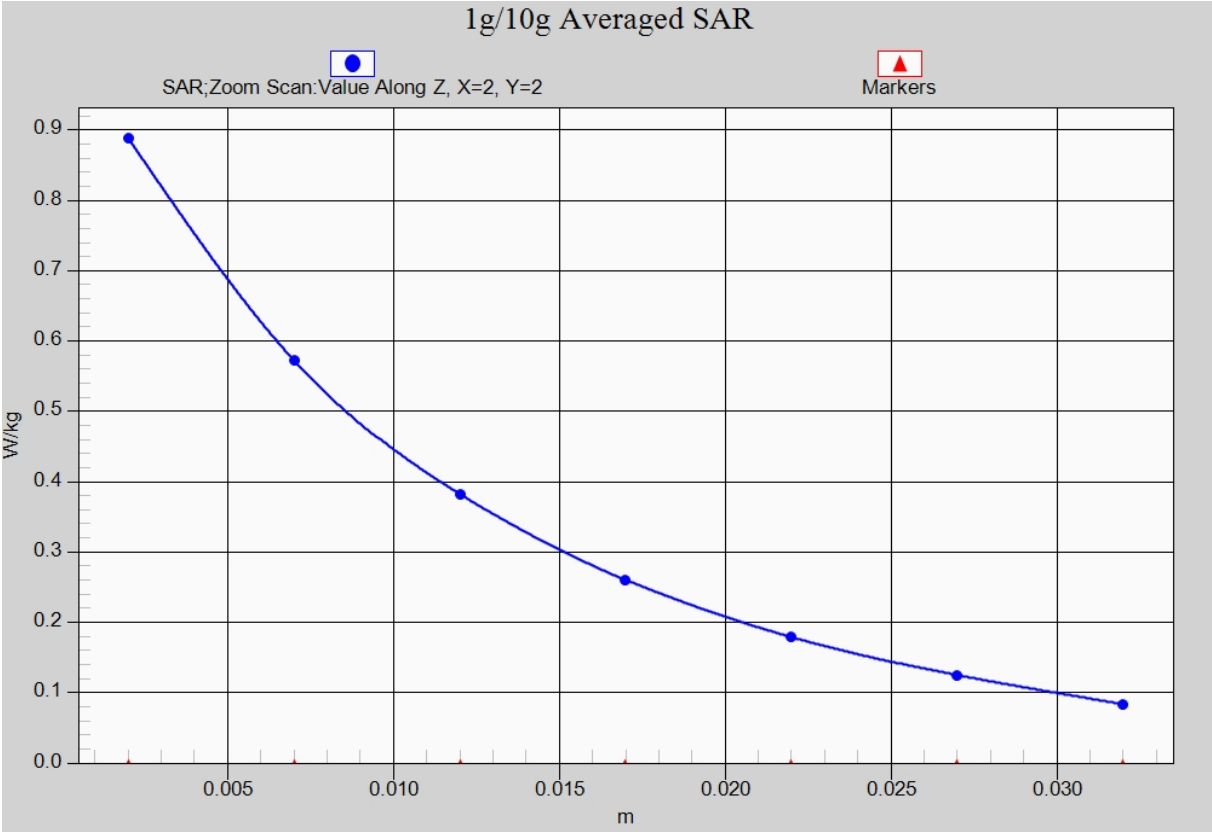

Fig. 15-1 Z-Scan at power reference point (LTE Band4)

©Copyright. All rights reserved by CTTL.

LTE Band4 Body Rear Low with QPSK_20M_1RB_Middle

Date: 2016-05-12
Electronics: DAE4 Sn777
Medium: Body 1750 MHz
Medium parameters used: f = 1720 MHz; σ = 1.448 mho/m; εr = 52.843; ρ = 1000 kg/m^3
Ambient Temperature: 23.0^{o}C Liquid Temperature: 22.5^{o}C
Communication System: LTE Band4 Frequency: 1720 MHz Duty Cycle: 1:1
Probe: EX3DV4 - SN3617 ConvF(7.96, 7.96, 7.96)

Area Scan (111x71x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 1.22 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 18.23 V/m; Power Drift = -0.15dB
Peak SAR (extrapolated) = 1.55 W/kg
SAR(1 g) = 1.02 W/kg; SAR(10 g) = 0.657 W/kg
Maximum value of SAR (measured) = 1.16 W/kg

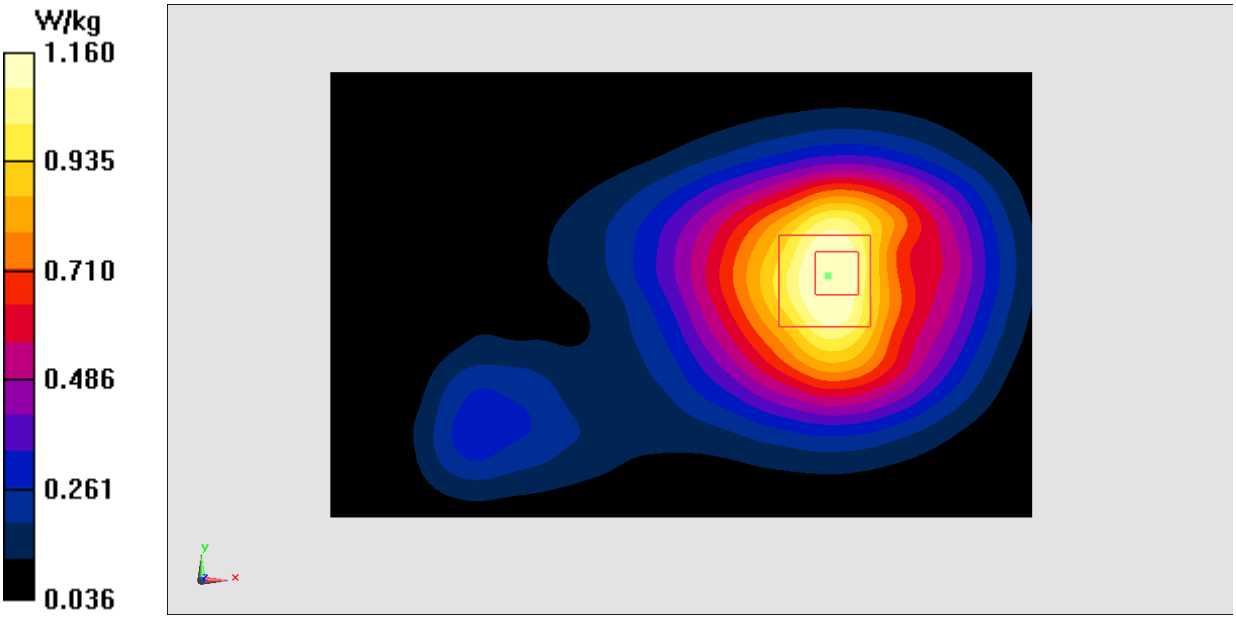

Fig.16 LTE Band4

©Copyright. All rights reserved by CTTL.

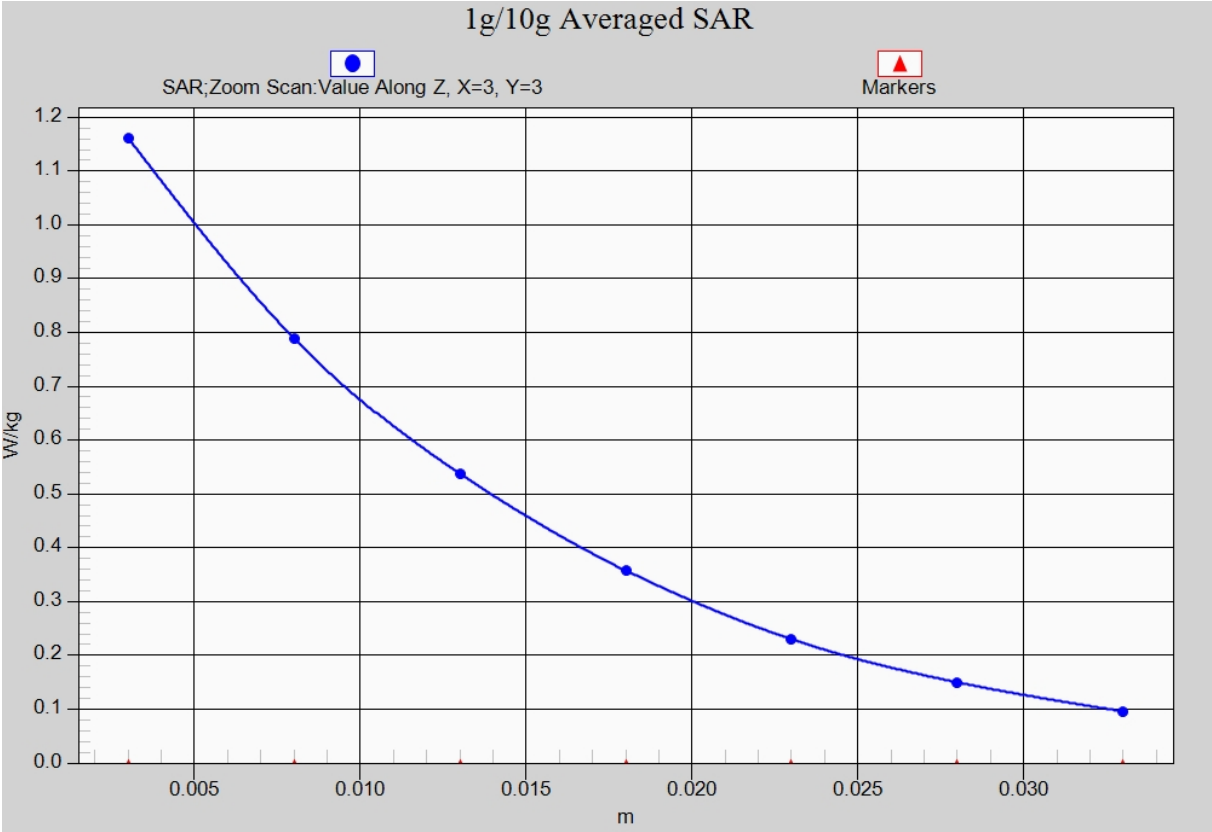

Fig. 16-1 Z-Scan at power reference point (LTE Band4)

©Copyright. All rights reserved by CTTL.

LTE Band5 Left Cheek Middle with QPSK_10M_1RB_Middle

Date: 2016-1-11
Electronics: DAE4 Sn777
Medium: Head 850 MHz
Medium parameters used (interpolated): f = 836.5 MHz; σ = 0.916 mho/m; εr = 41.861; ρ = 1000 kg/m^3
Ambient Temperature: 23.0^{o}C Liquid Temperature: 22.5^{o}C
Communication System: LTE Band5 Frequency: 836.5 MHz Duty Cycle: 1:1
Probe: EX3DV4 - SN3617 ConvF(9.56, 9.56, 9.56)

Area Scan (71x111x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 0.471 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 8.910 V/m; Power Drift = -0.12 dB
Peak SAR (extrapolated) = 0.521 W/kg
SAR(1 g) = 0.394 W/kg; SAR(10 g) = 0.292 W/kg
Maximum value of SAR (measured) = 0.420 W/kg

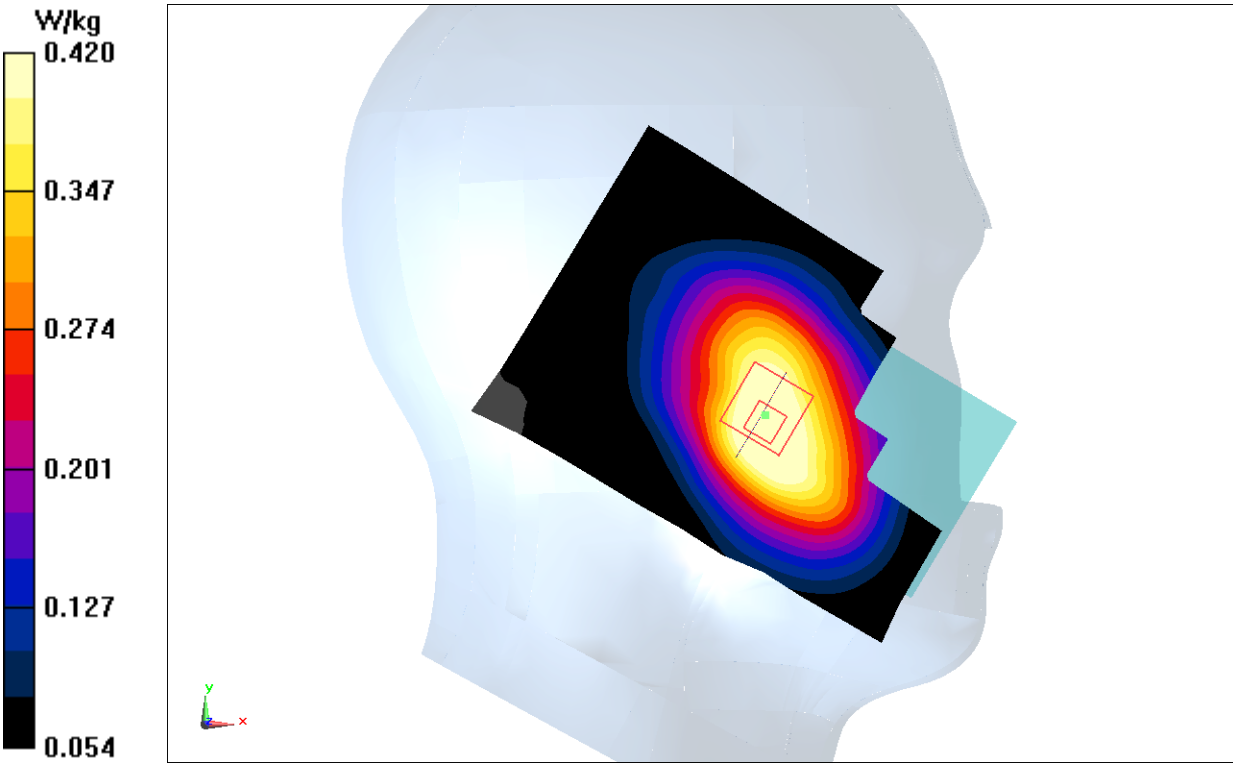

Fig.17 LTE Band5

©Copyright. All rights reserved by CTTL.

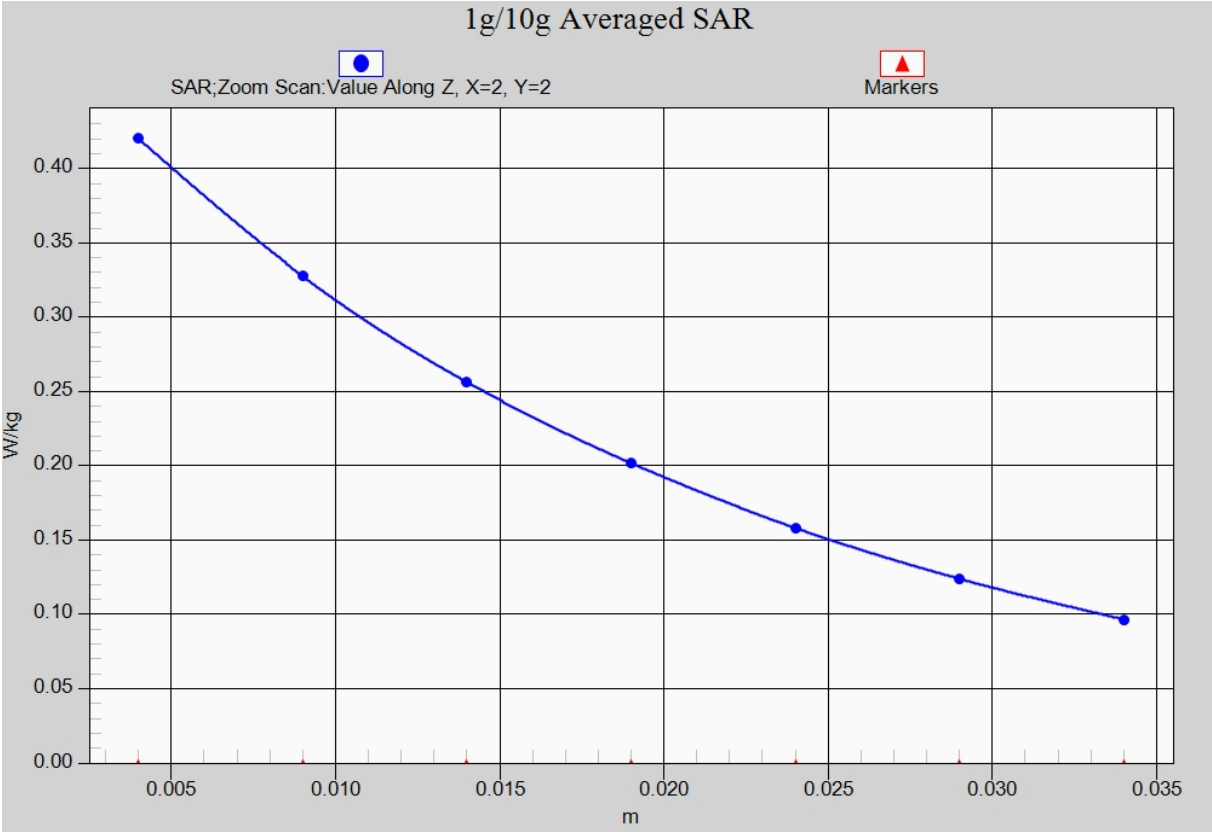

Fig. 17-1 Z-Scan at power reference point (LTE Band5)

©Copyright. All rights reserved by CTTL.

LTE Band5 Body Rear Middle with QPSK_10M_1RB_Middle

Date: 2016-05-11
Electronics: DAE4 Sn777
Medium: Body 850 MHz
Medium parameters used (interpolated): f = 836.5 MHz; σ = 0.994 mho/m; εr = 56.084; ρ = 1000 kg/m^3
Ambient Temperature: 23.0^{o}C Liquid Temperature: 22.5^{o}C
Communication System: LTE Band5 Frequency: 836.5 MHz Duty Cycle: 1:1
Probe: EX3DV4 - SN3617 ConvF(9.71, 9.71, 9.71)

Area Scan (111x71x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 0.476 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 19.36 V/m; Power Drift = 0.15 dB
Peak SAR (extrapolated) = 0.562 W/kg
SAR(1 g) = 0.434 W/kg; SAR(10 g) = 0.326 W/kg
Maximum value of SAR (measured) = 0.457 W/kg

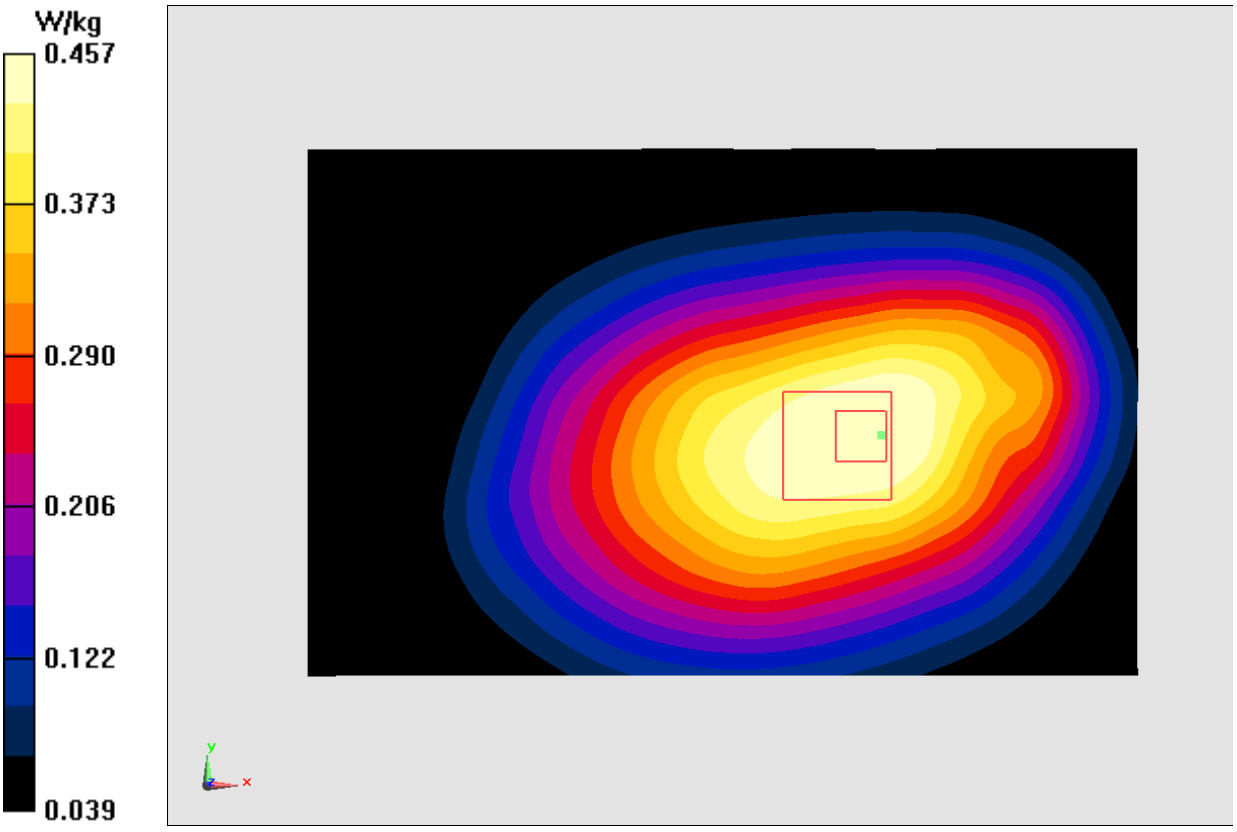

Fig.18 LTE Band5

©Copyright. All rights reserved by CTTL.

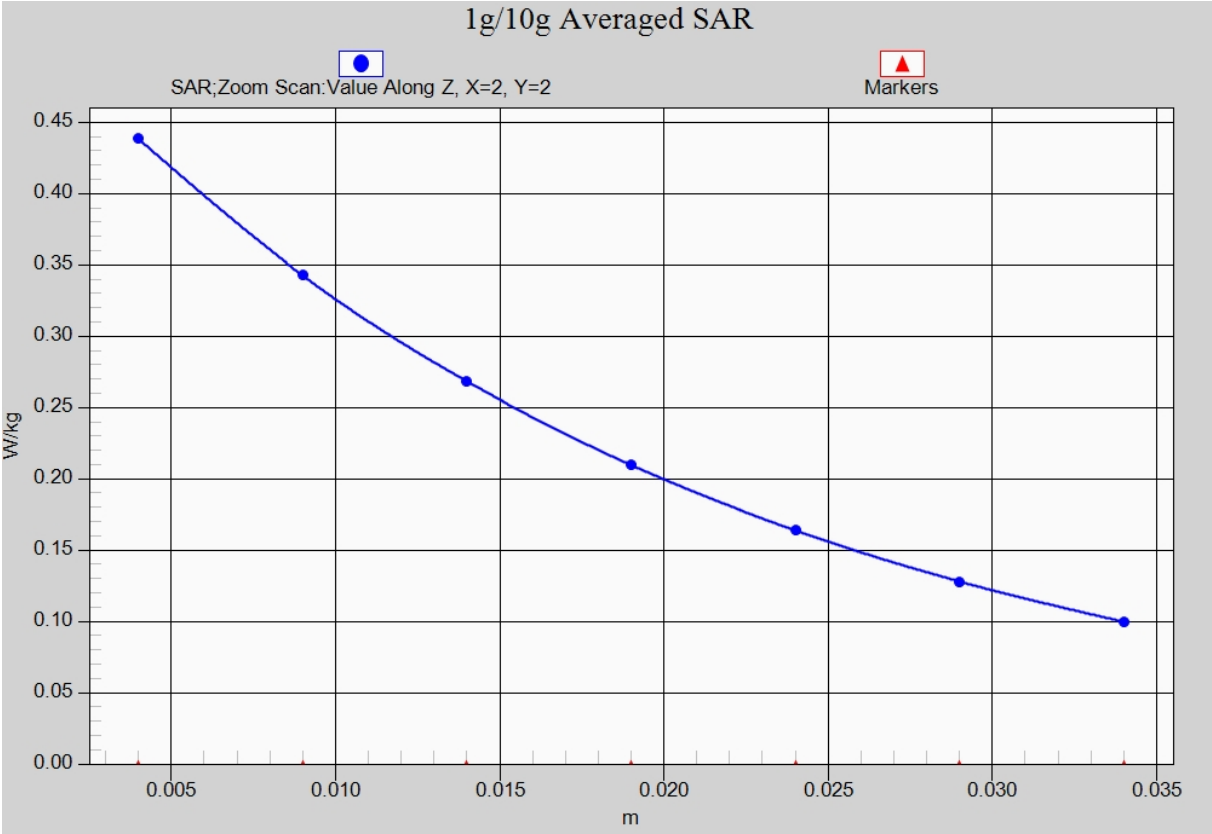

Fig. 18-1 Z-Scan at power reference point (LTE Band5)

©Copyright. All rights reserved by CTTL.

LTE Band12 Left Cheek Middle with QPSK_10M_1RB_Middle

Date: 2016-1-8
Electronics: DAE4 Sn777
Medium: Head 750 MHz
Medium parameters used (interpolated): f = 707.5 MHz; σ = 0.871 mho/m; εr = 42.864; ρ = 1000 kg/m^3
Ambient Temperature: 23.0^{o}C Liquid Temperature: 22.5^{o}C
Communication System: LTE Band12 Frequency: 707.5 MHz Duty Cycle: 1:1
Probe: EX3DV4 - SN3617 ConvF(9.98, 9.98, 9.98)

Area Scan (71x111x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 0.349 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 8.155 V/m; Power Drift = -0.02 dB
Peak SAR (extrapolated) = 0.387 W/kg
SAR(1 g) = 0.304 W/kg; SAR(10 g) = 0.232 W/kg
Maximum value of SAR (measured) = 0.319 W/kg

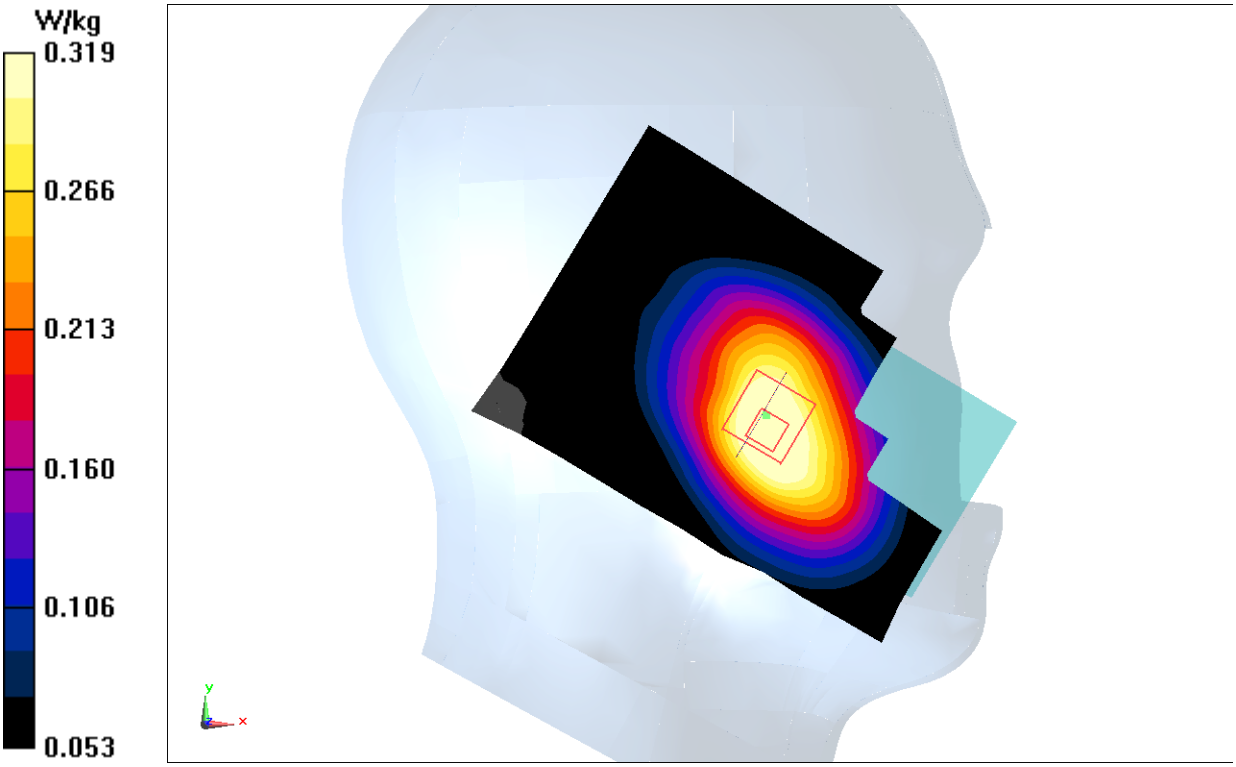

Fig.19 LTE Band12

©Copyright. All rights reserved by CTTL.

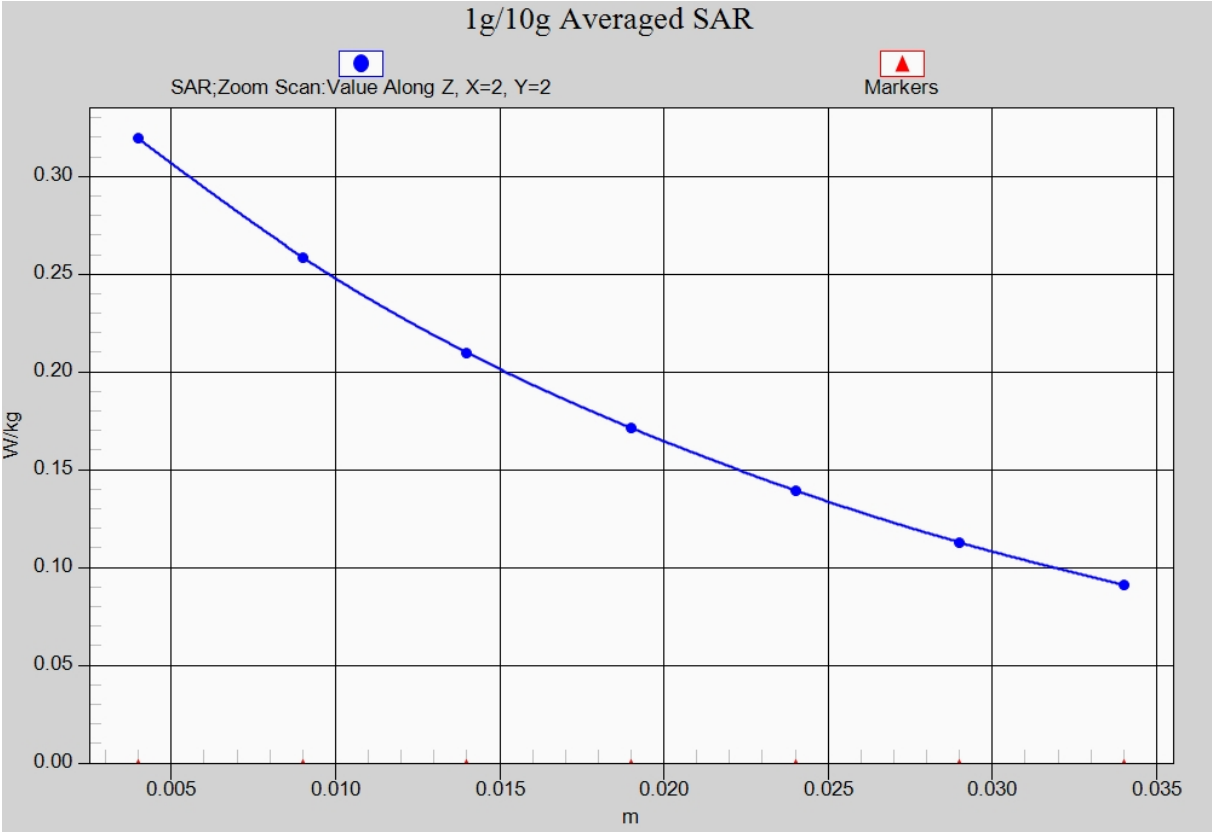

Fig. 19-1 Z-Scan at power reference point (LTE Band12)

©Copyright. All rights reserved by CTTL.

LTE Band12 Body Rear Low with QPSK_10M_1RB_Middle

Date: 2016-05-10
Electronics: DAE4 Sn777
Medium: Body 750 MHz
Medium parameters used (interpolated): f = 704 MHz; σ = 0.825 mho/m; εr = 56.942; ρ = 1000 kg/m^3
Ambient Temperature: 23.0^{o}C Liquid Temperature: 22.5^{o}C
Communication System: LTE Band12 Frequency: 704 MHz Duty Cycle: 1:1
Probe: EX3DV4 - SN3617 ConvF(9.76, 9.76, 9.76)

Area Scan (111x71x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 0.520 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 20.11 V/m; Power Drift = 0.17 dB
Peak SAR (extrapolated) = 0.618 W/kg
SAR(1 g) = 0.471 W/kg; SAR(10 g) = 0.352 W/kg
Maximum value of SAR (measured) = 0.494 W/kg

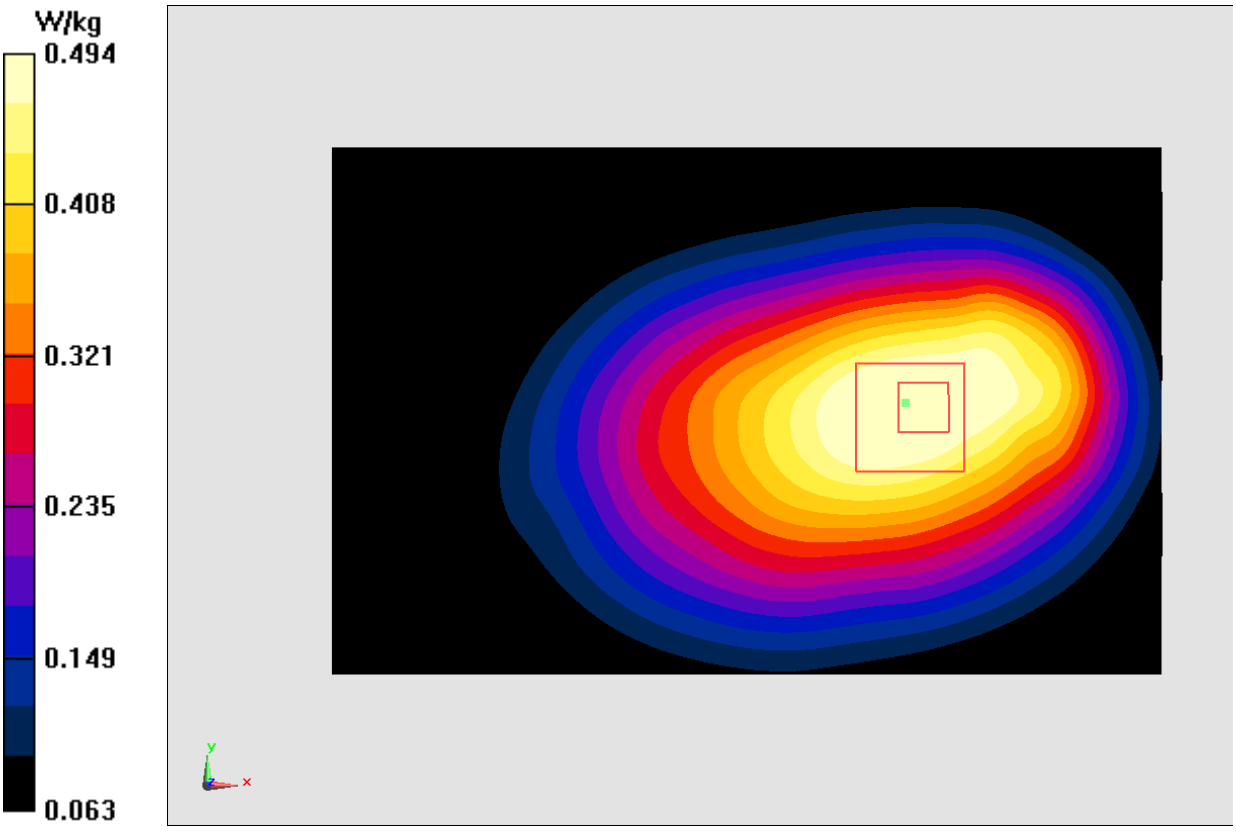

Fig.20 LTE Band12

©Copyright. All rights reserved by CTTL.

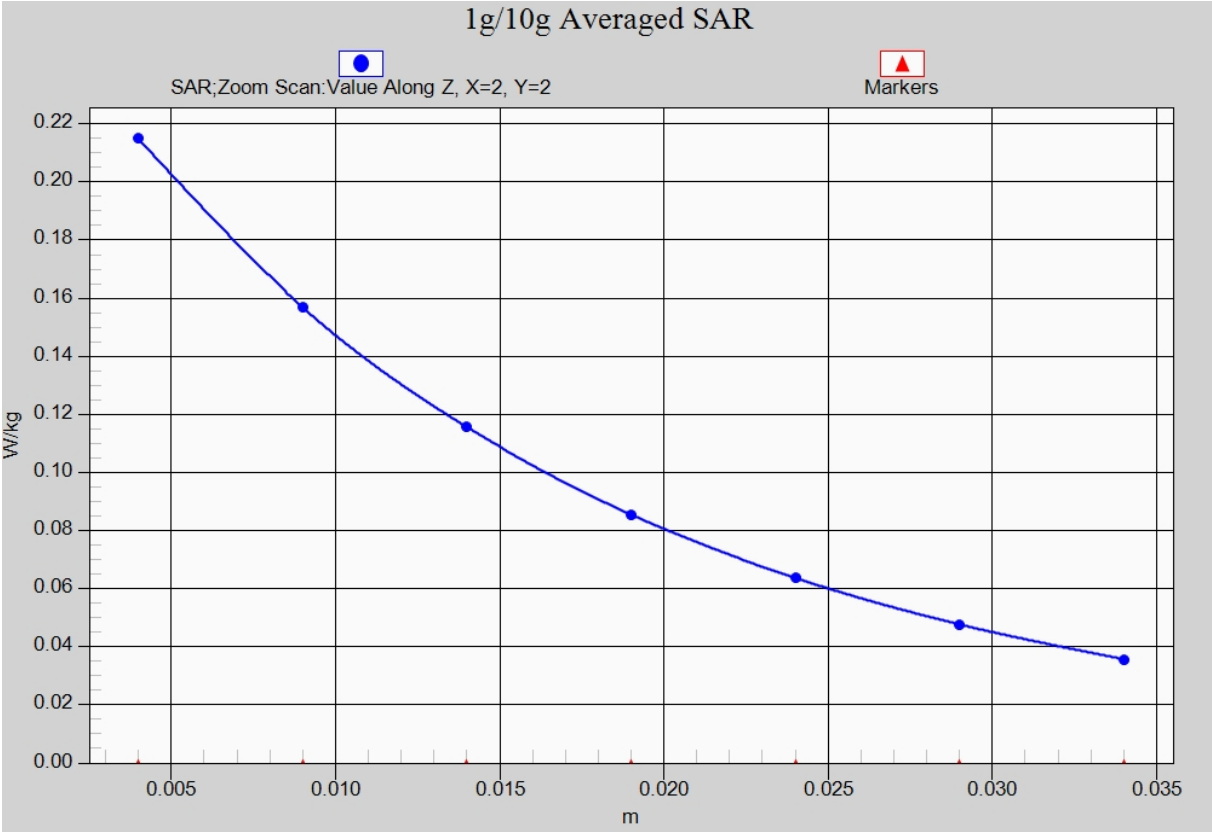

Fig. 20-1 Z-Scan at power reference point (LTE Band12)

©Copyright. All rights reserved by CTTL.

LTE Band17 Left Cheek Low with QPSK_10M_1RB_Low

Date: 2016-06-20
Electronics: DAE4 Sn777
Medium: Head 750 MHz
Medium parameters used (interpolated): f = 709 MHz; σ = 0.825 mho/m; εr = 44.193; ρ = 1000 kg/m^3
Ambient Temperature: 23.0^{o}C Liquid Temperature: 22.5^{o}C
Communication System: LTE Band17 Frequency: 709 MHz Duty Cycle: 1:1
Probe: EX3DV4 - SN3617 ConvF(9.98, 9.98, 9.98)

Area Scan (71x111x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 0.274 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 3.531 V/m; Power Drift = 0.12 dB
Peak SAR (extrapolated) = 0.290 W/kg
SAR(1 g) = 0.233 W/kg; SAR(10 g) = 0.183 W/kg
Maximum value of SAR (measured) = 0.240 W/kg

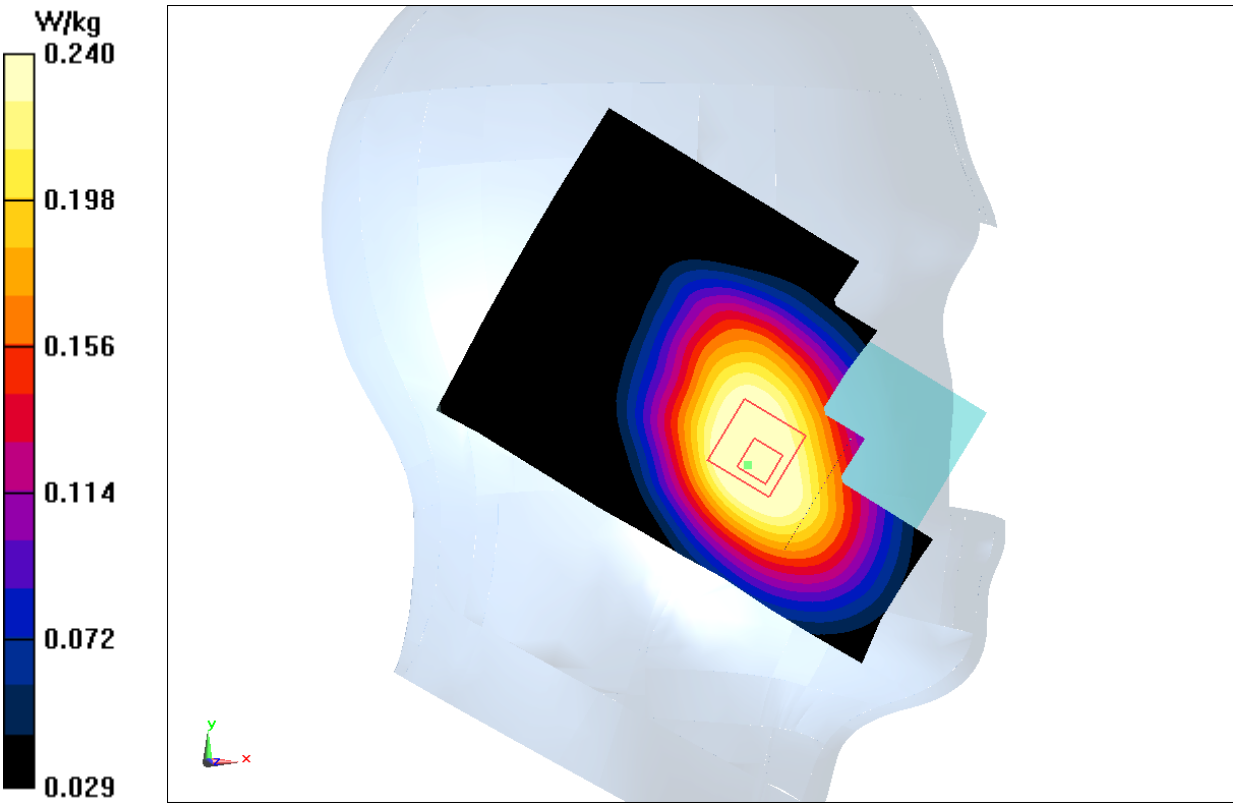

Fig.21 LTE Band17

©Copyright. All rights reserved by CTTL.

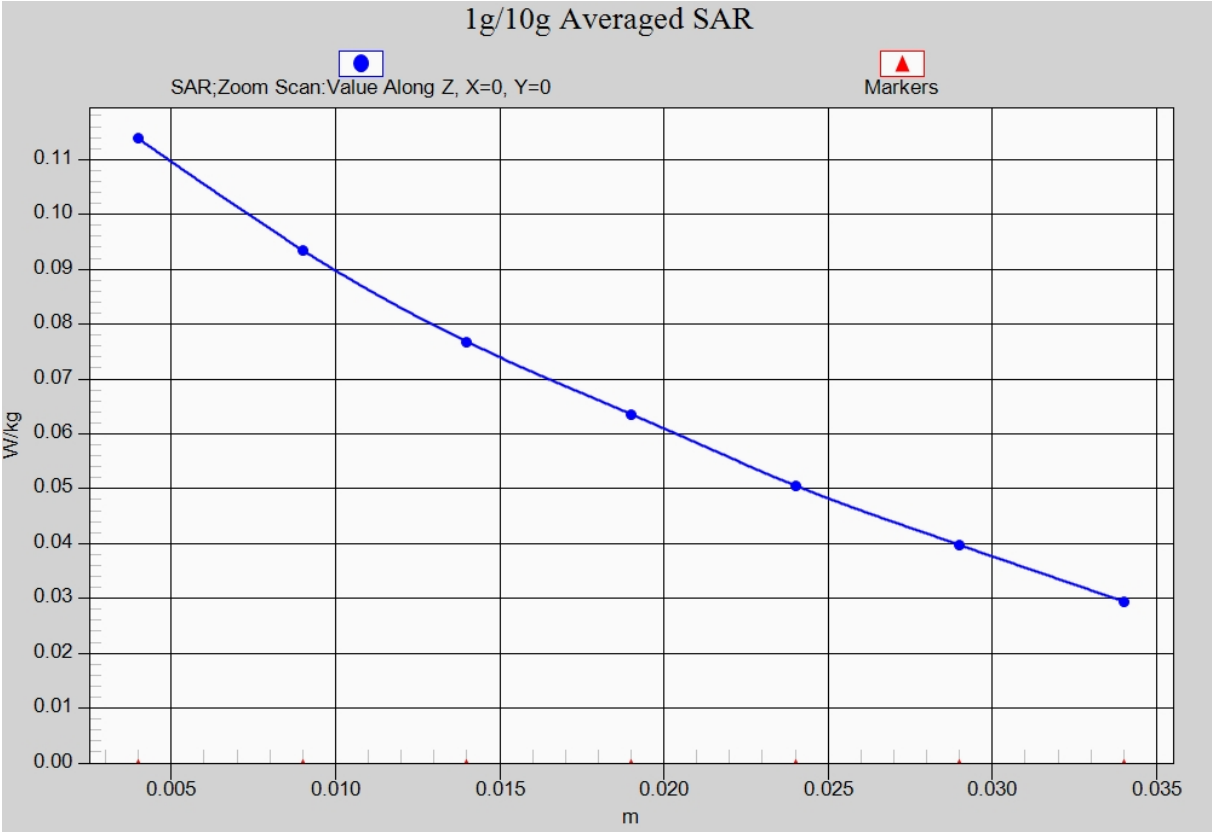

Fig. 21-1 Z-Scan at power reference point (LTE Band17)

©Copyright. All rights reserved by CTTL.

LTE Band17 Body Rear Low with QPSK_10M_1RB_Low

Date: 2016-06-20
Electronics: DAE4 Sn777
Medium: Body 750 MHz
Medium parameters used (interpolated): f = 709 MHz; σ = 0.905 mho/m; εr = 57.811; ρ = 1000 kg/m^3
Ambient Temperature: 23.0^{o}C Liquid Temperature: 22.5^{o}C
Communication System: LTE Band17 Frequency: 709 MHz Duty Cycle: 1:1
Probe: EX3DV4 - SN3617 ConvF(9.76, 9.76, 9.76)

Area Scan (111x71x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 0.459 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 19.78 V/m; Power Drift = -0.12 dB
Peak SAR (extrapolated) = 0.540 W/kg
SAR(1 g) = 0.408 W/kg; SAR(10 g) = 0.308 W/kg
Maximum value of SAR (measured) = 0.430 W/kg

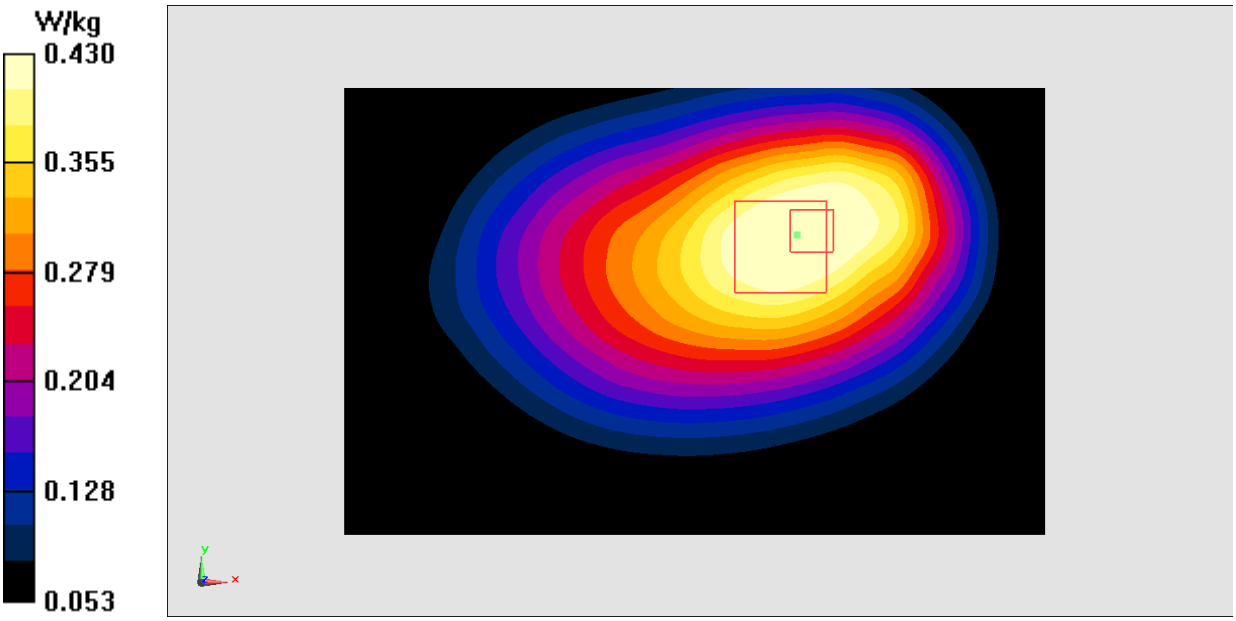

Fig.22 LTE Band17

©Copyright. All rights reserved by CTTL.

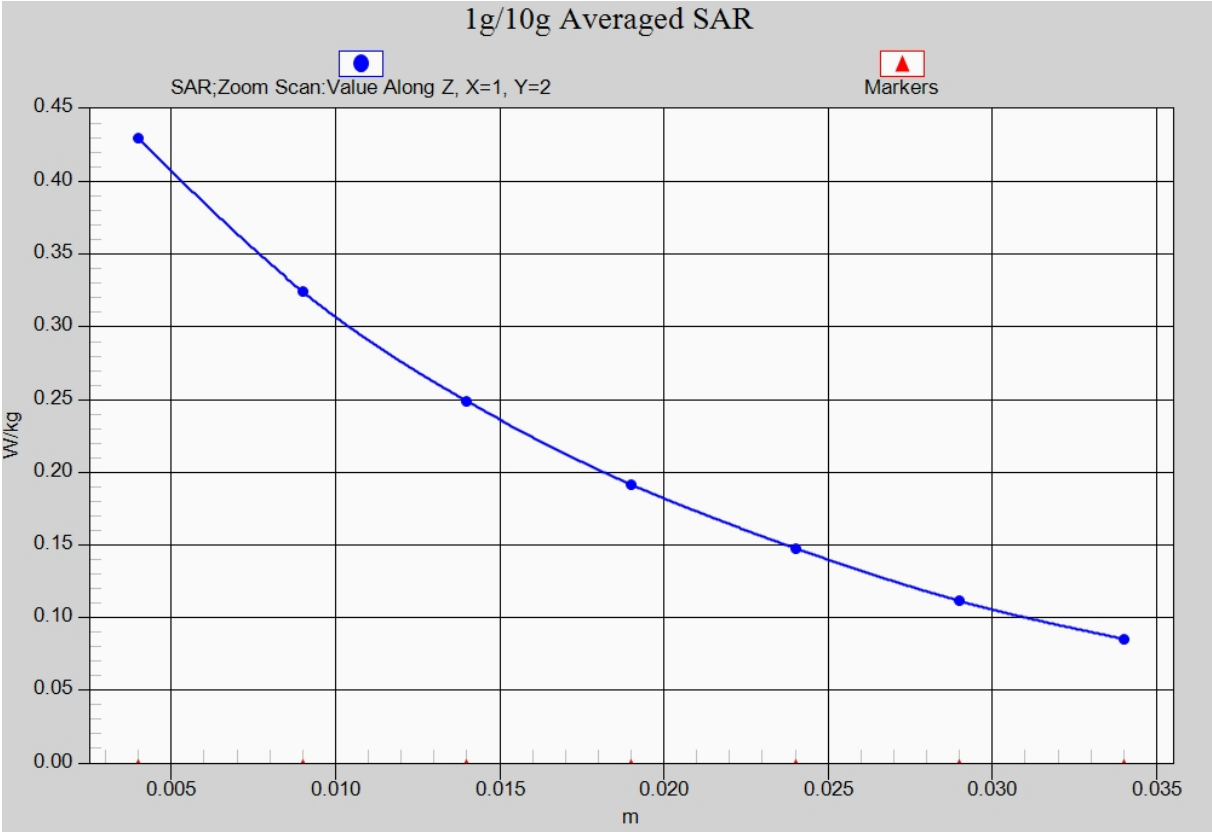

Fig. 22-1 Z-Scan at power reference point (LTE Band17)

©Copyright. All rights reserved by CTTL.

Wifi 802.11b Right Cheek Channel 6

Date: 2016-1-14
Electronics: DAE4 Sn777
Medium: Head 2450 MHz
Medium parameters used (interpolated): f = 2437 MHz; σ = 1.814 mho/m; ε_r = 39.973; ρ = 1000 kg/m^3
Ambient Temperature: 23.0^{o}C Liquid Temperature: 22.5^{o}C
Communication System: WLan 2450 Frequency: 2437 MHz Duty Cycle: 1:1
Probe: EX3DV4 - SN3617 ConvF(7.24, 7.24, 7.24)

Area Scan (81x141x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 1.68 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 16.99 V/m; Power Drift = -0.12 dB
Peak SAR (extrapolated) = 2.56 W/kg
SAR(1 g) = 1.13 W/kg; SAR(10 g) = 0.524 W/kg
Maximum value of SAR (measured) = 1.47 W/kg

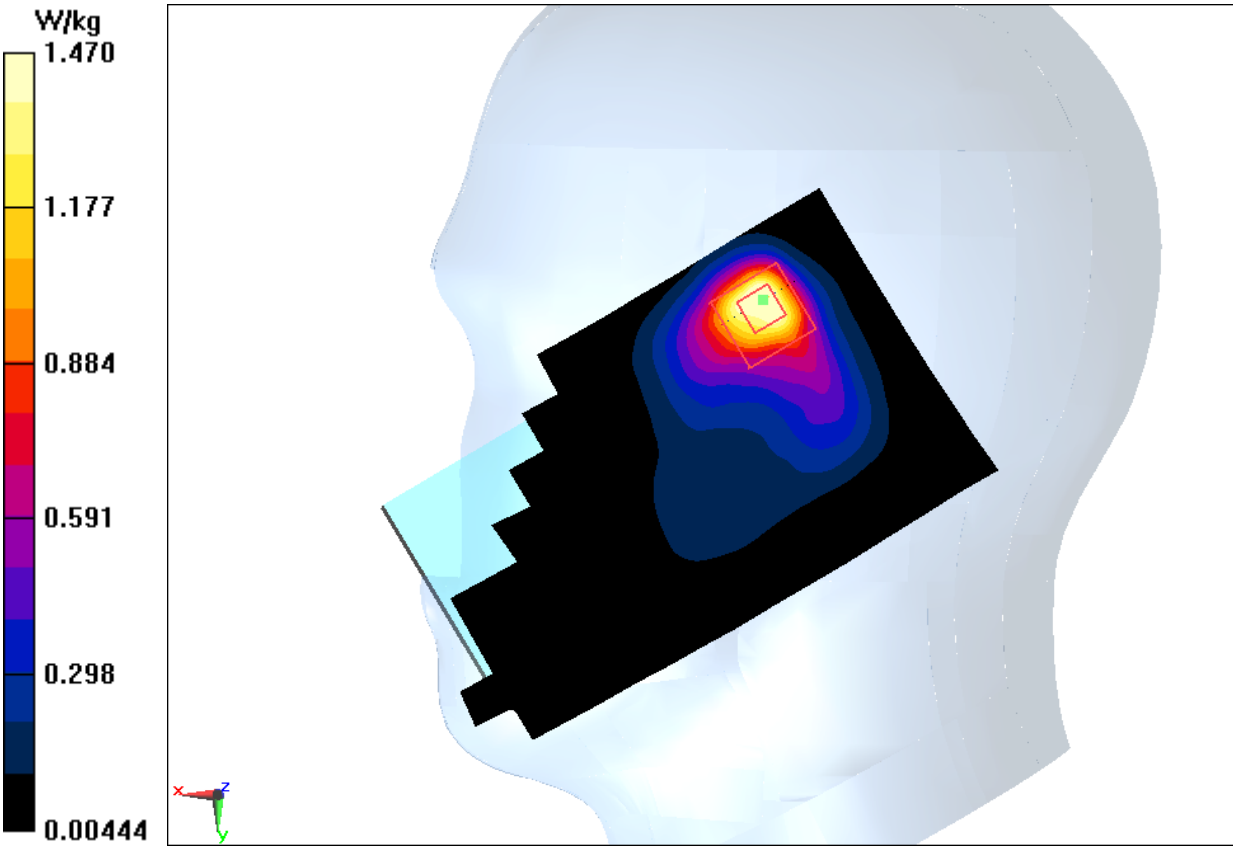

Fig.23 2450 MHz

©Copyright. All rights reserved by CTTL.

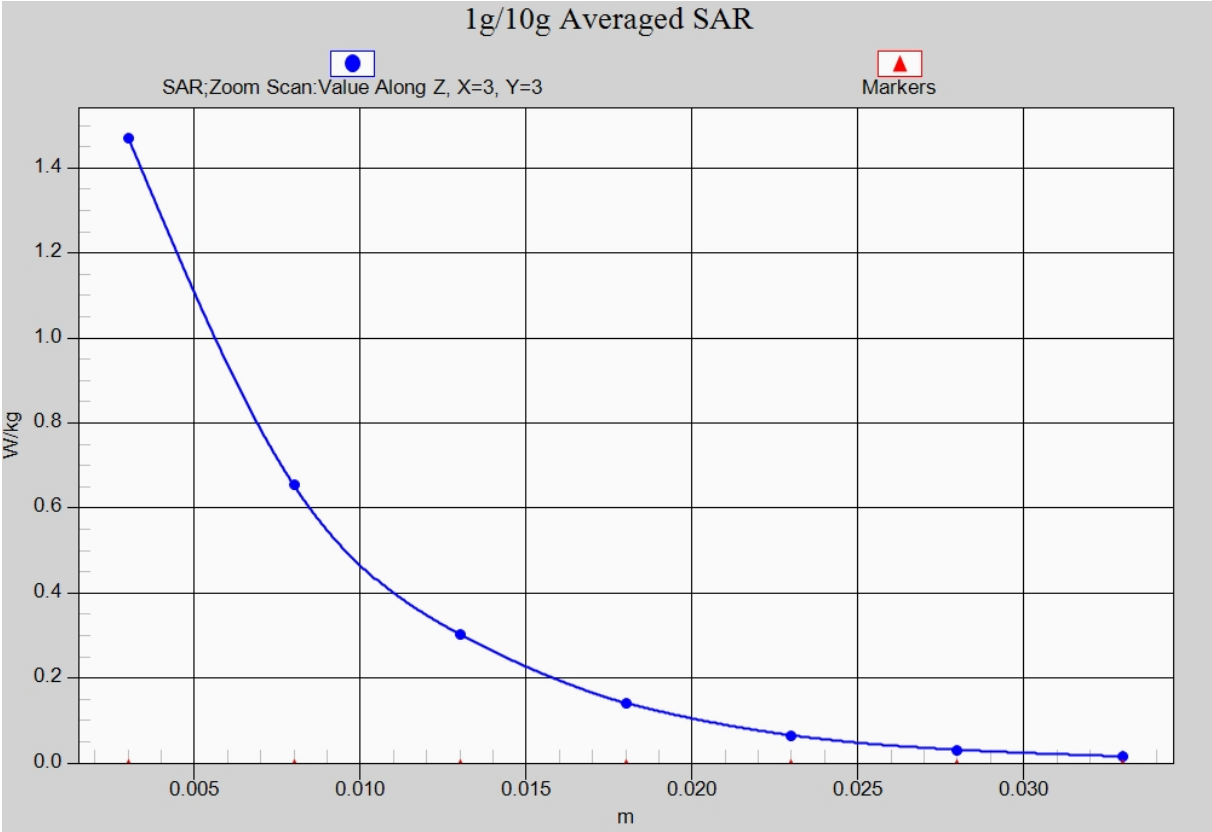

Fig. 23-1 Z-Scan at power reference point (2450 MHz)

©Copyright. All rights reserved by CTTL.

Wifi 802.11b Body Rear Channel 11

Date: 2016-05-14
Electronics: DAE4 Sn777
Medium: Body 2450 MHz
Medium parameters used (interpolated): f = 2462 MHz; σ = 2.009 mho/m; ε_r = 51.784; ρ = 1000 kg/m^3
Ambient Temperature: 23.0^{o}C Liquid Temperature: 22.5^{o}C
Communication System: WLan 2450 Frequency: 2462 MHz Duty Cycle: 1:1
Probe: EX3DV4 - SN3617 ConvF(7.35, 7.35, 7.35)

Area Scan (141x81x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 0.370 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 5.011 V/m; Power Drift = 0.04 dB
Peak SAR (extrapolated) = 0.558 W/kg
SAR(1 g) = 0.280 W/kg; SAR(10 g) = 0.133 W/kg
Maximum value of SAR (measured) = 0.324 W/kg

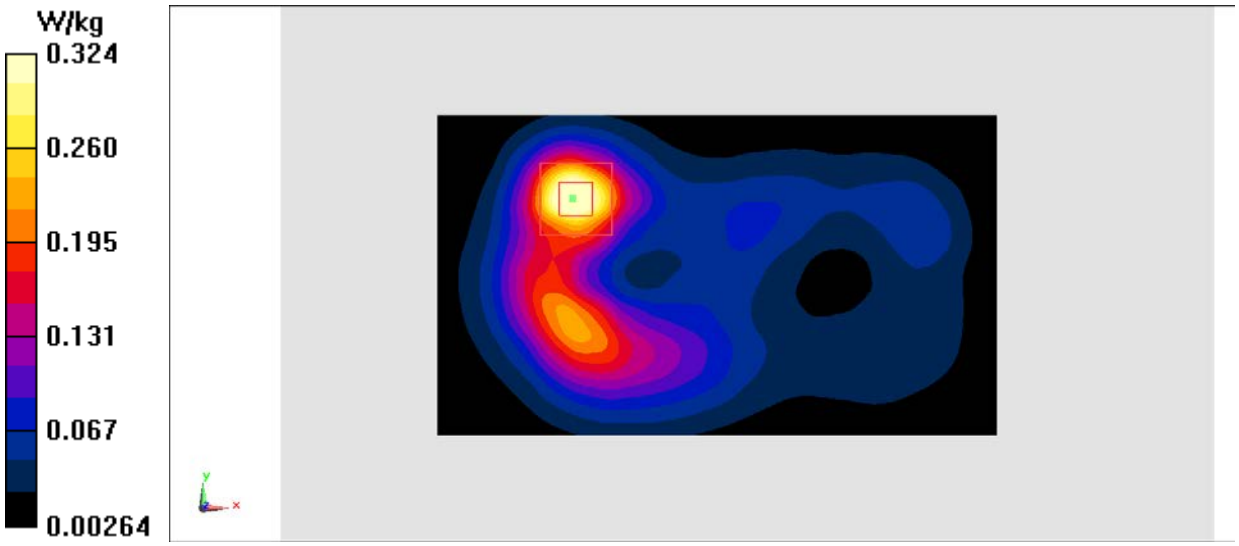

Fig.24 2450 MHz

©Copyright. All rights reserved by CTTL.

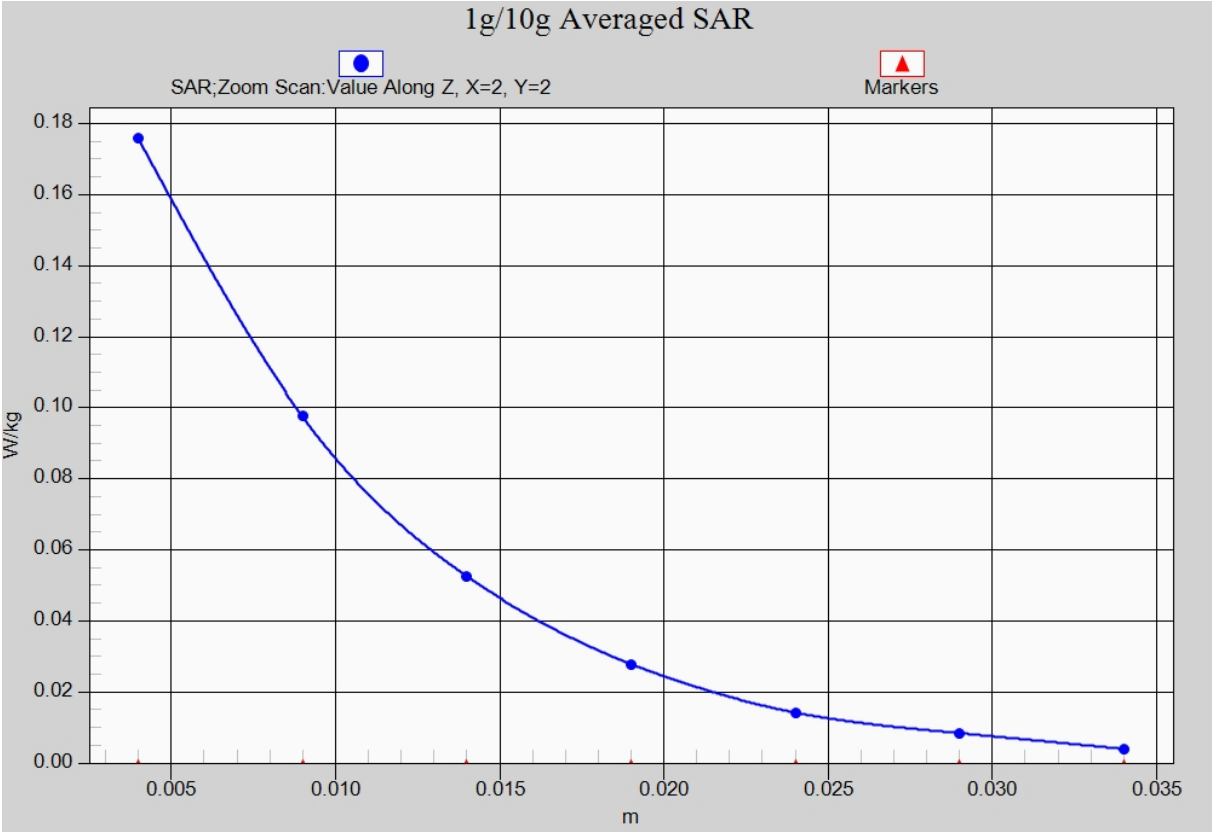

Fig. 24-1 Z-Scan at power reference point (2450 MHz)

©Copyright. All rights reserved by CTTL.

ANNEX B System Verification Results

750MHz

Date: 2016-01-08
Electronics: DAE4 Sn777
Medium: Head 750 MHz
Medium parameters used: f = 750 MHz; σ = 0.912 mho/m; ε_r = 43.08; ρ = 1000 kg/m^3
Ambient Temperature: 22.2^{o}C Liquid Temperature: 21.7^{o}C
Communication System: CW Frequency: 750 MHz Duty Cycle: 1:1
Probe: EX3DV4 - SN3617 ConvF(9.98, 9.98, 9.98)

System Validation /Area Scan (81x191x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Reference Value = 49.848 V/m; Power Drift = -0.09 dB
Fast SAR: SAR(1 g) = 2.08 W/kg; SAR(10 g) = 1.37 W/kg
Maximum value of SAR (interpolated) = 2.23 W/kg

System Validation /Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 49.848 V/m; Power Drift = -0.09 dB
Peak SAR (extrapolated) = 2.88 W/kg
SAR(1 g) = 2.07 W/kg; SAR(10 g) = 1.35 W/kg
Maximum value of SAR (measured) = 2.19 W/kg

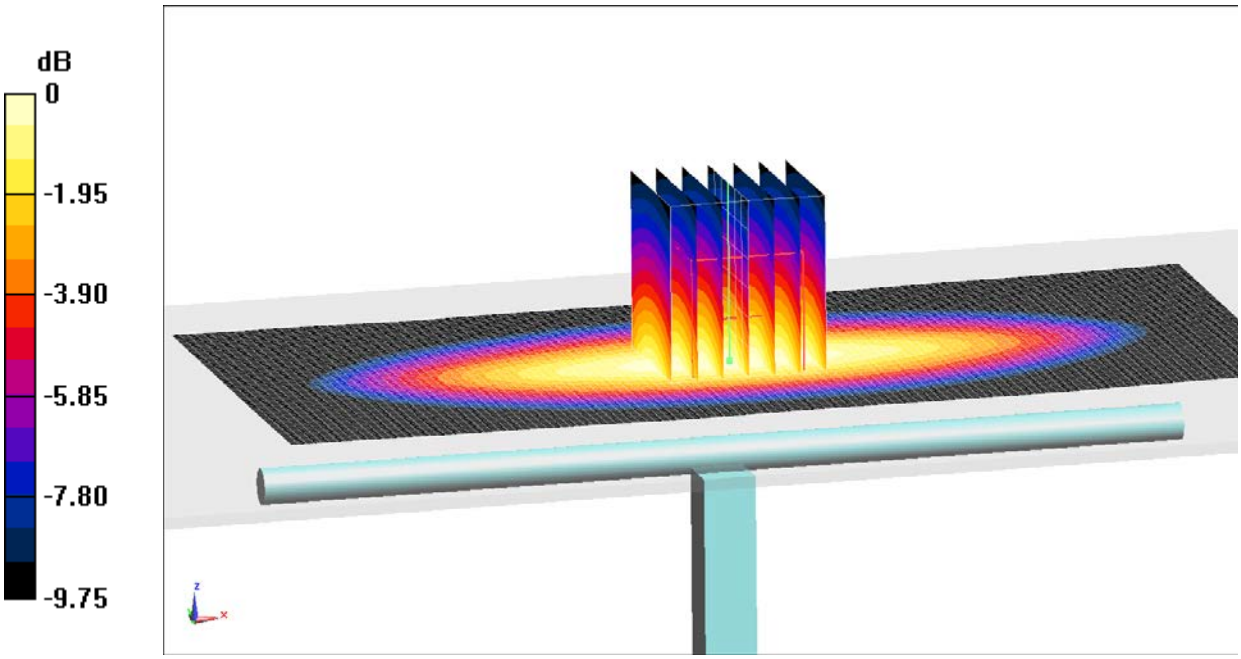

0 dB = 2.19 W/kg = 3.40 dB W/kg

Fig.B.1 validation 750MHz 250mW

©Copyright. All rights reserved by CTTL.

835MHz

Date: 2016-01-11
Electronics: DAE4 Sn777
Medium: Head 850 MHz
Medium parameters used: f = 835 MHz; σ = 0.915 S/m; ε_r = 41.85; ρ = 1000 kg/m^3
Ambient Temperature: 23.0^{o}C Liquid Temperature: 22.5^{o}C
Communication System: CW Frequency: 835 MHz Duty Cycle: 1:1
Probe: EX3DV4 – SN3617 ConvF(9.56, 9.56, 9.56)

System Validation /Area Scan (81x161x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Reference Value = 50.281 V/m; Power Drift = 0.07 dB
Fast SAR: SAR(1 g) = 2.23 W/kg; SAR(10 g) = 1.44 W/kg
Maximum value of SAR (interpolated) = 2.49 W/kg

System Validation /Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 50.281 V/m; Power Drift = 0.07 dB
Peak SAR (extrapolated) = 3.58 W/kg
SAR(1 g) = 2.27 W/kg; SAR(10 g) = 1.47 W/kg
Maximum value of SAR (measured) = 2.54 W/kg

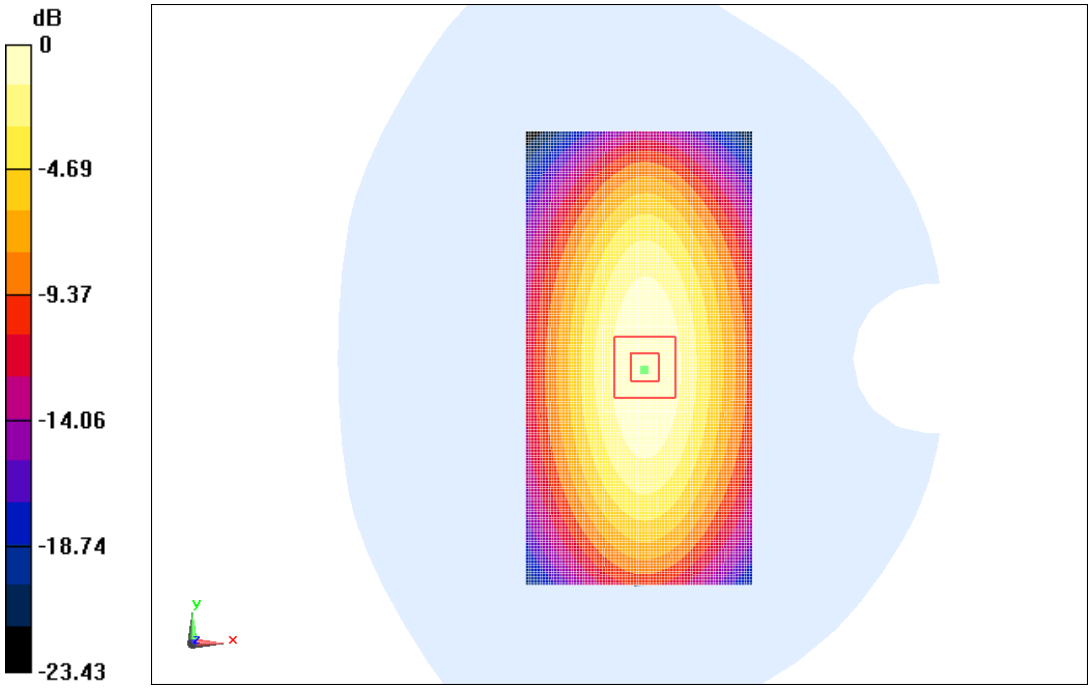

0 dB = 2.54 W/kg = 4.01 dBW/kg

Fig.B.2 validation 835MHz 250mW

©Copyright. All rights reserved by CTTL.