

FCC RF Test Report

APPLICANT : TCL Communication Ltd.
EQUIPMENT : Tablet PC
BRAND NAME : ALCATEL ONETOUCH
MODEL NAME : 9002W
MARKETING NAME : ALCATEL ONETOUCH PIXI 3 (7)
FCC ID : 2ACCJB040
STANDARD : FCC 47 CFR Part 2, 22(H), 24(E), 27(L)
CLASSIFICATION : PCS Licensed Transmitter (PCB)

The product testing was completed on Dec. 15, 2015. We, SPORTON INTERNATIONAL (SHENZHEN) INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI / TIA / EIA-603-D-2010 and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL (SHENZHEN) INC., the test report shall not be reproduced except in full.



Prepared by: Andy Yeh / Manager



Approved by: Jones Tsai / Manager



SPORTON INTERNATIONAL (SHENZHEN) INC.

**1F & 2F, Building A, Morning Business Center, No. 4003 ShiGu Rd., Xili Town,
Nanshan District, Shenzhen, Guangdong, P. R. China**



TABLE OF CONTENTS

REVISION HISTORY	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant.....	5
1.2 Manufacturer	5
1.3 Product Feature of Equipment Under Test	5
1.4 Product Specification of Equipment Under Test	6
1.5 Specification of Accessory	7
1.6 Modification of EUT	8
1.7 Maximum ERP/EIRP Power, Frequency Tolerance, and Emission Designator	8
1.8 Testing Location	9
1.9 Applicable Standards	9
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	10
2.1 Test Mode.....	10
2.2 Connection Diagram of Test System	11
2.3 Support Unit used in test configuration	11
2.4 Measurement Results Explanation Example	11
3 CONDUCTED TEST RESULT	12
3.1 Measuring Instruments.....	12
3.2 Test Setup	12
3.3 Test Result of Conducted Test.....	12
3.4 Conducted Output Power	13
3.5 Peak-to-Average Ratio	13
3.6 99% Occupied Bandwidth and 26dB Bandwidth Measurement.....	14
3.7 Conducted Band Edge	15
3.8 Conducted Spurious Emission	16
3.9 Frequency Stability	17
4 RADIATED TEST ITEMS	18
4.1 Measuring Instruments.....	18
4.2 Test Setup	18
4.3 Test Result of Radiated Test.....	18
4.4 Effective Radiated Power and Effective Isotropic Radiated Power Measurement	19
4.5 Field Strength of Spurious Radiation Measurement	21
5 LIST OF MEASURING EQUIPMENT	22
6 UNCERTAINTY OF EVALUATION	23
APPENDIX A. TEST RESULTS OF CONDUCTED TEST	
APPENDIX B. TEST RESULTS OF RADIATED TEST	
APPENDIX C. TEST SETUP PHOTOGRAPHS	
APPENDIX D. PRODUCT EQUALITY DECLARATION	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FG532002-03	Rev. 01	This is a variant product of 9002A. The product equality declaration could be referred to Appendix D. All the test cases were performed on original report which can be referred to Sporton Report Number FG532002 (Model name: 9002A; FCC ID: 2ACCJB009). Based on the original test report, adding WCDMA 1700 to full test and the worst case of ERP/EIRP was verified.	Dec. 21, 2015

SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.4	§2.1046	Conducted Output Power	Reporting Only	PASS	-
3.5	§24.232(d)	Peak-to-Average Ratio	< 13 dB	PASS	-
3.6	§2.1049 §22.917(b) §24.238(b) §27.53(g)	Occupied Bandwidth	Reporting Only	PASS	-
3.7	§2.1051 §22.917(a) §24.238(a) §27.53(h)	Band Edge Measurement	< 43+10log10(P[Watts])	PASS	-
3.8	§2.1051 §22.917(a) §24.238(a) §27.53(h)	Conducted Emission	< 43+10log10(P[Watts])	PASS	-
3.9	§2.1055 §22.355	Frequency Stability for Temperature & Voltage	< 2.5 ppm for Part 22H	PASS	-
	§2.1055 §24.235 §27.54		Within Authorized Band		
4.4	§22.913(a)(2)	Effective Radiated Power	< 7 Watts	PASS	-
	§24.232(c)	Equivalent Isotropic Radiated Power	< 2 Watts	PASS	-
	§27.50(d)(4)	Equivalent Isotropic Radiated Power	< 1 Watts	PASS	-
4.5	§2.1053 §22.917(a) §24.238(a) §27.53(h)	Field Strength of Spurious Radiation	< 43+10log10(P[Watts])	PASS	Under limit 18.53 dB at 15040.000 MHz



1 General Description

1.1 Applicant

TCL Communication Ltd.

5F, C-Tower, No. 232, Liang Jing Road, ZhangJiang High-Tech Park, Pudong Area, Shanghai, 201203,
P. R. China

1.2 Manufacturer

TCL Communication Ltd.

5F, C-Tower, No. 232, Liang Jing Road, ZhangJiang High-Tech Park, Pudong Area, Shanghai, 201203,
P. R. China

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Tablet PC
Brand Name	ALCATEL ONETOUCH
Model Name	9002W
Marketing Name	ALCATEL ONETOUCH PIXI 3 (7)
FCC ID	2ACCJB040
EUT supports Radios application	GSM/GPRS/EGPRS/ WCDMA/HSPA/HSPA+(16QAM uplink is not supported)/ WLAN 2.4GHz 802.11b/g/n HT20/HT40 Bluetooth v3.0 + EDR/Bluetooth v4.0 LE
IMEI Code	Conducted: 014472000882873 Radiation/ ERP&EIRP: 014472000882725 for 22H.24E 014472000882675 for 27L
HW Version	V03
SW Version	BFO
EUT Stage	Production Unit

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx Frequency	GSM/GPRS/EDGE: 850: 824.2 MHz ~ 848.8 MHz 1900: 1850.2 MHz ~ 1909.8MHz WCDMA: Band V: 826.4 MHz ~ 846.6 MHz Band II: 1852.4 MHz ~ 1907.6 MHz Band IV: 1712.4 MHz ~ 1752.6 MHz
Rx Frequency	GSM/GPRS/EDGE: 850: 869.2 MHz ~ 893.8 MHz 1900: 1930.2 MHz ~ 1989.8 MHz WCDMA: Band V: 871.4 MHz ~ 891.6 MHz Band II: 1932.4 MHz ~ 1987.6 MHz Band IV: 2112.4 MHz ~ 2152.6 MHz
Maximum Output Power to Antenna	GSM/GPRS/EDGE: 850: 32.96 dBm 1900: 29.96 dBm WCDMA: Band V: 22.80 dBm Band II: 22.82 dBm Band IV: 22.11 dBm
Antenna Type	IFA Antenna
Type of Modulation	GSM: GMSK GPRS: GMSK EDGE: GMSK / 8PSK WCDMA: QPSK (Uplink) HSDPA: QPSK (Uplink) HSUPA: QPSK (Uplink) HSPA+: 16QAM (16QAM uplink is not supported)

1.5 Specification of Accessory

Specification of Accessory				
AC Adapter	Brand Name	ALCATEL onetouch	Model Name	UC11US
	Power Rating	I/P: 100-240Vac, 200mA, O/P: 5Vdc, 1000mA		
	P/N	CBA0058AG0C2		
Battery	Brand Name	ALCATEL onetouch	Model Name	TLp028B2
	Power Rating	3.75Vdc, 2820mAh		
	S/N	C2820012C2YF908HWSFP		
USB Cable	Brand Name	NA	Model Name	NA
	Signal Line Type	1.0m shielded without core		
Earphone	Brand Name	NA	Model Name	NA
	Signal Line Type	1.5m non-shielded without core		

1.6 Modification of EUT

No modifications are made to the EUT during all test items.

1.7 Maximum ERP/EIRP Power, Frequency Tolerance, and Emission Designator

FCC Rule	System	Type of Modulation	Maximum ERP/EIRP (W)	Frequency Tolerance (ppm)	Emission Designator
Part 22	GSM850 GSM	GMSK	1.4191	0.0359 ppm	249KGXW
Part 22	GSM850 EDGE class 8	8PSK	0.2938	0.0299 ppm	249KG7W
Part 22	WCDMA Band V RMC 12.2Kbps	QPSK	0.1694	0.0179 ppm	4M15F9W
Part 24	GSM1900 GSM	GMSK	1.4859	0.0181 ppm	247KGXW
Part 24	GSM1900 EDGE class 8	8PSK	-	0.0266 ppm	245KG7W
Part 24	WCDMA Band II RMC 12.2Kbps	QPSK	-	0.0191 ppm	4M17F9W
Part 27	WCDMA Band IV RMC 12.2Kbps	QPSK	0.2244	0.0144 ppm	4M17F9W

1.8 Testing Location

Test Site	SPORTON INTERNATIONAL (SHENZHEN) INC.	
Test Site Location	1F & 2F, Building A, Morning Business Center, No. 4003 ShiGu Rd., Xili Town, Nanshan District, Shenzhen, Guangdong, P. R. China TEL: +86-755-8637-9589 FAX: +86-755-8637-9595	
Test Site No.	Sporton Site No.	
	TH01-SZ	

Test Site	SPORTON INTERNATIONAL (SHENZHEN) INC.	
Test Site Location	No. 3 Building, the third floor of south, Shahe River west, Fengzeyuan warehouse, Nanshan District, Shenzhen, Guangdong, P. R. China TEL: +86-755- 3320-2398	
Test Site No.	Sporton Site No.	FCC/IC Registration No.
	03CH01-SZ	831040/4086F

1.9 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 2, 22(H), 24(E), 27(L)
- ♦ ANSI / TIA / EIA-603-D-2010
- ♦ FCC KDB 971168 D01 Power Meas. License Digital Systems v02r02

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

2 Test Configuration of Equipment Under Test

2.1 Test Mode

Antenna port conducted and radiated test items were performed according to KDB 971168 D01 Power Meas. License Digital Systems v02r02 with maximum output power.

Radiated measurements were performed with rotating EUT in different three orthogonal test planes to find the maximum emission.

Radiated emissions were investigated as following frequency range:


1. 30 MHz to 10th harmonic for GSM850 and WCDMA Band V.
2. 30 MHz to 10th harmonic for WCDMA Band IV.
3. 30 MHz to 10th harmonic for GSM1900 and WCDMA Band II.

All modes and data rates and positions were investigated.

Test modes are chosen to be reported as the worst case configuration below:

Test Modes		
Band	Radiated TCs	Conducted TCs
GSM 850	■ GSM Link ■ EDGE class 8 Link	■ GSM Link ■ EDGE class 8 Link
GSM 1900	■ GSM Link ■ EDGE class 8 Link	■ GSM Link ■ EDGE class 8 Link
WCDMA Band V	■ RMC 12.2Kbps Link	■ RMC 12.2Kbps Link
WCDMA Band II	■ RMC 12.2Kbps Link	■ RMC 12.2Kbps Link
WCDMA Band IV	■ RMC 12.2Kbps Link	■ RMC 12.2Kbps Link

2.2 Connection Diagram of Test System

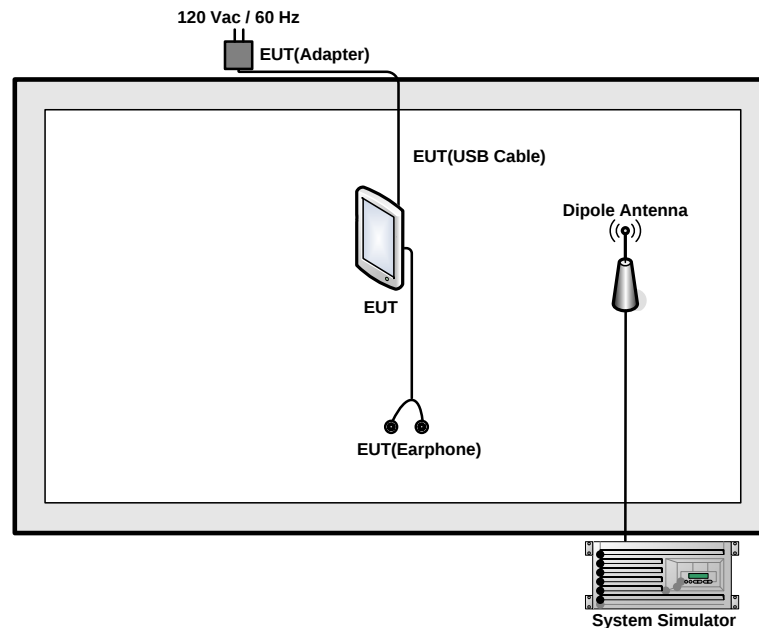

2.3 Support Unit used in test configuration

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	System Simulator	R&S	CMU 200	N/A	N/A	Unshielded, 1.8 m
2.	DC Power Supply	GW INSTRON	GPS-3030D	N/A	N/A	Unshielded, 1.8 m

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between RF conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level will be exactly the RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

The following shows an offset computation example with RF cable loss 4.5 dB and a 10dB attenuator.

Example :

$$\begin{aligned}
 \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\
 &= 4.5 + 10 = 14.5 \text{ (dB)}
 \end{aligned}$$


3 Conducted Test Result

3.1 Measuring Instruments


See list of measuring instruments of this test report.

3.2 Test Setup


3.2.1 Conducted Output Power

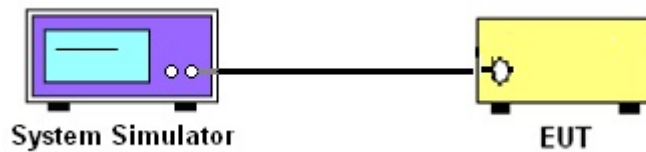

3.2.2 Peak-to-Average Ratio, Occupied Bandwidth, Conducted Band-Edge and Conducted Spurious Emission

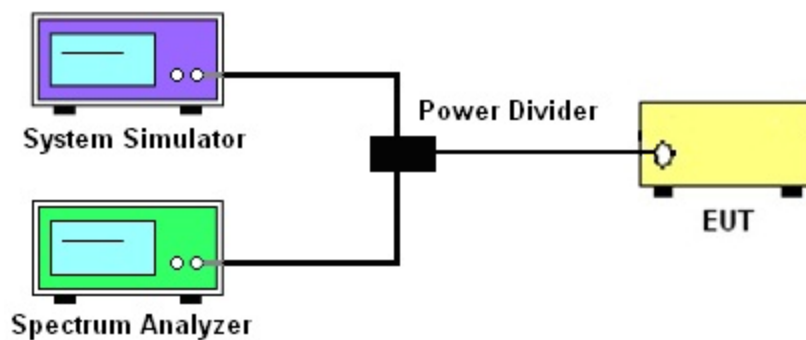

3.2.3 Frequency Stability

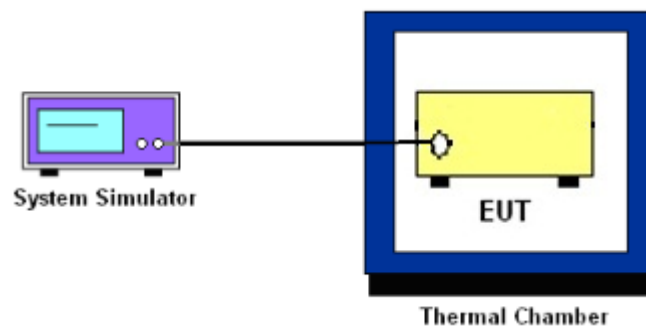

3.3 Test Result of Conducted Test

Please refer to Appendix A.

3.4 Conducted Output Power

3.4.1 Description of the Conducted Output Power

A system simulator was used to establish communication with the EUT. Its parameters were set to enforce EUT transmitting at the maximum power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

3.4.2 Test Procedures

1. The transmitter output port was connected to the system simulator.
2. Set EUT at maximum power through system simulator.
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Measure the maximum burst average power for GSM and maximum average power for other modulation signal.

3.5 Peak-to-Average Ratio

3.5.1 Description of the PAR Measurement

The peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

3.5.2 Test Procedures

1. The testing follows FCC KDB 971168 D01 v02r02 Section 5.7.1.
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. Set EUT to transmit at maximum output power.
4. When the duty cycle is less than 98%, then signal gating will be implemented on the spectrum analyzer by triggering from the system simulator.
5. Set the CCDF (Complementary Cumulative Distribution Function) option of the spectrum analyzer. Record the maximum PAPR level associated with a probability of 0.1%.

3.6 99% Occupied Bandwidth and 26dB Bandwidth Measurement

3.6.1 Description of 99% Occupied Bandwidth and 26dB Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

3.6.2 Test Procedures

1. The testing follows FCC KDB 971168 v02r02 Section 4.2.
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.
4. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
5. Set the detection mode to peak, and the trace mode to max hold.
6. Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace.
(this is the reference value)
7. Determine the “-26 dB down amplitude” as equal to (Reference Value – X).
8. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the “-X dB down amplitude” determined in step 6. If a marker is below this “-X dB down amplitude” value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.
9. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.

3.7 Conducted Band Edge

3.7.1 Description of Conducted Band Edge Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

3.7.2 Test Procedures

1. The testing follows FCC KDB 971168 D01 v02r02 Section 6.0.
2. The EUT was connected to the spectrum analyzer and system simulator via a power divider.
3. The RF output of EUT was connected to the spectrum analyzer by an RF cable and attenuator.
The path loss was compensated to the results for each measurement.
4. The band edges of low and high channels for the highest RF powers were measured.
5. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
6. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
$$= P(W) - [43 + 10\log(P)] \text{ (dB)}$$
$$= [30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)}$$
$$= -13\text{dBm}.$$

3.8 Conducted Spurious Emission

3.8.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.

3.8.2 Test Procedures

1. The testing follows FCC KDB 971168 D01 v02r02 Section 6.0.
2. The EUT was connected to the spectrum analyzer and system simulator via a power divider.
3. The RF output of EUT was connected to the spectrum analyzer by an RF cable and attenuator. The path loss was compensated to the results for each measurement.
4. The middle channel for the highest RF power within the transmitting frequency was measured.
5. The conducted spurious emission for the whole frequency range was taken.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
7. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
= $P(W) - [43 + 10\log(P)]$ (dB)
= $[30 + 10\log(P)]$ (dBm) - $[43 + 10\log(P)]$ (dB)
= -13dBm.

3.9 Frequency Stability

3.9.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ ($\pm 2.5\text{ppm}$) of the center frequency.

3.9.2 Test Procedures for Temperature Variation

1. The testing follows FCC KDB 971168 D01 v02r02 Section 9.0.
2. The EUT was set up in the thermal chamber and connected with the system simulator.
3. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
4. With power OFF, the temperature was raised in 10°C steps up to 50°C . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

3.9.3 Test Procedures for Voltage Variation

1. The testing follows FCC KDB 971168 D01 v02r02 Section 9.0.
2. The EUT was placed in a temperature chamber at $25\pm 5^{\circ}\text{C}$ and connected with the system simulator.
3. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value measured at the input to the EUT.
4. The variation in frequency was measured for the worst case.


4 Radiated Test Items

4.1 Measuring Instruments


See list of measuring instruments of this test report.

4.2 Test Setup

4.2.1 For radiated test from 30MHz to 1GHz

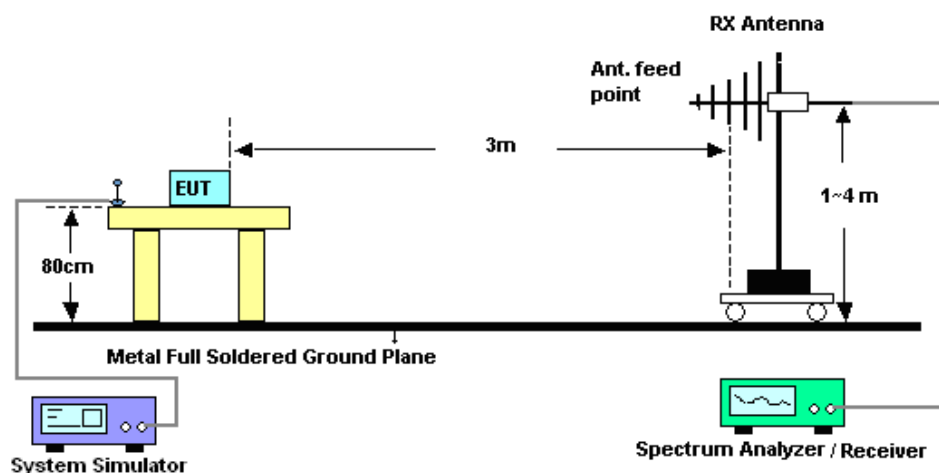

4.2.2 For radiated test above 1GHz

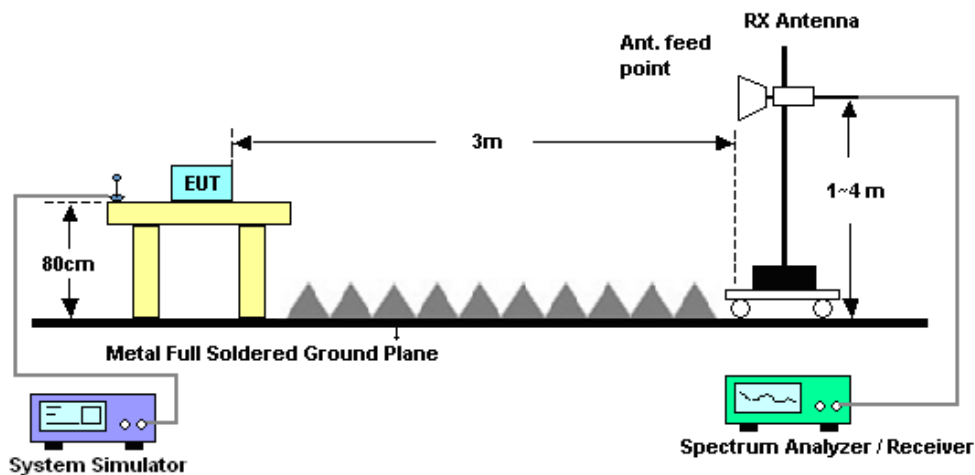

4.3 Test Result of Radiated Test

Please refer to Appendix B.

4.4 Effective Radiated Power and Effective Isotropic Radiated Power Measurement

4.4.1 Description of the ERP/EIRP Measurement

The substitution method, in ANSI / TIA / EIA-603-D-2010, was used for ERP/EIRP measurement, and the spectrum analyzer configuration follows KDB 971168 D01 Power Meas. License Digital Systems v02r02. The ERP of mobile transmitters must not exceed 7 Watts (Cellular Band) and the EIRP of mobile transmitters are limited to 2 Watts (PCS Band) and 1 Watts (AWS Band).

4.4.2 Test Procedures

1. The testing follows FCC KDB 971168 D01 v02r02 Section 5.2.1. (for CDMA/WCDMA), Section 5.2.2.2 (for GSM/GPRS/EDGE) and ANSI / TIA-603-D-2010 Section 2.2.17.
2. The EUT was placed on a non-conductive rotating platform 0.8 meters high in a semi-anechoic chamber. The radiated emission at the fundamental frequency was measured at 3 m with a test antenna and a spectrum analyzer with RMS detector per section 5. of KDB 971168 D01.
3. During the measurement, the system simulator parameters were set to force the EUT transmitting at maximum output power. The maximum emission was recorded from analyzer power level (LVL) from the 360 degrees rotation of the turntable and the test antenna raised and lowered over a range from 1 to 4 meters in both horizontally and vertically polarized orientations.
4. Effective Isotropic Radiated Power (EIRP) was measured by substitution method according to TIA/EIA-603-D. The EUT was replaced by the substitution antenna at same location, and then a known power from S.G. was applied into the dipole antenna through a Tx cable, and then recorded the maximum Analyzer reading through raised and lowered the test antenna. The correction factor (in dB) = S.G. - Tx Cable loss + Substitution antenna gain - Analyzer reading. Then the EUT's EIRP was calculated with the correction factor, $EIRP = LVL + \text{Correction factor}$ and $ERP = EIRP - 2.15$. Take the record of the output power at substitution antenna.



	GSM/GPRS/EDGE	WCDMA/HSPA
SPAN	500kHz	10MHz
RBW	10kHz	100kHz
VBW	30kHz	300kHz
Detector	RMS	RMS
Trace	Average	Average
Average Type	Power	Power
Sweep Count	100	100

4.5 Field Strength of Spurious Radiation Measurement

4.5.1 Description of Field Strength of Spurious Radiated Measurement

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

4.5.2 Test Procedures

1. The testing follows FCC KDB 971168 D01 v02r02 Section 5.8 and ANSI / TIA-603-D-2010 Section 2.2.12.
2. The EUT was placed on a rotatable wooden table 0.8 meters above the ground.
3. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
4. The table was rotated 360 degrees to determine the position of the highest spurious emission.
5. The height of the receiving antenna is varied between one meter and four meters to search for the maximum spurious emission for both horizontal and vertical polarizations.
6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking record of maximum spurious emission.
7. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
8. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
9. Taking the record of output power at antenna port.
10. Repeat step 7 to step 8 for another polarization.
11. $EIRP \text{ (dBm)} = S.G. \text{ Power} - Tx \text{ Cable Loss} + Tx \text{ Antenna Gain}$
12. $ERP \text{ (dBm)} = EIRP - 2.15$
13. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
14. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
 $= P(W) - [43 + 10\log(P)] \text{ (dB)}$
 $= [30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)}$
 $= -13\text{dBm}.$



5 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101078	9kHz~40GHz	May 05, 2015	Dec. 02, 2015	May 04, 2016	Conducted (TH01-SZ)
Thermal Chamber	Ten Billion	LP-150U	H2014081803	-40~+150°C	Aug. 07, 2015	Dec. 02, 2015	Aug. 06, 2016	Conducted (TH01-SZ)
EMI Test Receiver&SA	Agilent Technologies	N9038A	MY52260185	20Hz~26.5GHz	May 26, 2015	Dec. 07, 2015~ Dec. 15, 2015	May 25, 2016	Radiation (03CH01-SZ)
Spectrum Analyzer	KEYSIGHT	N9010A	MY55150213	10Hz~44GHz;Max 30dBm	Jun. 07, 2015	Dec. 07, 2015~ Dec. 15, 2015	Jun. 06, 2016	Radiation (03CH01-SZ)
Bilog Antenna	TeseQ	CBL6112D	23188	30MHz~2GHz	Oct. 17, 2015	Dec. 07, 2015~ Dec. 15, 2015	Oct. 16, 2016	Radiation (03CH01-SZ)
Double Ridge Horn Antenna	SCHWARZBECK	BBHA 9120D	9120D-1285	1GHz~18GHz	Jan. 20, 2015	Dec. 07, 2015~ Dec. 15, 2015	Jan. 19, 2016	Radiation (03CH01-SZ)
SHF-EHF Horn	com-power	AH-840	101071	18Ghz~40GHz	Aug.19, 2015	Dec. 07, 2015~ Dec. 15, 2015	Aug. 18, 2016	Radiation (03CH01-SZ)
Amplifier	ADVANTEST	BB525C	E9007003	9kHz ~3000MHz / 30 dB	Jan. 28, 2015	Dec. 07, 2015~ Dec. 15, 2015	Jan. 27, 2016	Radiation (03CH01-SZ)
Amplifier	Agilent Technologies	83017A	MY39501302	500MHz~26.5GHz	Jan. 28, 2015	Dec. 07, 2015~ Dec. 15, 2015	Jan. 27, 2016	Radiation (03CH01-SZ)
Amplifier	Yiai	AV3860B	04030	2GHz~26.5GHz	May 05, 2015	Dec. 07, 2015~ Dec. 15, 2015	May 04, 2016	Radiation (03CH01-SZ)
AC Power Source	Chroma	61601	61601000198 5	N/A	NCR	Dec. 07, 2015~ Dec. 15, 2015	NCR	Radiation (03CH01-SZ)
Turn Table	EM	EM1000	N/A	0~360 degree	NCR	Dec. 07, 2015~ Dec. 15, 2015	NCR	Radiation (03CH01-SZ)
Antenna Mast	EM	EM1000	N/A	1 m~4 m	NCR	Dec. 07, 2015~ Dec. 15, 2015	NCR	Radiation (03CH01-SZ)



6 Uncertainty of Evaluation

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	4.8dB
--	-------

Appendix A. Test Results of Conducted Test

Conducted Output Power(Average power)

Conducted Power (*Unit: dBm)						
Band	GSM850			GSM1900		
Channel	128	189	251	512	661	810
Frequency	824.2	836.4	848.8	1850.2	1880.0	1909.8
GSM	32.91	32.96	32.95	29.92	29.88	29.96
GPRS class 8	32.90	32.94	32.93	29.90	29.87	29.95
GPRS class 10	31.33	31.37	31.36	28.30	28.26	28.33
GPRS class 11	29.34	29.38	29.37	26.35	26.29	26.36
GPRS class 12	27.89	27.99	27.98	24.88	24.83	24.89
EGPRS class 8	26.98	26.94	27.04	26.10	26.07	26.03
EGPRS class 10	25.73	25.71	26.02	25.03	25.02	24.91
EGPRS class 11	24.46	24.44	24.55	24.01	23.97	23.72
EGPRS class 12	23.17	23.16	23.61	22.65	22.59	22.51

Conducted Power (*Unit: dBm)									
Band	WCDMA Band V			WCDMA Band II			WCDMA Band IV		
Channel	4132	4182	4233	9262	9400	9538	1312	1413	1513
Frequency	826.4	836.4	846.6	1852.4	1880	1907.6	1712.4	1732.6	1752.6
AMR 12.2K	22.67	22.62	22.79	22.75	22.81	22.76	22.10	21.98	22.04
RMC 12.2K	22.68	22.64	22.80	22.76	22.82	22.78	22.11	22.00	22.05
HSDPA Subtest-1	21.41	21.57	21.43	21.38	21.46	21.35	20.66	20.67	20.73
HSDPA Subtest-2	21.42	21.60	21.44	21.39	21.47	21.37	20.67	20.67	20.74
HSDPA Subtest-3	20.96	21.14	20.94	20.92	21.03	20.88	20.19	20.20	20.27
HSDPA Subtest-4	20.96	21.10	20.93	20.88	21.00	20.86	20.20	20.20	20.26
HSUPA Subtest-1	19.46	19.64	19.45	19.44	19.54	19.45	18.70	18.74	18.82
HSUPA Subtest-2	19.43	19.64	19.43	19.43	19.54	19.43	18.72	18.74	18.79
HSUPA Subtest-3	20.43	20.62	20.40	20.41	20.55	20.45	19.72	19.73	19.81
HSUPA Subtest-4	18.89	19.11	18.90	18.91	18.94	18.92	18.15	18.21	18.28
HSUPA Subtest-5	21.40	21.60	21.40	21.40	21.60	21.40	20.70	20.70	20.70







**Peak-to-Average Ratio**

Mode	GSM850		Limit: 13dB
Mod.	GSM	EDGE class 8	Result
Lowest CH	0.24	3.72	PASS
Middle CH	0.20	3.80	
Highest CH	0.24	3.44	







Mode	GSM1900		Limit: 13dB
Mod.	GSM	EDGE class 8	Result
Lowest CH	0.24	3.04	PASS
Middle CH	0.20	3.28	
Highest CH	0.24	3.24	

Mode	WCDMA Band V	WCDMA Band II	WCDMA Band IV	Limit: 13dB
Mod.	RMC 12.2Kbps	RMC 12.2Kbps	RMC 12.2Kbps	Result
Lowest CH	2.92	2.96	2.76	PASS
Middle CH	2.92	2.88	2.92	
Highest CH	2.80	2.76	2.80	

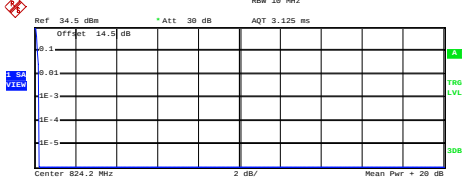
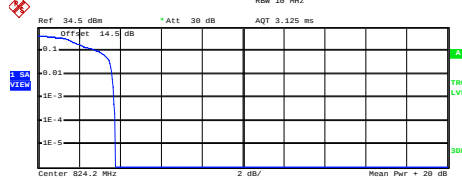
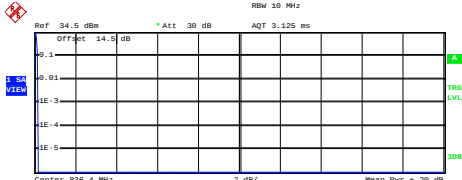
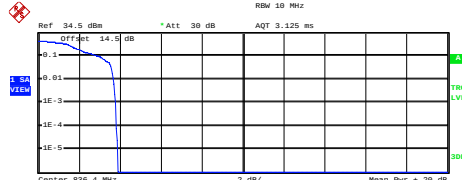
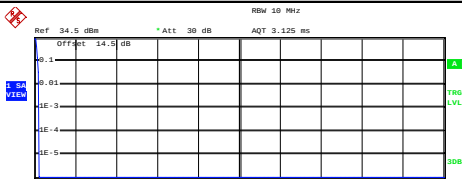
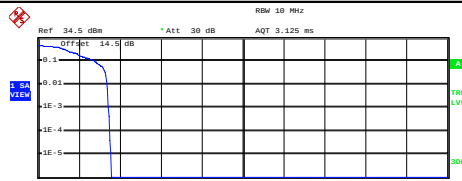


GSM850 (GSM)		GSM850 (EDGE class 8)	
Lowest Channel		Lowest Channel	
 Ref: 34.5 dBm *Att: 30 dB RBW 10 MHz Offset 14.5 dB Center 824.2 MHz 2 dB/ Mean Per + 20 dB Complementary Cumulative Distribution Function (100000 samples) Trace 1 Mean 32.99 dBm Peak 33.20 dBm Crest 0.22 dB 10 % 0.16 dB 1 % 0.24 dB .1 % 0.24 dB .01 % 0.24 dB Date: 2.DEC.2015 16:50:13		 Ref: 34.5 dBm *Att: 30 dB RBW 10 MHz Offset 14.5 dB Center 824.2 MHz 2 dB/ Mean Per + 20 dB Complementary Cumulative Distribution Function (100000 samples) Trace 1 Mean 25.89 dBm Peak 29.67 dBm Crest 3.78 dB 10 % 2.92 dB 1 % 3.60 dB .1 % 3.72 dB .01 % 3.80 dB Date: 2.DEC.2015 20:26:50	
Middle Channel		Middle Channel	
 Ref: 34.5 dBm *Att: 30 dB RBW 10 MHz Offset 14.5 dB Center 836.4 MHz 2 dB/ Mean Per + 20 dB Complementary Cumulative Distribution Function (100000 samples) Trace 1 Mean 32.96 dBm Peak 33.13 dBm Crest 0.17 dB 10 % 0.16 dB 1 % 0.20 dB .1 % 0.20 dB .01 % 0.20 dB Date: 2.DEC.2015 16:50:27		 Ref: 34.5 dBm *Att: 30 dB RBW 10 MHz Offset 14.5 dB Center 836.4 MHz 2 dB/ Mean Per + 20 dB Complementary Cumulative Distribution Function (100000 samples) Trace 1 Mean 25.78 dBm Peak 29.67 dBm Crest 3.89 dB 10 % 2.96 dB 1 % 3.68 dB .1 % 3.80 dB .01 % 3.84 dB Date: 2.DEC.2015 20:27:29	
Highest Channel		Highest Channel	
 Ref: 34.5 dBm *Att: 30 dB RBW 10 MHz Offset 14.5 dB Center 848.8 MHz 2 dB/ Mean Per + 20 dB Complementary Cumulative Distribution Function (100000 samples) Trace 1 Mean 32.92 dBm Peak 33.13 dBm Crest 0.21 dB 10 % 0.16 dB 1 % 0.24 dB .1 % 0.24 dB .01 % 0.24 dB Date: 2.DEC.2015 16:50:40		 Ref: 34.5 dBm *Att: 30 dB RBW 10 MHz Offset 14.5 dB Center 848.8 MHz 2 dB/ Mean Per + 20 dB Complementary Cumulative Distribution Function (100000 samples) Trace 1 Mean 26.03 dBm Peak 29.60 dBm Crest 3.57 dB 10 % 2.80 dB 1 % 3.40 dB .1 % 3.44 dB .01 % 3.52 dB Date: 2.DEC.2015 20:27:49	

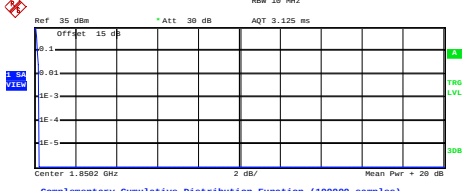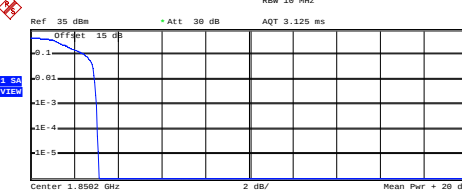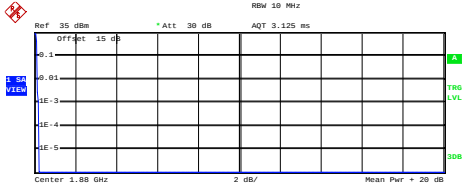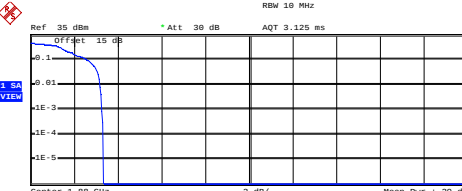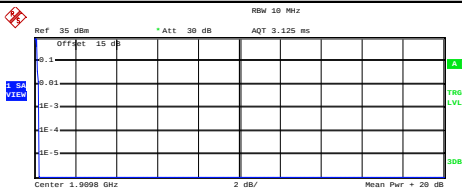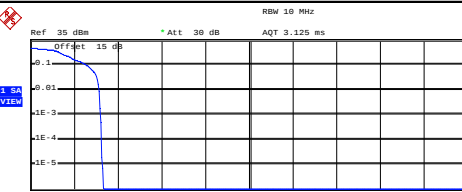

GSM1900 (GSM)		GSM1900 (EDGE class 8)	
Lowest Channel		Lowest Channel	
 Ref: 35 dBm * Att: 30 dB AQT: 3.125 ms Center 1.8502 GHz 2 dB/ Mean Pur: + 20 dB Complementary Cumulative Distribution Function (100000 samples) Trace 1 Mean 29.82 dBm Peak 30.03 dBm Crest 0.21 dB 10 % 0.16 dB 1 % 0.24 dB .1 % 0.24 dB .01 % 0.24 dB Date: 2.DEC.2015 17:41:58		 Ref: 35 dBm * Att: 30 dB AQT: 3.125 ms Center 1.8502 GHz 2 dB/ Mean Pur: + 20 dB Complementary Cumulative Distribution Function (100000 samples) Trace 1 Mean 25.28 dBm Peak 28.41 dBm Crest 3.13 dB 10 % 2.48 dB 1 % 2.96 dB .1 % 3.04 dB .01 % 3.08 dB Date: 2.DEC.2015 20:09:44	
Middle Channel		Middle Channel	
 Ref: 35 dBm * Att: 30 dB AQT: 3.125 ms Center 1.88 GHz 2 dB/ Mean Pur: + 20 dB Complementary Cumulative Distribution Function (100000 samples) Trace 1 Mean 29.81 dBm Peak 30.03 dBm Crest 0.22 dB 10 % 0.16 dB 1 % 0.16 dB .1 % 0.20 dB .01 % 0.24 dB Date: 2.DEC.2015 17:42:17		 Ref: 35 dBm * Att: 30 dB AQT: 3.125 ms Center 1.88 GHz 2 dB/ Mean Pur: + 20 dB Complementary Cumulative Distribution Function (100000 samples) Trace 1 Mean 24.99 dBm Peak 28.34 dBm Crest 3.35 dB 10 % 2.64 dB 1 % 3.20 dB .1 % 3.28 dB .01 % 3.36 dB Date: 2.DEC.2015 20:10:13	
Highest Channel		Highest Channel	
 Ref: 35 dBm * Att: 30 dB AQT: 3.125 ms Center 1.9098 GHz 2 dB/ Mean Pur: + 20 dB Complementary Cumulative Distribution Function (100000 samples) Trace 1 Mean 29.74 dBm Peak 29.96 dBm Crest 0.22 dB 10 % 0.16 dB 1 % 0.20 dB .1 % 0.24 dB .01 % 0.24 dB Date: 2.DEC.2015 17:42:34		 Ref: 35 dBm * Att: 30 dB AQT: 3.125 ms Center 1.9098 GHz 2 dB/ Mean Pur: + 20 dB Complementary Cumulative Distribution Function (100000 samples) Trace 1 Mean 24.72 dBm Peak 28.06 dBm Crest 3.34 dB 10 % 2.60 dB 1 % 3.16 dB .1 % 3.24 dB .01 % 3.28 dB Date: 2.DEC.2015 20:10:41	

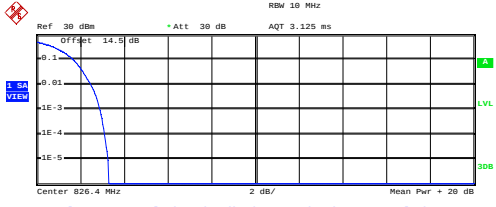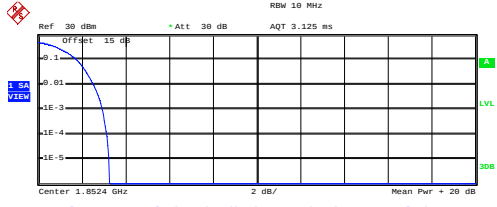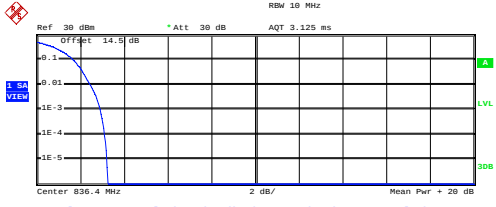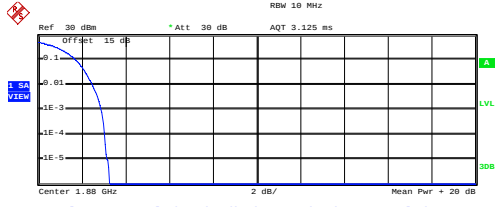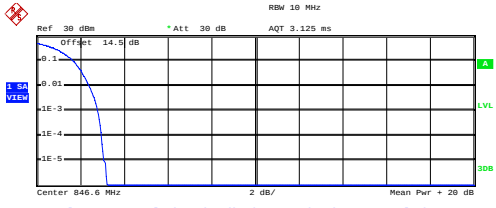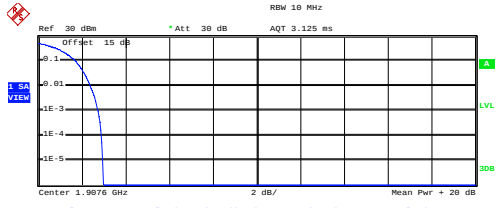


WCDMA Band V (RMC 12.2Kbps)	WCDMA Band II (RMC 12.2Kbps)
Lowest Channel	Lowest Channel
 Complementary Cumulative Distribution Function (100000 samples) Trace 1 Mean 23.07 dBm Peak 26.37 dBm Crest 3.31 dB 10 % 1.68 dB 1 % 2.48 dB .1 % 2.92 dB .01 % 3.12 dB Date: 2.DEC.2015 20:42:57	 Complementary Cumulative Distribution Function (100000 samples) Trace 1 Mean 22.97 dBm Peak 26.23 dBm Crest 3.26 dB 10 % 1.76 dB 1 % 2.56 dB .1 % 2.96 dB .01 % 3.16 dB Date: 2.DEC.2015 21:19:15
Middle Channel	Middle Channel
 Complementary Cumulative Distribution Function (100000 samples) Trace 1 Mean 22.92 dBm Peak 26.16 dBm Crest 3.25 dB 10 % 1.68 dB 1 % 2.48 dB .1 % 2.92 dB .01 % 3.12 dB Date: 2.DEC.2015 20:43:58	 Complementary Cumulative Distribution Function (100000 samples) Trace 1 Mean 22.89 dBm Peak 26.16 dBm Crest 3.27 dB 10 % 1.72 dB 1 % 2.48 dB .1 % 2.88 dB .01 % 3.04 dB Date: 2.DEC.2015 21:19:27
Highest Channel	Highest Channel
 Complementary Cumulative Distribution Function (100000 samples) Trace 1 Mean 23.02 dBm Peak 26.23 dBm Crest 3.21 dB 10 % 1.68 dB 1 % 2.40 dB .1 % 2.80 dB .01 % 2.96 dB Date: 2.DEC.2015 20:44:09	 Complementary Cumulative Distribution Function (100000 samples) Trace 1 Mean 22.95 dBm Peak 25.95 dBm Crest 3.00 dB 10 % 1.72 dB 1 % 2.40 dB .1 % 2.76 dB .01 % 2.92 dB Date: 2.DEC.2015 21:20:06




WCDMA Band IV (RMC 12.2Kbps)

Lowest Channel

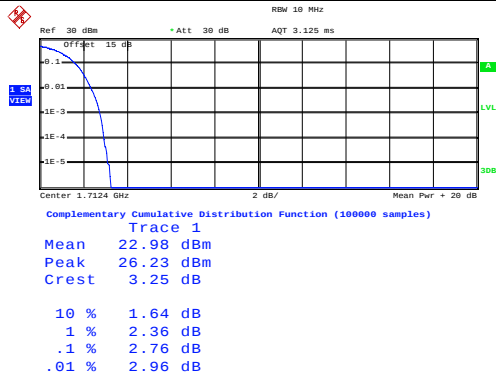


Date: 2.DEC.2015 21:00:56

Middle Channel

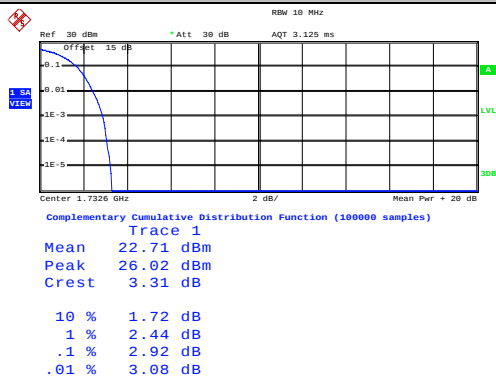

Date: 2.DEC.2015 21:01:07

Highest Channel

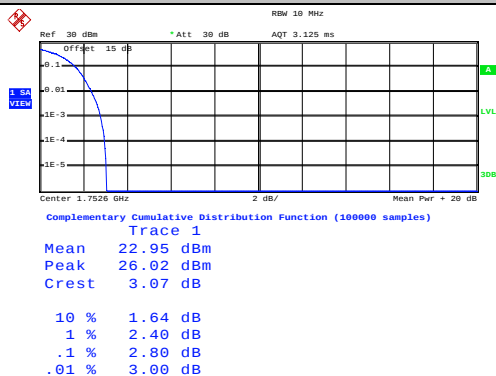

Date: 2.DEC.2015 21:01:19

**26dB Bandwidth**

Mode	GSM850	
Mod.	GSM	EDGE class 8
Lowest CH	0.310	0.313
Middle CH	0.312	0.314
Highest CH	0.310	0.303


Mode	GSM1900	
Mod.	GSM	EDGE class 8
Lowest CH	0.315	0.305
Middle CH	0.313	0.313
Highest CH	0.310	0.306

Mode	WCDMA Band V	WCDMA Band II	WCDMA Band IV
Mod.	RMC 12.2Kbps	RMC 12.2Kbps	RMC 12.2Kbps
Lowest CH	4.68	4.70	4.68
Middle CH	4.69	4.68	4.69
Highest CH	4.68	4.69	4.69



GSM850 (GSM)


Lowest Channel

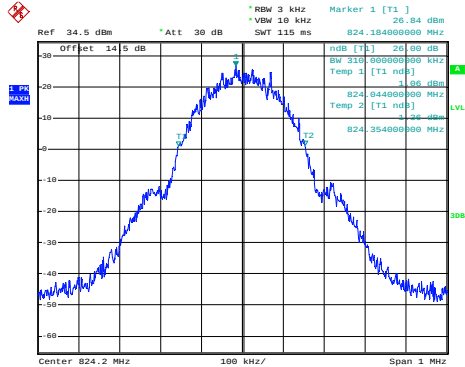

Date: 2.DEC.2015 17:16:32


GSM850 (EDGE class 8)

Lowest Channel

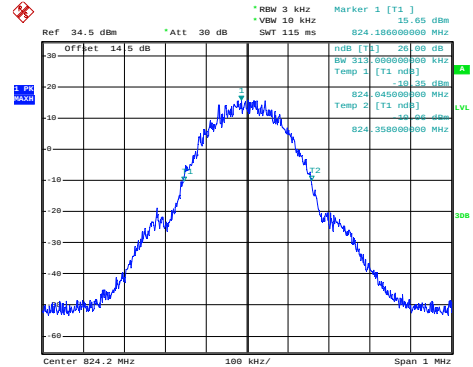


Date: 2.DEC.2015 16:58:09

Middle Channel

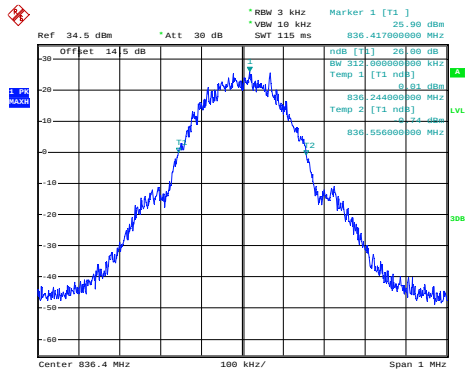


Date: 2.DEC.2015 17:17:01

Middle Channel

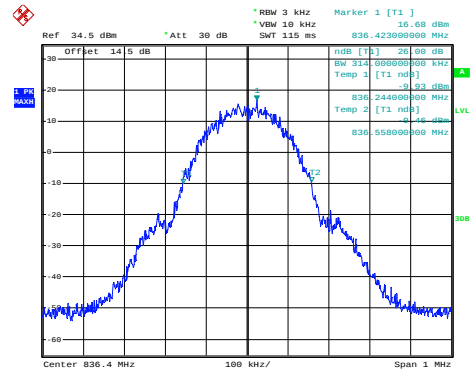


Date: 2.DEC.2015 16:58:38

Highest Channel

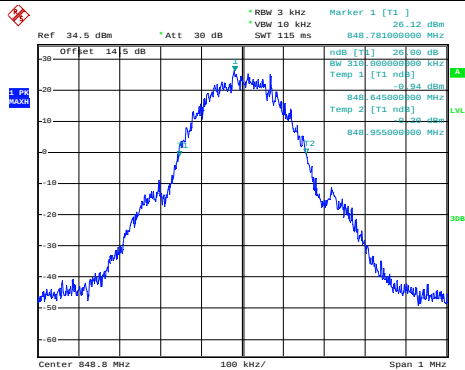

Date: 2.DEC.2015 17:17:29

Highest Channel

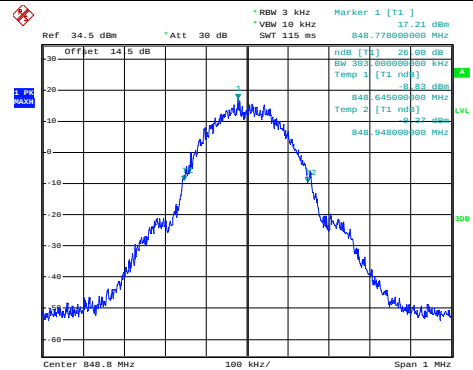


Date: 2.DEC.2015 16:59:07



GSM1900 (GSM)


Lowest Channel

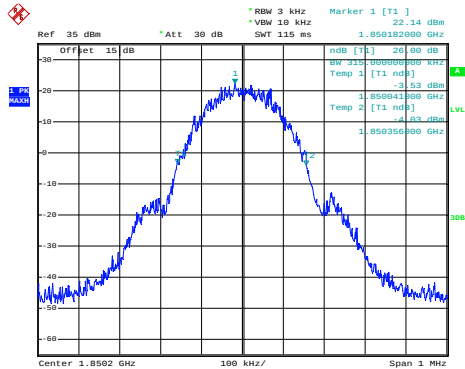

Date: 2.DEC.2015 17:30:29


GSM1900 (EDGE class 8)

Lowest Channel

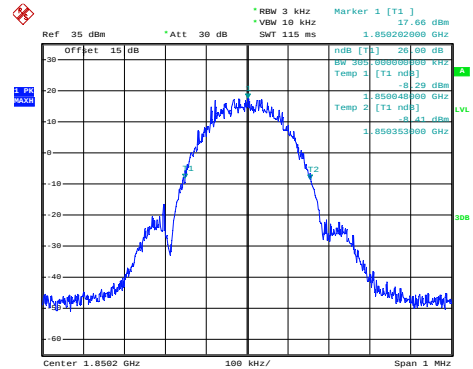


Date: 2.DEC.2015 19:58:21

Middle Channel

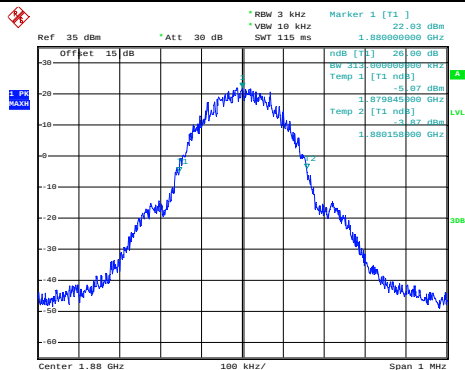


Date: 2.DEC.2015 17:30:58

Middle Channel

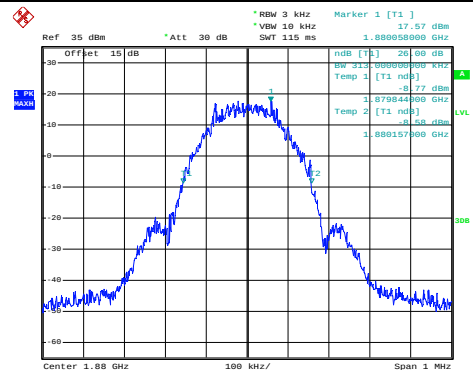


Date: 2.DEC.2015 19:58:49

Highest Channel

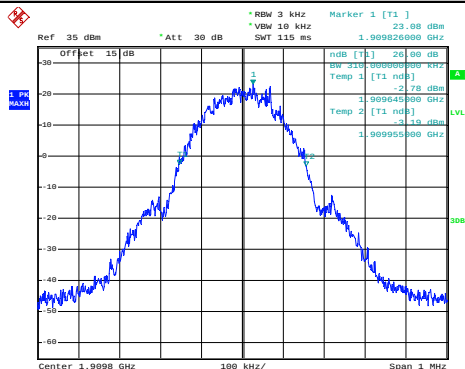

Date: 2.DEC.2015 17:31:26

Highest Channel

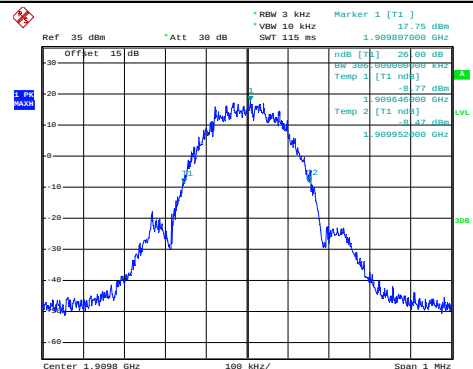


Date: 2.DEC.2015 19:59:18



WCDMA Band V (RMC 12.2Kbps)


Lowest Channel

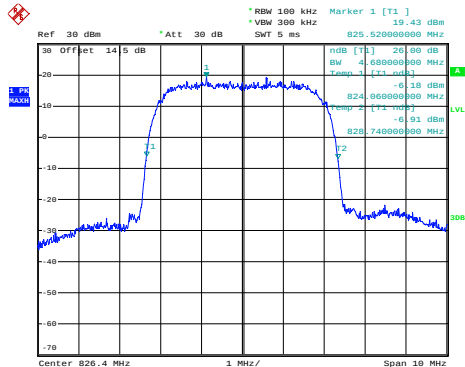

Date: 2.DEC.2015 20:33:23


WCDMA Band II (RMC 12.2Kbps)

Lowest Channel

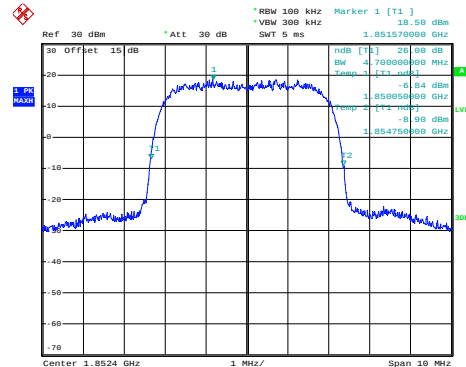


Date: 2.DEC.2015 21:09:43

Middle Channel

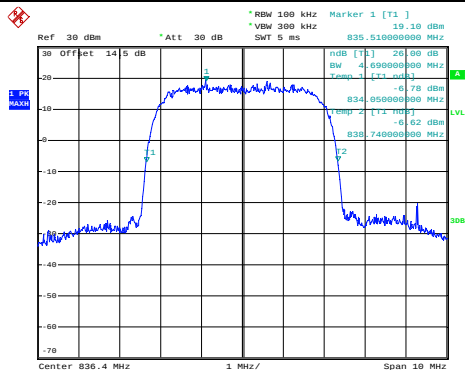


Date: 2.DEC.2015 20:33:51

Middle Channel

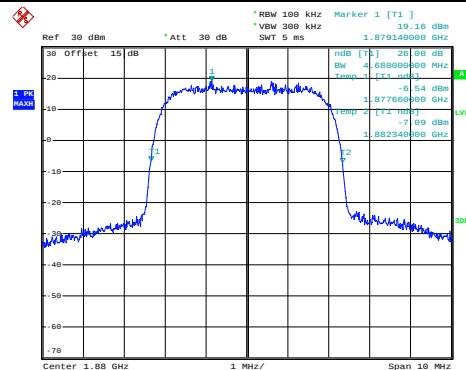


Date: 2.DEC.2015 21:10:11

Highest Channel

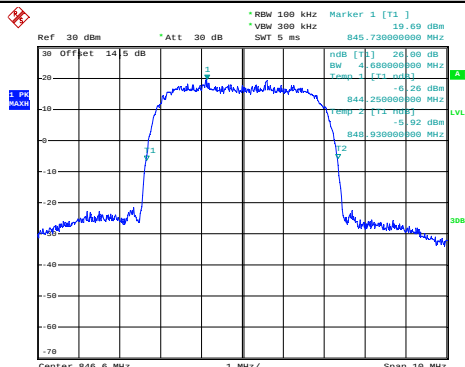

Date: 2.DEC.2015 20:34:20

Highest Channel

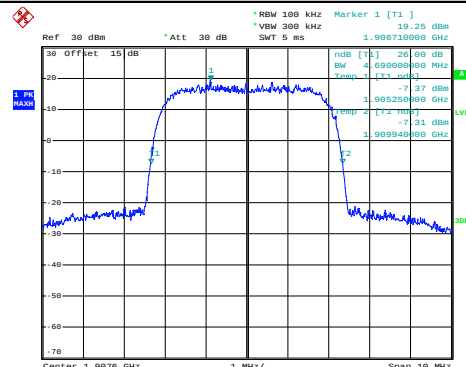


Date: 2.DEC.2015 21:10:40




WCDMA Band IV (RMC 12.2Kbps)

Lowest Channel

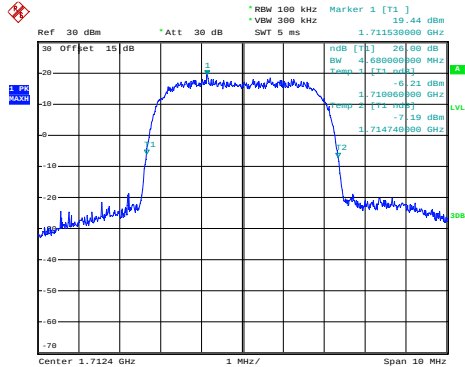


Date: 2.DEC.2015 20:49:40

Middle Channel

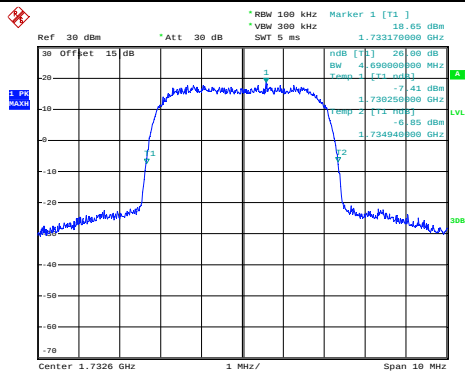

Date: 2.DEC.2015 20:50:08

Highest Channel

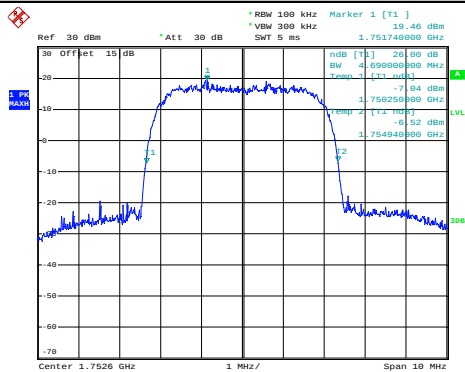

Date: 2.DEC.2015 20:50:36

**Occupied Bandwidth**


Mode	GSM850	
Mod.	GSM	EDGE class 8
Lowest CH	0.247	0.249
Middle CH	0.249	0.246
Highest CH	0.243	0.243

Mode	GSM1900	
Mod.	GSM	EDGE class 8
Lowest CH	0.244	0.244
Middle CH	0.247	0.245
Highest CH	0.244	0.243

Mode	WCDMA Band V	WCDMA Band II	WCDMA Band IV
Mod.	RMC 12.2Kbps	RMC 12.2Kbps	RMC 12.2Kbps
Lowest CH	4.15	4.16	4.16
Middle CH	4.15	4.16	4.17
Highest CH	4.15	4.17	4.16

GSM850 (GSM)


Lowest Channel

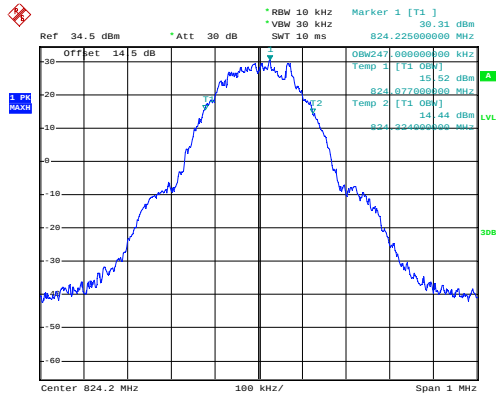

Date: 2.DEC.2015 16:37:53


GSM850 (EDGE class 8)

Lowest Channel

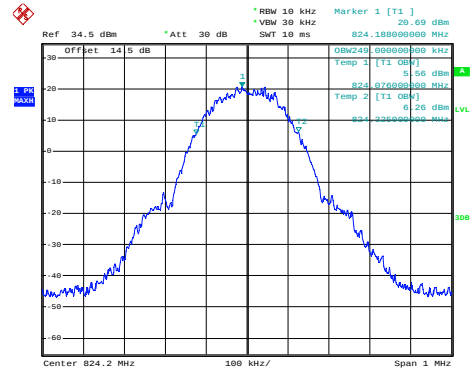


Date: 2.DEC.2015 16:59:41

Middle Channel

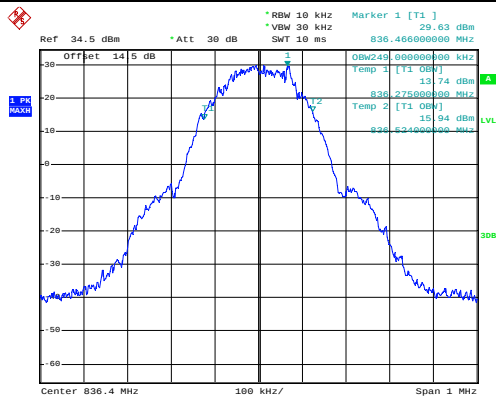


Date: 2.DEC.2015 16:38:21

Middle Channel

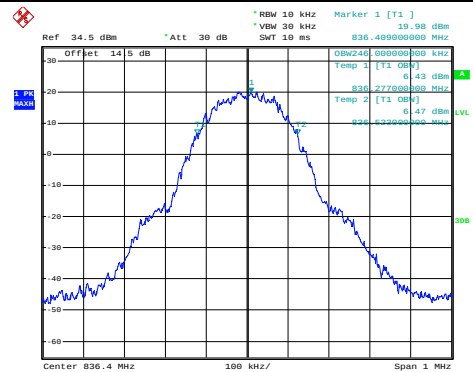


Date: 2.DEC.2015 17:00:10

Highest Channel

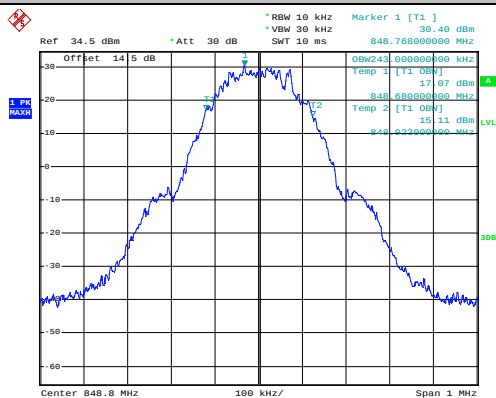

Date: 2.DEC.2015 16:38:49

Highest Channel

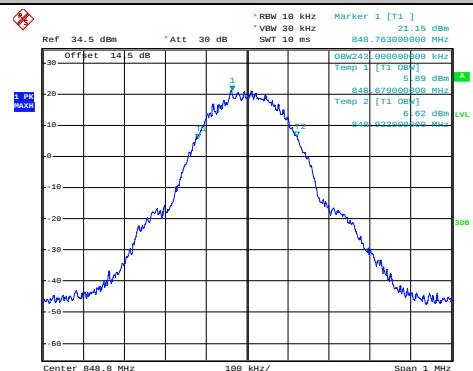


Date: 2.DEC.2015 17:00:39



GSM1900 (GSM)


Lowest Channel

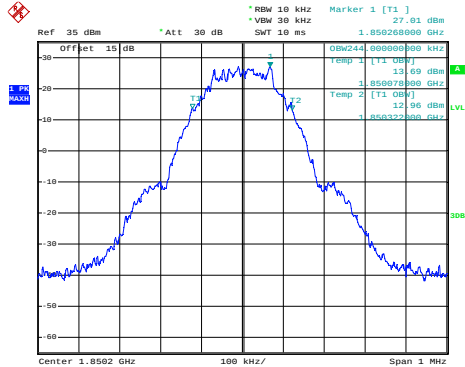

Date: 2.DEC.2015 17:33:30


GSM1900 (EDGE class 8)

Lowest Channel

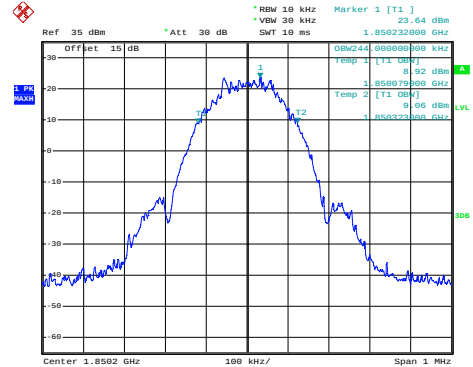


Date: 2.DEC.2015 20:00:47

Middle Channel

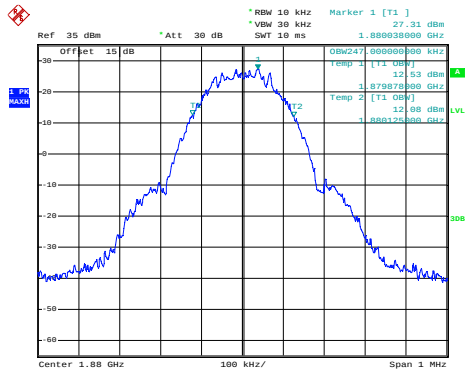


Date: 2.DEC.2015 17:33:58

Middle Channel

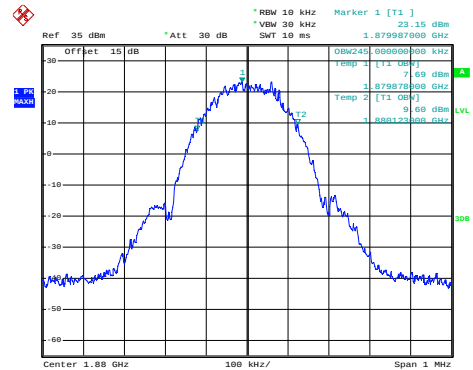


Date: 2.DEC.2015 20:01:15

Highest Channel

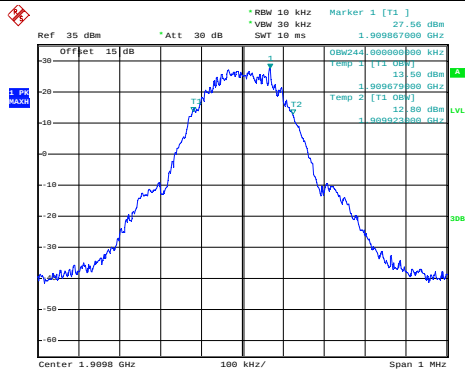

Date: 2.DEC.2015 17:34:26

Highest Channel

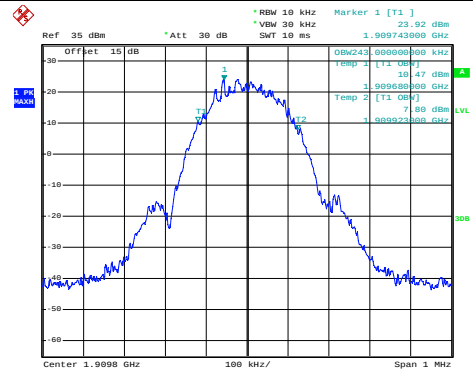


Date: 2.DEC.2015 20:01:44



WCDMA Band V (RMC 12.2Kbps)


Lowest Channel

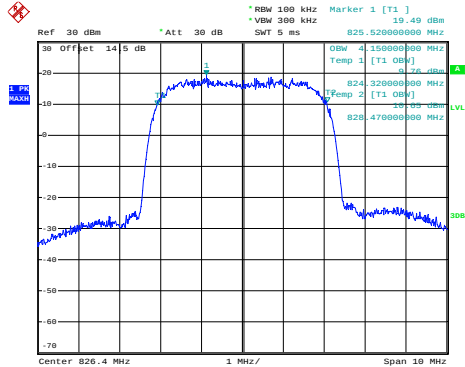

Date: 2.DEC.2015 20:35:24


WCDMA Band II (RMC 12.2Kbps)

Lowest Channel

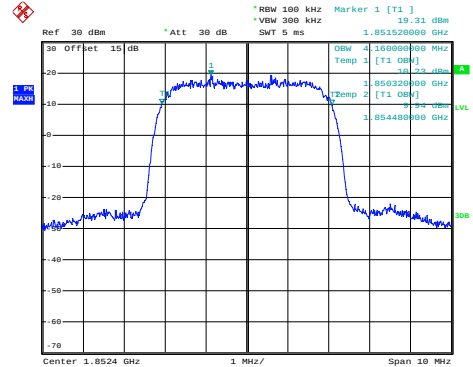


Date: 2.DEC.2015 21:11:38

Middle Channel

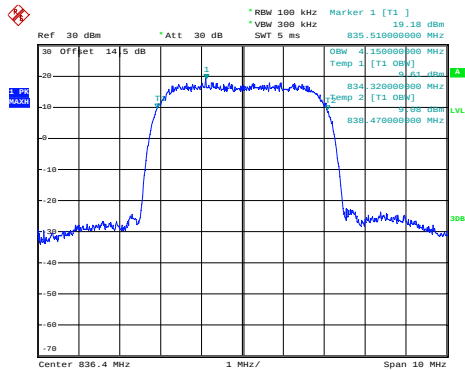


Date: 2.DEC.2015 20:35:53

Middle Channel

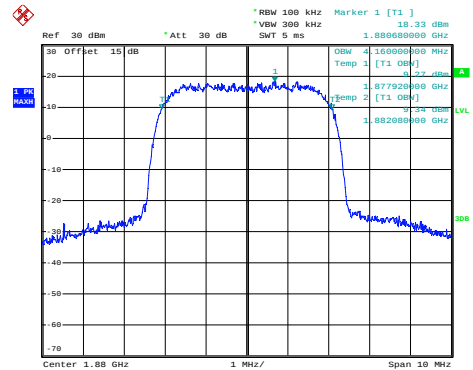


Date: 2.DEC.2015 21:12:06

Highest Channel

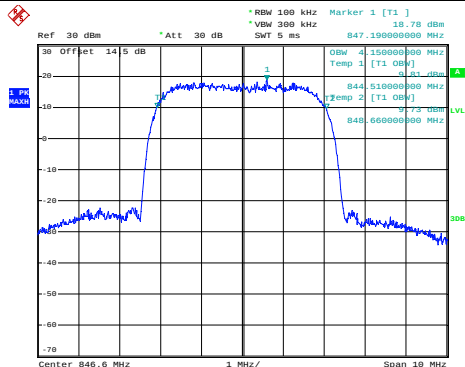

Date: 2.DEC.2015 20:36:21

Highest Channel

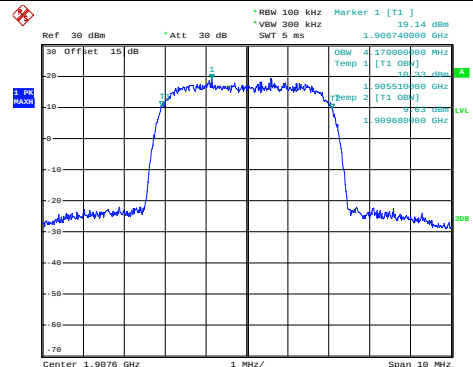


Date: 2.DEC.2015 21:12:34




WCDMA Band IV (RMC 12.2Kbps)

Lowest Channel

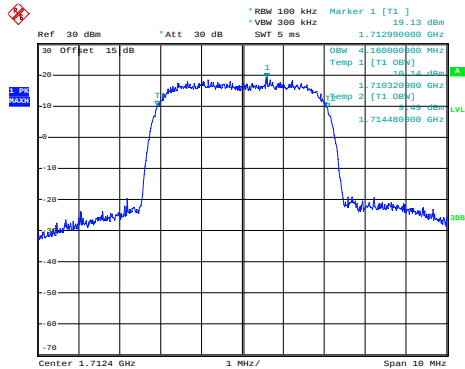


Date: 2.DEC.2015 20:51:35

Middle Channel

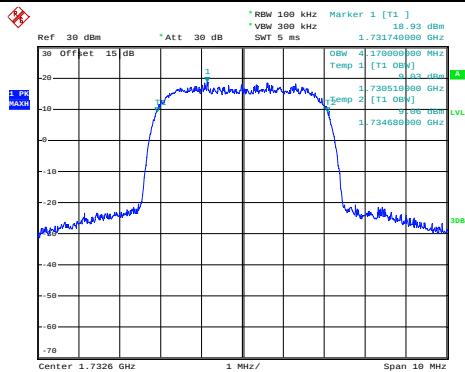


Date: 2.DEC.2015 20:52:03


Highest Channel

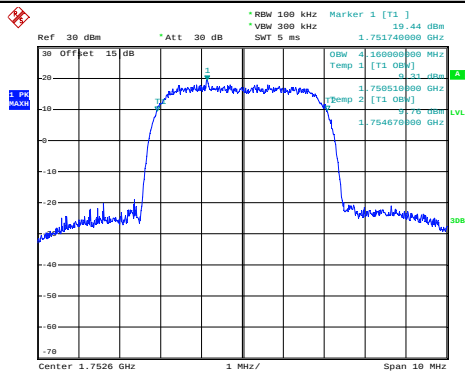


Date: 2.DEC.2015 20:52:31

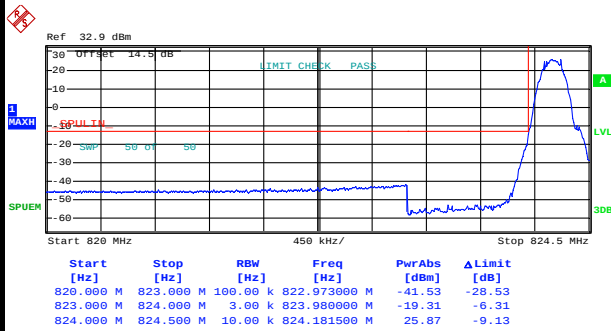**Conducted Band Edge****GSM850 (GSM)****Lowest Band Edge**


Date: 2.DEC.2015 16:41:30

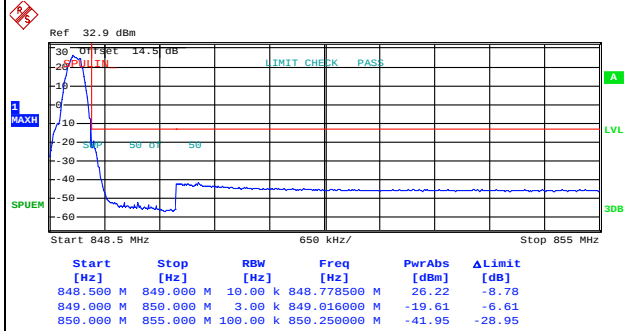Highest Band Edge

Date: 2.DEC.2015 16:42:58

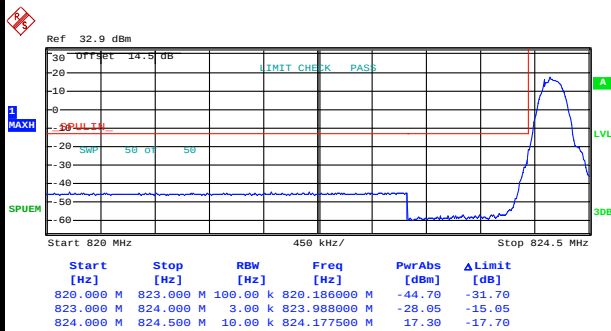GSM850 (EDGE class 8)**Lowest Band Edge**

Date: 2.DEC.2015 17:02:09

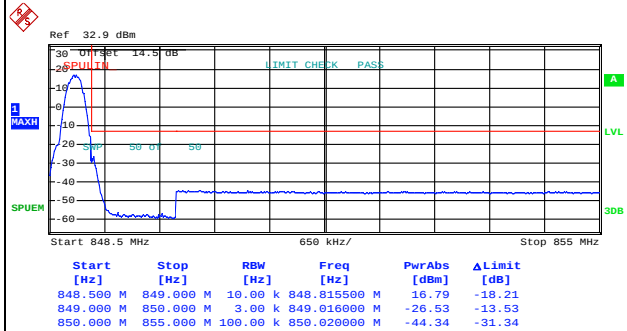
Highest Band Edge

Date: 2.DEC.2015 17:03:37




GSM1900 (GSM)

Lowest Band Edge

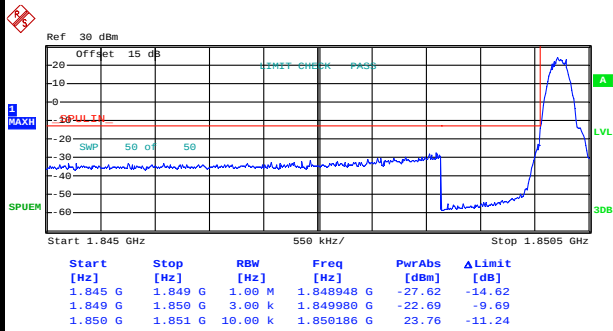

Date: 2.DEC.2015 17:36:22


Highest Band Edge

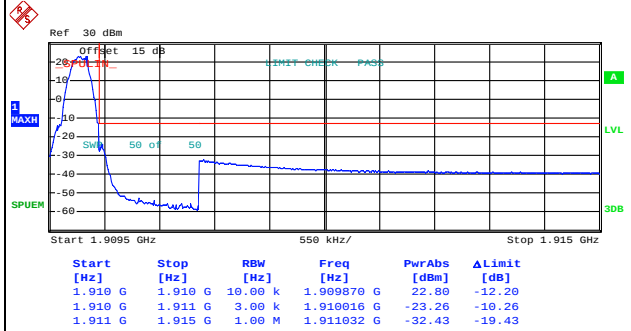

Date: 2.DEC.2015 17:37:50


GSM1900 (EDGE class 8)

Lowest Band Edge

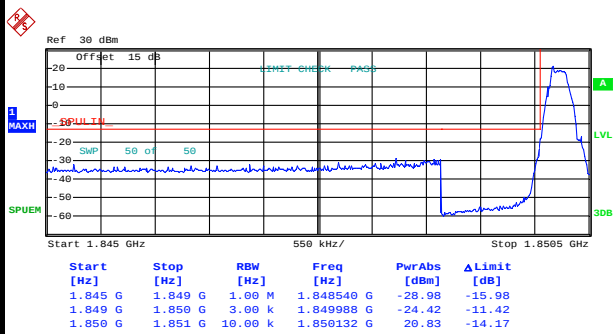

Date: 2.DEC.2015 20:06:41

Highest Band Edge

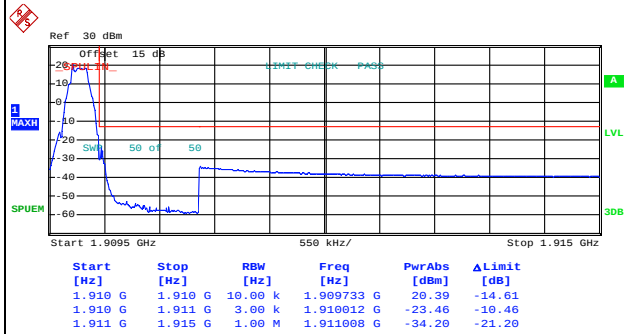


Date: 2.DEC.2015 20:08:09




WCDMA Band V (RMC 12.2Kbps)

Lowest Band Edge

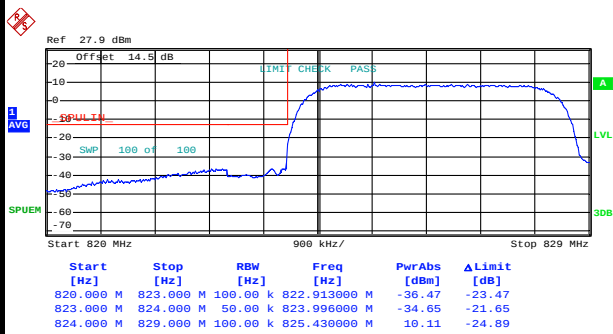

Date: 2.DEC.2015 20:39:21

Highest Band Edge

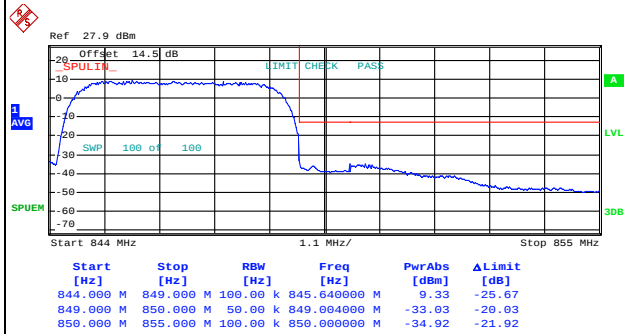


Date: 2.DEC.2015 20:42:05




WCDMA Band II (RMC 12.2Kbps)

Lowest Band Edge

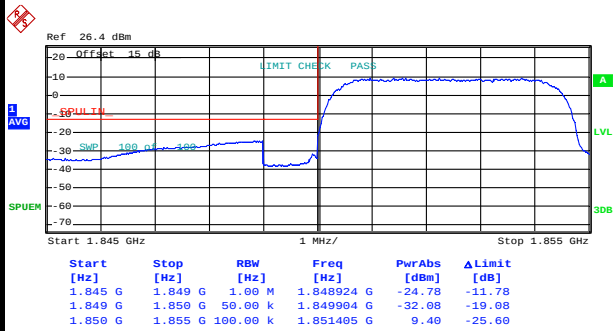

Date: 2.DEC.2015 21:15:29


Highest Band Edge

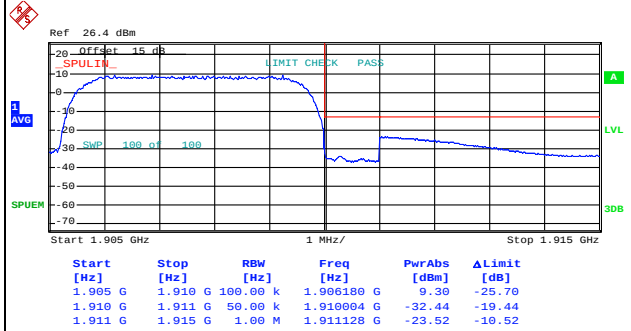

Date: 2.DEC.2015 21:18:13


WCDMA Band IV (RMC 12.2Kbps)

Lowest Band Edge

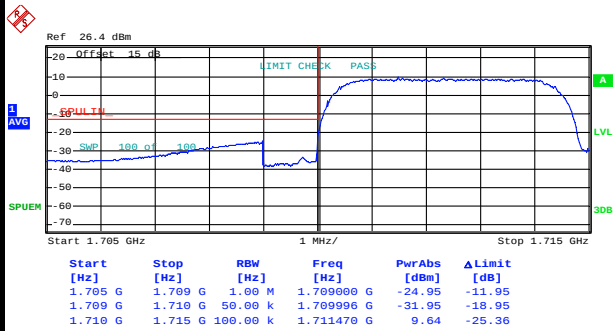

Date: 2.DEC.2015 20:55:52

Highest Band Edge

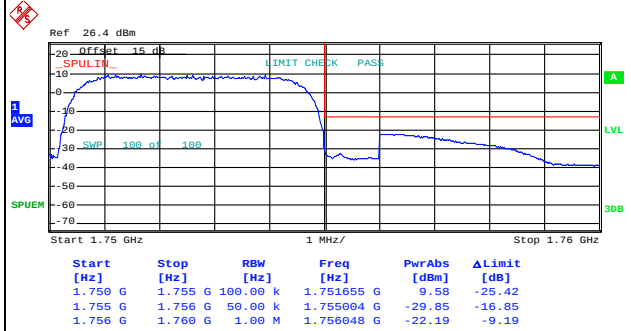

Date: 2.DEC.2015 20:58:36




Conducted Spurious Emission

GSM850 (GSM)		GSM850 (EDGE class 8)	
Lowest Channel		Lowest Channel	
</			



GSM1900 (GSM)


Lowest Channel

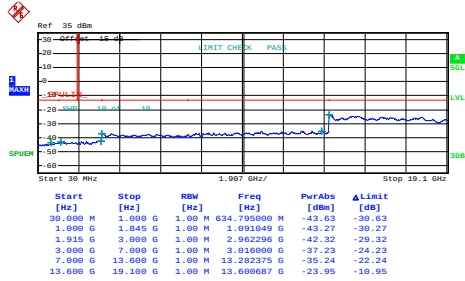

Date: 2.DEC.2015 17:40:00


GSM1900 (EDGE class 8)

Lowest Channel

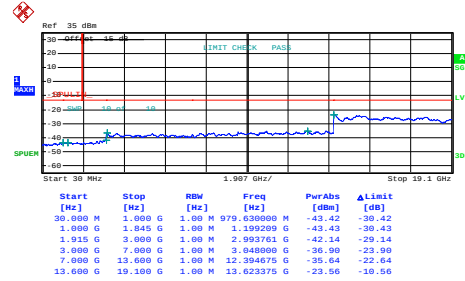


Date: 2.DEC.2015 20:11:48

Middle Channel

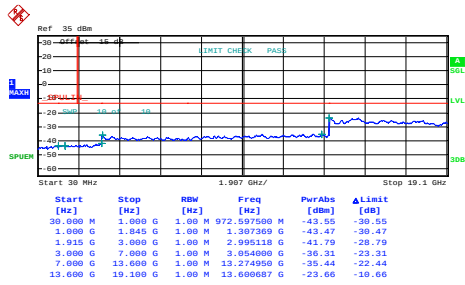


Date: 2.DEC.2015 17:40:30

Middle Channel

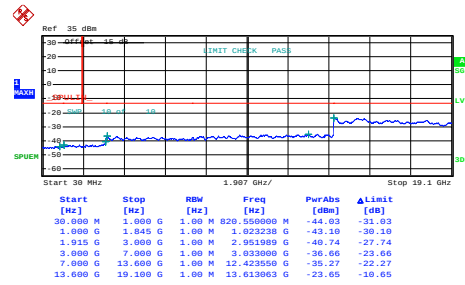


Date: 2.DEC.2015 20:12:18

Highest Channel

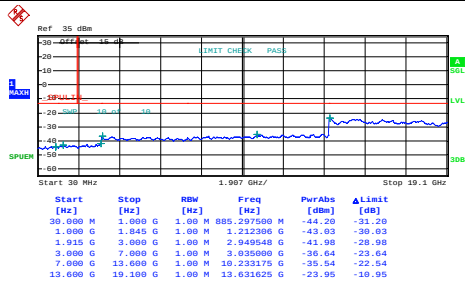

Date: 2.DEC.2015 17:41:00

Highest Channel

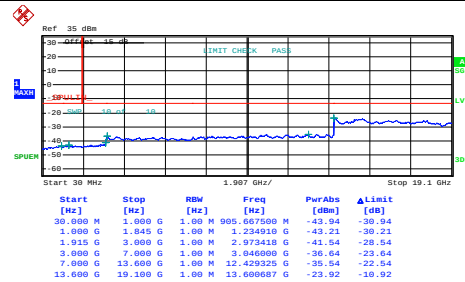


Date: 2.DEC.2015 20:12:49



WCDMA Band V (RMC 12.2Kbps)


Lowest Channel

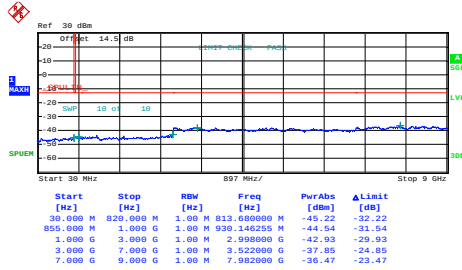

Date: 2.DEC.2015 20:45:12


WCDMA Band II (RMC 12.2Kbps)

Lowest Channel

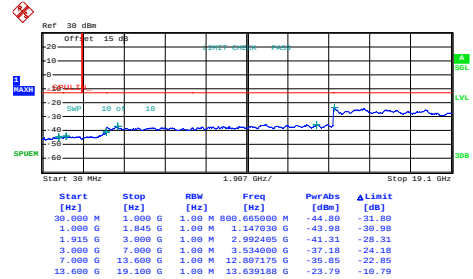


Date: 2.DEC.2015 21:07:07

Middle Channel

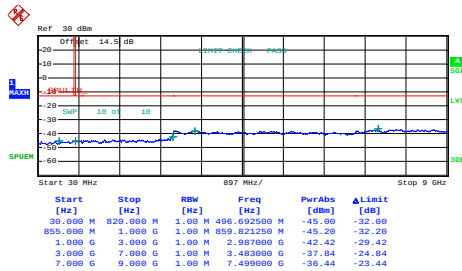


Date: 2.DEC.2015 20:45:42

Middle Channel

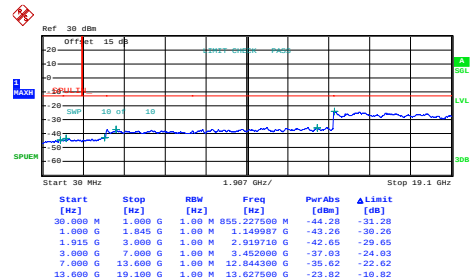


Date: 2.DEC.2015 21:07:37

Highest Channel

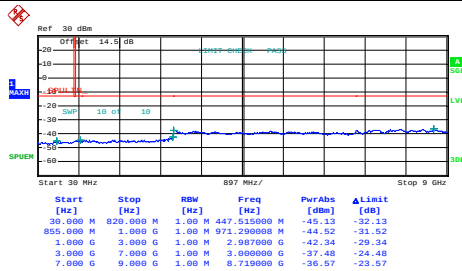

Date: 2.DEC.2015 20:46:12

Highest Channel

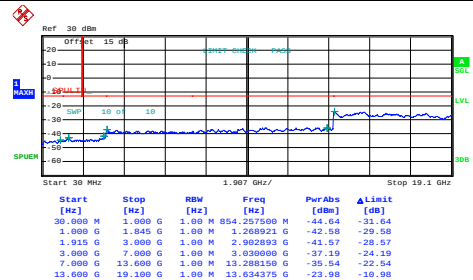


Date: 2.DEC.2015 21:08:07




WCDMA Band IV (RMC 12.2Kbps)

Lowest Channel

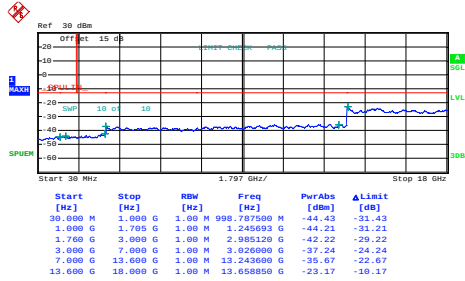


Date: 2.DEC.2015 21:02:44

Middle Channel

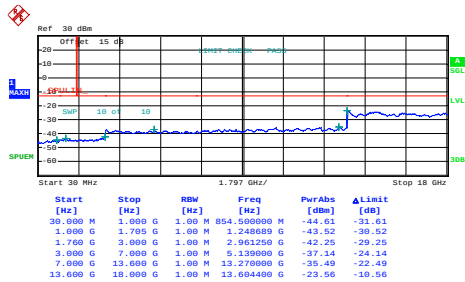

Date: 2.DEC.2015 21:03:14

Highest Channel

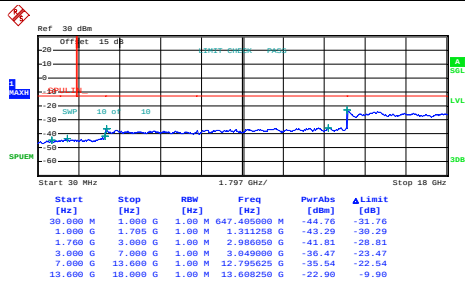

Date: 2.DEC.2015 21:03:44

**Frequency Stability**

Test Conditions	Middle Channel	GSM850 (GSM)	GSM850 (EDGE class 8)	Limit 2.5ppm
Temperature (°C)	Voltage (Volt)	Deviation (ppm)		Result
50	Normal Voltage	0.0072	0.0060	PASS
40	Normal Voltage	0.0036	0.0263	
30	Normal Voltage	0.0311	0.0012	
20(Ref.)	Normal Voltage	0.0000	0.0000	
10	Normal Voltage	0.0287	0.0024	
0	Normal Voltage	0.0012	0.0275	
-10	Normal Voltage	0.0048	0.0299	
-20	Normal Voltage	0.0359	0.0072	
-30	Normal Voltage	0.0012	0.0048	
20	Maximum Voltage	0.0048	0.0036	
20	Normal Voltage	0.0000	0.0012	
20	Battery End Point	0.0012	0.0048	

Note: Normal Voltage = 3.9V. ; Battery End Point (BEP) = 3.5V. ; Maximum Voltage =4.2V



Test Conditions	Middle Channel	GSM1900 (GSM)	GSM1900 (EDGE class 8)	Limit Note 2.
Temperature (°C)	Voltage (Volt)	Deviation (ppm)		Result
50	Normal Voltage	0.0032	0.0016	PASS
40	Normal Voltage	0.0011	0.0239	
30	Normal Voltage	0.0181	0.0011	
20(Ref.)	Normal Voltage	0.0000	0.0000	
10	Normal Voltage	0.0165	0.0005	
0	Normal Voltage	0.0000	0.0016	
-10	Normal Voltage	0.0005	0.0266	
-20	Normal Voltage	0.0021	0.0043	
-30	Normal Voltage	0.0037	0.0053	
20	Maximum Voltage	0.0011	0.0011	
20	Normal Voltage	0.0005	0.0011	
20	Battery End Point	0.0016	0.0005	

Note:

1. Normal Voltage = 3.9V. ; Battery End Point (BEP) = 3.5V. ; Maximum Voltage =4.2V
2. The frequency fundamental emissions stay within the authorized frequency block based on the frequency deviation measured is small.



Test Conditions	Middle Channel	WCDMA Band V (RMC 12.2KbpsRMC 12.2Kbps)	Limit 2.5ppm
Temperature (°C)	Voltage (Volt)	Deviation (ppm)	Result
50	Normal Voltage	0.0048	PASS
40	Normal Voltage	0.0167	
30	Normal Voltage	0.0012	
20(Ref.)	Normal Voltage	0.0000	
10	Normal Voltage	0.0000	
0	Normal Voltage	0.0024	
-10	Normal Voltage	0.0179	
-20	Normal Voltage	0.0048	
-30	Normal Voltage	0.0072	
20	Maximum Voltage	0.0024	
20	Normal Voltage	0.0000	
20	Battery End Point	0.0048	

Note: Normal Voltage = 3.9V. ; Battery End Point (BEP) = 3.5V. ; Maximum Voltage =4.2 V



Test Conditions	Middle Channel	WCDMA Band II (RMC 12.2Kbps)	Limit Note 2.
Temperature (°C)	Voltage (Volt)	Deviation (ppm)	Result
50	Normal Voltage	0.0021	PASS
40	Normal Voltage	0.0181	
30	Normal Voltage	0.0005	
20(Ref.)	Normal Voltage	0.0000	
10	Normal Voltage	0.0011	
0	Normal Voltage	0.0191	
-10	Normal Voltage	0.0032	
-20	Normal Voltage	0.0043	
-30	Normal Voltage	0.0027	
20	Maximum Voltage	0.0005	
20	Normal Voltage	0.0005	
20	Battery End Point	0.0011	

Note:

1. Normal Voltage = 3.9V. ; Battery End Point (BEP) = 3.5V. ; Maximum Voltage =4.2 V
2. The frequency fundamental emissions stay within the authorized frequency block based on the frequency deviation measured is small.



Test Conditions	Middle Channel	WCDMA Band IV (RMC 12.2Kbps)	Limit Note 2.
Temperature (°C)	Voltage (Volt)	Deviation (ppm)	Result
50	Normal Voltage	0.0029	PASS
40	Normal Voltage	0.0133	
30	Normal Voltage	0.0012	
20(Ref.)	Normal Voltage	0.0000	
10	Normal Voltage	0.0006	
0	Normal Voltage	0.0017	
-10	Normal Voltage	0.0144	
-20	Normal Voltage	0.0035	
-30	Normal Voltage	0.0046	
20	Maximum Voltage	0.0012	
20	Normal Voltage	0.0000	
20	Battery End Point	0.0023	

Note:

1. Normal Voltage = 3.9V. ; Battery End Point (BEP) = 3.5 V. ; Maximum Voltage =4.2V
2. The frequency fundamental emissions stay within the authorized frequency block based on the frequency deviation measured is small.

Appendix B. Test Results of Radiated Test

ERP/EIRP

Channel	Mode	Horizontal		Vertical	
		ERP(dBm)	ERP(W)	ERP(dBm)	ERP(W)
Lowest	GSM850 GSM	31.16	1.3062	27.51	0.5636
Middle		31.52	1.4191	26.06	0.4036
Highest		31.27	1.3397	26.22	0.4188
Lowest	GSM850 EDGE class 8	24.24	0.2655	22.95	0.1972
Middle		24.68	0.2938	22.52	0.1786
Highest		23.59	0.2286	22.38	0.1730
Lowest	WCDMA Band V RMC 12.2Kbps	21.65	0.1462	18.42	0.0695
Middle		22.29	0.1694	18.62	0.0728
Highest		22.10	0.1622	19.17	0.0826
Limit	ERP < 7W	Result		PASS	



Channel	Mode	Horizontal		Vertical	
		EIRP(dBm)	EIRP(W)	EIRP(dBm)	EIRP(W)
Lowest	GSM1900 GSM	31.00	1.2589	31.72	1.4859
Middle		31.23	1.3274	31.33	1.3583
Highest		31.46	1.3996	31.11	1.2912
Limit	EIRP < 2W	Result		PASS	

Channel	Mode	Horizontal		Vertical	
		EIRP(dBm)	EIRP(W)	EIRP(dBm)	EIRP(W)
Lowest	WCDMA Band IV RMC 12.2Kbps	20.10	0.1023	23.04	0.2014
Middle		20.46	0.1112	23.51	0.2244
Highest		20.00	0.1000	23.16	0.2070
Limit	EIRP < 1W	Result		PASS	

**Radiated Spurious Emission**

GSM850 (GSM)									
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	1672	-44.77	-13	-31.77	-47.91	-51.46	0.56	9.40	H
	2510	-59.90	-13	-46.90	-63.80	-67.60	0.75	10.60	H
	3346	-51.15	-13	-38.15	-60.45	-60.75	0.85	12.60	H
	4182	-56.54	-13	-43.54	-67.36	-66.10	0.89	12.60	H
	5018	-52.72	-13	-39.72	-66.14	-62.33	0.94	12.70	H
	1672	-45.62	-13	-32.62	-50.56	-52.31	0.56	9.40	V
	2510	-58.19	-13	-45.19	-62.57	-65.89	0.75	10.60	V
	3346	-56.92	-13	-43.92	-63.78	-66.52	0.85	12.60	V
	4182	-56.36	-13	-43.36	-66.65	-65.92	0.89	12.60	V
	5018	-53.16	-13	-40.16	-65.15	-62.77	0.94	12.70	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

GSM850 (EDGE class 8)									
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	1672	-42.62	-13	-29.62	-46.03	-49.31	0.56	9.40	H
	2510	-61.76	-13	-48.76	-65.66	-69.46	0.75	10.60	H
	3346	-54.90	-13	-41.90	-64.20	-64.50	0.85	12.60	H
	1672	-44.35	-13	-31.35	-49.34	-51.04	0.56	9.40	V
	2510	-60.85	-13	-47.85	-65.23	-68.55	0.75	10.60	V
	3346	-59.44	-13	-46.44	-66.30	-69.04	0.85	12.60	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



GSM1900 (GSM)									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	3760	-53.03	-13	-40.03	-64.28	-64.76	0.87	12.60	H
	5640	-52.12	-13	-39.12	-68.00	-64.15	1.07	13.10	H
	7520	-50.78	-13	-37.78	-69.10	-60.39	1.69	11.30	H
	9400	-46.85	-13	-33.85	-70.28	-56.92	1.83	11.90	H
	11280	-46.25	-13	-33.25	-69.30	-55.86	1.89	11.50	H
	13160	-45.46	-13	-32.46	-69.39	-57.13	1.93	13.60	H
	15040	-31.53	-13	-18.53	-58.31	-43.05	2.08	13.60	H
	3760	-52.93	-13	-39.93	-65.4	-64.66	0.87	12.6	V
	5640	-49.95	-13	-36.95	-66.27	-61.98	1.07	13.1	V
	7520	-50.25	-13	-37.25	-68.47	-59.86	1.69	11.3	V
	9400	-47.22	-13	-34.22	-70.03	-57.29	1.83	11.9	V
	11280	-47.29	-13	-34.29	-70.09	-56.90	1.89	11.5	V
	13160	-46.01	-13	-33.01	-69.66	-57.68	1.93	13.6	V
	15040	-34.93	-13	-21.93	-61.99	-46.45	2.08	13.6	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

GSM1900 (EDGE class 8)									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	3760	-54.50	-13	-41.50	-65.75	-66.23	0.87	12.60	H
	5640	-52.99	-13	-39.99	-68.87	-65.02	1.07	13.10	H
	7520	-50.41	-13	-37.41	-68.73	-60.02	1.69	11.30	H
	3760	-54.31	-13	-41.31	-66.78	-66.04	0.87	12.6	V
	5640	-52.56	-13	-39.56	-68.88	-64.59	1.07	13.1	V
	7520	-50.50	-13	-37.50	-68.72	-60.11	1.69	11.3	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



WCDMA Band V(RMC 12.2Kbps)									
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	1672	-61.15	-13	-48.15	-62.76	-67.84	0.56	9.40	H
	2510	-59.07	-13	-46.07	-62.97	-66.77	0.75	10.60	H
	3346	-55.92	-13	-42.92	-65.22	-65.52	0.85	12.60	H
	1672	-60.49	-13	-47.49	-62.94	-67.18	0.56	9.40	V
	2510	-57.47	-13	-44.47	-61.85	-65.17	0.75	10.60	V
	3346	-58.74	-13	-45.74	-65.60	-68.34	0.85	12.60	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

WCDMA Band II(RMC 12.2Kbps)									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	3760	-44.25	-13	-31.25	-55.50	-55.98	0.87	12.60	H
	5640	-49.87	-13	-36.87	-65.75	-61.90	1.07	13.10	H
	7520	-50.50	-13	-37.50	-68.82	-60.11	1.69	11.30	H
	3760	-45.30	-13	-32.30	-57.77	-57.03	0.87	12.60	V
	5640	-46.75	-13	-33.75	-63.07	-58.78	1.07	13.10	V
	7520	-50.18	-13	-37.18	-68.4	-59.79	1.69	11.30	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

WCDMA Band IV(RMC 12.2Kbps)									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	3465	-43.06	-13	-30.06	-54.86	-54.81	0.85	12.60	H
	5197.5	-47.68	-13	-34.68	-63.55	-59.43	0.95	12.70	H
	6930	-51.70	-13	-38.70	-68.33	-62.22	1.18	11.70	H
	3465	-43.46	-13	-30.46	-54.44	-55.25	0.81	12.6	V
	5197.5	-48.59	-13	-35.59	-61.19	-60.34	0.95	12.7	V
	6930	-51.60	-13	-38.60	-68.78	-62.17	1.13	11.7	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



Appendix D. product equality declaration

TCL Communication Ltd.

5F, C building, No. 232, Liang Jing Road
ZhangJiang High-Tech Park, Pudong Area
Shanghai, P.R. China. 201203
TEL: +86(0)21 61460666
FAX: +86(0)21 61460602

Declaration of changes from 9002A (initial) to 9002W (variant)

● SOFTWARE MODIFICATIONS:

- Protocol Stack changes: No
- MMS/STK/USAT/USIM changes: No
- DM/SUPL/VT/FUMO/SWP/HCI: No
- Other changes detailed: [SW Version changed](#)

● HARDWARE MODIFICATIONS:

- Band changes: [YES :UMTS Band1,2,5,8 change to UMTS Band2,4,5,8](#)
- PCB Layout changes: No
- Main components changes: [YES](#)

	Antenna	AP	Modem	Transceiver	Power Amplifier	Balun	Band pass filter	Duplexer
GSM	NO	NO	NO	NO	YES	NO	YES	NO
WCDMA	NO	NO	NO	NO	YES	NO	YES	NO
LTE	NA	NA	NA	NA	NA	NA	NA	NA

	Antenna	AP	Modem	Transceiver	Power Amplifier	Balun	Band pass filter	Duplexer
Bluetooth	NO	NO	NO	NO	Not support	NO	Not support	NO
Wi-Fi	NO	NO	NO	NO	Not support	NO	Not support	NO

	Antenna	AP	Modem	Transceiver	LNA	Rx SAW Filter	Duplexer
GPS	NO	NO	NO	NO	NO	NO	NO

- FM changes: no
- Other components changes:
[U804 PA SKY77761 change to SKY77764](#)
[FL802 Band pass filter SAYRF1G95HQ0F0A change to SAYRF1G73CE0F0AR05](#)
- Other changes detailed: NO

● MECHANICAL MODIFICATIONS:

- Use new metal front/back cover or keypad: No
- Mechanical shell changes: No ; Whole size of EUT: no
- Other changes detailed: print information on back cover changed.

APPROVED BY:

Project Manager:

Signature:

Date: 2015-10-27

