

Variant FCC RF Test Report

APPLICANT : TCL Communication Ltd.
EQUIPMENT : Tablet PC
BRAND NAME : ALCATEL ONETOUCH
MODEL NAME : 8053
MARKETING NAME : Pixi3-7 Kids
FCC ID : 2ACCJB041
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : (DTS) Digital Transmission System

This is a variant report which is only valid together with the original test report. The product was received on Dec. 04, 2015. We, SPORTON INTERNATIONAL (SHENZHEN) INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL (SHENZHEN) INC., the test report shall not be reproduced except in full.



Prepared by: Andy Yeh / Manager



Approved by: Jones Tsai / Manager



SPORTON INTERNATIONAL (SHENZHEN) INC.

**1F & 2F, Building A, Morning Business Center, No. 4003 ShiGu Rd., Xili Town,
Nanshan District, Shenzhen, Guangdong, P. R. China**



TABLE OF CONTENTS

1	GENERAL DESCRIPTION	4
1.1	Applicant	4
1.2	Manufacturer	4
1.3	Product Feature of Equipment Under Test	4
1.4	Product Specification subjective to this standard	4
1.5	Modification of EUT	4
1.6	Accessories and Support Equipment	5
APPENDIX A. PRODUCT EQUALITY DECLARATION		
APPENDIX B. ORIGINAL REPORT		



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR552604-02C	Rev. 01	This is a variant report for 8053. The product equality declaration could be referred to Appendix A. Since the test result is not affected, all the test cases were performed on original test report (Sporton Report Number FR552604C).	Dec. 07, 2015



1 General Description

1.1 Applicant

TCL Communication Ltd.

5F, C-Tower, No. 232, Liang Jing Road, ZhangJiang High-Tech Park, Pudong Area, Shanghai, 201203,
P.R.China

1.2 Manufacturer

TCL Communication Ltd.

5F, C-Tower, No. 232, Liang Jing Road, ZhangJiang High-Tech Park, Pudong Area, Shanghai, 201203,
P.R.China

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Tablet PC
Brand Name	ALCATEL ONETOUCH
Model Name	8053
Marketing Name	Pixi3-7 Kids
FCC ID	2ACCJB041
EUT supports Radios application	WLAN 2.4GHz 802.11b/g/n HT20/HT40/ Bluetooth v3.0 + EDR/Bluetooth v4.0 LE
HW Version	V4.1.0
SW Version	2BX8
EUT Stage	Production Unit

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Product Specification subjective to this standard

Product Specification subjective to this standard	
Tx/Rx Channel Frequency Range	802.11b/g/n : 2412 MHz ~ 2462 MHz
Antenna Type	802.11b/g/n : IFA Antenna with gain -2.00 dBi
Type of Modulation	802.11b : DSSS (DBPSK / DQPSK / CCK)
	802.11g/n : OFDM (BPSK / QPSK / 16QAM / 64QAM)

1.5 Modification of EUT

No modifications are made to the EUT during all test items.



1.6 Accessories and Support Equipment

Specification of Accessory				
AC Adapter	Brand Name	ALCATEL ONETOUCH	Model Name	UC11US
	Power Rating	INPUT:AC100-240V ~50/60Hz 0.2A OUTPUT:DC5.0V-1.0A		
	P/N	CBA0057AG0C1		
Battery 1	Brand Name	ALCATEL ONETOUCH	Model Name	TLp028BC
	Power Rating	3.7V 2820mAh		
	P/N	C2820008CCJ00087		
Battery 2	Brand Name	ALCATEL ONETOUCH	Model Name	TLp028B2
	Power Rating	3.75V 2820mAh		
	P/N	C2820009C2YF32100008		
USB Cable	Signal Line Type	1.0meter,shielded cable, without ferrite core		



Appendix A. Appendix A. Product Equality Declaration

TCL Communication Ltd.

5F, C-Tower, No. 232, Liang Jing Road,
ZhangJiang High-Tech Park, Pudong Area,
Shanghai, 201203, P.R.China
TEL: +86(0)21 61460666
FAX: +86(0)21 61460602

Declaration of changes from C15100M,C15150M (initial) to 8053 (variant)

● SOFTWARE MODIFICATIONS:

- Protocol Stack changes: No
- MMS/STK/USAT/USIM changes: No
- DM/SUPL/VT/FUMO/SWP/HCI: No
- Other changes detailed: [SW Version changed](#)

● HARDWARE MODIFICATIONS:

- Band changes: NO
- PCB Layout changes: No
- Main components changes: No

	Antenna	AP	Modem	Transceiver	Power Amplifier	Balun	Band pass filter	Duplexer
Bluetooth	NO	NO	NO	NO	Not support	NO	Not support	NO
Wi-Fi	NO	NO	NO	NO	Not support	NO	Not support	NO

	Antenna	AP	Modem	Transceiver	LNA	Rx SAW Filter	Duplexer
GPS	NO	NO	NO	NO	NO	NO	NO

- FM changes: no
- Other components changes:
LCD/ Speaker/ Camera changes: No
- Other changes detailed: No

● MECHANICAL MODIFICATIONS:

- Use new metal front/back cover or keypad: No
- Mechanical shell changes: No ; Whole size of EUT: no
- Other changes detailed: [print information on back cover changed.](#)

APPROVED BY:

Project Manager:

Signature:

Date: 2015-12-02





Appendix B. Original Report

FCC RF Test Report

APPLICANT : CATALANA de INVESTIGACION y DESARROLLO de
ELECTRONICA INTERACTIVE S.L.U

EQUIPMENT : Tablet PC

BRAND NAME : KURIO

MODEL NAME : C15100M, C15150M

MARKETING NAME : Kurio Tab 2, Kurio Xtreme 2

FCC ID : NXM-C15150M

STANDARD : FCC Part 15 Subpart C §15.247


CLASSIFICATION : (DTS) Digital Transmission System

The product was received on May 26, 2015 and testing was completed on Jun. 16, 2015. We, SPORTON INTERNATIONAL (SHENZHEN) INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL (SHENZHEN) INC., the test report shall not be reproduced except in full.



Reviewed by: Joseph Lin / Supervisor



Approved by: Jones Tsai / Manager



SPORTON INTERNATIONAL (SHENZHEN) INC.

**1F & 2F, Building A, Morning Business Center, No. 4003 ShiGu Rd., Xili Town,
Nanshan District, Shenzhen, Guangdong, P. R. China**



TABLE OF CONTENTS

1	GENERAL DESCRIPTION	5
1.1	Applicant.....	5
1.2	Manufacturer.....	5
1.3	Product Feature of Equipment Under Test.....	5
1.4	Product Specification subjective to this standard	5
1.5	Modification of EUT	6
1.6	Accessories and Support Equipment	6
1.7	Testing Location	7
1.8	Applicable Standards.....	8
2	TEST CONFIGURATION OF EQUIPMENT UNDER TEST	9
2.1	Carrier Frequency Channel	9
2.2	Pre-Scanned RF Power.....	10
2.3	Test Mode.....	11
2.4	Connection Diagram of Test System.....	12
2.5	Support Unit used in test configuration and system	13
2.6	EUT Operation Test Setup	13
2.7	Measurement Results Explanation Example.....	14
3	TEST RESULT.....	15
3.1	6dB and 99% Bandwidth Measurement	15
3.2	Output Power Measurement.....	17
3.3	Power Spectral Density Measurement	19
3.4	Conducted Band Edges and Spurious Emission Measurement	21
3.5	Radiated Band Edges and Spurious Emission Measurement	34
3.6	AC Conducted Emission Measurement.....	38
3.7	Antenna Requirements.....	43
4	LIST OF MEASURING EQUIPMENT	44
5	UNCERTAINTY OF EVALUATION	45
APPENDIX A. CONDUCTED TEST RESULTS		
APPENDIX B. RADIATED TEST RESULTS		
APPENDIX C. SETUP PHOTOGRAPHS		



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR552604C	Rev. 01	Initial issue of report	Jul. 08, 2015

SUMMARY OF TEST RESULT

Report Section	FCC Rule	IC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(2)	RSS-247 5.2(1)	6dB Bandwidth	$\geq 0.5\text{MHz}$	Pass	-
3.1	-	RSS-Gen 6.6	99% Bandwidth	-	Pass	-
3.2	15.247(b)	RSS-247 A5.4(4)	Power Output Measurement	$\leq 30\text{dBm}$	Pass	-
3.3	15.247(e)	RSS-247 5.2(2)	Power Spectral Density	$\leq 8\text{dBm}/3\text{kHz}$	Pass	-
3.4	15.247(d)	RSS-247 5.5	Conducted Band Edges	$\leq 20\text{dBc}$	Pass	-
			Conducted Spurious Emission		Pass	-
3.5	15.247(d)	RSS-247 5.5	Radiated Band Edges and Radiated Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 3.31 dB at 2483.640 MHz
3.6	15.207	RSS-GEN 8.8	AC Conducted Emission	15.207(a)	Pass	Under limit 8.66 dB at 4.160 MHz
3.7	15.203 & 15.247(b)	N/A	Antenna Requirement	N/A	Pass	-

1 General Description

1.1 Applicant

CATALANA de INVESTIGACION y DESARROLLO de ELECTRONICA INTERACTIVE S.L.U

Viladecans Business Park, Edificio Brasil, C/ Catalunya, 83-85 Pl.1 B1, 08840 VILADECANS - BARCELONA, SPAIN

1.2 Manufacturer

TCL Communication Ltd.

5F, C building, No. 232, Liang Jing Road ZhangJiang High-Tech Park, Pudong Area Shanghai, P.R. China. 201203

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Tablet PC
Brand Name	KURIO
Model Name	C15100M, C15150M
Marketing Name	Kurio Tab 2, Kurio Xtreme 2
FCC ID	NXM-C15150M
EUT supports Radios application	WLAN 2.4GHz 802.11b/g/n HT20/HT40/ Bluetooth v3.0 + EDR/Bluetooth v4.0 LE
HW Version	V4.1.0
SW Version	BCD
EUT Stage	Production Unit

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Product Specification subjective to this standard

Product Specification subjective to this standard	
Tx/Rx Channel Frequency Range	802.11b/g/n : 2412 MHz ~ 2462 MHz
Maximum (Peak) Output Power to Antenna	802.11b : 19.02 dBm (0.0798 W) 802.11g : 23.41 dBm (0.2193 W) 802.11n HT20 : 23.36 dBm (0.2168 W) 802.11n HT40 : 23.74 dBm (0.2366 W)
99% Occupied Bandwidth	802.11b : 12.59MHz 802.11g : 18.08MHz 802.11n HT20 : 18.48MHz 802.11n HT40 : 36.46MHz
Antenna Type	802.11b/g/n : IFA Antenna with gain -2.00 dBi
Type of Modulation	802.11b : DSSS (DBPSK / DQPSK / CCK) 802.11g/n : OFDM (BPSK / QPSK / 16QAM / 64QAM)

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Accessories and Support Equipment

Specification of Accessory				
AC Adapter	Brand Name	ALCATEL ONETOUCH	Model Name	UC11US
	Power Rating	INPUT:AC100-240V ~50/60Hz 0.2A OUTPUT:DC5.0V-1.0A		
	P/N	CBA0057AG0C1		
Battery 1	Brand Name	ALCATEL ONETOUCH	Model Name	TLp028BC
	Power Rating	3.7V 2820mAh		
	P/N	C2820008CCJ00087		
Battery 2	Brand Name	ALCATEL ONETOUCH	Model Name	TLp028B2
	Power Rating	3.75V 2820mAh		
	P/N	C2820009C2YF32100008		
USB Cable	Signal Line Type	1.0meter,shielded cable, without ferrite core		

1.7 Testing Location

Test Site	SPORTON INTERNATIONAL (SHENZHEN) INC.	
Test Site Location	1F & 2F, Building A, Morning Business Center, No. 4003 ShiGu Rd., Xili Town, Nanshan District, Shenzhen, Guangdong, P. R. China TEL: +86-755-8637-9589 FAX: +86-755-8637-9595	
Test Site No.	Sporton Site No.	
	TH01-SZ	CO01-SZ

Test Site	SPORTON INTERNATIONAL (SHENZHEN) INC.	
Test Site Location	No. 3 Building, the third floor of south, Shahe River west, Fengzeyuan warehouse, Nanshan District, Shenzhen, Guangdong, P. R. China TEL: +86-755- 3320-2398	
Test Site No.	Sporton Site No.	FCC/IC Registration No.
	03CH01-SZ	831040/4086F-1

Note: The test site complies with ANSI C63.4 2009 requirement.



1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r03
- ♦ ANSI C63.10-2013
- ♦ IC RSS-247 Issue 1
- ♦ IC RSS-Gen Issue 4

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. FCC permits the use of the 1.5 meter table as an alternative in C63.10-2013 through inquiry tracking number 961829.
3. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

2 Test Configuration of Equipment Under Test

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conducted emission (150 kHz to 30 MHz) and radiated emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (X plane) were recorded in this report.

The final configuration from all the combinations and the worst-case data rates were investigated by measuring the maximum power across all the data rates and modulation modes under section 2.2.

Based on the worst configuration found above, the RF power setting is set individually to meet FCC compliance limit for the final conducted and radiated tests shown in section 2.3.

2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	1	2412	7	2442
	2	2417	8	2447
	3	2422	9	2452
	4	2427	10	2457
	5	2432	11	2462
	6	2437	-	-



2.2 Pre-Scanned RF Power

Preliminary tests were performed in different data rate and data rate associated with the highest power were chosen for full test shown in the following tables.

2.4GHz 802.11b RF Output Power (dBm)						
Power vs. Channel			Power vs. Data Rate			
Channel	Frequency (MHz)	Data Rate 1Mbps	Channel	2Mbps	5.5Mbps	11Mbps
CH 01	2412 MHz	18.48	CH 11	18.97	18.93	18.95
CH 06	2437 MHz	18.71				
CH 11	2462 MHz	19.02				

2.4GHz 802.11g RF Output Power (dBm)										
Power vs. Channel			Power vs. Data Rate							
Channel	Frequency (MHz)	Data Rate 6Mbps	Channel	9Mbps	12Mbps	18Mbps	24Mbps	36Mbps	48Mbps	54Mbps
CH 01	2412 MHz	23.08	CH 11	23.39	23.37	23.36	23.40	23.36	23.34	23.33
CH 06	2437 MHz	23.25								
CH 11	2462 MHz	23.41								

2.4GHz 802.11n HT20 RF Output Power (dBm)										
Power vs. Channel			Power vs. MCS Index							
Channel	Frequency (MHz)	MCS Index MCS0	Channel	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
CH 01	2412 MHz	23.11	CH 11	23.21	23.22	23.25	23.26	23.15	23.25	23.24
CH 06	2437 MHz	23.33								
CH 11	2462 MHz	23.36								

2.4GHz 802.11n HT40 RF Output Power (dBm)										
Power vs. Channel			Power vs. MCS Index							
Channel	Frequency (MHz)	MCS Index MCS0	Channel	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
CH 03	2422 MHz	23.49	CH 09	23.23	23.27	23.16	23.15	22.86	22.70	22.70
CH 06	2437 MHz	23.65								
CH 09	2452 MHz	23.74								

2.3 Test Mode

Final test mode of conducted test items and radiated spurious emissions are considering the modulation and worse data rates from the power table described in section 2.2.


<2.4GHz>

Modulation	Data Rate
802.11b	1 Mbps
802.11g	6 Mbps
802.11n HT20	MCS0
802.11n HT40	MCS0


Test Cases	
AC Conducted Emission	Mode 1: Bluetooth Link + WLAN Link + Earphone + Battery 1 + USB Cable (Charging from Adapter)
Remark: For radiated test cases, the tests were performed with adapter, battery1, earphone and USB cable.	

2.4 Connection Diagram of Test System

<WLAN Tx Mode>

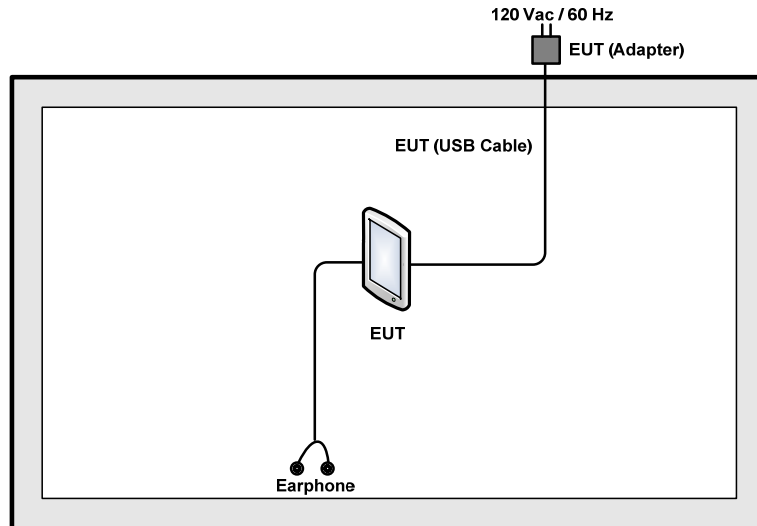

<AC Conducted Emission Mode>

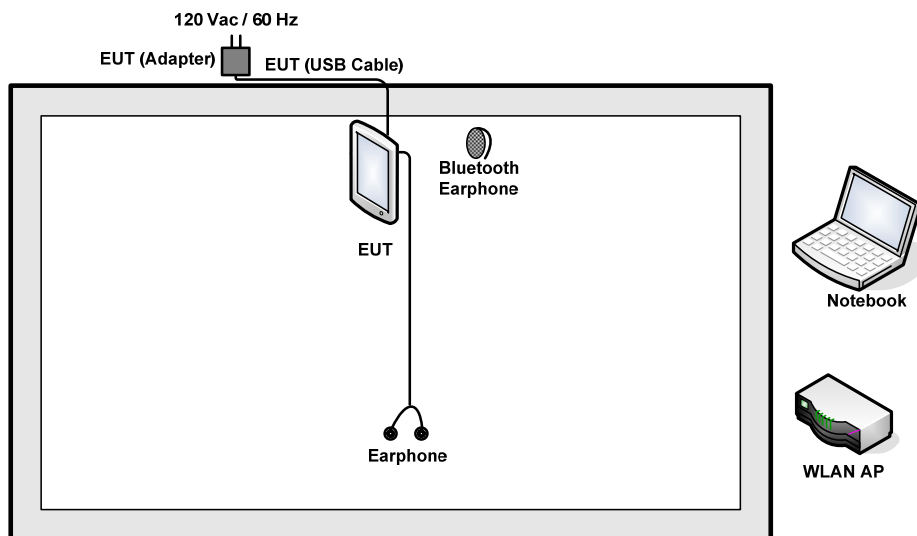

2.5 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	WLAN AP	D-Link	DIR-628	KA2DIR628A2	N/A	Unshielded, 1.8 m
2.	Notebook	Lenovo	E540	FCC DoC	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
3.	Bluetooth Earphone	Nokia	BH-108	PYAHS-107W	N/A	N/A
4.	Earphone	Apple	MC690ZP/A	FCC DoC	Unshielded, 1.8 m	N/A

2.6 EUT Operation Test Setup

For WLAN function, the engineering test program was provided and enabled to make EUT continuous transmit/receive.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.

2.7 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 5.0 dB and 10dB attenuator.

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 5.0 + 10 = 15.0 \text{ (dB)}\end{aligned}$$

3 Test Result

3.1 6dB and 99% Bandwidth Measurement

3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures

1. The testing follows FCC KDB Publication No. 558074 DTS D01 Meas. Guidance v03r03.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) = 1MHz and set the Video bandwidth (VBW) = 3MHz.
6. Measure and record the results in the test report.


3.1.4 Test Setup

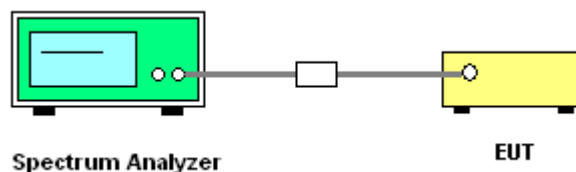



3.1.5 Test Result of 6dB and 99% Occupied Bandwidth

Please refer to Appendix A of this test report.

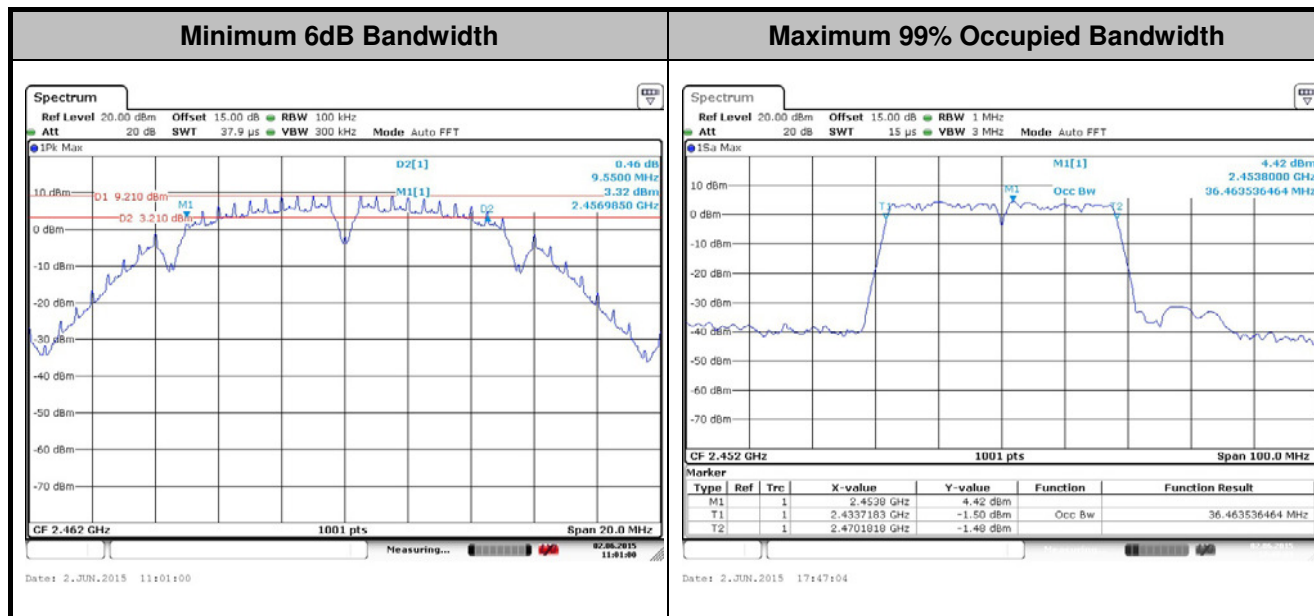

Note : The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

3.2 Output Power Measurement

3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting Antenna of directional gain greater than 6dBi are used the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the Antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the Antenna exceeds 6dBi.


3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.2.3 Test Procedures

1. The testing follows the Measurement Procedure of FCC KDB No. 558074 DTS D01 Meas. Guidance v03r03.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.

3.2.4 Test Setup

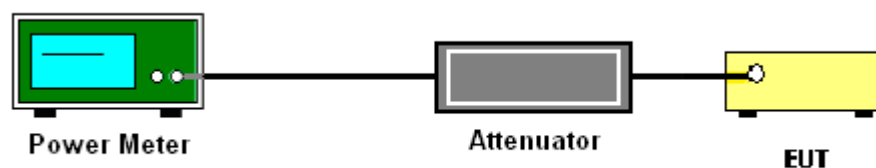



3.2.5 Test Result of Peak Output Power

Please refer to Appendix A of this test report.

3.2.6 Test Result of Average output Power (Reporting Only)

Please refer to Appendix A of this test report.

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.


3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures


1. The testing follows Measurement Procedure 10.2 Method PKPSD of FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r03
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.

3.3.4 Test Setup

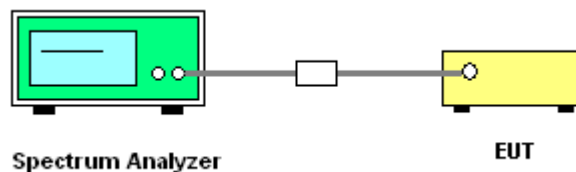

3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A of this test report.

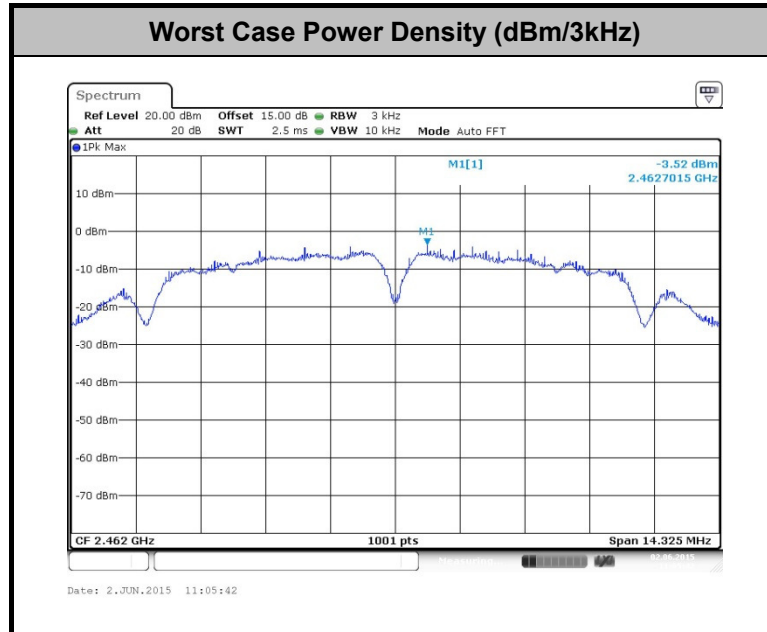

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission Measurement

In any 100 kHz bandwidth outside of the authorized frequency band, the emissions which fall in the non-restricted bands shall be attenuated at least 20 dB / 30dB relative to the maximum PSD level in 100 kHz by RF conducted measurement and radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).


3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.4.3 Test Procedures

1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r03.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB per 15.247(d).
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.


3.4.4 Test Setup

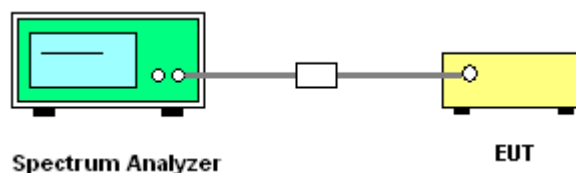



3.4.5 Test Result of Conducted Band Edges and Spurious Emission

Test Mode :	802.11b	Temperature :	24~26℃
Test Band :	2.4GHz Low	Relative Humidity :	50~53%
Test Channel :	01	Test Engineer :	Tiny You

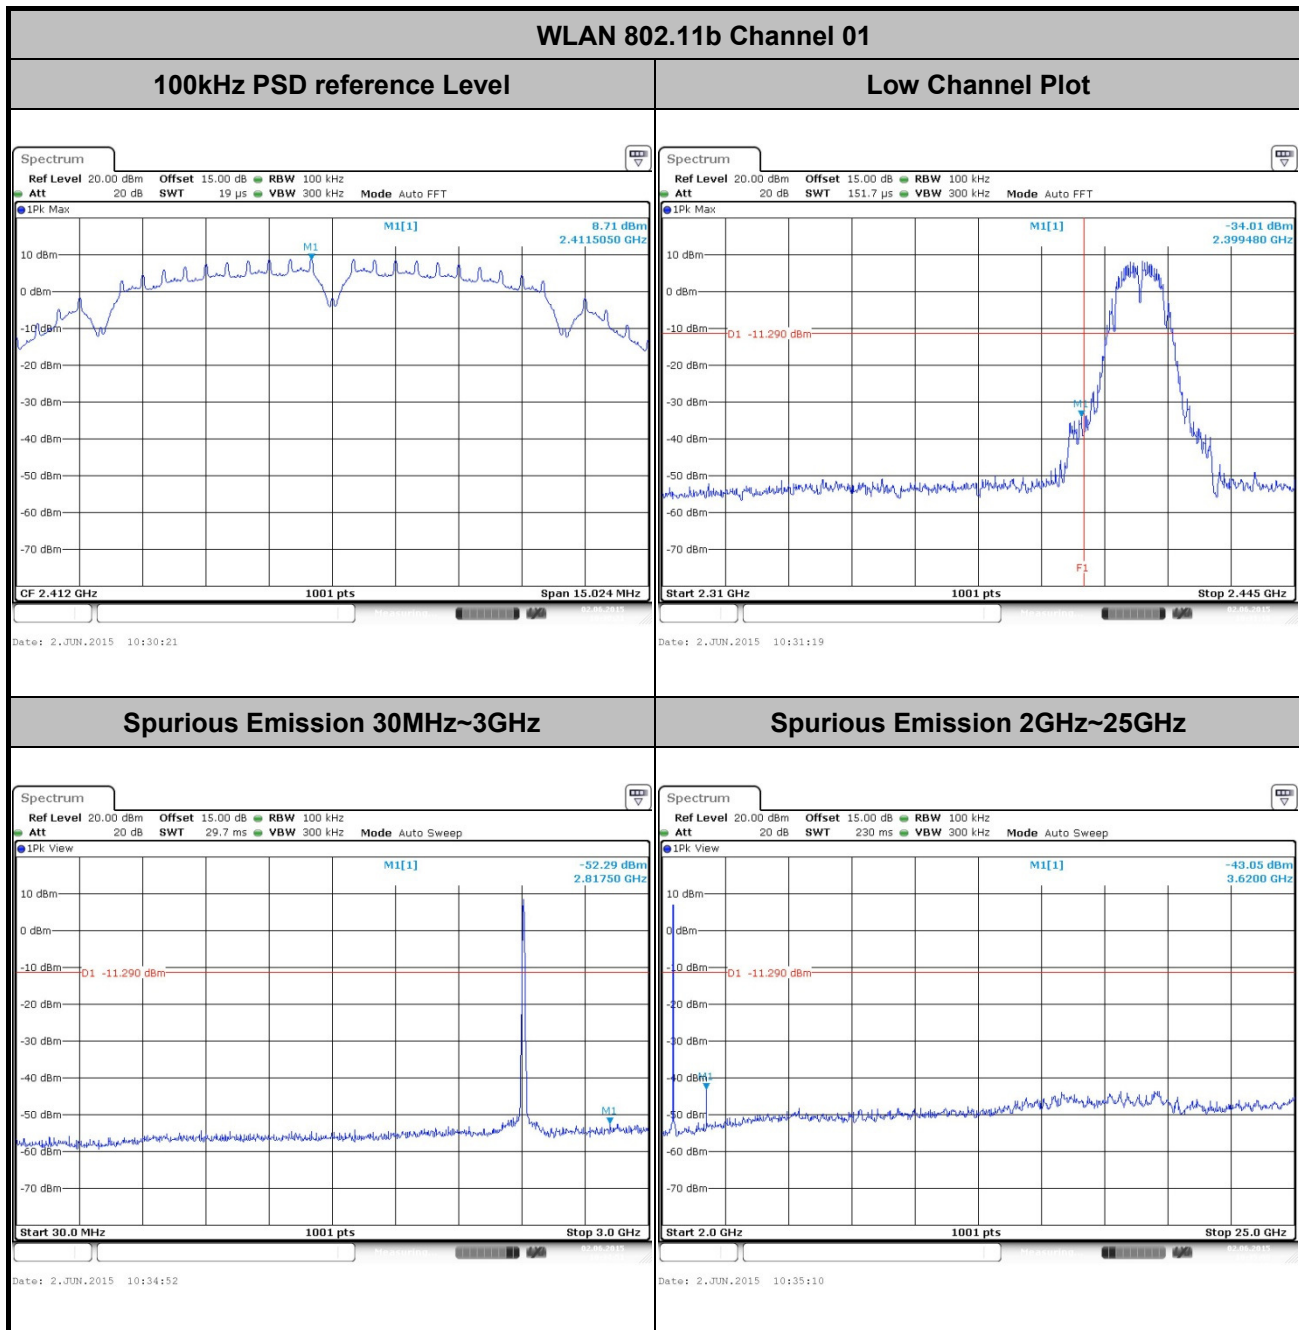





Test Mode :	802.11b	Temperature :	24~26°C
Test Band :	2.4GHz Mid	Relative Humidity :	50~53%
Test Channel :	06	Test Engineer :	Tiny You

WLAN 802.11b Channel 06


100kHz PSD reference Level

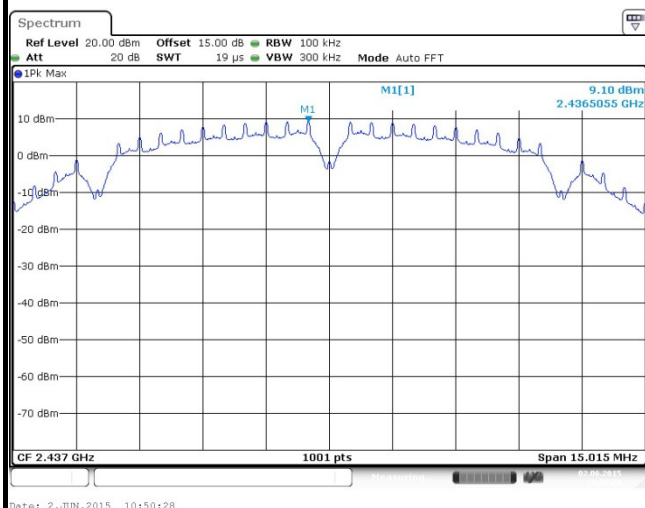

Spurious Emission 30MHz~3GHz

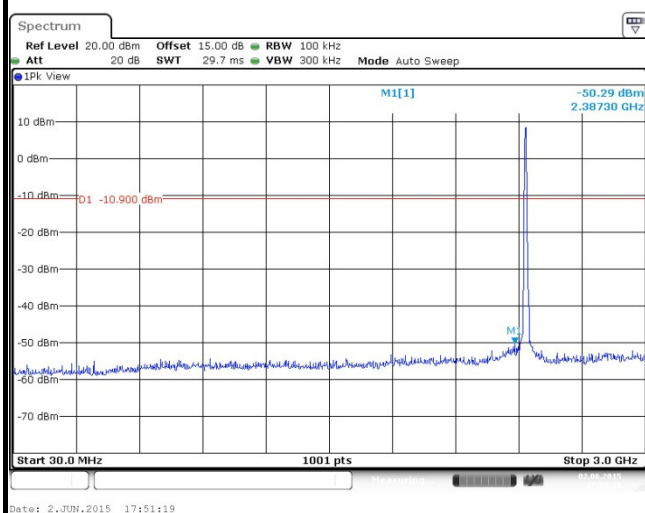

Spurious Emission 2GHz~25GHz

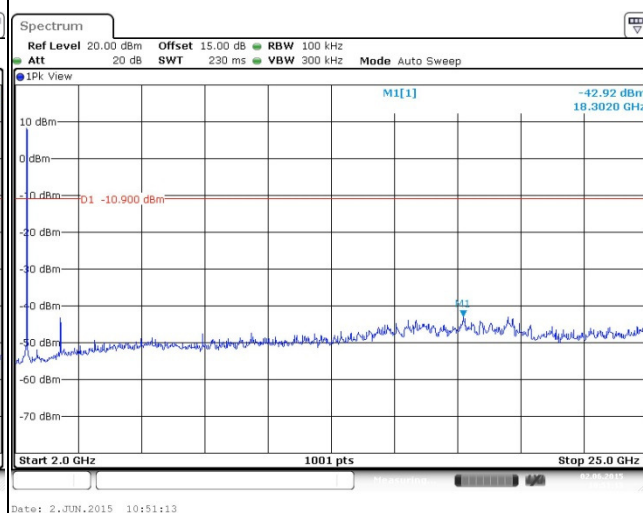




Test Mode :	802.11b	Temperature :	24~26°C
Test Band :	2.4GHz High	Relative Humidity :	50~53%
Test Channel :	11	Test Engineer :	Tiny You


WLAN 802.11b Channel 11

100kHz PSD reference Level

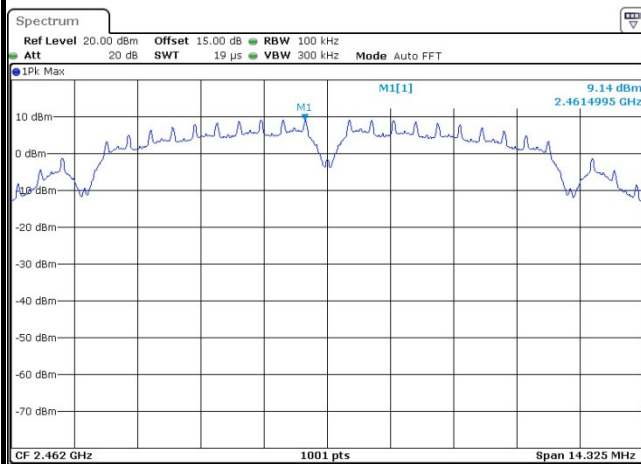


Date: 2.JUN.2015 11:02:19

High Channel Plot

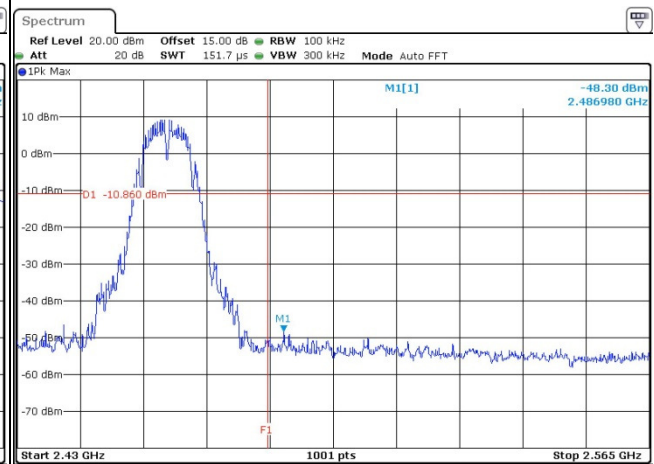


Date: 2.JUN.2015 11:02:37

Spurious Emission 30MHz~3GHz

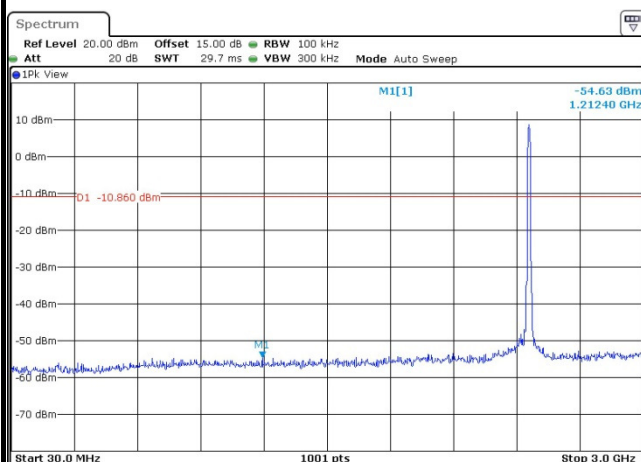

Date: 2.JUN.2015 11:03:00


Spurious Emission 2GHz~25GHz

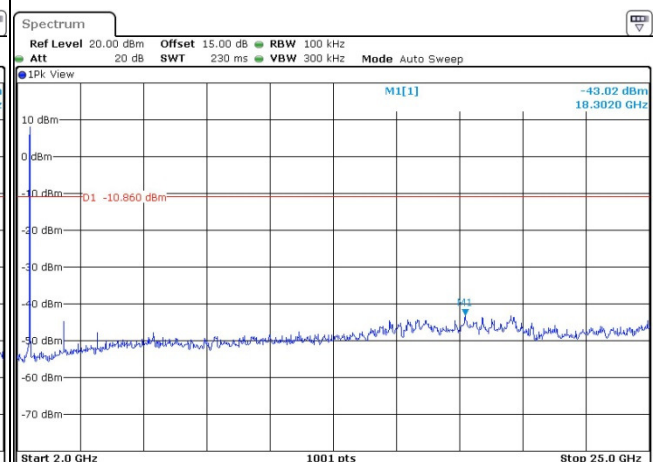


Date: 2.JUN.2015 11:03:18




Test Mode :	802.11g	Temperature :	24~26°C
Test Band :	2.4GHz Low	Relative Humidity :	50~53%
Test Channel :	01	Test Engineer :	Tiny You

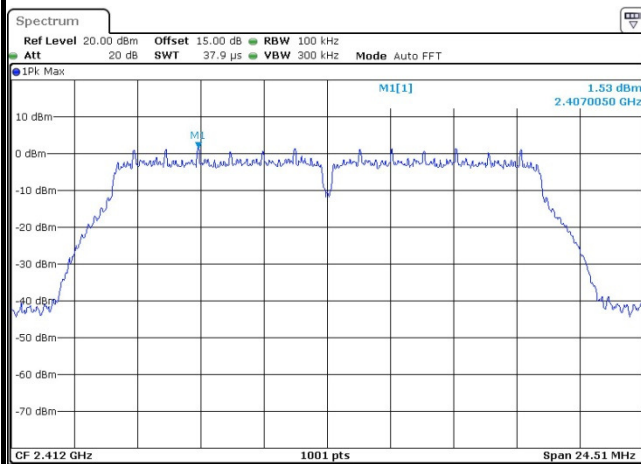WLAN 802.11g Channel 01**100kHz PSD reference Level**


Date: 2.JUN.2015 11:13:57

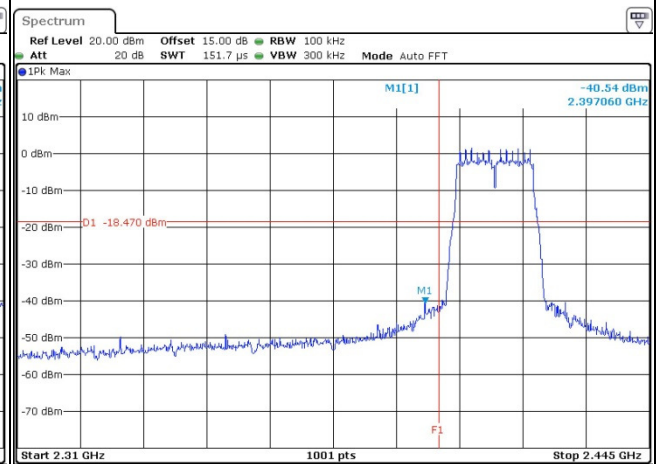Low Channel Plot

Date: 2.JUN.2015 11:14:14

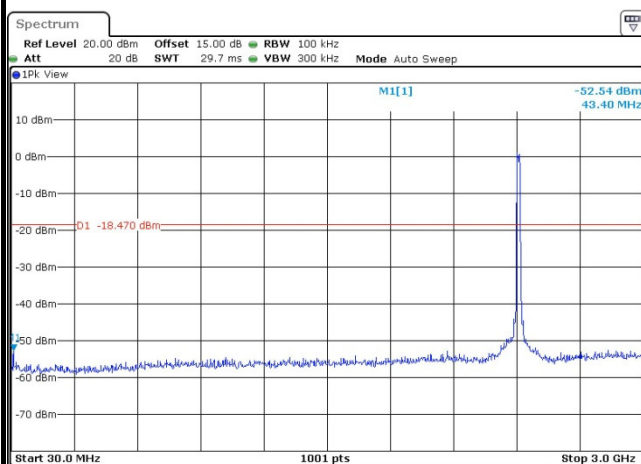Spurious Emission 30MHz~3GHz

Date: 2.JUN.2015 11:14:56

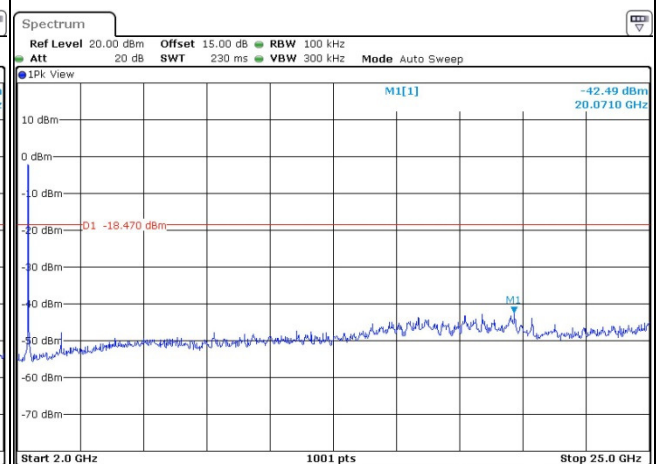Spurious Emission 2GHz~25GHz


Date: 2.JUN.2015 11:15:14




Test Mode :	802.11g	Temperature :	24~26°C
Test Band :	2.4GHz Mid	Relative Humidity :	50~53%
Test Channel :	06	Test Engineer :	Tiny You

WLAN 802.11g Channel 06


100kHz PSD reference Level

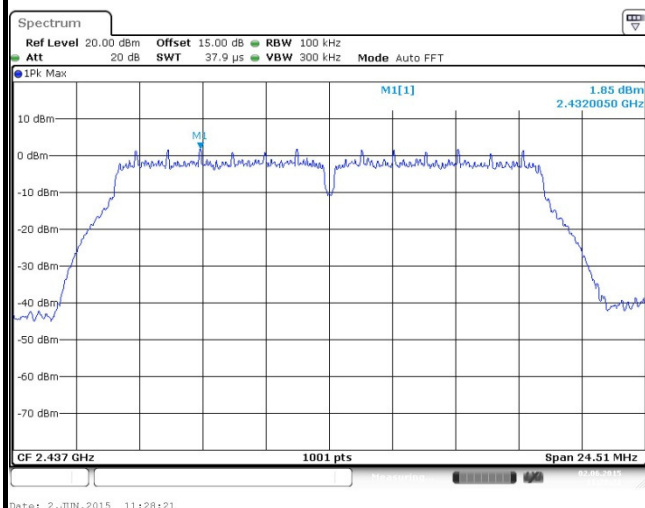

Spurious Emission 30MHz~3GHz

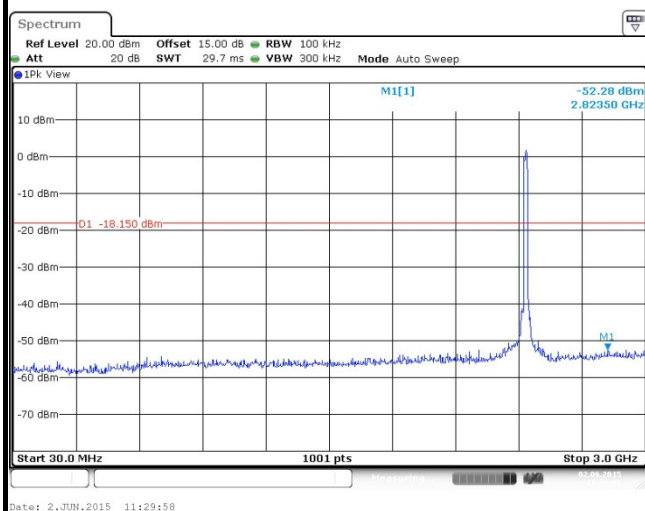


Spurious Emission 2GHz~25GHz

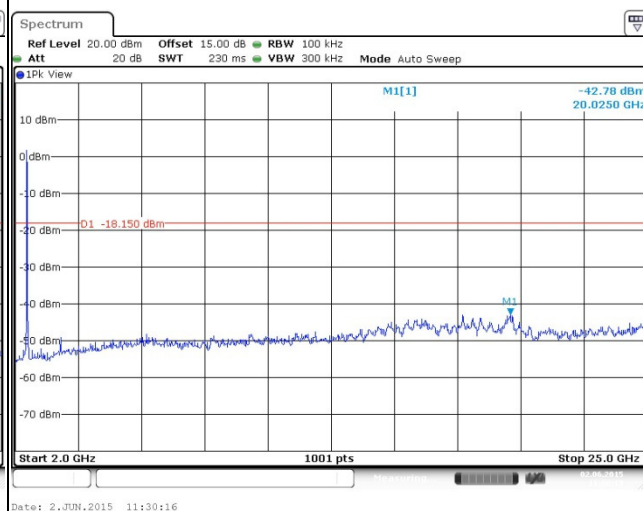





Test Mode :	802.11g	Temperature :	24~26°C
Test Band :	2.4GHz High	Relative Humidity :	50~53%
Test Channel :	11	Test Engineer :	Tiny You

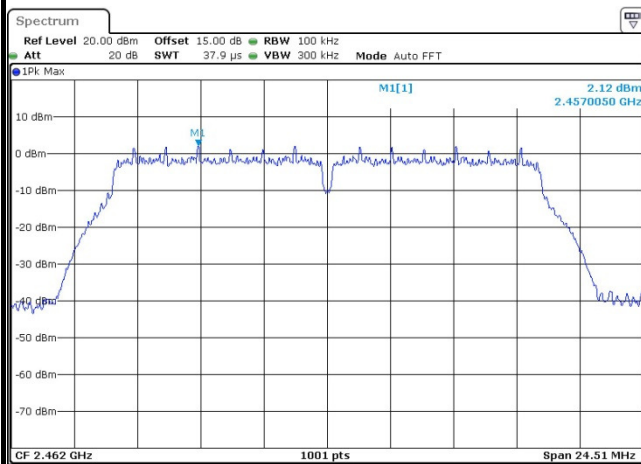WLAN 802.11g Channel 11**100kHz PSD reference Level**


Date: 2.JUN.2015 11:39:26

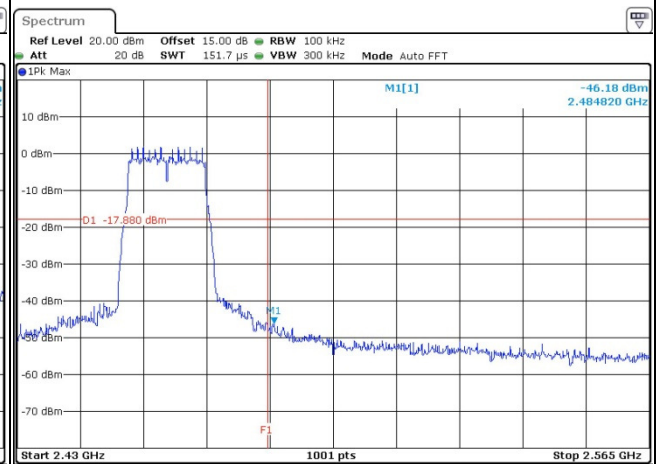High Channel Plot

Date: 2.JUN.2015 15:51:16

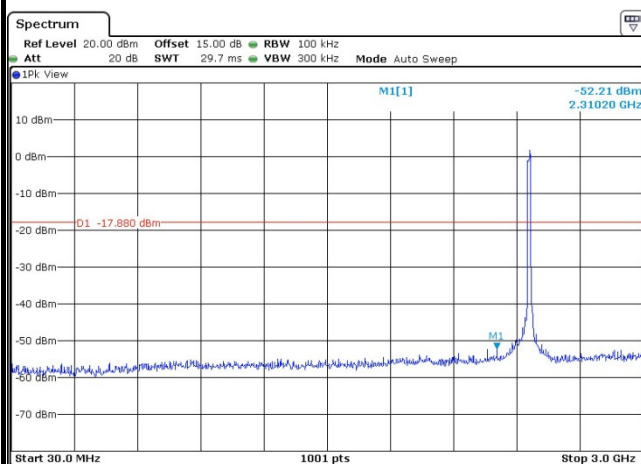Spurious Emission 30MHz~3GHz

Date: 2.JUN.2015 16:03:01

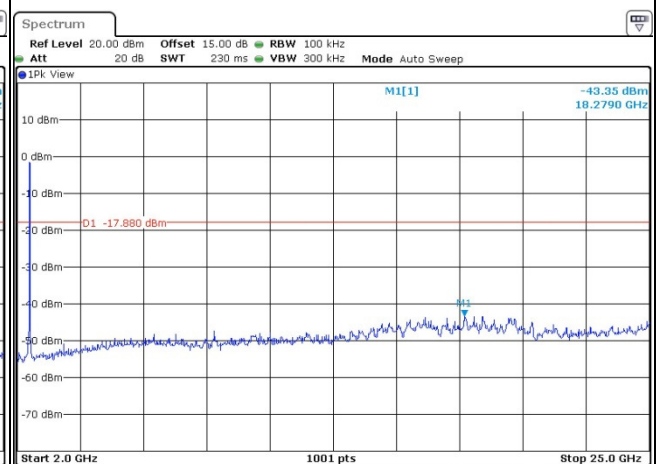Spurious Emission 2GHz~25GHz


Date: 2.JUN.2015 16:02:20




Test Mode :	802.11n HT20	Temperature :	24~26°C
Test Band :	2.4GHz Low	Relative Humidity :	50~53%
Test Channel :	01	Test Engineer :	Tiny You

WLAN 802.11n HT20 Channel 01


100kHz PSD reference Level

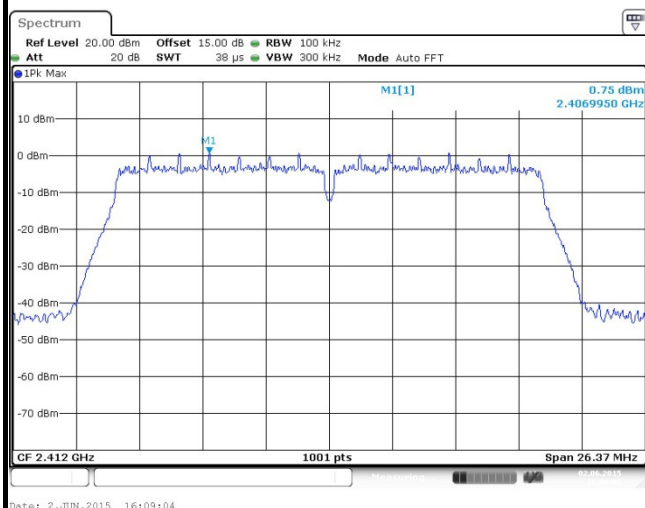


Low Channel Plot

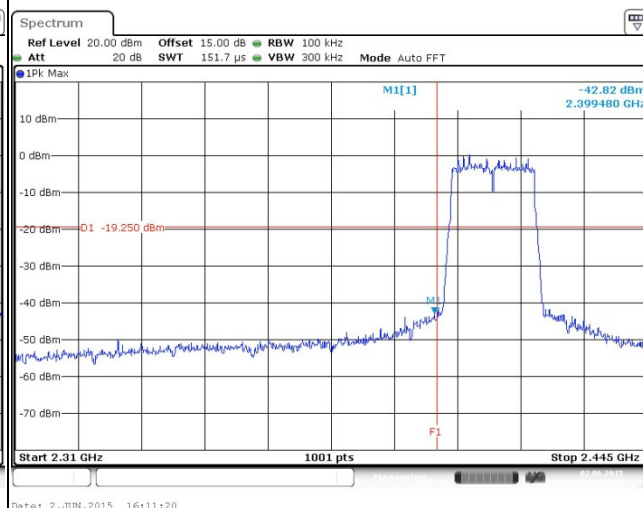

Spurious Emission 30MHz~3GHz

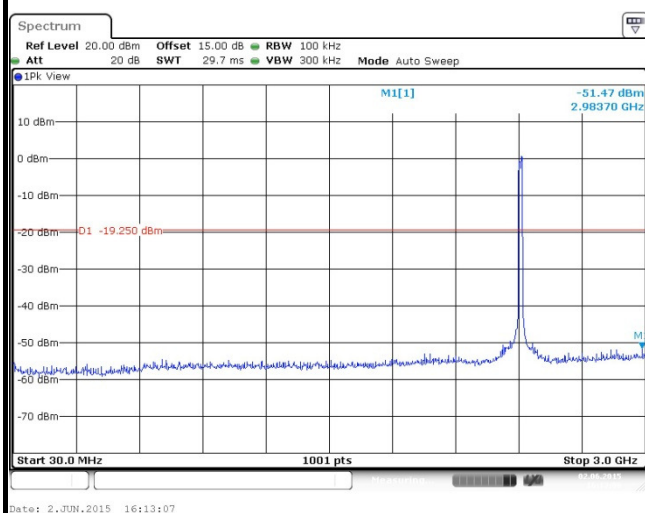

Spurious Emission 2GHz~25GHz

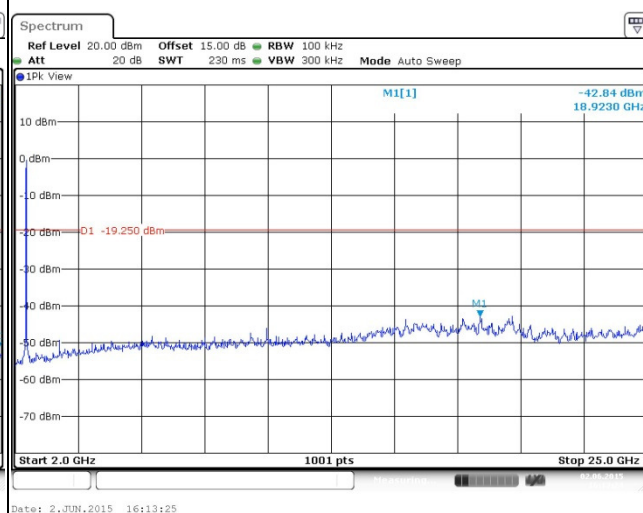





Test Mode :	802.11n HT20	Temperature :	24~26°C
Test Band :	2.4GHz Mid	Relative Humidity :	50~53%
Test Channel :	06	Test Engineer :	Tiny You

WLAN 802.11n HT20 Channel 06


100kHz PSD reference Level

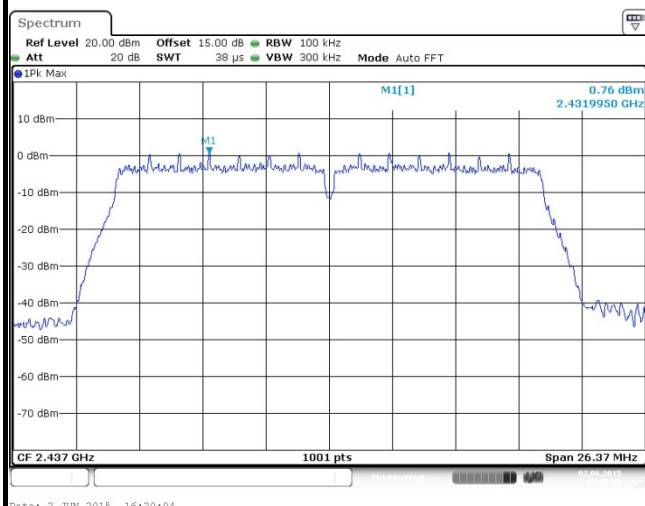

Spurious Emission 30MHz~3GHz

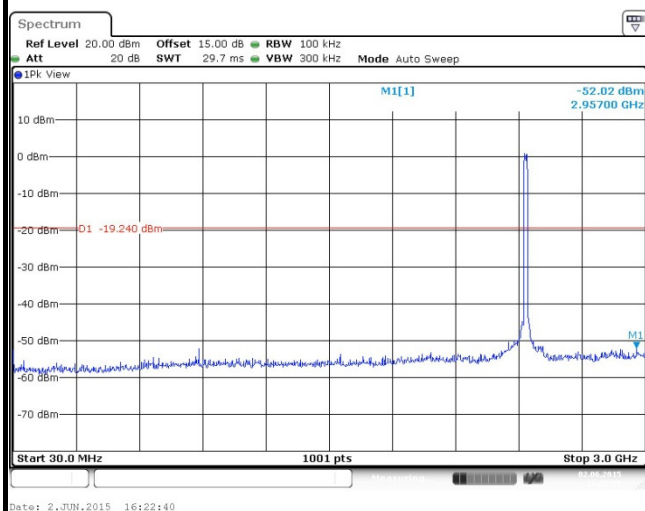

Spurious Emission 2GHz~25GHz

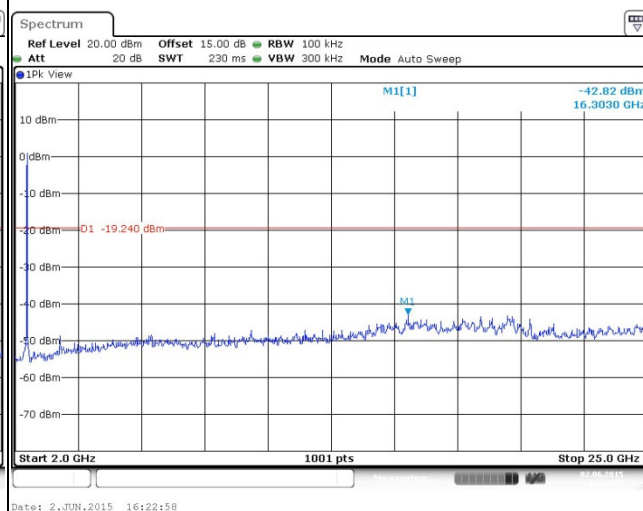





Test Mode :	802.11n HT20	Temperature :	24~26°C
Test Band :	2.4GHz High	Relative Humidity :	50~53%
Test Channel :	11	Test Engineer :	Tiny You

WLAN 802.11n HT20 Channel 11


100kHz PSD reference Level

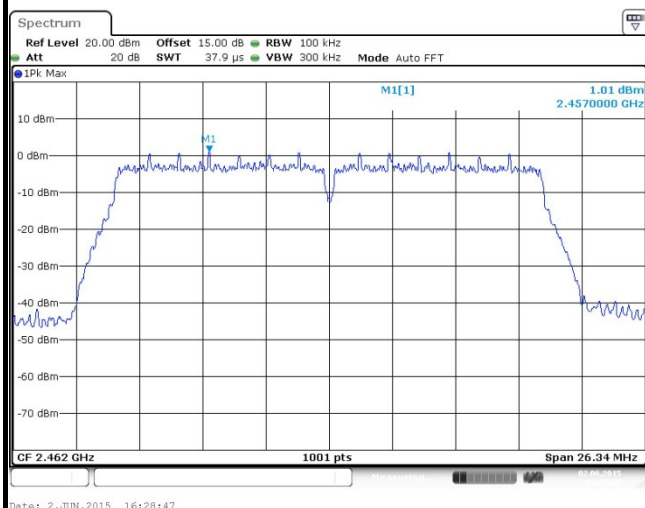


High Channel Plot

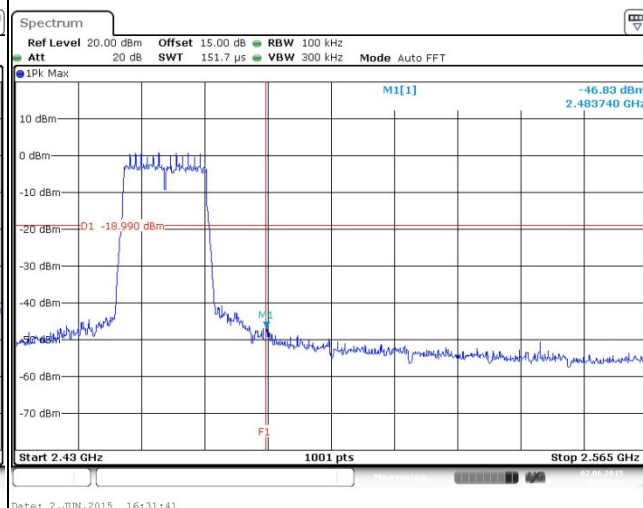

Spurious Emission 30MHz~3GHz

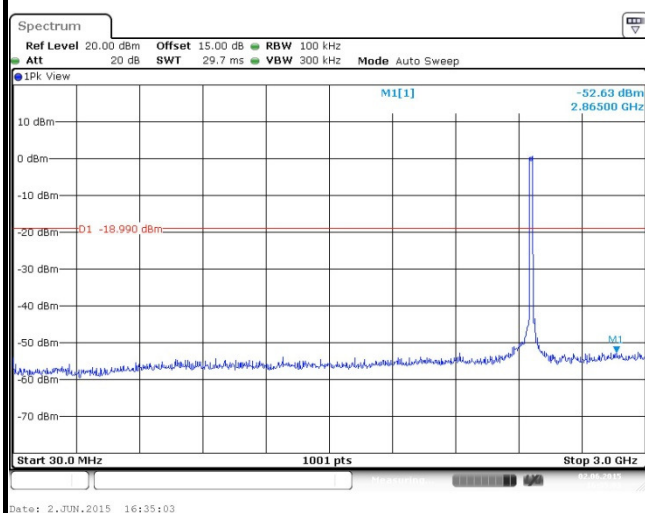

Spurious Emission 2GHz~25GHz

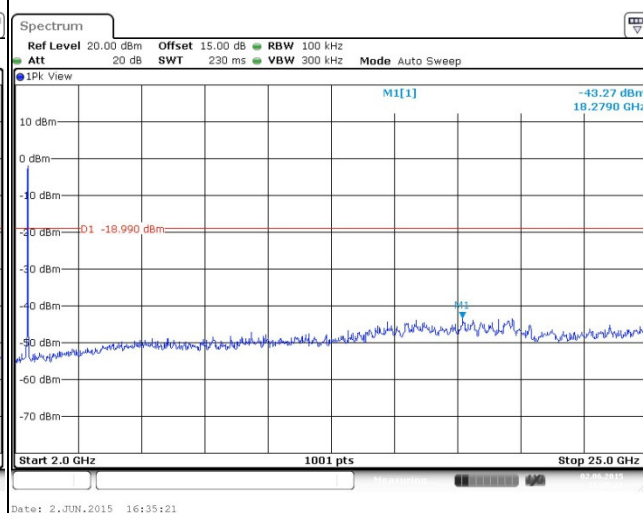




Test Mode :	802.11n HT40	Temperature :	24~26°C
Test Band :	2.4GHz Low	Relative Humidity :	50~53%
Test Channel :	03	Test Engineer :	Tiny You


WLAN 802.11n HT40 Channel 03

100kHz PSD reference Level

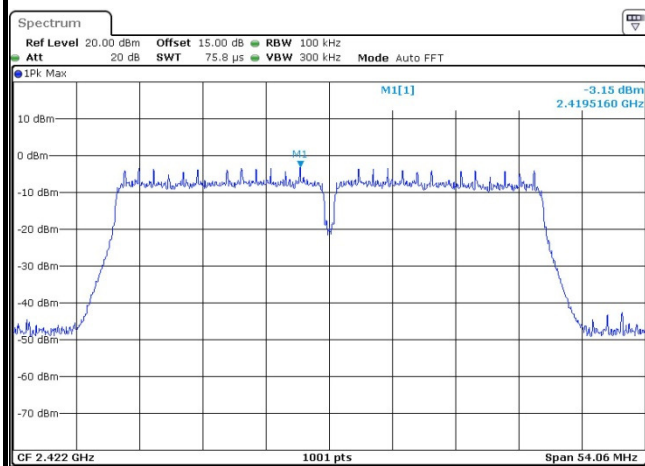


Date: 2.JUN.2015 16:45:07

Low Channel Plot

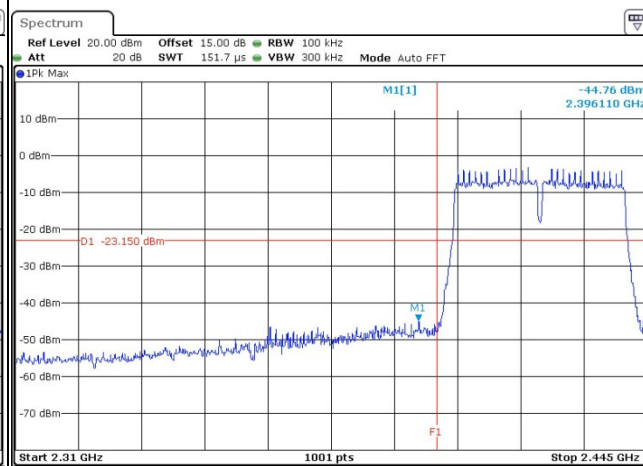


Date: 2.JUN.2015 16:46:15

Spurious Emission 30MHz~3GHz

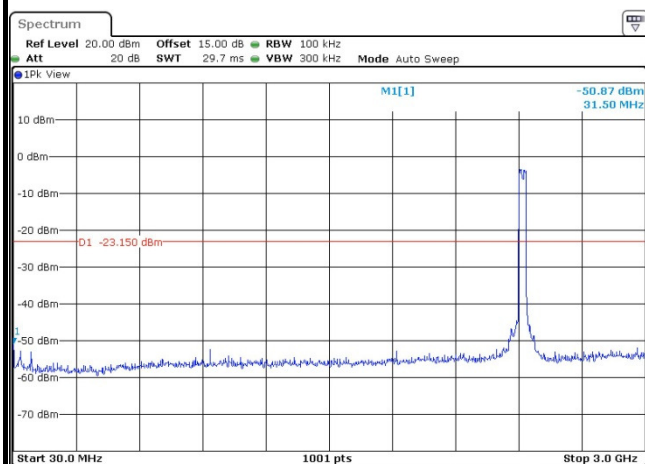

Date: 2.JUN.2015 16:50:08




Spurious Emission 2GHz~25GHz

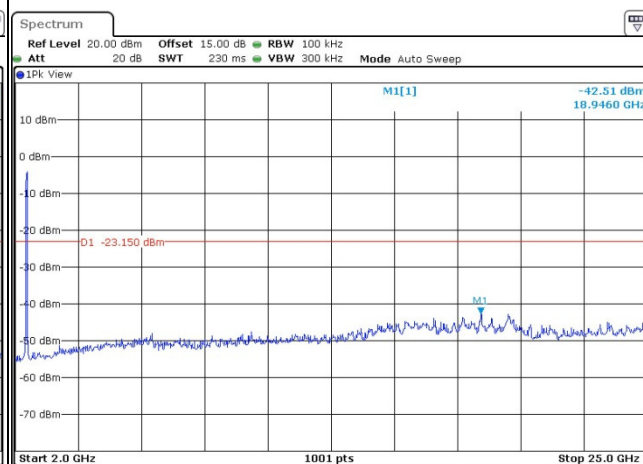

Date: 2.JUN.2015 16:50:26




Test Mode :	802.11n HT40	Temperature :	24~26°C
Test Band :	2.4GHz Mid	Relative Humidity :	50~53%
Test Channel :	06	Test Engineer :	Tiny You

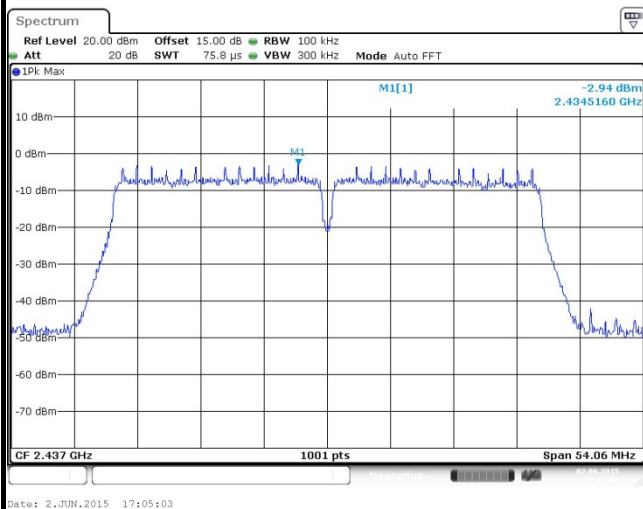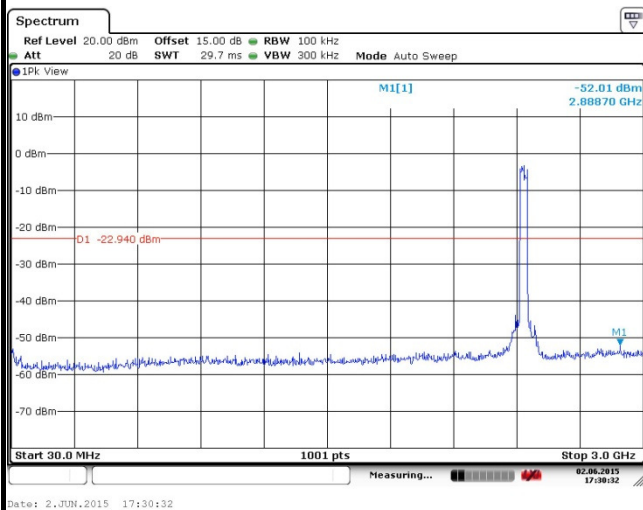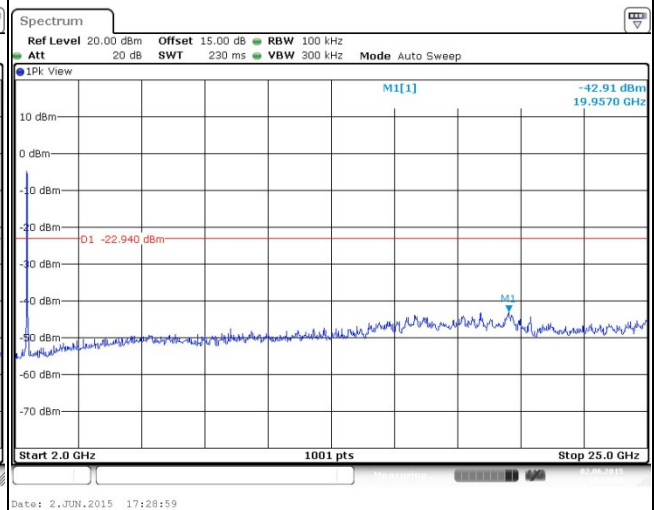WLAN 802.11n HT40 Channel 06**100kHz PSD reference Level****Spurious Emission 30MHz~3GHz****Spurious Emission 2GHz~25GHz**



Test Mode :	802.11n HT40	Temperature :	24~26°C
Test Band :	2.4GHz High	Relative Humidity :	50~53%
Test Channel :	09	Test Engineer :	Tiny You

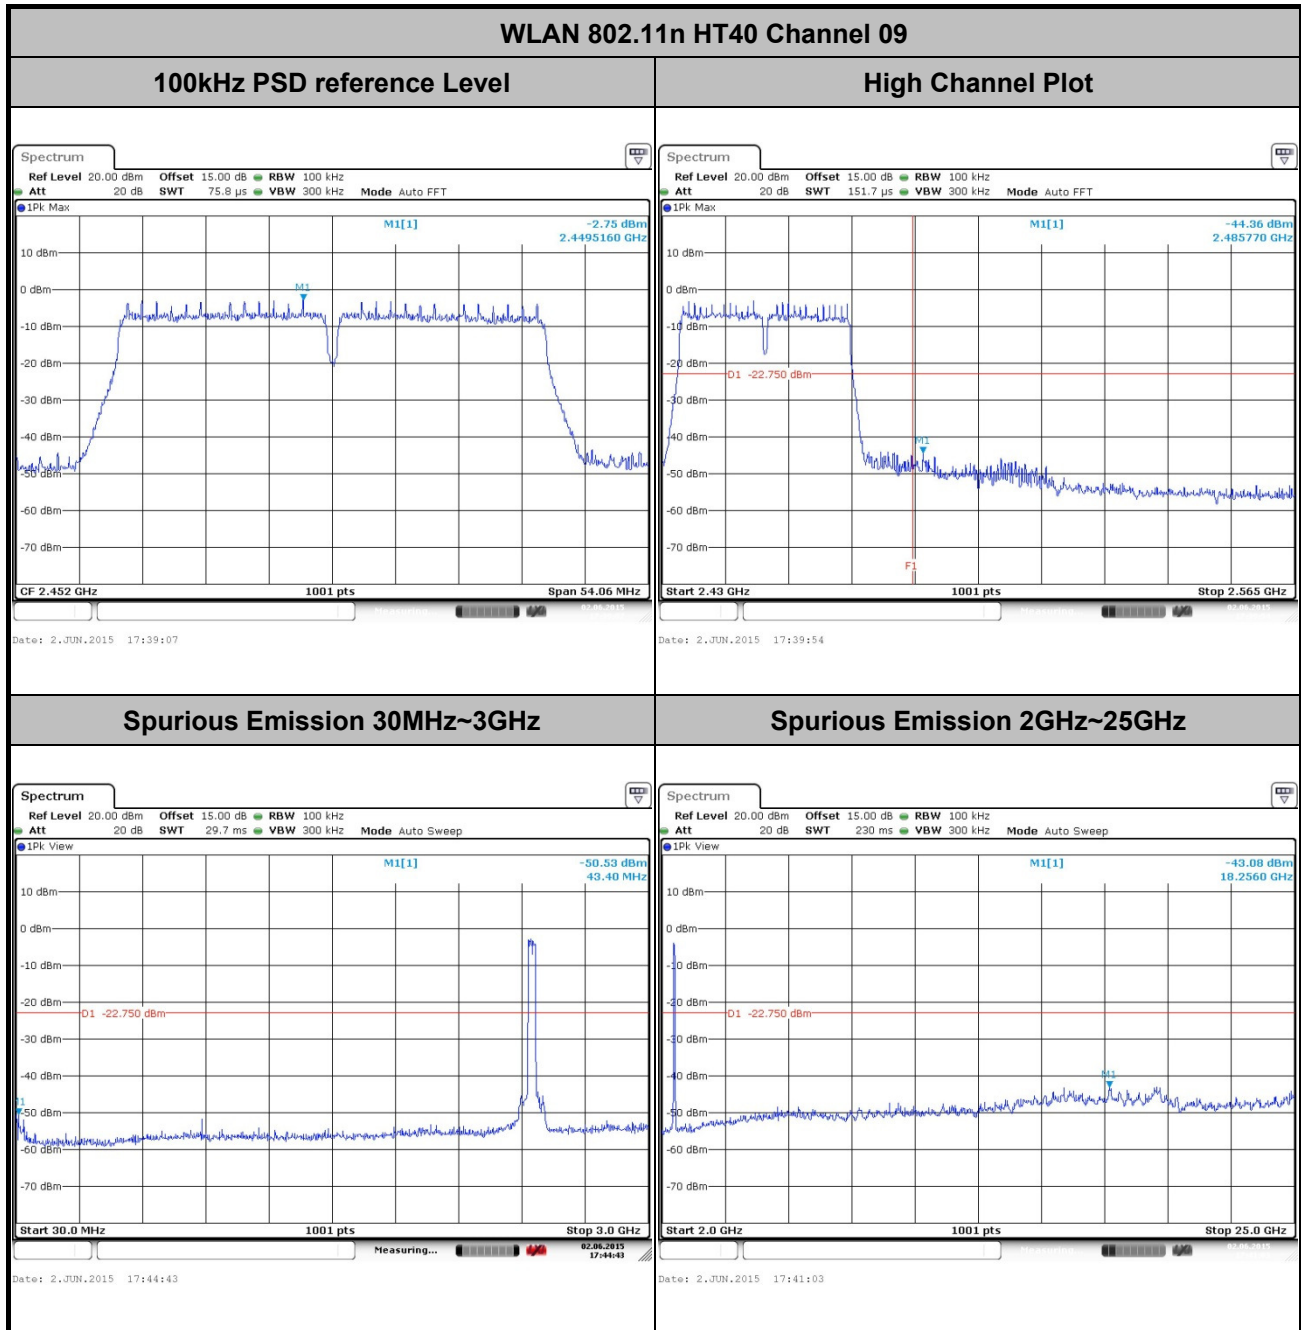

3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated band edge and Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the FCC section 15.209 limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.5.3 Test Procedures

1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r03.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
7. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for peak measurement.


For average measurement:

 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.


Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
802.11b	98.27	-	-	10Hz
802.11g	89.40	1.40	0.71	1kHz
2.4GHz 802.11n HT20	88.61	1.32	0.76	1kHz
2.4GHz 802.11n HT40	77.86	0.64	1.56	3kHz

3.5.4 Test Setup


For radiated emissions below 30MHz

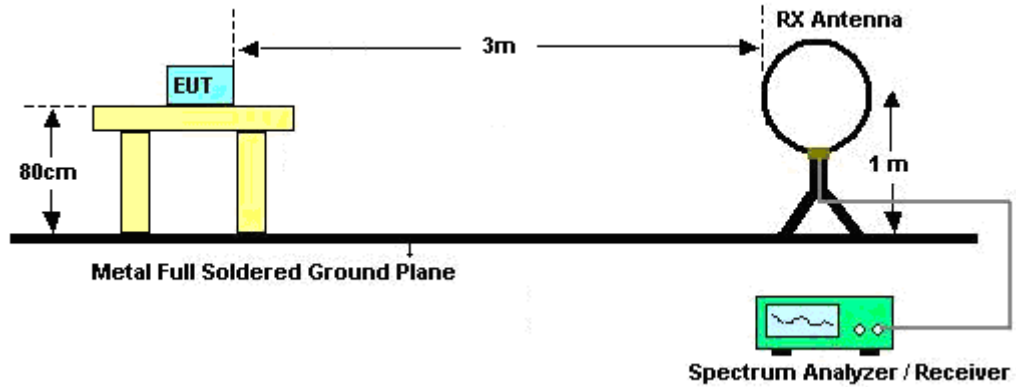

For radiated emissions from 30MHz to 1GHz

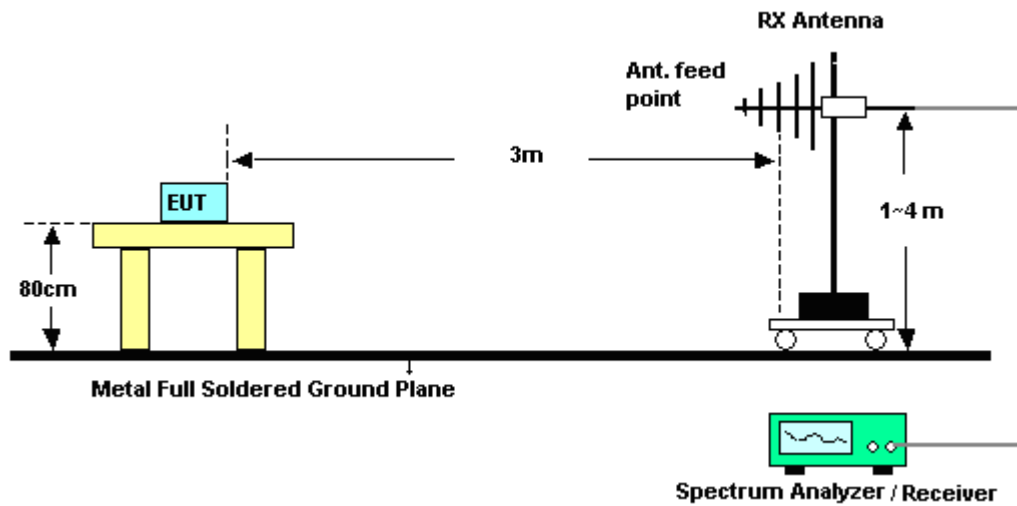

For radiated emissions above 1GHz

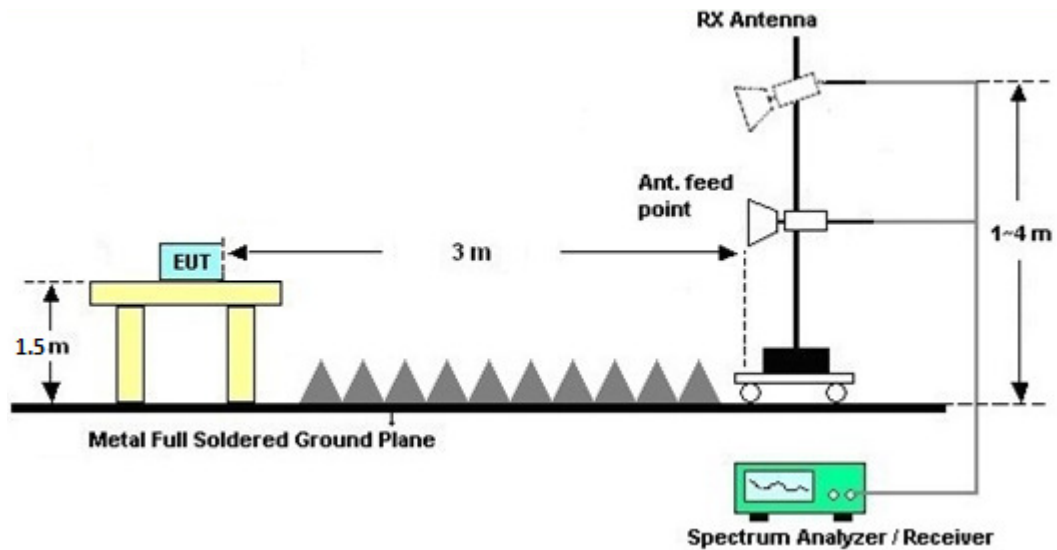

3.5.5 Test Results of Radiated Spurious Emissions (9kHz ~ 30MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.

3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix B.

3.5.7 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic)

Please refer to Appendix B.

3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of Emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-Peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.6.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room, and it was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF bandwidth = 9kHz) with Maximum Hold Mode.


3.6.4 Test Setup

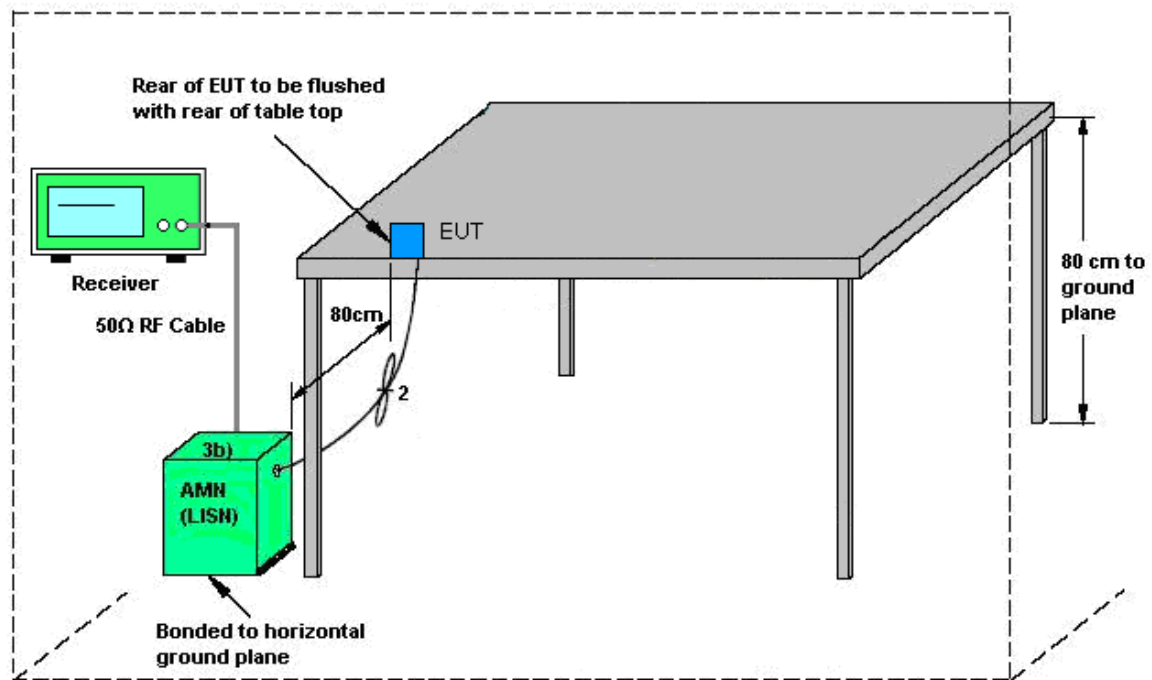

AMN = Artificial mains network (LISN)
 AE = Associated equipment
 EUT = Equipment under test
 ISN = Impedance stabilization network

3.6.5 Test Result of AC Conducted Emission

Test Mode :	Mode 1	Temperature :	21~22℃
Test Engineer :	Jack Tian	Relative Humidity :	41~43%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	Bluetooth Link + WLAN Link + Earphone + Battery 1 + USB Cable (Charging from Adapter)		

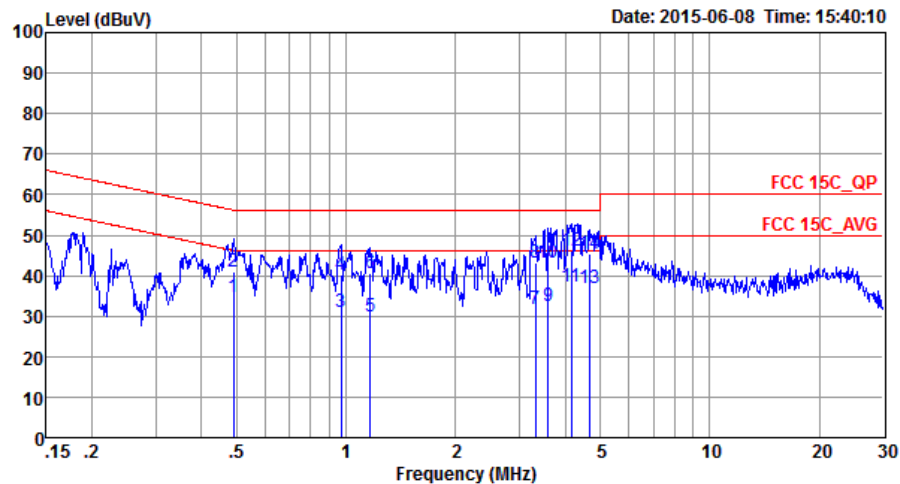


Site : CO01-SZ
Condition: FCC 15C_QP LISN_L_20150304 LINE
Mode : Mode 1

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.49	34.82	-11.32	46.14	24.00	0.66	10.16	Average
2	0.49	41.12	-15.02	56.14	30.30	0.66	10.16	QP
3	0.97	30.86	-15.14	46.00	20.20	0.51	10.15	Average
4	0.97	40.16	-15.84	56.00	29.50	0.51	10.15	QP
5	1.17	29.76	-16.24	46.00	19.10	0.50	10.16	Average
6	1.17	40.66	-15.34	56.00	30.00	0.50	10.16	QP
7	3.31	31.89	-14.11	46.00	21.10	0.57	10.22	Average
8	3.31	43.29	-12.71	56.00	32.50	0.57	10.22	QP
9	3.60	32.41	-13.59	46.00	21.60	0.59	10.22	Average
10	3.60	43.11	-12.89	56.00	32.30	0.59	10.22	QP
11 *	4.16	37.34	-8.66	46.00	26.50	0.61	10.23	Average
12	4.16	46.14	-9.86	56.00	35.30	0.61	10.23	QP
13	4.70	37.07	-8.93	46.00	26.20	0.63	10.24	Average
14	4.70	45.47	-10.53	56.00	34.60	0.63	10.24	QP



Test Mode :	Mode 1	Temperature :	21~22℃
Test Engineer :	Jack Tian	Relative Humidity :	41~43%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	Bluetooth Link + WLAN Link + Earphone + Battery 1 + USB Cable (Charging from Adapter)		

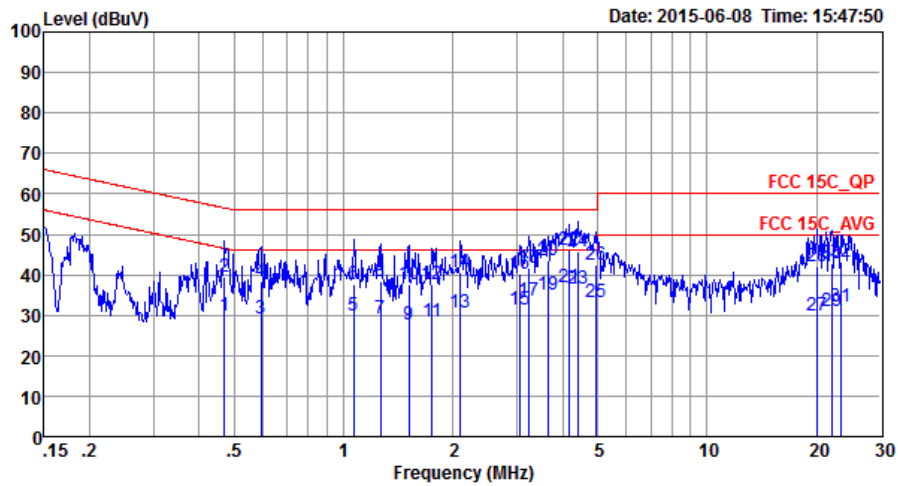


Site : CO01-SZ
Condition: FCC 15C_QP LISN_N_20150304 NEUTRAL
Mode : Mode 1

	Freq	Level	Over	Limit	Read	LISN	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.47	29.75	-16.74	46.49	19.00	0.59	10.16	Average
2	0.47	39.65	-16.84	56.49	28.90	0.59	10.16	QP
3	0.59	29.23	-16.77	46.00	18.50	0.58	10.15	Average
4	0.59	38.33	-17.67	56.00	27.60	0.58	10.15	QP
5	1.07	29.71	-16.29	46.00	19.00	0.56	10.15	Average
6	1.07	37.71	-18.29	56.00	27.00	0.56	10.15	QP
7	1.26	29.33	-16.67	46.00	18.61	0.56	10.16	Average
8	1.26	38.43	-17.57	56.00	27.71	0.56	10.16	QP
9	1.51	27.84	-18.16	46.00	17.10	0.57	10.17	Average
10	1.51	37.74	-18.26	56.00	27.00	0.57	10.17	QP
11	1.75	28.35	-17.65	46.00	17.60	0.57	10.18	Average
12	1.75	37.75	-18.25	56.00	27.00	0.57	10.18	QP
13	2.10	30.57	-15.43	46.00	19.81	0.57	10.19	Average
14	2.10	40.47	-15.53	56.00	29.71	0.57	10.19	QP
15	3.04	31.52	-14.48	46.00	20.70	0.61	10.21	Average
16	3.04	40.32	-15.68	56.00	29.50	0.61	10.21	QP
17	3.24	33.53	-12.47	46.00	22.70	0.61	10.22	Average
18	3.24	41.73	-14.27	56.00	30.90	0.61	10.22	QP
19	3.64	34.94	-11.06	46.00	24.10	0.62	10.22	Average
20	3.64	43.64	-12.36	56.00	32.80	0.62	10.22	QP



Test Mode :	Mode 1	Temperature :	21~22℃
Test Engineer :	Jack Tian	Relative Humidity :	41~43%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	Bluetooth Link + WLAN Link + Earphone + Battery 1 + USB Cable (Charging from Adapter)		

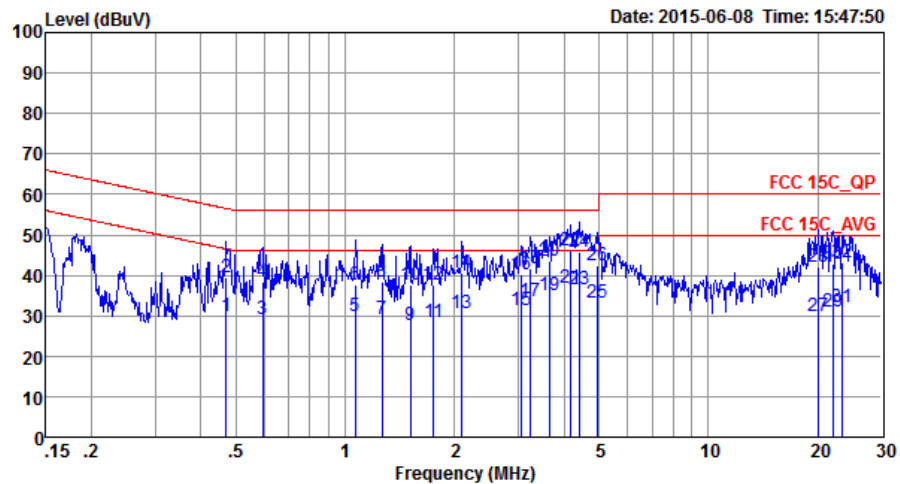

Site : C001-SZ
Condition: FCC 15C_QP LISN_N_20150304 NEUTRAL

Mode : Mode 1

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
21 *	4.18	36.86	-9.14	46.00	26.00	0.63	10.23	Average
22	4.18	45.96	-10.04	56.00	35.10	0.63	10.23	QP
23	4.41	36.47	-9.53	46.00	25.60	0.64	10.23	Average
24	4.41	45.57	-10.43	56.00	34.70	0.64	10.23	QP
25	4.93	33.19	-12.81	46.00	22.30	0.65	10.24	Average
26	4.93	42.49	-13.51	56.00	31.60	0.65	10.24	QP
27	20.16	29.92	-20.08	50.00	18.60	0.69	10.63	Average
28	20.16	42.12	-17.88	60.00	30.80	0.69	10.63	QP
29	22.06	30.93	-19.07	50.00	19.60	0.74	10.59	Average
30	22.06	42.63	-17.37	60.00	31.30	0.74	10.59	QP
31	23.39	31.94	-18.06	50.00	20.61	0.76	10.57	Average
32	23.39	43.34	-16.66	60.00	32.01	0.76	10.57	QP



3.7 Antenna Requirements

3.7.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. For the fixed point-to-point operation, the power shall be reduced by one dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.7.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101078	9kHz~40GHz	May 05, 2015	Jun. 02, 2015	May 04, 2016	Conducted (TH01-SZ)
Pulse Power Sensor	Anritsu	MA2411B	1207253	30MHz~40GHz	Jan. 28, 2015	Jun. 02, 2015	Jan. 27, 2016	Conducted (TH01-SZ)
Power Meter	Anritsu	ML2495A	1218010	50MHz Bandwidth	Jan. 28, 2015	Jun. 02, 2015	Jan. 27, 2016	Conducted (TH01-SZ)
EMI Test Receiver&SA	Agilent Technologies	N9038A	MY52260185	20Hz~26.5GHz	May 26, 2015	Jun. 16, 2015	May 25, 2016	Radiation (03CH01-SZ)
Spectrum Analyzer	R&S	FSV40	101041	10kHz~40GHz; Max 30dBm	Sep. 25, 2014	Jun. 16, 2015	Sep. 24, 2015	Radiation (03CH01-SZ)
Loop Antenna	R&S	HFH2-Z2	100354	9kHz~30MHz	May 06, 2015	Jun. 16, 2015	May 05, 2016	Radiation (03CH01-SZ)
Bilog Antenna	TeseQ	CBL6112D	23188	30MHz~2GHz	Nov. 07, 2014	Jun. 16, 2015	Nov. 06, 2015	Radiation (03CH01-SZ)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00119436	1GHz~18GHz	Oct. 15, 2014	Jun. 16, 2015	Oct. 14, 2015	Radiation (03CH01-SZ)
SHF-EHF Horn	com-power	AH-840	101071	18GHz~40GHz	Sep. 04, 2014	Jun. 16, 2015	Sep. 03, 2015	Radiation (03CH01-SZ)
Amplifier	ADVANTEST	BB525C	E9007003	9kHz~3000MHz / 30 dB	Jan. 28, 2015	Jun. 16, 2015	Jan. 27, 2016	Radiation (03CH01-SZ)
Amplifier	Yiai	AV3860B	04030	2GHz~26.5GHz	May 05, 2015	Jun. 16, 2015	May 04, 2016	Radiation (03CH01-SZ)
Amplifier	Agilent Technologies	83017A	MY39501302	500MHz~26.5GHz	Jan. 28, 2015	Jun. 16, 2015	Jan. 27, 2016	Radiation (03CH01-SZ)
AC Power Source	Chroma	61601	616010001985	N/A	NCR	Jun. 16, 2015	NCR	Radiation (03CH01-SZ)
Turn Table	EM	EM1000	N/A	0~360 degree	NCR	Jun. 16, 2015	NCR	Radiation (03CH01-SZ)
Antenna Mast	EM	EM1000	N/A	1 m~4 m	NCR	Jun. 16, 2015	NCR	Radiation (03CH01-SZ)
EMI Receiver	R&S	ESCI7	100724	9kHz~3GHz	Jan. 28, 2015	Jun. 08, 2015	Jan. 27, 2016	Conduction (CO01-SZ)
AC LISN	EMCO	3816/2SH	103892	9kHz~30MHz	Feb. 02, 2015	Jun. 08, 2015	Feb. 01, 2016	Conduction (CO01-SZ)
AC LISN (for auxiliary equipment)	MessTec	AN3016	16850	9kHz~30MHz	Feb. 02, 2015	Jun. 08, 2015	Feb. 01, 2016	Conduction (CO01-SZ)
AC Power Source	Chroma	61602	616020000891	100Vac~250Vac	Sep. 29, 2014	Jun. 08, 2015	Sep. 28, 2015	Conduction (CO01-SZ)
Pulse Limiter	COM-POWER	LIT-153 Transient Limiter	53139	150kHz~30MHz	Oct. 24, 2014	Jun. 08, 2015	Oct. 23, 2015	Conduction (CO01-SZ)

5 Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.3dB
---	-------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.9dB
---	-------



Appendix A. Conducted Test Results

Test Engineer:	Ting You	Temperature:	21~25	°C
Test Date:	2015/6/2	Relative Humidity:	51~54	%

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

2.4GHz Band								
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
11b	1Mbps	1	1	2412	12.59	10.02	0.50	Pass
11b	1Mbps	1	6	2437	12.59	10.01	0.50	Pass
11b	1Mbps	1	11	2462	12.64	9.55	0.50	Pass
11g	6Mbps	1	1	2412	17.78	16.34	0.50	Pass
11g	6Mbps	1	6	2437	17.63	16.34	0.50	Pass
11g	6Mbps	1	11	2462	18.08	16.34	0.50	Pass
HT20	MCS0	1	1	2412	18.48	17.58	0.50	Pass
HT20	MCS0	1	6	2437	18.28	17.53	0.50	Pass
HT20	MCS0	1	11	2462	18.28	17.56	0.50	Pass
HT40	MCS0	1	3	2422	36.46	36.04	0.50	Pass
HT40	MCS0	1	6	2437	36.36	36.04	0.50	Pass
HT40	MCS0	1	9	2452	36.46	36.04	0.50	Pass

TEST RESULTS DATA
Peak Power Table

2.4GHz Band										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
11b	1Mbps	1	1	2412	18.48	30.00	-2.00	16.48	36.00	Pass
11b	1Mbps	1	6	2437	18.71	30.00	-2.00	16.71	36.00	Pass
11b	1Mbps	1	11	2462	19.02	30.00	-2.00	17.02	36.00	Pass
11g	6Mbps	1	1	2412	23.08	30.00	-2.00	21.08	36.00	Pass
11g	6Mbps	1	6	2437	23.25	30.00	-2.00	21.25	36.00	Pass
11g	6Mbps	1	11	2462	23.41	30.00	-2.00	21.41	36.00	Pass
HT20	MCS0	1	1	2412	23.11	30.00	-2.00	21.11	36.00	Pass
HT20	MCS0	1	6	2437	23.33	30.00	-2.00	21.33	36.00	Pass
HT20	MCS0	1	11	2462	23.36	30.00	-2.00	21.36	36.00	Pass
HT40	MCS0	1	3	2422	23.49	30.00	-2.00	21.49	36.00	Pass
HT40	MCS0	1	6	2437	23.65	30.00	-2.00	21.65	36.00	Pass
HT40	MCS0	1	9	2452	23.74	30.00	-2.00	21.74	36.00	Pass

TEST RESULTS DATA
Average Power Table
(Reporting Only)

2.4GHz Band						
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)
11b	1Mbps	1	1	2412	0.08	15.49
11b	1Mbps	1	6	2437	0.08	15.75
11b	1Mbps	1	11	2462	0.08	15.97
11g	6Mbps	1	1	2412	0.49	11.86
11g	6Mbps	1	6	2437	0.49	12.11
11g	6Mbps	1	11	2462	0.49	12.24
HT20	MCS0	1	1	2412	0.53	11.97
HT20	MCS0	1	6	2437	0.53	12.11
HT20	MCS0	1	11	2462	0.53	12.22
HT40	MCS0	1	3	2422	1.03	11.88
HT40	MCS0	1	6	2437	1.03	11.93
HT40	MCS0	1	9	2452	1.03	12.16

TEST RESULTS DATA
Peak Power Density

2.4GHz Band								
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
11b	1Mbps	1	1	2412	-4.46	-2.00	8.00	Pass
11b	1Mbps	1	6	2437	-4.09	-2.00	8.00	Pass
11b	1Mbps	1	11	2462	-3.52	-2.00	8.00	Pass
11g	6Mbps	1	1	2412	-10.83	-2.00	8.00	Pass
11g	6Mbps	1	6	2437	-11.40	-2.00	8.00	Pass
11g	6Mbps	1	11	2462	-10.76	-2.00	8.00	Pass
HT20	MCS0	1	1	2412	-10.64	-2.00	8.00	Pass
HT20	MCS0	1	6	2437	-11.52	-2.00	8.00	Pass
HT20	MCS0	1	11	2462	-11.95	-2.00	8.00	Pass
HT40	MCS0	1	3	2422	-15.15	-2.00	8.00	Pass
HT40	MCS0	1	6	2437	-16.08	-2.00	8.00	Pass
HT40	MCS0	1	9	2452	-16.04	-2.00	8.00	Pass



Appendix B. Radiated Spurious Emission

15C 2.4GHz 2400~2483.5MHz

WIFI 802.11b (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b CH 01 2412MHz		2361.03	46.68	-27.32	74	49.86	27.13	4.74	35.05	151	47	P	H
		2389.92	31.42	-22.58	54	34.38	27.25	4.79	35	151	47	A	H
	*	2412	98.96	-	-	101.83	27.31	4.82	35	151	47	P	H
	*	2412	92.84	-	-	95.71	27.31	4.82	35	151	47	A	H
		2374.44	40.84	-33.16	74	43.88	27.19	4.79	35.02	180	240	P	V
		2389.92	26.98	-27.02	54	29.94	27.25	4.79	35	180	240	A	V
	*	2412	90.2	-	-	93.07	27.31	4.82	35	180	240	P	V
	*	2412	84.35	-	-	87.22	27.31	4.82	35	180	240	A	V
802.11b CH 06 2437MHz		2388.66	46.73	-27.27	74	49.71	27.25	4.79	35.02	175	81	P	H
		2374.44	31.23	-22.77	54	34.27	27.19	4.79	35.02	175	81	A	H
	*	2437	99.55	-	-	102.28	27.42	4.82	34.97	175	81	P	H
	*	2437	93.44	-	-	96.17	27.42	4.82	34.97	175	81	A	H
		2487.24	45.15	-28.85	74	47.68	27.54	4.85	34.92	175	81	P	H
		2491.64	29.28	-24.72	54	31.71	27.6	4.89	34.92	175	81	A	H
		2379.3	41.89	-32.11	74	44.93	27.19	4.79	35.02	150	330	P	V
		2380.56	27.08	-26.92	54	30.12	27.19	4.79	35.02	150	330	A	V
	*	2437	91.78	-	-	94.51	27.42	4.82	34.97	150	330	P	V
	*	2437	85.88	-	-	88.61	27.42	4.82	34.97	150	330	A	V
		2496.36	41.46	-32.54	74	43.87	27.6	4.89	34.9	150	330	P	V
		2498.08	27.65	-26.35	54	30.06	27.6	4.89	34.9	150	330	A	V



802.11b CH 11 2462MHz	*	2462	101.42	-	-	104.04	27.48	4.85	34.95	168	68	P	H
	*	2462	95.25	-	-	97.87	27.48	4.85	34.95	168	68	A	H
		2498.44	47.23	-26.77	74	49.64	27.6	4.89	34.9	168	68	P	H
		2483.52	34.69	-19.31	54	37.22	27.54	4.85	34.92	168	68	A	H
	*	2462	91.05	-	-	93.67	27.48	4.85	34.95	187	40	P	V
	*	2462	85.08	-	-	87.7	27.48	4.85	34.95	187	40	A	V
		2484.96	42.05	-31.95	74	44.58	27.54	4.85	34.92	187	40	P	V
		2483.52	28.04	-25.96	54	30.57	27.54	4.85	34.92	187	40	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



15C 2.4GHz 2400~2483.5MHz
WIFI 802.11b (Harmonic @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b CH 01 2412MHz		4824	45.29	-28.71	74	65.66	31.05	6.97	58.39	110	360	P	H
		4824	42.75	-31.25	74	63.12	31.05	6.97	58.39	110	360	P	V
802.11b CH 06 2437MHz		4874	47.16	-26.84	74	67.71	31.12	6.99	58.66	100	360	P	H
		7311	45.62	-28.38	74	60.06	35.96	8.22	58.62	174	100	P	H
		4874	42.53	-31.47	74	63.08	31.12	6.99	58.66	100	360	P	V
		7311	43.98	-30.02	74	58.42	35.96	8.22	58.62	174	100	P	V
802.11b CH 11 2462MHz		4924	48.92	-25.08	74	69.25	31.19	7	58.52	146	347	P	H
		7386	46.76	-27.24	74	60.95	36.08	8.27	58.54	145	274	P	H
		4924	42.66	-31.34	74	62.99	31.19	7	58.52	146	347	P	V
		7386	44.95	-29.05	74	59.14	36.08	8.27	58.54	145	274	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



15C 2.4GHz 2400~2483.5MHz
WIFI 802.11g (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11g CH 01 2412MHz		2389.92	56.28	-17.72	74	59.24	27.25	4.79	35	153	47	P	H
		2389.92	38.24	-15.76	54	41.2	27.25	4.79	35	153	47	A	H
	*	2412	98.33	-	-	101.2	27.31	4.82	35	153	47	P	H
	*	2412	87.83	-	-	90.7	27.31	4.82	35	153	47	A	H
		2385.87	47.51	-26.49	74	50.49	27.25	4.79	35.02	158	296	P	V
		2389.47	29.19	-24.81	54	32.17	27.25	4.79	35.02	158	296	A	V
	*	2412	88.63	-	-	91.5	27.31	4.82	35	158	296	P	V
	*	2412	77.8	-	-	80.67	27.31	4.82	35	158	296	A	V
802.11g CH 06 2437MHz		2384.43	49.66	-24.34	74	52.7	27.19	4.79	35.02	172	77	P	H
		2357.07	36.31	-17.69	54	39.49	27.13	4.74	35.05	172	77	A	H
	*	2437	100.08	-	-	102.81	27.42	4.82	34.97	172	77	P	H
	*	2437	89.34	-	-	92.07	27.42	4.82	34.97	172	77	A	H
		2483.52	47.77	-26.23	74	50.3	27.54	4.85	34.92	172	77	P	H
		2484.2	34.54	-19.46	54	37.07	27.54	4.85	34.92	172	77	A	H
		2382.54	44.31	-29.69	74	47.35	27.19	4.79	35.02	250	84	P	V
		2356.89	31.81	-22.19	54	34.99	27.13	4.74	35.05	250	84	A	V
	*	2437	96	-	-	98.73	27.42	4.82	34.97	250	84	P	V
	*	2437	85.55	-	-	88.28	27.42	4.82	34.97	250	84	A	V
		2488.68	44.36	-29.64	74	46.79	27.6	4.89	34.92	250	84	P	V
		2483.72	31.24	-22.76	54	33.77	27.54	4.85	34.92	250	84	A	V



802.11g CH 11 2462MHz	*	2462	101.09	-	-	103.71	27.48	4.85	34.95	169	62	P	H
	*	2462	90.83	-	-	93.45	27.48	4.85	34.95	169	62	A	H
		2483.76	69.02	-4.98	74	71.55	27.54	4.85	34.92	169	62	P	H
		2484	43.53	-10.47	54	46.06	27.54	4.85	34.92	169	62	A	H
	*	2462	90.5	-	-	93.12	27.48	4.85	34.95	150	299	P	V
	*	2462	80.09	-	-	82.71	27.48	4.85	34.95	150	299	A	V
		2484.56	57.09	-16.91	74	59.62	27.54	4.85	34.92	150	299	P	V
		2483.56	32.51	-21.49	54	35.04	27.54	4.85	34.92	150	299	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



15C 2.4GHz 2400~2483.5MHz
WIFI 802.11g (Harmonic @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11g CH 01 2412MHz		4824	42.69	-31.31	74	63.06	31.05	6.97	58.39	110	360	P	H
		4824	42.4	-31.6	74	62.77	31.05	6.97	58.39	110	360	P	V
802.11g CH 06 2437MHz		4874	43.43	-30.57	74	63.98	31.12	6.99	58.66	100	360	P	H
		7311	45.79	-28.21	74	60.23	35.96	8.22	58.62	174	100	P	H
		4874	42.16	-31.84	74	62.71	31.12	6.99	58.66	100	360	P	V
		7311	43.68	-30.32	74	58.12	35.96	8.22	58.62	174	100	P	V
802.11g CH 11 2462MHz		4924	47.54	-26.46	74	67.87	31.19	7	58.52	146	347	P	H
		7386	47.85	-26.15	74	62.04	36.08	8.27	58.54	145	274	P	H
		4924	43.98	-30.02	74	64.31	31.19	7	58.52	146	347	P	V
		7386	44.24	-29.76	74	58.43	36.08	8.27	58.54	145	274	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



15C 2.4GHz 2400~2483.5MHz

WIFI 802.11n HT20 (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11n HT20 CH 01 2412MHz		2388.75	60.72	-13.28	74	63.7	27.25	4.79	35.02	150	67	P	H
		2389.92	42.89	-11.11	54	45.85	27.25	4.79	35	150	67	A	H
	*	2412	99.88	-	-	102.75	27.31	4.82	35	150	67	P	H
	*	2412	88.92	-	-	91.79	27.31	4.82	35	150	67	A	H
		2389.38	51.13	-22.87	74	54.11	27.25	4.79	35.02	230	9	P	V
		2389.83	33.34	-20.66	54	36.3	27.25	4.79	35	230	9	A	V
	*	2412	90.92	-	-	93.79	27.31	4.82	35	230	9	P	V
	*	2412	80.08	-	-	82.95	27.31	4.82	35	230	9	A	V
802.11n HT20 CH 06 2437MHz		2389.83	51.98	-22.02	74	54.94	27.25	4.79	35	175	65	P	H
		2389.11	36.95	-17.05	54	39.93	27.25	4.79	35.02	175	65	A	H
	*	2437	100.43	-	-	103.16	27.42	4.82	34.97	175	65	P	H
	*	2437	89.97	-	-	92.7	27.42	4.82	34.97	175	65	A	H
		2486.72	47.93	-26.07	74	50.46	27.54	4.85	34.92	175	65	P	H
		2485.72	34.78	-19.22	54	37.31	27.54	4.85	34.92	175	65	A	H
		2389.65	45.33	-28.67	74	48.31	27.25	4.79	35.02	250	110	P	V
		2356.98	33.08	-20.92	54	36.26	27.13	4.74	35.05	250	110	A	V
	*	2437	95.44	-	-	98.17	27.42	4.82	34.97	250	110	P	V
	*	2437	84.27	-	-	87	27.42	4.82	34.97	250	110	A	V
		2483.72	44.33	-29.67	74	46.86	27.54	4.85	34.92	250	110	P	V
		2484.32	30.89	-23.11	54	33.42	27.54	4.85	34.92	250	110	A	V



802.11n HT20 CH 11 2462MHz	*	2462	101.38	-	-	104	27.48	4.85	34.95	150	60	P	H
	*	2462	90.51	-	-	93.13	27.48	4.85	34.95	150	60	A	H
		2484.28	69.21	-4.79	74	71.74	27.54	4.85	34.92	150	60	P	H
		2483.56	44.06	-9.94	54	46.59	27.54	4.85	34.92	150	60	A	H
	*	2462	90.74	-	-	93.36	27.48	4.85	34.95	187	299	P	V
	*	2462	80.57	-	-	83.19	27.48	4.85	34.95	187	299	A	V
		2483.88	61.62	-12.38	74	64.15	27.54	4.85	34.92	187	299	P	V
		2483.56	34.96	-19.04	54	37.49	27.54	4.85	34.92	187	299	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



15C 2.4GHz 2400~2483.5MHz
WIFI 802.11n HT20 (Harmonic @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11n HT20 CH 01 2412MHz		4824	42.84	-31.16	74	63.21	31.05	6.97	58.39	110	360	P	H
		4824	42.56	-31.44	74	62.93	31.05	6.97	58.39	110	360	P	V
802.11n HT20 CH 06 2437MHz		4874	42.06	-31.94	74	62.61	31.12	6.99	58.66	100	360	P	H
		7311	43.93	-30.07	74	58.37	35.96	8.22	58.62	174	100	P	H
		4874	41.59	-32.41	74	62.14	31.12	6.99	58.66	100	360	P	V
		7311	42.8	-31.2	74	57.24	35.96	8.22	58.62	174	100	P	V
802.11n HT20 CH 11 2462MHz		4924	43.66	-30.34	74	63.99	31.19	7	58.52	146	347	P	H
		7386	47.34	-26.66	74	61.53	36.08	8.27	58.54	145	274	P	H
		4924	41.96	-32.04	74	62.29	31.19	7	58.52	146	347	P	V
		7386	44.88	-29.12	74	59.07	36.08	8.27	58.54	145	274	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



15C 2.4GHz 2400~2483.5MHz
WIFI 802.11n HT40 (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11n HT40 CH 03 2422MHz		2388.75	69.54	-4.46	74	72.52	27.25	4.79	35.02	150	57	P	H
		2389.2	46.13	-7.87	54	49.11	27.25	4.79	35.02	150	57	A	H
	*	2422	96.59	-	-	99.37	27.37	4.82	34.97	150	57	P	H
	*	2422	86.34	-	-	89.12	27.37	4.82	34.97	150	57	A	H
		2483.96	52.94	-21.06	74	55.47	27.54	4.85	34.92	150	57	P	H
		2483.6	34.92	-19.08	54	37.45	27.54	4.85	34.92	150	57	A	H
		2388.39	60.13	-13.87	74	63.11	27.25	4.79	35.02	250	115	P	V
		2389.56	37.48	-16.52	54	40.46	27.25	4.79	35.02	250	115	A	V
	*	2422	90.34	-	-	93.12	27.37	4.82	34.97	250	115	P	V
	*	2422	79.32	-	-	82.1	27.37	4.82	34.97	250	115	A	V
		2485.56	46.38	-27.62	74	48.91	27.54	4.85	34.92	250	115	P	V
		2484	31.05	-22.95	54	33.58	27.54	4.85	34.92	250	115	A	V
802.11n HT40 CH 06 2437MHz		2389.56	57.42	-16.58	74	60.4	27.25	4.79	35.02	150	60	P	H
		2389.92	39.29	-14.71	54	42.25	27.25	4.79	35	150	60	A	H
	*	2437	95.29	-	-	98.02	27.42	4.82	34.97	150	60	P	H
	*	2437	85.07	-	-	87.8	27.42	4.82	34.97	150	60	A	H
		2486.72	56.58	-17.42	74	59.11	27.54	4.85	34.92	150	60	P	H
		2483.84	37.27	-16.73	54	39.8	27.54	4.85	34.92	150	60	A	H
		2370.48	52.4	-21.6	74	55.44	27.19	4.79	35.02	250	80	P	V
		2389.92	33.21	-20.79	54	36.17	27.25	4.79	35	250	80	A	V
	*	2437	90.82	-	-	93.55	27.42	4.82	34.97	250	80	P	V
	*	2437	80.76	-	-	83.49	27.42	4.82	34.97	250	80	A	V
		2485.88	51.73	-22.27	74	54.26	27.54	4.85	34.92	250	80	P	V
		2484.2	32.97	-21.03	54	35.5	27.54	4.85	34.92	250	80	A	V



802.11n HT40 CH 09 2452MHz		2388.84	58.11	-15.89	74	61.09	27.25	4.79	35.02	174	60	P	H
		2389.92	37.9	-16.1	54	40.86	27.25	4.79	35	174	60	A	H
	*	2452	95.79	-	-	98.47	27.42	4.85	34.95	174	60	P	H
	*	2452	85.75	-	-	88.43	27.42	4.85	34.95	174	60	A	H
		2483.64	70.69	-3.31	74	73.22	27.54	4.85	34.92	174	60	P	H
		2483.88	44.72	-9.28	54	47.25	27.54	4.85	34.92	174	60	A	H
		2370.12	52.43	-21.57	74	55.47	27.19	4.79	35.02	226	59	P	V
		2389.92	33.86	-20.14	54	36.82	27.25	4.79	35	226	59	A	V
	*	2452	90.57	-	-	93.25	27.42	4.85	34.95	226	59	P	V
	*	2452	80.52	-	-	83.2	27.42	4.85	34.95	226	59	A	V
		2484.2	64.08	-9.92	74	66.61	27.54	4.85	34.92	226	59	P	V
		2484.72	38.27	-15.73	54	40.8	27.54	4.85	34.92	226	59	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



15C 2.4GHz 2400~2483.5MHz
WIFI 802.11n HT40 (Harmonic @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11n HT40 CH 03 2422MHz		4844	42.83	-31.17	74	63.27	31.07	6.97	58.48	100	360	P	H
		7266	40.83	-33.17	74	55.26	35.91	8.19	58.53	200	360	P	H
		4844	42.27	-31.73	74	62.71	31.07	6.97	58.48	100	360	P	V
		7266	40.85	-33.15	74	55.28	35.91	8.19	58.53	200	360	P	V
802.11n HT40 CH 06 2437MHz		4874	42.89	-31.11	74	63.44	31.12	6.99	58.66	100	163	P	H
		7311	43.22	-30.78	74	57.66	35.96	8.22	58.62	120	360	P	H
		4874	42.58	-31.42	74	63.13	31.12	6.99	58.66	100	163	P	V
		7311	41.73	-32.27	74	56.17	35.96	8.22	58.62	120	360	P	V
802.11n HT40 CH 09 2452MHz		4904	44.24	-29.76	74	64.71	31.17	7	58.64	129	360	P	H
		7356	46.69	-27.31	74	60.98	36.03	8.25	58.57	121	320	P	H
		4904	42.44	-31.56	74	62.91	31.17	7	58.64	129	360	P	V
		7356	44.75	-29.25	74	59.04	36.03	8.25	58.57	121	320	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



15C Emission below 1GHz

2.4GHz WIFI 802.11n HT40 (LF)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
2.4GHz 802.11n HT40 LF		46.49	23.36	-16.64	40	45.39	10.35	1	33.38	-	-	P	H
		77.53	17.68	-22.32	40	40.99	8.93	1.14	33.38	-	-	P	H
		119.24	30.2	-13.3	43.5	50.27	11.87	1.38	33.32	100	360	P	H
		164.83	29.94	-13.56	43.5	50.76	10.87	1.53	33.22	-	-	P	H
		250.19	22.11	-23.89	46	41.41	11.97	1.83	33.1	-	-	P	H
		350.1	18.55	-27.45	46	34.25	15.16	2.04	32.9	-	-	P	H
		46.49	34.26	-5.74	40	56.29	10.35	1	33.38	100	0	P	V
		71.71	31.85	-8.15	40	56.3	7.78	1.14	33.37	-	-	P	V
		127.97	34.57	-8.93	43.5	54.8	11.68	1.38	33.29	-	-	P	V
		189.08	26.15	-17.35	43.5	47.42	10.33	1.57	33.17	-	-	P	V
		245.34	18.34	-27.66	46	37.85	11.79	1.8	33.1	-	-	P	V
		323.91	19.8	-26.2	46	36.38	14.46	1.94	32.98	-	-	P	V
Remark	1. No other spurious found. 2. All results are PASS against limit line.												

Note symbol

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency per 15.209(c).
!	Test result is over limit line.
P/A	P eak or A verage
H/V	H orizontal or V ertical



A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Level(dBμV/m) =

Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

2. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)

= 55.45 (dBμV/m)

2. Over Limit(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 55.45(dBμV/m) – 74(dBμV/m)

= -18.55(dB)

For Average Limit @ 2390MHz:

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)

= 43.54 (dBμV/m)

2. Over Limit(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 43.54(dBμV/m) – 54(dBμV/m)

= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.