



# TEST REPORT

No. I16Z40431-GTE01

for

**TCL Communication Ltd.**

**GSM Quad-band / UMTS Quad-band / LTE 7-band mobile phone**

**Model Name: 5051J**

**FCC ID: 2ACCJB048**

with

**Hardware Version: PIO**

**Software Version: PAS1**

**Issued Date: 2016-04-21**

**Note:**

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

**Test Laboratory:**

**FCC 2.948 Listed: No. 525429**

CTTL, Telecommunication Technology Labs, Academy of Telecommunication Research, MIIT

No. 52, Huayuan North Road, Haidian District, Beijing, P. R. China 100191.

Tel: +86(0)10-62304633-2512, Fax: +86(0)10-62304633-2504

Email: [cttl\\_terminals@catr.cn](mailto:cttl_terminals@catr.cn), website: [www.chinattl.com](http://www.chinattl.com)

## **REPORT HISTORY**

| <b>Report Number</b> | <b>Revision</b> | <b>Description</b> | <b>Issue Date</b> |
|----------------------|-----------------|--------------------|-------------------|
| I16Z40431-GTE01      | Rev.0           | 1st edition        | 2016-04-07        |
| I16Z40431-GTE01      | Rev.1           | 2nd edition        | 2016-04-21        |

## **CONTENTS**

|                                                                         |           |
|-------------------------------------------------------------------------|-----------|
| <b>1. TEST LABORATORY .....</b>                                         | <b>4</b>  |
| <b>1.1. TESTING LOCATION.....</b>                                       | <b>4</b>  |
| <b>1.2. TESTING ENVIRONMENT .....</b>                                   | <b>4</b>  |
| <b>1.3. PROJECT DATA .....</b>                                          | <b>4</b>  |
| <b>1.4. SIGNATURE .....</b>                                             | <b>4</b>  |
| <b>2. CLIENT INFORMATION.....</b>                                       | <b>5</b>  |
| <b>2.1. APPLICANT INFORMATION.....</b>                                  | <b>5</b>  |
| <b>2.2. MANUFACTURER INFORMATION.....</b>                               | <b>5</b>  |
| <b>3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE) .....</b> | <b>6</b>  |
| <b>3.1. ABOUT EUT .....</b>                                             | <b>6</b>  |
| <b>3.2. INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST .....</b>   | <b>6</b>  |
| <b>3.3. INTERNAL IDENTIFICATION OF AE USED DURING THE TEST .....</b>    | <b>6</b>  |
| <b>3.4. GENERAL DESCRIPTION .....</b>                                   | <b>7</b>  |
| <b>4. REFERENCE DOCUMENTS.....</b>                                      | <b>8</b>  |
| <b>4.1. REFERENCE DOCUMENTS FOR TESTING .....</b>                       | <b>8</b>  |
| <b>5. LABORATORY ENVIRONMENT.....</b>                                   | <b>9</b>  |
| <b>6. SUMMARY OF TEST RESULTS .....</b>                                 | <b>10</b> |
| <b>7. TEST EQUIPMENTS UTILIZED .....</b>                                | <b>11</b> |
| <b>ANNEX A: MEASUREMENT RESULTS.....</b>                                | <b>12</b> |
| <b>A.1 OUTPUT POWER.....</b>                                            | <b>12</b> |
| <b>A.2 EMISSION LIMIT.....</b>                                          | <b>18</b> |
| <b>A.3 FREQUENCY STABILITY.....</b>                                     | <b>24</b> |
| <b>A.4 OCCUPIED BANDWIDTH .....</b>                                     | <b>27</b> |
| <b>A.5 EMISSION BANDWIDTH.....</b>                                      | <b>40</b> |
| <b>A.6 BAND EDGE COMPLIANCE .....</b>                                   | <b>52</b> |
| <b>A.7 CONDUCTED SPURIOUS EMISSION.....</b>                             | <b>59</b> |

## 1. Test Laboratory

### 1.1. Testing Location

Company Name: CTTL, Telecommunication Technology Labs, Academy of  
Telecommunication Research, MIIT  
Address: No. 52, Huayuan North Road, Haidian District, Beijing, P. R. China  
Postal Code: 100191  
Telephone: 00861062304633  
Fax: 00861062304793

### 1.2. Testing Environment

Normal Temperature: 15-35°C  
Relative Humidity: 20-75%

### 1.3. Project data

Testing Start Date: 2016-03-08  
Testing End Date: 2016-04-18

### 1.4. Signature



---

Shen Yi


(Prepared this test report)



---

Zhong Nan

(Reviewed this test report)



---

Sun Xiang Qian

Deputy Director of the laboratory  
(Approved this test report)



## **2. Client Information**

### **2.1. Applicant Information**

Company Name: TCL Communication Ltd.  
Address /Post: 5F, C building, No. 232, Liang Jing Road ZhangJiang High-Tech Park,  
Pudong Area Shanghai, P.R. China. 201203  
Contact Person: Gong Zhizhou  
Contact Email zhizhou.gong@tcl.com  
Telephone: 0086-21-31363544  
Fax: 0086-21-61460602

### **2.2. Manufacturer Information**

Company Name: TCL Communication Ltd.  
Address /Post: 5F, C building, No. 232, Liang Jing Road ZhangJiang High-Tech Park,  
Pudong Area Shanghai, P.R. China. 201203  
Contact Person: Gong Zhizhou  
Contact Email zhizhou.gong@tcl.com  
Telephone: 0086-21-31363544  
Fax: 0086-21-61460602

### 3. Equipment Under Test (EUT) and Ancillary Equipment (AE)

#### 3.1. About EUT

|                         |                                                          |
|-------------------------|----------------------------------------------------------|
| Description             | GSM Quad-band / UMTS Quad-band / LTE 7-band mobile phone |
| Model Name              | 5051J                                                    |
| FCC ID                  | 2ACCJB048                                                |
| Antenna                 | Integrated                                               |
| Output power            | 30.77dBm maximum EIRP measured for PCS1900               |
| Extreme vol. Limits     | 3.6VDC to 4.4VDC (nominal: 3.8VDC)                       |
| Extreme temp. Tolerance | -30°C to +50°C                                           |

Note: Components list, please refer to documents of the manufacturer; it is also included in the original test record of CTTL, Telecommunication Technology Labs, Academy of Telecommunication Research, MIIT

The EUT is a variant model of 5051A. All the result is coming from the initial model.

#### 3.2. Internal Identification of EUT used during the test

| EUT ID* | IMEI | HW Version | SW Version |
|---------|------|------------|------------|
| \       | \    | \          | \          |

#### 3.3. Internal Identification of AE used during the test

| AE ID* | Description    |
|--------|----------------|
| AE1    | Battery        |
| AE2    | Battery        |
| AE3    | Travel charger |
| AE4    | Travel charger |

##### AE1

|                 |                               |
|-----------------|-------------------------------|
| Model           | TLp025H7 (Li-polymer)         |
| Manufacturer    | Ningbo Veken Battery Co.,LTD. |
| Capacitance     | 2500mAh                       |
| Nominal voltage | 3.85V                         |

##### AE2

|                 |                                          |
|-----------------|------------------------------------------|
| Model           | TLp025HF (Li-polymer)                    |
| Manufacturer    | Jiade Energy Technology(Zhuhai) Co.,Ltd. |
| Capacitance     | 2500mAh                                  |
| Nominal voltage | 3.85V                                    |

##### AE3

|              |              |
|--------------|--------------|
| Model        | CBA0058AG0C2 |
| Manufacturer | TENPAO       |

##### AE4



|              |              |
|--------------|--------------|
| Model        | CBA0058AG0C3 |
| Manufacturer | Yingju       |

\*AE ID: is used to identify the test sample in the lab internally.

### **3.4. General Description**

The Equipment Under Test (EUT) is a model of GSM Quad-band / UMTS Quad-band / LTE 7-band mobile phone with integrated antenna. Manual and specifications of the EUT were provided to fulfil the test.



## **4. Reference Documents**

### **4.1. Reference Documents for testing**

The following documents listed in this section are referred for testing.

| <b>Reference</b> | <b>Title</b>                                                                                                                               | <b>Version</b>     |
|------------------|--------------------------------------------------------------------------------------------------------------------------------------------|--------------------|
| FCC Part 24      | PERSONAL COMMUNICATIONS SERVICES                                                                                                           | 10-1-15<br>Edition |
| FCC Part 22      | PUBLIC MOBILE SERVICES                                                                                                                     | 10-1-15<br>Edition |
| ANSI/TIA-603-D   | Land Mobile FM or PM Communications Equipment<br>Measurement and Performance Standards                                                     | 2015               |
| ANSI C63.4       | Methods of Measurement of Radio-Noise Emissions from<br>Low-Voltage Electrical and Electronic Equipment in the<br>Range of 9 kHz to 40 GHz | 2014               |
| KDB 971168 D01   | Measurement Guidance for Certification of Licensed Digital<br>Transmitters                                                                 | v02r02             |

## 5. LABORATORY ENVIRONMENT

**Control room / conducted chamber** did not exceed following limits along the EMC testing:

|                          |                            |
|--------------------------|----------------------------|
| Temperature              | Min. = 15 °C, Max. = 35 °C |
| Relative humidity        | Min. = 20 %, Max. = 80 %   |
| Shielding effectiveness  | > 110 dB                   |
| Electrical insulation    | > 2 MΩ                     |
| Ground system resistance | < 0.5 Ω                    |

**Fully-anechoic chamber 2** (8.6 meters×6.1 meters×3.85 meters) did not exceed following limits along the EMC testing:

|                                                 |                                         |
|-------------------------------------------------|-----------------------------------------|
| Temperature                                     | Min. = 15 °C, Max. = 30 °C              |
| Relative humidity                               | Min. = 35 %, Max. = 60 %                |
| Shielding effectiveness                         | > 110 dB                                |
| Electrical insulation                           | > 2 MΩ                                  |
| Ground system resistance                        | < 1 Ω                                   |
| Site voltage standing-wave ratio ( $S_{VSWR}$ ) | Between 0 and 6 dB, from 1GHz to 18GHz  |
| Uniformity of field strength                    | Between 0 and 6 dB, from 80 to 4000 MHz |

**Semi-anechoic chamber 2 / Fully-anechoic chamber 3** (10 meters×6.7 meters×6.15 meters) did not exceed following limits along the EMC testing:

|                                                 |                                         |
|-------------------------------------------------|-----------------------------------------|
| Temperature                                     | Min. = 15 °C, Max. = 30 °C              |
| Relative humidity                               | Min. = 35 %, Max. = 60 %                |
| Shielding effectiveness                         | > 100 dB                                |
| Electrical insulation                           | > 2 MΩ                                  |
| Ground system resistance                        | < 0.5 Ω                                 |
| Normalised site attenuation (NSA)               | < ±3.5 dB, 3 m distance                 |
| Site voltage standing-wave ratio ( $S_{VSWR}$ ) | Between 0 and 6 dB, from 1GHz to 18GHz  |
| Uniformity of field strength                    | Between 0 and 6 dB, from 80 to 3000 MHz |



## 6. SUMMARY OF TEST RESULTS

| Items | List                        | Clause in FCC rules  | Verdict |
|-------|-----------------------------|----------------------|---------|
| 1     | Output Power                | 22.913(a)/24.232(c)  | P       |
| 2     | Emission Limit              | 2.1051/22.917/24.238 | P       |
| 3     | Frequency Stability         | 2.1055/24.235        | P       |
| 4     | Occupied Bandwidth          | 2.1049(h)(i)         | P       |
| 5     | Emission Bandwidth          | 22.917(b)/24.238(b)  | P       |
| 6     | Band Edge Compliance        | 22.917(b)/24.238(b)  | P       |
| 7     | Conducted Spurious Emission | 2.1057/22.917/24.238 | P       |

**7. Test Equipments Utilized**

| NO. | Description                          | TYPE      | series number | MANUFACTURE  | CAL DUE DATE | Calibration interval |
|-----|--------------------------------------|-----------|---------------|--------------|--------------|----------------------|
| 1   | Test Receiver                        | ESU26     | 100235        | R&S          | 2017-03-02   | 1 year               |
| 2   | Test Receiver                        | ESU26     | 100376        | R&S          | 2016-10-29   | 1 year               |
| 3   | EMI Antenna                          | VULB 9163 | 302           | Schwarzbeck  | 2017-01-03   | 3 year               |
| 4   | EMI Antenna                          | 3117      | 00119024      | ETS-Lindgren | 2017-01-20   | 3 year               |
| 5   | LISN                                 | ENV216    | 101200        | R&S          | 2016-07-07   | 1 year               |
| 6   | Universal Radio Communication Tester | CMU200    | 108646        | R&S          | 2016-10-27   | 1 year               |
| 7   | Universal Radio Communication Tester | E5515C    | MY48361083    | Agilent      | 2016-07-06   | 1 year               |
| 8   | Spectrum Analyzer                    | E4440A    | MY48250642    | Agilent      | 2017-03-02   | 1 year               |
| 9   | EMI Antenna                          | 9117      | 177           | Schwarzbeck  | 2017-06-25   | 3 year               |
| 10  | EMI Antenna                          | VULB9163  | 9163-234      | Schwarzbeck  | 2016-09-15   | 3 year               |
| 11  | Signal Generator                     | N5183A    | MY49060052    | Agilent      | 2017-03-07   | 1 year               |
| 12  | Climate chamber                      | SH-241    | 92007454      | ESPEC        | 2017-12-14   | 2 year               |
| 13  | Loop Antenna                         | HFH2-Z2   | 829324/007    | R&S          | 2017-12-10   | 3 year               |

## **ANNEX A: MEASUREMENT RESULTS**

### **A.1 OUTPUT POWER**

#### **A.1.1 Summary**

During the process of testing, the EUT was controlled via Rhode & Schwarz Digital Radio Communication tester (CMU-200) to ensure max power transmission and proper modulation. This result contains output power and EIRP measurements for the EUT. In all cases, output power is within the specified limits.

#### **A.1.2 Conducted**

##### **A.1.2.1 Method of Measurements**

The EUT was set up for the max output power with pseudo random data modulation. These measurements were done at 3 frequencies, 1850.2 MHz, 1880.0MHz and 1909.8MHz for PCS1900 band; 824.2MHz, 836.6MHz and 848.8MHz for GSM850 band. (bottom, middle and top of operational frequency range).

#### **GSM850**

|       | Power step | Nominal Peak output power (dBm) |
|-------|------------|---------------------------------|
| GSM   | 5          | 33dBm(2W)                       |
| GPRS  | 3          | 33dBm(2W)                       |
| EGPRS | 6          | 33dBm(2W)                       |

#### **Measurement result**

##### **GSM(GMSK)**

| Frequency(MHz) | Power Step | Output power(dBm) |
|----------------|------------|-------------------|
| 824.2          | 5          | 32.35             |
| 836.6          | 5          | 32.36             |
| 848.8          | 5          | 32.38             |

##### **GPRS(GMSK,1Slot)**

| Frequency(MHz) | Power Step | Output power(dBm) |
|----------------|------------|-------------------|
| 824.2          | 3          | 32.38             |
| 836.6          | 3          | 32.46             |
| 848.8          | 3          | 32.55             |

##### **EGPRS(8PSK,1Slot)**

| Frequency(MHz) | Power Step | Output power(dBm) |
|----------------|------------|-------------------|
| 824.2          | 6          | 26.15             |
| 836.6          | 6          | 26.16             |
| 848.8          | 6          | 26.09             |

### PCS1900

|       | Power step | Nominal Peak output power (dBm) |
|-------|------------|---------------------------------|
| GSM   | 0          | 30dBm(1W)                       |
| GPRS  | 3          | 30dBm(1W)                       |
| EGPRS | 5          | 30dBm(1W)                       |

### Measurement result

#### GSM(GMSK)

| Frequency(MHz) | Power Step | Output power(dBm) |
|----------------|------------|-------------------|
| 1850.2         | 0          | 29.77             |
| 1880.0         | 0          | 29.66             |
| 1909.8         | 0          | 29.62             |

#### GPRS(GMSK,1Slot)

| Frequency(MHz) | Power Step | Output power(dBm) |
|----------------|------------|-------------------|
| 1850.2         | 3          | 29.75             |
| 1880.0         | 3          | 29.58             |
| 1909.8         | 3          | 29.77             |

#### EGPRS(8PSK,1Slot)

| Frequency(MHz) | Power Step | Output power(dBm) |
|----------------|------------|-------------------|
| 1850.2         | 5          | 25.36             |
| 1880.0         | 5          | 25.34             |
| 1909.8         | 5          | 25.45             |

### A.1.3 Radiated

#### A.1.3.1 Description

This is the test for the maximum radiated power from the EUT.


Rule Part 24.232(c) specifies, "Mobile/portable stations are limited to 2 watts e.i.r.p. Peak power" and 24.232(c) specifies that "Peak transmit power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage."

Rule Part 22.913(a) specifies "The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts."


#### A.1.3.2 Method of Measurement

The measurements procedures in TIA-603D-2015 are used.

1. EUT was placed on a 1.5 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 1.5m. The test setup refers to figure below. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all transmit frequencies in three channels (High, Middle, Low) were measured with peak detector.

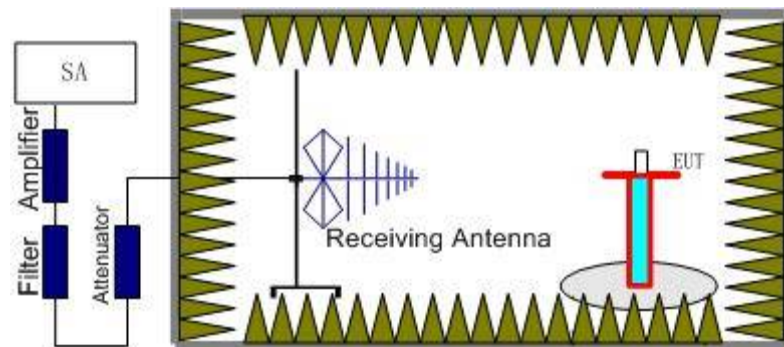

2. The EUT is then put into continuously transmitting mode at its maximum power level during the test. And the maximum value of the receiver should be recorded as (Pr).
3. The EUT shall be replaced by a substitution antenna. The test setup refers to figure below.

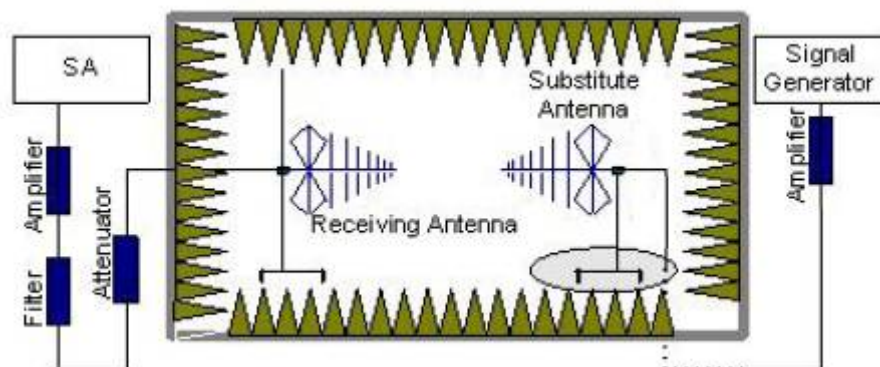

In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere

with the radiation pattern of the antenna. A power ( $P_{Mea}$ ) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded ( $P_r$ ). The power of signal source ( $P_{Mea}$ ) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.

4. A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna.

The cable loss ( $P_{cl}$ ), the Substitution Antenna Gain ( $G_a$ ) and the Amplifier Gain ( $P_{Ag}$ ) should be recorded after test.

The measurement results are obtained as described below:

$$\text{Power(EIRP)} = P_{Mea} - P_{Ag} - P_{cl} - G_a$$

5. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power.
6. ERP can be calculated from EIRP by subtracting the gain of the dipole,  $ERP = EIRP - 2.15\text{dBi}$ .

### GSM 850-ERP 22.913(a)

#### Limits

|       | Power Step | Burst Peak ERP (dBm) |
|-------|------------|----------------------|
| GSM   | 5          | ≤38.45dBm (7W)       |
| GPRS  | 3          | ≤38.45dBm (7W)       |
| EGPRS | 6          | ≤38.45dBm (7W)       |

#### Measurement result

##### GSM

| Frequency(MHz) | P <sub>Mea</sub> (dBm) | P <sub>cl</sub> (dB) | P <sub>Ag</sub> (dB) | G <sub>a</sub> Antenna Gain(dB) | Correction (dB) | ERP(dBm) | Limit(dBm) | Margin(dB) | Polarization |
|----------------|------------------------|----------------------|----------------------|---------------------------------|-----------------|----------|------------|------------|--------------|
| 824.20         | -15.28                 | 2.26                 | -45.79               | -0.96                           | 2.15            | 27.06    | 38.45      | 11.39      | H            |
| 836.60         | -15.12                 | 2.26                 | -45.66               | -0.82                           | 2.15            | 26.95    | 38.45      | 11.50      | H            |
| 848.80         | -15.75                 | 2.28                 | -45.54               | -0.79                           | 2.15            | 26.15    | 38.45      | 12.30      | V            |

##### GPRS

| Frequency(MHz) | P <sub>Mea</sub> (dBm) | P <sub>cl</sub> (dB) | P <sub>Ag</sub> (dB) | G <sub>a</sub> Antenna Gain(dB) | Correction (dB) | ERP(dBm) | Limit(dBm) | Margin(dB) | Polarization |
|----------------|------------------------|----------------------|----------------------|---------------------------------|-----------------|----------|------------|------------|--------------|
| 824.20         | -14.98                 | 2.26                 | -45.79               | -0.96                           | 2.15            | 27.36    | 38.45      | 11.09      | H            |
| 836.60         | -15.13                 | 2.26                 | -45.66               | -0.82                           | 2.15            | 26.94    | 38.45      | 11.51      | V            |
| 848.80         | -15.69                 | 2.28                 | -45.54               | -0.79                           | 2.15            | 26.21    | 38.45      | 12.24      | V            |

##### EGPRS-8PSK

| Frequency(MHz) | P <sub>Mea</sub> (dBm) | P <sub>cl</sub> (dB) | P <sub>Ag</sub> (dB) | G <sub>a</sub> Antenna Gain(dB) | Correction (dB) | ERP(dBm) | Limit(dBm) | Margin(dB) | Polarization |
|----------------|------------------------|----------------------|----------------------|---------------------------------|-----------------|----------|------------|------------|--------------|
| 824.20         | -22.75                 | 2.26                 | -45.79               | -0.96                           | 2.15            | 19.59    | 38.45      | 18.86      | H            |
| 836.60         | -23.25                 | 2.26                 | -45.66               | -0.82                           | 2.15            | 18.82    | 38.45      | 19.63      | V            |
| 848.80         | -23.18                 | 2.28                 | -45.54               | -0.79                           | 2.15            | 18.72    | 38.45      | 19.73      | V            |

Frequency: 824.20MHz

Peak ERP(dBm)=P<sub>Mea</sub>(-14.98dBm)-P<sub>cl</sub>(2.26dB)-P<sub>Ag</sub>(-45.79dB)-G<sub>a</sub> (-0.96dB)-2.15dB=27.36dBm

**ANALYZER SETTINGS: RBW = VBW = 3MHz**

**PCS1900-EIRP 24.232(c)**

**Limits**

|       | Power Step | Burst Peak EIRP (dBm) |
|-------|------------|-----------------------|
| GSM   | 0          | ≤33dBm (2W)           |
| GPRS  | 3          | ≤33dBm (2W)           |
| EGPRS | 5          | ≤33dBm (2W)           |

**Measurement result**

**GSM**

| Frequency(MHz) | P <sub>Mea</sub> (dBm) | P <sub>cl</sub> (dB) | P <sub>Ag</sub> (dB) | G <sub>a</sub> Antenna Gain(dB) | EIRP(dBm) | Limit(dBm) | Margin(dB) | Polarization |
|----------------|------------------------|----------------------|----------------------|---------------------------------|-----------|------------|------------|--------------|
| 1850.20        | -15.87                 | 2.93                 | -43.75               | -4.87                           | 29.82     | 33.00      | 3.18       | H            |
| 1880.00        | -15.19                 | 2.85                 | -43.75               | -4.82                           | 30.53     | 33.00      | 2.47       | H            |
| 1909.80        | -14.87                 | 2.89                 | -43.77               | -4.76                           | 30.77     | 33.00      | 2.23       | H            |

**GPRS**

| Frequency(MHz) | P <sub>Mea</sub> (dBm) | P <sub>cl</sub> (dB) | P <sub>Ag</sub> (dB) | G <sub>a</sub> Antenna Gain(dB) | EIRP(dBm) | Limit(dBm) | Margin(dB) | Polarization |
|----------------|------------------------|----------------------|----------------------|---------------------------------|-----------|------------|------------|--------------|
| 1850.20        | -15.94                 | 2.93                 | -43.75               | -4.87                           | 29.75     | 33.00      | 3.25       | H            |
| 1880.00        | -15.22                 | 2.85                 | -43.75               | -4.82                           | 30.50     | 33.00      | 2.50       | H            |
| 1909.80        | -14.89                 | 2.89                 | -43.77               | -4.76                           | 30.75     | 33.00      | 2.25       | H            |

**EGPRS-8PSK**

| Frequency(MHz) | P <sub>Mea</sub> (dBm) | P <sub>cl</sub> (dB) | P <sub>Ag</sub> (dB) | G <sub>a</sub> Antenna Gain(dB) | EIRP(dBm) | Limit(dBm) | Margin(dB) | Polarization |
|----------------|------------------------|----------------------|----------------------|---------------------------------|-----------|------------|------------|--------------|
| 1850.20        | -20.89                 | 2.93                 | -43.75               | -4.87                           | 24.80     | 33.00      | 8.20       | H            |
| 1880.00        | -20.01                 | 2.85                 | -43.75               | -4.82                           | 25.71     | 33.00      | 7.29       | H            |
| 1909.80        | -19.77                 | 2.89                 | -43.77               | -4.76                           | 25.87     | 33.00      | 7.13       | H            |

Frequency: 1909.80 MHz

Peak EIRP(dBm)= P<sub>Mea</sub>(-14.87dBm) - P<sub>cl</sub>(2.89dB) - P<sub>Ag</sub>(-43.77dB) - G<sub>a</sub> (-4.76dB) =30.77dBm

**ANALYZER SETTINGS: RBW = VBW = 3MHz**

## A.2 EMISSION LIMIT


### A.2.1 Measurement Method

The measurement procedures in TIA-603D-2015 are used.


The spectrum was scanned from 30 MHz to the 10th harmonic of the highest frequency generated within the equipment, which is the transmitted carrier that can be as high as 1910 MHz. The resolution bandwidth is set as outlined in Part 24.238 and Part 22.917. The spectrum is scanned with the mobile station transmitting at carrier frequencies that pertain to low, mid and high channels of PCS1900 and GSM850.

**The procedure of radiated spurious emissions is as follows:**

1. EUT was placed on a 1.5 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 1.5m. The test setup refers to figure below. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all non-harmonic and harmonics of the transmit frequency through the 10th harmonic were measured with peak detector.

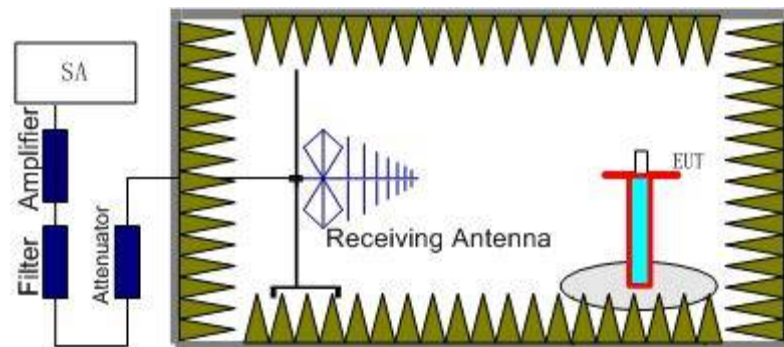

2. The EUT is then put into continuously transmitting mode at its maximum power level during the test. And the maximum value of the receiver should be recorded as ( $P_r$ ).
3. The EUT shall be replaced by a substitution antenna. The test setup refers to figure below.

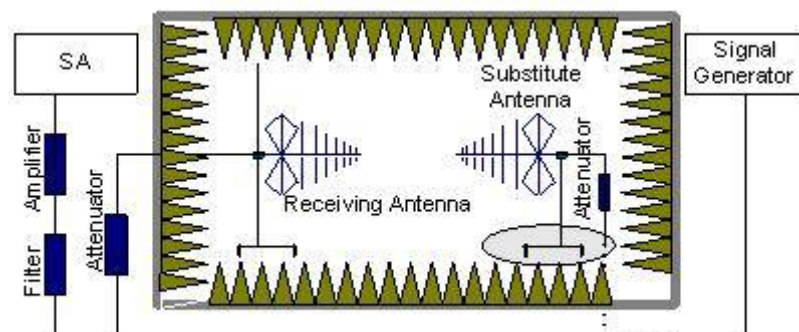

In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power ( $P_{Mea}$ ) is applied to the input of the

substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded ( $P_r$ ). The power of signal source ( $P_{Mea}$ ) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.

4. The Path loss ( $P_{pl}$ ) between the Signal Source with the Substitution Antenna and the Substitution Antenna Gain ( $G_a$ ) should be recorded after test.

A amplifier should be connected in for the test.

The Path loss ( $P_{pl}$ ) is the summation of the cable loss and the gain of the amplifier.

The measurement results are obtained as described below:

$$\text{Power(EIRP)} = P_{Mea} - P_{pl} - G_a$$

5. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power.
6. ERP can be calculated from EIRP by subtracting the gain of the dipole,  $ERP = EIRP - 2.15\text{dBi}$ .

### **A.2.2 Measurement Limit**

Part 24.238 and Part 22.917 specify that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.

The specification that emissions shall be attenuated below the transmitter power (P) by at least  $43 + 10 \log(P)$  dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

### **A.2.3 Measurement Results**

Radiated emissions measurements were made only at the upper, middle, and lower carrier frequencies of the PCS1900 band (1850.2 MHz, 1880 MHz and 1909.8 MHz) and GSM850 band (824.2MHz, 836.6MHz, 848.8MHz) . It was decided that measurements at these three carrier frequencies would be sufficient to demonstrate compliance with emissions limits because it was seen that all the significant spurs occur well outside the band and no radiation was seen from a carrier in one block of the PCS1900 ,GSM850 into any of the other blocks. The equipment must still, however, meet emissions requirements with the carrier at all frequencies over which it is capable of operating and it is the manufacturer's responsibility to verify this.

#### A.2.4 Measurement Results Table

| Frequency   | Channel | Frequency Range | Result |
|-------------|---------|-----------------|--------|
| GSM 850MHz  | Low     | 30MHz-10GHz     | Pass   |
|             | Middle  | 30MHz-10GHz     | Pass   |
|             | High    | 30MHz-10GHz     | Pass   |
| GSM 1900MHz | Low     | 30MHz-20GHz     | Pass   |
|             | Middle  | 30MHz-20GHz     | Pass   |
|             | High    | 30MHz-20GHz     | Pass   |

#### A.2.5 Sweep Table

| Working Frequency | Subrange (GHz) | RBW    | VBW    | Sweep time (s) |
|-------------------|----------------|--------|--------|----------------|
| 850MHz            | 0.03~1         | 100KHz | 300KHz | 10             |
|                   | 1-2            | 1 MHz  | 3 MHz  | 2              |
|                   | 2~5            | 1 MHz  | 3 MHz  | 3              |
|                   | 5~8            | 1 MHz  | 3 MHz  | 3              |
|                   | 8~10           | 1 MHz  | 3 MHz  | 3              |
| 1900MHz           | 0.03~1         | 100KHz | 300KHz | 10             |
|                   | 1-2            | 1 MHz  | 3 MHz  | 2              |
|                   | 2~5            | 1 MHz  | 3 MHz  | 3              |
|                   | 5~8            | 1 MHz  | 3 MHz  | 3              |
|                   | 8~11           | 1 MHz  | 3 MHz  | 3              |
|                   | 11~14          | 1 MHz  | 3 MHz  | 3              |
|                   | 14~18          | 1 MHz  | 3 MHz  | 3              |
|                   | 18~20          | 1 MHz  | 3 MHz  | 2              |

**GSM Mode Channel 128/824.2MHz**

| Frequency(MHz) | P <sub>Mea</sub> (dBm) | Path Loss | Antenna Gain | Correction (dB) | Peak ERP(dBm) | Limit (dBm) | Margin(dB) | Polarization |
|----------------|------------------------|-----------|--------------|-----------------|---------------|-------------|------------|--------------|
| 1648.64        | -53.23                 | 3.41      | -5.23        | 2.15            | -53.56        | -13.00      | 40.56      | V            |
| 2467.03        | -63.21                 | 4.44      | -6.00        | 2.15            | -63.80        | -13.00      | 50.80      | V            |
| 3784.54        | -64.11                 | 5.04      | -8.60        | 2.15            | -62.70        | -13.00      | 49.70      | H            |
| 4798.16        | -65.06                 | 6.31      | -9.70        | 2.15            | -63.82        | -13.00      | 50.82      | H            |
| 6623.66        | -65.15                 | 7.25      | -11.15       | 2.15            | -63.40        | -13.00      | 50.40      | V            |
| 7735.59        | -62.32                 | 7.36      | -12.39       | 2.15            | -59.44        | -13.00      | 46.44      | V            |

**GSM Mode Channel 190/836.6MHz**

| Frequency(MHz) | P <sub>Mea</sub> (dBm) | Path Loss | Antenna Gain | Correction (dB) | Peak ERP(dBm) | Limit (dBm) | Margin(dB) | Polarization |
|----------------|------------------------|-----------|--------------|-----------------|---------------|-------------|------------|--------------|
| 1673.39        | -52.23                 | 3.54      | -5.19        | 2.15            | -52.73        | -13.00      | 39.73      | V            |
| 2509.03        | -62.12                 | 4.48      | -6.12        | 2.15            | -62.63        | -13.00      | 49.63      | V            |
| 3346.61        | -56.93                 | 5.22      | -7.83        | 2.15            | -56.47        | -13.00      | 43.47      | H            |
| 4183.47        | -62.08                 | 5.84      | -9.08        | 2.15            | -60.99        | -13.00      | 47.99      | H            |
| 5689.14        | -65.78                 | 6.68      | -10.56       | 2.15            | -64.05        | -13.00      | 51.05      | V            |
| 7164.44        | -63.74                 | 7.03      | -11.80       | 2.15            | -61.12        | -13.00      | 48.12      | H            |

**GSM Mode Channel 251/848.8MHz**

| Frequency(MHz) | P <sub>Mea</sub> (dBm) | Path Loss | Antenna Gain | Correction (dB) | Peak ERP(dBm) | Limit (dBm) | Margin(dB) | Polarization |
|----------------|------------------------|-----------|--------------|-----------------|---------------|-------------|------------|--------------|
| 1697.25        | -53.02                 | 3.45      | -5.14        | 2.15            | -53.48        | -13.00      | 40.48      | H            |
| 2258.37        | -54.25                 | 4.23      | -5.38        | 2.15            | -55.25        | -13.00      | 42.25      | V            |
| 3408.35        | -64.21                 | 5.51      | -7.98        | 2.15            | -63.89        | -13.00      | 50.89      | V            |
| 4282.23        | -66.03                 | 5.98      | -9.18        | 2.15            | -64.98        | -13.00      | 51.98      | H            |
| 5089.83        | -65.25                 | 6.45      | -10.03       | 2.15            | -63.82        | -13.00      | 50.82      | V            |
| 7422.39        | -61.53                 | 7.24      | -12.11       | 2.15            | -58.81        | -13.00      | 45.81      | H            |

**GSM Mode Channel 512/1850.2MHz**

| Frequency(MHz) | P <sub>Mea</sub> (dBm) | Path Loss | Antenna Gain | Peak EIRP(dBm) | Limit (dBm) | Margin(dB) | Polarization |
|----------------|------------------------|-----------|--------------|----------------|-------------|------------|--------------|
| 5550.51        | -62.71                 | 6.61      | -10.59       | -58.73         | -13.00      | 45.73      | H            |
| 6869.20        | -63.46                 | 6.67      | -11.44       | -58.69         | -13.00      | 45.69      | V            |
| 8141.20        | -60.96                 | 7.58      | -12.71       | -55.83         | -13.00      | 42.83      | H            |
| 10105.22       | -62.52                 | 8.34      | -12.94       | -57.92         | -13.00      | 44.92      | H            |
| 13438.73       | -56.36                 | 9.99      | -14.11       | -52.24         | -13.00      | 39.24      | V            |
| 15306.42       | -55.37                 | 10.70     | -13.82       | -52.25         | -13.00      | 39.25      | H            |

**GSM Mode Channel 661/1880.0MHz**

| Frequency(MHz) | P <sub>Mea</sub> (dBm) | Path Loss | Antenna Gain | Peak EIRP(dBm) | Limit (dBm) | Margin(dB) | Polarization |
|----------------|------------------------|-----------|--------------|----------------|-------------|------------|--------------|
| 3240.58        | -67.61                 | 5.14      | -7.58        | -65.17         | -13.00      | 52.17      | V            |
| 4644.56        | -62.42                 | 6.07      | -9.54        | -58.95         | -13.00      | 45.95      | H            |
| 5640.28        | -59.75                 | 6.85      | -10.57       | -56.03         | -13.00      | 43.03      | H            |
| 7042.07        | -62.75                 | 7.45      | -11.65       | -58.55         | -13.00      | 45.55      | H            |
| 8593.25        | -60.31                 | 7.63      | -13.02       | -54.92         | -13.00      | 41.92      | V            |
| 9800.64        | -60.86                 | 8.24      | -13.10       | -56.00         | -13.00      | 43.00      | H            |

**GSM Mode Channel 810/1909.8MHz**

| Frequency(MHz) | P <sub>Mea</sub> (dBm) | Path Loss | Antenna Gain | Peak EIRP(dBm) | Limit (dBm) | Margin(dB) | Polarization |
|----------------|------------------------|-----------|--------------|----------------|-------------|------------|--------------|
| 3289.66        | -65.74                 | 5.27      | -7.70        | -63.31         | -13.00      | 50.31      | V            |
| 5729.51        | -57.79                 | 6.76      | -10.55       | -54.00         | -13.00      | 41.00      | H            |
| 6943.17        | -65.57                 | 7.13      | -11.53       | -61.17         | -13.00      | 48.17      | V            |
| 9076.92        | -63.07                 | 8.05      | -13.15       | -57.97         | -13.00      | 44.97      | H            |
| 10272.34       | -60.84                 | 8.98      | -13.01       | -56.81         | -13.00      | 43.81      | H            |
| 13634.98       | -53.51                 | 10.39     | -14.28       | -49.62         | -13.00      | 36.62      | V            |

### **A.3 FREQUENCY STABILITY**

#### **A.3.1 Method of Measurement**

In order to measure the carrier frequency under the condition of AFC lock, it is necessary to make measurements with the EUT in a "call mode". This is accomplished with the use of R&S CMU200 DIGITAL RADIO COMMUNICATION TESTER.

1. Measure the carrier frequency at room temperature.
2. Subject the EUT to overnight soak at -30°C.
3. With the EUT, powered via nominal voltage, connected to the CMU200 and in a simulated call on mid channel of PCS 1900 and GSM850, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
4. Repeat the above measurements at 10°C increments from -30°C to +50°C. Allow at least 1 1/2 hours at each temperature, unpowered, before making measurements.
5. Remeasure carrier frequency at room temperature with nominal voltage. Vary supply voltage from minimum voltage to maximum voltage, in 0.1Volt increments remeasuring carrier frequency at each voltage. Pause at nominal voltage for 1 1/2 hours unpowered, to allow any self-heating to stabilize, before continuing.
6. Subject the EUT to overnight soak at +50°C.
7. With the EUT, powered via nominal voltage, connected to the CMU200 and in a simulated call on the centre channel, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
8. Repeat the above measurements at 10 C decrements from +50°C to -30°C. Allow at least 1 1/2 hours at each temperature, unpowered, before making measurements.
9. At all temperature levels hold the temperature to +/- 0.5°C during the measurement procedure.

#### **A.3.2 Measurement Limit**

##### **A.3.2.1 For Hand carried battery powered equipment**

According to the JTC standard the frequency stability of the carrier shall be accurate to within 0.1 ppm of the received frequency from the base station. This accuracy is sufficient to meet Sec. 24.235, Frequency Stability. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. As this transceiver is considered "Hand carried, battery powered equipment" Section 2.1055(d)(2) applies. This requires that the lower voltage for frequency stability testing be specified by the manufacturer. This transceiver is specified to operate with an input voltage of between 3.6VDC and 4.4VDC, with a nominal voltage of 3.8VDC. Operation above or below these voltage limits is prohibited by transceiver software in order to prevent improper operation as well as to protect components from overstress.

##### **A.3.2.2 For equipment powered by primary supply voltage**

According to the JTC standard the frequency stability of the carrier shall be accurate to within 0.1 ppm of the received frequency from the base station. This accuracy is sufficient to meet Sec. 24.235, Frequency Stability. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. For this EUT section 2.1055(d)(1) applies.

### A.3.3 Measurement results

#### GSM 850

##### Frequency Error vs Voltage

| Voltage(V) | Frequency error(Hz) | Frequency error(ppm) |
|------------|---------------------|----------------------|
| 3.6        | 19                  | 0.023                |
| 3.8        | 28                  | 0.034                |
| 4.4        | 19                  | 0.023                |

##### Frequency Error vs Temperature

| temperature(°C) | Frequency error(Hz) | Frequency error(ppm) |
|-----------------|---------------------|----------------------|
| -30             | 15                  | 0.018                |
| -20             | 12                  | 0.014                |
| -10             | 33                  | 0.039                |
| 0               | 17                  | 0.020                |
| 10              | 15                  | 0.018                |
| 20              | 19                  | 0.022                |
| 30              | 12                  | 0.015                |
| 40              | 30                  | 0.036                |
| 50              | 20                  | 0.024                |

#### EGPRS 850 - 8PSK

##### Frequency Error vs Voltage

| Voltage(V) | Frequency error(Hz) | Frequency error(ppm) |
|------------|---------------------|----------------------|
| 3.6        | -69                 | 0.082                |
| 3.8        | -63                 | 0.076                |
| 4.4        | -82                 | 0.098                |

##### Frequency Error vs Temperature

| temperature(°C) | Frequency error(Hz) | Frequency error(ppm) |
|-----------------|---------------------|----------------------|
| -30             | -60                 | 0.072                |
| -20             | -62                 | 0.074                |
| -10             | -62                 | 0.074                |
| 0               | -63                 | 0.076                |
| 10              | -63                 | 0.075                |
| 20              | -80                 | 0.096                |
| 30              | -61                 | 0.072                |
| 40              | -62                 | 0.074                |
| 50              | -63                 | 0.075                |

### PCS 1900

#### Frequency Error vs Voltage

| Voltage(V) | Frequency error(Hz) | Frequency error(ppm) |
|------------|---------------------|----------------------|
| 3.6        | 15                  | 0.008                |
| 3.8        | 14                  | 0.007                |
| 4.4        | -10                 | 0.005                |

#### Frequency Error vs Temperature

| temperature(°C) | Frequency error(Hz) | Frequency error(ppm) |
|-----------------|---------------------|----------------------|
| -30             | 10                  | 0.006                |
| -20             | -11                 | 0.006                |
| -10             | 9                   | 0.005                |
| 0               | 16                  | 0.008                |
| 10              | 4                   | 0.002                |
| 20              | -14                 | 0.007                |
| 30              | 29                  | 0.016                |
| 40              | -18                 | 0.009                |
| 50              | -17                 | 0.009                |

### EGPRS 1900 - 8PSK

#### Frequency Error vs Voltage

| Voltage(V) | Frequency error(Hz) | Frequency error(ppm) |
|------------|---------------------|----------------------|
| 3.6        | -63                 | 0.033                |
| 3.8        | -51                 | 0.027                |
| 4.4        | -53                 | 0.028                |

#### Frequency Error vs Temperature

| temperature(°C) | Frequency error(Hz) | Frequency error(ppm) |
|-----------------|---------------------|----------------------|
| -30             | -51                 | 0.027                |
| -20             | -54                 | 0.029                |
| -10             | -59                 | 0.032                |
| 0               | -56                 | 0.030                |
| 10              | -52                 | 0.028                |
| 20              | -60                 | 0.032                |
| 30              | -60                 | 0.032                |
| 40              | -56                 | 0.030                |
| 50              | -57                 | 0.030                |

## **A.4 OCCUPIED BANDWIDTH**

### **Reference**

FCC: CFR Part 2.1049(h)(i)

#### **A.4.1 Occupied Bandwidth Results**

Occupied bandwidth measurements are only provided for selected frequencies in order to reduce the amount of submitted data. Data were taken at the extreme and mid frequencies of the US Cellular/PCS frequency bands. The table below lists the measured 99% BW. Spectrum analyzer plots are included on the following pages.

The measurement method is from KDB 971168 v02r02 4.2:


- a) The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be set wide enough to capture all modulation products including the emission skirts (i.e., two to five times the OBW).
- b) The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
- c) Set the reference level of the instrument as required to keep the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope must be at least  $10\log (OBW / RBW)$  below the reference level.
- d) Set the detection mode to peak, and the trace mode to max hold.
- e) Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.

#### **GSM 850(99% BW)**

| Frequency(MHz) | Occupied Bandwidth (99% BW)( kHz) |
|----------------|-----------------------------------|
| 824.2          | 245.192                           |
| 836.6          | 243.590                           |
| 848.8          | 242.788                           |


## GSM 850

### Channel 128-Occupied Bandwidth (99% BW)

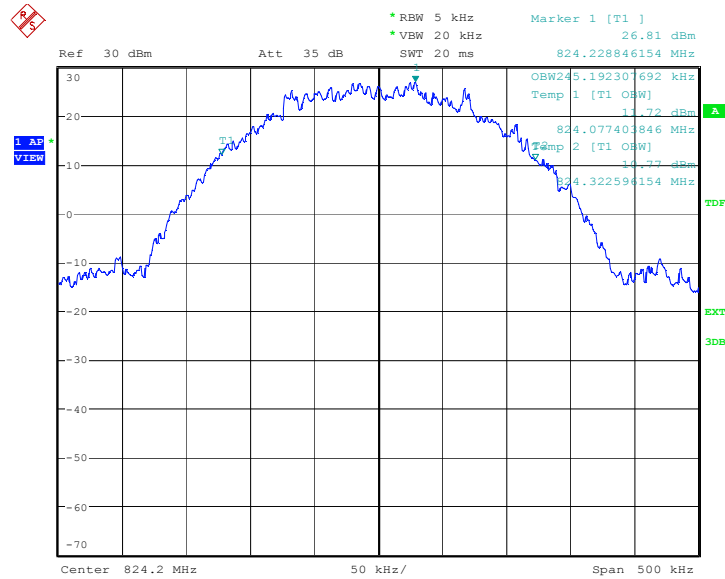


Date: 14.MAR.2016 16:35:15

### Channel 190-Occupied Bandwidth (99% BW)

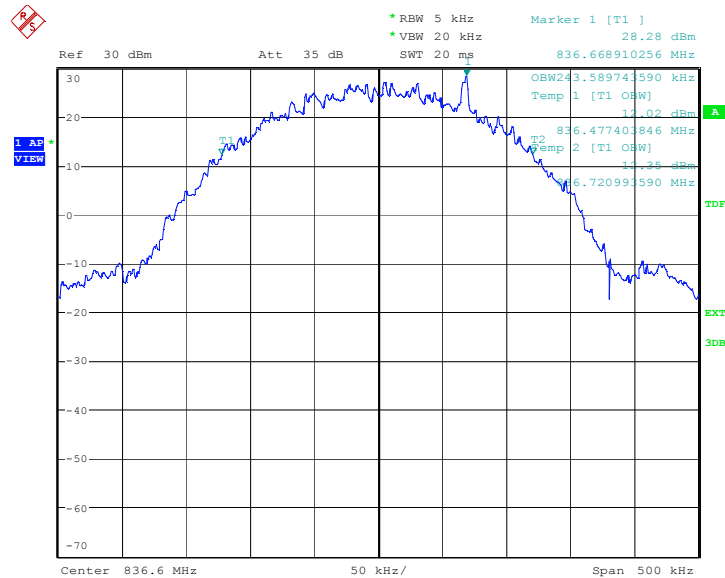

Date: 14.MAR.2016 16:35:47

### Channel 251-Occupied Bandwidth (99% BW)

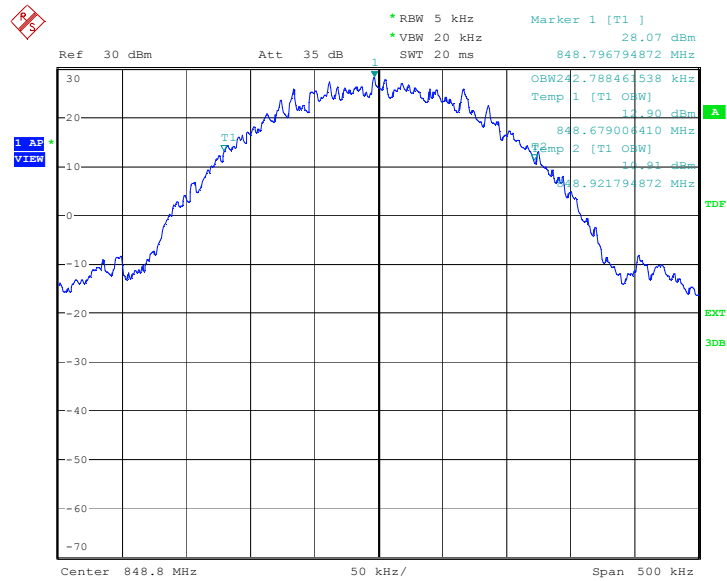


Date: 14.MAR.2016 16:36:20

### GPRS 850(99% BW)

| Frequency(MHz) | Occupied Bandwidth (99% BW)( kHz) |
|----------------|-----------------------------------|
| 824.2          | 246.795                           |
| 836.6          | 246.795                           |
| 848.8          | 244.391                           |


### GPRS 850

#### Channel 128-Occupied Bandwidth (99% BW)

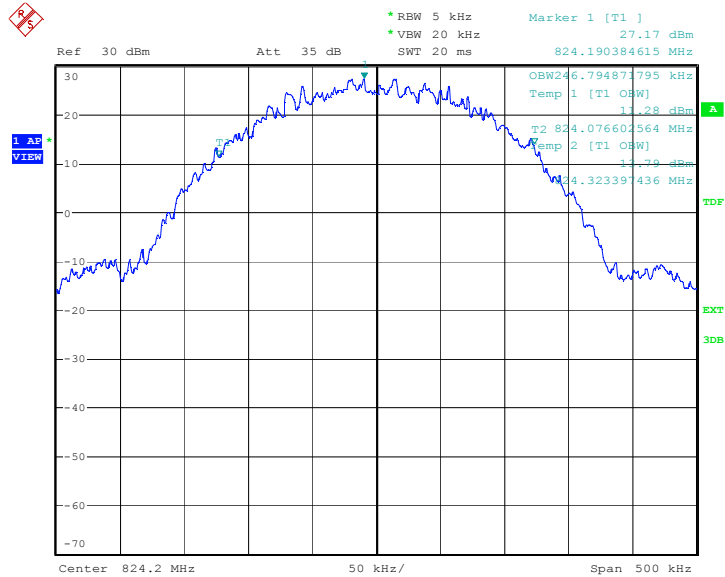


Date: 14.MAR.2016 17:15:24

### Channel 190-Occupied Bandwidth (99% BW)

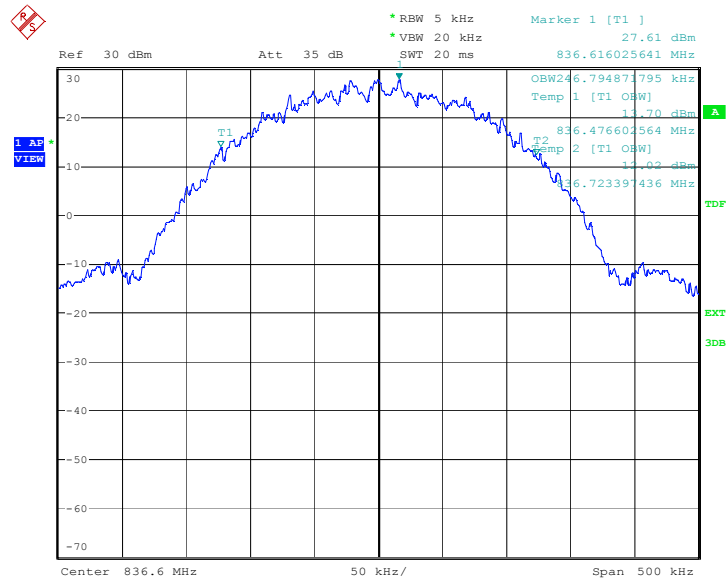

Date: 14.MAR.2016 17:15:56

### Channel 251-Occupied Bandwidth (99% BW)

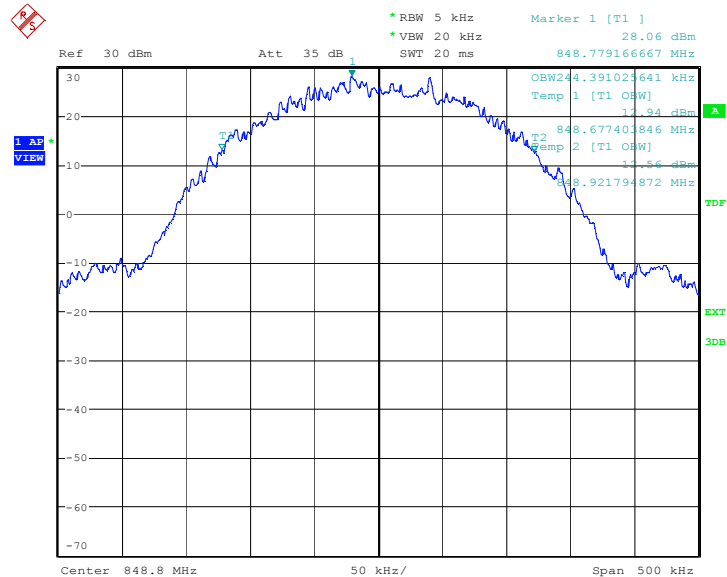


Date: 14.MAR.2016 17:16:28

### EGPRS 850-8PSK(99% BW)

| Frequency(MHz) | Occupied Bandwidth (99% BW)( kHz) |
|----------------|-----------------------------------|
| 824.2          | 243.590                           |
| 836.6          | 246.795                           |
| 848.8          | 245.192                           |


### EGPRS 850-8PSK

#### Channel 128-Occupied Bandwidth (99% BW)

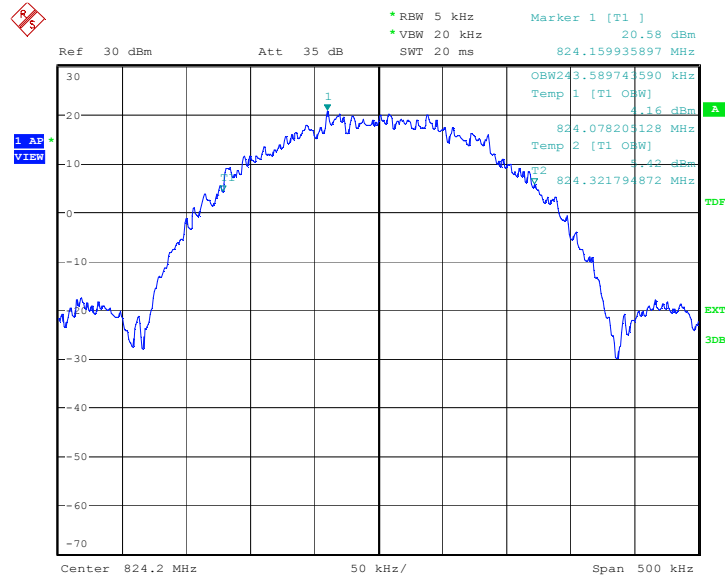


Date: 14.MAR.2016 17:36:00

### Channel 190-Occupied Bandwidth (99% BW)

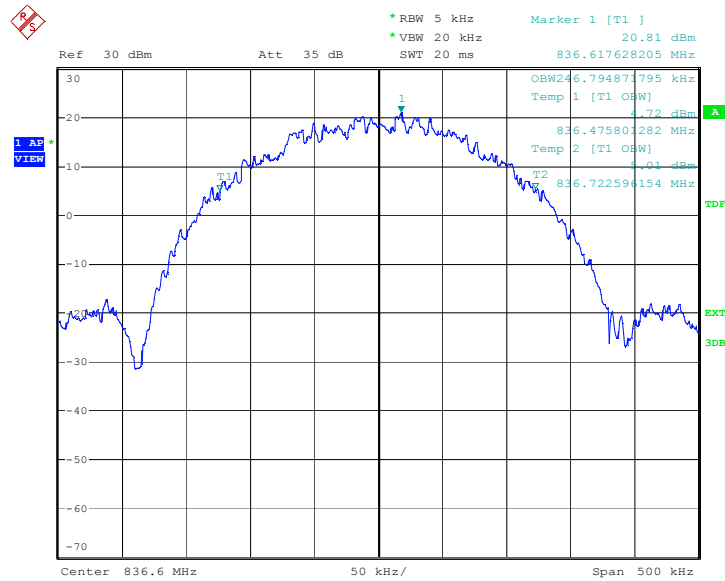

Date: 14.MAR.2016 17:36:32

### Channel 251-Occupied Bandwidth (99% BW)

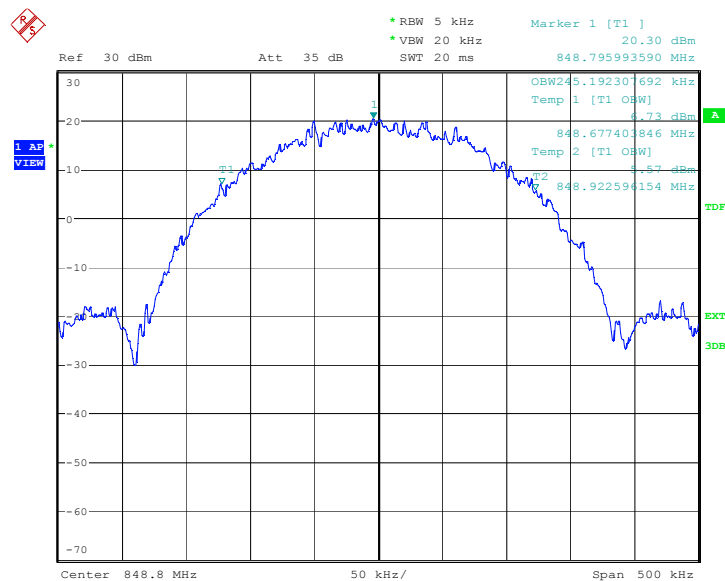


Date: 14.MAR.2016 17:37:04

### PCS 1900(99% BW)

| Frequency(MHz) | Occupied Bandwidth (99% BW)( kHz) |
|----------------|-----------------------------------|
| 1850.2         | 245.994                           |
| 1880.0         | 246.795                           |
| 1909.8         | 245.994                           |


### PCS 1900

#### Channel 512-Occupied Bandwidth (99% BW)

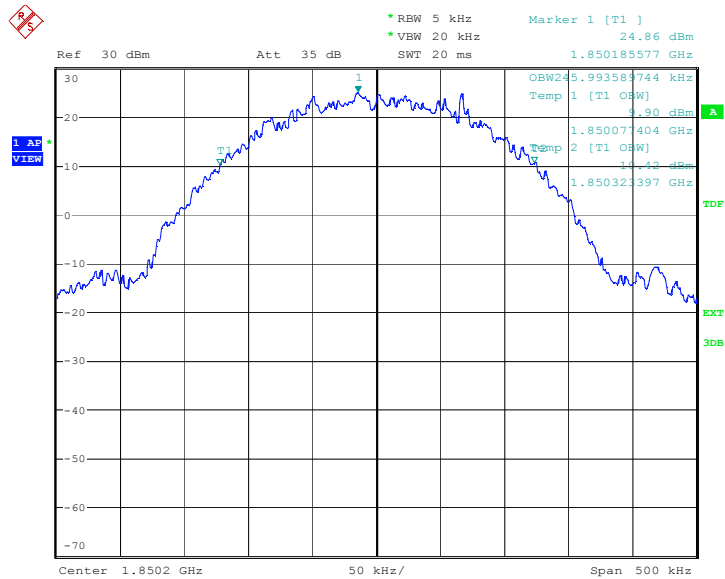


Date: 14.MAR.2016 16:56:28

### Channel 661-Occupied Bandwidth (99% BW)

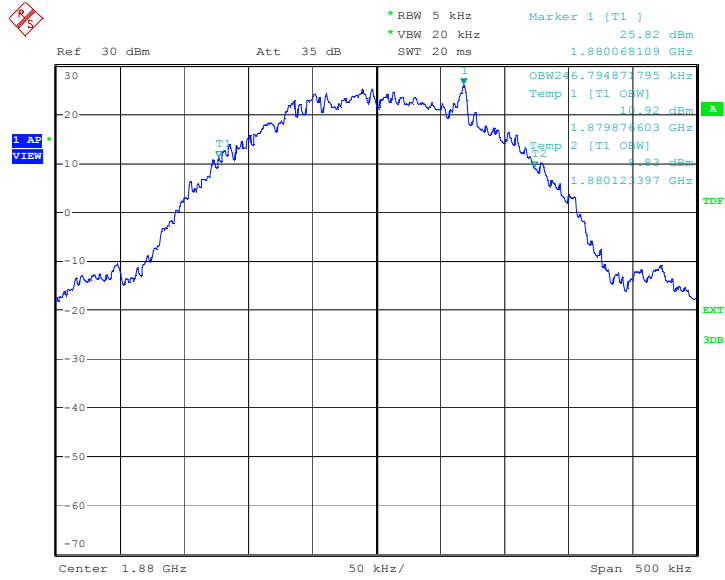

Date: 14.MAR.2016 16:57:00

### Channel 810-Occupied Bandwidth (99% BW)

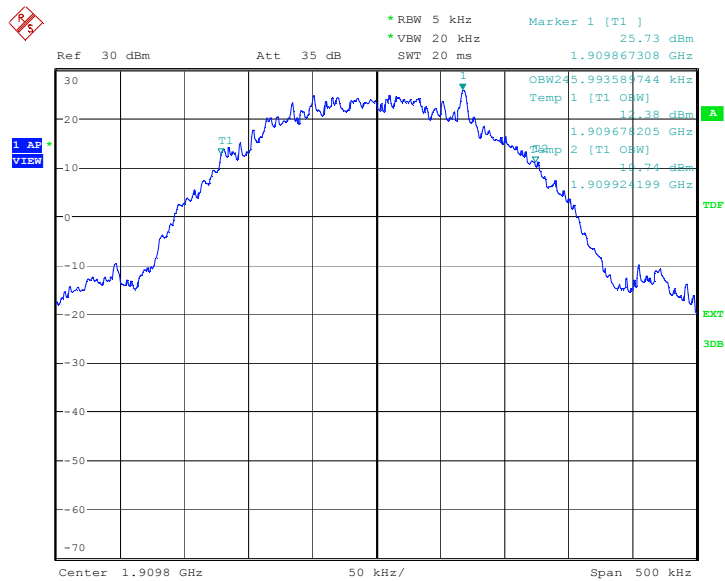


Date: 14.MAR.2016 16:57:32

### GPRS 1900(99% BW)

| Frequency(MHz) | Occupied Bandwidth (99% BW)( kHz) |
|----------------|-----------------------------------|
| 1850.2         | 245.192                           |
| 1880.0         | 244.391                           |
| 1909.8         | 245.192                           |


### GPRS 1900

#### Channel 512-Occupied Bandwidth (99% BW)

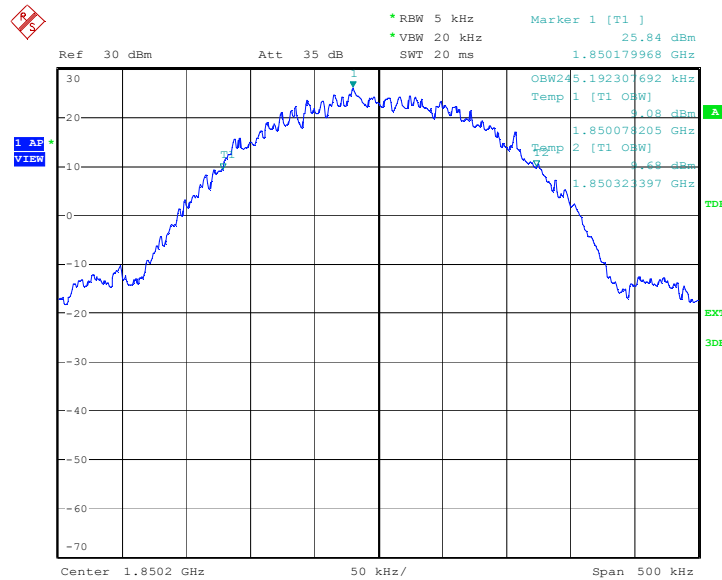


Date: 14.MAR.2016 17:29:17

### Channel 661-Occupied Bandwidth (99% BW)

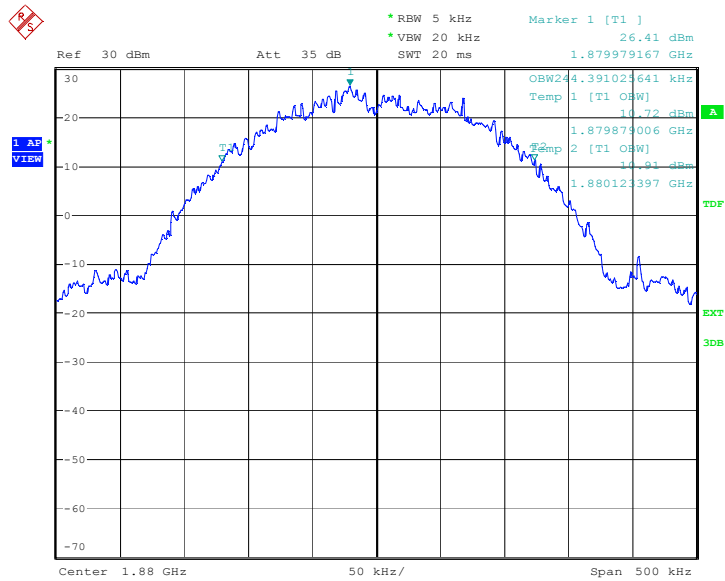

Date: 14.MAR.2016 17:29:49

### Channel 810-Occupied Bandwidth (99% BW)

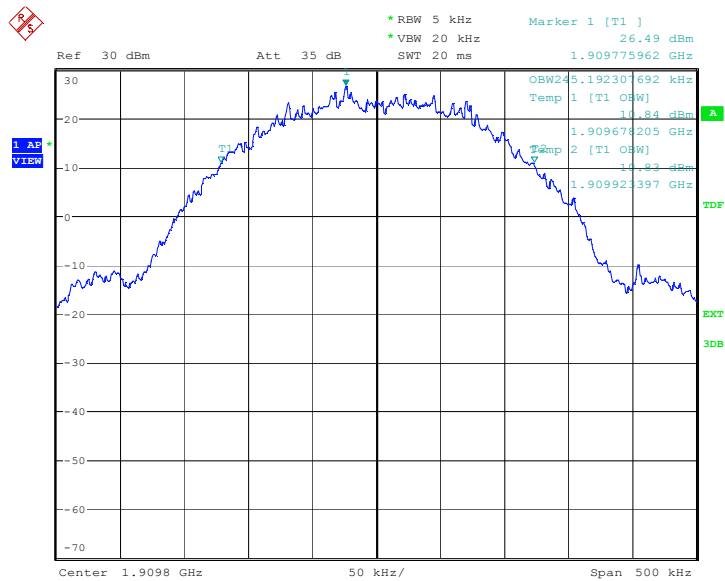


Date: 14.MAR.2016 17:30:21

### EGPRS 1900-8PSK(99% BW)

| Frequency(MHz) | Occupied Bandwidth (99% BW)( kHz) |
|----------------|-----------------------------------|
| 1850.2         | 242.788                           |
| 1880.0         | 245.994                           |
| 1909.8         | 244.391                           |


### EGPRS 1900-8PSK

#### Channel 512-Occupied Bandwidth (99% BW)

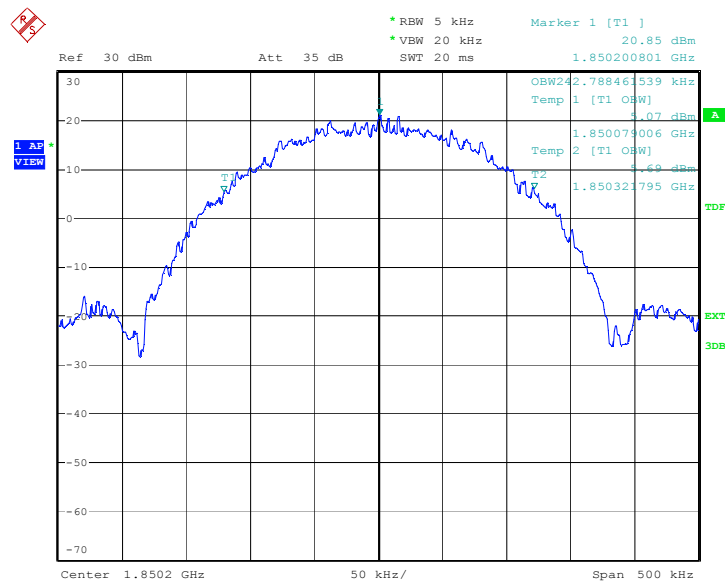


Date: 14.MAR.2016 17:57:25

### Channel 661-Occupied Bandwidth (99% BW)

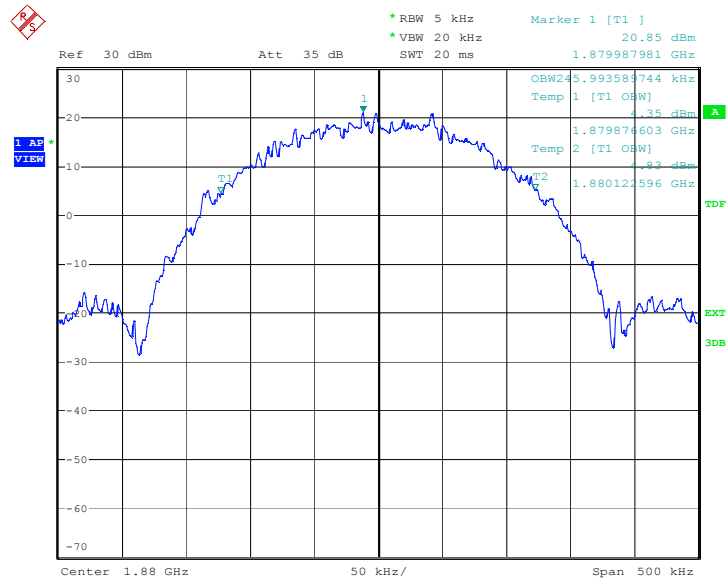

Date: 14.MAR.2016 17:57:57

### Channel 810-Occupied Bandwidth (99% BW)

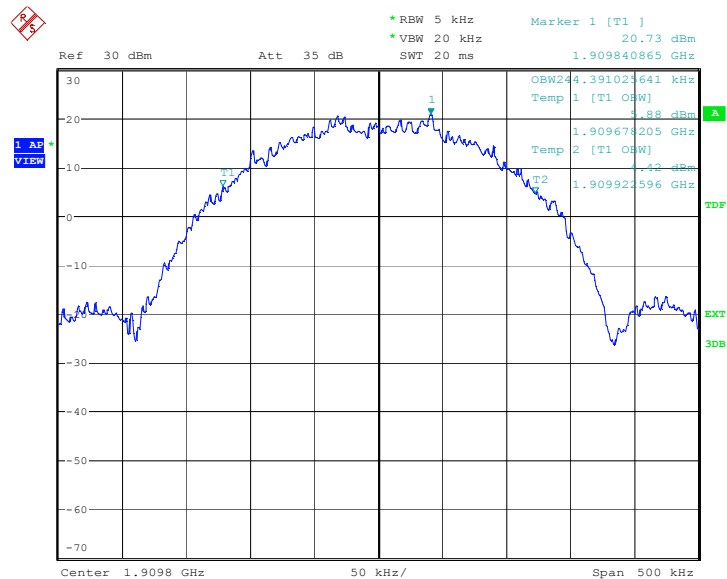

Date: 14.MAR.2016 17:58:30

## A.5 EMISSION BANDWIDTH

### Reference

FCC: CFR Part 22.917(b), 24.238(a)

### A.5.1 Emission Bandwidth Results


The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

### GSM 850(EMISSION BW)

| Frequency(MHz) | Emission Bandwidth ( kHz) |
|----------------|---------------------------|
| 824.2          | 314.10                    |
| 836.6          | 314.10                    |
| 848.8          | 317.31                    |


### GSM 850

### Channel 128-Emission Bandwidth

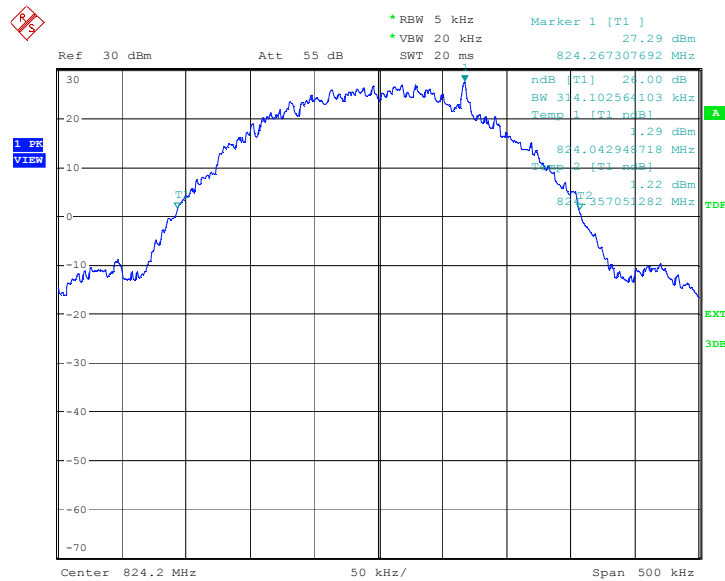


Date: 18.APR.2016 23:03:57

### Channel 190-Emission Bandwidth

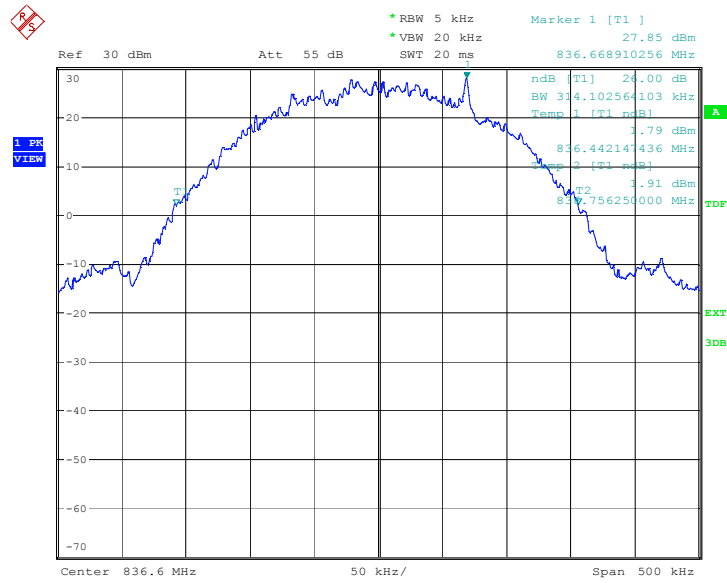

Date: 18.APR.2016 23:05:05

### Channel 251-Emission Bandwidth

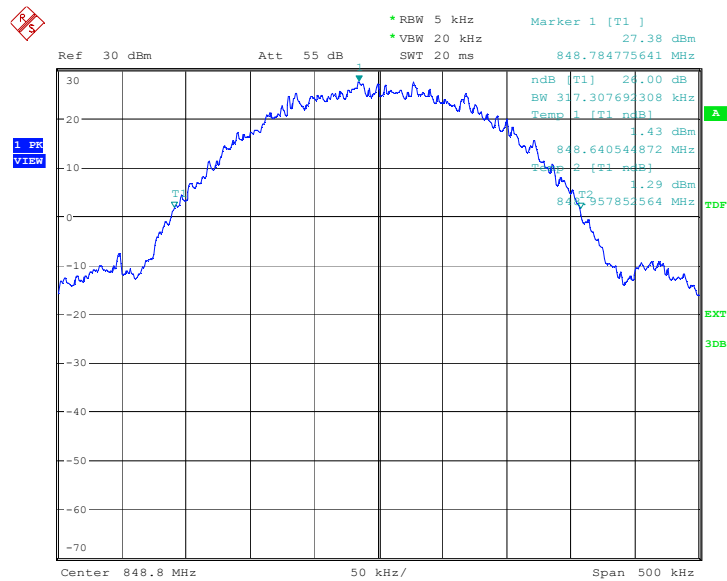


Date: 18.APR.2016 23:06:12

### GPRS 850(EMISSION BW)

| Frequency(MHz) | Emission Bandwidth ( kHz) |
|----------------|---------------------------|
| 824.2          | 317.31                    |
| 836.6          | 313.30                    |
| 848.8          | 318.11                    |


### GPRS 850

#### Channel 128-Emission Bandwidth

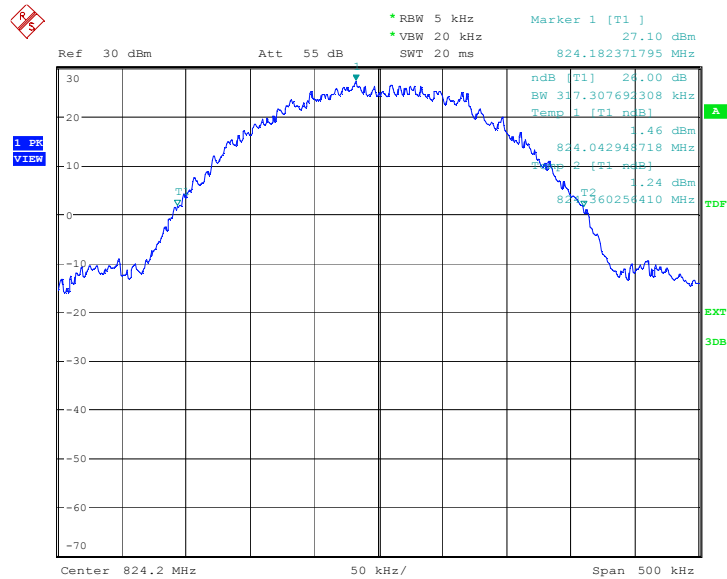


Date: 18.APR.2016 23:24:27

### Channel 190-Emission Bandwidth

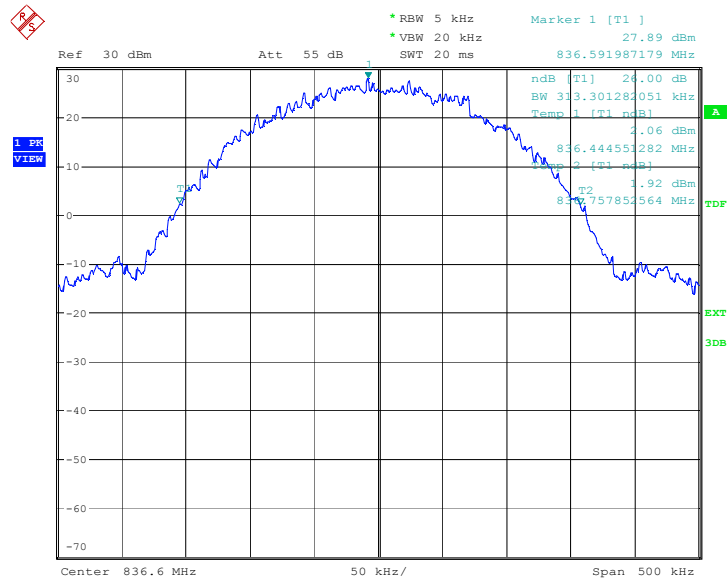

### Channel 251-Emission Bandwidth

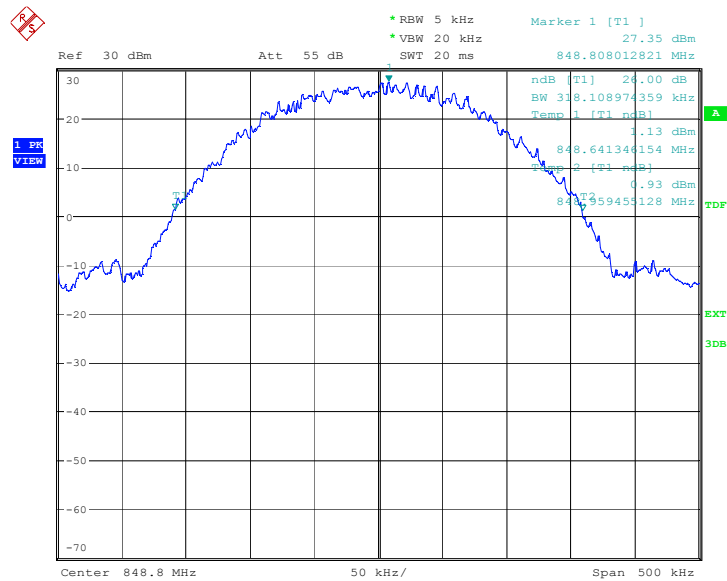


### EGPRS 850-8PSK(EMISSION BW)

| Frequency(MHz) | Emission Bandwidth ( kHz) |
|----------------|---------------------------|
| 824.2          | 310.10                    |
| 836.6          | 310.10                    |
| 848.8          | 310.10                    |


### EGPRS 850-8PSK

#### Channel 128-Emission Bandwidth

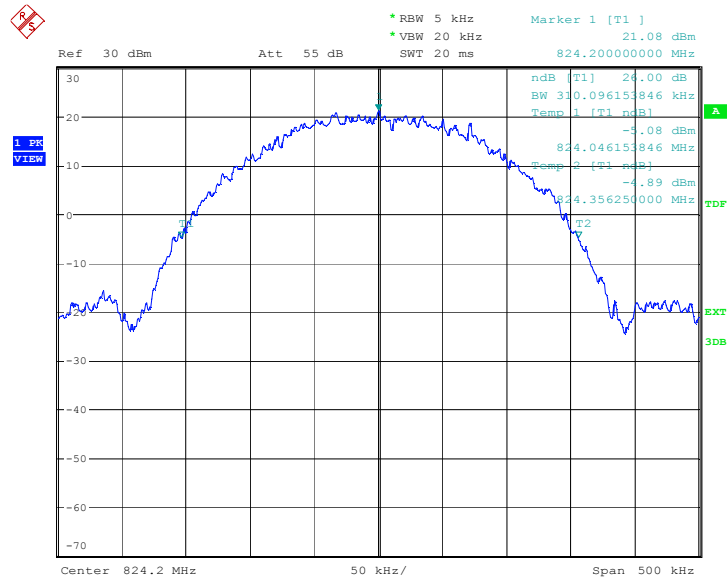


Date: 18.APR.2016 23:46:31

### Channel 190-Emission Bandwidth

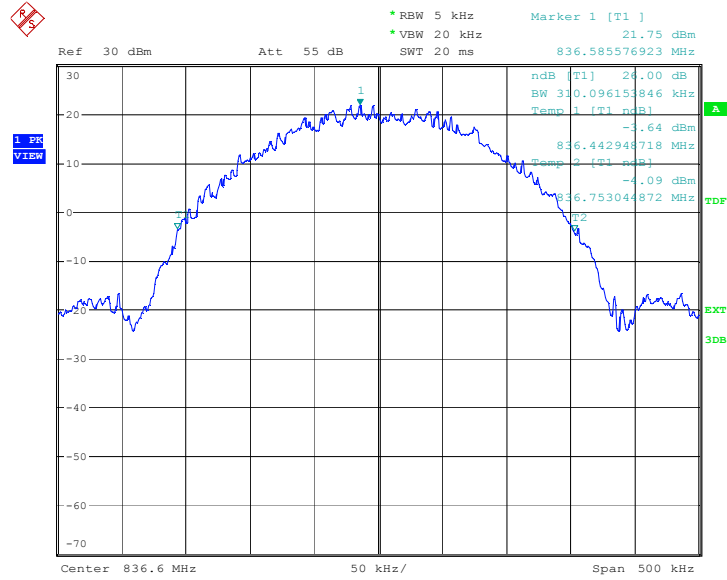

Date: 18.APR.2016 23:47:38

### Channel 251-Emission Bandwidth

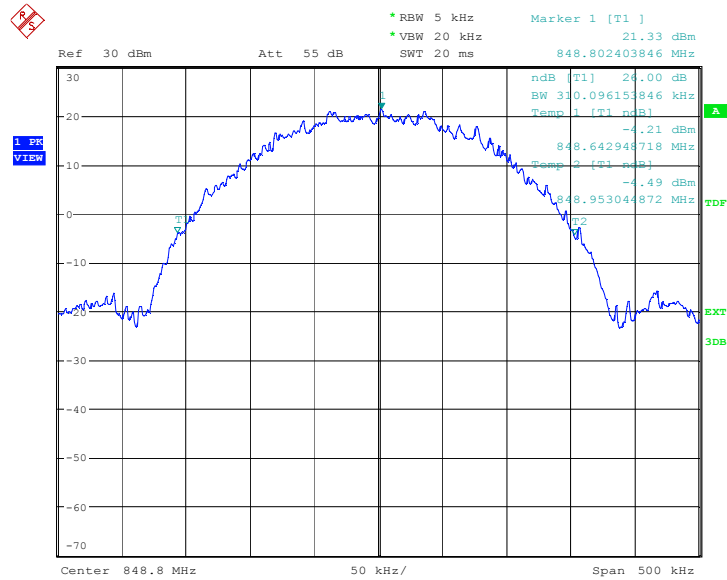


Date: 18.APR.2016 23:48:45

### PCS 1900(EMISSION BW)

| Frequency(MHz) | Emission Bandwidth ( kHz) |
|----------------|---------------------------|
| 1850.2         | 311.70                    |
| 1880.0         | 312.50                    |
| 1909.8         | 317.31                    |


### PCS 1900

#### Channel 512-Emission Bandwidth

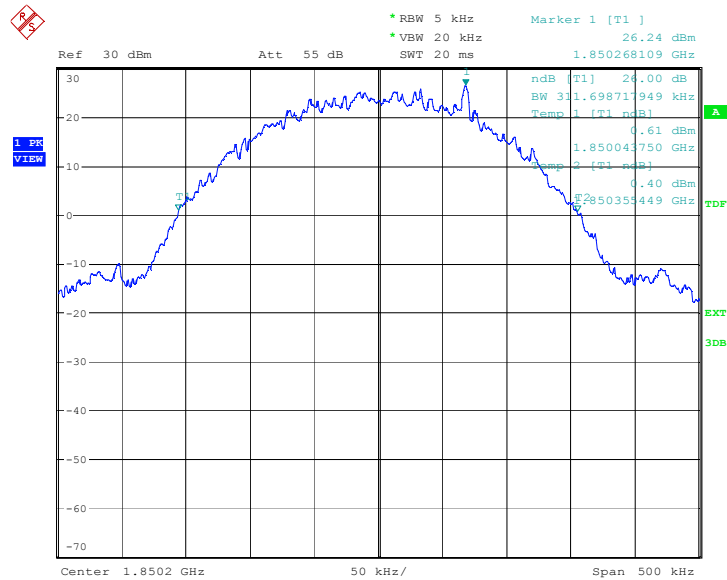


Date: 18.APR.2016 23:12:31

### Channel 661-Emission Bandwidth

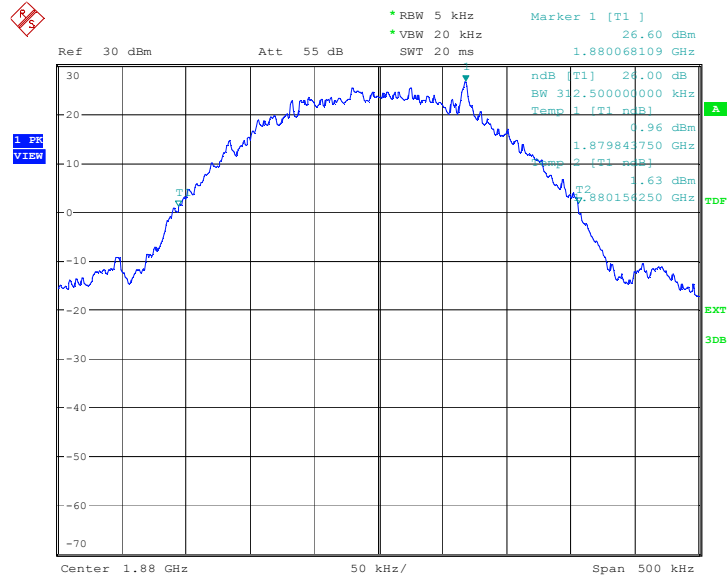

Date: 18.APR.2016 23:13:38

### Channel 810-Emission Bandwidth

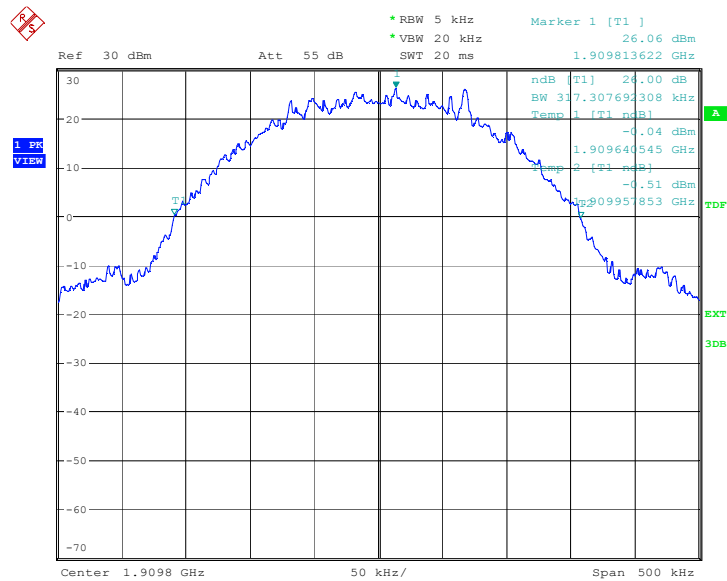


Date: 18.APR.2016 23:14:46

### GPRS 1900(EMISSION BW)

| Frequency(MHz) | Emission Bandwidth ( kHz) |
|----------------|---------------------------|
| 1850.2         | 317.31                    |
| 1880.0         | 316.51                    |
| 1909.8         | 317.31                    |


### GPRS 1900

#### Channel 512-Emission Bandwidth

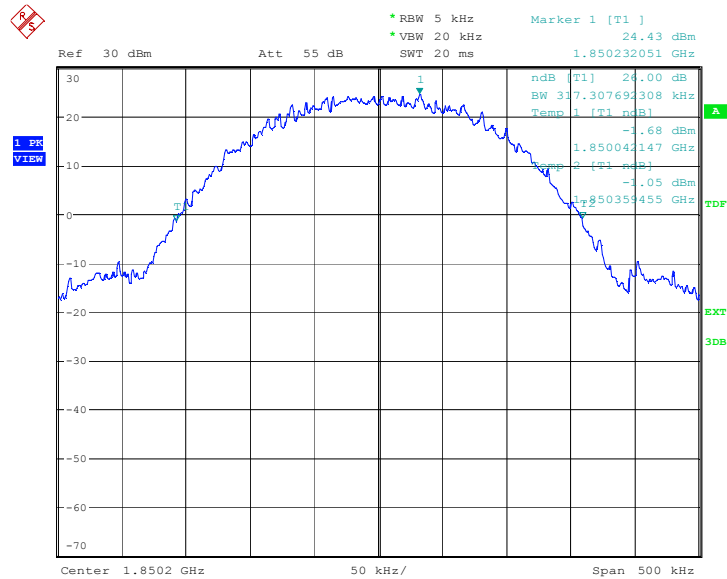


Date: 18.APR.2016 23:38:51

### Channel 661-Emission Bandwidth

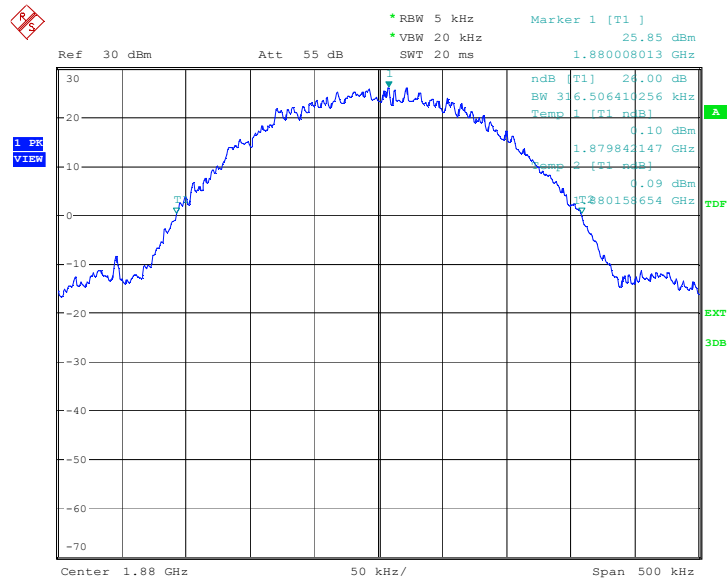

Date: 18.APR.2016 23:39:58

### Channel 810-Emission Bandwidth

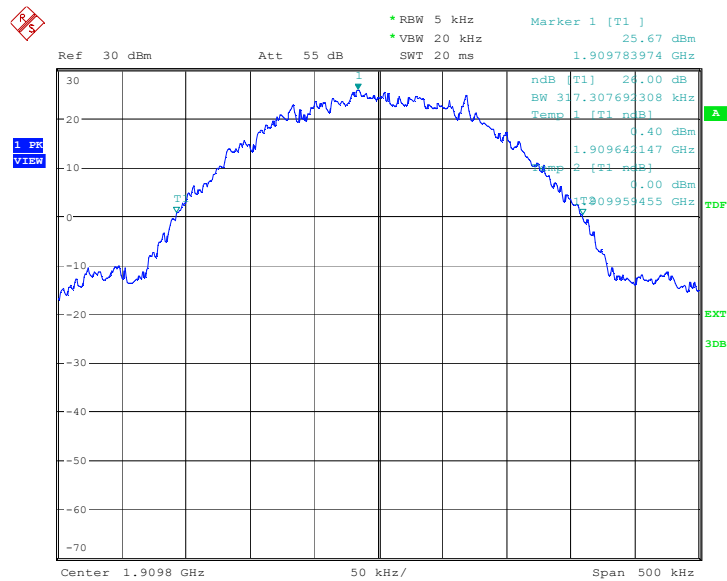


Date: 18.APR.2016 23:41:06

### EGPRS 1900-8PSK(EMISSION BW)

| Frequency(MHz) | Emission Bandwidth ( kHz) |
|----------------|---------------------------|
| 1850.2         | 310.90                    |
| 1880.0         | 312.50                    |
| 1909.8         | 308.49                    |


### EGPRS 1900-8PSK

#### Channel 512-Emission Bandwidth

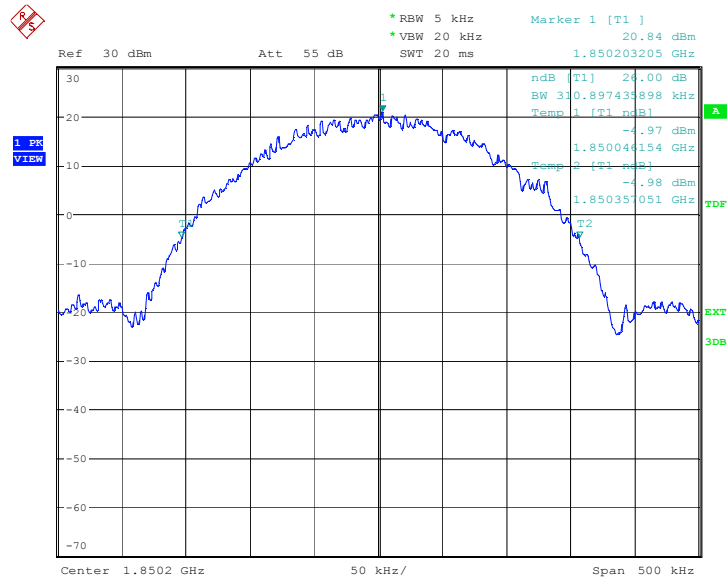


Date: 18.APR.2016 23:53:26

### Channel 661-Emission Bandwidth

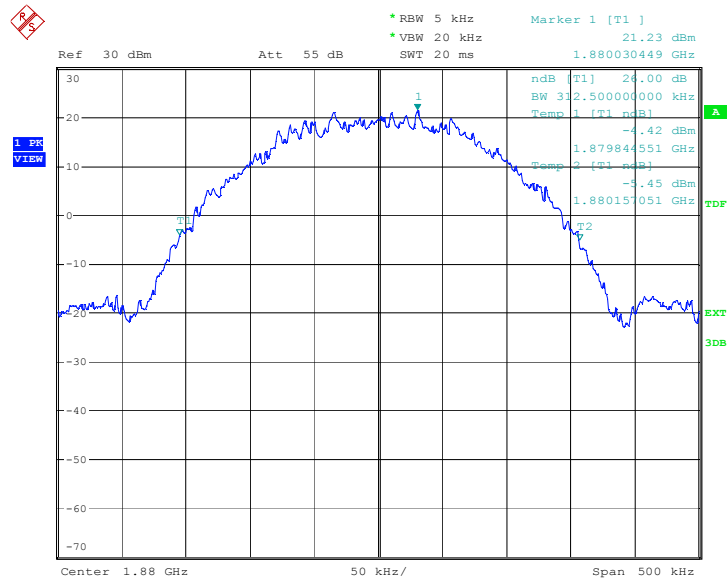

Date: 18.APR.2016 23:54:34

### Channel 810-Emission Bandwidth

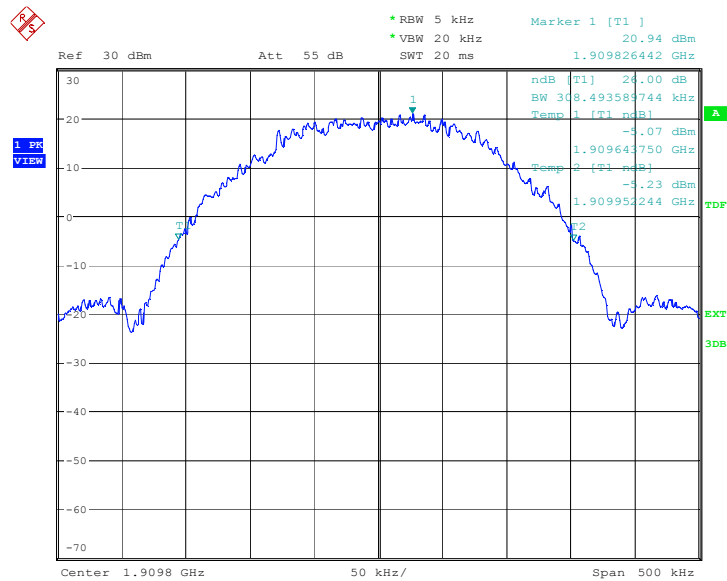

Date: 18.APR.2016 23:55:41

## A.6 BAND EDGE COMPLIANCE

### Reference

FCC: CFR Part 22.917(b), 24.238(a)


### Measurement limit

On any frequency outside frequency band of the US Cellular/PCS spectrum, the power of any emission shall be attenuated below the transmitter power (P, in Watts) by at least  $43+10\log(P)$  dB. For all power levels +30 dBm to 0 dBm, this becomes a constant specification limit of -13 dBm.

According to KDB 971168 v02r02 6.0, a relaxation of the reference bandwidth is often provided for measurements within a specified frequency range at the edge of the authorized frequency block/band. This is often implemented by permitting the use of a narrower RBW (typically limited to a minimum RBW of 1% of the OBW) for measuring the out-of-band emissions without a requirement to integrate the result over the full reference bandwidth.


### GSM 850

#### LOW BAND EDGE BLOCK-A (GSM850)-Channel 128

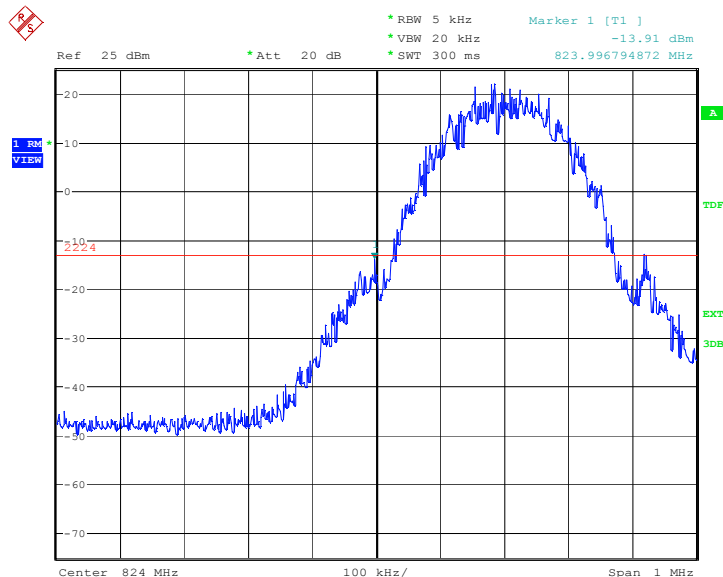


Date: 14.MAR.2016 16:38:07

# HIGH BAND EDGE BLOCK-C (GSM850) –Channel 251

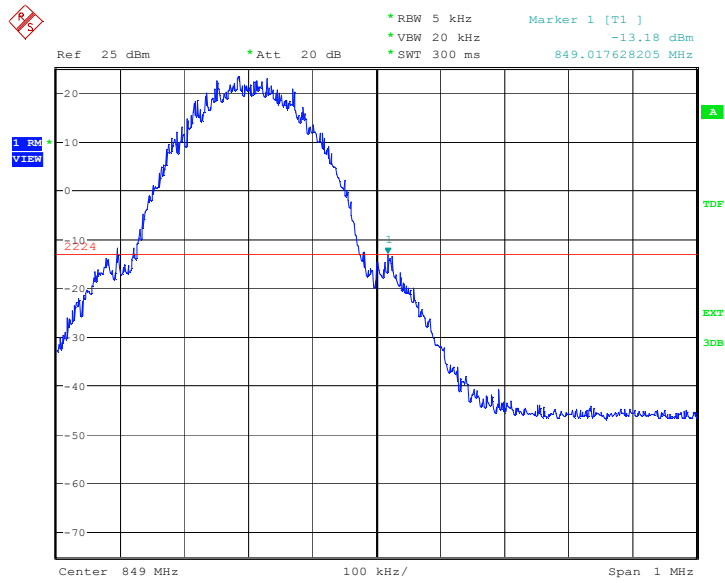


Date: 14.MAR.2016 20:18:01

## GPRS 850 LOW BAND EDGE BLOCK-A (GSM850)-Channel 128

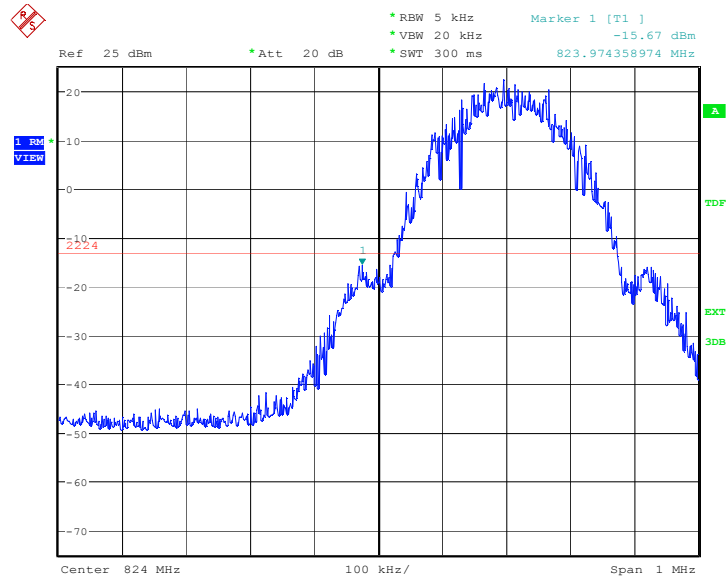


Date: 14.MAR.2016 17:18:15

## HIGH BAND EDGE BLOCK-C (GSM850) –Channel 251

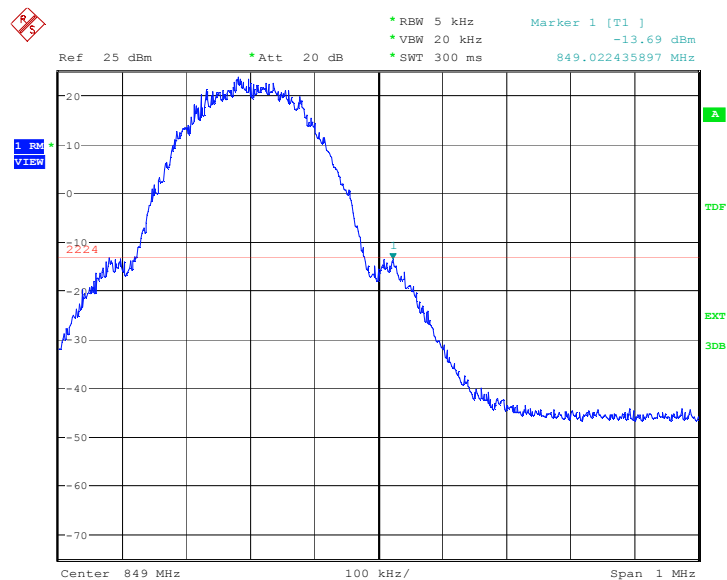


Date: 14.MAR.2016 17:20:19

## EGPRS 850-8PSK LOW BAND EDGE BLOCK-A (GSM850)-Channel 128

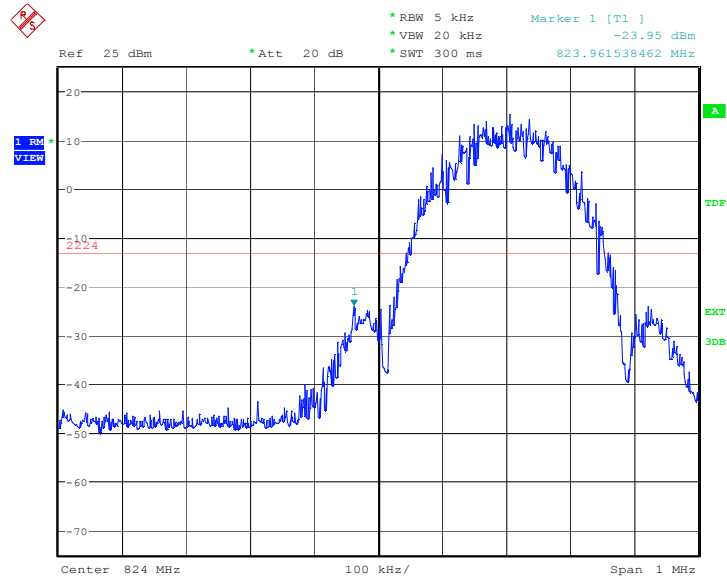


Date: 14.MAR.2016 17:38:51

## HIGH BAND EDGE BLOCK-C (GSM850) –Channel 251

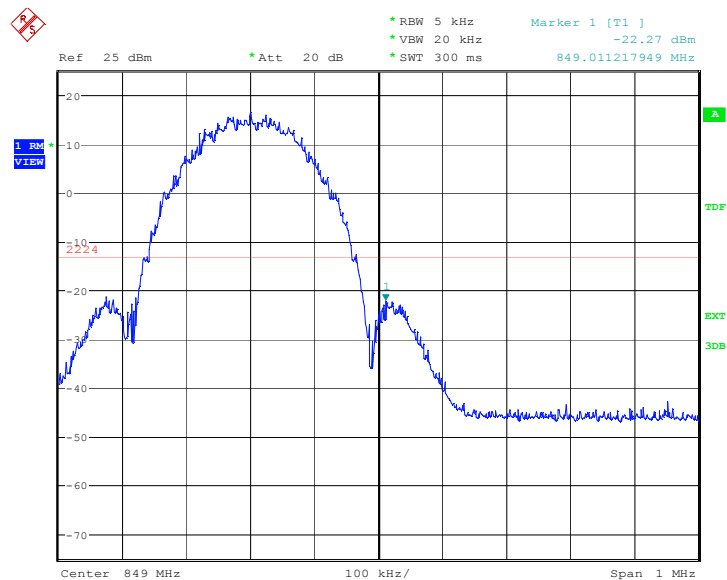


Date: 14.MAR.2016 17:40:55

## PCS 1900 LOW BAND EDGE BLOCK-A (PCS-1900)-Channel 512

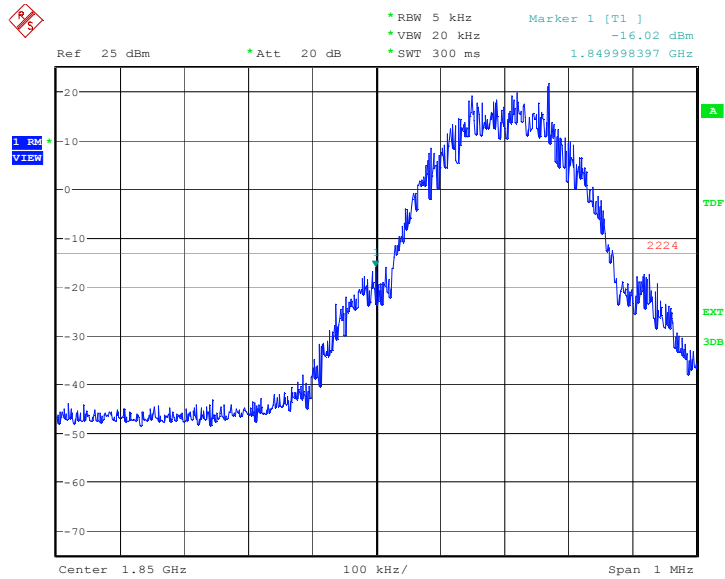


Date: 21.MAR.2016 17:51:52

## HIGH BAND EDGE BLOCK-C (PCS-1900) –Channel 810

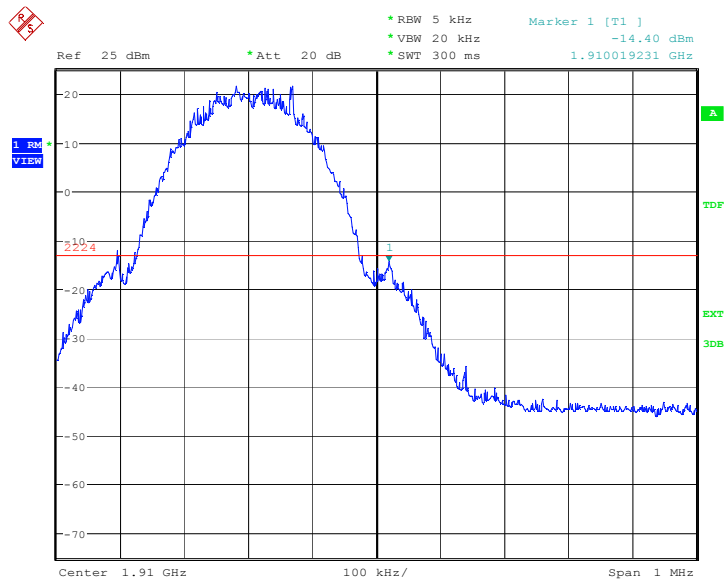


Date: 14.MAR.2016 17:01:23

## GPRS 1900 LOW BAND EDGE BLOCK-A (PCS-1900)-Channel 512

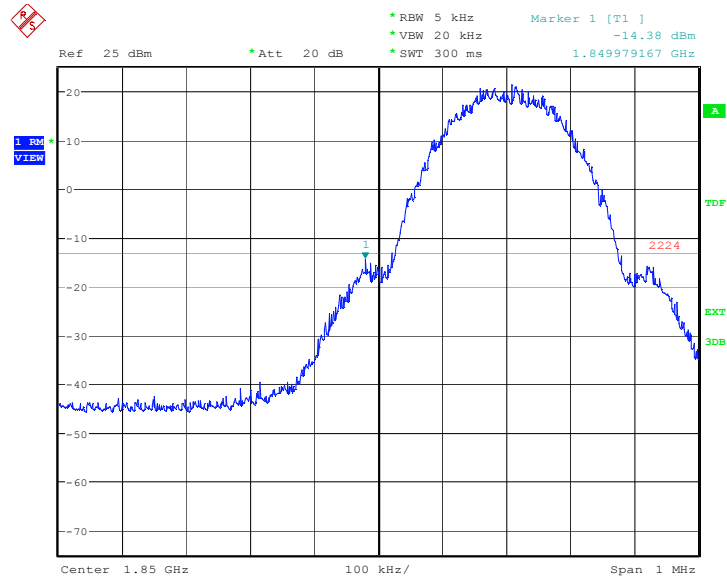


Date: 14.MAR.2016 19:41:43

## HIGH BAND EDGE BLOCK-C (PCS-1900) –Channel 810

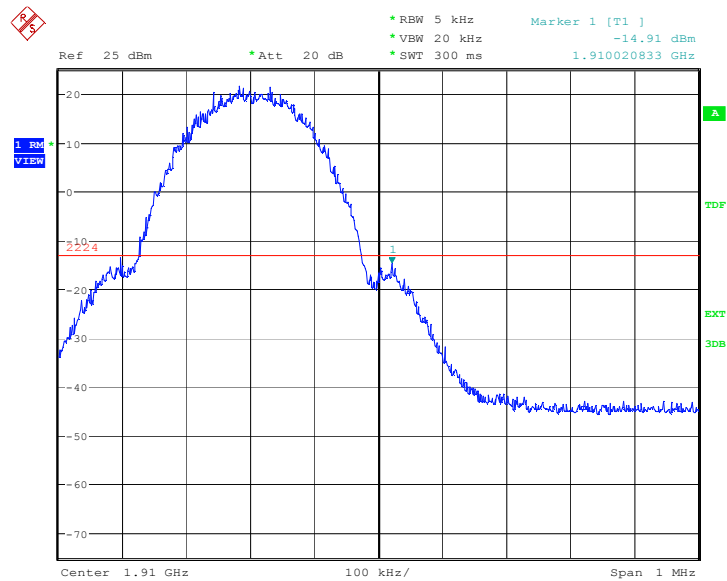


Date: 14.MAR.2016 17:34:12

## EGPRS 1900-8PSK LOW BAND EDGE BLOCK-A (PCS-1900)-Channel 512

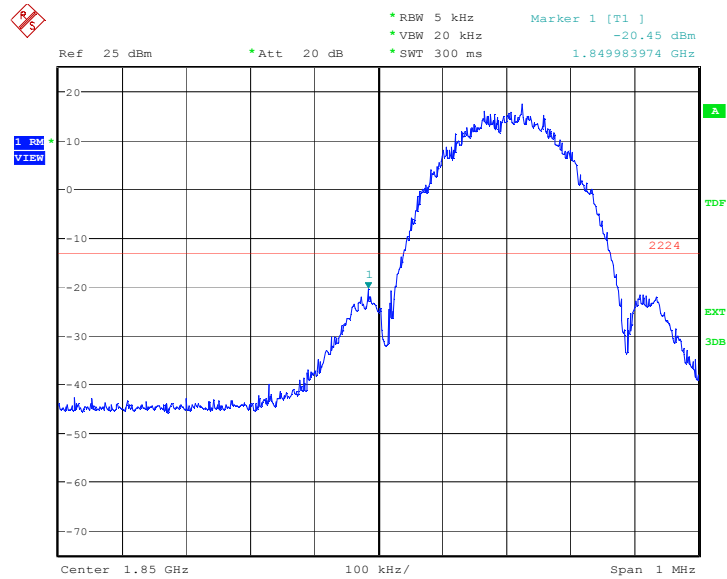

Date: 14.MAR.2016 19:29:54

## HIGH BAND EDGE BLOCK-C (PCS-1900) –Channel 810

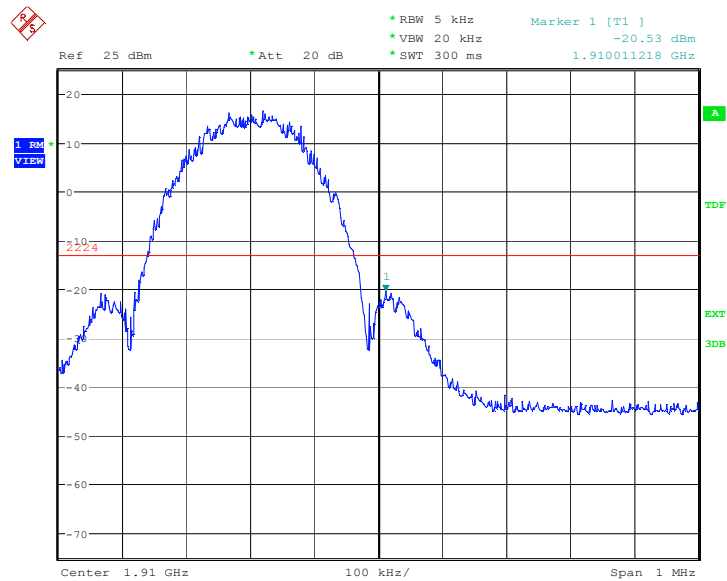

Date: 14.MAR.2016 18:02:20

## **A.7 CONDUCTED SPURIOUS EMISSION**

### **Reference**

FCC: CFR Part 2.1057, 22.917, 24.238.

### **A.7.1 Measurement Method**

The following steps outline the procedure used to measure the conducted emissions from the EUT.

1. Determine frequency range for measurements: From CFR 2.1057 the spectrum should be investigated from the lowest radio frequency generated in the equipment up to at least the 10th harmonic of the carrier frequency.
2. Determine EUT transmit frequencies: below outlines the band edge frequencies pertinent to conducted emissions testing.
3. According to KDB 971168 v02r02 6.0, the applicable rule part specifies the reference bandwidth for measuring unwanted emission levels (typically, 100 kHz if the authorized frequency band/block is at or below 1 GHz and 1 MHz if the authorized frequency band/block is above 1 GHz)

#### **GSM850 Transmitter**

| Channel | Frequency (MHz) |
|---------|-----------------|
| 128     | 824.2           |
| 190     | 836.6           |
| 251     | 848.8           |

#### **PCS1900 Transmitter**

| Channel | Frequency (MHz) |
|---------|-----------------|
| 512     | 1850.2          |
| 661     | 1880.0          |
| 810     | 1909.8          |

### **A. 7.2 Measurement Limit**

Part 24.238 and Part 22.917 specify that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.

The specification that emissions shall be attenuated below the transmitter power (P) by at least  $43 + 10 \log(P)$  dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.


### A.7.3 Measurement result

#### GSM850

#### Channel 128: 30MHz – 1GHz

Spurious emission limit –13dBm.


**NOTE:** peak above the limit line is the carrier frequency.

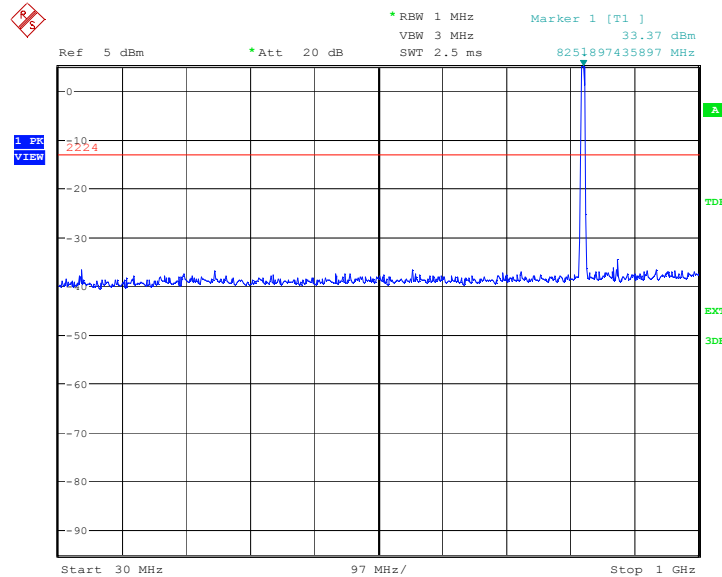

Date: 14.MAR.2016 16:42:39


#### Channel 128: 1GHz – 2.5GHz

Spurious emission limit –13dBm.

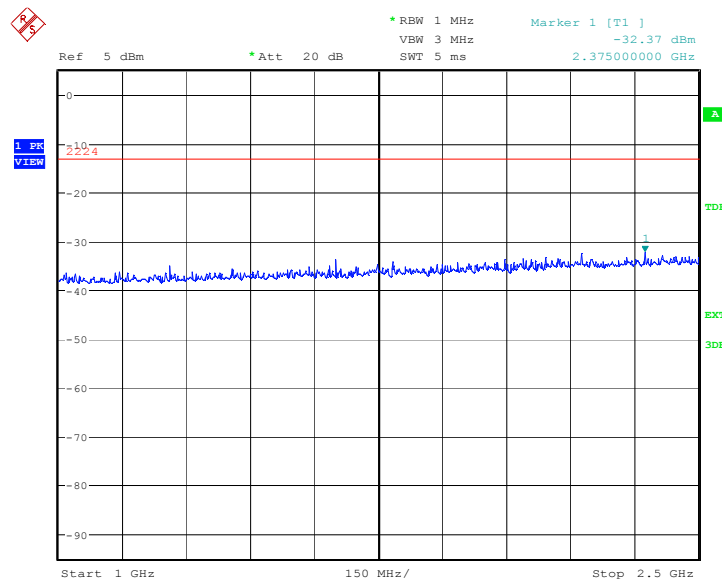


Date: 14.MAR.2016 16:43:08

**Channel 128: 2.5GHz – 7.5GHz**  
Spurious emission limit –13dBm.

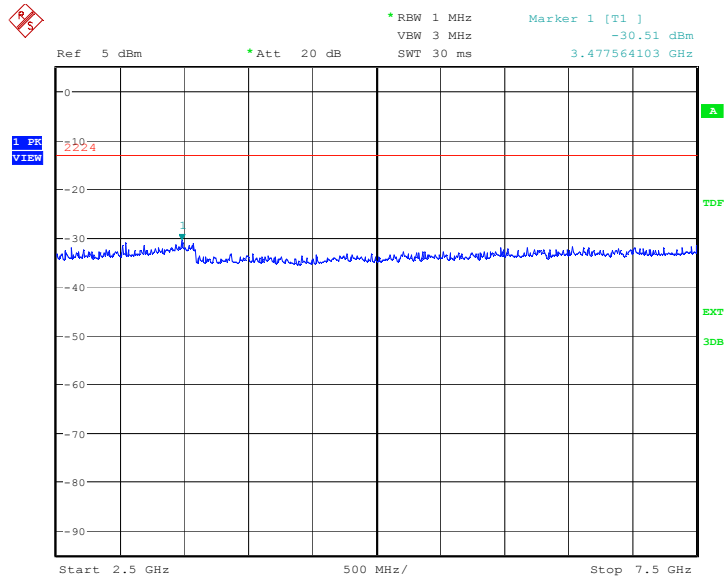

Date: 14.MAR.2016 16:43:36

**Channel 128: 7.5GHz –10GHz**  
Spurious emission limit –13dBm.

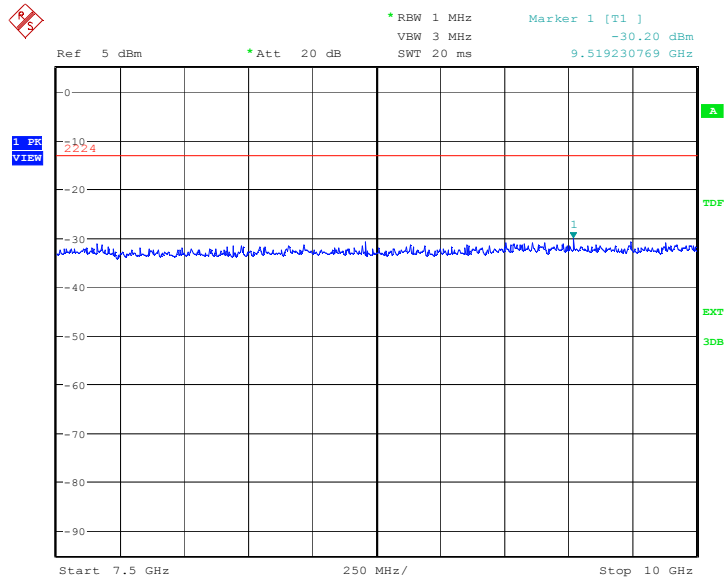


Date: 14.MAR.2016 16:44:04

### Channel 190: 30MHz – 1GHz

Spurious emission limit –13dBm


**NOTE: peak above the limit line is the carrier frequency.**

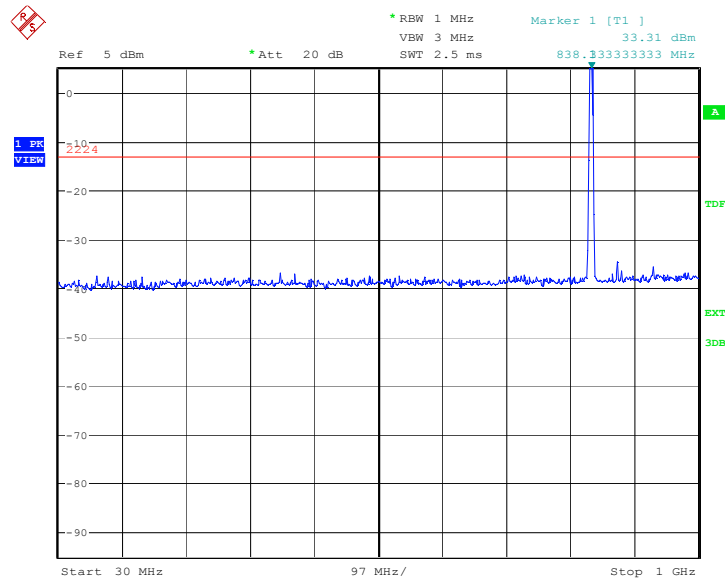

Date: 14.MAR.2016 16:44:33


### Channel 190: 1GHz –2.5GHz

Spurious emission limit –13dBm

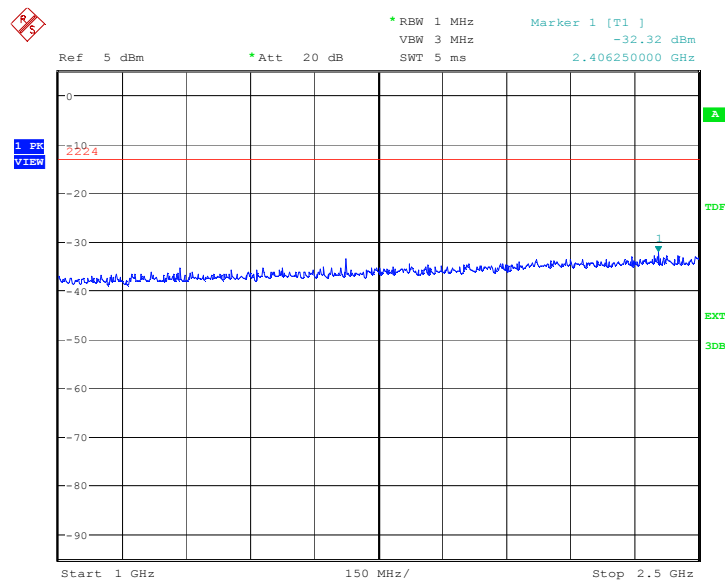


Date: 14.MAR.2016 16:45:02

**Channel 190: 2.5GHz –7.5GHz**  
Spurious emission limit –13dBm

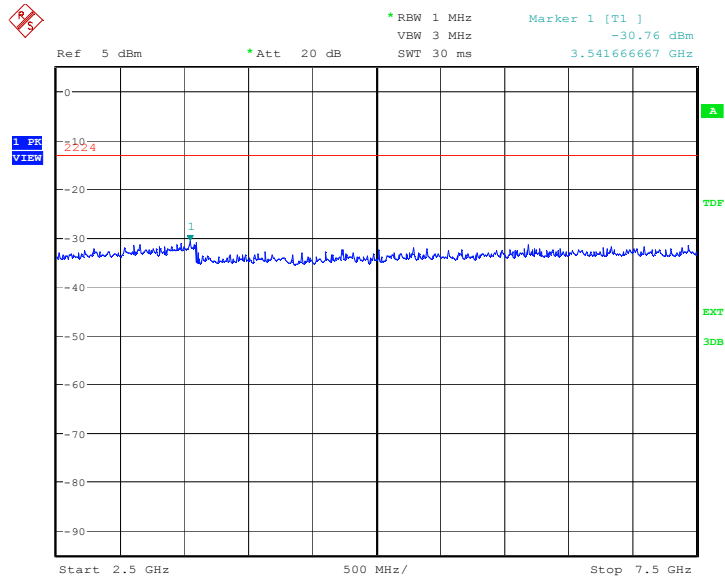

Date: 14.MAR.2016 16:45:30

**Channel 190: 7.5GHz –10GHz**  
Spurious emission limit –13dBm

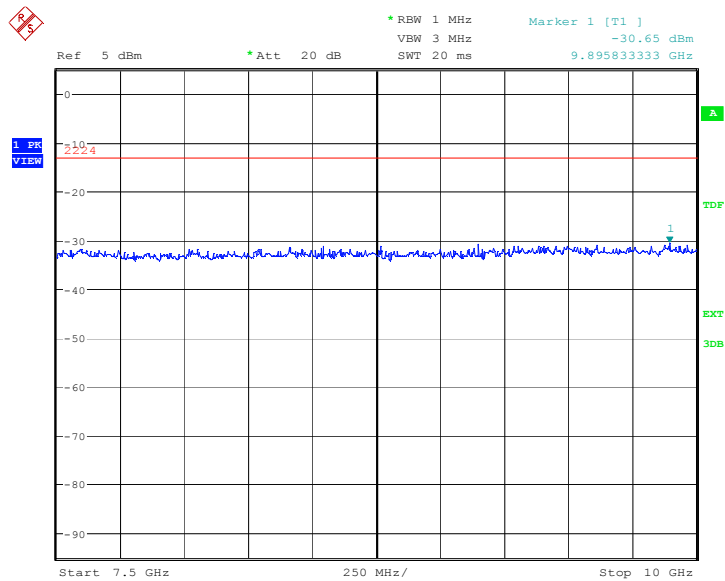


Date: 14.MAR.2016 16:45:58

### Channel 251: 30MHz – 1GHz

Spurious emission limit –13dBm.


**NOTE: peak above the limit line is the carrier frequency.**

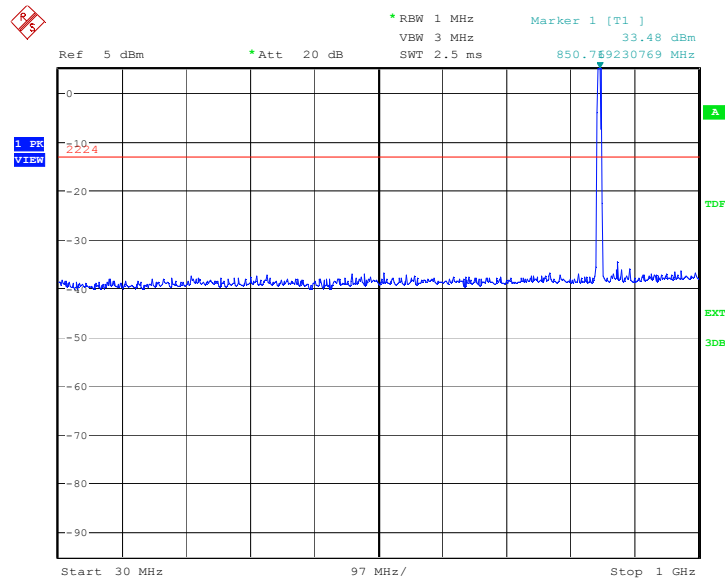

Date: 14.MAR.2016 16:46:27

### Channel 251: 1GHz – 2.5GHz


Spurious emission limit –13dBm.

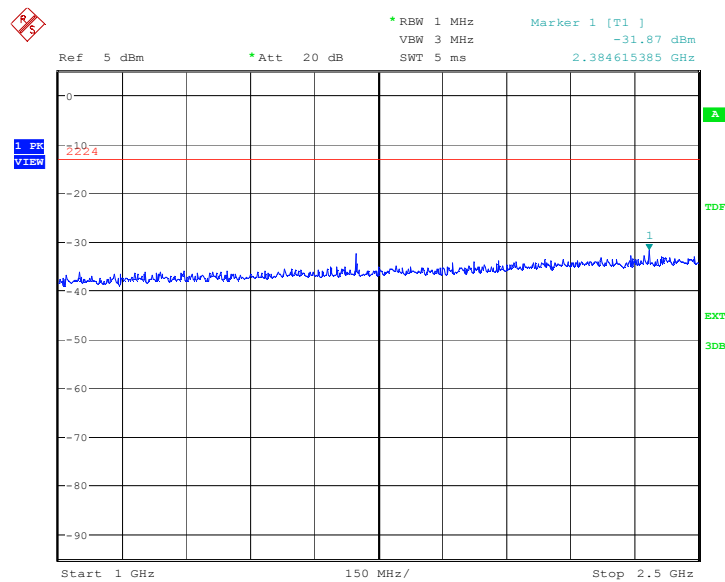

Date: 14.MAR.2016 16:46:56

### Channel 251: 2.5GHz – 7.5GHz


Spurious emission limit –13dBm.

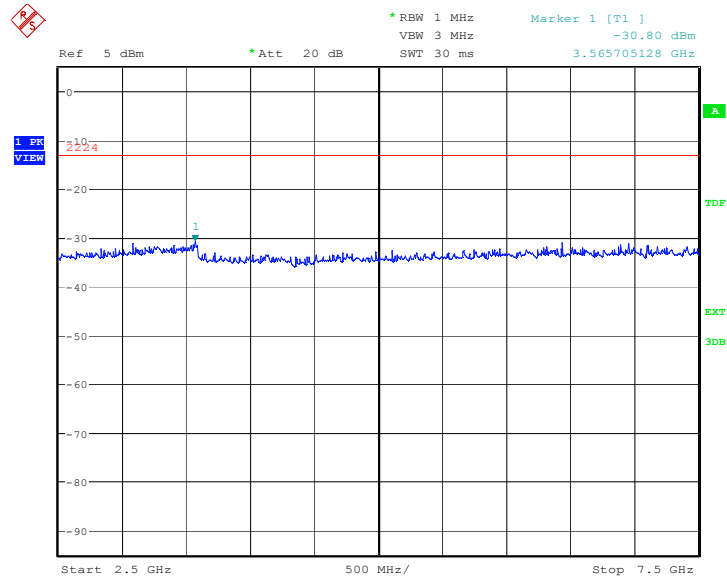

Date: 14.MAR.2016 16:47:24

### Channel 251: 7.5GHz – 10GHz

Spurious emission limit –13dBm.

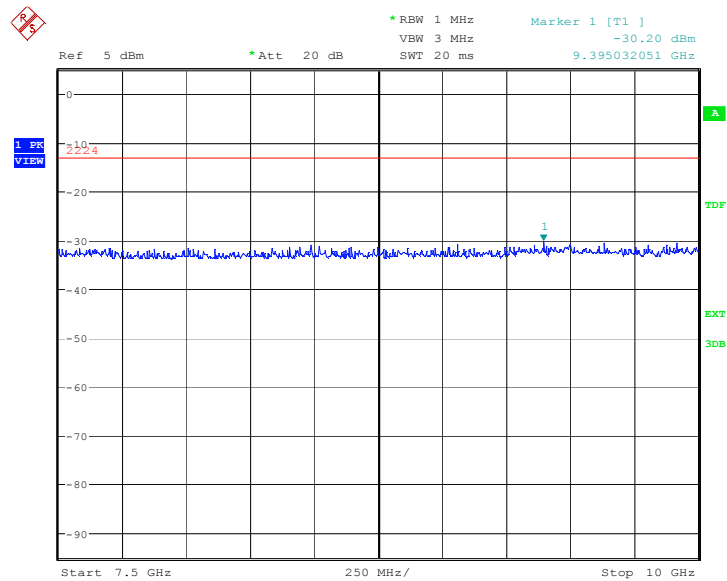


Date: 14.MAR.2016 16:47:53

### PCS1900

Channel 512: 30MHz – 1GHz

Spurious emission limit –13dBm.

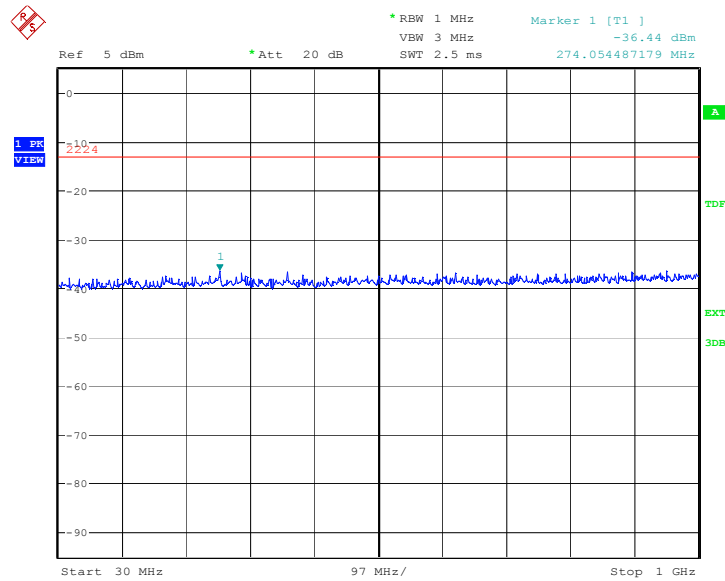


Date: 14.MAR.2016 17:03:49

Channel 512: 1GHz – 2.5GHz


Spurious emission limit –13dBm.

**NOTE: peak above the limit line is the carrier frequency.**

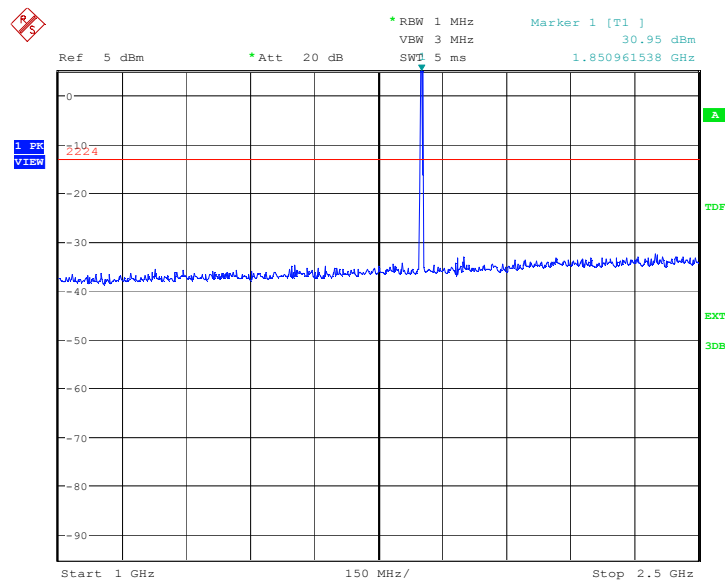


Date: 14.MAR.2016 17:04:17

**Channel 512: 2.5GHz – 7.5GHz**  
Spurious emission limit –13dBm.

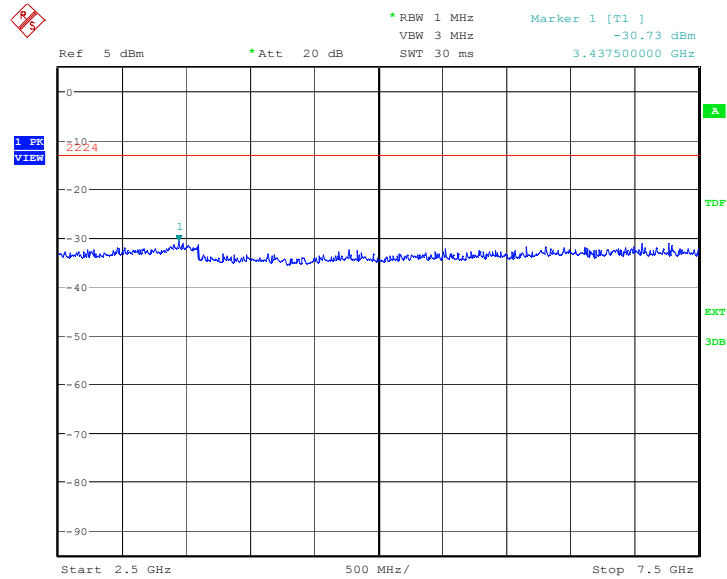

Date: 14.MAR.2016 17:04:45


**Channel 512: 7.5GHz –10GHz**  
Spurious emission limit –13dBm.

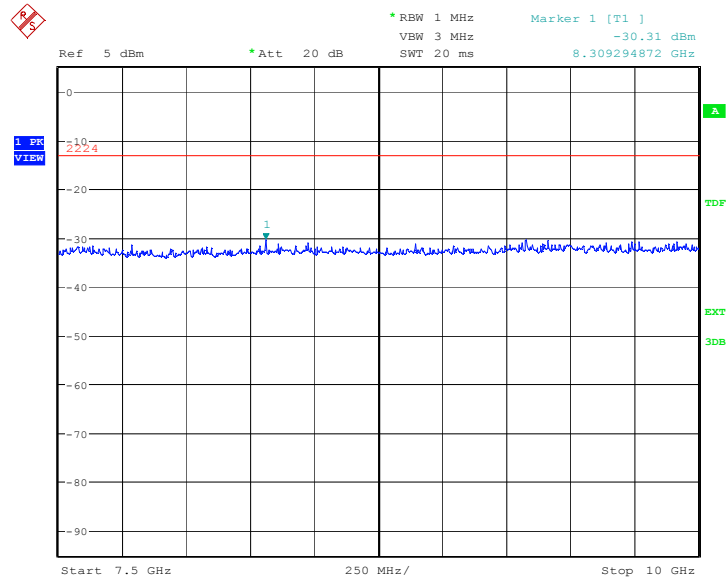

Date: 14.MAR.2016 17:05:13

### Channel 512: 10GHz –15GHz


Spurious emission limit –13dBm.

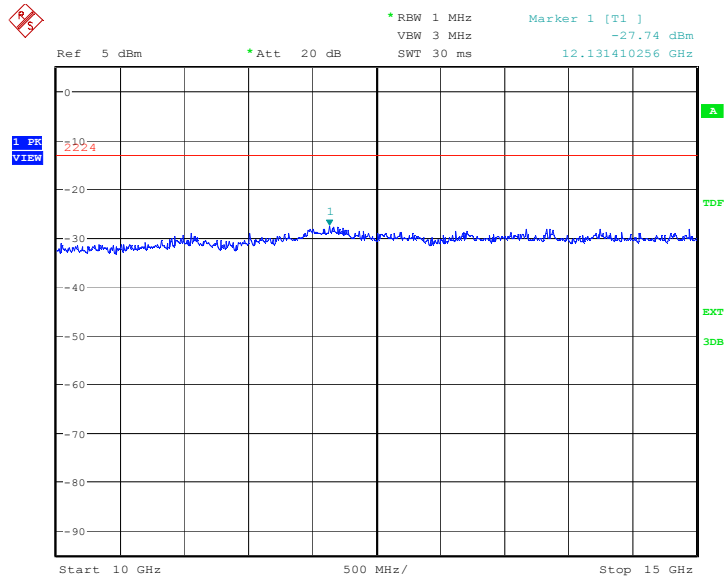

Date: 14.MAR.2016 17:05:41


### Channel 512: 15GHz –20GHz

Spurious emission limit –13dBm.

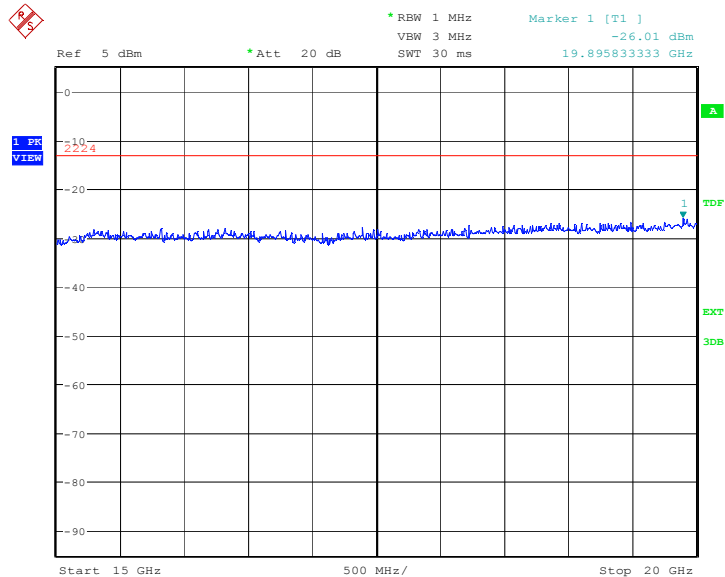

Date: 14.MAR.2016 17:06:09


**Channel 661: 30MHz – 1GHz**  
Spurious emission limit –13dBm

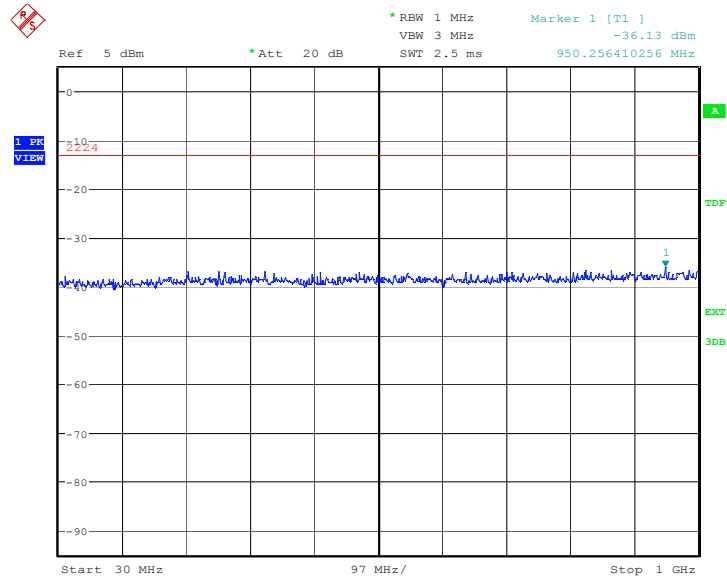

Date: 14.MAR.2016 17:06:38


**Channel 661: 1GHz –2.5GHz**  
Spurious emission limit –13dBm

**NOTE: peak above the limit line is the carrier frequency.**

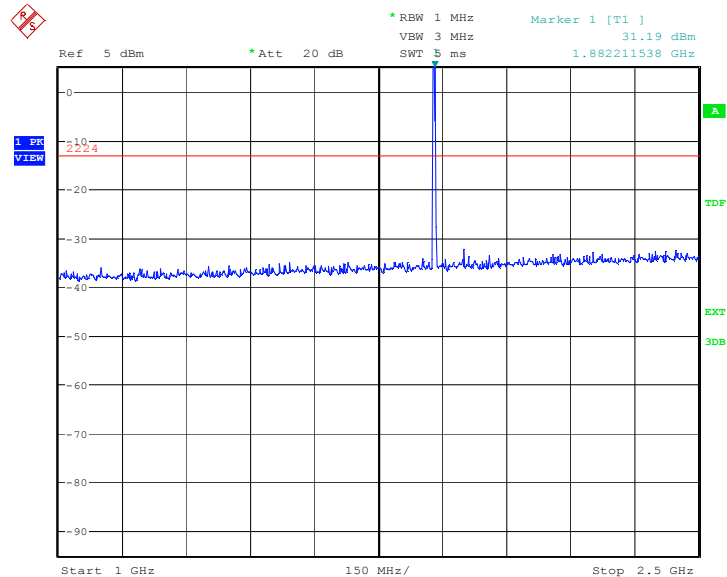


Date: 14.MAR.2016 17:07:06

**Channel 661: 2.5GHz –7.5GHz**  
Spurious emission limit –13dBm

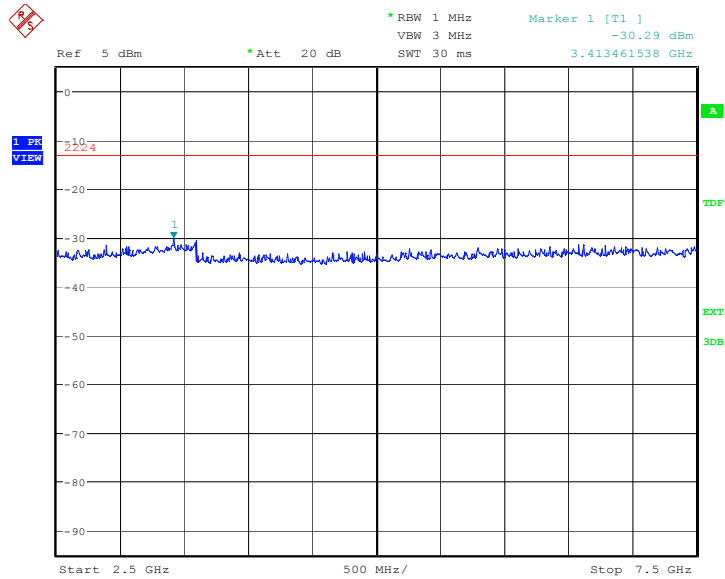

Date: 14.MAR.2016 17:07:34


**Channel 661: 7.5GHz –10GHz**  
Spurious emission limit –13dBm

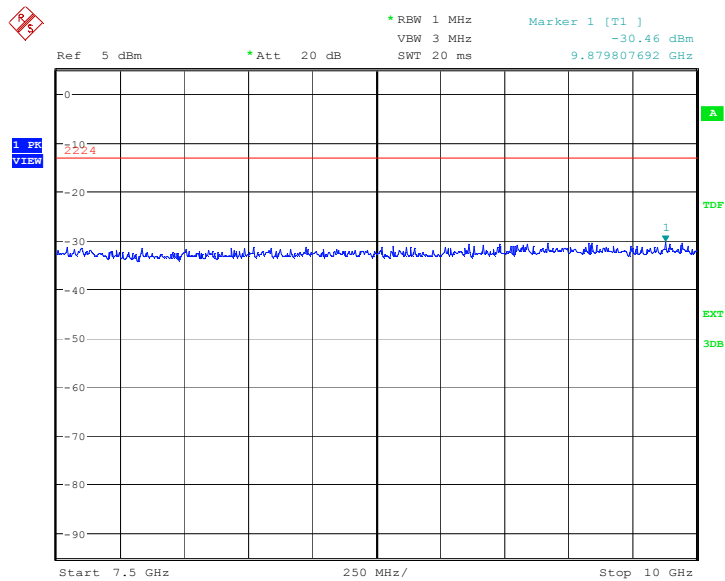

Date: 14.MAR.2016 17:08:02

### Channel 661: 10GHz –15GHz


Spurious emission limit –13dBm.

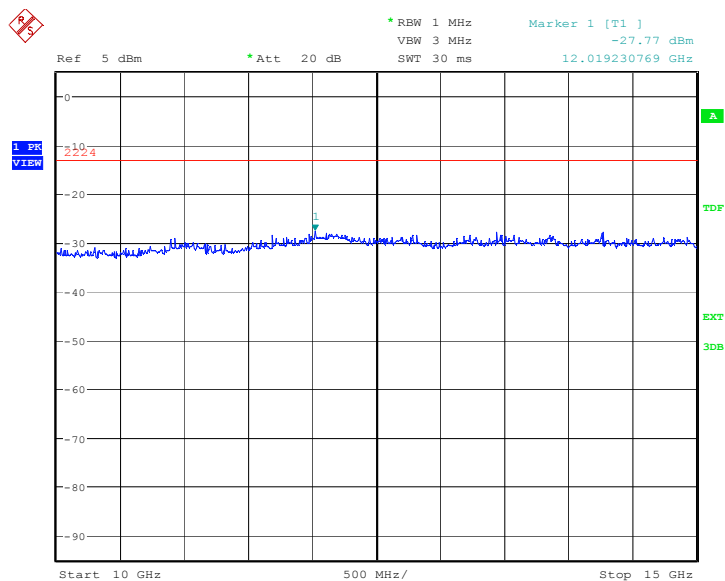

Date: 14.MAR.2016 17:08:31

### Channel 661: 15GHz –20GHz


Spurious emission limit –13dBm.

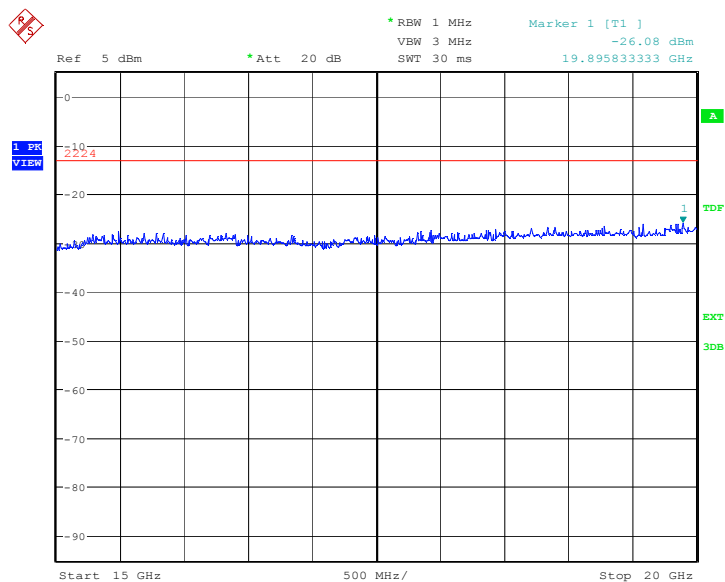

Date: 14.MAR.2016 17:08:59

### Channel 810: 30MHz – 1GHz

Spurious emission limit –13dBm.

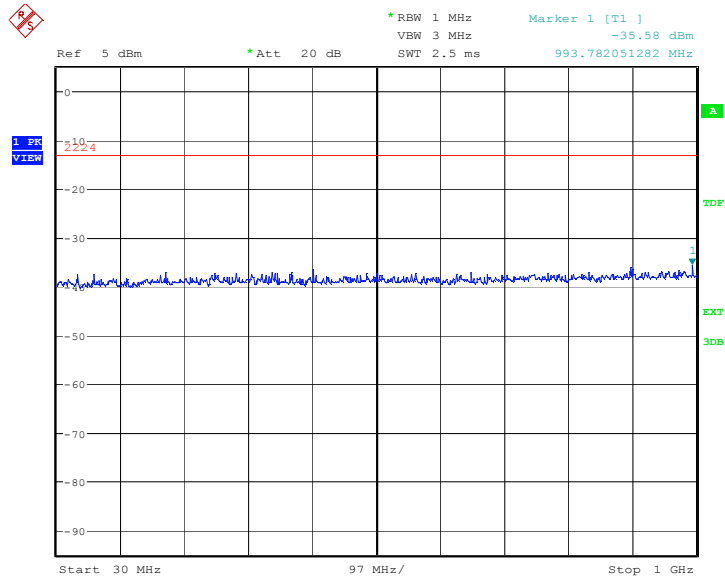


Date: 14.MAR.2016 17:09:27

### Channel 810: 1GHz – 2.5GHz

Spurious emission limit –13dBm.


**NOTE: peak above the limit line is the carrier frequency.**

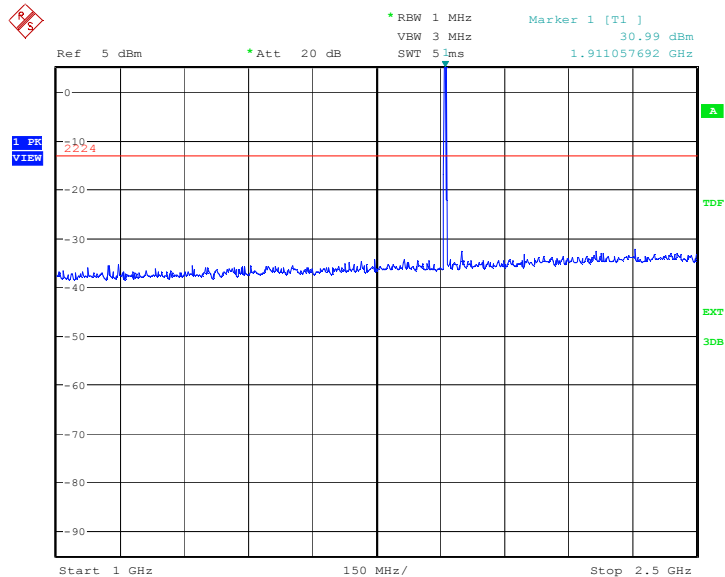

Date: 14.MAR.2016 17:09:56

### Channel 810: 2.5GHz – 7.5GHz


Spurious emission limit –13dBm.

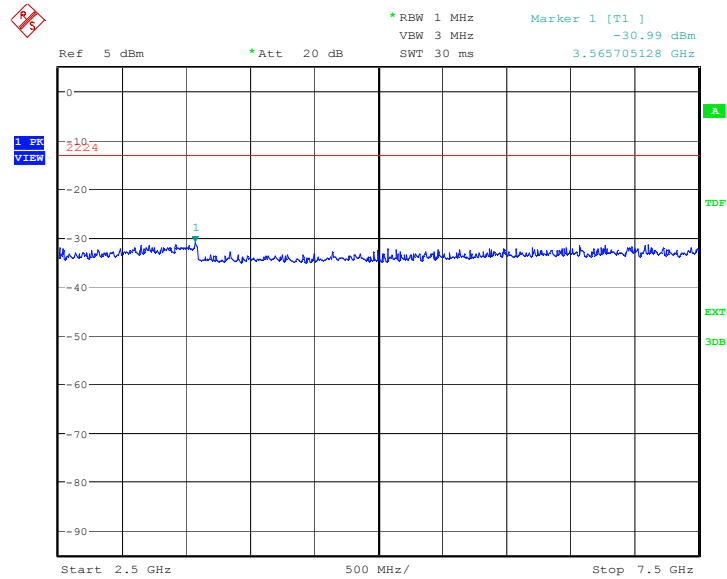

Date: 14.MAR.2016 17:10:24

### Channel 810: 7.5GHz – 10GHz


Spurious emission limit –13dBm.

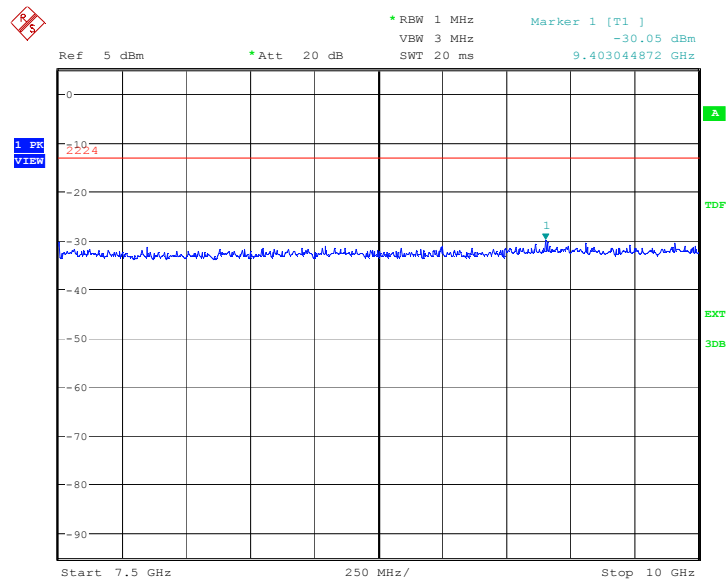

Date: 14.MAR.2016 17:10:52

### Channel 810: 10GHz –15GHz


Spurious emission limit –13dBm.

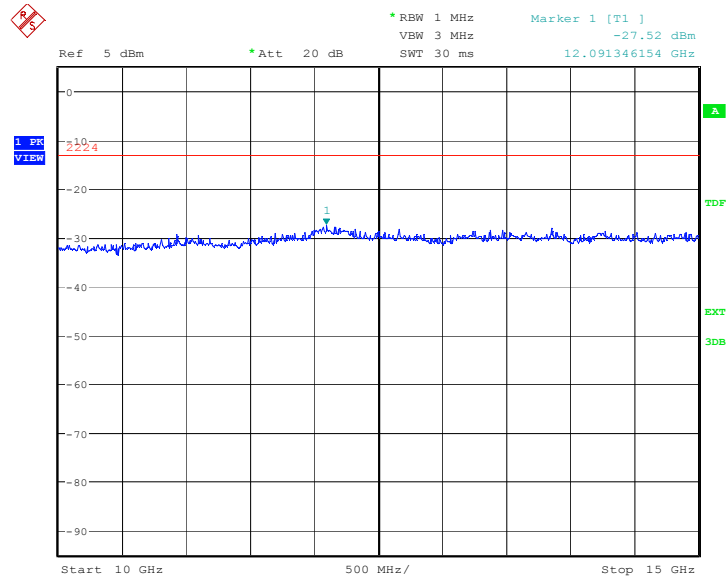

Date: 14.MAR.2016 17:11:20

### Channel 810: 15GHz –20GHz

Spurious emission limit –13dBm.

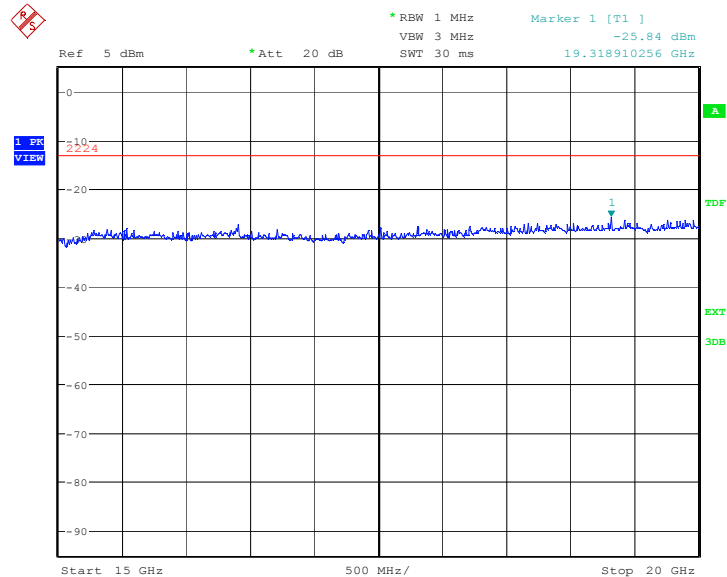

Date: 14.MAR.2016 17:11:48

\*\*\*END OF REPORT\*\*\*