



FCC RF Test Report

APPLICANT : TCL Communication Ltd.
EQUIPMENT : Tablet PC
BRAND NAME : alcatel
MODEL NAME : 9003A
MARKETING NAME : PIXI 4 7" 3G Android
FCC ID : 2ACCJB051
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : (DTS) Digital Transmission System

The product was received on Jan. 22, 2016 and testing was completed on Feb. 03, 2016. We, SPORTON INTERNATIONAL (SHENZHEN) INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL (SHENZHEN) INC., the test report shall not be reproduced except in full.

Prepared by: Andy Yeh / Manager

Approved by: Jones Tsai / Manager



SPORTON INTERNATIONAL (SHENZHEN) INC.

**1F & 2F, Building A, Morning Business Center, No. 4003 ShiGu Rd., Xili Town,
Nanshan District, Shenzhen, Guangdong, P. R. China**



TABLE OF CONTENTS

SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant	5
1.2 Manufacturer	5
1.3 Product Feature of Equipment Under Test	5
1.4 Product Specification of Equipment Under Test	5
1.5 Modification of EUT	6
1.6 Specification of Accessory	6
1.7 Testing Location	7
1.8 Applicable Standards	7
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	8
2.1 Descriptions of Test Mode	8
2.2 Test Mode	9
2.3 Connection Diagram of Test System	10
2.4 Support Unit used in test configuration and system	11
2.5 EUT Operation Test Setup	11
2.6 Measurement Results Explanation Example	12
3 TEST RESULT	13
3.1 6dB Bandwidth Measurement	13
3.2 Peak Output Power Measurement	16
3.3 Power Spectral Density Measurement	18
3.4 Conducted Band Edges and Spurious Emission Measurement	24
3.5 Radiated Band Edges and Spurious Emission Measurement	33
3.6 AC Conducted Emission Measurement	37
3.7 Antenna Requirements	43
4 LIST OF MEASURING EQUIPMENT	44
5 UNCERTAINTY OF EVALUATION	45
APPENDIX A. RADIATED TEST RESULTS	
APPENDIX B. SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR612204B	Rev. 01	Initial issue of report	Feb. 29, 2016

SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(2)	6dB Bandwidth	$\geq 0.5\text{MHz}$	Pass	-
3.2	15.247(b)(1)	Peak Output Power	$\leq 30\text{dBm}$	Pass	-
3.3	15.247(e)	Power Spectral Density	$\leq 8\text{dBm}/3\text{kHz}$	Pass	-
3.4	15.247(d)	Conducted Band Edges and Spurious Emission	$\leq 20\text{dBc}$	Pass	-
3.5	15.247(d)	Radiated Band Edges and Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 3.92 dB at 33.880 MHz
3.6	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 5.39 dB at 1.010 MHz
3.7	15.203 & 15.247(b)	Antenna Requirement	N/A	Pass	-



1 General Description

1.1 Applicant

TCL Communication Ltd.

5F, C-Tower, No. 232, Liang Jing Road, ZhangJiang High-Tech Park, Pudong Area, Shanghai, 201203, P.R.China

1.2 Manufacturer

TCL Communication Ltd.

5F, C-Tower, No. 232, Liang Jing Road, ZhangJiang High-Tech Park, Pudong Area, Shanghai, 201203, P.R.China

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Tablet PC
Brand Name	alcatel
Model Name	9003A
Marketing Name	PIXI 4 7" 3G Android
FCC ID	2ACCJB051
EUT supports Radios application	GSM/GPRS/EGPRS(Downlink Only)/ WCDMA/HSPA/HSPA+(16QAM uplink is not supported)/ WLAN 2.4GHz 802.11b/g/n HT20/HT40 Bluetooth v3.0 + EDR/Bluetooth v4.1 LE
IMEI Code	Conducted:014627000100184 Radiation: 014627000100168 Conduction: 014627000100176
HW Version	V04
SW Version	C66
EUT Stage	Production Unit

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Frequency Range	2402 MHz ~ 2480 MHz
Number of Channels	40
Carrier Frequency of Each Channel	40 Channel(37 hopping + 3 advertising channel)
Maximum Output Power to Antenna	-3.06 dBm (0.00049 W)
Antenna Type	Monopole Antenna with gain 2 dBi
Type of Modulation	Bluetooth LE : GFSK



1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Specification of Accessory

Specification of Accessory				
AC Adapter 1	Brand Name	ALCATEL ONETOUCH	Model Name	UC11US
	Power Rating	I/P: 100 - 240 Vac, 300mA, O/P: 5 Vdc, 1000 mA		
	P/N	CBA0057AG0C3		
AC Adapter 2	Brand Name	ALCATEL ONETOUCH	Model Name	UC11US
	Power Rating	I/P: 100 - 240 Vac, 200mA, O/P: 5 Vdc, 1000 mA		
	P/N	CBA0057AG0C1		
Battery 1	Brand Name	ALCATEL ONETOUCH	Model Name	TLp025GC
	Power Rating	3.8 Vdc, 2580 mAh		
	S/N	C2580007CCJ00020		
Battery 2	Brand Name	ALCATEL ONETOUCH	Model Name	TLp025G2
	Power Rating	3.8 Vdc, 2580 mAh		
	S/N	C2580005C2000EG		
USB Cable 1	Brand Name	NA	Model Name	NA
	Signal Line Type	0.8meter, non-shielded cable, with w/o ferrite core		
USB Cable 2	Brand Name	NA	Model Name	NA
	Signal Line Type	0.8meter, non-shielded cable, with w/o ferrite core		
Earphone 1	Brand Name	NA	Model Name	NA
	Signal Line Type	1.5meter, non-shielded cable, with w/o ferrite core		
Earphone 2	Brand Name	NA	Model Name	NA
	Signal Line Type	1.5meter, non-shielded cable, with w/o ferrite core		



1.7 Testing Location

Test Site	SPORTON INTERNATIONAL (SHENZHEN) INC.	
Test Site Location	1F & 2F, Building A, Morning Business Center, No. 4003 ShiGu Rd., Xili Town, Nanshan District, Shenzhen, Guangdong, P. R. China TEL: +86-755-8637-9589 FAX: +86-755-8637-9595	
Test Site No.	Sporton Site No.	
	TH01-SZ	CO01-SZ

Test Site	SPORTON INTERNATIONAL (SHENZHEN) INC.	
Test Site Location	No. 3 Building, the third floor of south, Shahe River west, Fengzeyuan warehouse, Nanshan District, Shenzhen, Guangdong, P. R. China TEL: +86-755-3320-2398	
Test Site No.	Sporton Site No.	FCC Registration No.
	03CH01-SZ	831040

Note: The test site complies with ANSI C63.4 2009 requirement.

1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r04
- ♦ ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

2 Test Configuration of Equipment Under Test

2.1 Descriptions of Test Mode

The RF output power was recorded in the following table:

Channel	Frequency	Bluetooth 4.1 – LE RF Output Power
		Data Rate / Modulation
		GFSK
		1Mbps
Ch00	2402MHz	-3.44 dBm
Ch19	2440MHz	-3.40 dBm
Ch39	2480MHz	-3.06 dBm

- The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction (150 kHz to 30 MHz), radiation (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). Pre-scanned tests, X, Y, Z in three orthogonal panels to determine the final configuration (X plane as worst plane) from all possible combinations.
- AC power line Conducted Emission was tested under maximum output power.


2.2 Test Mode

The following summary table is showing all test modes to demonstrate in compliance with the standard.


Summary table of Test Cases	
Test Item	Data Rate / Modulation
	Bluetooth 4.1 – LE / GFSK
Conducted TCs	Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps Mode 2: Bluetooth Tx CH19_2440 MHz_1Mbps Mode 3: Bluetooth Tx CH39_2480 MHz_1Mbps
Radiated TCs	Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps Mode 2: Bluetooth Tx CH19_2440 MHz_1Mbps Mode 3: Bluetooth Tx CH39_2480 MHz_1Mbps
AC Conducted Emission	Mode 1: GSM850 Idle + Bluetooth Link + WLAN Link + Earphone 1 + Battery 1 + USB Cable 1 (Charging from Adapter 1)
Remark: For Radiated TCs, The tests were performance with Adapter 2, Battery 2, Earphone 2, and USB Cable 2.	

2.3 Connection Diagram of Test System

<Bluetooth 4.1 – LE Tx Mode>

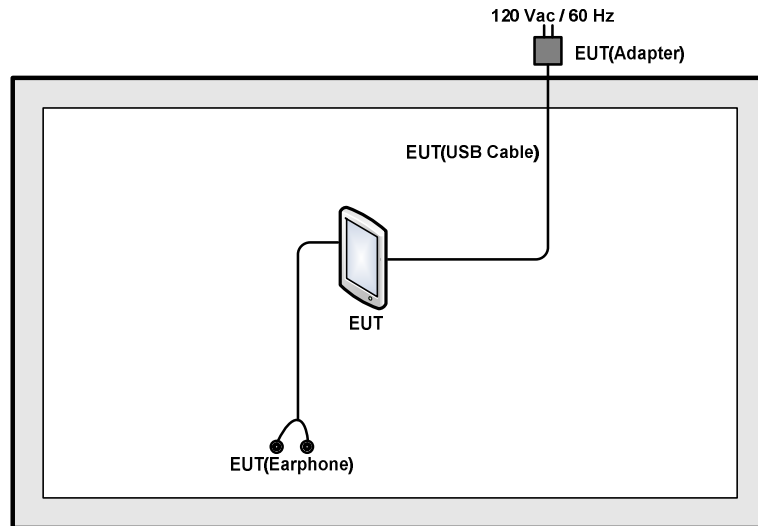

<AC Conducted Emission Mode>

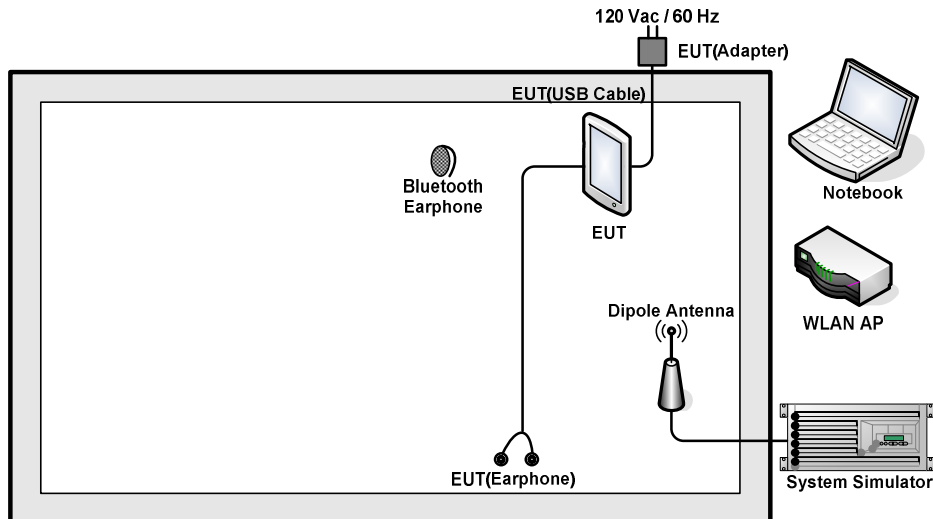

2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	Anritsu	MT8820C	N/A	N/A	Unshielded, 1.8 m
2.	Bluetooth Earphone	Nokia	BH-108	PYAHS-107W	N/A	N/A
3.	WLAN AP	D-link	DIR-628	KA2DIR628A2	N/A	Unshielded, 1.8 m
4.	Notebook	Lenovo	E540	FCC DoC	N/A	Shielded cable DC O/P 1.8 m Unshielded AC I/P cable 1.2 m

2.5 EUT Operation Test Setup

For Bluetooth v4.1 LE function, the engineering test program was provided and enabled to make EUT continuous transmit/receive.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.



2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 5 dB and 10dB attenuator.

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 5 + 10 = 15 \text{ (dB)}\end{aligned}$$

3 Test Result

3.1 6dB Bandwidth Measurement

3.1.1 Limit of 6dB Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.


3.1.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.1.3 Test Procedures

1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r04.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. Measure and record the results in the test report.

3.1.4 Test Setup

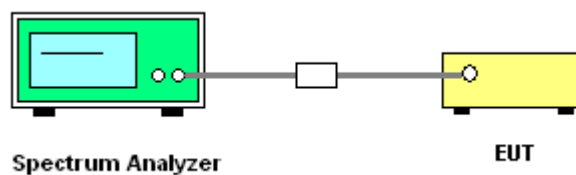


3.1.5 Test Result of 6dB Bandwidth

Test Mode :	Bluetooth v4.1 LE	Temperature :	24~26°C
Test Engineer :	Bruce Huang	Relative Humidity :	50~53%

Channel	Frequency (MHz)	6dB Bandwidth (MHz)	6dB Bandwidth Min. Limit (MHz)	Pass/Fail
00	2402	0.696	0.5	Pass
19	2440	0.696	0.5	Pass
39	2480	0.696	0.5	Pass


6 dB Bandwidth Plot on Channel 00

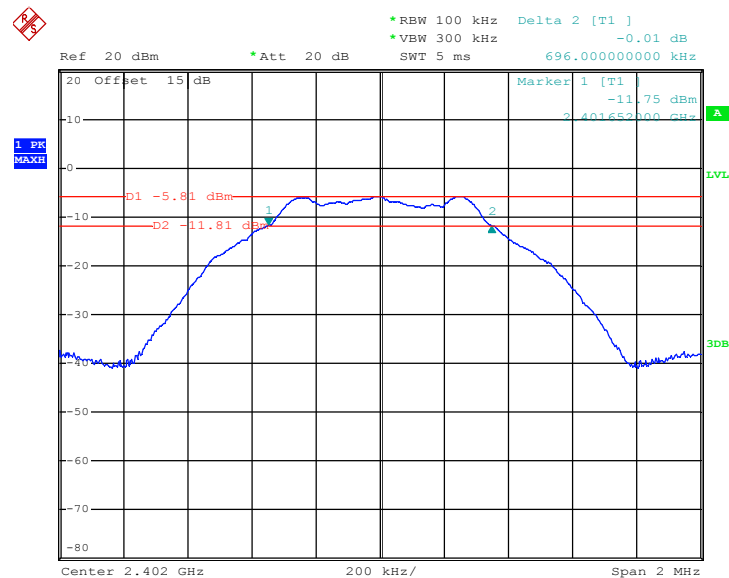

Date: 28.JAN.2016 01:14:33




6 dB Bandwidth Plot on Channel 19

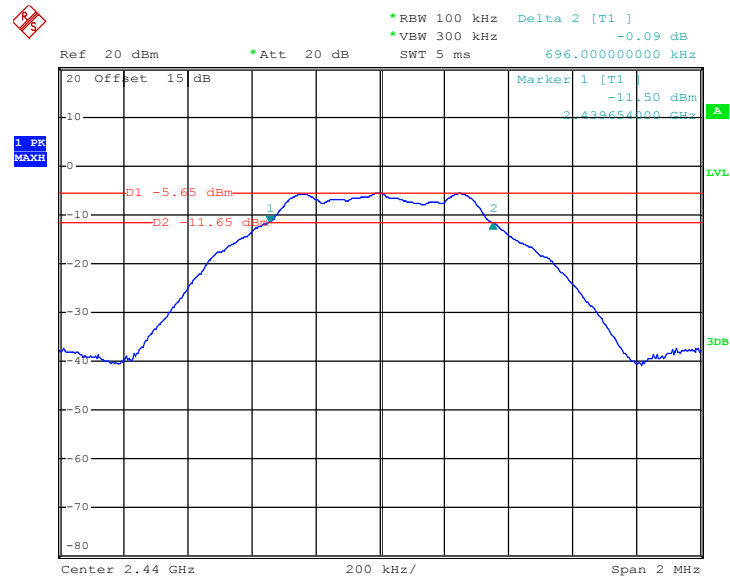

Date: 28.JAN.2016 01:18:55

6 dB Bandwidth Plot on Channel 39

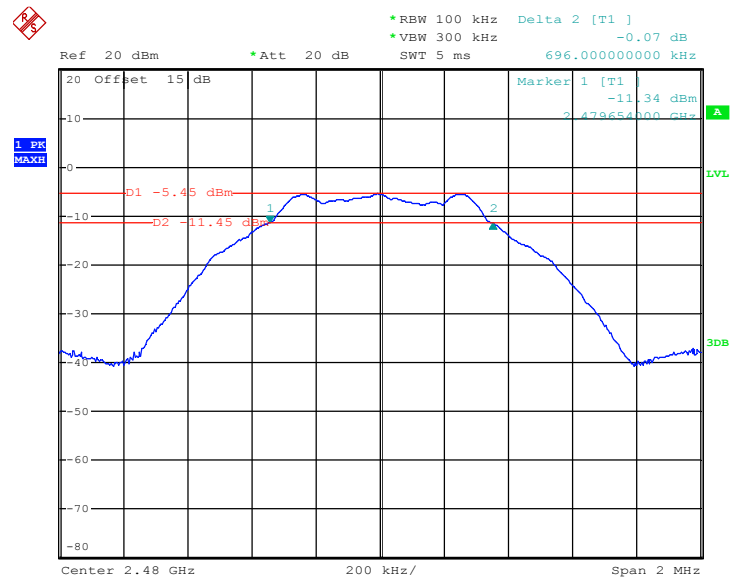

Date: 28.JAN.2016 01:23:31

3.2 Peak Output Power Measurement

3.2.1 Limit of Peak Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting antenna of directional gain greater than 6dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.


3.2.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.2.3 Test Procedures

1. The testing follows the Measurement Procedure of FCC KDB No. 558074 DTS D01 Meas. Guidance v03r04 section 9.1.2 PKPM1 Peak power meter method.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.

3.2.4 Test Setup

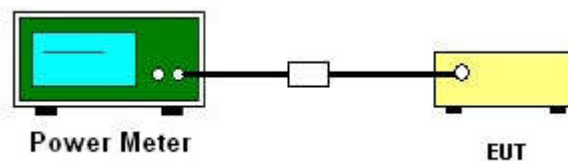

**3.2.5 Test Result of Peak Output Power**

Test Mode :	Bluetooth v4.1 LE	Temperature :	24~26℃
Test Engineer :	Bruce Huang	Relative Humidity :	50~53%

Channel	Frequency (MHz)	RF Power (dBm)		
		GFSK	Max. Limits (dBm)	Pass/Fail
		1 Mbps		
00	2402	-3.44	30.00	Pass
19	2440	-3.40	30.00	Pass
39	2480	-3.06	30.00	Pass

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.


3.3.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.3.3 Test Procedures

1. The testing follows Measurement Procedure 10.2 Method PKPSD of FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r04
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.
7. The Measured power density (dBm)/ 100kHz is a reference level and used as 20dBc down limit line for Conducted Band Edges and Conducted Spurious Emission.

3.3.4 Test Setup

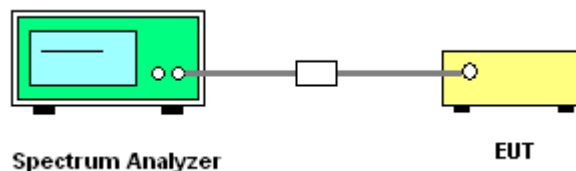

**3.3.5 Test Result of Power Spectral Density**

Test Mode :	Bluetooth v4.1 LE	Temperature :	24~26℃
Test Engineer :	Bruce Huang	Relative Humidity :	50~53%

Channel	Frequency (MHz)	Power Density		Max. Limits (dBm/3kHz)	Pass/Fail
		PSD/100kHz (dBm)	PSD/3kHz (dBm)		
00	2402	-5.67	-20.35	8	Pass
19	2440	-5.65	-20.31	8	Pass
39	2480	-5.45	-20.12	8	Pass


Note:

1. Measured power density (dBm) has offset with cable loss.
2. The Measured power density (dBm)/ 100kHz is reference level and used as 20dBc down for Conducted Band Edges and Conducted Spurious Emission limit line.



3.3.6 Test Result of Power Spectral Density Plots (100kHz)


PSD 100kHz Plot on Channel 00

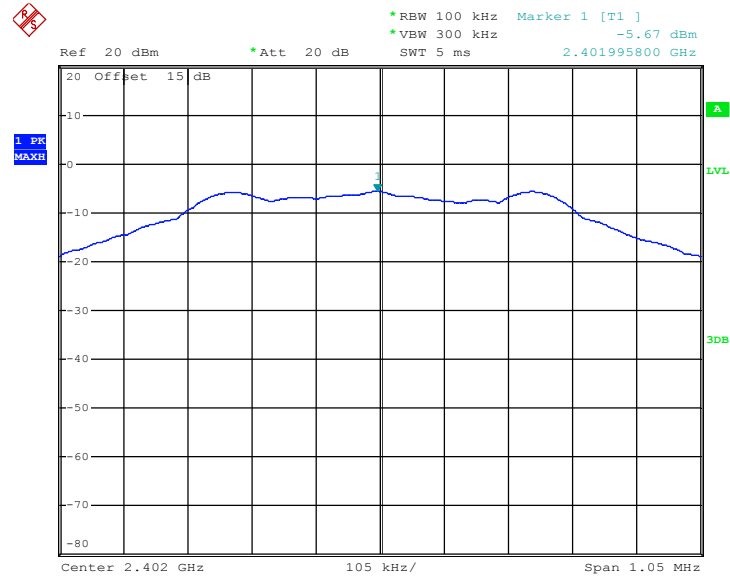

Date: 28.JAN.2016 01:15:30




PSD 100kHz Plot on Channel 19

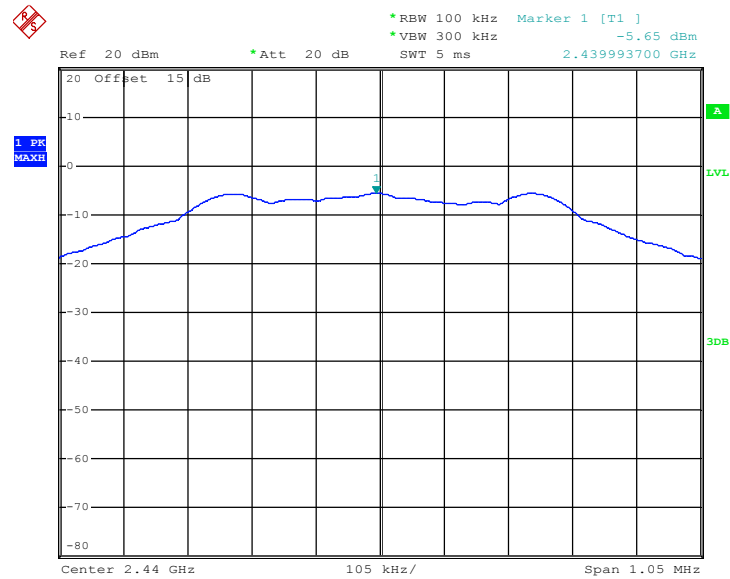

Date: 28.JAN.2016 01:19:49

PSD 100kHz Plot on Channel 39

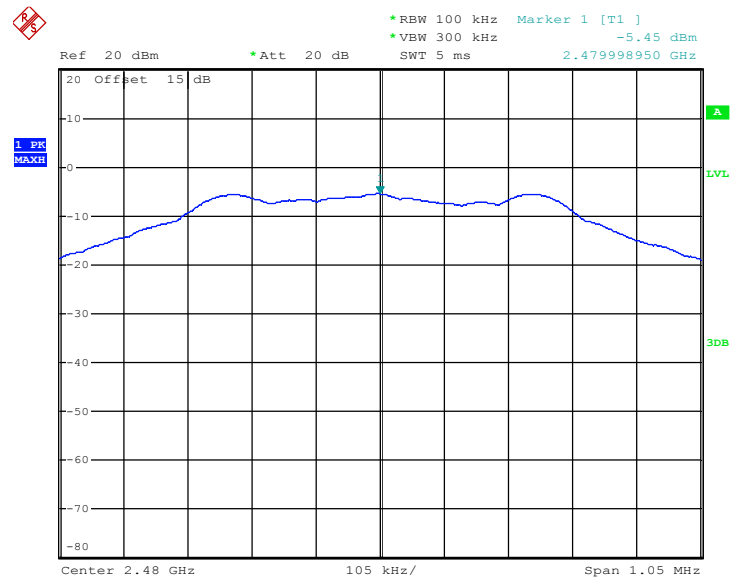


Date: 28.JAN.2016 01:24:18



3.3.7 Test Result of Power Spectral Density Plots (3kHz)


PSD 3kHz Plot on Channel 00

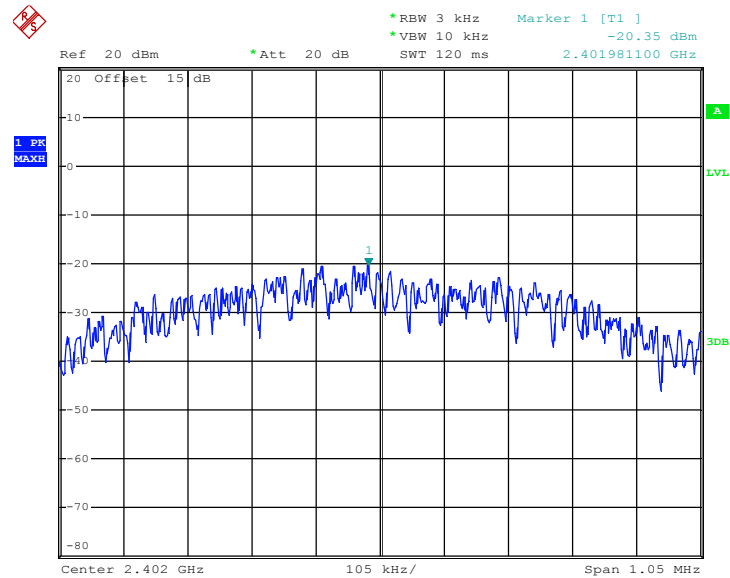

Date: 28.JAN.2016 01:14:59




PSD 3kHz Plot on Channel 19

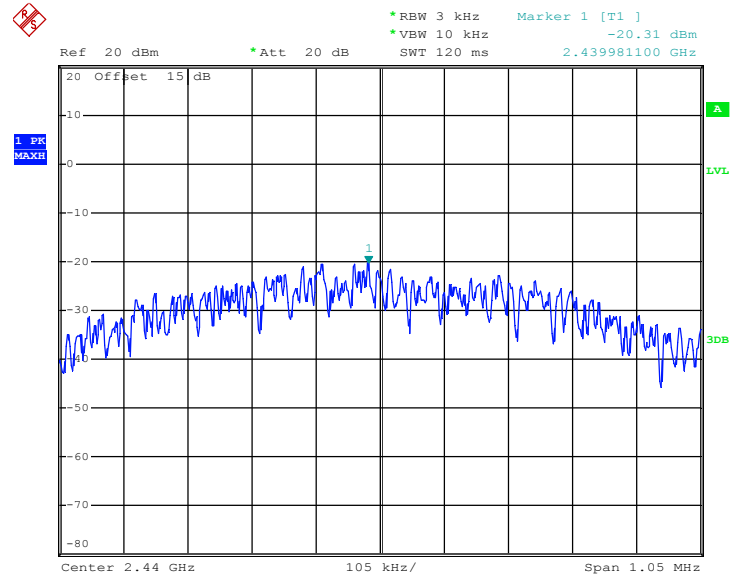

Date: 28.JAN.2016 01:19:11

PSD 3kHz Plot on Channel 39

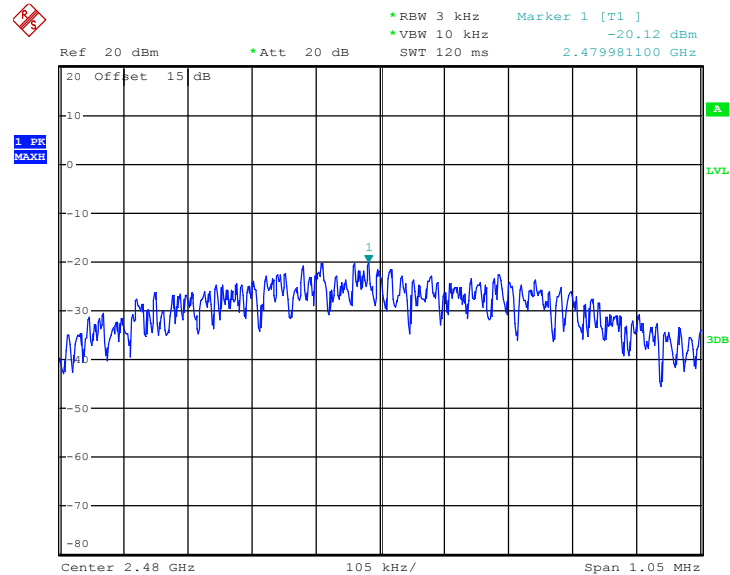

Date: 28.JAN.2016 01:23:58

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission

All harmonics/spurious must be at least 20 dB down from the highest emission level within the authorized band.


3.4.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.4.3 Test Procedure


1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r04.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB per 15.247(d).
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.4.4 Test Setup

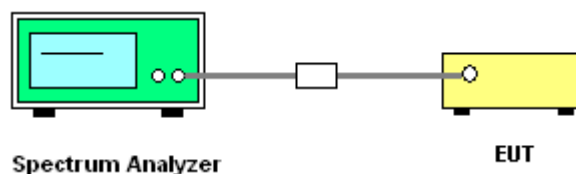

**3.4.5 Test Result of Conducted Band Edges Plots**


Test Mode :	Bluetooth v4.1 LE	Temperature :	24~26℃
Test Channel :	00 and 39	Relative Humidity :	50~53%
		Test Engineer :	Bruce Huang

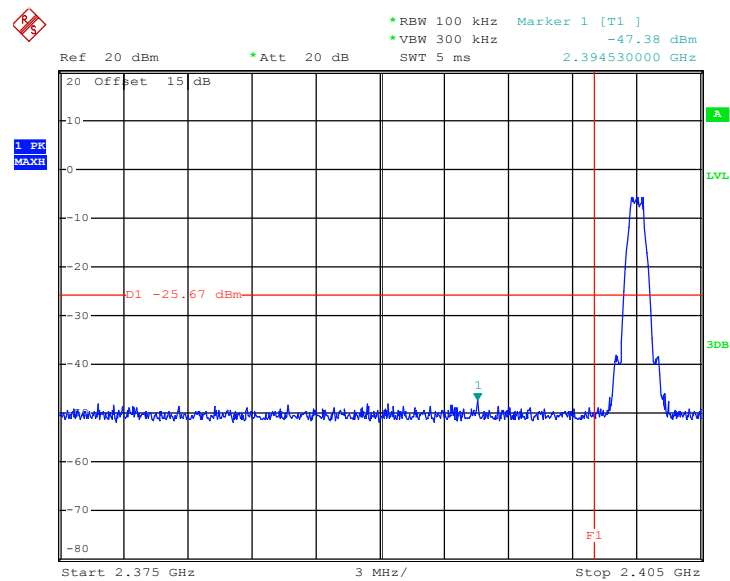Low Band Edge Plot on Channel 00

Date: 28.JAN.2016 01:16:08




High Band Edge Plot on Channel 39

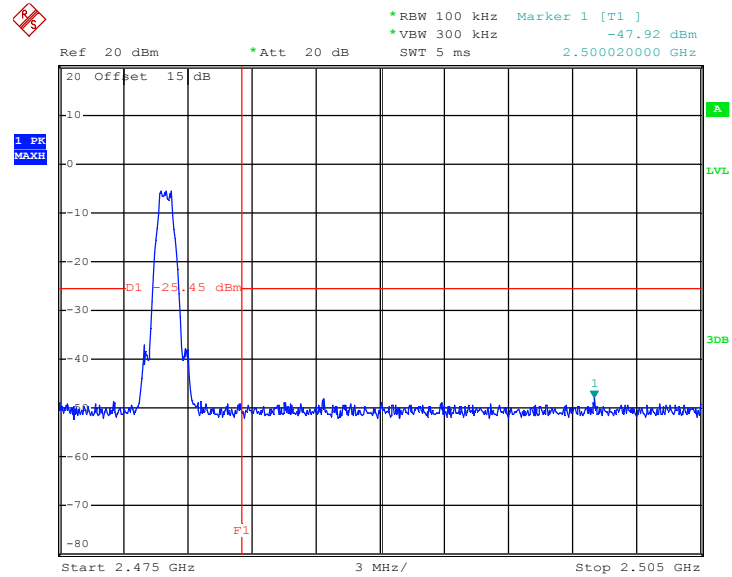

Date: 28.JAN.2016 01:24:46

**3.4.6 Test Result of Conducted Spurious Emission Plots**


Test Mode :	Bluetooth v4.1 LE	Temperature :	24~26℃
Test Channel :	00	Relative Humidity :	50~53%
		Test Engineer :	Bruce Huang

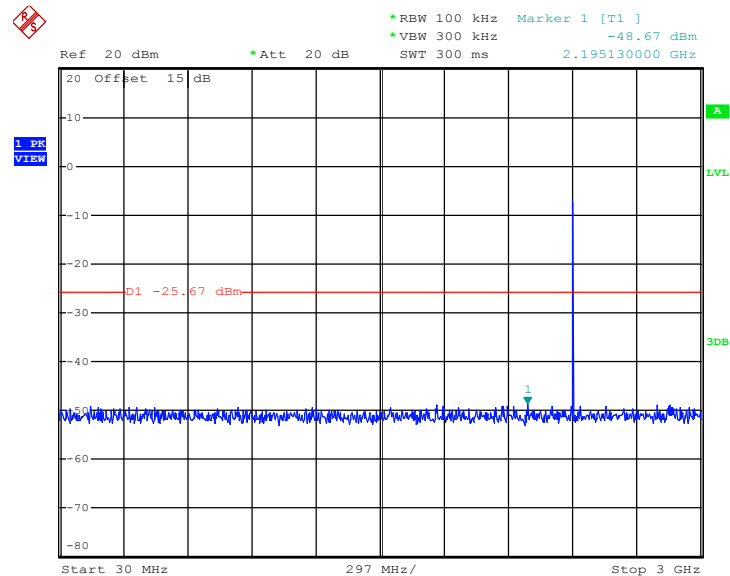**Conducted Spurious Emission Plot on Bluetooth LE 1Mbps
GFSK Channel 00**

Date: 28.JAN.2016 01:16:43




Conducted Spurious Emission Plot on Bluetooth LE 1Mbps
GFSK Channel 00

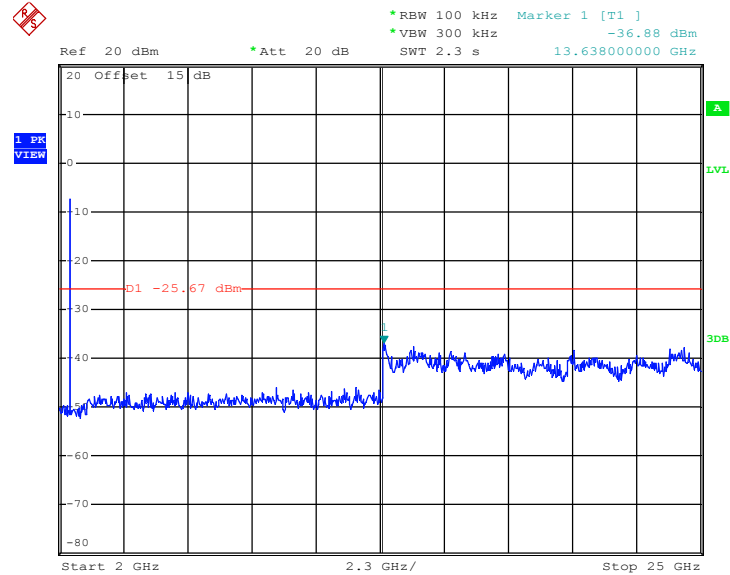

Date: 28.JAN.2016 01:16:52




Conducted Spurious Emission Plot on Bluetooth LE 1Mbps
GFSK Channel 19

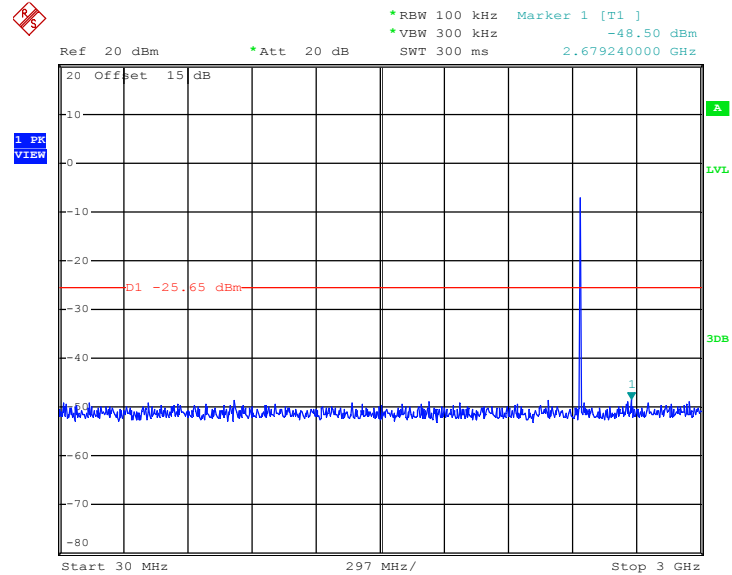

Date: 28.JAN.2016 01:20:52


Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 19

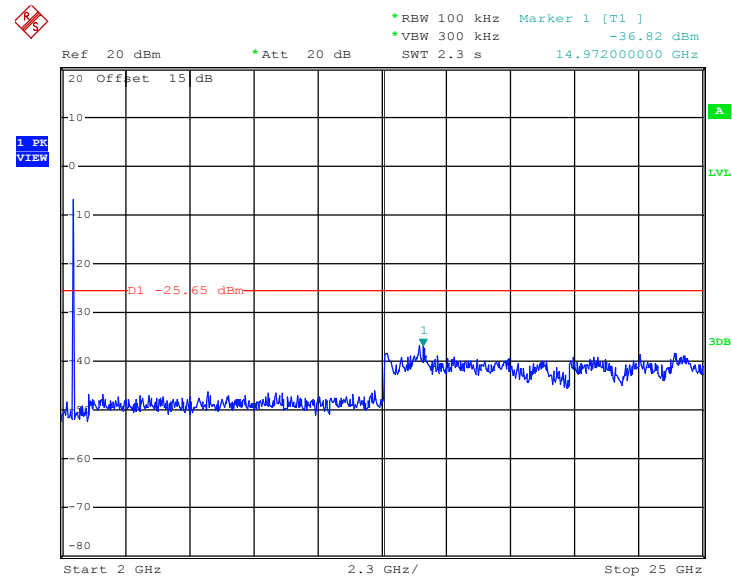

Date: 28.JAN.2016 01:21:00




Conducted Spurious Emission Plot on Bluetooth LE 1Mbps
GFSK Channel 39

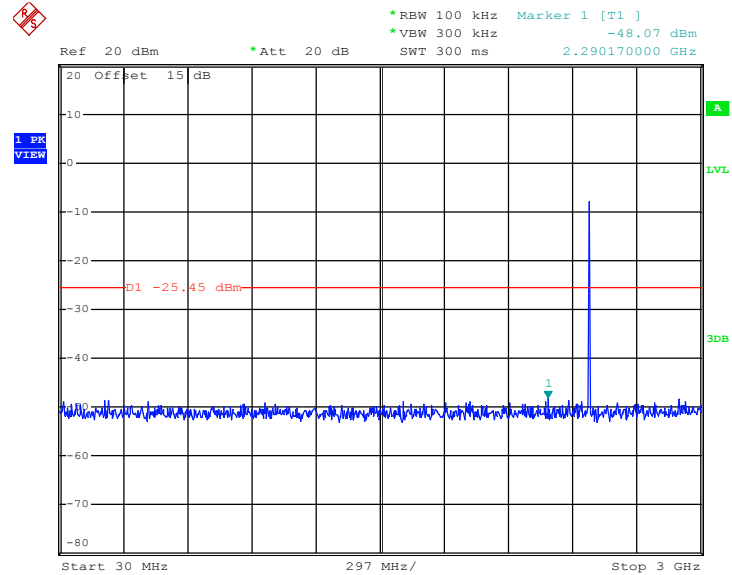

Date: 28.JAN.2016 01:25:41



Conducted Spurious Emission Plot on Bluetooth LE 1Mbps
GFSK Channel 39

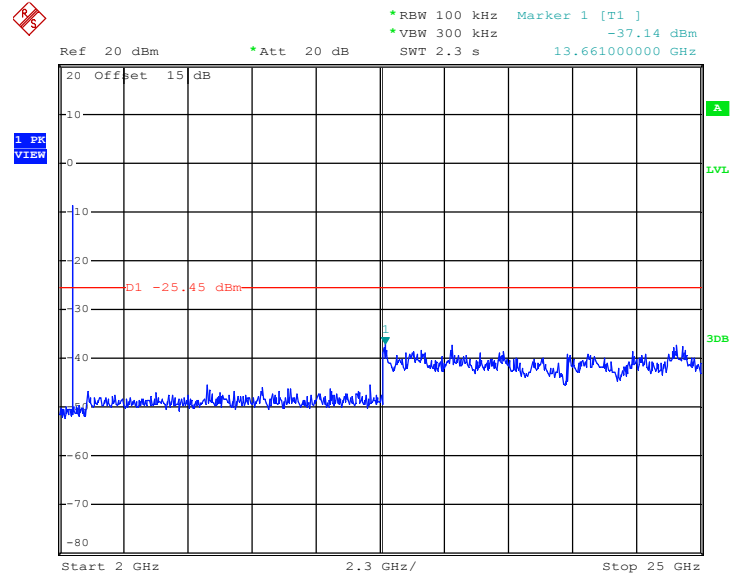

Date: 28.JAN.2016 01:25:49

3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the FCC section 15.209 limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.5.3 Test Procedures

1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r04.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
7. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for peak measurement.


For average measurement:

 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.


Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
Bluetooth 4.1 - LE	60.30	0.378	2.646	3kHz

3.5.4 Test Setup


For radiated emissions below 30MHz

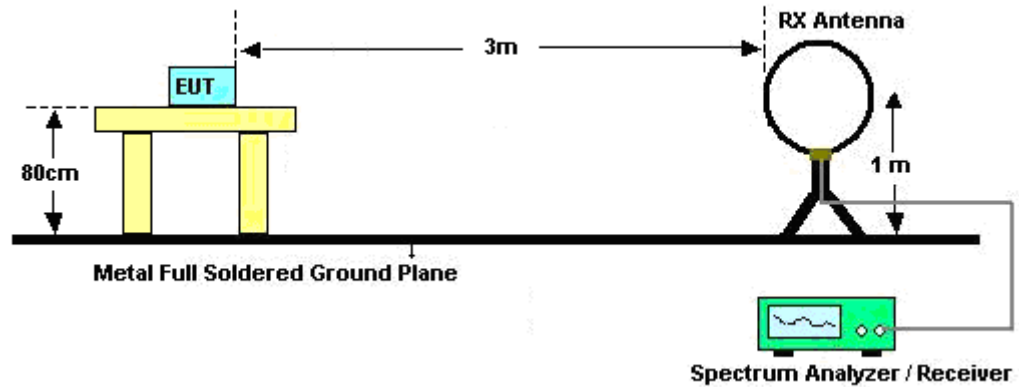

For radiated emissions from 30MHz to 1GHz

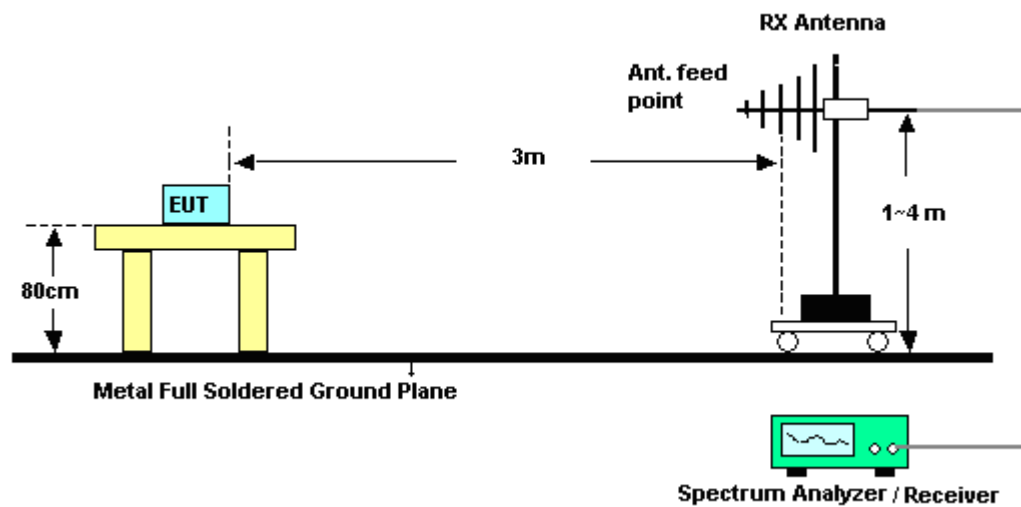

For radiated emissions above 1GHz

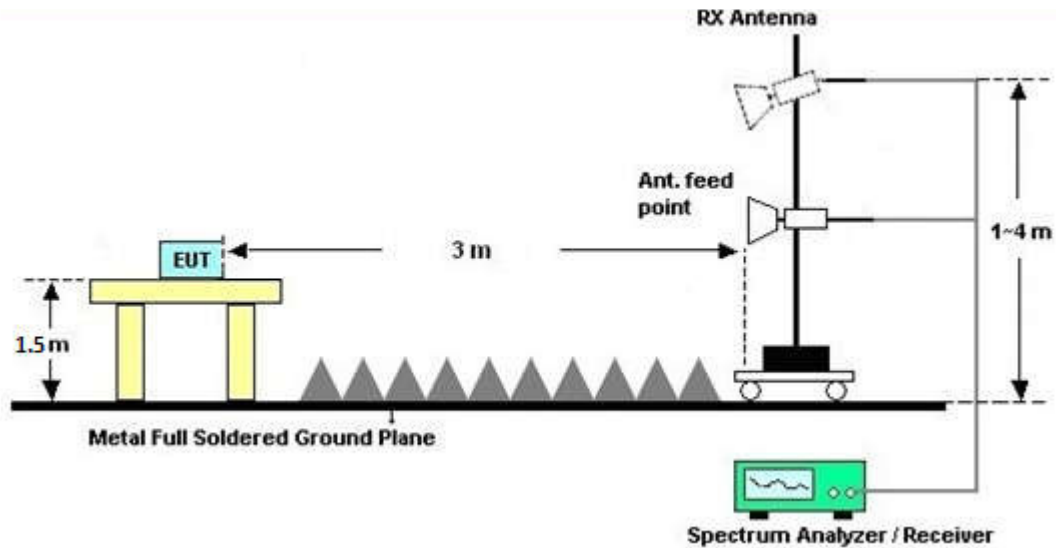

3.5.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.

3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix A.

3.5.7 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic)

Please refer to Appendix A.

3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.6.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.6.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.


3.6.4 Test Setup

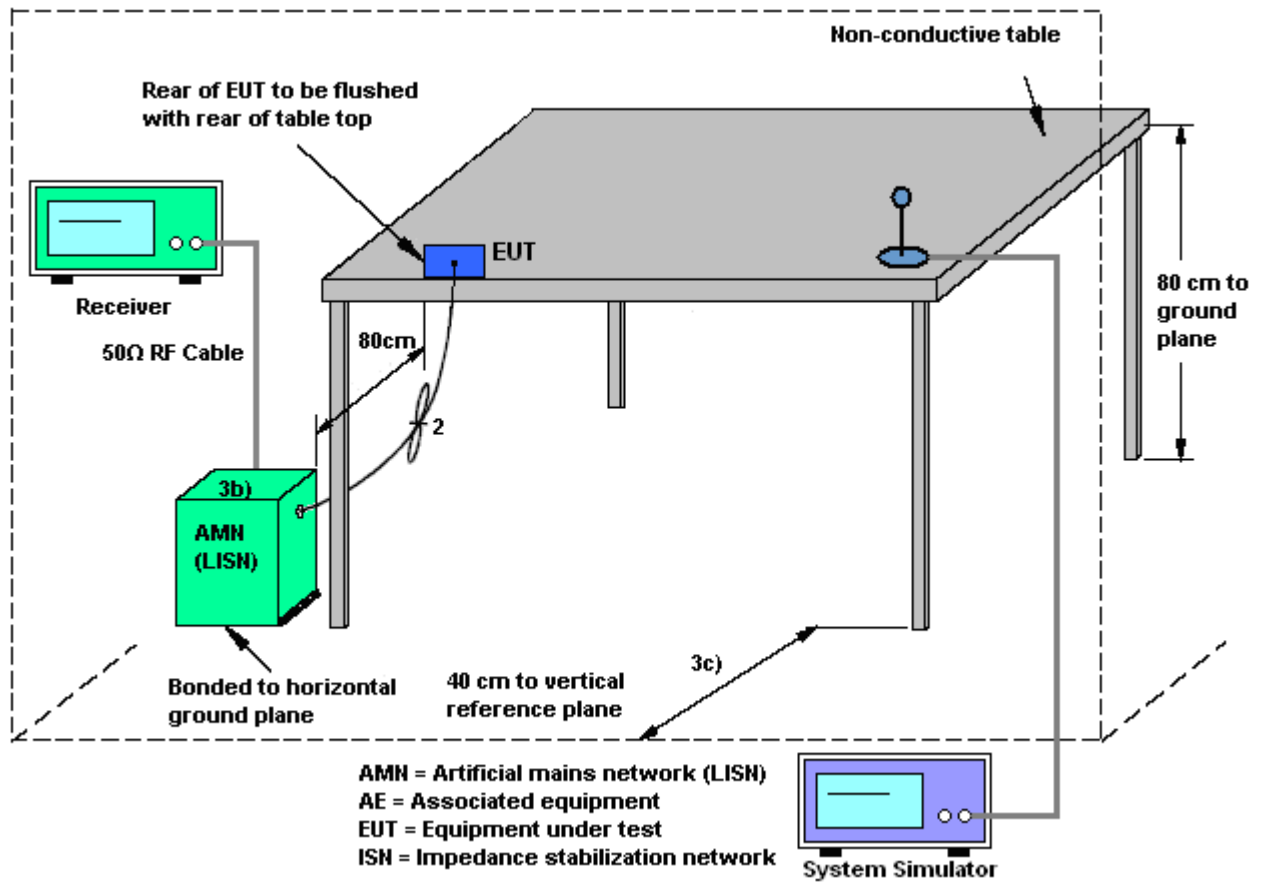



3.6.5 Test Result of AC Conducted Emission

Test Mode :	Mode 1	Temperature :	21~23℃
Test Engineer :	Jacky Yang	Relative Humidity :	41~43%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	GSM850 Idle + Bluetooth Link + WLAN Link + Earphone 1 + Battery 1 + USB Cable 1 (Charging from Adapter 1)		

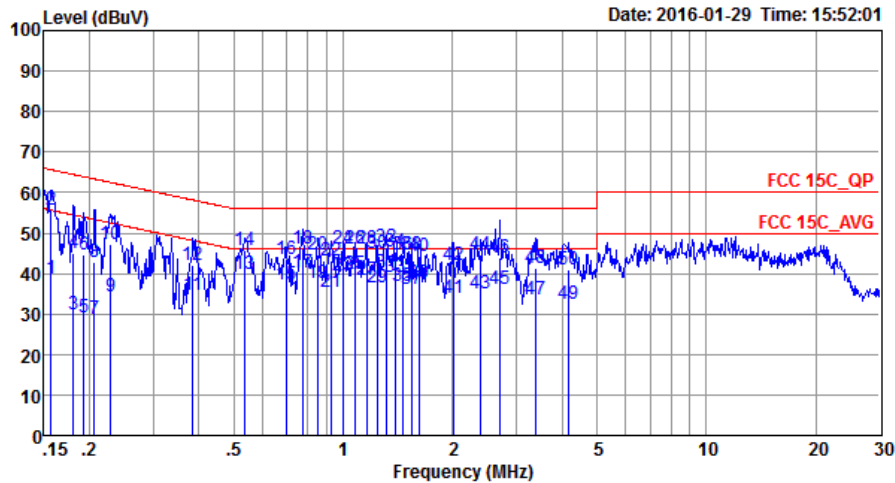


Site : CO01-SZ
Condition: FCC 15C_QP LISN_L_20160112 LINE

	Freq	Level	Over	Limit	Read	LISN	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
			dB	dBuV	dBuV	dB	dB	
1	0.16	38.79	-16.86	55.65	28.00	0.44	10.35	Average
2	0.16	55.59	-10.06	65.65	44.80	0.44	10.35	QP
3	0.18	29.81	-24.65	54.46	19.00	0.49	10.32	Average
4	0.18	45.01	-19.45	64.46	34.20	0.49	10.32	QP
5	0.19	29.31	-24.58	53.89	18.50	0.51	10.30	Average
6	0.19	44.51	-19.38	63.89	33.70	0.51	10.30	QP
7	0.21	28.81	-24.55	53.36	18.00	0.52	10.29	Average
8	0.21	42.91	-20.45	63.36	32.10	0.52	10.29	QP
9	0.23	34.40	-18.08	52.48	23.60	0.54	10.26	Average
10	0.23	47.20	-15.28	62.48	36.40	0.54	10.26	QP
11	0.39	34.52	-13.65	48.17	23.80	0.54	10.18	Average
12	0.39	42.12	-16.05	58.17	31.40	0.54	10.18	QP
13	0.54	40.00	-6.00	46.00	29.21	0.64	10.15	Average
14	0.54	45.90	-10.10	56.00	35.11	0.64	10.15	QP
15	0.70	37.19	-8.81	46.00	26.50	0.54	10.15	Average
16	0.70	43.38	-12.62	56.00	32.69	0.54	10.15	QP
17 *	0.77	40.28	-5.72	46.00	29.60	0.53	10.15	Average
18	0.77	46.08	-9.92	56.00	35.40	0.53	10.15	QP
19	0.85	37.77	-8.23	46.00	27.10	0.52	10.15	Average
20	0.85	44.77	-11.23	56.00	34.10	0.52	10.15	QP
21	0.92	35.57	-10.43	46.00	24.90	0.52	10.15	Average
22	0.92	43.27	-12.73	56.00	32.60	0.52	10.15	QP
23	1.00	39.36	-6.64	46.00	28.70	0.51	10.15	Average
24	1.00	46.06	-9.94	56.00	35.40	0.51	10.15	QP
25	1.08	39.96	-6.04	46.00	29.31	0.50	10.15	Average
26	1.08	46.26	-9.74	56.00	35.61	0.50	10.15	QP
27	1.16	38.46	-7.54	46.00	27.80	0.50	10.16	Average
28	1.16	46.06	-9.94	56.00	35.40	0.50	10.16	QP
29	1.24	36.36	-9.64	46.00	25.71	0.49	10.16	Average



Test Mode :	Mode 1	Temperature :	21~23℃
Test Engineer :	Jacky Yang	Relative Humidity :	41~43%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	GSM850 Idle + Bluetooth Link + WLAN Link + Earphone 1 + Battery 1 + USB Cable 1 (Charging from Adapter 1)		

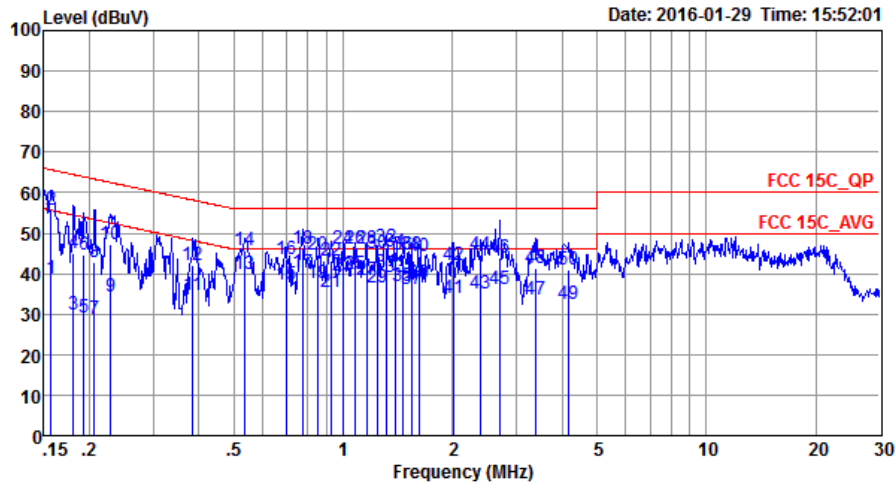


Site : C001-SZ
Condition: FCC 15C_QP LISN_L_20160112 LINE

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
30	1.24	44.96	-11.04	56.00	34.31	0.49	10.16	QP
31	1.31	40.06	-5.94	46.00	29.40	0.49	10.17	Average
32	1.31	46.56	-9.44	56.00	35.90	0.49	10.17	QP
33	1.40	38.95	-7.05	46.00	28.29	0.49	10.17	Average
34	1.40	45.55	-10.45	56.00	34.89	0.49	10.17	QP
35	1.46	36.85	-9.15	46.00	26.20	0.48	10.17	Average
36	1.46	44.75	-11.25	56.00	34.10	0.48	10.17	QP
37	1.55	36.05	-9.95	46.00	25.40	0.48	10.17	Average
38	1.55	44.55	-11.45	56.00	33.90	0.48	10.17	QP
39	1.62	37.75	-8.25	46.00	27.09	0.48	10.18	Average
40	1.62	44.25	-11.75	56.00	33.59	0.48	10.18	QP
41	2.01	34.05	-11.95	46.00	23.40	0.46	10.19	Average
42	2.01	42.15	-13.85	56.00	31.50	0.46	10.19	QP
43	2.40	34.90	-11.10	46.00	24.20	0.50	10.20	Average
44	2.40	44.50	-11.50	56.00	33.80	0.50	10.20	QP
45	2.69	36.03	-9.97	46.00	25.30	0.52	10.21	Average
46	2.69	43.83	-12.17	56.00	33.10	0.52	10.21	QP
47	3.40	33.69	-12.31	46.00	22.89	0.58	10.22	Average
48	3.40	41.19	-14.81	56.00	30.39	0.58	10.22	QP
49	4.18	32.35	-13.65	46.00	21.50	0.62	10.23	Average
50	4.18	40.95	-15.05	56.00	30.10	0.62	10.23	QP



Test Mode :	Mode 1	Temperature :	21~23°C
Test Engineer :	Jacky Yang	Relative Humidity :	41~43%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	GSM850 Idle + Bluetooth Link + WLAN Link + Earphone 1 + Battery 1 + USB Cable 1 (Charging from Adapter 1)		

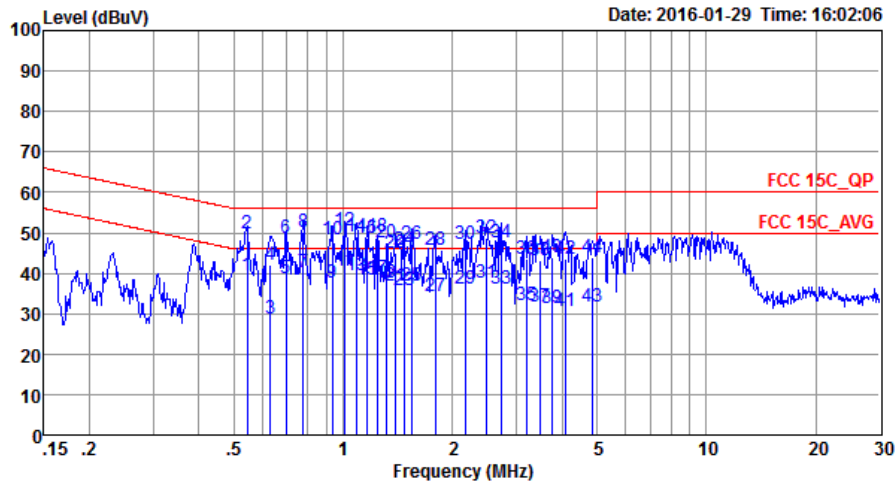


Site : C001-SZ

Condition: FCC 15C QP LISN N_20160112 NEUTRAL

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.54	39.45	-6.55	46.00	28.71	0.59	10.15	Average
2	0.54	49.65	-6.35	56.00	38.91	0.59	10.15	QP
3	0.63	28.72	-17.28	46.00	18.00	0.57	10.15	Average
4	0.63	41.92	-14.08	56.00	31.20	0.57	10.15	QP
5	0.70	38.80	-7.20	46.00	28.10	0.55	10.15	Average
6	0.70	48.60	-7.40	56.00	37.90	0.55	10.15	QP
7	0.78	40.10	-5.90	46.00	29.40	0.55	10.15	Average
8	0.78	50.20	-5.80	56.00	39.50	0.55	10.15	QP
9	0.93	37.51	-8.49	46.00	26.80	0.56	10.15	Average
10	0.93	48.21	-7.79	56.00	37.50	0.56	10.15	QP
11	1.01	40.51	-5.49	46.00	29.80	0.56	10.15	Average
12 *	1.01	50.61	-5.39	56.00	39.90	0.56	10.15	QP
13	1.09	39.32	-6.68	46.00	28.61	0.56	10.15	Average
14	1.09	49.12	-6.88	56.00	38.41	0.56	10.15	QP
15	1.17	38.22	-7.78	46.00	27.50	0.56	10.16	Average
16	1.17	48.82	-7.18	56.00	38.10	0.56	10.16	QP
17	1.24	38.83	-7.17	46.00	28.11	0.56	10.16	Average
18	1.24	49.03	-6.97	56.00	38.31	0.56	10.16	QP
19	1.32	37.73	-8.27	46.00	27.00	0.56	10.17	Average
20	1.32	47.53	-8.47	56.00	36.80	0.56	10.17	QP
21	1.40	37.03	-8.97	46.00	26.30	0.56	10.17	Average
22	1.40	44.93	-11.07	56.00	34.20	0.56	10.17	QP
23	1.47	35.74	-10.26	46.00	25.00	0.57	10.17	Average
24	1.47	45.64	-10.36	56.00	34.90	0.57	10.17	QP
25	1.55	36.74	-9.26	46.00	26.00	0.57	10.17	Average
26	1.55	47.24	-8.76	56.00	36.50	0.57	10.17	QP
27	1.79	34.35	-11.65	46.00	23.60	0.57	10.18	Average
28	1.79	45.85	-10.15	56.00	35.10	0.57	10.18	QP
29	2.18	36.17	-9.83	46.00	25.40	0.58	10.19	Average



Test Mode :	Mode 1	Temperature :	21~23℃
Test Engineer :	Jacky Yang	Relative Humidity :	41~43%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	GSM850 Idle + Bluetooth Link + WLAN Link + Earphone 1 + Battery 1 + USB Cable 1 (Charging from Adapter 1)		

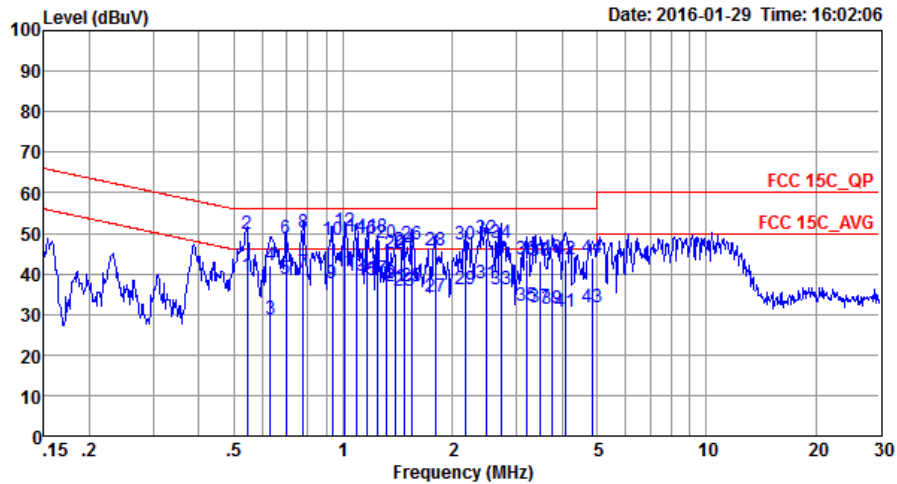

Site : C001-SZ
Condition: FCC 15C_QP LISN_N_20160112 NEUTRAL

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
30	2.18	47.27	-8.73	56.00	36.50	0.58	10.19	QP
31	2.49	37.79	-8.21	46.00	27.00	0.59	10.20	Average
32	2.49	48.79	-7.21	56.00	38.00	0.59	10.20	QP
33	2.72	36.10	-9.90	46.00	25.29	0.60	10.21	Average
34	2.72	47.70	-8.30	56.00	36.89	0.60	10.21	QP
35	3.19	31.93	-14.07	46.00	21.11	0.61	10.21	Average
36	3.19	43.53	-12.47	56.00	32.71	0.61	10.21	QP
37	3.49	31.74	-14.26	46.00	20.90	0.62	10.22	Average
38	3.49	43.34	-12.66	56.00	32.50	0.62	10.22	QP
39	3.76	31.55	-14.45	46.00	20.71	0.62	10.22	Average
40	3.76	43.75	-12.25	56.00	32.91	0.62	10.22	QP
41	4.11	30.76	-15.24	46.00	19.90	0.63	10.23	Average
42	4.11	43.36	-12.64	56.00	32.50	0.63	10.23	QP
43	4.87	31.89	-14.11	46.00	21.00	0.65	10.24	Average
44	4.87	44.09	-11.91	56.00	33.20	0.65	10.24	QP



3.7 Antenna Requirements

3.7.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.7.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSP30	101400	9kHz~30GHz	Jan. 12, 2016	Jan. 28, 2016	Jan. 11, 2017	Conducted (TH01-SZ)
Pulse Power Sensor	Anritsu	MA2411B	1207253	30MHz~40GHz	Jan. 12, 2016	Jan. 28, 2016	Jan. 11, 2017	Conducted (TH01-SZ)
Power Meter	Anritsu	ML2495A	1218010	50MHz Bandwidth	Jan. 12, 2016	Jan. 28, 2016	Jan. 11, 2017	Conducted (TH01-SZ)
EMI Test Receiver&SA	Agilent Technologies	N9038A	MY52260185	20Hz~26.5GHz	May 26, 2015	Feb. 03, 2016	May 25, 2016	Radiation (03CH01-SZ)
Spectrum Analyzer	KEYSIGHT	N9010A	MY55150213	10Hz~44GHz;Max 30dBm	Jun. 07, 2015	Feb. 03, 2016	Jun. 06, 2016	Radiation (03CH01-SZ)
Loop Antenna	R&S	HFH2-Z2	100354	9kHz~30MHz	May 06, 2015	Feb. 03, 2016	May 05, 2016	Radiation (03CH01-SZ)
Bilog Antenna	TeseQ	CBL6112D	23188	30MHz-2GHz	Oct. 17, 2015	Feb. 03, 2016	Oct. 16, 2016	Radiation (03CH01-SZ)
Double Ridge Horn Antenna	ETS Lindgren	3117	00119436	1GHz~18GHz	Oct. 17, 2015	Feb. 03, 2016	Oct. 16, 2016	Radiation (03CH01-SZ)
SHF-EHF Horn	com-power	AH-840	101071	18GHz-40GHz	Aug. 19, 2015	Feb. 03, 2016	Aug. 18, 2016	Radiation (03CH01-SZ)
Amplifier	HP	8447F	3113A04622	9kHz ~1300MHz / 30 dB	Aug. 07, 2015	Feb. 03, 2016	Aug. 06, 2016	Radiation (03CH01-SZ)
Amplifier	MITEQ	AMF-7D-00101800-30-10P-R	1889561	1GHz~18GHz	Oct. 20, 2015	Feb. 03, 2016	Oct. 19, 2015	Radiation (03CH01-SZ)
Amplifier	Yiai	AV3860B	04030	2GHz~26.5GHz	May 05, 2015	Feb. 03, 2016	May 04, 2016	Radiation (03CH01-SZ)
AC Power Source	Chroma	61601	616010001985	N/A	NCR	Feb. 03, 2016	NCR	Radiation (03CH01-SZ)
Turn Table	EM	EM1000	N/A	0~360 degree	NCR	Feb. 03, 2016	NCR	Radiation (03CH01-SZ)
Antenna Mast	EM	EM1000	N/A	1 m~4 m	NCR	Feb. 03, 2016	NCR	Radiation (03CH01-SZ)
EMI Receiver	R&S	ESCI7	100724	9kHz~3GHz;	Nov. 23, 2015	Jan. 29, 2016	Nov. 22, 2016	Conduction (CO01-SZ)
AC LISN	EMCO	3816/2SH	00103892	9kHz~30MHz	Jan. 12, 2016	Jan. 29, 2016	Jan. 11, 2017	Conduction (CO01-SZ)
AC LISN (for auxiliary equipment)	MessTec	3816/2SH	00103912	9kHz~30MHz	Jan. 12, 2016	Jan. 29, 2016	Jan. 11, 2017	Conduction (CO01-SZ)
AC Power Source	Chroma	61602	616020000891	100Vac~250Vac	Aug. 07, 2015	Jan. 29, 2016	Aug. 06, 2016	Conduction (CO01-SZ)
Pulse Limiter	COM-POWER	LIT-153 Transient Limiter	53139	150kHz~30MHz	Oct. 20, 2015	Jan. 29, 2016	Oct. 19, 2016	Conduction (CO01-SZ)

NCR: No Calibration Required



5 Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.3 dB
--	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.8 dB
--	--------



Appendix A. Radiated Spurious Emission

15C 2.4GHz 2400~2483.5MHz

BLE (Band Edge @ 3m)

BLE	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
BLE CH 00 2402MHz		2388.66	47.9	-26.1	74	39.57	32.6	5.07	29.34	179	258	P	H
		2370.48	37.44	-16.56	54	29.13	32.58	5.07	29.34	179	258	A	H
	*	2402	94.19	-	-	85.9	32.6	5.07	29.38	179	258	P	H
	*	2402	93.55	-	-	85.26	32.6	5.07	29.38	179	258	A	H
		2316.39	47.84	-26.16	74	39.62	32.51	4.98	29.27	193	96	P	V
		2385.24	37.37	-16.63	54	29.06	32.58	5.07	29.34	193	96	A	V
	*	2402	91.88	-	-	83.59	32.6	5.07	29.38	193	96	P	V
	*	2402	91.23	-	-	82.94	32.6	5.07	29.38	193	96	A	V
BLE CH 19 2440MHz		2361.75	47.76	-26.24	74	39.48	32.56	5.03	29.31	238	308	P	H
		2328.72	37.32	-16.68	54	29.03	32.53	5.03	29.27	238	308	A	H
	*	2440	94.27	-	-	85.85	32.65	5.12	29.35	238	308	P	H
	*	2440	93.63	-	-	85.21	32.65	5.12	29.35	238	308	A	H
		2486.52	47.96	-26.04	74	39.43	32.68	5.16	29.31	238	308	P	H
		2483.64	37.48	-16.52	54	28.95	32.68	5.16	29.31	238	308	A	H
		2353.38	47.9	-26.1	74	39.62	32.56	5.03	29.31	170	93	P	V
		2368.05	37.34	-16.66	54	29.09	32.56	5.03	29.34	170	93	A	V
	*	2440	91.63	-	-	83.21	32.65	5.12	29.35	170	93	P	V
	*	2440	91.01	-	-	82.59	32.65	5.12	29.35	170	93	A	V
		2490.8	47.48	-26.52	74	38.88	32.7	5.21	29.31	170	93	P	V
		2485.32	37.59	-16.41	54	29.06	32.68	5.16	29.31	170	93	A	V



BLE CH 39 2480MHz	*	2480	94.17	-	-	85.64	32.68	5.16	29.31	169	244	P	H
	*	2480	93.53	-	-	85	32.68	5.16	29.31	169	244	A	H
		2499.36	47.02	-26.98	74	38.39	32.7	5.21	29.28	169	244	P	H
		2484.96	37.58	-16.42	54	29.05	32.68	5.16	29.31	169	244	A	H
	*	2480	90.02	-	-	81.49	32.68	5.16	29.31	156	100	P	V
	*	2480	89.34	-	-	80.81	32.68	5.16	29.31	156	100	A	V
		2485.84	47.56	-26.44	74	39.03	32.68	5.16	29.31	156	100	P	V
		2494.52	37.56	-16.44	54	28.93	32.7	5.21	29.28	156	100	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



15C 2.4GHz 2400~2483.5MHz

BLE (Harmonic @ 3m)

BLE	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
BLE CH 00 2402MHz		4804	47.76	-26.24	74	64.24	34.39	7.43	58.3	153	360	P	H
		4804	44.6	-29.4	74	61.08	34.39	7.43	58.3	153	360	P	V
BLE CH 19 2440MHz		4880	44.17	-29.83	74	60.91	34.43	7.49	58.66	154	360	P	H
		7320	45.56	-28.44	74	58.23	36.23	9.7	58.6	154	360	P	H
		4880	44.72	-29.28	74	61.46	34.43	7.49	58.66	154	360	P	V
		7320	47.45	-26.55	74	60.12	36.23	9.7	58.6	154	360	P	V
BLE CH 39 2480MHz		4960	44.43	-29.57	74	60.69	34.48	7.56	58.3	153	360	P	H
		7440	46.84	-27.16	74	59.16	36.28	9.85	58.45	153	360	P	H
		4960	44.66	-29.34	74	60.92	34.48	7.56	58.3	153	360	P	V
		7440	47.2	-26.8	74	59.52	36.28	9.85	58.45	153	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



15C Emission below 1GHz

2.4GHz BLE (LF)

BLE	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
2.4GHz BLE LF		30.97	27.47	-12.53	40	27.67	25.09	0.77	26.06	100	150	P	H
		218.18	24.97	-21.03	46	36.05	11.89	2.24	25.21	-	-	P	H
		363.68	22.26	-23.74	46	29.9	14.93	2.96	25.53	-	-	P	H
		512.09	25.94	-20.06	46	29.18	19.43	3.68	26.35	-	-	P	H
		640.13	28.29	-17.71	46	30.39	19.94	4.37	26.41	-	-	P	H
		826.37	29.8	-16.2	46	28.52	22.26	5.11	26.09	-	-	P	H
		33.88	36.08	-3.92	40	37.76	23.56	0.8	26.04	150	200	P	V
		92.08	25.28	-18.22	43.5	38.95	10.74	1.4	25.81	-	-	P	V
		213.33	22.13	-21.37	43.5	33.32	11.82	2.21	25.22	-	-	P	V
		528.58	25.62	-20.38	46	28.8	19.48	3.71	26.37	-	-	P	V
		786.6	29.87	-16.13	46	28.95	22.2	4.92	26.2	-	-	P	V
		894.27	29.75	-16.25	46	28.62	21.65	5.37	25.89	-	-	P	V
Remark	1. No other spurious found. 2. All results are PASS against limit line.												

**Note symbol**

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency per 15.209(c).
!	Test result is over limit line.
P/A	P eak or A verage
H/V	H orizontal or V ertical



A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Level(dBμV/m) =

Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

2. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)

= 55.45 (dBμV/m)

2. Over Limit(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 55.45(dBμV/m) – 74(dBμV/m)

= -18.55(dB)

For Average Limit @ 2390MHz:

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)

= 43.54 (dBμV/m)

2. Over Limit(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 43.54(dBμV/m) – 54(dBμV/m)

= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.