



FCC RF Test Report

APPLICANT : TCL Communication Ltd.
EQUIPMENT : Tablet PC
BRAND NAME : alcatel
MODEL NAME : 8085
MARKETING NAME : PLUS 10" WiFi Windows
FCC ID : 2ACCJB056
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : (DTS) Digital Transmission System

The product was received on Mar. 17, 2016 and testing was completed on Apr. 28, 2016. We, SPORTON INTERNATIONAL (SHENZHEN) INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL (SHENZHEN) INC., the test report shall not be reproduced except in full.

Prepared by: Ken Chen / Manager

Approved by: Jones Tsai / Manager



SPORTON INTERNATIONAL (SHENZHEN) INC.

**1F & 2F, Building A, Morning Business Center, No. 4003 ShiGu Rd., Xili Town,
Nanshan District, Shenzhen, Guangdong, P. R. China**



TABLE OF CONTENTS

REVISION HISTORY	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant	5
1.2 Manufacturer	5
1.3 Product Feature of Equipment Under Test	5
1.4 Product Specification of Equipment Under Test	6
1.5 Modification of EUT	6
1.6 Specification of Accessory	6
1.7 Testing Location	7
1.8 Applicable Standards	7
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	8
2.1 Carrier Frequency Channel	8
2.2 Pre-Scanned RF Power	9
2.3 Test Mode	10
2.4 Connection Diagram of Test System	11
2.5 Support Unit used in test configuration and system	12
2.6 EUT Operation Test Setup	12
2.7 Measurement Results Explanation Example	13
3 TEST RESULT	14
3.1 6dB Bandwidth Measurement	14
3.2 Output Power Measurement	16
3.3 Power Spectral Density Measurement	17
3.4 Conducted Band Edges and Spurious Emission Measurement	19
3.5 Radiated Band Edges and Spurious Emission Measurement	32
3.6 AC Conducted Emission Measurement	36
3.7 Antenna Requirements	40
4 LIST OF MEASURING EQUIPMENT	41
5 UNCERTAINTY OF EVALUATION	42
APPENDIX A. CONDUCTED TEST RESULTS	
APPENDIX B. RADIATED TEST RESULTS	
APPENDIX C. SETUP PHOTOGRAPHS	
APPENDIX D. Duty Cycle Plots	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR631706C	Rev. 01	Initial issue of report	May 17, 2016

SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(2)	6dB Bandwidth	$\geq 0.5\text{MHz}$	Pass	-
3.2	15.247(b)	Power Output Measurement	$\leq 30\text{dBm}$	Pass	-
3.3	15.247(e)	Power Spectral Density	$\leq 8\text{dBm}/3\text{kHz}$	Pass	-
3.4	15.247(d)	Conducted Band Edges	$\leq 20\text{dBc}$	Pass	-
		Conducted Spurious Emission		Pass	-
3.5	15.247(d)	Radiated Band Edges and Radiated Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 0.57 dB at 39.700 MHz for Quasi-Peak
3.6	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 12.09 dB at 9.200 MHz
3.7	15.203 & 15.247(b)	Antenna Requirement	N/A	Pass	-



1 General Description

1.1 Applicant

TCL Communication Ltd.

5F, C-Tower, No. 232, Liang Jing Road, ZhangJiang High-Tech Park, Pudong Area, Shanghai, 201203, P.R.China

1.2 Manufacturer

TCL Communication Ltd.

5F, C-Tower, No. 232, Liang Jing Road, ZhangJiang High-Tech Park, Pudong Area, Shanghai, 201203, P.R.China

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Tablet PC
Brand Name	alcatel
Model Name	8085
Marketing Name	PLUS 10" WiFi Windows
FCC ID	2ACCJB056
EUT supports Radios application	WLAN 2.4GHz 802.11b/g/n HT20/HT40 Bluetooth v3.0 + EDR/Bluetooth v4.0 LE
HW Version	V3.0
SW Version	V1.0
EUT Stage	Production Unit

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Channel Frequency Range	802.11b/g/n : 2412 MHz ~ 2462 MHz
Maximum (Peak) Output Power to Antenna	802.11b : 16.96 dBm (0.0497 W) 802.11g : 22.37 dBm (0.1726 W) 802.11n HT20 : 21.59 dBm (0.1442 W) 802.11n HT40 : 20.86 dBm (0.1219 W)
Antenna Type/Gain	802.11b/g/n : IFA Antenna with gain -3 dBi
Type of Modulation	802.11b : DSSS (DBPSK / DQPSK / CCK) 802.11g/n : OFDM (BPSK / QPSK / 16QAM / 64QAM)

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Specification of Accessory

Specification of Accessory				
AC Adapter	Brand Name	ALCATEL ONETOUCH	Model Name	UC13US
	Power Rating	I/P: 100 - 240 Vac, 400mA, O/P: 5 Vdc, 2000 mA		
	P/N	CBA0059AG0C2		
Battery 1	Brand Name	alcatel	Model Name	TLp058A2
	Power Rating	3.85 Vdc, 5830 mAh		
Battery 2	Brand Name	alcatel	Model Name	TLp058AC
	Power Rating	3.8 Vdc, 5830 mAh		
USB Cable 1	Brand Name	NA	Model Name	NA
	Signal Line Type	0.8meter, non-shielded cable, with w/o ferrite core		
USB Cable 2	Brand Name	NA	Model Name	NA
	Signal Line Type	0.8meter, non-shielded cable, with w/o ferrite core		
Earphone 1	Brand Name	NA	Model Name	NA
	Signal Line Type	1.5meter, non-shielded cable, with w/o ferrite core		
Earphone 2	Brand Name	NA	Model Name	NA
	Signal Line Type	1.5meter, non-shielded cable, with w/o ferrite core		
keyboard	Brand Name	alcatel	Model Name	KB8085

1.7 Testing Location

Test Site	SPORTON INTERNATIONAL (SHENZHEN) INC.	
Test Site Location	1F & 2F, Building A, Morning Business Center, No. 4003 ShiGu Rd., Xili Town, Nanshan District, Shenzhen, Guangdong, P. R. China TEL: +86-755-8637-9589 FAX: +86-755-8637-9595	
Test Site No.	Sporton Site No.	
	TH01-SZ	CO01-SZ

Test Site	SPORTON INTERNATIONAL (SHENZHEN) INC.	
Test Site Location	No. 3 Building, the third floor of south, Shahe River west, Fengzeyuan warehouse, Nanshan District, Shenzhen, Guangdong, P. R. China TEL: +86-755-3320-2398	
Test Site No.	Sporton Site No.	FCC Registration No.
	03CH02-SZ	566869

Note: The test site complies with ANSI C63.4 2014 requirement.

1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r05
- ♦ ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

2 Test Configuration of Equipment Under Test

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conducted emission (150 kHz to 30 MHz) and radiated emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z, Laptop. The worst cases (Laptop/Z plane) were recorded in this report.

The final configuration from all the combinations and the worst-case data rates were investigated by measuring the maximum power across all the data rates and modulation modes under section 2.2.

Based on the worst configuration found above, the RF power setting is set individually to meet FCC compliance limit for the final conducted and radiated tests shown in section 2.3.

2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	1	2412	7	2442
	2	2417	8	2447
	3	2422	9	2452
	4	2427	10	2457
	5	2432	11	2462
	6	2437	-	-



2.2 Pre-Scanned RF Power

Preliminary tests were performed in different data rate and data rate associated with the highest power were chosen for full test shown in the following tables.

2.4GHz 802.11b RF Output Power (dBm)						
Power vs. Channel			Power vs. Data Rate			
Channel	Frequency (MHz)	Data Rate 1Mbps	Channel	2Mbps	5.5Mbps	11Mbps
CH 01	2412 MHz	16.59	CH 06	16.79	16.72	16.91
CH 06	2437 MHz	16.96				
CH 11	2462 MHz	16.89				

2.4GHz 802.11g RF Output Power (dBm)										
Power vs. Channel			Power vs. Data Rate							
Channel	Frequency (MHz)	Data Rate 6Mbps	Channel	9Mbps	12Mbps	18Mbps	24Mbps	36Mbps	48Mbps	54Mbps
CH 01	2412 MHz	21.60	CH 11	22.33	22.26	22.19	22.27	22.32	22.30	22.35
CH 06	2437 MHz	21.86								
CH 11	2462 MHz	22.37								

2.4GHz 802.11n HT20 RF Output Power (dBm)										
Power vs. Channel			Power vs. MCS Index							
Channel	Frequency (MHz)	MCS Index MCS0	Channel	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
CH 01	2412 MHz	20.12	CH 11	21.51	21.49	21.53	21.48	21.57	21.54	21.58
CH 06	2437 MHz	20.52								
CH 11	2462 MHz	21.59								

2.4GHz 802.11n HT40 RF Output Power (dBm)										
Power vs. Channel			Power vs. MCS Index							
Channel	Frequency (MHz)	MCS Index MCS0	Channel	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
CH 03	2422 MHz	20.34	CH 09	20.71	20.81	20.83	20.85	20.84	20.83	20.31
CH 06	2437 MHz	20.16								
CH 09	2452 MHz	20.86								

2.3 Test Mode

Final test mode of conducted test items and radiated spurious emissions are considering the modulation and worse data rates from the power table described in section 2.2.

<2.4GHz>


Modulation	Data Rate
802.11b	1 Mbps
802.11g	6 Mbps
802.11n HT20	MCS0
802.11n HT40	MCS0

Test Cases	
AC Conducted Emission	Mode 1 : Bluetooth Link + WLAN Link + Earphone 1 + Battery 1 + USB Cable 1 (Charging from Adapter)
Remark: - For Radiated TCs, The tests were performance with Adapter, Battery 1, Earphone 2, Keyboard and USB Cable 1. - Without keyboard mode verify worse mode of with keyboard mode.	


2.4 Connection Diagram of Test System


<WLAN Tx Mode>

Laptop plane

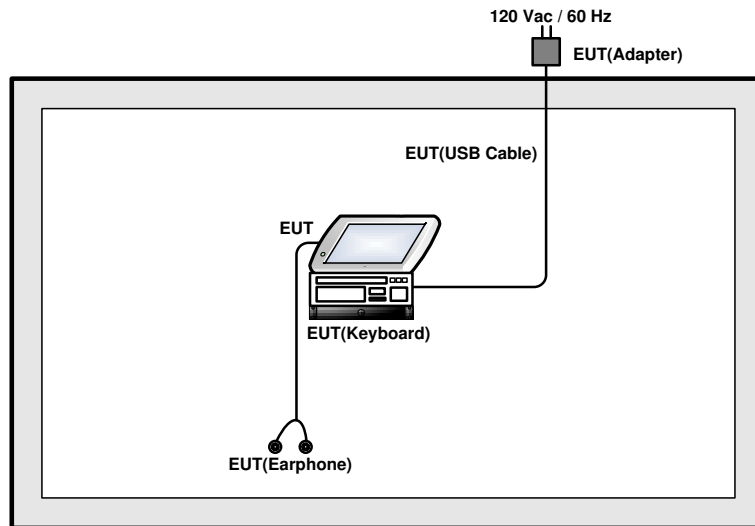

Z plane

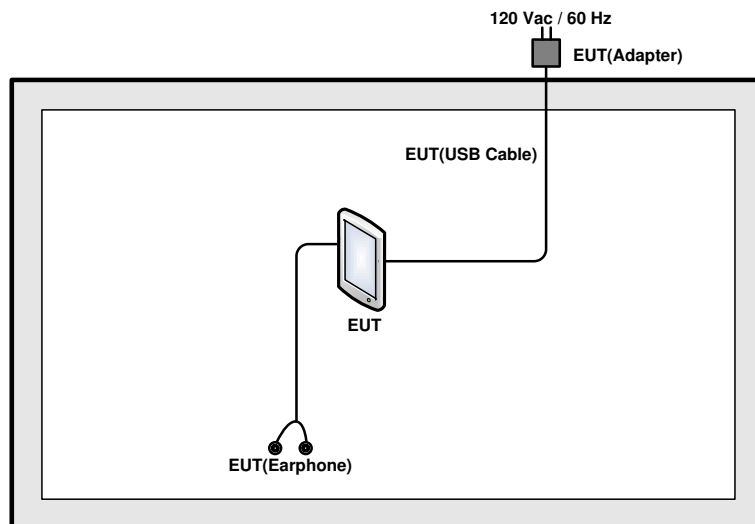
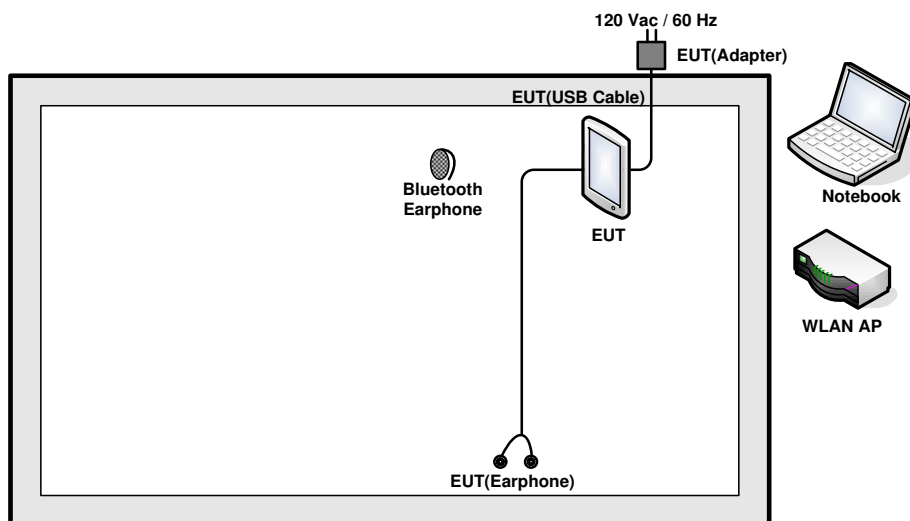
<AC Conducted Emission Mode>


2.5 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Bluetooth Earphone	Nokia	BH-108	PYAHS-107W	N/A	N/A
2.	WLAN AP	ASUS	RT-AC66U	MSQ-RTAC66U	N/A	Unshielded, 1.8 m
3.	Notebook	Lenovo	E540	FCC DoC	N/A	Shielded cable DC O/P 1.8 m Unshielded AC I/P cable 1.2 m

2.6 EUT Operation Test Setup

For WLAN function, the engineering test program was provided and enabled to make EUT continuous transmit/receive.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.

2.7 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 5 dB and 10dB attenuator.

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 5 + 10 = 15 \text{ (dB)}\end{aligned}$$

3 Test Result

3.1 6dB Bandwidth Measurement

3.1.1 Limit of 6dB Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures

1. The testing follows FCC KDB Publication No. 558074 DTS D01 Meas. Guidance v03r05.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. Measure and record the results in the test report.


3.1.4 Test Setup

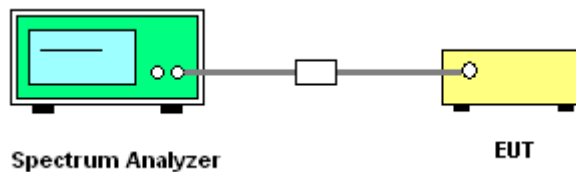



3.1.5 Test Result of 6dB Bandwidth

Please refer to Appendix A of this test report.

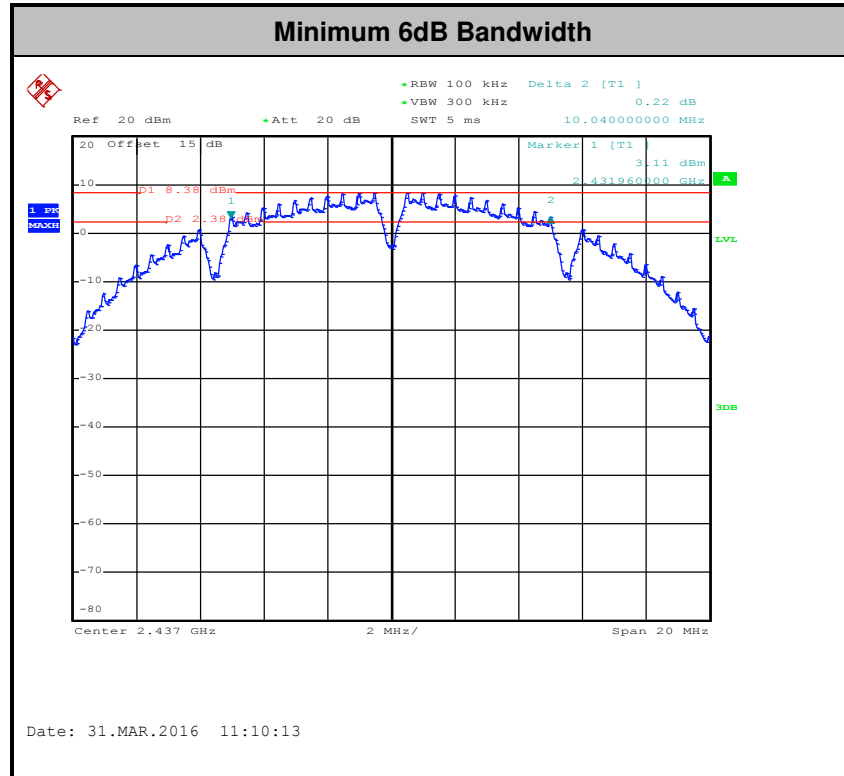

3.2 Output Power Measurement

3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting Antenna of directional gain greater than 6dBi are used the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the Antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the Antenna exceeds 6dBi.

3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.2.3 Test Procedures

1. The testing follows the Measurement Procedure of FCC KDB No. 558074 DTS D01 Meas. Guidance v03r05 section 9.1.2 PKPM1 Peak power meter method.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.

3.2.4 Test Setup



3.2.5 Test Result of Peak Output Power

Please refer to Appendix A of this test report.

3.2.6 Test Result of Average output Power (Reporting Only)

Please refer to Appendix A of this test report.

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.


3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures


1. The testing follows Measurement Procedure 10.2 Method PKPSD of FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r05
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.

3.3.4 Test Setup

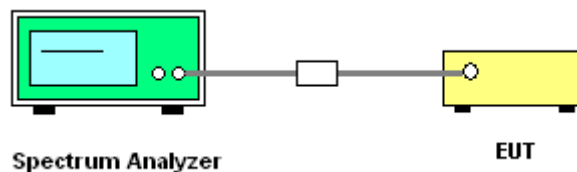

3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A of this test report.

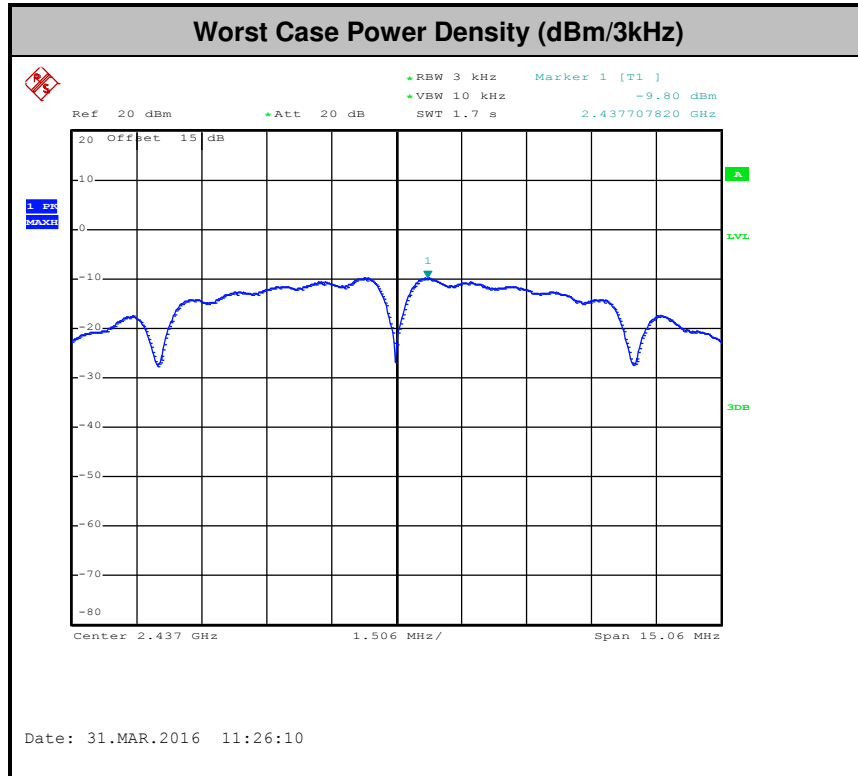

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission Measurement

In any 100 kHz bandwidth outside of the authorized frequency band, the emissions which fall in the non-restricted bands shall be attenuated at least 20 dB / 30dB relative to the maximum PSD level in 100 kHz by RF conducted measurement and radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).


3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.4.3 Test Procedures

1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r05.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB per 15.247(d).
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.


3.4.4 Test Setup

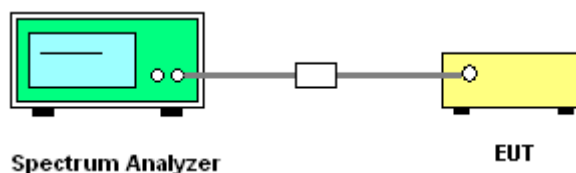




3.4.5 Test Result of Conducted Band Edges and Spurious Emission

Test Mode :	802.11b	Temperature :	24~26℃
Test Band :	2.4GHz Low	Relative Humidity :	50~53%
Test Channel :	01	Test Engineer :	Bruce Huang

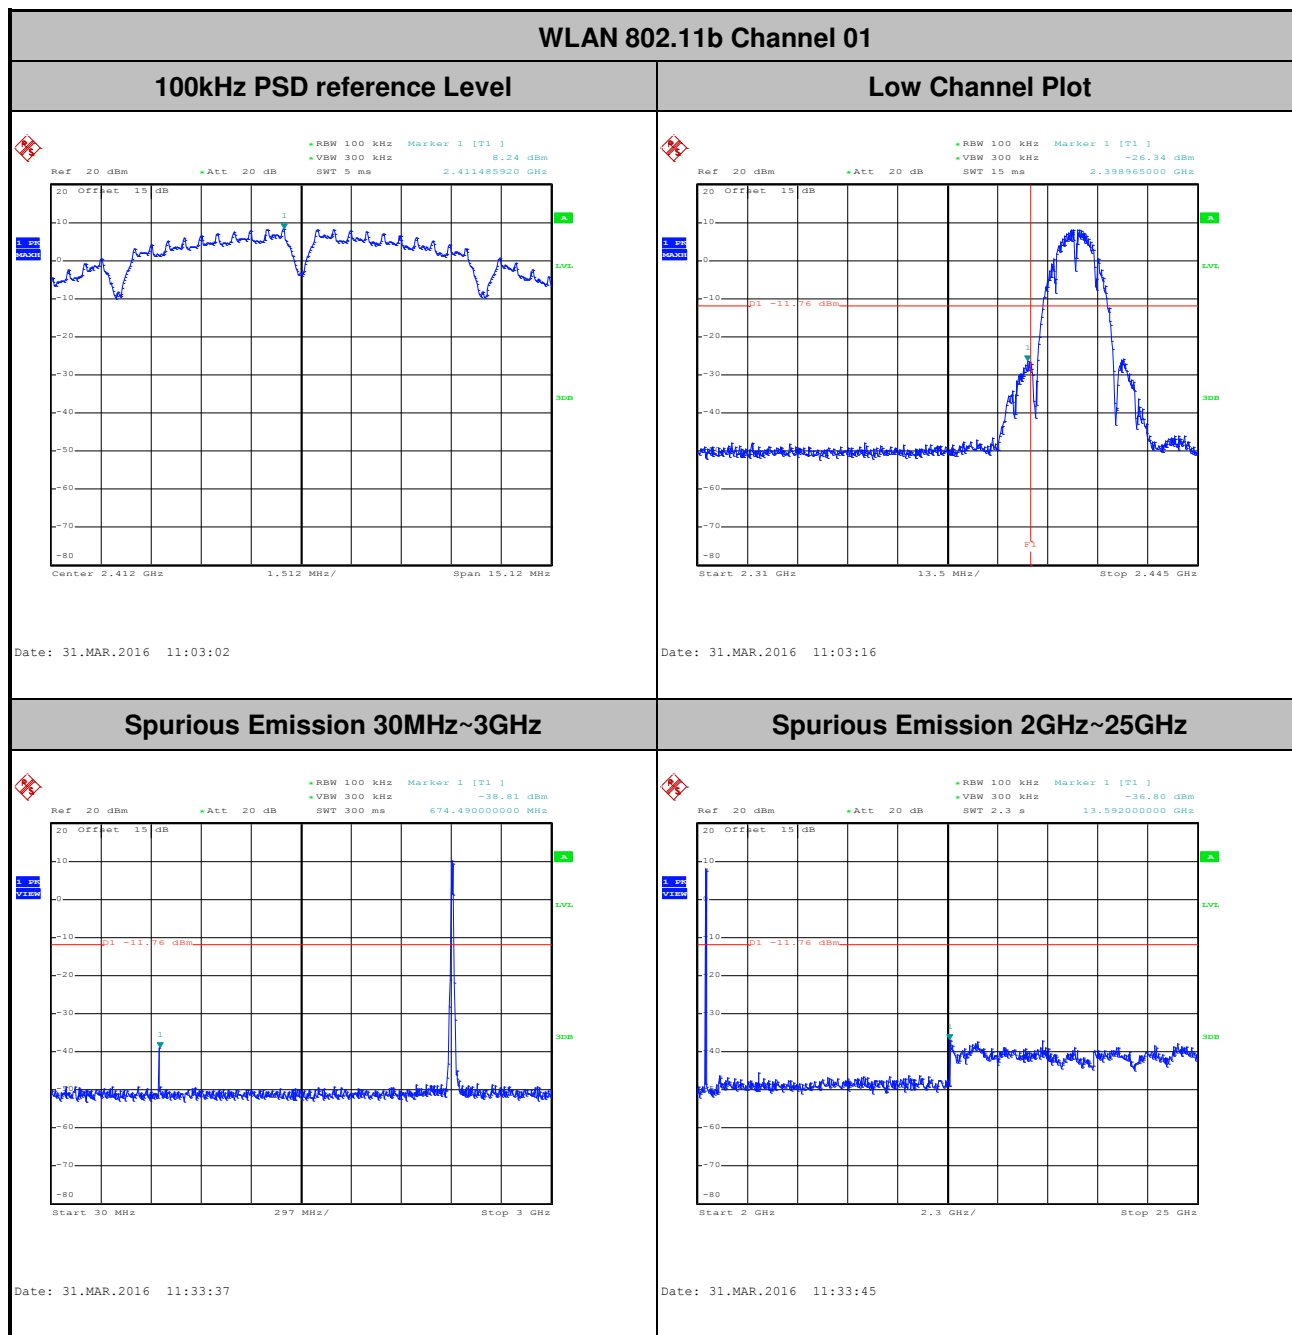





Test Mode :	802.11b	Temperature :	24~26°C
Test Band :	2.4GHz Mid	Relative Humidity :	50~53%
Test Channel :	06	Test Engineer :	Bruce Huang

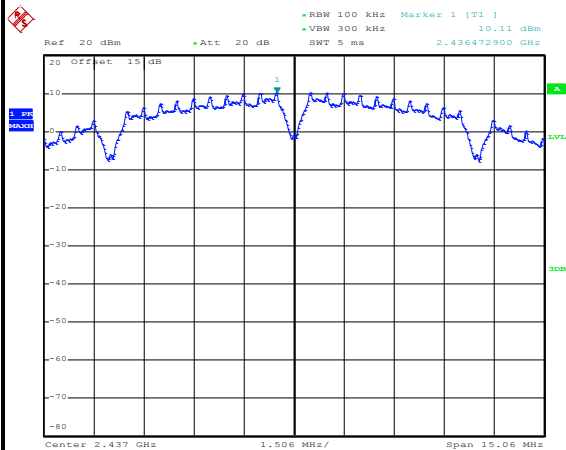WLAN 802.11b Channel 06**100kHz PSD reference Level**

Date: 31.MAR.2016 11:26:22

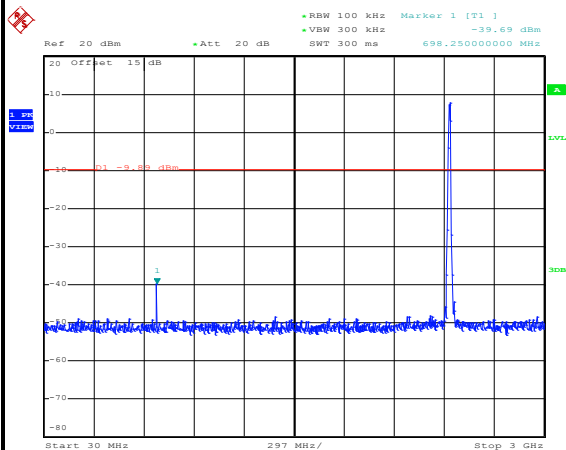Spurious Emission 30MHz~3GHz


Date: 31.MAR.2016 11:32:28

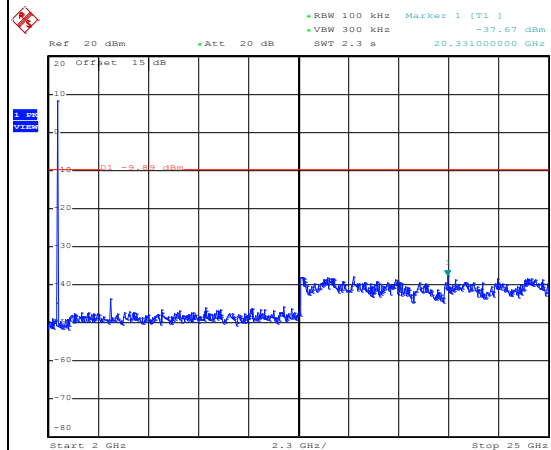Spurious Emission 2GHz~25GHz


Date: 31.MAR.2016 11:32:36




Test Mode :	802.11b	Temperature :	24~26°C
Test Band :	2.4GHz High	Relative Humidity :	50~53%
Test Channel :	11	Test Engineer :	Bruce Huang

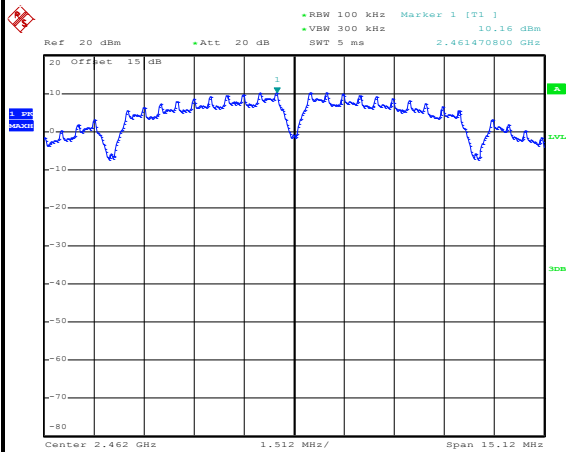WLAN 802.11b Channel 11**100kHz PSD reference Level**


Date: 31.MAR.2016 11:38:06

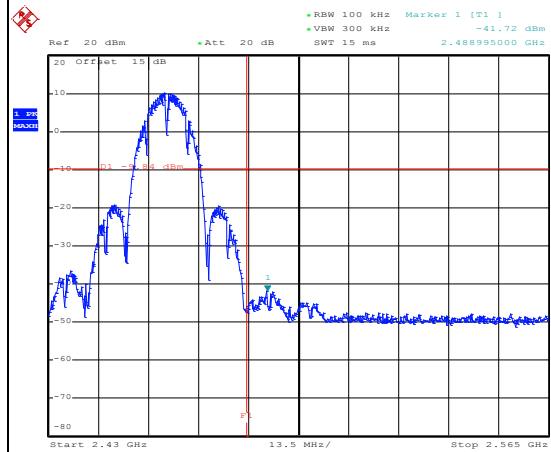High Channel Plot

Date: 31.MAR.2016 11:39:04

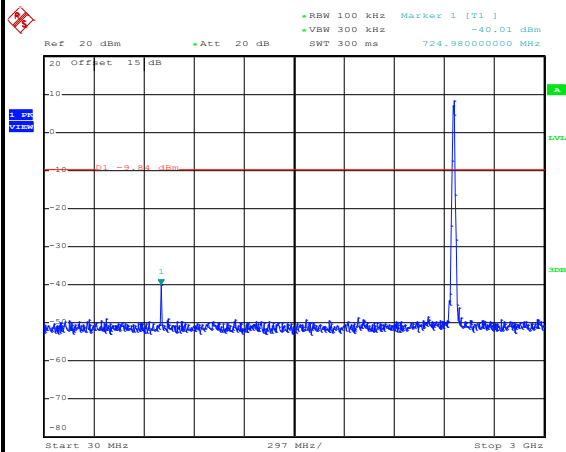Spurious Emission 30MHz~3GHz

Date: 31.MAR.2016 11:41:13

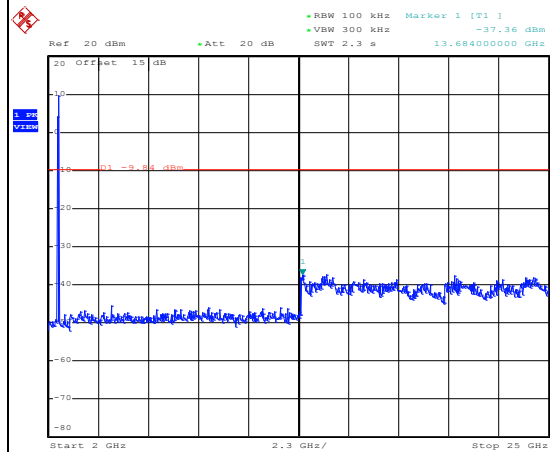Spurious Emission 2GHz~25GHz


Date: 31.MAR.2016 11:41:21



Test Mode :	802.11g	Temperature :	24~26°C
Test Band :	2.4GHz Low	Relative Humidity :	50~53%
Test Channel :	01	Test Engineer :	Bruce Huang


WLAN 802.11g Channel 01

100kHz PSD reference Level

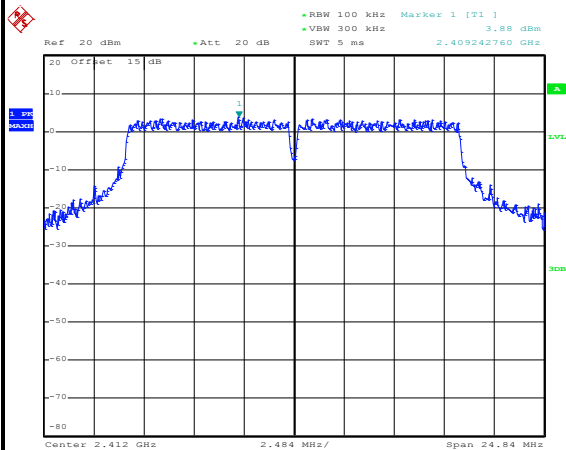


Date: 31.MAR.2016 11:54:54

Low Channel Plot

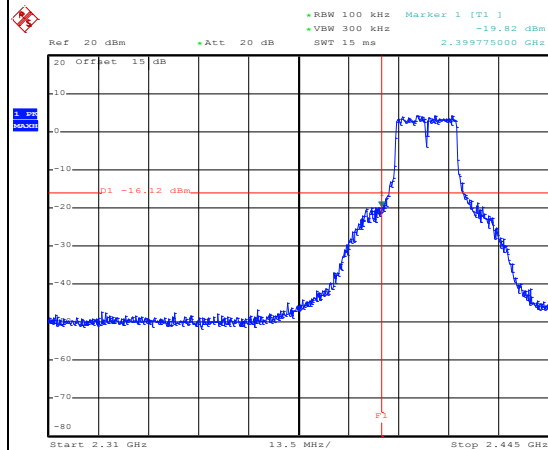


Date: 31.MAR.2016 11:55:14

Spurious Emission 30MHz~3GHz

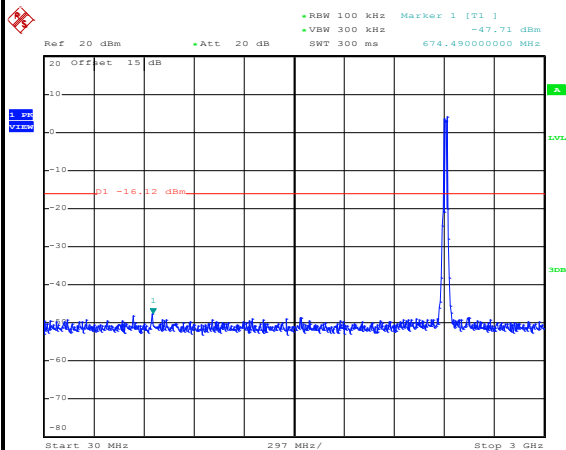

Date: 31.MAR.2016 11:56:43

Spurious Emission 2GHz~25GHz

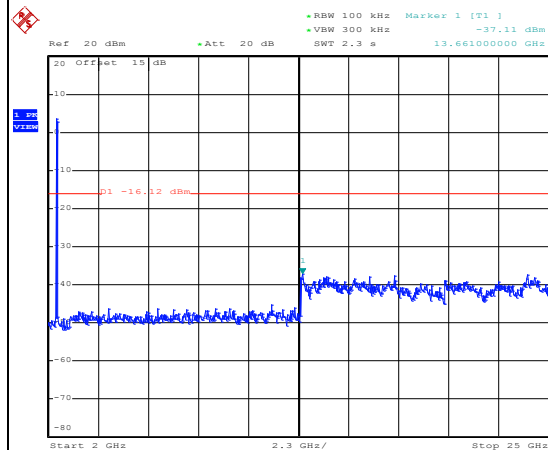


Date: 31.MAR.2016 11:56:51



Test Mode :	802.11g	Temperature :	24~26°C
Test Band :	2.4GHz Mid	Relative Humidity :	50~53%
Test Channel :	06	Test Engineer :	Bruce Huang


WLAN 802.11g Channel 06

100kHz PSD reference Level

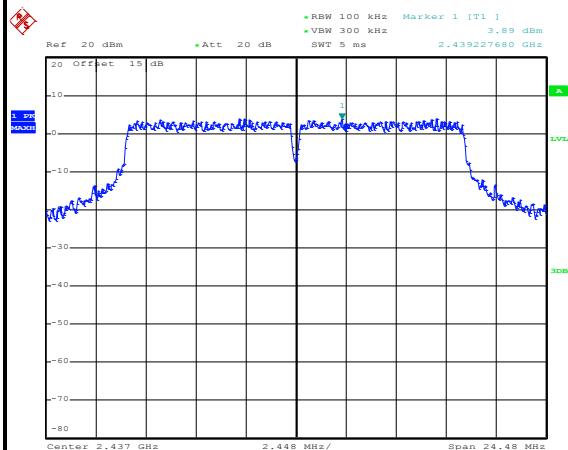


Date: 31.MAR.2016 12:04:32

Spurious Emission 30MHz~3GHz

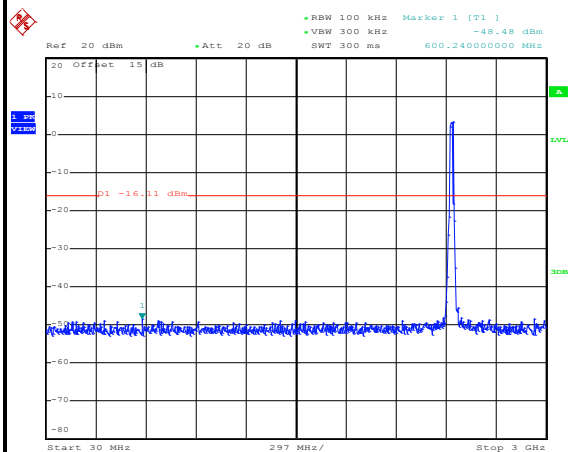

Date: 31.MAR.2016 12:13:03

Spurious Emission 2GHz~25GHz

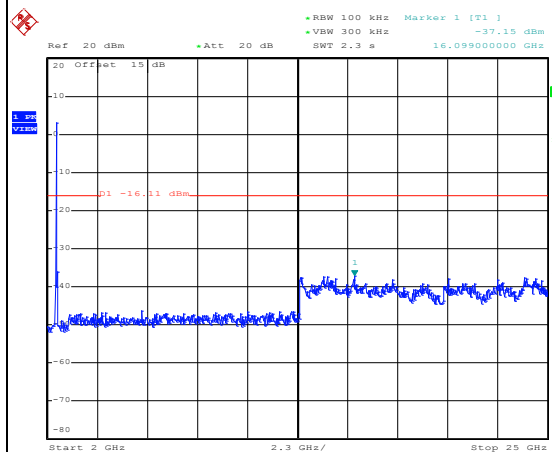


Date: 31.MAR.2016 12:13:12



Test Mode :	802.11g	Temperature :	24~26°C
Test Band :	2.4GHz High	Relative Humidity :	50~53%
Test Channel :	11	Test Engineer :	Bruce Huang


WLAN 802.11g Channel 11

100kHz PSD reference Level

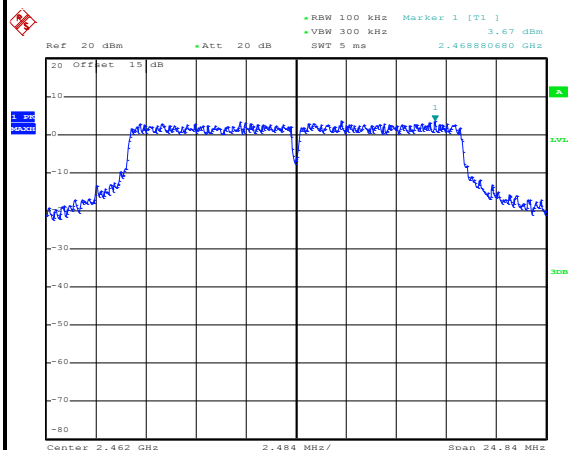


Date: 11.APR.2016 18:04:19

High Channel Plot

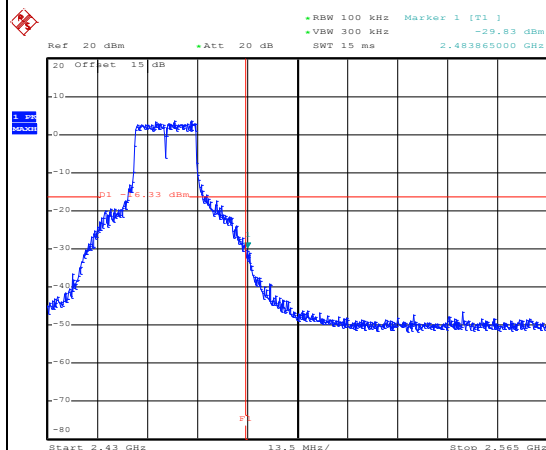


Date: 11.APR.2016 18:04:46

Spurious Emission 30MHz~3GHz

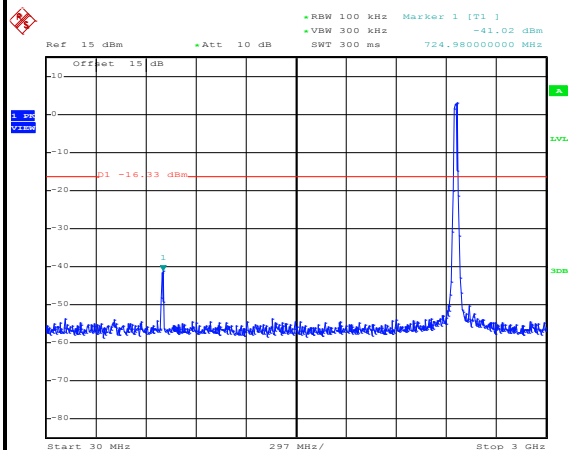

Date: 11.APR.2016 18:05:05

Spurious Emission 2GHz~25GHz

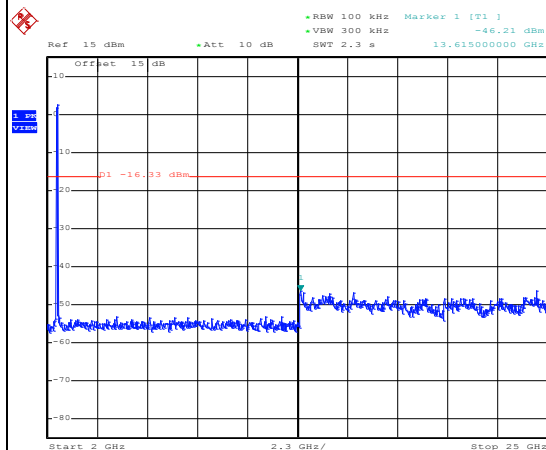


Date: 11.APR.2016 18:05:13



Test Mode :	802.11n HT20	Temperature :	24~26°C
Test Band :	2.4GHz Low	Relative Humidity :	50~53%
Test Channel :	01	Test Engineer :	Bruce Huang


WLAN 802.11n HT20 Channel 01

100kHz PSD reference Level

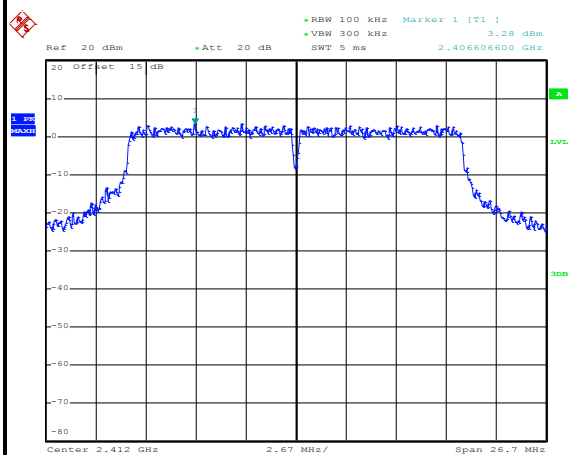


Date: 31.MAR.2016 15:42:27

Low Channel Plot

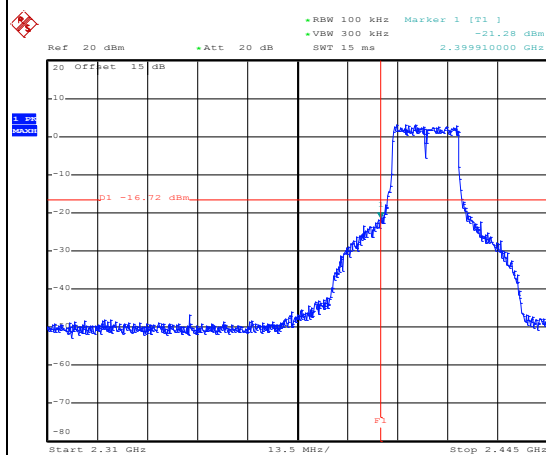


Date: 31.MAR.2016 15:42:40

Spurious Emission 30MHz~3GHz

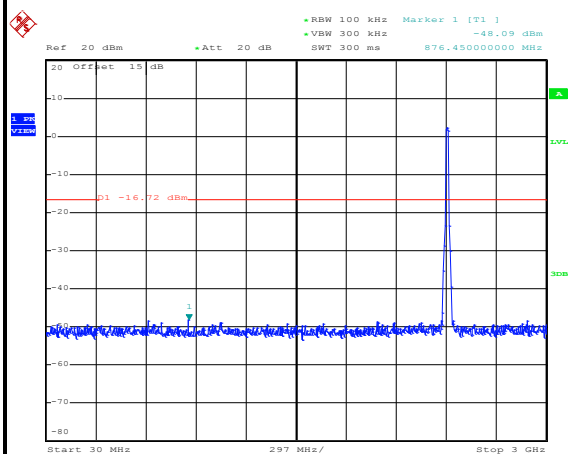

Date: 31.MAR.2016 15:47:59


Spurious Emission 2GHz~25GHz

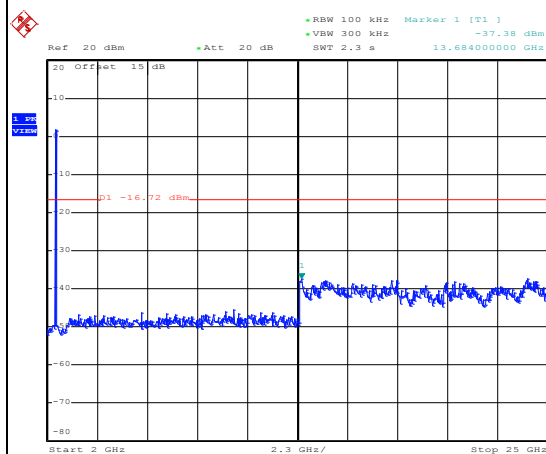


Date: 31.MAR.2016 15:48:07




Test Mode :	802.11n HT20	Temperature :	24~26°C
Test Band :	2.4GHz Mid	Relative Humidity :	50~53%
Test Channel :	06	Test Engineer :	Bruce Huang

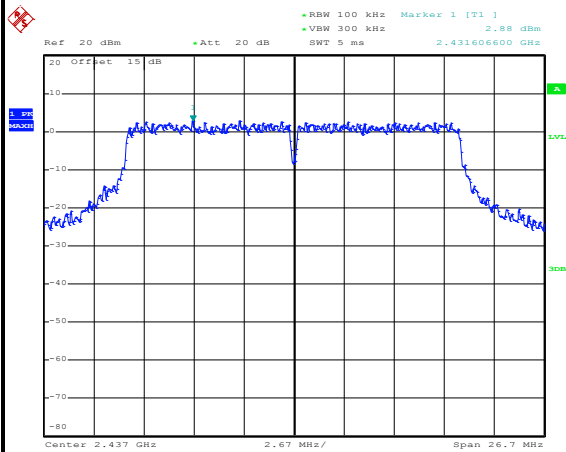WLAN 802.11n HT20 Channel 06**100kHz PSD reference Level**

Date: 31.MAR.2016 15:59:14

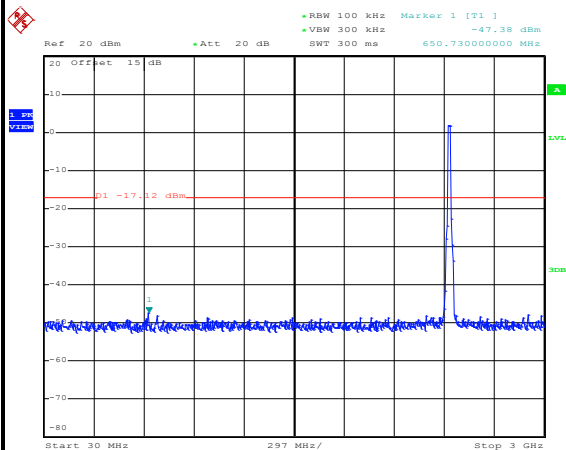Spurious Emission 30MHz~3GHz

Date: 31.MAR.2016 16:39:10

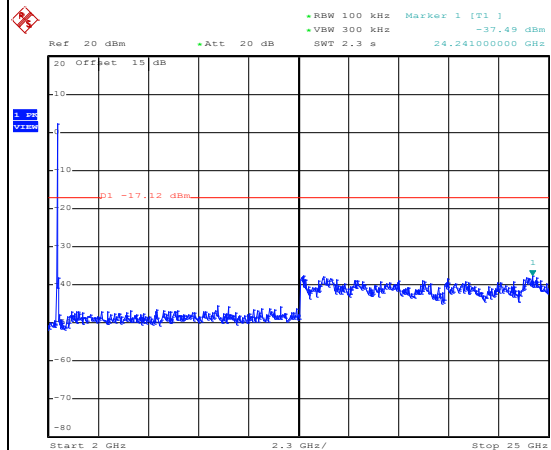Spurious Emission 2GHz~25GHz


Date: 31.MAR.2016 16:35:28



Test Mode :	802.11n HT20	Temperature :	24~26°C
Test Band :	2.4GHz High	Relative Humidity :	50~53%
Test Channel :	11	Test Engineer :	Bruce Huang


WLAN 802.11n HT20 Channel 11

100kHz PSD reference Level

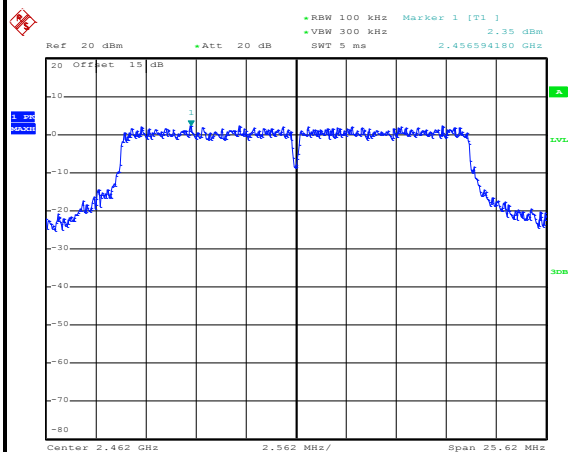


Date: 11.APR.2016 18:07:50

High Channel Plot

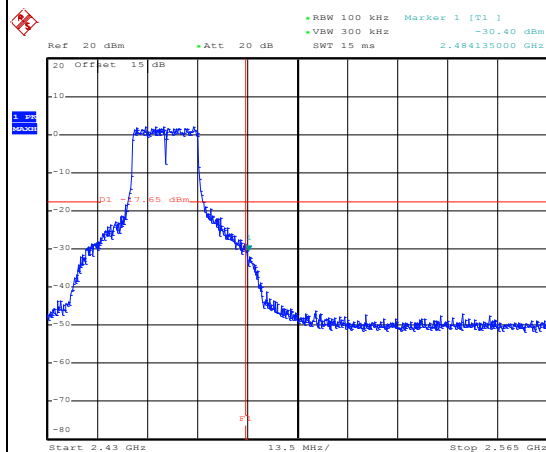


Date: 11.APR.2016 18:58:10

Spurious Emission 30MHz~3GHz

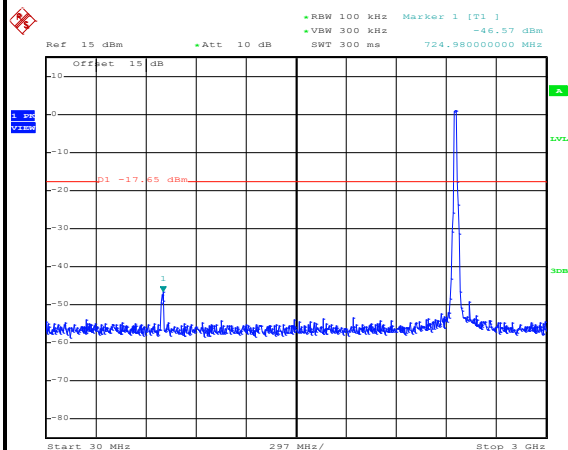

Date: 11.APR.2016 18:58:22

Spurious Emission 2GHz~25GHz

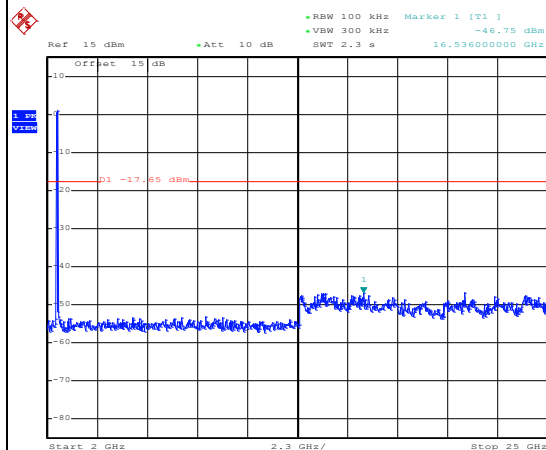


Date: 11.APR.2016 18:58:30



Test Mode :	802.11n HT40	Temperature :	24~26°C
Test Band :	2.4GHz Low	Relative Humidity :	50~53%
Test Channel :	03	Test Engineer :	Bruce Huang


WLAN 802.11n HT40 Channel 03

100kHz PSD reference Level

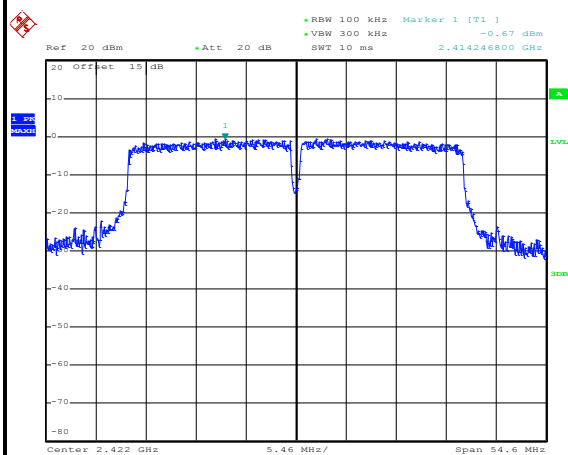


Date: 31.MAR.2016 17:10:44

Low Channel Plot

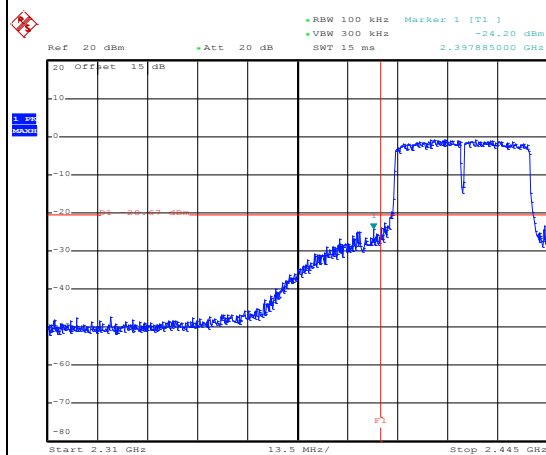


Date: 31.MAR.2016 17:10:59

Spurious Emission 30MHz~3GHz

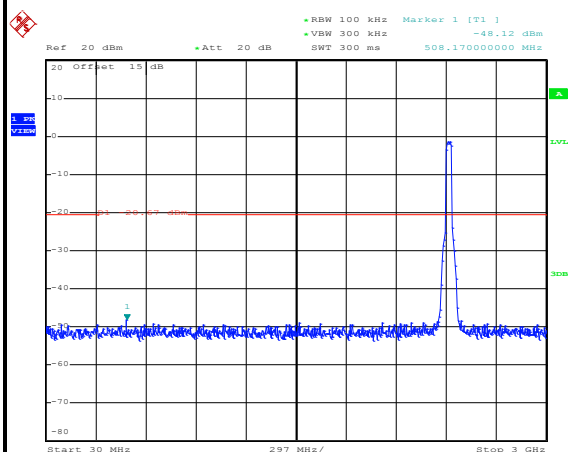

Date: 31.MAR.2016 17:20:27

Spurious Emission 2GHz~25GHz

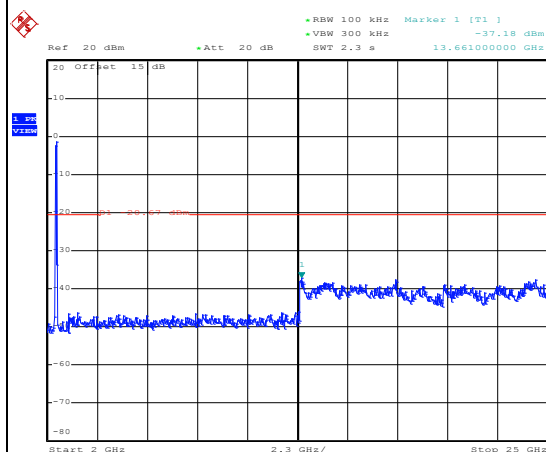


Date: 31.MAR.2016 17:18:18



Test Mode :	802.11n HT40	Temperature :	24~26°C
Test Band :	2.4GHz Mid	Relative Humidity :	50~53%
Test Channel :	06	Test Engineer :	Bruce Huang


WLAN 802.11n HT40 Channel 06

100kHz PSD reference Level

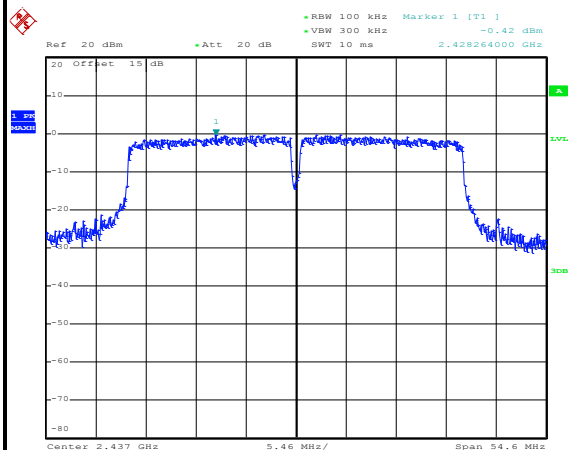


Date: 31.MAR.2016 17:25:11

Spurious Emission 30MHz~3GHz

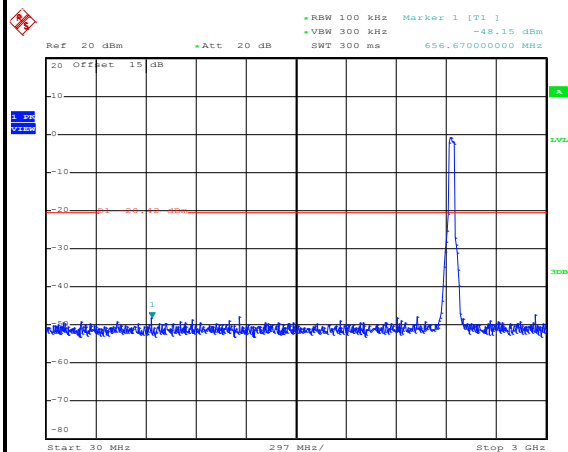

Date: 31.MAR.2016 17:30:29


Spurious Emission 2GHz~25GHz

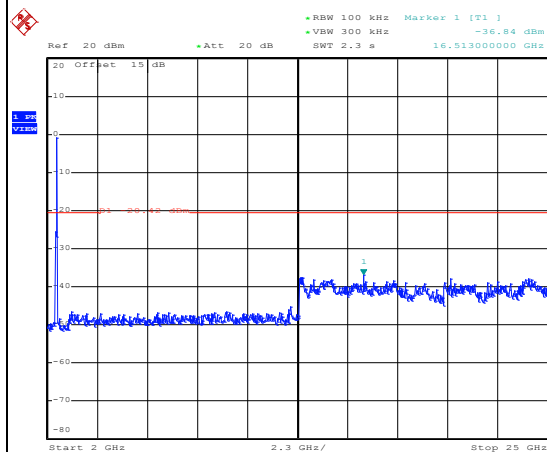


Date: 31.MAR.2016 17:27:57




Test Mode :	802.11n HT40	Temperature :	24~26°C
Test Band :	2.4GHz High	Relative Humidity :	50~53%
Test Channel :	09	Test Engineer :	Bruce Huang

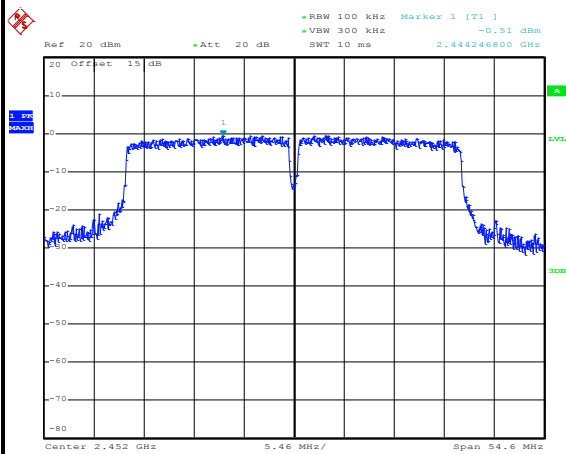WLAN 802.11n HT40 Channel 09**100kHz PSD reference Level**


Date: 31.MAR.2016 17:37:13

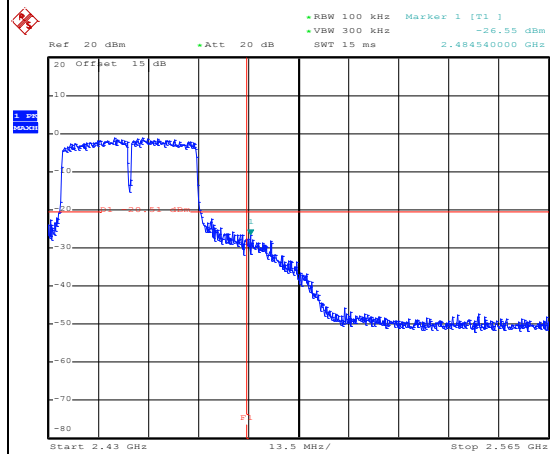High Channel Plot

Date: 11.APR.2016 18:11:16

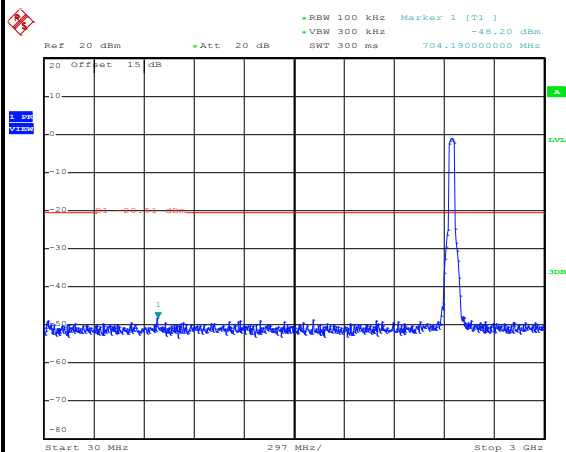Spurious Emission 30MHz~3GHz

Date: 31.MAR.2016 17:38:35

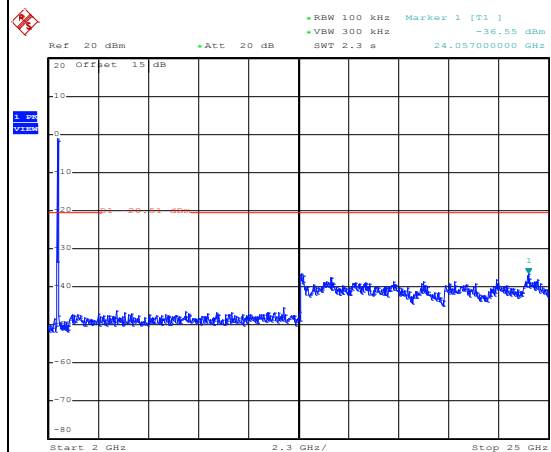Spurious Emission 2GHz~25GHz

Date: 31.MAR.2016 17:38:44

3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated band edge and Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the FCC section 15.209 limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.5.3 Test Procedures


1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r05.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
7. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for peak measurement.

For average measurement:


 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

3.5.4 Test Setup


For radiated emissions below 30MHz

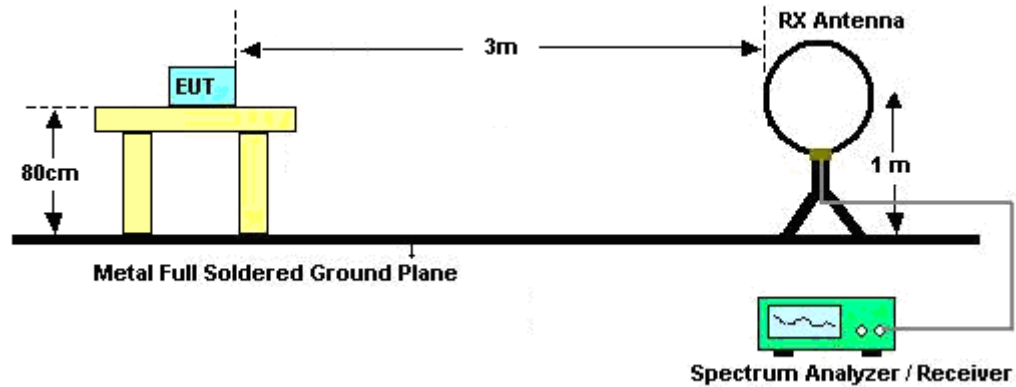

For radiated emissions from 30MHz to 1GHz

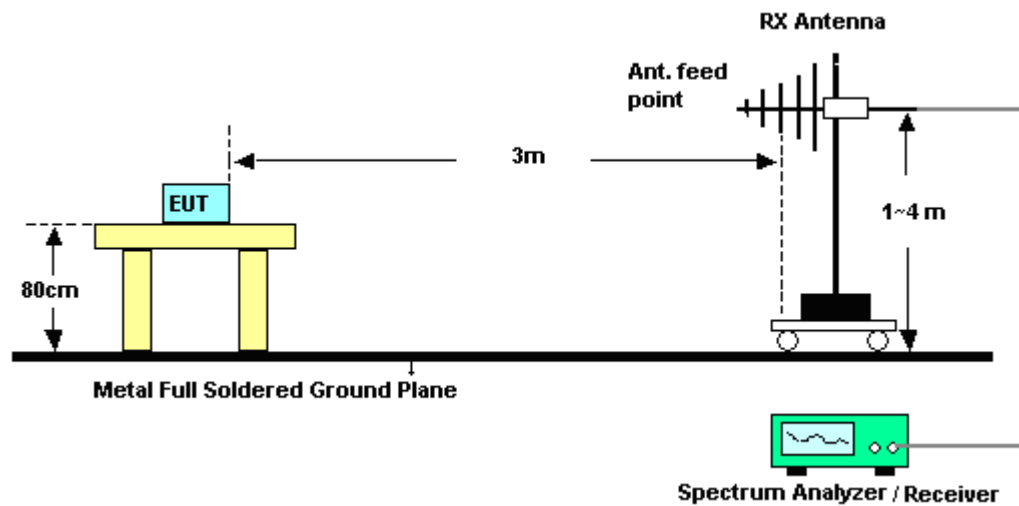

For radiated emissions above 1GHz

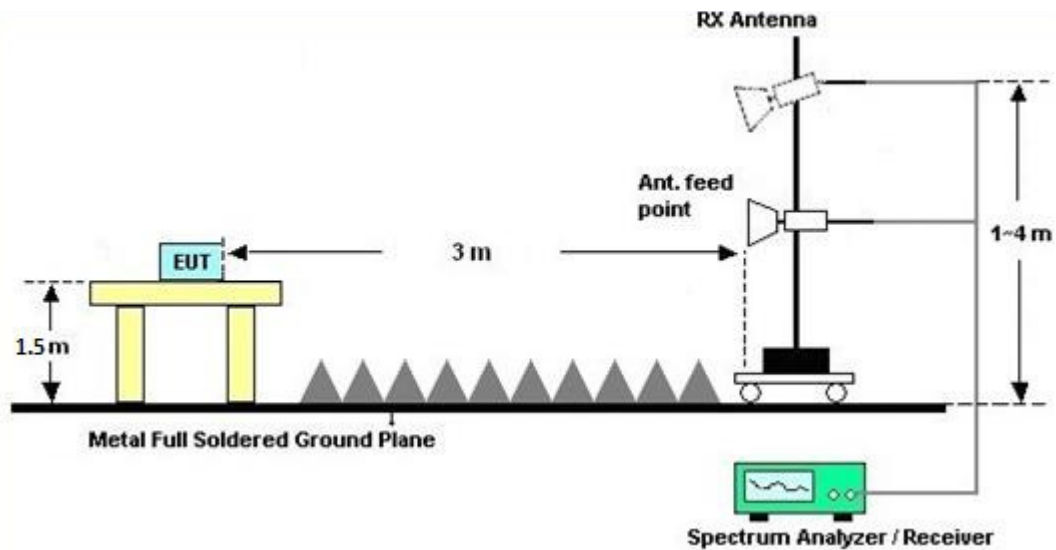

3.5.5 Test Results of Radiated Spurious Emissions (9kHz ~ 30MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.

3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix B.

3.5.7 Duty Cycle

Please refer to Appendix D.

3.5.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic)

Please refer to Appendix B.

3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of Emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-Peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.6.3 Test Procedures


1. The EUT was placed 0.4 meter from the conducting wall of the shielding room, and it was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF bandwidth = 9kHz) with Maximum Hold Mode.

3.6.4 Test Setup

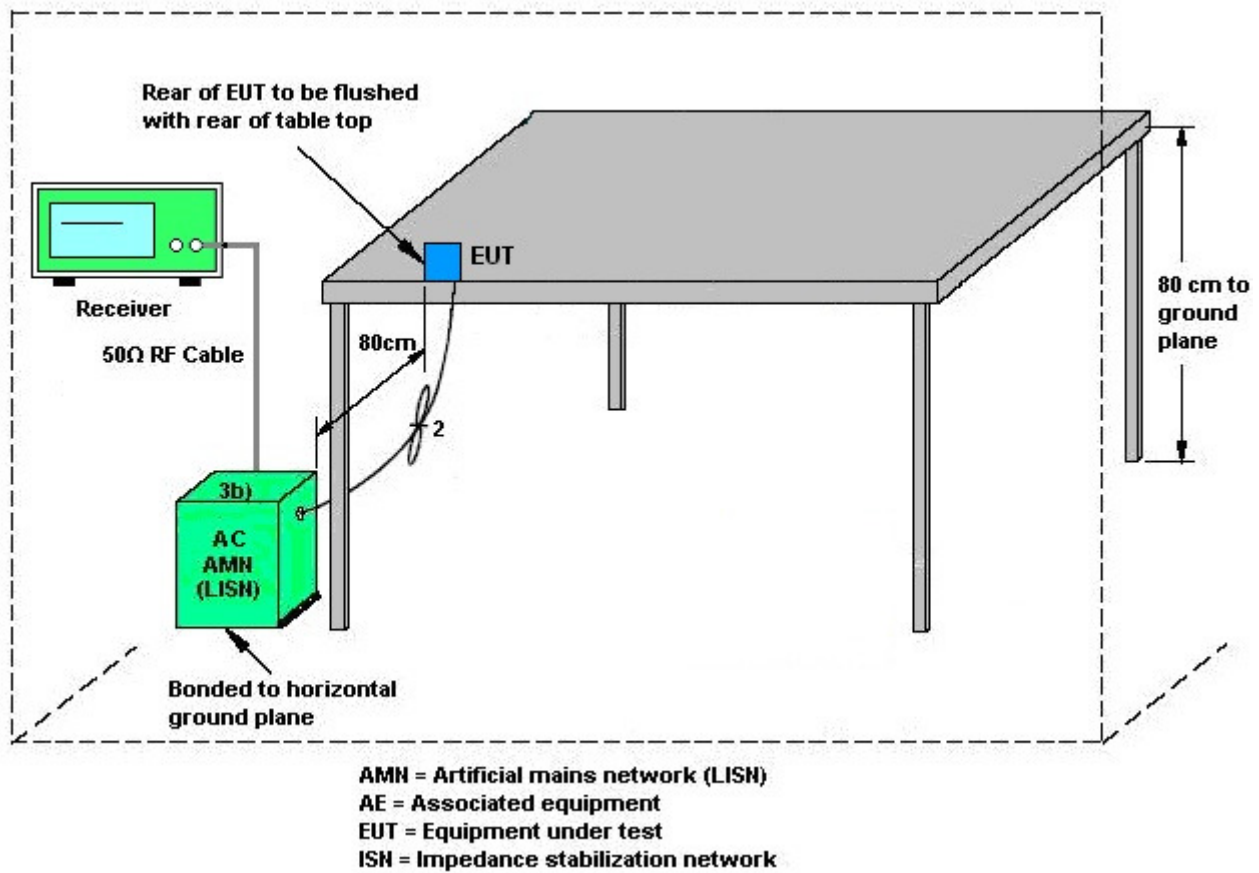

3.6.5 Test Result of AC Conducted Emission

Test Mode :	Mode 1	Temperature :	21~23℃
Test Engineer :	Tao Cheng	Relative Humidity :	41~43%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	Bluetooth Link + WLAN Link + Earphone 1 + Battery 1 + USB Cable 1 (Charging from Adapter)		

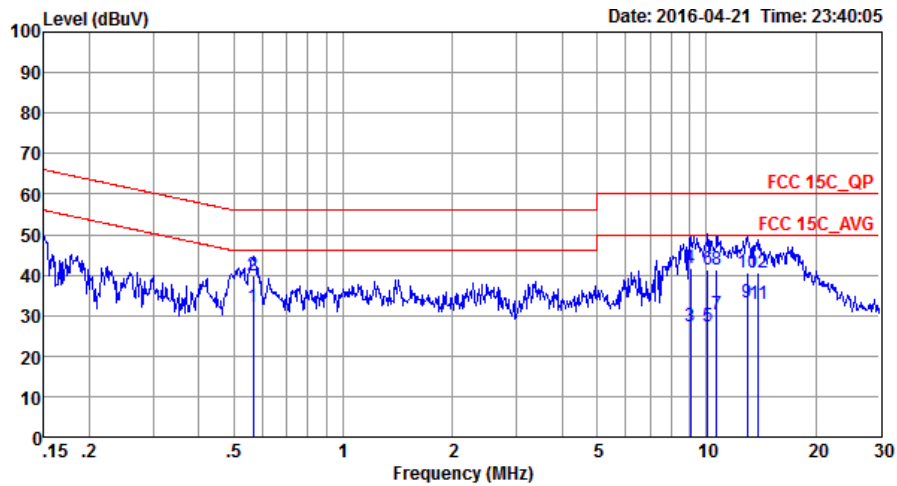


Site : CO01-SZ
Condition: FCC 15C_QP LISN_L_20160415 LINE
Mode : Mode 1

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1 *	0.56	31.98	-14.02	46.00	21.21	0.62	10.15	Average
2	0.56	39.98	-16.02	56.00	29.21	0.62	10.15	QP
3	9.06	27.19	-22.81	50.00	16.30	0.58	10.31	Average
4	9.06	41.59	-18.41	60.00	30.70	0.58	10.31	QP
5	10.07	27.26	-22.74	50.00	16.40	0.54	10.32	Average
6	10.07	41.36	-18.64	60.00	30.50	0.54	10.32	QP
7	10.68	30.23	-19.77	50.00	19.30	0.58	10.35	Average
8	10.68	41.33	-18.67	60.00	30.40	0.58	10.35	QP
9	12.99	33.05	-16.95	50.00	21.90	0.69	10.46	Average
10	12.99	40.65	-19.35	60.00	29.50	0.69	10.46	QP
11	13.91	32.72	-17.28	50.00	21.50	0.73	10.49	Average
12	13.91	40.72	-19.28	60.00	29.50	0.73	10.49	QP



Test Mode :	Mode 1	Temperature :	21~23℃
Test Engineer :	Tao Cheng	Relative Humidity :	41~43%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	Bluetooth Link + WLAN Link + Earphone 1 + Battery 1 + USB Cable 1 (Charging from Adapter)		

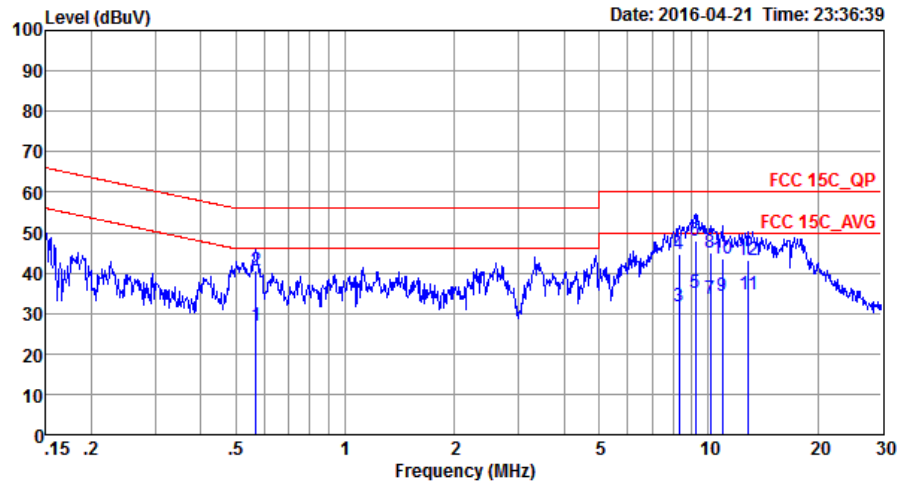

Site : CO01-SZ
Condition: FCC 15C_QP LISN_N_20160415 NEUTRAL
Mode : Mode 1

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.57	26.84	-19.16	46.00	16.10	0.59	10.15	Average
2	0.57	40.74	-15.26	56.00	30.00	0.59	10.15	QP
3	8.32	31.69	-18.31	50.00	20.70	0.69	10.30	Average
4	8.32	44.79	-15.21	60.00	33.80	0.69	10.30	QP
5	9.20	34.91	-15.09	50.00	23.90	0.70	10.31	Average
6 *	9.20	47.91	-12.09	60.00	36.90	0.70	10.31	QP
7	10.13	33.63	-16.37	50.00	22.60	0.70	10.33	Average
8	10.13	45.13	-14.87	60.00	34.10	0.70	10.33	QP
9	10.90	34.27	-15.73	50.00	23.21	0.70	10.36	Average
10	10.90	43.67	-16.33	60.00	32.61	0.70	10.36	QP
11	12.92	34.86	-15.14	50.00	23.70	0.71	10.45	Average
12	12.92	43.16	-16.84	60.00	32.00	0.71	10.45	QP



3.7 Antenna Requirements

3.7.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. For the fixed point-to-point operation, the power shall be reduced by one dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.7.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSP30	101400	9kHz~30GHz	Jan. 12, 2016	Mar. 21, 2016~ Apr. 11, 2016	Jan. 11, 2017	Conducted (TH01-SZ)
Spectrum Analyzer	R&S	FSV40	101078	9kHz~40GHz	May 05, 2015	Mar. 21, 2016~ Apr. 11, 2016	May 04, 2016	Conducted (TH01-SZ)
Pulse Power Sensor	Anritsu	MA2411B	1207253	30MHz~40GHz	Jan. 12, 2016	Mar. 21, 2016~ Apr. 11, 2016	Jan. 11, 2017	Conducted (TH01-SZ)
Power Meter	Anritsu	ML2495A	1218010	50MHz Bandwidth	Jan. 12, 2016	Mar. 21, 2016~ Apr. 11, 2016	Jan. 11, 2017	Conducted (TH01-SZ)
EMI Test Receiver	R&S	ESR7	101404	9kHz~7GHz; Max 30dBm	Oct. 20, 2015	Mar. 21, 2016~ Apr. 28, 2016	Oct. 19, 2016	Radiation (03CH02-SZ)
Spectrum Analyzer	KEYSIGHT	N9010A	MY551502 13	10Hz~44GHz; Max 30dBm	Jun. 07, 2015	Mar. 21, 2016~ Apr. 28, 2016	Jun. 06, 2016	Radiation (03CH02-SZ)
Loop Antenna	R&S	HFH2-Z2	100354	9kHz~30MHz	May 06, 2015	Mar. 21, 2016~ Apr. 28, 2016	May 05, 2016	Radiation (03CH02-SZ)
Bilog Antenna	TeseQ	CBL6112D	23188	30MHz~2GHz	Oct. 17, 2015	Mar. 21, 2016~ Apr. 28, 2016	Oct. 16, 2016	Radiation (03CH02-SZ)
Double Ridge Horn Antenna	SCHWARZBECK	BBHA 9120D	9120D-125	1GHz~18GHz	Jan. 11, 2016	Mar. 21, 2016~ Apr. 28, 2016	Jan. 10, 2017	Radiation (03CH02-SZ)
SHF-EHF Horn	com-power	AH-840	101071	18GHz~40GHz	Aug. 19, 2015	Mar. 21, 2016~ Apr. 28, 2016	Aug. 18, 2016	Radiation (03CH02-SZ)
Amplifier	HP	8447F	3113A046 22	9kHz~1300MHz / 30 dB	Aug. 07, 2015	Mar. 21, 2016~ Apr. 28, 2016	Aug. 06, 2016	Radiation (03CH02-SZ)
Amplifier	Agilent	8449B	3008A010 23	1GHz~26.5GHz	Oct. 20, 2015	Mar. 21, 2016~ Apr. 28, 2016	Oct. 19, 2016	Radiation (03CH02-SZ)
AC Power Source	Chroma	61601	616010002 470	N/A	NCR	Mar. 21, 2016~ Apr. 28, 2016	NCR	Radiation (03CH02-SZ)
Turn Table	Chaintek	T-200	N/A	0~360 degree	NCR	Mar. 21, 2016~ Apr. 28, 2016	NCR	Radiation (03CH02-SZ)
Antenna Mast	Chaintek	MBS-400	N/A	1 m~4 m	NCR	Mar. 21, 2016~ Apr. 28, 2016	NCR	Radiation (03CH02-SZ)
EMI Receiver	R&S	ESCI7	100724	9kHz~3GHz;	Nov. 23, 2015	Apr. 21, 2016	Nov. 22, 2016	Conduction (CO01-SZ)
AC LISN	EMCO	3816/2SH	00103892	9kHz~30MHz	Jan. 12, 2016	Apr. 21, 2016	Jan. 11, 2017	Conduction (CO01-SZ)
AC LISN (for auxiliary equipment)	MessTec	3816/2SH	00103912	9kHz~30MHz	Jan. 12, 2016	Apr. 21, 2016	Jan. 11, 2017	Conduction (CO01-SZ)
AC Power Source	Chroma	61602	616020000 891	100Vac~250Vac	Aug. 07, 2015	Apr. 21, 2016	Aug. 06, 2016	Conduction (CO01-SZ)
Pulse Limiter	COM-POWER	LIT-153 Transient Limiter	53139	150kHz~30MHz	Oct. 20, 2015	Apr. 21, 2016	Oct. 19, 2016	Conduction (CO01-SZ)

NCR: No Calibration Required



5 Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.3 dB
---	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.0 dB
---	--------



Appendix A. Conducted Test Results

A1 - DTS Part

Test Engineer:	Bruce Huang	Temperature:	24~26	°C
Test Date:	2016/3/21~2016/4/11	Relative Humidity:	50~53	%

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

2.4GHz Band								
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
11b	1Mbps	1	1	2412	15.30	10.08	0.50	Pass
11b	1Mbps	1	6	2437	15.75	10.04	0.50	Pass
11b	1Mbps	1	11	2462	15.65	10.08	0.50	Pass
11g	6Mbps	1	1	2412	19.00	16.56	0.50	Pass
11g	6Mbps	1	6	2437	19.25	16.32	0.50	Pass
11g	6Mbps	1	11	2462	19.55	16.56	0.50	Pass
HT20	MCS0	1	1	2412	19.40	17.80	0.50	Pass
HT20	MCS0	1	6	2437	19.85	17.80	0.50	Pass
HT20	MCS0	1	11	2462	19.30	17.80	0.50	Pass
HT40	MCS0	1	3	2422	37.10	36.40	0.50	Pass
HT40	MCS0	1	6	2437	37.20	36.40	0.50	Pass
HT40	MCS0	1	9	2452	37.00	36.40	0.50	Pass

TEST RESULTS DATA
Peak Power Table

2.4GHz Band										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
11b	1Mbps	1	1	2412	16.59	30.00	-3.00	13.59	36.00	Pass
11b	1Mbps	1	6	2437	16.96	30.00	-3.00	13.96	36.00	Pass
11b	1Mbps	1	11	2462	16.89	30.00	-3.00	13.89	36.00	Pass
11g	6Mbps	1	1	2412	21.60	30.00	-3.00	18.60	36.00	Pass
11g	6Mbps	1	6	2437	21.86	30.00	-3.00	18.86	36.00	Pass
11g	6Mbps	1	11	2462	22.37	30.00	-3.00	19.37	36.00	Pass
HT20	MCS0	1	1	2412	20.12	30.00	-3.00	17.12	36.00	Pass
HT20	MCS0	1	6	2437	20.52	30.00	-3.00	17.52	36.00	Pass
HT20	MCS0	1	11	2462	21.59	30.00	-3.00	18.59	36.00	Pass
HT40	MCS0	1	3	2422	20.34	30.00	-3.00	17.34	36.00	Pass
HT40	MCS0	1	6	2437	20.16	30.00	-3.00	17.16	36.00	Pass
HT40	MCS0	1	9	2452	20.86	30.00	-3.00	17.86	36.00	Pass

TEST RESULTS DATA
Average Power Table
(Reporting Only)

2.4GHz Band						
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)
11b	1Mbps	1	1	2412	0.00	13.97
11b	1Mbps	1	6	2437	0.00	14.85
11b	1Mbps	1	11	2462	0.00	14.76
11g	6Mbps	1	1	2412	0.00	13.40
11g	6Mbps	1	6	2437	0.00	13.89
11g	6Mbps	1	11	2462	0.00	14.24
HT20	MCS0	1	1	2412	0.00	11.99
HT20	MCS0	1	6	2437	0.00	12.39
HT20	MCS0	1	11	2462	0.00	13.22
HT40	MCS0	1	3	2422	0.00	12.01
HT40	MCS0	1	6	2437	0.00	11.80
HT40	MCS0	1	9	2452	0.00	12.49

TEST RESULTS DATA
Peak Power Density

2.4GHz Band								
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
11b	1Mbps	1	1	2412	-11.81	-3.00	8.00	Pass
11b	1Mbps	1	6	2437	-9.80	-3.00	8.00	Pass
11b	1Mbps	1	11	2462	-9.82	-3.00	8.00	Pass
11g	6Mbps	1	1	2412	-9.82	-3.00	8.00	Pass
11g	6Mbps	1	6	2437	-10.03	-3.00	8.00	Pass
11g	6Mbps	1	11	2462	-10.57	-3.00	8.00	Pass
HT20	MCS0	1	1	2412	-11.14	-3.00	8.00	Pass
HT20	MCS0	1	6	2437	-10.76	-3.00	8.00	Pass
HT20	MCS0	1	11	2462	-10.63	-3.00	8.00	Pass
HT40	MCS0	1	3	2422	-11.21	-3.00	8.00	Pass
HT40	MCS0	1	6	2437	-11.27	-3.00	8.00	Pass
HT40	MCS0	1	9	2452	-13.02	-3.00	8.00	Pass



Appendix B. Radiated Spurious Emission

Laptop-Plane

15C 2.4GHz 2400~2483.5MHz

WIFI 802.11b (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b CH 01 2412MHz		2386.05	50.31	-23.69	74	41.98	32.6	5.07	29.34	150	239	P	H
		2386.41	39.69	-14.31	54	31.36	32.6	5.07	29.34	150	239	A	H
	*	2412	103.04	-	-	94.69	32.61	5.12	29.38	150	239	P	H
	*	2412	101.06	-	-	92.71	32.61	5.12	29.38	150	239	A	H
		2389.38	50.67	-23.33	74	42.34	32.6	5.07	29.34	215	259	P	V
		2388.93	39.96	-14.04	54	31.63	32.6	5.07	29.34	215	259	A	V
	*	2412	103.62	-	-	95.27	32.61	5.12	29.38	215	259	P	V
	*	2412	101.67	-	-	93.32	32.61	5.12	29.38	215	259	A	V
802.11b CH 06 2437MHz		2386.32	48.56	-25.44	74	40.23	32.6	5.07	29.34	210	294	P	H
		2383.08	37.33	-16.67	54	29.02	32.58	5.07	29.34	210	294	A	H
	*	2437	104.97	-	-	96.55	32.65	5.12	29.35	210	294	P	H
	*	2437	102.98	-	-	94.56	32.65	5.12	29.35	210	294	A	H
		2489.56	50.51	-23.49	74	41.91	32.7	5.21	29.31	210	294	P	H
		2491	38.99	-15.01	54	30.39	32.7	5.21	29.31	210	294	A	H
		2337.09	49.39	-24.61	74	41.09	32.54	5.03	29.27	152	267	P	V
		2337	38.86	-15.14	54	30.56	32.54	5.03	29.27	152	267	A	V
	*	2437	104.11	-	-	95.69	32.65	5.12	29.35	152	267	P	V
	*	2437	102.17	-	-	93.75	32.65	5.12	29.35	152	267	A	V
		2498.8	49.72	-24.28	74	41.09	32.7	5.21	29.28	152	267	P	V
		2490.96	38.31	-15.69	54	29.71	32.7	5.21	29.31	152	267	A	V



802.11b CH 11 2462MHz	*	2462	103.29	-	-	94.79	32.67	5.16	29.33	178	238	P	H
	*	2462	101.29	-	-	92.79	32.67	5.16	29.33	178	238	A	H
		2487.36	51.67	-22.33	74	43.14	32.68	5.16	29.31	178	238	P	H
		2488.92	42.32	-11.68	54	33.72	32.7	5.21	29.31	178	238	A	H
	*	2462	104.18	-	-	95.68	32.67	5.16	29.33	201	266	P	V
	*	2462	102.23	-	-	93.73	32.67	5.16	29.33	201	266	A	V
		2488.44	51.98	-22.02	74	43.38	32.7	5.21	29.31	201	266	P	V
		2489	41.93	-12.07	54	33.33	32.7	5.21	29.31	201	266	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



15C 2.4GHz 2400~2483.5MHz

WIFI 802.11b (Harmonic @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b		4824	47.49	-26.51	74	64.02	34.4	7.46	58.39	185	255	P	H
CH 01		4824	48.68	-25.32	74	65.21	34.4	7.46	58.39	185	255	P	V
2412MHz													
802.11b		4874	46.48	-27.52	74	63.22	34.43	7.49	58.66	165	106	P	H
CH 06		7311	45.7	-28.3	74	58.4	36.22	9.7	58.62	174	100	P	H
2437MHz		4874	46.41	-27.59	74	63.15	34.43	7.49	58.66	165	106	P	V
		7311	45.86	-28.14	74	58.56	36.22	9.7	58.62	174	100	P	V
802.11b		4924	45.42	-28.58	74	61.95	34.46	7.53	58.52	150	285	P	H
CH 11		7386	46.12	-27.88	74	58.6	36.26	9.8	58.54	155	274	P	H
2462MHz		4924	46.38	-27.62	74	62.91	34.46	7.53	58.52	150	285	P	V
		7386	45.81	-28.19	74	58.29	36.26	9.8	58.54	155	274	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



15C 2.4GHz 2400~2483.5MHz
WIFI 802.11g (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11g CH 01 2412MHz		2389.56	63.36	-10.64	74	55.03	32.6	5.07	29.34	162	299	P	H
		2389.92	48.53	-5.47	54	40.24	32.6	5.07	29.38	162	299	A	H
	*	2412	106.31	-	-	97.96	32.61	5.12	29.38	162	299	P	H
	*	2412	98.82	-	-	90.47	32.61	5.12	29.38	162	299	A	H
		2389.47	62.14	-11.86	74	53.81	32.6	5.07	29.34	207	248	P	V
		2389.92	47.13	-6.87	54	38.84	32.6	5.07	29.38	207	248	A	V
	*	2412	103.99	-	-	95.64	32.61	5.12	29.38	207	248	P	V
	*	2412	97.18	-	-	88.83	32.61	5.12	29.38	207	248	A	V
802.11g CH 06 2437MHz		2389.2	53.08	-20.92	74	44.75	32.6	5.07	29.34	158	297	P	H
		2356.98	39.33	-14.67	54	31.05	32.56	5.03	29.31	158	297	A	H
	*	2437	106.7	-	-	98.28	32.65	5.12	29.35	158	297	P	H
	*	2437	99.52	-	-	91.1	32.65	5.12	29.35	158	297	A	H
		2485.92	52.33	-21.67	74	43.8	32.68	5.16	29.31	158	297	P	H
		2483.6	40.16	-13.84	54	31.63	32.68	5.16	29.31	158	297	A	H
		2389.29	50.83	-23.17	74	42.5	32.6	5.07	29.34	226	277	P	V
		2357.07	38.51	-15.49	54	30.23	32.56	5.03	29.31	226	277	A	V
	*	2437	105.4	-	-	96.98	32.65	5.12	29.35	226	277	P	V
	*	2437	98.05	-	-	89.63	32.65	5.12	29.35	226	277	A	V
		2490.16	50.16	-23.84	74	41.56	32.7	5.21	29.31	226	277	P	V
		2484.2	38.29	-15.71	54	29.76	32.68	5.16	29.31	226	277	A	V



802.11g CH 11 2462MHz	*	2462	107.71	-	-	99.21	32.67	5.16	29.33	156	297	P	H
	*	2462	100.63	-	-	92.13	32.67	5.16	29.33	156	297	A	H
		2484.96	67.09	-6.91	74	58.56	32.68	5.16	29.31	156	297	P	H
		2483.52	50.88	-3.12	54	42.35	32.68	5.16	29.31	156	297	A	H
	*	2462	107.38	-	-	98.88	32.67	5.16	29.33	222	252	P	V
	*	2462	100.06	-	-	91.56	32.67	5.16	29.33	222	252	A	V
		2484.96	66.94	-7.06	74	58.41	32.68	5.16	29.31	222	252	P	V
		2483.52	50.67	-3.33	54	42.14	32.68	5.16	29.31	222	252	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



15C 2.4GHz 2400~2483.5MHz

WIFI 802.11g (Harmonic @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11g		4824	45.67	-28.33	74	62.2	34.4	7.46	58.39	185	255	P	H
CH 01		4824	45.24	-28.76	74	61.77	34.4	7.46	58.39	185	255	P	V
2412MHz													
802.11g		4874	43.22	-30.78	74	59.96	34.43	7.49	58.66	165	106	P	H
CH 06		7311	45.37	-28.63	74	58.07	36.22	9.7	58.62	174	100	P	H
2437MHz		4874	44.44	-29.56	74	61.18	34.43	7.49	58.66	165	106	P	V
		7311	46.32	-27.68	74	59.02	36.22	9.7	58.62	174	100	P	V
802.11g		4924	43.83	-30.17	74	60.36	34.46	7.53	58.52	150	285	P	H
CH 11		7386	45.31	-28.69	74	57.79	36.26	9.8	58.54	155	274	P	H
2462MHz		4924	43.39	-30.61	74	59.92	34.46	7.53	58.52	150	285	P	V
		7386	45.54	-28.46	74	58.02	36.26	9.8	58.54	155	274	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



15C 2.4GHz 2400~2483.5MHz

WIFI 802.11n HT20 (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11n HT20 CH 01 2412MHz		2389.92	67.25	-6.75	74	58.96	32.6	5.07	29.38	184	298	P	H
		2389.92	48.49	-5.51	54	40.2	32.6	5.07	29.38	184	298	A	H
	*	2412	105.42	-	-	97.07	32.61	5.12	29.38	184	298	P	H
	*	2412	97.87	-	-	89.52	32.61	5.12	29.38	184	298	A	H
		2389.83	66.86	-7.14	74	58.57	32.6	5.07	29.38	207	259	P	V
		2389.92	48.47	-5.53	54	40.18	32.6	5.07	29.38	207	259	A	V
	*	2412	104.25	-	-	95.9	32.61	5.12	29.38	207	259	P	V
	*	2412	97.47	-	-	89.12	32.61	5.12	29.38	207	259	A	V
802.11n HT20 CH 06 2437MHz		2363.37	49.93	-24.07	74	41.65	32.56	5.03	29.31	156	297	P	H
		2356.98	38.97	-15.03	54	30.69	32.56	5.03	29.31	156	297	A	H
	*	2437	105.62	-	-	97.2	32.65	5.12	29.35	156	297	P	H
	*	2437	98.37	-	-	89.95	32.65	5.12	29.35	156	297	A	H
		2484.08	51.99	-22.01	74	43.46	32.68	5.16	29.31	156	297	P	H
		2484.68	40.01	-13.99	54	31.48	32.68	5.16	29.31	156	297	A	H
		2337.27	49.4	-24.6	74	41.1	32.54	5.03	29.27	207	259	P	V
		2337	38.87	-15.13	54	30.57	32.54	5.03	29.27	207	259	A	V
	*	2437	105.18	-	-	96.76	32.65	5.12	29.35	207	259	P	V
	*	2437	97.46	-	-	89.04	32.65	5.12	29.35	207	259	A	V
		2496.36	49.97	-24.03	74	41.34	32.7	5.21	29.28	207	259	P	V
		2491.32	39.07	-14.93	54	30.47	32.7	5.21	29.31	207	259	A	V



802.11n HT20 CH 11 2462MHz	*	2462	105.91	-	-	97.41	32.67	5.16	29.33	150	294	P	H
	*	2462	98.6	-	-	90.1	32.67	5.16	29.33	150	294	A	H
		2484	69.26	-4.74	74	60.73	32.68	5.16	29.31	150	294	P	H
		2483.52	50.79	-3.21	54	42.26	32.68	5.16	29.31	150	294	A	H
	*	2462	104.71	-	-	96.21	32.67	5.16	29.33	229	266	P	V
	*	2462	97.17	-	-	88.67	32.67	5.16	29.33	229	266	A	V
		2483.68	67.52	-6.48	74	58.99	32.68	5.16	29.31	229	266	P	V
		2483.52	48.92	-5.08	54	40.39	32.68	5.16	29.31	229	266	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



15C 2.4GHz 2400~2483.5MHz

WIFI 802.11n HT20 (Harmonic @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11n HT20 CH 01 2412MHz		4824	45.34	-28.66	74	61.87	34.4	7.46	58.39	185	255	P	H
		4824	45.33	-28.67	74	61.86	34.4	7.46	58.39	185	255	P	V
802.11n HT20 CH 06 2437MHz		4874	43.43	-30.57	74	60.17	34.43	7.49	58.66	165	106	P	H
		7311	46.07	-27.93	74	58.77	36.22	9.7	58.62	174	100	P	H
		4874	43.82	-30.18	74	60.56	34.43	7.49	58.66	165	106	P	V
		7311	45.72	-28.28	74	58.42	36.22	9.7	58.62	174	100	P	V
802.11n HT20 CH 11 2462MHz		4924	43.86	-30.14	74	60.39	34.46	7.53	58.52	150	285	P	H
		7386	46.06	-27.94	74	58.54	36.26	9.8	58.54	155	274	P	H
		4924	44.06	-29.94	74	60.59	34.46	7.53	58.52	150	285	P	V
		7386	45.42	-28.58	74	57.9	36.26	9.8	58.54	155	274	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



15C 2.4GHz 2400~2483.5MHz

WIFI 802.11n HT40 (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11n HT40 CH 03 2422MHz		2388.66	64.88	-9.12	74	56.55	32.6	5.07	29.34	167	235	P	H
		2389.92	50.05	-3.95	54	41.76	32.6	5.07	29.38	167	235	A	H
	*	2422	100.71	-	-	92.31	32.63	5.12	29.35	167	235	P	H
	*	2422	93.85	-	-	85.45	32.63	5.12	29.35	167	235	A	H
		2486.16	53.21	-20.79	74	44.68	32.68	5.16	29.31	167	235	P	H
		2484.32	43.18	-10.82	54	34.65	32.68	5.16	29.31	167	235	A	H
		2388.75	66.86	-7.14	74	58.53	32.6	5.07	29.34	231	265	P	V
		2388.93	51.31	-2.69	54	42.98	32.6	5.07	29.34	231	265	A	V
	*	2422	101.88	-	-	93.48	32.63	5.12	29.35	231	265	P	V
	*	2422	94.25	-	-	85.85	32.63	5.12	29.35	231	265	A	V
		2484.96	53.92	-20.08	74	45.39	32.68	5.16	29.31	231	265	P	V
		2484.4	43.16	-10.84	54	34.63	32.68	5.16	29.31	231	265	A	V
802.11n HT40 CH 06 2437MHz		2389.2	57.4	-16.6	74	49.07	32.6	5.07	29.34	169	239	P	H
		2389.92	43.48	-10.52	54	35.19	32.6	5.07	29.38	169	239	A	H
	*	2437	101.27	-	-	92.85	32.65	5.12	29.35	169	239	P	H
	*	2437	93.93	-	-	85.51	32.65	5.12	29.35	169	239	A	H
		2483.52	57.57	-16.43	74	49.04	32.68	5.16	29.31	169	239	P	H
		2483.52	43.19	-10.81	54	34.66	32.68	5.16	29.31	169	239	A	H
		2388.93	55.91	-18.09	74	47.58	32.6	5.07	29.34	246	267	P	V
		2389.92	41.98	-12.02	54	33.69	32.6	5.07	29.38	246	267	A	V
	*	2437	101.03	-	-	92.61	32.65	5.12	29.35	246	267	P	V
	*	2437	94.3	-	-	85.88	32.65	5.12	29.35	246	267	A	V
		2483.56	57.37	-16.63	74	48.84	32.68	5.16	29.31	246	267	P	V
		2483.52	43.39	-10.61	54	34.86	32.68	5.16	29.31	246	267	A	V



802.11n HT40 CH 09 2452MHz		2378.22	50.39	-23.61	74	42.08	32.58	5.07	29.34	171	239	P	H
		2371.83	40.48	-13.52	54	32.17	32.58	5.07	29.34	171	239	A	H
	*	2452	102.52	-	-	94.04	32.65	5.16	29.33	171	239	P	H
	*	2452	95.32	-	-	86.84	32.65	5.16	29.33	171	239	A	H
		2484.4	65.48	-8.52	74	56.95	32.68	5.16	29.31	171	239	P	H
		2483.52	47.87	-6.13	54	39.34	32.68	5.16	29.31	171	239	A	H
		2352.03	49.99	-24.01	74	41.71	32.56	5.03	29.31	250	253	P	V
		2352.03	39.67	-14.33	54	31.39	32.56	5.03	29.31	250	253	A	V
	*	2452	102.34	-	-	93.86	32.65	5.16	29.33	250	253	P	V
	*	2452	94.97	-	-	86.49	32.65	5.16	29.33	250	253	A	V
		2485.96	64.23	-9.77	74	55.7	32.68	5.16	29.31	250	253	P	V
		2483.52	47.26	-6.74	54	38.73	32.68	5.16	29.31	250	253	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



15C 2.4GHz 2400~2483.5MHz
WIFI 802.11n HT40 (Harmonic @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11n		4844	44.5	-29.5	74	61.11	34.41	7.46	58.48	150	350	P	H
HT40		7266	46.5	-27.5	74	59.17	36.21	9.65	58.53	200	360	P	H
CH 03		4844	44.62	-29.38	74	61.23	34.41	7.46	58.48	150	350	P	V
2422MHz		7266	46.44	-27.56	74	59.11	36.21	9.65	58.53	200	360	P	V
802.11n		4874	44.62	-29.38	74	61.36	34.43	7.49	58.66	165	230	P	H
HT40		7311	45.72	-28.28	74	58.42	36.22	9.7	58.62	186	323	P	H
CH 06		4874	45.41	-28.59	74	62.15	34.43	7.49	58.66	165	230	P	V
2437MHz		7311	45.1	-28.9	74	57.8	36.22	9.7	58.62	186	323	P	V
802.11n		4904	44.27	-29.73	74	60.93	34.45	7.53	58.64	150	360	P	H
HT40		7356	45.28	-28.72	74	57.86	36.24	9.75	58.57	165	335	P	H
CH 09		4904	44.51	-29.49	74	61.17	34.45	7.53	58.64	150	360	P	V
2452MHz		7356	45.37	-28.63	74	57.95	36.24	9.75	58.57	165	335	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

**15C Emission below 1GHz****2.4GHz WIFI 802.11n HT40 (LF)**

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
2.4GHz 802.11n HT40 LF		30	29.87	-10.13	40	28.58	26.6	0.76	26.07	-	-	P	H
		156.1	37.52	-5.98	43.5	43.8	17.33	1.87	25.48	100	50	P	H
		267.65	29.01	-16.99	46	34.42	17.21	2.49	25.11	-	-	P	H
		449.04	30.46	-15.54	46	28.68	24.47	3.38	26.07	-	-	P	H
		671.17	34.16	-11.84	46	30.25	25.81	4.49	26.39	-	-	P	H
		800.18	37.81	-8.19	46	31.61	27.4	4.97	26.17	-	-	P	H
		39.7	39.43	-0.57	40	42.88	21.7	0.87	26.02	100	356	QP	V
		156.1	34.84	-8.66	43.5	41.12	17.33	1.87	25.48	-	-	P	V
		277.35	26.74	-19.26	46	31.69	17.6	2.54	25.09	-	-	P	V
		443.22	30.73	-15.27	46	29.11	24.31	3.35	26.04	-	-	P	V
		677.96	34	-12	46	29.9	25.97	4.52	26.39	-	-	P	V
		906.88	38.55	-7.45	46	30.49	28.47	5.41	25.82	-	-	P	V
Remark	1. No other spurious found. 2. All results are PASS against limit line.												



Z-Plane

15C 2.4GHz 2400~2483.5MHz

WIFI 802.11n HT40 (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11n HT40 CH 03 2422MHz		2388.75	65.62	-8.38	74	57.29	32.6	5.07	29.34	150	240	P	H
		2389.92	50.96	-3.04	54	42.67	32.6	5.07	29.38	150	240	A	H
	*	2422	102.59	-	-	94.19	32.63	5.12	29.35	150	240	P	H
	*	2422	94.98	-	-	86.58	32.63	5.12	29.35	150	240	A	H
		2485.92	53.31	-20.69	74	44.78	32.68	5.16	29.31	150	240	P	H
		2484.24	43.29	-10.71	54	34.76	32.68	5.16	29.31	150	240	A	H
		2388.93	63.63	-10.37	74	55.3	32.6	5.07	29.34	153	242	P	V
		2389.92	49.01	-4.99	54	40.72	32.6	5.07	29.38	153	242	A	V
	*	2422	100.91	-	-	92.51	32.63	5.12	29.35	153	242	P	V
	*	2422	93.42	-	-	85.02	32.63	5.12	29.35	153	242	A	V
		2487.88	50.01	-23.99	74	41.46	32.7	5.16	29.31	153	242	P	V
		2484.24	39.18	-14.82	54	30.65	32.68	5.16	29.31	153	242	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

**15C 2.4GHz 2400~2483.5MHz****WIFI 802.11n HT40 (Harmonic @ 3m)**

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11n HT40 CH 03 2422MHz		4844	44.71	-29.29	74	61.32	34.41	7.46	58.48	150	350	P	H
		7266	46.56	-27.44	74	59.23	36.21	9.65	58.53	200	360	P	H
		4844	44.64	-29.36	74	61.25	34.41	7.46	58.48	150	350	P	V
		7266	46.23	-27.77	74	58.9	36.21	9.65	58.53	200	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

**Note symbol**

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency per 15.209(c).
!	Test result is over limit line.
P/A	P eak or A verage
H/V	H orizontal or V ertical



A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b CH 01 2412MHz		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Level(dBμV/m) =

Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

2. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)

= 55.45 (dBμV/m)

2. Over Limit(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 55.45(dBμV/m) – 74(dBμV/m)

= -18.55(dB)

For Average Limit @ 2390MHz:

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)

= 43.54 (dBμV/m)

2. Over Limit(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)


= 43.54(dBμV/m) – 54(dBμV/m)

= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.

Appendix D. Duty Cycle Plots

Band	Duty Cycle(%)	T(us)	1/T(kHz)	VBW Setting
802.11b	100.00	-	-	10Hz
802.11g	100.00	-	-	10Hz
2.4GHz 802.11n HT20	100.00	-	-	10Hz
2.4GHz 802.11n HT40	100.00	-	-	10Hz

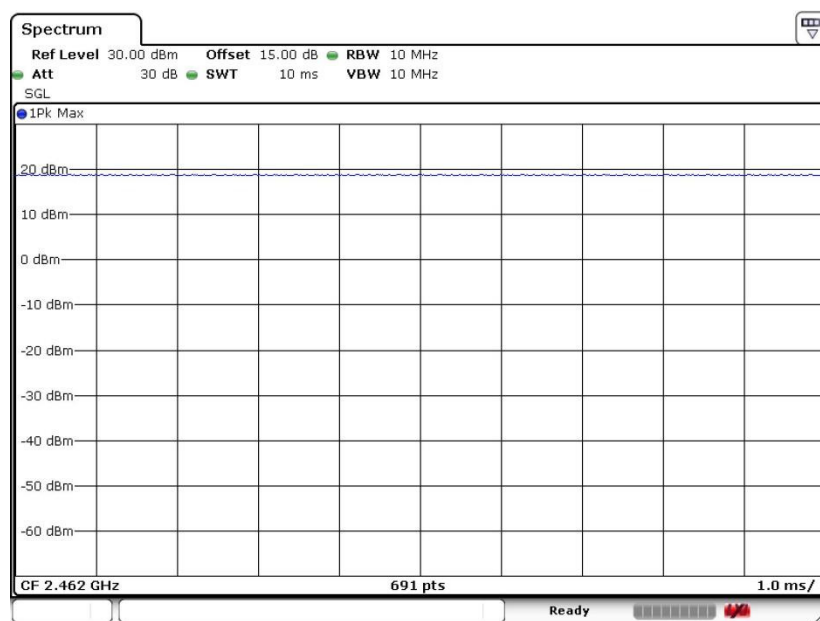
802.11b
1Mbps


Date: 21.MAR.2016 14:09:55



802.11g

6Mbps

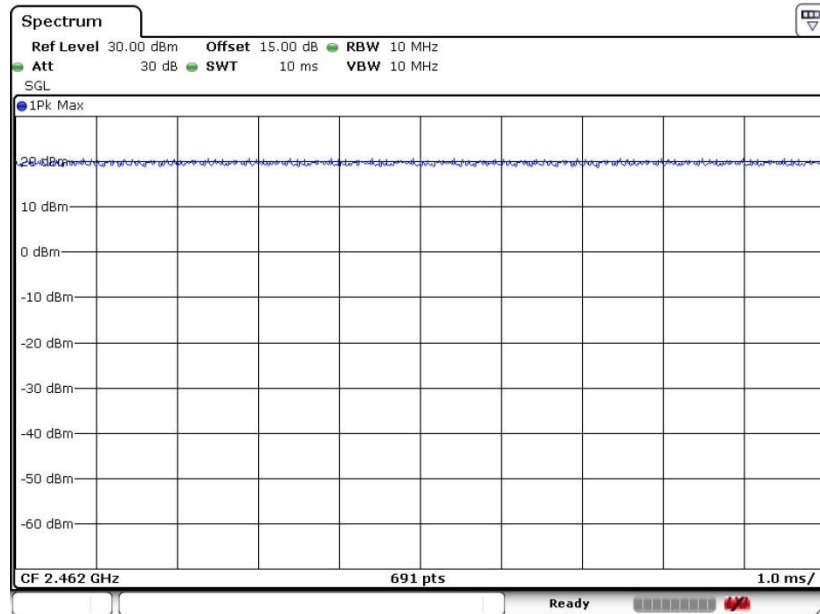


Date: 21.MAR.2016 14:40:16



802.11n HT20

MCS0

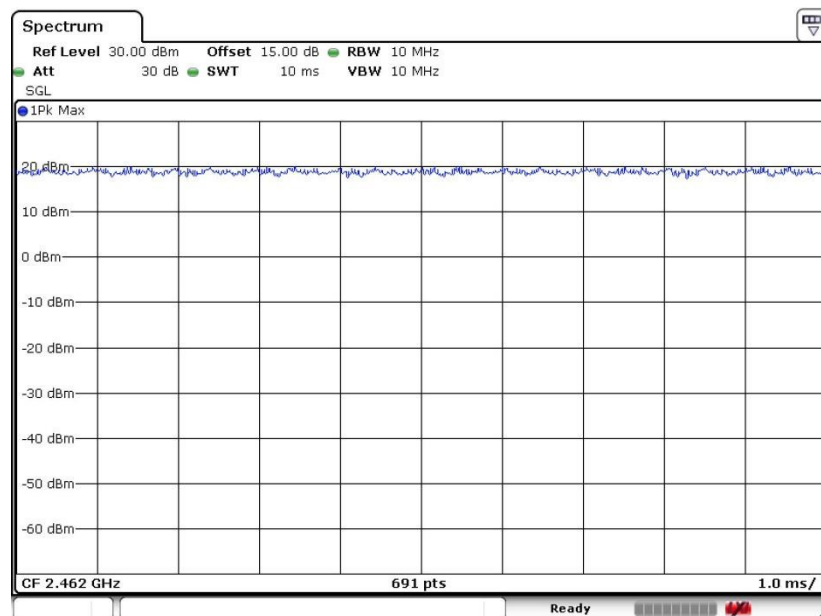


Date: 21.MAR.2016 14:56:14



802.11n HT40

MCS0

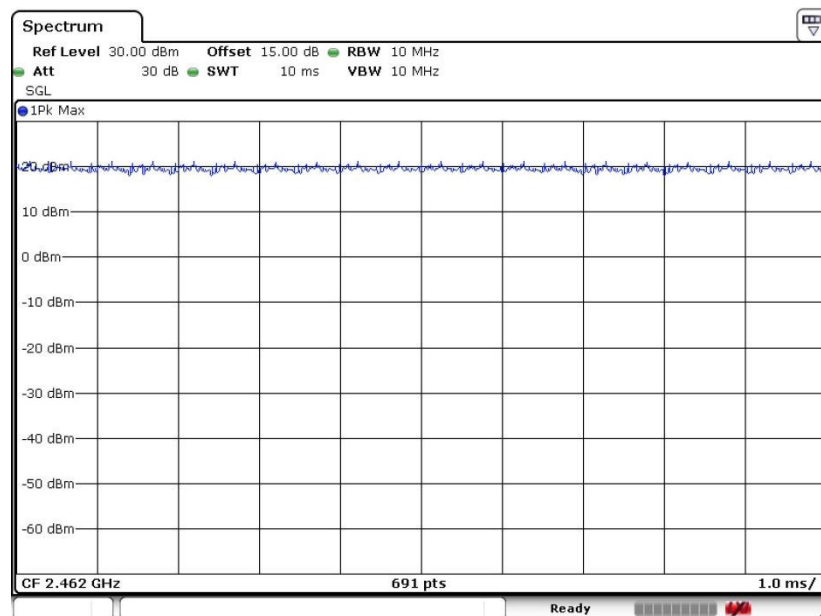

Date: 21.MAR.2016 14:47:35