

8.2 System Verification

SAR system verification is required to confirm measurement accuracy, according to the tissue dielectric media, probe calibration points and other system operating parameters required for measuring the SAR of a test device. The system verification must be performed for each frequency band and within the valid range of each probe calibration point required for testing the device.

The system verification results are required that the area scan estimated 1-g SAR is within 3% of the zoom scan 1-g SAR. The details are presented in annex B.

Table 8.1: System Verification of Head

Measurement Date (yyyy-mm-dd)	Frequency	Target value (W/kg)		Measured value (W/kg)		Deviation	
		10 g Average	1 g Average	10 g Average	1 g Average	10 g Average	1 g Average
2018/3/5	835 MHz	6.06	9.37	6.08	9.4	0.33%	0.32%
2018/3/6	1750 MHz	19.4	36.7	19.72	36.68	1.65%	-0.05%
2018/3/7	1900 MHz	21.0	40.0	21.24	39.32	1.14%	-1.70%
2018/3/8	2450 MHz	24.7	52.2	24.6	51.2	-0.40%	-1.92%

Table 8.2: System Verification of Body

Measurement Date (yyyy-mm-dd)	Frequency	Target value (W/kg)		Measured value (W/kg)		Deviation	
		10 g Average	1 g Average	10 g Average	1 g Average	10 g Average	1 g Average
2018/3/5	835 MHz	6.12	9.41	6.08	9.56	-0.65%	1.59%
2018/3/6	1750 MHz	19.8	37.1	19.68	37.36	-0.61%	0.70%
2018/3/7	1900 MHz	21.5	40.5	21.4	39.8	-0.47%	-1.73%
2018/3/8	2450 MHz	23.8	50.4	23.6	50.28	-0.84%	-0.24%

9 Measurement Procedures

9.1 Tests to be performed

In order to determine the highest value of the peak spatial-average SAR of a handset, all device positions, configurations and operational modes shall be tested for each frequency band according to steps 1 to 3 below. A flowchart of the test process is shown in picture 9.1.


Step 1: The tests described in 9.2 shall be performed at the channel that is closest to the center of the transmit frequency band (f_c) for:

- a) all device positions (cheek and tilt, for both left and right sides of the SAM phantom, as described in annex D),
- b) all configurations for each device position in a), e.g., antenna extended and retracted, and
- c) all operational modes, e.g., analogue and digital, for each device position in a) and configuration in b) in each frequency band.

If more than three frequencies need to be tested according to 11.1 (i.e., $N_c > 3$), then all frequencies, configurations and modes shall be tested for all of the above test conditions.

Step 2: For the condition providing highest peak spatial-average SAR determined in Step 1, perform all tests described in 9.2 at all other test frequencies, i.e., lowest and highest frequencies. In addition, for all other conditions (device position, configuration and operational mode) where the peak spatial-average SAR value determined in Step 1 is within 3 dB of the applicable SAR limit, it is recommended that all other test frequencies shall be tested as well.

Step 3: Examine all data to determine the highest value of the peak spatial-average SAR found in Steps 1 to 2.

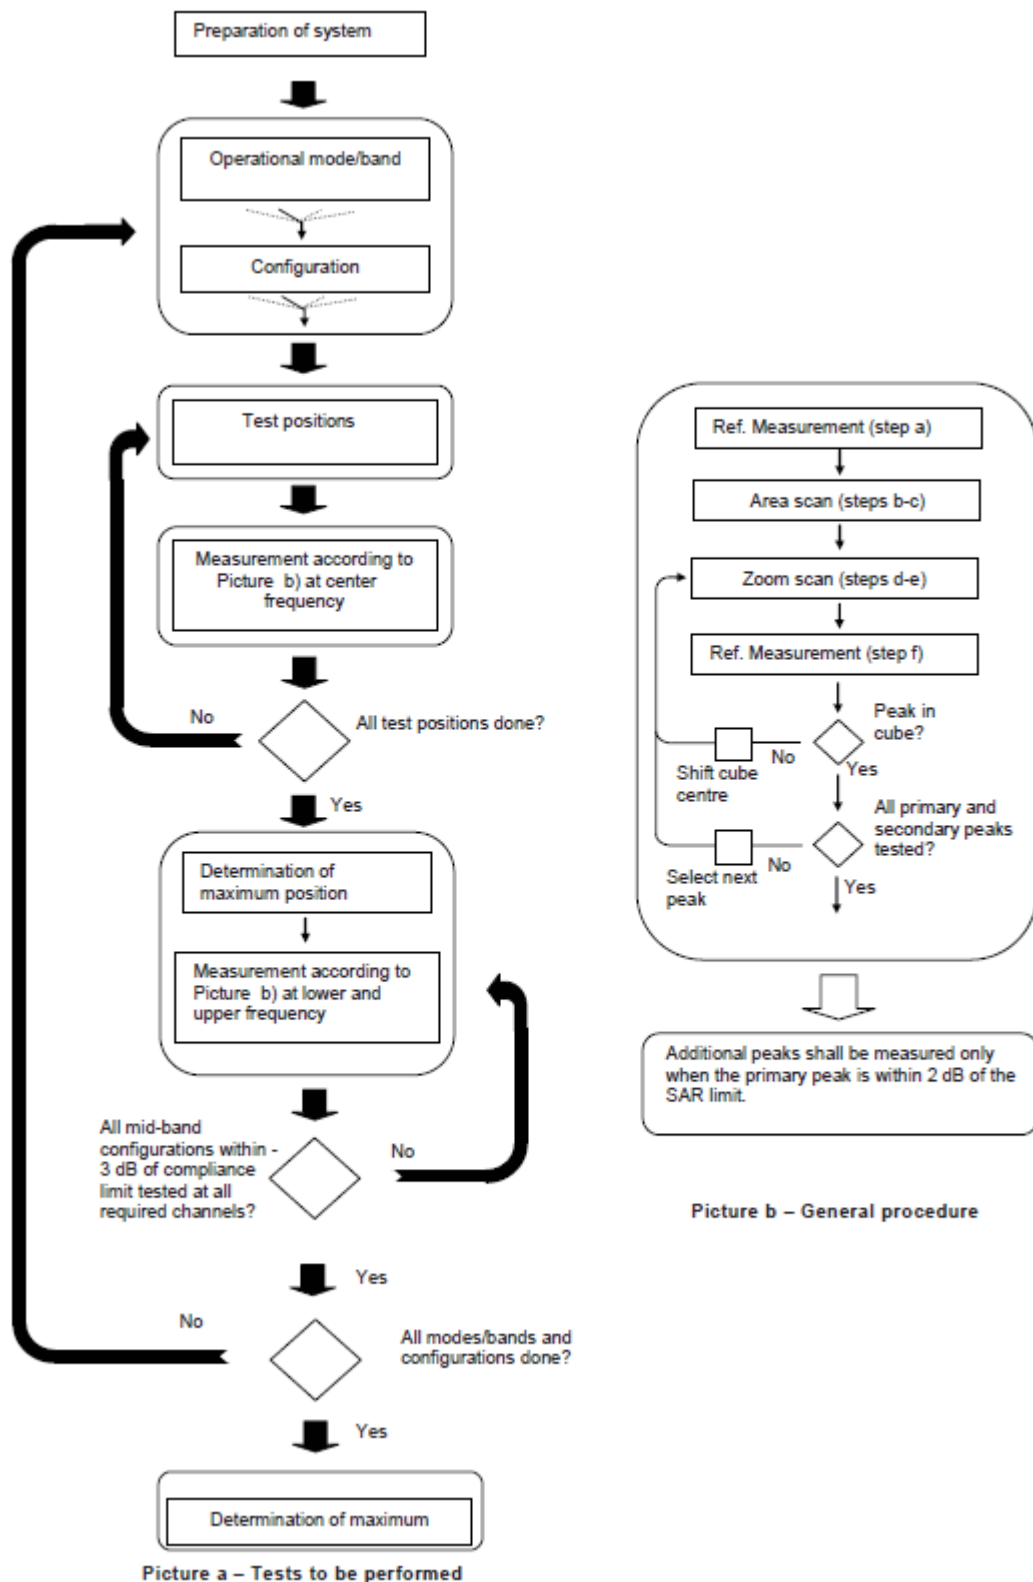

Picture 9.1 Block diagram of the tests to be performed

9.2 General Measurement Procedure

The area and zoom scan resolutions specified in the table below must be applied to the SAR measurements and fully documented in SAR reports to qualify for TCB approval. Probe boundary effect error compensation is required for measurements with the probe tip closer than half a probe tip diameter to the phantom surface. Both the probe tip diameter and sensor offset distance must satisfy measurement protocols; to ensure probe boundary effect errors are minimized and the higher fields closest to the phantom surface can be correctly measured and extrapolated to the phantom surface for computing 1-g SAR. Tolerances of the post-processing algorithms must be verified by the test laboratory for the scan resolutions used in the SAR measurements, according to the reference distribution functions specified in IEEE Std 1528-2013. The results should be documented as part of the system validation records and may be requested to support test results when all the measurement parameters in the following table are not satisfied.

			≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface			5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location			$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: Δx_{Area} , Δy_{Area}			≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
			When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	
Maximum zoom scan spatial resolution: Δx_{Zoom} , Δy_{Zoom}			≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$		≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm
	graded grid	$\Delta z_{Zoom}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{Zoom}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$	
Minimum zoom scan volume	x, y, z		≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.				
* When zoom scan is required and the <u>reported</u> SAR from the area scan based 1-g SAR estimation procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

9.3 WCDMA Measurement Procedures for SAR

The following procedures are applicable to WCDMA handsets operating under 3GPP Release99, Release 5 and Release 6. The default test configuration is to measure SAR with an established radio link between the DUT and a communication test set using a 12.2kbps RMC (reference measurement channel) configured in Test Loop Mode 1. SAR is selectively confirmed for other physical channel configurations (DPCCH & DPDCH_n), HSDPA and HSPA (HSUPA/HSDPA) modes according to output power, exposure conditions and device operating capabilities. Both uplink and downlink should be configured with the same RMC or AMR, when required. SAR for Release 5 HSDPA and Release 6 HSPA are measured using the applicable FRC (fixed reference channel) and E-DCH reference channel configurations. Maximum output power is verified according to applicable versions of 3GPP TS 34.121 and SAR must be measured according to these maximum output conditions. When Maximum Power Reduction (MPR) is not implemented according to Cubic Metric (CM) requirements for Release 6 HSPA, the following procedures do not apply.

For Release 5 HSDPA Data Devices:

Sub-test	β_c	β_d	β_d (SF)	β_c / β_d	β_{hs}	CM/dB
1	2/15	15/15	64	2/15	4/15	0.0
2	12/15	15/15	64	12/15	24/25	1.0
3	15/15	8/15	64	15/8	30/15	1.5
4	15/15	4/15	64	15/4	30/15	1.5

For Release 6 HSPA Data Devices

Sub-test	β_c	β_d	β_d (SF)	β_c / β_d	β_{hs}	β_{ec}	β_{ed}	β_{ed} (SF)	β_{ed} (codes)	CM (dB)	MPR (dB)	AG Index	E-TFCI
1	11/15	15/15	64	11/15	22/15	209/225	1039/225	4	1	1.5	1.5	20	75
2	6/15	15/15	64	6/15	12/15	12/15	12/15	4	1	1.5	1.5	12	67
3	15/15	9/15	64	15/9	30/15	30/15	$\beta_{ed1}:47/15$ $\beta_{ed2}:47/15$	4	2	1.5	1.5	15	92
4	2/15	15/15	64	2/15	4/15	4/15	56/75	4	1	1.5	1.5	17	71
5	15/15	15/15	64	15/15	24/15	30/15	134/15	4	1	1.5	1.5	21	81

Rel.8 DC-HSDPA (Cat 24)

SAR test exclusion for Rel.8 DC-HSDPA must satisfy the SAR test exclusion requirements of Rel.5 HSDPA. SAR test exclusion for DC-HSDPA devices is determined by power measurements according to the H-Set 12, Fixed Reference Channel (FRC) configuration in Table C.8.1.12 of 3GPP TS 34.121-1. A primary and a secondary serving HS-DSCH Cell are required to perform the power measurement and for the results to qualify for SAR test exclusion.

9.4 Bluetooth & Wi-Fi Measurement Procedures for SAR

Normal network operating configurations are not suitable for measuring the SAR of 802.11 transmitters in general. Unpredictable fluctuations in network traffic and antenna diversity conditions can introduce undesirable variations in SAR results. The SAR for these devices should be measured using chipset based test mode software to ensure that the results are consistent and reliable.

Chipset based test mode software is hardware dependent and generally varies among manufacturers. The device operating parameters established in a test mode for SAR measurements must be identical to those programmed in production units, including output power levels, amplifier gain settings and other RF performance tuning parameters. The test frequencies should correspond to actual channel frequencies defined for domestic use. SAR for devices with switched diversity should be measured with only one antenna transmitting at a time during each SAR measurement, according to a fixed modulation and data rate. The same data pattern should be used for all measurements.

9.5 Power Drift

To control the output power stability during the SAR test, DASY4 system calculates the power drift by measuring the E-field at the same location at the beginning and at the end of the measurement for each test position. These drift values can be found in section 14 labeled as: (Power Drift [dB]). This ensures that the power drift during one measurement is within 5%.

10 Area Scan Based 1-g SAR

10.1 Requirement of KDB

According to the KDB447498 D01 v05, when the implementation is based the specific polynomial fit algorithm as presented at the 29th Bioelectromagnetics Society meeting (2007) and the estimated 1-g SAR is ≤ 1.2 W/kg, a zoom scan measurement is not required provided it is also not needed for any other purpose; for example, if the peak SAR location required for simultaneous transmission SAR test exclusion can be determined accurately by the SAR system or manually to discriminate between distinctive peaks and scattered noisy SAR distributions from area scans.

There must not be any warning or alert messages due to various measurement concerns identified by the SAR system; for example, noise in measurements, peaks too close to scan boundary, peaks are too sharp, spatial resolution and uncertainty issues etc. The SAR system verification must also demonstrate that the area scan estimated 1-g SAR is within 3% of the zoom scan 1-g SAR (See Annex B). When all the SAR results for each exposure condition in a frequency band and wireless mode are based on estimated 1-g SAR, the 1-g SAR for the highest SAR configuration must be determined by a zoom scan.

10.2 Fast SAR Algorithms

The approach is based on the area scan measurement applying a frequency dependent attenuation parameter. This attenuation parameter was empirically determined by analyzing a large number of phones. The MOTOROLA FAST SAR was developed and validated by the MOTOROLA Research Group in Ft. Lauderdale.

In the initial study, an approximation algorithm based on Linear fit was developed. The accuracy of the algorithm has been demonstrated across a broad frequency range (136-2450 MHz) and for both 1- and 10-g averaged SAR using a sample of 264 SAR measurements from 55 wireless handsets. For the sample size studied, the root-mean-squared errors of the algorithm are 1.2% and 5.8% for 1- and 10-g averaged SAR, respectively. The paper describing the algorithm in detail is expected to be published in August 2004 within the Special Issue of Transactions on MTT.

In the second step, the same research group optimized the fitting algorithm to an Polynomial fit whereby the frequency validity was extended to cover the range 30-6000MHz. Details of this study can be found in the BEMS 2007 Proceedings.

Both algorithms are implemented in DASY software.

11 Conducted Output Power

11.1 GSM Measurement result

During the process of testing, the EUT was controlled via Agilent Digital Radio Communication tester (E5515C) to ensure the maximum power transmission and proper modulation. This result contains conducted output power for the EUT. In all cases, the measured peak output power should be greater and within 5% than EMI measurement.

Note: The #1 is normal power (Hotspot off)

The #2 is low power (Hotspot on)

Table 11-1 GSM850 #1

GSM850 #1								
Config	Tune-up	Measured Power (dBm)			Caculation	Frame Burst Power (dBm)		
		CH251 848.8 MHz	CH190 836.6 MHz	CH128 824.2 MHz		CH251 848.8 MHz	CH190 836.6 MHz	CH128 824.2 MHz
GSM Speech	33.50	33.16	33.21	33.24				
GPRS 1 Txslot	33.50	33.15	33.16	33.21	-9.03	24.12	24.13	24.18
GPRS 2 Txslots	33.00	32.43	32.46	32.50	-6.02	26.41	26.44	26.48
GPRS 3 Txslots	31.00	30.68	30.72	30.75	-4.26	26.42	26.46	26.49
GPRS 4 Txslots	30.00	29.60	29.64	29.66	-3.01	26.59	26.63	26.65
EGPRS GMSK 1 Txslot	33.50	33.40	33.44	33.46	-9.03	24.37	24.41	24.43
EGPRS GMSK 2 Txslots	33.00	32.70	32.74	32.76	-6.02	26.68	26.72	26.74
EGPRS GMSK 3 Txslots	31.00	30.97	31.00	31.00	-4.26	26.71	26.74	26.74
EGPRS GMSK 4 Txslots	30.00	29.89	29.92	29.94	-3.01	26.88	26.91	26.93
EGPRS 8PSK 1 Txslot	28.00	27.24	27.68	27.61	-9.03	18.21	18.65	18.58
EGPRS 8PSK 2 Txslots	27.00	26.31	26.67	26.75	-6.02	20.29	20.65	20.73
EGPRS 8PSK 3 Txslots	25.00	24.34	24.71	24.75	-4.26	20.08	20.45	20.49
EGPRS 8PSK 4 Txslots	24.00	23.57	23.47	23.51	-3.01	20.56	20.46	20.50

Table 11-2 PCS1900 #1

PCS1900 #1								
Config	Tune-up	Measured Power (dBm)			Caculation	Frame Burst Power (dBm)		
		CH810 1909.8 MHz	CH661 1880 MHz	CH512 1850.2 MHz		CH810 1909.8 MHz	CH661 1880 MHz	CH512 1850.2 MHz
GSM Speech	30.50	30.33	30.30	30.21				
GPRS 1 Txslot	30.50	30.36	30.29	30.20	-9.03	21.33	21.26	21.17
GPRS 2 Txslots	30.00	29.63	29.58	29.48	-6.02	23.61	23.56	23.46
GPRS 3 Txslots	28.00	27.93	27.87	27.77	-4.26	23.67	23.61	23.51
GPRS 4 Txslots	27.00	26.84	26.78	26.68	-3.01	23.83	23.77	23.67
EGPRS GMSK 1 Txslot	30.50	30.22	30.26	30.17	-9.03	21.19	21.23	21.14
EGPRS GMSK 2 Txslots	30.00	29.52	29.55	29.46	-6.02	23.50	23.53	23.44
EGPRS GMSK 3 Txslots	28.00	27.83	27.85	27.75	-4.26	23.57	23.59	23.49
EGPRS GMSK 4 Txslots	27.00	26.75	26.76	26.66	-3.01	23.74	23.75	23.65
EGPRS 8PSK 1 Txslot	27.00	26.51	26.76	26.69	-9.03	17.48	17.73	17.66
EGPRS 8PSK 2 Txslots	26.00	25.48	25.67	25.81	-6.02	19.46	19.65	19.79
EGPRS 8PSK 3 Txslots	24.00	23.46	23.64	23.82	-4.26	19.20	19.38	19.56
EGPRS 8PSK 4 Txslots	23.00	22.28	22.43	22.59	-3.01	19.27	19.42	19.58

Table 11-3 PCS1900 #2

PCS1900 #2								
Config	Tune-up	Measured Power (dBm)			Calculation	Frame Burst Power (dBm)		
		CH810 1909.8 MHz	CH661 1880 MHz	CH512 1850.2 MHz		CH810 1909.8 MHz	CH661 1880 MHz	CH512 1850.2 MHz
GSM Speech	/	/	/	/				
GPRS 1 Txslot	29.00	28.88	28.82	28.72	-9.03	19.85	19.79	19.69
GPRS 2 Txslots	27.00	25.95	25.87	25.79	-6.02	19.93	19.85	19.77
GPRS 3 Txslots	25.00	24.20	24.14	24.06	-4.26	19.94	19.88	19.80
GPRS 4 Txslots	23.00	22.85	22.79	22.72	-3.01	19.84	19.78	19.71
EGPRS GMSK 1 Txslot	29.00	28.78	28.86	28.70	-9.03	19.75	19.83	19.67
EGPRS GMSK 2 Txslots	27.00	25.86	25.92	25.77	-6.02	19.84	19.90	19.75
EGPRS GMSK 3 Txslots	25.00	24.10	24.19	24.04	-4.26	19.84	19.93	19.78
EGPRS GMSK 4 Txslots	23.00	22.76	22.83	22.70	-3.01	19.75	19.82	19.69
EGPRS 8PSK 1 Txslot	26.00	24.94	25.14	25.21	-9.03	15.91	16.11	16.18
EGPRS 8PSK 2 Txslots	23.00	21.76	22.07	22.15	-6.02	15.74	16.05	16.13
EGPRS 8PSK 3 Txslots	21.00	20.17	20.17	20.24	-4.26	15.91	15.91	15.98
EGPRS 8PSK 4 Txslots	19.00	18.33	18.59	18.68	-3.01	15.32	15.58	15.67

NOTES:

Division Factors

To average the power, the division factor is as follows:

1TX-slot = 1 transmit time slot out of 8 time slots=> conducted power divided by (8/1) => -9.03dB

2TX-slots = 2 transmit time slots out of 8 time slots=> conducted power divided by (8/2) => -6.02dB

3TX-slots = 3 transmit time slots out of 8 time slots=> conducted power divided by (8/3) => -4.26dB

4TX-slots = 4 transmit time slots out of 8 time slots=> conducted power divided by (8/4) => -3.01dB

According to the conducted power as above, the body measurements are performed with 4Txslots for 850MHz and 1900MHz #1, 3Txslots for 1900MHz #2.

11.2 WCDMA Measurement result

Table 11-4 WCDMA1900-BII #1

WCDMA1900-BII #1					
Item		Tune-up	Measured Power (dBm)		
			CH9538 1907.6 MHz	CH9400 1880 MHz	CH9262 1852.4 MHz
WCDMA	RMC	24.00	23.40	23.46	23.53
HSUPA	subtest1	21.00	20.13	20.05	20.19
	subtest2	21.00	20.16	20.08	20.23
	subtest3	22.00	21.20	21.13	21.24
	subtest4	20.00	19.62	19.52	19.67
	subtest5	23.00	22.20	22.13	22.31

Table 11-5 WCDMA1900-BII #2

WCDMA1900-BII #2					
Item		Tune-up	Measured Power (dBm)		
			CH9538 1907.6 MHz	CH9400 1880 MHz	CH9262 1852.4 MHz
WCDMA	RMC	21.00	20.47	20.57	20.61
HSUPA	subtest1	20.00	18.08	18.09	18.29
	subtest2	20.00	18.05	18.04	18.25
	subtest3	21.00	19.02	19.02	19.25
	subtest4	19.00	17.52	17.49	17.70
	subtest5	22.00	20.01	20.03	20.23

Table 11-6 WCDMA1700-BIV #1

WCDMA1700-BIV #1					
			Measured Power (dBm)		
Item		Tune-up	CH1513 1752.6 MHz	CH1412 1732.4 MHz	CH1312 1712.4 MHz
WCDMA	RMC	24.00	23.20	23.42	23.26
HSUPA	subtest1	21.00	20.24	20.41	20.13
	subtest2	21.00	20.24	20.39	20.11
	subtest3	22.00	21.20	21.37	21.18
	subtest4	20.00	19.68	19.88	19.58
	subtest5	23.00	22.18	22.36	22.17

Table 11-7 WCDMA1700-BIV #2

WCDMA1700-BIV #2					
			Measured Power (dBm)		
Item		Tune-up	CH1513 1752.6 MHz	CH1412 1732.4 MHz	CH1312 1712.4 MHz
WCDMA	RMC	22.00	21.25	21.52	21.39
HSUPA	subtest1	20.00	19.30	19.31	19.32
	subtest2	20.00	19.29	19.25	19.31
	subtest3	21.00	20.24	20.28	20.32
	subtest4	19.00	18.73	18.75	18.77
	subtest5	22.00	21.23	21.25	21.38

Table 11-8 WCDMA850-BV #1

WCDMA850-BV #1					
			Measured Power (dBm)		
Item		Tune-up	CH4233 846.6 MHz	CH4182 835.4 MHz	CH4132 826.4 MHz
WCDMA	RMC	24.00	23.41	23.42	23.26
HSUPA	subtest1	21.00	20.33	20.41	20.23
	subtest2	21.00	20.29	20.40	20.23
	subtest3	22.00	21.27	21.36	21.22
	subtest4	20.00	19.77	19.84	19.71
	subtest5	23.00	22.25	22.33	22.22

11.3 Wi-Fi and BT Measurement result

Table 11-9 Bluetooth Power

Bluetooth Power				
Mode	Channel	Frequency	Tune-up	Measured
GFSK	78	2480 MHz	5	3.62
	39	2441 MHz	5	3.65
	0	2402 MHz	5	3.53
EDR2M-4_DQPSK	78	2480 MHz	5	3.21
	39	2441 MHz	5	3.29
	0	2402 MHz	5	3.15
EDR3M-8DPSK	78	2480 MHz	5	3.35
	39	2441 MHz	5	3.37
	0	2402 MHz	5	3.21

Table 11-10 WLAN2450 #1

WLAN2450 #1						
Band	Mode	Channel	Frequency	Data Rate	Tune-up	Measured
WLAN 2.4G 20M	802.11b	11	2462 MHz	5.5Mbps	16.50	16.21
		6	2437 MHz		16.50	16.07
		1	2412 MHz		16.50	15.66
		11	2462 MHz	2Mbps	16.50	15.92
		6	2437 MHz		/	/
		1	2412 MHz		/	/
		11	2462 MHz	1Mbps	16.50	16.12
		6	2437 MHz		16.50	15.63
		1	2412 MHz		16.50	15.83
		11	2462 MHz	11Mbps	16.50	16.14
		6	2437 MHz		/	/
		1	2412 MHz		/	/
	802.11g	11	2462 MHz	6Mbps	15.00	14.54
		6	2437 MHz		15.00	13.71
		1	2412 MHz		15.00	13.67
		11	2462 MHz	9Mbps	15.00	14.49
		6	2437 MHz		/	/
		1	2412 MHz		/	/
		11	2462 MHz	12Mbps	15.00	14.21
		6	2437 MHz		/	/
		1	2412 MHz		/	/
		11	2462 MHz	18Mbps	15.00	14.29
		6	2437 MHz		/	/
		1	2412 MHz		/	/
		11	2462 MHz	24Mbps	15.00	13.84
		6	2437 MHz		/	/
		1	2412 MHz		/	/
		11	2462 MHz	36Mbps	15.00	13.79
		6	2437 MHz		/	/
		1	2412 MHz		/	/
		11	2462 MHz	48Mbps	15.00	13.41
		6	2437 MHz		/	/
		1	2412 MHz		/	/
		11	2462 MHz	54Mbps	15.00	13.64
		6	2437 MHz		/	/
		1	2412 MHz		/	/
	802.11n	11	2462 MHz	MCS0	14.00	13.89
		6	2437 MHz		14.00	12.55
		1	2412 MHz		14.00	12.83
		11	2462 MHz	MCS1	14.00	12.54
		6	2437 MHz		/	/
		1	2412 MHz		/	/
		11	2462 MHz	MCS2	14.00	13.06
		6	2437 MHz		/	/
		1	2412 MHz		/	/
		11	2462 MHz	MCS3	14.00	13.25
		6	2437 MHz		/	/
		1	2412 MHz		/	/


WLAN 2.4G 40M	20M	11	2462 MHz	MCS4	14.00	13.03
		6	2437 MHz		/	/
		1	2412 MHz		/	/
		11	2462 MHz	MCS5	14.00	13.11
		6	2437 MHz		/	/
		1	2412 MHz		/	/
		11	2462 MHz	MCS6	14.00	13.12
		6	2437 MHz		/	/
		1	2412 MHz		/	/
		11	2462 MHz	MCS7	14.00	13.08
		6	2437 MHz		/	/
		1	2412 MHz		/	/
	802.11n 40M	9	2452 MHz	MCS0	14.00	13.61
		6	2437 MHz		14.00	13.04
		3	2422 MHz		14.00	13.02
		9	2452 MHz	MCS1	14.00	13.21
		6	2437 MHz		/	/
		3	2422 MHz		/	/
		9	2452 MHz	MCS2	14.00	13.34
		6	2437 MHz		/	/
		3	2422 MHz		/	/
		9	2452 MHz	MCS3	14.00	13.31
		6	2437 MHz		/	/
		3	2422 MHz		/	/
		9	2452 MHz	MCS4	14.00	13.17
		6	2437 MHz		/	/
		3	2422 MHz		/	/
		9	2452 MHz	MCS5	14.00	12.95
		6	2437 MHz		/	/
		3	2422 MHz		/	/
		9	2452 MHz	MCS6	14.00	13.18
		6	2437 MHz		/	/
		3	2422 MHz		/	/
		9	2452 MHz	MCS7	14.00	12.88
		6	2437 MHz		/	/
		3	2422 MHz		/	/

12 Simultaneous TX SAR Considerations

12.1 Introduction

The following procedures adopted from “FCC SAR Considerations for Cell Phones with Multiple Transmitters” are applicable to handsets with built-in unlicensed transmitters such as 802.11 a/b/g and Bluetooth devices which may simultaneously transmit with the licensed transmitter. For this device, the BT and Wi-Fi can transmit simultaneous with other transmitters.

12.2 Transmit Antenna Separation Distances

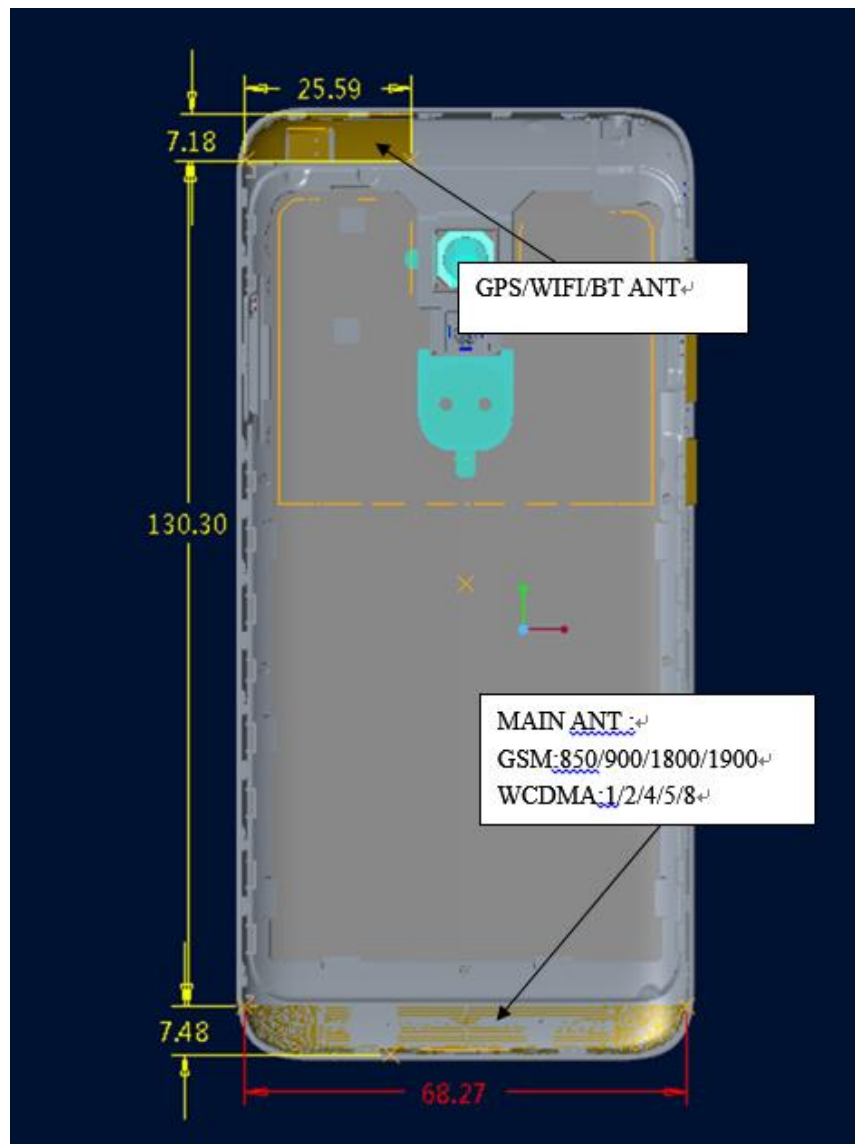

Picture 12.1 Antenna Locations

12.3 SAR Measurement Positions

According to the KDB941225 D06 Hot Spot SAR v01, the edges with less than 2.5 cm distance to the antennas need to be tested for SAR.

SAR measurement positions						
Mode	Front	Rear	Left edge	Right edge	Top edge	Bottom edge
Main antenna	Yes	Yes	Yes	Yes	No	Yes
WLAN	Yes	Yes	No	Yes	Yes	No

12.4 Standalone SAR Test Exclusion Considerations

Standalone 1-g head or body SAR evaluation by measurement or numerical simulation is not required when the corresponding SAR Exclusion Threshold condition, listed below, is satisfied.

The 1-g SAR test exclusion threshold for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$$\left[\frac{(\text{max. power of channel, including tune-up tolerance, mW})}{(\text{min. test separation distance, mm})} \right] \cdot \sqrt{f(\text{GHz})} \leq 3.0 \text{ for 1-g SAR, where}$$

- $f(\text{GHz})$ is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison

Table 12.1: Standalone SAR test exclusion considerations

Band/Mode	F(GHz)	Position	SAR test exclusion threshold (mW)	RF output power		SAR test exclusion
				dBm	mW	
Bluetooth	2.441	Head	9.6	5	3.16	Yes
		Body	9.6	5	3.16	Yes
2.4GHz WLAN 802.11 b	2.45	Head	9.58	16.5	44.67	No
		Body	9.58	16.5	44.67	No

13 Evaluation of Simultaneous

Table 13.1: The sum of reported SAR values for main antenna and WiFi

	Position	Main antenna	WiFi	Sum
Highest reported SAR value for Head	Right hand, Touch cheek	0.29	0.55	0.84
Highest reported SAR value for Body	Rear	0.95	0.13	1.08

Table 13.2: The sum of reported SAR values for main antenna and BT

	Position	Main antenna	BT	Sum
Maximum reported SAR value for Head	Left hand, Touch cheek	0.32	0.13	0.45
Maximum reported SAR value for Body	Rear	0.95	0.07	1.02

[1] - Estimated SAR for Bluetooth (see the table 13.3)

Table 13.3: Estimated SAR for Bluetooth

Mode/Band	F (GHz)	Position	Distance (mm)	Upper limit of power *		Estimated _{1g} (W/kg)
				dBm	mW	
Bluetooth	2.441	Head	5	5	3.16	0.13
Bluetooth	2.441	Body	10	5	3.16	0.07

* - Maximum possible output power declared by manufacturer

When standalone SAR test exclusion applies to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to following to determine simultaneous transmission SAR test exclusion:

(max. power of channel, including tune-up tolerance, mW)/(min. test separation distance, mm) · [$\sqrt{f(\text{GHz})/x}$] W/kg for test separation distances ≤ 50 mm;

where x = 7.5 for 1-g SAR.

When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion

Conclusion:

According to the above tables, the sum of reported SAR values is < 1.6 W/kg. So the simultaneous transmission SAR with volume scans is not required.

14 SAR Test Result

It is determined by user manual for the distance between the EUT and the phantom bottom.

The distance is 10 or 15mm and just applied to the condition of body worn accessory.

It is performed for all SAR measurements with area scan based 1-g SAR estimation (Fast SAR). A zoom scan measurement is added when the estimated 1-g SAR is the highest measured SAR in each exposure configuration, wireless mode and frequency band combination or more than 1.2W/kg.

The calculated SAR is obtained by the following formula:

$$\text{Reported SAR} = \text{Measured SAR} \times 10^{(P_{\text{Target}} - P_{\text{Measured}})/10}$$

Where P_{Target} is the power of manufacturing upper limit;

P_{Measured} is the measured power in chapter 11.

Mode	Duty Cycle
Speech for GSM850/1900	1:8.3
GPRS&EGPRS for GSM850/1900 #1	1:2
GPRS&EGPRS for GSM1900 #2	1:2.67
WCDMA&LTE	1:1

14.1 Evaluation of multi-batteries

Note: B1: CAC2400008C1 **B2:** CAC2400009C7

We'll perform the head measurement in all bands with the primary battery depending on the evaluation of multi-batteries retest on highest value point with other battery. Then, repeat the measurement in the Body test.

frequency		Mode/Band	Side	Position	BatteryType	1g SAR (W/kg)	PowerDrift
MHz	Channel						
848.8	251	GSM850	Right	Cheek	CAC2400008C1	0.224	-0.01
848.8	251	GSM850	Right	Cheek	CAC2400009C7	0.269	-0.03

Note: According to the values in the above table, the battery, B2, is the primary

battery. We'll perform the head measurement with this battery and retest on highest value point with others.

frequency		Mode/Band	Position	BatteryType	1g SAR (W/kg)	PowerDrift
MHz	Channel					
1712.4	1312	WCDMA1700	Rear 10mm	CAC2400008C1	0.418	0.01
1712.4	1312	WCDMA1700	Rear 10mm	CAC2400009C7	0.424	0.02

Note: According to the values in the above table, the battery, B2, is the primary

battery. We'll perform the Body measurement with this battery and retest on highest value point with others.

14.2 SAR results

Note: H1: CCB0046A10C1 H2: CCB0046A10C4

Table 14-1 GSM850 #1 Head

GSM850 #1 Head								
Ambient Temperature:			22.5			Liquid Temperature: 22.3		
Mode	Device orientation	SAR measurement	Measured SAR [W/kg]			Reported SAR [W/kg]		
			CH251 848.8 MHz	CH190 836.6 MHz	CH128 824.2 MHz	CH251 848.8 MHz	CH190 836.6 MHz	CH128 824.2 MHz
GSM	Tune-up		33.50	33.50	33.50	Scaling factor*		
	Slot Average Power [dBm]		33.16	33.21	33.24	1.08	1.07	1.06
	Left Cheek	1g SAR		0.142			0.15	
		10g SAR		0.114			0.12	
		Deviation		0.08			0.08	
	Left Tilt	1g SAR		0.068			0.07	
		10g SAR		0.056			0.06	
		Deviation		0.11			0.11	
	Right Cheek	1g SAR	0.269	0.25	0.229	0.29	0.27	0.24
		10g SAR	0.208	0.193	0.176	0.22	0.21	0.19
		Deviation	-0.03	0.14	-0.05	-0.03	0.14	-0.05
	Right Tilt	1g SAR		0.089			0.10	
		10g SAR		0.073			0.08	
		Deviation		0.06			0.06	
GSM B1	Right Cheek	1g SAR	0.257			0.28		
		10g SAR	0.201			0.22		
		Deviation	-0.05			-0.05		

Table 14-2 GSM850 #1 Body

GSM850 #1 Body								
Ambient Temperature: 22.5					Liquid Temperature: 22.3			
Mode	Device orientation	SAR measurement	Measured SAR [W/kg]			Reported SAR [W/kg]		
			CH251 848.8 MHz	CH190 836.6 MHz	CH128 824.2 MHz	CH251 848.8 MHz	CH190 836.6 MHz	CH128 824.2 MHz
GPRS 4 Txslots	Tune-up		30.00	30.00	30.00	Scaling factor*		
	Slot Average Power [dBm]		29.60	29.64	29.66	1.10	1.09	1.08
	Front	1g SAR		0.472			0.51	
		10g SAR		0.34			0.37	
		Deviation		0.08			0.08	
	Rear	1g SAR	0.733	0.872	0.747	0.81	0.95	0.81
		10g SAR	0.553	0.666	0.53	0.61	0.72	0.57
		Deviation	-0.06	-0.02	0.07	-0.06	-0.02	0.07
	Left edge	1g SAR		0.712			0.77	
		10g SAR		0.321			0.35	
		Deviation		-0.07			-0.07	
	Right edge	1g SAR		0.598			0.65	
		10g SAR		0.368			0.40	
		Deviation		-0.08			-0.08	
	Bottom edge	1g SAR		0.07			0.08	
		10g SAR		0.04			0.04	
		Deviation		-0.01			-0.01	
EGPRS GMSK 4 Txslots	Tune-up		30.00	30.00	30.00	Scaling factor*		
	Slot Average Power [dBm]		29.89	29.92	29.94	1.02	1.02	1.01
	Rear	1g SAR		0.85			0.87	
		10g SAR		0.6			0.61	
Deviation			0.03			0.03		
GPRS 4 Txslots B1	Rear	1g SAR		0.851			0.92	
		10g SAR		0.604			0.66	
		Deviation		0.02			0.02	