TEST REPORT

No.I20N02297-EMC

for

TCL Communication Ltd.

10 inch wifi tablet

Model Name： 8095

With

Hardware Version: 1.2

Software Version: DL7

FCC ID: 2ACCJB133

Issued Date: 2020-09-07

Designation Number: CN1210

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of SAICT.

Test Laboratory:

SAICT, Shenzhen Academy of Information and Communications Technology

Building G, Shenzhen International Innovation Center, No.1006 Shennan Road, Futian District, Shenzhen, Guangdong, P. R. China 518026.

Tel:+86(0)755-33322000, Fax:+86(0)755-33322001

Email: yewu@caict.ac.cn. www.saict.ac.cn

REPORT HISTORY

Report Number	Revision	Description	Issue Date
I20N02297-EMC	Rev.0	1st edition	**2020-09-07**

Note: the latest revision of the test report supersedes all previous version.

©Copyright. All rights reserved by SAICT.

CONTENTS

1. SUMMARY OF TEST REPORT 4
1.1. TEST ITEMS 4
1.2. TEST STANDARDS 4
1.3. TEST RESULT 4
1.4. TESTING LOCATION 4
1.5. PROJECT DATA 4
1.6. SIGNATURE 4
2. CLIENTINFORMATION 5
2.1. APPLICANT INFORMATION 5
2.2. MANUFACTURER INFORMATION 5
3. EQUIPMENT UNDERTEST (EUT) AND ANCILLARY EQUIPMENT (AE) 6
3.1. ABOUT EUT 6
3.2. INTERNAL IDENTIFICATION OF EUT 6
3.3. INTERNAL IDENTIFICATION OF AE 6
3.4. EUT SET-UPS 7
3.5. GENERAL DESCRIPTION 8
4. REFERENCE DOCUMENTS 9
4.1. REFERENCE DOCUMENTS FOR TESTING 9
5. LABORATORY ENVIRONMENT 10
6. SUMMARY OF TEST RESULTS 11
6.1. TESTING ENVIRONMENT 11
6.2. SUMMARY OF MEASUREMENT RESULTS 11
6.3. STATEMENT 11
7. MEASUREMENT UNCERTAINTY 12
8. TEST FACILITIES UTILIZED 12
ANNEX A: MEASUREMENT RESULTS 13
A.1 RADIATED EMISSION (§15.109(A)) 13

©Copyright. All rights reserved by SAICT.

1. Summary of Test Report

1.1. Test Items

Description	10 inch wifi tablet
Model Name	8095
Applicant's name	TCL Communication Ltd.
Manufacturer's Name	TCL Communication Ltd.

1.2. Test Standards

FCC Part 15, Subpart B 10-1-2019 Edition; ANSI C63.4 2014;

1.3. Test Result

Total test 1 items, pass 1 items. Please refer to "6.2 Summary of Measurement Results"

1.4. Testing Location

Address: Building G, Shenzhen International Innovation Center, No.1006 Shennan Road, Futian District, Shenzhen, Guangdong, P. R. China

1.5. Project data

Testing Start Date: 2020-08-24 Testing End Date: 2020-09-02

1.6. Signature

Ma Shoujian
(Prepared this test report)

Zhang Yunzhuan
(Reviewed this test report)

Cao Junfei
(Approved this test report)

©Copyright. All rights reserved by SAICT.

2. ClientInformation

2.1. Applicant Information

Company Name:	TCL Communication Ltd.
Address:	5/F, Building 22E, 22 Science Park East Avenue, Hong Kong Science Park, Shatin, NT, Hong Kong
Contact	Gong Zhizhou
Email	zhizhou.gong@tcl.com
Tel.	0086-755-36611722
Fax	0086-755-36612000-81722

2.2. Manufacturer Information

Company Name:	TCL Communication Ltd.
Address:	5/F, Building 22E, 22 Science Park East Avenue, Hong Kong Science Park, Shatin, NT, Hong Kong
Contact	Gong Zhizhou
Email	zhizhou.gong@tcl.com
Tel.	0086-755-36611722
Fax	0086-755-36612000-81722

©Copyright. All rights reserved by SAICT.

3. Equipment Under Test (EUT) and Ancillary Equipment (AE)

3.1. About EUT

Description	10 inch wifi tablet
Model Name	8095
FCC ID	2ACCJB133
Antenna Type	Internal Antenna
Condition of EUT as received	No obvious damage in appearance

Note: Components list, please refer to documents of the manufacturer; it is also included in the original test record of Shenzhen Academy of Information and Communications Technology.

3.2. Internal Identification of EUT

EUT ID*	SN or IMEI	HW Version	SW Version	Receive Date
UT01aa	F05136CAECD4592	1.2	DL7	2020-08-11

*EUT ID: is used to identify the test sample in the lab internally.

3.3. Internal Identification of AE

AE ID*	Description
AE1	Battery
AE2	Charger
AE3	Cable

AE1

Model	TLp040M7
Manufacturer	VEKEN
Capacity	4000mAh
Nominal Voltage	3.85v

AE2-1

Model	CBA0058AGAC5
Manufacturer	PUAN

AE2-2

Model	CBA0058AGAC7
Manufacturer	chenyang

AE3-1

Model	CDA0000123C1
Manufacturer	JUWEI

AE3-2

Model	CDA0000123C8
Manufacturer	PUAN

©Copyright. All rights reserved by SAICT.

*AE ID is used to identify the test sample in the lab internally.

AE: ancillary equipment

AE2: There is just one internal circuit of charger, and the plug of the charger can be replaced to meet worldwide country's requirement.

3.4. EUT set-ups

EUT set-up No.	Combination of EUT and AE
Set.1	UT01aa+AE1-1+AE2-1+AE3-1
Set.2	UT01aa+AE1-1+AE2-2+AE3-2
Set.3	UT01aa+AE1-1+AE3-1+PC
Set.4	UT01aa+AE1-1+AE3-2+PC

©Copyright. All rights reserved by SAICT.

3.5. General Description

The Equipment Under Test (EUT) is a model of 10 inch wifi tablet with internal antenna.
It has Camera, Video Player, USB Data Transfer, Bluetooth, and Wi-Fi functions.
It consists of normal options: Battery, Charger and Data Cable.
Manual and specifications of the EUT were provided to fulfill the test.
Samples (EUT+AE) undergoing test were selected by the Client. Relevant information is provided by the Client.
10 inch wifi tablet 8095 manufactured by TCL Communication Ltd. is a variant model based on 8092 for conformance test. According to client's description, the table below shows the difference between model 8095 and 8092:

Changes	8095	8092
Other changes	1mic 2speaker P-sensor&L-sensor	2mic 2speaker no p&L sensor

According to the declaration of differences by the manufacturer, the following tests need to be performed at the worst mode from the report of the initial model:

NO.	Tests	Set	Mode
1	Radiated Emission	Set.3/ Set.4	Data Transfer
		Set.1/ Set.2	Camera/Video Player

Other results are cited from the initial report.
The report number for initial model is I20N02014-EMC.

©Copyright. All rights reserved by SAICT.

4. Reference Documents

4.1. Reference Documents for testing

The following documents listed in this section are referred for testing.

Reference	Title	Version
FCC Part 15, Subpart B	Radio frequency devices	10-1-2019 Edition
ANSI C63.4	Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz	2014

©Copyright. All rights reserved by SAICT.

5. LABORATORY ENVIRONMENT

Semi-anechoic chamber did not exceed following limits along the EMC testing:
9.10m×6.10m×5.60m (L×W×H)

Temperature	Min. = 15 ℃, Max. = 35℃
Relative humidity	Min. = 20 %, Max. = 75 %
Shielding effectiveness	0.014MHz-1MHz,>60dB; 1MHz-18000MHz,>90dB
Electrical insulation	>2MΩ
Ground system resistance	<4Ω
Normalised site attenuation (NSA)	<±4 dB, 3 m distance, from 30 to 1000 MHz

Shield room did not exceed following limits along the EMC testing:

Temperature	Min. = 15 ℃, Max. = 35 ℃
Relative humidity	Min. =20 %, Max. = 75 %
Shielding effectiveness	0.014MHz-1MHz,>60dB; 1MHz-10000MHz,>90dB
Electrical insulation	>2MΩ
Ground system resistance	<4Ω

Fully-anechoic chamber did not exceed following limits along the EMC testing:
9.10m×6.10m×5.60m (L×W×H)

Temperature	Min. = 15 ℃, Max. = 35℃
Relative humidity	Min. = 20 %, Max. = 75 %
Shielding effectiveness	0.014MHz-1MHz,>60dB; 1MHz-18000MHz,>90dB
Electrical insulation	>2MΩ
Ground system resistance	<4Ω
Voltage Standing Wave Ratio（VSWR）	≤ 6 dB, from 1 to 18GHz，3 m distance
Uniformity of field strength	Between 0 and 6 dB, from 80 to 6000 MHz

©Copyright. All rights reserved by SAICT.

6. SUMMARY OF TEST RESULTS

6.1. Testing Environment

Normal Temperature: 15~35℃
Relative Humidity: 20~75%
Atmospheric pressure 86~106kPa

6.2. Summary of Measurement Results

Abbreviations used in this clause:	
P	Pass
NA	Not applicable
F	Fail

Items	Test Name	Clause in FCC	Section in this report	Verdict
1	Radiated Emission	15.109(a)	A.1	P

6.3. Statement

6.3.1 Statements of conformity

This report takes measured values as criterion of test conclusion. The test conclusion meets the limit requirements.

©Copyright. All rights reserved by SAICT.

7. Measurement uncertainty

Test item	Frequency ranges	Measurement uncertaint
Radiated Emission	30MHz-1GHz	4.90dB(k=2)
	1GHz-18GHz	4.60dB(k=2)
	18GHz-40GHz	4.10dB(k=2)
Conducted Emission	150kHz-30MHz	3.00dB(k=2)

8. Test Facilities Utilized

NO.	NAME	TYPE	SERIES NUMBER	PRODUCER	CALDUE DATE	CAL PERIOD
1.	Test Receiver	ESR7	101676	R&S	2020.11.27	1 year
2.	Test Receiver	ESCI	100701	R&S	2021.08.09	1 year
3.	Spectrum Analyzer	FSV40	101192	R&S	2021.01.14	1 year
4.	BiLog Antenna	3142E	00224831	ETS-Lindgren	2021.05.17	3 years
5.	LISN	ENV216	102067	R&S	2021.07.16	1 year
6.	Horn Antenna	3117	00066577	ETS-Lindgren	2022.04.02	3 years
7.	Horn Antenna	QSH-SL-18-26-S-20	17013	Q-par	2023.01.06	3 years
8.	Horn Antenna	QSH-SL-8-26-40-K-20	17014	Q-par	2023.01.06	3 years
9.	Chamber	FACT3-2.0	1285	ETS-Lindgren	2021.07.19	2 years
10.	Software	EMC32	V10.01.00	R&S	/	/
11.	PC	ThinkPad T480	PF-13LW0C	Lenovo	/	/
12.	Printer	P1008	VNF6C12491	HP	/	/
13.	Mouse	MOEUUOA	44NY517	Lenovo	/	/
14.	Filter	HPF_3G18G-SMA	/	SKET	/	/
15.	Filter	HPF_6.3G21G-SMA	/	SKET	/	/

©Copyright. All rights reserved by SAICT.

ANNEX A: MEASUREMENT RESULTS

A.1 Radiated Emission (§15.109(a))

Reference

FCC: CFR Part 15.109(a)

A.1.1 Method of measurement

The field strength of radiated emissions from the unintentional radiator (Data transfer mode of EUT and charging mode of EUT) at a distance of 3 meters is tested. Tested in accordance with the procedures of ANSI C63.4 -2014, section 8.3.

The EUT was placed on a non-conductive table. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations.

A.1.2 EUT Operating Mode:

Camera: At the beginning of measurement, the battery is completely discharged. The battery and charger are installed so that the EUT works well and keeping on taking photos.

Video Player: The EUT is connected to a charger for charging and keeping on playing mp3.

Data Transfer: The model of the PC is Lenovo ThinkPad T480, and the serial number of the PC is PF-13LW0C. The EUT is connected to a PC for transmitting data. The software is used to let the PC keep on copying data to MS or TF Card, reading and erasing the data after copy action was finished.

This device does not contain the receivers which tune and operate between 30MHz-960MHz.

All equipment is placed on the test table top and arranged in a typical configuration in accordance with ANSI C63.4-2014 and manipulated to obtain worst case emissions.

A.1.3 Measurement Limit

Limit from CFR Part 15.109(a)

Frequency range (MHz)	Field strength limit (μV/m)		
	Quasi-peak	Average	Peak
30-88	100		
88-216	150		
216-960	200		
960-1000	500		
>1000		500	5000

*Note: The original limit is defined at 10m test distance. This limit is calculated according to CISPR requirements.

©Copyright. All rights reserved by SAICT.

A.1.4 Test Condition

Frequency of emission (MHz)	RBW/VBW	Sweep Time(s)
30-1000	120kHz (IF bandwidth)	5
Above 1000	1MHz/3MHz	15

A.1.5 Test set-up:

30MHz-1GHz

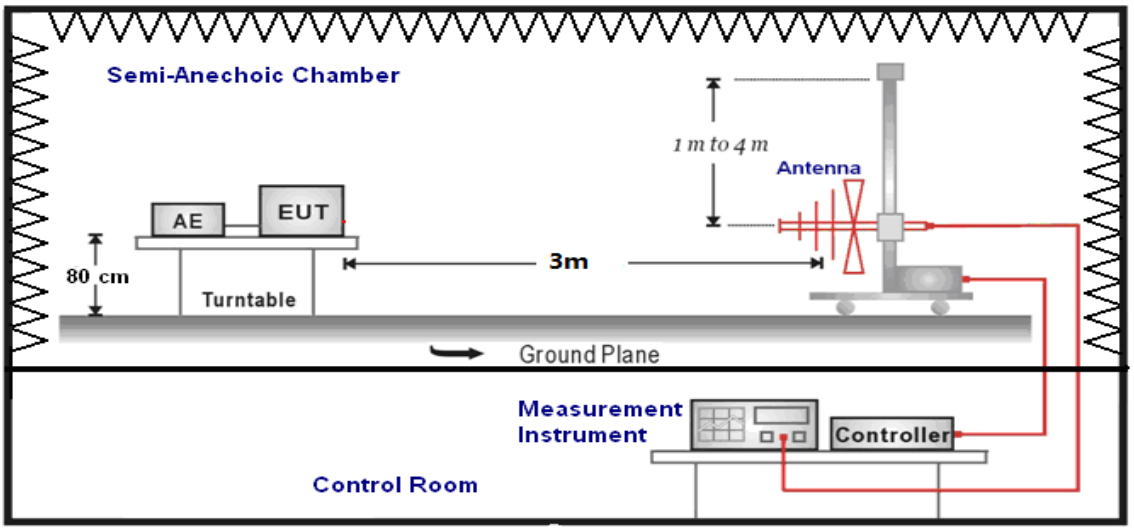

1GHz-18GHz

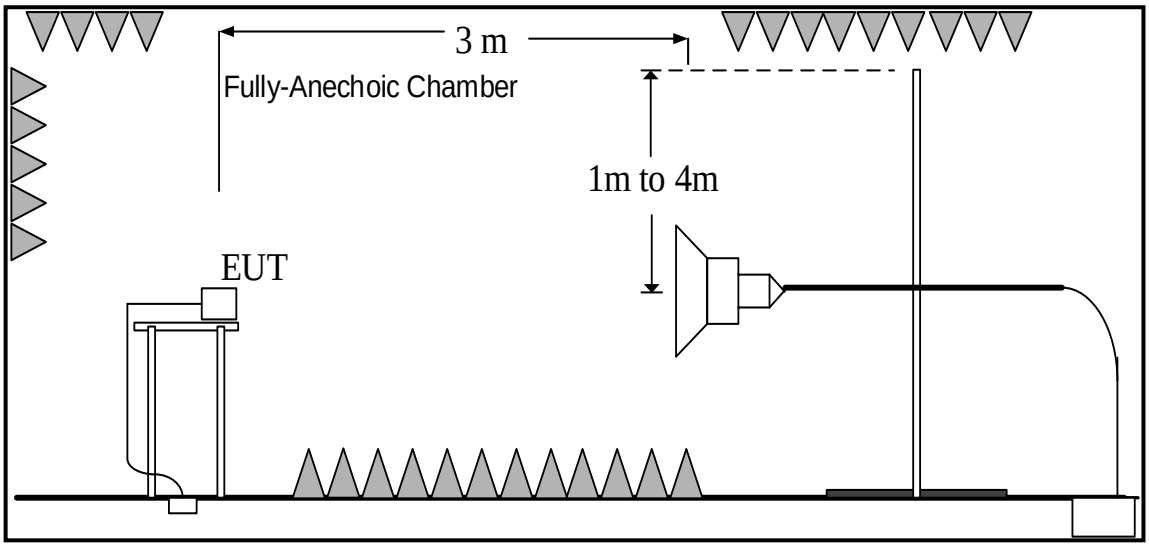

©Copyright. All rights reserved by SAICT.

A.1.6 Measurement Results

A "reference path loss" is established and the A_{Rpl} is the attenuation of “reference path loss”. It includes the antenna factor of receive antenna and the path loss.

The measurement results are obtained as described below:

$Result=P_{Mea}+A_{Rpl} = P_{Mea} +G_A+G_{PL}$

Where

G_A: Antenna factor of receive antenna

G_{PL}:PathLoss

P_{Mea}: Measurement result on receiver.

Result:Quasi-Peak(dBμV/m) /Average(dBμV/m)/Peak(dBμV/m)

Note: the result contains vertical part and Horizontal part

Video Player

Frequency range (MHz)	Quasi-Peak Limit (dBμV/m)	Result (dBμV/m) Set.1	Conclusion
30-88	40	See Figure A.1	P
88-216	44		
216-960	46		
960-1000	54		

Frequency range (MHz)	Average Limit (dBμV/m)	Peak Limit (dBμV/m)	Result (dBμV/m) Set.1	Conclusion
1000 to 18000	54	74	See Figure A.2	P

Camera

Frequency range (MHz)	Quasi-Peak Limit (dBμV/m)	Result (dBμV/m) Set.1	Conclusion
30-88	40	See Figure A.3	P
88-216	44		
216-960	46		
960-1000	54		

Frequency range (MHz)	Average Limit (dBμV/m)	Peak Limit (dBμV/m)	Result (dBμV/m) Set.1	Conclusion
1000 to 18000	54	74	See Figure A.4	P

©Copyright. All rights reserved by SAICT.

Video Player

Frequency range (MHz)	Quasi-Peak Limit (dBμV/m)	Result (dBμV/m) Set.2	Conclusion
30-88	40	See Figure A.5	P
88-216	44		
216-960	46		
960-1000	54		

Frequency range (MHz)	Average Limit (dBμV/m)	Peak Limit (dBμV/m)	Result (dBμV/m) Set.2	Conclusion
1000 to 18000	54	74	See Figure A.6	P

Data Transfer: EUT to PC

Frequency range (MHz)	Quasi-Peak Limit (dBμV/m)	Result (dBμV/m) Set.3	Conclusion
30-88	40	See Figure A.7	P
88-216	44		
216-960	46		
960-1000	54		

Frequency range (MHz)	Average Limit (dBμV/m)	Peak Limit (dBμV/m)	Result (dBμV/m) Set.3	Conclusion
1000 to 18000	54	74	See Figure A.8	P

Data Transfer : PC to EUT

Frequency range (MHz)	Quasi-Peak Limit (dBμV/m)	Result (dBμV/m) Set.3	Conclusion
30-88	40	See Figure A.9	P
88-216	44		
216-960	46		
960-1000	54		

Frequency range (MHz)	Average Limit (dBμV/m)	Peak Limit (dBμV/m)	Result (dBμV/m) Set.3	Conclusion
1000 to 18000	54	74	See Figure A.10	P

©Copyright. All rights reserved by SAICT.

Data Transfer : PC to TF

Frequency range (MHz)	Quasi-Peak Limit (dBμV/m)	Result (dBμV/m) Set.3	Conclusion
30-88	40	See Figure A.11	P
88-216	44		
216-960	46		
960-1000	54		

Frequency range (MHz)	Average Limit (dBμV/m)	Peak Limit (dBμV/m)	Result (dBμV/m) Set.3	Conclusion
1000 to 18000	54	74	See Figure A.12	P

Data Transfer : TF to EUT

Frequency range (MHz)	Quasi-Peak Limit (dBμV/m)	Result (dBμV/m) Set.3	Conclusion
30-88	40	See Figure A.13	P
88-216	44		
216-960	46		
960-1000	54		

Frequency range (MHz)	Average Limit (dBμV/m)	Peak Limit (dBμV/m)	Result (dBμV/m) Set.3	Conclusion
1000 to 18000	54	74	See Figure A.14	P

Data Transfer : PC to EUT

Frequency range (MHz)	Quasi-Peak Limit (dBμV/m)	Result (dBμV/m) Set.4	Conclusion
30-88	40	See Figure A.15	P
88-216	44		
216-960	46		
960-1000	54		

Frequency range (MHz)	Average Limit (dBμV/m)	Peak Limit (dBμV/m)	Result (dBμV/m) Set.4	Conclusion
1000 to 18000	54	74	See Figure A.16	P

©Copyright. All rights reserved by SAICT.

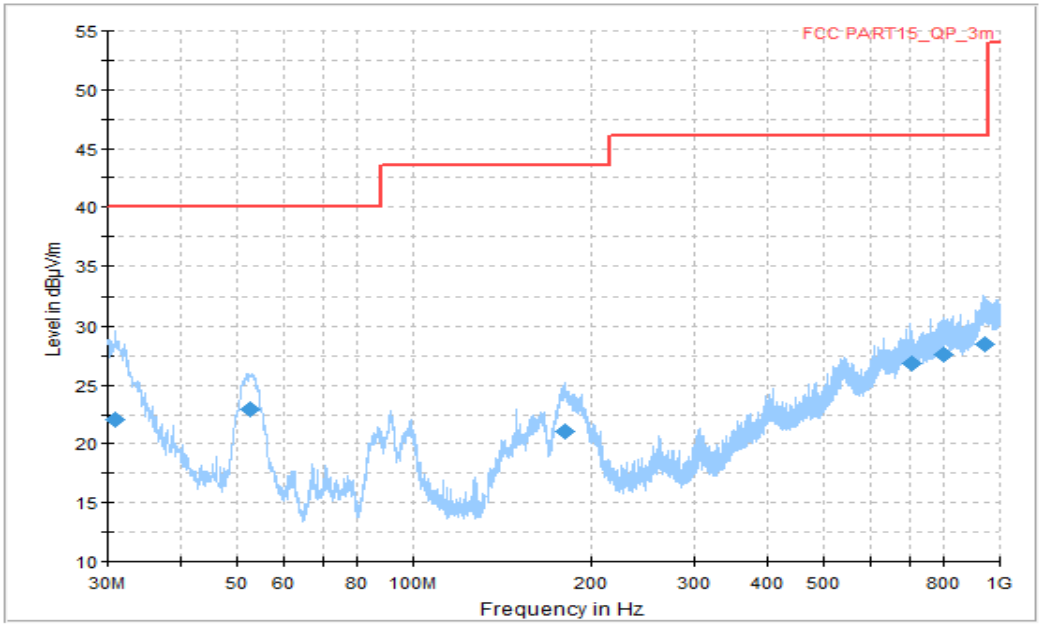

Figure A.1 Radiated Emission (Set.1,Camera, 30MHz to 1GHz)

Final_Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Pol	ARpl (dB/m)	P_{Mea} (dBµV)
30.970000	22.02	40.00	17.98	V	-14	36.02
52.613125	22.91	40.00	17.09	V	-22	44.91
179.743750	21.00	43.52	22.52	V	-18	39.00
706.332500	26.90	46.02	19.12	H	-2	28.90
803.090000	27.64	46.02	18.38	V	-1	28.64
942.709375	28.46	46.02	17.56	V	1	27.46

©Copyright. All rights reserved by SAICT.

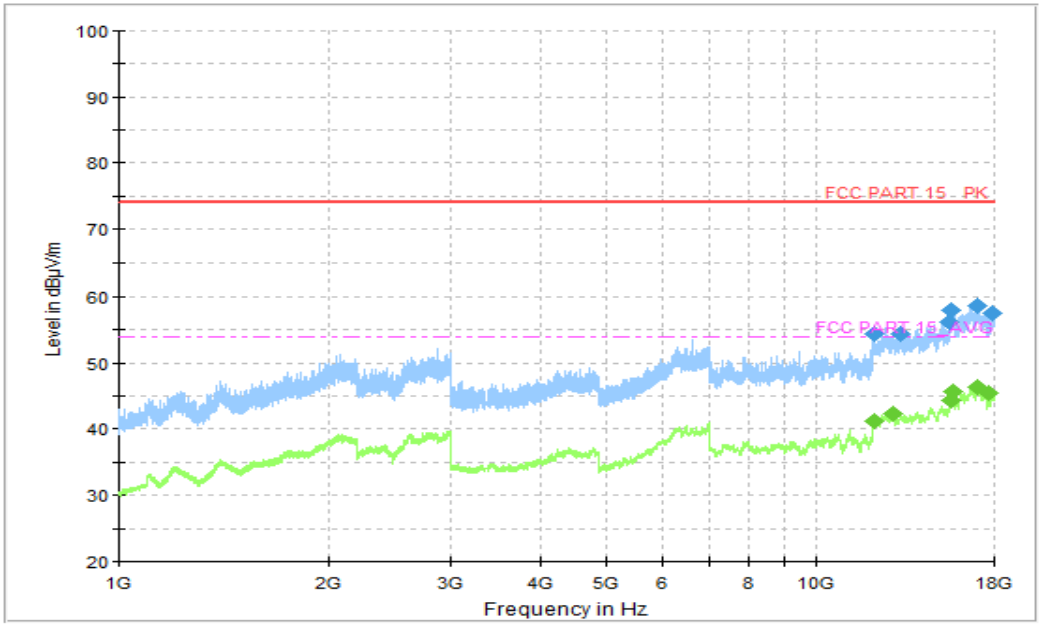

Figure A.2 Radiated Emission (Set.1, Camera , 1GHz to 18GHz)

Final_Results_PK

Frequency(MHz)	Peak (dBµV/m)	Limit (dBµV/m)	Margin(dB)	Polarity	ARpl (dB/m)	P_{Mea} (dBµV)
12072.500000	54.45	74.00	19.55	V	16	38.45
13190.000000	54.39	74.00	19.61	V	18	36.39
15548.250000	56.29	74.00	17.71	V	19	37.29
15639.250000	58.02	74.00	15.98	H	20	38.02
17034.250000	58.56	74.00	15.44	V	22	36.56
17905.500000	57.53	74.00	16.47	V	24	33.53

Final_Results_AVG

Frequency(MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin(dB)	Polarity	ARpl (dB/m)	P_{Mea} (dBµV)
12077.750000	41.20	54.00	12.80	V	16	25.20
12905.250000	42.35	54.00	11.65	V	17	25.35
15569.750000	44.32	54.00	9.68	V	20	24.32
15680.250000	45.62	54.00	8.38	H	20	25.62
16997.500000	46.29	54.00	7.71	H	23	23.29
17693.000000	45.49	54.00	8.51	H	23	22.49

©Copyright. All rights reserved by SAICT.

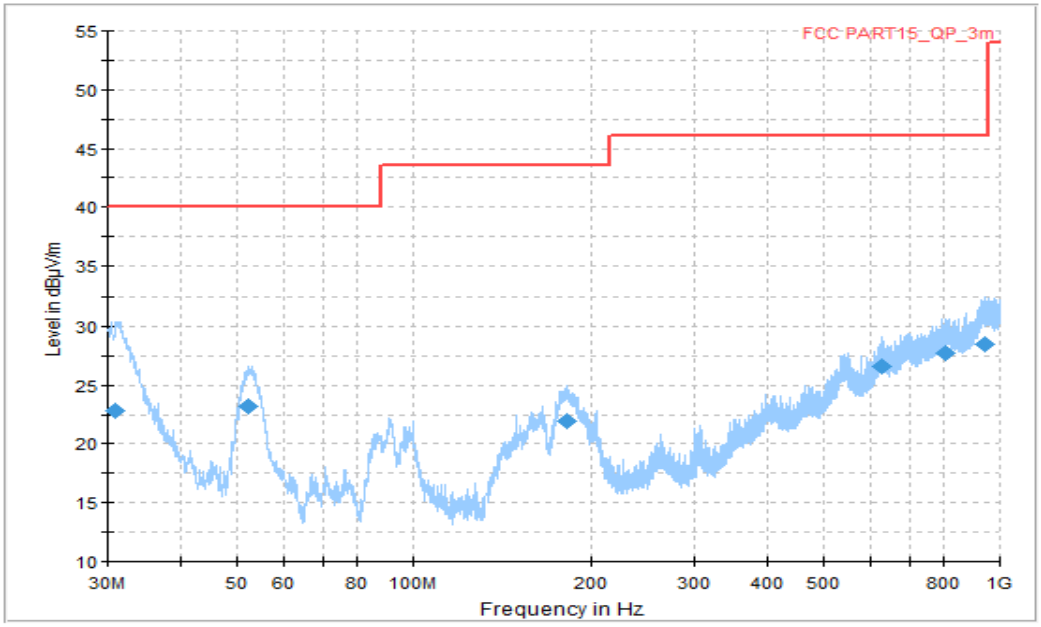

Figure A.3 Radiated Emission (Set.1,Video Player, 30MHz to 1GHz)

Final_Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Pol	ARpl (dB/m)	P_{Mea} (dBµV)
30.970000	22.78	40.00	17.22	V	-14	36.78
52.249375	23.24	40.00	16.76	V	-22	45.24
181.380625	21.95	43.52	21.57	V	-18	39.95
626.792500	26.57	46.02	19.45	H	-3	29.57
807.940000	27.74	46.02	18.28	H	-1	28.74
940.951250	28.46	46.02	17.56	H	1	27.46

©Copyright. All rights reserved by SAICT.

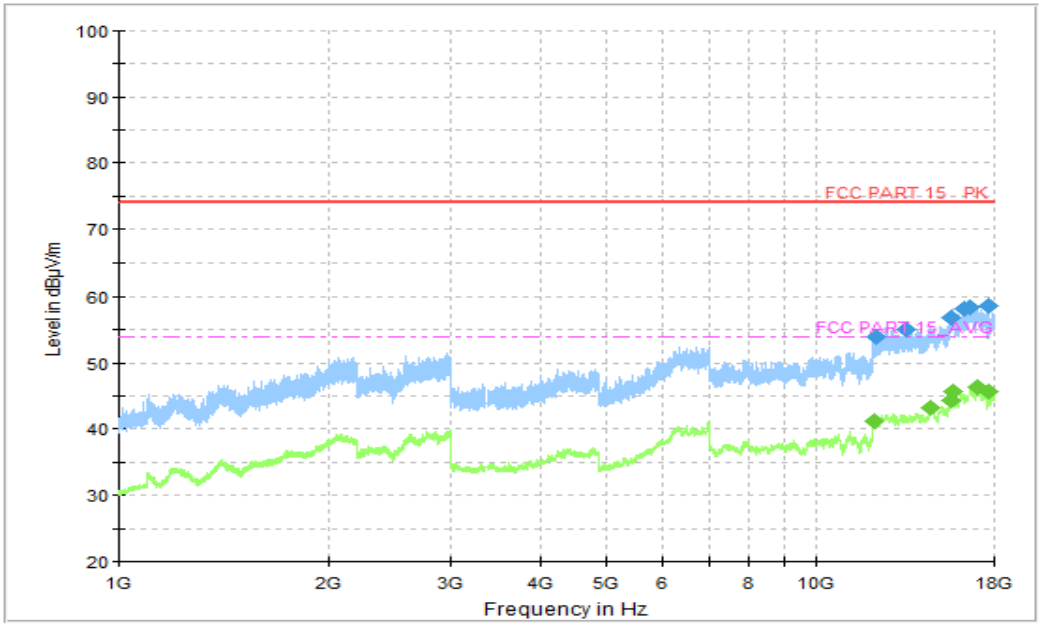

Figure A.4 Radiated Emission (Set.1, Video Player, 1GHz to 18GHz)

Final_Results_PK

Frequency(MHz)	Peak (dBµV/m)	Limit (dBµV/m)	Margin(dB)	Polarity	ARpl (dB/m)	P_{Mea} (dBµV)
12168.500000	53.87	74.00	20.13	V	16	37.87
13423.250000	55.09	74.00	18.91	V	17	38.09
15562.500000	56.78	74.00	17.22	V	19	37.78
16257.750000	58.26	74.00	15.74	V	21	37.26
16585.000000	58.43	74.00	15.57	H	22	36.43
17700.500000	58.62	74.00	15.38	V	23	35.62

Final_Results_AVG

Frequency(MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin(dB)	Polarity	ARpl (dB/m)	P_{Mea} (dBµV)
12080.250000	41.26	54.00	12.74	V	16	25.26
14562.250000	43.33	54.00	10.67	V	18	25.33
15577.500000	44.46	54.00	9.54	V	20	24.46
15664.500000	45.60	54.00	8.40	V	20	25.60
17020.500000	46.42	54.00	7.58	V	23	23.42
17693.000000	45.71	54.00	8.29	H	23	22.71

©Copyright. All rights reserved by SAICT.

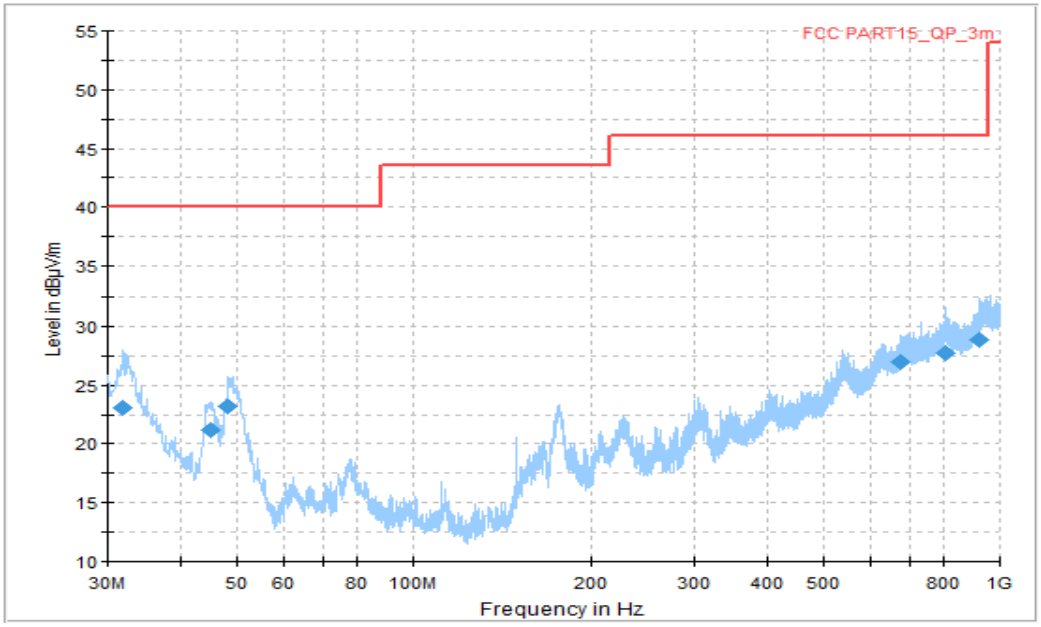

Figure A.5 Radiated Emission (Set.2, Video Player, 30MHz to 1GHz)

Final_Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Pol	ARpl (dB/m)	P_{Mea} (dBµV)
31.940000	23.06	40.00	16.94	V	-14	37.06
44.913750	21.21	40.00	18.79	V	-21	42.21
48.187500	23.14	40.00	16.86	V	-21	44.14
678.202500	26.94	46.02	19.08	H	-3	29.94
809.213125	27.78	46.02	18.24	H	-1	28.78
925.006875	28.91	46.02	17.11	V	1	27.91

©Copyright. All rights reserved by SAICT.

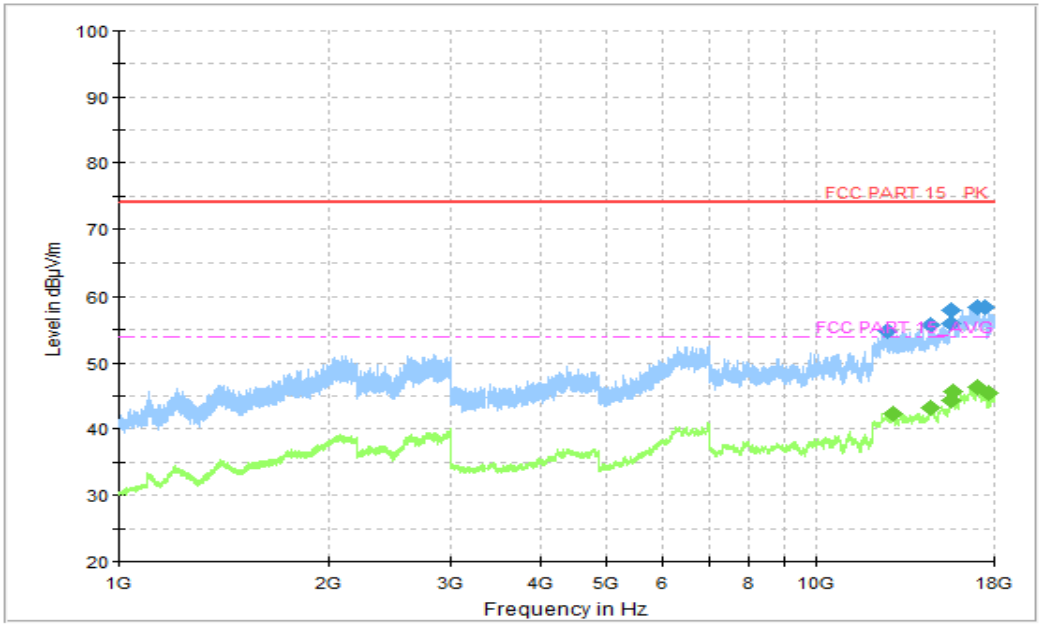

Figure A.6 Radiated Emission (Set.2, Video Player , 1GHz to 18GHz)

Final_Results_PK

Frequency(MHz)	Peak (dBµV/m)	Limit (dBµV/m)	Margin(dB)	Polarity	ARpl (dB/m)	P_{Mea} (dBµV)
12654.750000	54.83	74.00	19.17	V	17	37.83
14586.750000	55.79	74.00	18.21	V	18	37.79
15577.500000	56.08	74.00	17.92	H	20	36.08
15634.000000	58.07	74.00	15.93	V	20	38.07
17041.500000	58.51	74.00	15.49	V	22	36.51
17438.000000	58.47	74.00	15.53	H	22	36.47

Final_Results_AVG

Frequency(MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin(dB)	Polarity	ARpl (dB/m)	P_{Mea} (dBµV)
12905.000000	42.33	54.00	11.67	V	17	25.33
14535.000000	43.24	54.00	10.77	V	18	25.24
15576.750000	44.35	54.00	9.65	H	20	24.35
15660.000000	45.62	54.00	8.38	H	20	25.62
17053.000000	46.31	54.00	7.69	H	22	24.31
17701.250000	45.46	54.00	8.54	V	23	22.46

©Copyright. All rights reserved by SAICT.

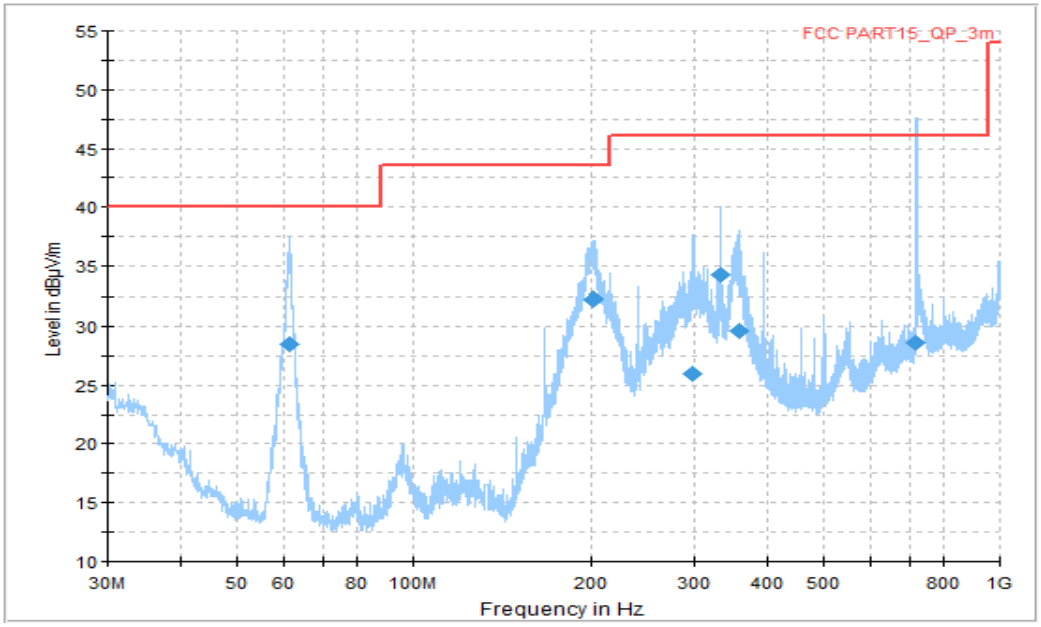

Figure A.7 Radiated Emission (Set.3, Data Transfer: EUT to PC, 30MHz to 1GHz)

Final_Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Pol	ARpl (dB/m)	P_{Mea} (dBµV)
61.282500	28.47	40.00	11.53	H	-22	50.47
202.175000	32.29	43.52	11.23	H	-17	49.29
298.932500	25.96	46.02	20.06	H	-14	39.96
331.912500	34.21	46.02	11.81	H	-12	46.21
357.556875	29.64	46.02	16.38	H	-10	39.64
719.973125	28.62	46.02	17.40	H	-2	30.62

©Copyright. All rights reserved by SAICT.

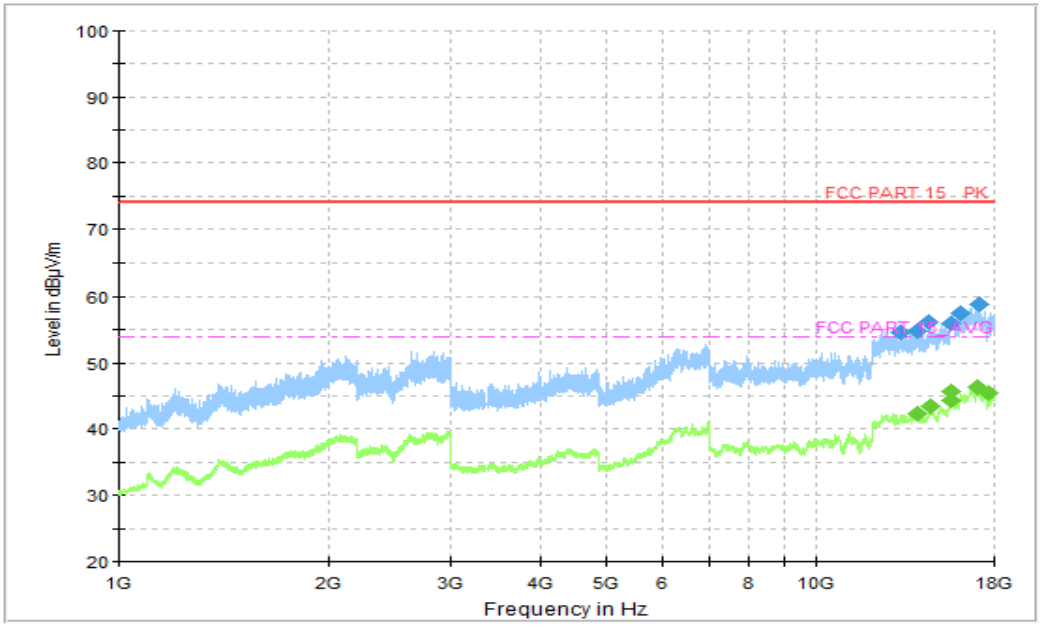

Figure A.8 Radiated Emission (Set.3, Data Transfer: EUT to PC, 1GHz to 18GHz)

Final_Results_PK

Frequency(MHz)	Peak (dBµV/m)	Limit (dBµV/m)	Margin(dB)	Polarity	ARpl (dB/m)	P_{Mea} (dBµV)
13215.750000	54.64	74.00	19.36	V	18	36.64
13955.500000	54.87	74.00	19.13	H	17	37.87
14517.750000	56.21	74.00	17.79	V	18	38.21
15569.000000	56.07	74.00	17.93	H	20	36.07
16147.000000	57.58	74.00	16.42	V	21	36.58
17125.750000	58.80	74.00	15.20	V	21	37.80

Final_Results_AVG

Frequency(MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin(dB)	Polarity	ARpl (dB/m)	P_{Mea} (dBµV)
13948.750000	42.43	54.00	11.57	H	17	25.43
14562.250000	43.48	54.00	10.52	V	18	25.48
15562.750000	44.41	54.00	9.59	V	19	25.41
15645.000000	45.63	54.00	8.37	V	20	25.63
17020.500000	46.40	54.00	7.60	H	23	23.40
17690.500000	45.49	54.00	8.51	V	23	22.49

©Copyright. All rights reserved by SAICT.

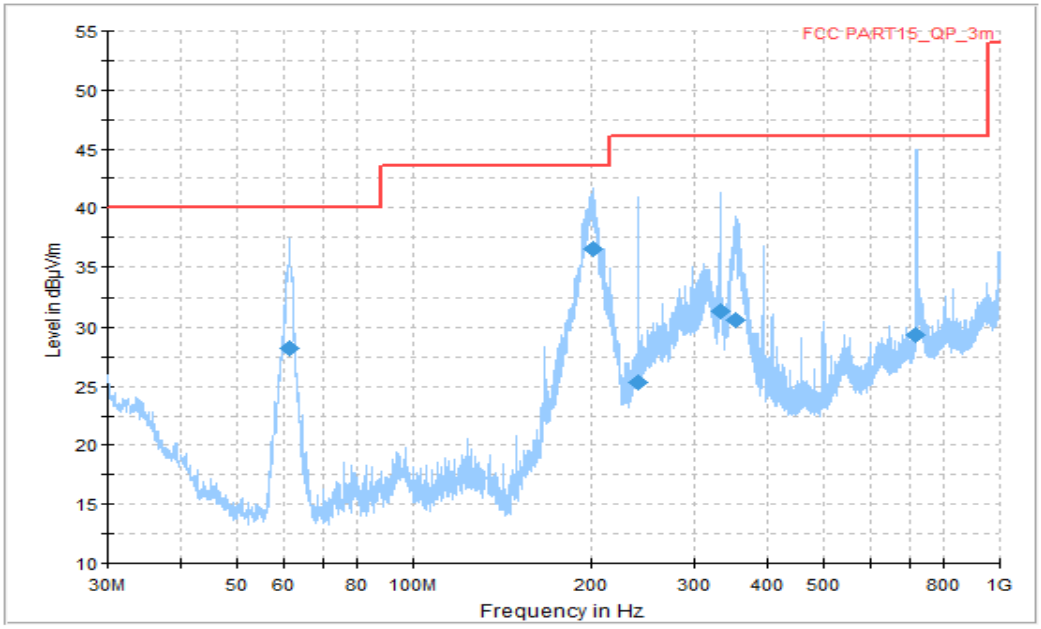

Figure A.9 Radiated Emission (Set.3, Data Transfer : PC to EUT, 30MHz to 1GHz)

Final_Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Pol	ARpl (dB/m)	P_{Mea} (dBµV)
61.403750	28.17	40.00	11.83	V	-22	50.17
200.962500	36.47	43.52	7.05	H	-17	53.47
239.944375	25.33	46.02	20.69	H	-15	40.33
332.033750	31.38	46.02	14.64	H	-12	43.38
353.070625	30.60	46.02	15.42	H	-10	40.60
719.973125	29.41	46.02	16.61	V	-2	31.41

©Copyright. All rights reserved by SAICT.

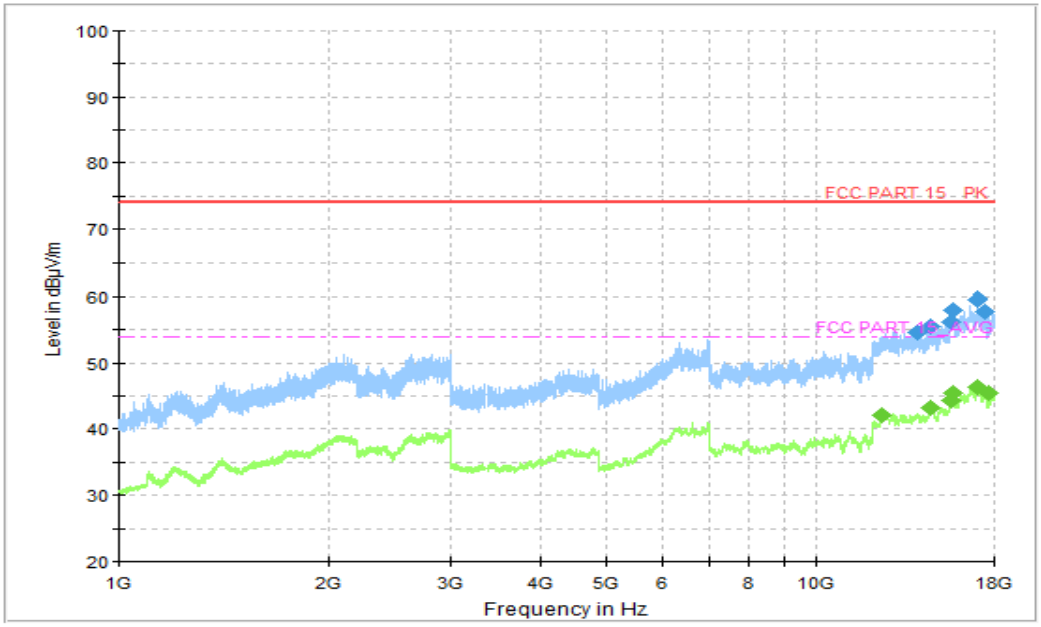

Figure A.10 Radiated Emission (Set.3, Data Transfer: PC to EUT, 1GHz to 18GHz)

Final_Results_PK

Frequency(MHz)	Peak (dBµV/m)	Limit (dBµV/m)	Margin(dB)	Polarity	ARpl (dB/m)	P_{Mea} (dBµV)
13922.500000	54.66	74.00	19.34	V	17	37.66
14544.750000	55.48	74.00	18.52	H	18	37.48
15569.250000	56.21	74.00	17.79	H	20	36.21
15701.750000	57.95	74.00	16.05	V	20	37.95
17072.500000	59.52	74.00	14.48	V	22	37.52
17468.750000	57.80	74.00	16.20	H	22	35.80

Final_Results_AVG

Frequency(MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin(dB)	Polarity	ARpl (dB/m)	PMea (dBµV)
12427.250000	42.15	54.00	11.85	V	17	25.15
14558.500000	43.27	54.00	10.73	V	18	25.27
15577.500000	44.32	54.00	9.68	H	20	24.32
15667.250000	45.55	54.00	8.45	H	20	25.55
17020.500000	46.37	54.00	7.63	V	23	23.37
17690.000000	45.47	54.00	8.53	V	23	22.47

©Copyright. All rights reserved by SAICT.

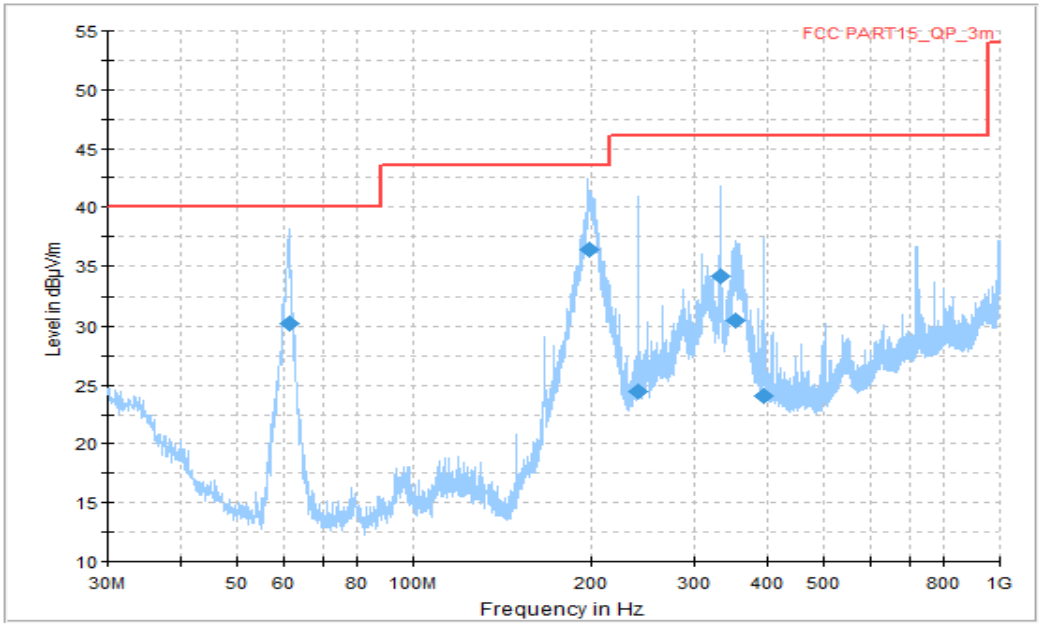

Figure A.11 Radiated Emission (Set.3, Data Transfer : PC to TF, 30MHz to 1GHz)

Final_Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Pol	ARpl (dB/m)	P_{Mea} (dBµV)
61.221875	30.28	40.00	9.72	H	-22	52.28
198.052500	36.42	43.52	7.10	H	-18	54.42
239.944375	24.47	46.02	21.55	H	-15	39.47
331.851875	34.17	46.02	11.85	H	-12	46.17
351.858125	30.50	46.02	15.52	H	-11	41.50
395.508125	24.11	46.02	21.91	V	-9	33.11

©Copyright. All rights reserved by SAICT.

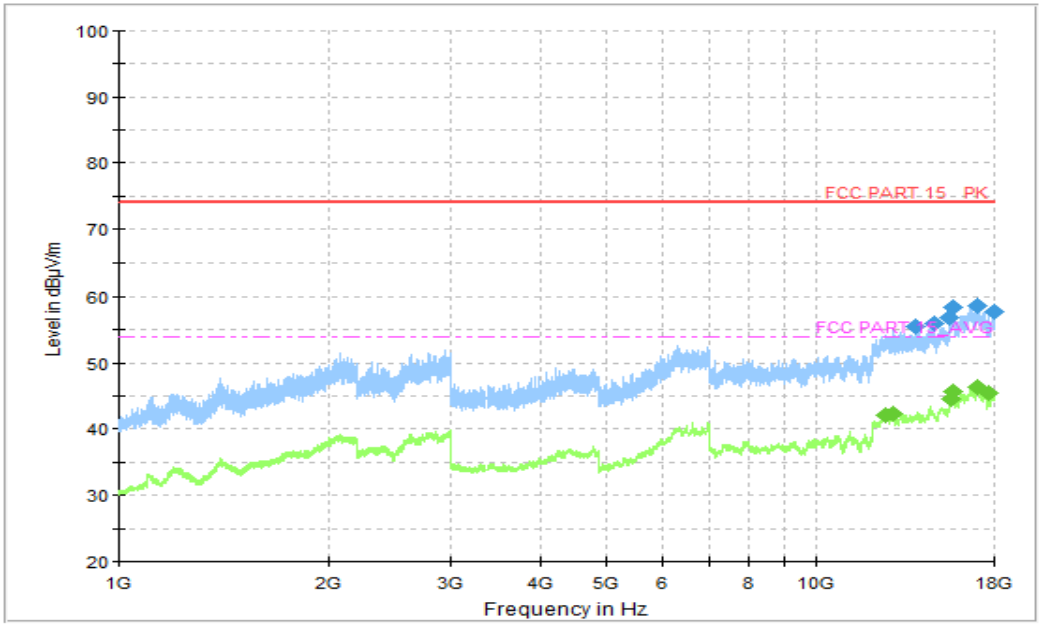

Figure A.12 Radiated Emission (Set.3, Data Transfer : PC to TF, 1GHz to 18GHz)

Final_Results_PK

Frequency(MHz)	Peak (dBµV/m)	Limit (dBµV/m)	Margin(dB)	Polarity	ARpl (dB/m)	P_{Mea} (dBµV)
13830.500000	55.61	74.00	18.39	V	17	38.61
14718.250000	55.93	74.00	18.07	H	18	37.93
15556.750000	56.79	74.00	17.21	H	19	37.79
15674.500000	58.42	74.00	15.58	V	20	38.42
17008.250000	58.73	74.00	15.27	H	23	35.73
17992.000000	57.75	74.00	16.25	V	23	34.75

Final_Results_AVG

Frequency(MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin(dB)	Polarity	ARpl (dB/m)	P_{Mea} (dBµV)
12555.250000	42.13	54.00	11.87	V	17	25.13
12893.500000	42.30	54.00	11.70	V	17	25.30
15573.750000	44.47	54.00	9.53	V	20	24.47
15681.250000	45.71	54.00	8.29	V	20	25.71
17021.000000	46.37	54.00	7.63	V	23	23.37
17700.500000	45.56	54.00	8.44	H	23	22.56

©Copyright. All rights reserved by SAICT.

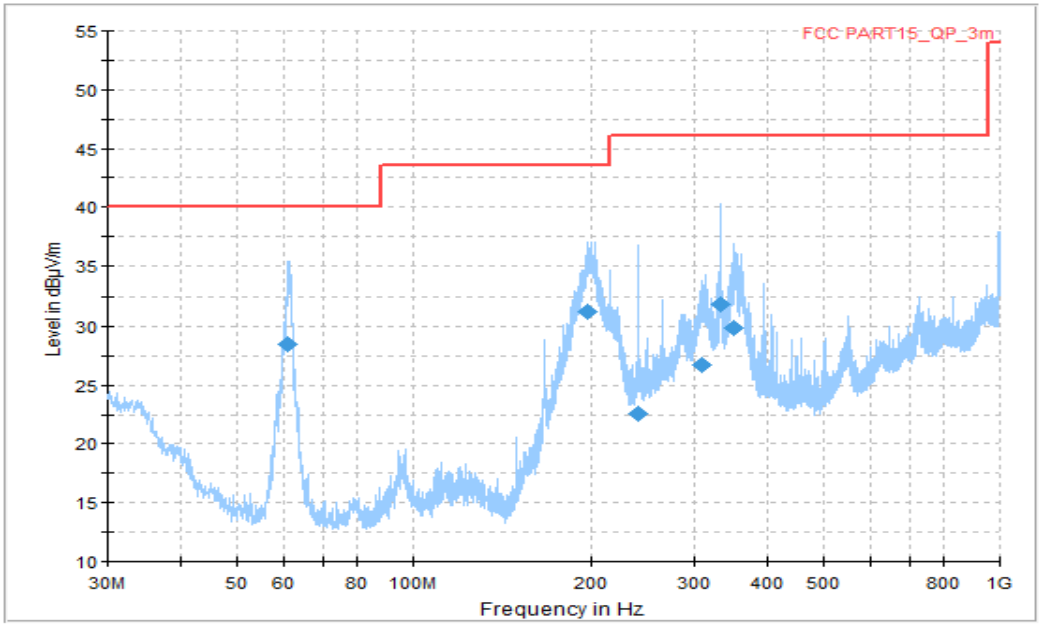

Figure A.13 Radiated Emission (Set.3, Data Transfer: TF to PC, 30MHz to 1GHz)

Final_Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Pol	ARpl (dB/m)	P_{Mea} (dBµV)
61.161250	28.43	40.00	11.57	V	-22	50.43
197.506875	31.29	43.52	12.23	H	-18	49.29
239.944375	22.53	46.02	23.49	H	-15	37.53
308.086875	26.74	46.02	19.28	H	-14	40.74
332.700625	31.89	46.02	14.13	H	-12	43.89
351.494375	29.91	46.02	16.11	H	-11	40.91

©Copyright. All rights reserved by SAICT.

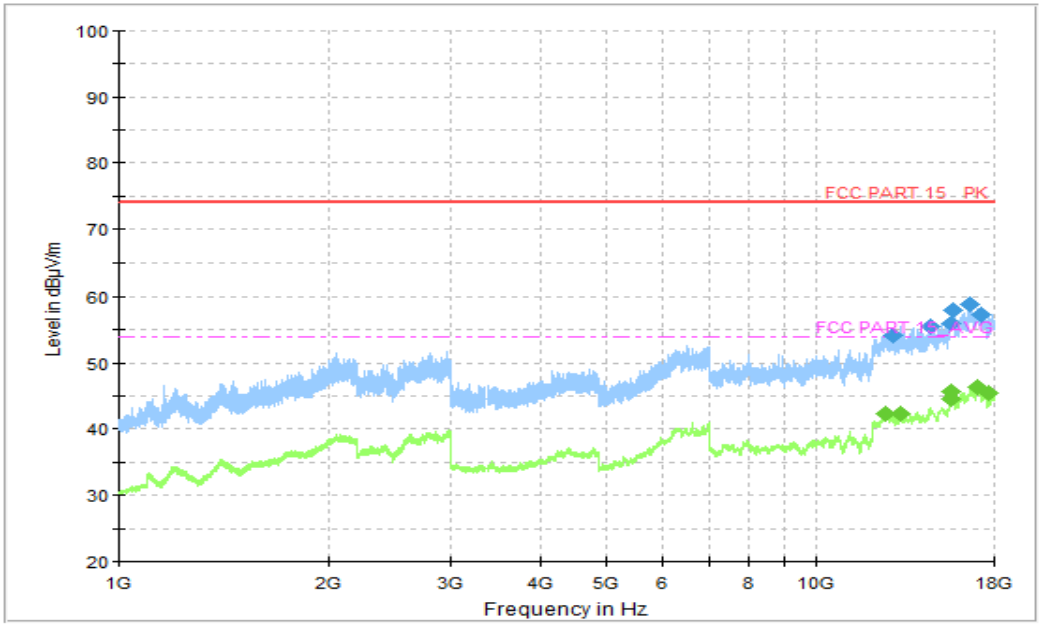

Figure A.14 Radiated Emission (Set.3, Data Transfer: TF to PC, 1GHz to 18GHz)

Final_Results_PK

Frequency(MHz)	Peak (dBµV/m)	Limit (dBµV/m)	Margin(dB)	Polarity	ARpl (dB/m)	P_{Mea} (dBµV)
12838.250000	54.22	74.00	19.78	V	17	37.22
14571.000000	55.47	74.00	18.53	H	18	37.47
15565.750000	55.90	74.00	18.10	V	20	35.90
15660.750000	57.89	74.00	16.11	V	20	37.89
16643.000000	58.86	74.00	15.14	H	22	36.86
17225.750000	57.37	74.00	16.63	H	22	35.37

Final_Results_AVG

Frequency(MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin(dB)	Polarity	ARpl (dB/m)	PMea (dBµV)
12556.000000	42.33	54.00	11.67	V	17	25.33
13221.500000	42.32	54.00	11.68	V	17	25.32
15576.250000	44.48	54.00	9.52	H	20	24.48
15647.500000	45.69	54.00	8.31	V	20	25.69
17021.000000	46.44	54.00	7.56	V	23	23.44
17704.250000	45.52	54.00	8.48	V	23	22.52

©Copyright. All rights reserved by SAICT.

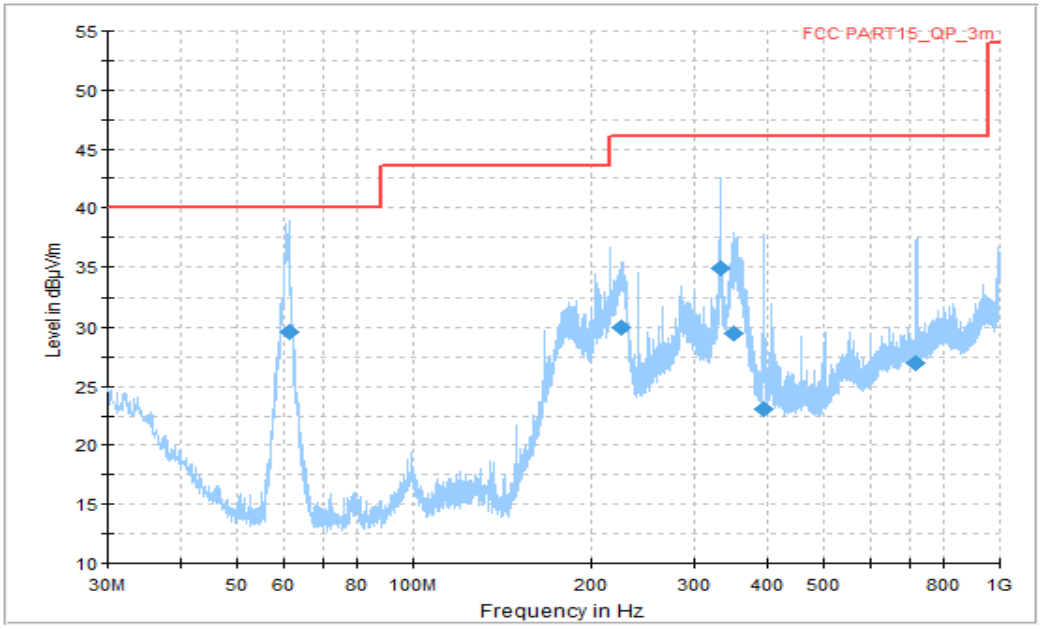

Figure A.15 Radiated Emission (Set.4, Data Transfer: PC to EUT, 30MHz to 1GHz)

Final_Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Pol	ARpl (dB/m)	P_{Mea} (dBµV)
61.221875	29.64	40.00	10.36	H	-22	51.64
225.273125	29.93	46.02	16.09	H	-17	46.93
331.912500	34.85	46.02	11.17	H	-12	46.85
351.009375	29.51	46.02	16.51	H	-11	40.51
395.205000	23.08	46.02	22.94	V	-9	32.08
719.973125	27.02	46.02	19.00	V	-2	29.02

©Copyright. All rights reserved by SAICT.

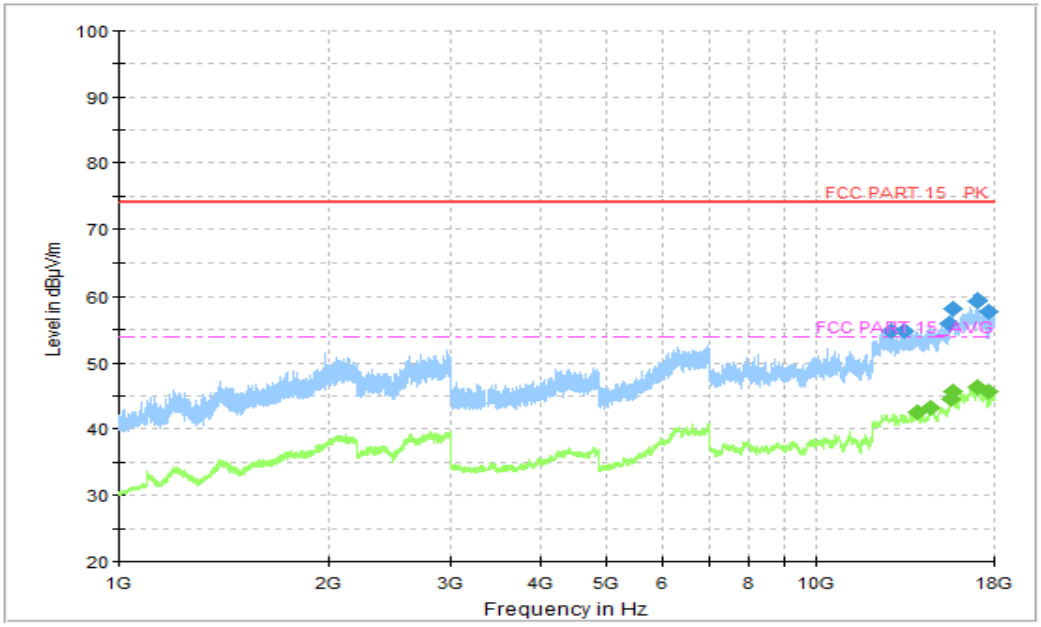

Figure A.16 Radiated Emission (Set.4, Data Transfer : PC to EUT, 1GHz to 18GHz)

Final_Results_PK

Frequency(MHz)	Peak (dBµV/m)	Limit (dBµV/m)	Margin(dB)	Polarity	ARpl (dB/m)	P_{Mea} (dBµV)
12791.750000	54.78	74.00	19.22	V	17	37.78
13370.250000	54.86	74.00	19.14	V	17	37.86
15552.250000	56.03	74.00	17.97	H	19	37.03
15685.000000	58.19	74.00	15.81	V	20	38.19
17058.500000	59.35	74.00	14.65	V	22	37.35
17706.750000	57.74	74.00	16.26	H	23	34.74

Final_Results_AVG

Frequency(MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin(dB)	Polarity	ARpl (dB/m)	PMea (dBµV)
13950.250000	42.54	54.00	11.46	H	17	25.54
14561.500000	43.28	54.00	10.72	H	18	25.28
15573.500000	44.55	54.00	9.45	H	20	24.55
15678.500000	45.70	54.00	8.30	V	20	25.70
17020.500000	46.36	54.00	7.64	V	23	23.36
17704.000000	45.62	54.00	8.38	H	23	22.62

*****END OF REPORT*****

©Copyright. All rights reserved by SAICT.