

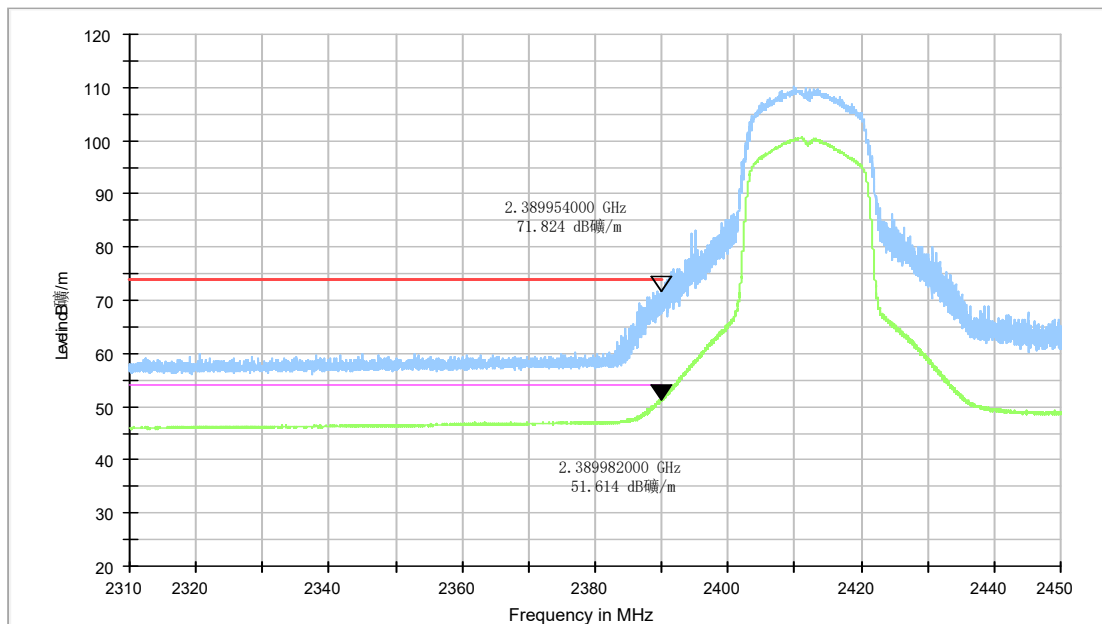


Fig.A.6.2.5 Transmitter Spurious Emission - Radiated (Power): 802.11n-HT20, ch1, 2.31 GHz - 2.45GHz

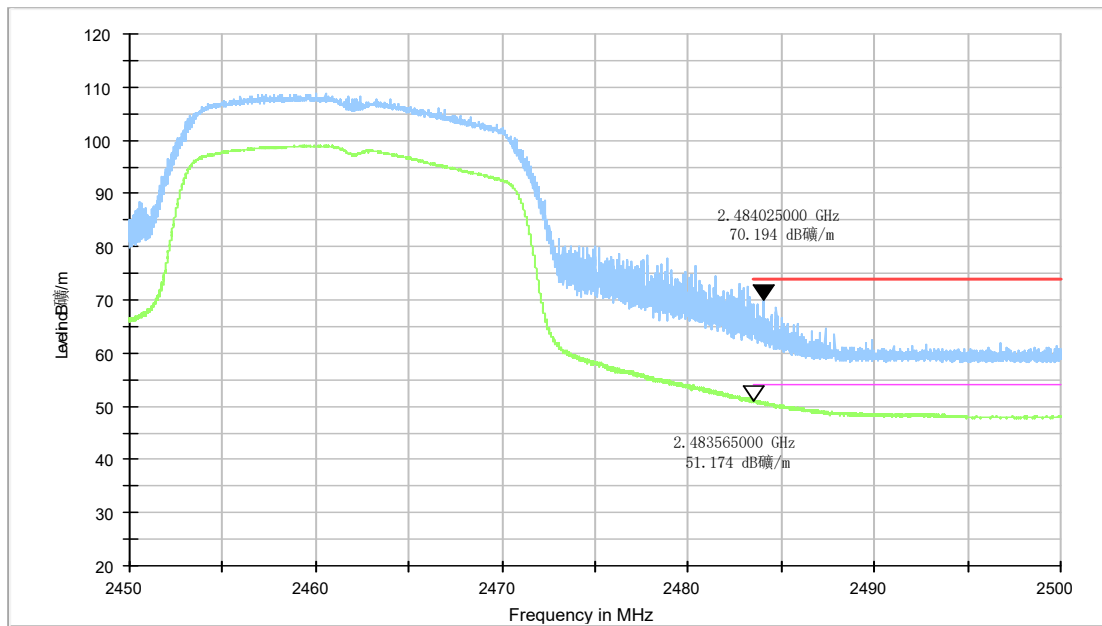


Fig.A.6.2.6 Transmitter Spurious Emission - Radiated (Power): 802.11n-HT20, ch11, 2.45 GHz - 2.50GHz

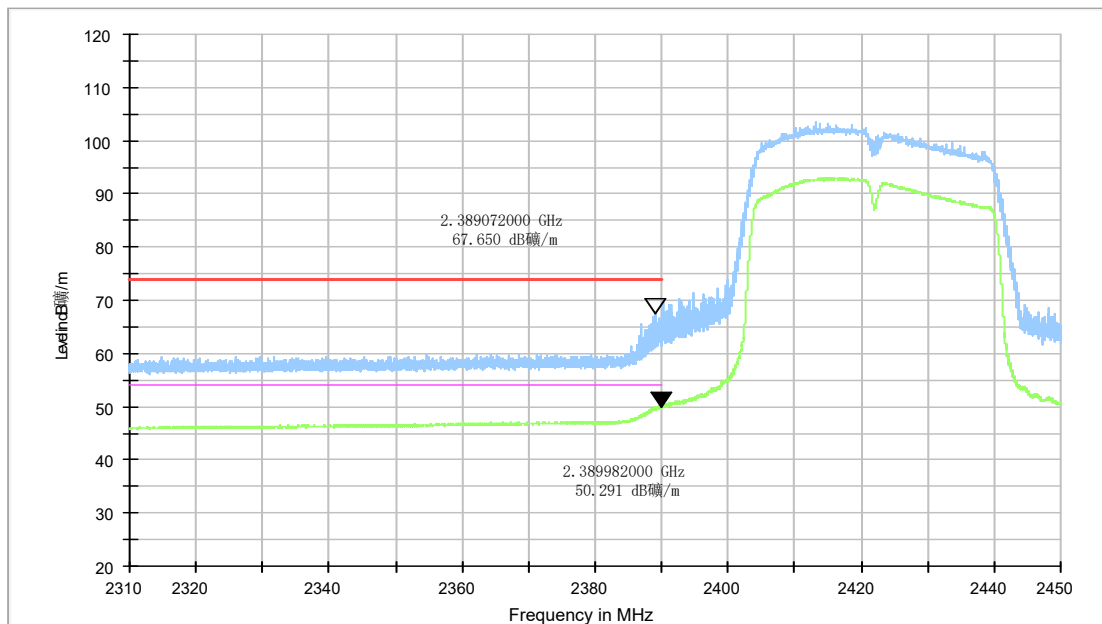


Fig.A.6.2.7 Transmitter Spurious Emission - Radiated (Power): 802.11n-HT40, ch3, 2.31 GHz - 2.45GHz

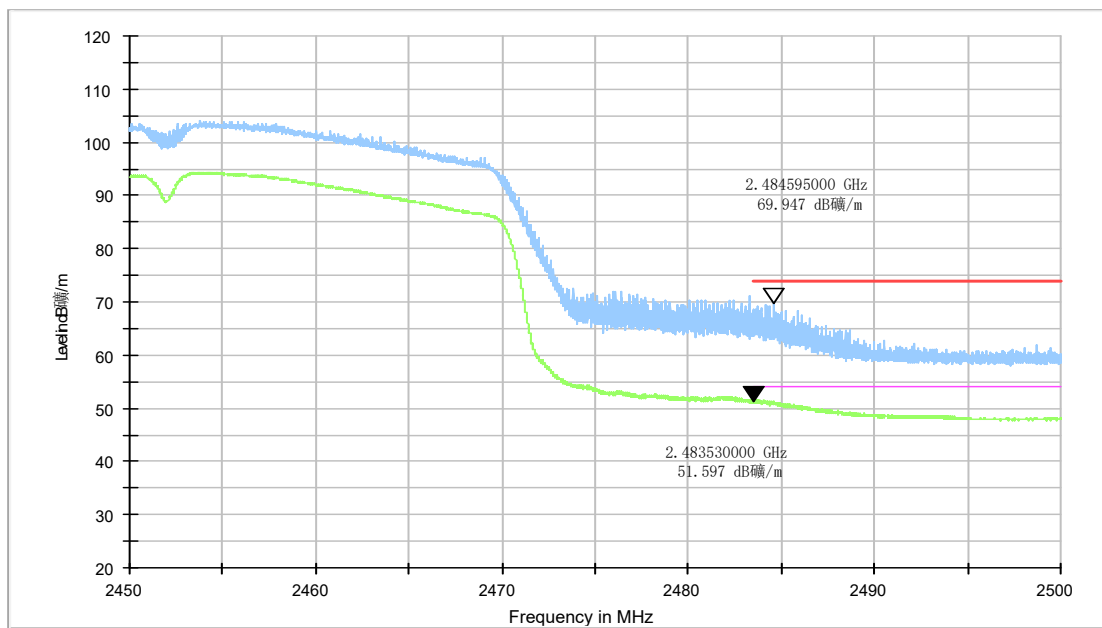


Fig.A.6.2.8 Transmitter Spurious Emission - Radiated (Power): 802.11n-HT40, ch9, 2.45 GHz - 2.50GHz

A.7. AC Power-line Conducted Emission

Method of Measurement:

See Clause 6.2 of ANSI C63.10-2013 specifically.

See Clause 4 and Clause 5 of ANSI C63.10-2013 generally.

The conducted emissions from the AC port of the EUT are measured in a shielding room. The EUT is connected to a Line Impedance Stabilization Network (LISN). An overview sweep with peak detection was performed. The measurements were performed with a quasi-peak detector and if required, an average detector.

The conducted emission measurements were made with the following detector of the test receiver:
Quasi-Peak / Average Detector.


The measurement bandwidth is:

Frequency of Emission (MHz)	RBW/IF bandwidth
0.15-30	9kHz

Test Condition:

Voltage (V)	Frequency (Hz)
120	60

Measurement Setup

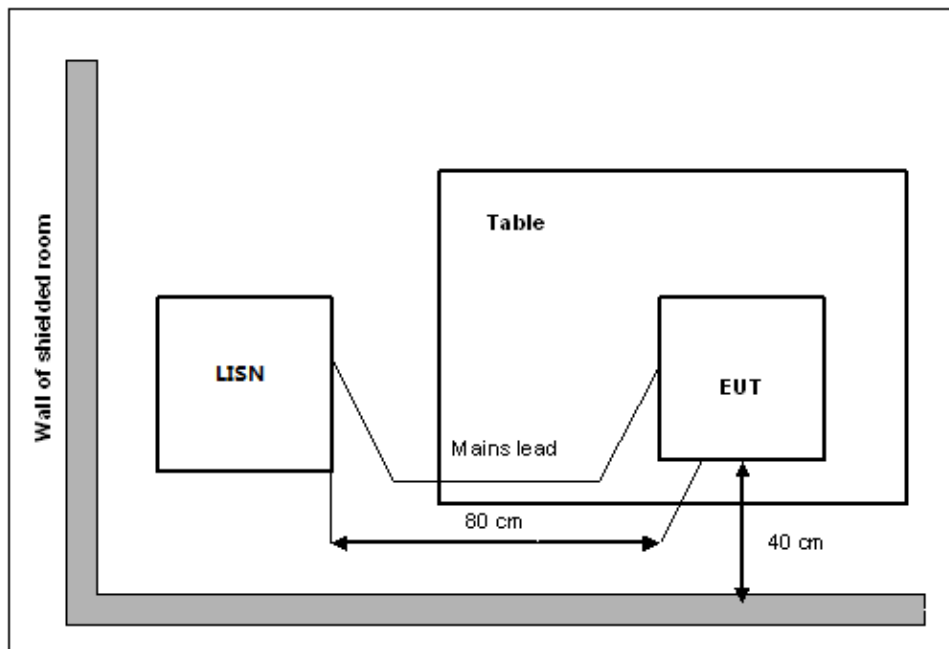

Measurement Result and limit:
WLAN (Quasi-peak Limit)

Frequency range (MHz)	Quasi-peak Limit (dBμV)	Result (dBμV)		Conclusion
		With charger		
		802.11b	Idle	
0.15 to 0.5	66 to 56	Fig.A.7.1	Fig.A.7.2	P
0.5 to 5	56			
5 to 30	60			

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

WLAN (Average Limit)

Frequency range (MHz)	Average Limit (dBμV)	Result (dBμV)		Conclusion
		With charger		
		802.11b	Idle	
0.15 to 0.5	56 to 46	Fig.A.7.1	Fig.A.7.2	P
0.5 to 5	46			
5 to 30	50			

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

Conclusion: Pass
Test graphs as below:

Note: The measurement results showed here are worst cases.

Result for Traffic:

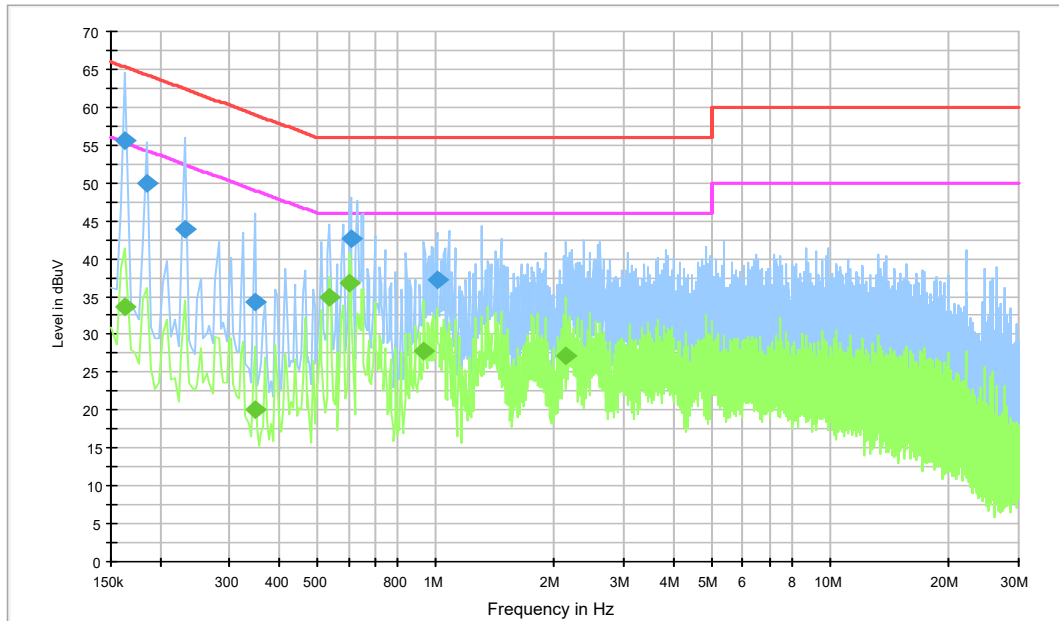


Fig.A.7.1 AC Powerline Conducted Emission-802.11b

Note1: The graphic result above is the maximum of the measurements for both phase line and neutral line.

Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.163500	55.6	1000.	9.000	N	26.0	9.7	65.3
0.186000	50.0	1000.	9.000	N	22.0	14.2	64.2
0.231000	43.9	1000.	9.000	N	19.7	18.5	62.4
0.348000	34.2	1000.	9.000	N	19.7	24.8	59.0
0.609000	42.7	1000.	9.000	N	19.7	13.3	56.0
1.005000	37.2	1000.	9.000	L1	19.6	18.8	56.0

Final Result 2

Frequency (MHz)	Average (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.163500	33.7	1000.0	9.000	N	26.0	21.5	55.3
0.348000	20.1	1000.0	9.000	L1	19.7	28.9	49.0
0.537000	34.8	1000.0	9.000	N	19.8	11.2	46.0
0.604500	36.7	1000.0	9.000	N	19.7	9.3	46.0
0.933000	27.8	1000.0	9.000	N	19.7	18.2	46.0
2.143500	27.1	1000.0	9.000	N	19.6	18.9	46.0

Result for Idle:

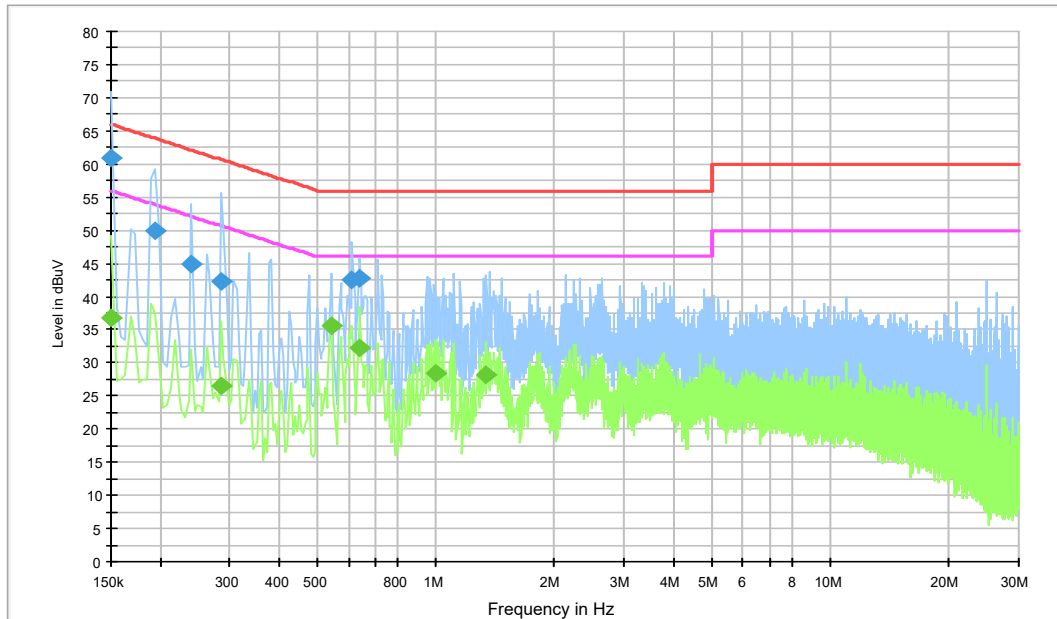


Fig.A.7.2 AC Powerline Conducted Emission-Idle

Note1: The graphic result above is the maximum of the measurements for both phase line and neutral line.

Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.150000	60.9	1000.	9.000	N	28.6	5.1	66.0
0.195000	50.0	1000.	9.000	N	20.5	13.8	63.8
0.240000	44.9	1000.	9.000	N	19.7	17.2	62.1
0.285000	42.4	1000.	9.000	N	19.7	18.3	60.7
0.613500	42.6	1000.	9.000	N	19.7	13.4	56.0
0.640500	42.8	1000.	9.000	N	19.7	13.2	56.0


Final Result 2

Frequency (MHz)	Average (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.150000	36.8	1000.0	9.000	N	28.6	19.2	56.0
0.285000	26.6	1000.0	9.000	N	19.7	24.1	50.7
0.541500	35.7	1000.0	9.000	N	19.8	10.3	46.0
0.640500	32.3	1000.0	9.000	L1	19.7	13.7	46.0
0.996000	28.4	1000.0	9.000	N	19.6	17.6	46.0
1.342500	28.1	1000.0	9.000	N	19.6	17.9	46.0

ANNEX B: EUT parameters

Disclaimer: The antenna gain and worse case provided by the client may affect the validity of the measurement results in this report, and the client shall bear the impact and consequences arising therefrom.

ANNEX C: Accreditation Certificate

<p>United States Department of Commerce National Institute of Standards and Technology</p> <div style="display: flex; justify-content: space-around; align-items: center;"><div style="font-size: 4em; font-weight: bold; letter-spacing: 0.5em;">NVLAP[®]</div><div style="text-align: center;"> ILAC-MRA</div></div> <hr style="border: 1px solid black;"/> <h3 style="text-align: center; margin: 0;">Certificate of Accreditation to ISO/IEC 17025:2017</h3> <hr style="border: 1px solid black;"/> <p style="text-align: center; margin: 10px 0;">NVLAP LAB CODE: 600118-0</p> <p style="text-align: center; margin: 10px 0;">Telecommunication Technology Labs, CAICT Beijing China</p> <p style="text-align: center; margin: 10px 0;"><i>is accredited by the National Voluntary Laboratory Accreditation Program for specific services, listed on the Scope of Accreditation, for:</i></p> <p style="text-align: center; margin: 10px 0;">Electromagnetic Compatibility & Telecommunications</p> <p style="text-align: center; margin: 10px 0;"><i>This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communique dated January 2009).</i></p> <div style="display: flex; justify-content: space-between; align-items: flex-end; padding-top: 20px;"><div style="width: 40%; text-align: center;"><hr style="border: 0.5px solid black;"/><p>2022-10-01 through 2023-09-30 <i>Effective Dates</i></p></div><div style="width: 15%; text-align: center;"></div><div style="width: 40%; text-align: center;"> <hr style="border: 0.5px solid black;"/><p><i>For the National Voluntary Laboratory Accreditation Program</i></p></div></div>	
--	--

*****END OF REPORT*****