

Meas.1 Body Plane with Top Edge 0mm on 6 Channel in IEEE802.11b mode with Ant.1

Date: 2025.06.01

Communication System Band: WLAN(b); Frequency: 2437 MHz; Duty Cycle: 1:1.028

Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.777$ S/m; $\epsilon_r = 39.18$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.4°C Liquid Temperature: 21.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(7.75, 7.75, 7.75); Calibrated: 2024.06.25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2025.01.20
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch6/Area Scan (61x121x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.998 W/kg

Ch6/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 9.146 V/m; Power Drift = -0.04 dB


Peak SAR (extrapolated) = 2.10 W/kg

SAR(1 g) = 0.762 W/kg; SAR(10 g) = 0.266 W/kg

Smallest distance from peaks to all points 3 dB below = 5.1 mm

Ratio of SAR at M2 to SAR at M1 = 46.2%

Maximum value of SAR (measured) = 0.959 W/kg

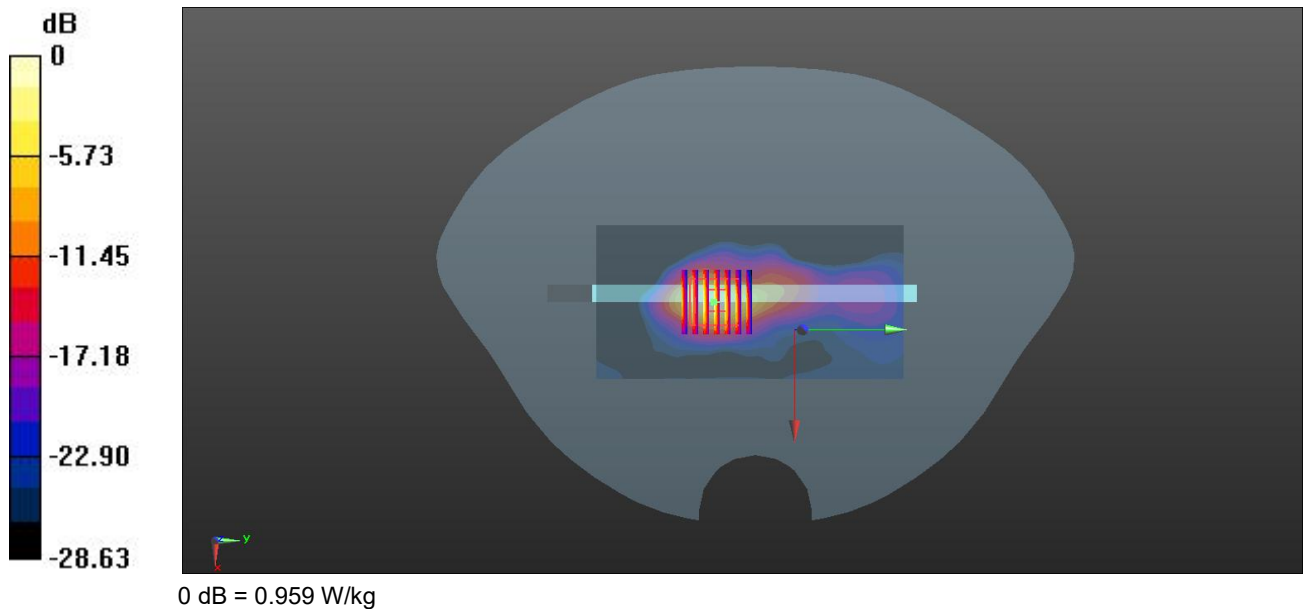

Meas.2 Body Plane with Top Edge 0mm on 52 Channel in IEEE802.11a mode with Ant.1

Date: 2025.06.01

Communication System Band: WLAN(a); Frequency: 5260 MHz; Duty Cycle: 1:1.039

Medium parameters used (interpolated): $f = 5260$ MHz; $\sigma = 4.689$ S/m; $\epsilon_r = 36.053$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.4°C Liquid Temperature: 21.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(5.5, 5.5, 5.5); Calibrated: 2024.06.25
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2025.01.20
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch52/Area Scan (61x121x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.883 W/kg

Ch52/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 6.646 V/m; Power Drift = -0.13 dB


Peak SAR (extrapolated) = 5.06 W/kg

SAR(1 g) = 0.862 W/kg; SAR(10 g) = 0.175 W/kg

Smallest distance from peaks to all points 3 dB below = 4.5 mm

Ratio of SAR at M2 to SAR at M1 = 43.1%

Maximum value of SAR (measured) = 1.10 W/kg

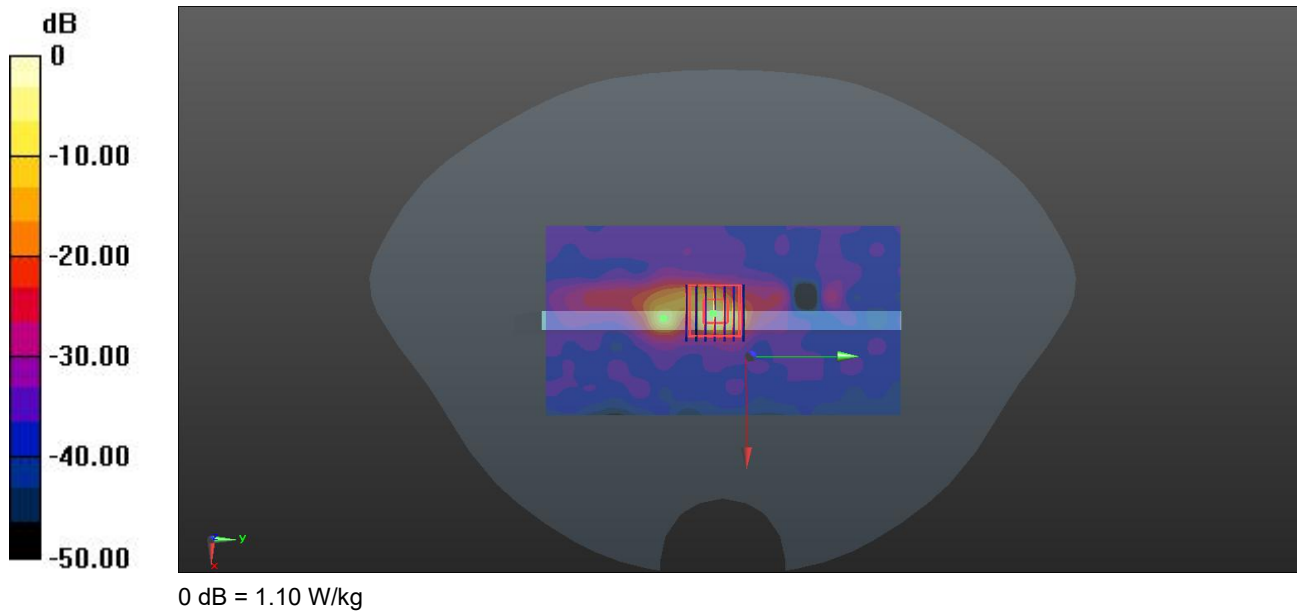

Meas.3 Body Plane with Top Edge 0mm on 116 Channel in IEEE802.11a mode with Ant.1

Date: 2025.06.01

Communication System Band: WLAN(a); Frequency: 5580 MHz; Duty Cycle: 1:1.039

Medium parameters used (interpolated): $f = 5580$ MHz; $\sigma = 4.95$ S/m; $\epsilon_r = 35.672$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.4°C Liquid Temperature: 21.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(5, 5, 5); Calibrated: 2024.06.25
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2025.01.20
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch116/Area Scan (81x151x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 1.15 W/kg

Ch116/Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 4.666 V/m; Power Drift = 0.04 dB


Peak SAR (extrapolated) = 4.51 W/kg

SAR(1 g) = 0.725 W/kg; SAR(10 g) = 0.165 W/kg

Smallest distance from peaks to all points 3 dB below = 4.3 mm

Ratio of SAR at M2 to SAR at M1 = 53.7%

Maximum value of SAR (measured) = 1.82 W/kg

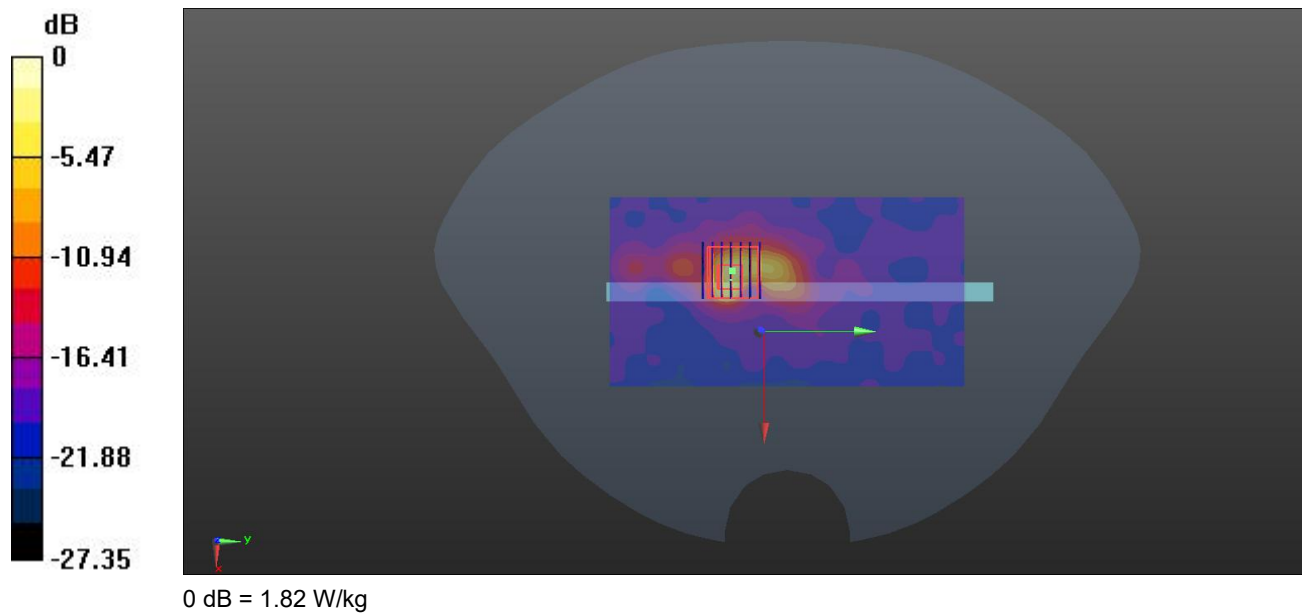

Meas.4 Body Plane with Top Edge 0mm on 165 Channel in IEEE802.11a mode with Ant.1

Date: 2025.06.01

Communication System Band: WLAN(a); Frequency: 5825 MHz; Duty Cycle: 1:1.039

Medium parameters used (interpolated): $f = 5825$ MHz; $\sigma = 5.3$ S/m; $\epsilon_r = 34.929$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.4°C Liquid Temperature: 21.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(5.04, 5.04, 5.04); Calibrated: 2024.06.25
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2025.01.20
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch165/Area Scan (61x121x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.726 W/kg

Ch165/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.717 V/m; Power Drift = 0.13 dB


Peak SAR (extrapolated) = 4.64 W/kg

SAR(1 g) = 0.652 W/kg; SAR(10 g) = 0.133 W/kg

Smallest distance from peaks to all points 3 dB below = 4.3 mm

Ratio of SAR at M2 to SAR at M1 = 50.7%

Maximum value of SAR (measured) = 0.982 W/kg

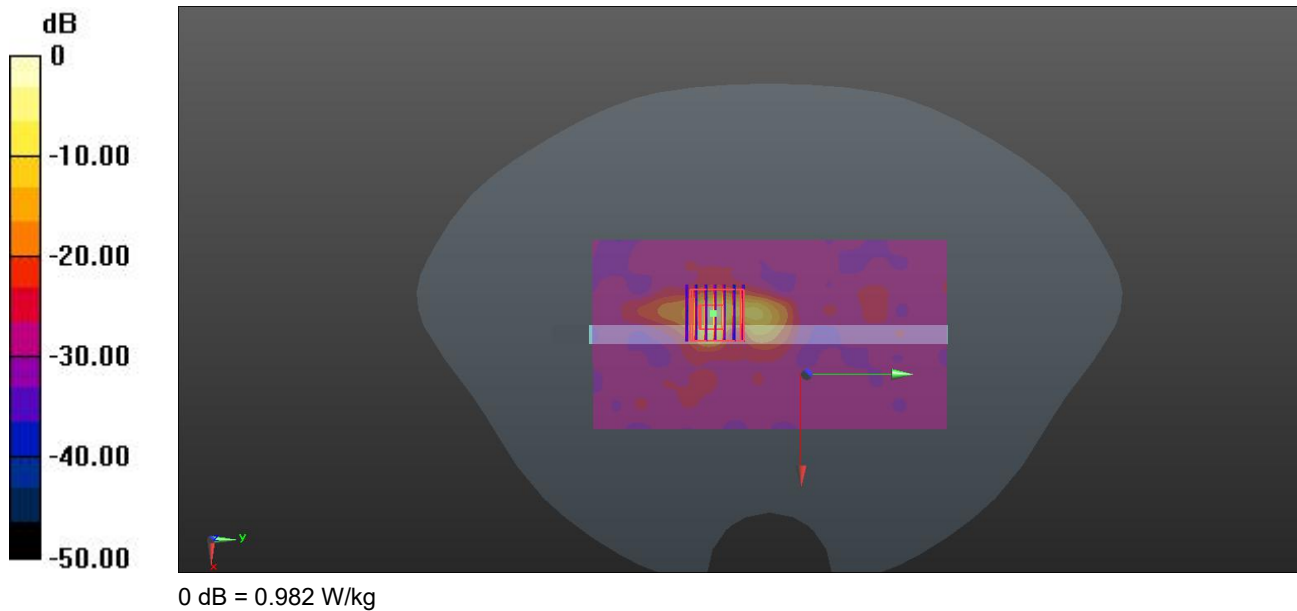

Meas.5 Body Plane with Top Edge 0mm on 39 Channel in Bluetooth mode with Ant.1

Date: 2025.06.01

Communication System Band: Bluetooth; Frequency: 2441 MHz; Duty Cycle: 1:1.305

Medium parameters used (interpolated): $f = 2441$ MHz; $\sigma = 1.782$ S/m; $\epsilon_r = 38.373$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.4°C Liquid Temperature: 21.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(7.75, 7.75, 7.75); Calibrated: 2024.06.25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2025.01.20
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch39/Area Scan (61x81x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.702 W/kg

Ch39/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 11.45 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 1.72 W/kg

SAR(1 g) = 0.583 W/kg; SAR(10 g) = 0.192 W/kg

Smallest distance from peaks to all points 3 dB below = 5.1 mm

Ratio of SAR at M2 to SAR at M1 = 44.2%

Maximum value of SAR (measured) = 0.735 W/kg

