

TEST REPORT

Applicant: TCL Communication Ltd.
Address: 5/F, Building 22E, 22 Science Park East Avenue,
Hong Kong Science Park, Shatin, NT, Hong Kong
Equipment Type: Tablet PC
Model Name: 9566X (refer to section 2.3)
Brand Name: TCL
Test Standard: 47 CFR Part 15 Subpart C
ANSI C63.10-2013
Sample Arrival Date: Sep. 09, 2025
Test Date: Sep. 10, 2025 - Oct. 22, 2025
Date of Issue: Nov. 18, 2025

ISSUED BY:

Shenzhen BALUN Technology Co., Ltd.

Tested by: Qiu Yongjing**Checked by:** Zong Liyao**Approved by:** Tolan Tu
(Technical Director)

Revision History

Version	Issue Date	Revisions Content
<u>Rev. 01</u>	<u>Oct. 31, 2025</u>	<u>Initial Issue</u>
<u>Rev. 02</u>	<u>Nov. 18, 2025</u>	<u>Add second-screen information</u>

TABLE OF CONTENTS

1	GENERAL INFORMATION	3
1.1	Test Laboratory	3
1.2	Test Location	3
2	PRODUCT INFORMATION	4
2.1	Applicant Information.....	4
2.2	Manufacturer Information	4
2.3	General Description for Equipment under Test (EUT)	4
2.4	Technical Information	4
3	SUMMARY OF TEST RESULTS.....	5
3.1	Test Standards	5
3.2	Verdict	5
3.3	Test Uncertainty	5
4	GENERAL TEST CONFIGURATIONS	6
4.1	Test Environments	6
4.2	Test Setups	6
5	TEST ITEMS.....	8
5.1	Antenna Requirements.....	8
5.2	Emission Tests	9
ANNEX A	TEST RESULTS.....	13
A.1	Radiated Emission	13
A.2	Conducted Emission	18
A.3	20 dB Bandwidth	21
ANNEX B	TEST SETUP PHOTOS	24
ANNEX C	EUT EXTERNAL PHOTOS	24
ANNEX D	EUT INTERNAL PHOTOS	24

1 GENERAL INFORMATION

1.1 Test Laboratory

Name	Shenzhen BALUN Technology Co., Ltd.
Address	Block B, 1/F, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Phone Number	+86 755 6685 0100

1.2 Test Location

Name	Shenzhen BALUN Technology Co., Ltd.
Location	☒ Block B, 1/F, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
	☐ 1/F, Building B, Ganghongji High-tech Intelligent Industrial Park, No. 1008, Songbai Road, Yangguang Community, Xili Sub-district, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Accreditation Certificate	The laboratory is a testing organization accredited by FCC as a accredited testing laboratory. The designation number is CN1196. The certification body is American Association for Laboratory Accreditation (A2LA).

2 PRODUCT INFORMATION

2.1 Applicant Information

Applicant	TCL Communication Ltd.
Address	5/F, Building 22E, 22 Science Park East Avenue, Hong Kong Science Park, Shatin, NT, Hong Kong

2.2 Manufacturer Information

Manufacturer	TCL Communication Ltd.
Address	5/F, Building 22E, 22 Science Park East Avenue, Hong Kong Science Park, Shatin, NT, Hong Kong

2.3 General Description for Equipment under Test (EUT)

EUT Name	Tablet PC
Model Name Under Test	9566X
Series Model Name	9566X(2082114OFH064001-53D)
Description of Model name differentiation	The distinction lies in screen variations, with specific specifications as follows: Supply1: 2082114QFH064002-53D Supply2: 2082114OFH064001-53D
Hardware Version	05
Software Version	1W13
Dimensions (Approx.)	N/A
Weight (Approx.)	N/A

2.4 Technical Information

Network and Wireless connectivity	Bluetooth (BR+EDR+BLE) WIFI 802.11a, 802.11b, 802.11g, 802.11n(HT20/40), 802.11ac(VHT20/40/80) WPT
-----------------------------------	---

The requirement for the following technical information of the EUT was tested in this report:

Modulation Type	FSK
Operating Frequency	110.5~148Khz
Product Type	☐ Mobile ☒ Portable ☐ Fix Location
Antenna Type	Loop Antenna
About Product	The EUT support the Qi and PMA technology, and they have the same operating frequency.

3 SUMMARY OF TEST RESULTS

3.1 Test Standards

No.	Identity	Document Title
1	47 CFR Part 15, Subpart C	Intentional Radiators
2	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices

3.2 Verdict

No.	Description	FCC Part No.	Verdict
1	Antenna Requirement	15.203	Pass ^{Note}
2	Radiated Emission	15.209,15.215(b)	Pass
3	Conducted Emission, AC Ports	15.207	Pass
4	20 dB Bandwidth	15.215(c)	Pass
Note: The EUT has a permanently and irreplaceable attached antenna, which complies with the requirement FCC 15.203.			

3.3 Test Uncertainty

The following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Measurement	Value
Conducted emissions (9 kHz-30 MHz)	3.2 dB
Radiated emissions (9 kHz-30 MHz)	3.9 dB
Radiated emissions (30 MHz-1 GHz)-3m	4.4 dB

4 GENERAL TEST CONFIGURATIONS


4.1 Test Environments

Relative Humidity	30% to 60%	
Atmospheric Pressure	100 kPa to 102 kPa	
Temperature	NT (Normal Temperature)	+22°C to +25°C
Working Voltage of the EUT	NV (Normal Voltage)	3.91V

4.2 Test Setups

Test Setup 1


Radiated Test (Below 30 MHz)

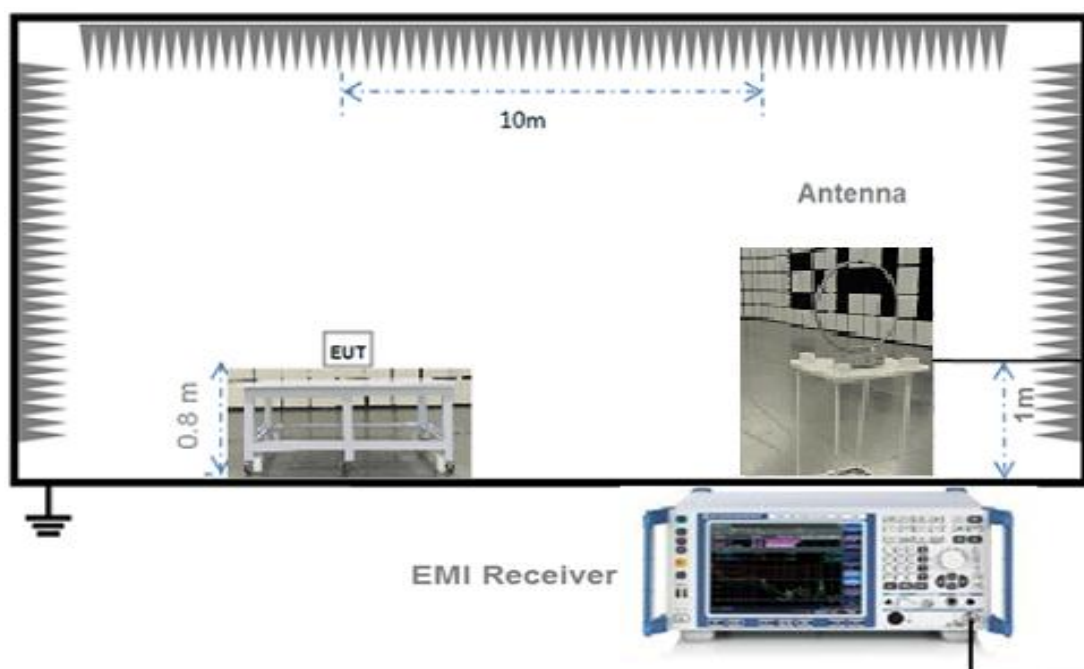

(Diagram 1)

Test Setup 2


Radiated Test (30 MHz-1 GHz)

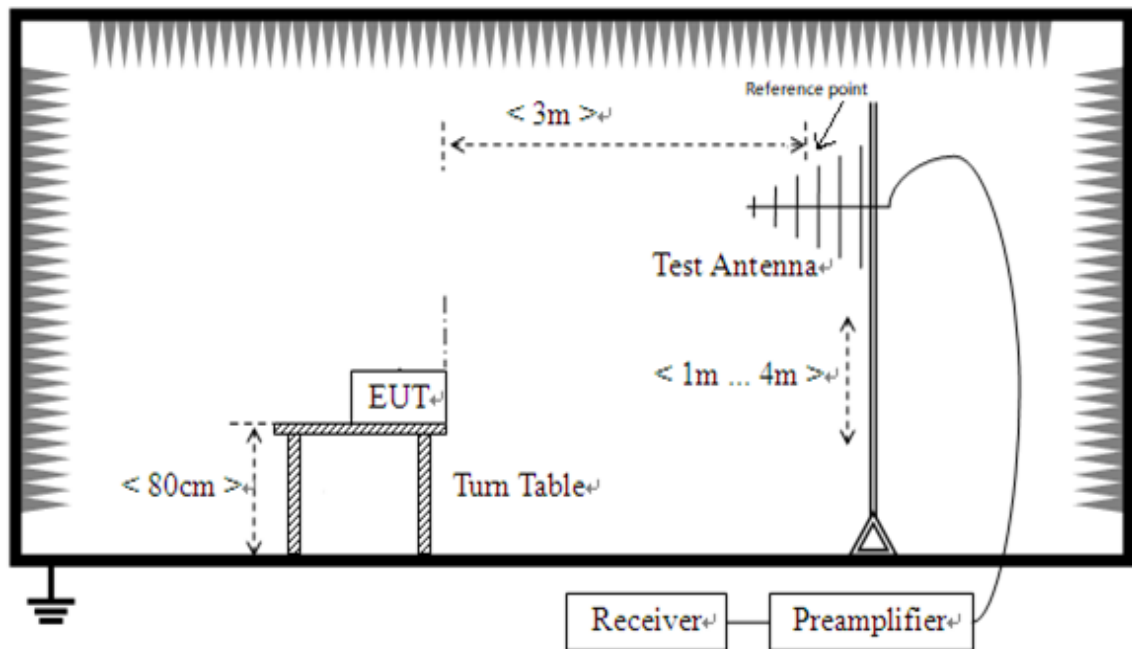

(Diagram 2)

Test Setup 3

AC Power Supply Port Test

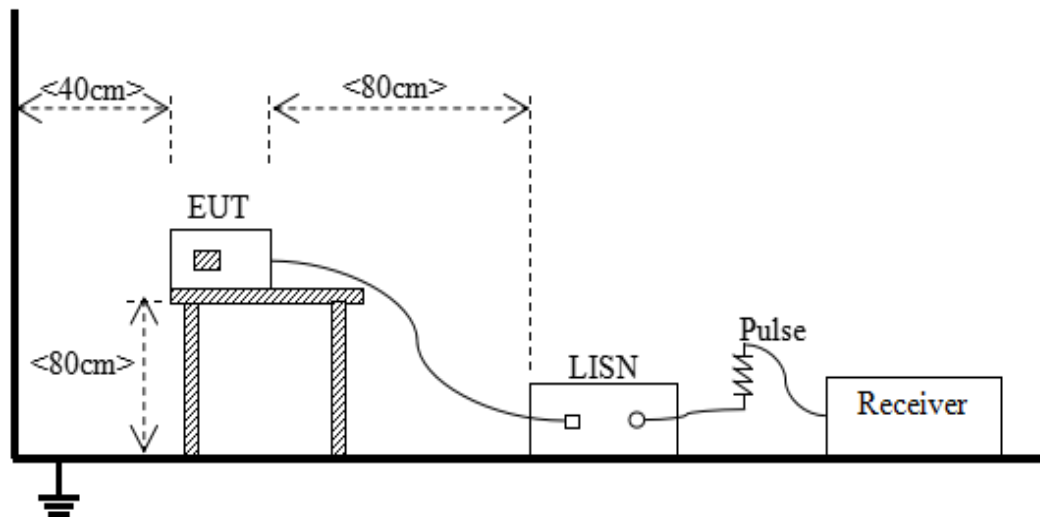

(Diagram 3)

5 TEST ITEMS

5.1 Antenna Requirements

5.1.1 Relevant Standards

FCC §15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of § 15.211, § 15.213, § 15.217, § 15.219, or § 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

5.1.2 Antenna Anti-Replacement Construction

The Antenna Anti-Replacement as following method:

Protected Method	Description
The antenna is embedded in the product.	An embedded-in antenna design is used.

Reference Documents	Item
Photo	Please refer EUT internal photos.

5.2 Emission Tests

5.2.1 Radiated Emission

5.2.1.1 Limit

Frequency (MHz)	Field Strength ($\mu\text{V/m}$)	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

NOTE:

- 1) Field Strength ($\text{dB}\mu\text{V/m}$) = $20 \times \log [\text{Field Strength } (\mu\text{V/m})]$.
- 2) In the emission tables above, the tighter limit applies at the band edges.
- 3) For above 1000 MHz, limit field strength of harmonics: $54 \text{ dB}\mu\text{V/m}@3 \text{ m (AV)}$ and $74 \text{ dB}\mu\text{V/m}@3 \text{ m (PK)}$
- 4) At frequencies below 30 MHz, measurements may be performed at a distance closer than that specified in the regulations, when performing measurements at a closer distance than specified, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). For example, at the frequency 9 kHz, limit @10m = $20 \times \log (2400/f) + 40 \log (d_{\text{limit}}/d_{\text{measure}})$ where limit = 300m, $d_{\text{measure}}=10\text{m}$. limit @10m = $20 \times \log (2400/9) + 40 \log (300/10) = 107.5 \text{ (dB}\mu\text{V/m)}$.
- 5) At frequencies at or above 30 MHz, measurements may be performed at a distance other than what is specified provided, When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse linear-distance for field strength measurements; inverse-linear-distance-squared for power density measurements). For example, at the frequency 30 MHz, limit @10m = $20 \times \log (100) + 20 \log (d_{\text{limit}}/d_{\text{measure}})$ where limit = 3m, $d_{\text{measure}}=10\text{m}$. limit @10m = $20 \times \log (100) + 20 \log (3/10) = 29.5 \text{ (dB}\mu\text{V/m)}$.

5.2.1.2 Test Setup

Refer to 4.2 section (test setup 1 to test setup 2) for radiated emission test, the photo of test setup please refer to ANNEX B.

5.2.1.3 Test Procedure

The measurement frequency range is from 9 kHz to the 10th harmonic of the fundamental frequency. The Turn Table is actuated to turn from 0° to 360° , and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. Mid channels on all channel bandwidth verified. Only the worst RB size/offset presented. The power of the EUT transmitting frequency should be ignored.

All Spurious Emission tests were performed in X, Y, Z axis direction. And only the worst axis test

condition was recorded in this test report.

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $30 \text{ MHz} < f < 1 \text{ GHz}$, 10 kHz for $150 \text{ kHz} < f < 30 \text{ MHz}$,
300 Hz for $f < 150 \text{ kHz}$

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

5.2.1.4 Test Result and Test Equipment List

Please refer to ANNEX A.1.

NOTE:

1. Results (dB μ V/m) = Reading (dB μ V) + Factor (dB/m)

The reading level is calculated by software which is not shown in the sheet

2. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) – Amplifier Gain (dB)

3. Margin = Limit – Results

5.2.2 Conduct Emission

5.2.2.1 Test Limit

Frequency range (MHz)	Conducted Limit (dBμV)	
	Quasi-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
5 - 30	60	50

NOTE:

- 1) The limit is applicable to Class B ITE.
- 2) The lower limit shall apply at the band edges.
- 3) The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50 MHz.

5.2.2.2 Test Setup

Refer to 4.2 section test (test setup 3) for conducted emission, the photo of test setup please refer to ANNEX B.

5.2.2.3 Test Procedure

The EUT is connected to the power mains through a LISN which provides 50 Ω /50 μ H of coupling impedance for the measuring instrument. The test frequency range is from 150 kHz to 30 MHz. The maximum conducted interference is searched using Peak (PK), Quasi-peak (QP) and Average (AV) detectors; the emission levels that are more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed.

Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a nominal 120 VAC, 50/60 Hz and 240 VAC, 50/60 Hz) for which the device is capable of operation. A device rated for 50/60 Hz operation need not be tested at both frequencies provided the radiated and line conducted emissions are the same at both frequencies.

5.2.2.4 Test Result and Test Equipment List

Please refer to ANNEX A.2.

NOTE:

1. Results (dBμV) = Reading (dBμV) + Factor (dB/m)

The reading level is calculated by software which is not shown in the sheet

2. Factor = Insertion loss + Cable loss

3. Margin = Limit – Results

5.2.3 20 dB Bandwidth

5.2.3.1 Limit

FCC §15.215(c)

The 20 dB bandwidth is known as the 99% emission bandwidth, or 20 dB bandwidth ($10 \cdot \log 1\% = 20$ dB) taking the total RF output power.

5.2.3.2 Test Setup

Refer to 4.2 section test (test setup 1) for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.2.3.3 Test Procedure

The 20dB bandwidth is measured with a spectrum analyzer connected via a receiver antenna placed near the EUT while the EUT is operating in transmission mode.

Use the following spectrum analyzer settings:

Span = between 2 to 5 times the OBW

RBW = 1% to 5% the OBW

VBW $\geq$ 3RBW

Sweep = auto

Detector function = peak

Trace = max hold

The 99% emission bandwidth is measured with a spectrum analyzer connected via a receiver antenna placed near the EUT while the EUT is operating in transmission mode.

Use the following spectrum analyzer settings:

Span = between 1.5 to 5 times the OBW

RBW = 1% to 5% OBW

VBW $\geq$ 3RBW

Sweep = auto

Detector function = peak

Trace = max hold

The EUT should be transmitting at its maximum data rate, Allow the trace to stabilize.

5.2.3.4 Test Result and Test Equipment List

Please refer to ANNEX A.3.

ANNEX A TEST RESULTS

A.1 Radiated Emission


Note 1: This frequency which near 0.19 kHz with circle should be ignored because they are WPT carrier frequency.

Note 2: All Radiated Emissions tests were performed in X, Y, Z axis direction of EUT. And only the worst axis test condition was recorded in this test report.

Sample No.	S09	Temperature	26.9℃
Humidity	47%RH	Pressure	101kPa
Test Engineer	Zhou Haonan	Test Date	2025.10.10

Test Data and Plot

9 kHz to 30 MHz, ANT-V

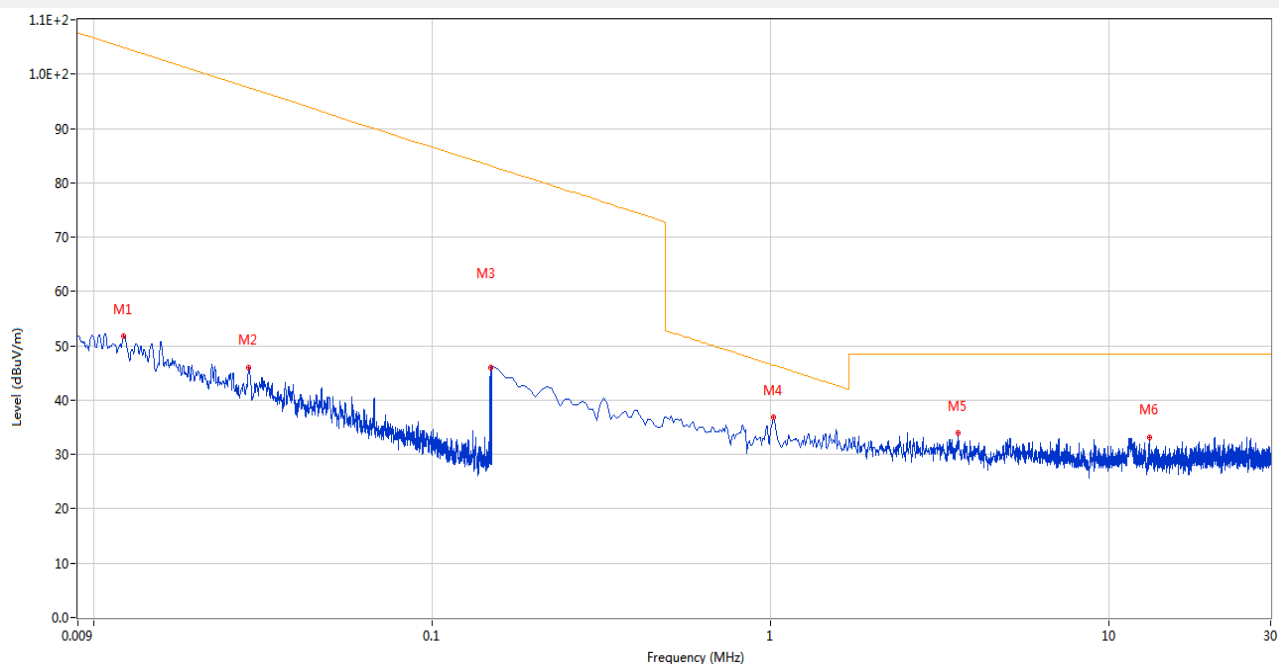


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	0.012	51.82	20.06	104.8	52.98	Peak	0.00	100	Vertical	Pass
2	0.029	46.07	20.15	97.4	51.33	Peak	79.00	100	Vertical	Pass
3	0.149	45.97	20.16	83.2	37.23	Peak	0.00	100	Vertical	N/A
4	1.023	36.85	20.37	46.4	9.55	Peak	93.00	100	Vertical	Pass
5	3.583	33.93	20.66	48.5	14.57	Peak	280.00	100	Vertical	Pass
6	13.194	33.24	20.91	48.5	15.26	Peak	170.00	100	Vertical	Pass

Equipment Information						
Equipment Name	Supplier	Model	Serial No.	Cal. Date	Cal. Due	Use
EMI Receiver	ROHDE&SCH WARZ	ESRP	101036	2025.06.16	2026.06.15	☒
Test Antenna- Loop(9 kHz-30 MHz)	SCHWARZBE CK	FMZB 1519	1519-037	2024.01.23	2027.01.22	☒
Anechoic Chamber (10M)	EMC Electronic Co., Ltd	20.10*11.60*7 .35m	130	2024.07.13	2027.07.12	☒
Description	Supplier	Name	Version	/		Use
Test Software	BALUN	BL410-E	V22.930	/		☒

Sample No.	S09	Temperature	22.2℃
Humidity	40%RH	Pressure	101kPa
Test Engineer	Chen Jingran	Test Date	2025.10.22


Test Data and Plot

30 MHz to 1 GHz, ANT-V

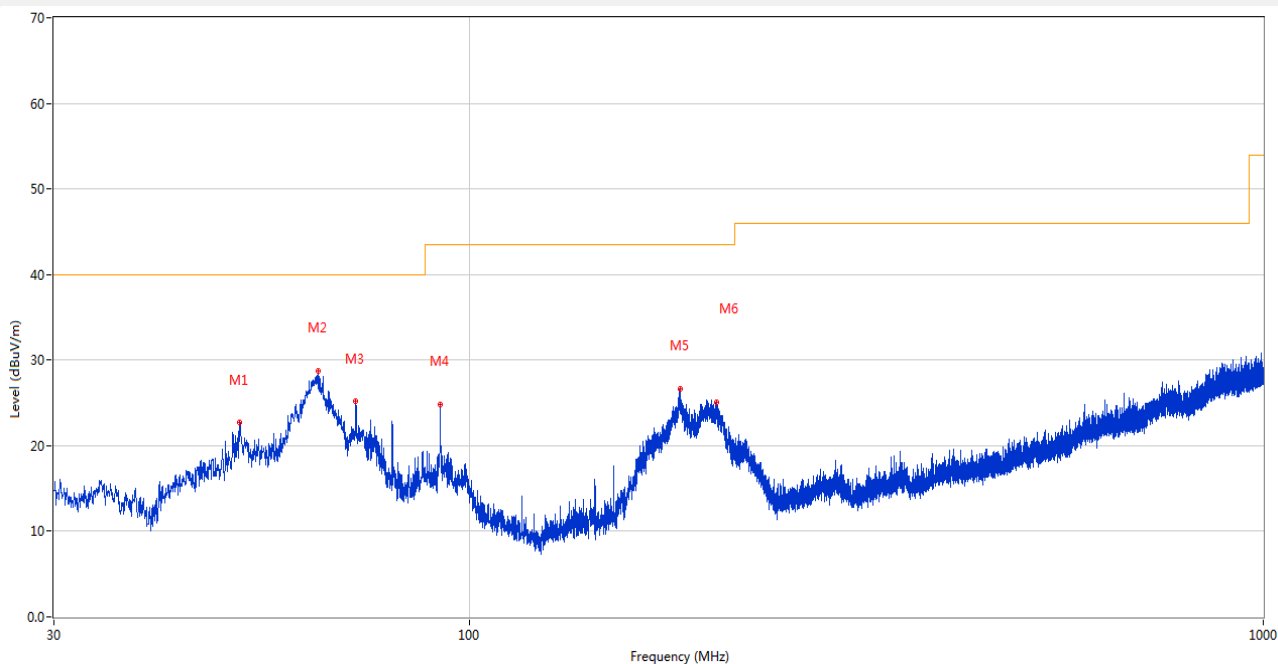

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	51.437	22.69	-24.76	40.0	17.31	Peak	126.50	100	Vertical	Pass
2	64.483	28.79	-27.25	40.0	11.21	Peak	228.40	100	Vertical	Pass
3	72.001	25.20	-29.71	40.0	14.80	Peak	345.60	200	Vertical	Pass
4	92.032	24.85	-28.07	43.5	18.65	Peak	359.60	100	Vertical	Pass
5	184.278	26.71	-27.31	43.5	16.79	Peak	296.60	100	Vertical	Pass
6	205.182	25.08	-26.19	43.5	18.42	Peak	211.50	100	Vertical	Pass

30 MHz to 1 GHz, ANT-H

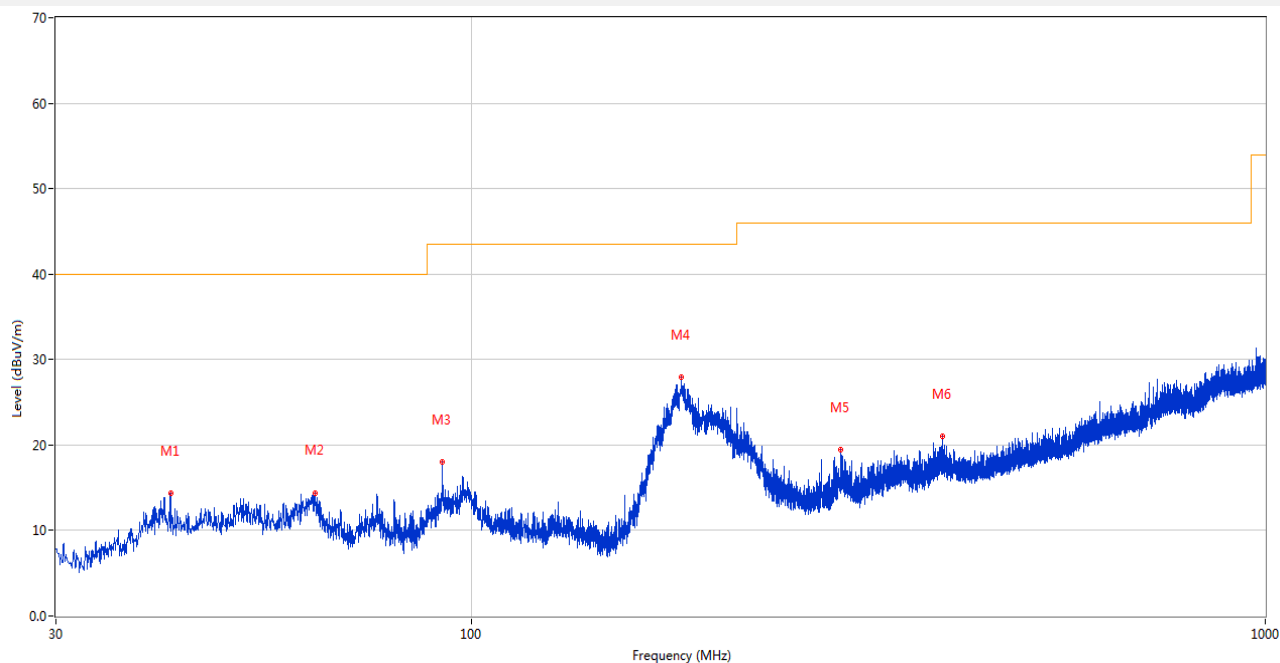

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	41.834	14.31	-25.69	40.0	25.69	Peak	173.10	200	Horizontal	Pass
2	63.611	14.42	-26.94	40.0	25.58	Peak	322.50	200	Horizontal	Pass
3	91.983	17.99	-28.09	43.5	25.51	Peak	177.50	200	Horizontal	Pass
4	183.794	27.89	-27.40	43.5	15.61	Peak	89.60	100	Horizontal	Pass
5	291.851	19.45	-23.32	46.0	26.55	Peak	271.70	100	Horizontal	Pass
6	392.489	21.04	-20.49	46.0	24.96	Peak	245.30	100	Horizontal	Pass

Equipment Information						
Equipment Name	Supplier	Model	Serial No.	Cal. Date	Cal. Due	Use
EMI Receiver	Keysight	N9038A	MY55330120	2025.06.17	2026.06.16	☒
Amplifier (30-1GHz)	COM-MV	ZT30- 1000M	B2017119081	2024.11.28	2025.11.27	☒
Test Antenna- Bi-Log	SCHWARZBE CK	VULB 9168	9168-00883	2025.03.23	2028.03.22	☒
Anechoic Chamber (#2)	YiHeng	9m*6m*6m	142	2024.07.21	2027.07.20	☒
Description	Supplier	Name	Version	/		Use
Test Software	BALUN	BL410-E	V22.930	/		☒


A.2 Conducted Emission

Note: Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a nominal 120 VAC, 60 Hz and 240 VAC, 50 Hz) for which the device is capable of operation. So, The configuration 120 VAC, 60 Hz and 240 VAC, 50 Hz were tested respectively, but only the worst configuration (120 VAC, 60 Hz) shown here.

Sample No.	S09	Temperature	22.1℃
Humidity	53%RH	Pressure	101kPa
Test Engineer	Yang Panxia	Test Date	2025.10.22


Test Data and Plot

PHASE L

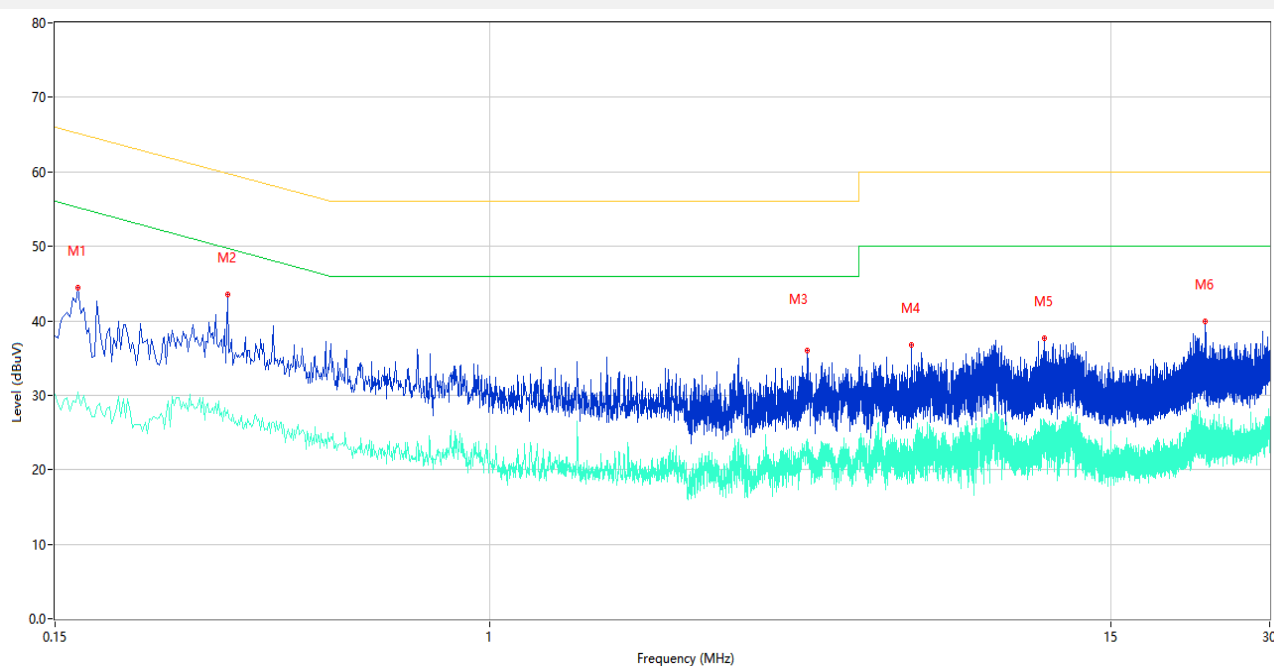

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Margin (dB)	Detector	Line	Verdict
1	0.166	44.48	10.29	65.16	20.68	Peak	L	Pass
1**	0.166	30.41	10.29	55.16	24.75	AV	L	Pass
2	0.318	43.54	10.26	59.76	16.22	Peak	L	Pass
2**	0.318	28.03	10.26	49.76	21.73	AV	L	Pass
3	3.986	35.95	10.70	56.00	20.05	Peak	L	Pass
3**	3.986	23.14	10.70	46.00	22.86	AV	L	Pass
4	6.300	36.75	11.10	60.00	23.25	Peak	L	Pass
4**	6.300	22.32	11.10	50.00	27.68	AV	L	Pass
5	11.246	37.62	12.17	60.00	22.38	Peak	L	Pass
5**	11.246	25.70	12.17	50.00	24.30	AV	L	Pass
6	22.680	39.92	14.96	60.00	20.08	Peak	L	Pass
6**	22.680	26.77	14.96	50.00	23.23	AV	L	Pass

PHASE N

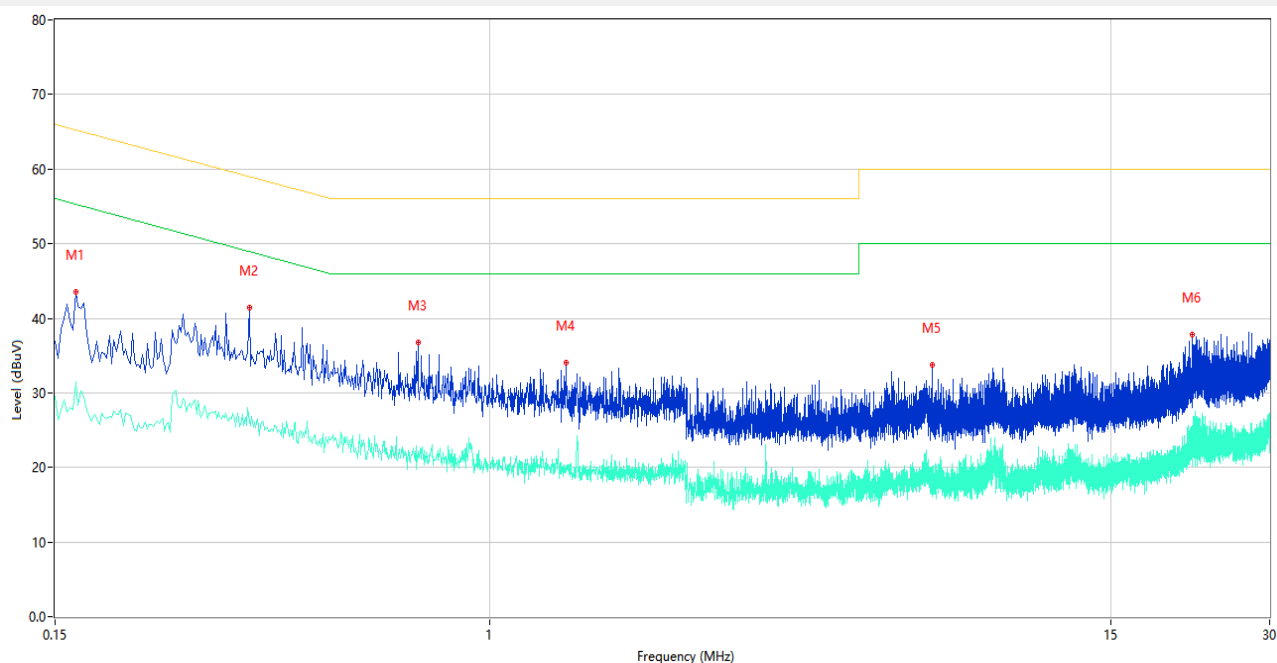

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Margin (dB)	Detector	Line	Verdict
1	0.164	43.57	10.21	65.26	21.69	Peak	N	Pass
1**	0.164	31.48	10.21	55.26	23.78	AV	N	Pass
2	0.350	41.46	10.18	58.96	17.50	Peak	N	Pass
2**	0.350	26.29	10.18	48.96	22.67	AV	N	Pass
3	0.730	36.79	10.21	56.00	19.21	Peak	N	Pass
3**	0.730	22.16	10.21	46.00	23.84	AV	N	Pass
4	1.396	34.08	10.28	56.00	21.92	Peak	N	Pass
4**	1.396	19.43	10.28	46.00	26.57	AV	N	Pass
5	6.874	33.73	11.11	60.00	26.27	Peak	N	Pass
5**	6.874	18.29	11.11	50.00	31.71	AV	N	Pass
6	21.406	37.82	14.75	60.00	22.18	Peak	N	Pass
6**	21.406	23.85	14.75	50.00	26.15	AV	N	Pass

Equipment Information						
Equipment Name	Supplier	Model	Serial No.	Cal. Date	Cal. Due	Use
EMI Receiver	KEYSIGHT	N9010B	MY57110309	2025.06.16	2026.06.15	☒
LISN	SCHWARZBECK	NSLK 8127	8127-687	2025.04.29	2026.04.28	☒
Shielded Room	YiHeng Electronic Co., Ltd	3.5m*3.1m*2.8m	112	2025.02.14	2028.02.13	☒
Description	Supplier	Name	Version	/		Use
Test Software	BALUN	BL410-E	V22.930	/		☒

A.3 20 dB Bandwidth

Note: Because the measured signal is CW adjusting the RBW per C63.10 would not be practical since measured bandwidth will always follow the RBW and the result will be approximately twice the RBW.

Sample No.	S09	Temperature	26.9°C
Humidity	47%RH	Pressure	101kPa
Test Engineer	Zeng Xiaoying	Test Date	2025.10.10


Test Data


Frequency (MHz)	Emission Bandwidth (20dB down) (kHz)	Occupied Bandwidth (99%) (kHz)
148.619	24.144	21.870

Note: Because the measured signal is CW adjusting the RBW per C63.10 would not be practical since measured bandwidth will always follow the RBW and the result will be approximately twice the RBW.

Test Plots

Emission Bandwidth

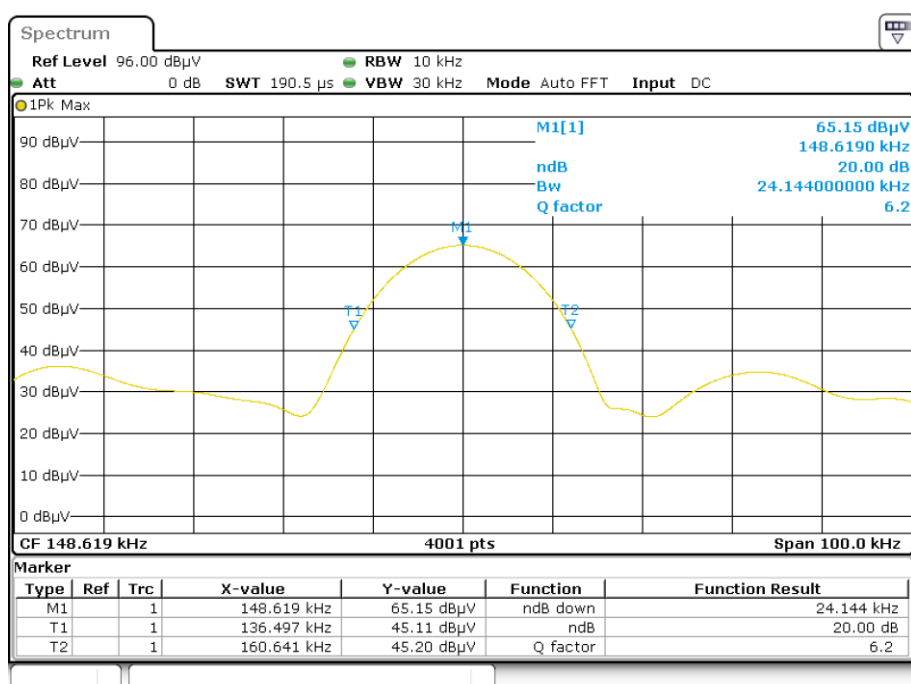

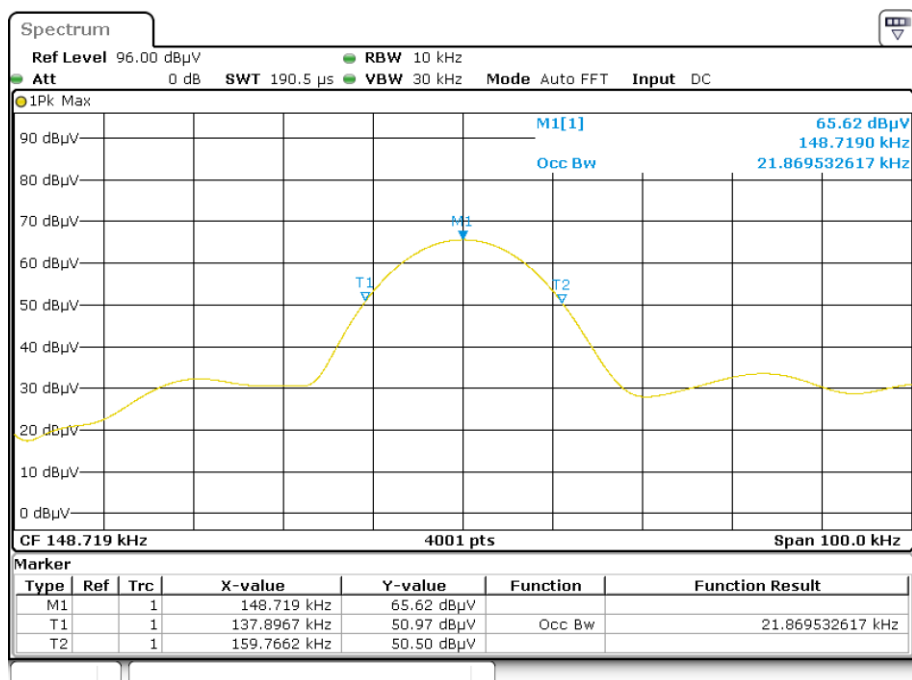99% Occupied Bandwidth

Note: Because the measured signal is CW adjusting the RBW per C63.10 would not be practical since measured bandwidth will always follow the RBW and the result will be approximately twice the RBW.

Equipment Information						
Equipment Name	Supplier	Model	Serial No.	Cal. Date	Cal. Due	Use
EMI Receiver	ROHDE&SCHW ARZ	ESRP	101036	2025.06.16	2026.06.15	☒
Test Antenna- Loop	SCHWARZBECK	FMZB 1519	1519-037	2024.01.23	2027.01.22	☒
Anechoic Chamber (10M)	EMC TECHNOLOGY LTD	20.1m*11.6 m*7.35m	130	2024.07.13	2027.07.12	☒

ANNEX B TEST SETUP PHOTOS

Please refer the document “BL-SZ2590682-AE-3.PDF”.

ANNEX C EUT EXTERNAL PHOTOS

Please refer the document “BL-SZ2590682-AW.PDF”.

ANNEX D EUT INTERNAL PHOTOS

Please refer the document “BL-SZ2590682-AI.PDF”.

Statement

1. The laboratory guarantees the scientificity, accuracy and impartiality of the test, and is responsible for all the information in the report, except the information provided by the customer. The customer is responsible for the impact of the information provided on the validity of the results.
2. The report without China inspection body and laboratory Mandatory Approval (CMA) mark has no effect of proving to the society.
3. For the report with CNAS mark or A2LA mark, the items marked with "☆" are not within the accredited scope.
4. This report is invalid if it is altered, without the signature of the testing and approval personnel, or without the "inspection and testing dedicated stamp" or test report stamp.
5. The test data and results are only valid for the tested samples provided by the customer.
6. This report shall not be partially reproduced without the written permission of the laboratory.
7. Any objection shall be raised to the laboratory within 30 days after receiving the report.

--END OF REPORT--