

TEST REPORT

Applicant: TCL Communication Ltd.
Address: 5/F, Building 22E, 22 Science Park East Avenue,
Hong Kong Science Park, Shatin, NT, Hong Kong
Equipment Type: Tablet PC
Model Name: 9445X
Brand Name: TCL
FCC ID: 2ACCJB245
Test Standard: 47 CFR Part 15 Subpart B
ANSI C63.4-2014
Sample Arrival Date: Apr. 21, 2026
Test Date: Apr. 21, 2026 - May 07, 2026
Date of Issue: May 15, 2026

ISSUED BY:

Shenzhen BALUN Technology Co., Ltd.

Tested by: Li JunFeng **Checked by:** Zong Liyao

Approved by: Tolan Tu
(Testing Director)

Li JunFeng

Zong Liyao

Tolan Tu

Revision History

Version	Issue Date	Revisions
<u>Rev. 01</u>	<u>May 15, 2026</u>	<u>Initial Issue</u>

TABLE OF CONTENTS

1	GENERAL INFORMATION.....	3
1.1	Test Laboratory	3
1.2	Test Location	3
2	PRODUCT INFORMATION	4
2.1	Applicant Information	4
2.2	Manufacturer Information.....	4
2.3	General Description for Equipment under Test (EUT).....	4
2.4	Ancillary Equipment.....	5
2.5	Technical Information	5
3	SUMMARY OF TEST RESULTS	6
3.1	Test Standards	6
3.2	Verdict.....	6
3.3	Test Uncertainty	6
4	GENERAL TEST CONFIGURATIONS	7
4.1	Test Enclosure List.....	7
4.2	Test Configurations	7
4.3	Test Setups	8
5	TEST ITEMS	10
5.1	Emission Tests	10
ANNEX A	TEST RESULTS	15
A.1	Radiated Emission.....	15
A.2	Conducted Emission, AC Ports.....	22
ANNEX B	TEST SETUP PHOTOS	25
ANNEX C	EUT EXTERNAL PHOTOS.....	25
ANNEX D	EUT INTERNAL PHOTOS.....	25

1 GENERAL INFORMATION

1.1 Test Laboratory

Name	Shenzhen BALUN Technology Co., Ltd.
Address	601, Building2,Intelligent Connected Vehicle Industrial Park,No.55, Xiangshan Road, Luotian Community, Yanluo Sub-district, Bao'an District, Shenzhen
Phone Number	+86 755 6685 0100

1.2 Test Location

Name	Shenzhen BALUN Technology Co., Ltd.
Location	☐ Block B, 1/F, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
	☒ 1/F., Building B, Ganghongji High-Tech Intelligent Industrial Park, No.1008, Songbai Road, Yangguang Community, Xili Subdistrict, Nanshan District, Shenzhen, Guangdong
	☐ Building 2, Intelligent Connected Vehicle Industrial Park, No.55, Xiangshan Road, Luotian Community, Yanluo Sub-district, Bao'an District, Shenzhen, Guangdong
Accreditation Certificate	The laboratory is a testing organization accredited by FCC as a accredited testing laboratory. The designation number is CN1196.The certification body is American Association for Laboratory Accreditation (A2LA).

2 PRODUCT INFORMATION

2.1 Applicant Information

Applicant	TCL Communication Ltd.
Address	5/F, Building 22E, 22 Science Park East Avenue, Hong Kong Science Park, Shatin, NT, Hong Kong

2.2 Manufacturer Information

Manufacturer	TCL Communication Ltd.
Address	5/F, Building 22E, 22 Science Park East Avenue, Hong Kong Science Park, Shatin, NT, Hong Kong

2.3 General Description for Equipment under Test (EUT)

EUT Name	Tablet PC
Model Name Under Test	9445X
Series Model Name	N/A
Description of Model name differentiation	N/A
Hardware Version	05
Software Version	N/A
Dimensions (Approx.)	N/A
Weight (Approx.)	N/A
Serial Number	589d15e8

2.4 Ancillary Equipment

Ancillary Equipment 1	Li-Polymer Battery	
	Brand Name	N/A
	Model No.	TLp100A7
	Serial No.	N/A
	Capacitance	Rated: 10000mAh/38.70Wh Typical: 10300mAh/39.87Wh
	Rated Voltage	3.87 V
	Limited Voltage	4.45 V
	Manufacturer	Dongguan Veken Battery CO.,Ltd
Ancillary Equipment 2	Power Supply Unit	
	Brand Name	TCL
	Model No.	QC16US-N
	Serial No.	N/A
	Rated Input	100-240V~ 50/60Hz 1.0A
	Rated Output	PD Output: 5.0VDC 3.0A 15.0W or 9.0VDC 3.0A 27.0W or 12.0VDC 2.5A 30.0W or 15.0VDC 2.0A 30.0W or 20.0VDC 2.0A 32.0W Max PPS Output: 5.0V to 11.0VDC 3.0A 33.0W Max or 5.0V to 16.0VDC 2.0A 32.0W Max
	Manufacturer	ShenZhen BaiJubDa Electronics CO., LTD
Ancillary Equipment 3	USB Cable	
	Model No.	N/A
	Length (Approx.)	0.8 m

2.5 Technical Information

Network and Wireless connectivity	Bluetooth (BR+EDR+BLE) WIFI 802.11a, 802.11b, 802.11g, 802.11n(HT20/40), 802.11ac(VHT20/40/80)
Classification of equipment	Class B
The highest internal frequency of EUT	5850 MHz

3 SUMMARY OF TEST RESULTS

3.1 Test Standards

No.	Identity	Document Title
1	47 CFR Part 15 Subpart B	Unintentional Radiators
2	ANSI C63.4-2014	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz

3.2 Verdict

No.	Description	FCC Rule	Test Verdict	Remark
1	Radiated Emission	15.109	Pass	--
2	Conducted Emission, AC Ports	15.107	Pass	--

Note : Compared with the EUT of test report BL-SZ25B1396-401, the EUT of this report shows different things as below:

1. Software supports 33W charging
2. Added the related modules for 33W charging
3. Use new charger (33W)
4. Use a new LCD
5. use new battery(10000mAh)
6. Add a new button (Turn on the software function for eye protection)

Other hardware circuit and software are the same as EUT referred to in test report BL-SZ25B1396-401.

Therefore, all the test items were retested in this report.

3.3 Test Uncertainty

The following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Measurement	Value
Conducted emissions (9 kHz-150 KHz)-AMN	3.36 dB
Conducted emissions (150 kHz-30 MHz)-AMN	2.92 dB
Radiated emissions (30 MHz-1 GHz)	4.24 dB
Radiated emissions (1 GHz-6 GHz)	5.10 dB
Radiated emissions (6 GHz-18 GHz)	5.30 dB

4 GENERAL TEST CONFIGURATIONS

4.1 Test Enclosure List

Description	Manufacturer	Model	Serial No.	Length	Description	Use
Laptop	N/A	N/A	N/A	N/A	N/A	☒
Data connector	N/A	N/A	N/A	N/A	N/A	☒
USB disk	N/A	N/A	N/A	N/A	N/A	☒
TF Card	N/A	N/A	N/A	N/A	N/A	☒

4.2 Test Configurations


All test modes of EUT are listed in the table below.

Test Mode Configuration	Description
Mode 1	<u>The Front Camera Test Mode</u> EUT + Adapter + USB Cable + Battery + TF Card
Mode 2	<u>The Rear Camera Test Mode</u> EUT + Adapter + USB Cable + Battery + TF Card
Mode 3	<u>The Video Play Test Mode</u> EUT + Adapter + USB Cable + Battery + TF Card
Mode 4	<u>The Charging Test Mode</u> EUT + Adapter + USB Cable + Battery + TF Card
Mode 5	<u>The USB Test Mode</u> EUT + USB Cable + Battery + Laptop + TF Card
Mode 6	<u>The OTG Test Mode</u> EUT + Battery + Data connector + USB Disk + TF Card


Test Case	Test Mode Configuration	Worst Mode
Radiated Emission	Mode 1~Mode 6	3
Conducted Emission, AC Ports	Mode 1~Mode 6	3
Note: All operation modes were tested, but only test data of the worst mode was presented in this report.		

4.3 Test Setups


Test Setup 1

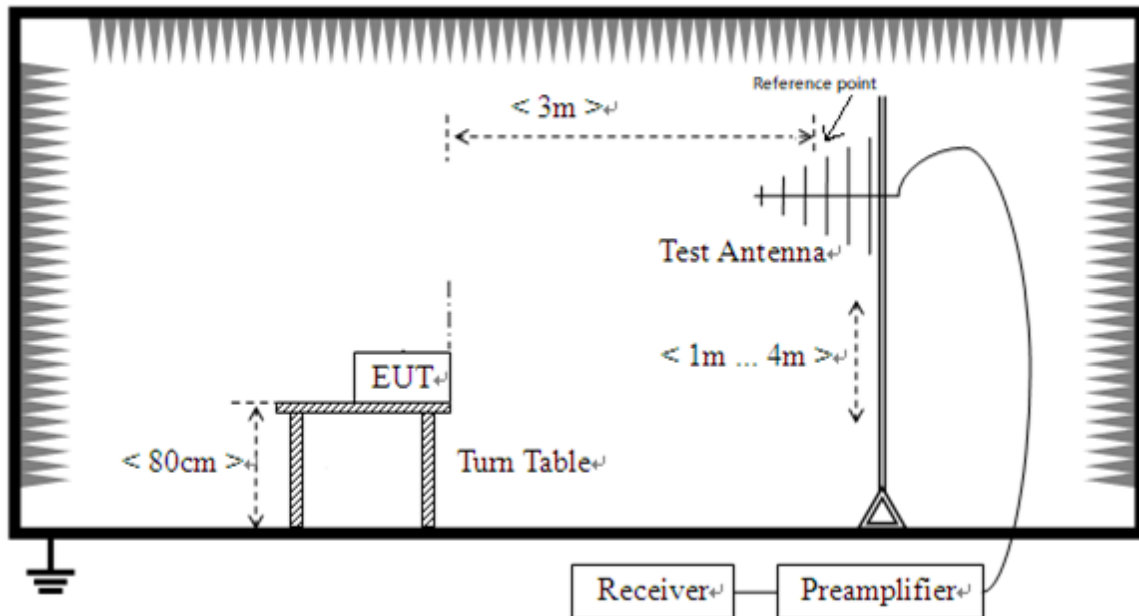

Radiated Emission (30 MHz-1 GHz)

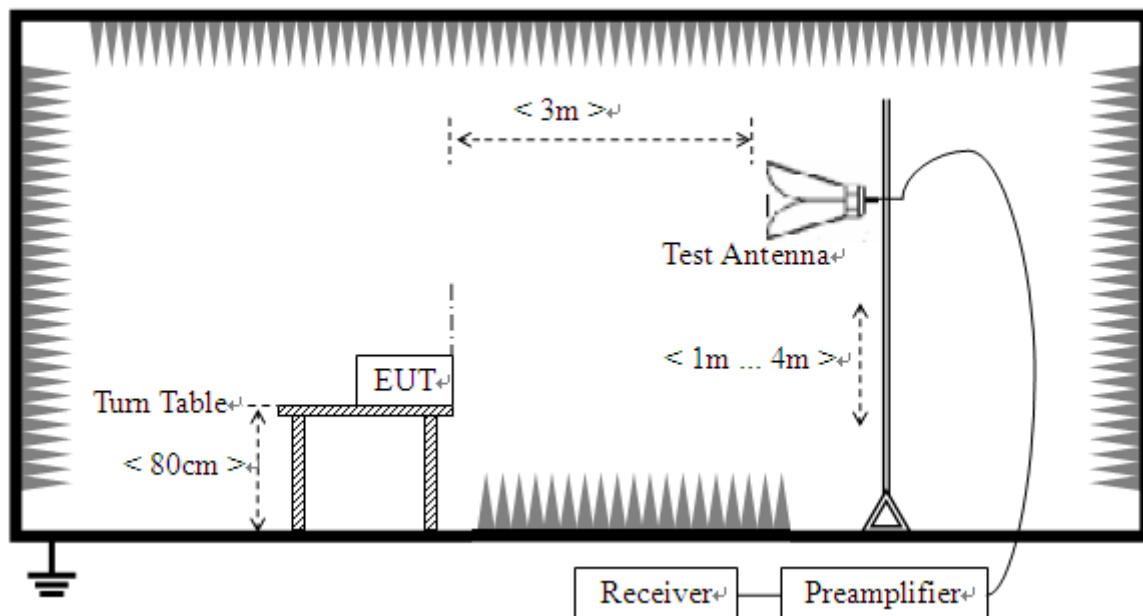

Radiated Emission (above 1 GHz)

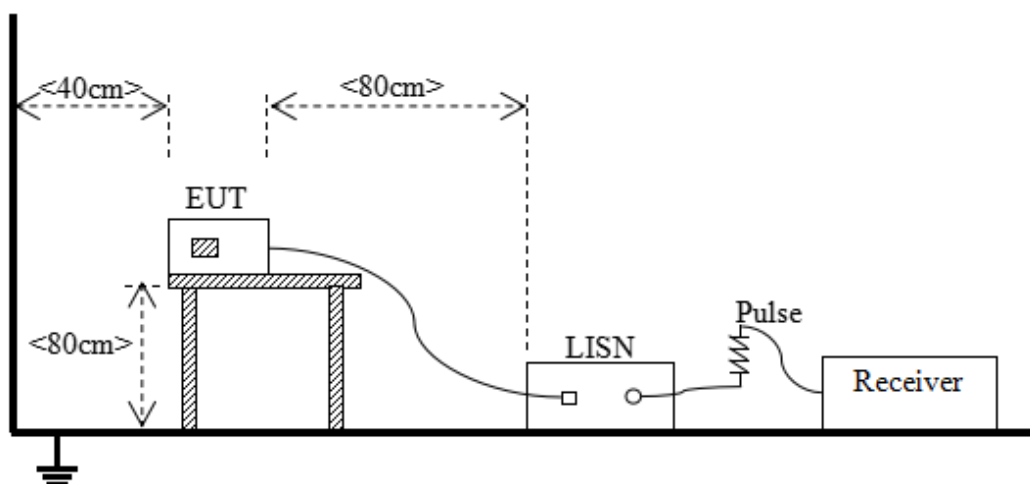Test Setup 2

Conducted Emissions, AC Ports

5 TEST ITEMS

5.1 Emission Tests

5.1.1 Radiated Emission

5.1.1.1 Limit

Frequency range (MHz)	Class B (at 3 m)		Class A (at 3 m)
	Field Strength ($\mu\text{V/m}$)	Field Strength (dB $\mu\text{V/m}$)	Field Strength (dB $\mu\text{V/m}$)
30 - 88	100	40	49.5
88 - 216	150	43.5	54
216 - 960	200	46	56.9
Above 960	500	54	60

NOTE:

- 1) Field Strength (dB $\mu\text{V/m}$) = $20 \cdot \log [\text{Field Strength } (\mu\text{V/m})]$.
- 2) In the emission tables above, the tighter limit applies at the band edges.
- 3) For 30 MHz to 1000 MHz, the CISPR quasi-peak is employed.

For above 1000 MHz, according to the requirements of FCC 15.35, unless otherwise specified, the limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit applicable to the equipment under test.

Frequency range (GHz)	Class B (at 3 m)			Class A (at 3 m)	
	Field Strength ($\mu\text{V/m}$)	Field Strength Average (dB $\mu\text{V/m}$)	Field Strength Peak (dB $\mu\text{V/m}$)	Field Strength Average (dB $\mu\text{V/m}$)	Field Strength Peak (dB $\mu\text{V/m}$)
1 - F_M	500	54	74	60	80

Note 1: The highest measurement frequency, F_M , in GHz, shall be determined as next Table.

Note 2: Average Class A limit at 3m L_{3m} is determined by the following conversion formula:
 $L_{3m} = L_{10m} + 20 \cdot \log(d_{10m}/d_{3m})$
 Where:
 L_{3m} is Average Class A limit at 3m;
 L_{10m} is Average Class A limit at 10m;
 d_{10m} is Measurement distance in 10m;
 d_{3m} is Measurement distance in 3m.
 For this case: $L_{3m} = 49.5 + 20 \cdot \log(10/3) = 60$ (dB $\mu\text{V/m}$).

Highest internal frequency (F_X)	Highest measurement frequency (F_M)
$F_X \leq 108 \text{ MHz}$	1 GHz
$108 \text{ MHz} \leq F_X \leq 500 \text{ MHz}$	2 GHz
$500 \text{ MHz} \leq F_X \leq 1 \text{ GHz}$	5 GHz
$F_X \geq 1 \text{ GHz}$	$5 * F_X$ or 40 GHz, whichever is lower.
Note: F_X is Highest frequency generated or used in the device or on which the device operates or tunes.	

5.1.1.2 Test Setup

Refer to 4.3 section (test setup 1) for radiated emission test, the photo of test setup please refer to ANNEX B.

5.1.1.3 Test Procedure

All Radiated Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

An initial pre-scan was performed in the chamber using the EMI Receiver in peak detection mode. Quasi-peak measurements were conducted based on the peak sweep graph. The EUT was measured by Bi-Log antenna with 2 orthogonal polarities.

The measurement frequency range is from 30 MHz to the 5th harmonic of the maximum frequency of the EUT internal source. The Turn Table is actuated to turn from 0° to 360° , and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. Mid channels on all channel bandwidth verified. Only the worst RB size/offset presented.

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1 \text{ GHz}$, 100 kHz for $f < 1 \text{ GHz}$

VBW $\geq$ RBW

Sweep = auto

Detector function = peak for $f < 1 \text{ GHz}$, peak & RMS Average for $f \geq 1 \text{ GHz}$

Trace = max hold

5.1.1.4 Test Result and Test Equipment List

Please refer to ANNEX A.1.

NOTE:

1. Results (dB μ V/m) = Reading (dB μ V) + Factor (dB/m)

The reading level is calculated by software which is not shown in the sheet

2. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) – Amplifier Gain (dB)

3. Margin = Limit - Results

5.1.2 Conducted Emission, AC Ports

5.1.2.1 Test Limit

Frequency range (MHz)	Class A	
	Quasi-peak (dB μ V)	Average (dB μ V)
0.15 - 0.50	79	66
0.50 - 30	73	60

Frequency range (MHz)	Class B	
	Quasi-peak (dB μ V)	Average (dB μ V)
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
5 - 30	60	50

NOTE:

- 1) The lower limit shall apply at the band edges.
- 2) The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50 MHz.

5.1.2.2 Test Setup

Refer to 4.3 section test (test setup 2) for conducted emission, the photo of test setup please refer to ANNEX B.

5.1.2.3 Test Procedure

The EUT is connected to the power mains through a LISN which provides 50 Ω /50 μ H of coupling impedance for the measuring instrument. The test frequency range is from 150 kHz to 30 MHz. The maximum conducted interference is searched using Peak (PK), Quasi-peak (QP) and Average (AV) detectors; the emission levels that are more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed.

Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a nominal 120 VAC, 50/60 Hz and 240 VAC, 50/60 Hz) for which the device is capable of operation. A device rated for 50/60 Hz operation need not be tested at both frequencies provided the radiated and line conducted emissions are the same at both frequencies.

Use the following spectrum analyzer settings:

RBW = 9 kHz

VBW $\geq$ RBW

Sweep = 10ms

Detector function = peak & Average

Trace = max hold

5.1.2.4 Test Result and Test Equipment List

Please refer to ANNEX A.2.

NOTE:

1. Results (dBμV) = Reading (dBμV) + Factor (dB)

The reading level is calculated by software which is not shown in the sheet

2. Factor = Insertion loss + Cable loss

3. Margin = Limit - Results

ANNEX A TEST RESULTS

A.1 Radiated Emission


Note 1: For the test data above 1 GHz, according the ANSI C63.4-2014, where limits are specified for both average and peak (or quasi-peak) detector functions, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement.

Note 2: The Radiated Emission is required to be investigated to the upper frequency of 5th harmonic of the highest internal frequency of EUT or 40 GHz, whichever is lower. The test results above 18GHz are only noise and are not recorded in the report.

Sample No.	S05	Temperature	22.8℃
Humidity	44%RH	Pressure	101kPa
Test Engineer	Guo siyu	Test Date	2026.05.07


Test Mode 3

1) Test Antenna Vertical, 30 MHz – 1 GHz

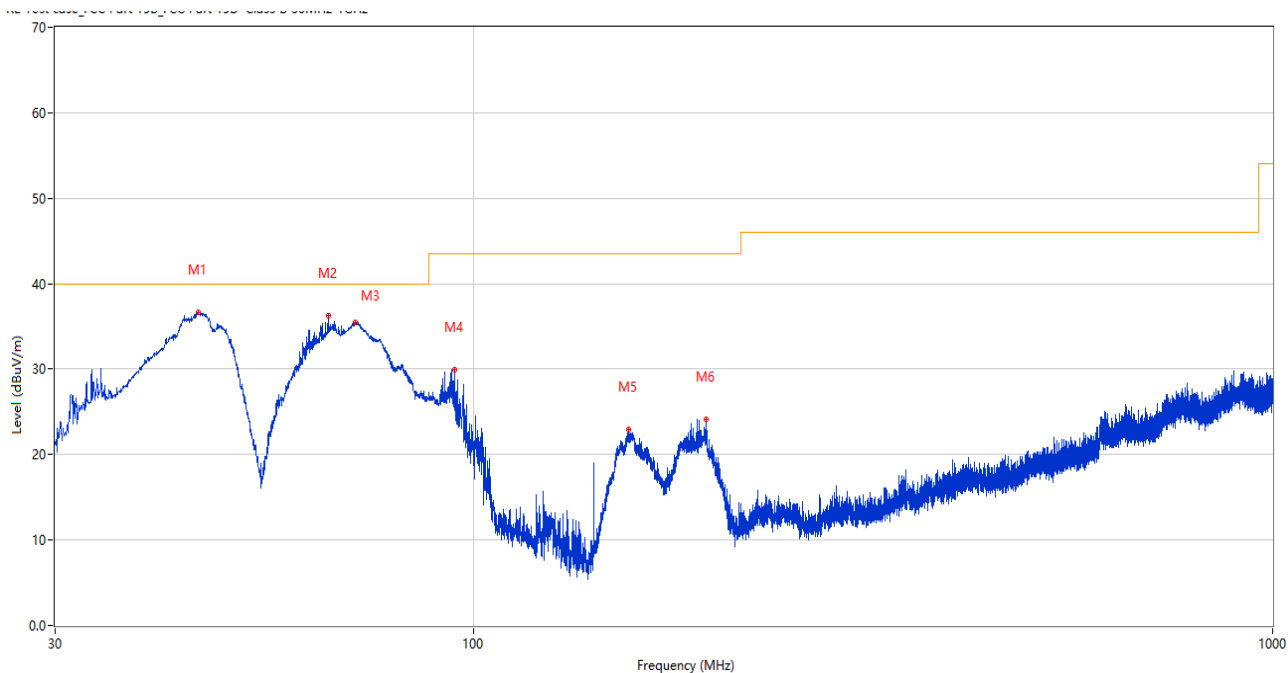

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	45.278	36.59	-25.43	40.0	3.41	Peak	92.00	100	Vertical	Pass
2	65.841	36.26	-27.51	40.0	3.74	Peak	55.00	100	Vertical	Pass
3	71.225	35.43	-29.10	40.0	4.57	Peak	103.00	100	Vertical	Pass
4	94.699	29.92	-26.74	43.5	13.58	Peak	97.00	100	Vertical	Pass
5	156.585	22.95	-29.36	43.5	20.55	Peak	341.00	100	Vertical	Pass
6	195.530	24.19	-25.25	43.5	19.31	Peak	313.00	100	Vertical	Pass


2) Test Antenna Horizontal, 30 MHz – 1 GHz

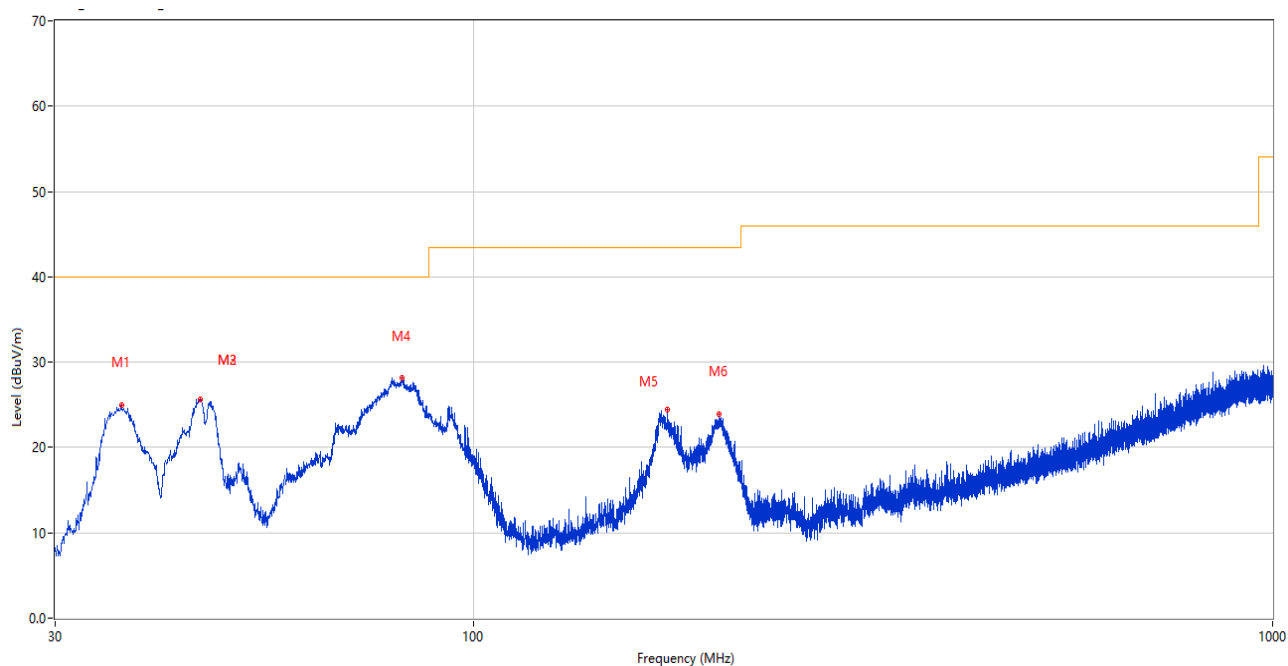

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	36.305	24.98	-28.33	40.0	15.02	Peak	76.00	100	Horizontal	Pass
2	45.569	25.61	-28.27	40.0	14.39	Peak	351.00	100	Horizontal	Pass
3	45.569	25.61	-28.27	40.0	14.39	Peak	351.00	100	Horizontal	Pass
4	81.507	28.12	-31.73	40.0	11.88	Peak	155.00	100	Horizontal	Pass
5	174.870	24.38	-27.66	43.5	19.12	Peak	310.00	100	Horizontal	Pass
6	203.290	23.97	-29.44	43.5	19.53	Peak	113.00	100	Horizontal	Pass


Equipment Information						
Equipment Name	Supplier	Model	Serial No.	Cal. Date	Cal. Due	Use
Frequency Below 1 GHz						
EMI Receiver	Keysight	N9038A	MY55330121	2025.12.26	2026.12.25	☒
Test Antenna-Bi-Log	SCHWARZB ECK	VULB 9163	01414	2023.11.03	2026.11.02	☒
Anechoic Chamber	EMC Electronic Co., Ltd	C8-966	107	2024.05.12	2027.05.11	☒
Description	Supplier	Name	Version	/		Use
Test Software	BALUN	BL410-E	V22.4 en	/		☒

3) Test Antenna Vertical, 1 GHz – 18 GHz

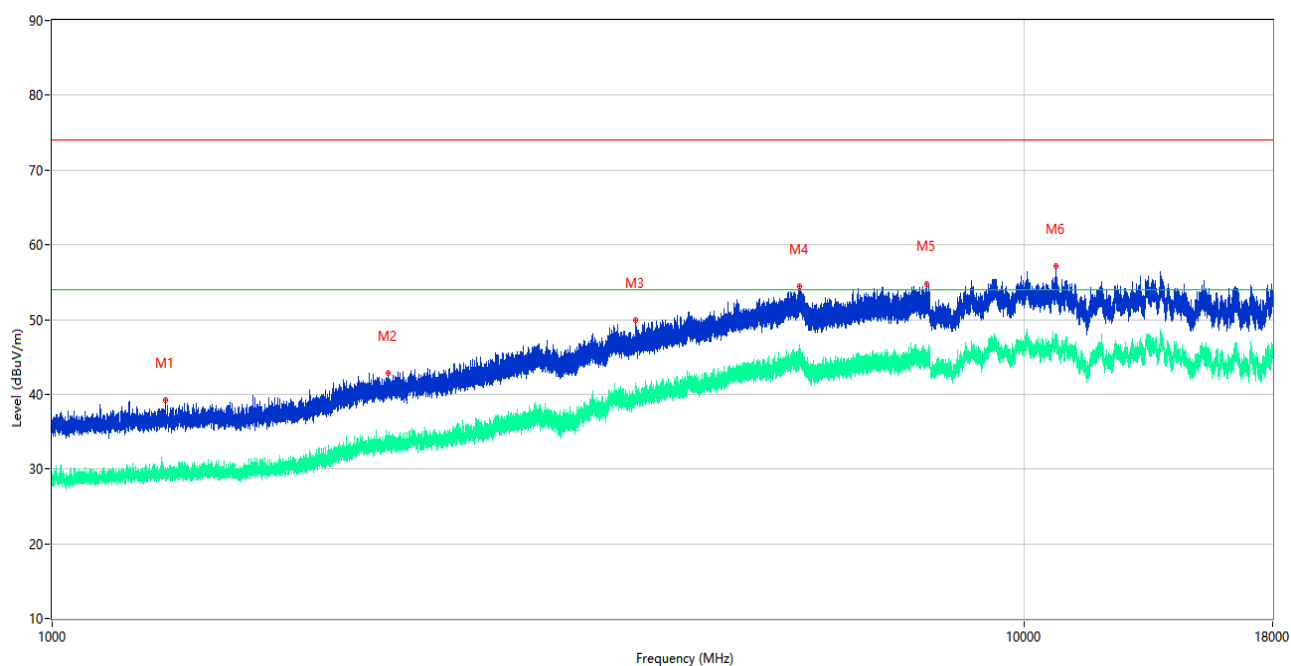

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1306.410	39.15	-16.02	74.0	34.85	Peak	333.00	100	Vertical	Pass
1**	1306.410	29.00	-16.02	54.0	25.00	AV	333.00	100	Vertical	Pass
2	2214.720	42.82	-11.90	74.0	31.18	Peak	23.00	100	Vertical	Pass
2**	2214.720	33.69	-11.90	54.0	20.31	AV	23.00	100	Vertical	Pass
3	3977.520	49.89	-1.98	74.0	24.11	Peak	345.00	100	Vertical	Pass
3**	3977.520	38.88	-1.98	54.0	15.12	AV	345.00	100	Vertical	Pass
4	5872.160	54.38	3.48	74.0	19.62	Peak	67.00	100	Vertical	Pass
4**	5872.160	44.95	3.48	54.0	9.05	AV	67.00	100	Vertical	Pass
5	7935.320	54.82	2.30	74.0	19.18	Peak	29.00	100	Vertical	Pass
5**	7935.320	44.73	2.30	54.0	9.27	AV	29.00	100	Vertical	Pass
6	10788.000	57.17	4.19	74.0	16.83	Peak	68.00	100	Vertical	Pass
6**	10788.000	47.20	4.19	54.0	6.80	AV	68.00	100	Vertical	Pass

4) Test Antenna Horizontal, 1 GHz – 18 GHz

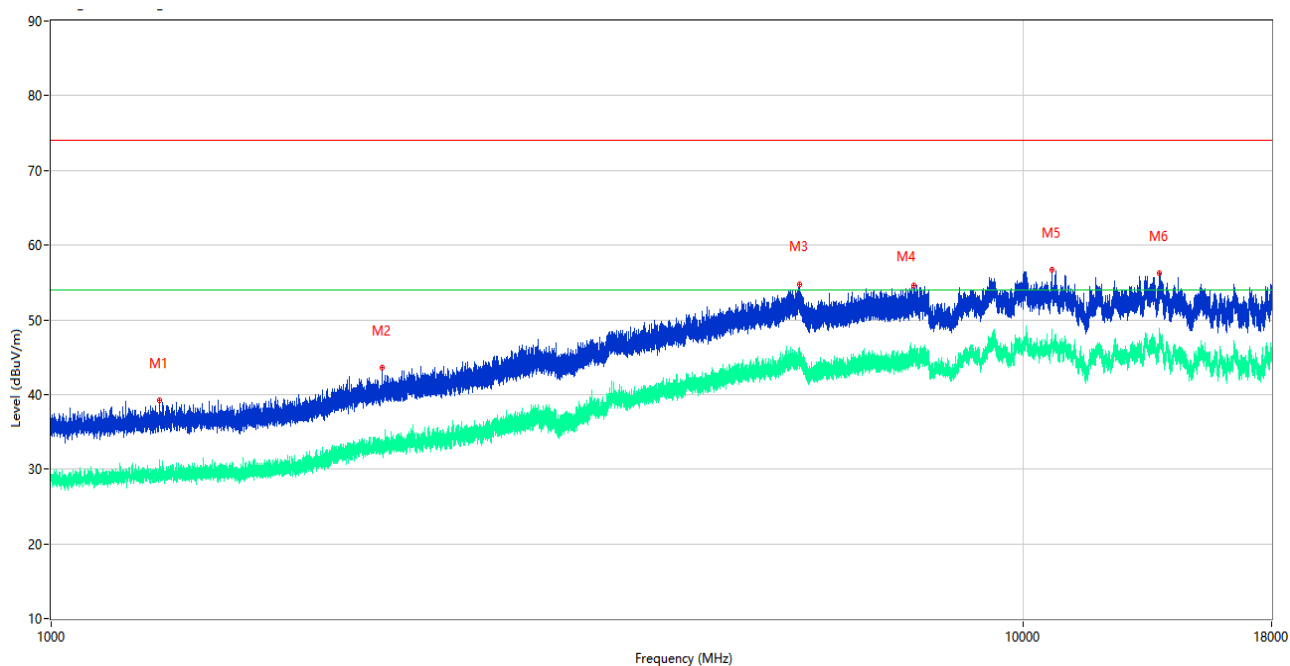

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1293.800	39.22	-16.03	74.0	34.78	Peak	40.00	100	Horizontal	Pass
1**	1293.800	29.36	-16.03	54.0	24.64	AV	40.00	100	Horizontal	Pass
2	2189.630	43.53	-12.50	74.0	30.47	Peak	0.00	100	Horizontal	Pass
2**	2189.630	32.21	-12.50	54.0	21.79	AV	0.00	100	Horizontal	Pass
3	5879.200	54.80	3.28	74.0	19.20	Peak	173.00	100	Horizontal	Pass
3**	5879.200	44.90	3.28	54.0	9.10	AV	173.00	100	Horizontal	Pass
4	7705.860	54.66	1.96	74.0	19.34	Peak	96.00	100	Horizontal	Pass
4**	7705.860	46.23	1.96	54.0	7.77	AV	96.00	100	Horizontal	Pass
5	10707.500	56.72	3.78	74.0	17.28	Peak	307.00	100	Horizontal	Pass
5**	10707.500	46.71	3.78	54.0	7.29	AV	307.00	100	Horizontal	Pass
6	13800.500	56.22	5.76	74.0	17.78	Peak	80.00	100	Horizontal	Pass
6**	13800.500	47.04	5.76	54.0	6.96	AV	80.00	100	Horizontal	Pass

Equipment Information						
Equipment Name	Supplier	Model	Serial No.	Cal. Date	Cal. Due	Use
Frequency Above 1 GHz						
EMI Receiver	Keysight	N9038A	MY55330121	2025.12.26	2026.12.25	☒
Test Antenna-Horn	SCHWARZB ECK	BBHA 9120D	02459	2023.10.26	2026.10.25	☒
Anechoic Chamber	EMC Electronic Co., Ltd	C8-966	107	2024.05.12	2027.05.11	☒
Description	Supplier	Name	Version	/		Use
Test Software	BALUN	BL410-E	V22.4 en	/		☒


A.2 Conducted Emission, AC Ports

Note: Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a nominal 120 VAC, 50/60 Hz and 240 VAC, 50/60 Hz) for which the device is capable of operation. So, The configuration 120 VAC, 60 Hz and 240 VAC, 50 Hz were tested respectively, but only the worst configuration (120 VAC, 60 Hz) shown here.

Sample No.	S05	Temperature	22.1℃
Humidity	42%RH	Pressure	101kPa
Test Engineer	Ye Guangqi	Test Date	2026.04.21


Test Mode 3

1) AC Ports - L Phase

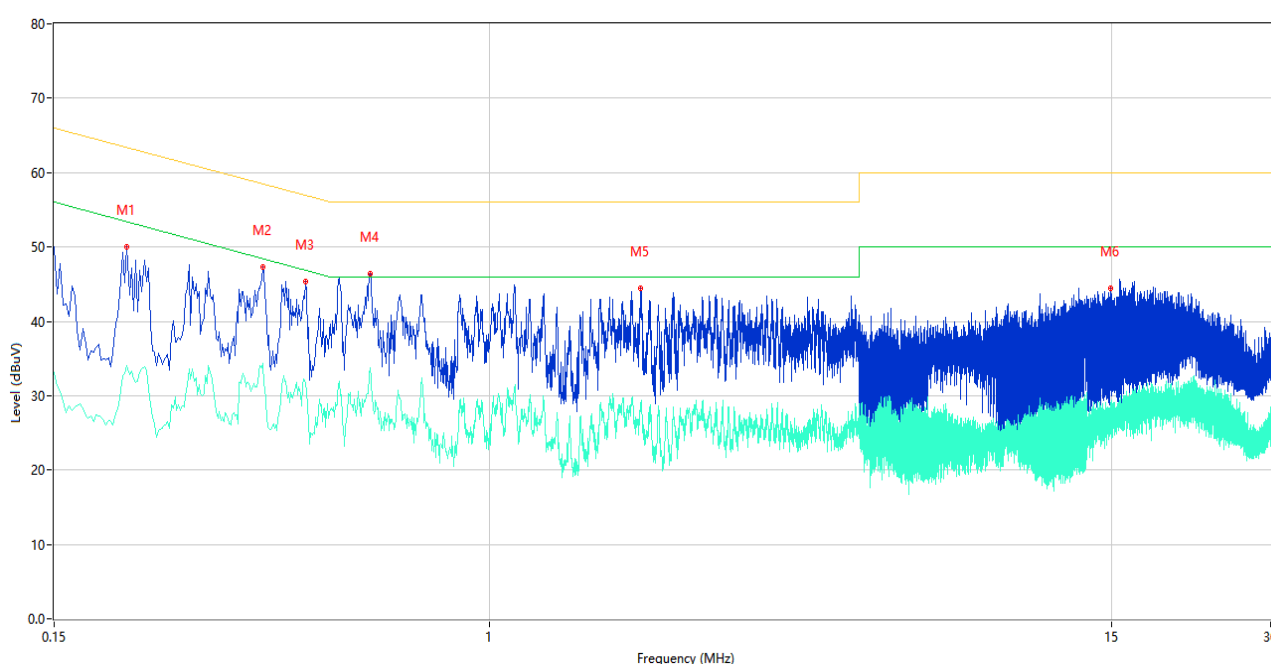

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Margin (dB)	Detector	Line	Verdict
1	0.206	50.00	10.24	63.37	13.37	Peak	L	Pass
1**	0.206	34.11	10.24	53.37	19.26	AV	L	Pass
2	0.372	47.30	10.24	58.46	11.16	Peak	L	Pass
2**	0.372	34.39	10.24	48.46	14.07	AV	L	Pass
3	0.448	45.35	10.25	56.91	11.56	Peak	L	Pass
3**	0.448	31.68	10.25	46.91	15.23	AV	L	Pass
4	0.594	46.41	10.26	56.00	9.59	Peak	L	Pass
4**	0.594	33.77	10.26	46.00	12.23	AV	L	Pass
5	1.932	44.44	10.39	56.00	11.56	Peak	L	Pass
5**	1.932	29.11	10.39	46.00	16.89	AV	L	Pass
6	14.950	44.48	12.97	60.00	15.52	Peak	L	Pass
6**	14.950	28.33	12.97	50.00	21.67	AV	L	Pass

2) AC Ports - N Phase

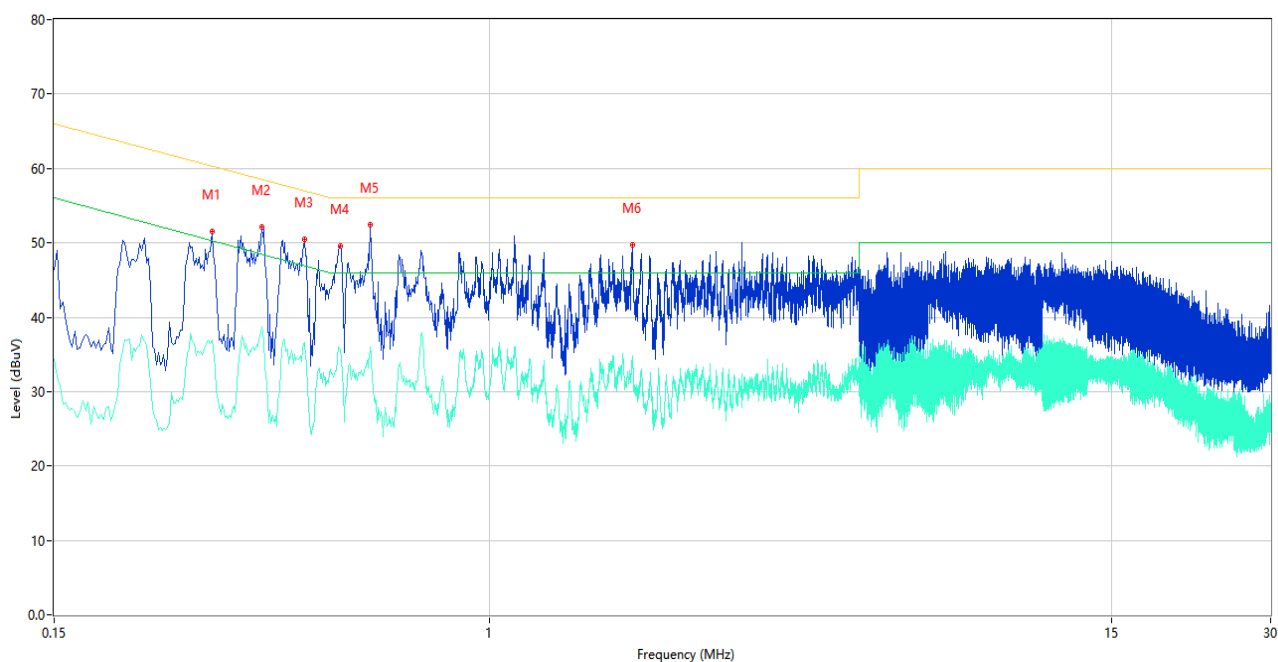

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Margin (dB)	Detector	Line	Verdict
1	0.298	51.51	10.16	60.30	8.79	Peak	N	Pass
1**	0.298	36.93	10.16	50.30	13.37	AV	N	Pass
2	0.370	52.08	10.16	58.50	6.42	Peak	N	Pass
2**	0.370	38.74	10.16	48.50	9.76	AV	N	Pass
3	0.446	50.50	10.17	56.95	6.45	Peak	N	Pass
3**	0.446	36.59	10.17	46.95	10.36	AV	N	Pass
4	0.522	49.57	10.17	56.00	6.43	Peak	N	Pass
4**	0.522	35.63	10.17	46.00	10.37	AV	N	Pass
5	0.594	52.46	10.17	56.00	3.54	Peak	N	Pass
5**	0.594	35.96	10.17	46.00	10.04	AV	N	Pass
6	1.862	49.65	10.29	56.00	6.35	Peak	N	Pass
6**	1.862	34.86	10.29	46.00	11.14	AV	N	Pass

Equipment Information						
Equipment Name	Supplier	Model	Serial No.	Cal. Date	Cal. Due	Use
EMI Receiver	KEYSIGHT	N9038B	MY61380132	2025.12.26	2026.12.25	☒
LISN	SCHWARZBECK	NSLK 8127	01009	2025.07.15	2026.07.14	☒
Shielded Room	YiHeng Electronic Co., Ltd	/	235	2024.11.05	2027.11.04	☒
Description	Supplier	Name	Version	/		Use
Test Software	BALUN	BL410-E	V22.930	/		☒

ANNEX B TEST SETUP PHOTOS

Please refer the document “Ti-CC26040209-AE-1.PDF”.

ANNEX C EUT EXTERNAL PHOTOS

Please refer the document “Ti-CC26040209-AW.PDF”.

ANNEX D EUT INTERNAL PHOTOS

Please refer the document “Ti-CC26040209-AI.PDF”.

Statement

1. The laboratory guarantees the scientificity, accuracy and impartiality of the test, and is responsible for all the information in the report, except the information provided by the customer. The customer is responsible for the impact of the information provided on the validity of the results.
2. The report without China inspection body and laboratory Mandatory Approval (CMA) mark has no effect of proving to the society.
3. For the report with CNAS mark or A2LA mark, the items marked with "☆" are not within the accredited scope.
4. This report is invalid if it is altered, without the signature of the testing and approval personnel, or without the "inspection and testing dedicated stamp" or test report stamp.
5. The test data and results are only valid for the tested samples provided by the customer.
6. This report shall not be partially reproduced without the written permission of the laboratory.
7. Any objection shall be raised to the laboratory within 30 days after receiving the report.

--END OF REPORT--